

| | | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------|----------------------|------------------|
| Test Report No.: | | 14120301.fcc01 | <i>Page 1 of 41</i> | | |
| <i>Client:</i> | Ambient Systems B.V. Demmersweg 66, 7559BN Hengelo (Ov), Netherlands | | | | |
| <i>Test Item:</i> | Digital Transmission System (DTS) Self-configuring mesh-routing device | | | | |
| <i>Identification:</i> | GW3030v2 | <i>Serial Number:</i> | -- | | |
| <i>Project No.:</i> | 14120301 | <i>Date of Receipt:</i> | March 04, 2015 | | |
| <i>Testing Location:</i> | TÜV Rheinland Nederland B.V. Eiberkamp 10 9351VT Leek | | | | |
| <i>Test Specification:</i> | FCC 47 CFR Part 15, Subpart C, Section 15.247 (10-1-14 Edition) RSS-Gen (Issue 4, November 2014) and RSS-210 (Issue 8, December 2010) ANSI C63.10:2013 | | | | |
| <i>Test Result:</i> | <i>The test item passed the test specification(s).</i> | | | | |
| <i>Testing Laboratory:</i> | TÜV Rheinland Nederland B.V. Eiberkamp 10 9351 VT Leek | | | | |
| <i>Tested by:</i> | <i>Reviewed by:</i> | | | | |
| 2015-03-25 | R. van der Meer / Inspector | 2015-03-25 | P. de Beer / Reviewer | | |
| <i>Date</i> | <i>Name/Position</i> | <i>Signature</i> | <i>Date</i> | <i>Name/Position</i> | <i>Signature</i> |
| <i>Other Aspects:-</i> | | | | | |
| <i>Abbreviations:</i> | | | | | |
| <i>P(pass) = passed</i> | | | | | |
| <i>F(fail) = failed</i> | | | | | |
| <i>N/A = not applicable</i> | | | | | |
| <i>N/T = not tested</i> | | | | | |
| <i>This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V.</i> <i>The test results relate only to the item(s) tested.</i> | | | | | |

Test Report No.:

14120301.fcc01

Page 2 of 41

TEST SUMMARY

5.1.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT

RESULT: PASS

5.1.2 6dB AND 99% BANDWIDTH

RESULT: PASS

5.1.3 PEAK POWER SPECTRAL DENSITY

RESULT: PASS

5.1.4 BAND EDGE CONDUCTED EMISSIONS

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

RESULT: PASS

5.1.6 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER IN RESTRICTED BANDS

RESULT: PASS

5.2.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: PASS

Test Report No.:

14120301.fcc01

Page 3 of 41

Contents

| | |
|----------------------------------------------------------------------------------------------------------|-----------|
| 1. GENERAL REMARKS | 4 |
| 1.1 COMPLEMENTARY MATERIALS | 4 |
| 2. TEST SITES | 4 |
| 2.1 TEST FACILITIES | 4 |
| 2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS TABLE 1: LIST OF TEST AND MEASUREMENT EQUIPMENT..... | 5 |
| 2.3 MEASUREMENT UNCERTAINTY | 6 |
| 3. GENERAL PRODUCT INFORMATION | 7 |
| 3.1 PRODUCT FUNCTION AND INTENDED USE..... | 7 |
| 3.2 SYSTEM DETAILS..... | 7 |
| 3.3 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE | 8 |
| 4. TEST SET-UP AND OPERATION MODES | 9 |
| 4.1 TEST METHODOLOGY | 9 |
| 4.2 OPERATION MODES | 9 |
| 4.3 PHYSICAL CONFIGURATION FOR TESTING | 10 |
| 4.4 TEST SOFTWARE | 11 |
| 4.5 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT..... | 12 |
| 5. TEST RESULTS | 13 |
| 5.1 CONDUCTED MEASUREMENTS AT ANTENNA PORT | 13 |
| 5.1.1 <i>Conducted Output Power.....</i> | 13 |
| 5.1.2 <i>6dB and 99% Bandwidth.....</i> | 17 |
| 5.1.3 <i>Peak Power Spectral Density.....</i> | 24 |
| 5.1.4 <i>Band Edge Conducted Emissions.....</i> | 27 |
| 5.1.5 <i>Radiated Spurious Emissions of Transmitter</i> | 30 |
| 5.2 AC POWER LINE CONDUCTED MEASUREMENTS | 34 |
| 5.2.1 <i>AC Power Line Conducted Emission of Transmitter.....</i> | 35 |

Test Report No.:

14120301.fcc01

Page 4 of 41

1. General Remarks

1.1 Complementary Materials

Appendix: Identical Equipment Declaration.

2. Test Sites

2.1 Test Facilities

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

Normal test conditions:

| | |
|----------------------|------------------|
| Temperature (*) | : +15°C to +35°C |
| Relative humidity(*) | : 20 % to 75 % |
| Supply voltage | : 120VAC/60Hz |
| Air pressure | : 950 – 1050 hPa |

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

Test Report No.:

14120301.fcc01

Page 5 of 41

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

| Kind of Equipment | Manufacturer | Model Name | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---------------------------------------------|-----------------|-------------------------------------|------------------|----------------------------|--------------------------------|
| For Antenna Port Conducted Emissions | | | | | |
| Temperature-Humiditymeter | Extech | SD500 | A00446 | 03-12/2015 | 03-12/2016 |
| Spectrum Analyzer | Rohde & Schwarz | FSV | A00337 | 08/2014 | 08/2015 |
| RF Cable | H+S | Secuflex | A00347 | 04/2014 | 04/2015 |
| For Radiated Emissions | | | | | |
| Measurement Receiver | Rohde & Schwarz | ESCS30 | A00726 | 09/2014 | 09/2015 |
| RF Cable S-AR <1GHz | Gigalink | APG0500 | A00447 | 01/2015 | 01/2016 |
| RF Cable >1GHz | H+S | Sucoflex | A00339 | 04/2014 | 04/2015 |
| RF Cable >1GHz | H+S | Sucoflex | A00343 | 04/2014 | 04/2015 |
| Controller | Maturo | SCU/088/8090811 | A00450 | N/A | N/A |
| Controller | EMCS | DOC202 | A00257 | N/A | N/A |
| Test facility | Comtest | FCC listed: 90828 IC: 2932G-2 | A00235 | 04/2014 | 04/2017 |
| Spectrum Analyzer | Rohde & Schwarz | FSV | A00337 | 08/2014 | 08/2015 |
| Antenna mast | EMCS | AP-4702C | A00258 | N/A | N/A |
| Temperature-Humiditymeter | Extech | SD500 | A00444 | 03-12/2015 | 03-12/2016 |
| Guidehorn 1-18 GHz | EMCO | 3115 | A00009 | 04/2014 | 04/2015 |
| Guidehorn 18-26.5 GHz | EMCO | 3160-09 | A00209 | 04/2014 | 04/2015 |
| Amplifier for Guidehorn 18-26.5 GHz | EMCS | -- | A00378 | 04/2014 | 04/2015 |
| Biconilog Testantenna | Teseq | CBL 6111D | A00466 | 06/2014 | 06/2015 |
| 2.4 GHz bandreject filter | BSC | XN-1783 | A00065 | N/A | N/A |
| Bandpass filter 4-10 GHz | Reactel | 7AS-7G-6G-511 | A00131 | N/A | N/A |
| Bandpass filter 10-26 GHz | Reactel | 9HS-10G/26.5G-S11 | A00151 | N/A | N/A |
| Preamplifier 0.5 - 18 GHz | Miteq | AMF-5D-005180-28-13p | A00247 | N/A | N/A |
| Filterbox | EMCS | RFS06S | A00255 | 08/2014 | 08/2015 |
| Non conducting support 70cm | NMi Certin | -- | A00166 | N/A | N/A |

Continues on next page.

Test Report No.:

14120301.fcc01

Page 6 of 41

| Kind of Equipment | Manufacturer | Model Name | Inventory number | Calibration date (mm/yyyy) | Calibration due date (mm/yyyy) |
|---------------------------------------------|-----------------|------------|------------------|----------------------------|--------------------------------|
| For AC Powerline Conducted Emissions | | | | | |
| Pulse limiter | R&S | ESH3-Z2 | A00051 | 01/2015 | 01/2016 |
| Variac | RFT | LSS020 | A00171 | NA | NA |
| LISN | EMCO | 3625/2 | A00022 | 01/2014 | 01/2016 |
| Measurement Receiver | Rohde & Schwarz | ESCS30 | A00726 | 09/2014 | 09/2015 |
| Shielded room for Conducted emissions | -- | -- | A00437 | NA | NA |
| Temperature-Humiditymeter | Extech | SD500 | A00441 | 03-12/2015 | 03-12/2016 |

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

| Measurement Type | Frequency | Uncertainty |
|----------------------------------|----------------|-------------|
| Antenna Port Conducted Emission | < 1GHz | ±0.5dB |
| | > 1GHz | ±0.7dB |
| Radiated Emission | 150kHz - 30MHz | ±5.0dB |
| | 30MHz - 1GHz | ±5.0dB |
| | > 1GHz | ±5.5dB |
| AC Powerline Conducted Emissions | 150kHz - 30MHz | ±3.5dB |

Test Report No.:

14120301.fcc01

Page 7 of 41

3. General Product Information

3.1 Product Function and Intended Use

The Digital Transmission System brand ambient model GW3030v2, hereafter referred to as EUT, is designed to operate in the 2.4 GHz ISM frequency band, frequency range 2405 MHz to 2480 MHz (ZigBee channels 11 to 26). The module will support and utilizes OQPSK modulation techniques. The EUT is equipped with an external antenna connector. A dedicated antenna is included with the EUT.

The product identical (model MR3000v2) to EUT (but not included in the tests) is described in the annexed Letter of Similarity. The judgment of the conformity of the model MR3000v2 is outside of the scope of TÜV Rheinland Nederland B.V.

The content of this report and measurement results have not been changed other than the way of presenting the data.

3.2 System Details

Details and an overview of the system and all of its components, as it has been tested, may be found below.

| | | |
|-----------------------|---|---------------------------------|
| EUT | : | Digital Transmission System |
| Manufacturer | : | Ambient Systems B.V. |
| Brand | : | ambient |
| Model(s) | : | GW3030v2 |
| Serial Number | : | -- |
| Voltage input rating | : | 5 - 48 Vdc |
| Voltage output rating | : | -- |
| Current input rating | : | -- |
| Antenna | : | Internal, integrated on the PCB |
| Antenna Gain | : | 2.15 dBi (declared) |
| Operating frequency | : | 2405MHz-2480MHz. |
| Modulation | : | OQPSK |
| Remarks | : | n.a. |



Test Report No.:

14120301.fcc01

Page 8 of 41

Table 3: Interfaces present on the EUT

| No. | Port | From | To | Remarks |
|-----|--------------|------------|-------------------|--------------------------------------------------------|
| 1. | Mains | Mains | Laptop (AUX1) | Unshielded cable <3m |
| 2. | Data com. | Laptop USB | EUT | Shielded cable <1m; (either by USB or USB > RS-232) |
| 3. | DC power | AUX2 | EUT | Unshielded cable <3m |
| 4. | Antenna port | EUT | Spectrum analyzer | Conducted tests, shielded cable 30cm |

3.3 Countermeasures to achieve EMC Compliance

No additional measures were employed to achieve compliance.

Test Report No.:

14120301.fcc01

Page 9 of 41

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of RSS-GEN, RSS-210, 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.207, 15.209, 15.247 and ANSI C63.10:2013

The test methods, which have been used, are based on ANSI C63.10-2013.

For details, see under each test item.

4.2 Operation Modes

Testing was performed at the lowest operating frequency (2405 MHz), at the operating frequency in the middle of the specified frequency band (2440 MHz) and at the highest operating frequency (2480 MHz). These operation modes were selected after review of the capabilities and characteristics of the EUT. The test software as mentioned in section 4.4 enabled the settings of these modes.

The EUT has been tested in the modes as described in table below

| Operation Mode | EUT Status | Channel | Frequency (MHz) | TX power |
|-----------------------|-------------------|----------------|------------------------|-----------------|
| Transmit (Tx) | On | 11 | 2405 | 41 |
| Transmit (Tx) | On | 18 | 2440 | 50 |
| Transmit (Tx) | On | 26 | 2480 | 62 |

Test Report No.:

14120301.fcc01

Page 10 of 41


4.3 Physical Configuration for Testing

The EUT was connected to the usb port of a laptop computer. The laptop computer was used to configure the EUT to continuously transmit at a specified output power and channel as specified in the testdata. See section 4.5 for Auxiliary details.

The EUT was tested on a stand-alone basis and the test system was configured in a typical fashion (as a customer would normally use it). For radiated tests the EUT was powered with batteries and for conducted tests the EUT was powered by a power supply.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

Figure 1: Test Setup Diagram

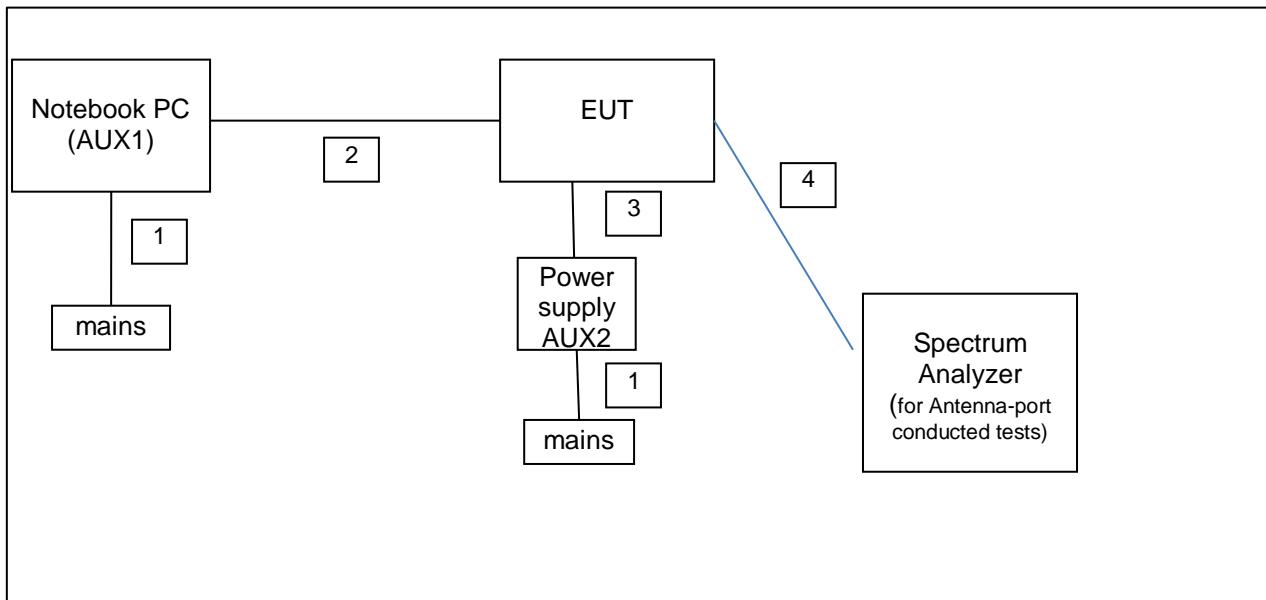

Notes:

For more details, refer to the document: Test Set-Up Photographs document.

Test Report No.:

14120301.fcc01

Page 11 of 41

4.4 Test Software

A continuous transmit or receive mode could be initiated by using test software as supplied by Intel Corporation. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : Ambient Studio 3000
Version : 1.1 p0 (r8425)

This software was running on a notebook PC (AUX1). It was used to enable the test operation modes listed in section 4.2 as appropriate (a screenshot of the testsoftware is shown below).

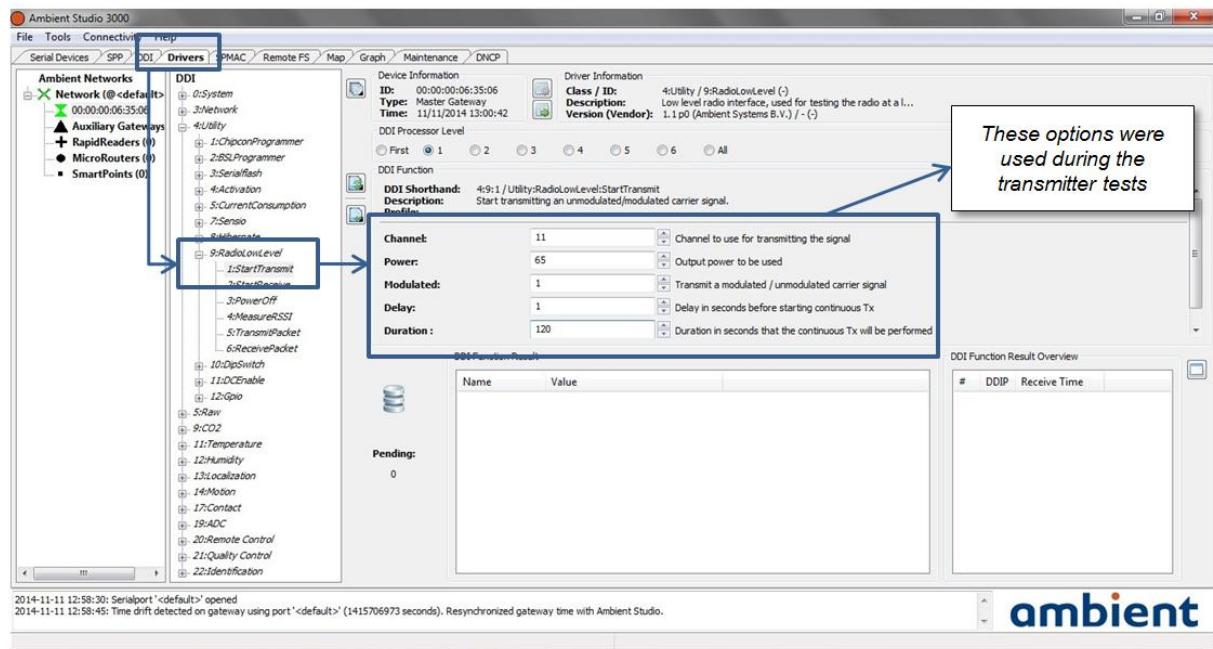


Figure: GUI-Ambient test software

Test Report No.:

14120301.fcc01

Page 12 of 41

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. AUX1
Product: Notebook PC
Brand: HP
Model: Compaq 610
Serial Number: CNU94710WB
Remark: host for testsoftware

2. AUX2
Product: Power supply
Brand: HN Power Germany
Model: HNP06-090
Serial Number: --
Input: 100-240 Vac 50/60 Hz 0.3A
Output: 9.0 Vdc 670mA
Remark: used to power EUT

3. AUX3
Product: USB to RS-232 converter
Brand: --
Model: UC-232A
Serial Number: --
Remark: for communication between AUX1 and EUT



Test Report No.:

14120301.fcc01

Page 13 of 41

5. Test Results

5.1 Conducted Measurements at Antenna Port

5.1.1 Conducted Output Power

RESULT: PASS

Date of testing: 2015-03-25

Requirements:

FCC 15.247(b)(3), RSS-210 A8.4(4)

FCC: For systems using digital modulation in the 2400-2483.5 MHz band, the maximum peak output power is 1W (+30dBm).

RSS-Gen: the e.i.r.p. shall not exceed 4 W (36 dBm).

Test procedure:

ANSI C63.10:2013

The Peak Conducted Output Power was measured using the channel integration method according to section 11.9.1.1 in ANSI C63.10:2013

The maximum peak output power (conducted) was measured at the antenna connector with a spectrum analyzer. The final measurement takes into account the loss generated by all the involved cables.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Notes: $mW = 10 ^ {(dBm/10)}$

$dBm = 10 \times \log(mW)$

plots : Peak power plots,

Figures A, B and C show plots of the Peak Power outputs, correction factors (= 0.5dB Cableloss) included in the reading.


Test Report No.:

14120301.fcc01

Page 14 of 41

Conducted Output Power

| Freq- uency [MHz] | Output Power [dBm] | Output Power [mW] | Limit [dBm] | Limit [mW] | Antenna Gain (dBi) | EIRP (dBm) | EIRP (mW) | Plot number |
|-------------------------|--------------------------|-------------------------|----------------|---------------|--------------------------|---------------|--------------|----------------|
| 2405 | 2.80 | 1.91 | +30 | 1000 | 2.15 | 4.95 | 3.13 | A |
| 2440 | 2.74 | 1.88 | +30 | 1000 | 2.15 | 4.89 | 3.08 | B |
| 2480 | 3.83 | 2.42 | +30 | 1000 | 2.15 | 5.98 | 3.96 | C |

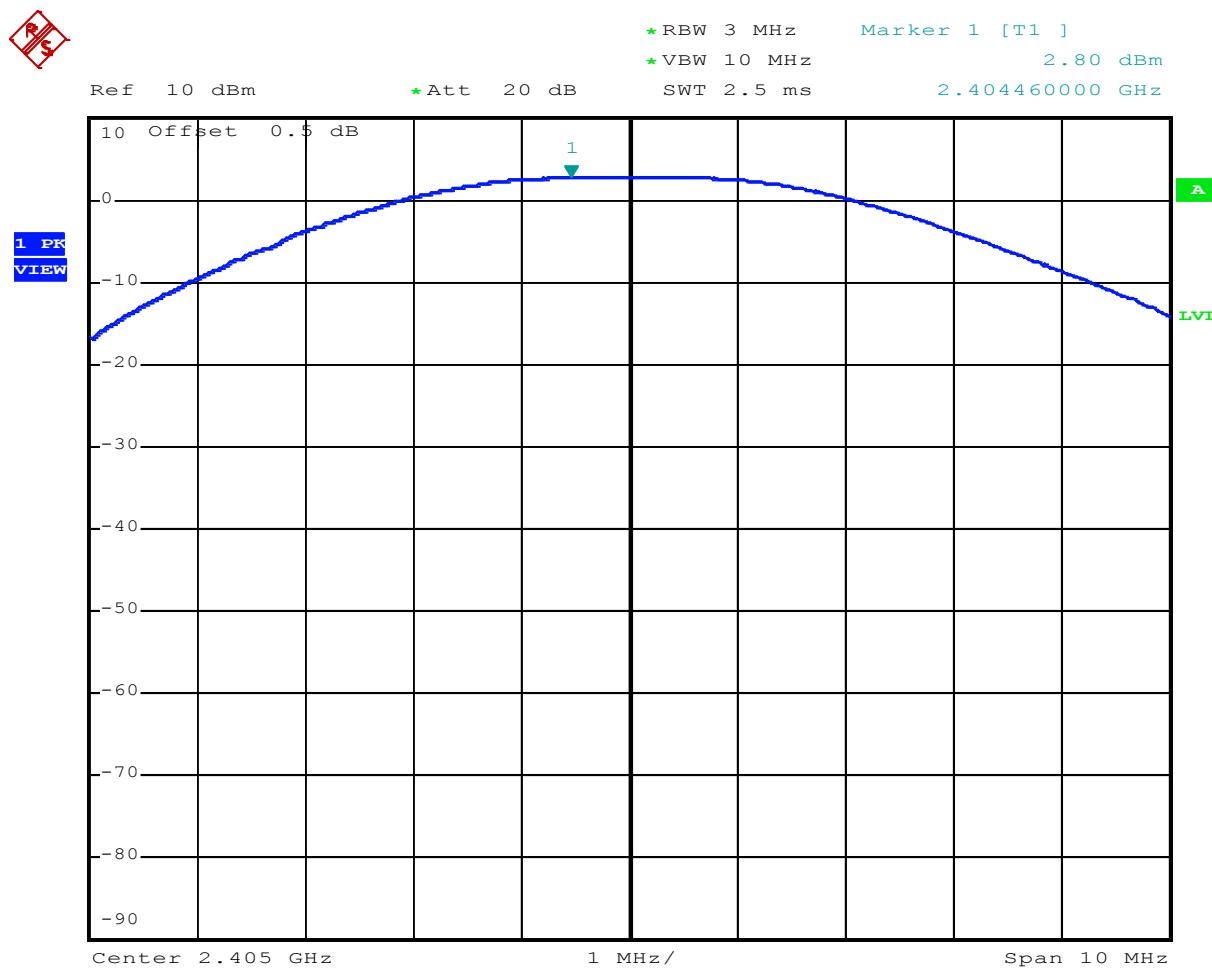


Date: 25.MAR.2015 10:57:47

Plot A

Test Report No.:

14120301.fcc01

Page 15 of 41

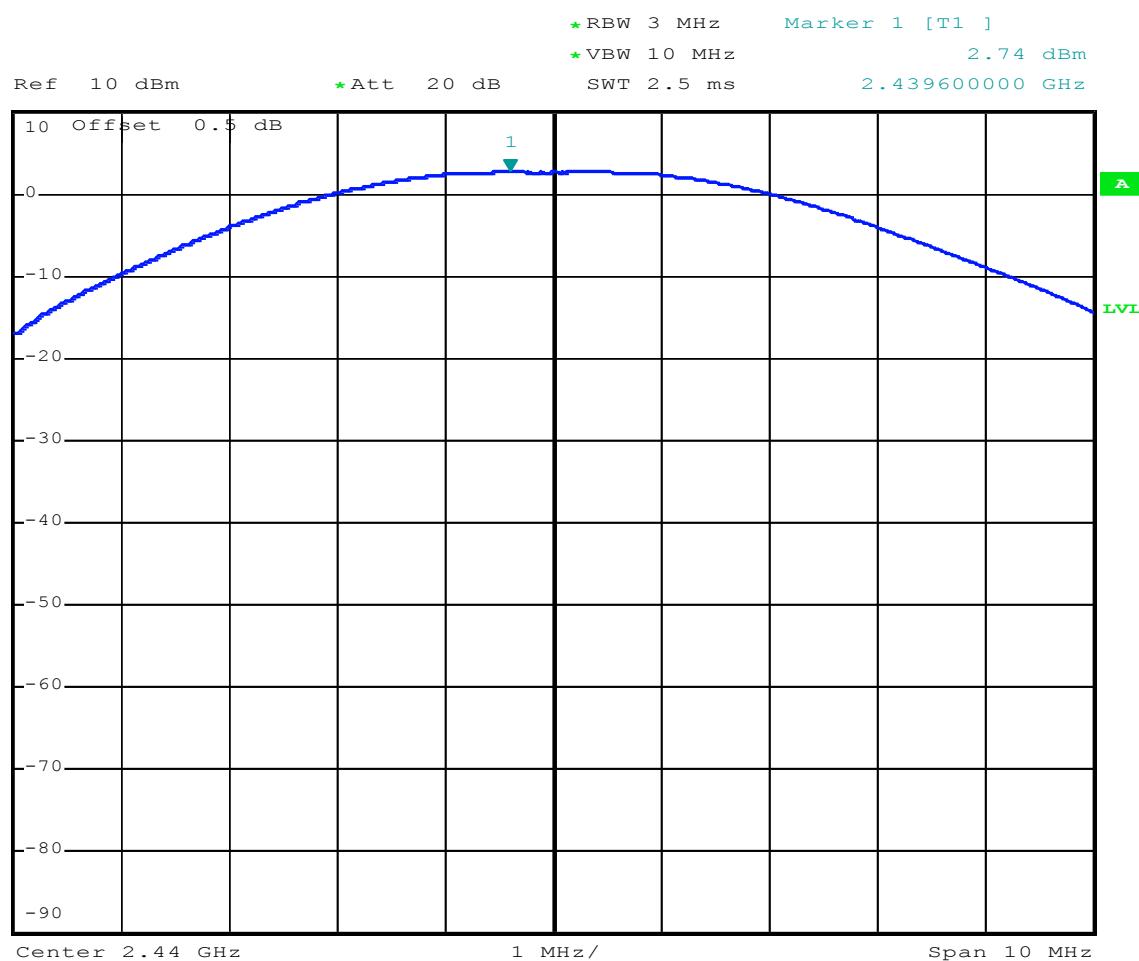


Date: 25.MAR.2015 10:59:12

Plot B

Test Report No.:

14120301.fcc01

Page 16 of 41

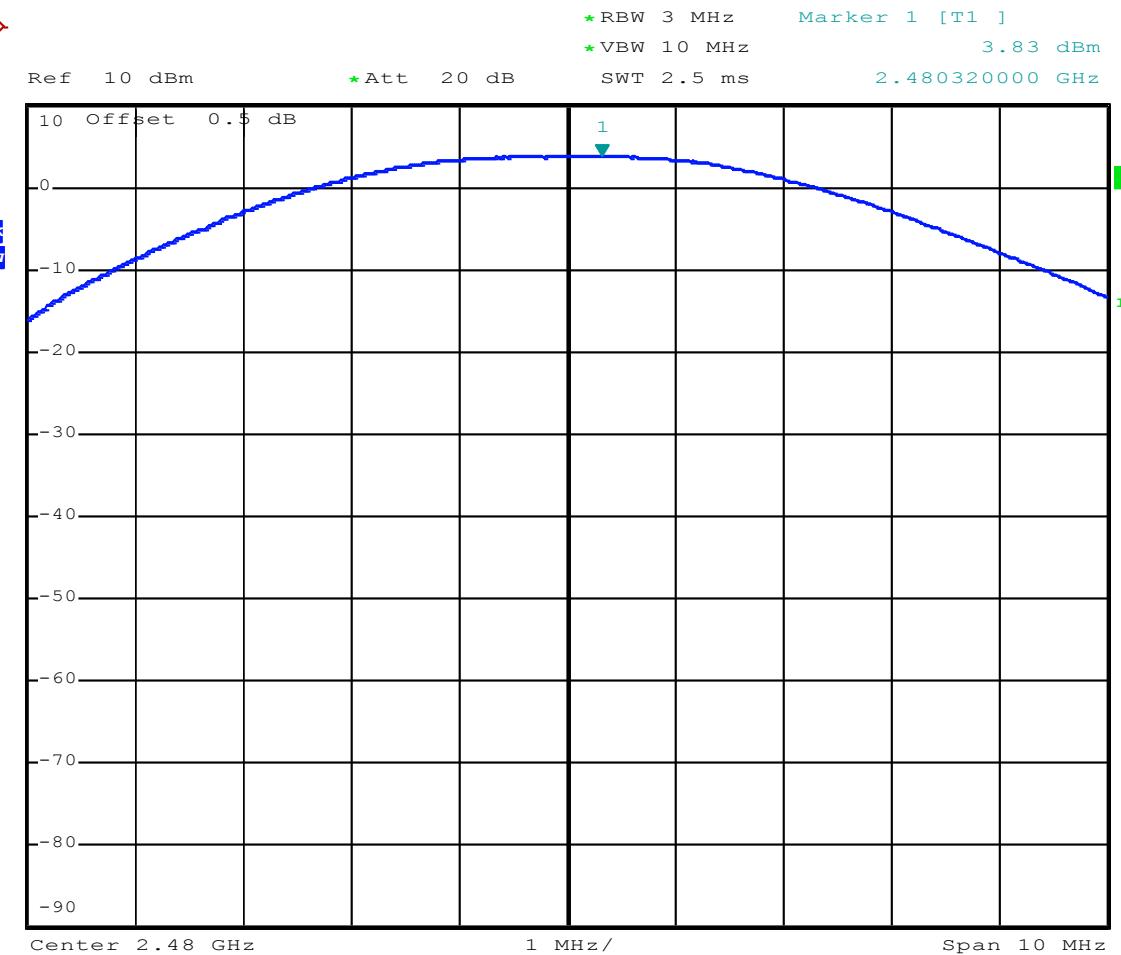

Date: 25.MAR.2015 10:59:59

Plot C

Test Report No.:

14120301.fcc01

Page 17 of 41

5.1.2 6dB and 99% Bandwidth

RESULT: PASS

Date of testing: 2015-03-25

Requirements:

FCC 15.247(a)(2), RSS-210 A8.2(a)

For systems using digital modulation in the 2400-2483.5MHz band, the 6dB bandwidth shall be at least 500kHz.

For 99% Bandwidth: RSS-Gen Section 4.6.1: No requirement is given.

Test procedure 6dB bandwidth:

ANSI C63.10:2013

Section 11.8.2

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 100kHz, video bandwidth to 300kHz and the span wide enough to capture the modulated carrier.

For 99% Bandwidth:

ANSI C63.10-2013 and RSS-Gen.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission sideskirts. The resolution bandwidth shall be set as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

A spectrum analyzer was connected to the antenna port of the EUT. The spectrum analyzer resolution bandwidth was set to 1% of the selected span, Video bandwidth was set to 3 times the resolution bandwidth. The span was set to capture the whole modulation process. The Spectrum analyzers automated function for 99% BW was used.

Plots A1,B1 and C1 shown on the next pages are of the 6 dB bandwidth.

Plots A2,B2 and C2 shown on the next pages are of the 99% bandwidth


Test Report No.:

14120301.fcc01

Page 18 of 41

6dB Bandwidth

| Operating Frequency [MHz] | 99% Bandwidth [kHz] | 6dB Bandwidth [kHz] | Limit [kHz] | Verdict [Pass/Fail] | Plot number |
|---------------------------|---------------------|---------------------|-------------|---------------------|-------------|
| 2405 | 2.58 | 1.60 | >500 | Pass | A1/A2 |
| 2440 | 2.57 | 1.61 | >500 | Pass | B1/B2 |
| 2480 | 2.57 | 1.61 | >500 | Pass | C1/C2 |

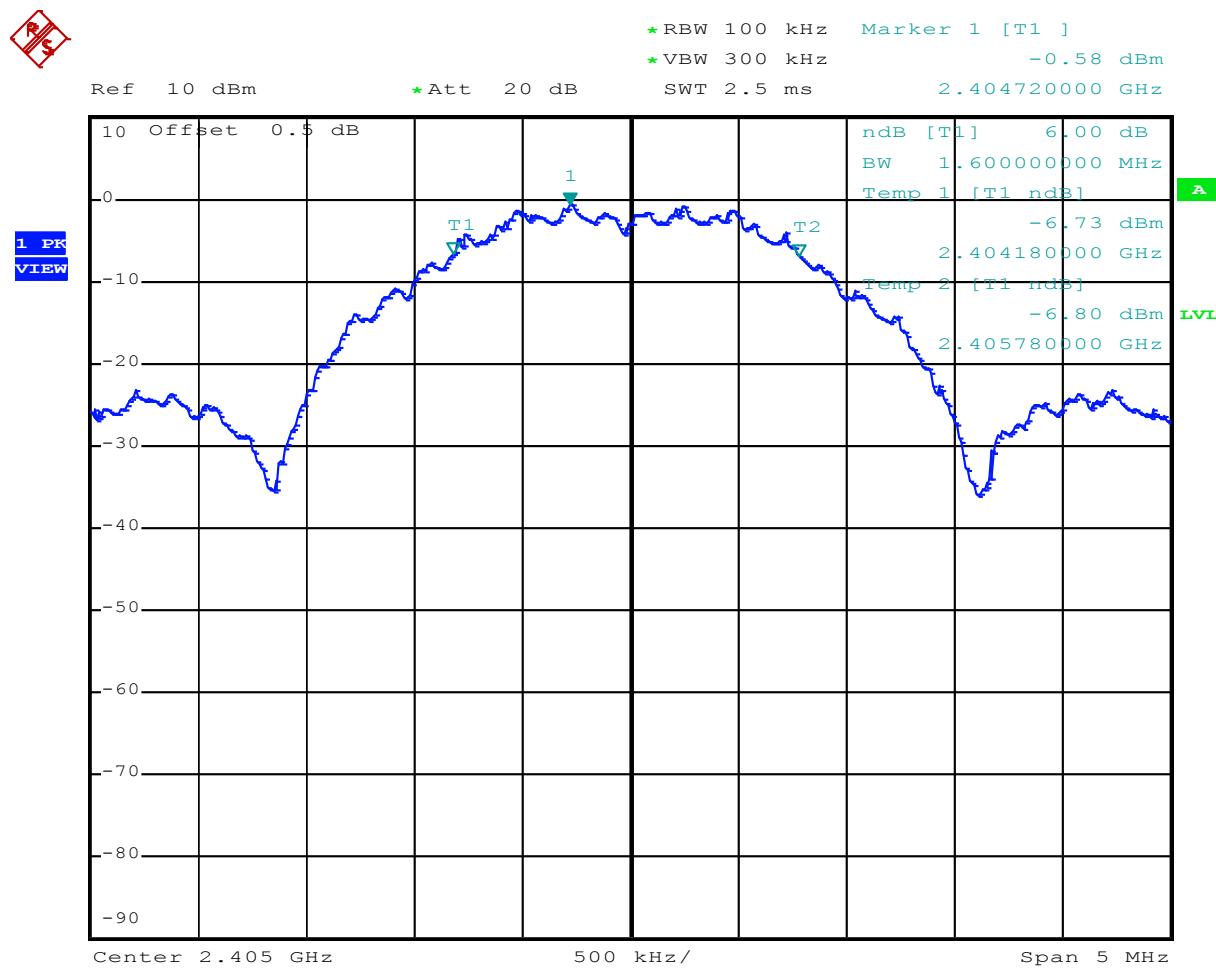


Date: 25.MAR.2015 11:05:33

Plot A1

Test Report No.:

14120301.fcc01

Page 19 of 41

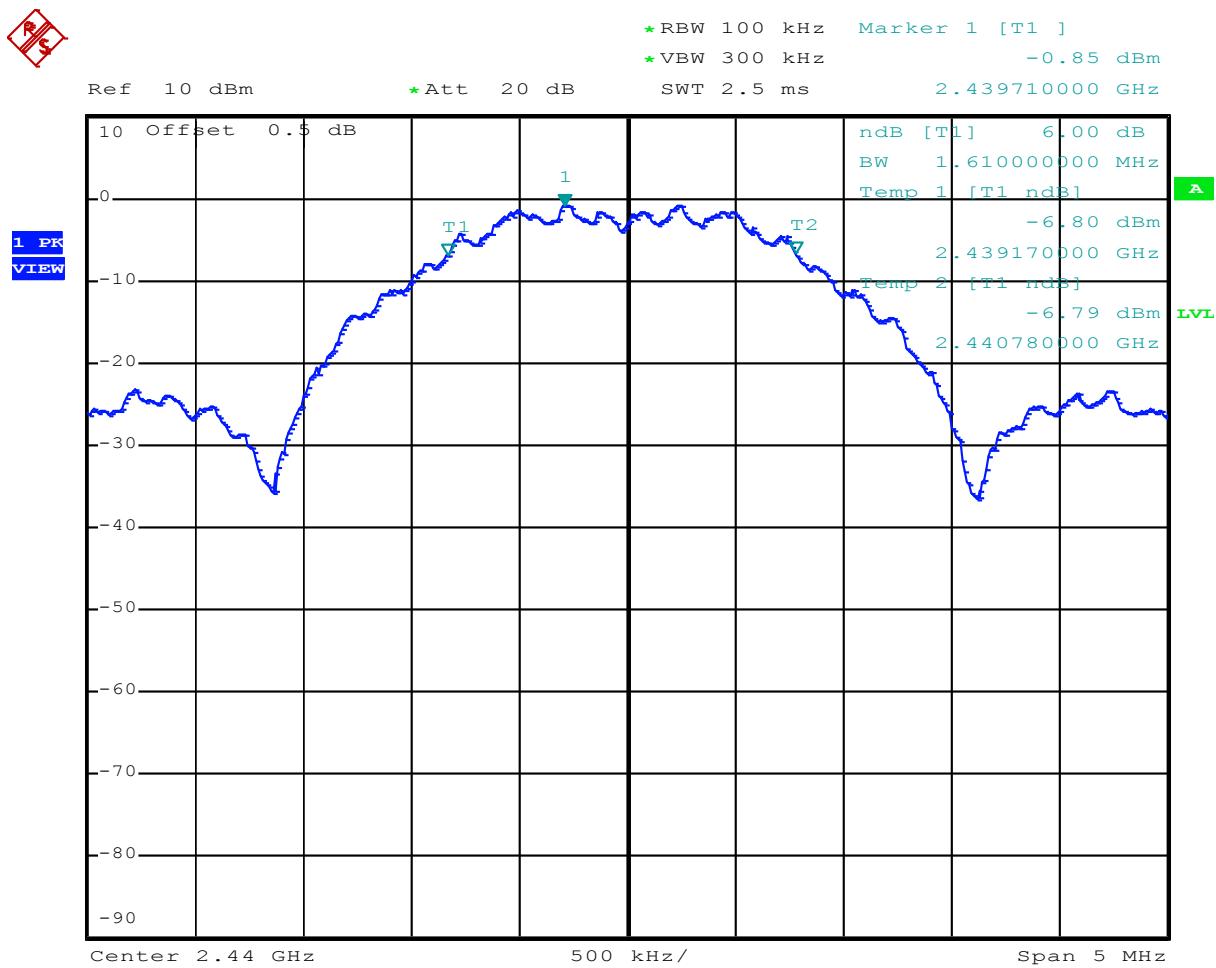


Date: 25.MAR.2015 11:03:36

Plot B1

Test Report No.:

14120301.fcc01

Page 20 of 41

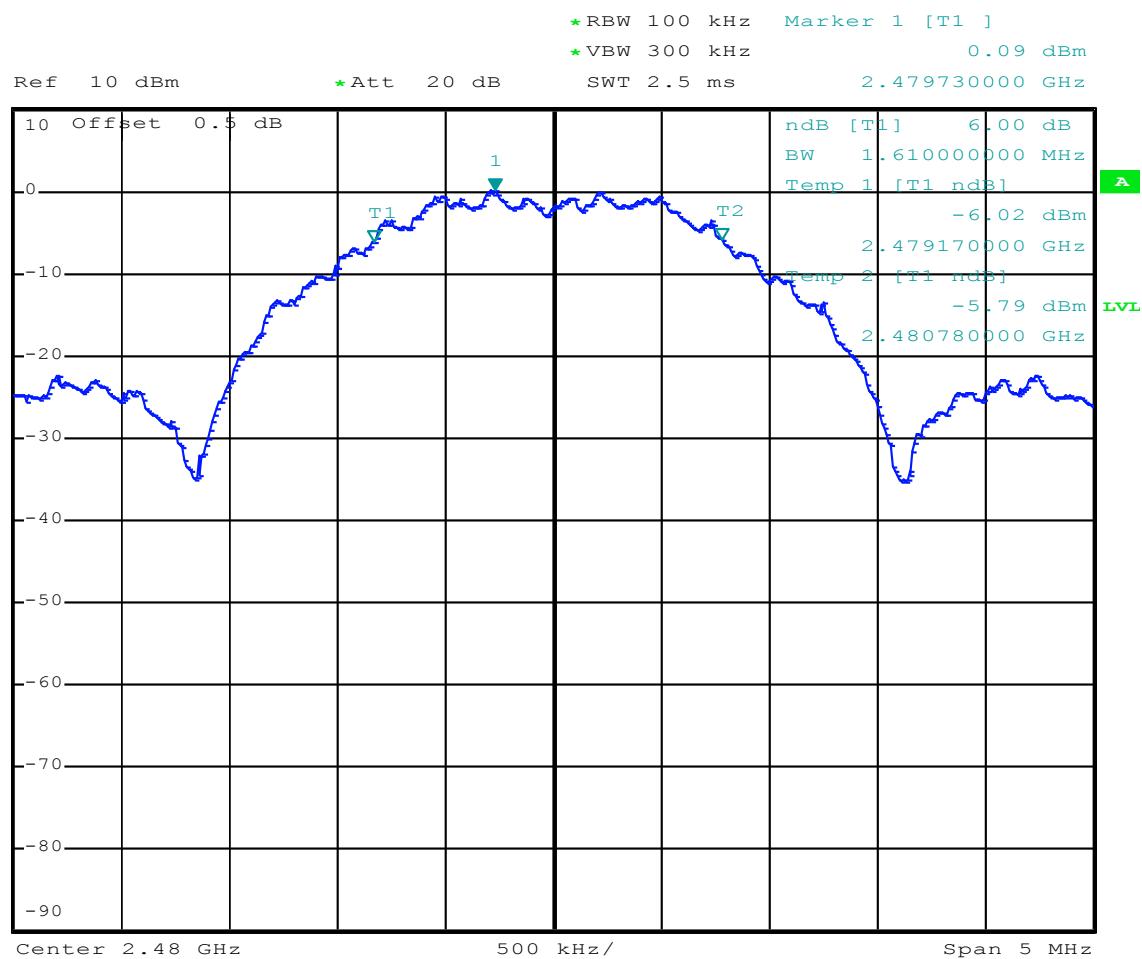


Date: 25.MAR.2015 11:01:24

Plot C1

Test Report No.:

14120301.fcc01

Page 21 of 41

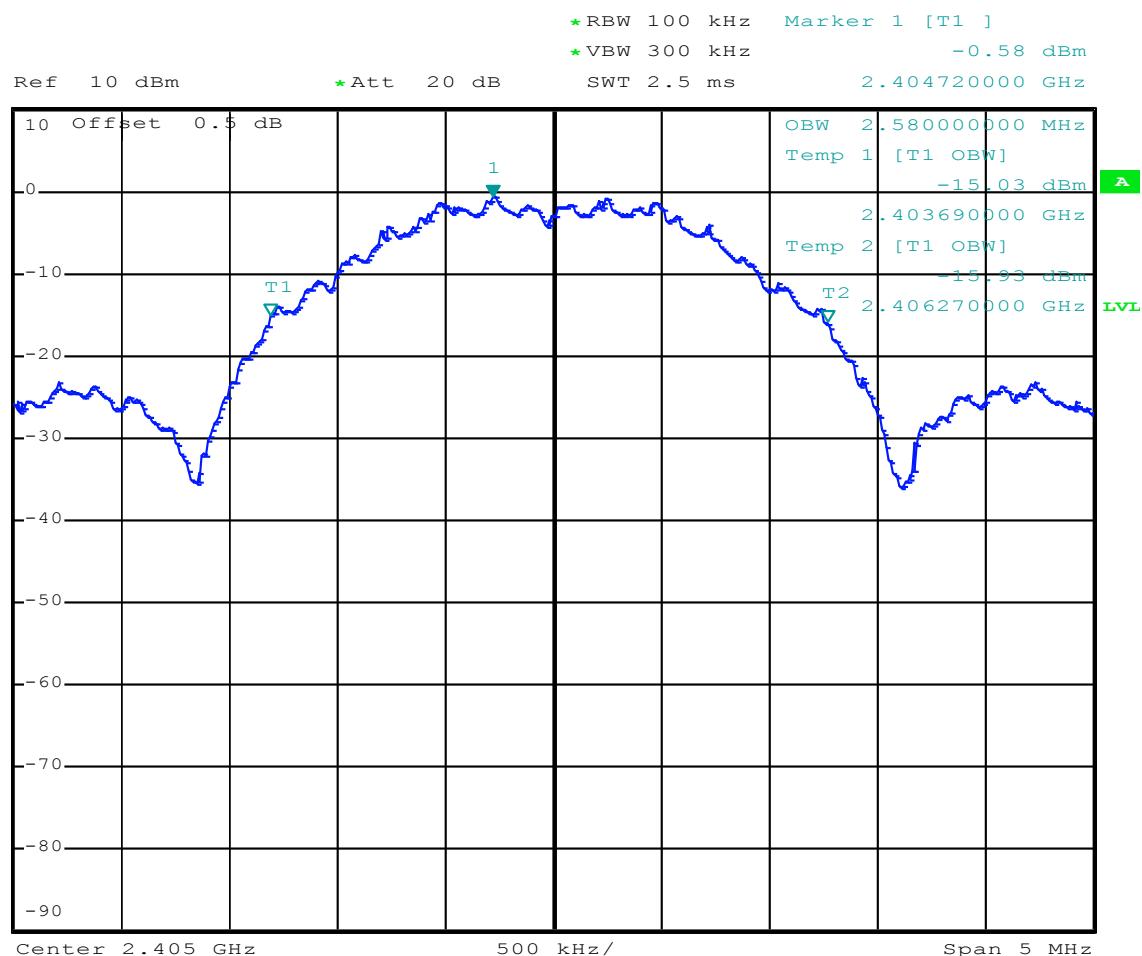


Date: 25.MAR.2015 11:06:10

Plot A2

Test Report No.:

14120301.fcc01

Page 22 of 41

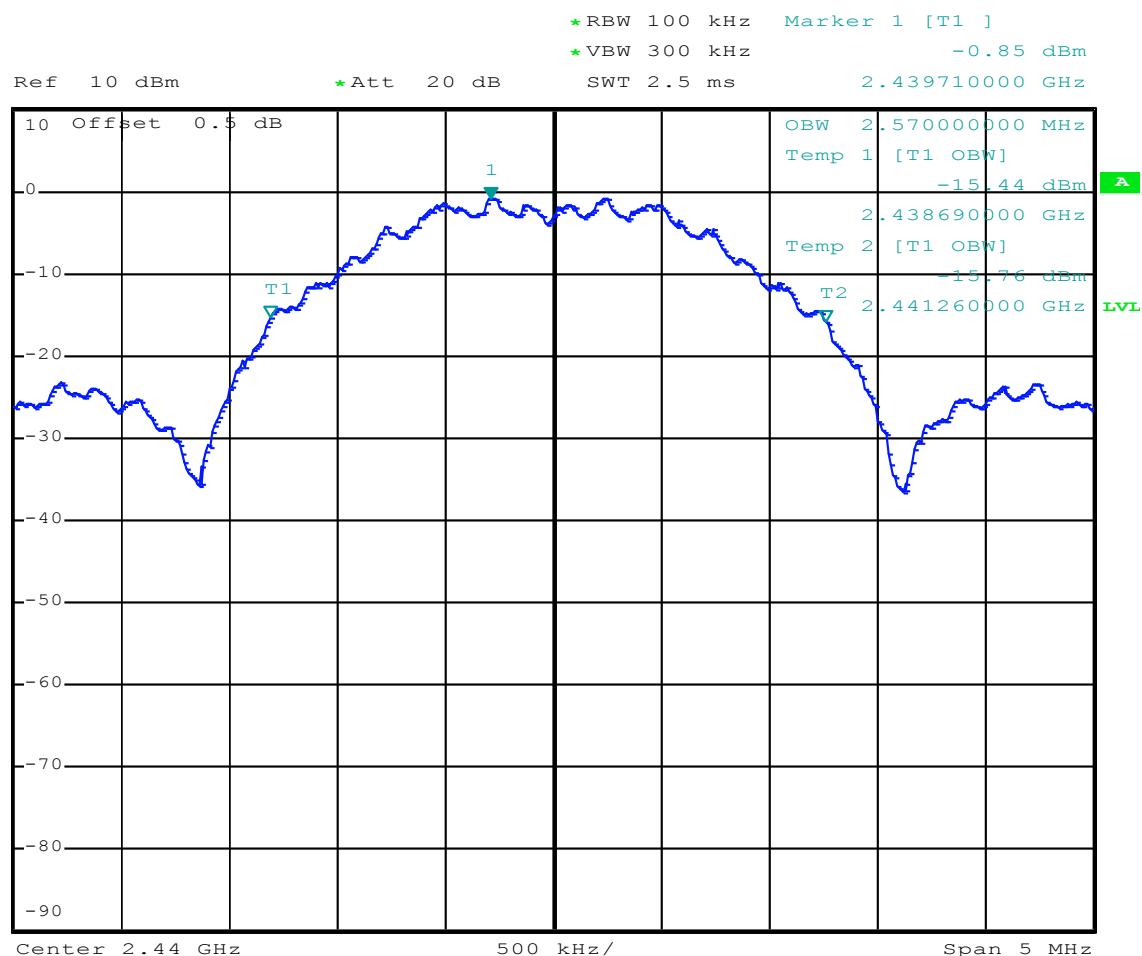

Date: 25.MAR.2015 11:04:01

Plot B2


Test Report No.:

14120301.fcc01

Page 23 of 41



1 PK
VIEW

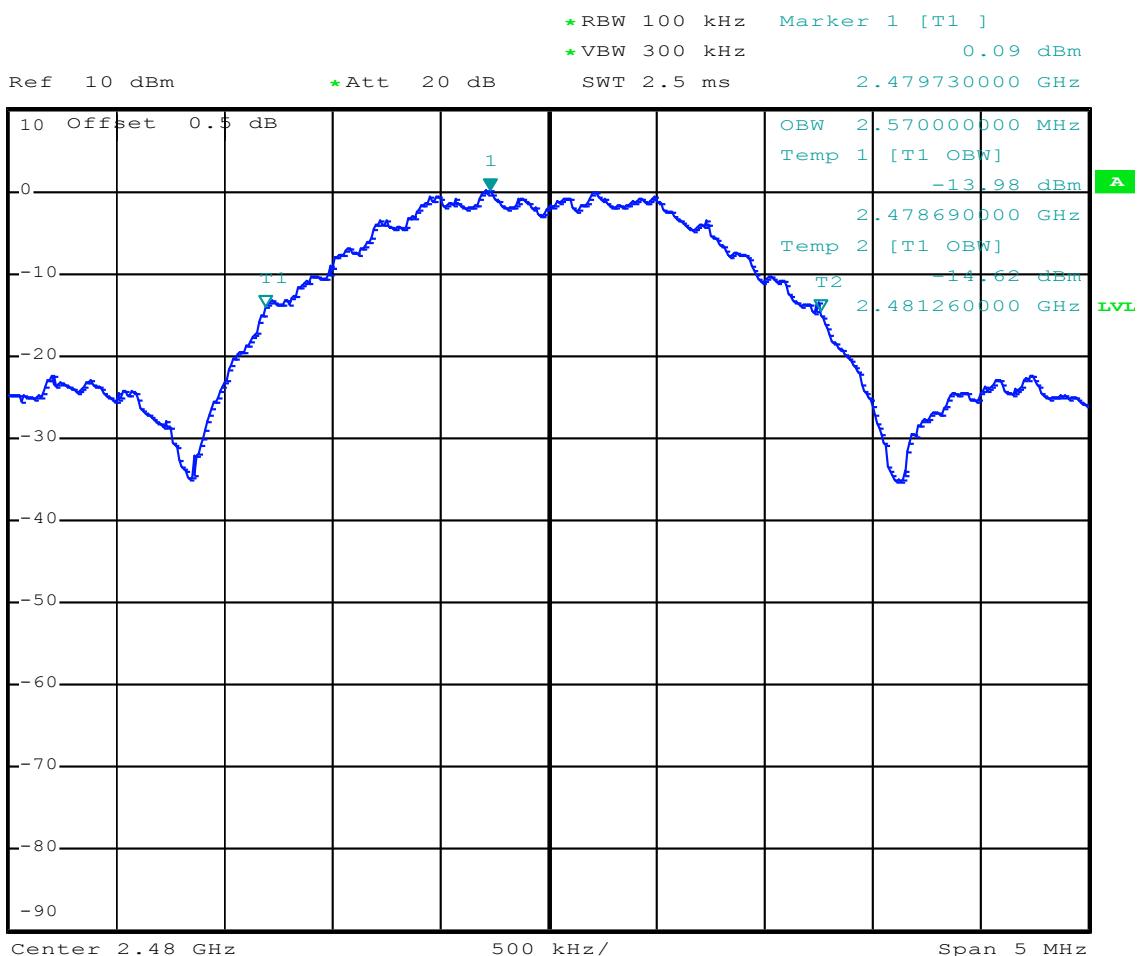

Date: 25.MAR.2015 11:02:05

Plot C2

Test Report No.:

14120301.fcc01

Page 24 of 41

5.1.3 Peak Power Spectral Density

RESULT: PASS

Date of testing: 2015-03-25

Requirements:

FCC 15.247(e) and RSS-210 section A8.2(b)

For digitally modulated systems, the power spectral density (PSD) conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

ANSI C63.10:2013

The section 11.10.2 PKPSD peak PSD procedure was used. A spectrum analyzer was connected to the antenna port of the EUT. The analyzer resolution bandwidth was set to 3kHz and the video bandwidth was set to 10kHz. The sweep time was set to auto couple and the trace was allowed to stabilize before making the final measurement. By using the Peak marker function the maximum amplitude was determined. The final measurement takes into account the loss generated by all the involved cables (0.5 dB).


Test Report No.:

14120301.fcc01

Page 25 of 41

Peak Power Spectral Density

| Operating Frequency [MHz] | Max PSD [dBm] | Limit [dBm] | Verdict [Pass/Fail] | Plot |
|---------------------------|---------------|-------------|---------------------|------|
| 2405 | -13.38 | 8 | Pass | A |
| 2440 | -12.90 | 8 | Pass | B |
| 2480 | -11.30 | 8 | Pass | C |

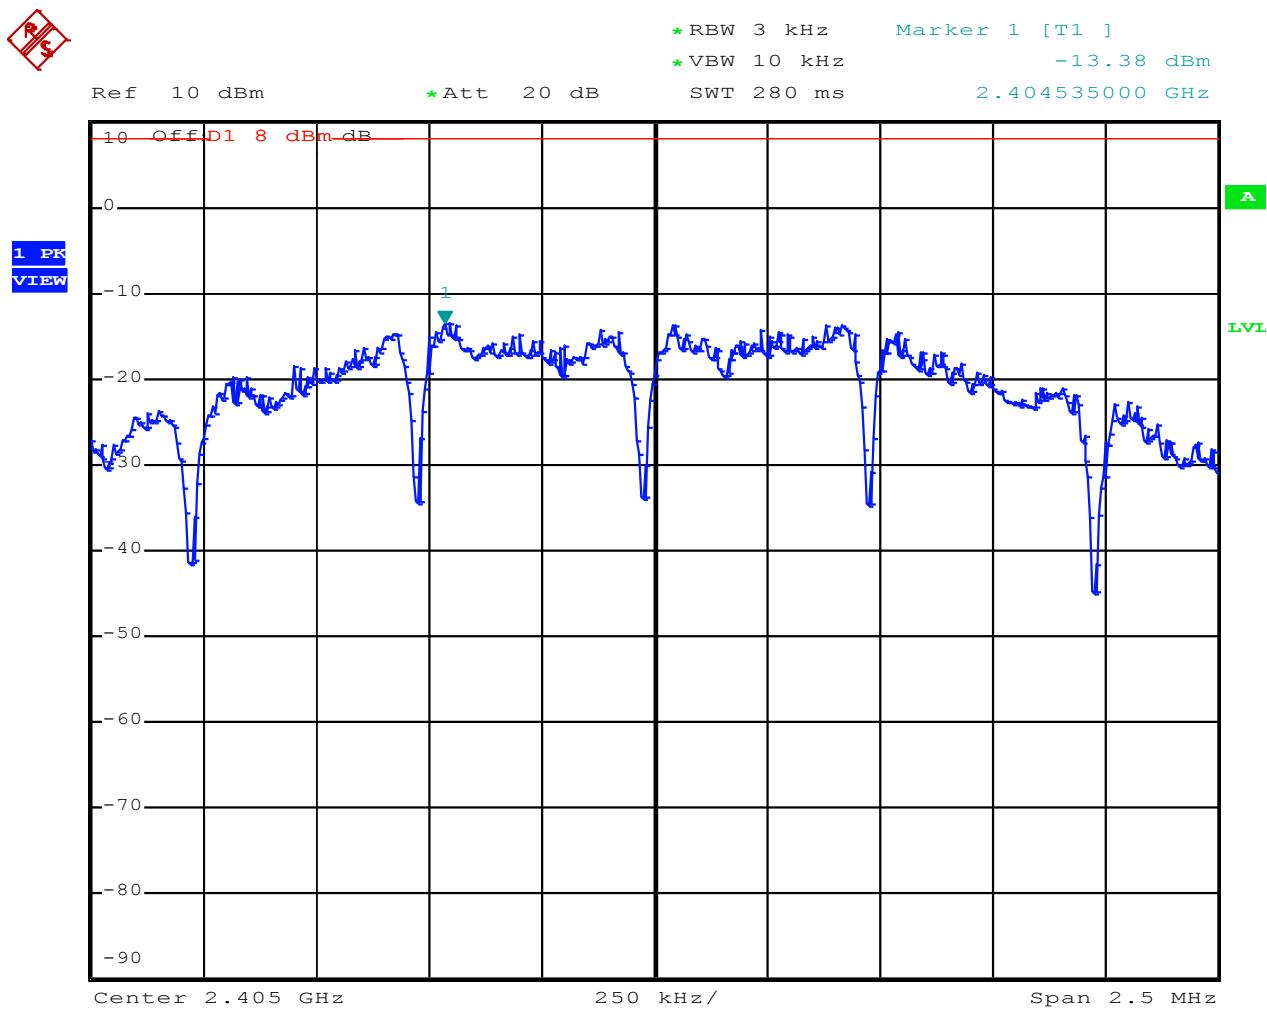


Date: 25.MAR.2015 11:10:07

Plot A:

Test Report No.:


14120301.fcc01

Page 26 of 41

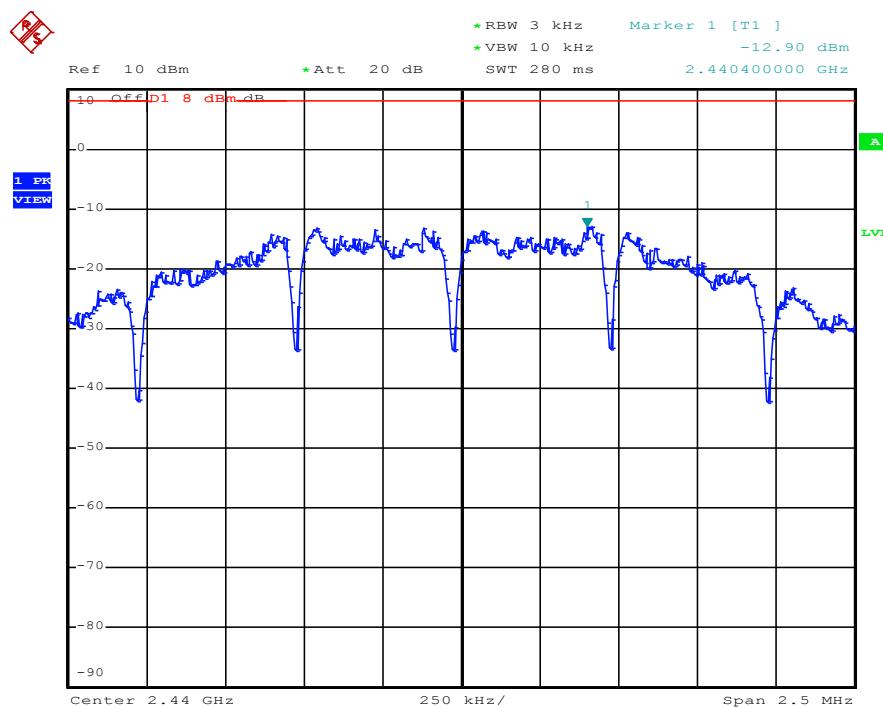

Date: 25.MAR.2015 11:11:16

Plot B

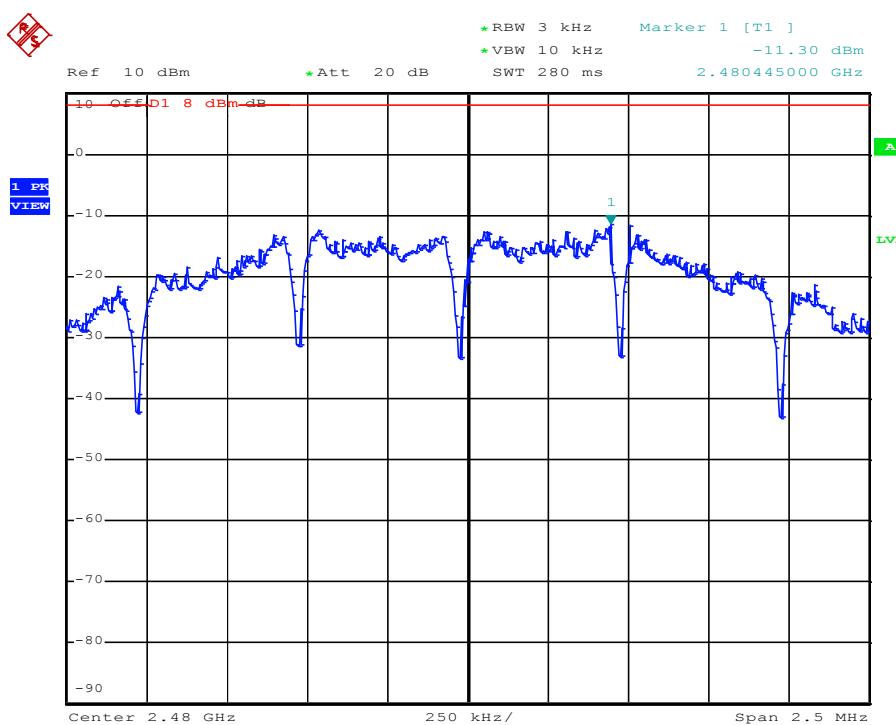

Date: 25.MAR.2015 11:12:09

Plot C

Test Report No.:

14120301.fcc01

Page 27 of 41

5.1.4 Band Edge Conducted Emissions

RESULT: Pass

Date of testing: 2015-03-25

Requirements:

FCC 15.205, FCC 15.209, FCC 15.247(d) and RSS-210 section A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test procedure:

ANSI C63.10:2013

The marker-delta method, as described in ANSI C63.10 was used.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings:

RBW = 100kHz, VBW = 300kHz.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Results: All out of band spurious emissions are more than 20 dB below the fundamental. See the figures on the following pages.

Test Report No.:

14120301.fcc01

Page 28 of 41

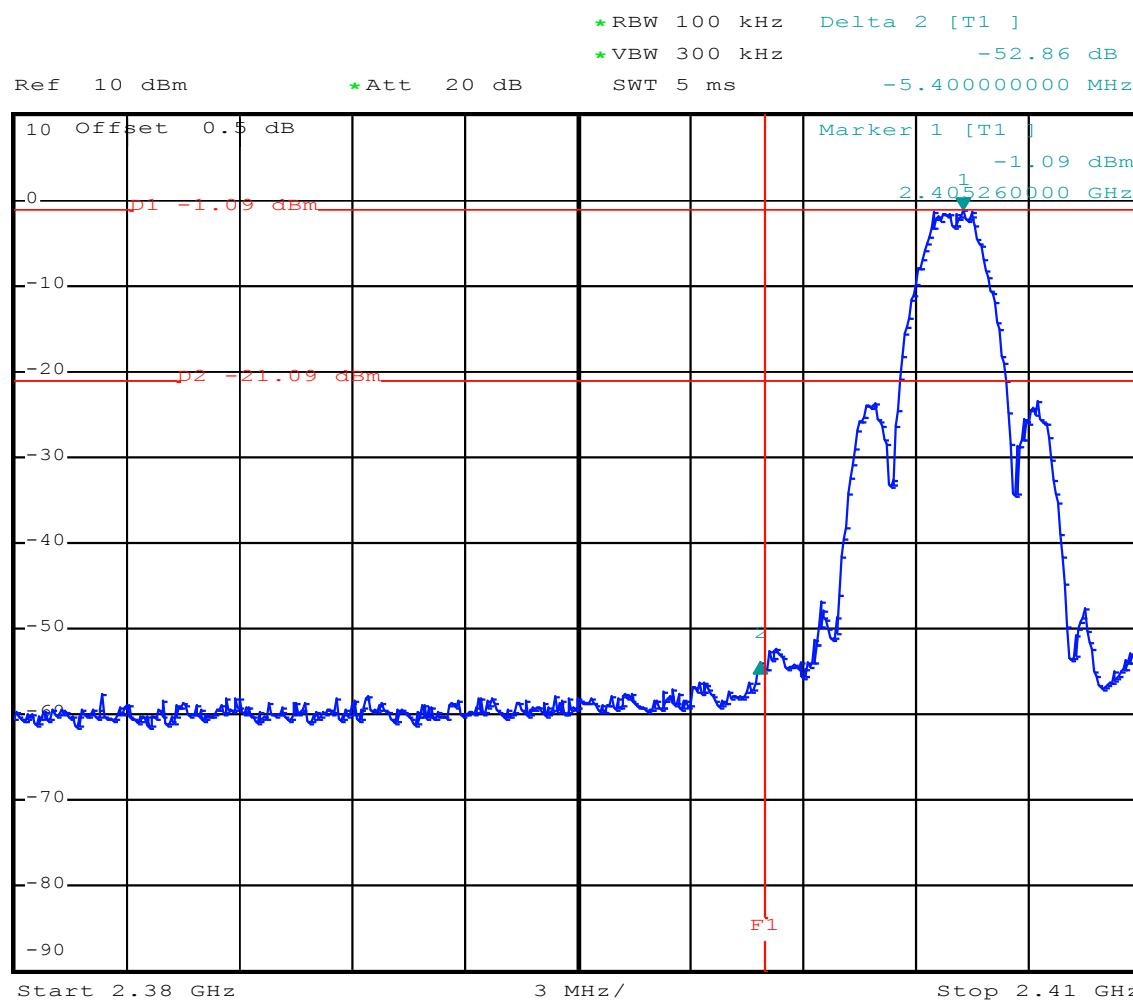

Date: 25.MAR.2015 11:30:48


Plot: Band Edge Conducted Emission, Spectral Diagram, 2405 MHz

Plot showing more than 20 dB band edge attenuation.
F1 shows the band edge frequency of 2400 MHz.

Test Report No.:

14120301.fcc01

Page 29 of 41

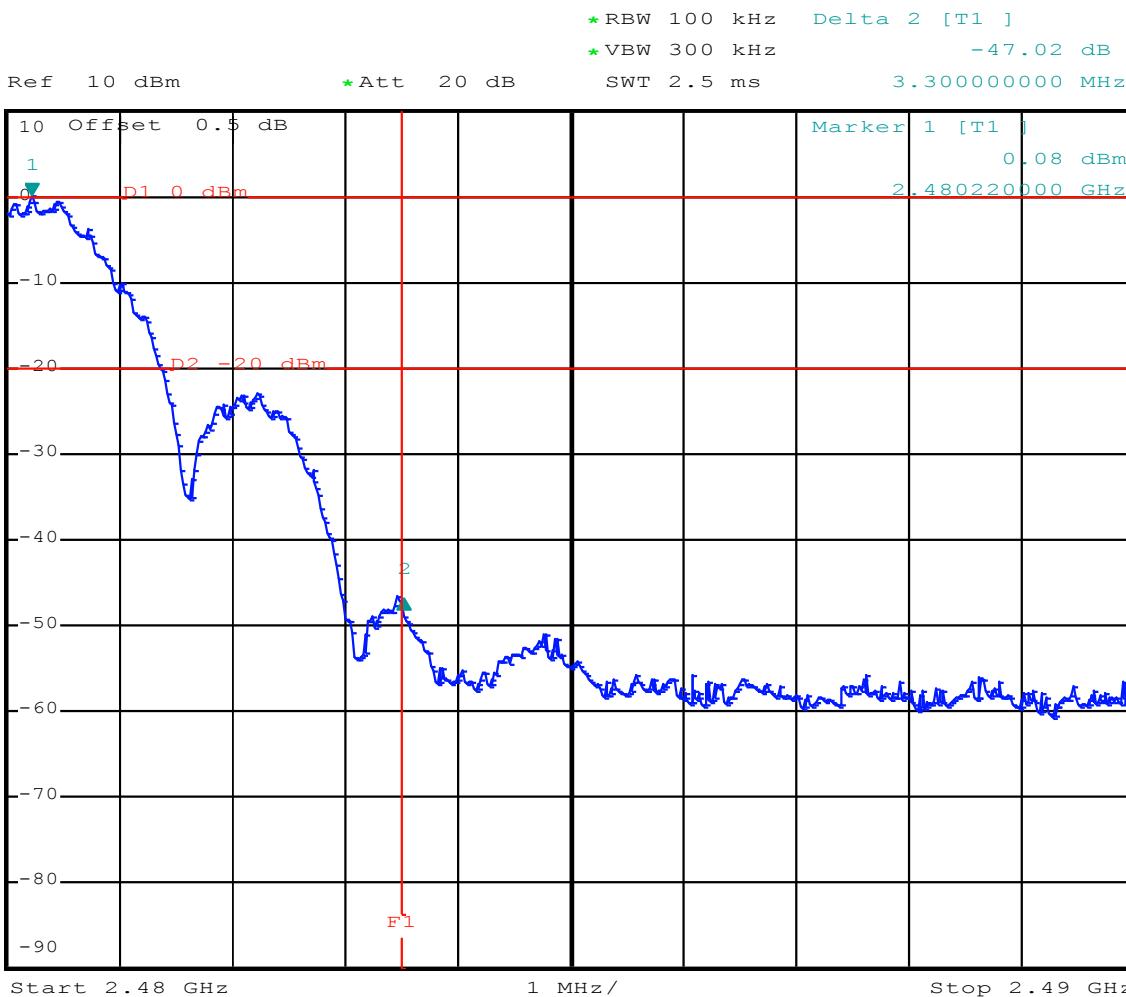

Date: 25.MAR.2015 11:22:02

Plot: Band Edge Conducted Emission, Spectral Diagram, 2480 MHz.
Plot showing more than 20 dB band edge attenuation.
F1 shows the band edge frequency of 2483,5 MHz.

Test Report No.:

14120301.fcc01

Page 30 of 41

5.1.5 Radiated Spurious Emissions of Transmitter

RESULT: PASS

Date of testing: 2015-03-26 and 2015-04-02

Frequency range: 30MHz - 25GHz

Requirements:

FCC 15.209 and FCC 15.247(d) and RSS-Gen

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Test procedure:

ANSI C63.10:2013

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. The levels are expressed in dBm which are derived from $dBm = E(dB\mu V/m) - 95.2dB$. Where Peak (Pk) values where at least 6 dB under the Average (Av) limits, Av value was not tested. Were Average values were tested, Average values were measured using a 10Hz Video Bandwidth.

Correction factors are incorporated in the spectrum analyzers as an automated function. Refer to section 4.2 for the power settings and modes.

Correction factors includes: antenna factor, cable loss and pre-amplifier gain.

Test Report No.:

14120301.fcc01

Page 31 of 41

**Radiated Emission, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical
Antenna Orientations**

| Frequency [MHz] | Antenna Orientation | Level QP [dB μ V/m] | Limit [dB μ V/m] | Verdict [Pass/Fail] |
|--------------------|------------------------|----------------------------|-------------------------|------------------------|
| 41.869 | Vertical | 36.5 | 40.0 | Pass |
| 51.464 | Vertical | 38.1 | 40.0 | Pass |
| 58.000 | Vertical | 30.7 | 40.0 | Pass |
| 76.533 | Vertical | 15.6 | 40.0 | Pass |
| 211.372 | Horizontal | 42.7 | 43.5 | Pass |
| 272.480 | Horizontal | 17.8 | 46.0 | Pass |

Note: - Quasi Peak detector used with a bandwidth of 120 kHz
- Tested in modes as described in section 4.2, highest values noted.
- Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating frequency.
- The EUT was varied in 3 positions.
- Test performed on April 02,2015

Test Report No.:

14120301.fcc01

Page 32 of 41

Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2405 MHz.

| Frequency [MHz] | Antenna Orientation | Detector | Resolution Bandwidth (kHz) | Level Pk [dBm] | Limit Av/Pk [dBm]*1 | Result |
|----------------------|---------------------|--------------|----------------------------|----------------|---------------------|--------|
| 1080.5 ^{*R} | Vertical | Peak (Pk) | 1000 | -61.2 | -41.2 / -21.2 | Pass |
| 1445.2 ^{*R} | Horizontal | Peak (Pk) | 1000 | -60.8 | -41.2 / -21.2 | Pass |
| 2341.0 ^{*R} | Horizontal | Peak (Pk) | 1000 | -52.9 | -41.2 / -21.2 | Pass |
| 4810 ^{H,R} | Horizontal | Peak (Pk) | 1000 | -39.9 | -21.2 | Pass |
| 4810 ^{H,R} | Horizontal | Average (Av) | 1000 | -51.2 | -41.2 | Pass |
| 11499 ^{*R} | Vertical | Peak (Pk) | 1000 | -43.3 | -21.2 | Pass |
| 11499 ^{*R} | Vertical | Average (Av) | 1000 | -55.7 | -41.2 | Pass |
| 17987 ^{*R} | Vertical | Peak (Pk) | 1000 | -38.2 | -21.2 | Pass |
| 17987 ^{*R} | Vertical | Average (Av) | 1000 | -51.6 | -41.2 | Pass |

See notes on page 33

Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2440 MHz.

| Frequency [MHz] | Antenna Orientation | Detector | Resolution Bandwidth (kHz) | Level Pk [dBm] | Limit Av/Pk [dBm]*1 | Result |
|----------------------|---------------------|--------------|----------------------------|----------------|---------------------|--------|
| 1088.1 ^{*R} | Horizontal | Peak (Pk) | 1000 | -60.9 | -41.2 / -21.2 | Pass |
| 1440.6 ^{*R} | Horizontal | Peak (Pk) | 1000 | -61.8 | -41.2 / -21.2 | Pass |
| 2335.3 ^{*R} | Vertical | Peak (Pk) | 1000 | -55.6 | -41.2 / -21.2 | Pass |
| 4880 ^{H,R} | Horizontal | Peak (Pk) | 1000 | -38.6 | -21.2 | Pass |
| 4880 ^{H,R} | Horizontal | Average (Av) | 1000 | -52.6 | -41.2 | Pass |
| 11798 ^{*R} | Horizontal | Peak (Pk) | 1000 | -44.4 | -21.2 | Pass |
| 11798 ^{*R} | Horizontal | Average (Av) | 1000 | -64.4 | -41.2 | Pass |

See notes on page 33

Test Report No.:

14120301.fcc01

Page 33 of 41

Radiated Emission, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, 2480 MHz.

| Frequency [MHz] | Antenna Orientation | Detector | Resolution Bandwidth (kHz) | Level Pk [dBm] | Limit Av/Pk [dBm]*1 | Result |
|---------------------|---------------------|--------------|----------------------------|----------------|---------------------|--------|
| 1080.8 ^R | Horizontal | Peak (Pk) | 1000 | -60.3 | -41.2 / -21.2 | Pass |
| 1440.3 ^R | Horizontal | Peak (Pk) | 1000 | -60.3 | -41.2 / -21.2 | Pass |
| 4960 ^{H,R} | Horizontal | Peak (Pk) | 1000 | -47.1 | -21.2 | Pass |
| 4960 ^{H,R} | Horizontal | Average (Av) | 1000 | -57.5 | -41.2 | Pass |
| 11577 ^R | Vertical | Peak (Pk) | 1000 | -49.3 | -41.2 / -21.2 | Pass |
| 17944 ^R | Vertical | Peak (Pk) | 1000 | -38.4 | -41.2 / -21.2 | Pass |
| 17944 ^R | Vertical | Peak (Pk) | 1000 | -52.0 | -41.2 / -21.2 | Pass |

Note:

- Peak detector used with a bandwidth of 1 MHz
- Tested in modes as described in section 4.2, highest values noted.
- Peak value were already within Average limits, therefor Average not tested.
- From pre-scan the worst case situation proved to be EUT in horizontal position with its antenna's in vertical position.
- ¹: Derived from the expression $\text{dBm} = \text{dB}\mu\text{V/m} - 95.2\text{dB}$.
- ^R refers to a frequency in a restricted band.
- ^H refers to a frequency which is a harmonic of the fundamental.
- Test performed on March 26,2015

Test Report No.:

14120301.fcc01

Page 34 of 41

5.2 AC Power Line Conducted Measurements

RESULT: PASS.

Date of testing: 2015-03-25

Requirements: FCC 15.109 and RSS-Gen Section 8.8.

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) Quasi-Peak | Conducted Limit (dB μ V) Average |
|-----------------------------|--------------------------------------------|-----------------------------------------|
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 - 30 | 46 | 50 |

*Decreases with the logarithm of the frequency.

Test procedure:

ANSI C63.10-2013.

Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a 50 μ H / 50 Ω LISN. The frequency range from 150kHz to 30MHz was searched. The six highest EUT emissions relative to the limit were noted. The EUT was positioned at least 80cm from the LISN.

Test Report No.:

14120301.fcc01

Page 35 of 41

5.2.1 AC Power Line Conducted Emission of Transmitter

| Frequency (MHz) | Measurement results (dB μ V) L1 | | Measurement results (dB μ V) L2/Neutral | | Limits (dB μ V) | | Verdict (Pass/Fail) |
|--------------------|----------------------------------------------|------|------------------------------------------------------|------|------------------------|------|------------------------|
| | QP | AV | QP | AV | QP | AV | |
| 0.150 | 57.3 | 32.0 | 55.7 | 33.1 | 66.0 | 56.0 | Pass |
| 0.215 | 43.4 | 26.0 | 43.3 | 32.1 | 62.8 | 52.8 | Pass |
| 0.245 | 46.4 | 28.4 | 48.9 | 35.6 | 61.8 | 51.8 | Pass |
| 0.330 | 45.3 | 29.5 | 48.0 | 37.2 | 59.5 | 49.5 | Pass |
| 0.425 | 43.3 | 29.0 | 48.1 | 40.1 | 57.3 | 47.3 | Pass |
| 0.505 | 44.6 | 29.8 | 47.9 | 37.6 | 56.0 | 46.0 | Pass |
| 0.585 | 42.6 | 27.7 | 45.9 | 36.0 | 56.0 | 46.0 | Pass |
| 0.685 | 42.4 | 28.2 | 45.0 | 35.0 | 56.0 | 46.0 | Pass |
| 0.855 | 40.7 | 25.1 | 43.8 | 33.3 | 56.0 | 46.0 | Pass |
| 0.955 | 37.6 | 21.8 | 43.4 | 32.0 | 56.0 | 46.0 | Pass |
| 1.180 | 36.0 | 19.9 | 42.0 | 29.9 | 56.0 | 46.0 | Pass |
| 10.625 | 44.5 | 33.4 | 47.1 | 40.4 | 60.0 | 50.0 | Pass |
| 14.450 | 50.1 | 40.5 | 52.4 | 45.7 | 60.0 | 50.0 | Pass |
| 21.260 | 45.5 | 39.0 | 47.3 | 41.4 | 60.0 | 50.0 | Pass |
| 26.055 | 40.0 | 33.3 | 43.5 | 36.1 | 60.0 | 50.0 | Pass |

Results of the EUT with USB connection

| Frequency (MHz) | Measurement results (dB μ V) L1 | | Measurement results (dB μ V) L2/Neutral | | Limits (dB μ V) | | Verdict (Pass/Fail) |
|--------------------|----------------------------------------------|------|------------------------------------------------------|------|------------------------|------|------------------------|
| | QP | AV | QP | AV | QP | AV | |
| 0.150 | 57.3 | 32.2 | 56.1 | 33.2 | 66.0 | 56.0 | Pass |
| 0.215 | 39.0 | 23.0 | 43.6 | 31.9 | 62.8 | 52.8 | Pass |
| 0.260 | 47.0 | 30.0 | 48.3 | 35.0 | 61.4 | 51.4 | Pass |
| 0.330 | 44.0 | 28.7 | 48.1 | 37.3 | 59.5 | 49.5 | Pass |
| 0.425 | 43.3 | 30.6 | 46.6 | 38.1 | 57.3 | 47.3 | Pass |
| 0.510 | 44.2 | 29.0 | 48.0 | 38.2 | 56.0 | 46.0 | Pass |
| 0.590 | 41.5 | 26.9 | 46.0 | 36.1 | 56.0 | 46.0 | Pass |
| 0.670 | 41.5 | 26.3 | 45.3 | 35.1 | 56.0 | 46.0 | Pass |
| 0.855 | 39.1 | 22.2 | 43.4 | 33.0 | 56.0 | 46.0 | Pass |
| 1.085 | 37.2 | 20.3 | 41.0 | 29.0 | 56.0 | 46.0 | Pass |
| 12.975 | 39.2 | 28.2 | 41.4 | 34.1 | 60.0 | 50.0 | Pass |
| 29.845 | 33.6 | 26.3 | 25.0 | 20.0 | 60.0 | 50.0 | Pass |

Results of the EUT with USB to RS-232 connection

The results of the conducted emission tests, carried out in accordance with FCC Part 15.109 and RS-Gen section 8.8, at the 120 Volts/ 60 Hz AC mains connection terminals of the EUT, are depicted in the tables above. See notes on the next page.

Test Report No.:

14120301.fcc01

Page 36 of 41

Notes:

1. The resolution bandwidth used was 9 kHz.
2. Preliminary measurements indicated that the emissions from EUT were not affected by the EUT's operating frequency. Worst case values noted.
3. Plots are provided on the next pages

Test Report No.:


14120301.fcc01

Page 37 of 41

5.2.2 Plots of the AC Power-line Conducted Emissions

25. Mar 15 14:24

| Scan Settings (1 Range) | | | | Receiver Settings | | | | |
|-------------------------|------|------|------|-------------------|----------|--------|-------|--------|
| Frequencies | | | Step | IF BW | Detector | M-Time | Atten | Preamp |
| Start | Stop | Step | 5k | 9k | PK | 20ms | 0dBIN | OFF |
| 150k | 30M | | | | | | | |

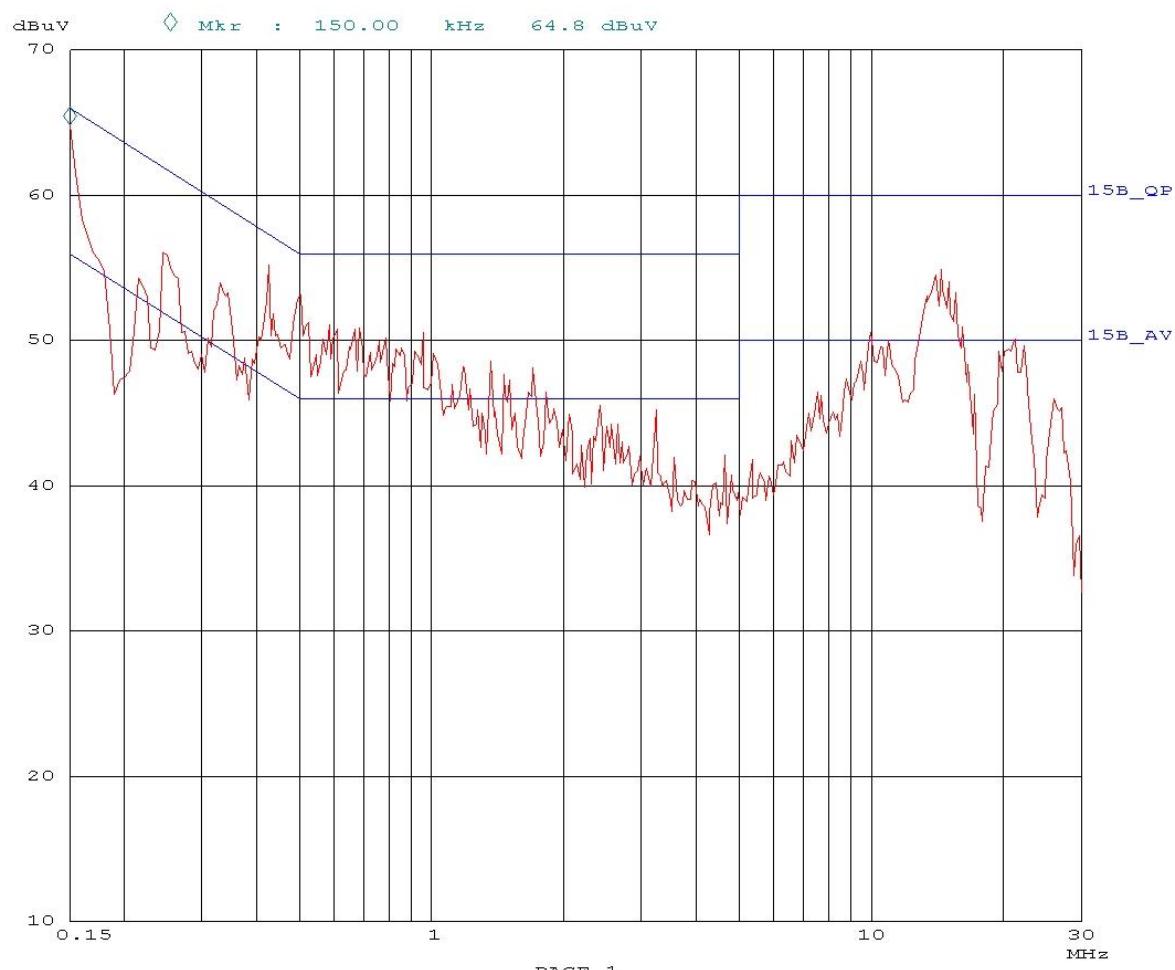

Plot of the AC Power-line Conducted emissions on L1, USB connection


Test Report No.:

14120301.fcc01

Page 38 of 41

25. Mar 15 14:44

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
| Start Stop Step IF BW Detector M-Time Atten Preamp |
| 150k 30M 5k 9k PK 20ms 0dBIN OFF |

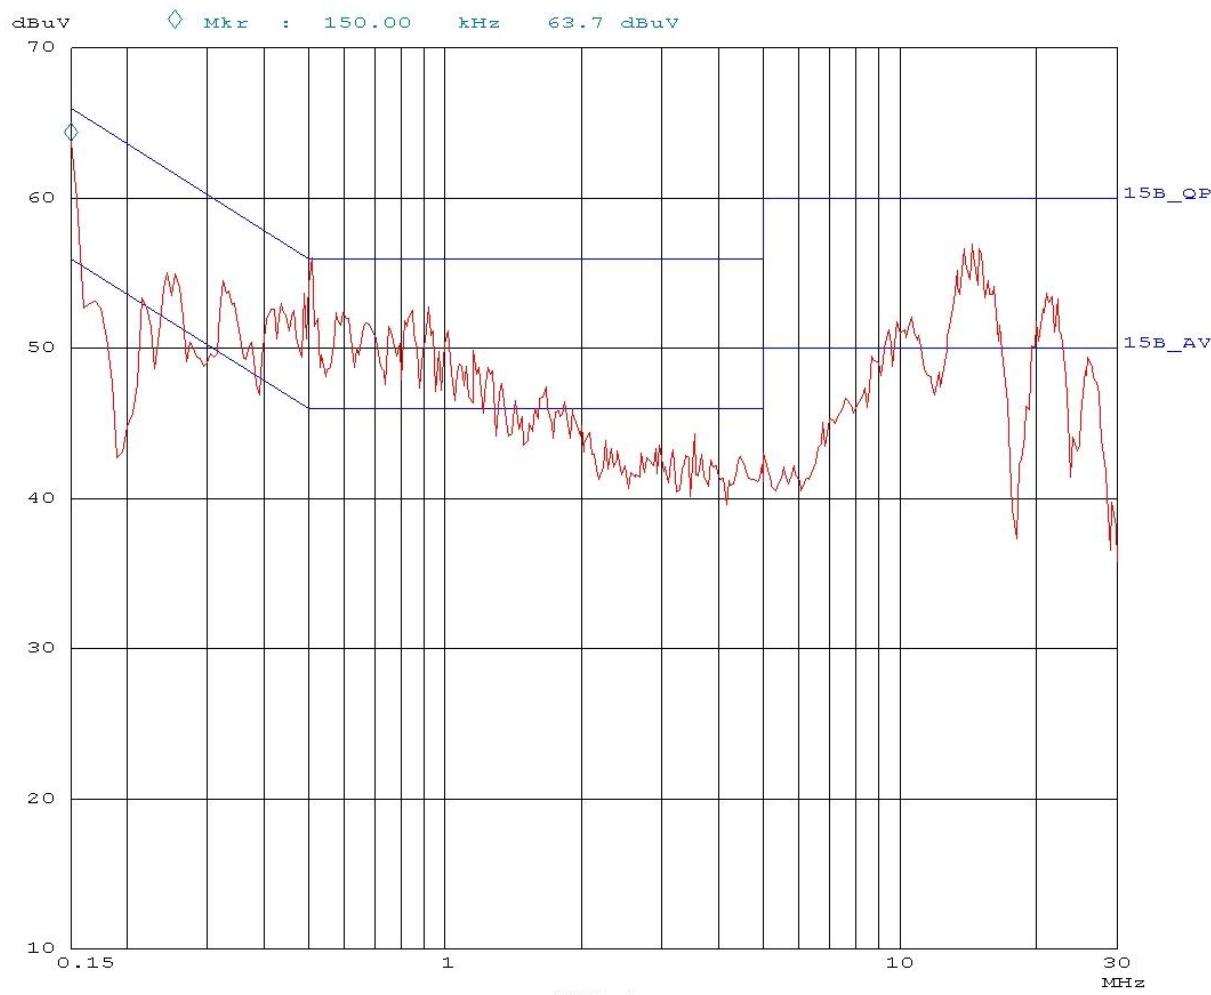

Plot of the AC Power-line Conducted emissions on L2, USB connection


Test Report No.:

14120301.fcc01

Page 39 of 41

25. Mar 15 15:17

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp
150k 30M 5k 9k PK 20ms 0dBLLN OFF

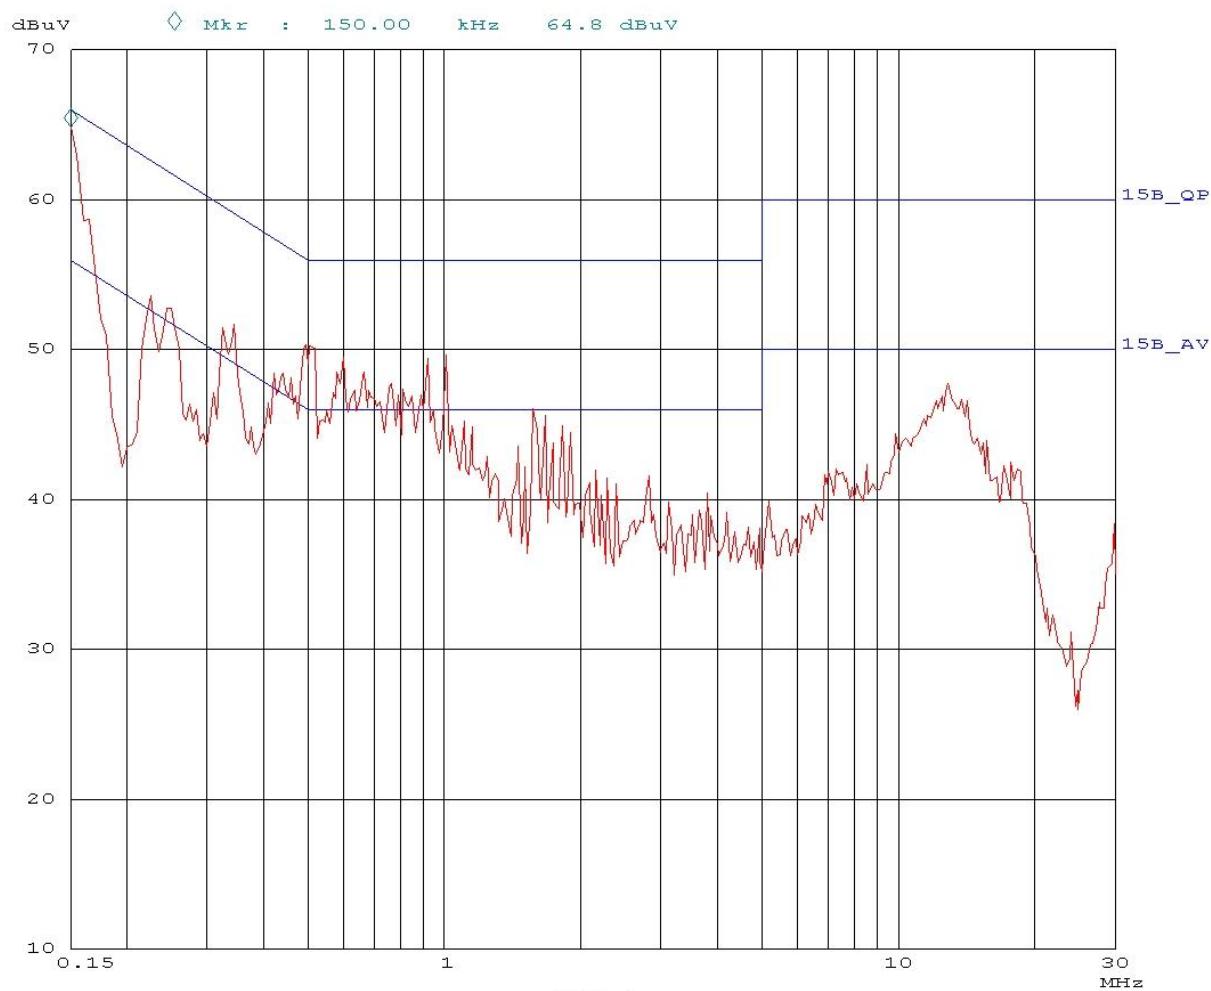

Plot of the AC Power-line Conducted emissions on L1, USB to RS-232 connection


Test Report No.:

14120301.fcc01

Page 40 of 41

25. Mar 15 15:07

Scan Settings (1 Range)
|----- Frequencies -----| |----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp
150k 30M 5k 9k PK 20ms 0dBIN OFF

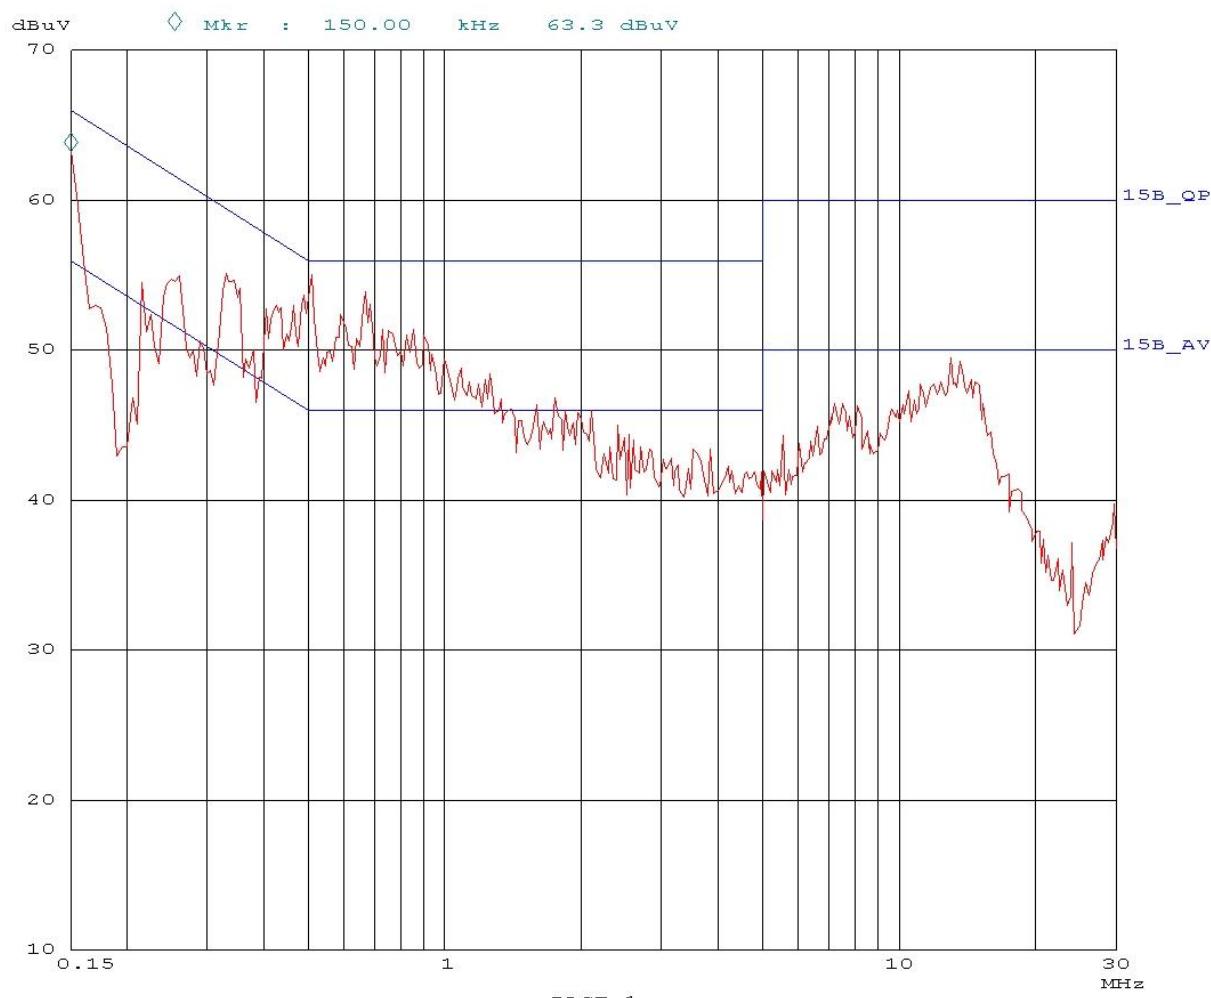

Plot of the AC Power-line Conducted emissions on L2, USB to RS-232 connection

Test Report No.:

14120301.fcc01

Page 41 of 41

End of report

Ambient Systems B.V.
Attn Mr. L. van Hoesel
Demmersweg 66
7556BN Hengelo
The Nederlands

Date: 2014-11-14

Subject: Identical Equipment Declaration

To whom it may concern:

The RF portion of GW3030v2 is identical to the RF portion of MR3000v2 from hw/firmware point of view. MR3000v2 has no serial port and is a de-populated version of GW3030v2.

Yours sincerely



L. van Hoesel
CTO