



FCC TEST REPORT

Reference No. : G-45-2019-01502
Applicant : Franklin Technology Inc.
Equipment Under Test (EUT) :
Product Name : Mobile Hotspot
Model Name : T9
Applied Standards : FCC Part 15 Subpart B
ANSI C 63.4:2014

FCC ID : XHG-R717

Date of Receipt : May 7, 2019
Date of Test : May 15, 2019 ~ June 19, 2019
Date of Issue : July 23, 2019
Test Results : Complied

Tested by :	 ----- Yongtae Yu
Reviewed by :	 ----- Paul Kang

Remarks :

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full. This test report does not assure KOLAS accreditation.

Contents

1. General Information.....	4
1.1 Client Information.....	4
1.2 Test Laboratory.....	4
1.3 General Information of E.U.T.	4
1.4 Operating Modes and Conditions.....	5
1.5 Auxiliary Equipments	5
1.6 Cable List.....	5
1.7 System Configurations.....	5
1.8 Test System Layout	5
1.9 Modifications.....	5
1.10 Applicable Standards for Testing	5
1.11 Summary of Test Results.....	5
2. Emission Test.....	6
2.1 Test Results.....	6
2.2 Test Method and Limits.....	6
2.2.1 Test Method	6
2.2.2 Test Limits.....	6
2.3 Conducted Emission	7
2.3.1 Test Equipments	7
2.3.2 Test Site.....	7
2.3.3 Environment Conditions and data	7
2.4 Radiated Emission	8
2.4.1 Test Equipments	8
2.4.2 Test Site.....	8
2.4.3 Environment Conditions and data	8
Appendix A : Conducted Emission at Mains Port	12
Appendix B : Radiated Emission	13

Revision History

Revision	Report Number	Description
0	F690501/RF-EMC004893(G)	Initial
1	F690501/RF-EMC004893-1(G)	Added tested results.
2		

1. General Information

1.1 Client Information

Applicant : Franklin Technology Inc.
 - Address of Applicant : 906(Gasan-Dong, JEI Platz), 186, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea(08502).

Manufacturer : Franklin Technology Inc.
 - Address of Manufacturer : 906(Gasan-Dong, JEI Platz), 186, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea(08502).

1.2 Test Laboratory

Name and Address : SGS Korea Co., Ltd.
 - Giheung 1 Laboratory : 35, Giheungdanji-ro 121beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
 - Giheung 2 Laboratory : 23, Giheungdanji-ro 24beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea
 - Gunpo Laboratory : 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807, Republic of Korea.

Phone : + 82 31 428 5700
 Fax : + 82 31 427 2370
 e-mail : paul.kang@sgs.com

1.3 General Information of E.U.T.

Classification	Description
Product Name	Mobile Hotspot
Model Name	T9
Serial No.	None
Highest Internal Frequency	5 825 MHz
EMI Classification	Class B
Test Voltage	120 V~, 60 Hz(for Travel Adapter)
Operating Voltage	3.8 Vd.c.
Operating Temperature	(-)10 °C ~ (+)55 °C
H/W Version	P1+
S/W Version	R717F21.FR.264

1.4 Operating Modes and Conditions

Operating Mode	Percussor
1) Charging mode	Charging status
2) WCDMA Idle + WLAN Idle + Charging	WCDMA Idle + WLAN Idle + Charging
3) LTE Idle + WLAN Idle + Charging	LTE Idle + WLAN Idle + Charging

1.5 Auxiliary Equipments

Description	Model	Serial No.	Manufacturer
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	-	R&S


1.6 Cable List

Start		END		Cable Spec.		Used core
Name	I/O Port	Name	I/O Port	Length	Shield	
AC Source	AC OUT	EUT (Travel Adapter)	DC IN	-	-	-
EUT (Travel Adapter)	DC OUT	EUT (Main unit)	DC OUT	1.5	Unshield	No

1.7 System Configurations

Description	Model	Serial No.	Manufacturer
Travel Adapter	APS-V010050200W-G	DC190331-00220	Shenzhen ACT Industrial Co., Ltd.
Main Board	-	-	-

1.8 Test System Layout



1.9 Modifications

- There was no modified item during the test.

1.10 Applicable Standards for Testing

Standards	Status	Deviation
FCC Part 15 Subpart B	Applicable	No Deviation

1.11 Summary of Test Results

Test Item	Basic Standards	Results
Conducted Emission	ANSI C 63.4:2014 FCC Part 15 Subpart B	Complied
Radiated Emission	ANSI C 63.4:2014 FCC Part 15 Subpart B	Complied

Note: Test methods of all test items are performed according to the basic standards in this table.

EMISSION

2.1 Test Results

Test Items	Basic Standards	Test Results
Conducted Emission	ANSI C 63.4:2014 FCC Part 15 Subpart B	Complied
Radiated Emission	ANSI C 63.4:2014, FCC Part 15 Subpart B	Complied

2.2 Test Method and Limits

2.2.1 Test Method

Test Items	Measuring Frequency Range	RBW	Measuring Distance
Conducted Emission	0.15 MHz ~ 30 MHz	9 kHz	-
Radiated Emission	30 MHz ~ 1 GHz	120 kHz	10 m&3 m
	Above 1 GHz	1 MHz	3 m

2.2.2 Test Limits

-Conducted Emission Limits at Mains Port

Frequency Range	Limits(dB(μ V))		Class
	Quasi-peak	Average	
0.15 MHz ~ 0.5 MHz	79	66	Class A
0.5 MHz ~ 30 MHz	73	60	
0.15 MHz ~ 0.5 MHz	66 to 56	56 to 46	Class B
0.5 MHz ~ 5 MHz	56	46	
5 MHz ~ 30 MHz	60	50	

Note : The lower limit shall apply at the transition frequencies. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

-Radiated Emission Limits below 1 GHz

Frequency Range	Limits(dB(μ V/m))		Class
	Quasi-peak		
30 MHz ~ 88 MHz	39.1		Class A
88 MHz ~ 216 MHz	43.5		
216 MHz ~ 960 MHz	46.4		
960 MHz ~ 1 GHz	49.5		
30 MHz ~ 88 MHz	40		Class B
88 MHz ~ 216 MHz	43.5		
216 MHz ~ 960 MHz	46		
960 MHz ~ 1 GHz	54		

-Radiated Emission Limits above 1 GHz (3m method)

Frequency Range	Limits(dB(μ V/m))		Class
	Average	Peak	
Above 1 GHz	59.5	79.5	Class A
Above 1 GHz	54	74	Class B

2.3 Conducted Emission

The initial preliminary exploratory scans were performed over the measuring frequency range(0.15 MHz to 30 MHz) using a max hold mode incorporating a Peak detector and Average detector and using the software of ES-K1(Version V1.71 from R&S). The final test data was measured using a Quasi-Peak detector and Average detector.

2.3.1 Test Equipments

Description	Model No.	Manufacturer	S/N	Cal Due. Date
Two-Line V-Network	ENV216	R & S	100190	2020.05.14
Test Receiver	ESCI 7	R & S	100911	2020.02.20

Note : The calibration period of every equipment is 1 year.

2.3.2 Test Site

Shield Room in Gunpo Laboratory

2.3.3 Environment Conditions and data

- Conducted Emission at AC Mains Port

Temperature : (minimum 23.4, maximum 23.5) °C

Humidity : (minimum 36.0, maximum 36.0) %R.H.

Atmospheric Pressure : (100.1) kPa

Test Date : May 27, 2019

- Test Mode : Charging

Freq. (MHz)	LISN (dB)	CL (dB)	Line (P/N)	Q/P				A/V			
				Limit (dB μ V)	Level (dB μ V)	Result (dB μ V)	Margin (dB)	Limit (dB μ V)	Level (dB μ V)	Result (dB μ V)	Margin (dB)
0.43	9.70	0.17	N	57.18	26.83	36.70	20.48	47.18	17.43	27.30	19.88
0.55	9.70	0.16	N	56.00	27.04	36.90	19.10	46.00	20.34	30.20	15.80
0.55	9.60	0.17	H	56.00	30.73	40.50	15.50	46.00	23.33	33.10	12.90
0.67	9.70	0.17	N	56.00	29.93	39.80	16.20	46.00	21.93	31.80	14.20
0.67	9.60	0.17	H	56.00	33.73	43.50	12.50	46.00	26.33	36.10	9.90
0.73	9.70	0.17	N	56.00	31.33	41.20	14.80	46.00	24.53	34.40	11.60
0.73	9.60	0.17	H	56.00	35.13	44.90	11.10	46.00	27.93	37.70	8.30
0.75	9.70	0.18	N	56.00	29.32	39.20	16.80	46.00	22.52	32.40	13.60
0.76	9.60	0.18	H	56.00	33.12	42.90	13.10	46.00	26.22	36.00	10.00
0.93	9.70	0.17	N	56.00	25.23	35.10	20.90	46.00	18.93	28.80	17.20
0.93	9.63	0.17	H	56.00	27.20	37.00	19.00	46.00	21.80	31.60	14.40
0.96	9.66	0.18	H	56.00	26.46	36.30	19.70	46.00	21.06	30.90	15.10

Measurement Uncertainty : 3.21 dB (The confidential level is about 95%, k=2)

Note : • Line (H) : Hot
 • CL: Cable Loss
 • Result = Level + CL + LISN
 • Line (N) : Neutral
 • LISN : LISN Factor
 • Margin = Limit – Result

See Appendix A (Conducted Emission at AC Mains Port)

2.4 Radiated Emission

The initial preliminary exploratory scans were performed at 3 m distance over the measuring frequency range(30 MHz to 13 GHz) using a max hold mode incorporating a Peak detector and using the software of EMC32(Version 8.50.0 from R&S) and EP5RE(Version Ver3.10.20 from TOYO). The final test data was measured using a Quasi-Peak detector below 1 GHz at 3 m distance and a Peak and Average detector above 1 GHz at 3 m distance. Measurements were made with the antenna positioned in both the horizontal and vertical planes of polarization. The antenna height was varied from 1 m to 4 m and the EUT was rotated 360° to find the maximum emitting point for each frequency.

2.4.1 Test Equipments

Description	Model No.	Manufacturer	S/N	Cal Due. Date
Double Ridged Horn Antenna	HF907	R & S	100208	2020.10.24
Horn Antenna	BBHA9170	SCHWARZBECK	BBHA9170223	2020.09.10
Signal Conditioning Unit	SCU 18	R & S	10117	2019.08.07
Test Receiver	ESU26	R & S	100109	2020.01.31
Bilog Antenna (KOLAS)	VULB9163	SCHWARZBECK	01126	2020.03.26
Amplifier	8447F	HP	2944A03909	2019.08.07
PREAMPLIFIER	JS44-18004000-35-8P	MITEQINC	1546891	2020.05.13

Note : Only the calibration period of Antennas is 2 years but the period of every equipment is 1 year.

2.4.2 Test Site

3m SEMI-ANECHOIC CHAMBER Gunpo Laboratory (Below 1 GHz, Above 1 GHz)

2.4.3 Environment Conditions and data

- Below 1 GHz

Temperature : (minimum 20.1, maximum 20.2) °C
 Humidity : (minimum 30.0, maximum 30.0) %R.H.
 Atmospheric Pressure : (101.4) kPa

Test Date : May 15, 2019

- Above 1 GHz

Temperature : (minimum 22.4, maximum 22.6) °C
 Humidity : (minimum 48.0, maximum 49.0) %R.H.
 Atmospheric Pressure : (101.1) kPa

Test Date : June 19, 2019

- Below 1 GHz (3 m method)

- Test Mode : Charging

Freq. (MHz)	Level (dB(μV))	Pol. (H/V)	A (°)	H (cm)	AF (dB/m)	CL (dB)	Amp. (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
101.90	28.50	V	196	200	17.79	1.94	27.70	20.53	43.50	22.97
101.90	29.40	V	196	200	17.79	1.94	27.70	21.43	43.50	22.07
531.73	28.60	V	27	100	23.40	6.22	28.53	29.69	46.00	16.31
681.19	28.30	H	73	200	25.20	6.64	28.52	31.62	46.00	14.38
837.57	27.90	V	158	200	27.05	5.84	28.22	32.57	46.00	13.43
945.40	27.90	H	285	100	28.00	6.38	27.82	34.46	46.00	11.54

- Test Mode : WCDMA Idle + WLAN Idle + Charging

Freq. (MHz)	Level (dB(μV))	Pol. (H/V)	A (°)	H (cm)	AF (dB/m)	CL (dB)	Amp. (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
60.94	39.80	H	125	100	18.22	1.43	27.78	31.67	40.00	8.33
131.56	40.70	V	32	400	14.30	2.36	27.64	29.72	43.50	13.78
181.29	42.10	H	40	300	15.33	3.96	27.41	33.98	43.50	9.52
204.99	46.50	H	72	100	16.50	3.93	27.29	39.64	43.50	3.86
265.34	45.90	V	312	100	18.11	4.21	27.17	41.05	46.00	4.95
457.24	42.50	H	247	200	21.94	5.55	28.33	41.66	46.00	4.34

- Test Mode : LTE Idle + WLAN Idle + Charging

Freq. (MHz)	Level (dB(μV))	Pol. (H/V)	A (°)	H (cm)	AF (dB/m)	CL (dB)	Amp. (dB)	Result (dB(μV/m))	Limit (dB(μV/m))	Margin (dB)
60.84	41.10	H	145	200	18.25	1.43	27.78	33.00	40.00	7.00
130.59	42.10	H	342	200	14.34	2.35	27.64	31.15	43.50	12.35
182.25	42.50	V	33	100	15.43	3.98	27.41	34.50	43.50	9.00
202.99	46.40	V	126	400	16.62	3.93	27.29	39.66	43.50	3.84
265.44	45.80	V	242	300	18.11	4.21	27.17	40.95	46.00	5.05
457.01	42.30	H	256	100	21.94	5.54	28.33	41.45	46.00	4.55

Measurement Uncertainty (Horizontal) : 5.31 dB (The confidential level is about 95%, k=2)

Measurement Uncertainty (Vertical) : 5.73 dB (The confidential level is about 95%, k=2)

- Note 1:
- AF = Antenna Factor
 - POL H = Horizontal
 - H : Height
 - CL = Cable Loss
 - POL V = Vertical
 - Margin = Limit – Result
 - Amp = Amplifier Gain
 - A : Angle
 - Result = Level + AF + CL – Amp

- Above 1 GHz (3 m method)

- Test Mode : Charging

Freq. (MHz)	Level (dB μ V)	Pol. (H/V)	A (°)	H (cm)	AF (dB)	CL (dB)	Amp. (dB)	CF (dB)	F/S (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Peak Detector											
1389.58	46.30	H	146	100	24.90	9.90	45.89	0.00	35.21	74.00	38.79
3545.04	43.20	H	311	100	32.08	12.79	45.05	0.00	43.02	74.00	30.98
5379.63	43.20	H	224	100	34.52	14.75	45.58	0.00	46.89	74.00	27.11
8031.62	43.30	H	255	100	36.53	19.72	46.28	0.00	53.27	74.00	20.73
14773.54	42.50	V	339	100	40.71	22.69	44.49	0.00	61.41	74.00	12.59
17911.46	42.90	H	360	100	44.60	25.14	46.20	0.00	66.44	74.00	7.56
Average Detector											
1389.58	32.70	H	146	100	24.90	9.90	45.89	0.00	21.61	54.00	32.39
3545.04	29.70	H	311	100	32.08	12.79	45.05	0.00	29.52	54.00	24.48
5379.63	29.70	H	224	100	34.52	14.75	45.58	0.00	33.39	54.00	20.61
8031.62	28.80	H	255	100	36.53	19.72	46.28	0.00	38.77	54.00	15.23
14773.54	28.10	V	339	100	40.71	22.69	44.49	0.00	47.01	54.00	6.99
17432.88	29.00	H	360	100	43.93	24.17	46.20	0.00	50.90	54.00	3.10

- Test Mode : WCDMA Idle + WLAN Idle + Charging

Freq. (MHz)	Level (dB μ V)	Pol. (H/V)	A (°)	H (cm)	AF (dB)	CL (dB)	Amp. (dB)	CF (dB)	F/S (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Peak Detector											
3415.26	45.10	H	34	100	32.00	12.83	45.18	0.00	44.75	74.00	29.25
4411.96	44.60	V	145	200	33.95	13.55	45.51	0.00	46.59	74.00	27.41
6635.27	40.50	H	302	100	35.64	16.37	45.93	0.00	46.58	74.00	27.42
9014.41	41.50	H	322	100	37.23	17.98	46.10	0.00	50.61	74.00	23.39
12112.34	44.20	V	222	100	38.22	20.22	44.94	0.00	57.70	74.00	16.30
16415.51	43.20	V	32	100	42.26	23.24	45.79	0.00	62.91	74.00	11.09
Average Detector											
3415.26	30.10	H	34	100	32.00	12.83	45.18	0.00	29.75	54.00	24.25
4411.96	32.10	V	145	200	33.95	13.55	45.51	0.00	34.09	54.00	19.91
6635.27	29.50	H	302	100	35.64	16.37	45.93	0.00	35.58	54.00	18.42
9014.41	28.60	H	322	100	37.23	17.98	46.10	0.00	37.71	54.00	16.29
12112.34	29.40	V	222	100	38.22	20.22	44.94	0.00	42.90	54.00	11.10
17432.88	29.10	V	32	100	43.93	24.17	46.20	0.00	51.00	54.00	3.00

- Test Mode : LTE Idle + WLAN Idle + Charging

Freq. (MHz)	Level (dB μ V)	Pol. (H/V)	A (°)	H (cm)	AF (dB)	CL (dB)	Amp. (dB)	CF (dB)	F/S (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Peak Detector											
3541.98	41.20	V	125	100	32.07	12.78	45.06	0.00	40.99	74.00	33.01
4542.65	43.20	V	101	200	33.51	13.71	45.64	0.00	44.78	74.00	29.22
6754.25	40.50	H	2	200	35.87	16.82	45.95	0.00	47.24	74.00	26.76
12141.56	39.40	H	63	100	38.28	20.17	44.93	0.00	52.92	74.00	21.08
15424.11	38.60	H	235	200	40.90	22.96	44.40	0.00	58.06	74.00	15.94
16458.24	40.20	H	312	100	42.42	23.20	45.82	0.00	60.00	74.00	14.00
Average Detector											
3541.98	29.30	V	125	100	32.07	12.78	45.06	0.00	29.09	54.00	24.91
4542.65	29.80	V	101	200	33.51	13.71	45.64	0.00	31.38	54.00	22.62
6754.25	30.50	H	2	200	35.87	16.82	45.95	0.00	37.24	54.00	16.76
12141.56	31.20	H	63	100	38.28	20.17	44.93	0.00	44.72	54.00	9.28
15424.11	30.60	H	235	200	40.90	22.96	44.40	0.00	50.06	54.00	3.94
17432.88	28.80	H	312	100	43.93	24.17	46.20	0.00	50.70	54.00	3.30

Measurement Uncertainty (Horizontal) : 5.73 dB (The confidential level is about 95%, $k=2$)


Measurement Uncertainty (Vertical) : 5.85 dB (The confidential level is about 95%, $k=2$)

Note 1: • AF = Antenna Factor • CL = Cable Loss • Amp = Amplifier Gain
 • POL H = Horizontal • POL V = Vertical • A : Angle
 • H : Height • Margin = Limit – Result • Result = Level + AF + CL – Amp


Note2. We have also tested from 18 GHz ~30 GHz and found no emission.

See Appendix B (Radiated Emission)

Appendix A : Conducted Emission at Mains Port
- Test Mode : Charging
 Hot

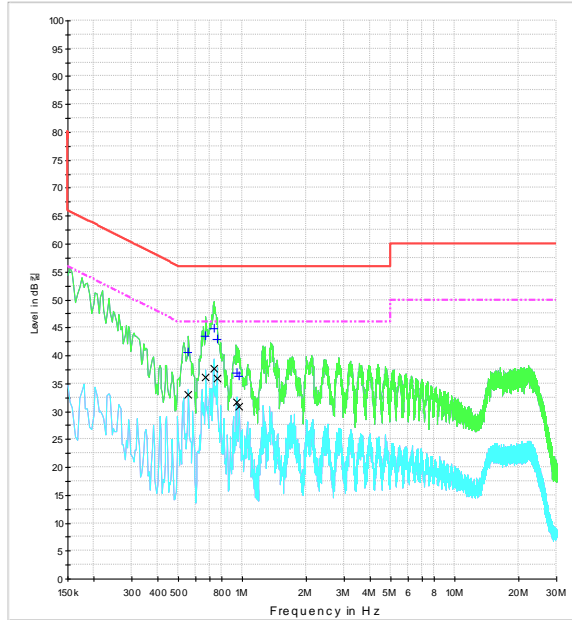


Neutral

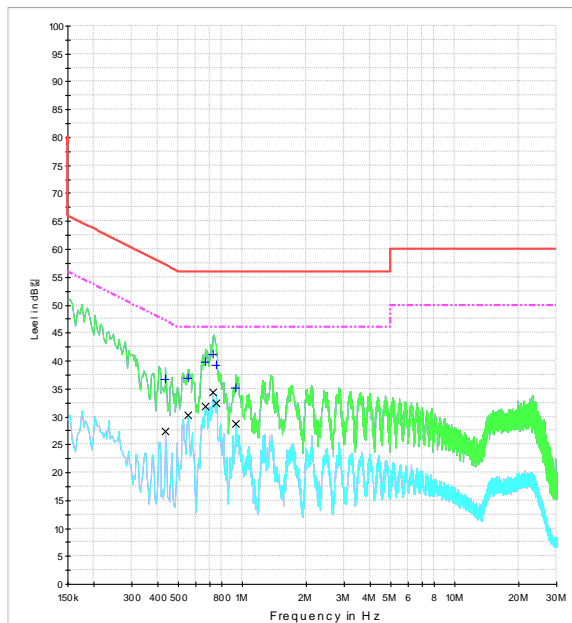


Appendix B : Radiated Emission

Below 1 GHz


- Test Mode : Charging

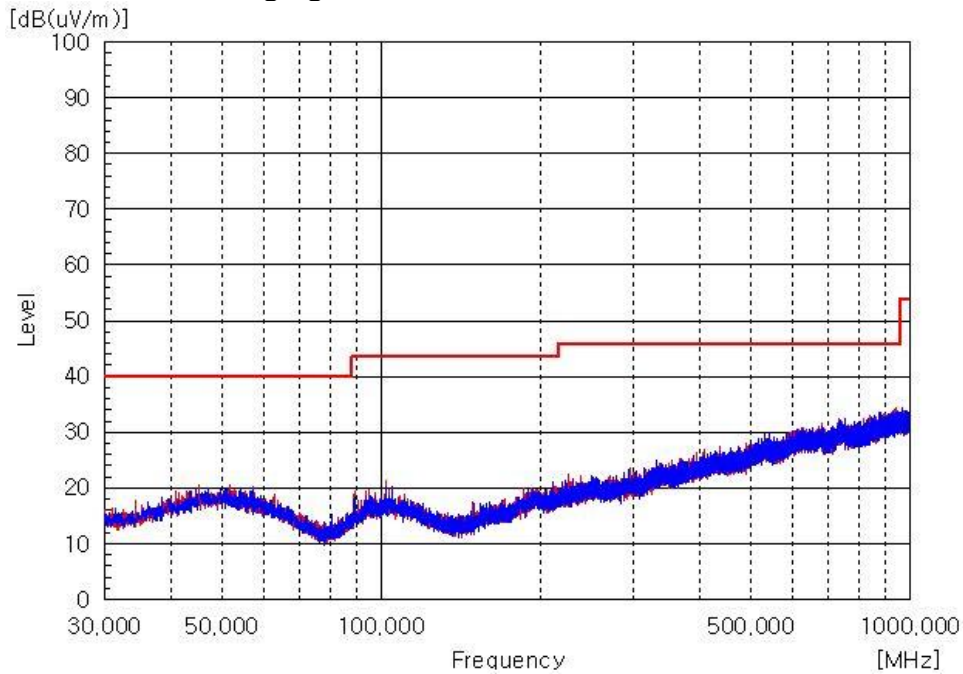


- Test Mode : WCDMA Idle + WLAN Idle + Charging

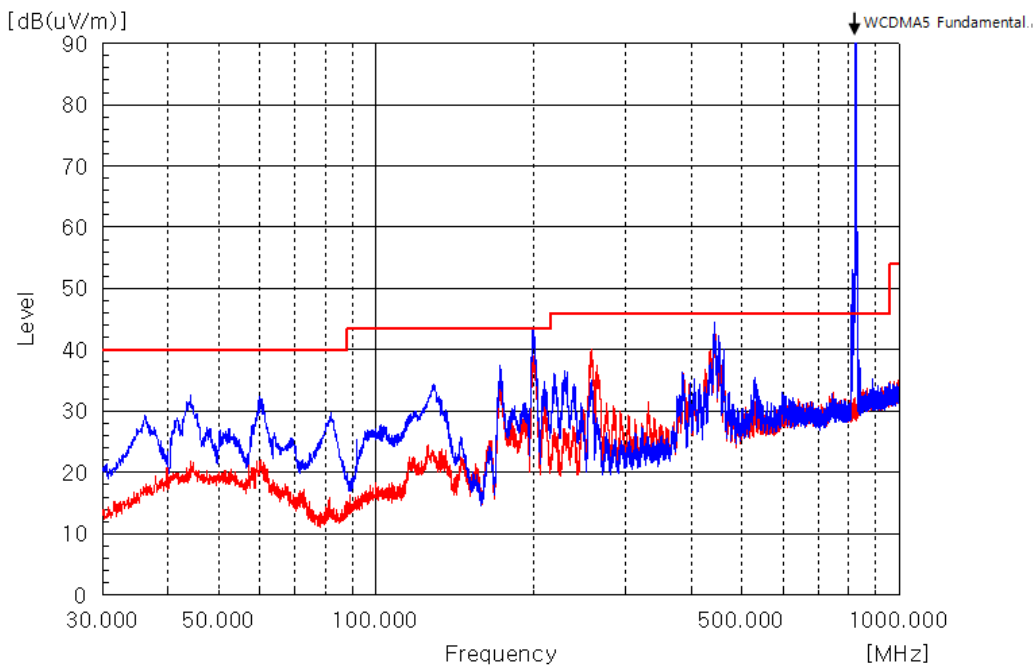


- Test Mode : LTE Idle + WLAN Idle + Charging

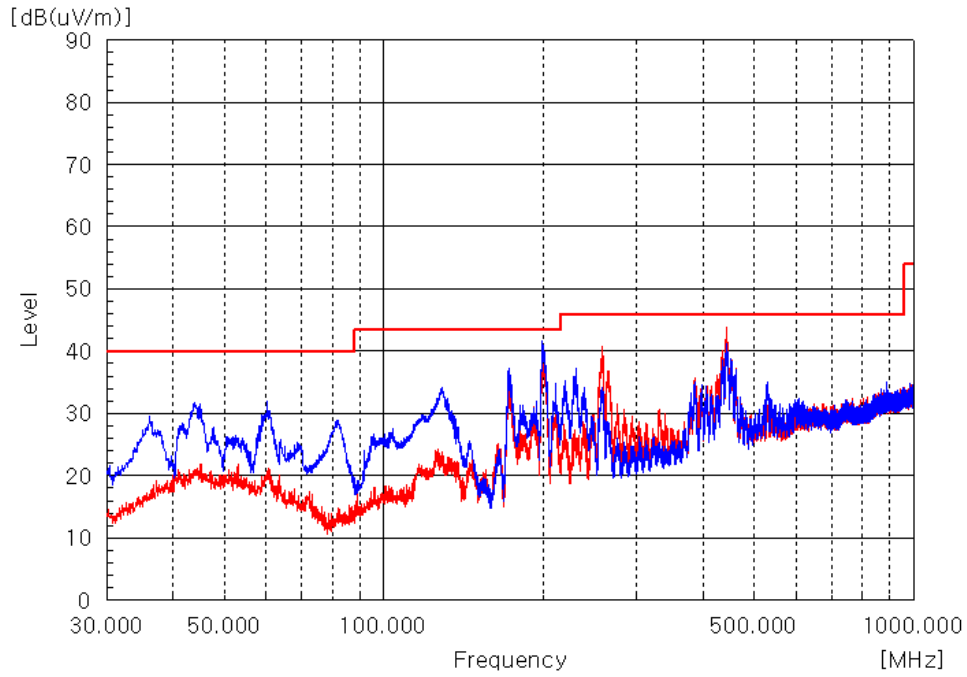


Above 1 GHz
- Test Mode : Charging

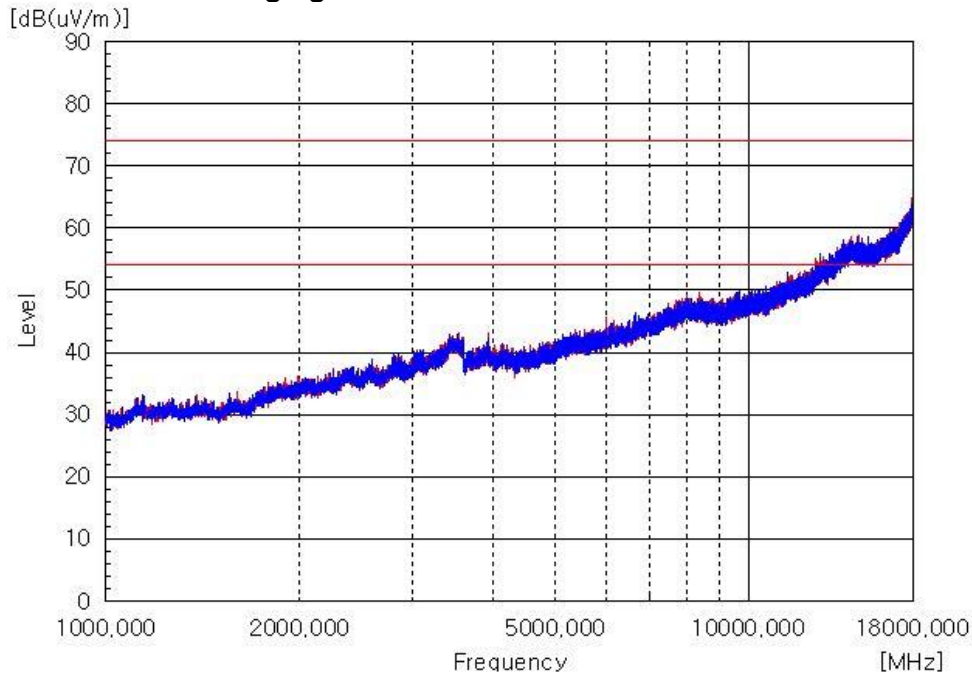

- Test Mode : WCDMA Idle + WLAN Idle + Charging

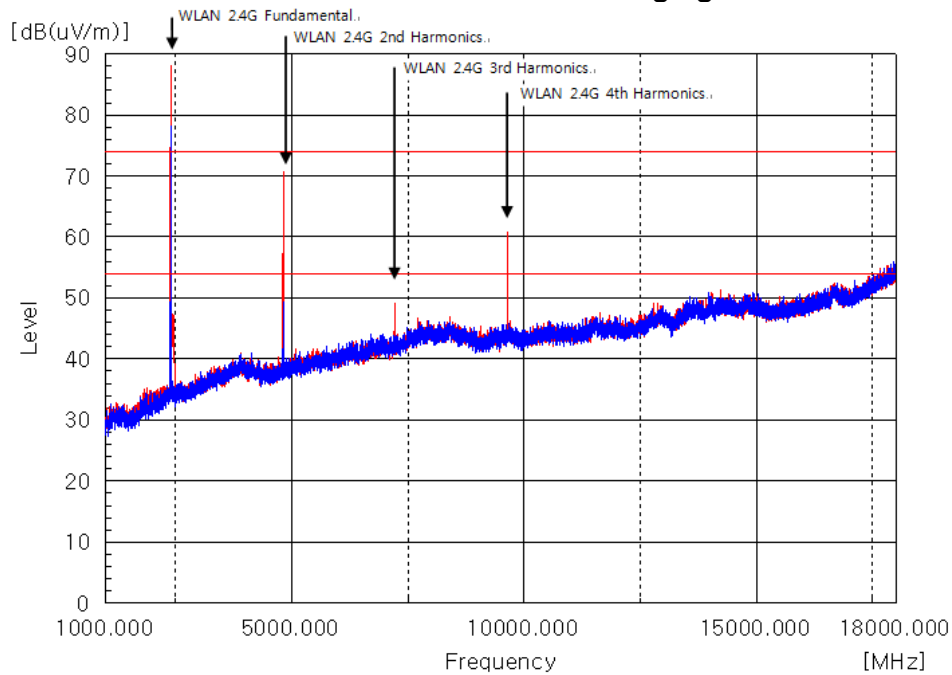

- Test Mode : LTE Idle + WLAN Idle + Charging

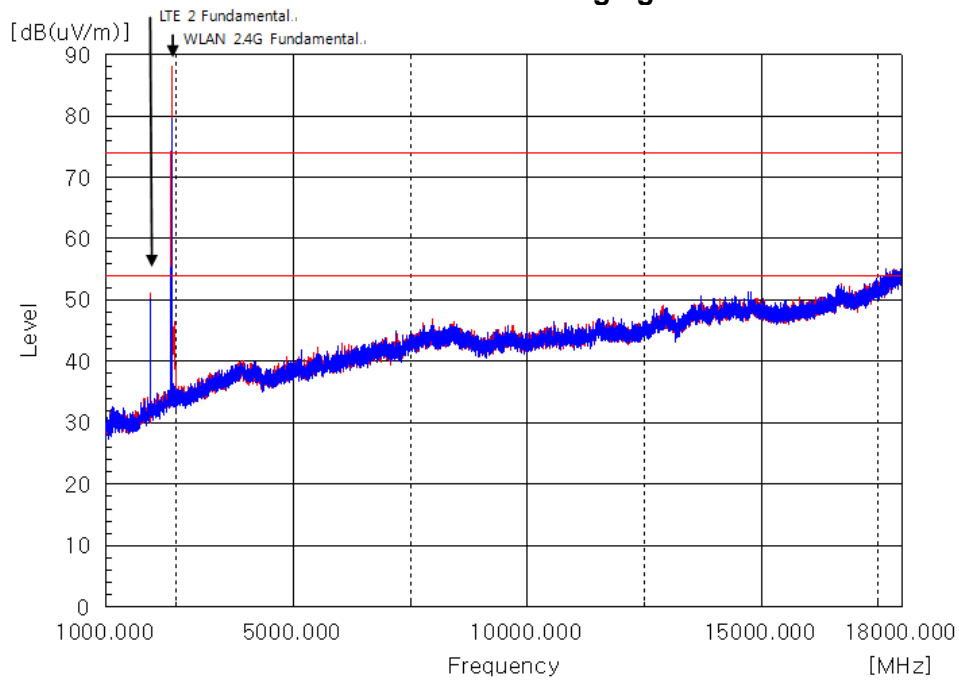

- End of the Report -