

# TEST REPORT

of

FCC Part 2 Subpart J, Part 22 Subpart H, Part 24 Subpart E and  
Part 27 Subpart C/L

FCC ID: XHG-RT410

Equipment Under Test : Mobile Hotspot  
Model Name : RT410  
Variant Model Name(s) : -  
Applicant : Franklin Technology Inc.  
Manufacturer : Franklin Technology Inc.  
Date of Receipt : 2020.09.15  
Date of Test(s) : 2020.09.16 ~ 2020.10.29  
Date of Issue : 2020.10.29

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.

Tested by:

  
\_\_\_\_\_  
Murphy Kim

Technical  
Manager:

  
\_\_\_\_\_  
Jungmin Yang



# INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Radiated Output Power & Spurious Radiated Emission -----	7
3. Occupied Bandwidth -----	14
4. Peak-Average Ratio -----	19
5. Spurious Emissions at Antenna Terminal -----	24
6. Band Edge -----	32
7. Frequency Stability -----	36

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Franklin Technology Inc.

Address : 906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu, Seoul, South Korea, 08502

Contact Person : Lee, James

Phone No. : +82 70 8228 6445

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

<b>Kind of Product</b>	Mobile Hotspot
<b>Model Name</b>	RT410
<b>Power Supply</b>	DC 3.8 V
<b>Rated Power</b>	WCDMA 2: 22.5 dB m WCDMA 4: 21.5 dB m WCDMA 5: 22 dB m
<b>Frequency Range</b>	WCDMA 2: 1 850 MHz ~ 1 910 MHz WCDMA 4: 1 710 MHz ~ 1 755 MHz WCDMA 5: 824 MHz ~ 849 MHz
<b>Emission Designator</b>	WCDMA 2: 4M15F9D WCDMA 4: 4M14F9D WCDMA 5: 4M17F9D
<b>Modulation Technique</b>	QPSK
<b>Antenna Type</b>	FPCB type antenna
<b>Antenna gain</b>	1 850 MHz ~ 1 910 MHz: 3.01 dB i 1 710 MHz ~ 1 755 MHz: 4.16 dB i 824 MHz ~ 849 MHz: 2.89 dB i

### 1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due.
Signal Generator	R&S	SMR40	100272	Jun. 18, 2020	Annual	Jun. 18, 2021
Signal Generator	R&S	SMBV100A	255834	Jun. 03, 2020	Annual	Jun. 03, 2021
Spectrum Analyzer	R&S	FSV30	103102	Jun. 01, 2020	Annual	Jun. 01, 2021
Mobile Test Unit	R&S	CMW500	144035	Feb. 17, 2020	Annual	Feb. 17, 2021
Power Meter	Anritsu	ML2495A	1223004	Jun. 01, 2020	Annual	Jun. 01, 2021
Power Sensor	Anritsu	MA2411B	1207272	Jun. 01, 2020	Annual	Jun. 01, 2021
Directional Coupler	KRYTAR	152613	122660	Jun. 11, 2020	Annual	Jun. 11, 2021
Temperature Chamber	ESPEC CORP.	PL-1J	15000793	Jun. 02, 2020	Annual	Jun. 02, 2021
High Pass Filter	Wainwright Instrument GmbH	WHKX10-900-1000-18000-40SS	7	Mar. 04, 2020	Annual	Mar. 04, 2021
High Pass Filter	Wainwright Instrument GmbH	WHKX2.2/12.75G-10SS	8	Mar. 04, 2020	Annual	Mar. 04, 2021
High Pass Filter	Wainwright Instrument GmbH	WHK3.0/18G-10SS	344	May 18, 2020	Annual	May 18, 2021
DC Power Supply	Agilent	U8002A	MY49030063	Feb. 03, 2020	Annual	Feb. 03, 2021
Preamplifier	H.P.	8447F	2944A03909	Aug. 06, 2020	Annual	Aug. 06, 2021
Signal Conditioning Unit	R&S	SCU-18	10117	Jun. 10, 2020	Annual	Jun. 10, 2021
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	May 08, 2020	Annual	May 08, 2021
Loop Antenna	SCHWARZBECK MESSELEKTRONIK	FMZB 1519	1519-039	Aug. 22, 2019	Biennial	Aug. 22, 2021
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	01126	Mar. 26, 2018	Biennial	Mar. 26, 2020
Horn Antenna	R&S	HF906	100326	Feb. 14, 2020	Annual	Feb. 14, 2021
Horn Antenna	SCHWARZBECK MESSELEKTRONIK	BBHA 9170	BBHA9170223	Sep. 16, 2020	Biennial	Sep. 16, 2022
Antenna Master	Innco systems GmbH	MM4640-XP-ET	MA4640/536/38330516/L	N.C.R.	N/A	N.C.R.
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	RFONE	SFX086-NMNM-5M (5 m)	20200323001	Aug. 10, 2020	Semi-annual	Feb. 10, 2021
Coaxial Cable	RFONE	PL520-NMNM-10M (10 m)	20200324001	Aug. 10, 2020	Semi-annual	Feb. 10, 2021
Coaxial Cable	Rosenberger	LA1-C006-1500	131014 01/20	Aug. 20, 2020	Semi-annual	Feb. 20, 2021
Coaxial Cable	Rosenberger	LA1-C006-1500	131014 05/20	Aug. 20, 2020	Semi-annual	Feb. 20, 2021
Coaxial Cable	Rosenberger	LA1-C006-1500	131014 10/20	Aug. 20, 2020	Semi-annual	Feb. 20, 2021

► **Support Equipment**

Description	Manufacturer	Model	Serial Number
N/A	-	-	-

### 1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 2, 22, 24 and 27		
Section	Test Item(s)	Result
§2.1046 §22.913(a)(5) §24.232(c) §27.50(d)(4)	RF Radiated Output Power	Complied
§22.917(a) §24.238(a) §27.53(h)(1)	Spurious Radiated Emission	Complied
§2.1046	Conducted Output Power	N/A <sup>1)</sup>
§2.1049	Occupied Bandwidth	Complied
§22.913(d) §24.232(d) §27.50(d)(5)	Peak-Average Ratio	Complied
§22.917(a) §24.238(a) §27.53(h)(1)	Spurious Emission at Antenna Terminal	Complied
§22.917(a) §24.238(a) §27.53(h)(1)	Band Edge	Complied
§2.1055 §22.355 §24.235 §27.54	Frequency Stability	Complied

**Note;**

1) Refer to SAR Report

### 1.7. Sample Calculation for Offset

Where relevant, the following sample calculation is provided:

#### 1.7.1. Conducted Test

Offset value (dB) = Directional Coupler (dB) + Cable loss (dB)

#### 1.7.2. Radiation Test

- E.I.R.P. (dB m) = Measured level (dB $\mu$ V) + Antenna factor (dB/m) + Cable loss (dB) + 20 Log D - 104.5; where D is the measurement distance in meters.
- E.R.P. (dB m) = E.I.R.P. (dB m) - 2.15 (dB)

### 1.8. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radiated Emission, 9 kHz to 30 MHz	± 3.59 dB
Radiated Emission, below 1 GHz	± 5.88 dB
Radiated Emission, above 1 GHz	± 5.94 dB

Uncertainty figures are valid to a confidence level of 95 %.


### 1.9. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL001274	2020.10.29	Initial


## 2. RF Radiated Output Power & Spurious Radiated Emission

### 2.1. Test Setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 MHz to 30 MHz.

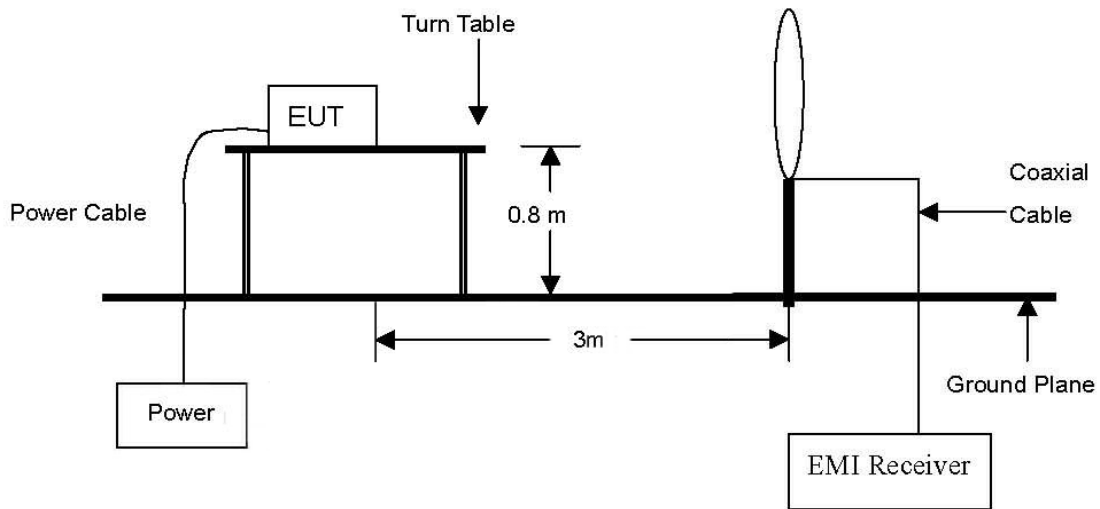

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

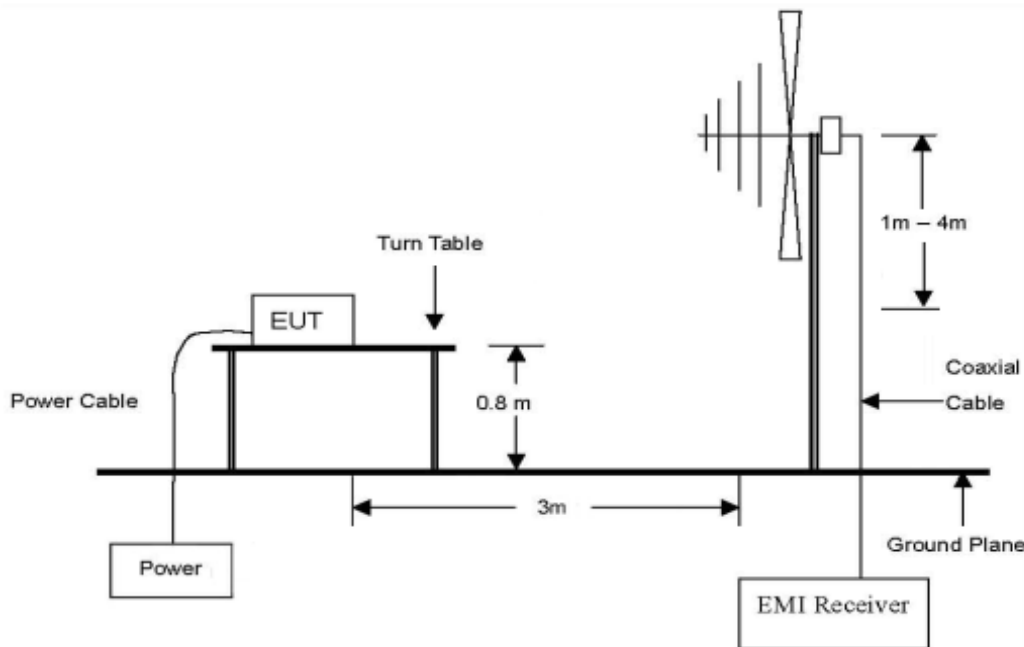

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 20 GHz.

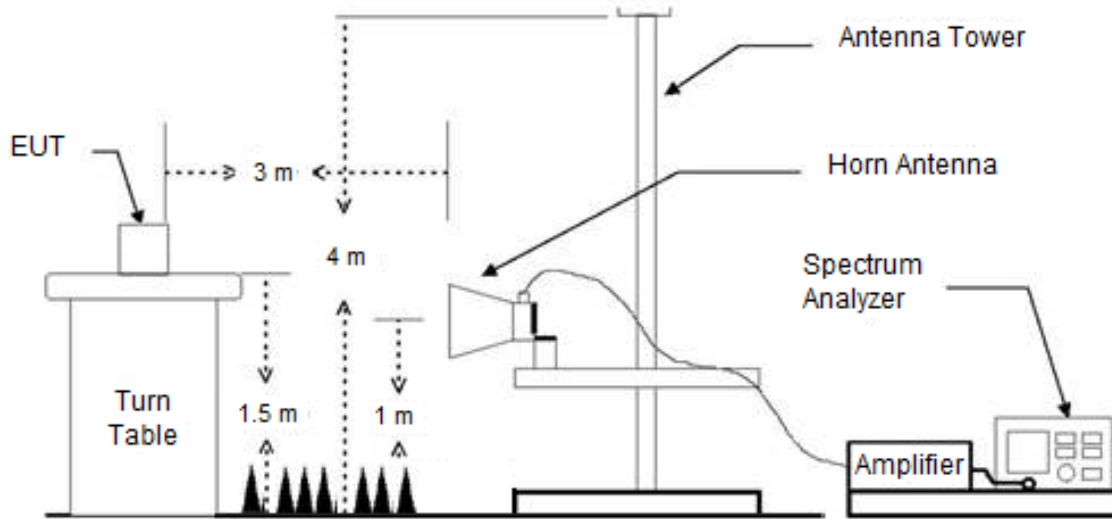



## 2.2. Limit

### 2.2.1. Limit of Radiated Output Power

- §22.913(a)(5), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.
- §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means to limiting power to the minimum necessary for successful communications.
- §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1 710-1 755 MHz band and mobile and portable stations operating in the 1 695-1 710 MHz and 1 755-1 780 MHz bands are limited to 1 watt EIRP.

### 2.2.2. Limit of Spurious Radiated Emission

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.
- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.
- §27.53(h)(1), for operations in the 1 695-1 710 MHz, 1 710-1 755 MHz, 1 755-1 780 MHz, 1 915-1 920 MHz, 1 995-2 000 MHz, 2 000-2 020 MHz, 2 110-2 155 MHz, 2 155-2 180 MHz, and 2 180-2 200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

**2.3. Test Procedure: Based on ANSI/TIA 603E: 2016 and ANSI C63.26-2015, KDB 971168 D01 Power Meas License Digital Systems v03r01.**

1. On a test site, the EUT shall be placed at 0.8 m or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions occupied bandwidth,  $RBW = 1-5\%$  of the OBW (not to exceed 1 MHz),  $VBW \geq 3 \times RBW$ , Detector = power averaging (rms), sweep time = auto, trace average at least 100 traces in power averaging (rms) mode, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
5. Radiated spurious emissions measurement method was set as follows:  
RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz,  $VBW \geq 3 \times RBW$ ,  
Detector = RMS, trace mode = max hold, per the guidelines of KDB 971168 D01 Power Meas License Digital Systems v03r01.
6. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
7. The test antenna shall be raised and lowered through the specified range of height until the maximum signal level is detected by the measuring receiver.
8. The transmitter shall be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
9. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
10. The maximum signal level detected by the measuring receiver shall be noted.
11. In necessary, the input attenuator setting on the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The measurement shall be repeated with the test antenna orientated for horizontal polarization.

## 2.4. Test Result for RF Radiated Output Power

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

### WCDMA 2\_RMC

Frequency (MHz)	Measured Level (dB $\mu$ V)	Ant. Pol.	AF (dB/m)	CL (dB)	E (dB $\mu$ V/m)	CF (dB)	E.I.R.P.	
							(dB m)	(mW)
1 852.40	84.70	H	27.52	8.65	120.87	-95.26	25.61	364.12
1 852.40	82.84	V	27.52	8.65	119.01	-95.26	23.75	237.27
1 880.00	84.15	H	27.74	8.57	120.46	-95.26	25.20	331.32
1 880.00	82.95	V	27.74	8.57	119.26	-95.26	24.00	251.33
1 907.60	83.21	H	27.84	8.60	119.65	-95.26	24.39	274.94
1 907.60	83.08	V	27.84	8.60	119.52	-95.26	24.26	266.83

### WCDMA 4\_RMC

Frequency (MHz)	Measured Level (dB $\mu$ V)	Ant. Pol.	AF (dB/m)	CL (dB)	E (dB $\mu$ V/m)	CF (dB)	E.I.R.P.	
							(dB m)	(mW)
1 712.40	84.97	H	26.95	8.21	120.13	-95.26	24.87	307.07
1 712.40	83.66	V	26.95	8.21	118.82	-95.26	23.56	227.11
1 732.60	85.04	H	26.87	8.25	120.16	-95.26	24.90	309.20
1 732.60	86.09	V	26.87	8.25	121.21	-95.26	25.95	393.77
1 752.60	84.87	H	26.80	8.36	120.03	-95.26	24.77	300.08
1 752.60	85.28	V	26.80	8.36	120.44	-95.26	25.18	329.79

### WCDMA 5\_RMC

Frequency (MHz)	Measured Level (dB $\mu$ V)	Ant. Pol.	AF (dB/m)	CL (dB)	E (dB $\mu$ V/m)	CF (dB)	E.R.P.	
							(dB m)	(mW)
826.40	80.82	H	26.96	5.36	113.14	-97.41	15.73	37.43
826.40	76.30	V	26.96	5.36	108.62	-97.41	11.21	13.22
836.60	79.74	H	27.30	5.38	112.42	-97.41	15.01	31.71
836.60	76.20	V	27.30	5.38	108.88	-97.41	11.47	14.04
846.60	78.76	H	27.36	5.42	111.54	-97.41	14.13	25.90
846.60	76.60	V	27.36	5.42	109.38	-97.41	11.97	15.75

### Remark;

1. AF = Antenna Factor, CL = Cable Loss, CF = Conversion Factor.
2. E (dB $\mu$ V/m) = Measured Level (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB).
3. E.I.R.P. (dB m) = E (dB $\mu$ V/m) + CF (dB).
4. E.R.P. (dB m) = E (dB $\mu$ V/m) + CF (dB) - 2.15 (dB); where E.R.P. and E.I.R.P. are expressed in consistent units.
5. CF (dB) = 20 log D - 104.8; where D is the measurement distance in meters, According to KDB 971168 D01 v03r01 5.8.4.

**WCDMA 2\_RMC**

Frequency (MHz)	Measured Level (dBμV)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dBμV/m)	CF (dB)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (1 852.4 MHz)									
5 560.89	62.96	H	34.00	-29.20	67.76	-95.26	-27.50	-13	14.50
5 560.07	63.51	V	34.00	-29.20	68.31	-95.26	-26.95	-13	13.95
Middle Channel (1 880.0 MHz)									
5 642.82	63.74	H	34.00	-28.98	68.76	-95.26	-26.50	-13	13.50
5 642.89	63.16	V	34.00	-28.98	68.18	-95.26	-27.08	-13	14.08
High Channel (1 907.6 MHz)									
5 726.49	66.56	H	34.05	-28.99	71.62	-95.26	-23.64	-13	10.64
5 726.35	66.67	V	34.05	-28.99	71.73	-95.26	-23.53	-13	10.53

**WCDMA 4\_RMC**

Frequency (MHz)	Measured Level (dBμV)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dBμV/m)	CF (dB)	E.I.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (1 712.4 MHz)									
5 134.81	57.53	H	33.47	-30.07	60.93	-95.26	-34.33	-13	21.33
5 134.45	56.28	V	33.47	-30.07	59.68	-95.26	-35.58	-13	22.58
Middle Channel (1 732.6 MHz)									
5 194.98	63.38	H	33.59	-29.92	67.05	-95.26	-28.21	-13	15.21
5 194.18	61.77	V	33.59	-29.92	65.44	-95.26	-29.82	-13	16.82
High Channel (1 752.6 MHz)									
5 260.69	66.31	H	33.72	-29.62	70.41	-95.26	-24.85	-13	11.85
5 260.55	65.55	V	33.72	-29.62	69.65	-95.26	-25.61	-13	12.61

**WCDMA 5\_RMC**

Frequency (MHz)	Measured Level (dB $\mu$ V)	Ant. Pol.	AF (dB/m)	AMP+CL (dB)	E (dB $\mu$ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
Low Channel (826.4 MHz)									
Above 1 000.00	Not detected	H	-	-	-	-	-	-	-
Above 1 000.00	Not detected	V	-	-	-	-	-	-	-
Middle Channel (836.6 MHz)									
Above 1 000.00	Not detected	H	-	-	-	-	-	-	-
Above 1 000.00	Not detected	V	-	-	-	-	-	-	-
High Channel (846.6 MHz)									
Above 1 000.00	Not detected	H	-	-	-	-	-	-	-
Above 1 000.00	Not detected	V	-	-	-	-	-	-	-

**Remark;**

1. AF = Antenna Factor, CL = Cable Loss, CF = Conversion Factor.
2. E (dB $\mu$ V/m) = Measured Level (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB).
3. E.I.R.P. (dB m) = E (dB $\mu$ V/m) + CF (dB).
4. E.R.P. (dB m) = E (dB $\mu$ V/m) + CF (dB) - 2.15 (dB); where E.R.P. and E.I.R.P. are expressed in consistent units.
5. CF (dB) = 20 log D - 104.8; where D is the measurement distance in meters, According to KDB 971168 D01 v03r01 5.8.4.

### 3. Occupied Bandwidth


#### 3.1. Limit

CFR 47, Section FCC §2.1049.

#### 3.2. Test Procedure

The test follows section 4.3 of KDB 971168 D01 Power Meas License Digital Systems v03r01.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation. products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b. The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. Set the detection mode to peak, and the trace mode to max-hold.
- e. If the instrument does not have a 99 % OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5 % of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5 % of the total is reached and record that frequency as the upper OBW frequency. The 99 % power OBW can be determined by computing the difference these two frequencies.
- f. The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

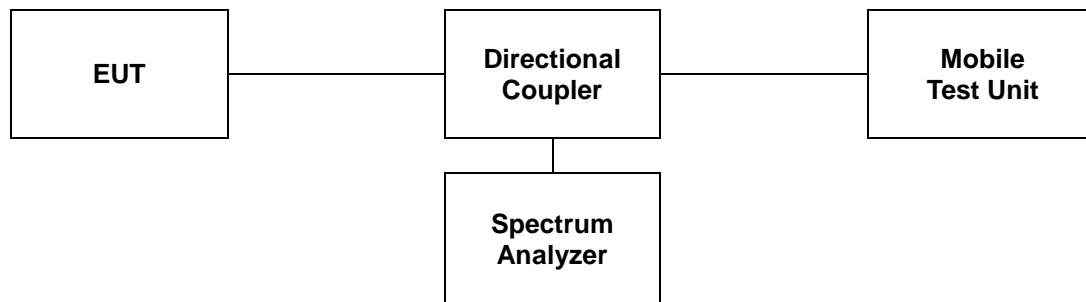

### 3.3 Test Results


Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)
2	RMC	1 852.4	4.139
		1 880.0	4.153
		1 907.6	4.124
4	RMC	1 712.4	4.139
		1 732.6	4.139
		1 752.6	4.139
5	RMC	826.4	4.153
		836.6	4.168
		846.6	4.153


**- Test plots**

**WCDMA 2**


Low Channel

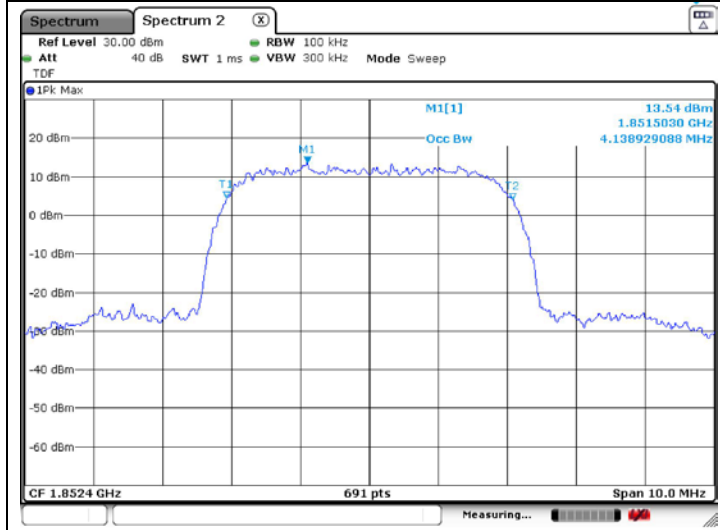

Middle Channel

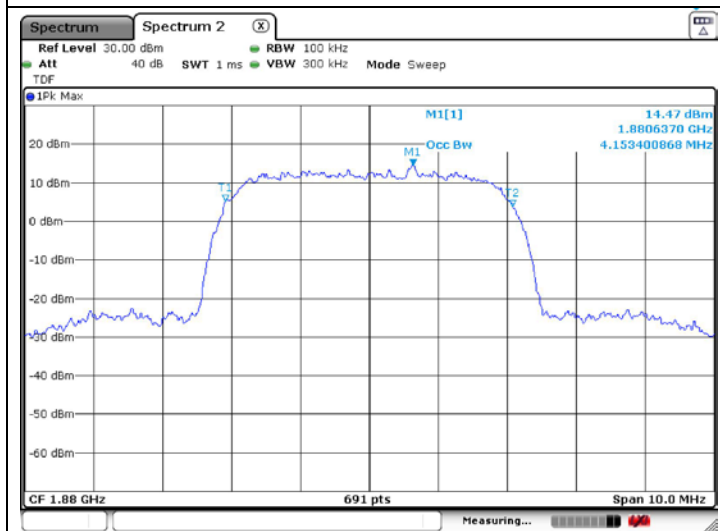


High Channel

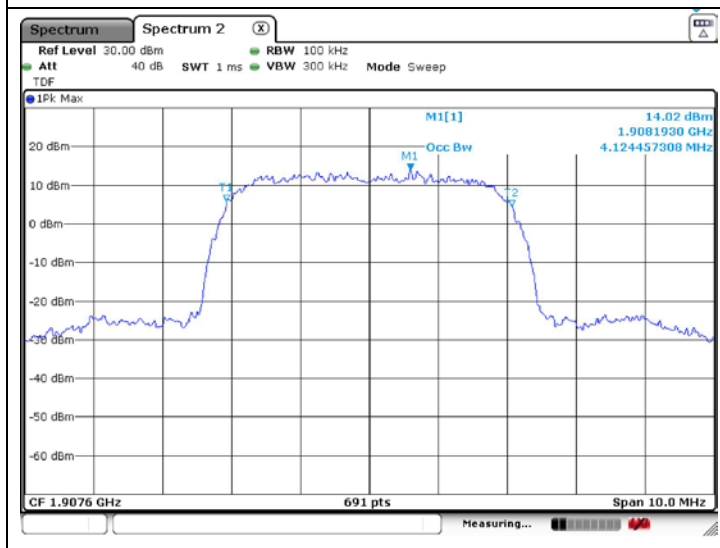




**WCDMA 4**


Low Channel

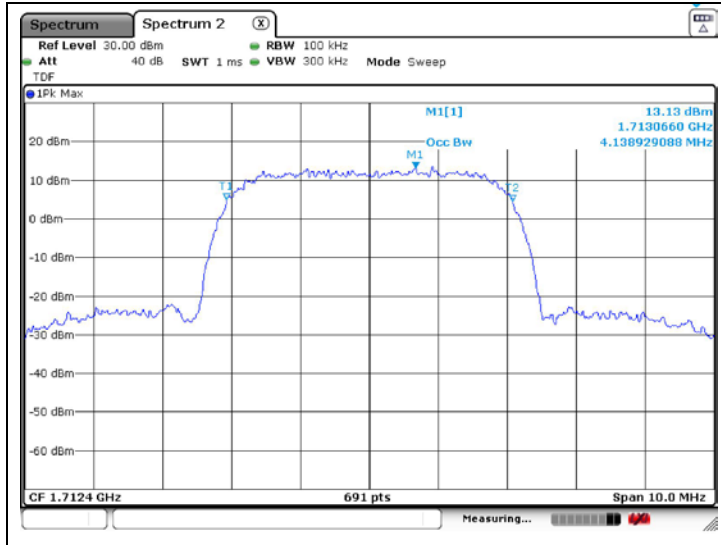

Middle Channel

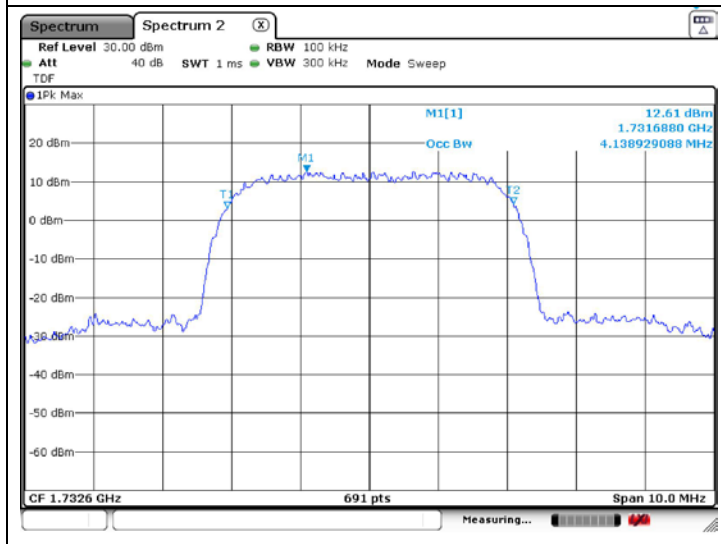


High Channel

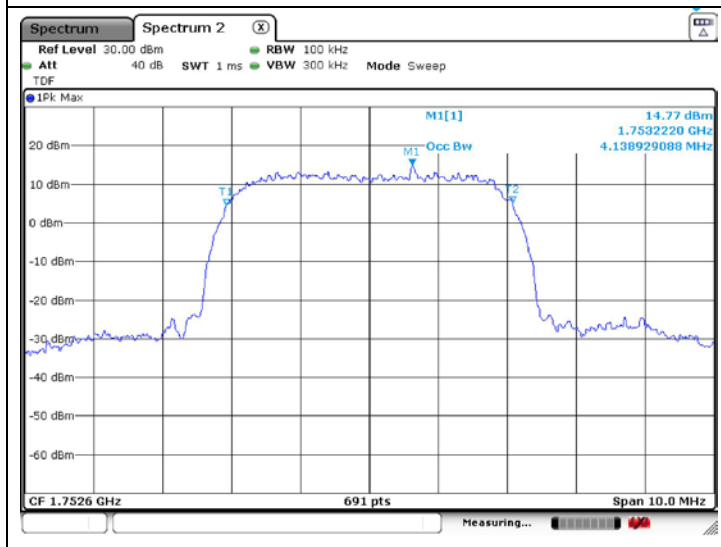


**WCDMA 5**


Low Channel

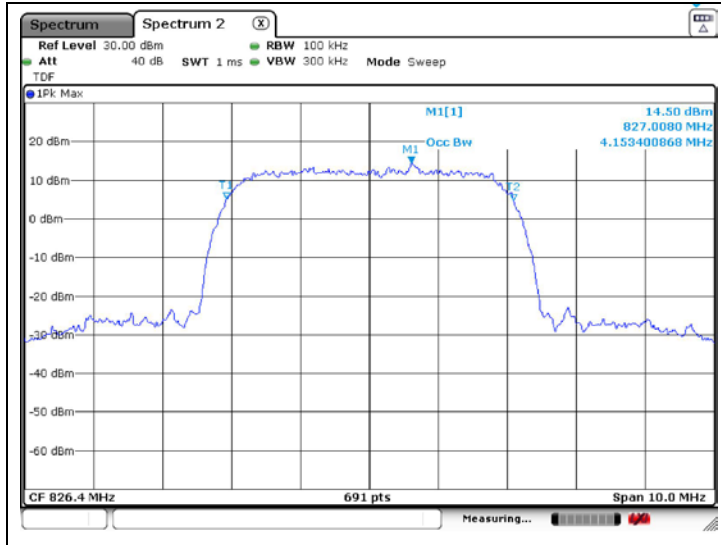

Middle Channel

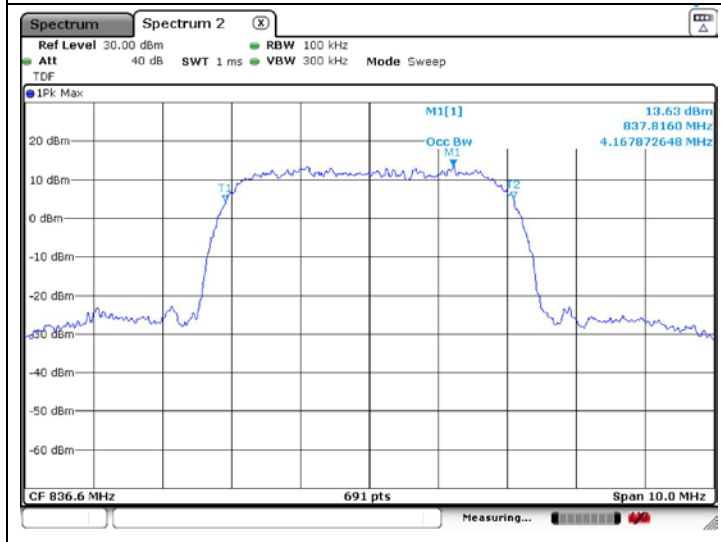

High Channel

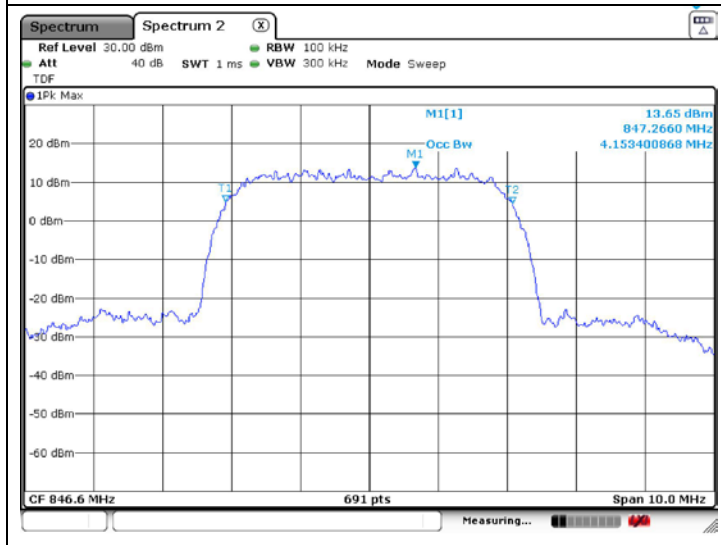

## 4. Peak-Average Ratio

### 4.1. Limit

- §22.913(d) Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

- §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


- §27.50(d)(5), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.2. Test Procedure

The test follows section 5.2.3.4 of ANSI C63.26-2015.

See instrumentation-specific application literature for further guidance regarding use of the CCDF capability. The following guidelines are offered for performing a CCDF measurement.

- a. Set resolution/measurement bandwidth  $\geq$  OBW or specified reference bandwidth.
- b. Set the number of counts to a value that stabilizes the measured CCDF curve.
- c. Set the measurement interval as follows:
  - 1) For continuous transmissions, set to greater of  $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$  or 1 ms.
  - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
  - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d. Record the maximum PAPR level associated with a probability of 0.1 %.
- e. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

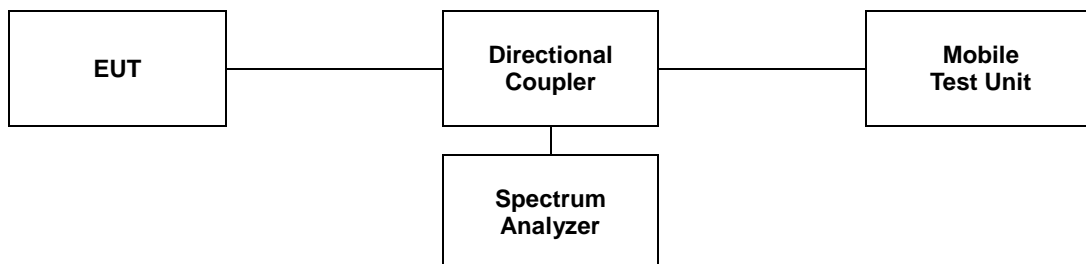

### 4.3 Test Results


Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

Band	Mode	Frequency (MHz)	PAR (dB)
2	RMC	1 852.4	2.93
		1 880.0	2.90
		1 907.6	2.96
4	RMC	1 712.4	2.55
		1 732.6	2.90
		1 752.6	2.93
5	RMC	826.4	2.93
		836.6	2.90
		846.6	2.84


**- Test plots**

**WCDMA 2**


Low Channel

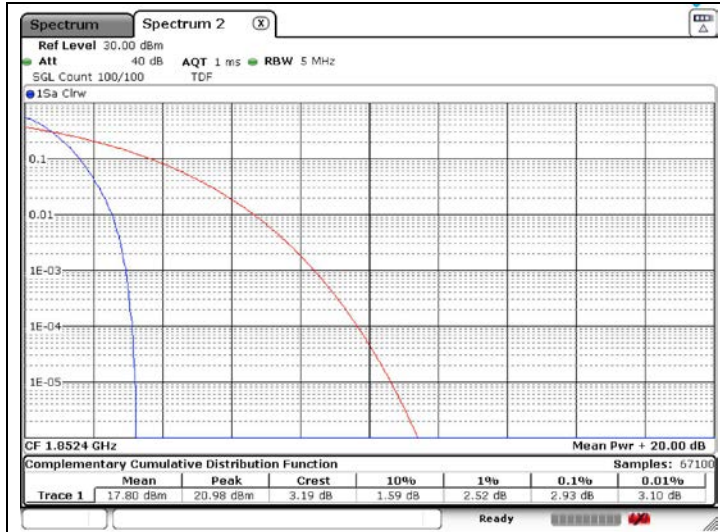

Middle Channel

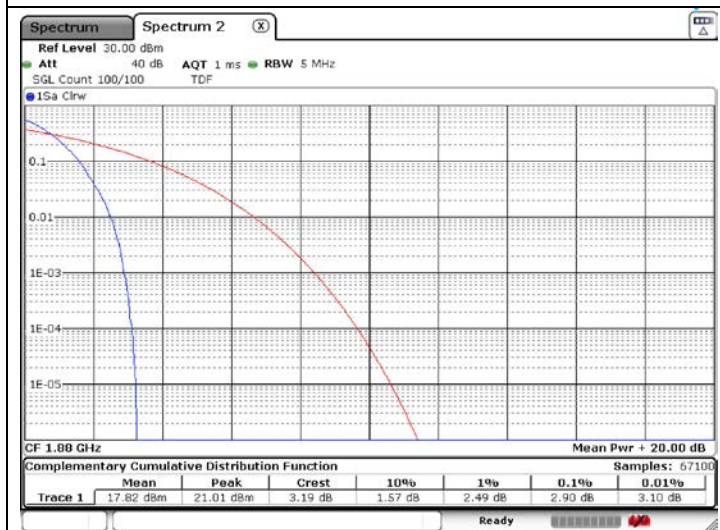


High Channel

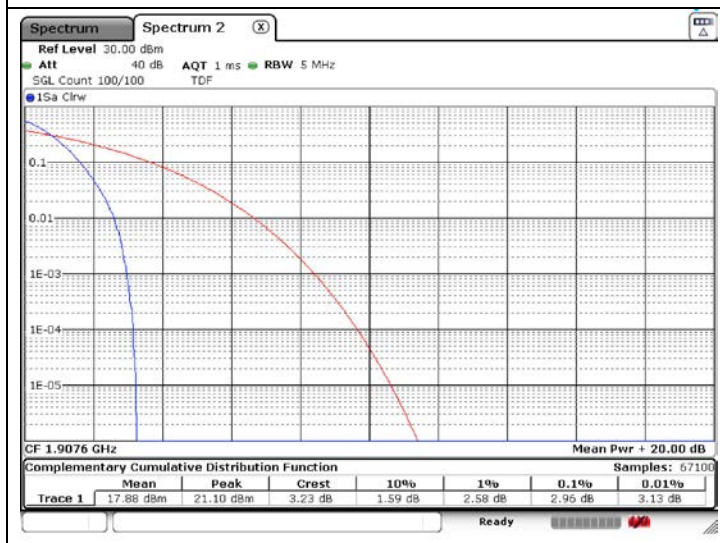


**WCDMA 4**


Low Channel

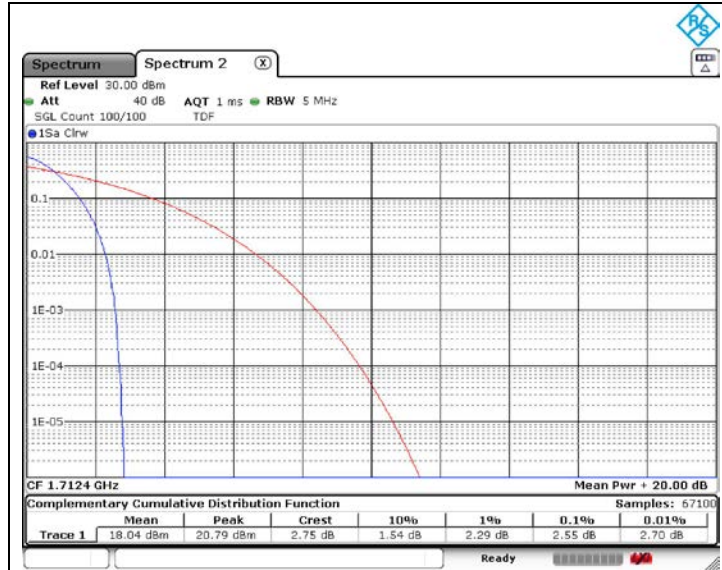

Middle Channel

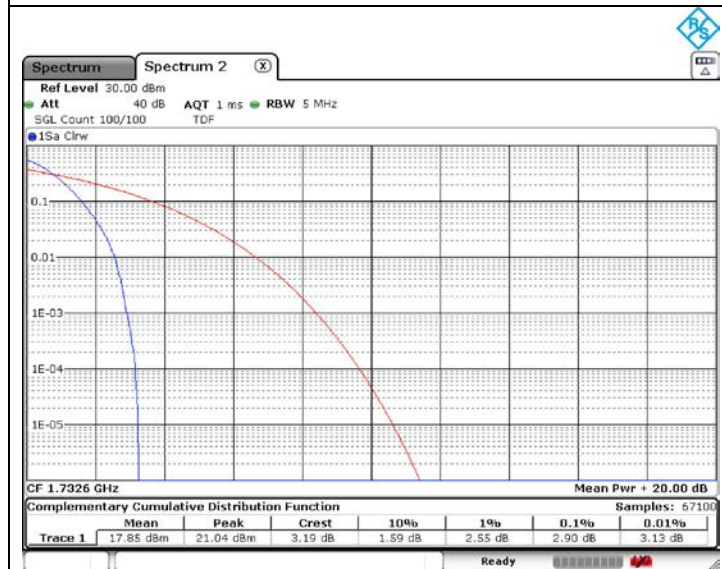


High Channel

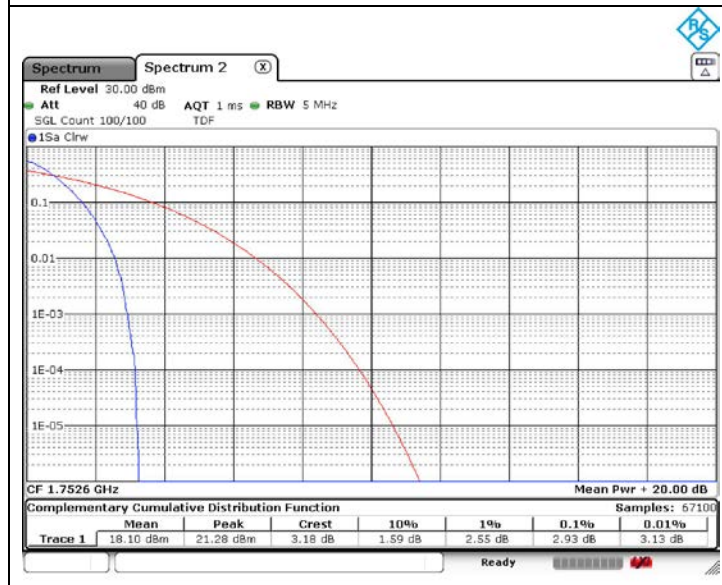


**WCDMA 5**


Low Channel

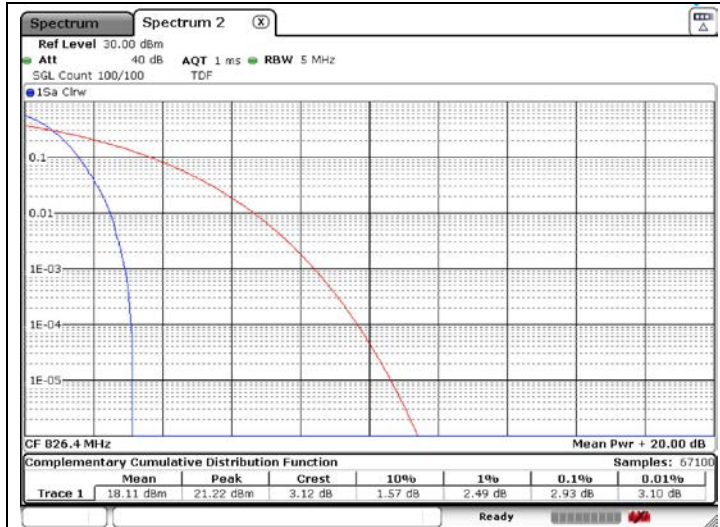

Middle Channel

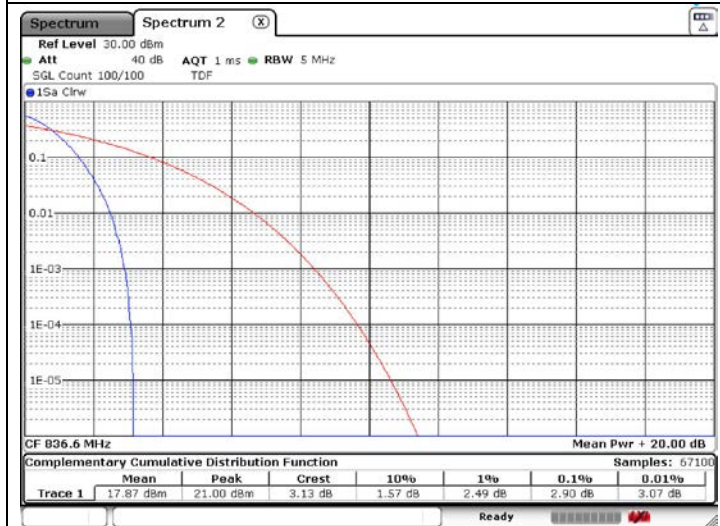

High Channel

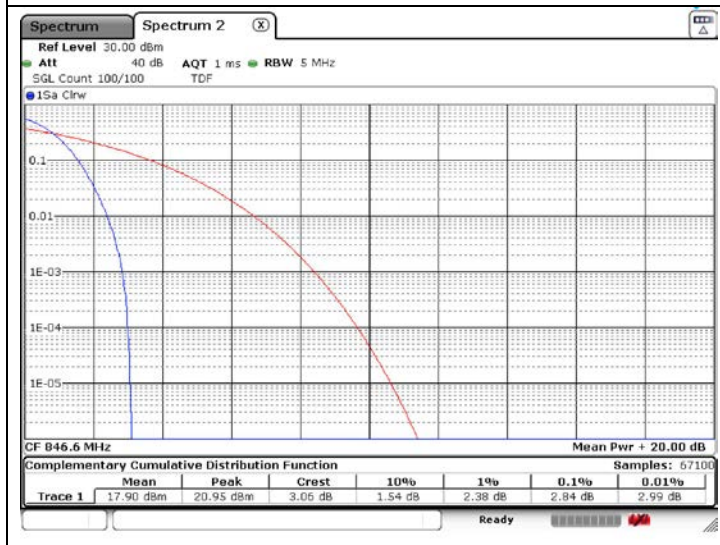

## 5. Spurious Emissions at Antenna Terminal

### 5.1. Limit

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.


- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

- §27.53(h)(1), for operations in the 1 695-1 710 MHz, 1 710-1 755 MHz, 1 755-1 780 MHz, 1 915-1 920 MHz, 1 995-2 000 MHz, 2 000-2 020 MHz, 2 110-2 155 MHz, 2 155-2 180 MHz, and 2 180-2 200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 5.2. Test Procedure

The test follows section 5.7 of ANSI C63.26-2015.

1. Start frequency was set to 9 kHz and stop frequency was set to at least 10\* the fundamental frequency.
2. Detector = Peak.
3. Trace mode = Max hold.
4. Sweep time = Auto couple.
5. The trace was allowed to stabilize.
6. Please see notes below for RBW and VBW settings.
7. For plots showing conducted spurious emissions from 9 kHz to 20 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as correction factor.

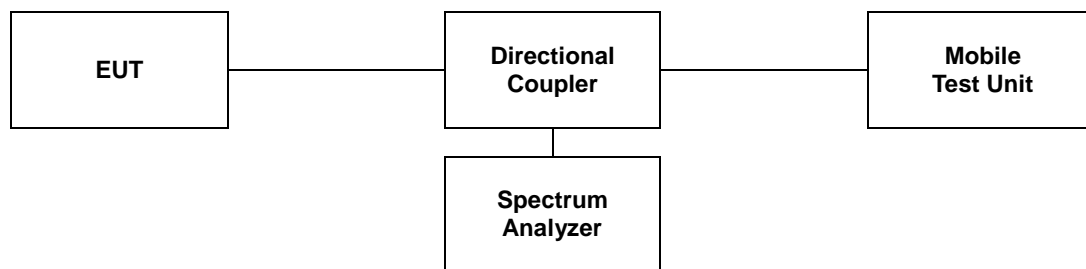

#### Note;

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two point, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.




### 5.3. Test Results


Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

#### - Test plots


WCDMA 2  
 Low channel

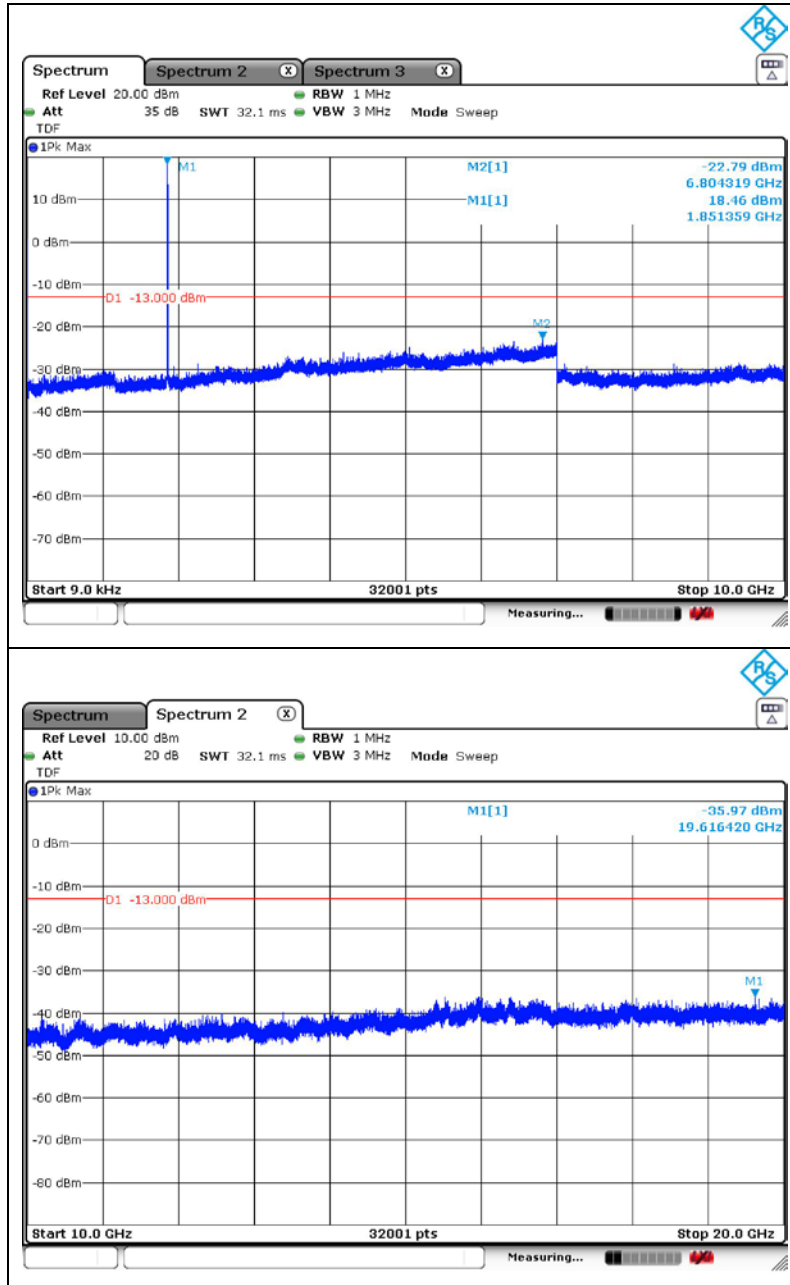


Middle channel

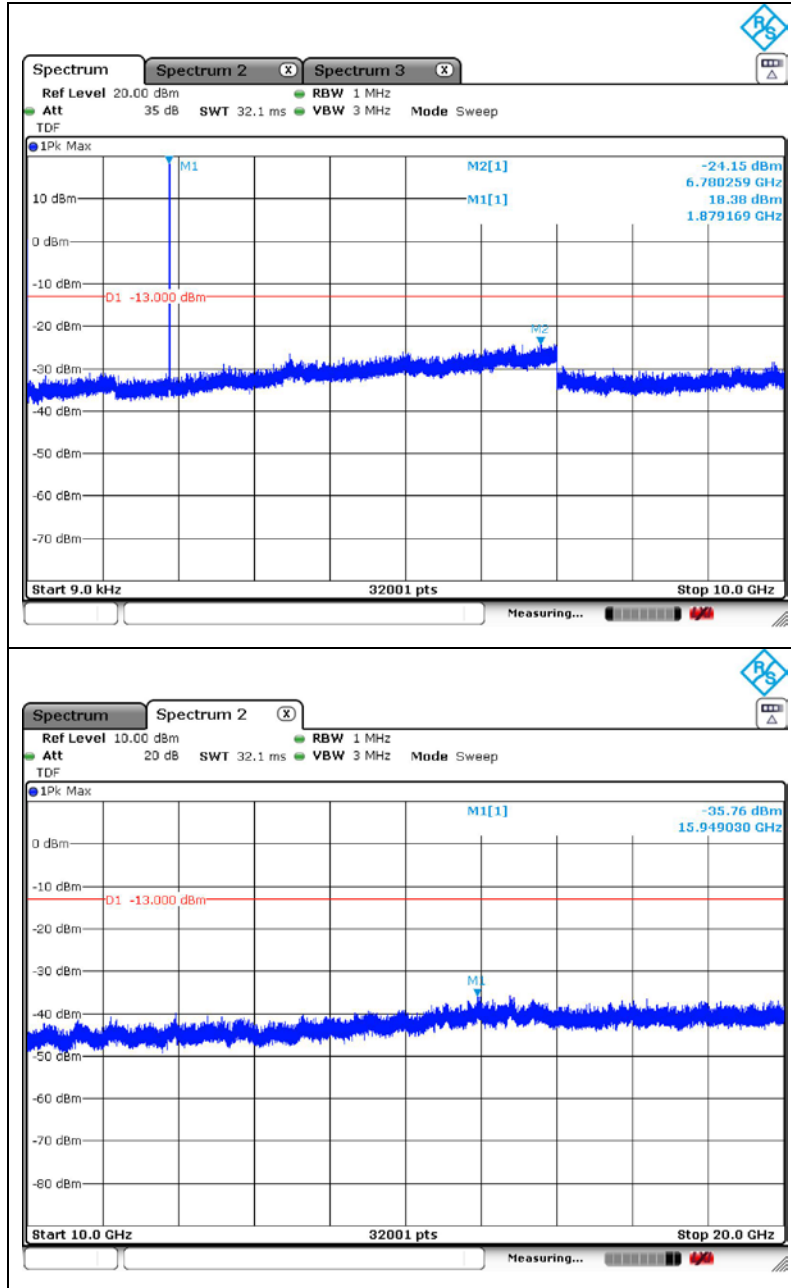


High channel

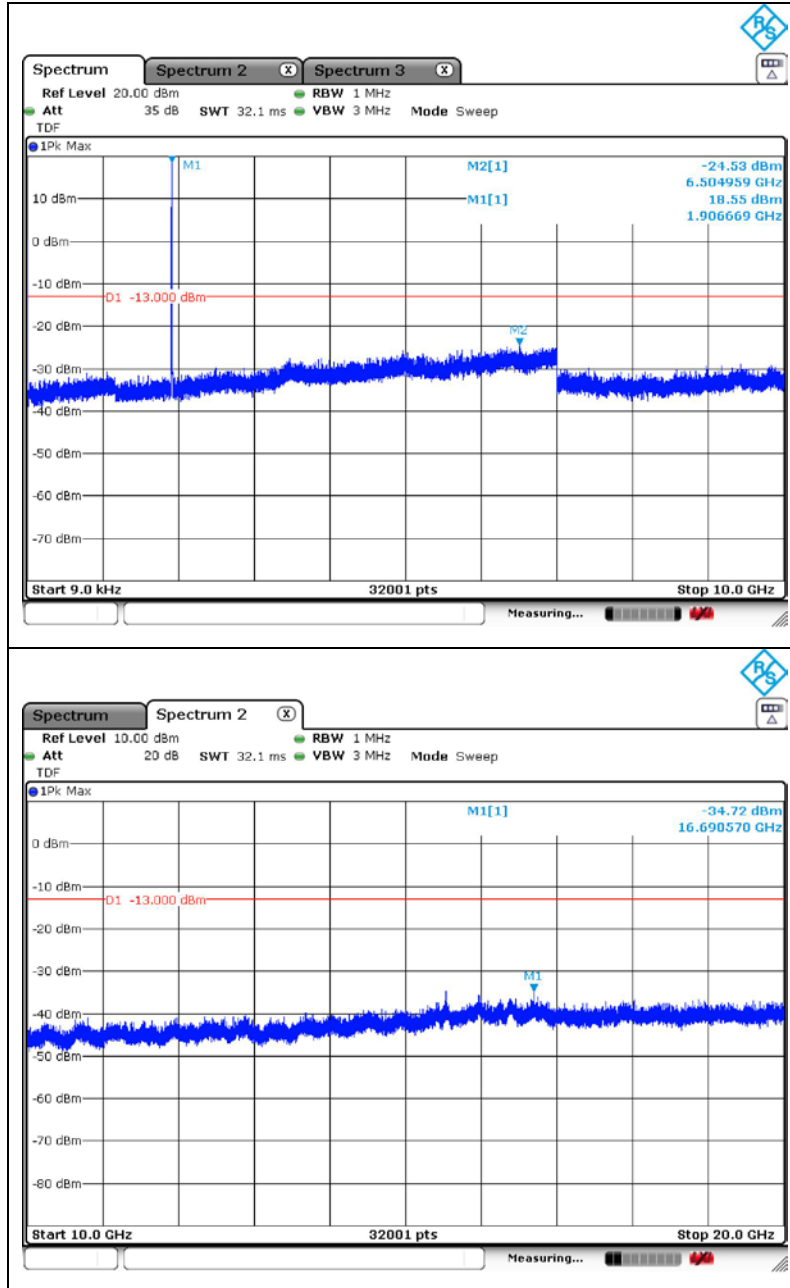


**WCDMA 4**  
 Low channel

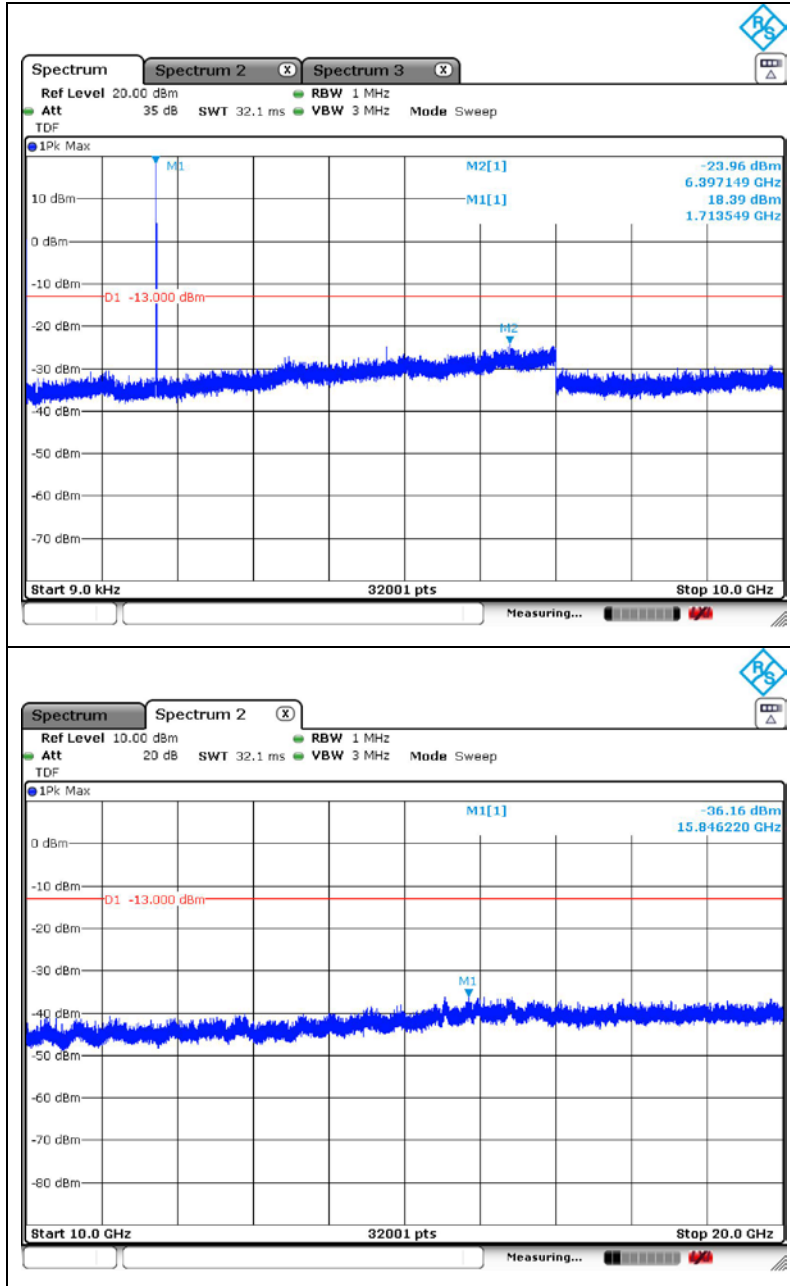

Middle channel

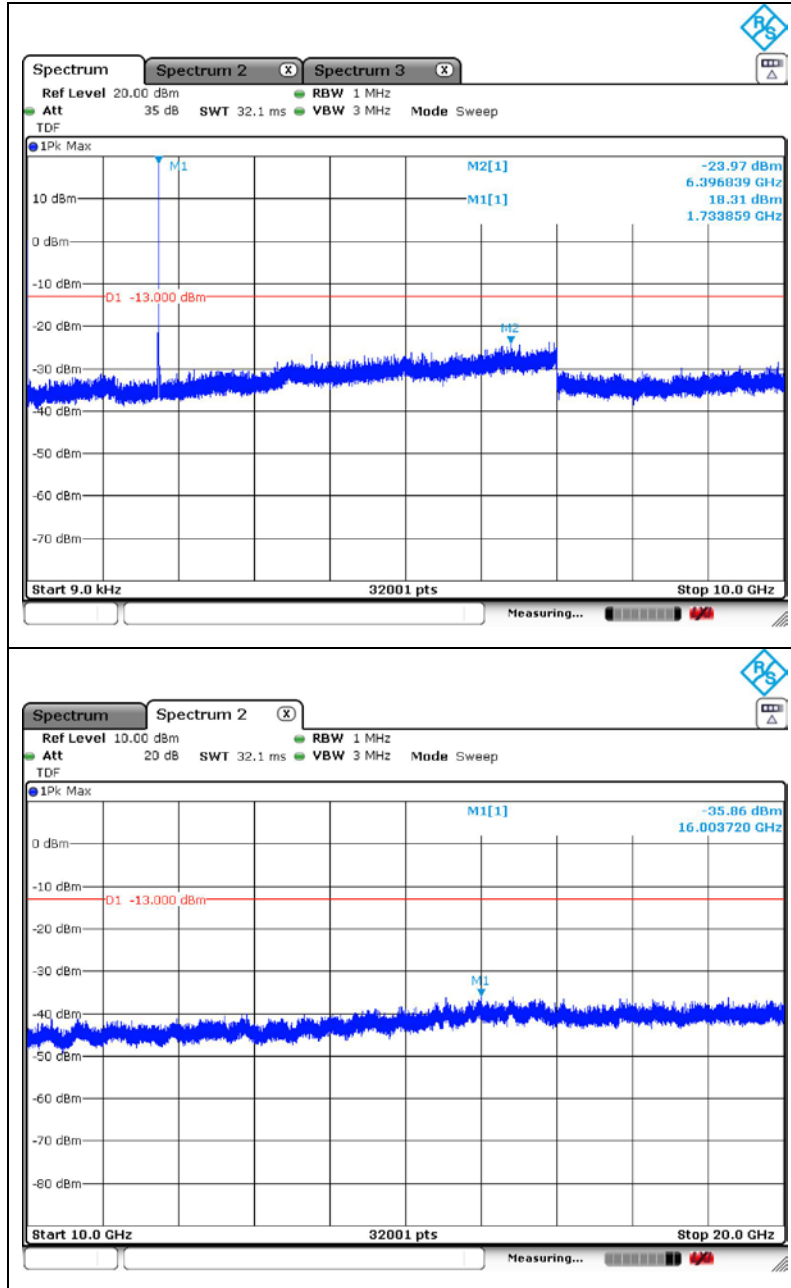


High channel

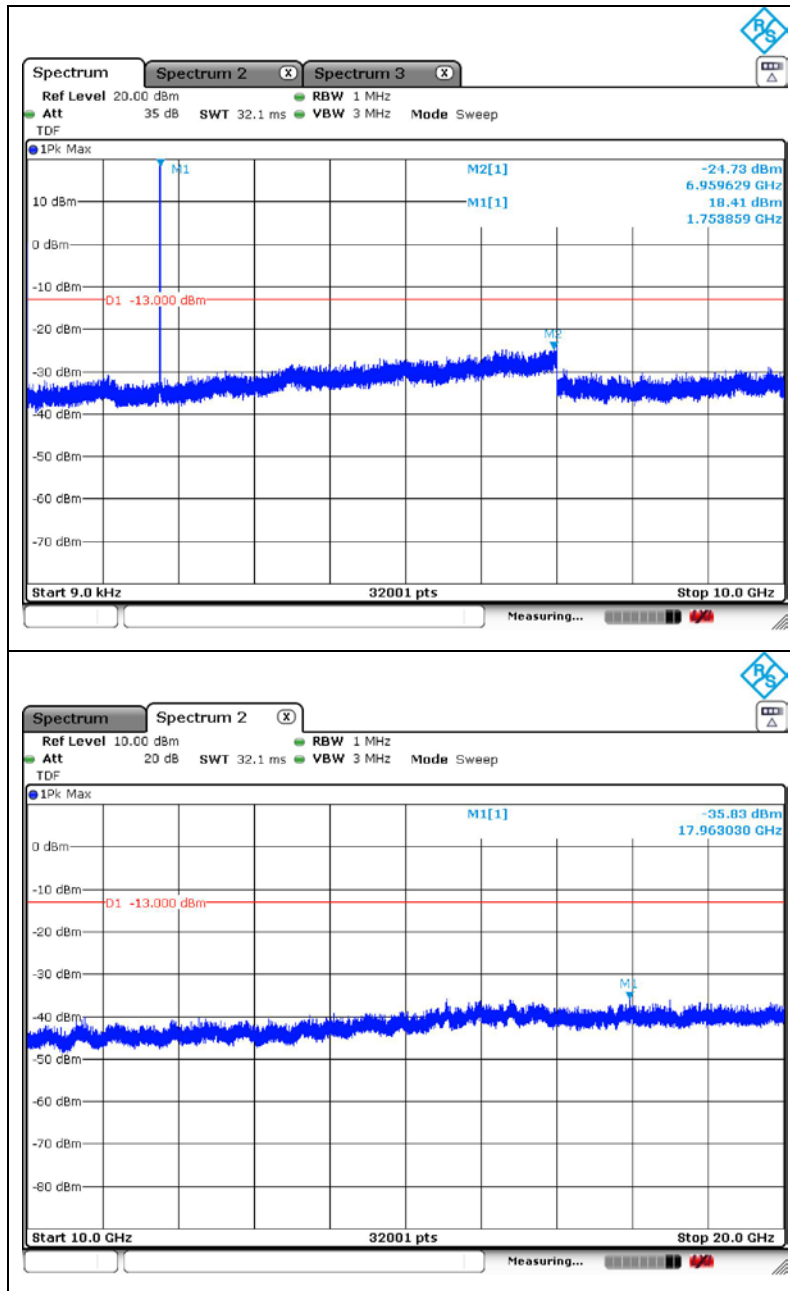


**WCDMA 5**


Low Channel

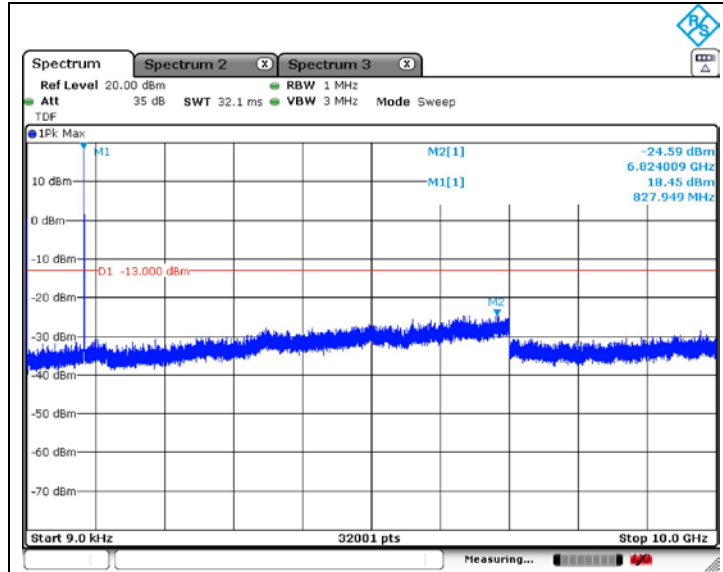

Middle Channel

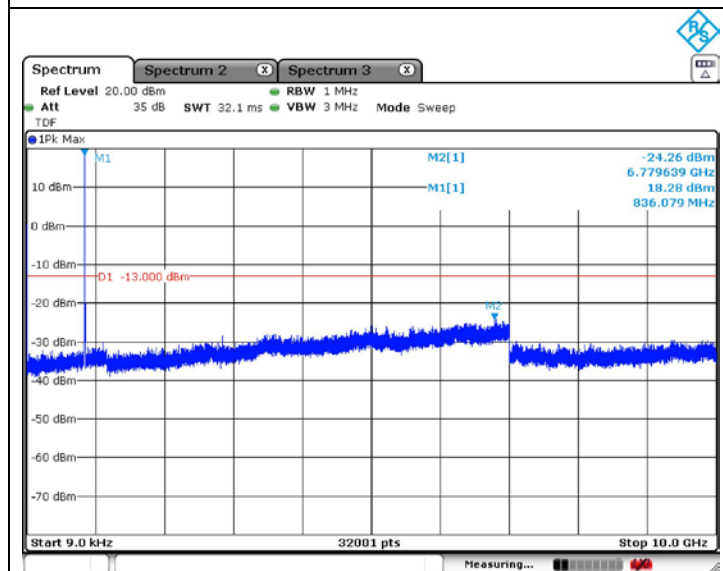

High Channel

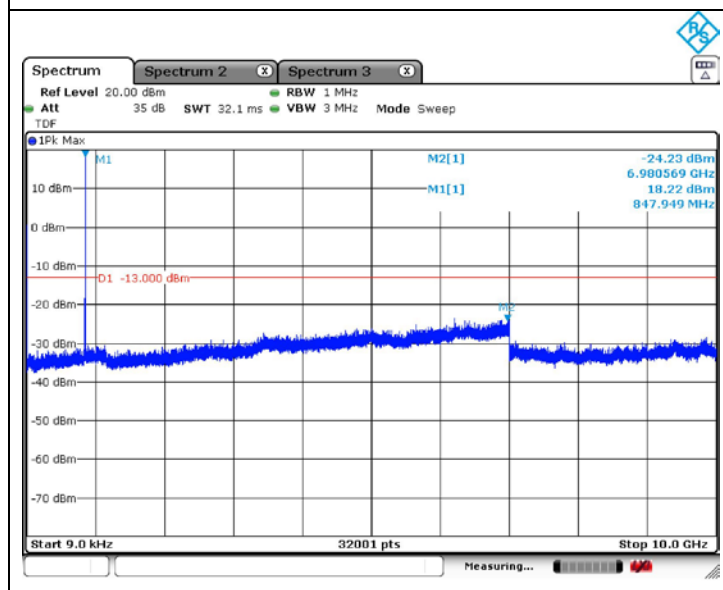

## 6. Band Edge

### 6.1. Limit

- §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.


- §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

- §27.53(h)(1), for operations in the 1 695-1 710 MHz, 1 710-1 755 MHz, 1 755-1 780 MHz, 1 915-1 920 MHz, 1 995-2 000 MHz, 2 000-2 020 MHz, 2 110-2 155 MHz, 2 155-2 180 MHz, and 2 180-2 200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 6.2. Test Procedure

The test follows section 5.7.2 of ANSI C63.26-2015.

- a. Span was set large enough so as to capture all out of band emissions near the band edge.
- b. RBW  $\geq$  1 % of OBW.
- c. VBW  $\geq$  3 x RBW.
- d. Detector = RMS.
- e. Trace mode = Average.
- f. Sweep time = Auto.
- g. The trace was allowed to stabilize.
- h. All path loss of frequency range was investigated and compensated to spectrum analyzer as TDF function.

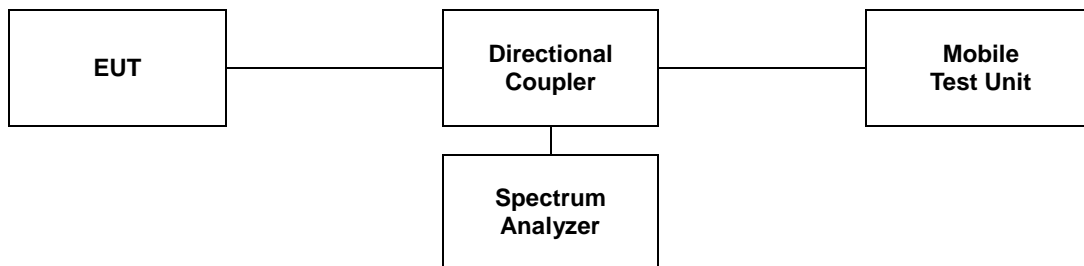




### 6.3. Test Results

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.


**- Test plots**

**WCDMA 2**

Low Channel

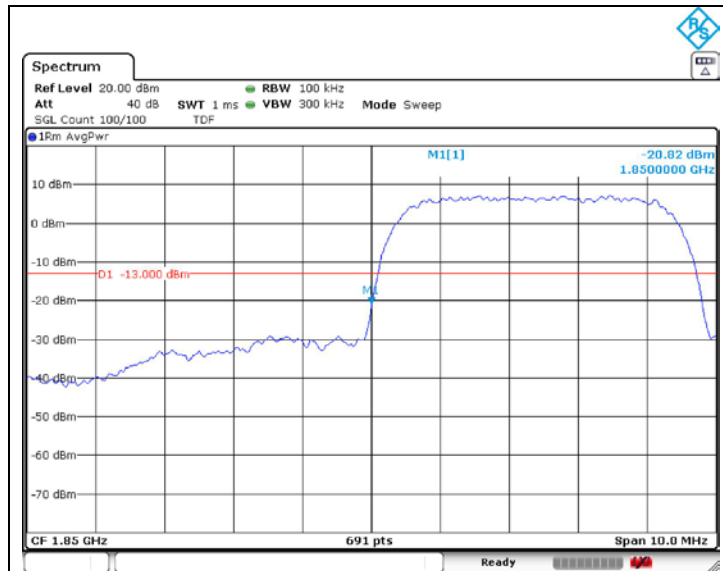


High Channel

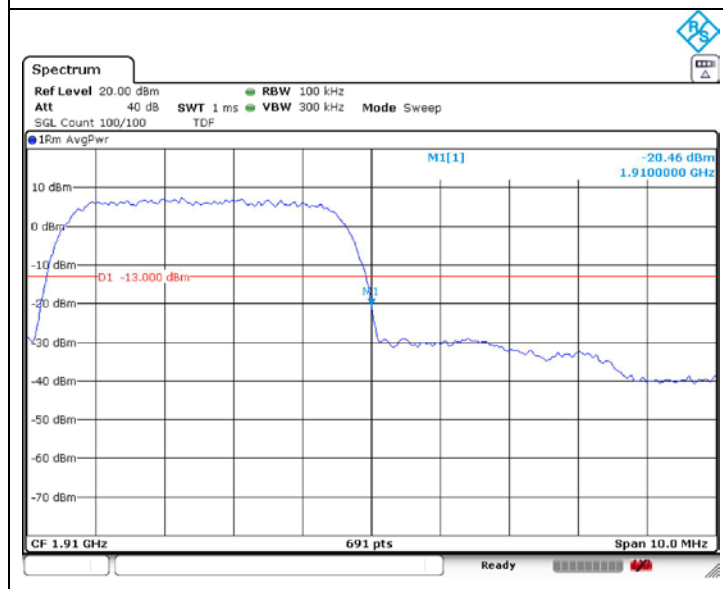


**WCDMA 4**

Low Channel

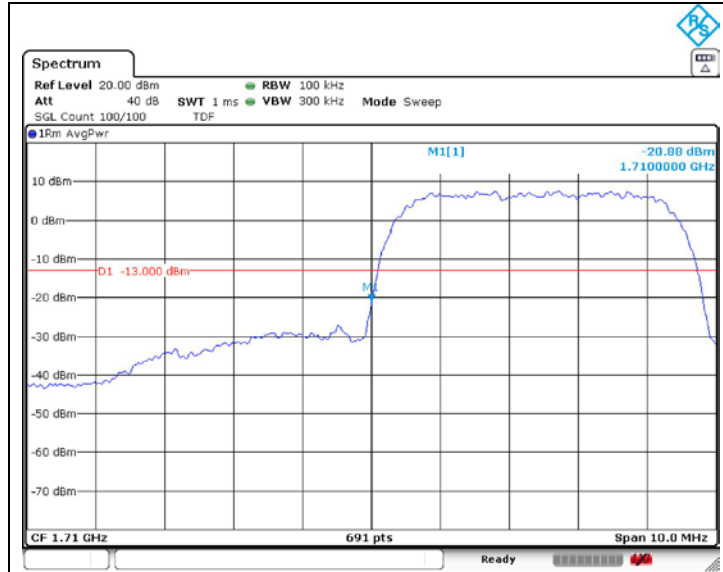


High Channel

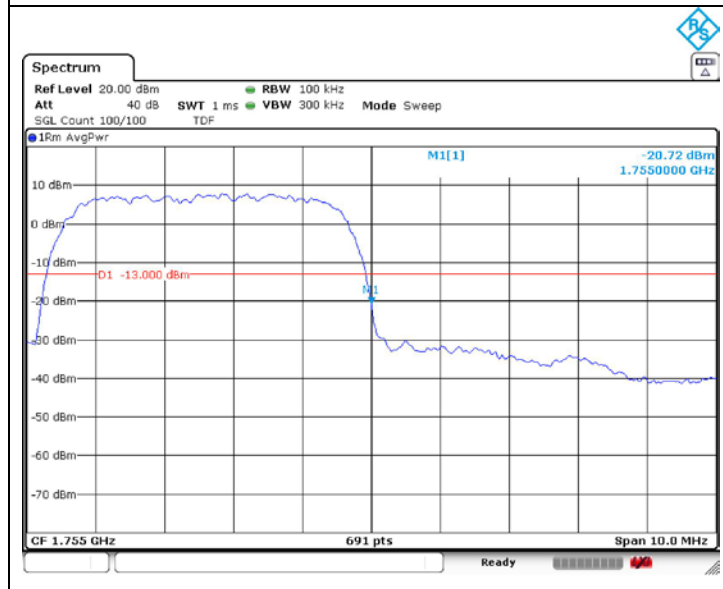


**WCDMA 5**

Low Channel

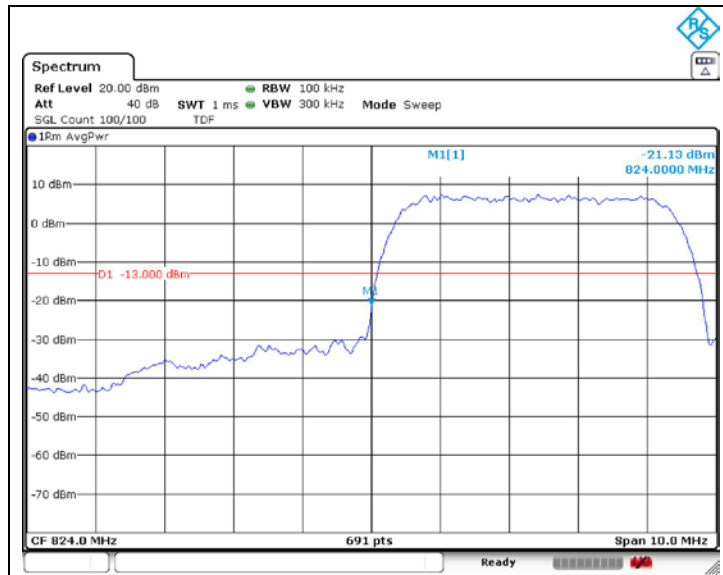

High Channel

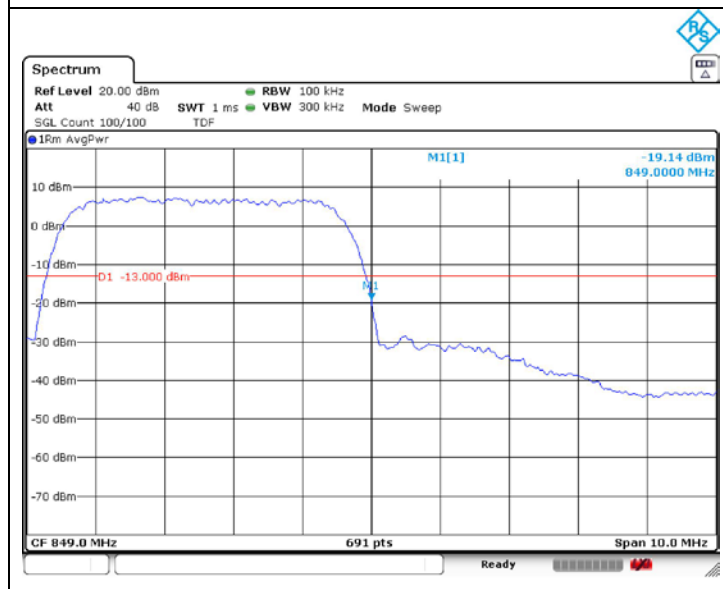

## 7. Frequency Stability

### 7.1. Limit

- § 2.1055(a), § 2.1055(d) & following:

- §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table of this section.


For Mobile devices operating in the 824 to 849 MHz band at a power level less than or equal to 3 Watts, the limit specified in Table C-1 is +/- 2.5 ppm.

- §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

- §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 7.2. Test Procedure

1. Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Mobile Test Unit via feed-through attenuators.
2. The EUT was placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from Mobile Test Unit.

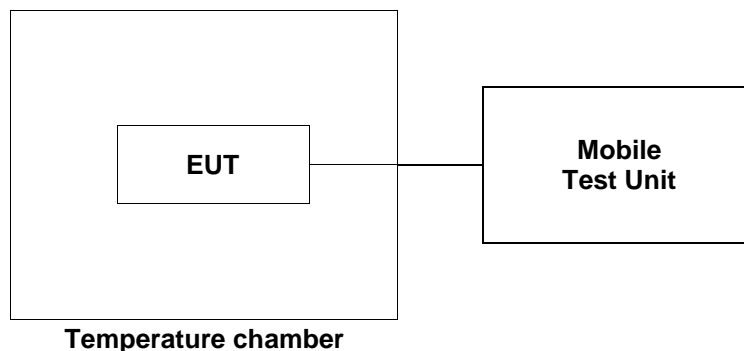

### 7.3. Test Results

Ambient temperature : (23 ± 1) °C  
 Relative humidity : 47 % R.H.

#### WCDMA 2 mode at middle channel

Operating Frequency: 1 880.0 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.8	1	0.000 5
40		2	0.001 1
30		4	0.002 1
20 (Ref.)		3	-
10		-2	-0.001 1
0		1	0.000 5
-10		2	0.001 1
-20		-1	-0.000 5
-30		3	0.001 6
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.37	3	0.001 6
	3.40 (End point)	-2	-0.001 1

**WCDMA 4 mode at middle channel**

Operating Frequency: 1 732.6 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	3.8	-2	-0.001 2
40		3	0.001 7
30		-2	-0.001 2
20 (Ref.)		3	-
10		1	0.000 6
0		-2	-0.001 2
-10		2	0.001 2
-20		3	0.001 7
-30		1	0.000 6
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	4.37	2	0.001 2
	3.40 (End point)	-2	-0.001 2

**WCDMA 5 mode at middle channel**

<b>Operating Frequency: 836.6 MHz</b>			
<b>Frequency Stability versus Temperature</b>			
<b>Environment Temperature (°C)</b>	<b>Power Supplied (V)</b>	<b>Frequency Measure with Time Elapse</b>	
		<b>Frequency Error (Hz)</b>	<b>ppm</b>
50	3.8	3	0.003 6
40		-2	-0.002 4
30		2	0.002 4
20 (Ref.)		-3	-
10		4	0.004 8
0		-1	-0.001 2
-10		2	0.002 4
-20		1	0.001 2
-30		3	0.003 6
<b>Frequency Stability versus Power Supply</b>			
<b>Environment Temperature (°C)</b>	<b>Power Supplied (V)</b>	<b>Frequency Measure with Time Elapse</b>	
		<b>Frequency Error (Hz)</b>	<b>ppm</b>
20	4.37	4	0.004 8
	3.40 (End point)	-3	-0.003 6

**- End of the Test Report -**