

# FCC LTE REPORT

## Certification

**Applicant Name:**  
Franklin Technology Inc.**Date of Issue:**  
February 01, 2019**Address:**  
906 JEI Platz, 186, Gasan digital 1-ro,  
Geumcheon-gu, Seoul, Korea, (08502)**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-1902-FC007**FCC ID:** XHG-T720**APPLICANT:** Franklin Technology Inc.

**Model(s):** T720  
**EUT Type:** Home Phone Connect  
**FCC Classification:** PCS Licensed Transmitter (PCB)  
**FCC Rule Part(s):** §24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band25 (1.4)	1 850.7 – 1 914.3	1M10G7D	QPSK	0.591	27.71
		1M10W7D	16QAM	0.477	26.78
LTE – Band25 (3)	1 851.5 – 1 913.5	2M71G7D	QPSK	0.605	27.82
		2M70W7D	16QAM	0.461	26.64
LTE – Band25 (5)	1 852.5 – 1 912.5	4M52G7D	QPSK	0.594	27.74
		4M49W7D	16QAM	0.448	26.51
LTE – Band25 (10)	1 855.0 – 1 910.0	8M98G7D	QPSK	0.599	27.77
		8M97W7D	16QAM	0.449	26.52
LTE – Band25 (15)	1 857.5 – 1 907.5	13M4G7D	QPSK	0.620	27.93
		13M4W7D	16QAM	0.466	26.68
LTE – Band25 (20)	1 860.0 – 1 905.0	18M0G7D	QPSK	0.603	27.81
		17M9W7D	16QAM	0.454	26.58

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by :** Jae Ryang Do  
**Engineer of Telecommunication Testing Center**

**Report approved by :** Jong Seok Lee  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1902-FC007	February 01, 2019	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. Description of EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 PEAK- TO- AVERAGE RATIO .....	9
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.7 BAND EDGE .....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(RADIATED TEST).....	15
3.10 WORST CASE(CONDUCTED TEST) .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION.....	20
8. TEST DATA .....	21
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	21
8.2 RADIATED SPURIOUS EMISSIONS.....	27
8.3 PEAK-TO-AVERAGE RATIO .....	33
8.4 OCCUPIED BANDWIDTH .....	34
8.5 CONDUCTED SPURIOUS EMISSIONS .....	35
8.6 BAND EDGE .....	35
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	36
9. TEST PLOTS.....	42
10. Annex A_ TEST SETUP PHOTO .....	139

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	Franklin Technology Inc.
<b>Address:</b>	906 JEI Platz, 186, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea, (08502)
<b>FCC ID:</b>	XHG-T720
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§24, §2
<b>EUT Type:</b>	Home Phone Connect
<b>Model(s):</b>	T720
<b>Tx Frequency:</b>	1 850.7 MHz – 1 914.3 MHz (LTE – Band25 (1.4 MHz)) 1 851.5 MHz – 1 913.5 MHz (LTE – Band25 (3 MHz)) 1 852.5 MHz – 1 912.5 MHz (LTE – Band25 (5 MHz)) 1 855.0 MHz – 1 910.0 MHz (LTE – Band25 (10 MHz)) 1 857.5 MHz – 1 907.5 MHz (LTE – Band25 (15 MHz)) 1 860.0 MHz – 1 905.0 MHz (LTE – Band25 (20 MHz))
<b>Date(s) of Tests:</b>	December 26, 2018 ~ January 28, 2019
<b>Peak. Ant gain:</b>	4.885 dBi

## **2. INTRODUCTION**

### **2.1. Description of EUT**

The EUT was a VoLTE Home Phone Connect with CDMA/EVDO Rev0/A and LTE.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### **3. DESCRIPTION OF TESTS**

#### **3.1 TEST PROCEDURE**

<b>Test Description</b>	<b>Test Procedure Used</b>
Occupied Bandwidth	- KDB 971168 D01 v03 – Section 4.2 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03 – Section 5.2 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03 – Section 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss } (\text{dB}) + \text{antenna gain } (\text{dB})$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

### 3.4 PEAK- TO- AVERAGE RATIO

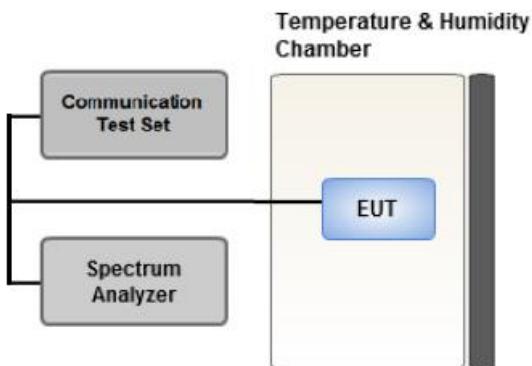

#### Test setup

##### ① CCDF Procedure for PAPR

###### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

## ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk \ (dBm)} - P_{Avg \ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### Test Settings(Average Power)

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep  
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

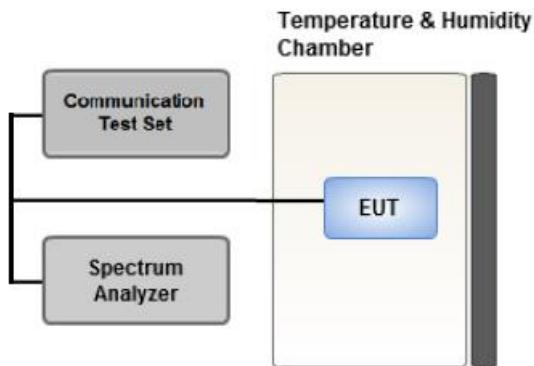

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

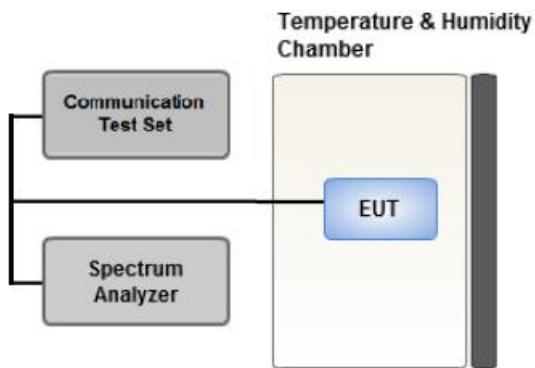

#### Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

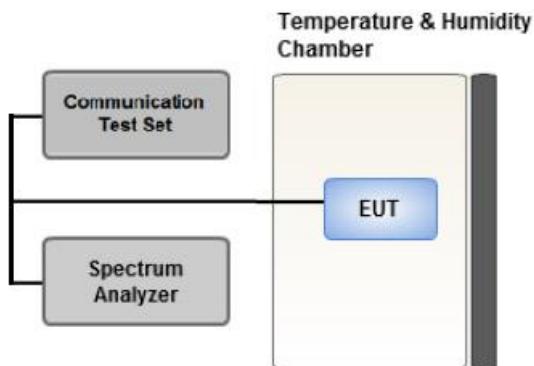

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

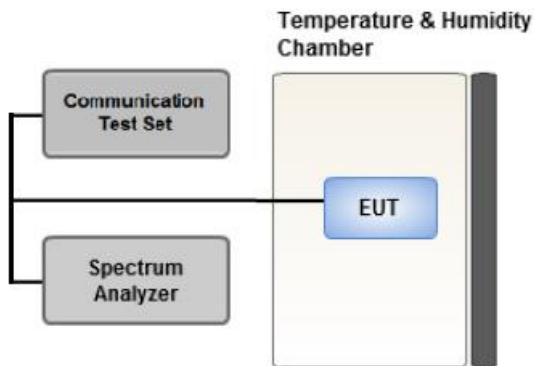

#### Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Radiated Spurious and Harmonic Emissions	QPSK	1	0	X

**3.10 WORST CASE(CONDUCTED TEST)**

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10, 15, 20	Low, Mid, High	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Channel Edge	* QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

\* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Biog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## **5. MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055 §24.235	Emission must remain in band	PASS

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1850.7	26047	1	0	22.56	21.43	27.44	26.32
		1	3	22.83	21.90	27.71	26.78
		1	5	22.71	21.46	27.59	26.34
		3	0	22.58	21.59	27.46	26.48
		3	1	22.65	21.77	27.53	26.66
		3	3	22.66	21.89	27.54	26.77
		6	0	21.59	20.53	26.48	25.42
1882.5	26365	1	0	22.50	21.42	27.39	26.31
		1	3	22.55	21.65	27.43	26.53
		1	5	22.51	21.49	27.40	26.37
		3	0	22.50	21.46	27.39	26.34
		3	1	22.53	21.53	27.42	26.42
		3	3	22.50	21.48	27.39	26.36
		6	0	21.52	20.50	26.41	25.39
1914.3	26683	1	0	22.19	21.24	27.08	26.12
		1	3	22.23	21.38	27.11	26.26
		1	5	22.24	21.29	27.12	26.18
		3	0	22.19	21.14	27.08	26.02
		3	1	22.22	21.19	27.10	26.08
		3	3	22.14	21.12	27.02	26.01
		6	0	21.26	20.21	26.15	25.09

LTE Conducted Average Output Powers (1.4 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1851.5	26055	1	0	22.56	21.52	27.44	26.41
		1	7	22.93	21.75	27.82	26.64
		1	14	22.77	21.70	27.66	26.59
		8	0	21.80	20.59	26.68	25.48
		8	3	21.75	20.92	26.64	25.81
		8	7	21.71	20.87	26.59	25.76
		15	0	21.63	20.73	26.51	25.61
1882.5	26365	1	0	22.51	21.48	27.40	26.36
		1	7	22.55	21.38	27.43	26.26
		1	14	22.56	21.53	27.44	26.42
		8	0	21.60	20.50	26.49	25.39
		8	3	21.55	20.71	26.43	25.59
		8	7	21.54	20.79	26.43	25.68
		15	0	21.53	20.54	26.42	25.43
1913.5	26675	1	0	22.31	21.11	27.19	26.00
		1	7	22.40	21.13	27.28	26.01
		1	14	22.39	21.25	27.27	26.14
		8	0	21.33	20.18	26.21	25.07
		8	3	21.25	20.28	26.14	25.17
		8	7	21.22	20.40	26.10	25.28
		15	0	21.32	20.47	26.20	25.35

LTE Conducted Average Output Powers (3 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1852.5	26065	1	0	22.54	21.43	27.43	26.32
		1	12	22.85	21.63	27.74	26.51
		1	24	22.74	21.51	27.62	26.40
		12	0	21.73	20.58	26.61	25.46
		12	6	21.72	20.66	26.60	25.54
		12	11	21.69	20.69	26.58	25.58
		25	0	21.67	20.85	26.56	25.74
1882.5	26365	1	0	22.64	21.35	27.52	26.24
		1	12	22.78	21.35	27.67	26.24
		1	24	22.51	21.27	27.40	26.16
		12	0	21.52	20.62	26.41	25.51
		12	6	21.48	20.58	26.36	25.46
		12	11	21.49	20.59	26.37	25.48
		25	0	21.46	20.56	26.34	25.44
1912.5	26665	1	0	22.42	21.22	27.31	26.10
		1	12	22.35	21.10	27.24	25.99
		1	24	22.22	21.10	27.10	25.99
		12	0	21.45	20.39	26.34	25.27
		12	6	21.33	20.38	26.21	25.26
		12	11	21.21	20.47	26.09	25.35
		25	0	21.33	20.46	26.21	25.34

LTE Conducted Average Output Powers (5 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1855.0	26090	1	0	22.69	21.57	27.58	26.45
		1	24	22.89	21.64	27.77	26.52
		1	49	22.51	21.42	27.40	26.31
		25	0	21.82	20.77	26.70	25.66
		25	12	21.66	20.69	26.54	25.58
		25	24	21.55	20.66	26.43	25.54
		50	0	21.58	20.69	26.46	25.58
1882.5	26365	1	0	22.59	21.48	27.48	26.36
		1	24	22.71	21.44	27.59	26.33
		1	49	22.42	21.06	27.31	25.94
		25	0	21.63	20.54	26.51	25.43
		25	12	21.61	20.61	26.50	25.50
		25	24	21.51	20.51	26.40	25.40
		50	0	21.52	20.61	26.41	25.50
1910.0	26640	1	0	22.43	21.19	27.32	26.08
		1	24	22.52	21.35	27.41	26.24
		1	49	22.52	21.00	27.41	25.89
		25	0	21.50	20.67	26.39	25.56
		25	12	21.55	20.59	26.43	25.48
		25	24	21.22	20.34	26.10	25.23
		50	0	21.38	20.50	26.26	25.39

LTE Conducted Average Output Powers (10 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1857.5	26115	1	0	22.64	21.32	27.52	26.20
		1	36	22.98	21.80	27.86	26.68
		1	74	22.53	21.33	27.42	26.21
		36	0	21.57	20.66	26.45	25.54
		36	18	21.72	20.75	26.60	25.64
		36	39	21.58	20.69	26.46	25.58
		75	0	21.65	20.75	26.53	25.64
1882.5	26365	1	0	22.69	21.47	27.58	26.35
		1	36	23.04	21.47	27.93	26.35
		1	74	22.47	21.27	27.35	26.16
		36	0	21.56	20.53	26.44	25.42
		36	18	21.61	20.61	26.50	25.50
		36	39	21.47	20.56	26.35	25.44
		75	0	21.56	20.66	26.44	25.54
1907.5	26615	1	0	22.66	21.48	27.54	26.36
		1	36	22.85	21.62	27.74	26.51
		1	74	22.30	21.17	27.18	26.06
		36	0	21.61	20.60	26.50	25.49
		36	18	21.47	20.57	26.35	25.45
		36	39	21.28	20.40	26.17	25.28
		75	0	21.53	20.63	26.42	25.51

LTE Conducted Average Output Powers (15 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.I.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
1860.0	26140	1	0	22.64	21.60	27.52	26.49
		1	49	22.92	21.67	27.81	26.56
		1	99	22.61	21.38	27.50	26.26
		50	0	21.63	20.73	26.51	25.61
		50	25	21.68	20.79	26.57	25.68
		50	49	21.58	20.69	26.46	25.58
		100	0	21.54	20.64	26.43	25.52
1882.5	26365	1	0	22.52	21.20	27.41	26.09
		1	49	22.88	21.69	27.76	26.58
		1	99	22.43	21.30	27.32	26.18
		50	0	21.64	20.57	26.52	25.45
		50	25	21.58	20.59	26.46	25.48
		50	49	21.44	20.45	26.33	25.34
		100	0	21.50	20.51	26.39	25.40
1905.0	26590	1	0	22.49	21.24	27.37	26.12
		1	49	22.90	21.49	27.78	26.37
		1	99	22.46	21.13	27.34	26.01
		50	0	21.69	20.78	26.58	25.67
		50	25	21.63	20.66	26.51	25.54
		50	49	21.39	20.51	26.27	25.40
		100	0	21.52	20.62	26.41	25.51

LTE Conducted Average Output Powers (20 MHz Band 25 LTE)

**Note:**

1. E.I.R.P = Conducted Power + Peak. Ant Gain(dBi)
2. Peak. Ant Gain = 4.885 dBi
3. Limit = 2 Watts(=33.01dBm)

## 8.2 RADIATED SPURIOUS EMISSIONS

- MODE: LTE B25  
 MODULATION SIGNAL: 1.4 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26047 (1850.7)	3,701.40	-55.54	12.51	-62.34	1.98	V	-51.81	38.81
	5,552.10	-48.13	13.62	-49.41	2.72	V	-38.51	25.51
	7,402.80	-51.36	11.50	-46.35	2.92	V	-37.77	24.77
	9,253.50	-52.01	10.93	-42.32	3.32	V	-34.71	21.71
26365 (1882.5)	3,765.00	-54.64	12.41	-61.19	2.01	V	-50.79	37.79
	5,647.50	-48.53	13.79	-49.41	2.70	V	-38.32	25.32
	7,530.00	-53.39	11.64	-48.18	2.93	V	-39.47	26.47
	9,412.50	-53.90	11.23	-44.31	3.45	V	-36.53	23.53
26683 (1914.3)	3,828.60	-51.41	12.52	-57.73	2.04	V	-47.25	34.25
	5,742.90	-45.59	13.67	-45.32	2.75	V	-34.40	21.40
	7,657.20	-52.17	12.04	-47.65	2.85	H	-38.46	25.46
	9,571.50	-44.48	11.17	-34.90	3.54	V	-27.27	14.27

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0 \text{ dBm}$

- MODE: LTE B25
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26055 (1851.5)	3,703.00	-54.43	12.51	-61.23	1.98	V	-50.70	37.70
	5,554.50	-48.53	13.63	-49.79	2.72	V	-38.88	25.88
	7,406.00	-51.17	11.50	-46.02	2.93	V	-37.45	24.45
	9,257.50	-53.84	10.92	-44.19	3.32	V	-36.59	23.59
26365 (1882.5)	3,765.00	-55.16	12.41	-61.71	2.01	V	-51.31	38.31
	5,647.50	-48.54	13.79	-49.42	2.70	V	-38.33	25.33
	7,530.00	-55.07	11.64	-49.86	2.93	V	-41.15	28.15
	9,412.50	-53.28	11.23	-43.69	3.45	V	-35.91	22.91
26675 (1913.5)	3,827.00	-53.90	12.52	-60.22	2.04	V	-49.74	36.74
	5,740.50	-46.43	13.67	-46.16	2.75	V	-35.24	22.24
	7,654.00	-52.94	12.04	-48.31	2.88	V	-39.15	26.15
	9,567.50	-45.28	11.17	-35.70	3.54	V	-28.07	15.07

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0$  dBm

- MODE: LTE B25
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26065 (1852.5)	3,705.00	-54.70	12.50	-61.33	2.00	V	-50.82	37.82
	5,557.50	-48.99	13.64	-50.23	2.71	V	-39.30	26.30
	7,410.00	-50.94	11.50	-45.65	2.93	V	-37.08	24.08
	9,262.50	-52.49	10.92	-42.84	3.32	V	-35.24	22.24
26365 (1882.5)	3,765.00	-54.84	12.41	-61.39	2.01	V	-50.99	37.99
	5,647.50	-47.98	13.79	-48.86	2.70	V	-37.77	24.77
	7,530.00	-53.61	11.64	-48.40	2.93	V	-39.69	26.69
26665 (1912.5)	3,825.00	-53.19	12.52	-59.47	2.05	V	-48.99	35.99
	5,737.50	-47.04	13.67	-46.77	2.75	V	-35.85	22.85
	7,650.00	-53.14	12.04	-48.40	2.91	V	-39.27	26.27
	9,562.50	-46.95	11.16	-37.35	3.50	V	-29.69	16.69

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0$  dBm

- MODE: LTE B25  
 MODULATION SIGNAL: 10 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26090 (1855.0)	3,710.00	-55.93	12.49	-62.39	2.01	V	-51.91	38.91
	5,565.00	-47.40	13.65	-48.68	2.71	V	-37.74	24.74
	7,420.00	-51.46	11.51	-46.08	2.94	V	-37.51	24.51
	9,275.00	-53.17	10.90	-43.64	3.34	V	-36.09	23.09
26365 (1882.5)	3,765.00	-56.61	12.41	-63.16	2.01	V	-52.76	39.76
	5,647.50	-47.70	13.79	-48.58	2.70	V	-37.49	24.49
	7,530.00	-54.87	11.64	-49.66	2.93	V	-40.95	27.95
	9,412.50	-54.96	11.23	-45.37	3.45	V	-37.59	24.59
26640 (1910.0)	3,820.00	-50.84	12.52	-57.08	2.05	V	-46.61	33.61
	5,730.00	-47.51	13.69	-47.46	2.72	V	-36.49	23.49
	7,640.00	-53.03	11.99	-48.23	2.93	V	-39.17	26.17
	9,550.00	-49.00	11.16	-39.92	3.46	V	-32.21	19.21

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0$  dBm

- MODE: LTE B25
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26115 (1857.5)	3,715.00	-54.32	12.49	-60.97	2.02	V	-50.50	37.50
	5,572.50	-48.34	13.66	-49.66	2.71	V	-38.71	25.71
	7,430.00	-51.38	11.51	-46.16	2.94	V	-37.59	24.59
	9,287.50	-54.00	10.86	-44.32	3.37	V	-36.83	23.83
26365 (1882.5)	3,765.00	-56.96	12.41	-63.51	2.01	V	-53.11	40.11
	5,647.50	-47.44	13.79	-48.32	2.70	V	-37.23	24.23
	7,530.00	-53.81	11.64	-48.60	2.93	V	-39.89	26.89
	9,412.50	-54.77	11.23	-45.18	3.45	V	-37.40	24.40
26615 (1907.5)	3,815.00	-51.73	12.52	-58.10	2.06	V	-47.63	34.63
	5,722.50	-47.43	13.70	-47.12	2.72	V	-36.14	23.14
	7,630.00	-52.93	11.95	-48.12	2.98	V	-39.15	26.15
	9,537.50	-49.54	11.16	-40.62	3.42	V	-32.88	19.88

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0$  dBm

- MODE: LTE B25
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10} (W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
26140 (1860.0)	3,720.00	-54.99	12.48	-61.83	2.03	V	-51.38	38.38
	5,580.00	-48.83	13.69	-49.89	2.69	V	-38.89	25.89
	7,440.00	-51.74	11.52	-46.65	2.89	V	-38.02	25.02
26365 (1882.5)	3,765.00	-55.93	12.41	-62.48	2.01	V	-52.08	39.08
	5,647.50	-49.11	13.79	-49.99	2.70	V	-38.90	25.90
	7,530.00	-54.69	11.64	-49.48	2.93	V	-40.77	27.77
26590 (1905.0)	3,810.00	-54.00	12.52	-60.50	2.06	V	-50.04	37.04
	5,715.00	-49.37	13.70	-49.19	2.72	V	-38.21	25.21
	7,620.00	-52.77	11.90	-47.97	2.94	V	-39.01	26.01
	9,525.00	-54.23	11.16	-45.22	3.38	V	-37.44	24.44

**Note:**

1. Limit =  $43 + 10 \log_{10} (W) = -13.0 \text{ dBm}$

### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )	
Band 25	1.4 MHz	1882.5	QPSK	6	0	4.76	
			16-QAM	6		5.50	
	3 MHz		QPSK	15		4.89	
			16-QAM	15		5.63	
	5 MHz		QPSK	25		4.84	
			16-QAM	25		5.60	
	10 MHz		QPSK	50		4.84	
			16-QAM	50		5.57	
	15 MHz		QPSK	75		4.79	
			16-QAM	75		5.56	
	20 MHz		QPSK	100		4.77	
			16-QAM	100		5.53	

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 55 ~ 66.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )	
Band 25	1.4 MHz	1882.5	QPSK	6	0	1.0946	
			16-QAM	6	0	1.0950	
	3 MHz		QPSK	15	0	2.7115	
			16-QAM	15	0	2.7003	
	5 MHz		QPSK	25	0	4.5186	
			16-QAM	25	0	4.4885	
	10 MHz		QPSK	50	0	8.9793	
			16-QAM	50	0	8.9672	
	15 MHz		QPSK	75	0	13.405	
			16-QAM	75	0	13.415	
	20 MHz		QPSK	100	0	17.965	
			16-QAM	100	0	17.908	

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 43 ~ 54.

### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
25	1.4	1850.7	5.5514	28.591	-75.836	-47.245	-13.00
		1882.5	5.6466	28.591	-76.367	-47.776	
		1914.3	5.7453	28.591	-76.761	-48.170	
	3	1851.5	5.5514	28.591	-75.684	-47.093	
		1882.5	5.6441	28.591	-75.546	-46.955	
		1913.5	7.6595	28.591	-75.839	-47.248	
	5	1852.5	5.5514	28.591	-75.322	-46.731	
		1882.5	5.6416	28.591	-76.236	-47.645	
		1912.5	5.7443	28.591	-76.443	-47.852	
	10	1855.0	5.5524	28.591	-75.622	-47.031	
		1882.5	5.6346	28.591	-76.157	-47.566	
		1910.0	5.7438	28.591	-76.022	-47.431	
	15	1857.5	5.5529	28.591	-75.520	-46.929	
		1882.5	5.6282	28.591	-76.495	-47.904	
		1907.5	3.8291	27.976	-76.396	-48.420	
	20	1860.0	5.5539	28.591	-75.259	-46.668	
		1882.5	5.6217	28.591	-76.346	-47.755	
		1905.0	3.8286	27.976	-76.465	-48.489	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 103 ~ 138.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


### 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 67 ~ 102.

## 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (1.4 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 997	0.0	0.000 000	0.000
100%		-30	1881 999 992	-4.8	0.000 000	-0.003
100%		-20	1881 999 988	-9.1	0.000 000	-0.005
100%		-10	1881 999 990	-7.3	0.000 000	-0.004
100%		0	1881 999 987	-9.8	-0.000 001	-0.005
100%		+10	1881 999 992	-5.0	0.000 000	-0.003
100%		+30	1881 999 991	-5.8	0.000 000	-0.003
100%		+40	1881 999 989	-8.2	0.000 000	-0.004
100%		+50	1881 999 990	-7.3	0.000 000	-0.004
Batt. Endpoint	3.40	+20	1881 999 989	-7.7	0.000 000	-0.004

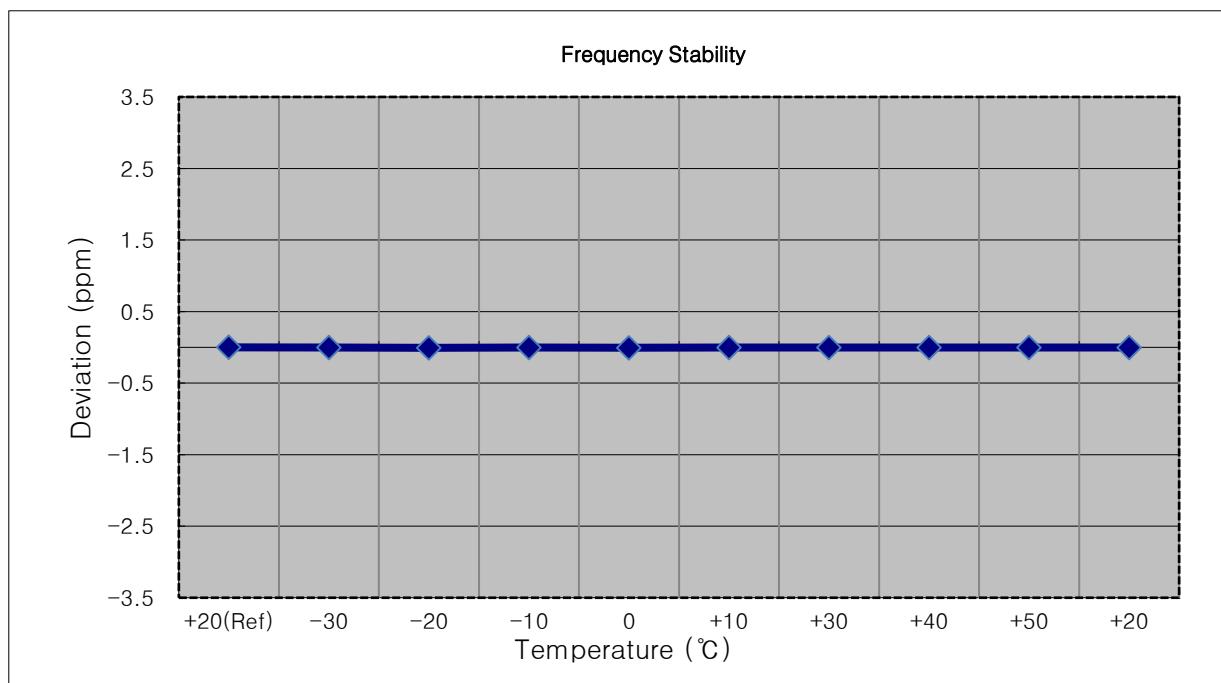


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (3 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 992	0.0	0.000 000	0.000
100%		-30	1881 999 983	-9.0	0.000 000	-0.005
100%		-20	1881 999 984	-7.8	0.000 000	-0.004
100%		-10	1881 999 984	-7.8	0.000 000	-0.004
100%		0	1881 999 985	-7.2	0.000 000	-0.004
100%		+10	1881 999 983	-8.3	0.000 000	-0.004
100%		+30	1881 999 983	-9.1	0.000 000	-0.005
100%		+40	1881 999 984	-8.0	0.000 000	-0.004
100%		+50	1881 999 984	-7.9	0.000 000	-0.004
Batt. Endpoint	3.40	+20	1881 999 982	-10.2	-0.000 001	-0.005

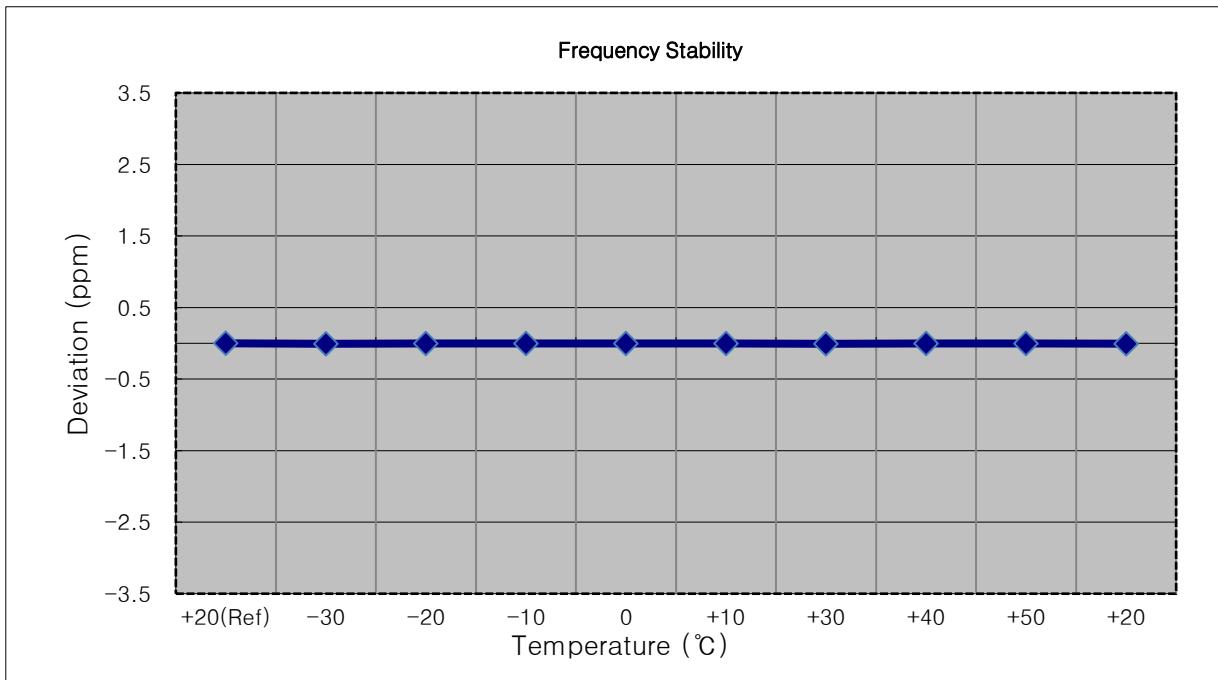


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (5 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 995	0.0	0.000 000	0.000
100%		-30	1881 999 988	-6.2	0.000 000	-0.003
100%		-20	1881 999 989	-5.3	0.000 000	-0.003
100%		-10	1881 999 987	-7.2	0.000 000	-0.004
100%		0	1881 999 987	-7.4	0.000 000	-0.004
100%		+10	1881 999 990	-4.9	0.000 000	-0.003
100%		+30	1882 000 000	5.0	0.000 000	0.003
100%		+40	1881 999 989	-6.0	0.000 000	-0.003
100%		+50	1881 999 990	-4.7	0.000 000	-0.002
Batt. Endpoint	3.40	+20	1881 999 999	4.7	0.000 000	0.002

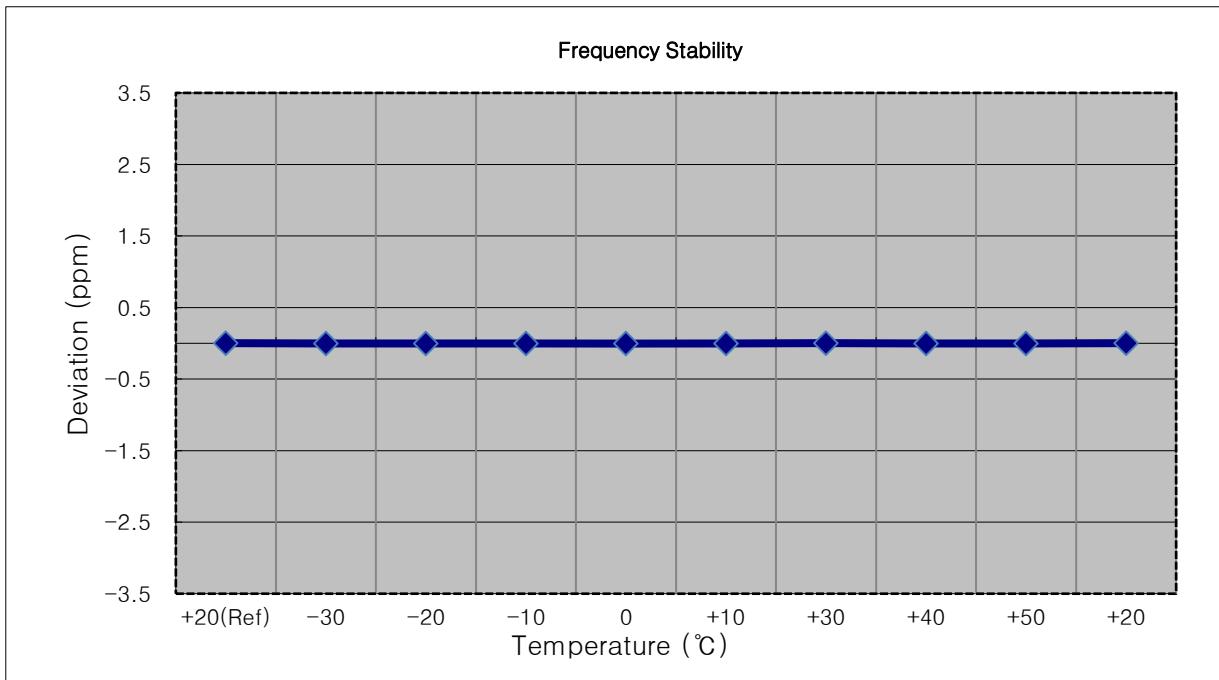


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (10 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 994	0.0	0.000 000	0.000
100%		-30	1881 999 999	4.7	0.000 000	0.002
100%		-20	1881 999 989	-4.8	0.000 000	-0.003
100%		-10	1881 999 988	-6.3	0.000 000	-0.003
100%		0	1881 999 989	-5.1	0.000 000	-0.003
100%		+10	1881 999 986	-7.5	0.000 000	-0.004
100%		+30	1881 999 989	-4.8	0.000 000	-0.003
100%		+40	1881 999 987	-6.4	0.000 000	-0.003
100%		+50	1881 999 987	-6.7	0.000 000	-0.004
Batt. Endpoint	3.40	+20	1881 999 989	-4.8	0.000 000	-0.003

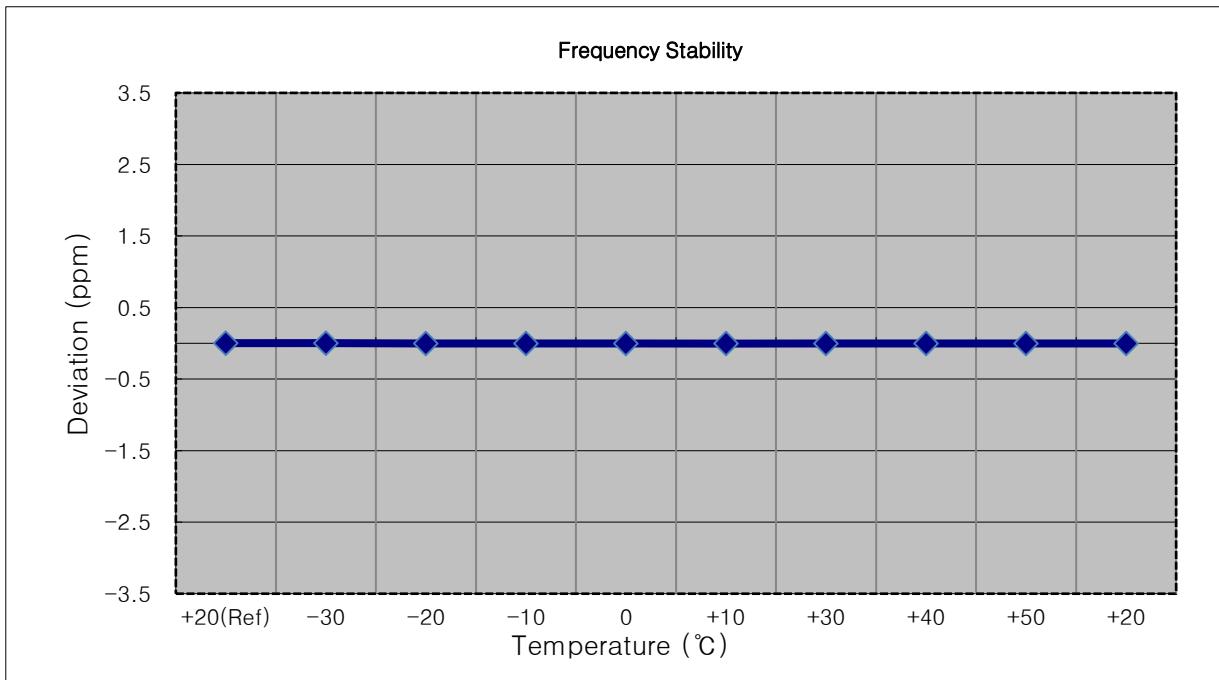


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (15 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 992	0.0	0.000 000	0.000
100%		-30	1881 999 984	-7.8	0.000 000	-0.004
100%		-20	1881 999 985	-7.0	0.000 000	-0.004
100%		-10	1881 999 986	-6.0	0.000 000	-0.003
100%		0	1881 999 986	-5.9	0.000 000	-0.003
100%		+10	1881 999 987	-5.2	0.000 000	-0.003
100%		+30	1881 999 985	-6.8	0.000 000	-0.004
100%		+40	1881 999 982	-10.0	-0.000 001	-0.005
100%		+50	1881 999 986	-6.2	0.000 000	-0.003
Batt. Endpoint	3.40	+20	1881 999 987	-5.1	0.000 000	-0.003

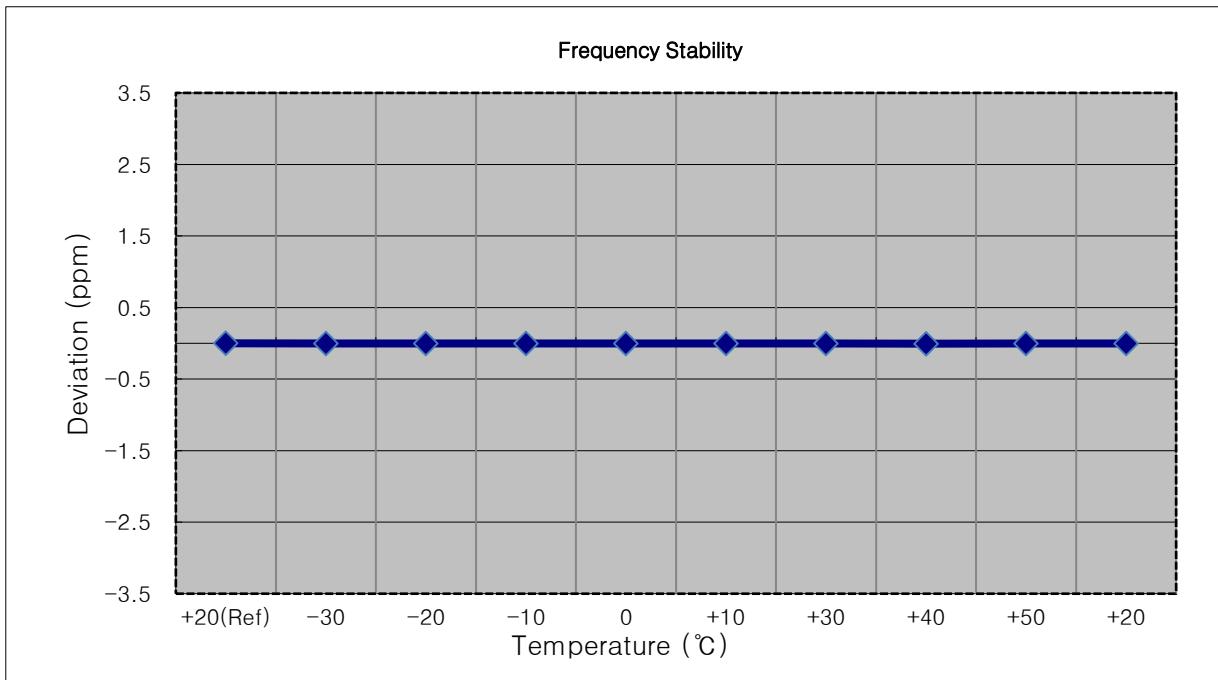


- MODE: LTE 25
- OPERATING FREQUENCY: 1882,500,000 Hz
- CHANNEL: 26365 (20 MHz)
- REFERENCE VOLTAGE: 3.80 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1881 999 994	0.0	0.000 000	0.000
100%		-30	1881 999 991	-3.1	0.000 000	-0.002
100%		-20	1882 000 001	6.3	0.000 000	0.003
100%		-10	1882 000 001	6.7	0.000 000	0.004
100%		0	1881 999 989	-5.7	0.000 000	-0.003
100%		+10	1882 000 000	5.5	0.000 000	0.003
100%		+30	1882 000 001	6.4	0.000 000	0.003
100%		+40	1882 000 000	5.7	0.000 000	0.003
100%		+50	1882 000 000	5.2	0.000 000	0.003
Batt. Endpoint	3.40	+20	1881 999 999	4.6	0.000 000	0.002

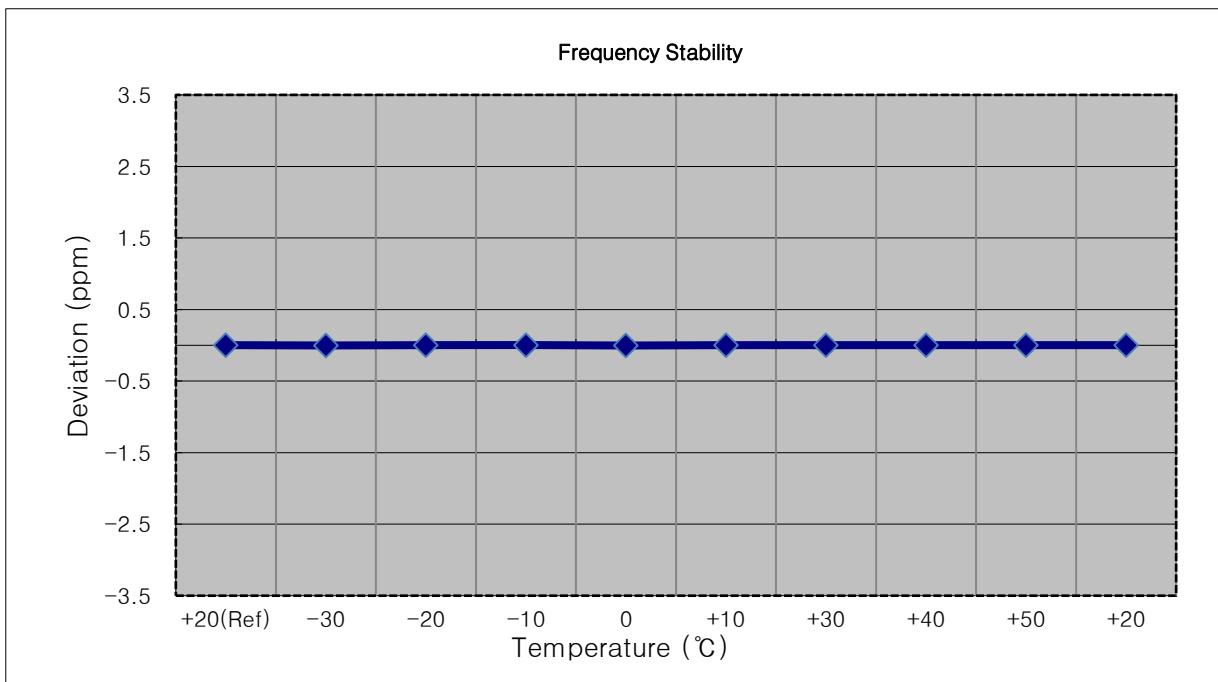


## **9. TEST PLOTS**


BAND 25. Occupied Bandwidth Plot (1.4M BW Ch.26365 QPSK RB 6\_0)

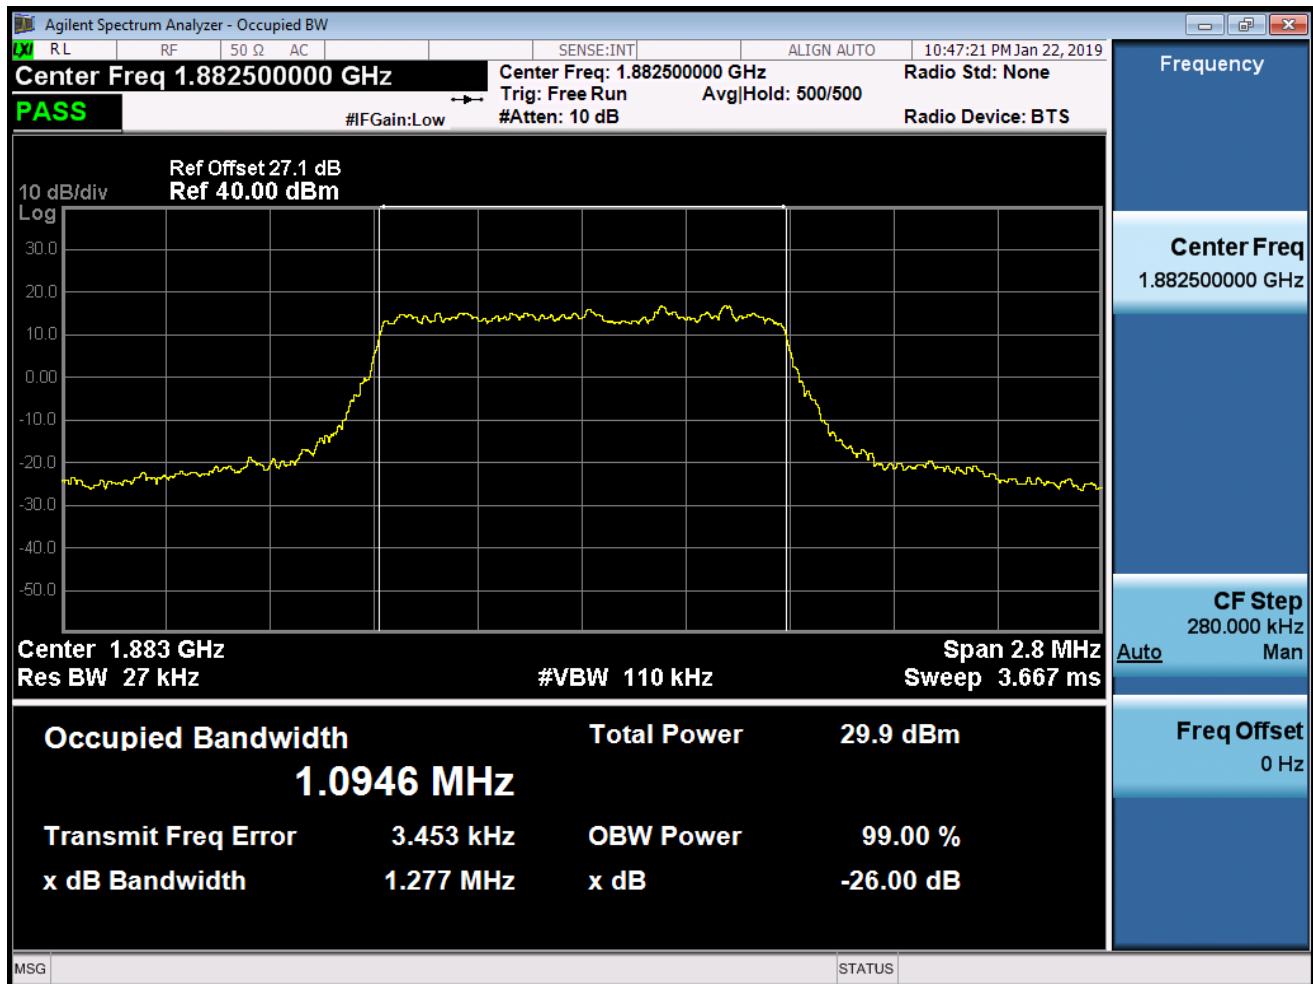


BAND 25. Occupied Bandwidth Plot (1.4M BW Ch. 26365 16QAM RB 6\_0)

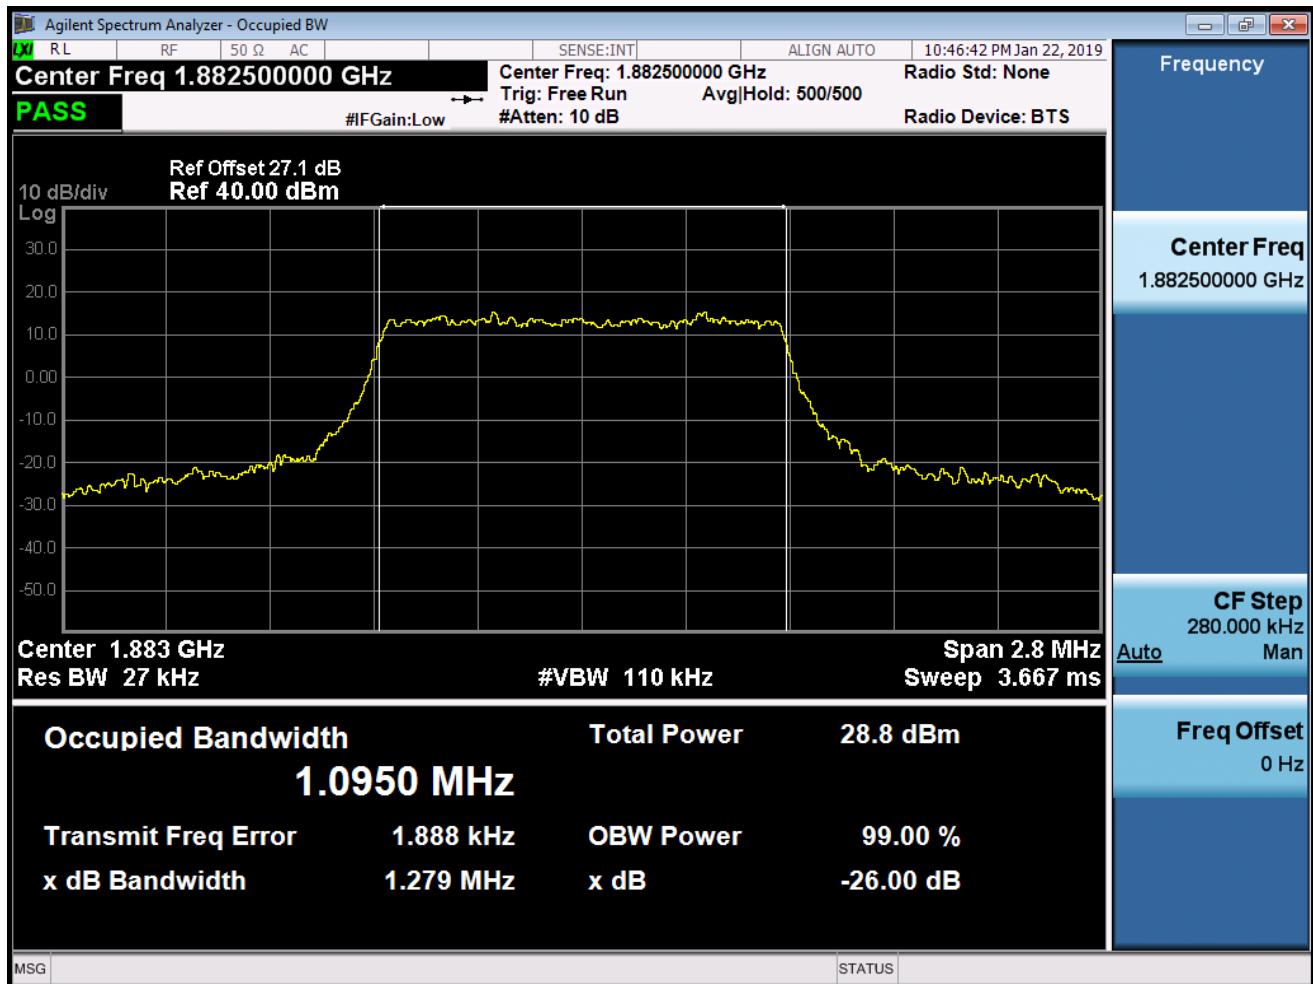


BAND 25. Occupied Bandwidth Plot (3M BW Ch. 26365 QPSK RB 15\_0)

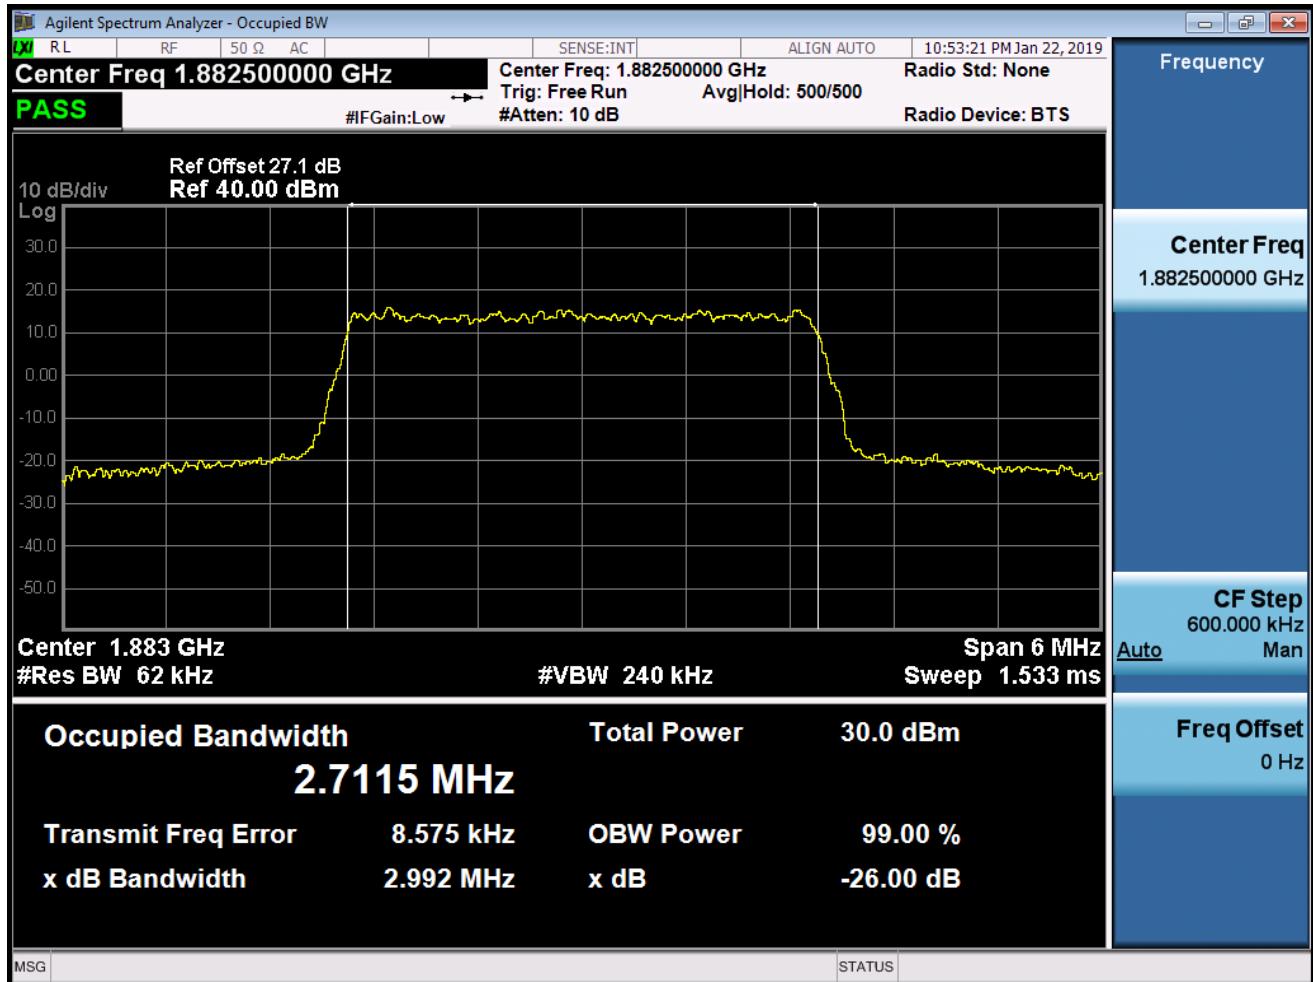


BAND 25. Occupied Bandwidth Plot (3M BW Ch. 26365 16QAM RB 15\_0)

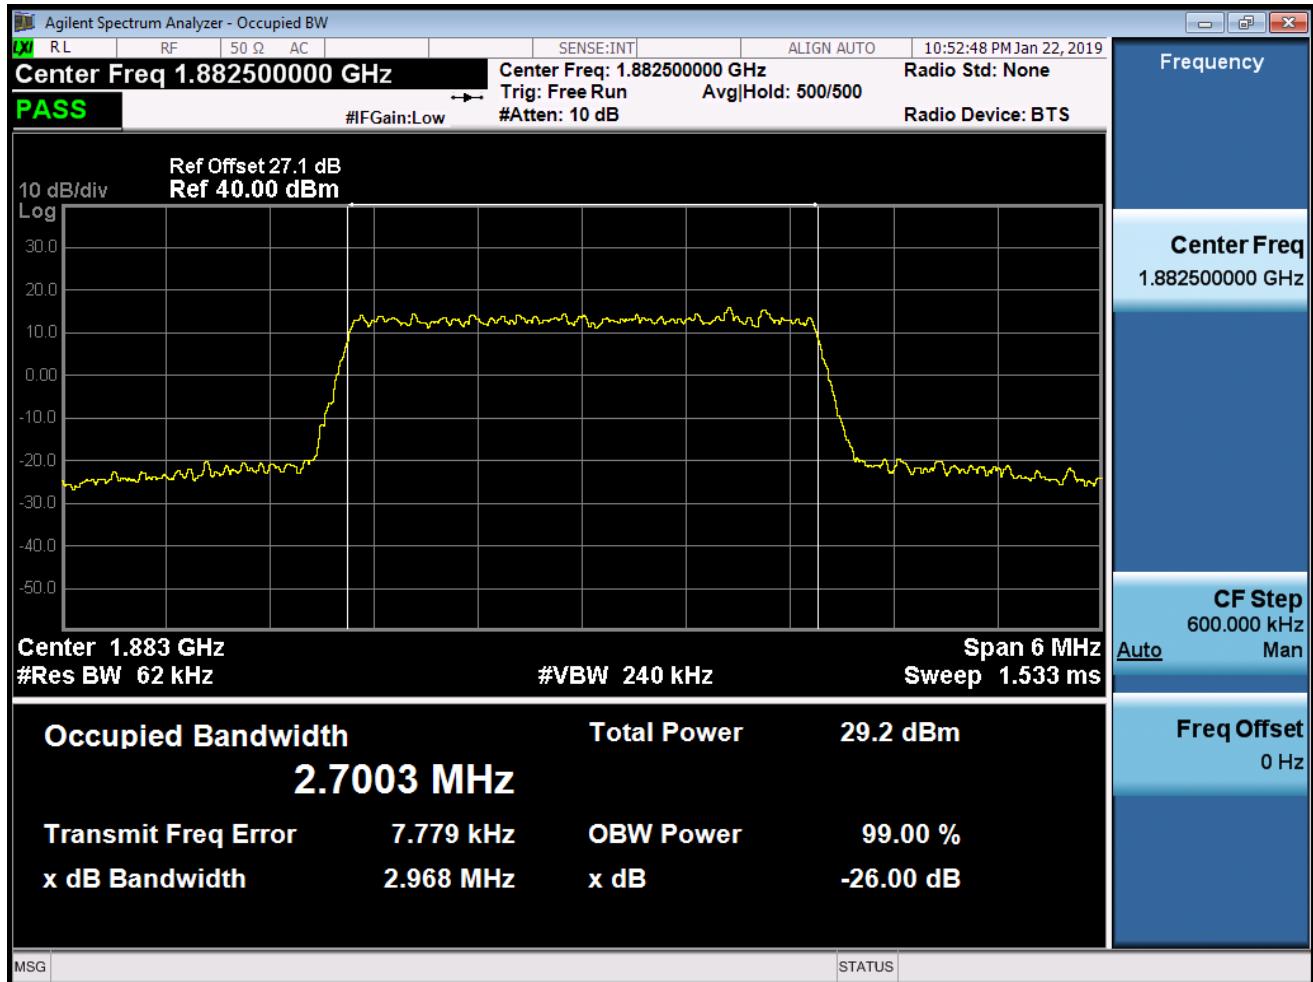


BAND 25. Occupied Bandwidth Plot (5M BW Ch. 26365 QPSK RB 25\_0)

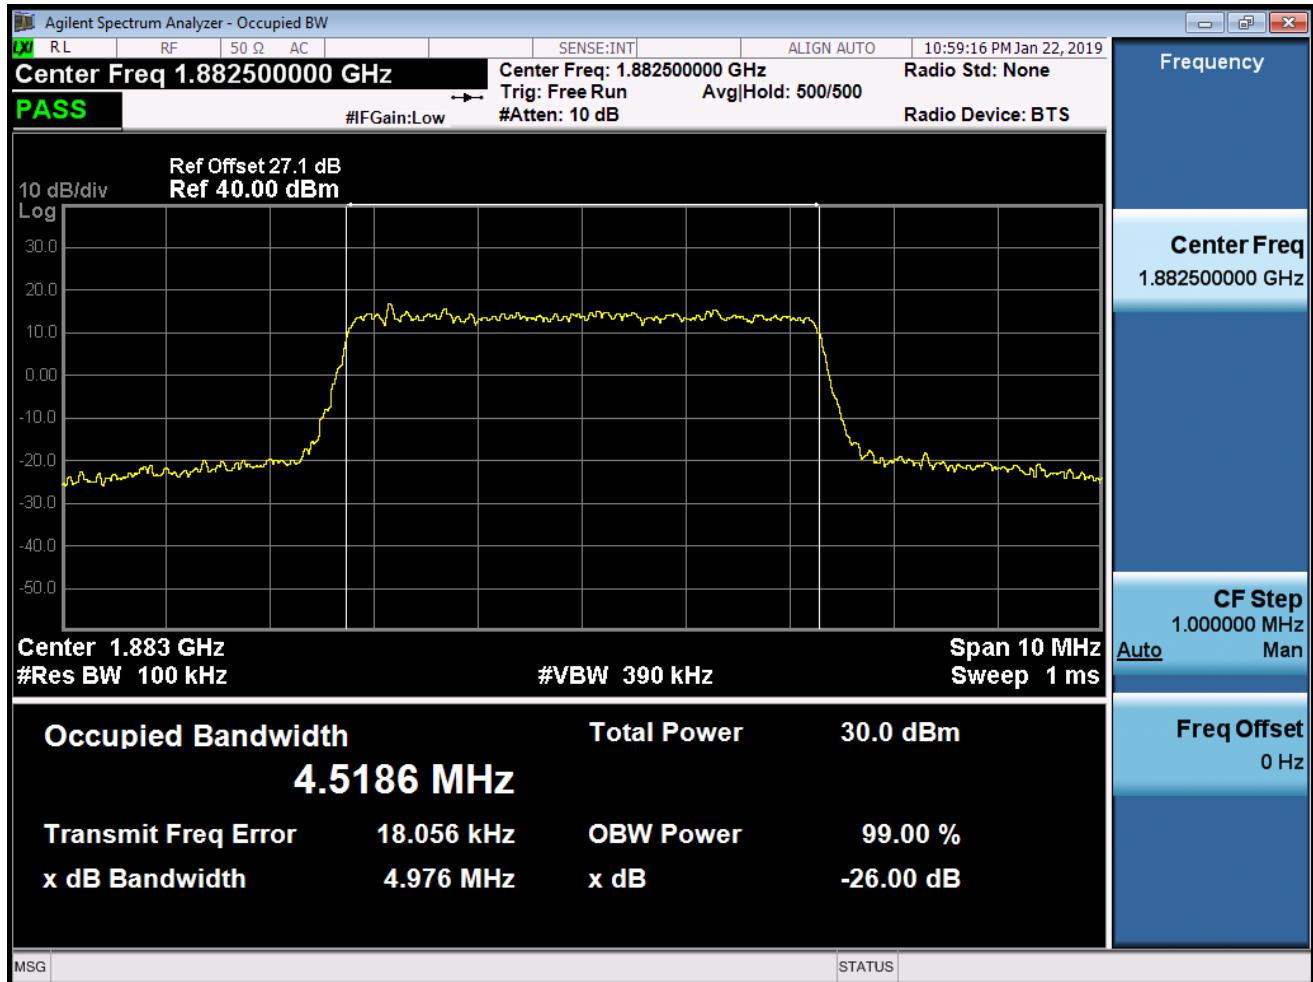


BAND 25. Occupied Bandwidth Plot (5M BW Ch. 26365 16QAM RB 25\_0)

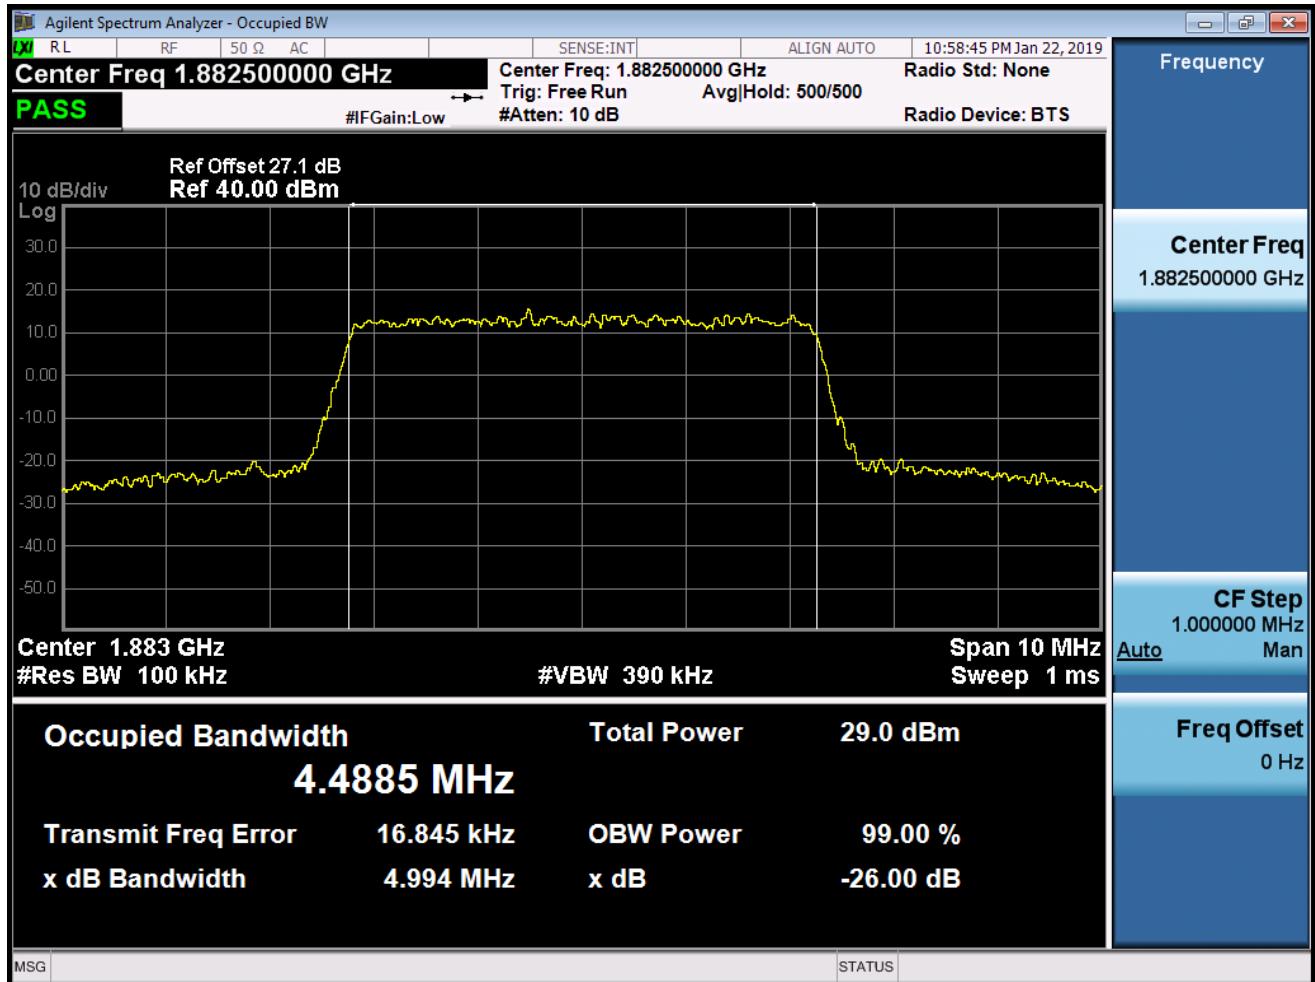


BAND 25. Occupied Bandwidth Plot (10M BW Ch. 26365 QPSK RB 50\_0)

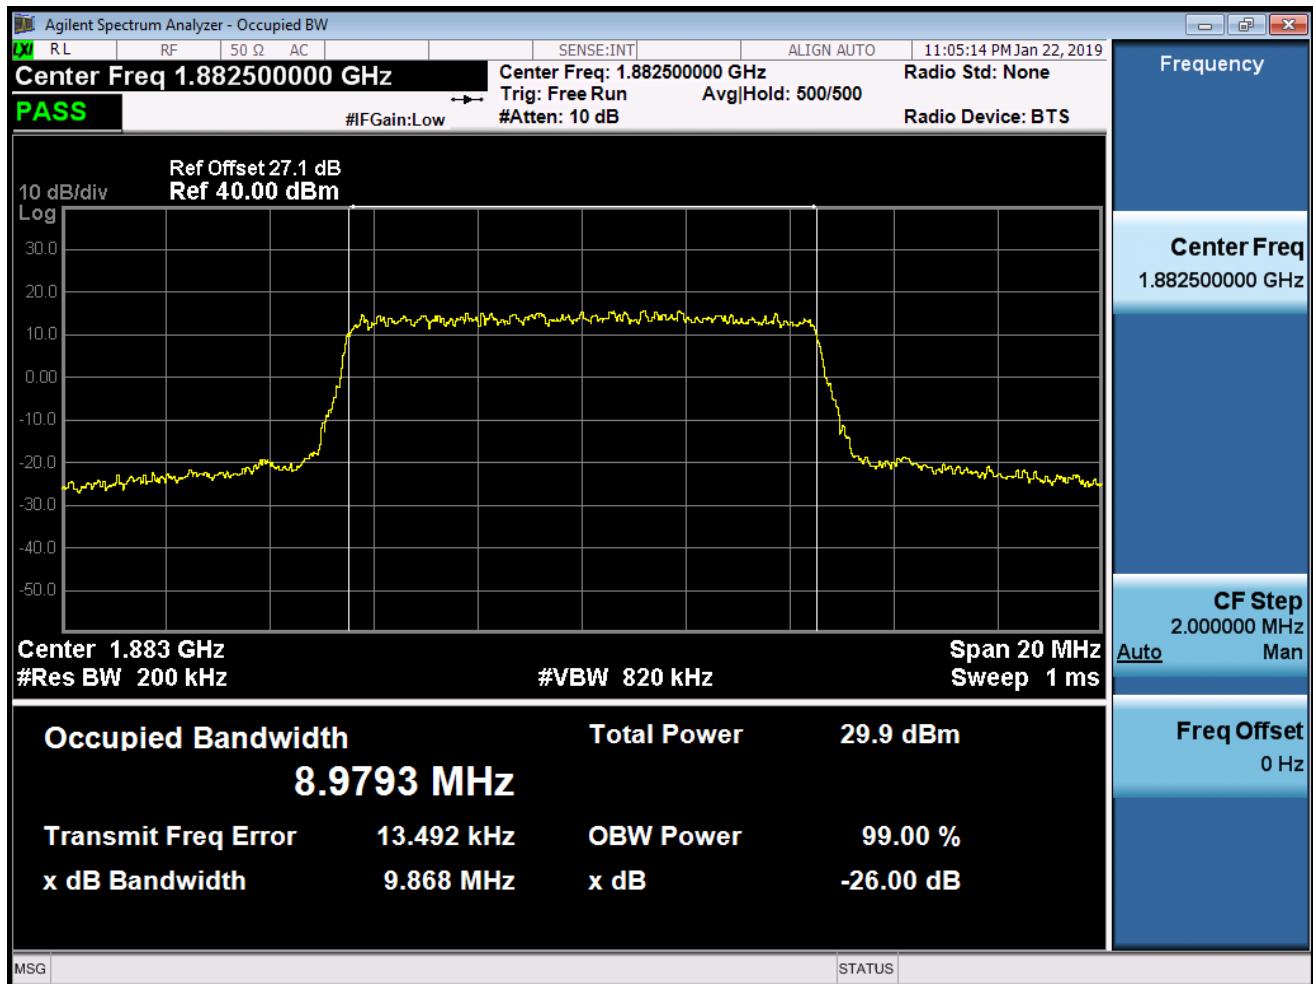


BAND 25. Occupied Bandwidth Plot (10M BW Ch. 26365 16QAM RB 50\_0)

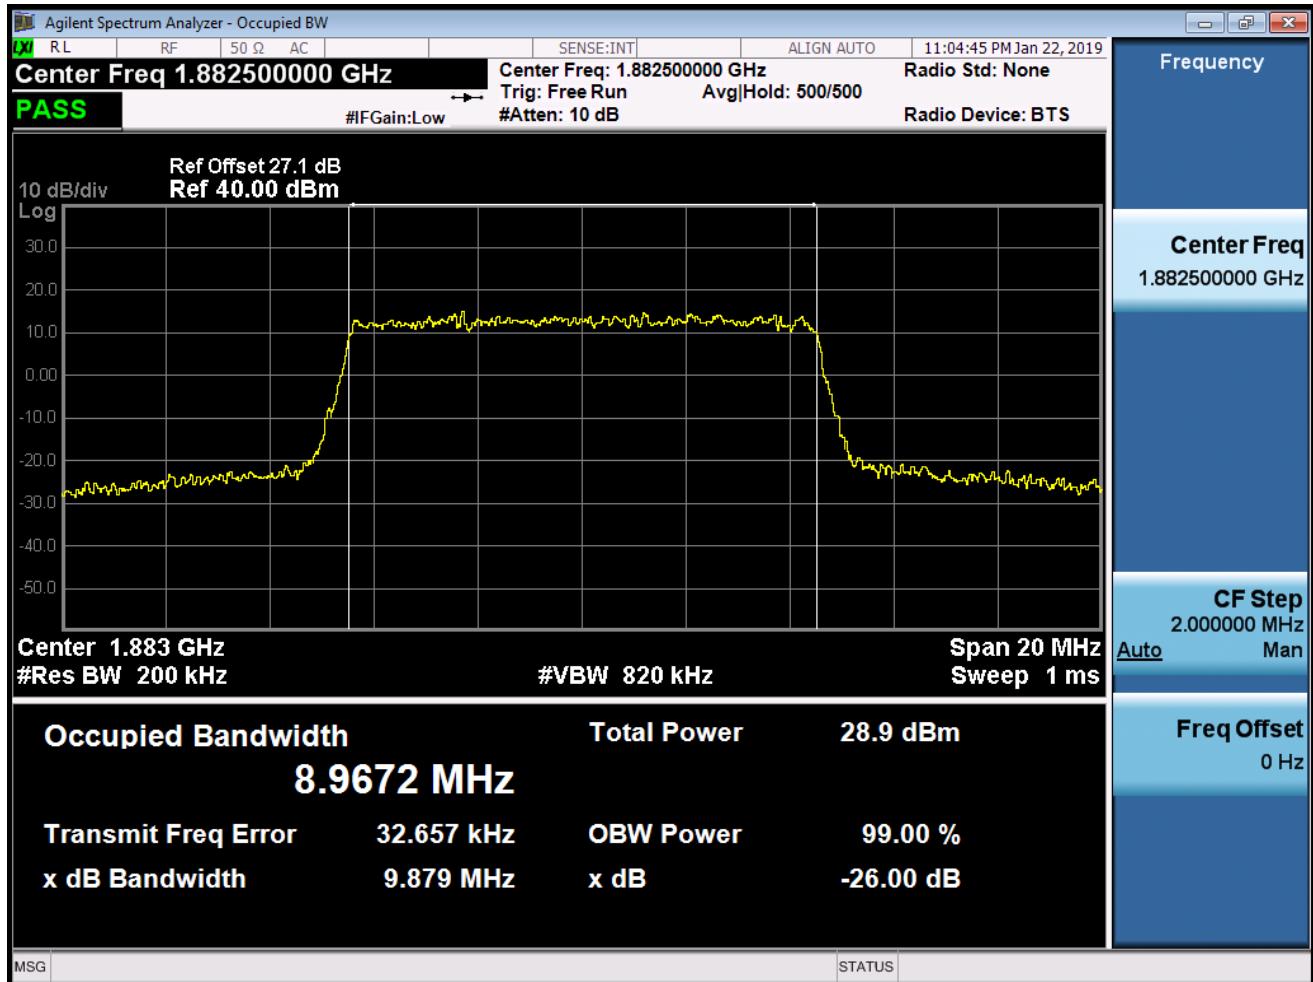


BAND 25. Occupied Bandwidth Plot (15M BW Ch. 26365 QPSK RB 75\_0)

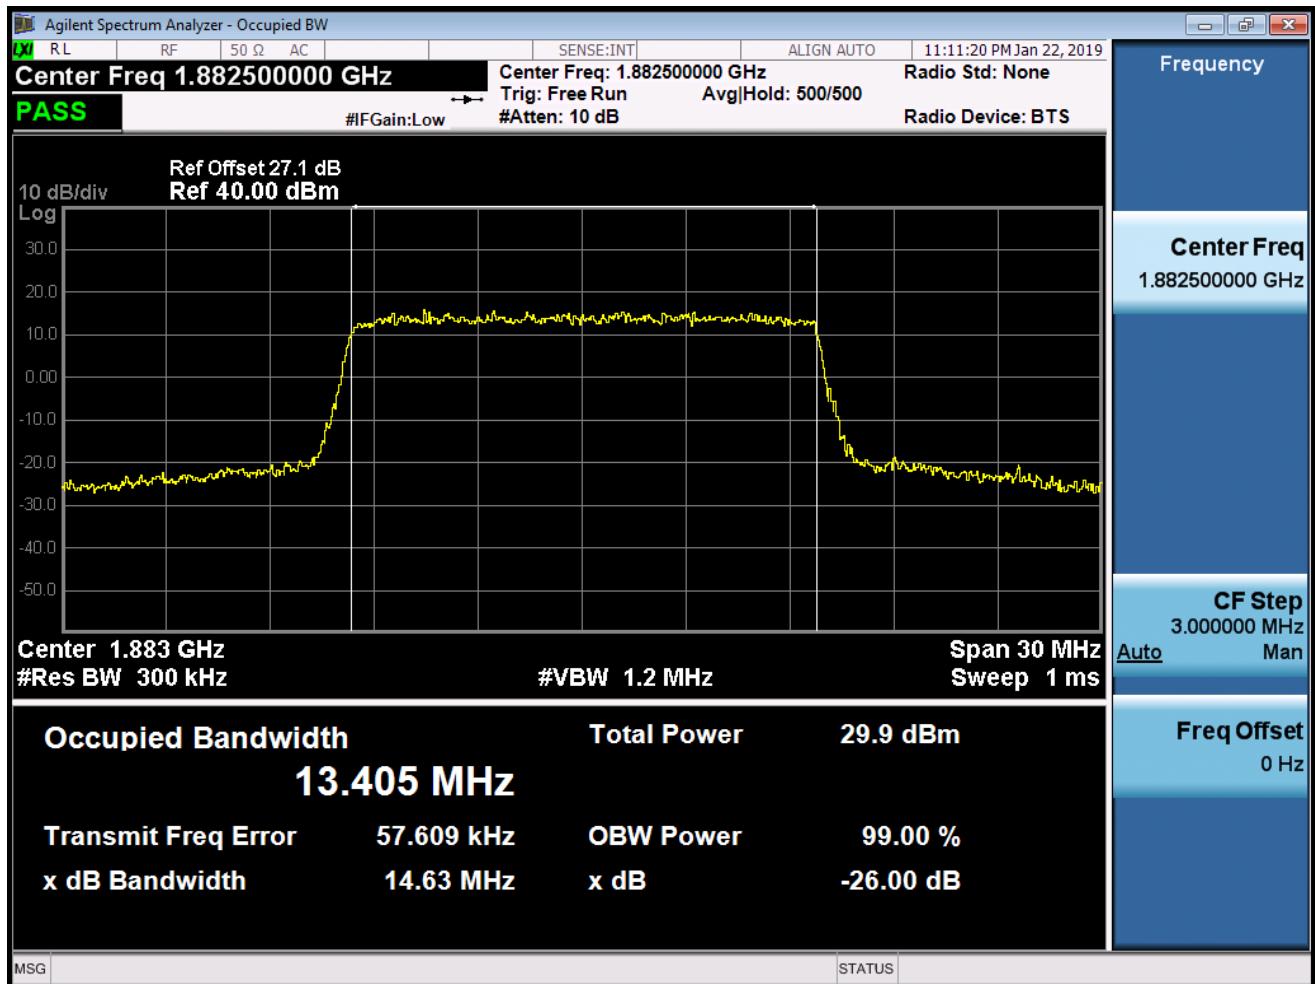


BAND 25. Occupied Bandwidth Plot (15M BW Ch. 26365 16QAM RB 75\_0)

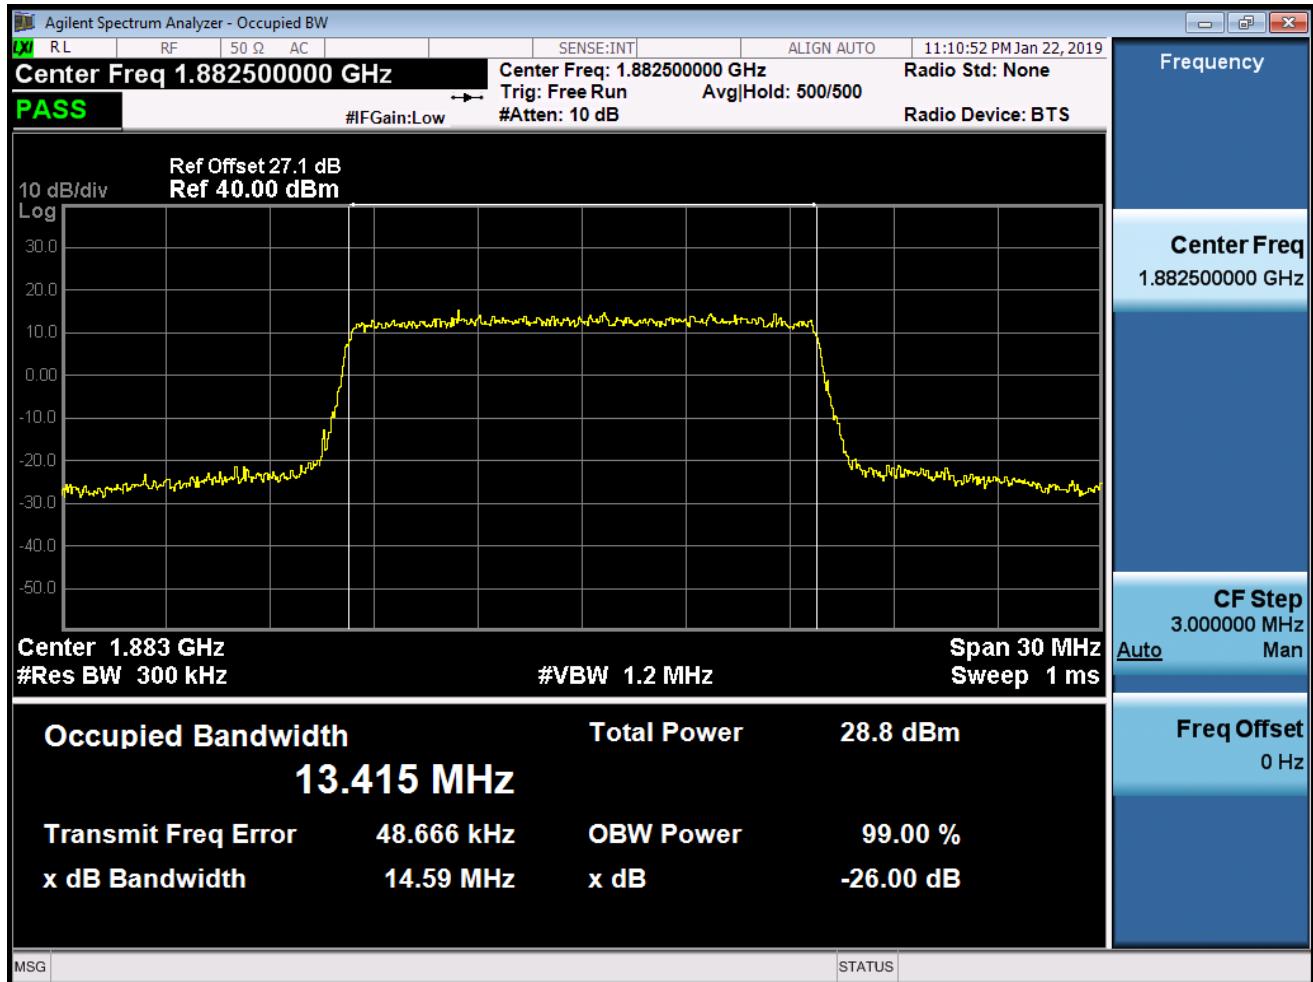


BAND 25. Occupied Bandwidth Plot (20M BW Ch. 26365 QPSK RB 100\_0)

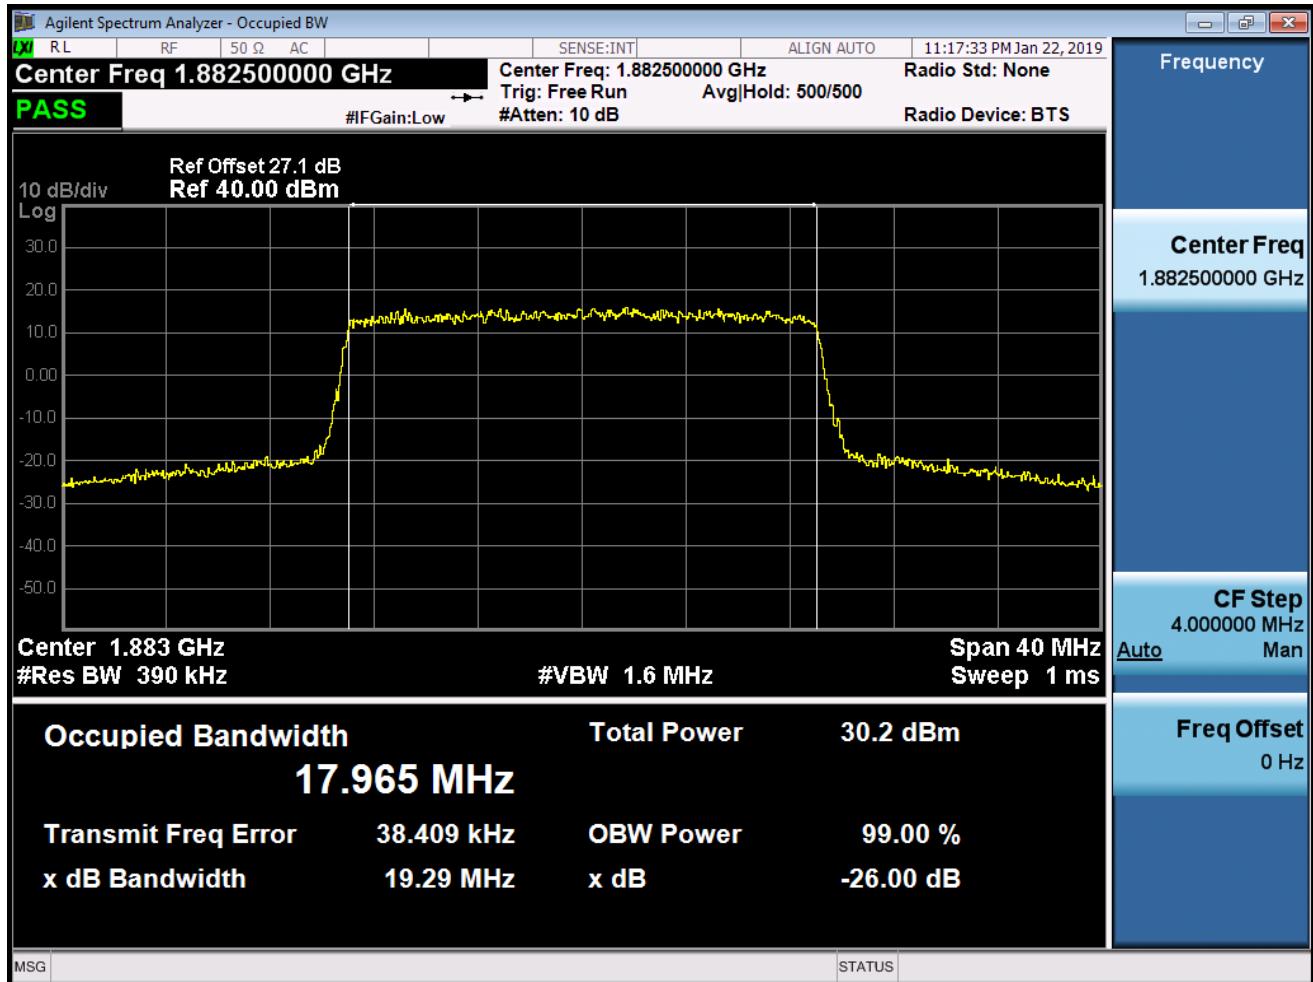


BAND 25. Occupied Bandwidth Plot (20M BW Ch. 26365 16QAM RB 100\_0)

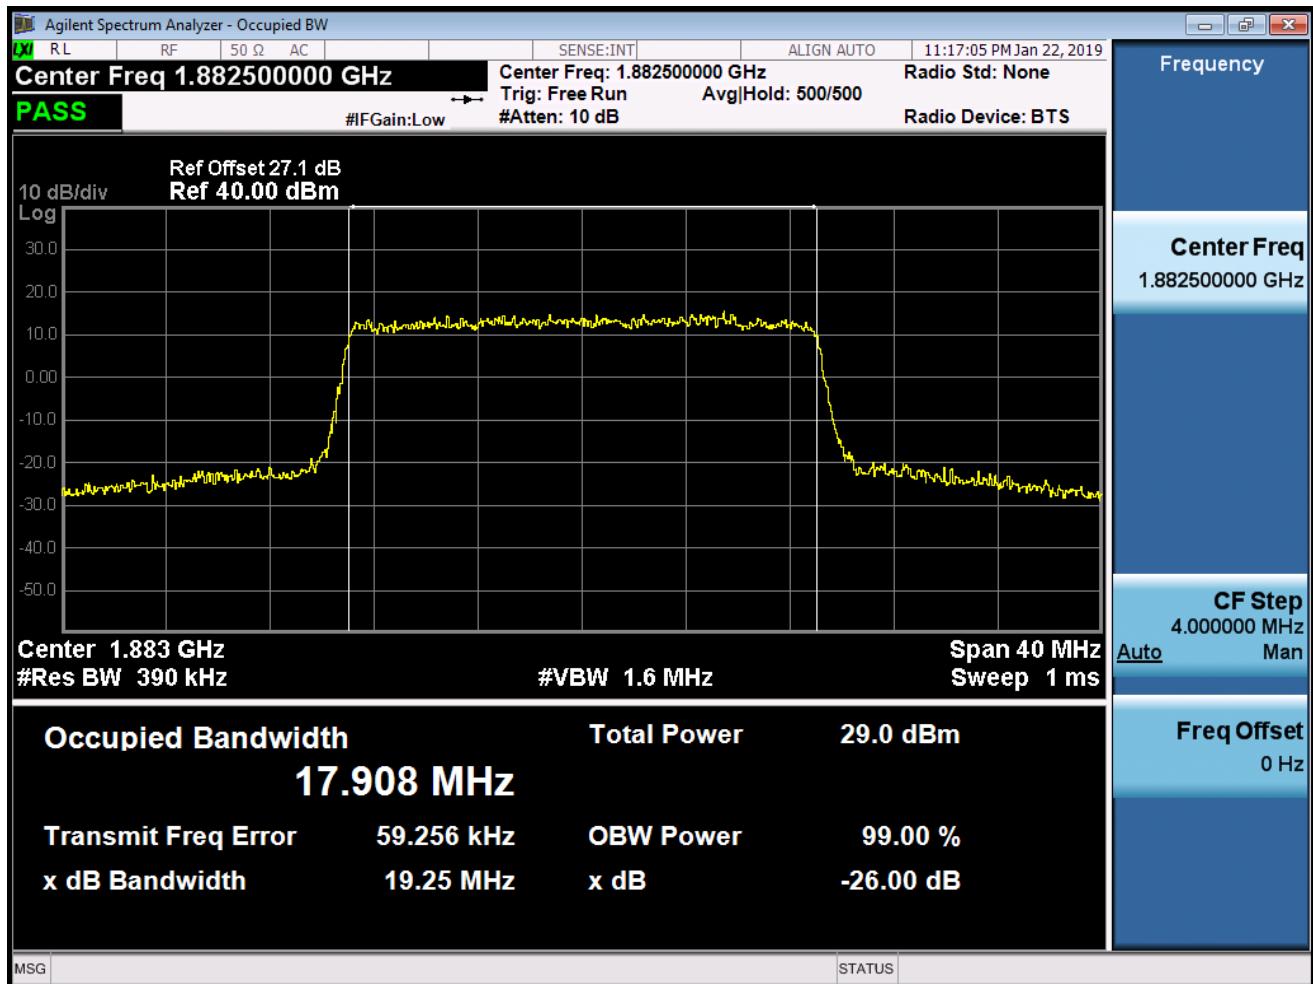


BAND 25. PAR Plot (1.4M BW Ch. 26365 QPSK RB 6\_0)

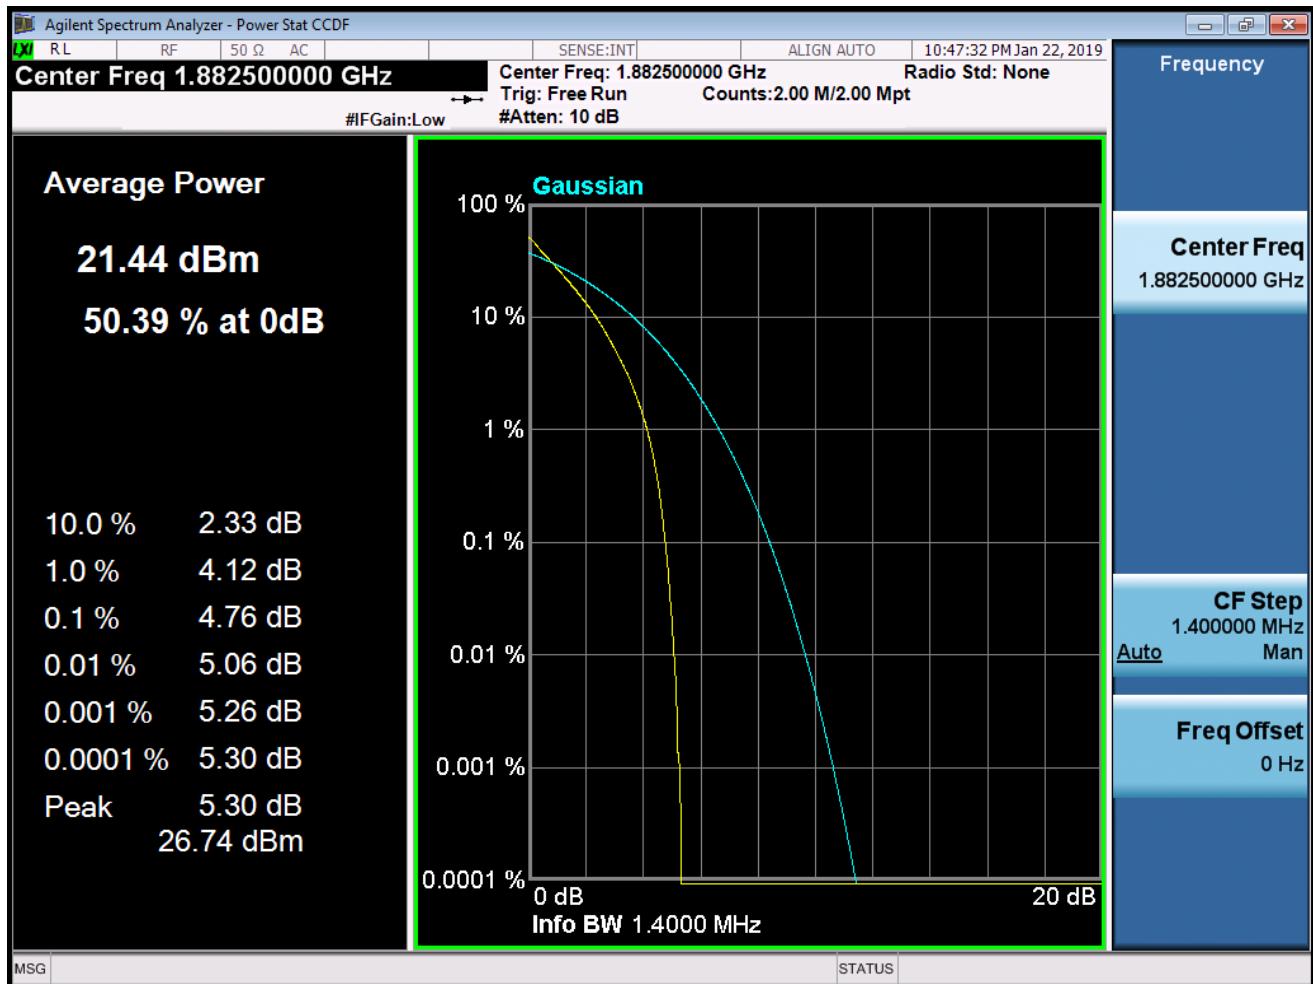


BAND 25. PAR Plot (1.4M BW Ch. 26365 16QAM RB 6\_0)

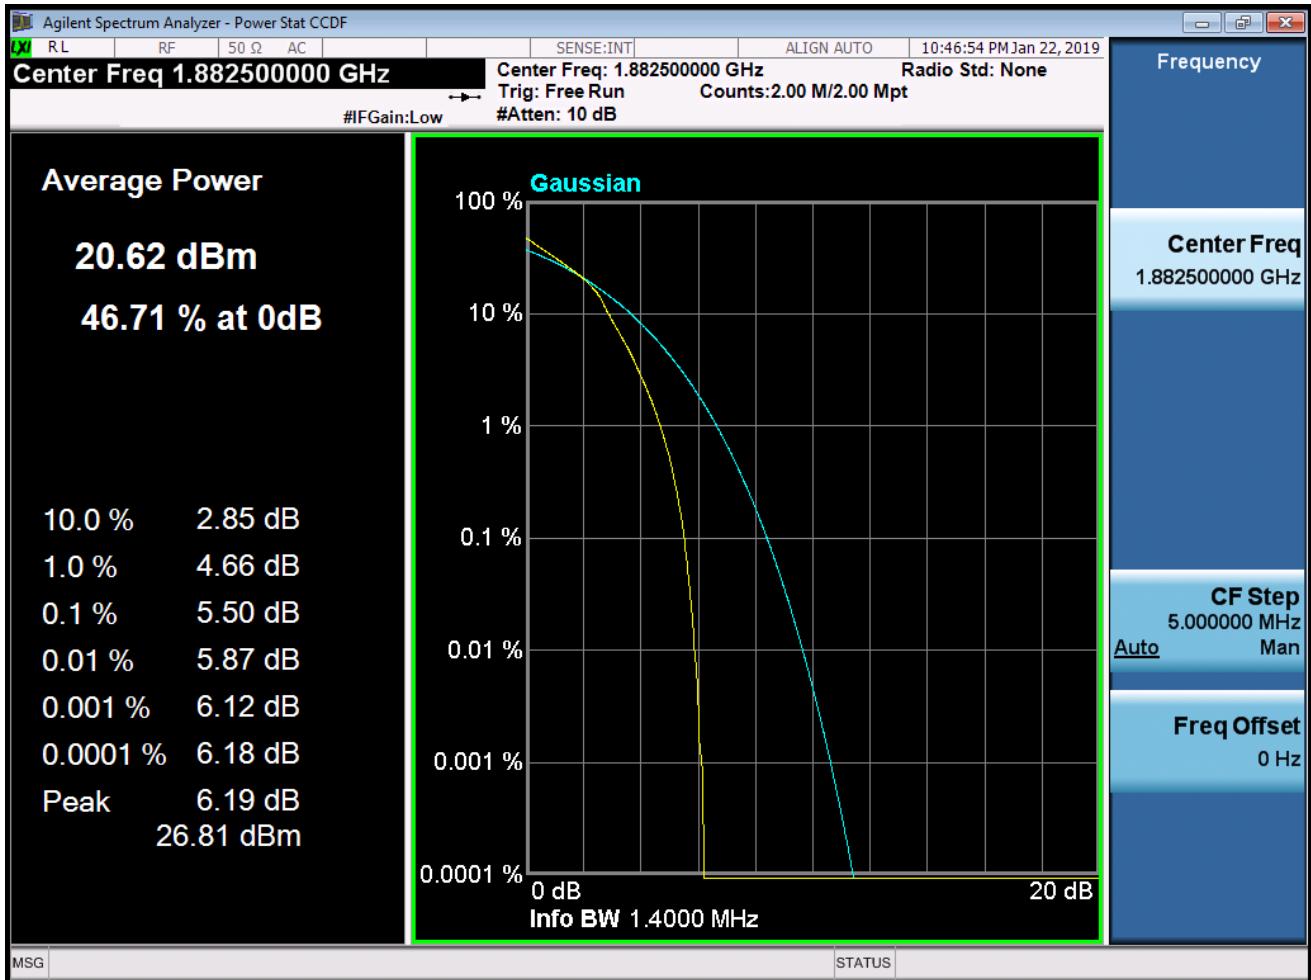


BAND 25. PAR Plot (3M BW Ch. 26365 QPSK RB 15\_0)

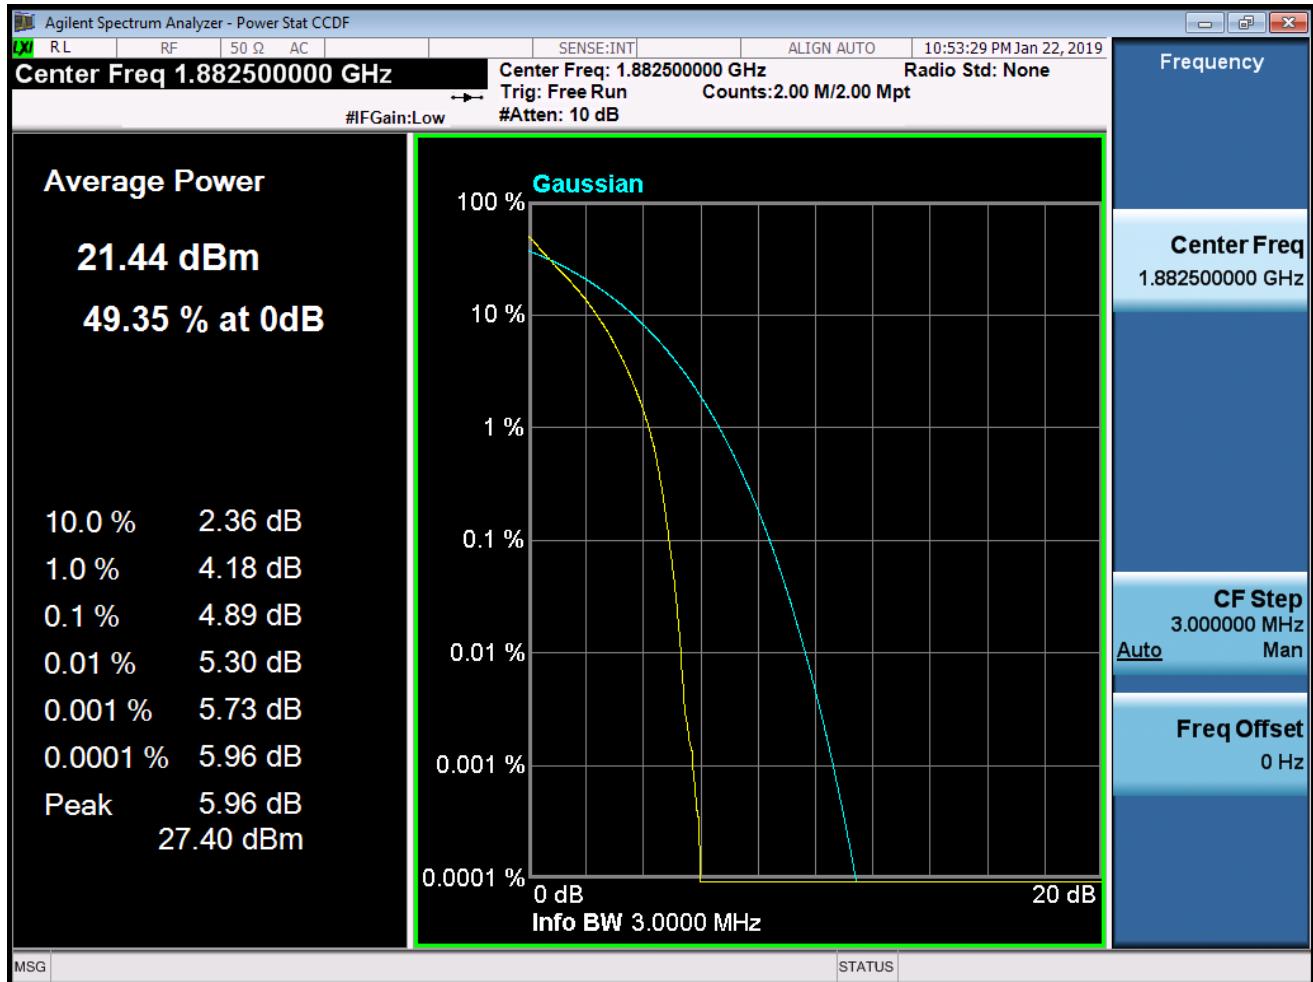


BAND 25. PAR Plot (3M BW Ch. 26365 16QAM RB 15\_0)

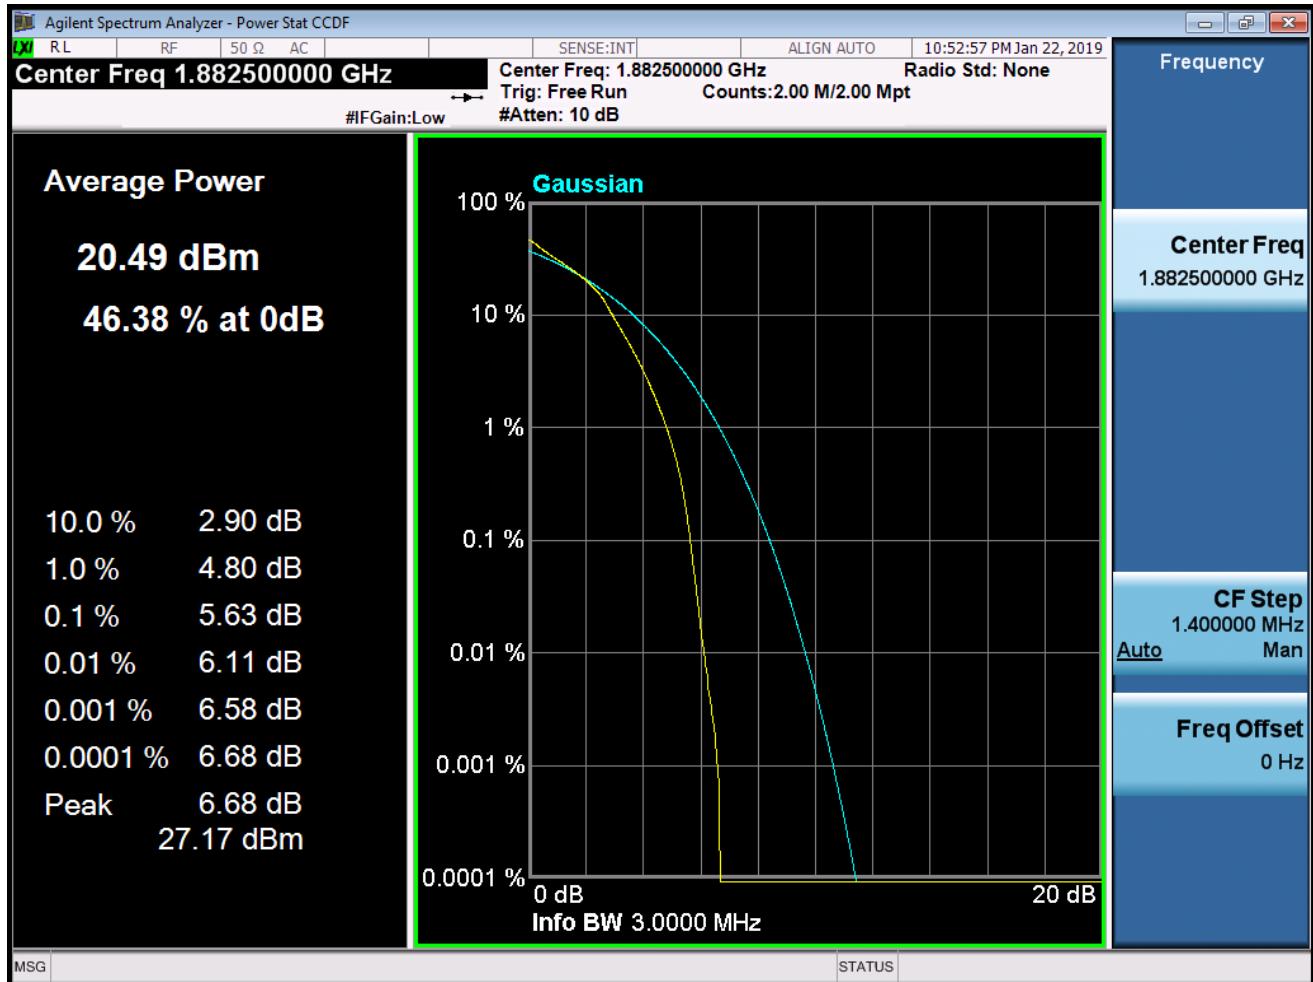


BAND 25. PAR Plot (5M BW Ch. 26365 QPSK RB 25\_0)

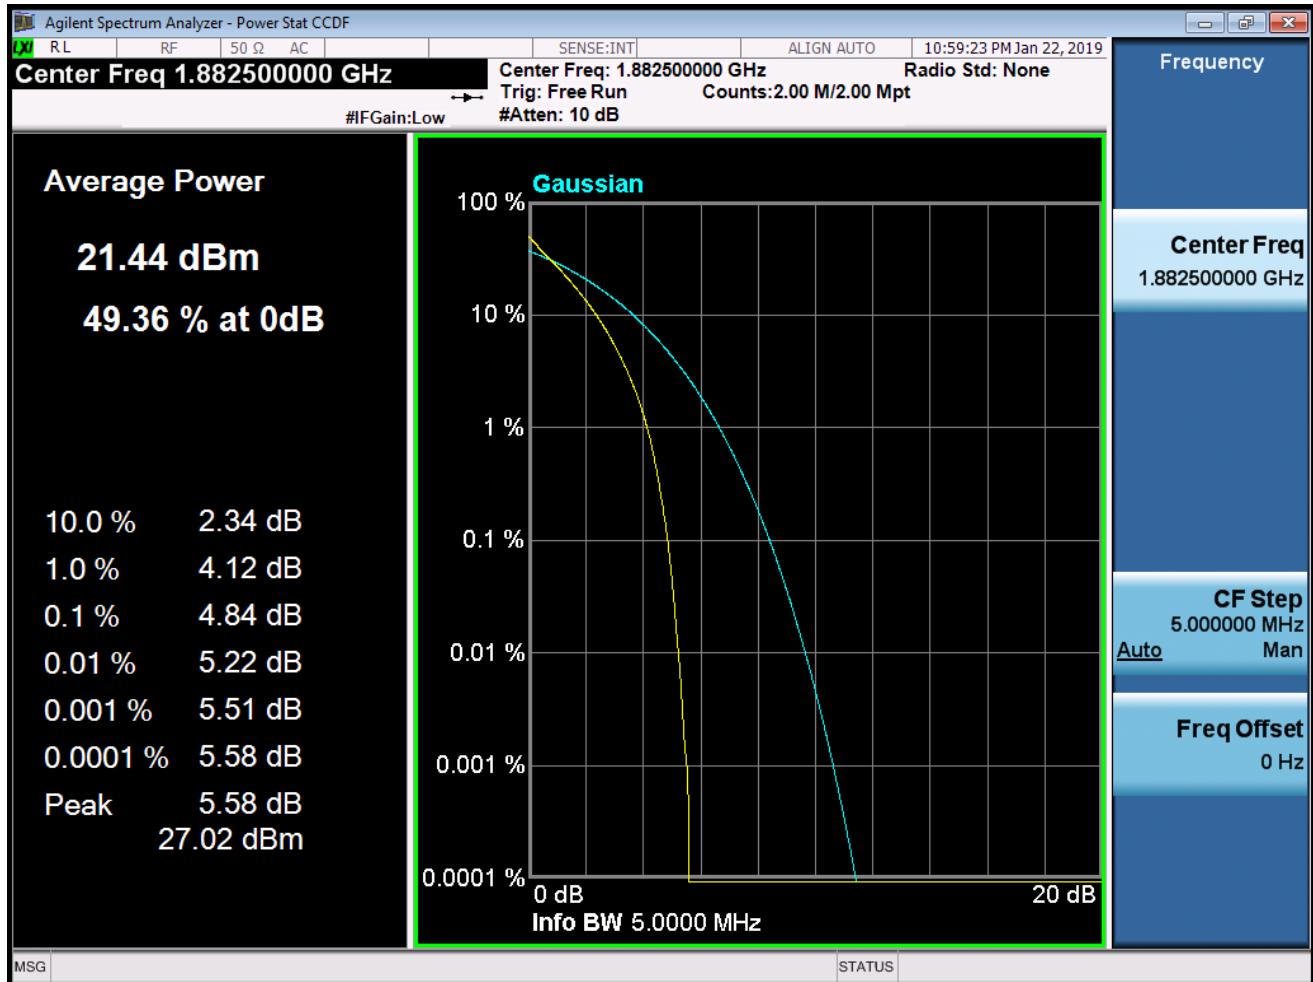


BAND 25. PAR Plot (5M BW Ch. 26365 16QAM RB 25\_0)

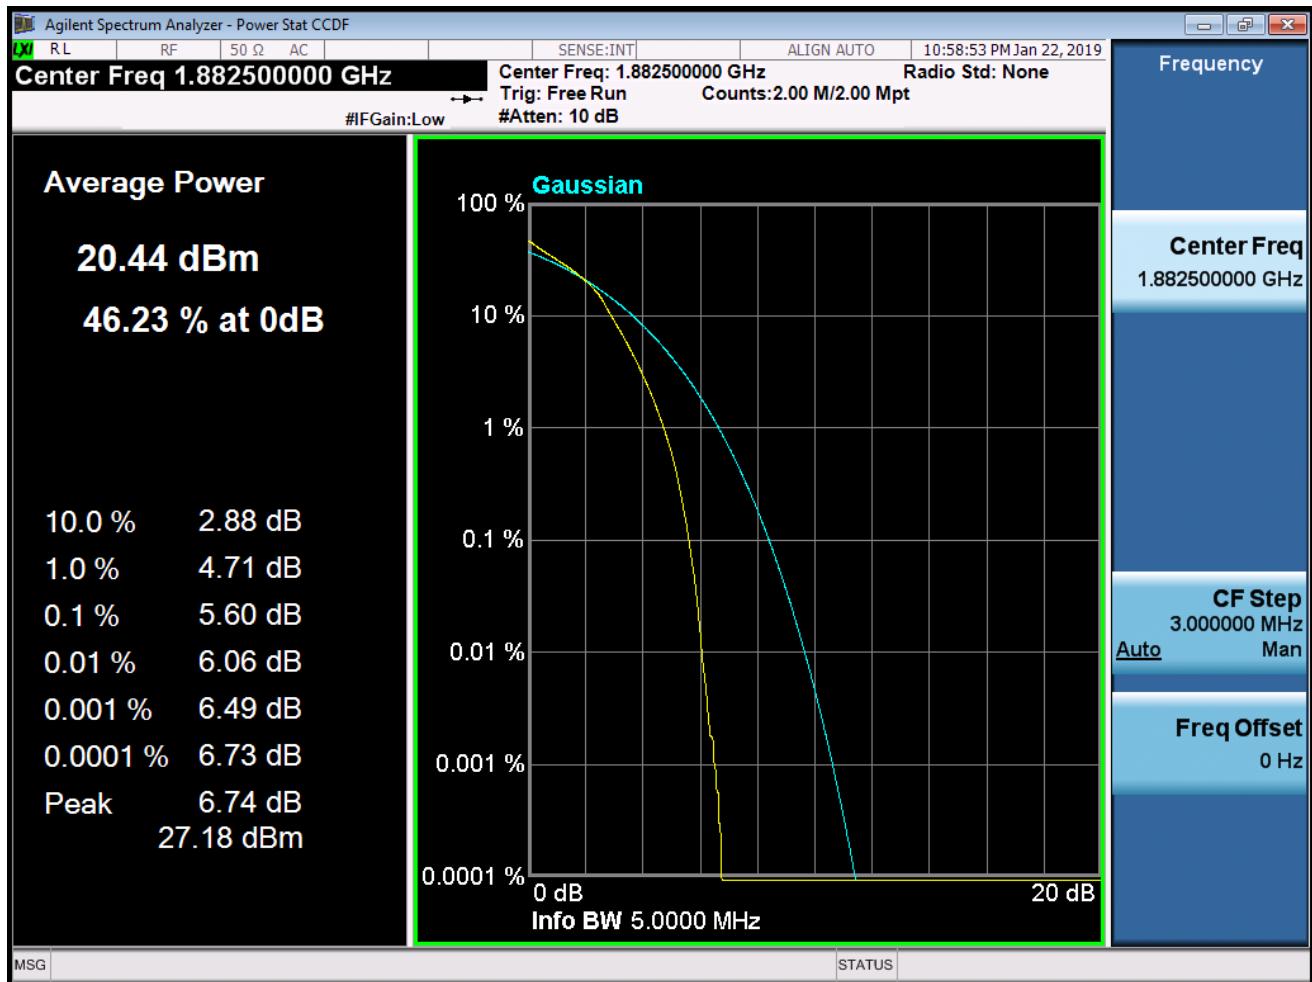


BAND 25. PAR Plot (10M BW Ch. 26365 QPSK RB 50\_0)

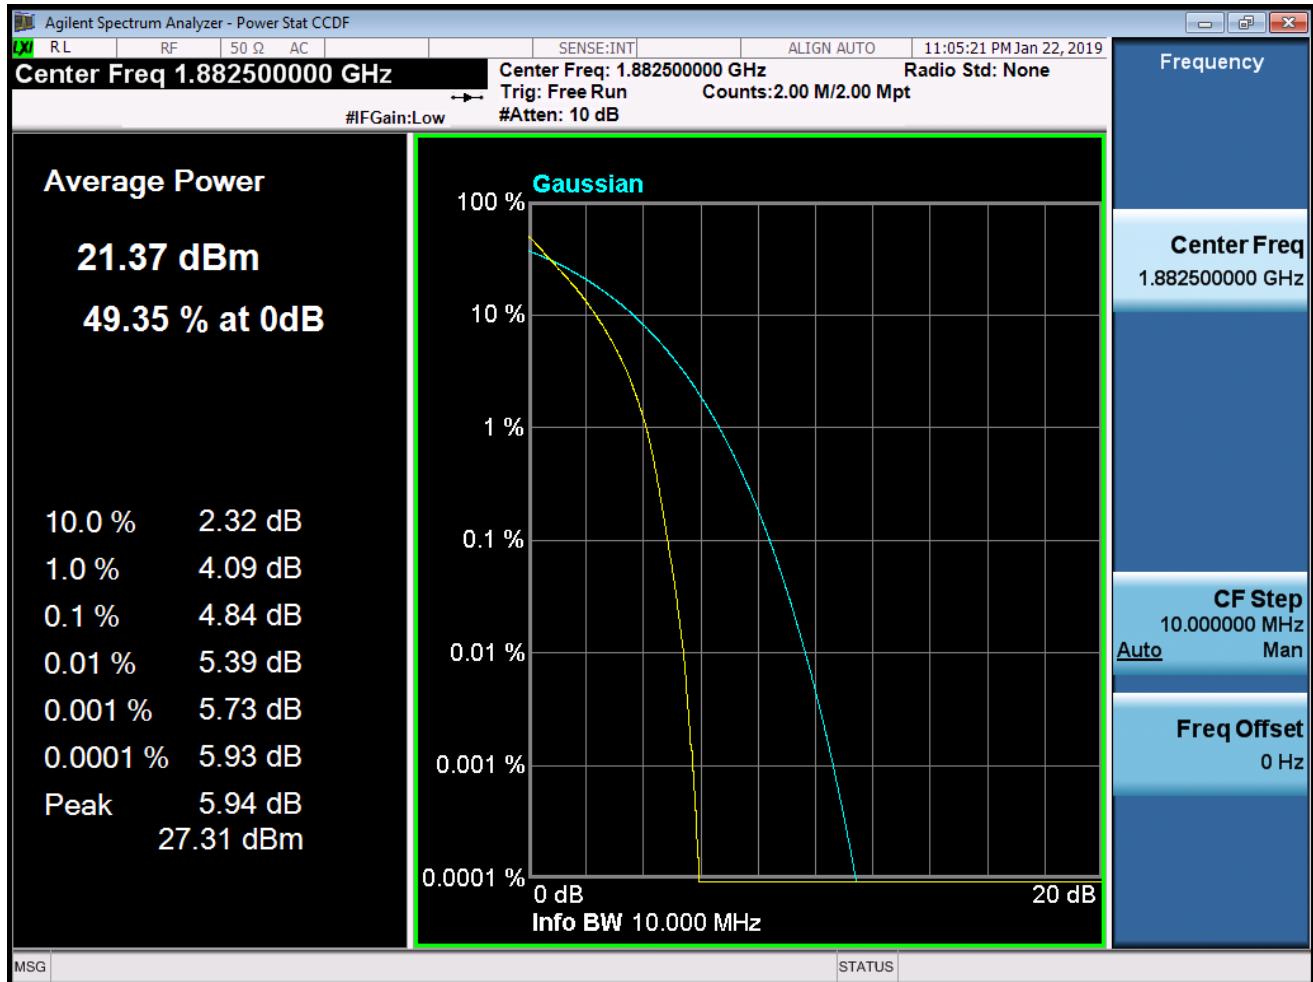


BAND 25. PAR Plot (10M BW Ch. 26365 16QAM RB 50\_0)

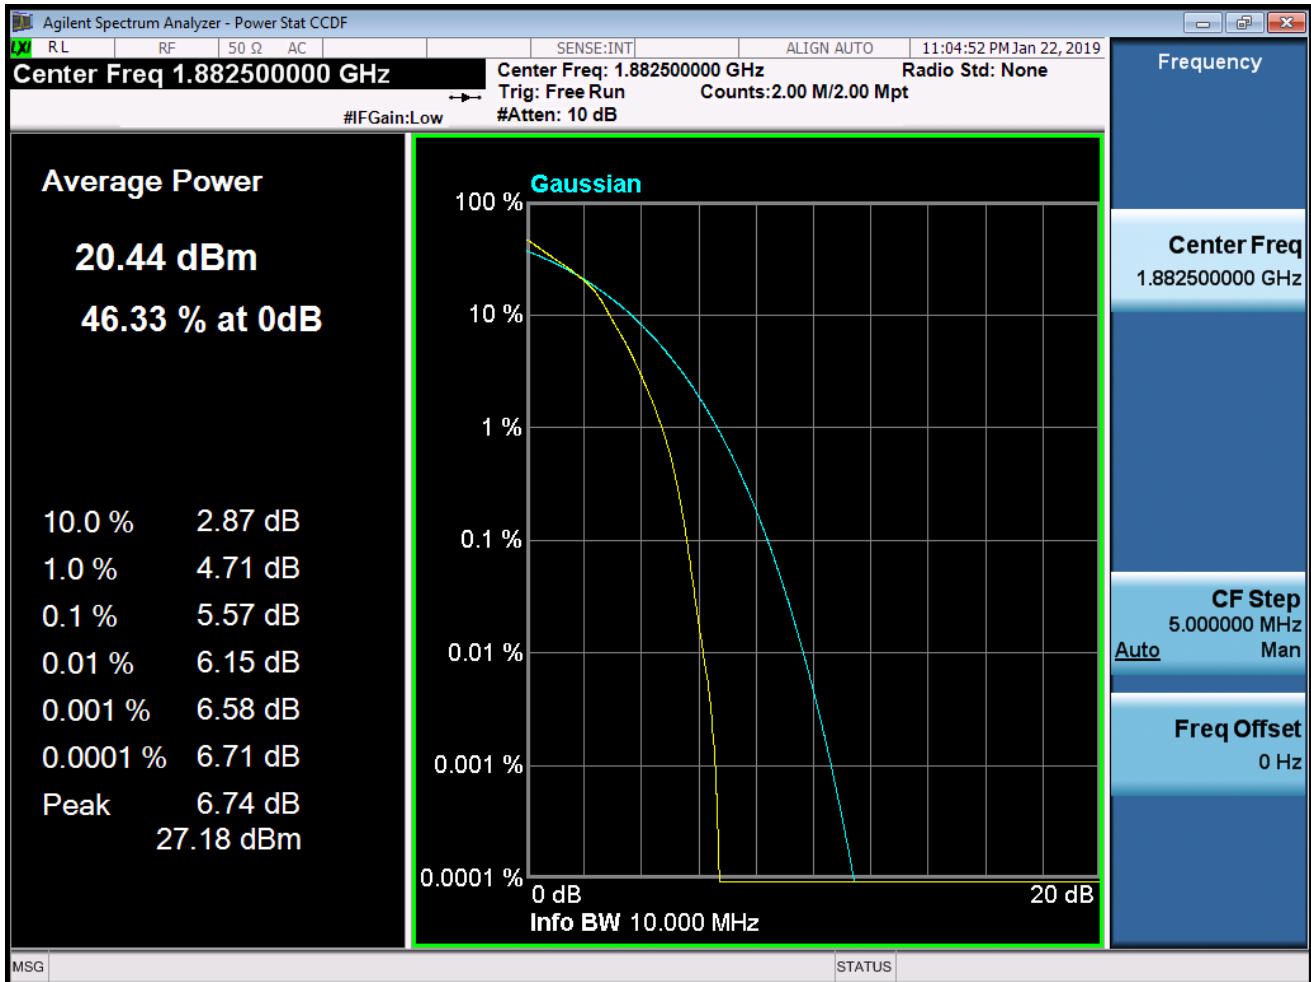


BAND 25. PAR Plot (15M BW Ch. 26365 QPSK RB 75\_0)

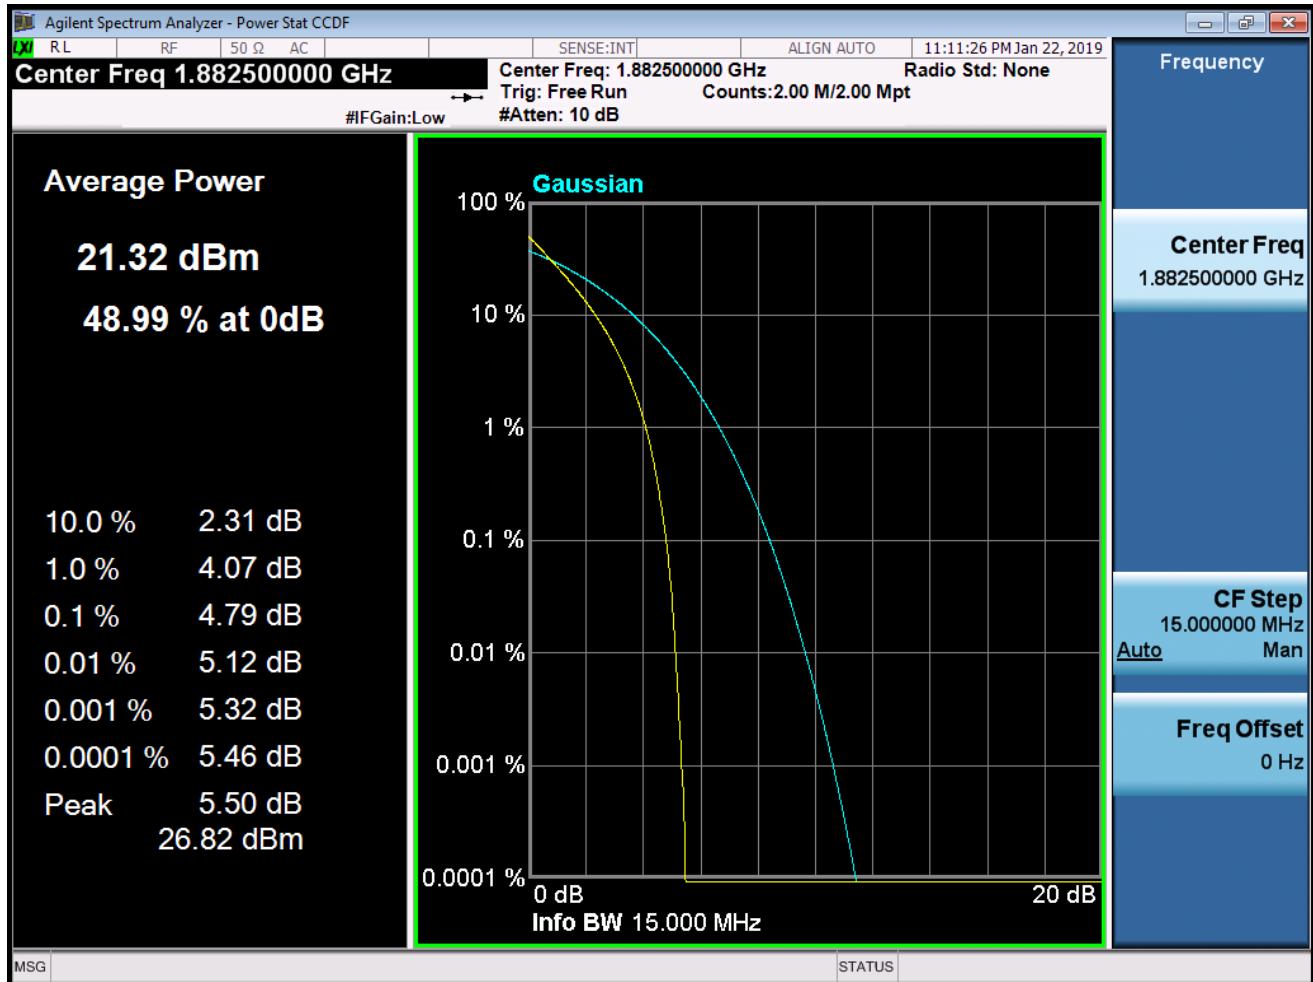


## BAND 25. PAR Plot (15M BW Ch. 26365 16QAM RB 75\_0)

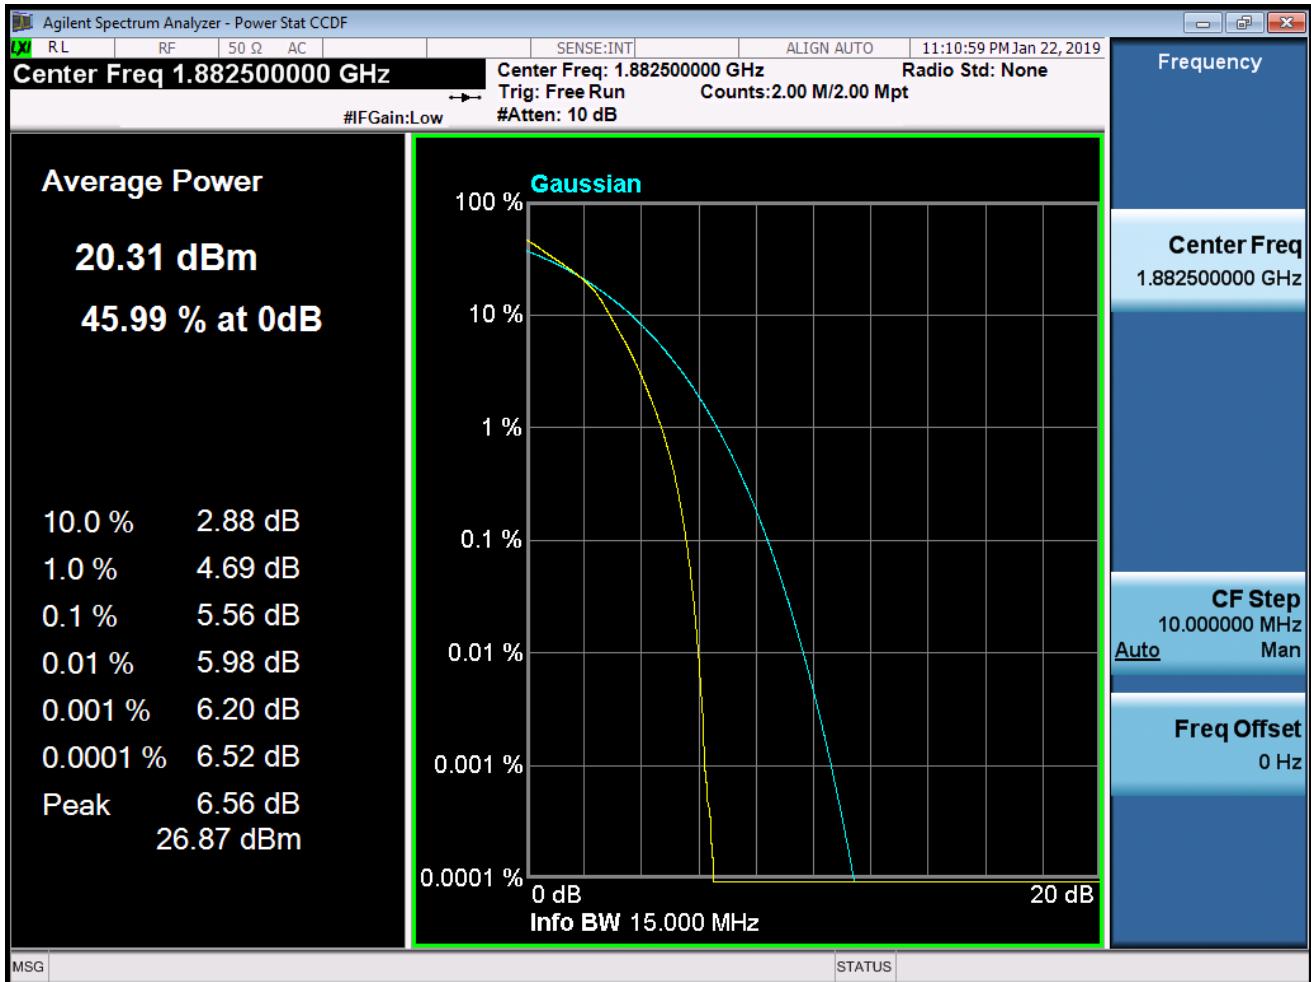


BAND 25. PAR Plot (20M BW Ch. 26365 QPSK RB 100\_0)

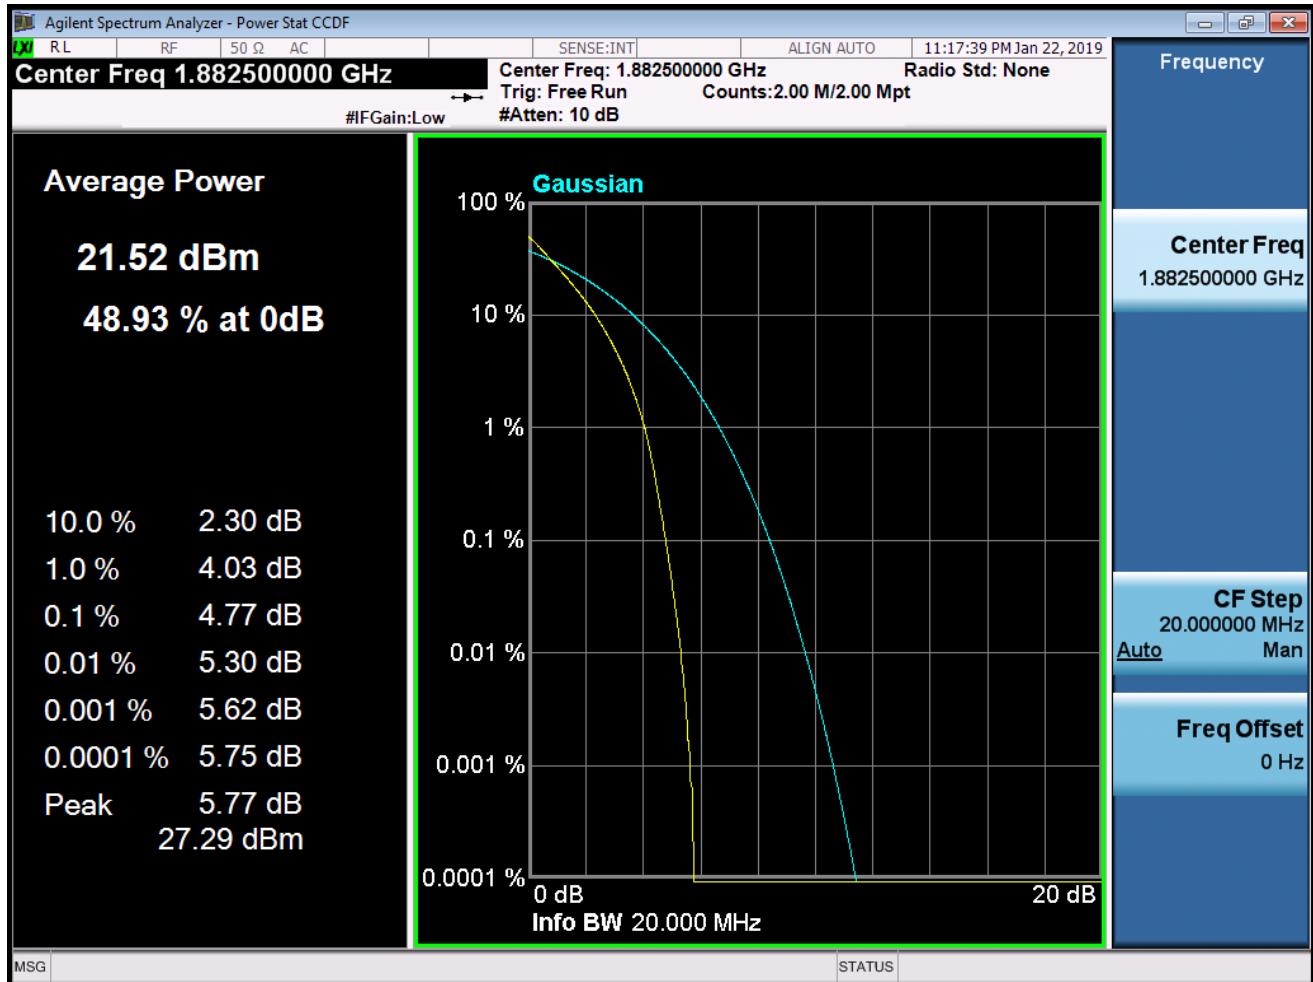

BAND 25. PAR Plot (20M BW Ch. 26365 16QAM RB 100\_0)

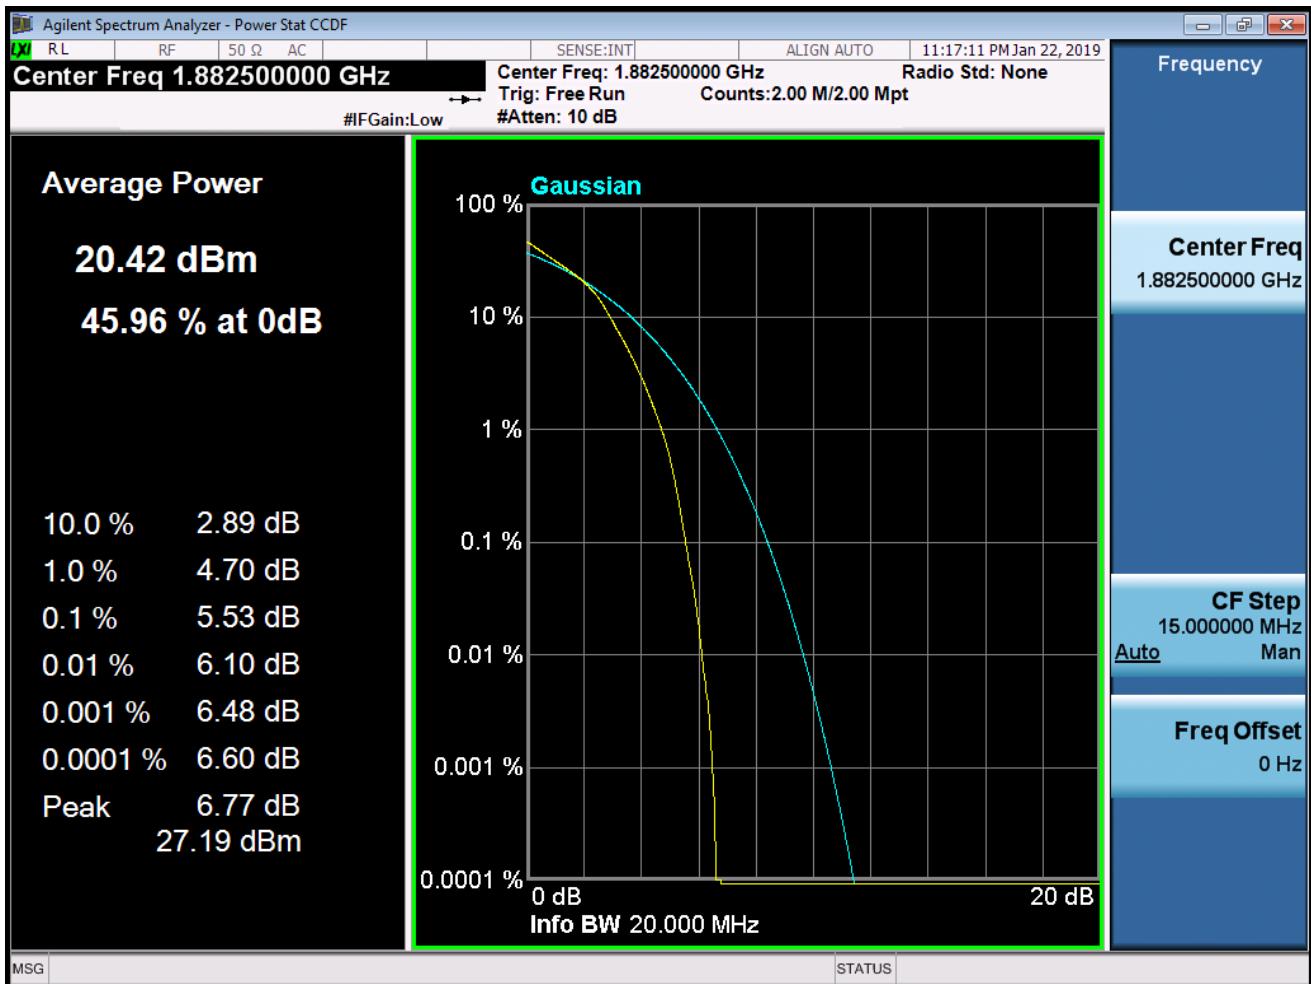


BAND 25. Lower Band Edge Plot (1.4M BW Ch.26047 QPSK\_RB1\_Offset 0) -1

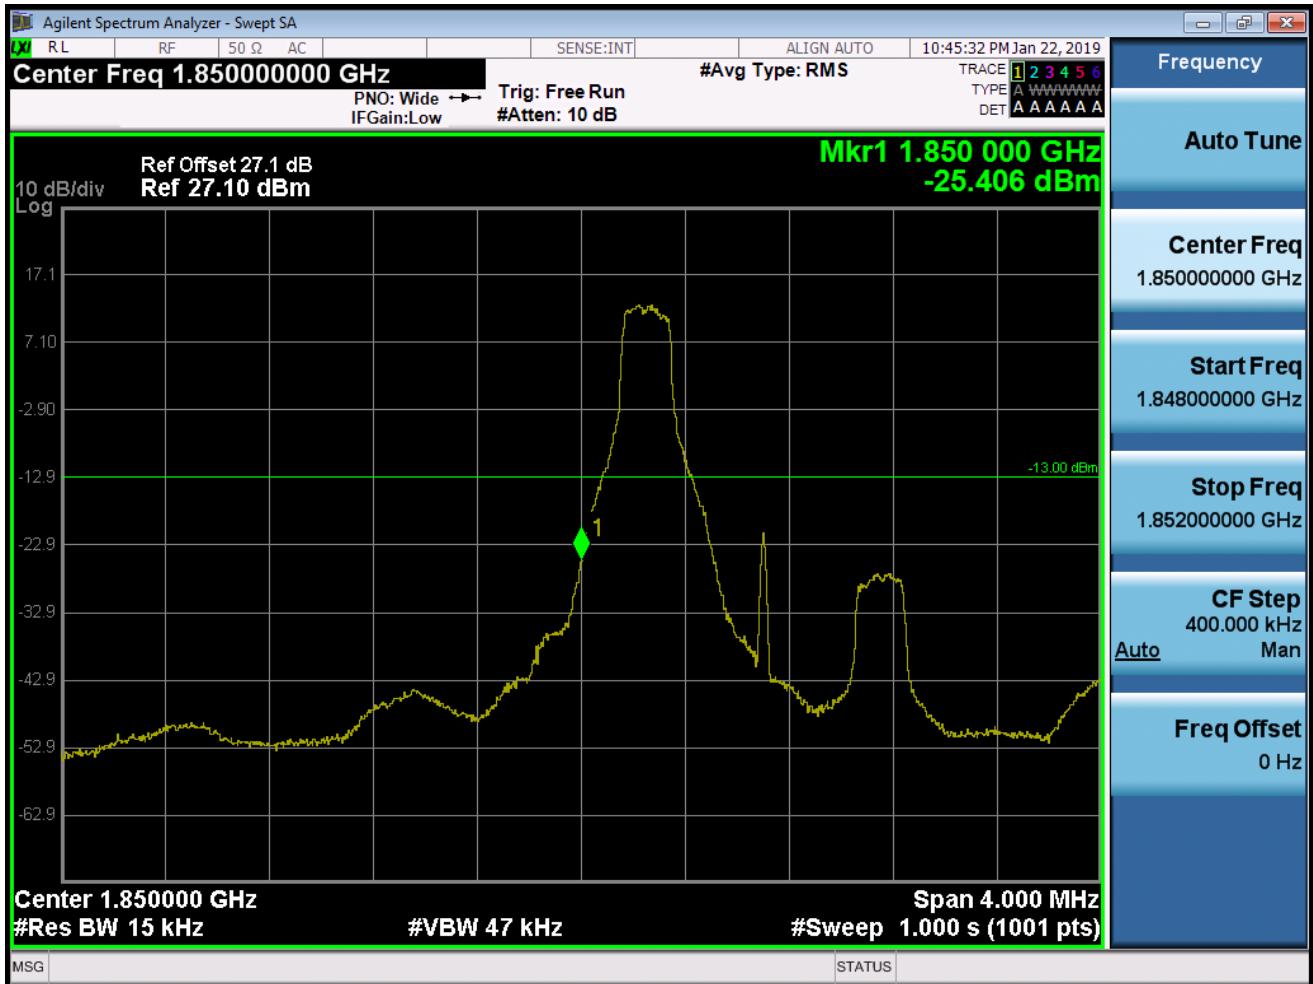


BAND 25. Lower Band Edge Plot (1.4M BW Ch. 26047 QPSK\_RB6\_Offset 0) -2




BAND 25. Lower Extended Band Edge Plot (1.4M BW Ch. 26047 QPSK\_RB6\_0) -3

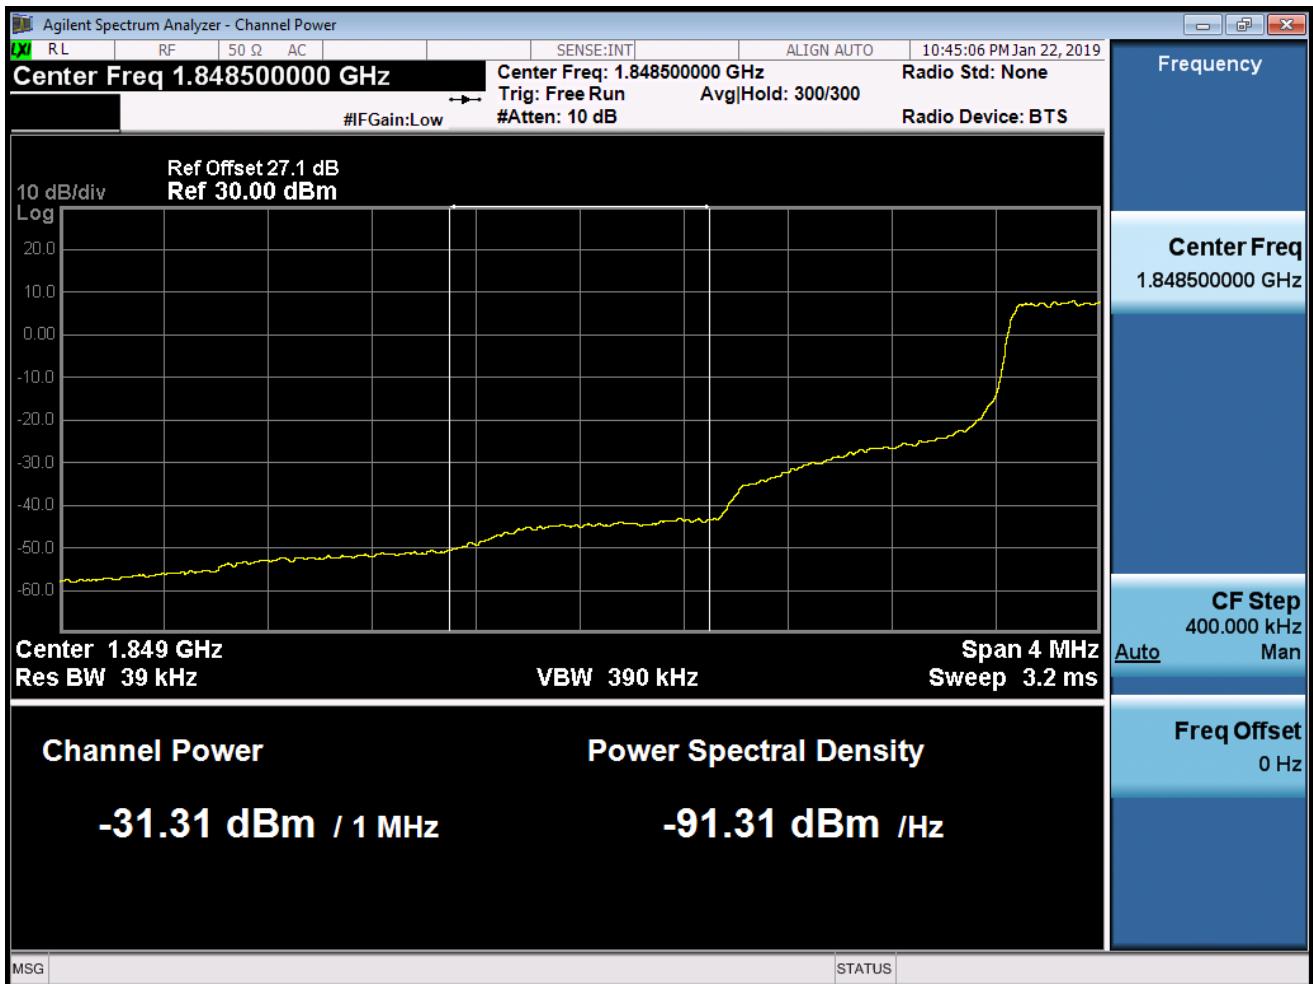


BAND 25. Lower Band Edge Plot (3M BW Ch.26055 QPSK\_RB1\_Offset 0) -1

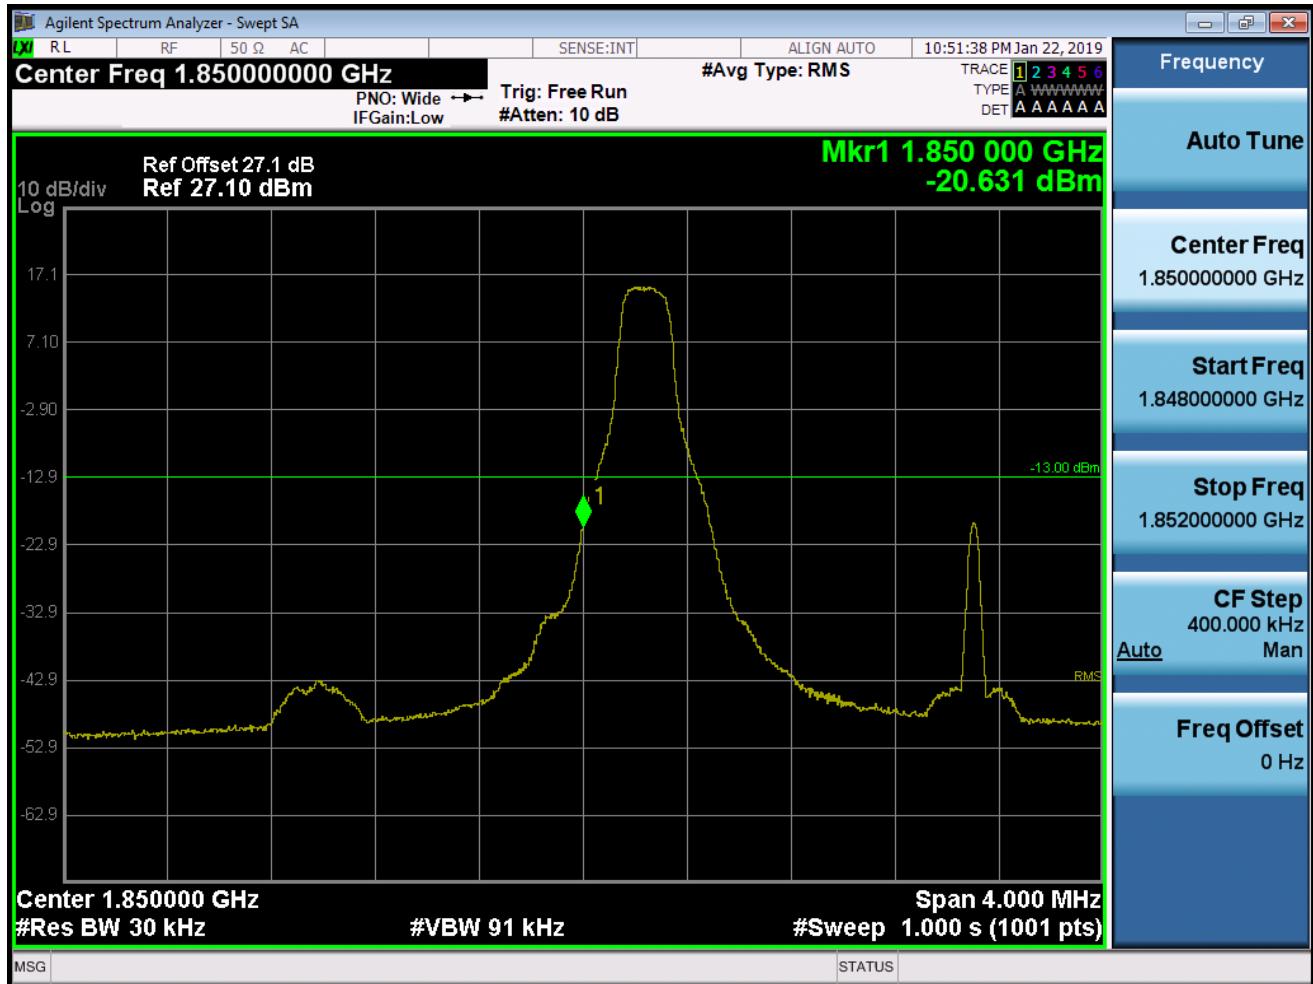


BAND 25. Lower Band Edge Plot (3M BW Ch. 26055 QPSK\_RB15\_Offset 0) -2

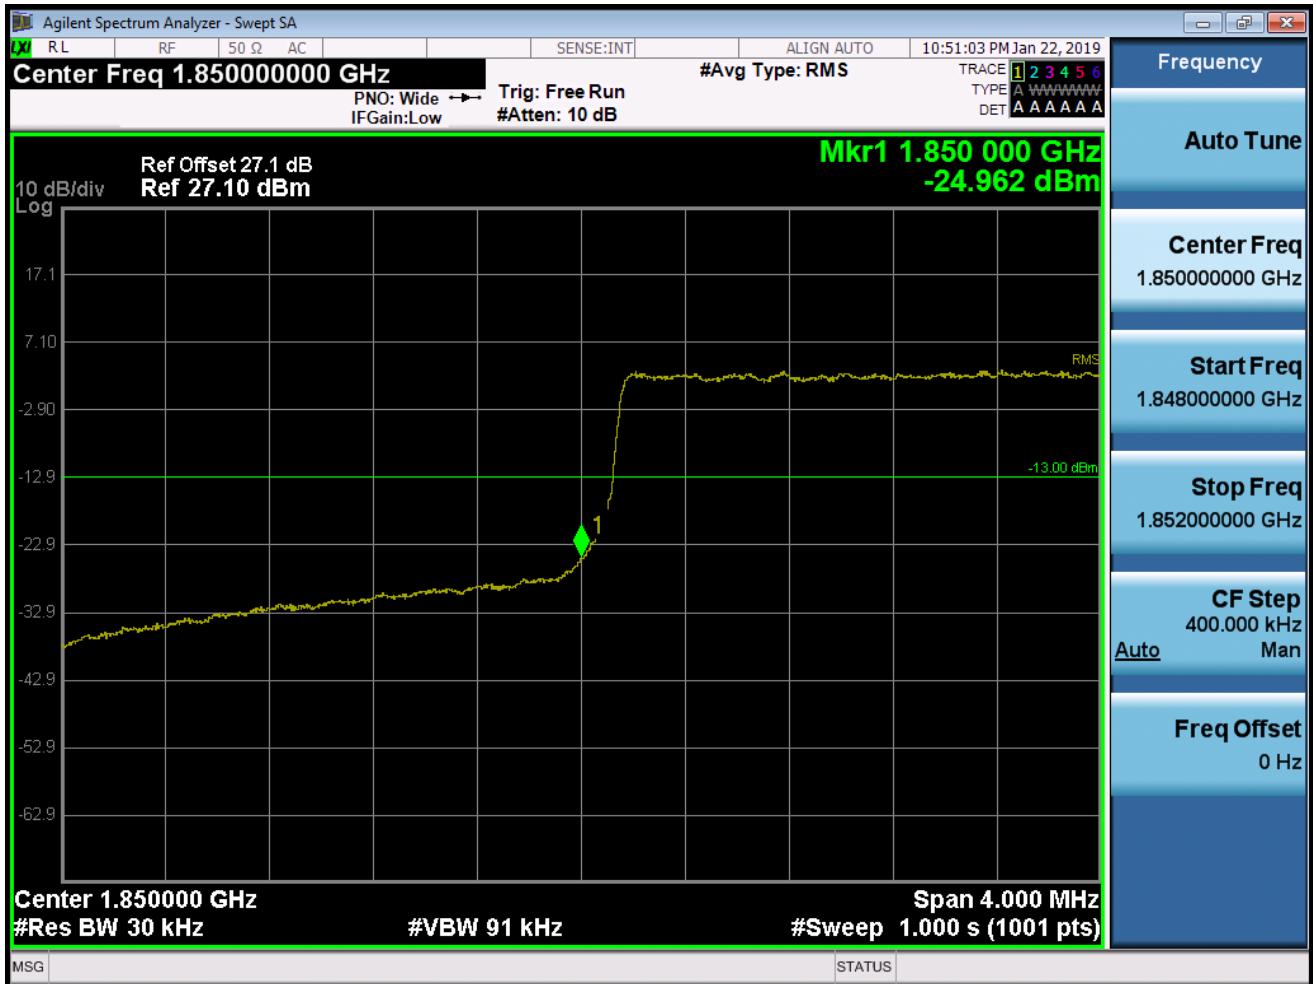

BAND 25. Lower Extended Band Edge Plot (3M BW Ch. 26055 QPSK\_RB15\_0) -3

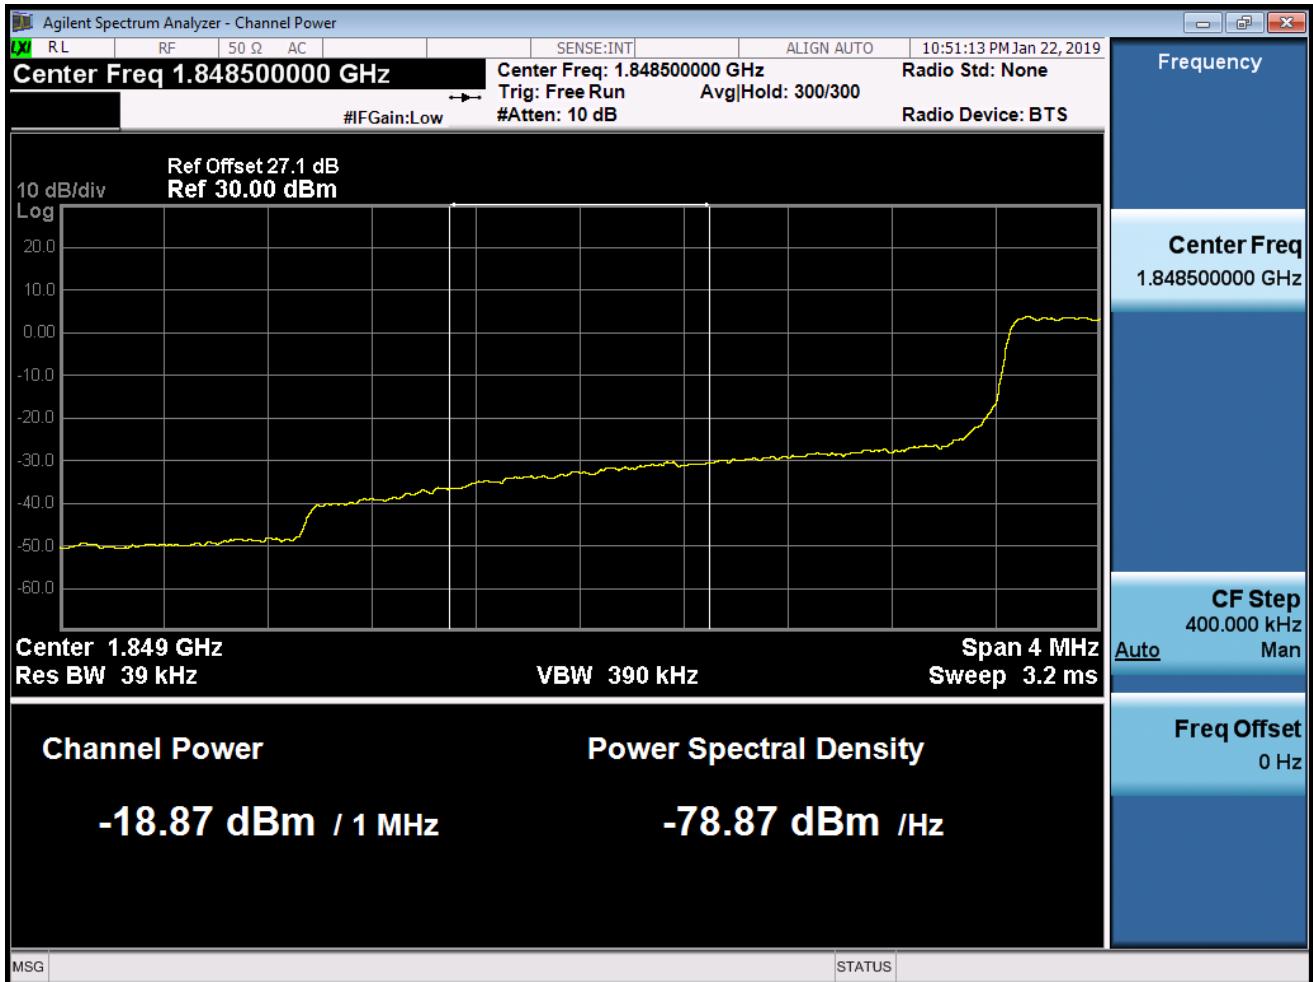


BAND 25. Lower Band Edge Plot (5M BW Ch.26065 QPSK\_RB1\_Offset 0) -1

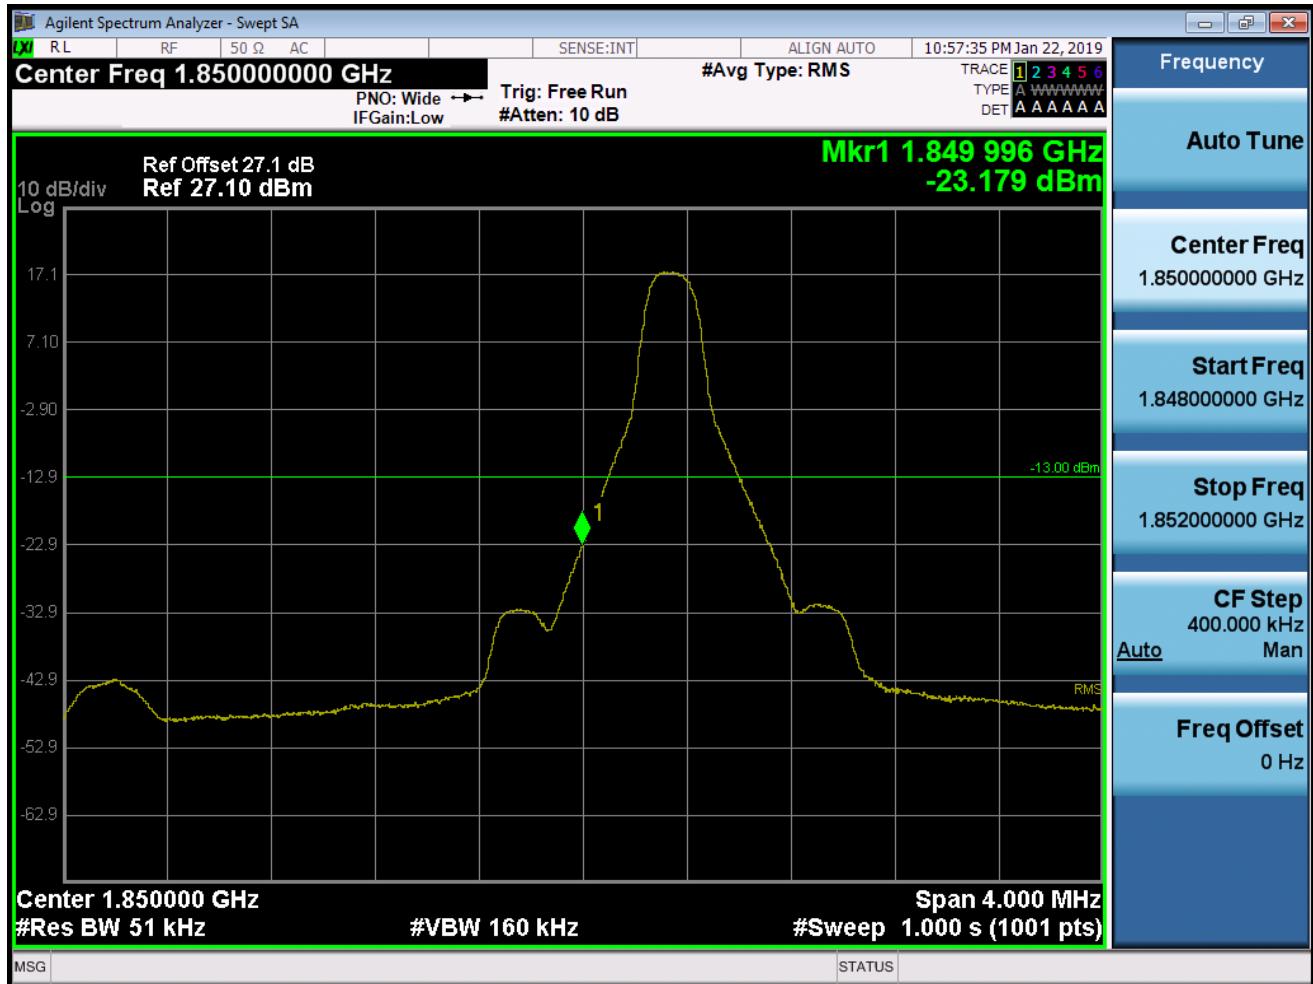

BAND 25. Lower Band Edge Plot (5M BW Ch. 26065 QPSK\_RB25\_Offset 0) -2



BAND 25. Lower Extended Band Edge Plot (5M BW Ch. 26065 QPSK\_RB25\_0) -3

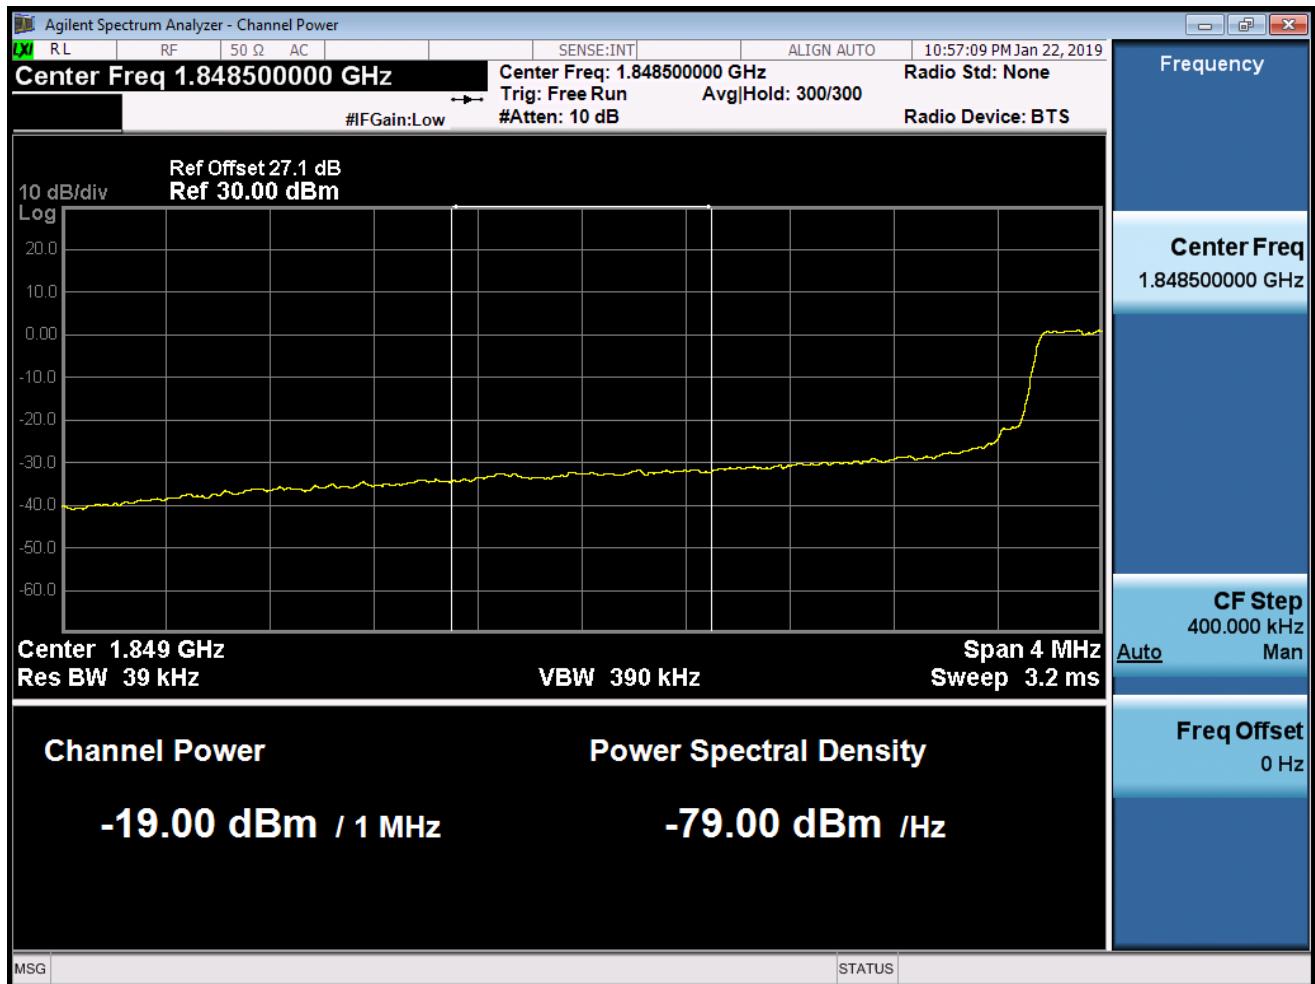


BAND 25. Lower Band Edge Plot (10M BW Ch.26090 QPSK\_RB1\_Offset 0) -1




BAND 25. Lower Band Edge Plot (10M BW Ch. 26090 QPSK\_RB50\_Offset 0) -2




BAND 25. Lower Extended Band Edge Plot (10M BW Ch. 26090 QPSK\_RB50\_0) -3

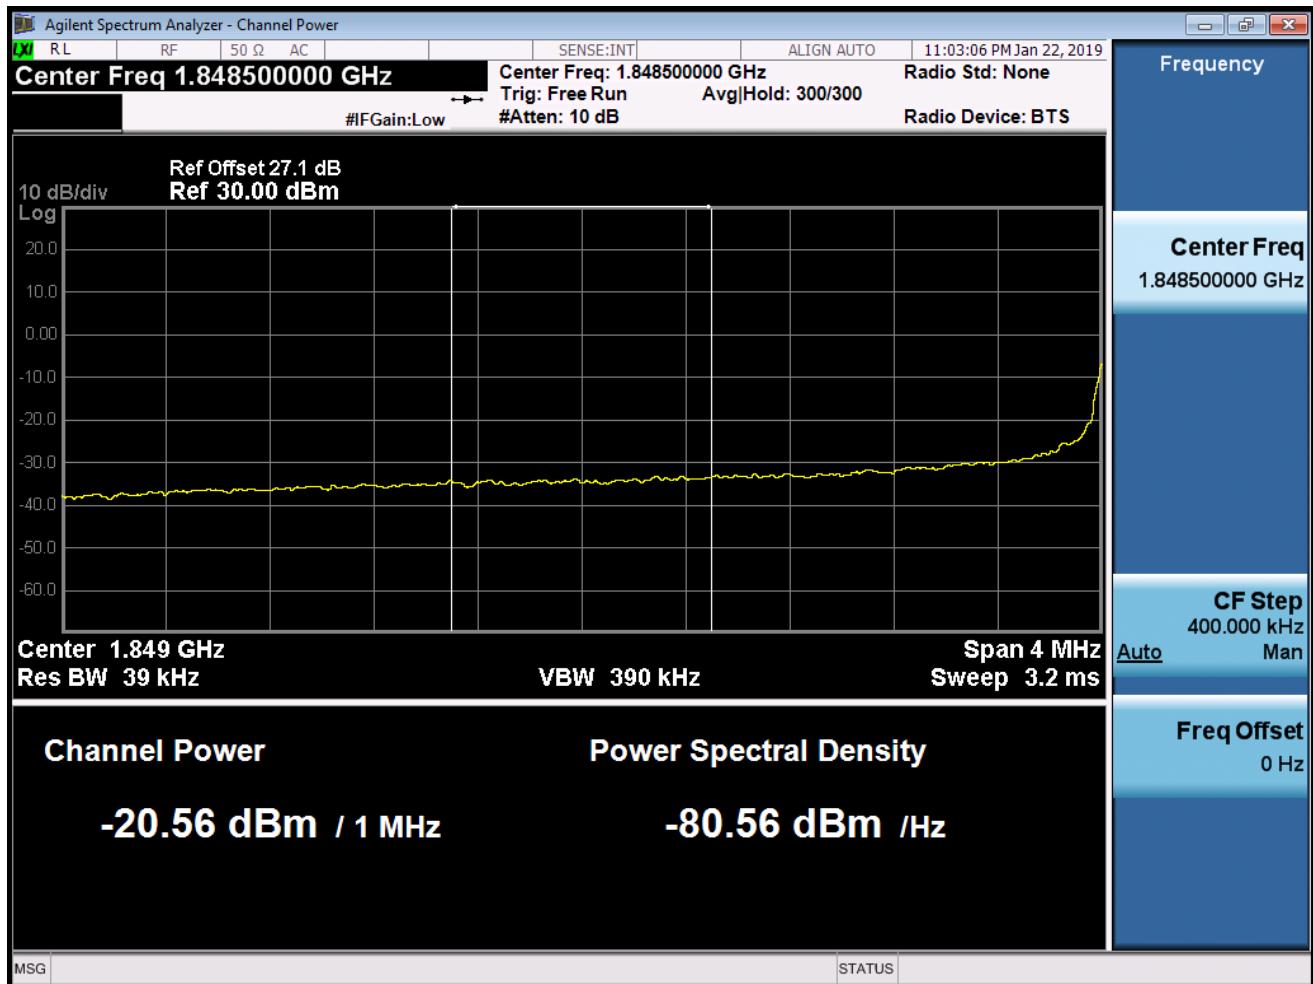


BAND 25. Lower Band Edge Plot (15M BW Ch.26115 QPSK\_RB75\_Offset 0) -1

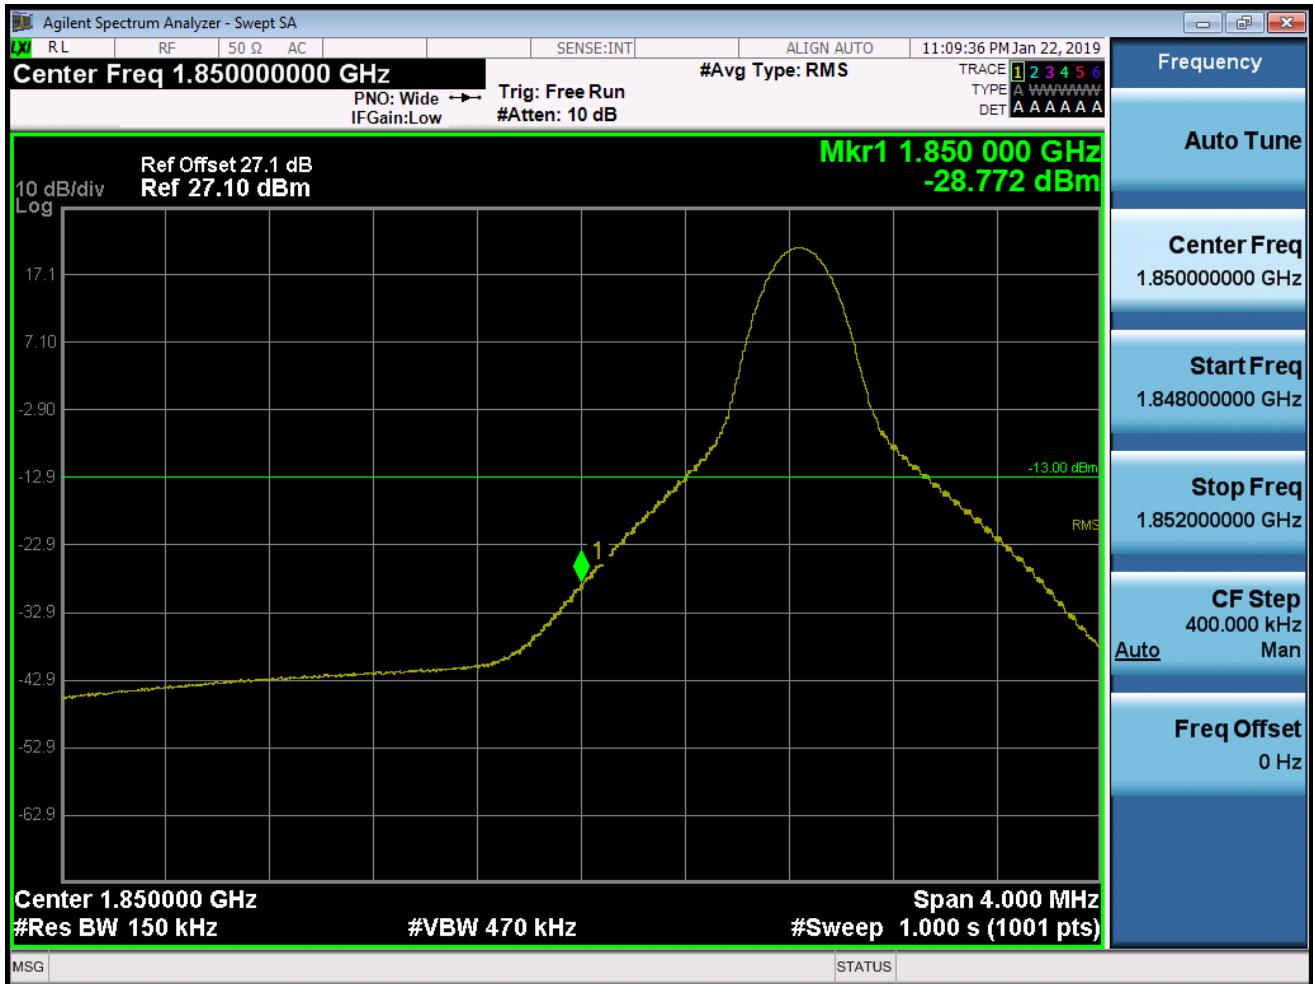

BAND 25. Lower Band Edge Plot (15M BW Ch. 26115 QPSK\_RB75\_Offset 0) -2

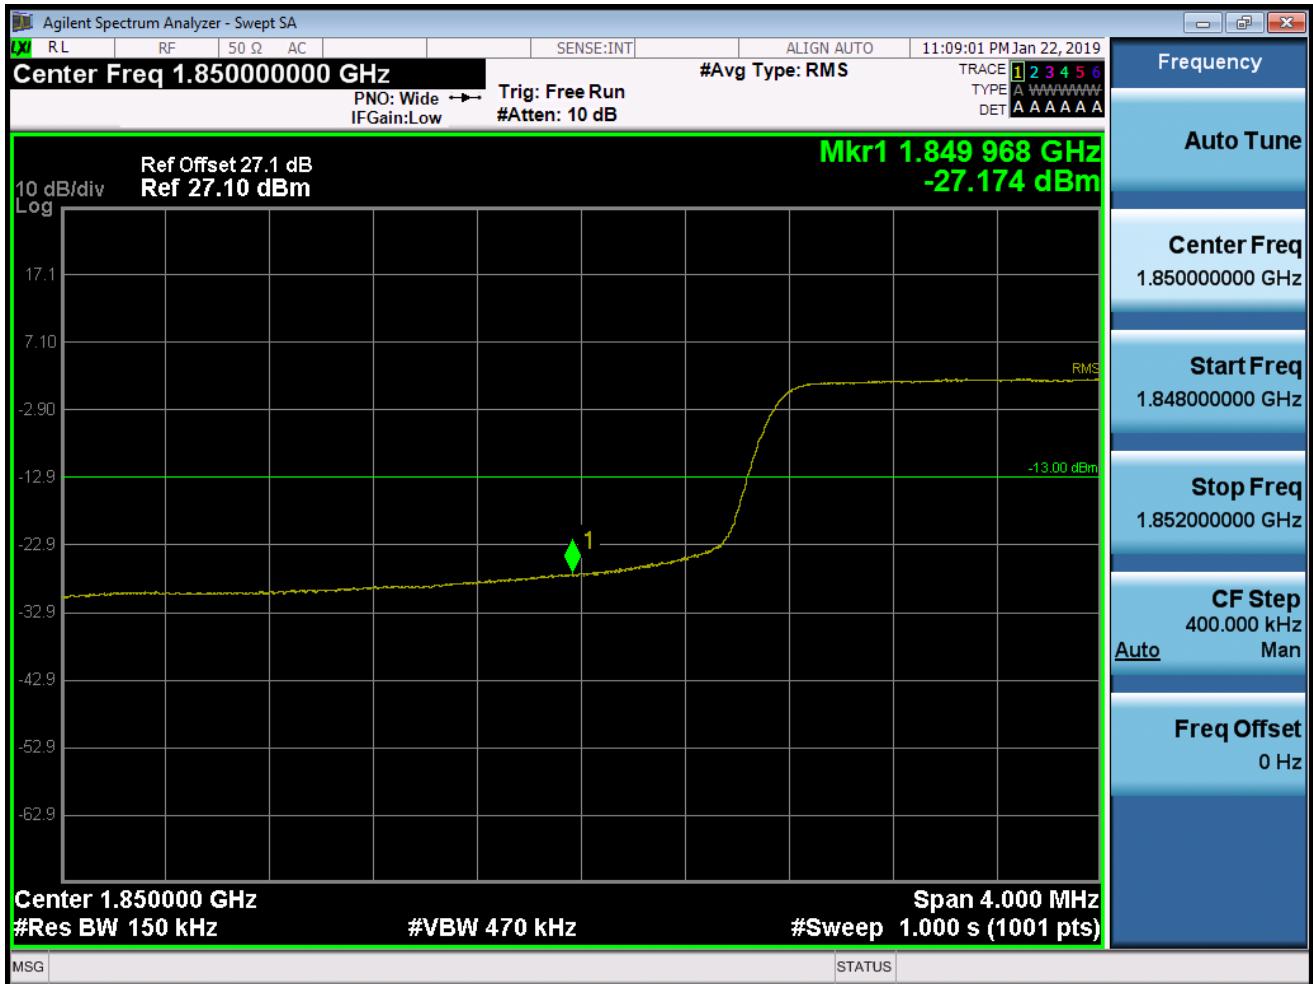

BAND 25. Lower Extended Band Edge Plot (15M BW Ch. 26115 QPSK\_RB75\_0) -3

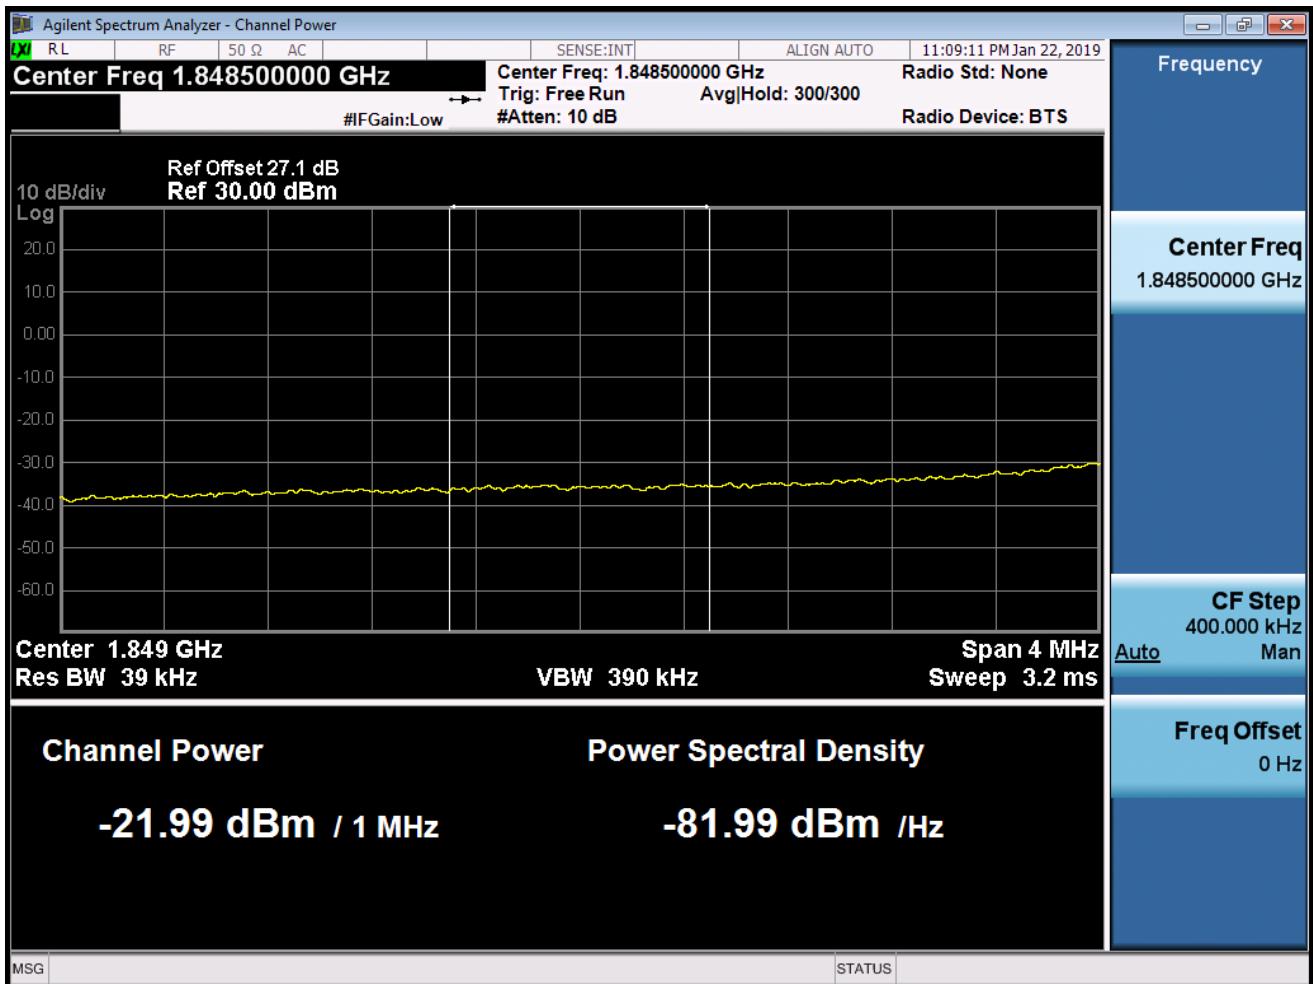


BAND 25. Lower Band Edge Plot (20M BW Ch.26140 QPSK\_RB1\_Offset 0) -1



BAND 25. Lower Band Edge Plot (20M BW Ch. 26140 QPSK\_RB100\_Offset 0) -2



BAND 25. Lower Extended Band Edge Plot (20M BW Ch. 26140 QPSK\_RB100\_0) -3

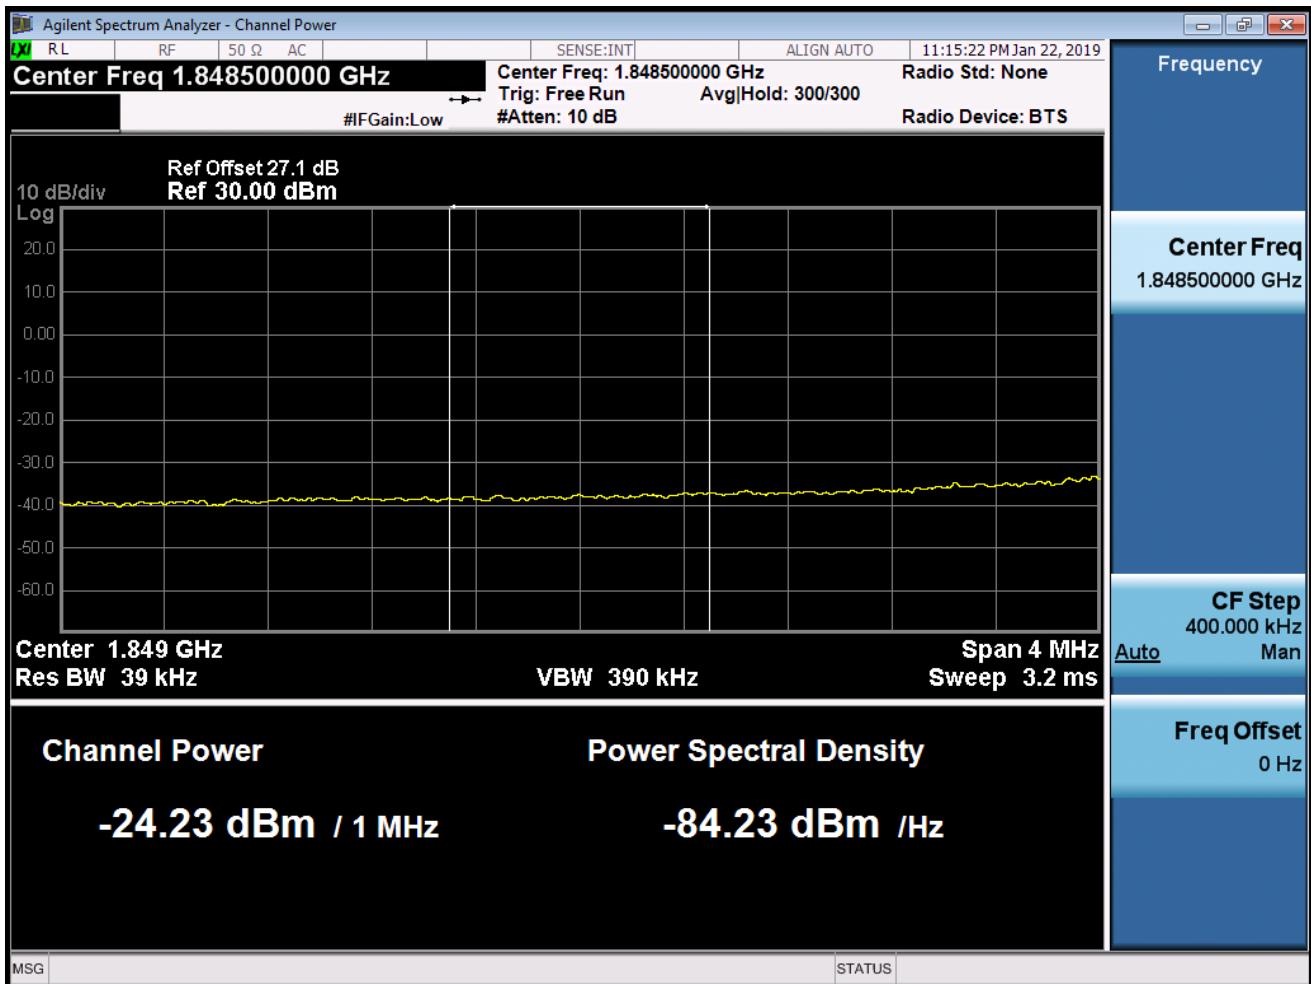


BAND 25. Upper Band Edge Plot (1.4M BW Ch.26683 QPSK\_RB1\_Offset 5) -1




BAND 25. Upper Band Edge Plot (1.4M BW Ch. 26683 QPSK\_RB6\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (1.4M BW Ch. 26683 QPSK\_RB6\_0) -3

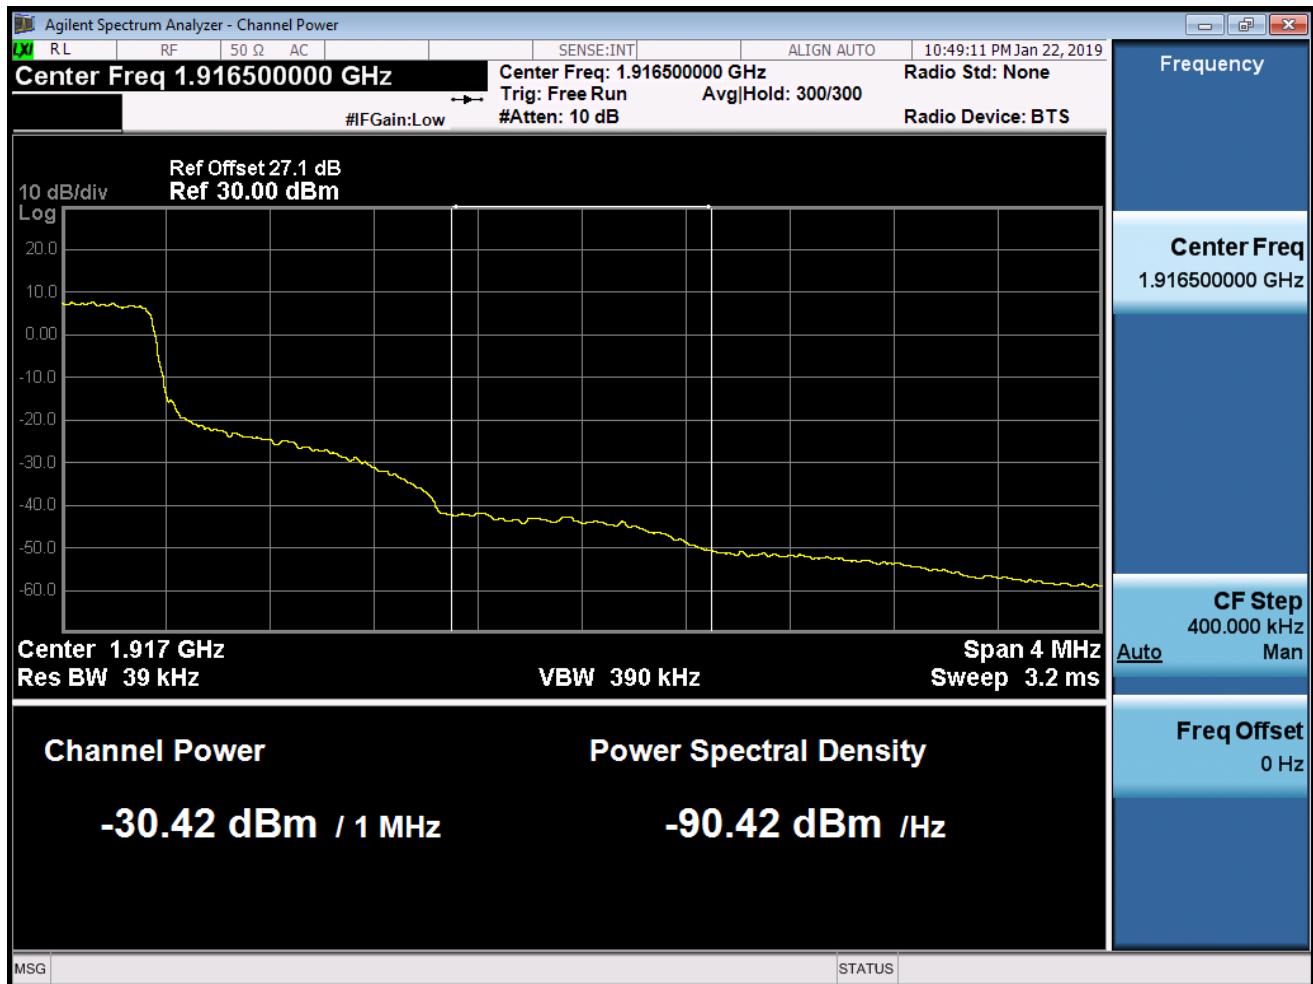


BAND 25. Upper Band Edge Plot (3M BW Ch.26675 QPSK\_RB1\_Offset 14) -1

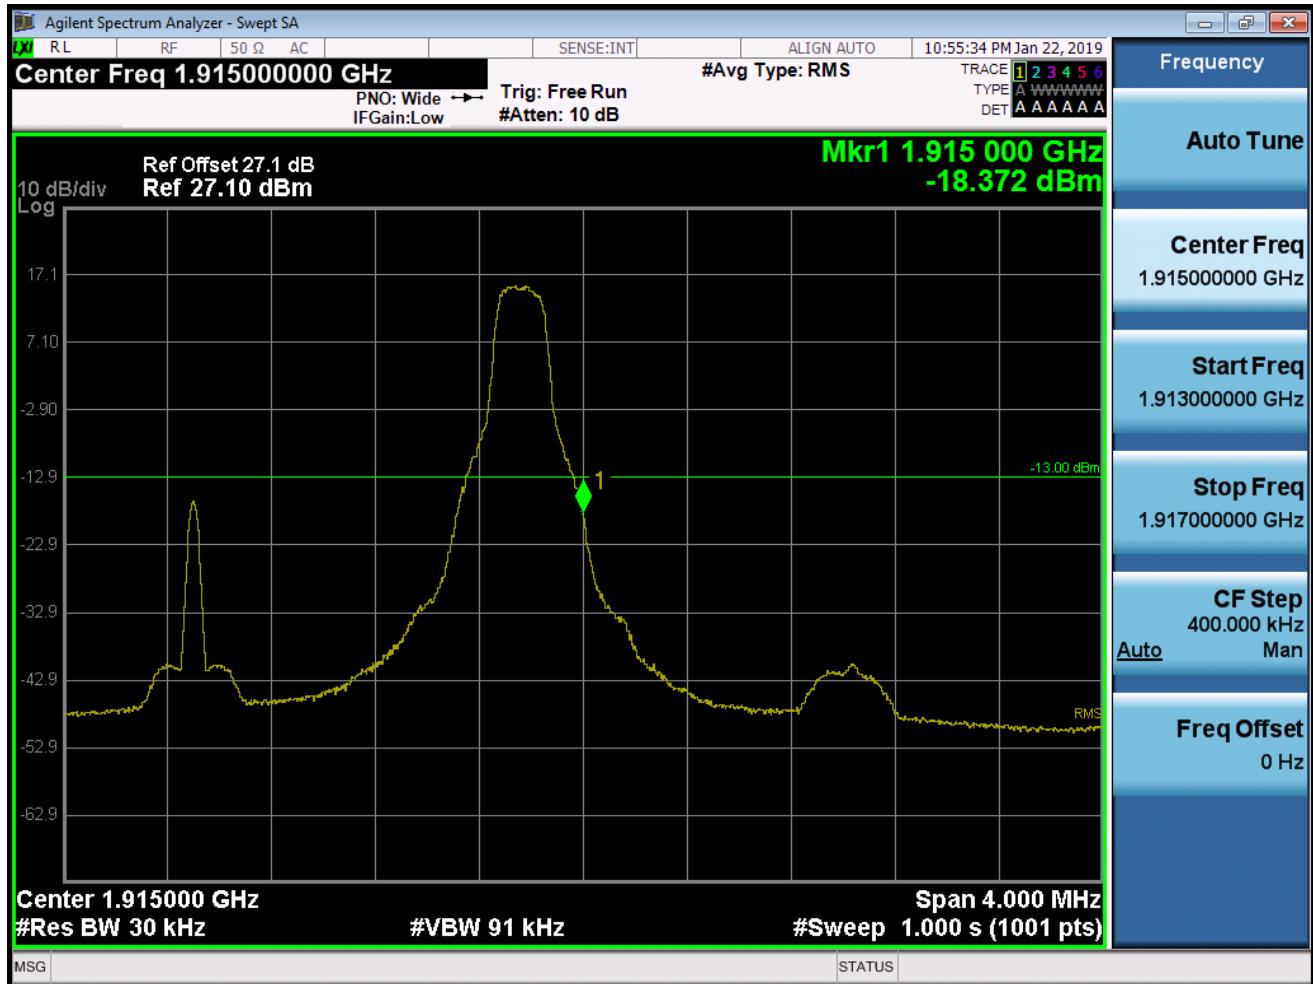


BAND 25. Upper Band Edge Plot (3M BW Ch. 26675 QPSK\_RB15\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (3M BW Ch. 26675 QPSK\_RB15 0) -3

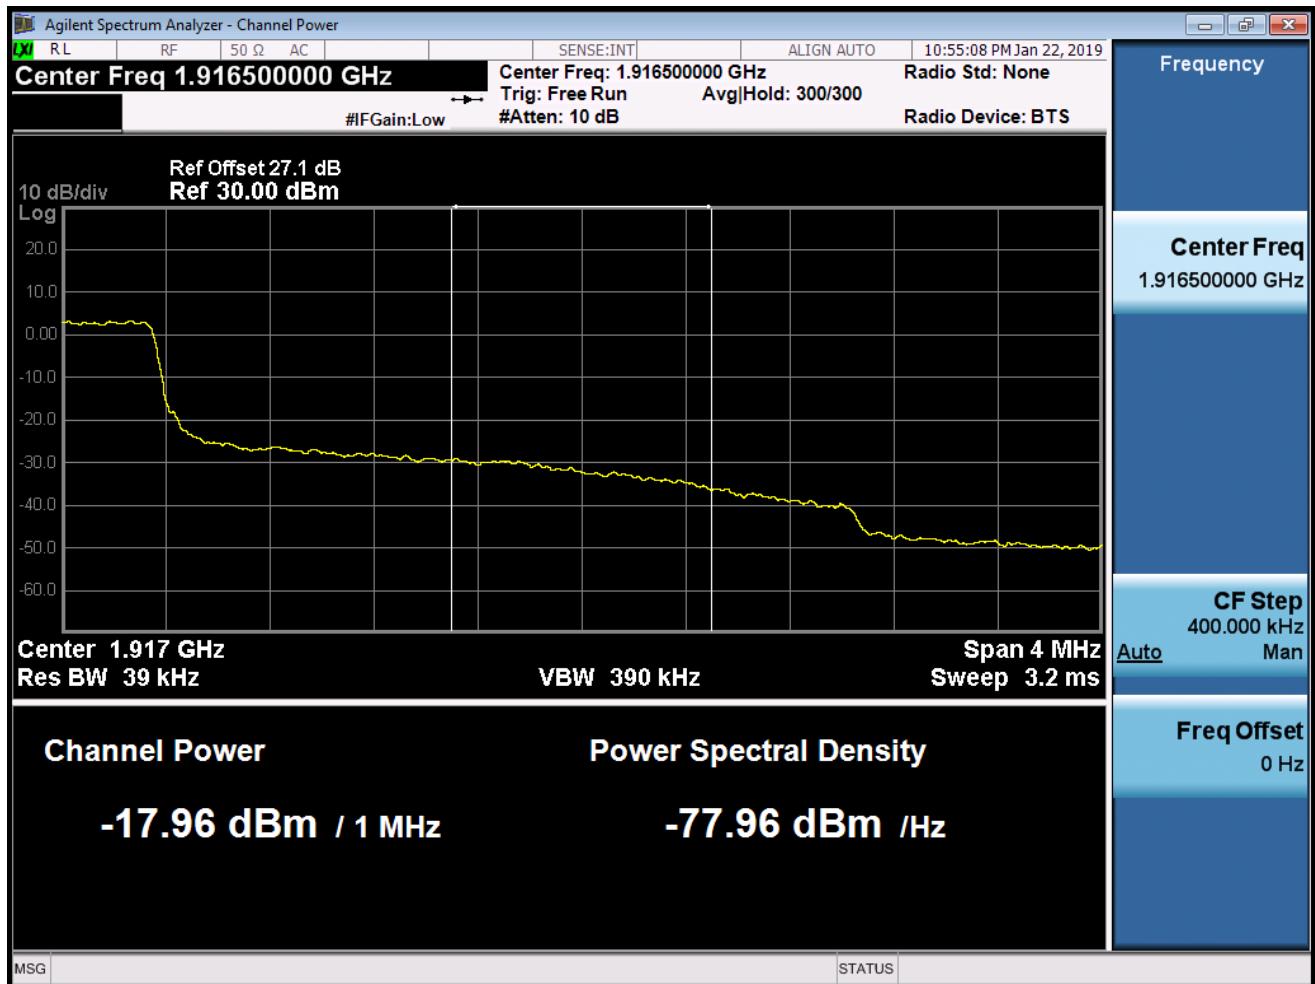


BAND 25. Upper Band Edge Plot (5M BW Ch.26665 QPSK\_RB1\_Offset 24) -1

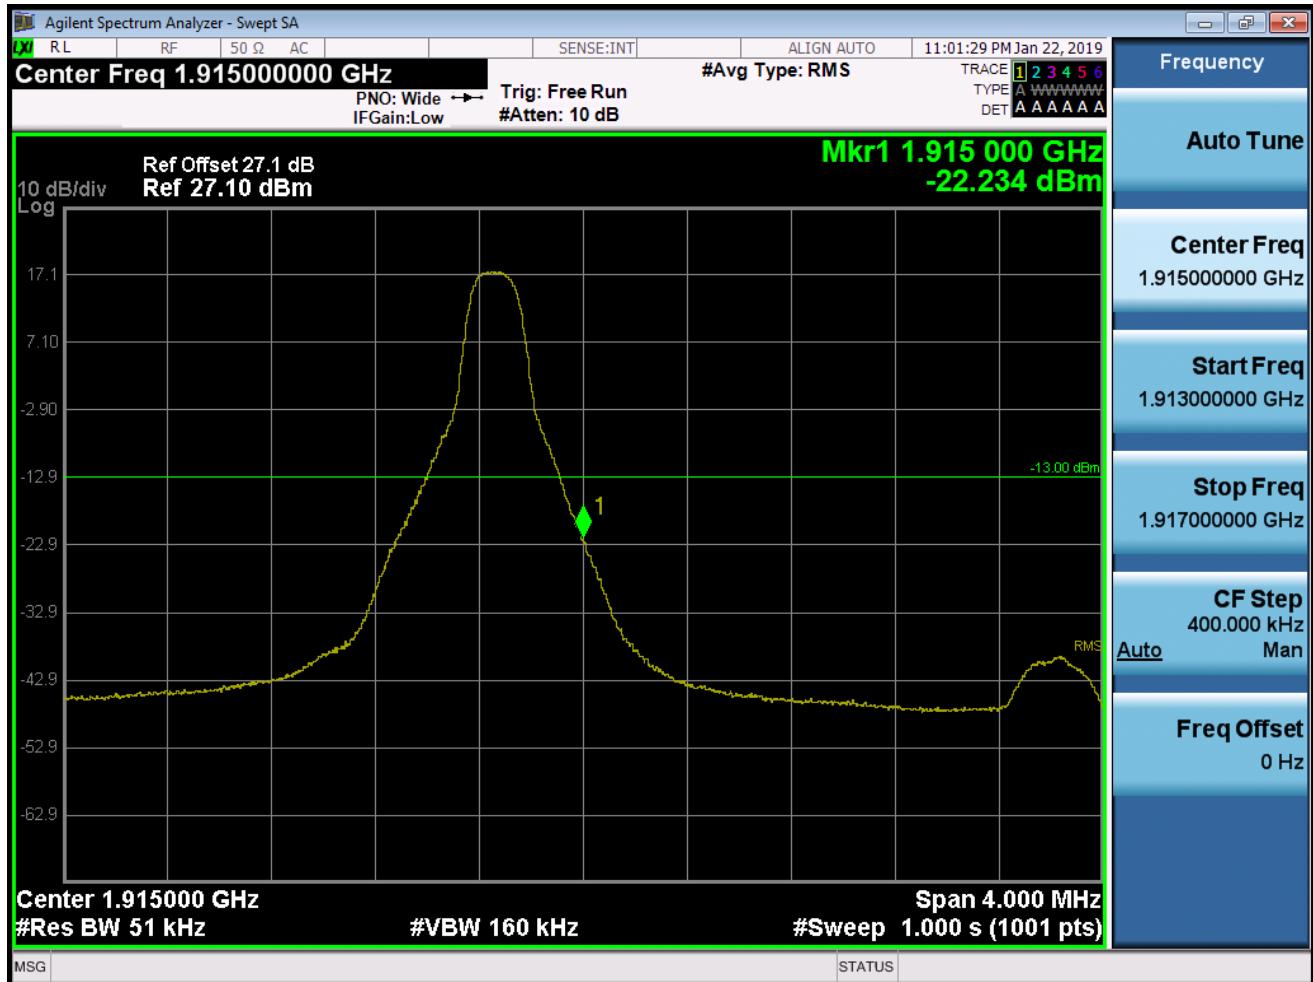

BAND 25. Upper Band Edge Plot (5M BW Ch. 26665 QPSK\_RB25\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (5M BW Ch. 26665 QPSK\_RB25\_0) -3

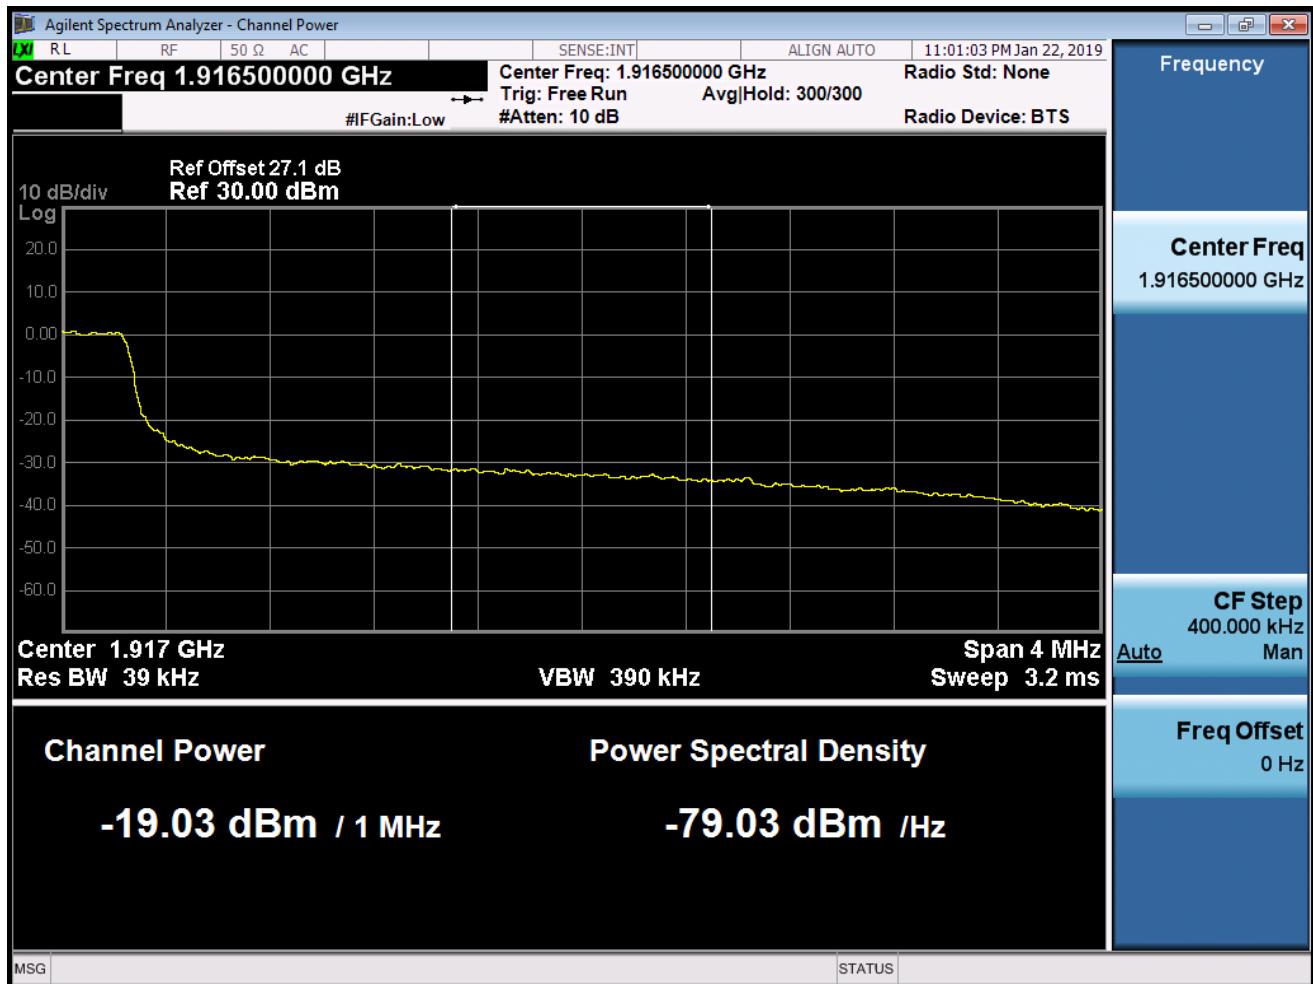


BAND 25. Upper Band Edge Plot (10M BW Ch.26640 QPSK\_RB1\_Offset 49) -1




BAND 25. Upper Band Edge Plot (10M BW Ch. 26640 QPSK\_RB50\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (10M BW Ch. 26640 QPSK\_RB50\_0) -3

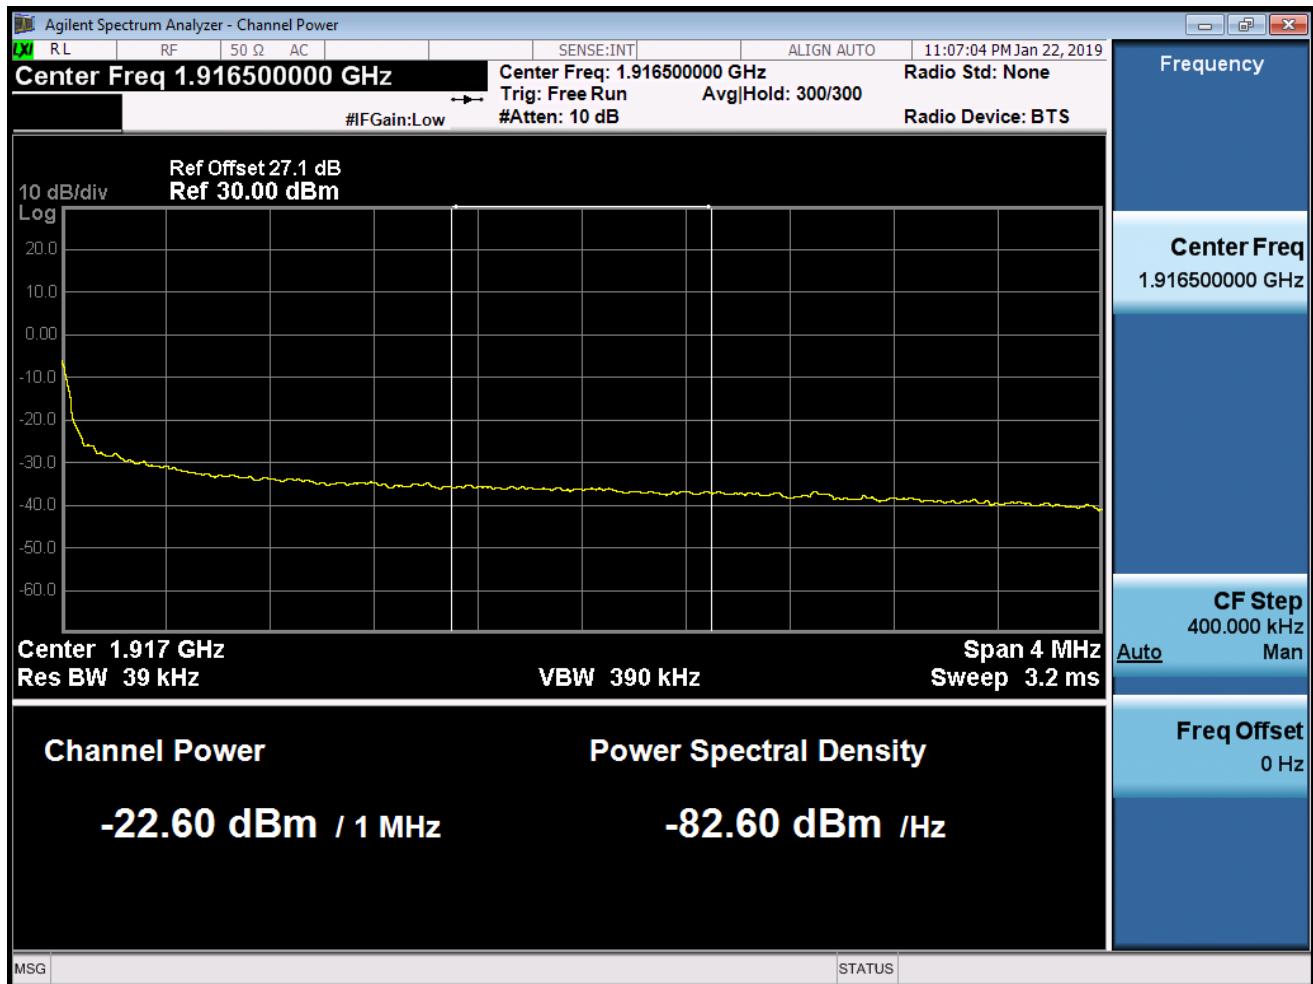


BAND 25. Upper Band Edge Plot (15M BW Ch.26615 QPSK\_RB1\_Offset 74) -1

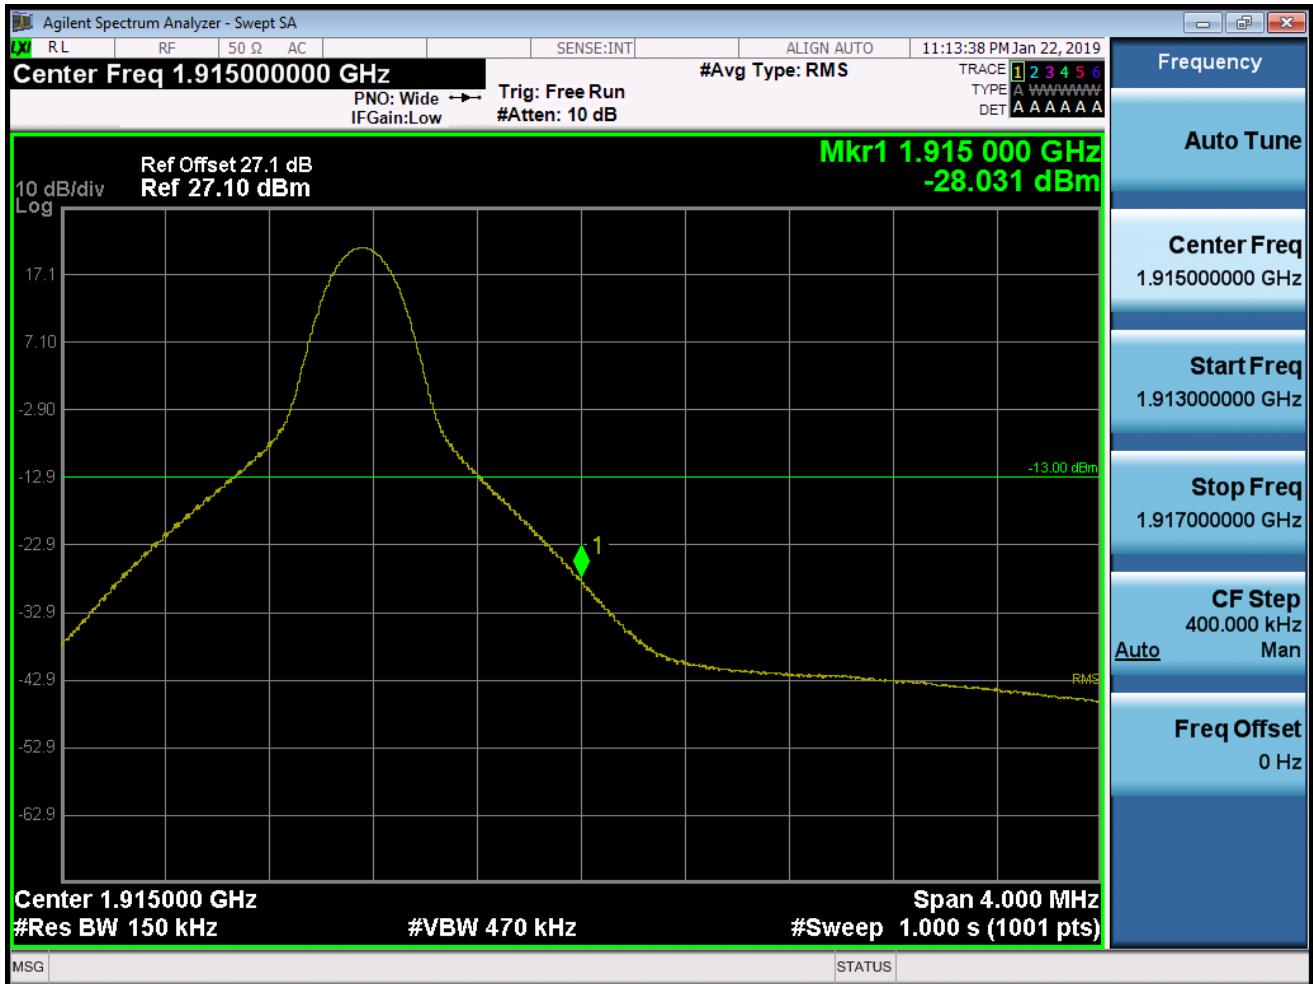

BAND 25. Upper Band Edge Plot (15M BW Ch. 26615 QPSK\_RB75\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (15M BW Ch. 26615 QPSK\_RB75\_0) -3

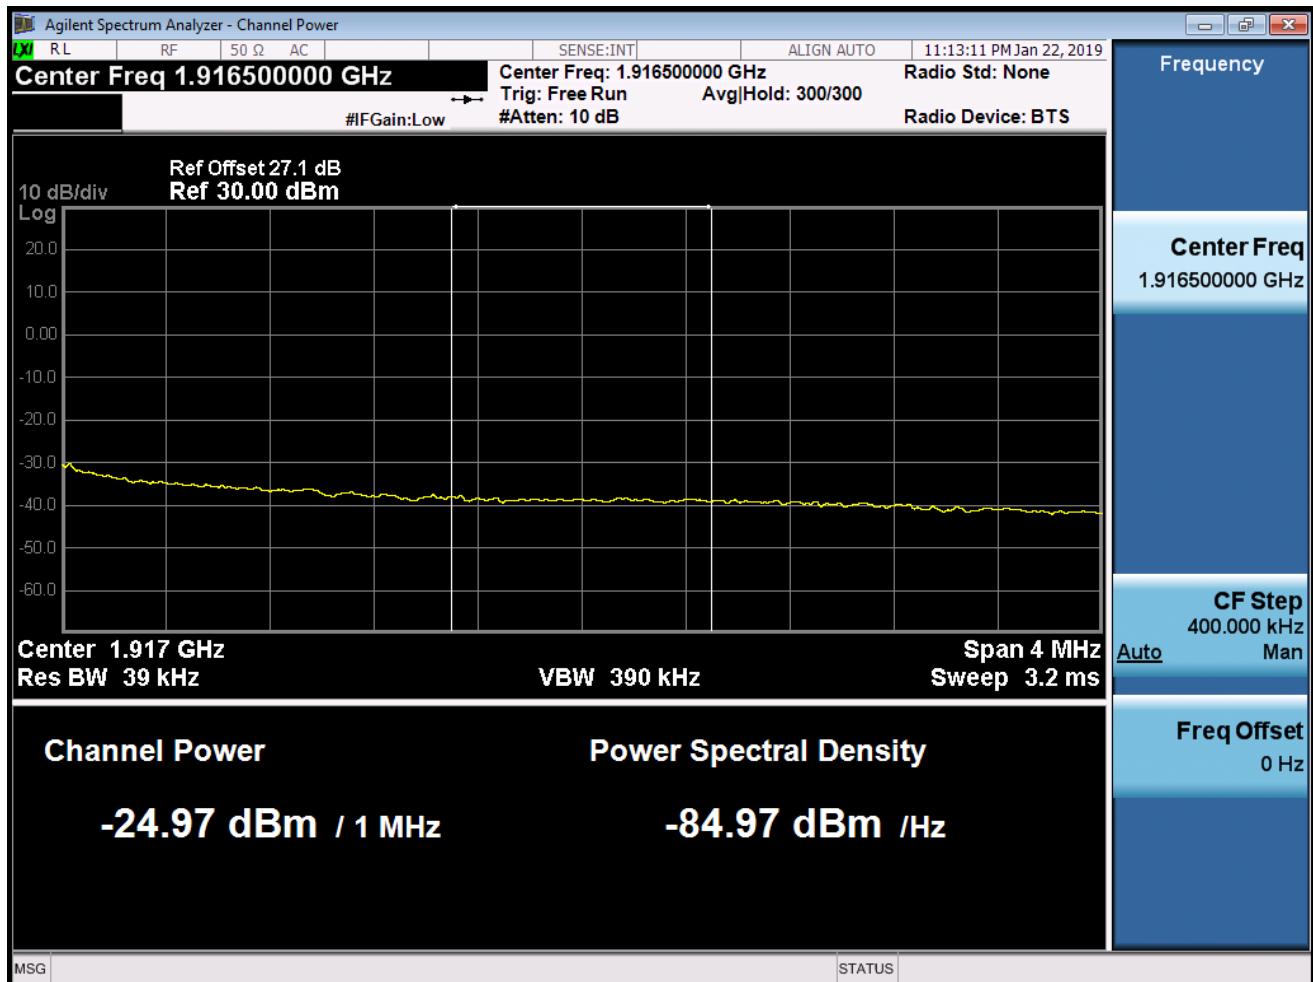


BAND 25. Upper Band Edge Plot (20M BW Ch.26590 QPSK\_RB1\_Offset 99) -1




BAND 25. Upper Band Edge Plot (20M BW Ch. 26590 QPSK\_RB100\_Offset 0) -2



BAND 25. Upper Extended Band Edge Plot (20M BW Ch. 26590 QPSK\_RB100\_0) -3

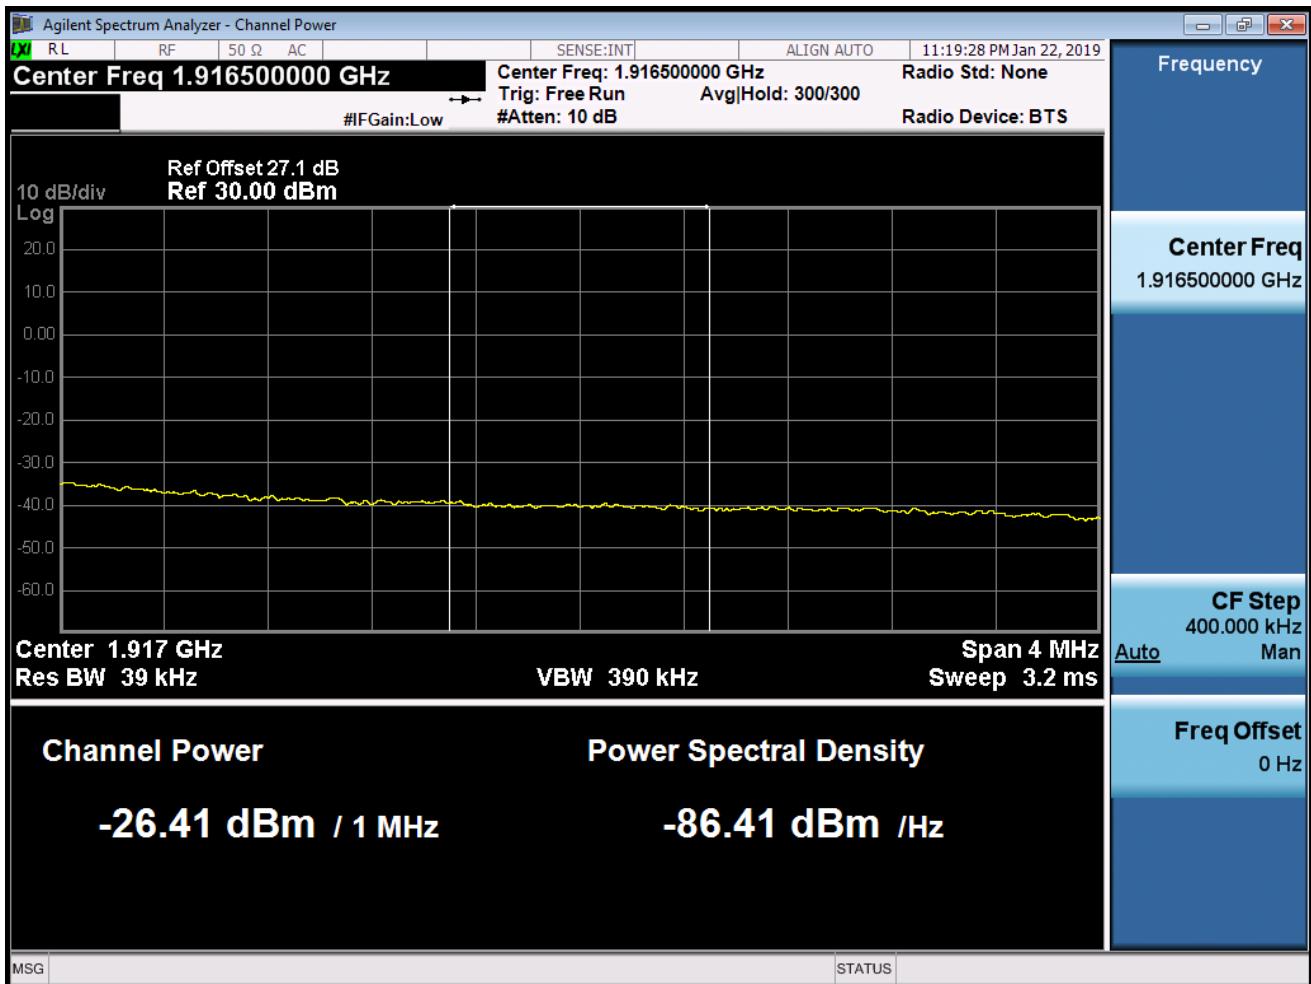


BAND 25. Conducted Spurious\_1 (26047ch\_1.4MHz\_QPSK\_RB 1\_0)

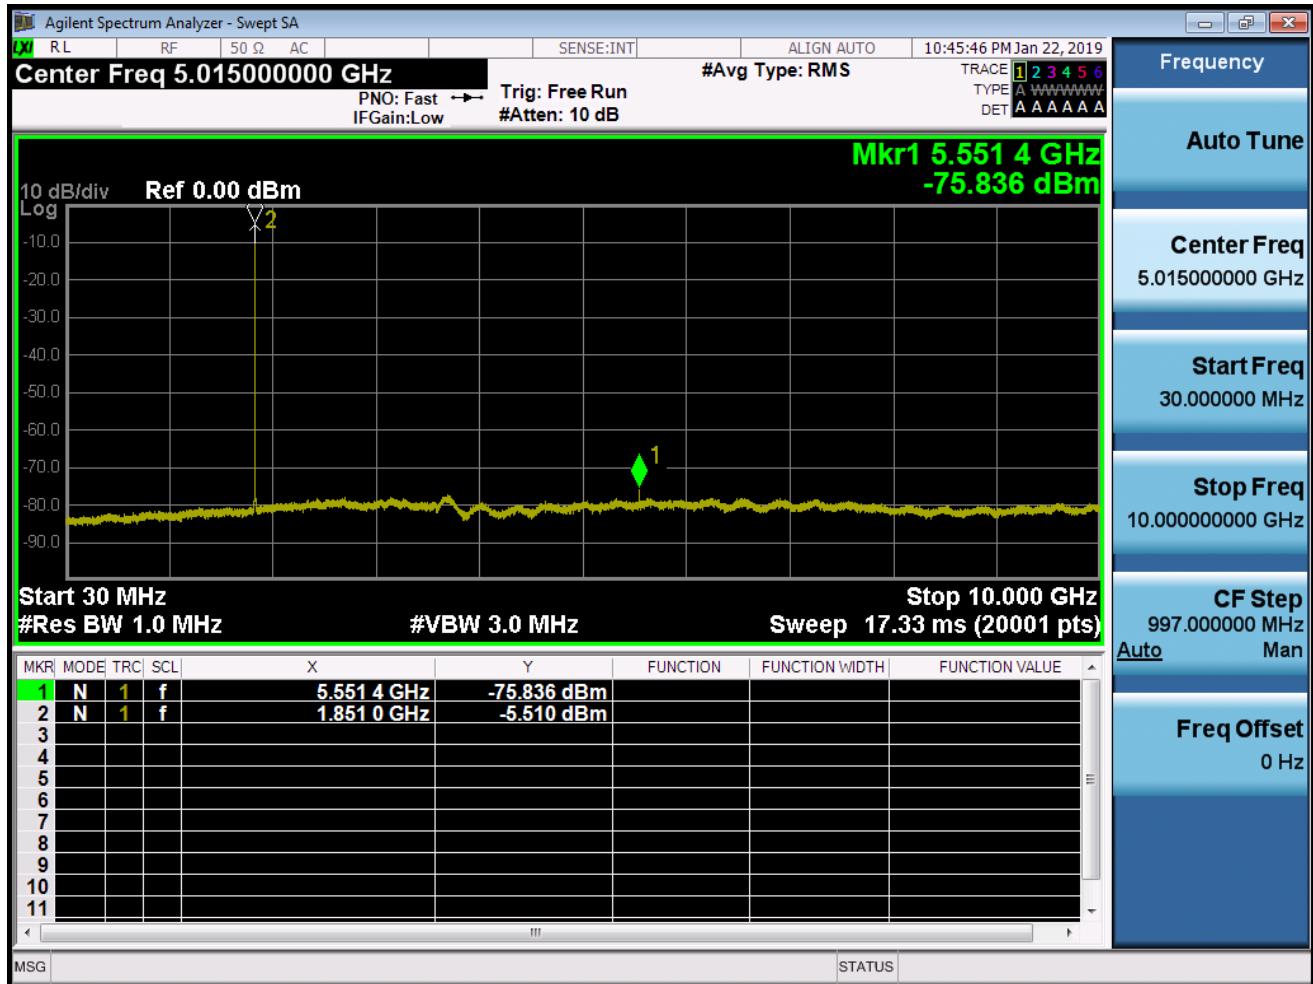

BAND 25. Conducted Spurious\_2 (26047ch\_1.4MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_1.4MHz\_QPSK\_RB 1\_0)

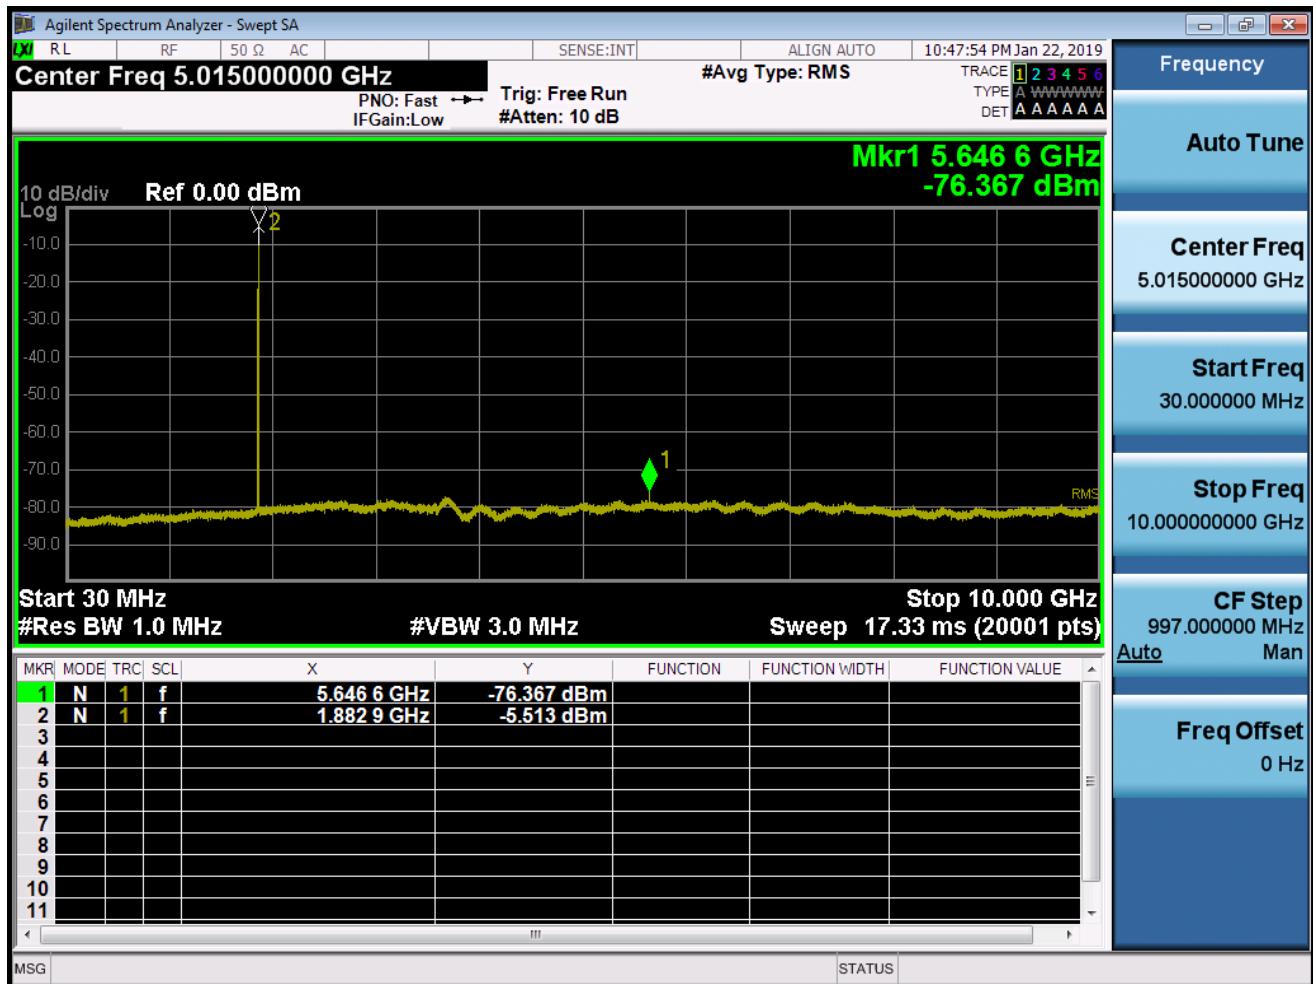

BAND 25. Conducted Spurious\_2 (26365ch\_1.4MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26683 ch\_1.4MHz\_QPSK\_RB 1\_0)

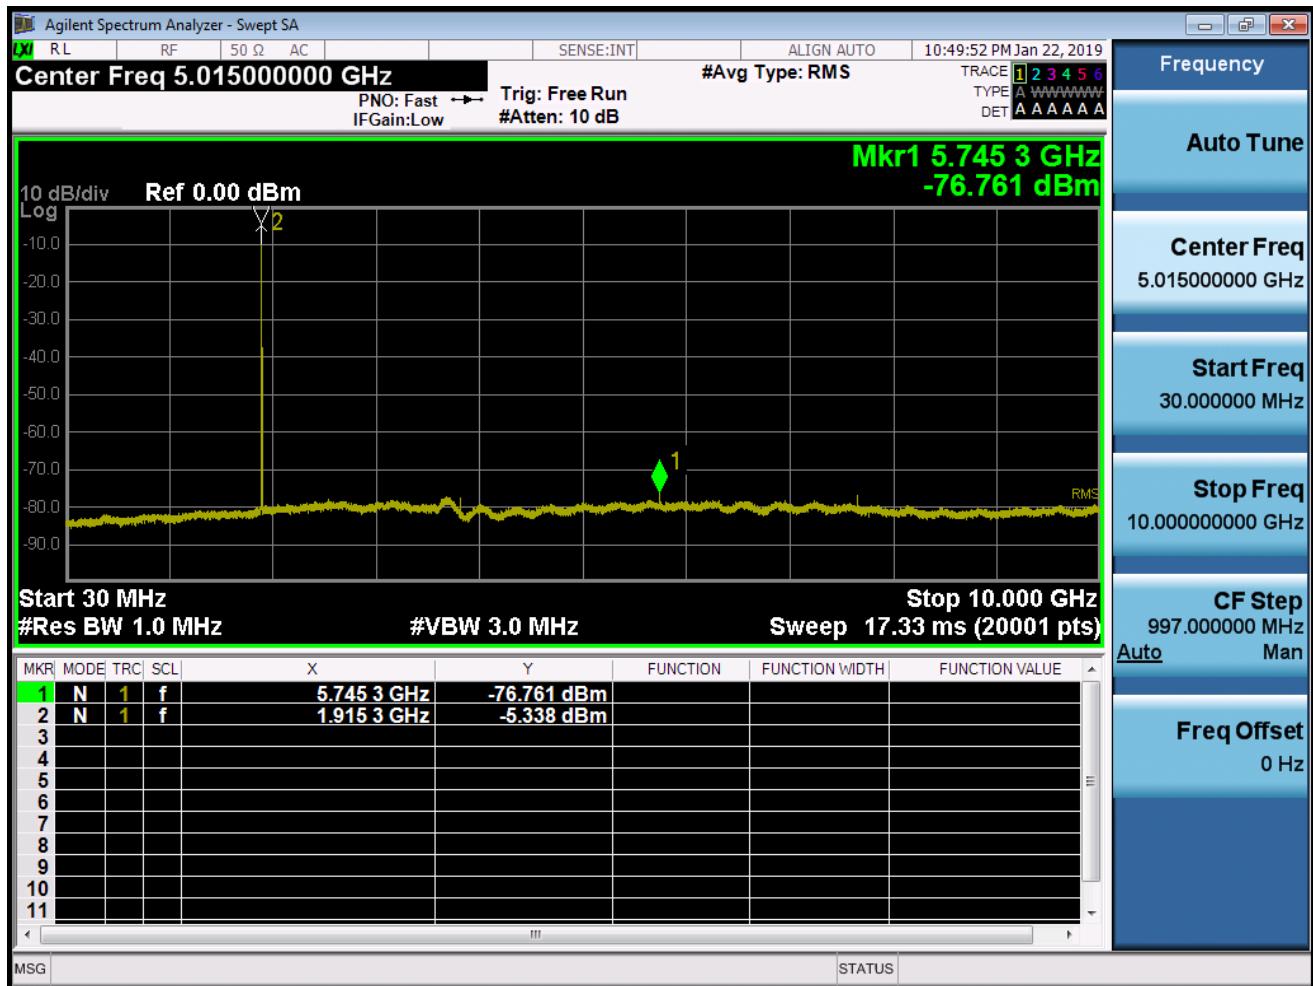

BAND 25. Conducted Spurious\_2 (26683 ch\_1.4MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26055 ch\_3MHz\_QPSK\_RB 1\_0)

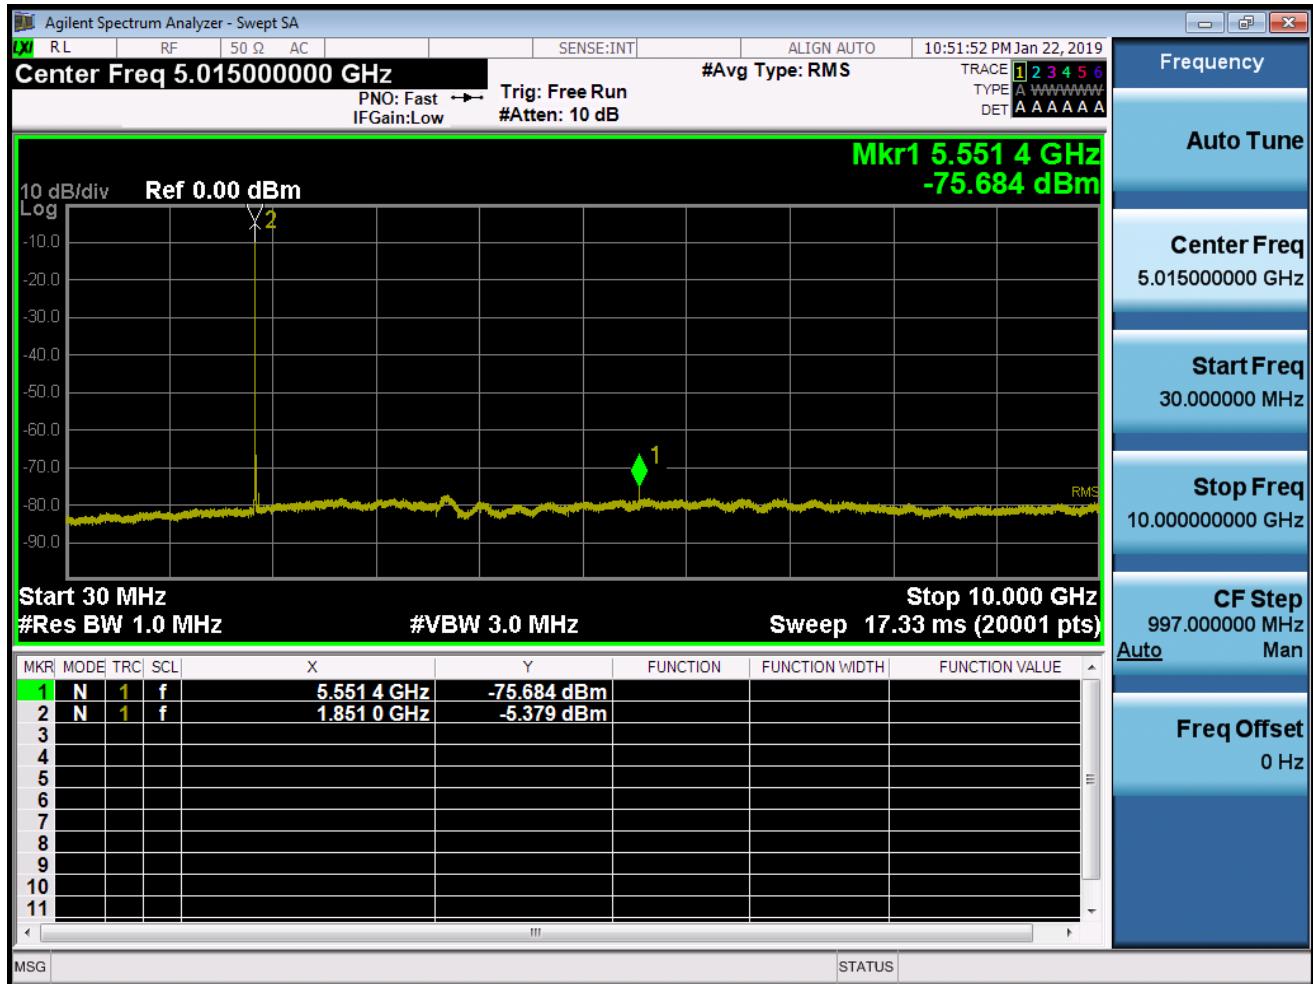

BAND 25. Conducted Spurious\_2 (26055 ch\_3MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_3MHz\_QPSK\_RB 1\_0)

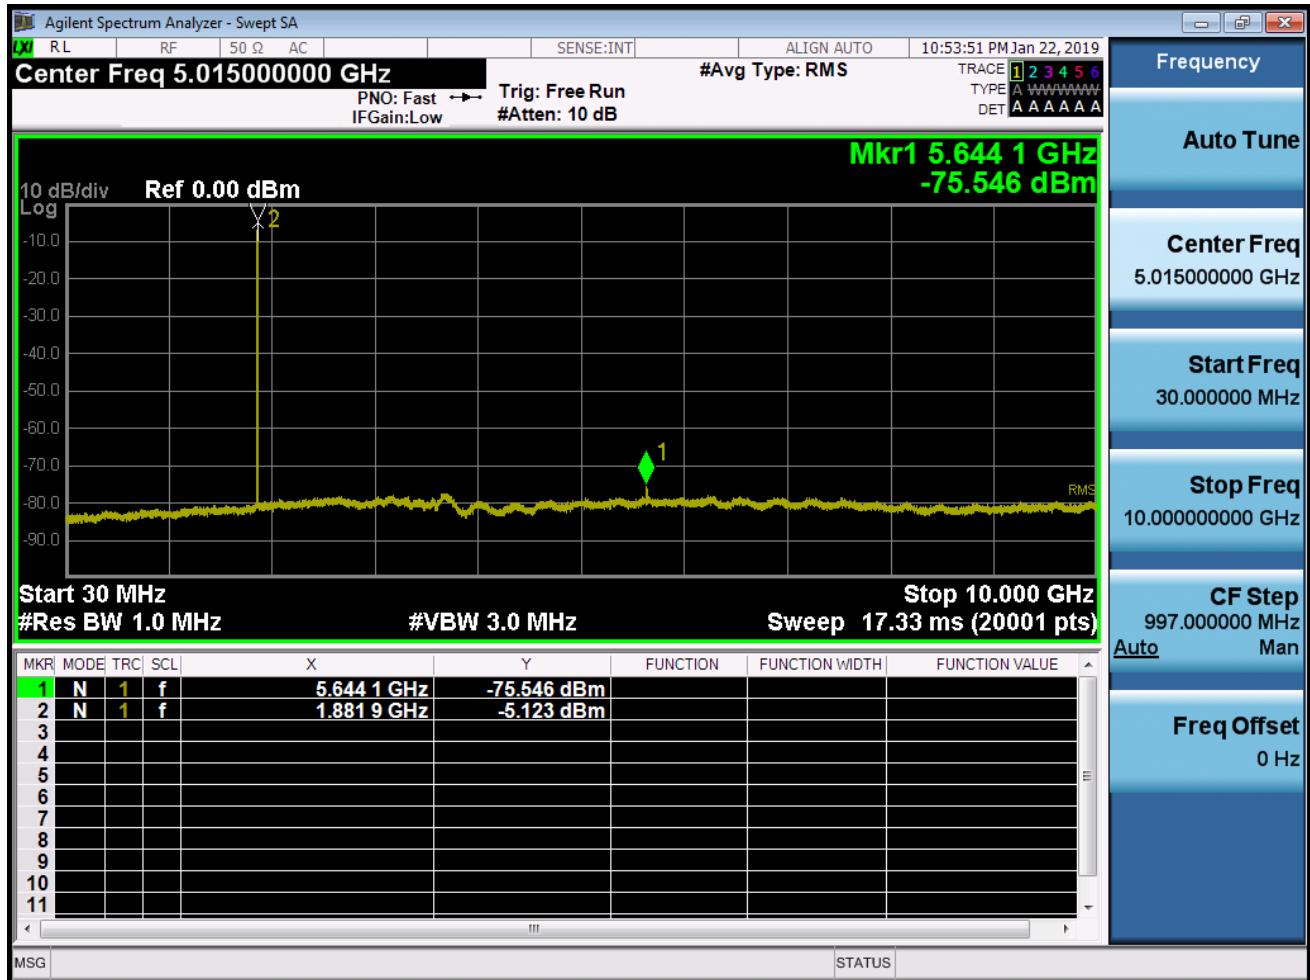

BAND 25. Conducted Spurious\_2 (26365 ch\_3MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26675 ch\_3MHz\_QPSK\_RB 1\_0)

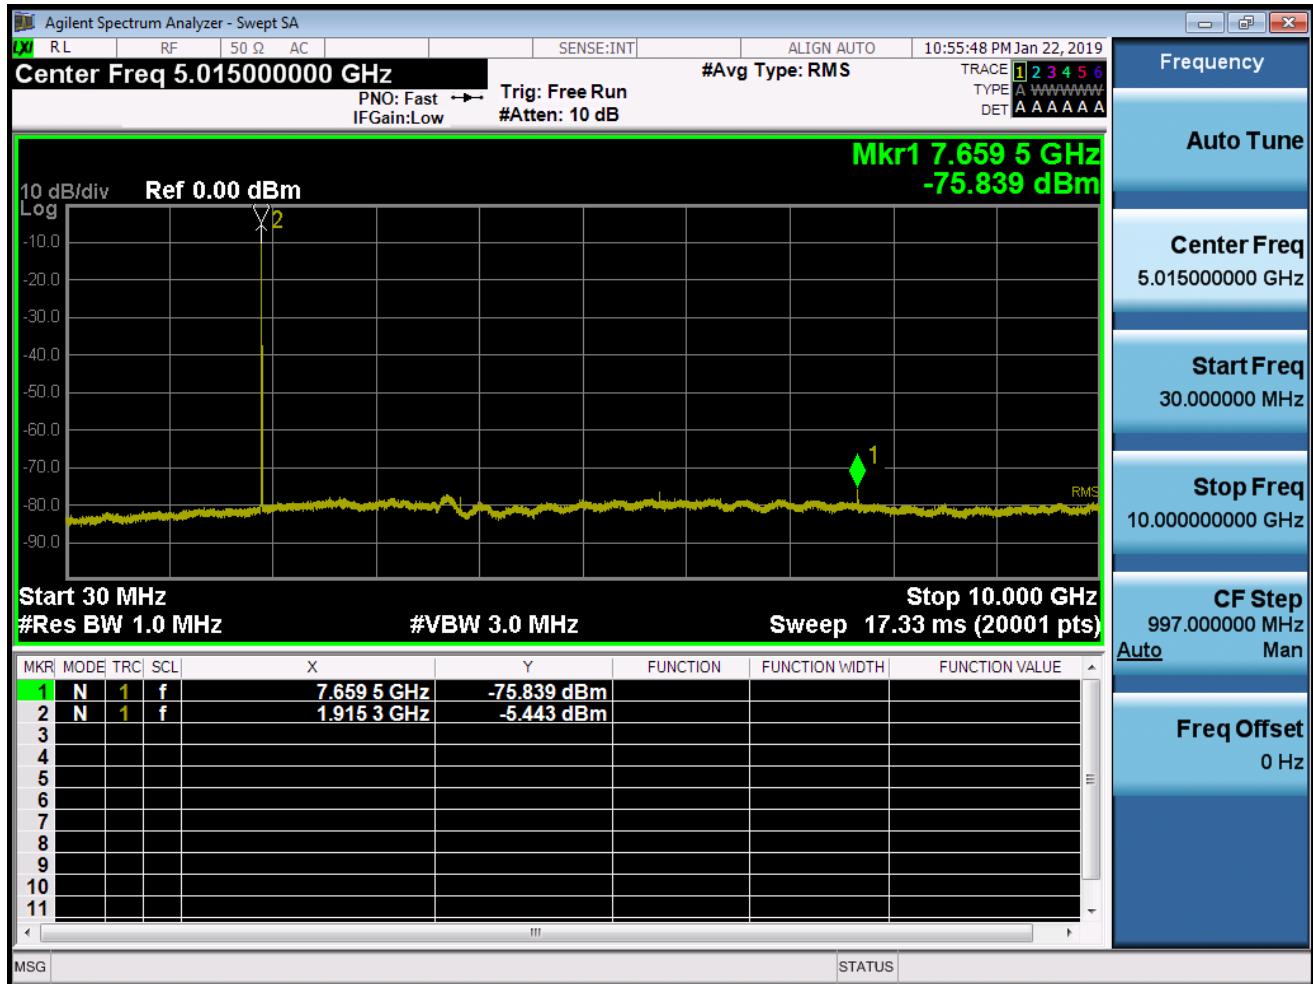

BAND 25. Conducted Spurious\_2 (26675 ch\_3MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26065 ch\_5MHz\_QPSK\_RB 1\_0)

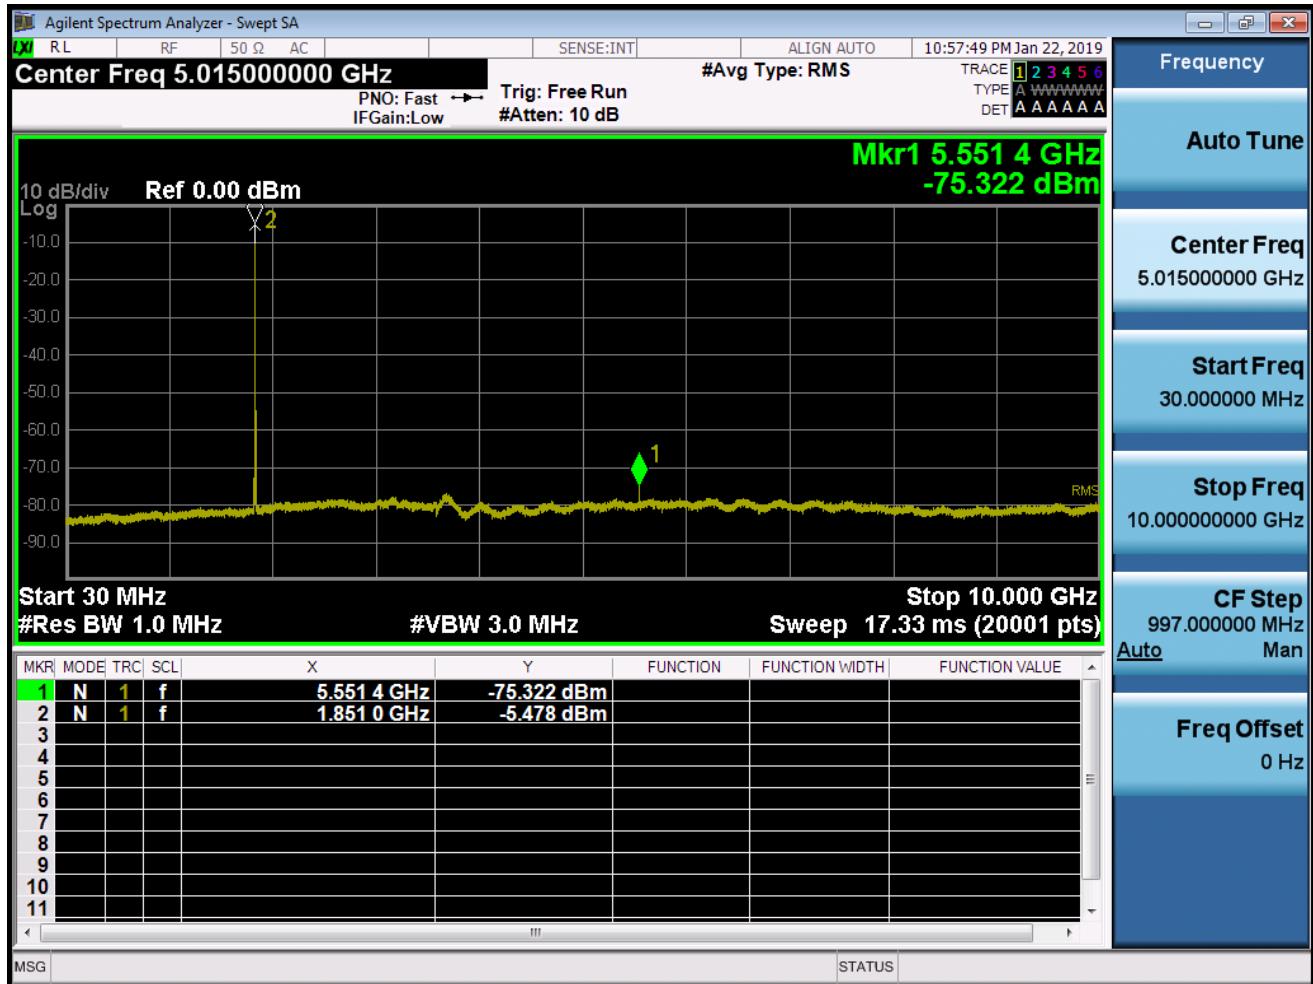

BAND 25. Conducted Spurious\_2 (26065 ch\_5MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_5MHz\_QPSK\_RB 1\_0)

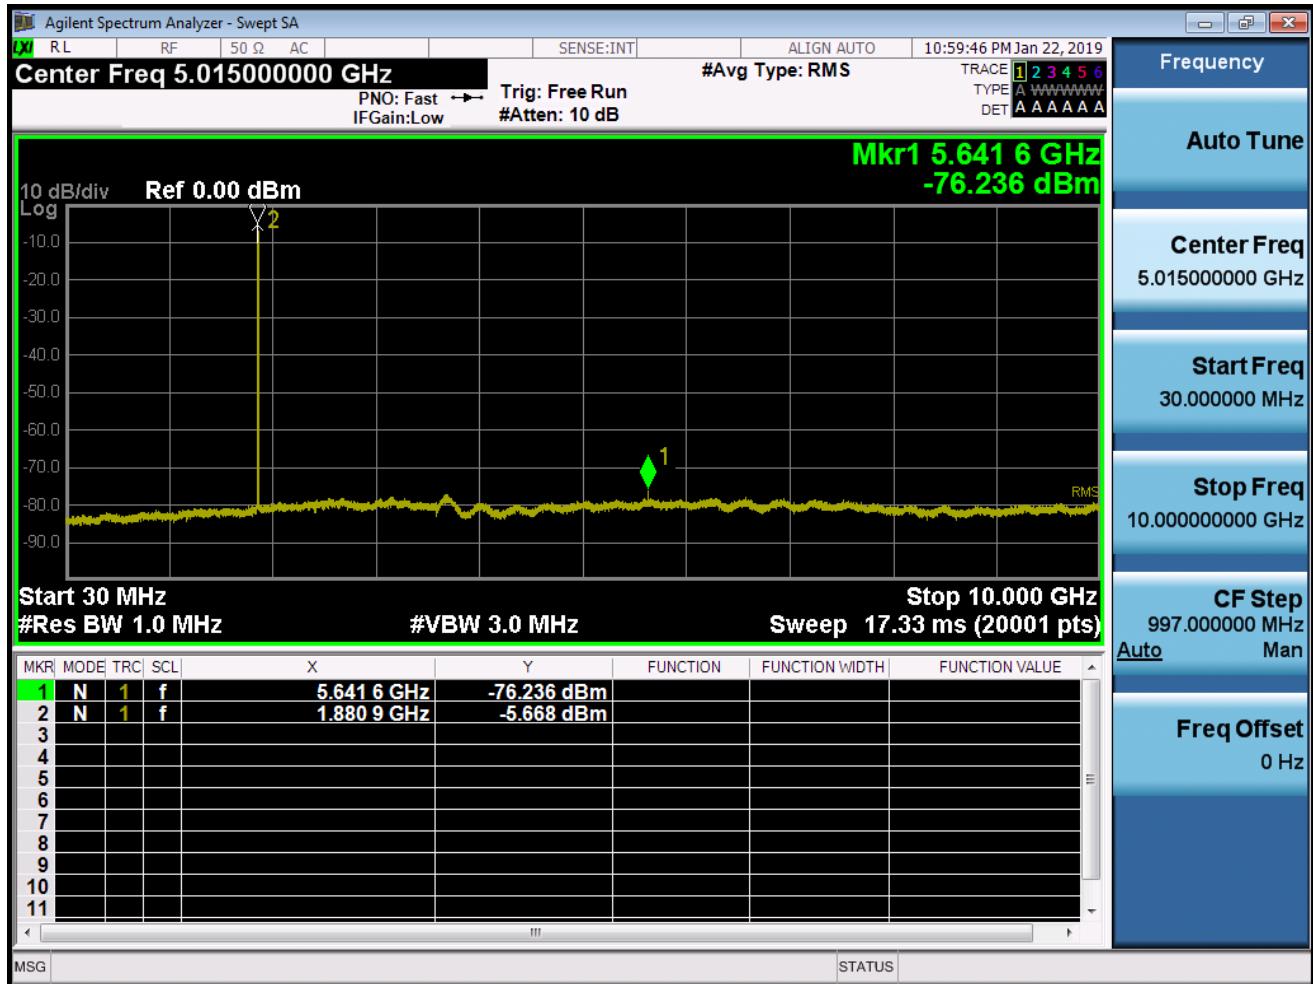

BAND 25. Conducted Spurious\_2 (26365 ch\_5MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26665 ch\_5MHz\_QPSK\_RB 1\_0)

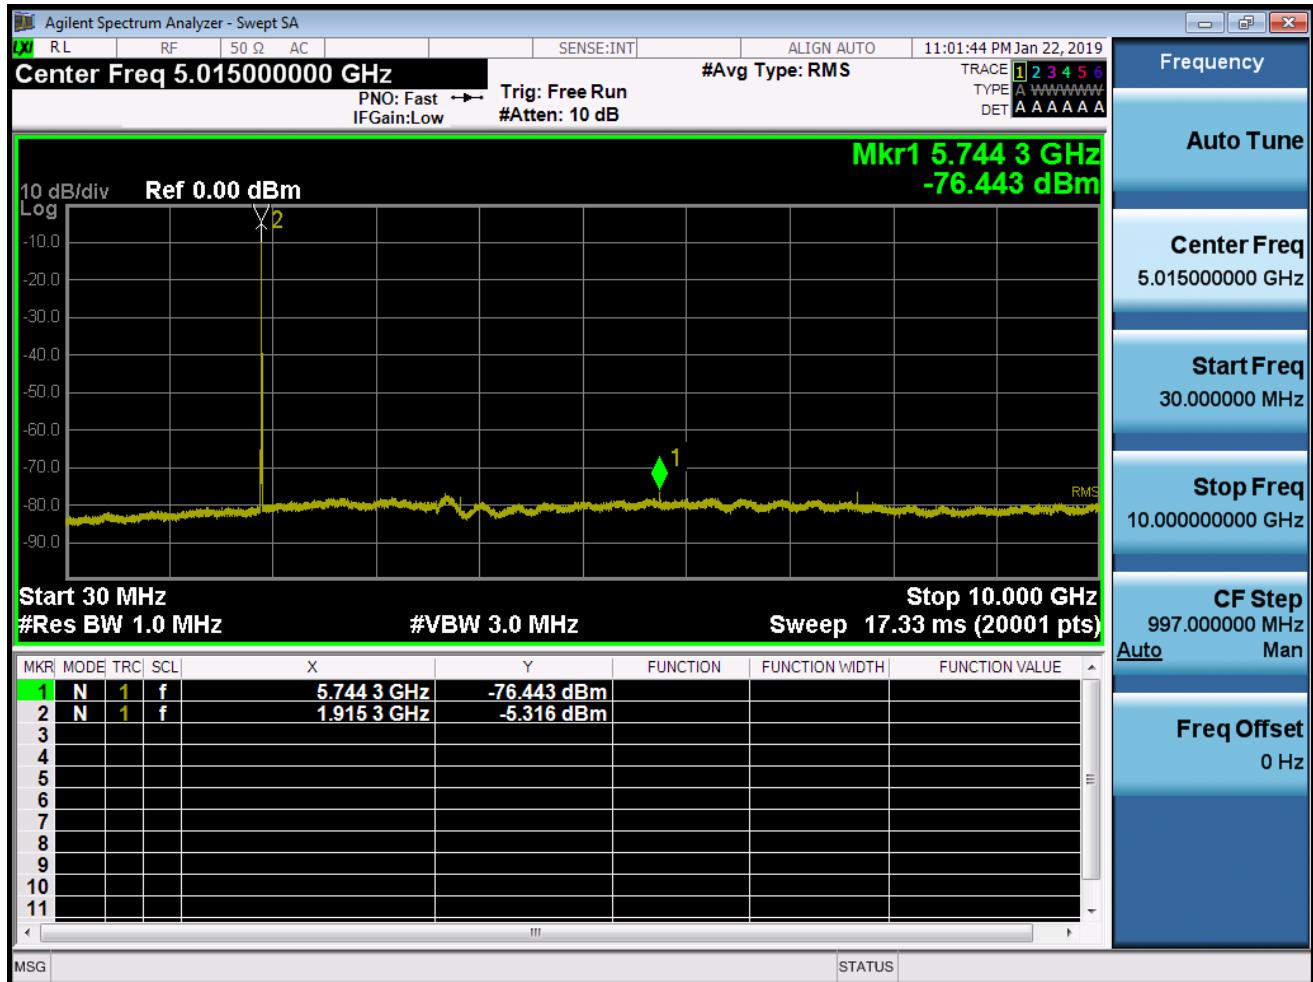

BAND 25. Conducted Spurious\_2 (26665 ch\_5MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26090 ch\_10MHz\_QPSK\_RB 1\_0)

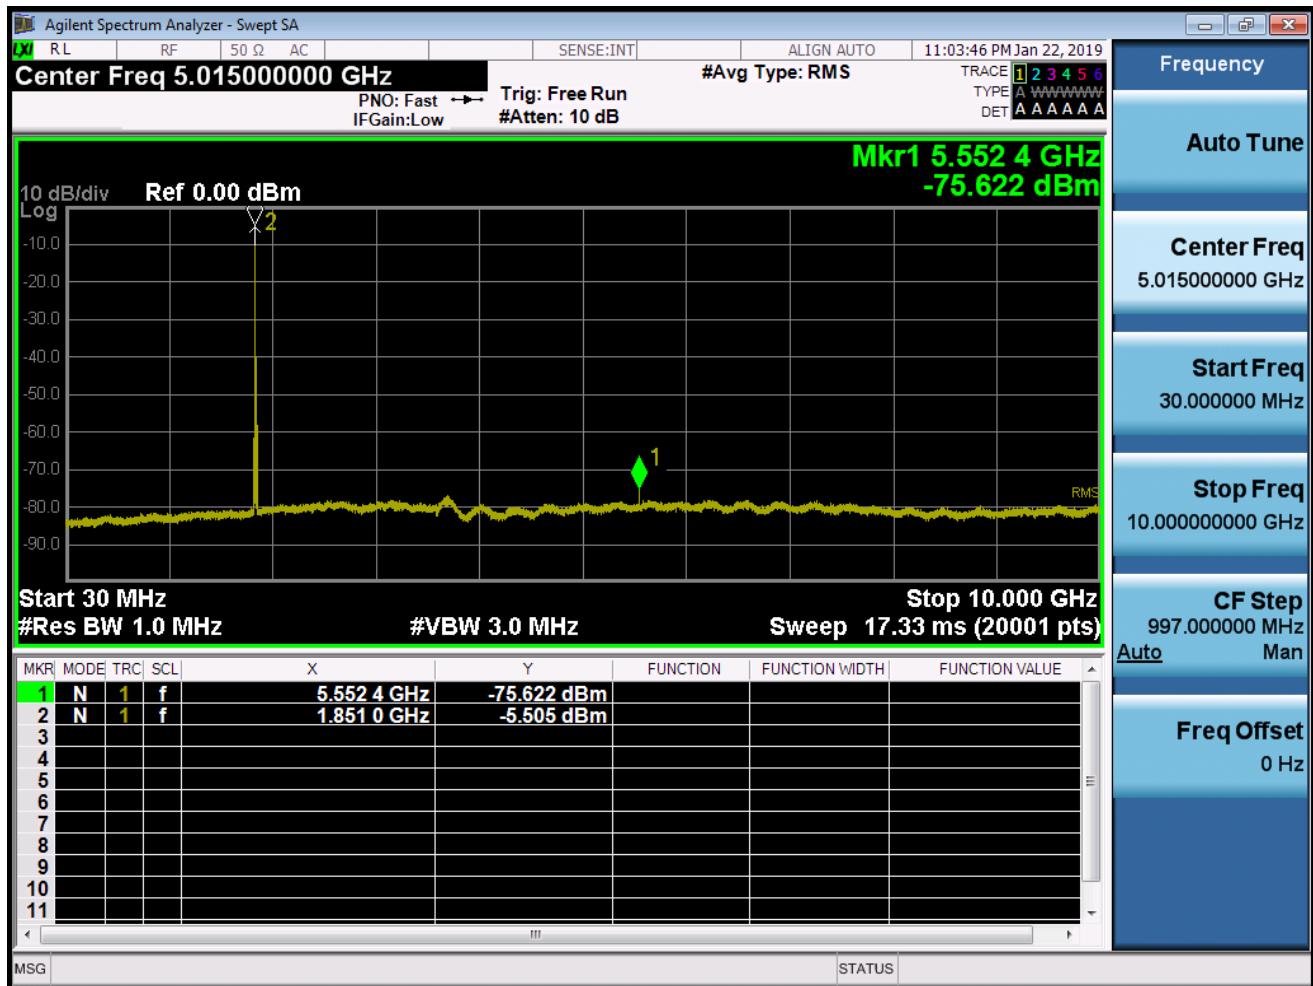

BAND 25. Conducted Spurious\_2 (26090 ch\_10MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_10MHz\_QPSK\_RB 1\_0)

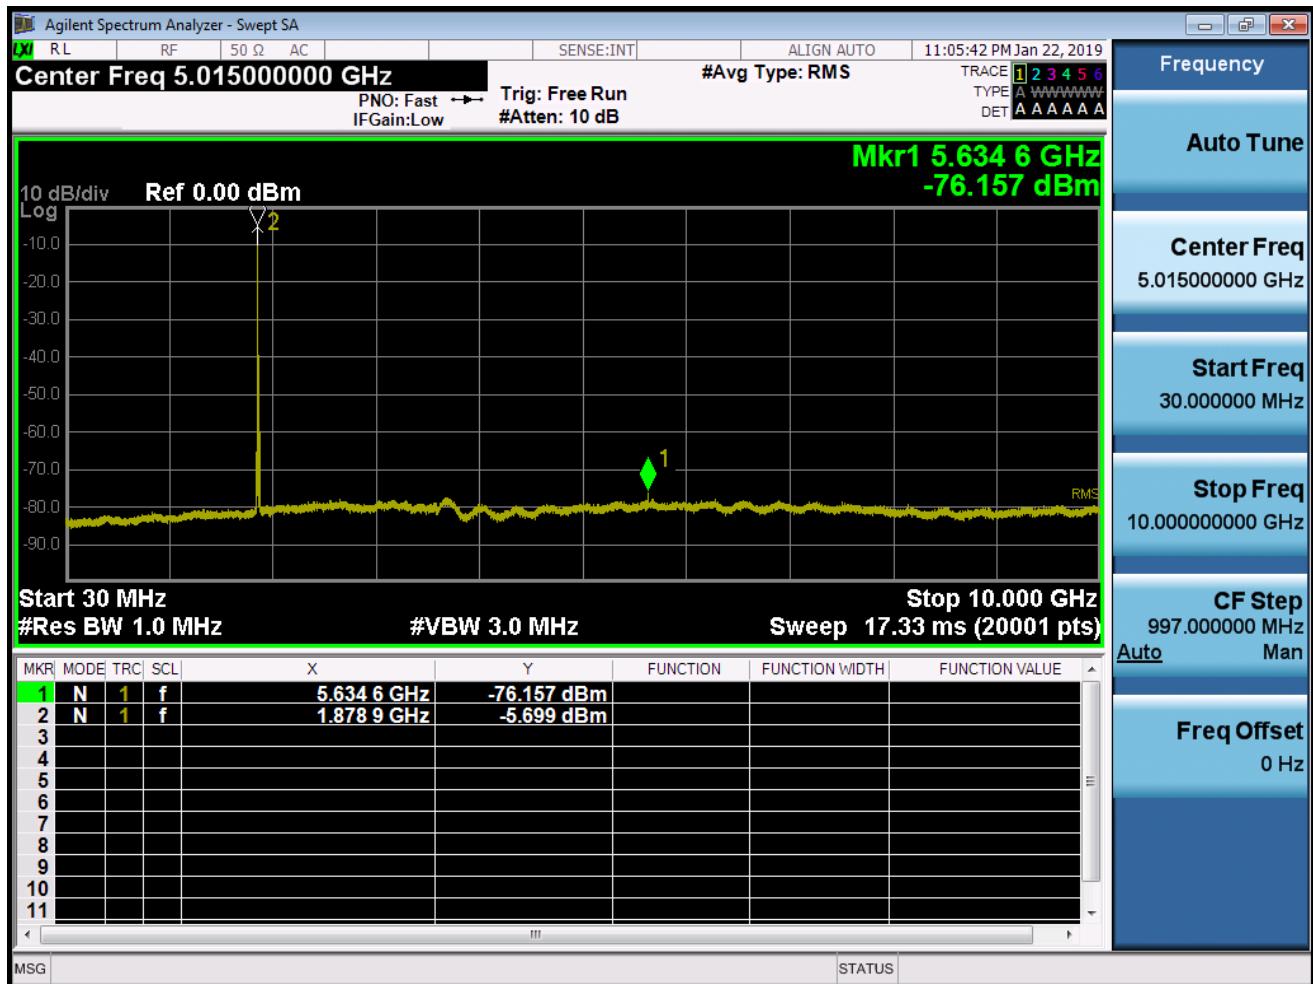

BAND 25. Conducted Spurious\_2 (26365 ch\_10MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26640 ch\_10MHz\_QPSK\_RB 1\_0)

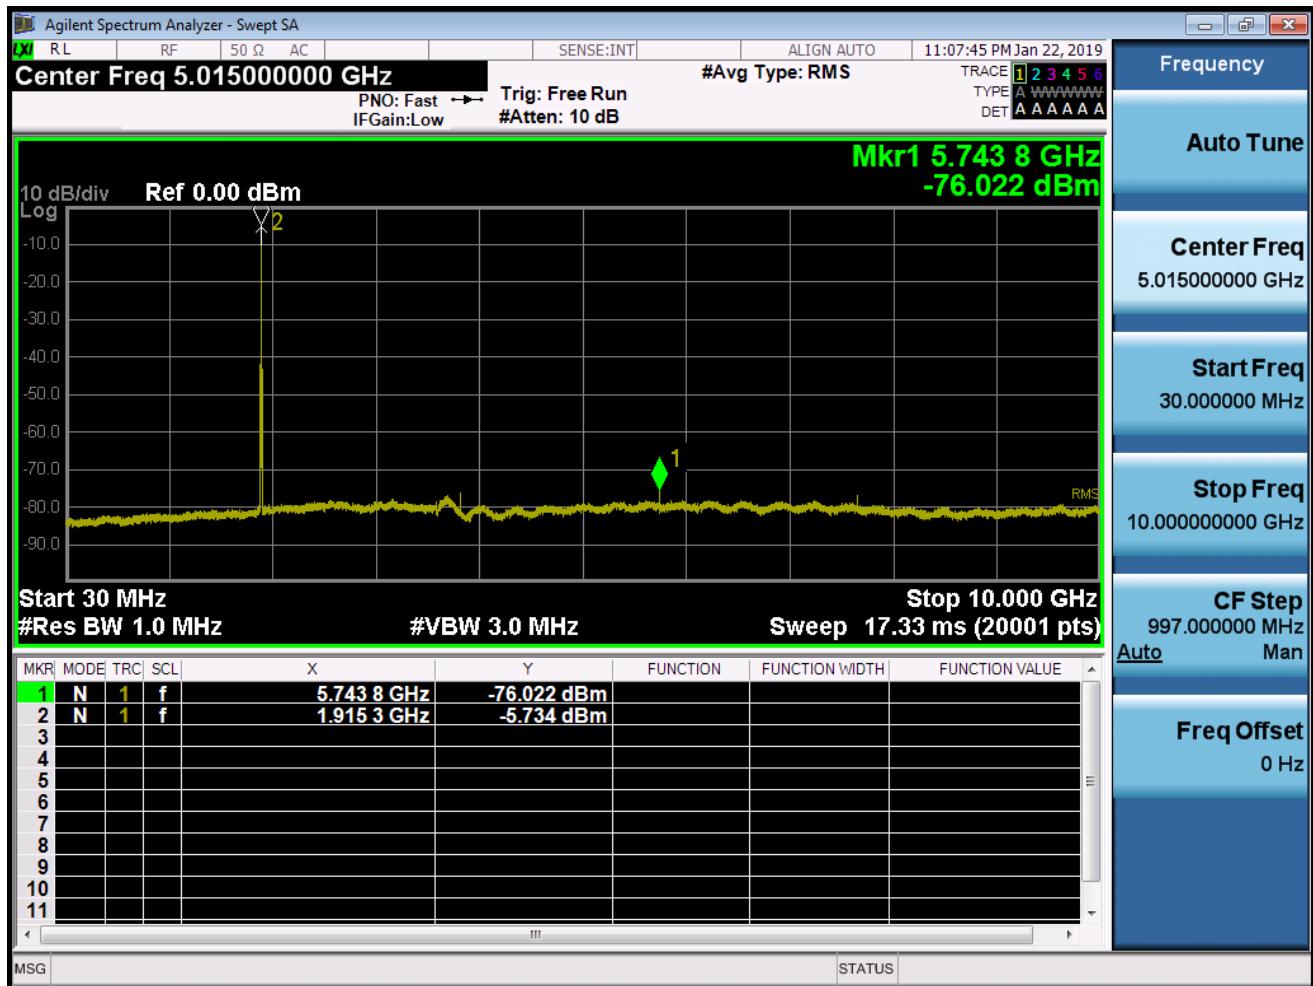

BAND 25. Conducted Spurious\_2 (26640 ch\_10MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26115 ch\_15MHz\_QPSK\_RB 1\_0)

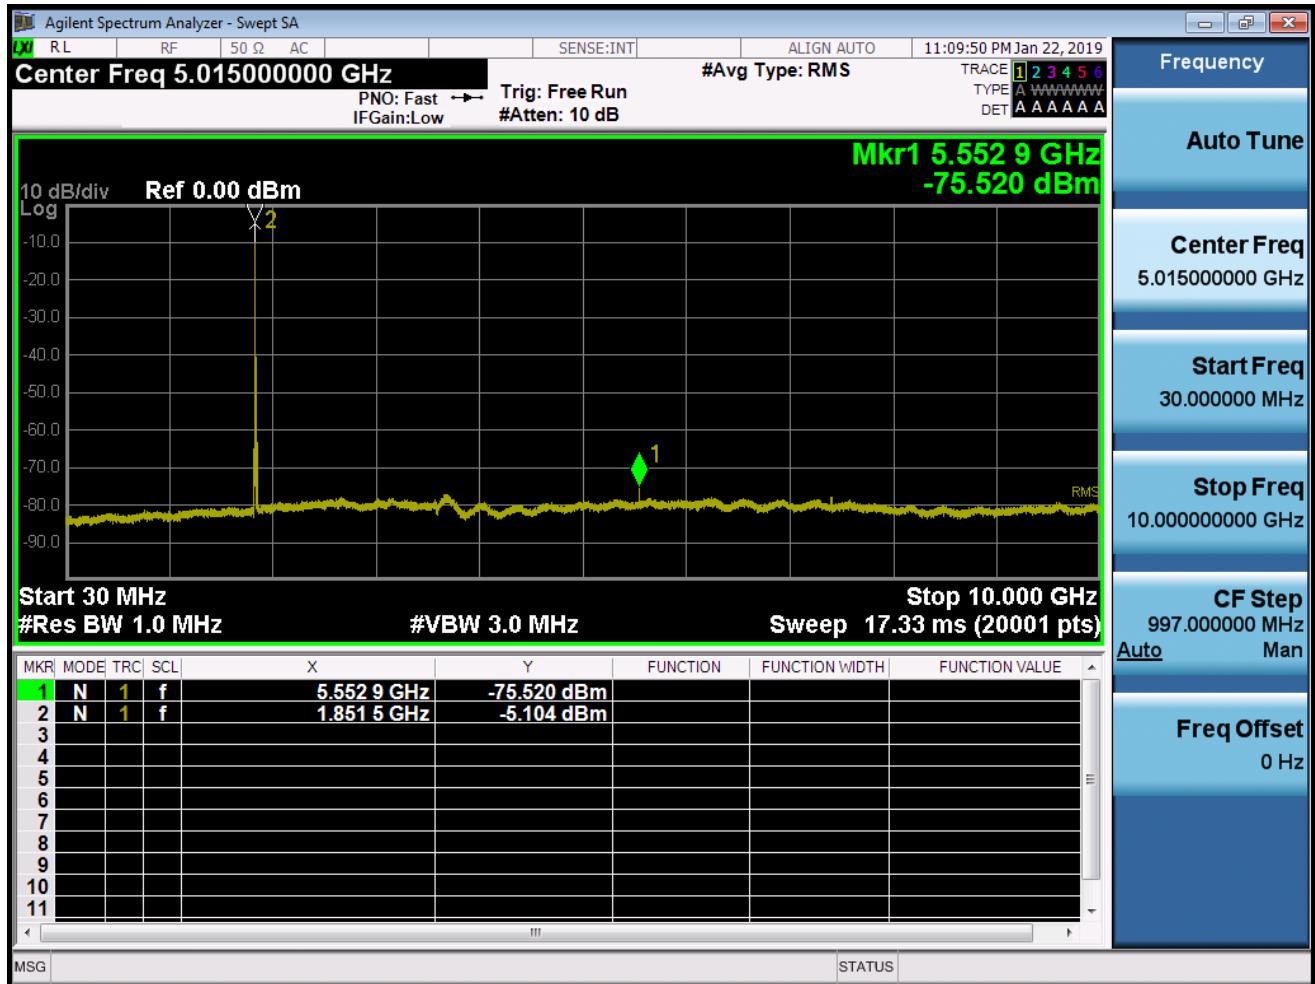

BAND 25. Conducted Spurious\_2 (26115 ch\_15MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_15MHz\_QPSK\_RB 1\_0)

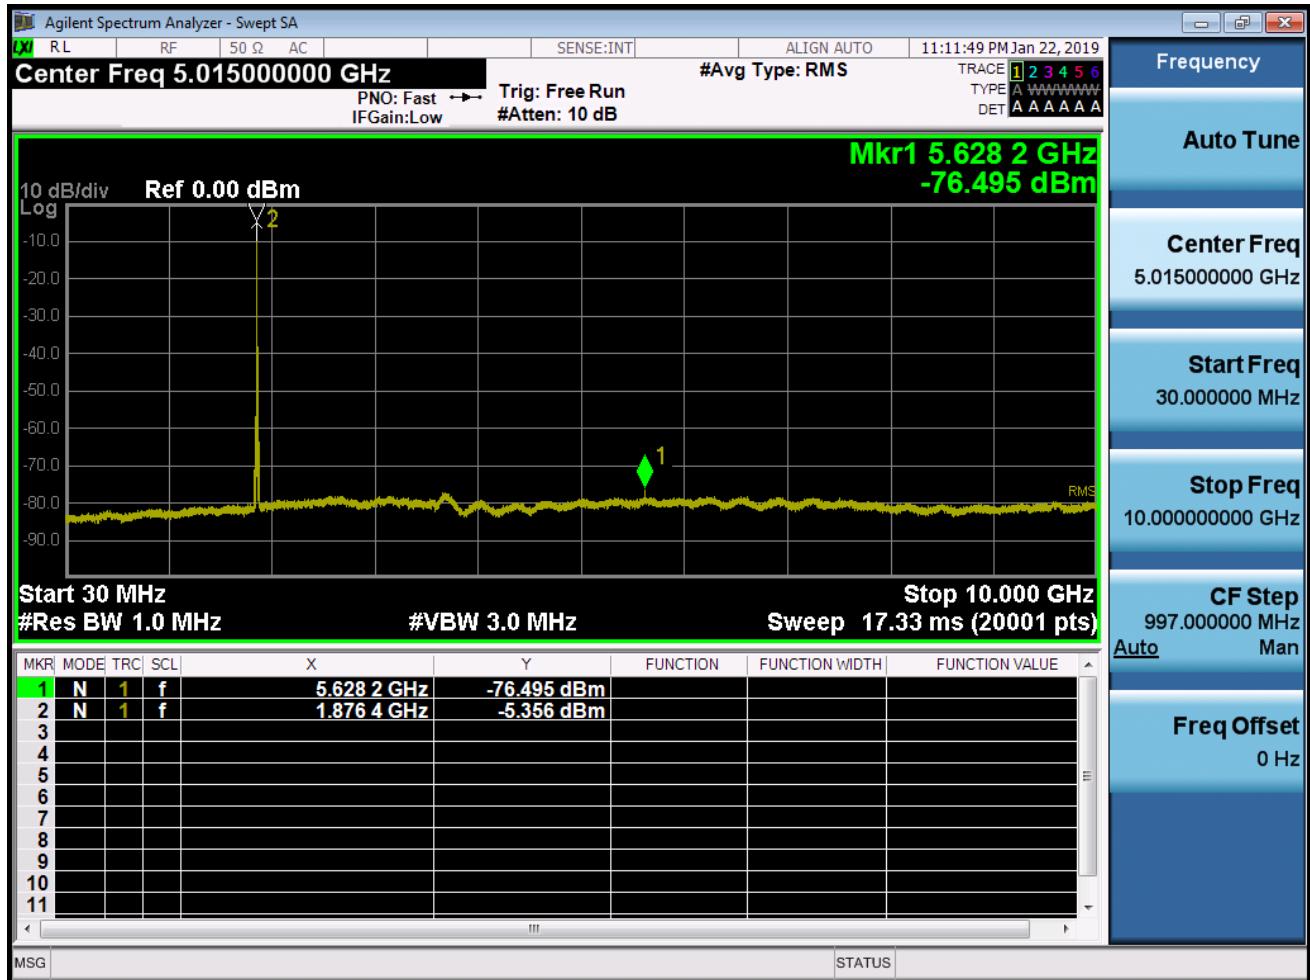

BAND 25. Conducted Spurious\_2 (26365 ch\_15MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26615 ch\_15MHz\_QPSK\_RB 1\_0)

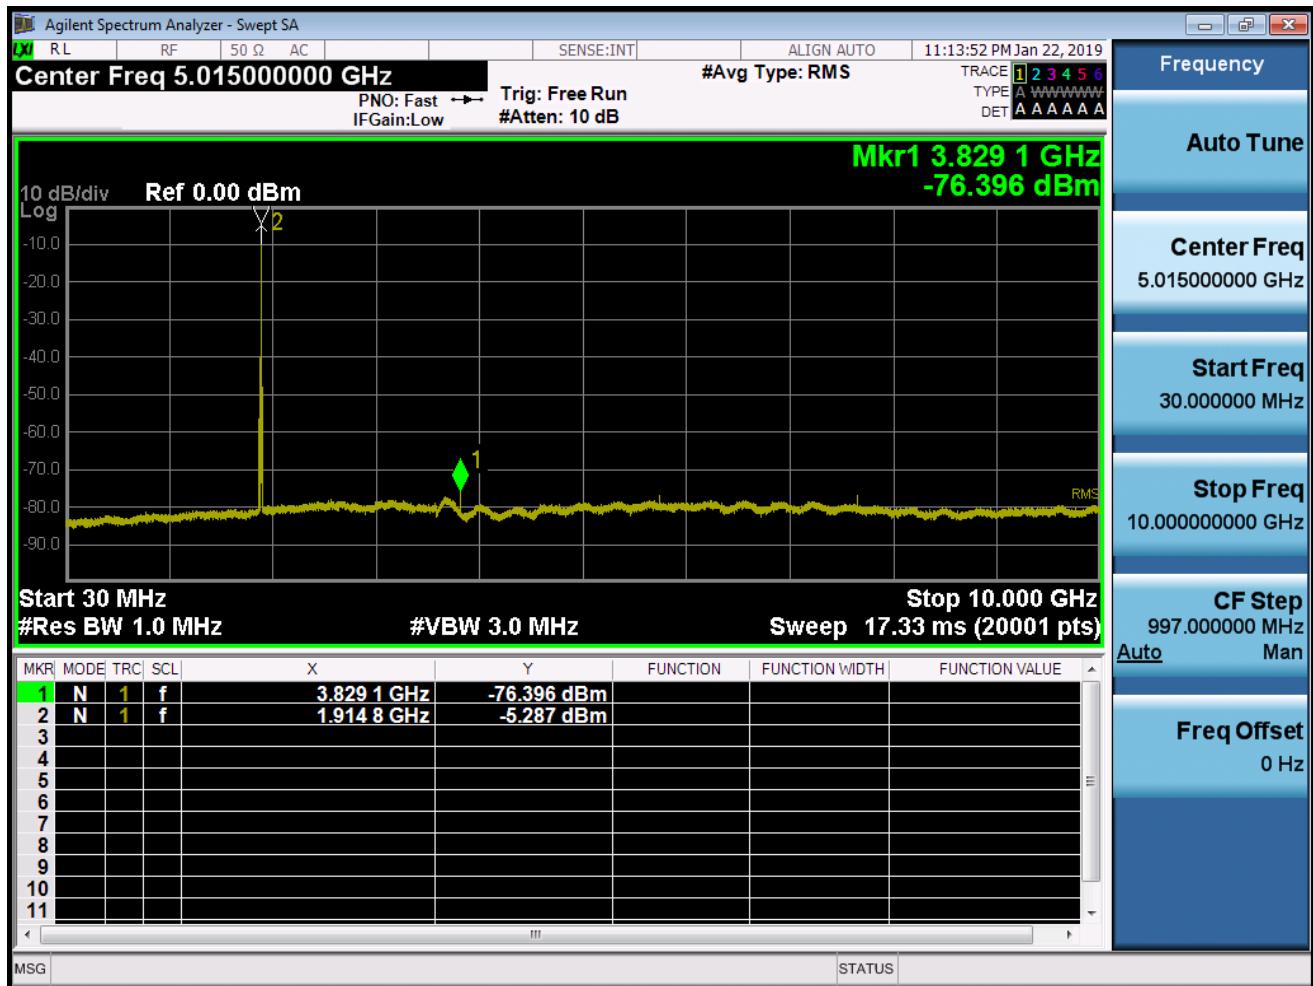

BAND 25. Conducted Spurious\_2 (26615 ch\_15MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26140 ch\_20MHz\_QPSK\_RB 1\_0)

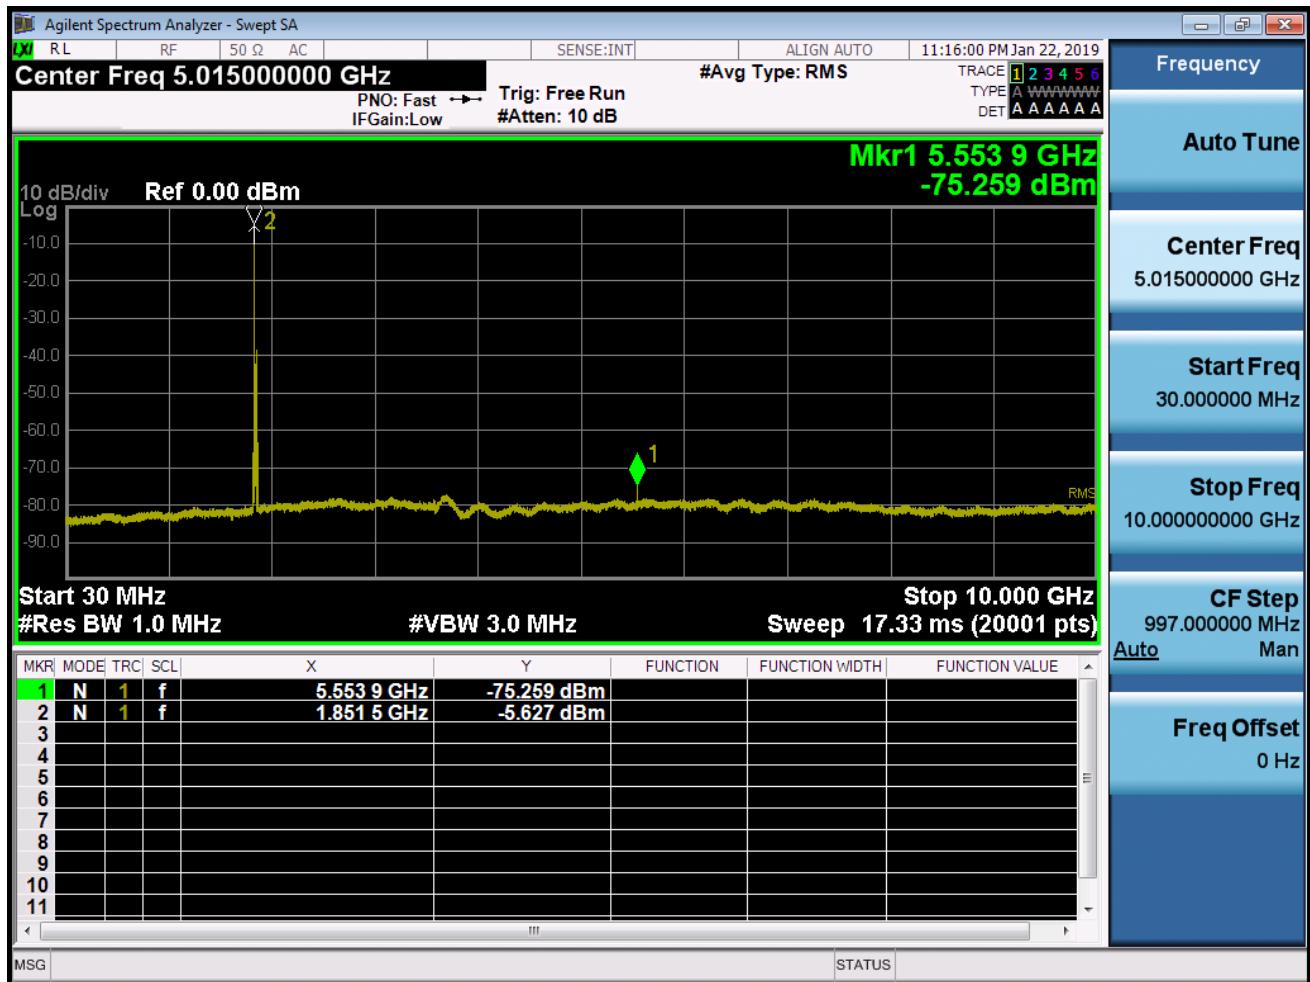

BAND 25. Conducted Spurious\_2 (26140 ch\_20MHz\_QPSK\_RB 1\_0)




BAND 25. Conducted Spurious\_1 (26365 ch\_20MHz\_QPSK\_RB 1\_0)

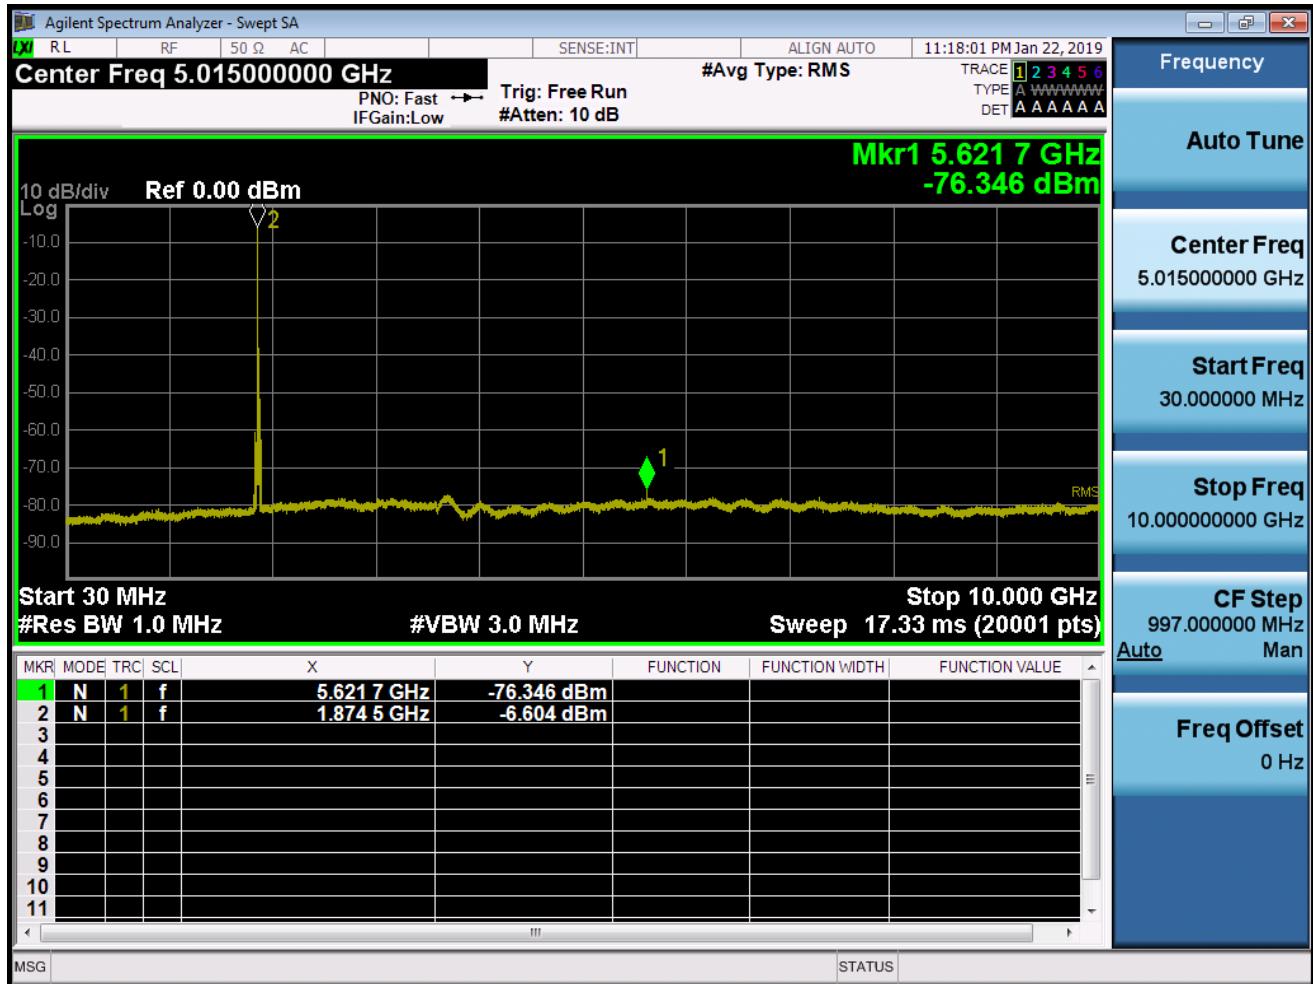

BAND 25. Conducted Spurious\_2 (26365 ch\_20MHz\_QPSK\_RB 1\_0)



BAND 25. Conducted Spurious\_1 (26590 ch\_20MHz\_QPSK\_RB 1\_0)

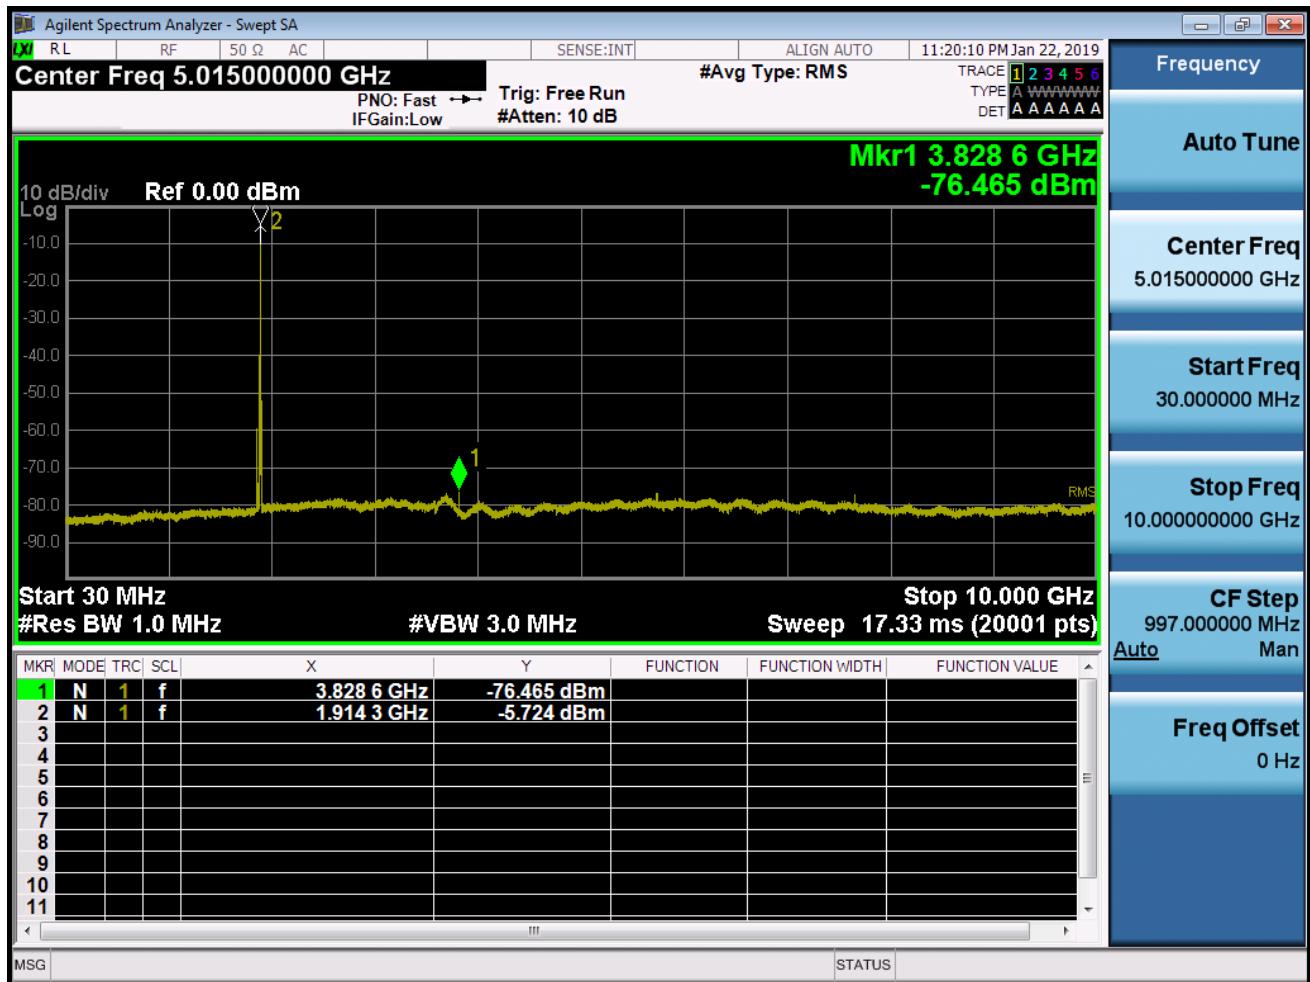

BAND 25. Conducted Spurious\_2 (26590 ch\_20MHz\_QPSK\_RB 1\_0)



## 10. Annex A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1902-FC006-P
2	HCT-RF-1902-FC007-P
3	HCT-RF-1902-FC008-P
4	HCT-RF-1902-FC009-P
5	HCT-RF-1902-FC010-P