

TEST REPORT

FCC LTE B5 Test for T720C
Certification

APPLICANT
Franklin Technology Inc.

REPORT NO.
HCT-RF-2112-FC026

DATE OF ISSUE
December 16, 2021

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

<p>TEST REPORT</p> <p>FCC LTE Test for T720C</p>	<p>REPORT NO. HCT-RF-2112-FC026</p> <p>DATE OF ISSUE December 16, 2021</p> <p>Additional Model -</p>
---	---

Applicant **Franklin Technology Inc.**
906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu, Seoul 08502, South Korea

Eut Type Home Phone Connect
Model Name T720C

FCC ID XHG-T720C

FCC Classification: PCS Licensed Transmitter (PCB)

FCC Rule Part(s): § 22, § 2

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 16, 2021	Initial Release

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : XHG-T720 report. (Report no : HCT-RF-1902-FC009)

If this report is required to confirmation of authenticity, please contact to www.hct.co.kr

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED POWER	10
3.4 RADIATED SPURIOUS EMISSIONS	11
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.10 WORST CASE(RADIATED TEST)	16
3.11 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	23
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 OCCUPIED BANDWIDTH	31
8.4 CONDUCTED SPURIOUS EMISSIONS	32
8.5 BAND EDGE	32
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
9. TEST PLOTS	37
10. ANNEX A_ TEST SETUP PHOTO	82

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	Franklin Technology Inc.
Address:	906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu, Seoul 08502, South Korea
FCC ID:	XHG-T720C
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule(s):	§ 22, § 2
EUT Type:	Home Phone Connect
Model(s):	T720C
Additional Model:	-
Tx Frequency:	824.7 MHz – 848.3 MHz (LTE – Band 5 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 5 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 5 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 5 (10 MHz))
Date(s) of Tests:	Original : December 26, 2018 ~ January 28, 2019 Re-use : November 30, 2021 ~ December 13, 2021
Serial number:	Radiated: TTLC007266 Conducted: TTLC007267

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.422	26.26
		1M10W7D	16QAM	0.342	25.35
LTE – Band5 (3)	825.5 – 847.5	2M71G7D	QPSK	0.429	26.33
		2M70W7D	16QAM	0.349	25.43
LTE – Band5 (5)	826.5 – 846.5	4M49G7D	QPSK	0.422	26.26
		4M50W7D	16QAM	0.333	25.23
LTE – Band5 (10)	829.0 – 844.0	8M95G7D	QPSK	0.452	26.56
		8M98W7D	16QAM	0.333	25.23

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Home Phone Connect with CDMA(BC0, 1) and LTE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

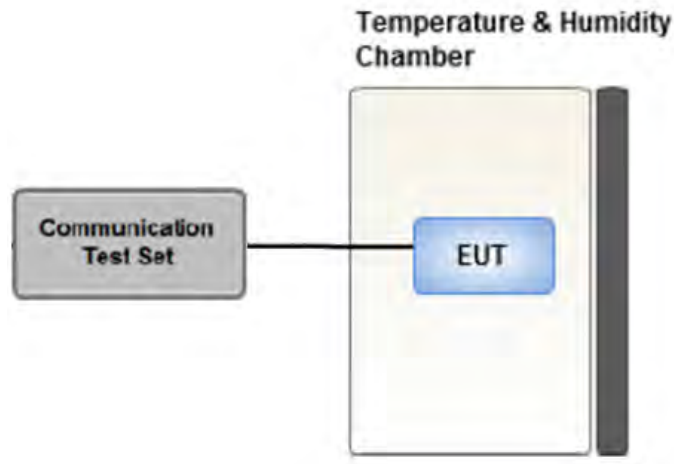

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

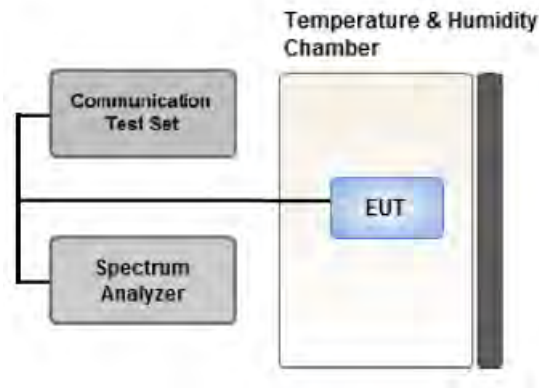

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

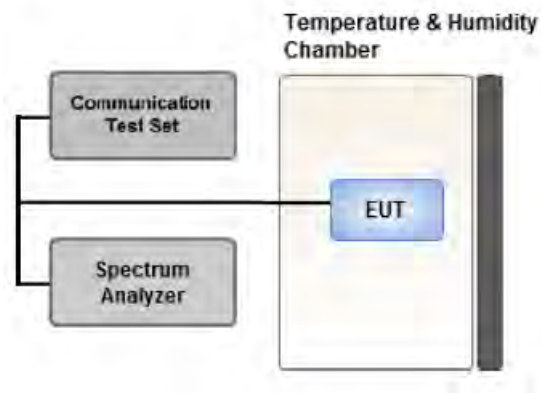

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

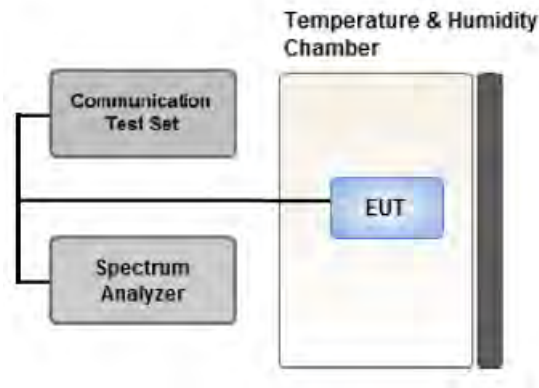

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

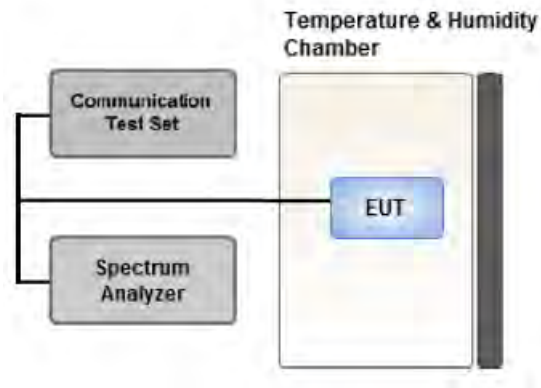

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
mode : A wall-hanging, Table top (Worst : Table top)
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[Worst case]				
Test Description	Modulation	RB size	RB offset	Axis
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.11 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
1.4, 3, 5, 10	Low, High	Full RB	0		
	Low, Mid, High	1	0		
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a)	< 43 + 10log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
824.7	20407	1	0	23.40	22.28	26.13	25.01
		1	3	23.40	22.35	26.13	25.08
		1	5	23.33	22.13	26.06	24.86
		3	0	23.33	22.36	26.06	25.09
		3	1	23.50	22.57	26.23	25.30
		3	3	23.30	22.31	26.03	25.04
		6	0	22.41	21.42	25.14	24.15
836.5	20525	1	0	23.34	22.58	26.07	25.31
		1	3	23.53	22.58	26.26	25.31
		1	5	23.40	22.56	26.13	25.29
		3	0	23.37	22.54	26.10	25.27
		3	1	23.36	22.61	26.09	25.34
		3	3	23.37	22.62	26.10	25.35
		6	0	22.36	21.40	25.09	24.13
848.3	20643	1	0	23.42	22.28	26.15	25.01
		1	3	23.24	22.43	25.97	25.16
		1	5	23.21	22.20	25.94	24.93
		3	0	23.32	22.34	26.05	25.07
		3	1	23.28	22.31	26.01	25.04
		3	3	23.27	22.27	26.00	25.00
		6	0	22.32	21.20	25.05	23.93

LTE Conducted Average Output Powers (1.4 MHz Band 5 LTE)

Note:

1. E.R.P = Conducted Power + Peak. Ant Gain(dBd)
2. Peak. Ant Gain(dBi) = 4.876 dBi
3. Peak. Ant Gain(dBd) = 4.876 - 2.15 = 2.726 dBd
4. Limit = 7 Watts(=38.45dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
825.5	20415	1	0	23.41	22.36	26.14	25.09
		1	7	23.46	22.44	26.19	25.17
		1	14	23.49	22.45	26.22	25.18
		8	0	22.32	21.33	25.05	24.06
		8	3	22.35	21.36	25.08	24.09
		8	7	22.27	21.37	25.00	24.10
		15	0	22.34	21.41	25.07	24.14
836.5	20525	1	0	23.29	22.17	26.02	24.90
		1	7	23.38	22.61	26.11	25.34
		1	14	23.30	22.44	26.03	25.17
		8	0	22.29	21.54	25.02	24.27
		8	3	22.28	21.62	25.01	24.35
		8	7	22.26	21.62	24.99	24.35
		15	0	22.19	21.35	24.92	24.08
847.5	20635	1	0	23.56	22.25	26.29	24.98
		1	7	23.60	22.70	26.33	25.43
		1	14	23.39	22.09	26.12	24.82
		8	0	22.53	21.14	25.26	23.87
		8	3	22.42	21.10	25.15	23.83
		8	7	22.33	21.40	25.06	24.13
		15	0	22.41	21.47	25.14	24.20

LTE Conducted Average Output Powers (3 MHz Band 5 LTE)

Note:

1. E.R.P = Conducted Power + Peak. Ant Gain(dBd)
2. Peak. Ant Gain(dBi) = 4.876 dBi
3. Peak. Ant Gain(dBd) = 4.876 - 2.15 = 2.726 dBd
4. Limit = 7 Watts(=38.45dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
826.5	20425	1	0	23.34	22.17	26.07	24.90
		1	12	23.48	22.50	26.21	25.23
		1	24	23.37	22.44	26.10	25.17
		12	0	22.34	21.21	25.07	23.94
		12	6	22.39	21.31	25.12	24.04
		12	11	22.49	21.35	25.22	24.08
		25	0	22.39	21.45	25.12	24.18
836.5	20525	1	0	23.27	22.15	26.00	24.88
		1	12	23.46	22.17	26.19	24.90
		1	24	23.37	22.08	26.10	24.81
		12	0	22.23	21.15	24.96	23.88
		12	6	22.26	21.29	24.99	24.02
		12	11	22.25	21.27	24.98	24.00
		25	0	22.16	21.13	24.89	23.86
846.5	20625	1	0	23.33	22.01	26.06	24.74
		1	12	23.53	22.25	26.26	24.98
		1	24	23.27	22.06	26.00	24.79
		12	0	22.45	21.31	25.18	24.04
		12	6	22.43	21.32	25.16	24.05
		12	11	22.42	21.31	25.15	24.04
		25	0	22.39	21.35	25.12	24.08

LTE Conducted Average Output Powers (5 MHz Band 5 LTE)

Note:

1. E.R.P = Conducted Power + Peak. Ant Gain(dBd)
2. Peak. Ant Gain(dBi) = 4.876 dBi
3. Peak. Ant Gain(dBd) = 4.876 - 2.15 = 2.726 dBd
4. Limit = 7 Watts(=38.45dBm)

Frequency (MHz)	Channel	Resource Block Size	Resource Block Offset	Conducted Power [dBm]		E.R.P [dBm]	
				QPSK	16QAM	QPSK	16QAM
829.0	20450	1	0	23.39	22.10	26.12	24.83
		1	24	23.65	22.43	26.38	25.16
		1	49	23.32	22.13	26.05	24.86
		25	0	22.42	21.38	25.15	24.11
		25	12	22.45	21.36	25.18	24.09
		25	24	22.35	21.39	25.08	24.12
		50	0	22.37	21.28	25.10	24.01
836.5	20525	1	0	23.36	22.06	26.09	24.79
		1	24	23.73	22.50	26.46	25.23
		1	49	23.41	22.17	26.14	24.90
		25	0	22.26	21.30	24.99	24.03
		25	12	22.24	21.37	24.97	24.10
		25	24	22.31	21.36	25.04	24.09
		50	0	22.27	21.14	25.00	23.87
844.0	20600	1	0	23.52	22.23	26.25	24.96
		1	24	23.83	22.35	26.56	25.08
		1	49	23.40	22.09	26.13	24.82
		25	0	22.53	21.25	25.26	23.98
		25	12	22.52	21.45	25.25	24.18
		25	24	22.49	21.52	25.22	24.25
		50	0	22.40	21.26	25.13	23.99

LTE Conducted Average Output Powers (10 MHz Band 5 LTE)

Note:

1. E.R.P = Conducted Power + Peak. Ant Gain(dBd)
2. Peak. Ant Gain(dBi) = 4.876 dBi
3. Peak. Ant Gain(dBd) = 4.876 - 2.15 = 2.726 dBd
4. Limit = 7 Watts(=38.45dBm)

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B5
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: 43 + 10 log₁₀ (W)

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
20407 (824.7)	1,649.40	-49.47	7.46	-58.36	1.27	V	-54.32	41.32
	2,474.10	-51.53	8.64	-57.66	1.58	H	-52.75	39.75
	3,298.80	-56.93	10.30	-62.98	1.86	V	-56.69	43.69
20525 (836.5)	1,673.00	-55.01	7.53	-64.00	1.28	H	-59.90	46.90
	2,509.50	-53.99	8.83	-60.31	1.62	V	-55.25	42.25
	3,346.00	-57.64	10.51	-63.96	1.91	V	-57.51	44.51
20643 (848.3)	1,696.60	-49.89	7.76	-58.97	1.29	H	-54.65	41.65
	2,544.90	-55.62	8.86	-61.65	1.62	H	-56.56	43.56
	3,393.20	-56.63	10.56	-62.89	1.95	V	-56.43	43.43

Note:

1. Limit = $43 + 10 \log_{10} (W) = -13.0 \text{ dBm}$

- ▣ MODE: LTE B5
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
20415 (825.5)	1,651.00	-34.91	7.46	-43.80	1.27	H	-39.76	26.76
	2,476.50	-50.16	8.64	-56.29	1.58	H	-51.38	38.38
	3,302.00	-57.52	10.30	-63.57	1.86	H	-57.28	44.28
20525 (836.5)	1,673.00	-52.30	7.53	-61.29	1.28	H	-57.19	44.19
	2,509.50	-54.09	8.83	-60.41	1.62	H	-55.35	42.35
	3,346.00	-57.65	10.51	-63.97	1.91	V	-57.52	44.52
20635 (847.5)	1,695.00	-48.77	7.76	-57.85	1.29	H	-53.53	40.53
	2,542.50	-52.10	8.86	-58.13	1.62	H	-53.04	40.04
	3,390.00	-58.24	10.56	-64.50	1.95	V	-58.04	45.04

Note:

1. Limit = $43 + 10 \log_{10}(W) = -13.0 \text{ dBm}$

- ▣ MODE: LTE B5
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W)$

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
20425 (826.5)	1,653.00	-54.71	7.46	-63.60	1.27	H	-59.56	46.56
	2,479.50	-50.52	8.71	-56.89	1.60	H	-51.93	38.93
	3,306.00	-56.81	10.32	-62.83	1.87	V	-56.53	43.53
20525 (836.5)	1,673.00	-52.98	7.53	-61.97	1.28	H	-57.87	44.87
	2,509.50	-54.68	8.83	-61.00	1.62	H	-55.94	42.94
	3,346.00	-55.82	10.51	-62.14	1.91	V	-55.69	42.69
20625 (846.5)	1,693.00	-53.83	7.67	-62.86	1.28	H	-58.62	45.62
	2,539.50	-50.00	8.86	-56.03	1.62	H	-50.94	37.94
	3,386.00	-56.44	10.56	-62.72	1.93	V	-56.24	43.24

Note:

1. Limit = $43 + 10 \log_{10}(W) = -13.0 \text{ dBm}$

- ▣ MODE: LTE B5
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: 43 + 10 log₁₀ (W)

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	Margin (dB)
20450 (829.0)	1,658.00	-55.78	7.50	-64.84	1.27	H	-60.76	47.76
	2,487.00	-51.46	8.77	-57.53	1.60	H	-52.51	39.51
	3,316.00	-57.92	10.35	-64.03	1.88	V	-57.71	44.71
20525 (836.5)	1,673.00	-53.25	7.53	-62.24	1.28	H	-58.14	45.14
	2,509.50	-53.87	8.83	-60.19	1.62	H	-55.13	42.13
	3,346.00	-58.17	10.51	-64.49	1.91	H	-58.04	45.04
20600 (844.0)	1,688.00	-54.21	7.67	-63.24	1.28	H	-59.00	46.00
	2,532.00	-54.95	8.85	-61.31	1.61	H	-56.22	43.22
	3,376.00	-57.37	10.56	-63.72	1.89	H	-57.20	44.20

Note:

1. Limit = 43 + 10 log₁₀ (W) = -13.0 dBm

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5	1.4 MHz	836.5	QPSK	6	0	1.0974
			16-QAM			1.0968
	3 MHz		QPSK	15	0	2.7109
			16-QAM			2.6984
	5 MHz		QPSK	25	0	4.4916
			16-QAM			4.5008
	10 MHz		QPSK	50	0	8.9488
			16-QAM			8.9761

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 38 ~ 45.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5	1.4	824.7	3.7134	27.976	-67.195	-39.219	-13.00
		836.5	3.6930	27.976	-67.250	-39.274	
		848.3	3.6935	27.976	-67.217	-39.241	
	3	825.5	3.6770	27.976	-67.428	-39.452	
		836.5	3.6915	27.976	-67.301	-39.325	
		847.5	3.6765	27.976	-67.033	-39.057	
	5	826.5	3.7214	27.976	-67.550	-39.574	
		836.5	3.6980	27.976	-67.186	-39.210	
		846.5	3.6960	27.976	-67.239	-39.263	
	10	829.0	3.6805	27.976	-67.283	-39.307	
		836.5	3.6800	27.976	-66.869	-38.893	
		844.0	3.7144	27.976	-67.130	-39.154	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 70 ~ 81
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.5 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 46 ~ 69.



8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B5
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.80 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 499 996	0.0	0.000 000	0.000
100%		-30	836 499 991	-5.3	-0.000 001	-0.006
100%		-20	836 500 000	3.5	0.000 000	0.004
100%		-10	836 499 992	-4.1	0.000 000	-0.005
100%		0	836 499 999	2.8	0.000 000	0.003
100%		+10	836 499 999	2.9	0.000 000	0.003
100%		+30	836 499 992	-4.0	0.000 000	-0.005
100%		+40	836 499 999	2.2	0.000 000	0.003
100%		+50	836 499 994	-2.3	0.000 000	-0.003
Batt. Endpoint		3.40	+20	836 499 999	2.6	0.000 000

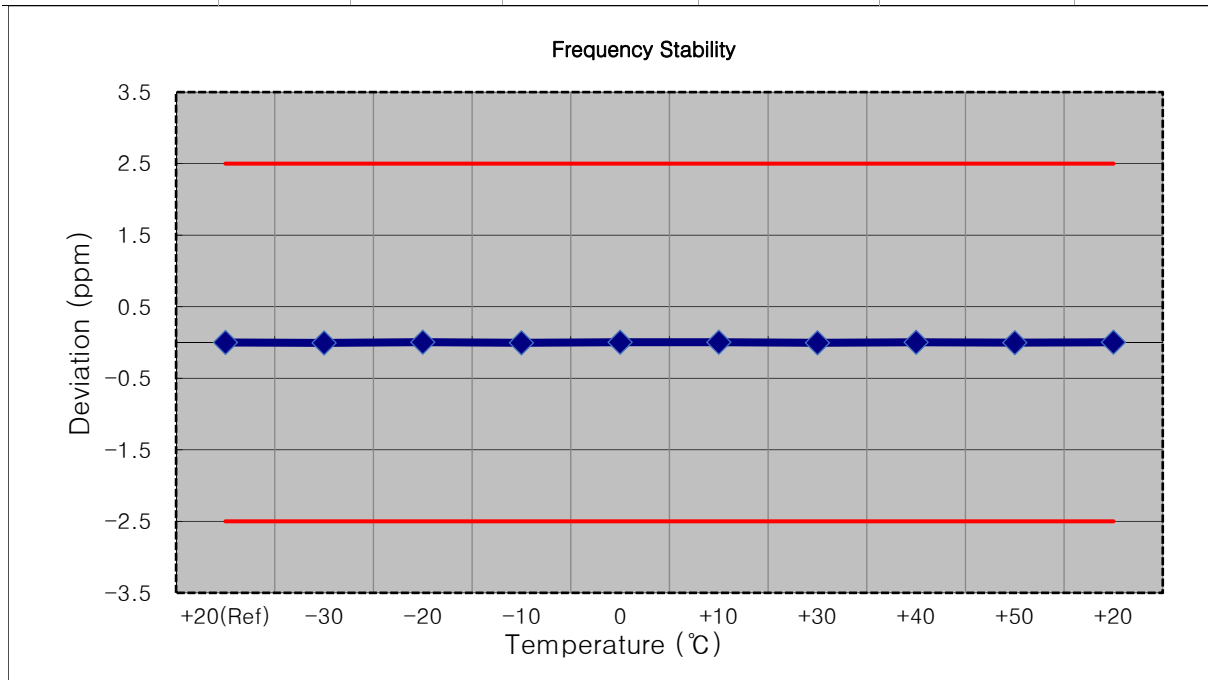


- ▣ MODE: LTE B5
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.80 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 499 998	0.0	0.000 000	0.000
100%		-30	836 499 994	-3.6	0.000 000	-0.004
100%		-20	836 500 001	2.9	0.000 000	0.003
100%		-10	836 499 995	-2.7	0.000 000	-0.003
100%		0	836 499 994	-3.2	0.000 000	-0.004
100%		+10	836 499 993	-4.9	-0.000 001	-0.006
100%		+30	836 499 999	1.6	0.000 000	0.002
100%		+40	836 499 995	-2.7	0.000 000	-0.003
100%		+50	836 499 994	-3.8	0.000 000	-0.005
Batt. Endpoint		3.40	+20	836 500 000	1.9	0.000 000

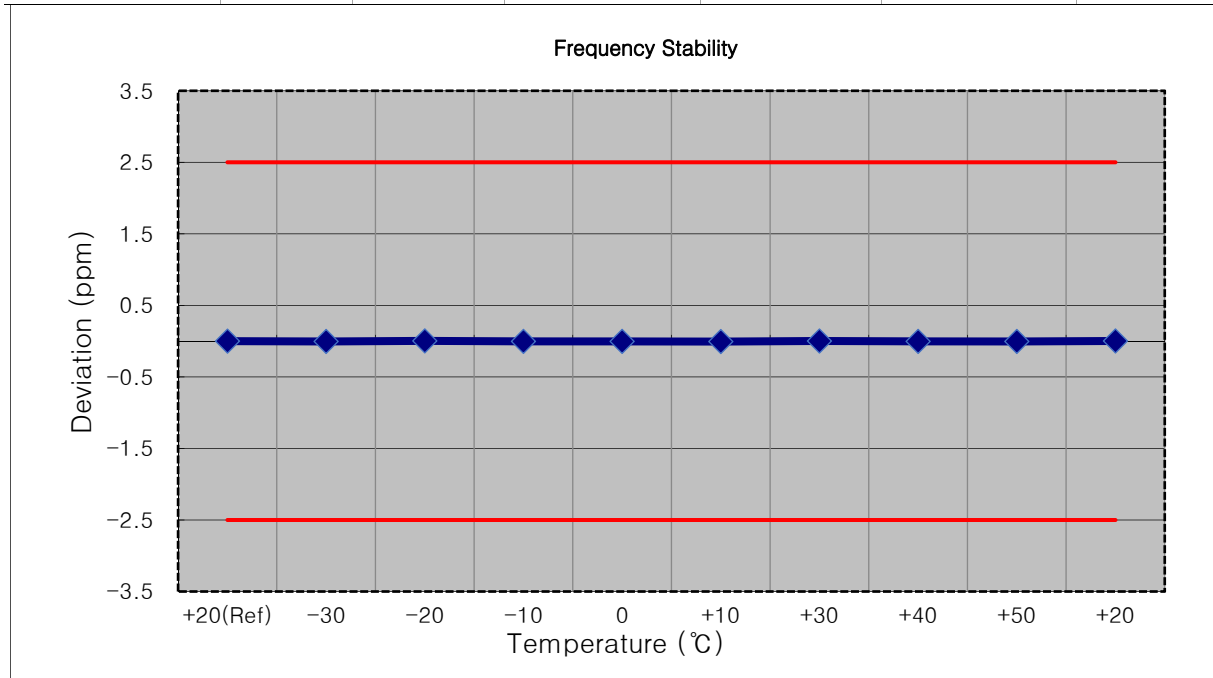


- ▣ MODE: LTE B5
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.80 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100%		-30	836 500 006	2.8	0.000 000	0.003
100%		-20	836 500 006	2.8	0.000 000	0.003
100%		-10	836 500 006	2.5	0.000 000	0.003
100%		0	836 499 998	-4.9	-0.000 001	-0.006
100%		+10	836 500 000	-2.9	0.000 000	-0.003
100%		+30	836 500 000	-2.9	0.000 000	-0.003
100%		+40	836 500 001	-1.8	0.000 000	-0.002
100%		+50	836 500 007	4.3	0.000 001	0.005
Batt. Endpoint		3.40	+20	836 500 001	-2.1	0.000 000

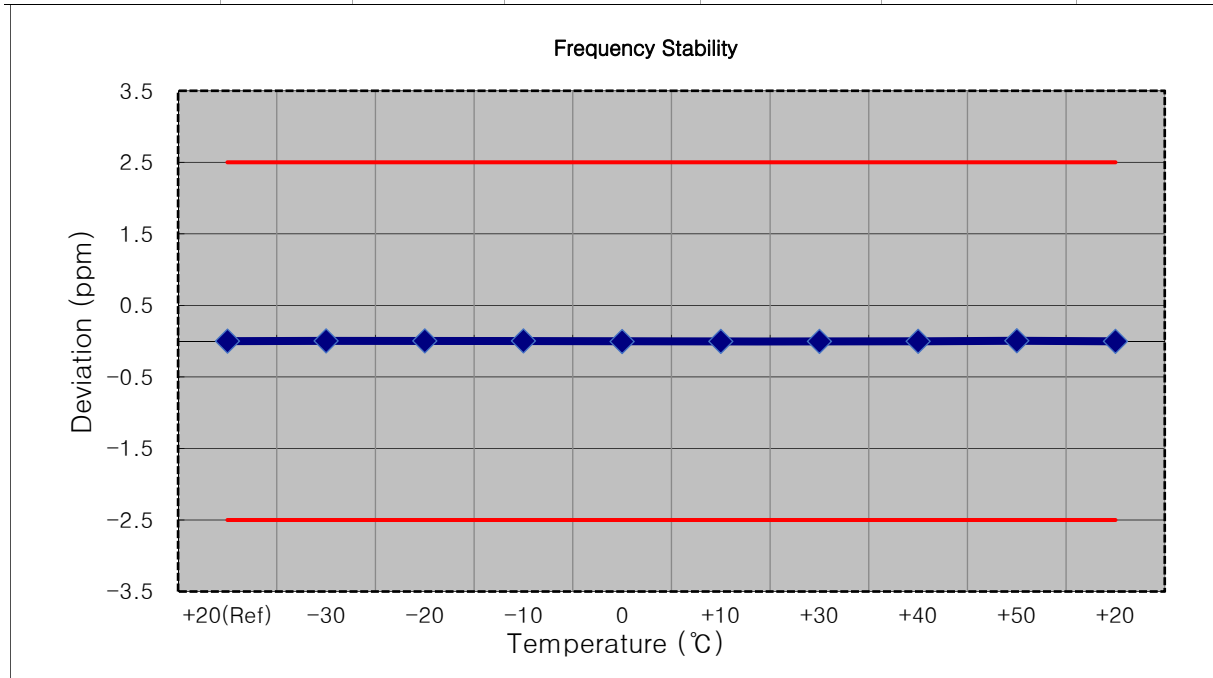


- ▣ MODE: LTE B5
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 20525 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.80 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 499 996	0.0	0.000 000	0.000
100%		-30	836 499 993	-2.9	0.000 000	-0.003
100%		-20	836 499 992	-3.6	0.000 000	-0.004
100%		-10	836 499 993	-2.8	0.000 000	-0.003
100%		0	836 499 994	-2.0	0.000 000	-0.002
100%		+10	836 499 993	-2.5	0.000 000	-0.003
100%		+30	836 499 993	-2.4	0.000 000	-0.003
100%		+40	836 499 994	-1.5	0.000 000	-0.002
100%		+50	836 499 992	-4.0	0.000 000	-0.005
Batt. Endpoint		3.40	+20	836 499 993	-2.4	0.000 000

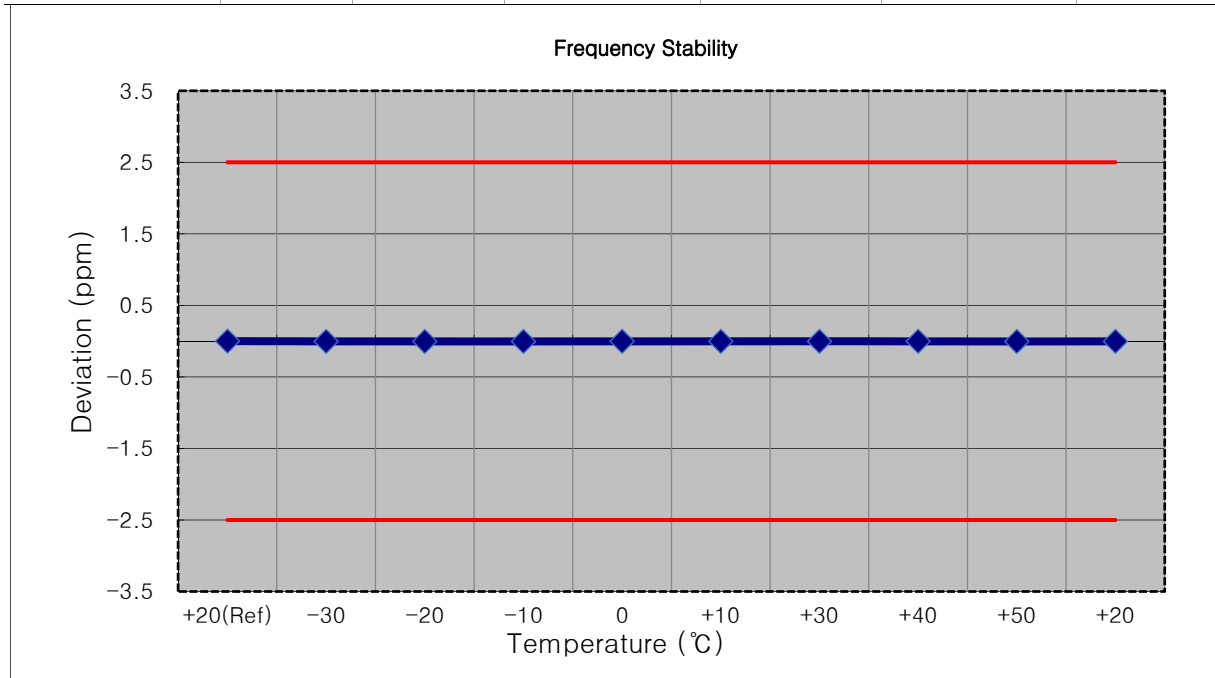


9. TEST PLOTS


BAND 5. Occupied Bandwidth Plot (1.4 M BW Ch.20525 QPSK_RB6_0)

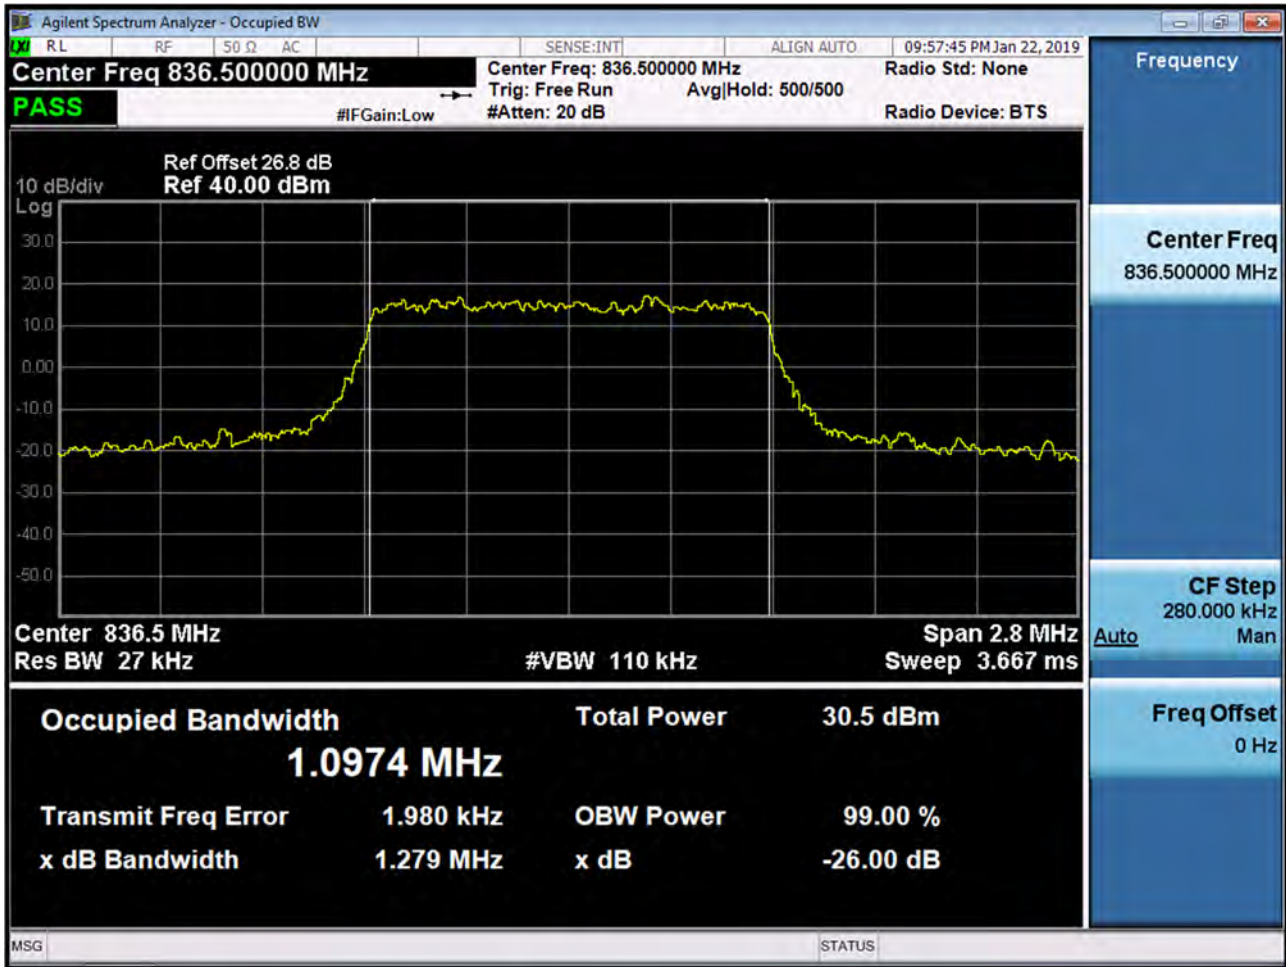


BAND 5. Occupied Bandwidth Plot (1.4 M BW Ch.20525 16QAM_RB6_0)

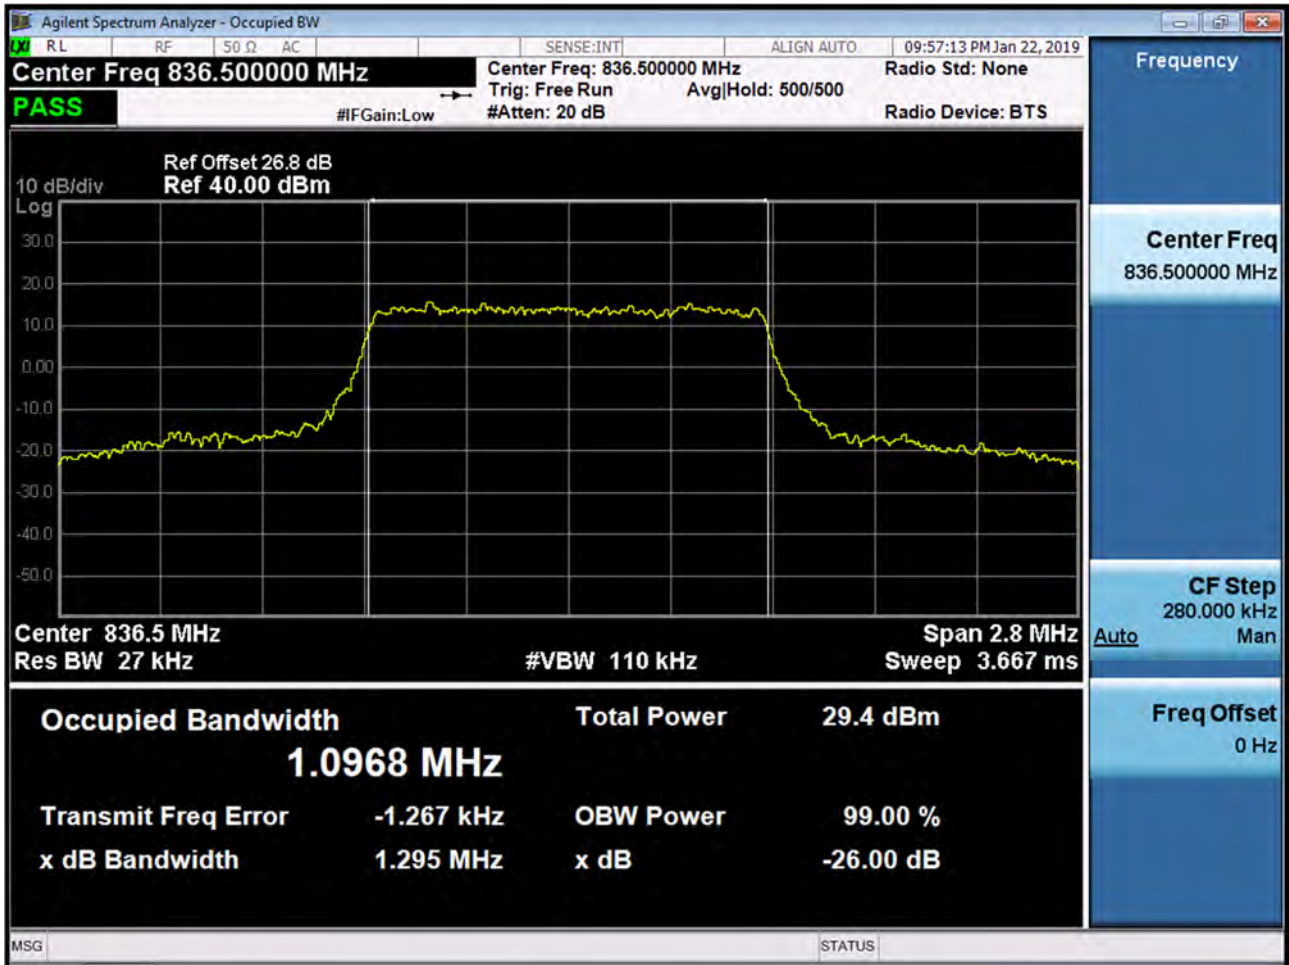


BAND 5. Occupied Bandwidth Plot (3 M BW Ch.20525 QPSK_RB15_0)

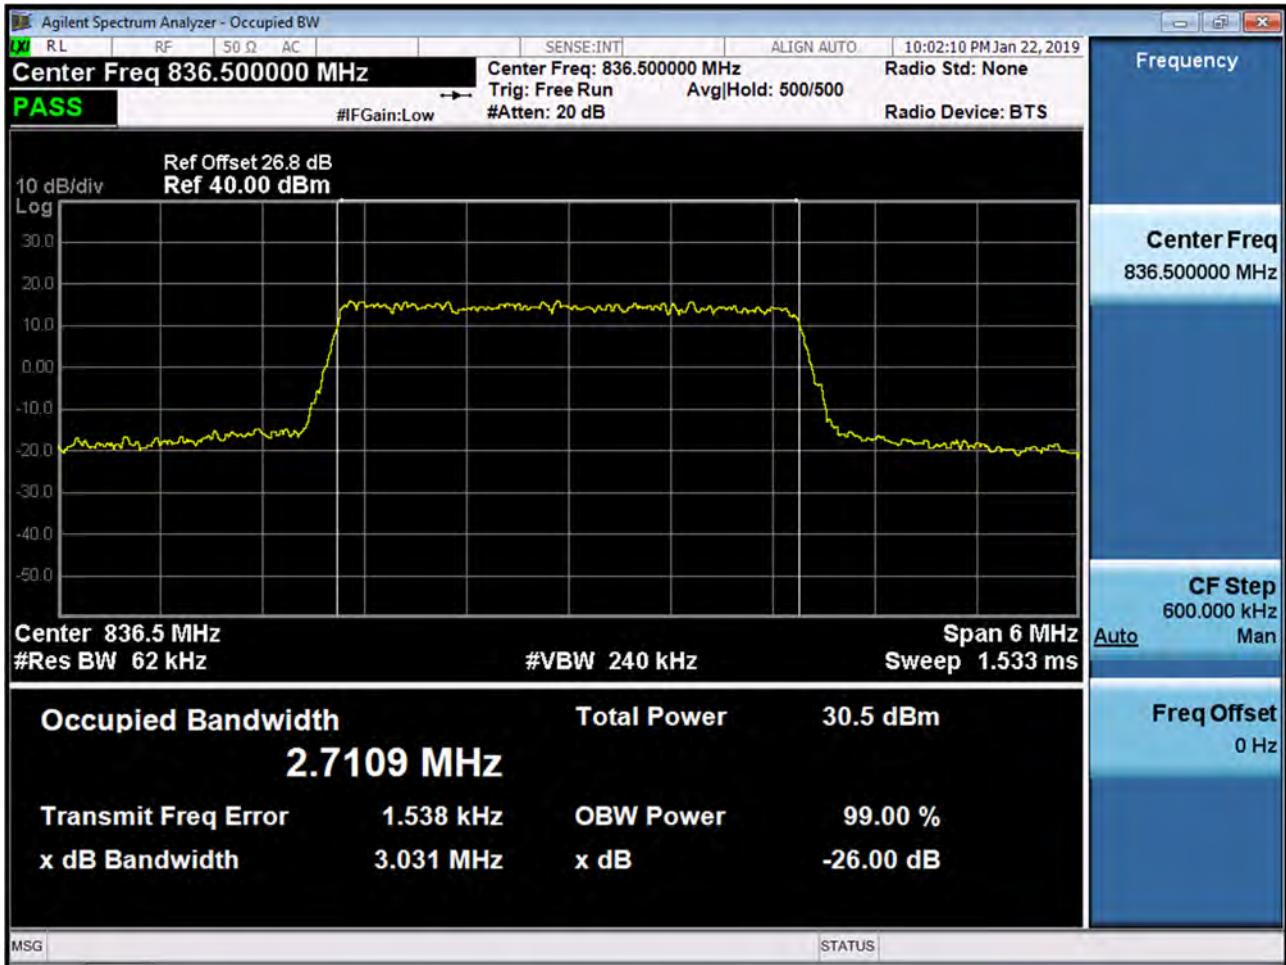


BAND 5. Occupied Bandwidth Plot (3 M BW Ch.20525 16QAM_RB15_0)

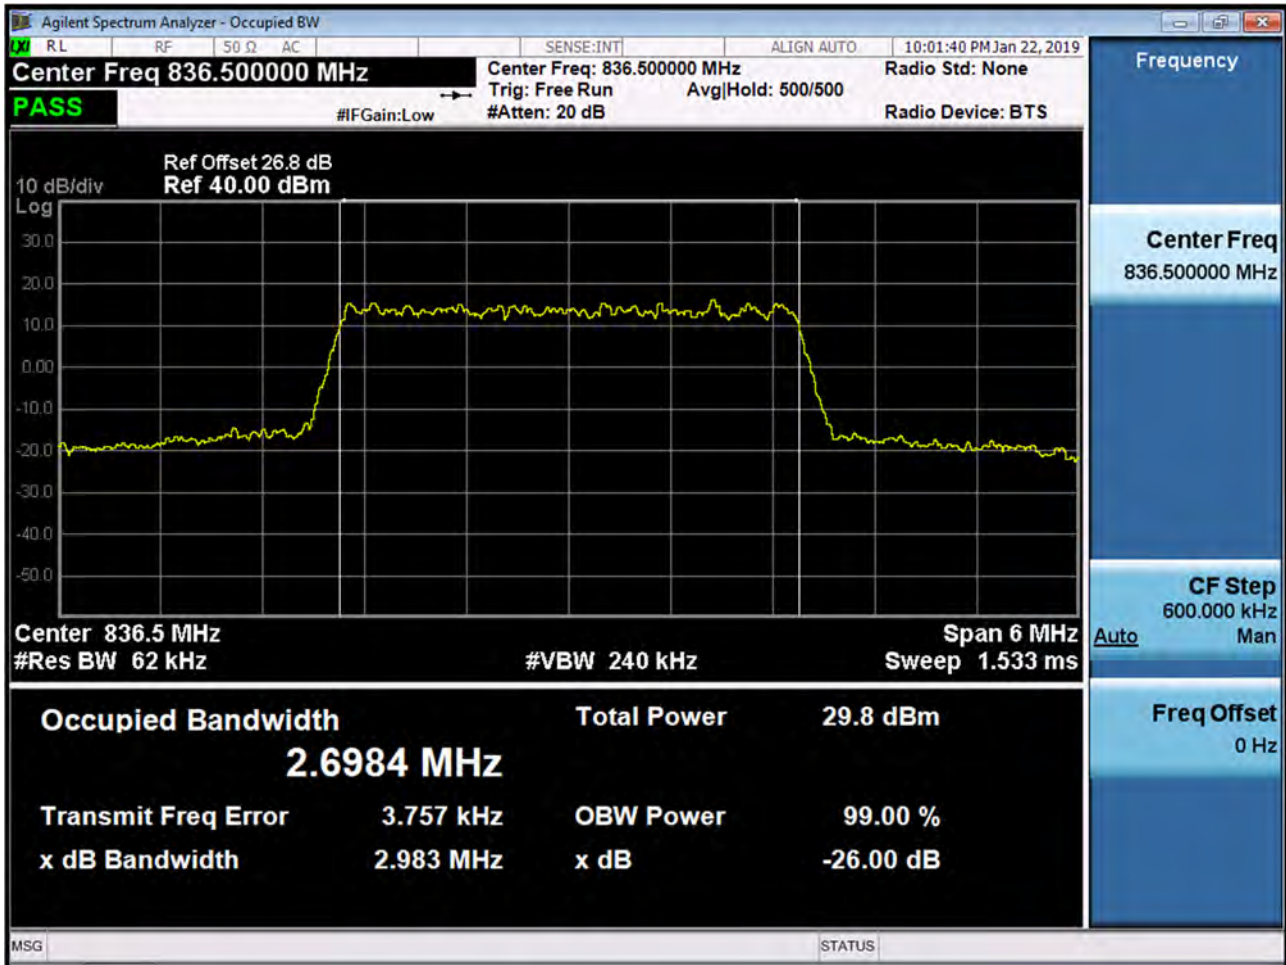


BAND 5. Occupied Bandwidth Plot (5 M BW Ch.20525 QPSK_RB25_0)

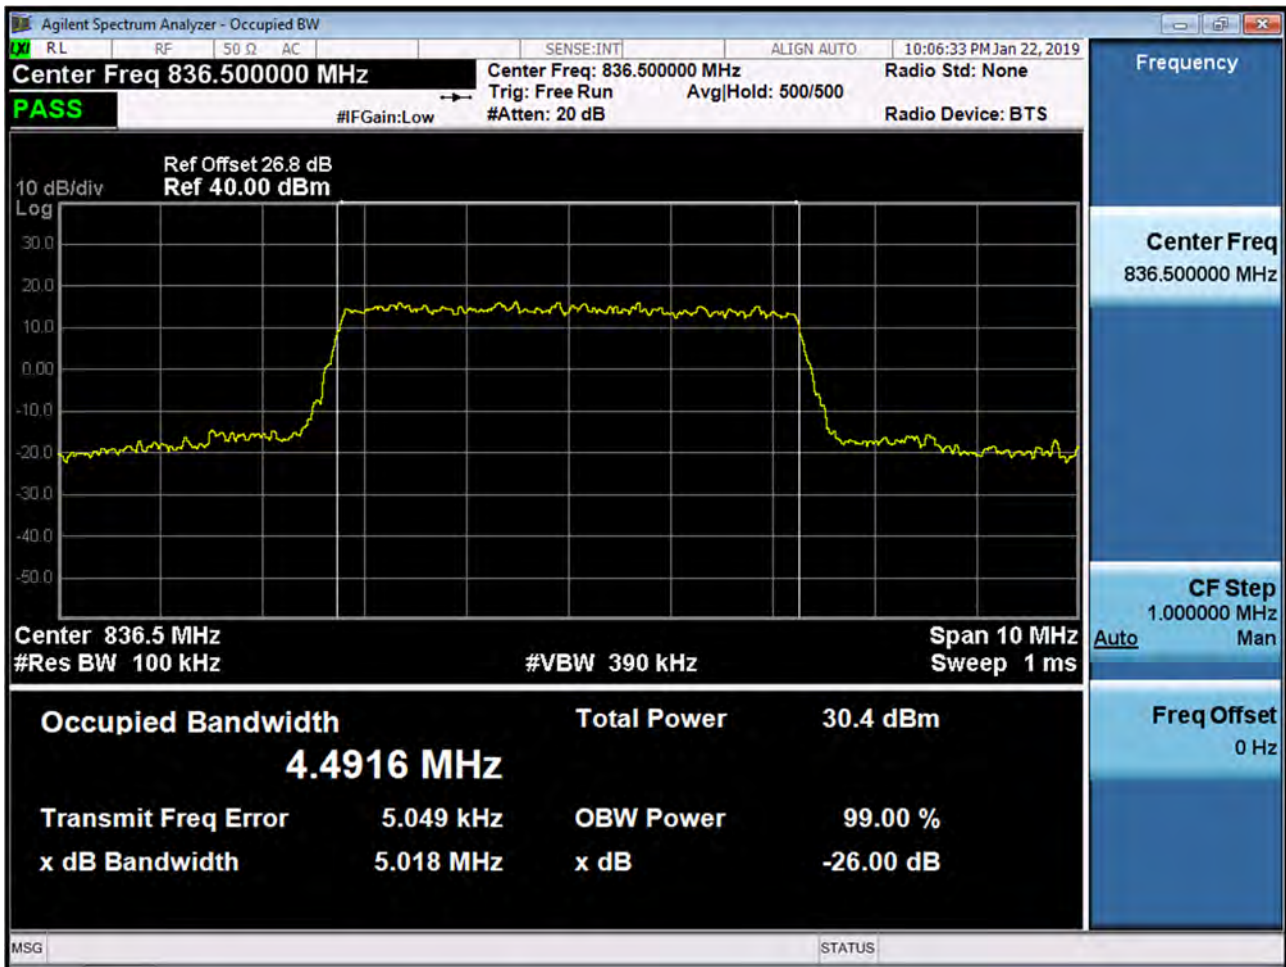


BAND 5. Occupied Bandwidth Plot (5 M BW Ch.20525 16QAM_RB25_0)

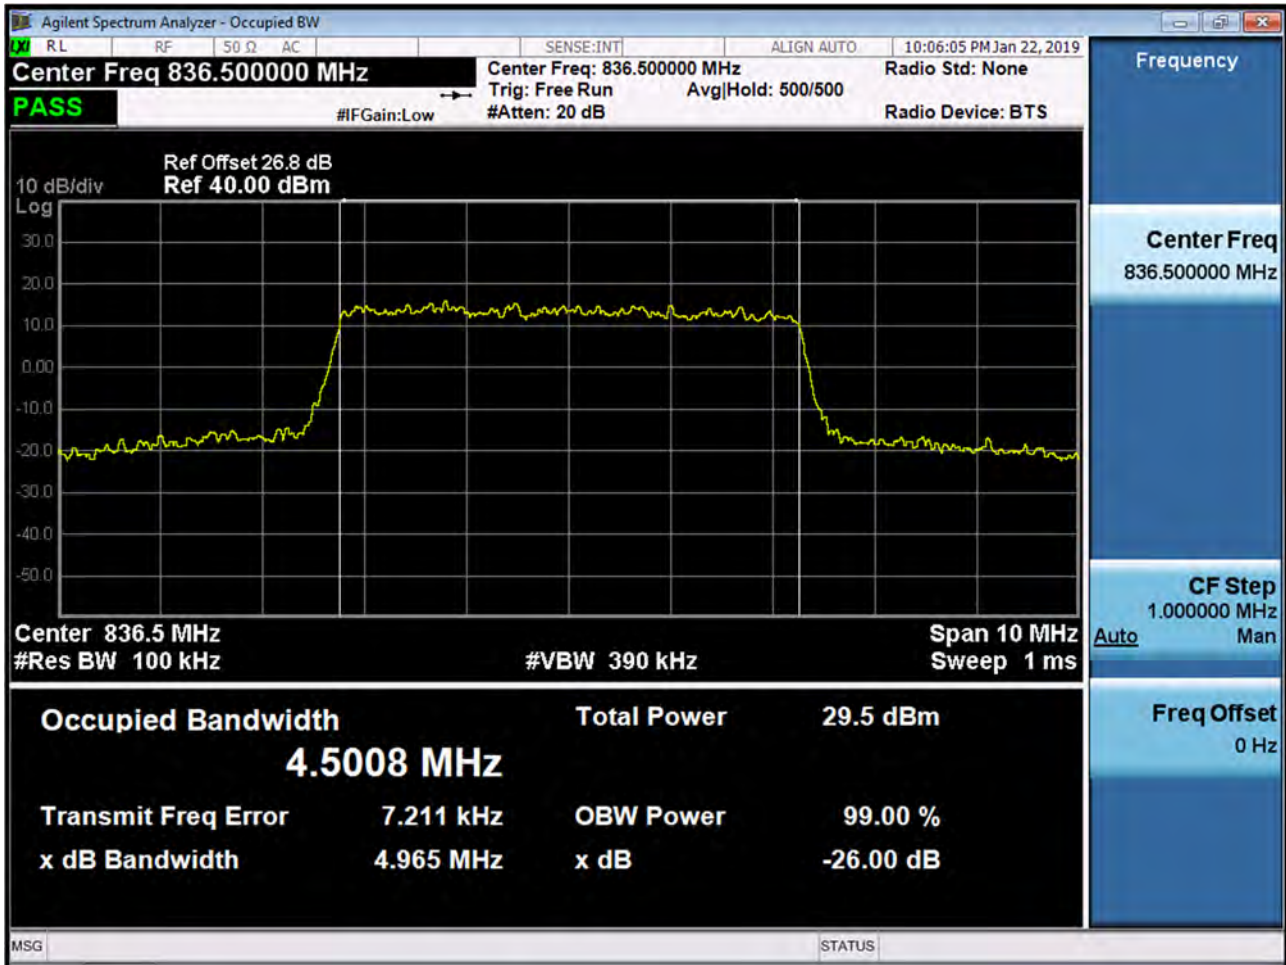


BAND 5. Occupied Bandwidth Plot (10 M BW Ch.20525 QPSK_RB50_0)

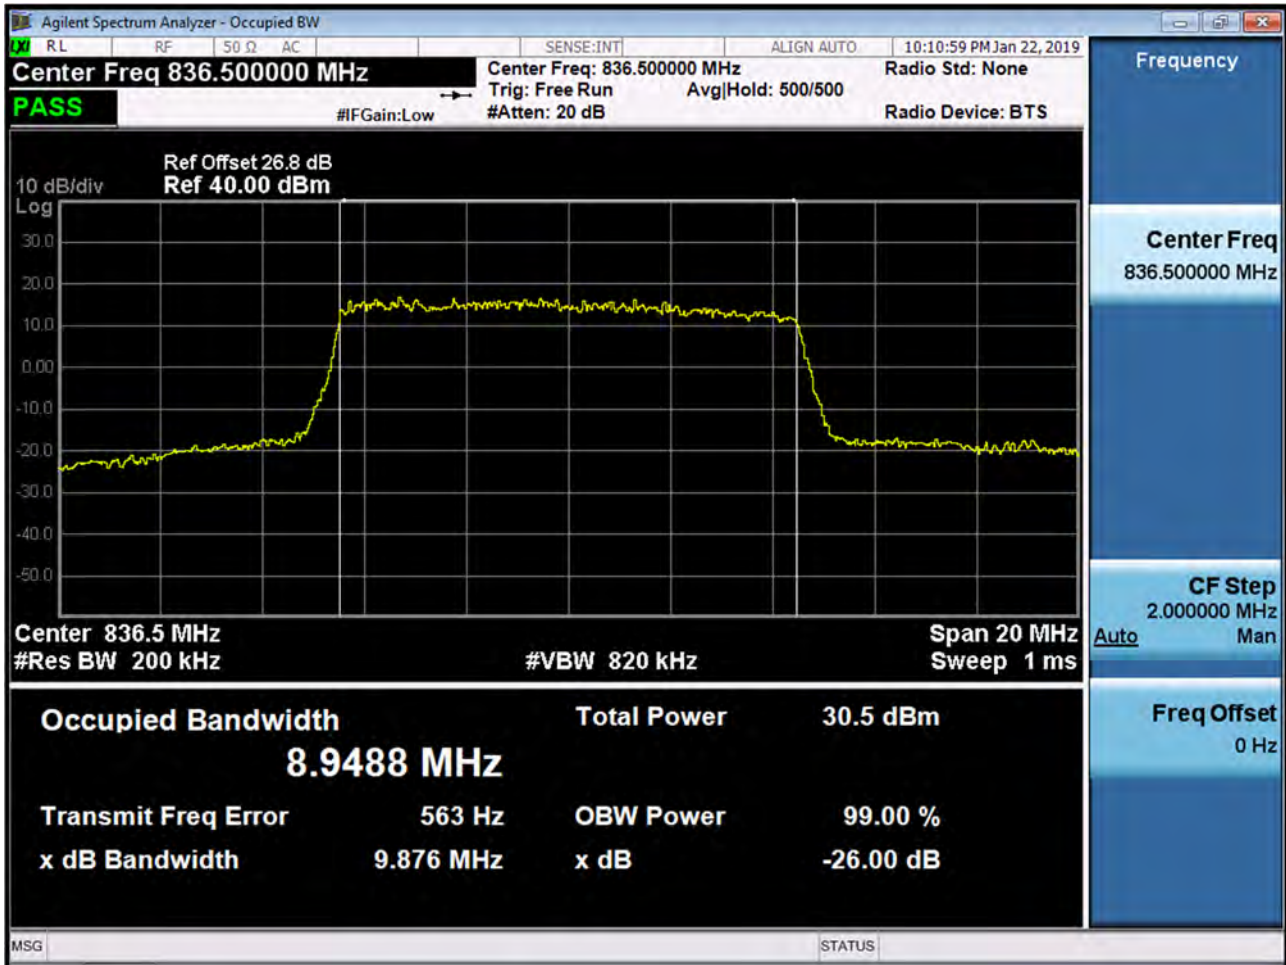


BAND 5. Occupied Bandwidth Plot (10 M BW Ch.20525 16QAM_RB50_0)

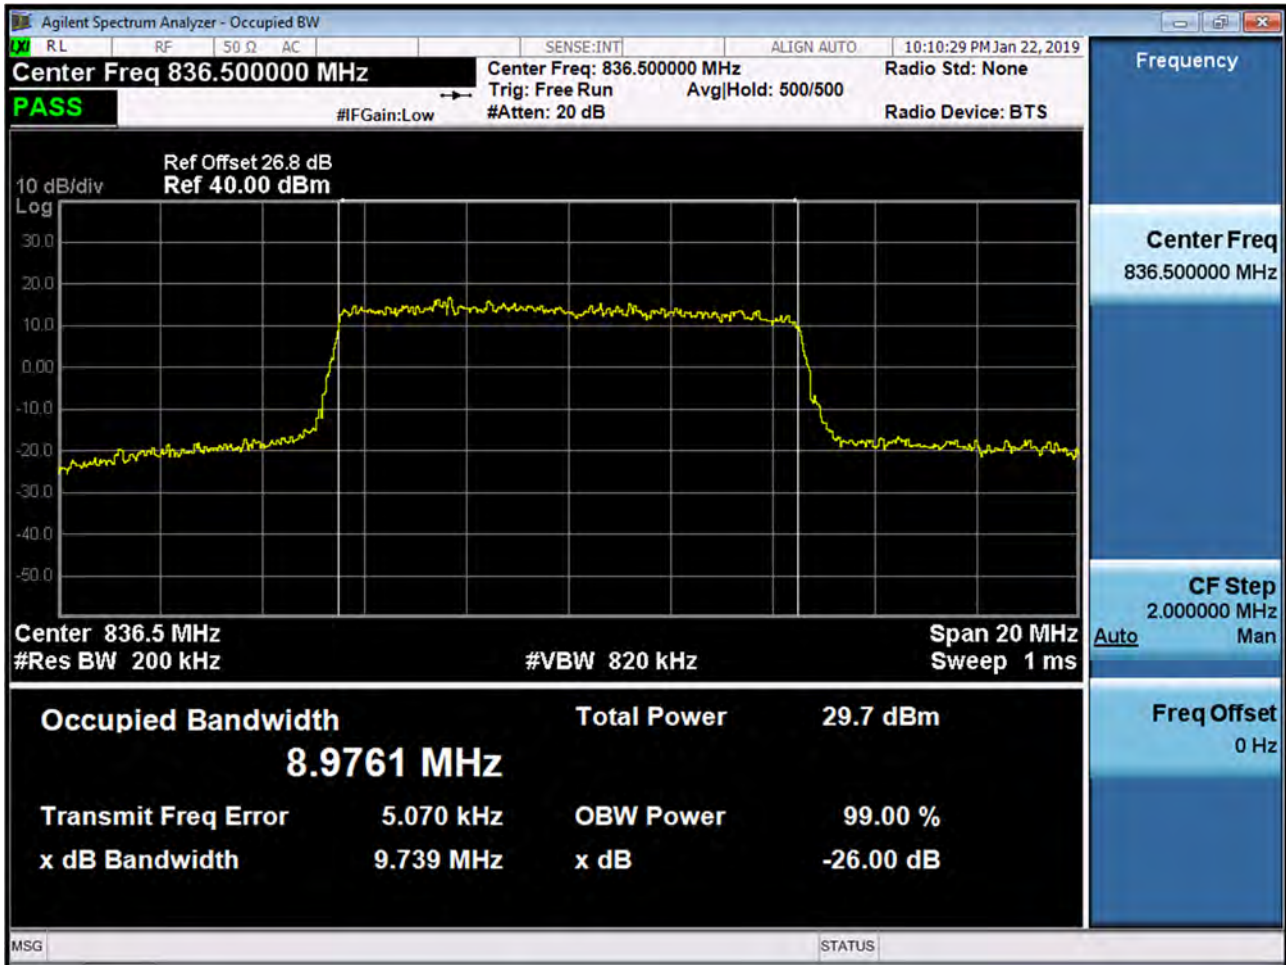

BAND 5. Lower Band Edge Plot (1.4 M BW Ch.20407 QPSK_RB1_Offset 0)

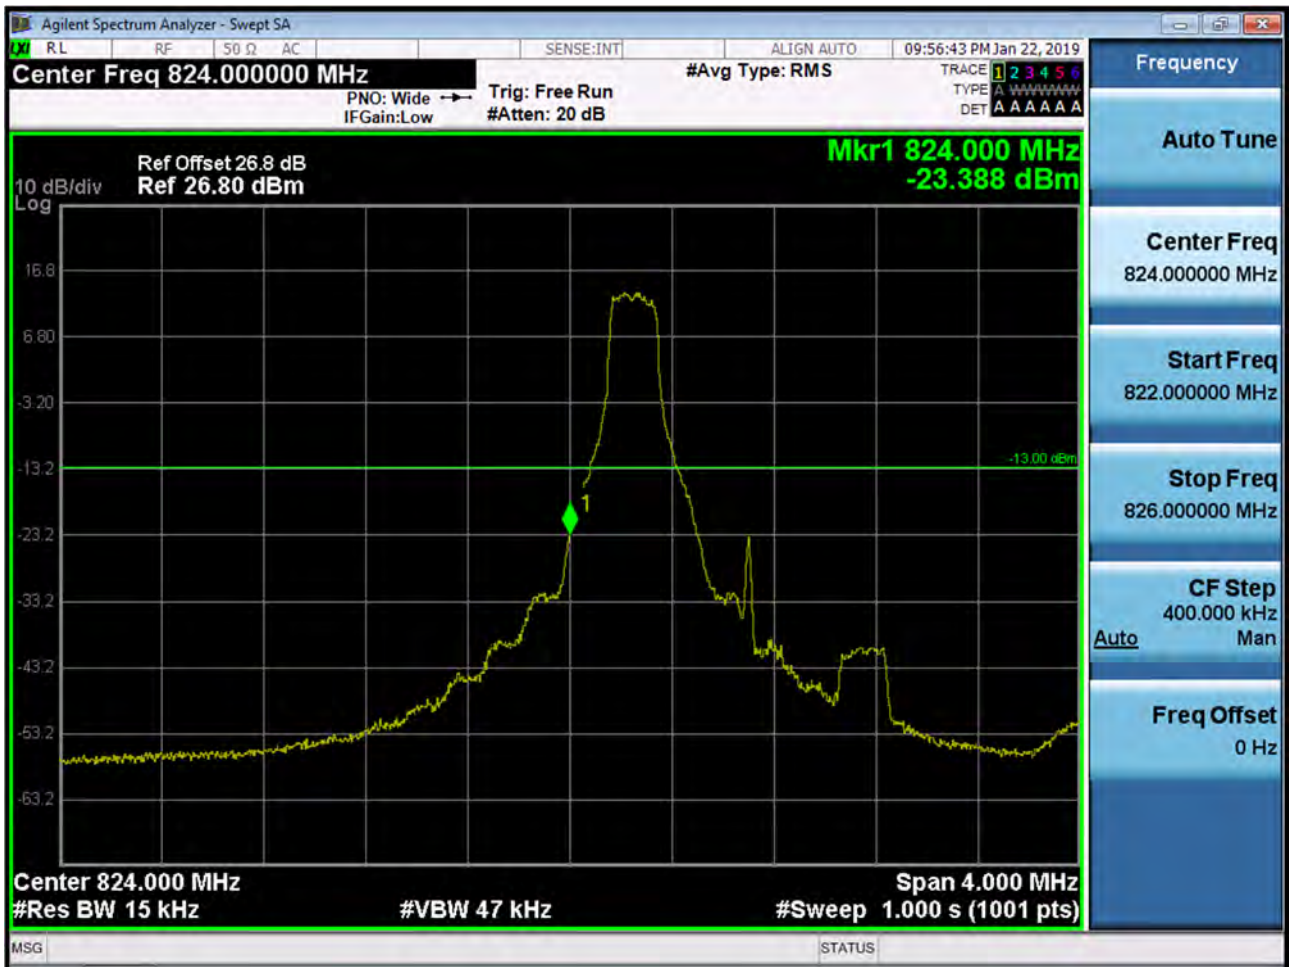


BAND 5. Lower Band Edge Plot (1.4 M BW Ch.20407 QPSK_RB6_Offset 0)

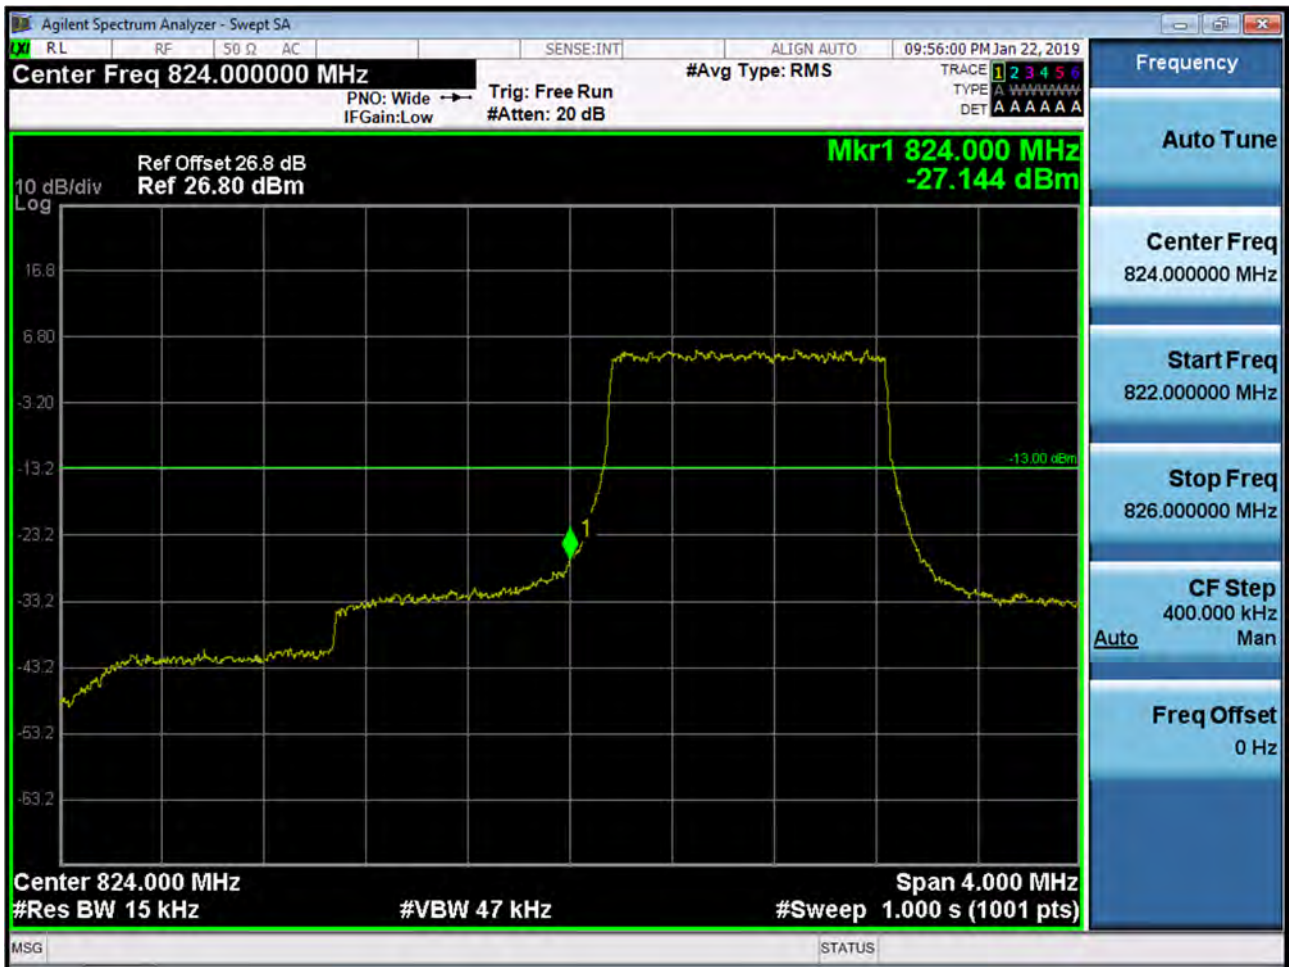

BAND 5. Lower Extended Band Edge Plot (1.4 M BW Ch.20407 QPSK_RB6_0)



BAND 5. Lower Band Edge Plot (3 M BW Ch.20415 QPSK_RB1_Offset 0)

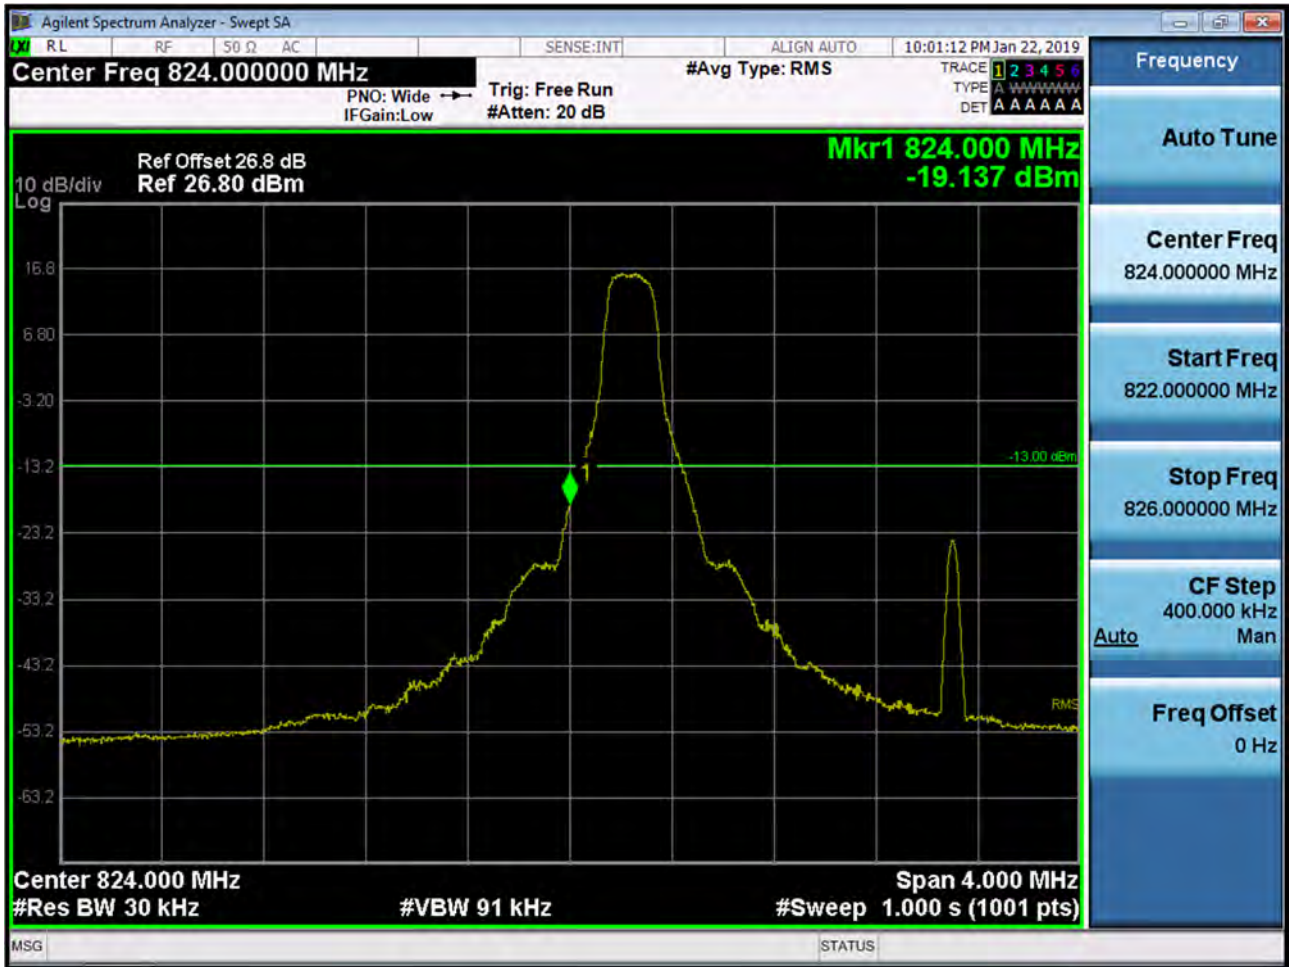


BAND 5. Lower Band Edge Plot (3 M BW Ch.20415 QPSK_RB15_Offset 0)




BAND 5. Lower Extended Band Edge Plot (3 M BW Ch.20415 QPSK_RB15_0)



BAND 5. Lower Band Edge Plot (5 M BW Ch.20425 QPSK_RB1_Offset 0)

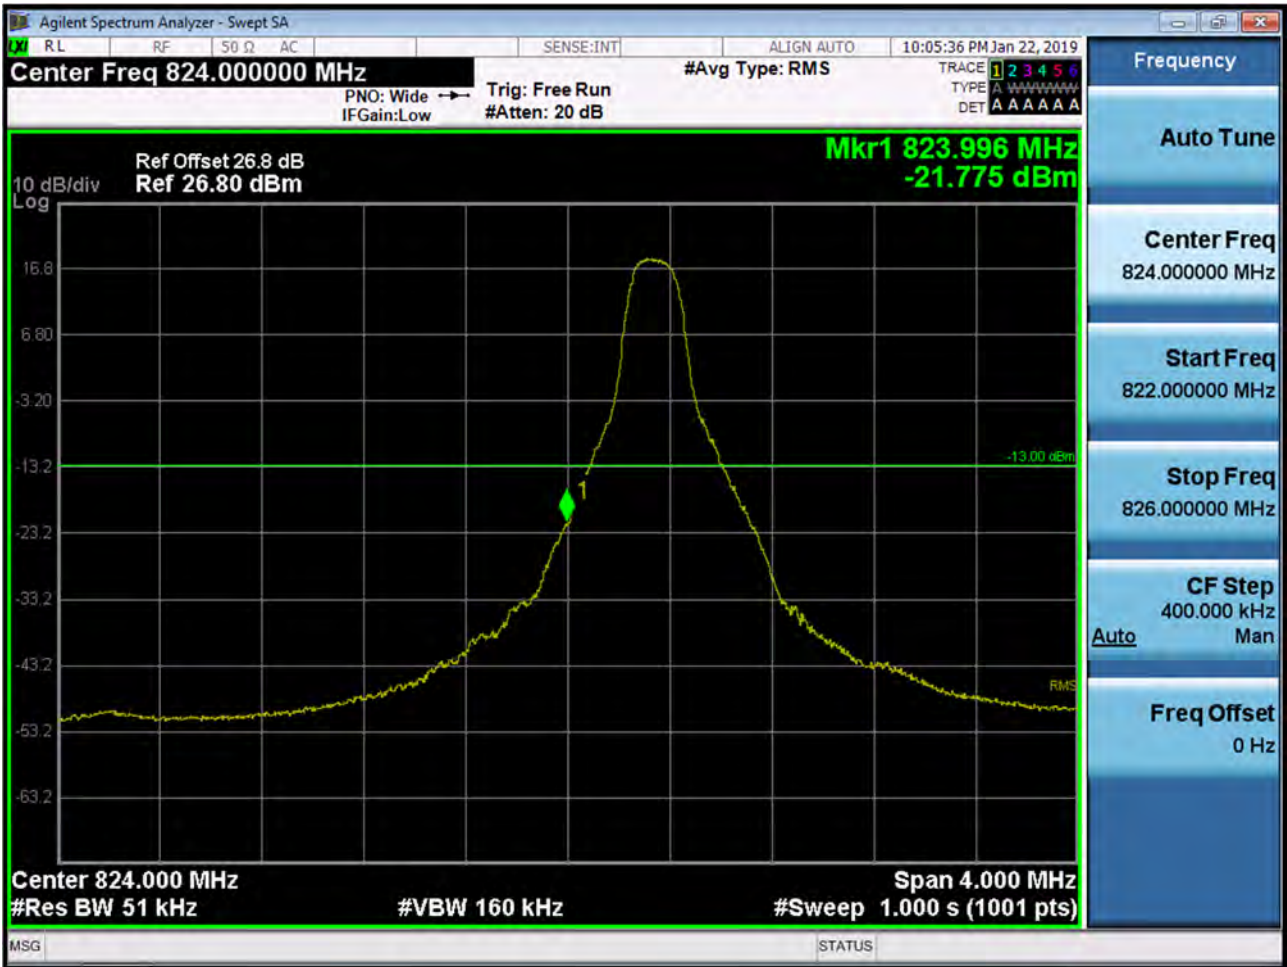

BAND 5. Lower Band Edge Plot (5 M BW Ch.20425 QPSK_RB25_Offset 0)

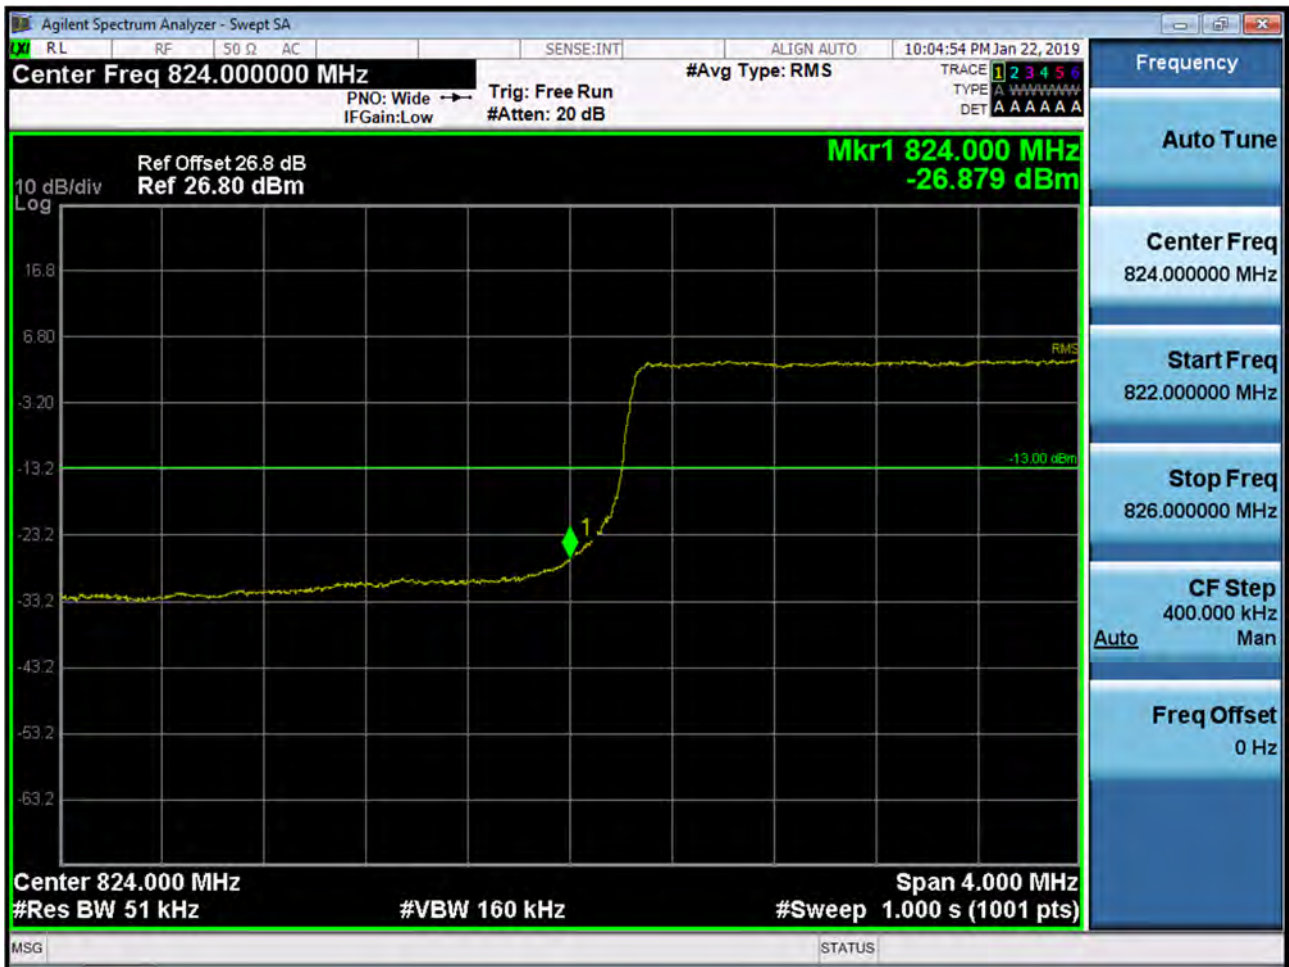

BAND 5. Lower Extended Band Edge Plot (5 M BW Ch.20425 QPSK_RB25_0)



BAND 5. Lower Band Edge Plot (10 M BW Ch.20450 QPSK_RB1_Offset 0)




BAND 5. Lower Band Edge Plot (10 M BW Ch.20450 QPSK_RB50_Offset 0)



BAND 5. Lower Extended Band Edge Plot (10 M BW Ch.20450 QPSK_RB50_0)



BAND 5. Upper Band Edge Plot (1.4 M BW Ch.20643 QPSK_RB1_Offset 5)

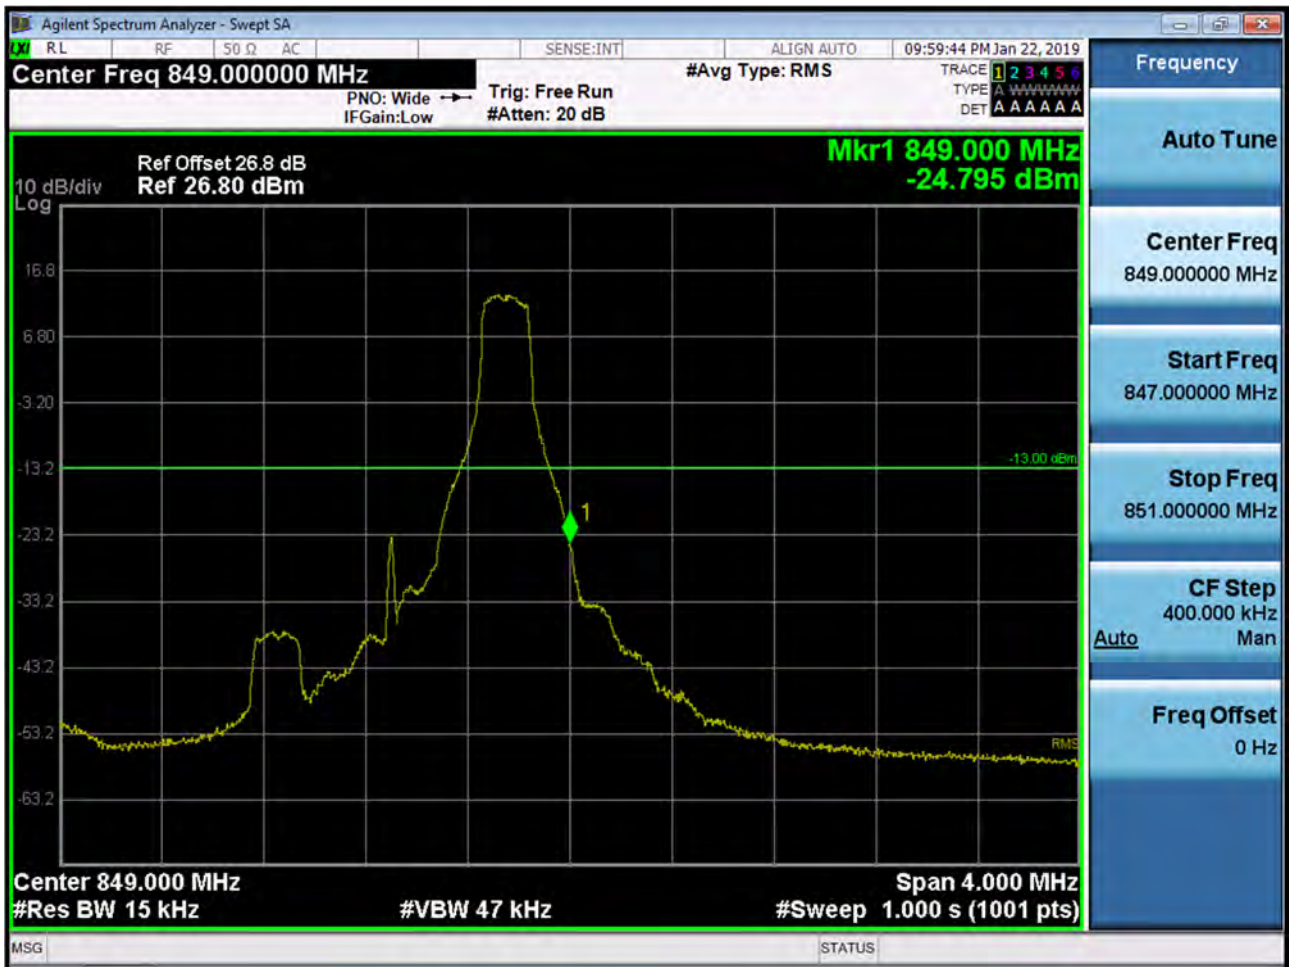


BAND 5. Upper Band Edge Plot (1.4 M BW Ch.20643 QPSK_RB6_Offset 0)



BAND 5. Upper Extended Band Edge Plot (1.4 M BW Ch.20643 QPSK_RB6_0)



BAND 5. Upper Band Edge Plot (3 M BW Ch.20635 QPSK_RB1_Offset 14)

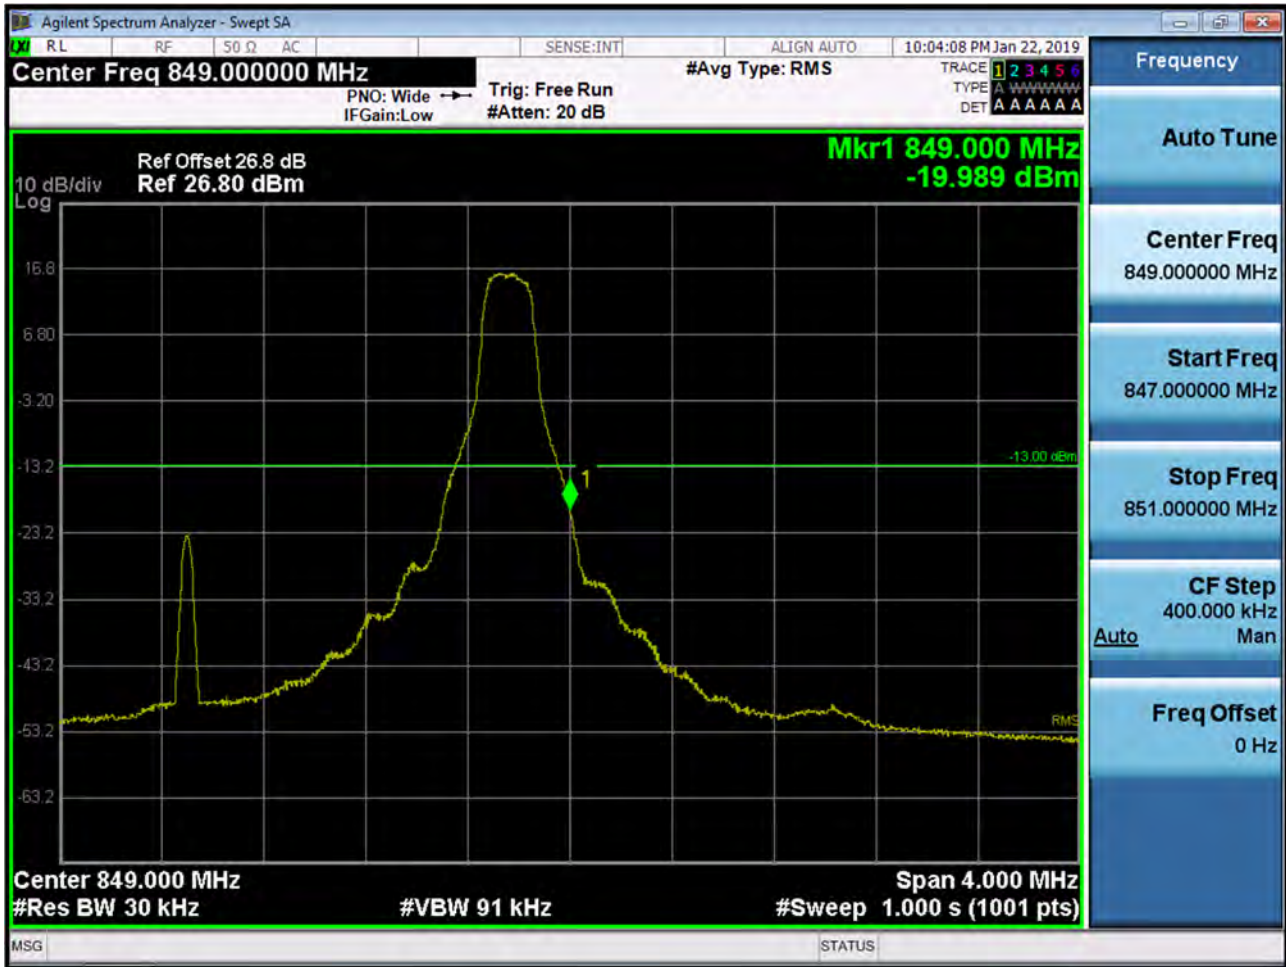

BAND 5. Upper Band Edge Plot (3 M BW Ch.20635 QPSK_RB15_Offset 0)



BAND 5. Upper Extended Band Edge Plot (3 M BW Ch.20635 QPSK_RB15_0)



BAND 5. Upper Band Edge Plot (5 M BW Ch.20625 QPSK_RB1_Offset 24)



BAND 5. Upper Band Edge Plot (5 M BW Ch.20625 QPSK_RB25_Offset 0)



BAND 5. Upper Extended Band Edge Plot (5 M BW Ch.20625 QPSK_RB25_0)



BAND 5. Upper Band Edge Plot (10 M BW Ch.20600 QPSK_RB1_Offset 49)




BAND 5. Upper Band Edge Plot (10 M BW Ch.20600 QPSK_RB50_Offset 0)




BAND 5. Upper Extended Band Edge Plot (10 M BW Ch.20600 QPSK_RB50_0)




BAND 5. Conducted Spurious Plot (20407ch_1.4 MHz_QPSK_RB 1_0)

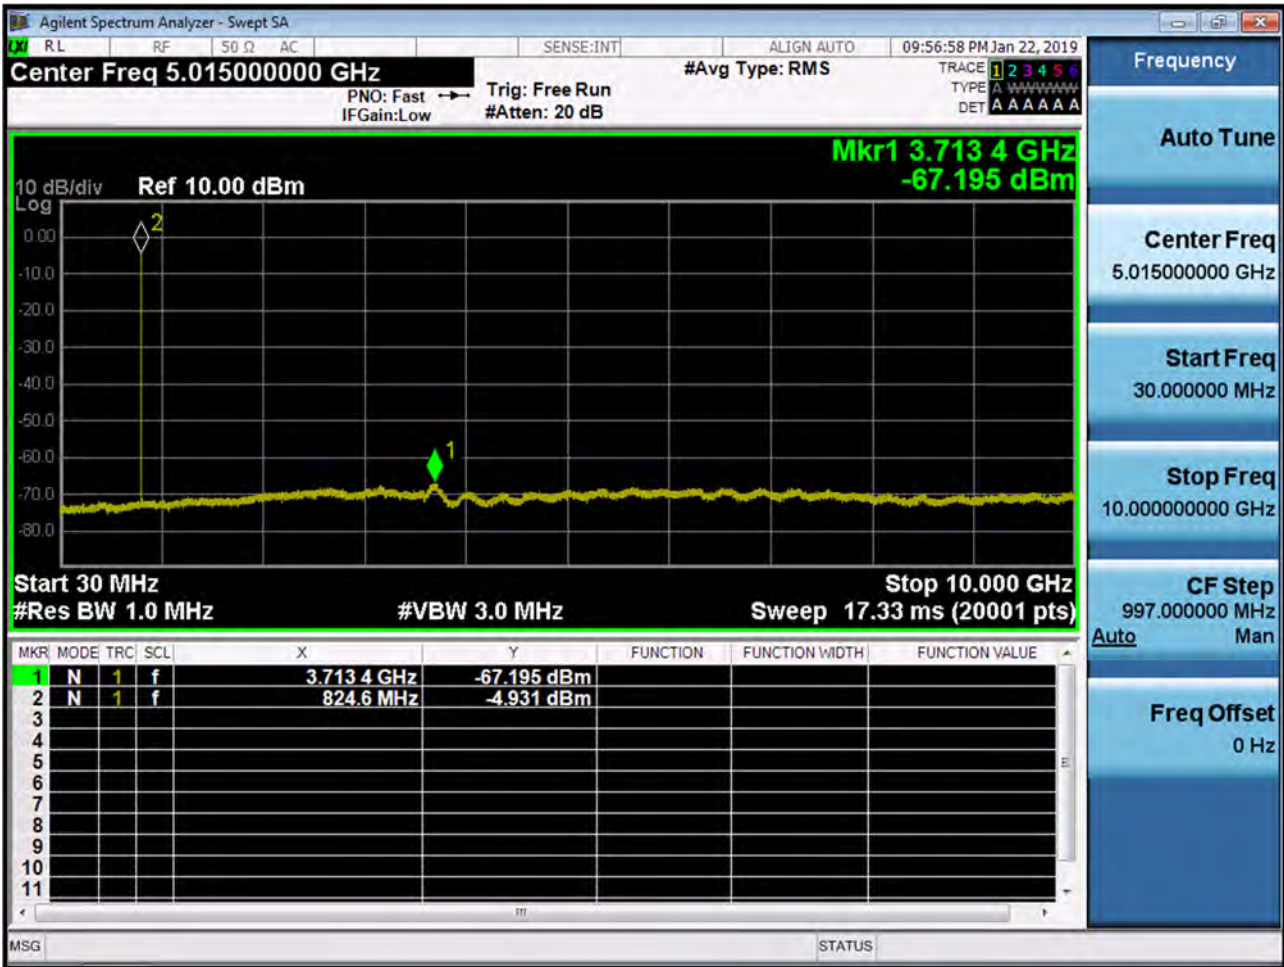


BAND 5. Conducted Spurious Plot (20525ch_1.4 MHz_QPSK_RB 1_0)

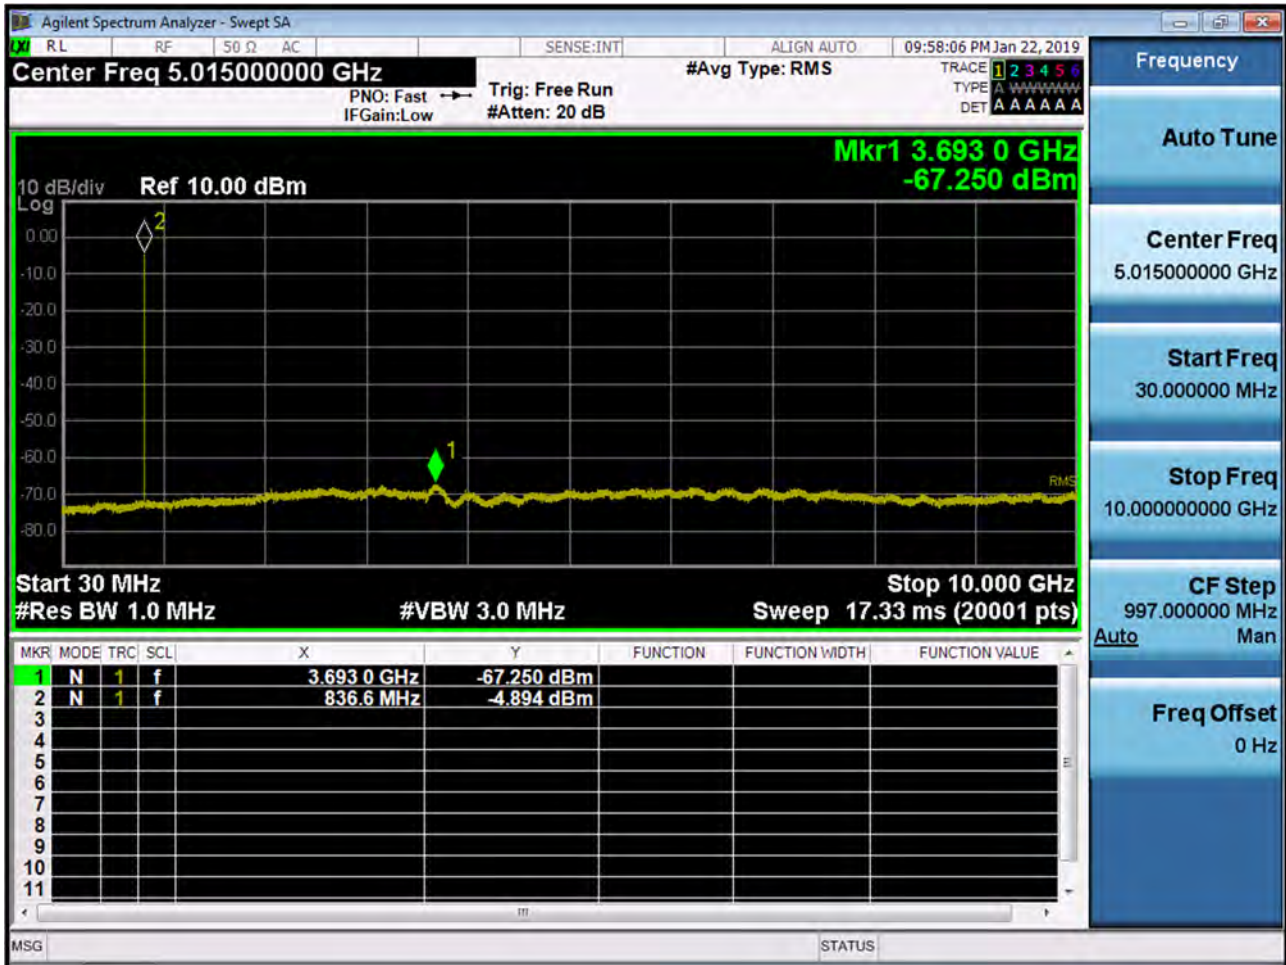


BAND 5. Conducted Spurious Plot (20643ch_1.4 MHz_QPSK_RB 1_0)

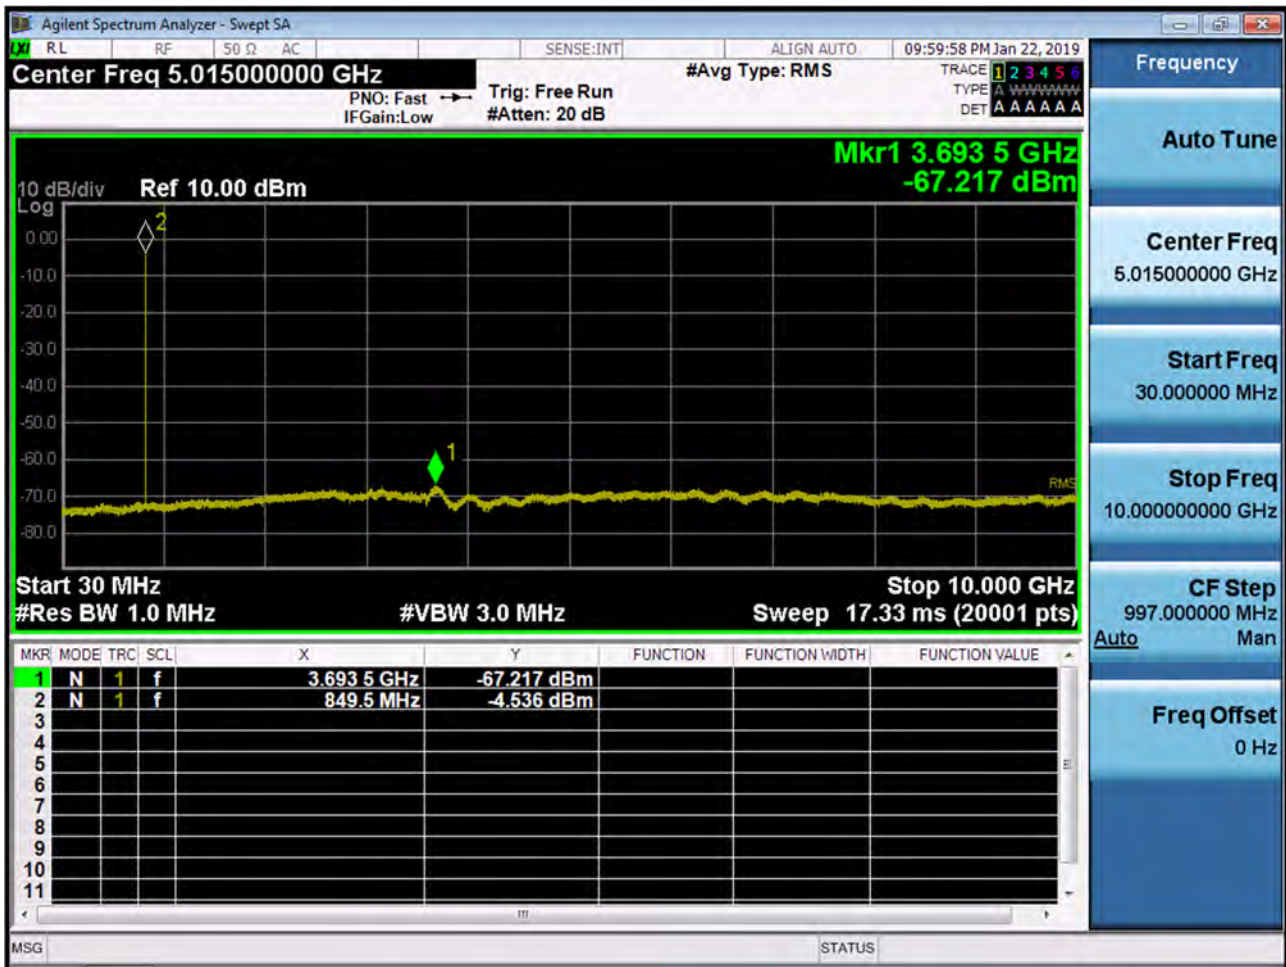


BAND 5. Conducted Spurious Plot (20415ch_3 MHz_QPSK_RB 1_0)

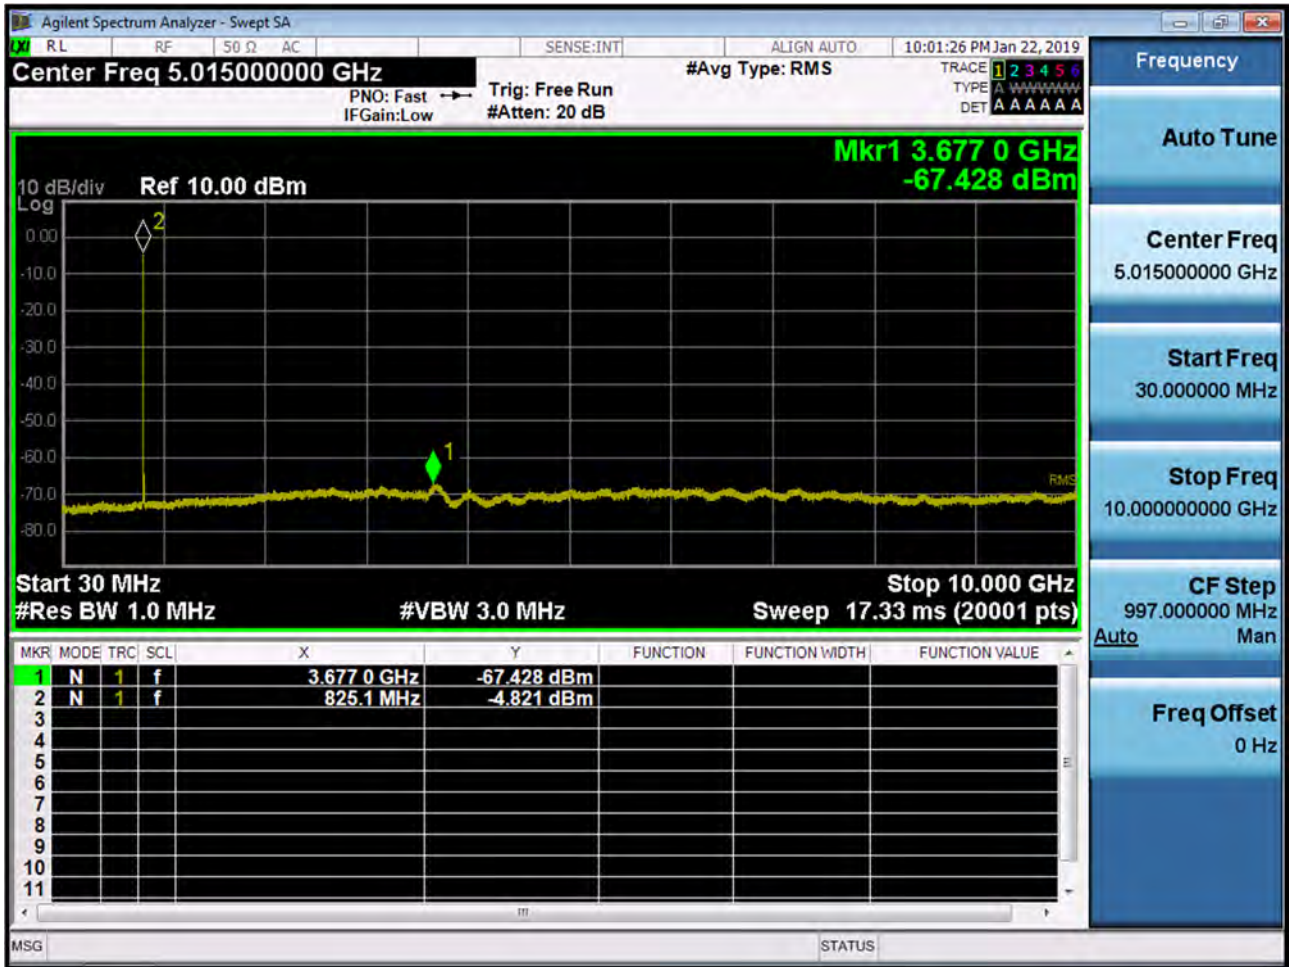


BAND 5. Conducted Spurious Plot (20525ch_3 MHz_QPSK_RB 1_0)

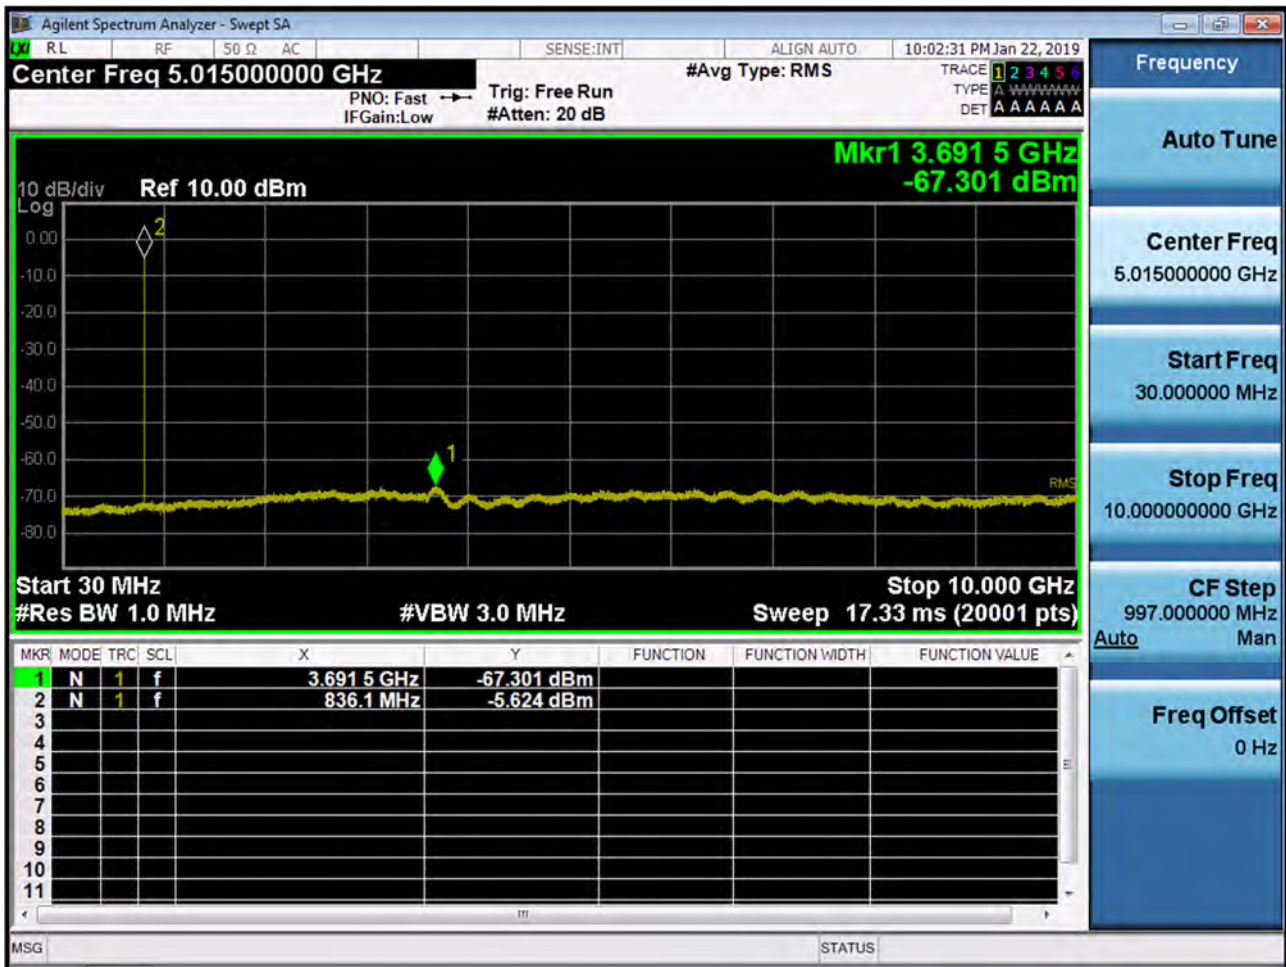


BAND 5. Conducted Spurious Plot (20635ch_3 MHz_QPSK_RB 1_0)

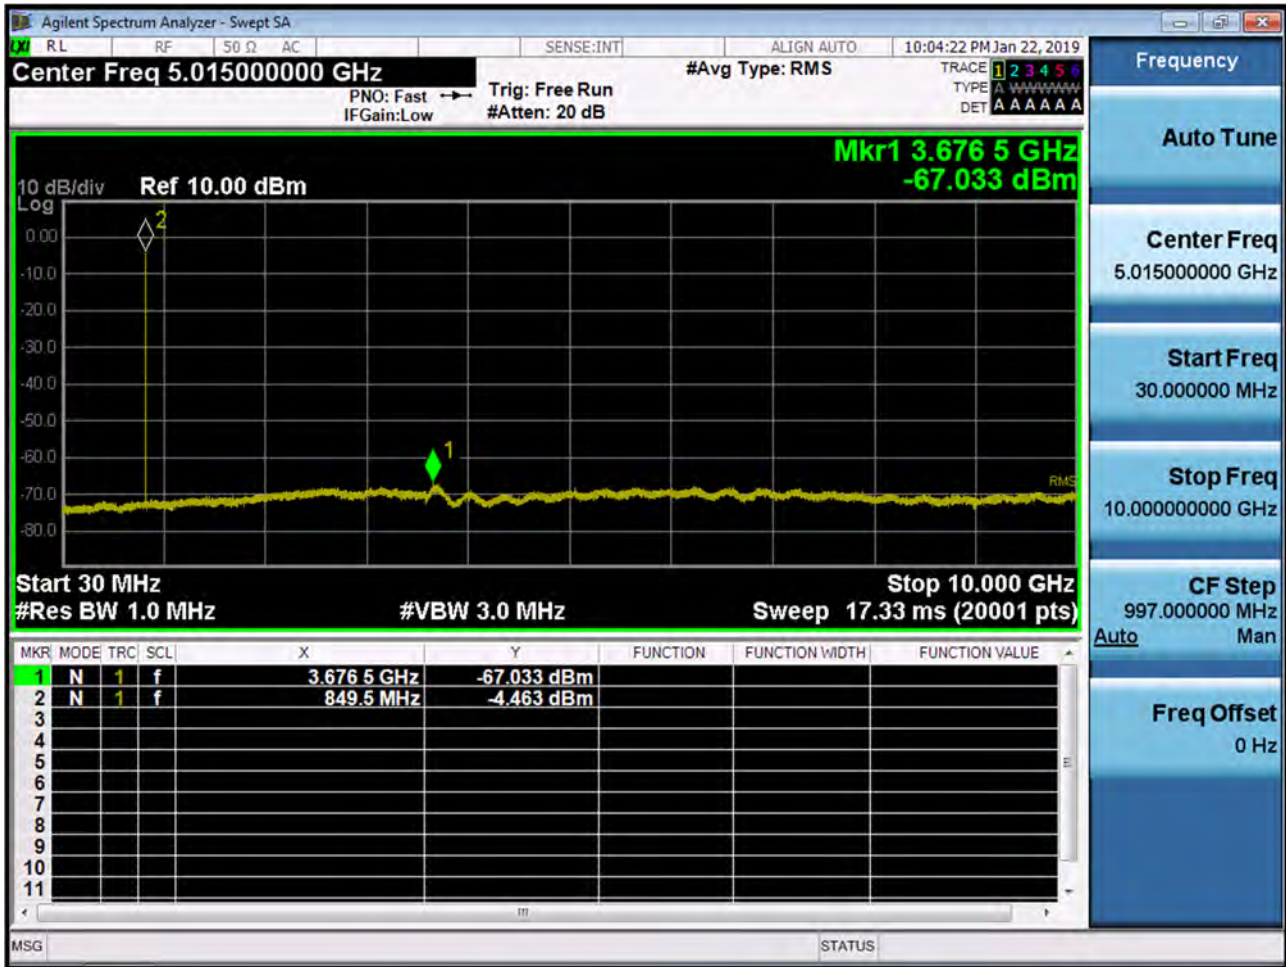


BAND 5. Conducted Spurious Plot (20425ch_5 MHz_QPSK_RB 1_0)

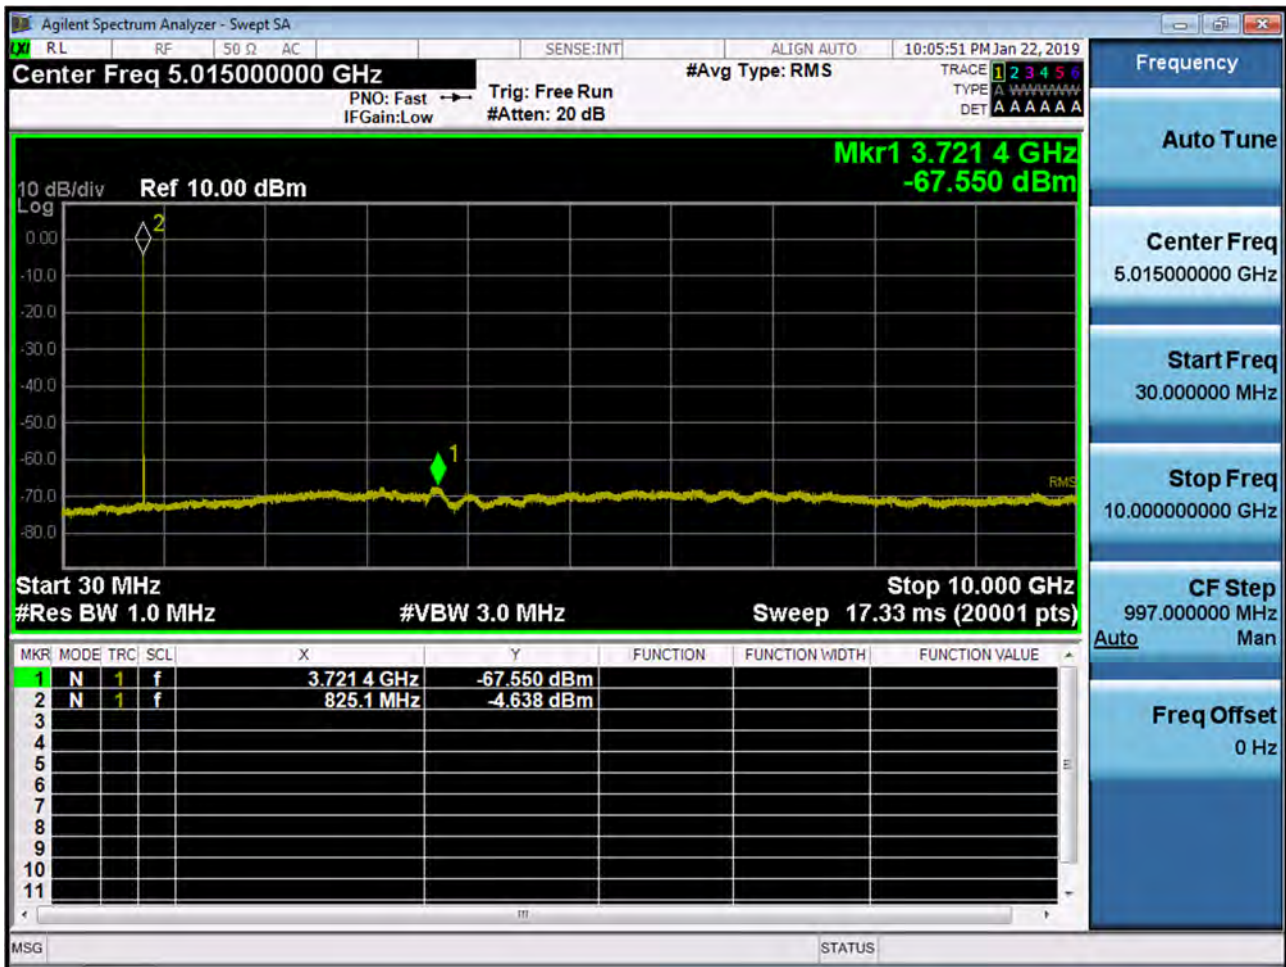


BAND 5. Conducted Spurious Plot (20525ch_5 MHz_QPSK_RB 1_0)

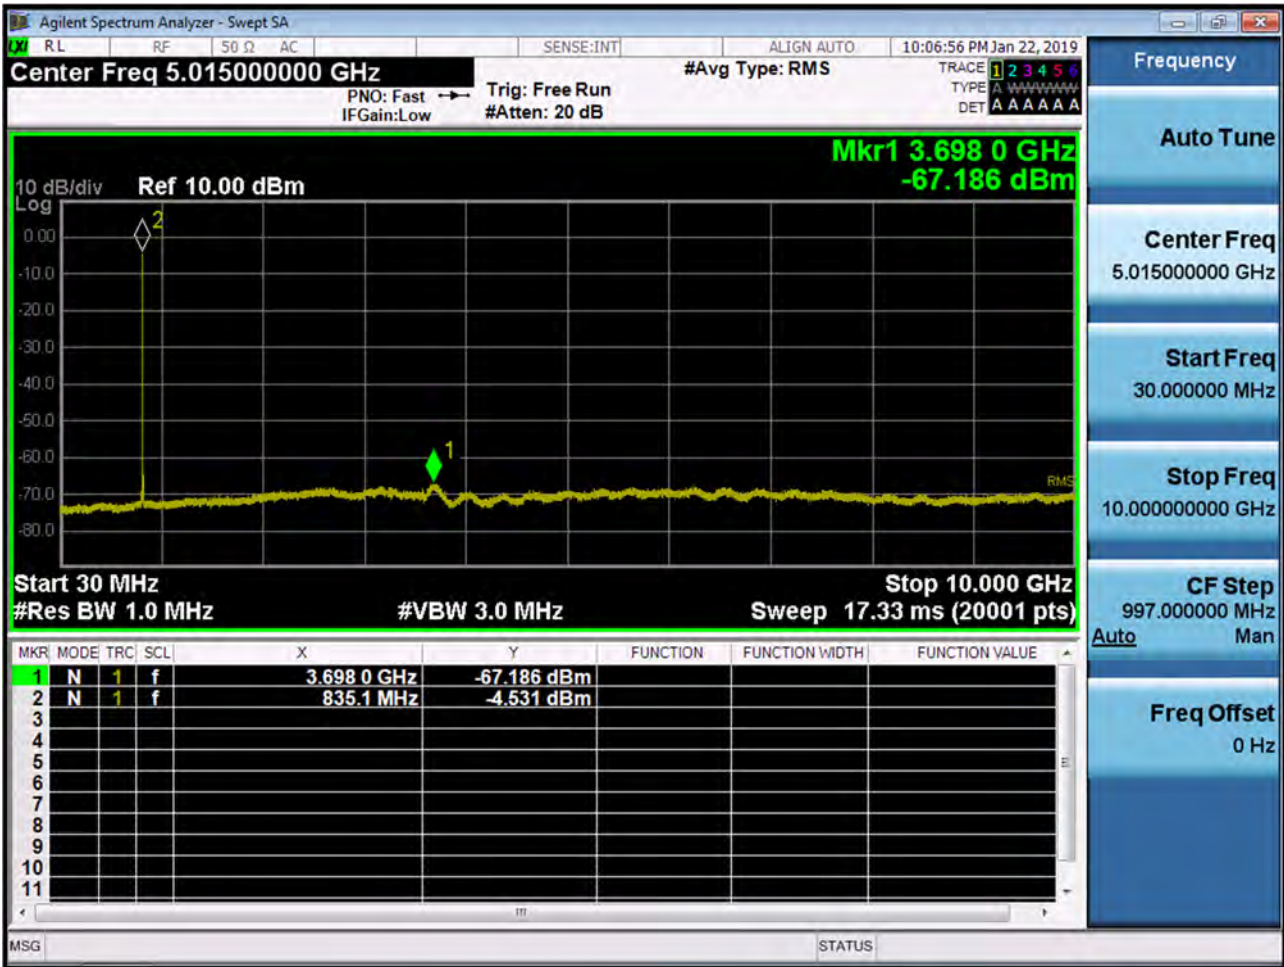


BAND 5. Conducted Spurious Plot (20625ch_5 MHz_QPSK_RB 1_0)

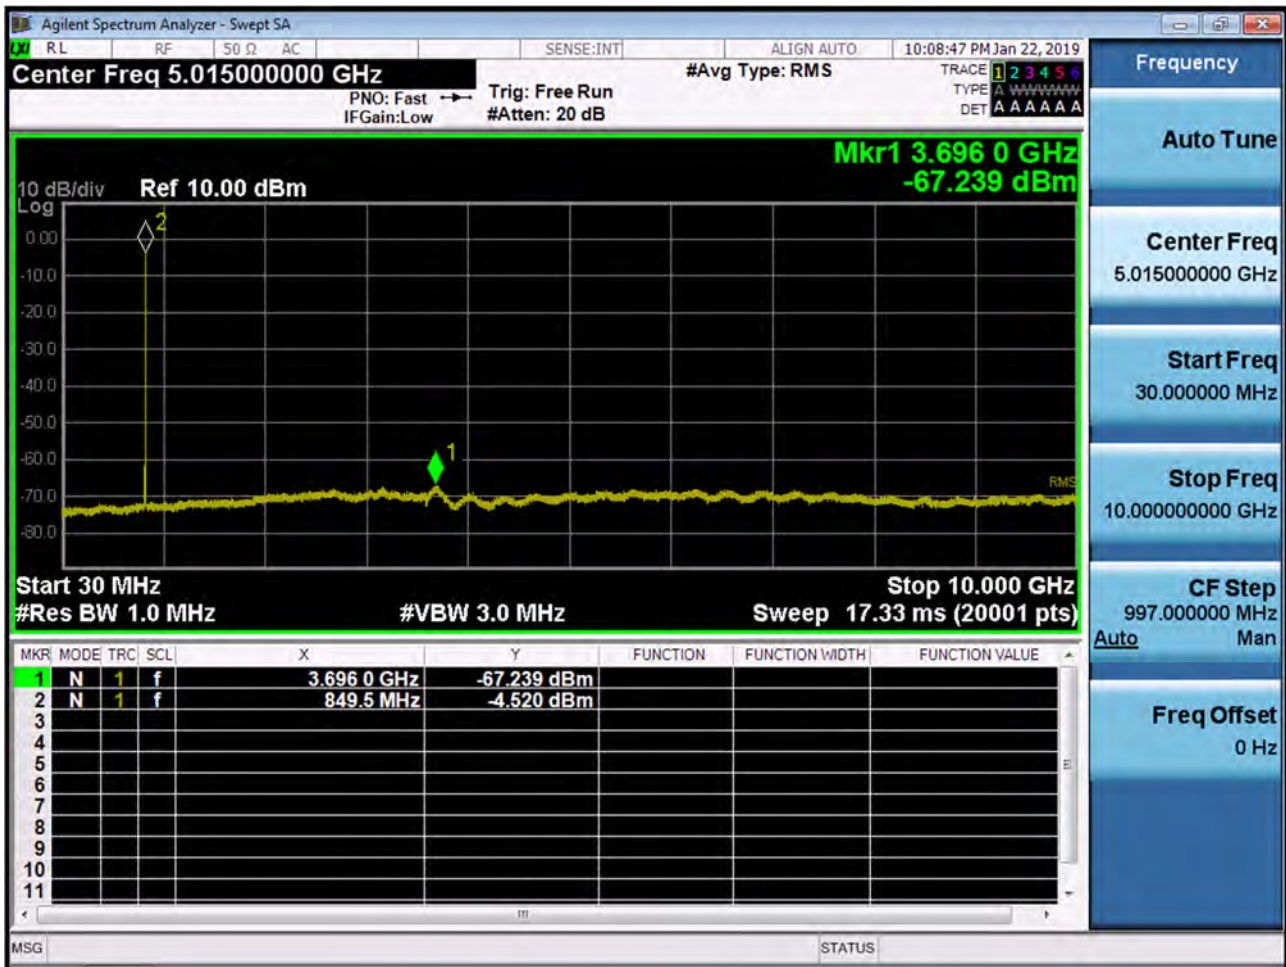


BAND 5. Conducted Spurious Plot (20450ch_10 MHz_QPSK_RB 1_0)

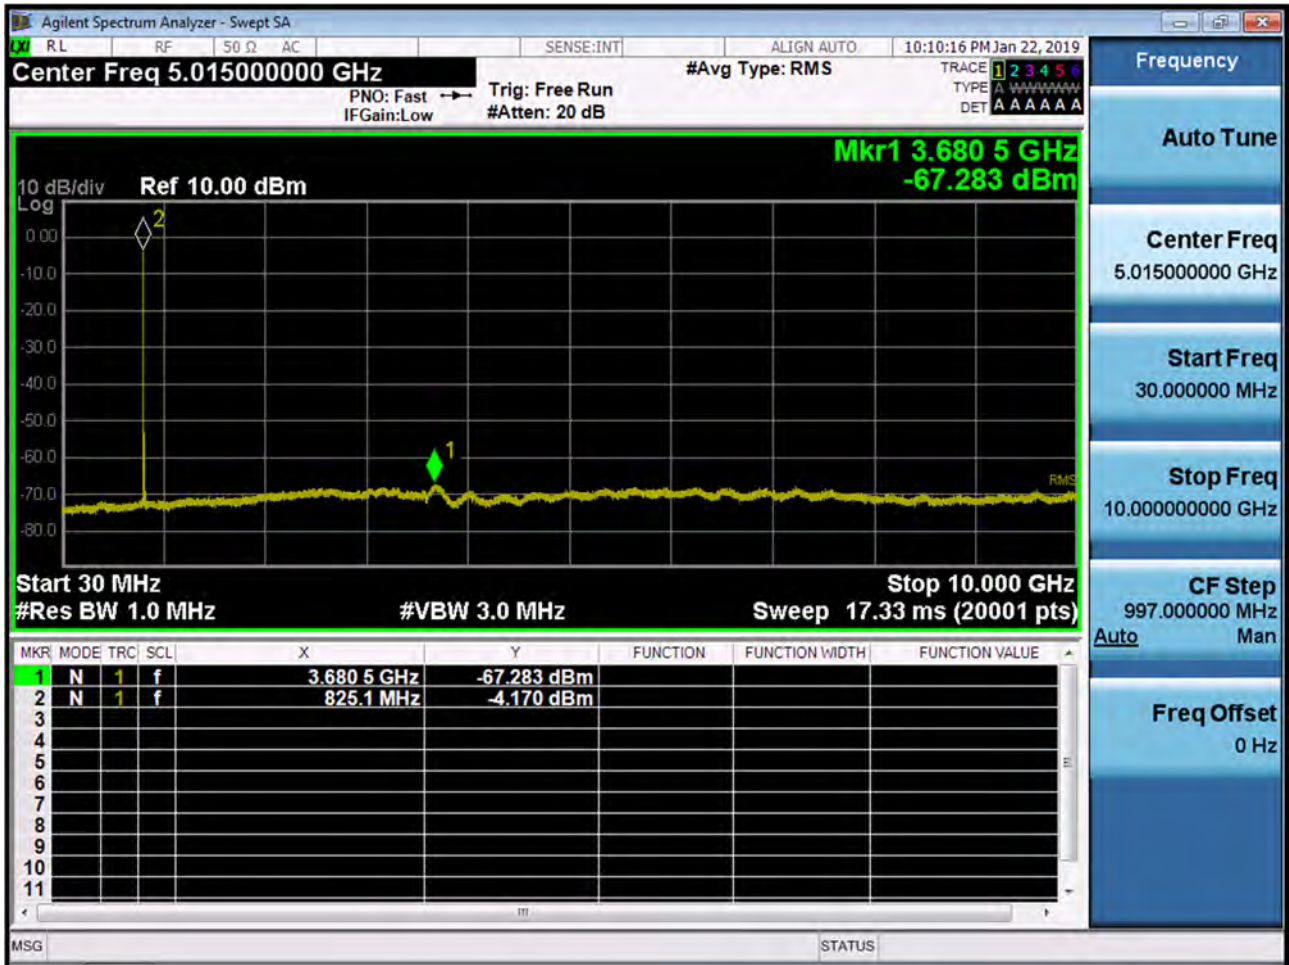

BAND 5. Conducted Spurious Plot (20525ch_10 MHz_QPSK_RB 1_0)

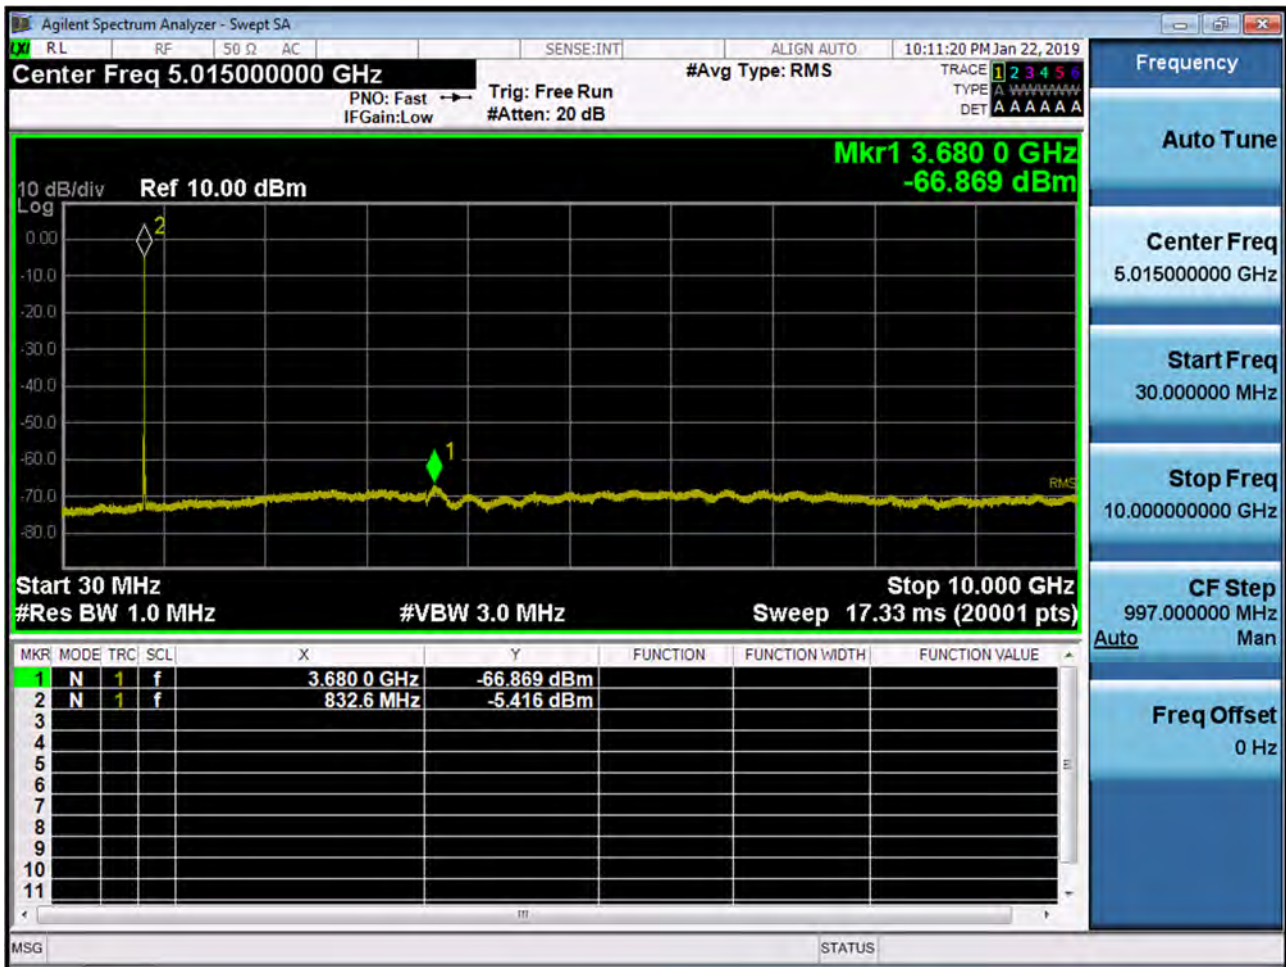

BAND 5. Conducted Spurious Plot (20600ch_10 MHz_QPSK_RB 1_0)

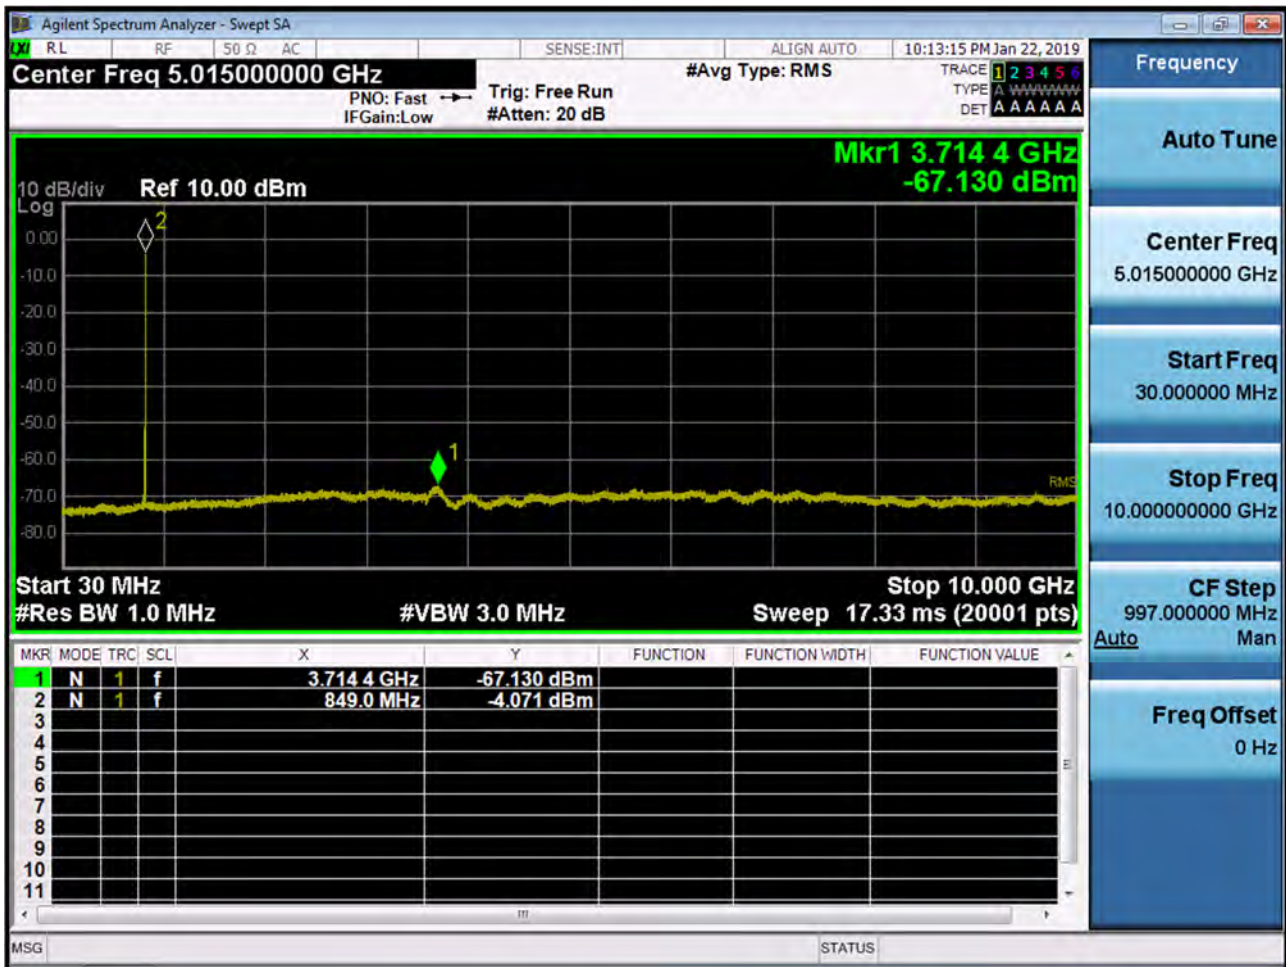

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2112-FC026-P