



FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 7

**CERTIFICATION TEST REPORT**

**FOR**

**AN ELECTRONIC READING DEVICE**

**MODEL NUMBER: BNRV200**

**FCC ID: XHHBNRV200-A  
IC: 8961A-BNRV200A**

**REPORT NUMBER: 10U13404-2, Revision A**

**ISSUE DATE: OCTOBER 28, 2010**

*Prepared for*  
**BARNES&NOBLE.COM**  
**76 NINTH AVE., 9TH FLOOR**  
**NEW YORK, NY 10011**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	10/13/10	Initial Issue	T. Chan
A	10/28/10	Updated client company name and address	A. Zaffar

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	7
5.5. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	7
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	8
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>11</b>
7.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	11
7.1.1. 6 dB BANDWIDTH .....	11
7.1.2. 99% BANDWIDTH .....	15
7.1.3. OUTPUT POWER .....	19
7.1.4. AVERAGE POWER .....	20
7.1.5. POWER SPECTRAL DENSITY .....	21
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	25
7.2. <i>802.11g MODE IN THE 2.4 GHz BAND.....</i>	29
7.2.1. 6 dB BANDWIDTH .....	29
7.2.2. 99% BANDWIDTH .....	32
7.2.3. OUTPUT POWER .....	35
7.2.4. AVERAGE POWER .....	36
7.2.5. POWER SPECTRAL DENSITY .....	37
7.2.6. CONDUCTED SPURIOUS EMISSIONS.....	40
7.3. <i>802.11 HT20 SISO MODE IN THE 2.4 GHz BAND .....</i>	44
7.3.1. 6 dB BANDWIDTH .....	44
7.3.2. 99% BANDWIDTH .....	47
7.3.3. OUTPUT POWER .....	50
7.3.4. AVERAGE POWER .....	51
7.3.5. POWER SPECTRAL DENSITY .....	52
7.3.6. CONDUCTED SPURIOUS EMISSIONS.....	55
<b>8. RADIATED TEST RESULTS .....</b>	<b>59</b>

---

8.1. <i>LIMITS AND PROCEDURE</i> .....	59
8.2. <i>TRANSMITTER ABOVE 1 GHz</i> .....	60
8.2.1. TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND ..	60
8.2.2. TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND ..	66
8.2.3. TRANSMITTER ABOVE 1 GHz FOR 802.11 HT20 SISO MODE IN THE 2.4 GHz BAND	71
8.3. <i>RECEIVER ABOVE 1 GHz</i> .....	76
8.4. <i>WORST-CASE BELOW 1 GHz</i> .....	77
<b>9. AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>80</b>
<b>10. MAXIMUM PERMISSIBLE EXPOSURE</b> .....	<b>84</b>
<b>11. SETUP PHOTOS</b> .....	<b>87</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BARNES&NOBLE.COM  
76 NINTH AVE., 9TH FLOOR  
NEW YORK, NY 10011

**EUT DESCRIPTION:** AN ELECTRONIC READING DEVICE

**MODEL:** BNRV200

**SERIAL NUMBER:** BDAA4100B308E0A

**DATE TESTED:** SEPTEMBER 30 - OCTOBER 12, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.


Approved & Released For UL CCS By:



---

THU CHAN  
ENGINEERING MANAGER  
UL CCS

Tested By:



---

MENGISTU MEKURIA  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an eBook reader with WiFi and USB ports device, without WWAN. The radio module is manufactured by Marvel.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	19.20	83.18
2412 - 2462	802.11g	27.04	505.82
2412 - 2462	HT20 SISO 11n	27.08	510.50

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a chip antenna, with a maximum gain of 1.62 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Usbnet driver and bumin1 tool v0.12

The test utility software used during testing was telnet 192.168.0.17.

### 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

802.11b Mode (20 MHz BW operation): 1 Mbps, CCK.

802.11g Mode (20 MHz BW operation): 6 Mbps, OFDM.

802.11HT20 SISO Mode (20 MHz BW operation): MCS\_0, OFDM.

Since the EUT is a portable device, the X, Y and Z orientations and the worst orientation among them with AC adapter and USB cable attached to the laptop is investigated. After the investigation the worst case was found to be Z orientation with USB connection to the support laptop.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	EliteBook 2530p	CND9051NRG	Doc
AC Adapter	HP		WACLN0CLLX56XS	Doc
AC Adapter	Nook	NA	NA	NA
Headset	N/A	NA	NA	NA


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2.0m	NA
2	DC	1	DC	Un-shielded	2.0m	NA
3	USB	1	USB	Un-shielded	1.5m	NA
4	Jack	1	Headset	Un-shielded	2.0m	NA

### TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

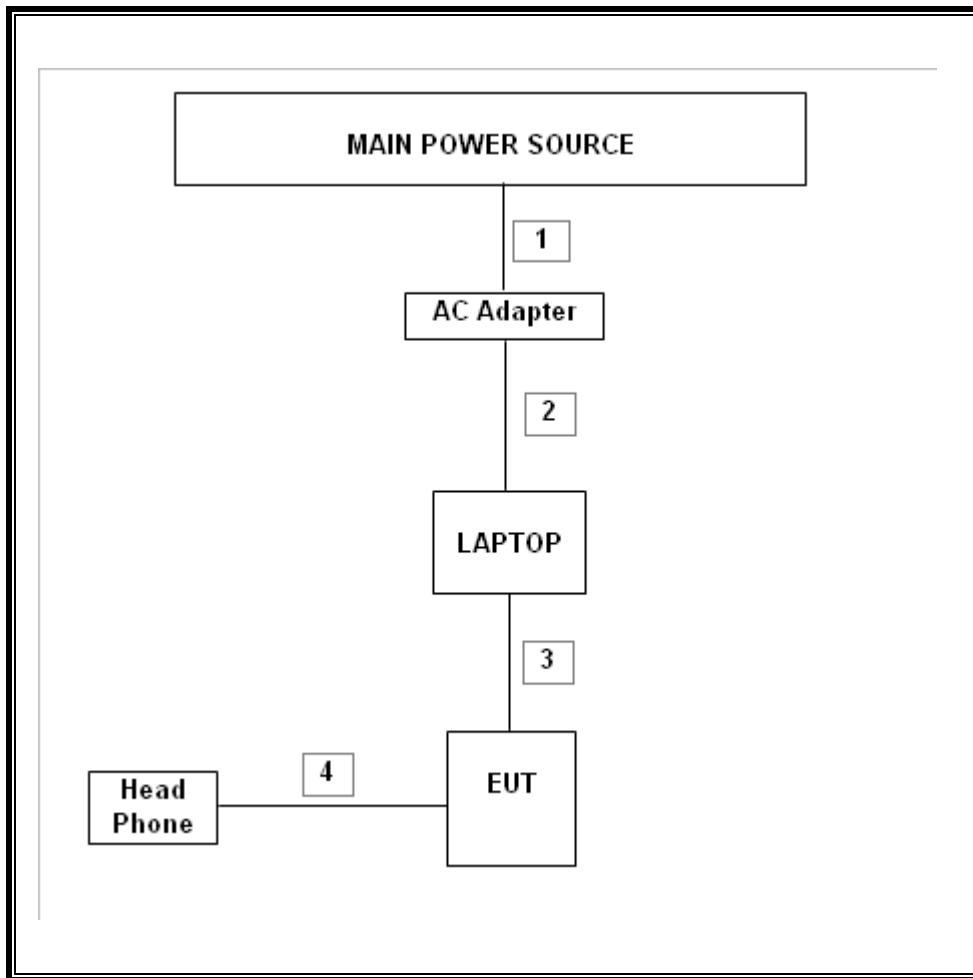

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Peak Power Sensor	Boonton	57006	O01203	02/24/11
Peak Power Meter	Boonton	4541	O01186	03/01/11
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	O00986	05/05/11
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	O01178	08/30/11
EMI Test Receiver, 30 MHz	R & S	ESHS20	N02396	5/6/2011
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	11/05/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	O01016	07/12/11
Antenna, Horn, 18 GHz	EMCO	3115	O00783	06/29/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	O00749	07/14/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	O01063	07/14/11

## 7. ANTENNA PORT TEST RESULTS

### 7.1. 802.11b MODE IN THE 2.4 GHz BAND

#### 7.1.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


##### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.00	0.5
Middle	2437	9.17	0.5
High	2462	9.08	0.5

**6 dB BANDWIDTH**

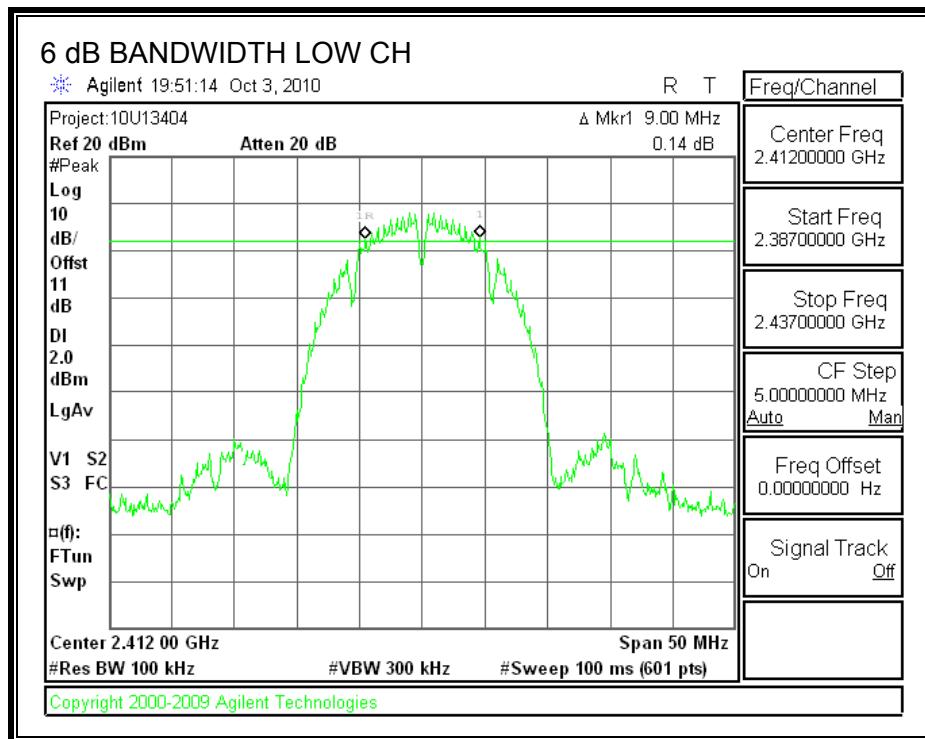

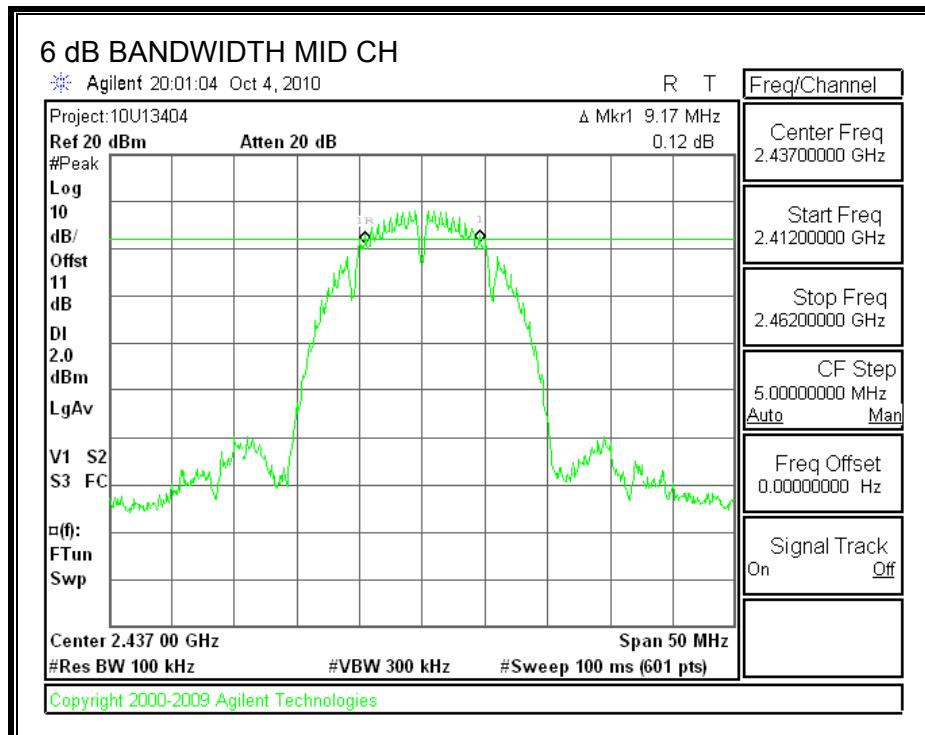

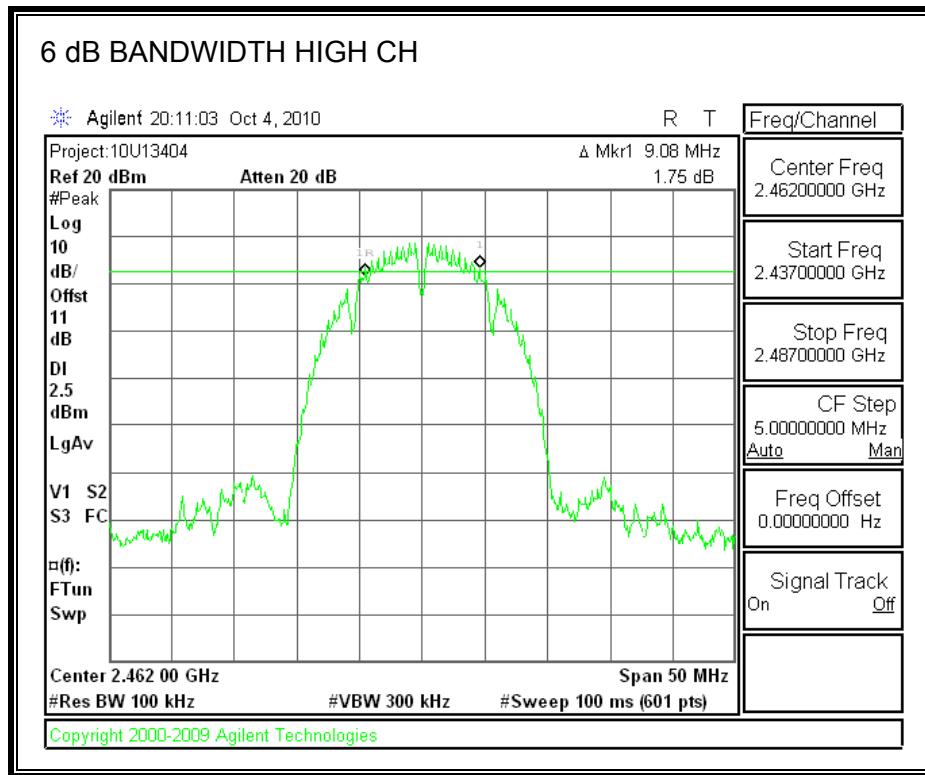

### 7.1.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.


#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.018
Middle	2437	13.316
High	2462	13.483

**99% BANDWIDTH**

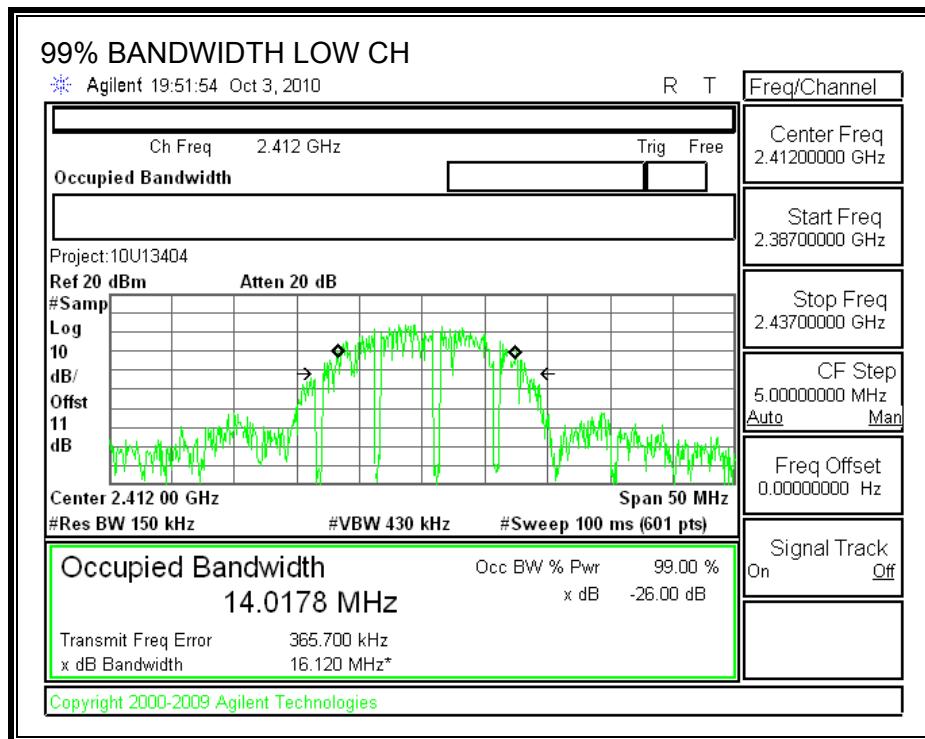

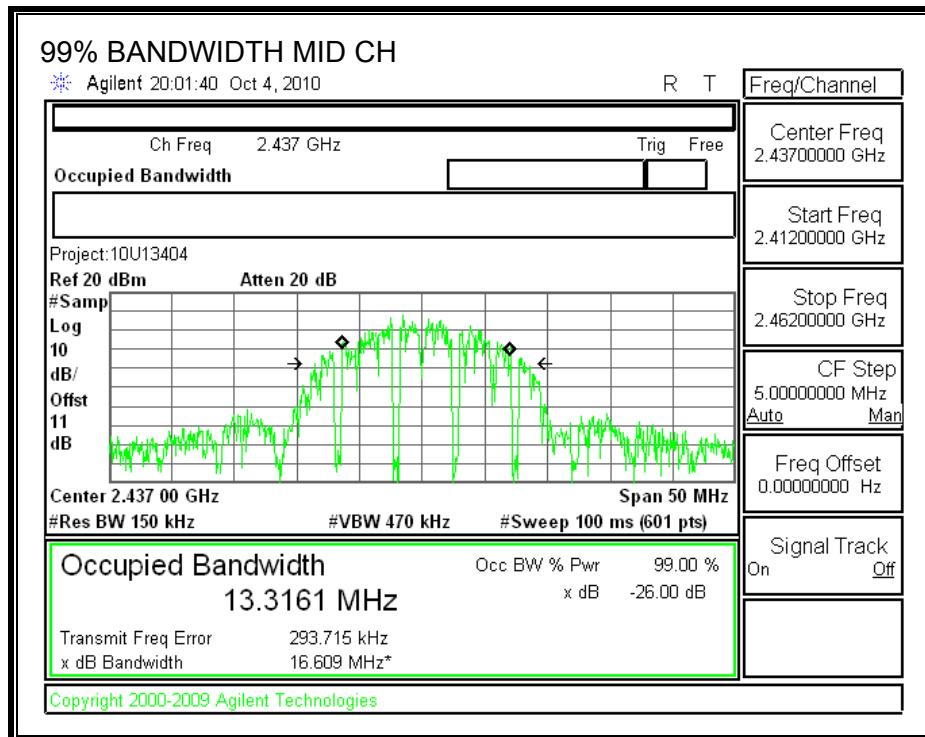

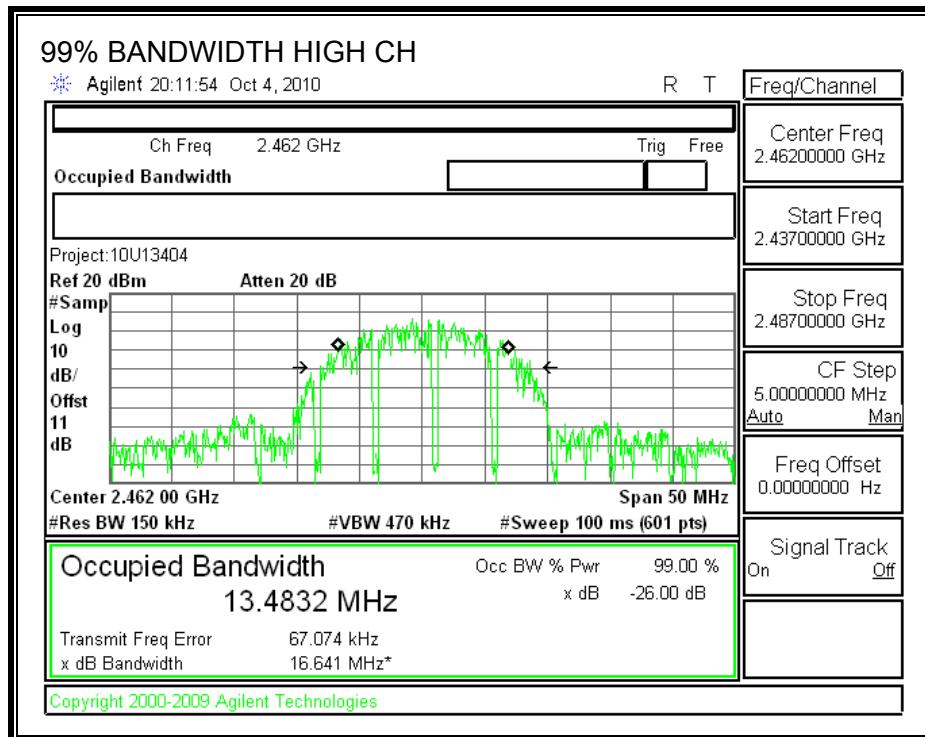

### 7.1.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

Channel	Frequency (MHz)	Power meter Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	8.17	11.00	19.17	30	-10.83
Middle	2437	8.16	11.00	19.16	30	-10.84
High	2462	8.20	11.00	19.20	30	-10.80

#### 7.1.4. AVERAGE POWER

##### LIMITS

None; for reporting purposes only.

##### TEST PROCEDURE

The transmitter output is connected to a power meter.

##### RESULTS

The cable assembly insertion loss of 11.0 dB (including 10 dB pad and 1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.07
Middle	2437	16.09
High	2462	16.09

### 7.1.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


#### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.16	8	-14.16
Middle	2437	-5.07	8	-13.07
High	2462	-4.79	8	-12.79

**POWER SPECTRAL DENSITY**

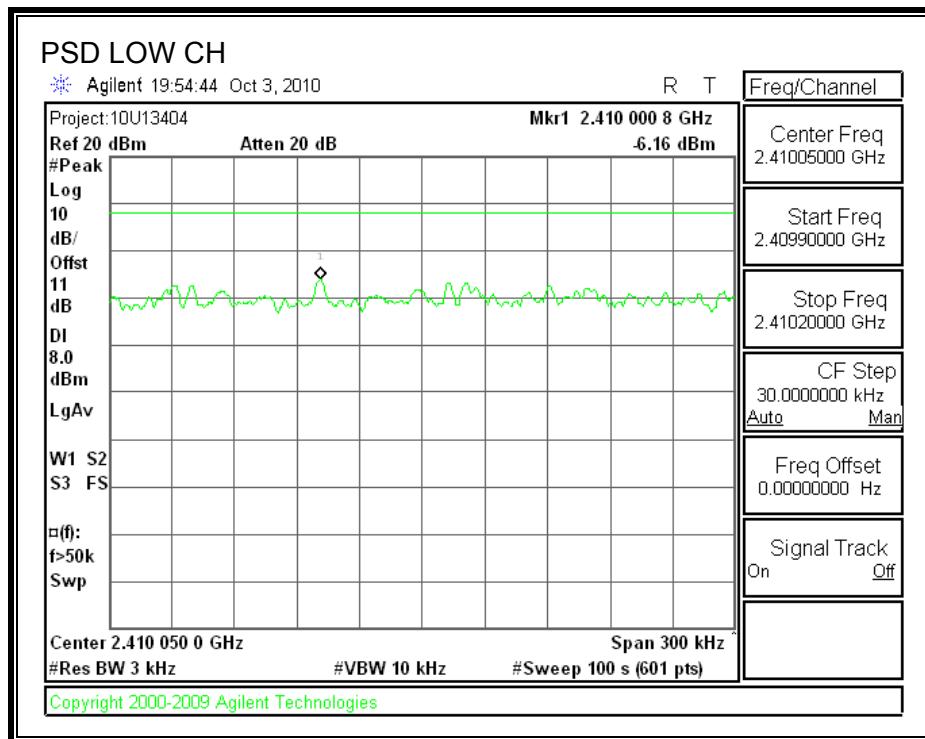

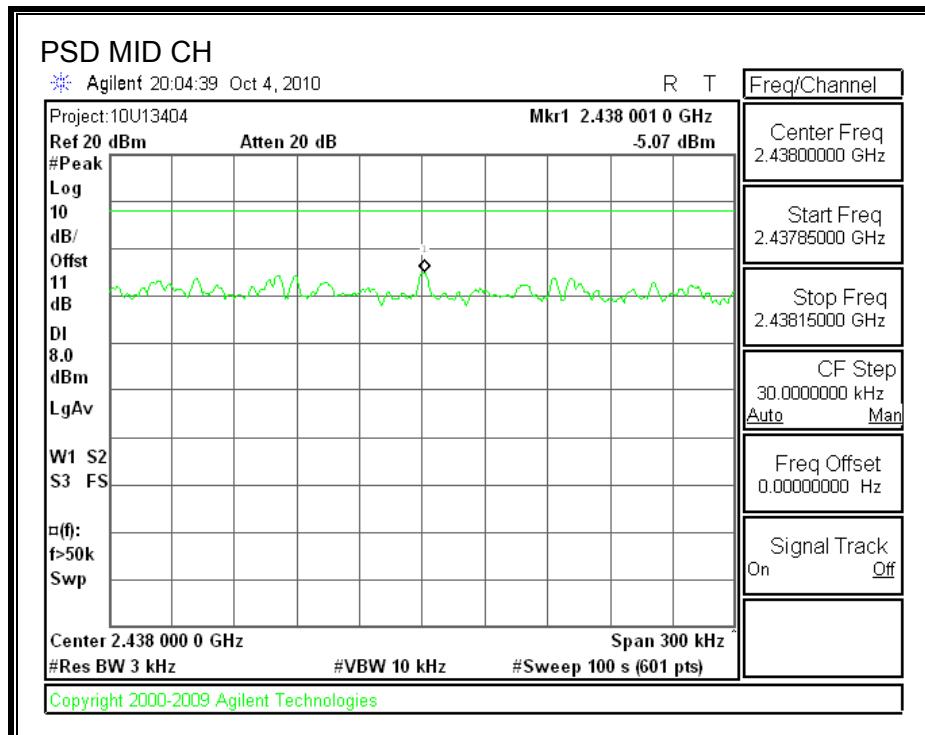

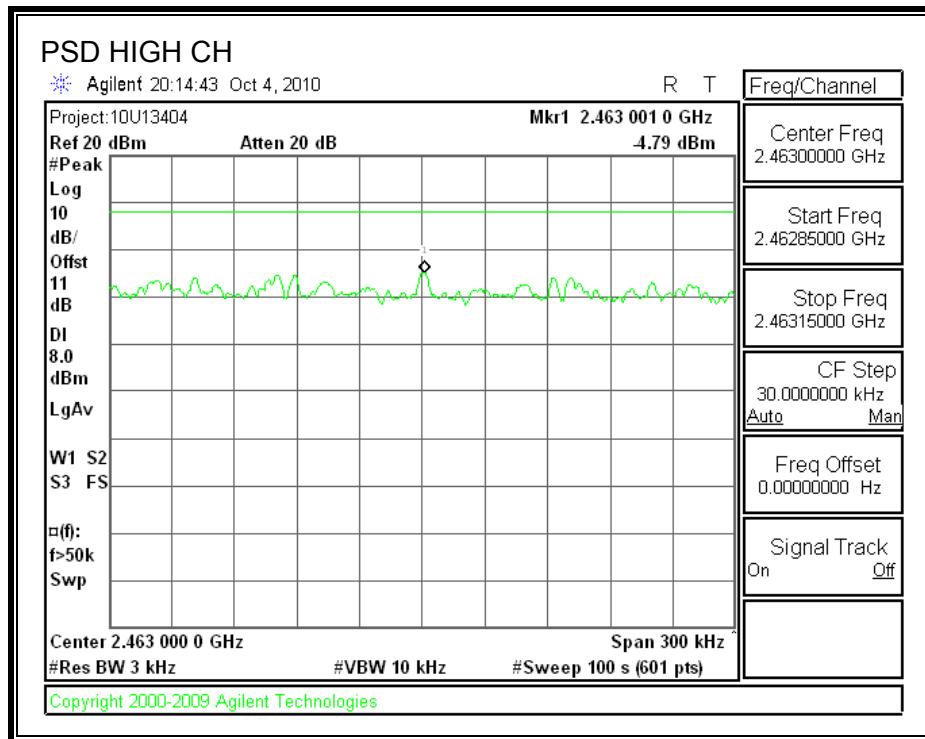

### 7.1.6. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

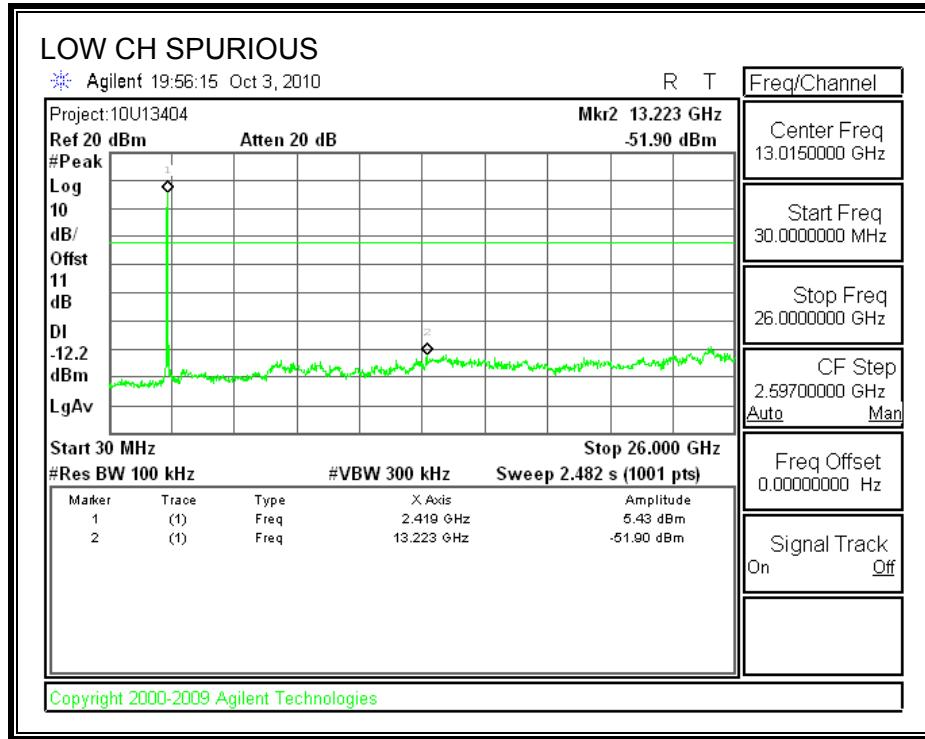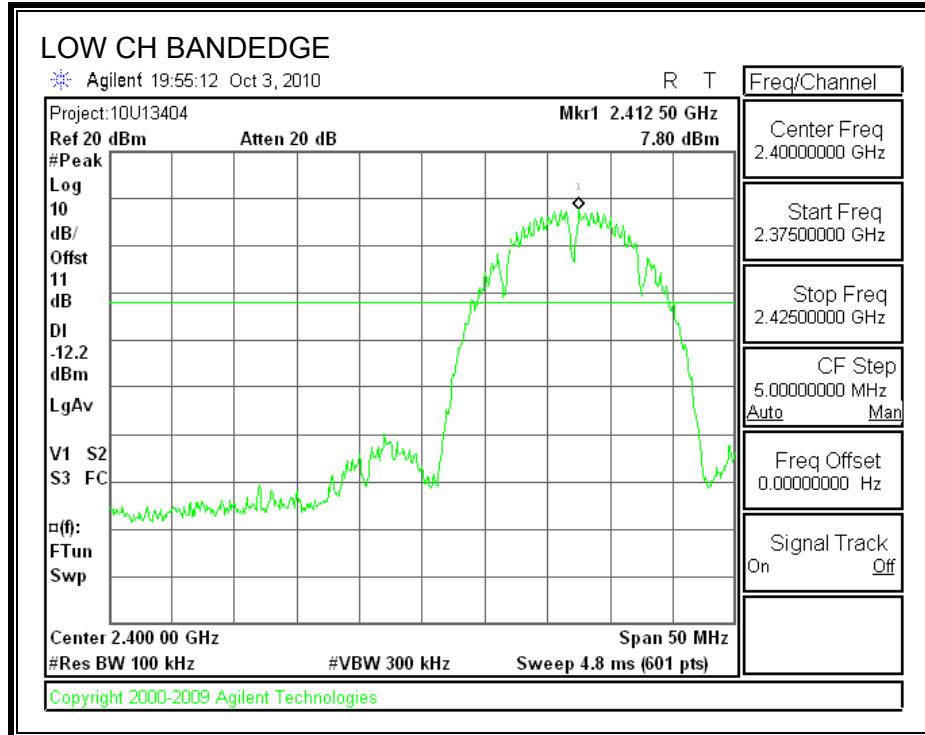

**SPURIOUS EMISSIONS, MID CHANNEL**

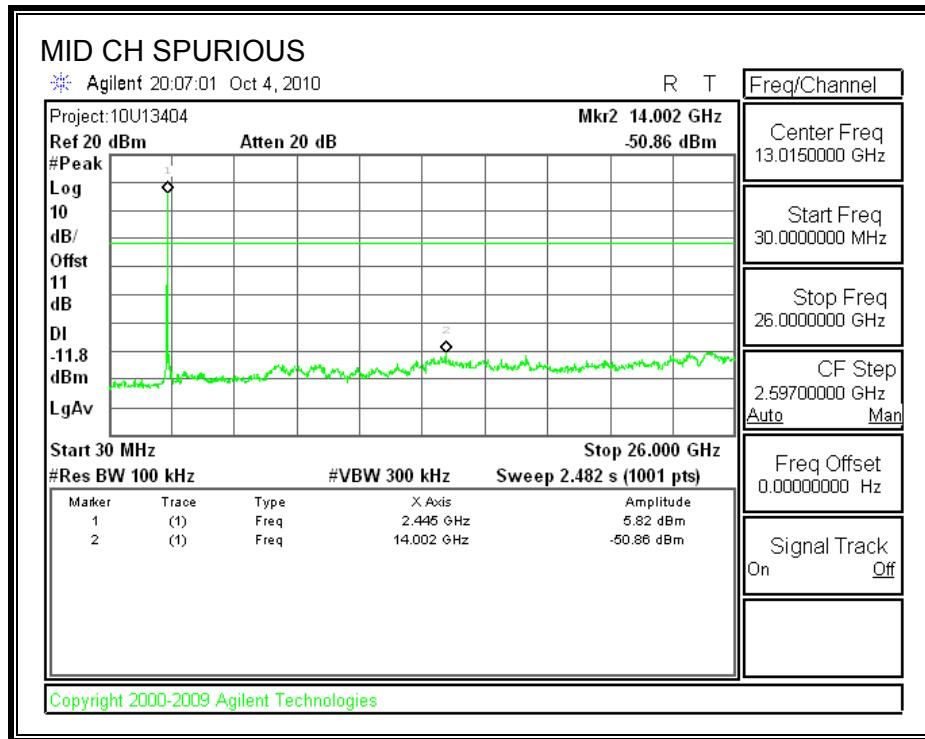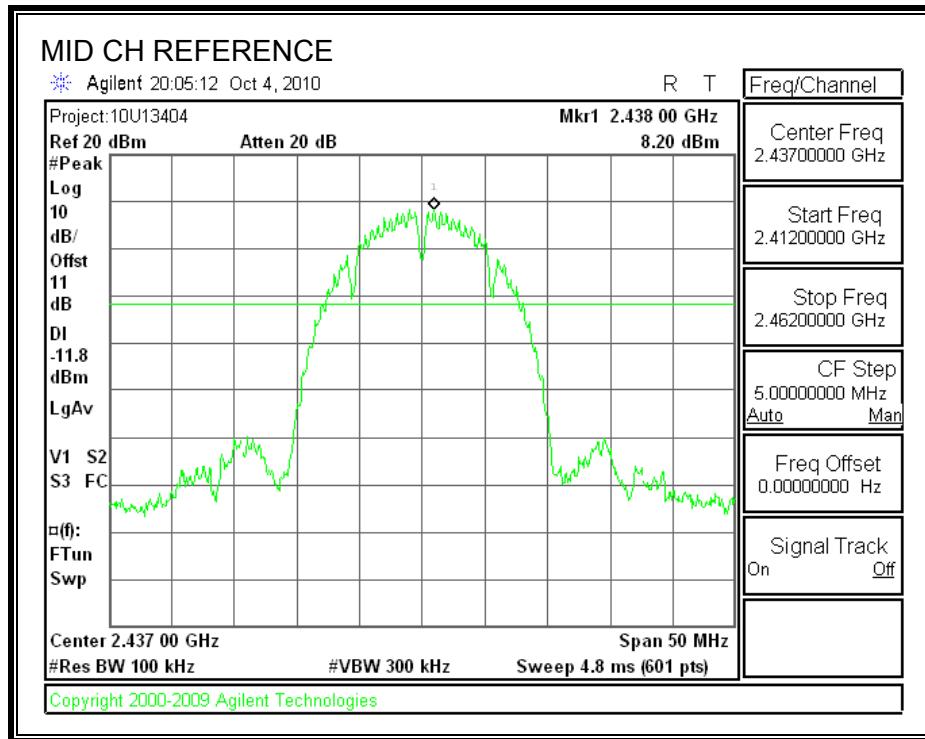

**SPURIOUS EMISSIONS, HIGH CHANNEL**

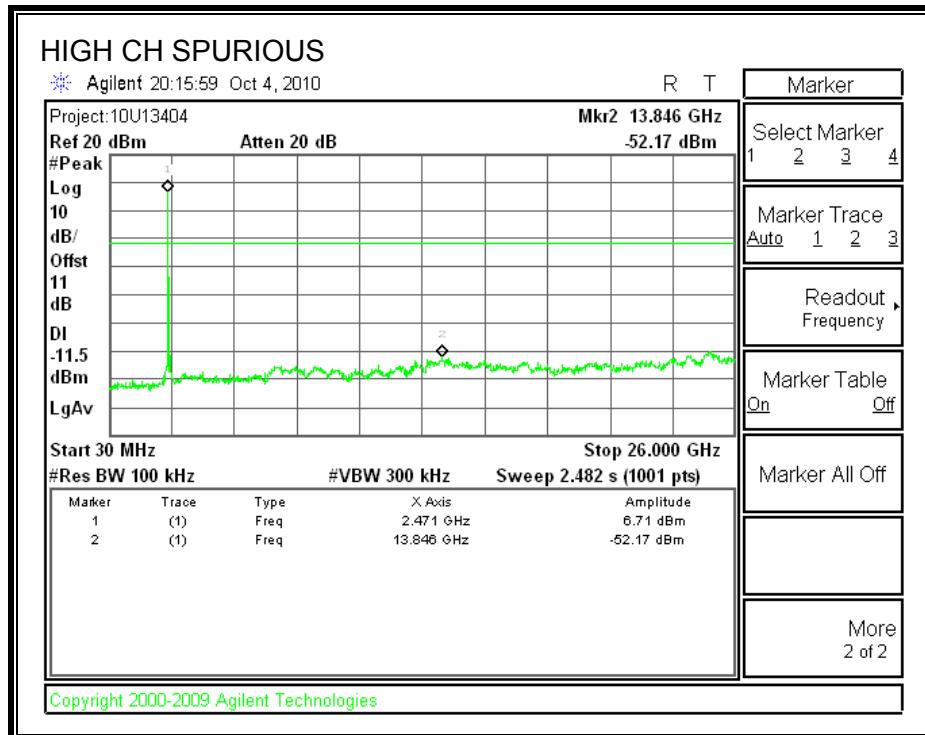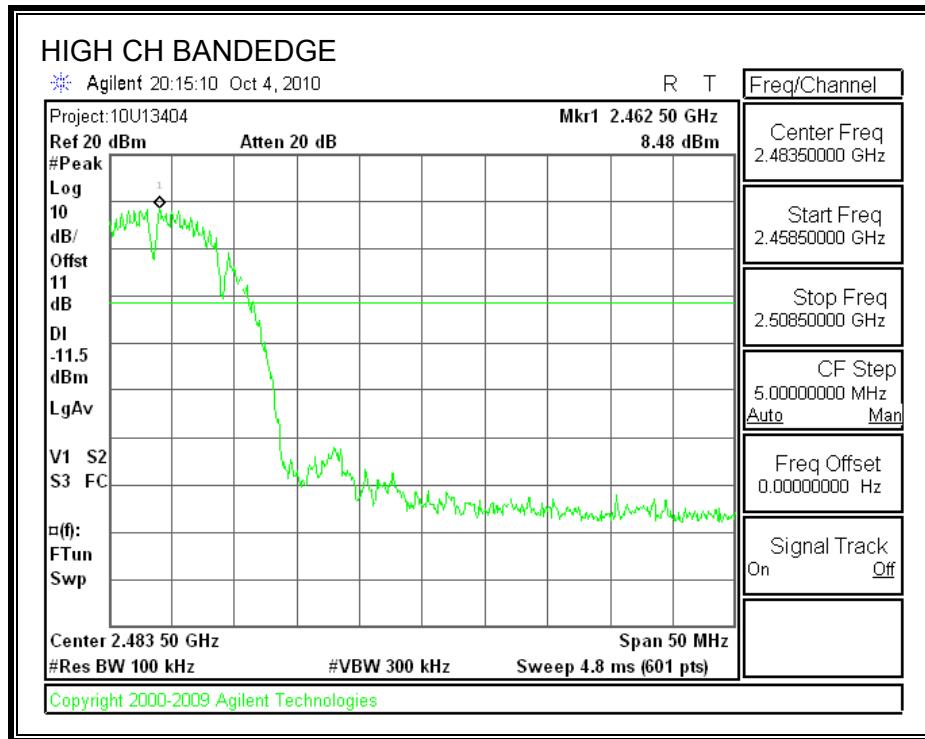

## 7.2. 802.11g MODE IN THE 2.4 GHz BAND

### 7.2.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.17	0.5
Middle	2437	15.58	0.5
High	2462	15.25	0.5

## 6dB BANDWIDTH

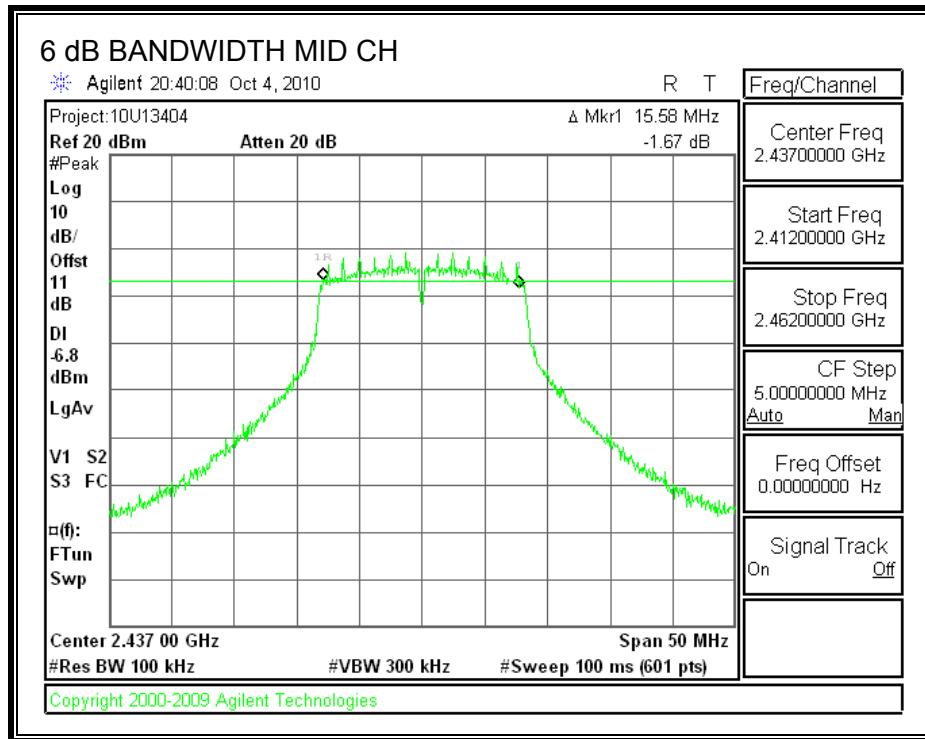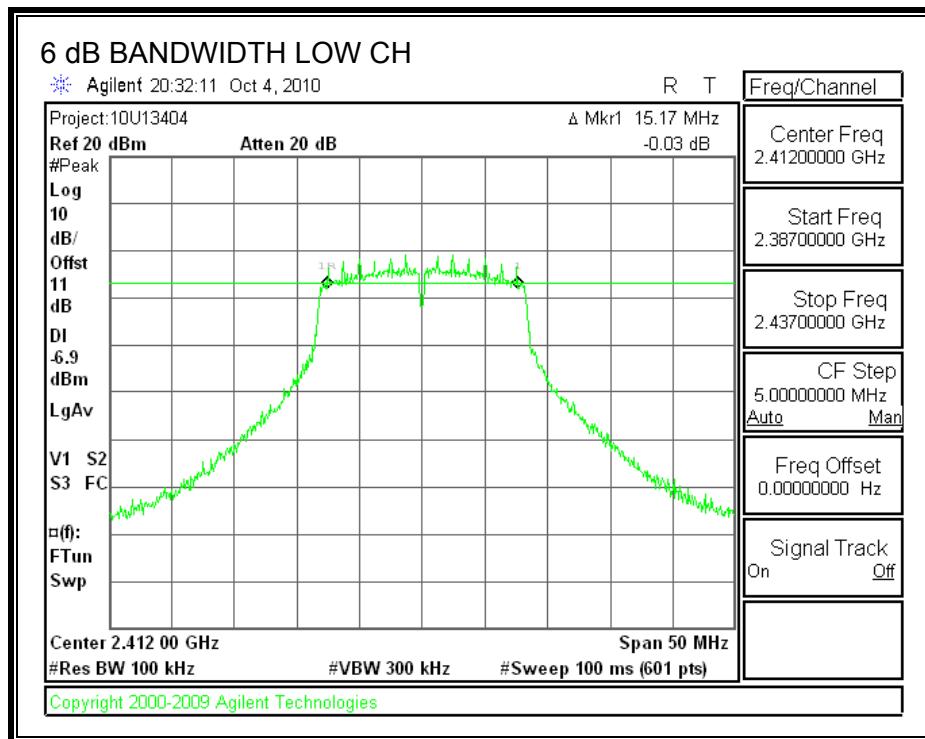

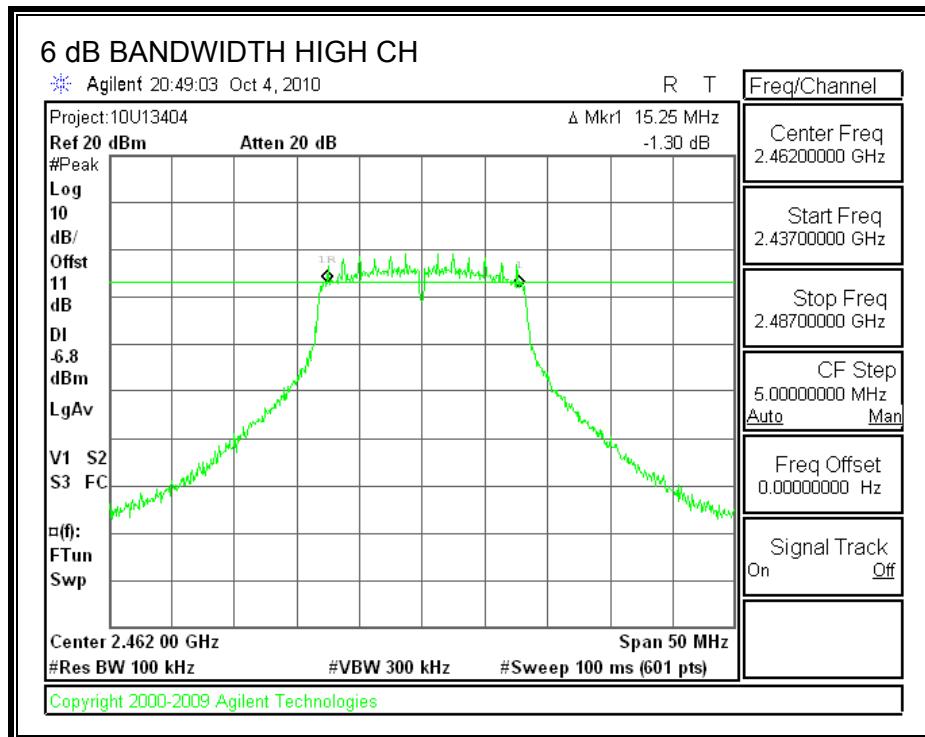

### 7.2.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.1081
Middle	2437	16.3716
High	2462	16.0047

**99% BANDWIDTH**

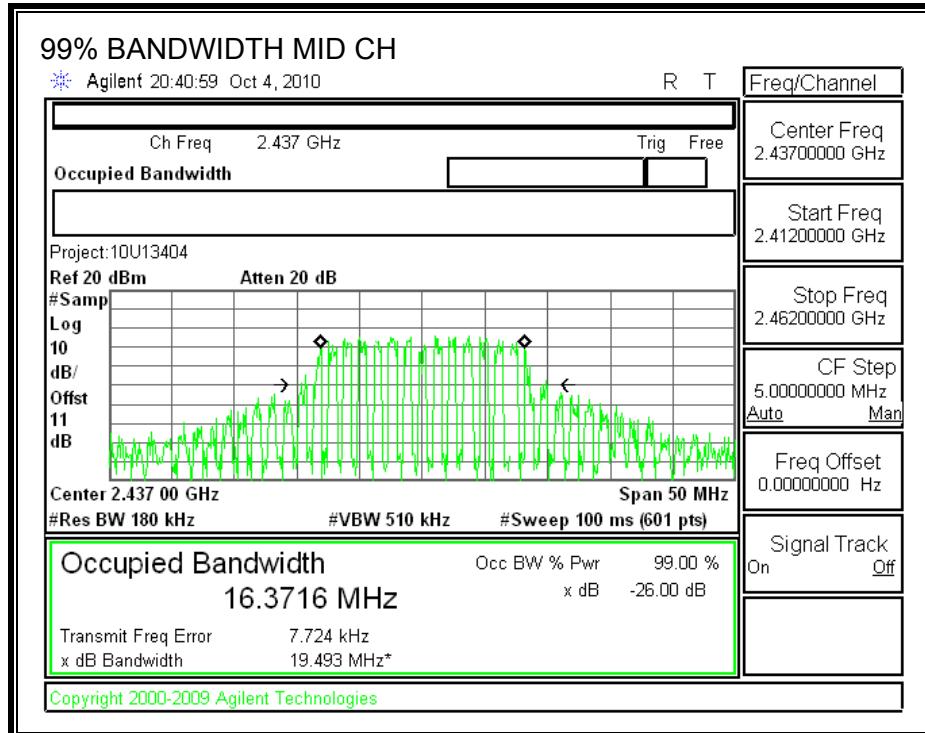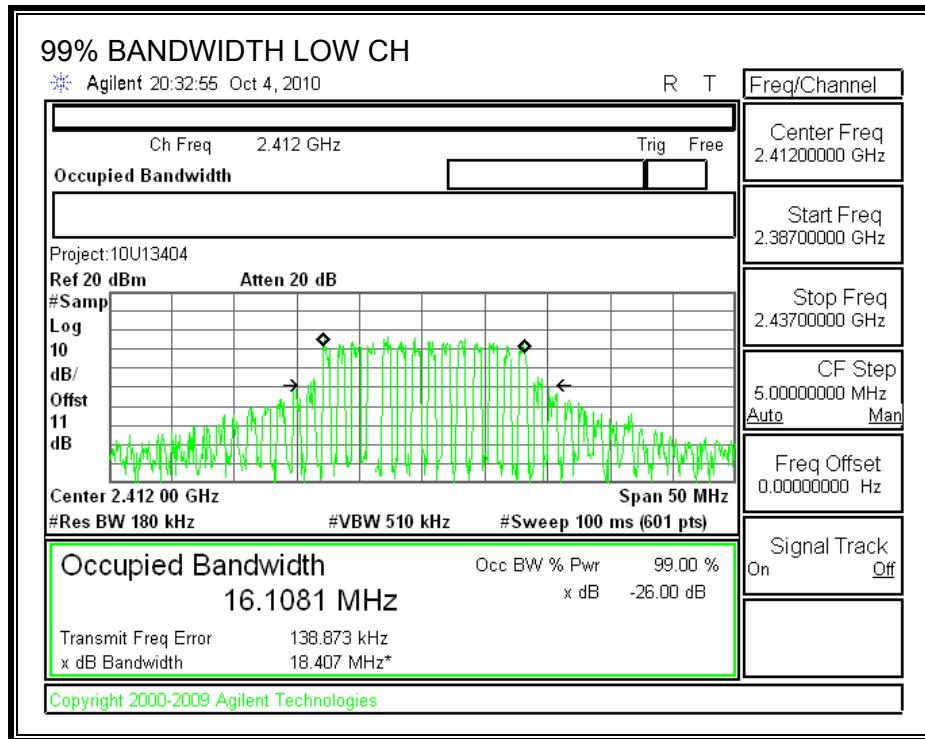

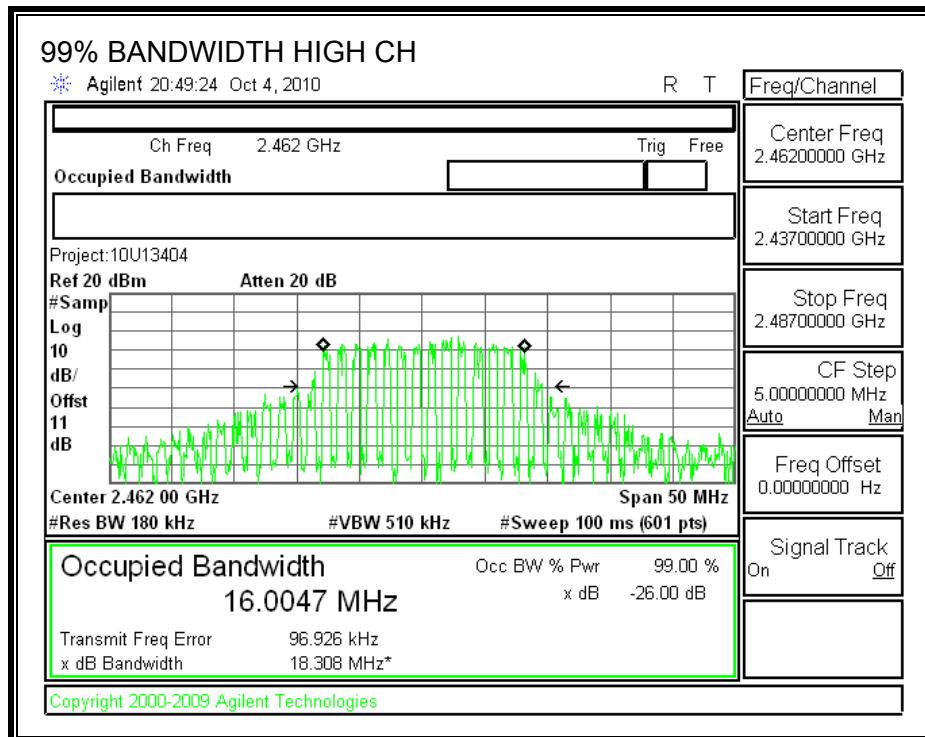

### 7.2.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

Channel	Frequency (MHz)	Power Meter PK Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	15.69	11.00	26.69	30	-3.31
Middle	2437	15.90	11.00	26.90	30	-3.10
High	2462	16.04	11.00	27.04	30	-2.96

### 7.2.4. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.0 dB (including 10 dB pad and .1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.17
Middle	2437	16.22
High	2462	16.18

## 7.2.5. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



### TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-14.82	8	-22.82
Middle	2437	-14.88	8	-22.88
High	2462	-15.59	8	-23.59

**POWER SPECTRAL DENSITY**

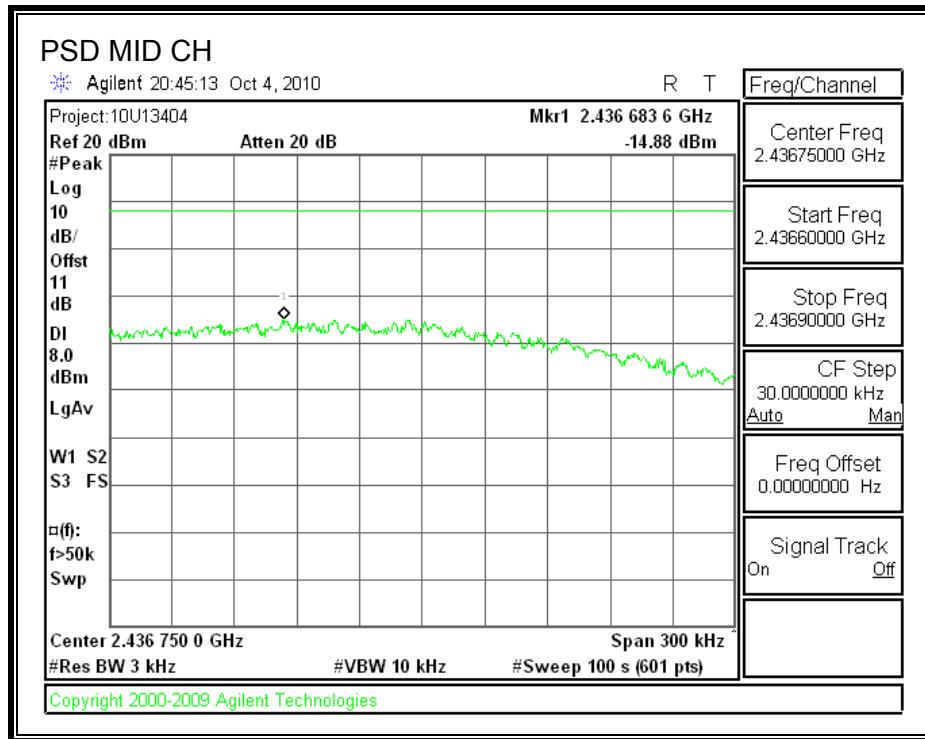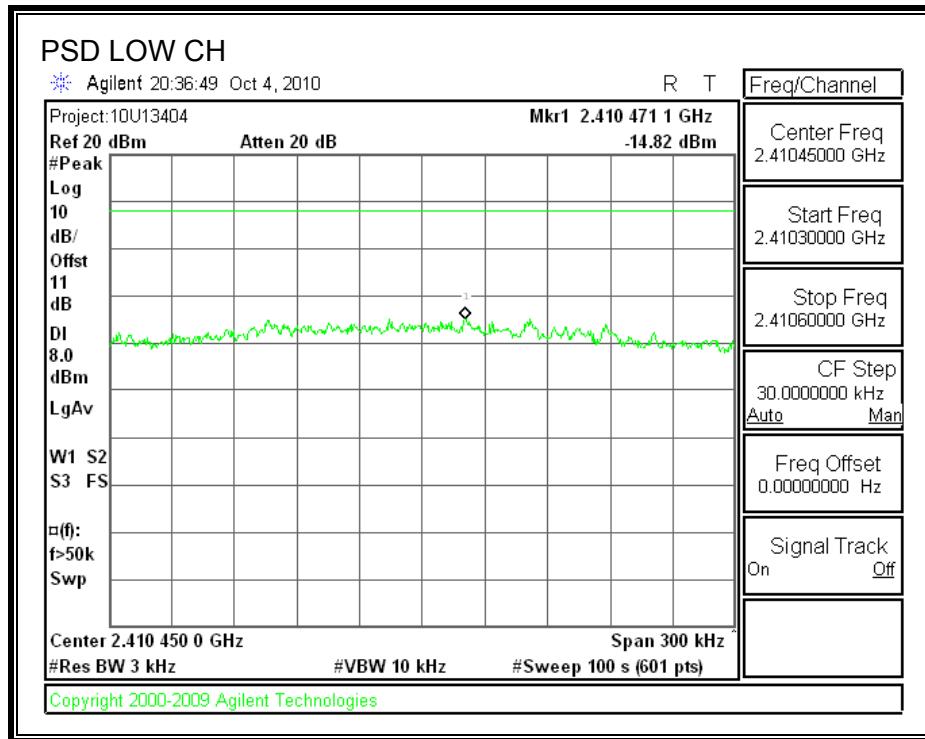

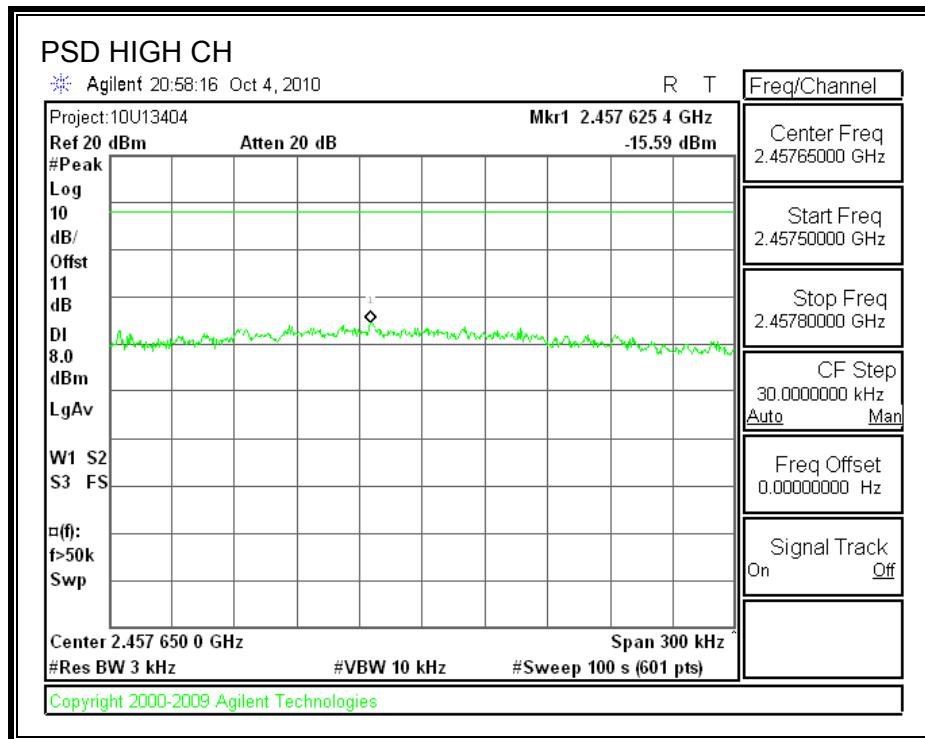

## 7.2.6. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

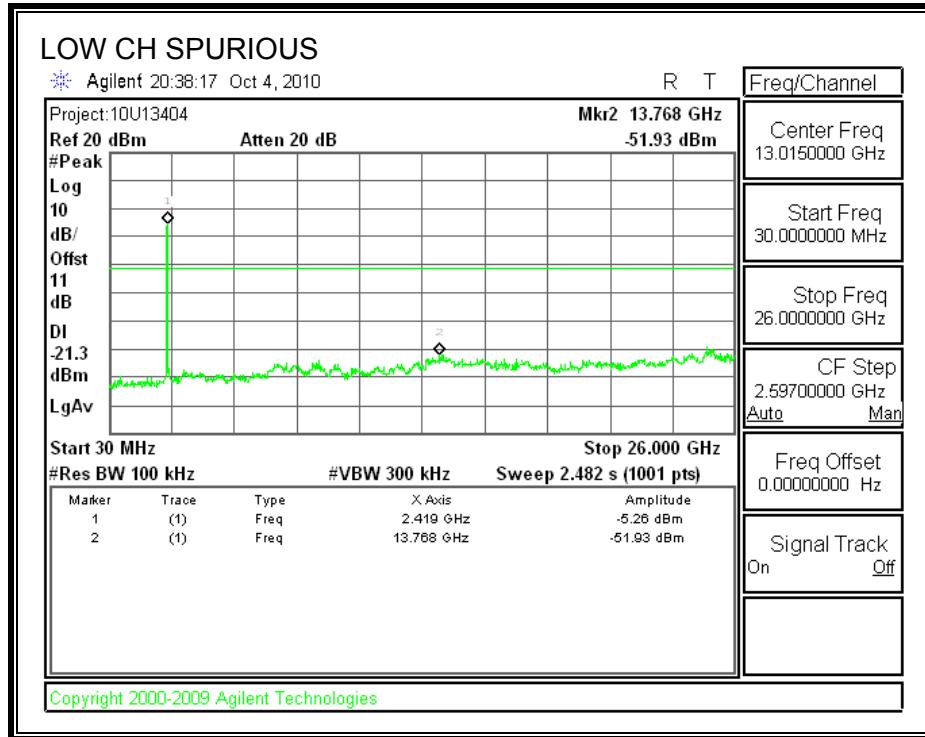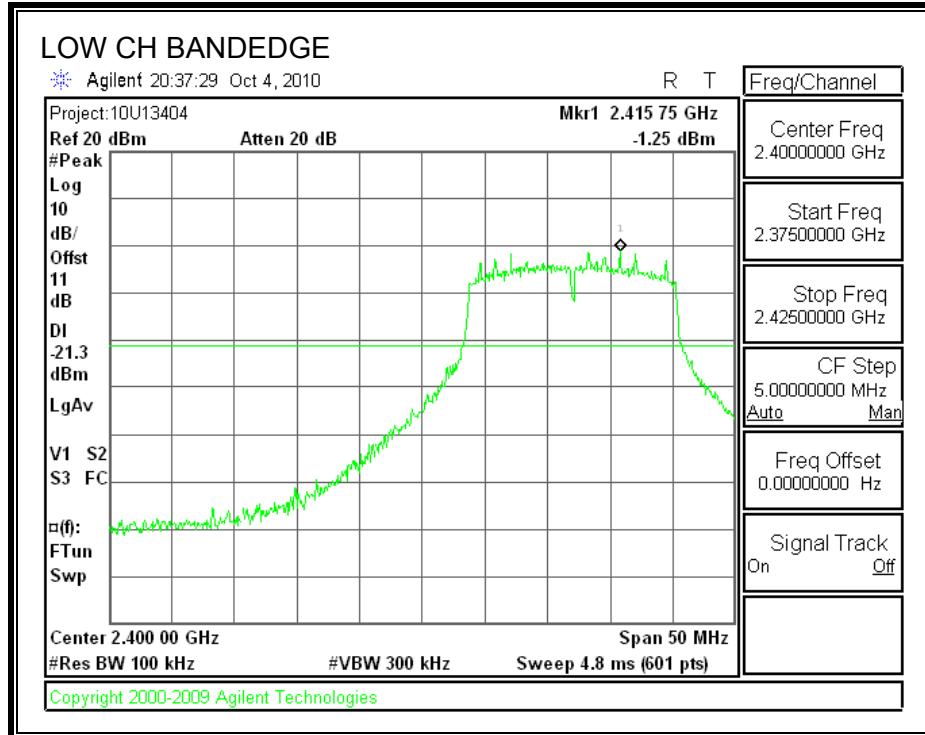

**SPURIOUS EMISSIONS, MID CHANNEL**

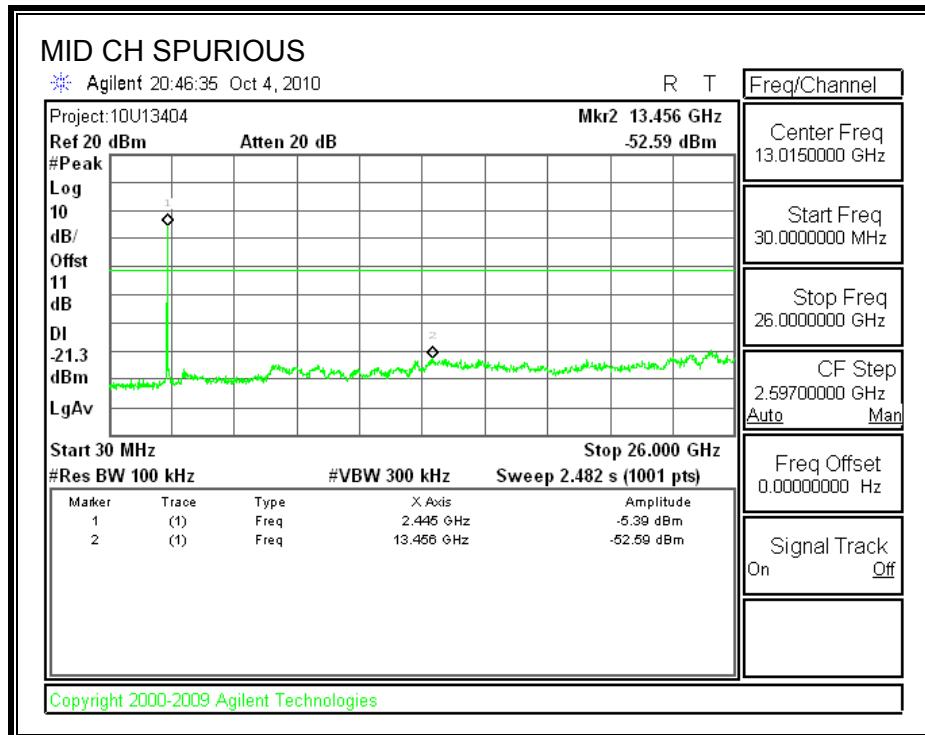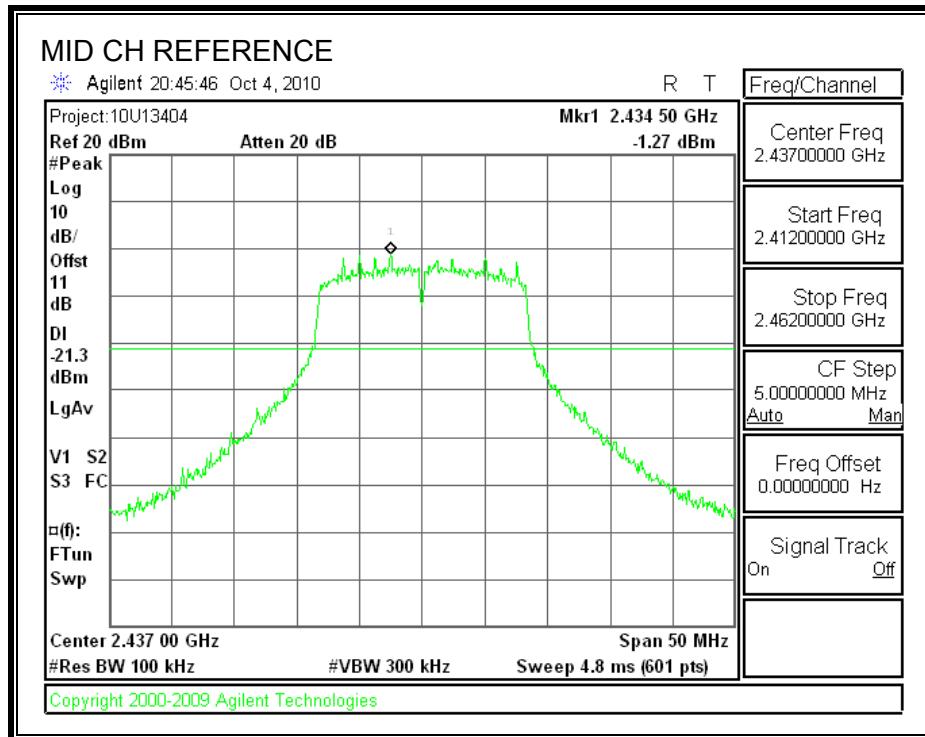

**SPURIOUS EMISSIONS, HIGH CHANNEL**

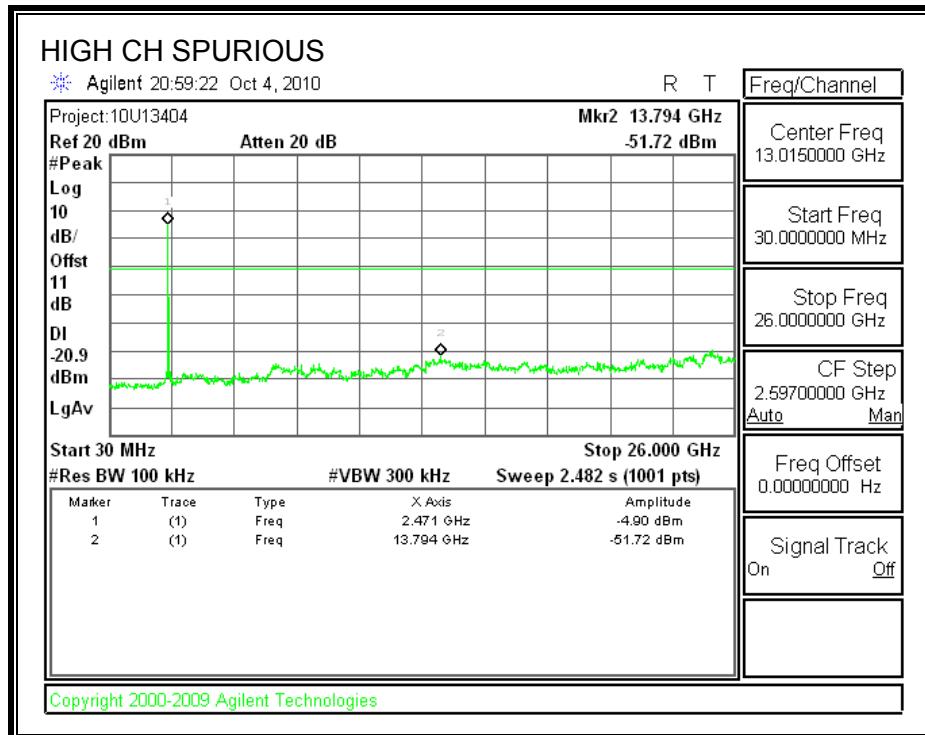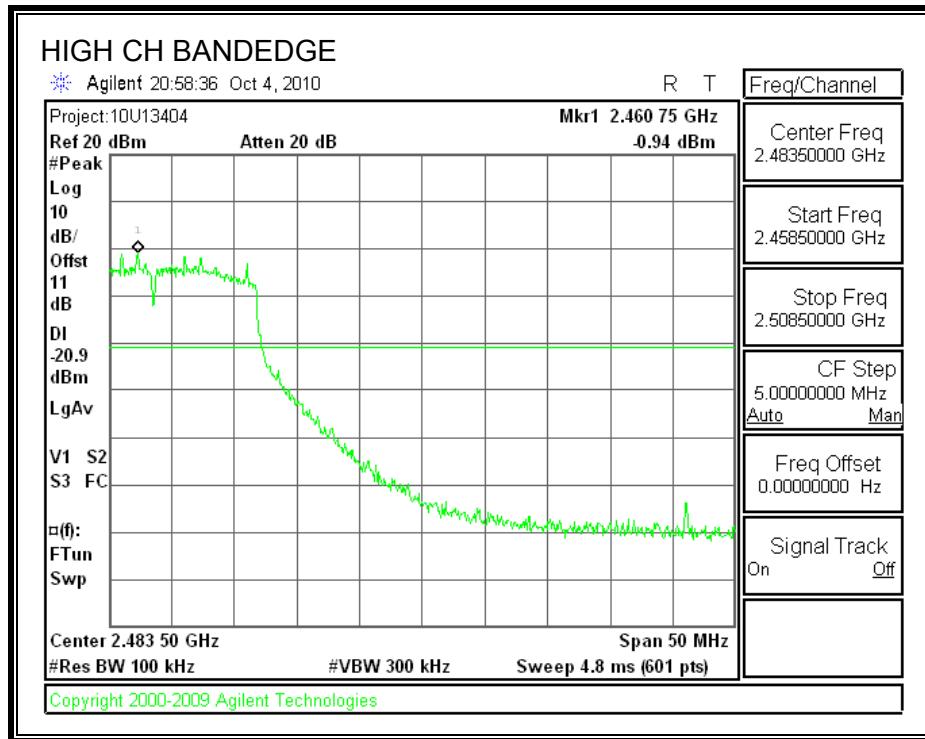

### 7.3. 802.11 HT20 SISO MODE IN THE 2.4 GHz BAND

#### 7.3.1. 6 dB BANDWIDTH

##### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

##### RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.17	0.5
Middle	2437	15.08	0.5
High	2462	15.25	0.5

## 6dB BANDWIDTH

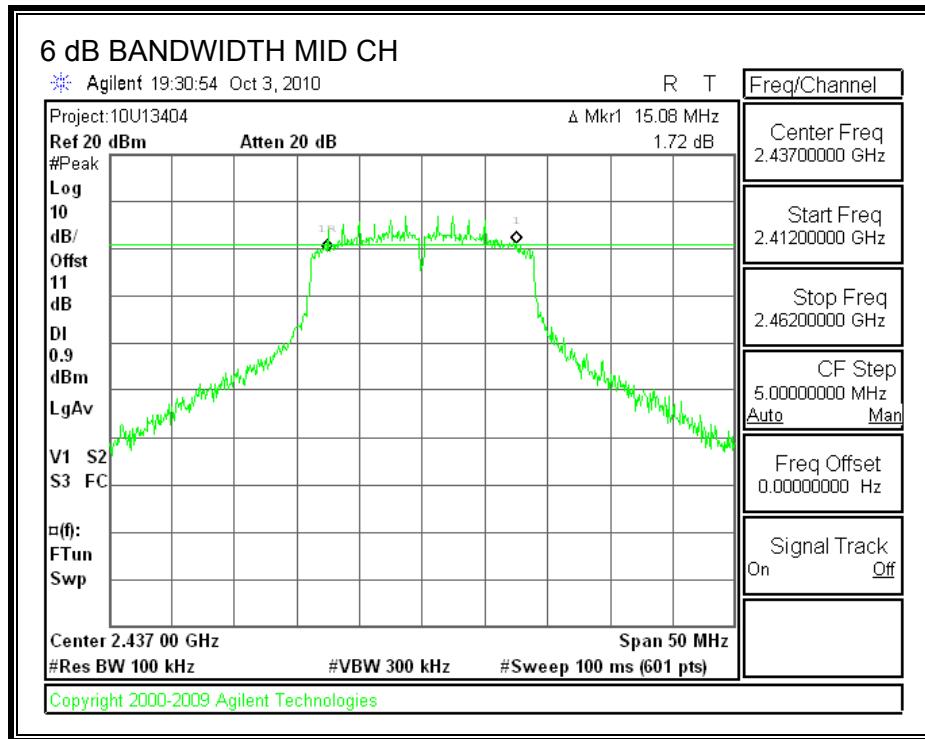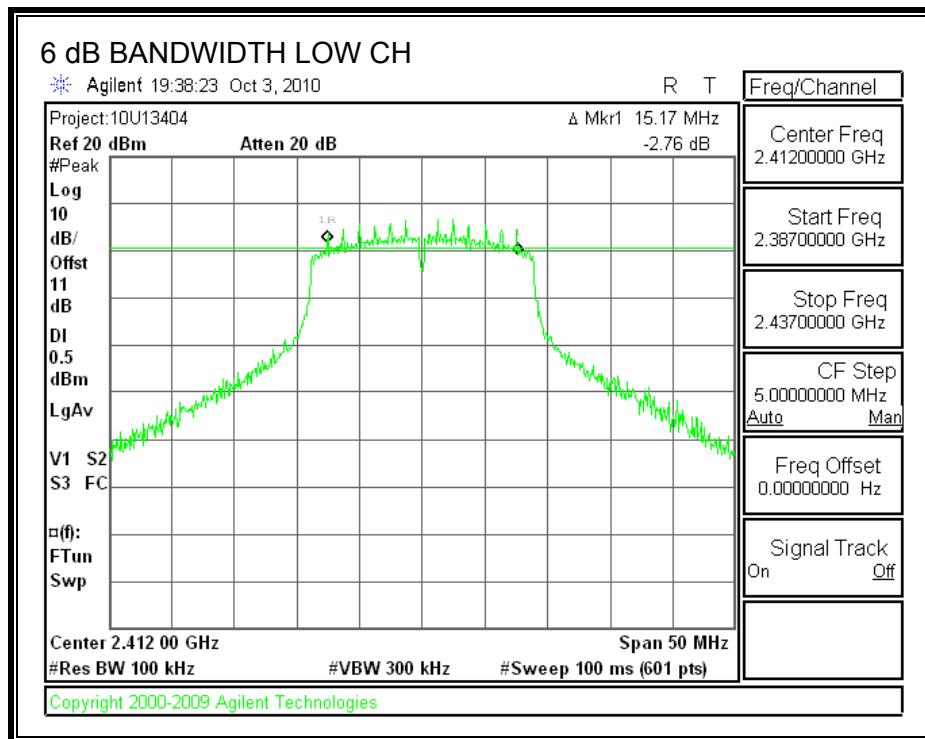

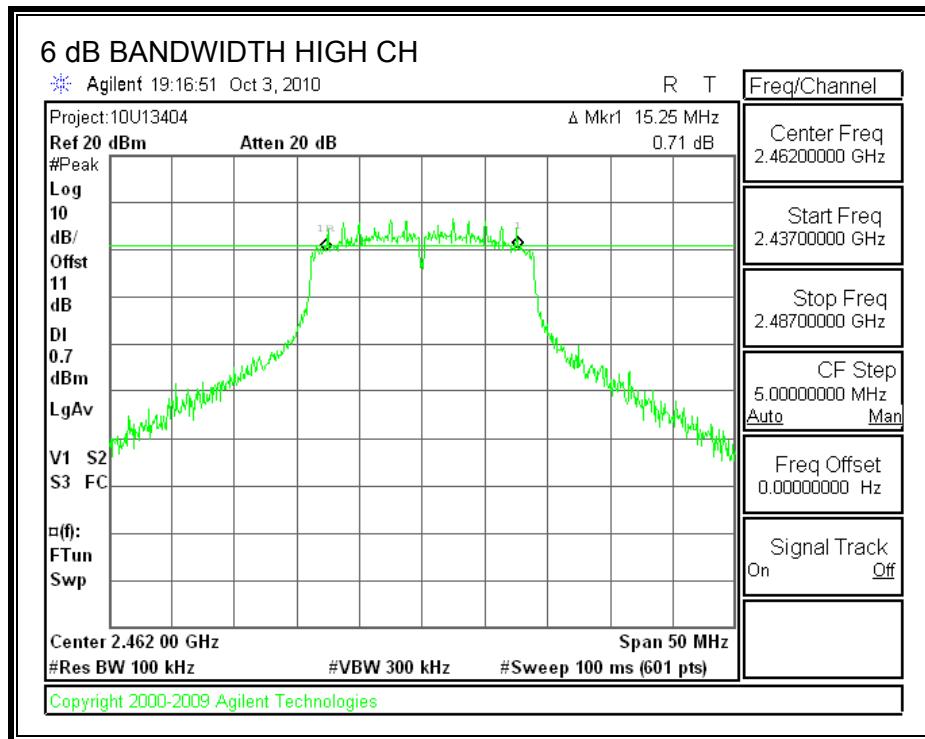

### 7.3.2. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.2792
Middle	2437	17.5500
High	2462	17.5900

**99% BANDWIDTH**

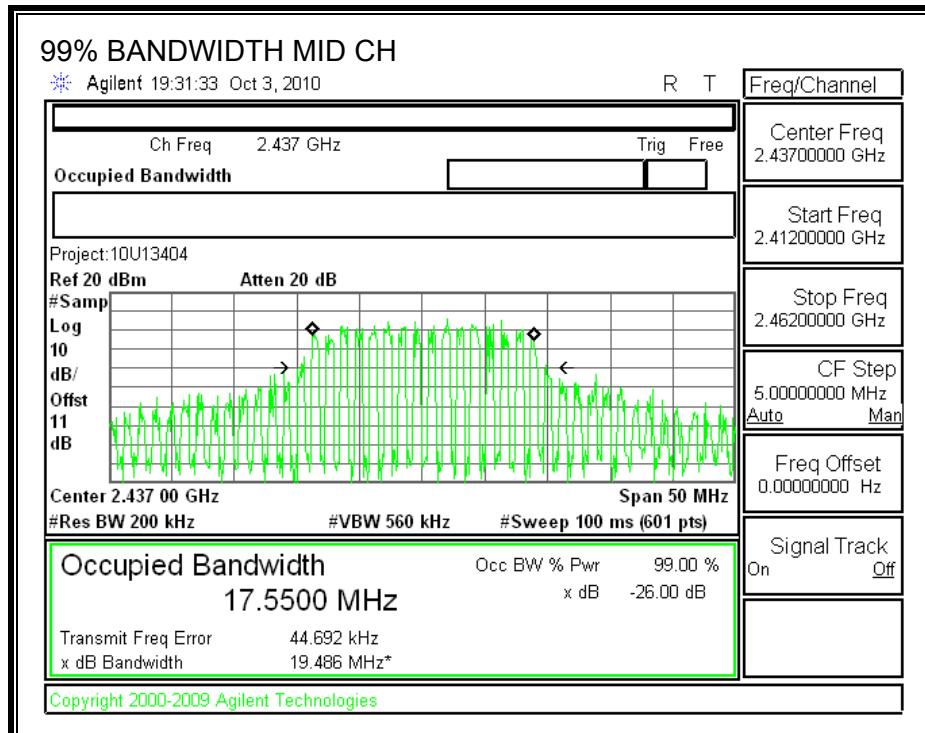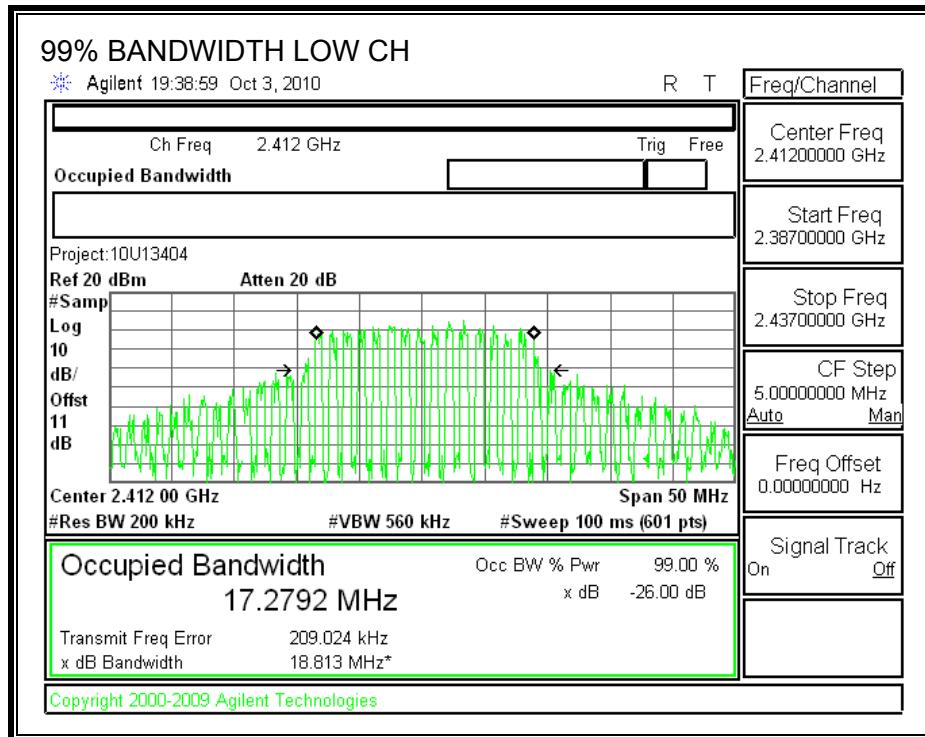

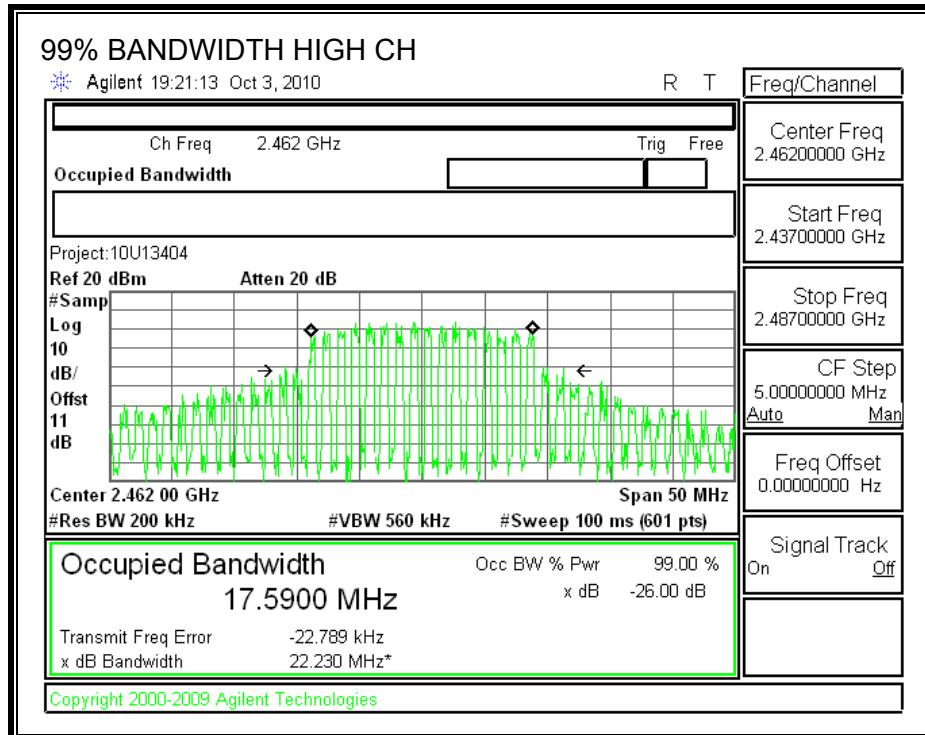

### 7.3.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

Channel	Frequency (MHz)	Power Meter PK Reading (dBm)	Attenuator and Cable Offset (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	15.75	11.00	26.75	30	-3.25
Middle	2437	16.02	11.00	27.02	30	-2.98
High	2462	16.08	11.00	27.08	30	-2.92

### 7.3.4. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 11.0 dB (including 10 dB pad and .1.0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.13
Middle	2437	16.18
High	2462	16.19

### 7.3.5. POWER SPECTRAL DENSITY

#### LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



#### TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

#### RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-7.08	8	-15.08
Middle	2437	-6.86	8	-14.86
High	2462	-7.20	8	-15.20

**POWER SPECTRAL DENSITY**

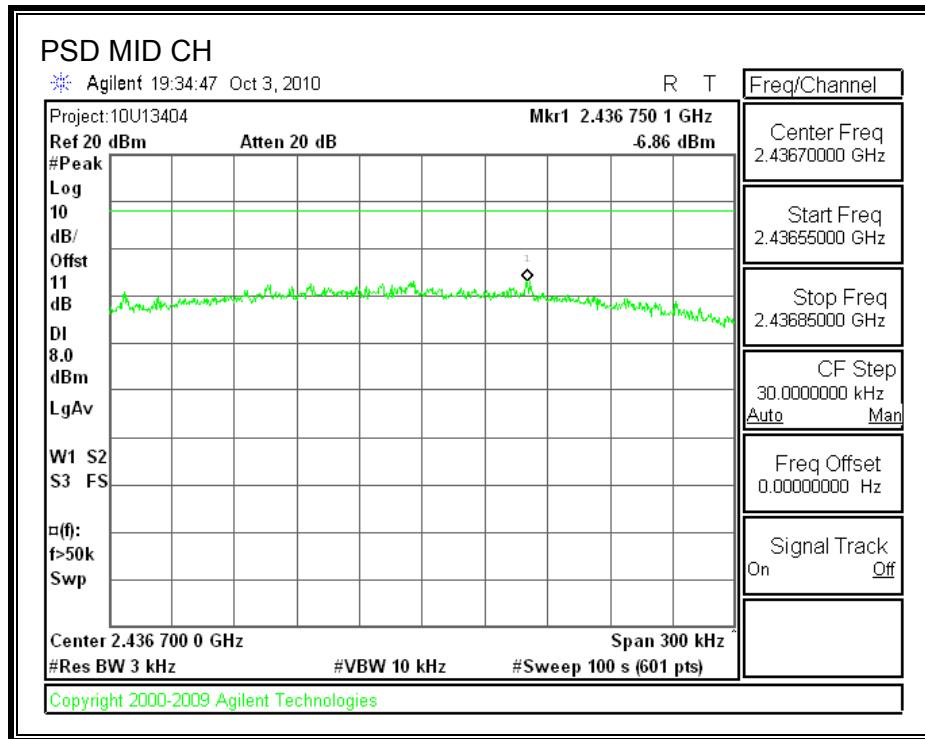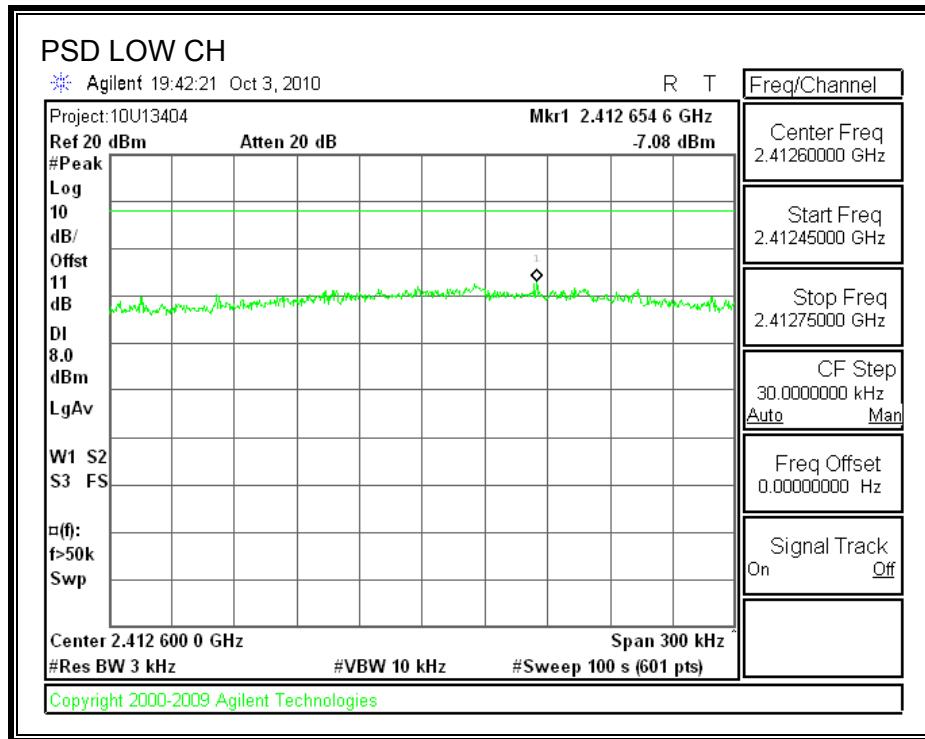

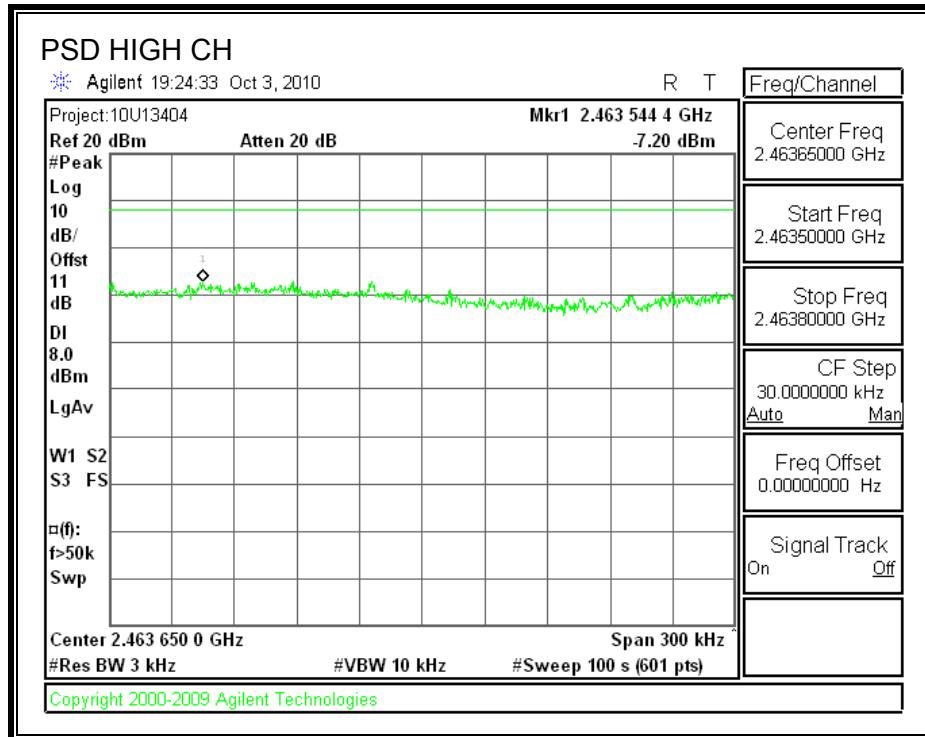

### 7.3.6. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

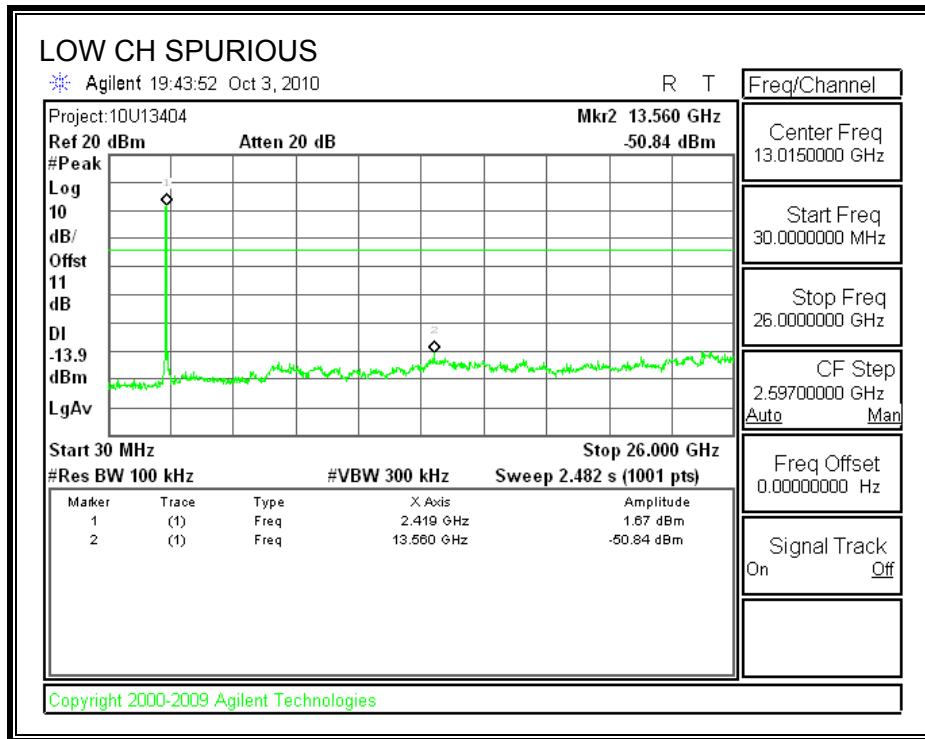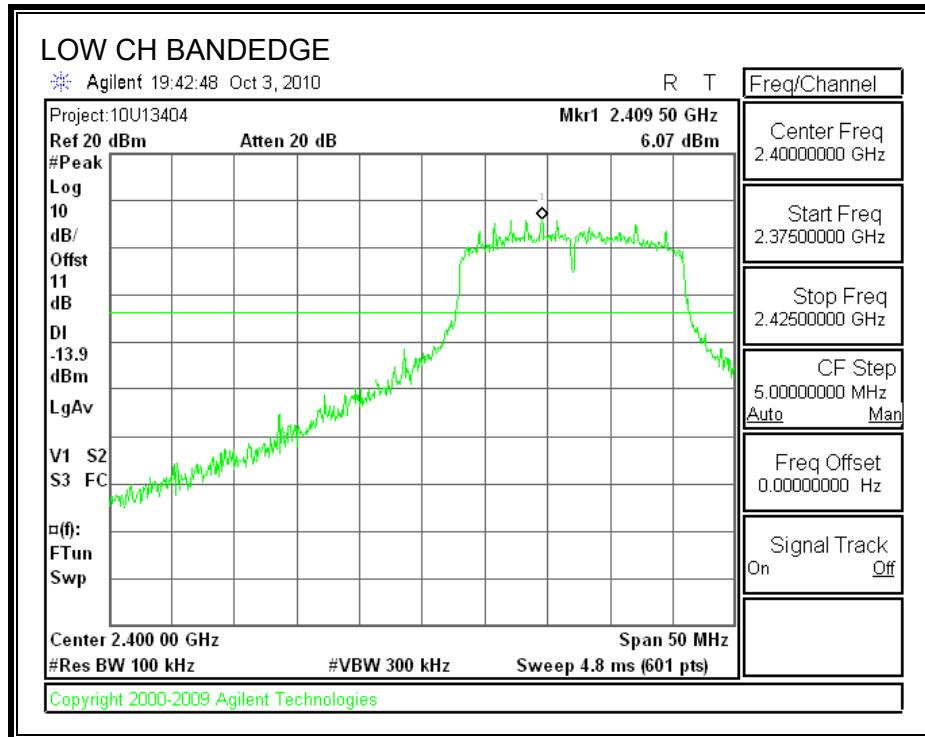

**SPURIOUS EMISSIONS, MID CHANNEL**

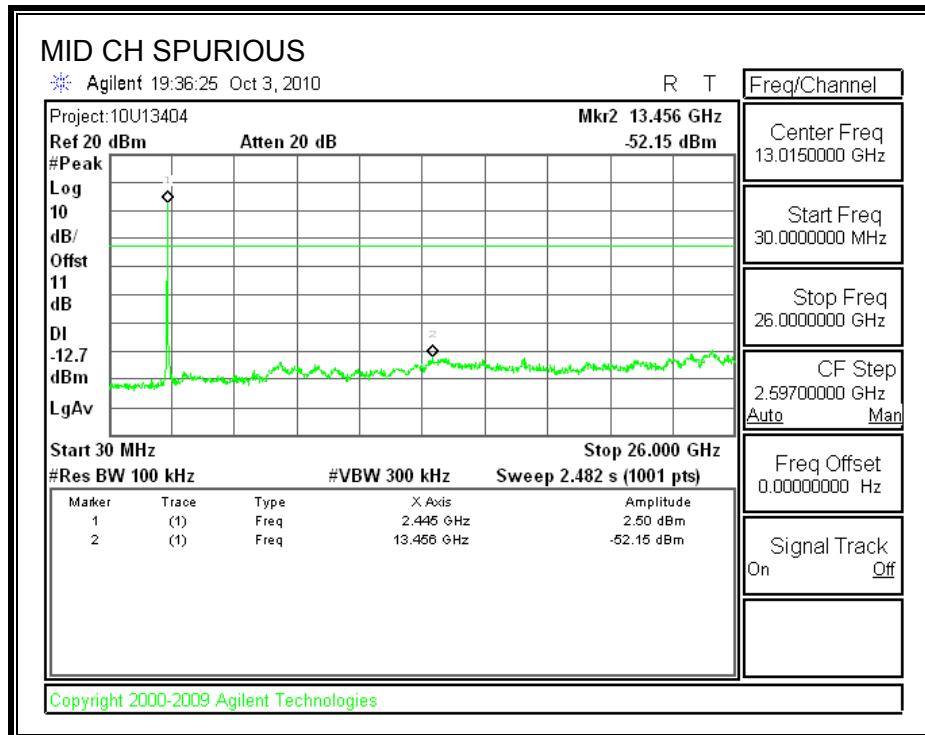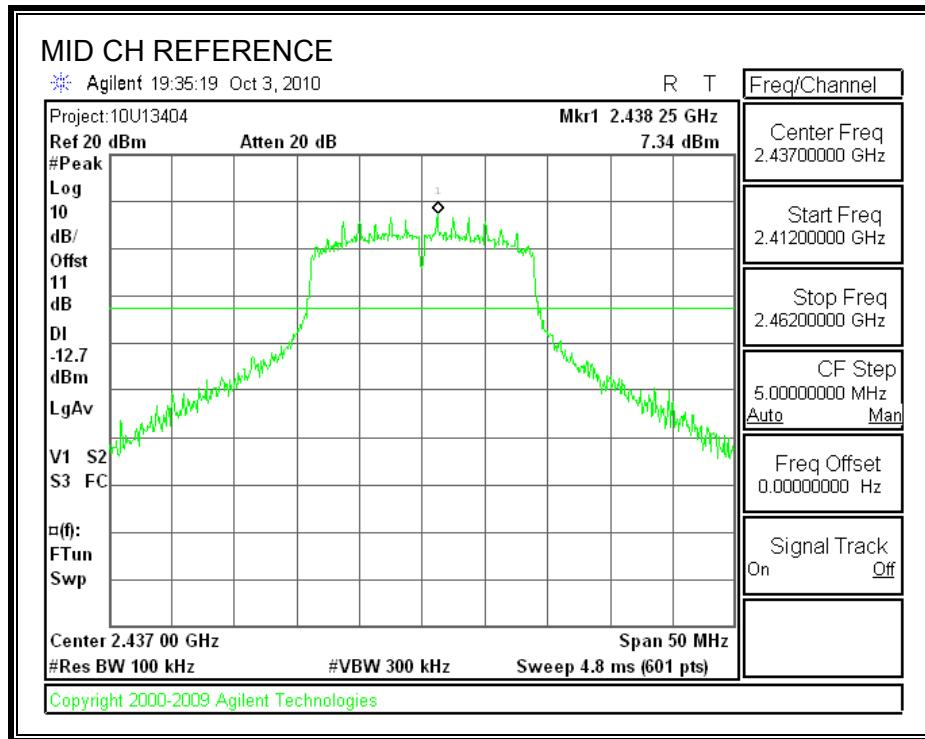

**SPURIOUS EMISSIONS, HIGH CHANNEL**

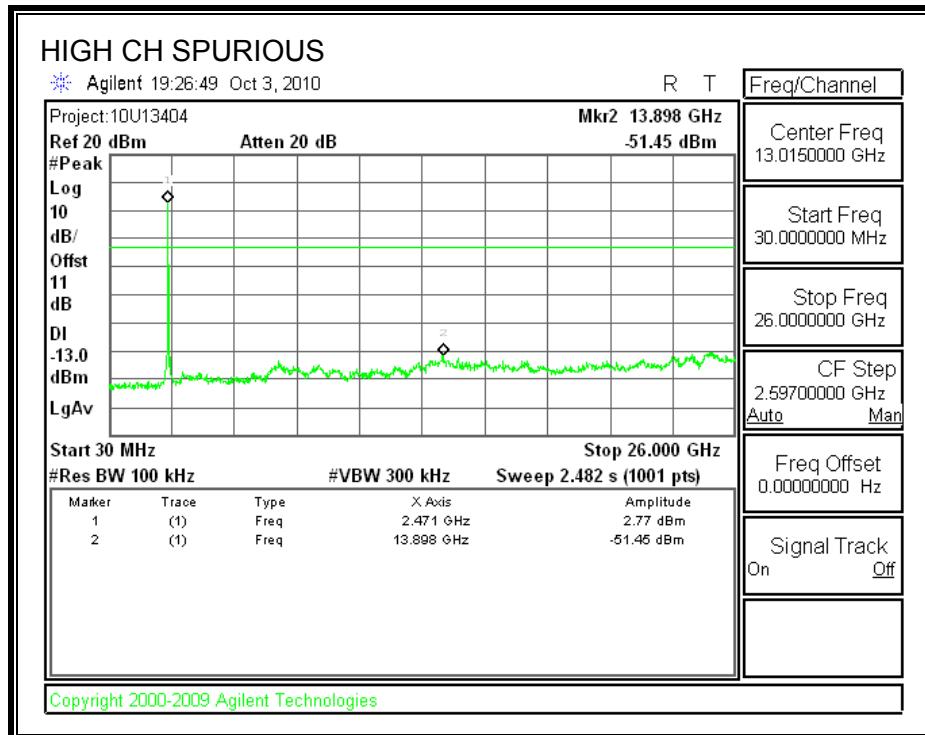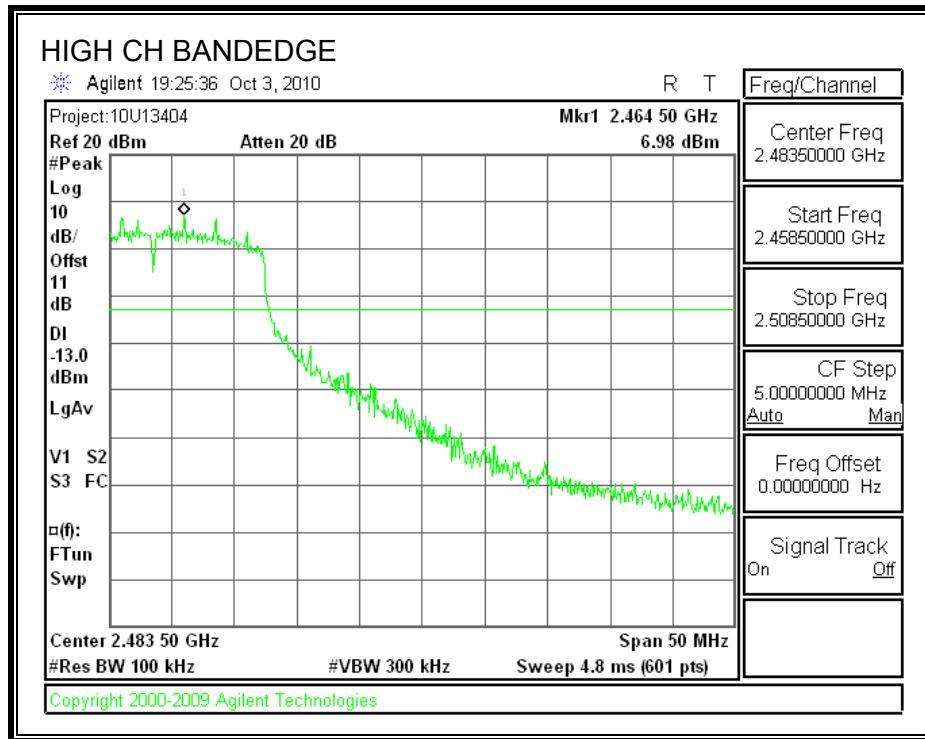

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz



### 8.2.1. TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


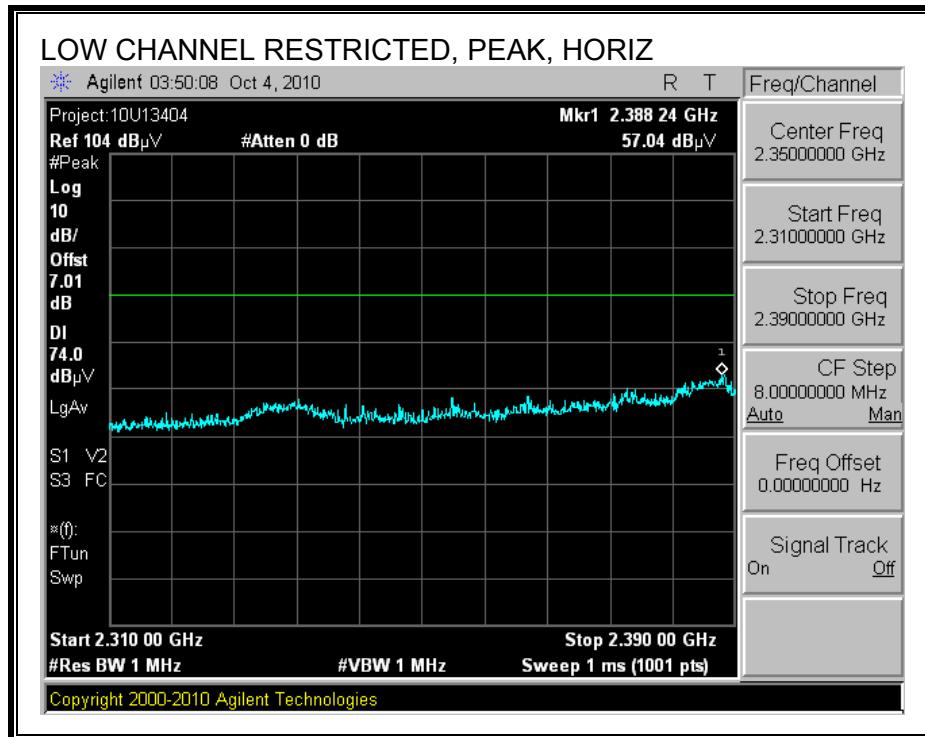


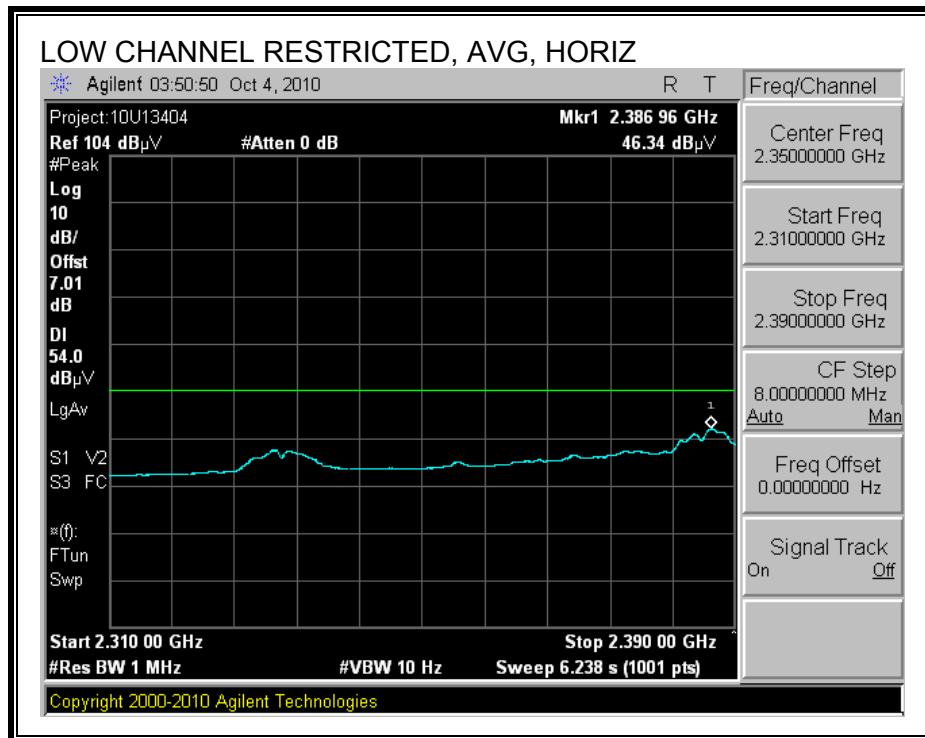



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

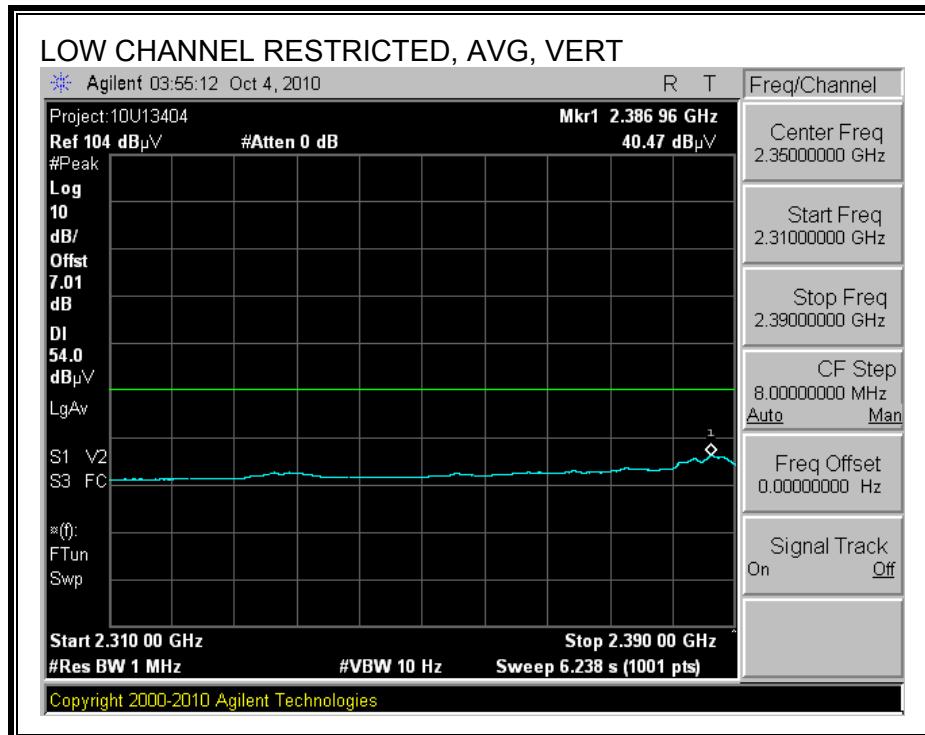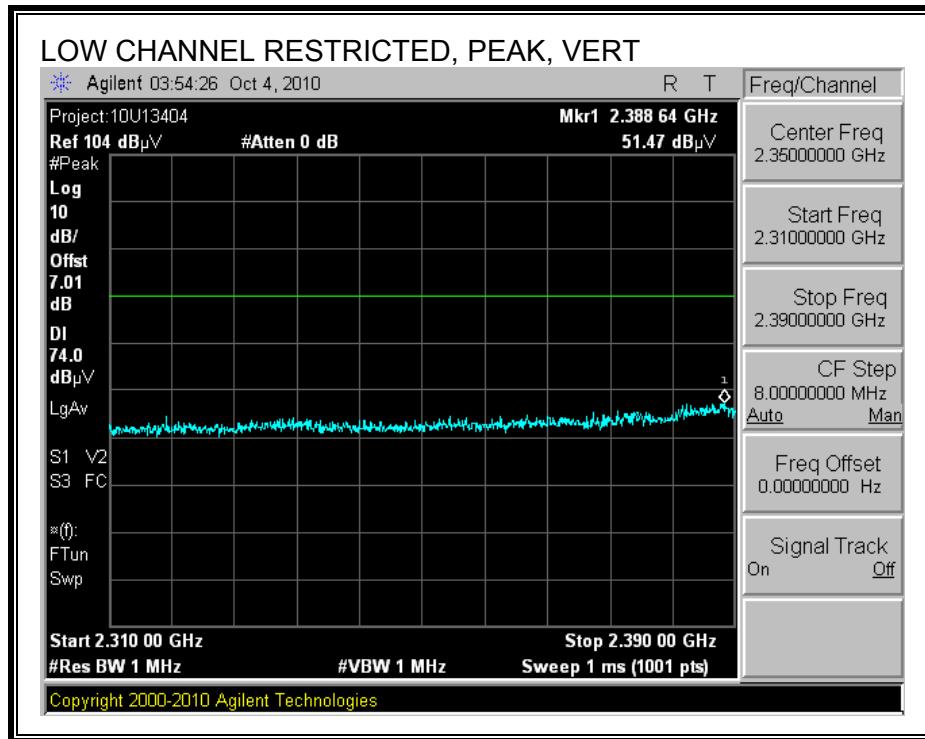

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

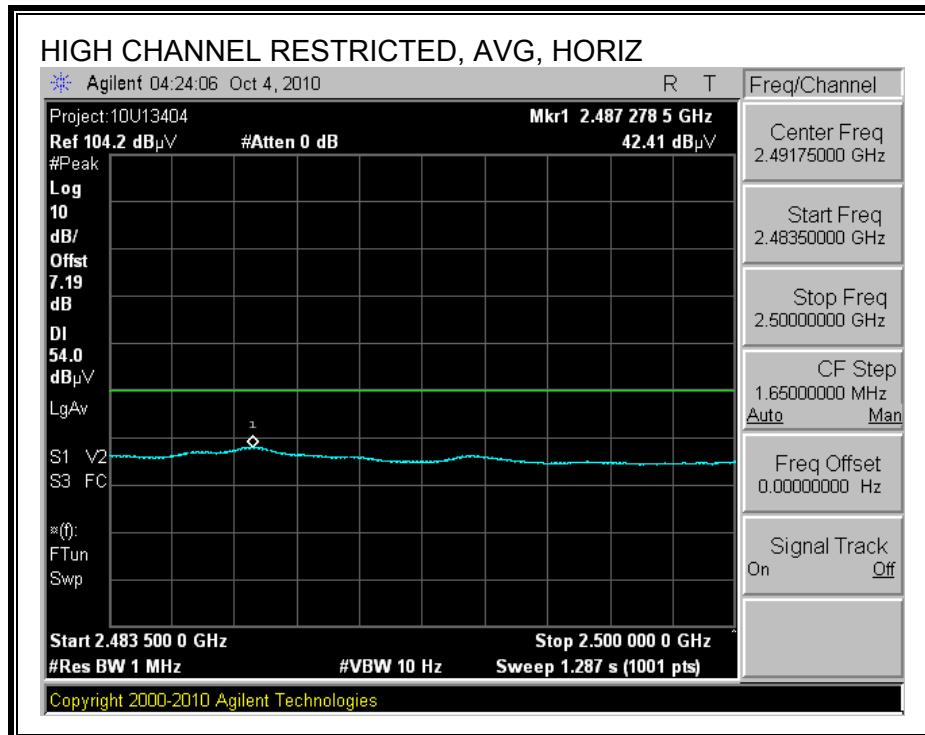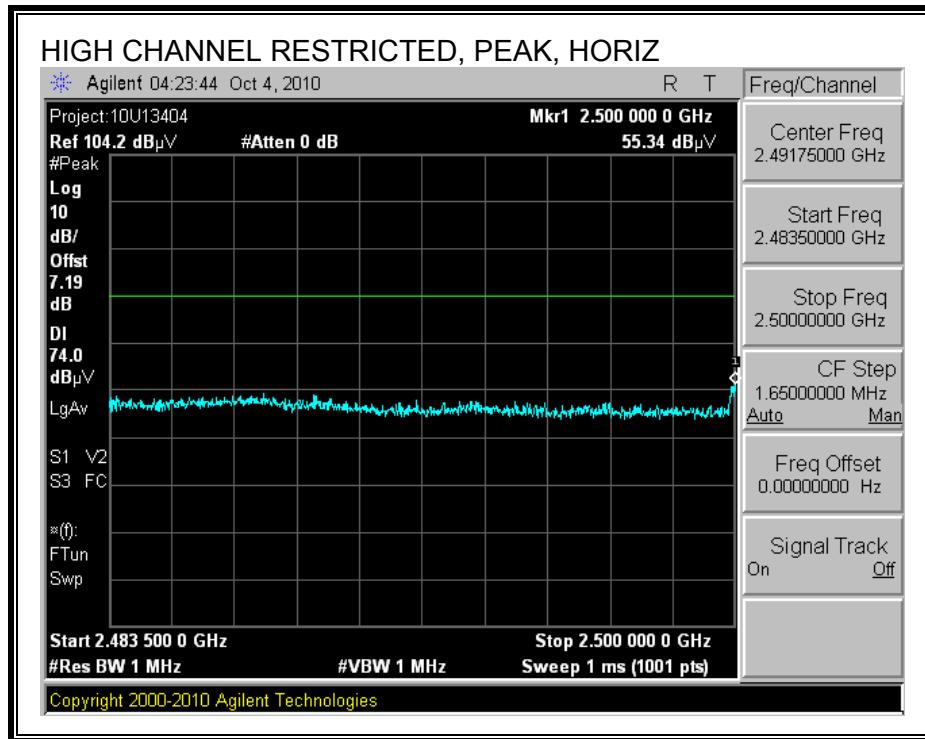

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

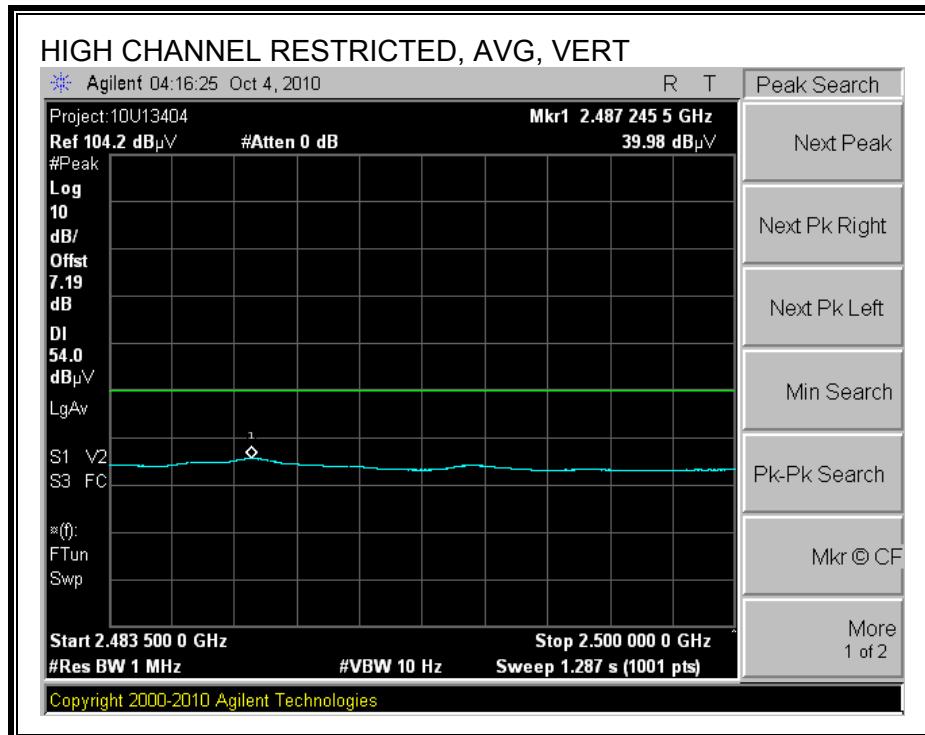
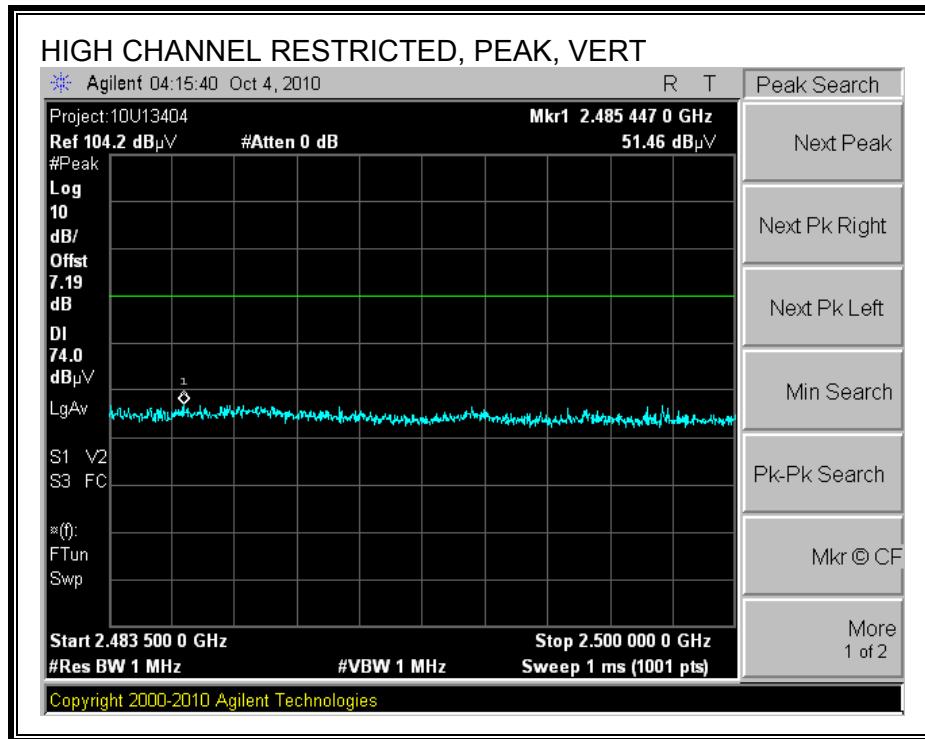


## HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company:	BARNES & NOBEL														
Project #:	10U13404														
Date:	10/3/2010														
Test Engineer:	MENGISTU MEKURIA														
Configuration:	EUT, HEADSET, AND AC ADAPTER														
Mode:	b MODE														
<u>Test Equipment:</u>															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit							
T73; S/N: 6717 @3m		T144 Miteq 3008A00931						FCC 15.209							
Hi Frequency Cables															
3' cable 22807700		12' cable 22807600		20' cable 22807500		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz					
3' cable 22807700		12' cable 22807600		40G_2210						Average Measurements RBW=1MHz, VBW=10Hz					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch. (2412MHz)															
4.824	3.0	39.6	26.8	33.0	9.3	-36.5	0.0	0.0	45.5	32.7	74	54	-28.5	-21.3	V
4.824	3.0	39.4	26.9	33.0	9.3	-36.5	0.0	0.0	45.3	32.8	74	54	-28.7	-21.2	H
Mid Ch. (2437MHz)															
4.874	3.0	40.2	26.6	33.1	9.3	-36.5	0.0	0.0	46.2	32.5	74	54	-27.8	-21.5	V
4.874	3.0	39.5	26.5	33.1	9.3	-36.5	0.0	0.0	45.4	32.4	74	54	-28.6	-21.6	H
Hi Ch. (2462MHz)															
4.924	3.0	39.7	26.5	33.1	9.4	-36.5	0.0	0.0	45.7	32.5	74	54	-28.3	-21.5	V
4.924	3.0	39.0	26.3	33.1	9.4	-36.5	0.0	0.0	45.1	32.4	74	54	-28.9	-21.6	H
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										

## 8.2.2. TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND



### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

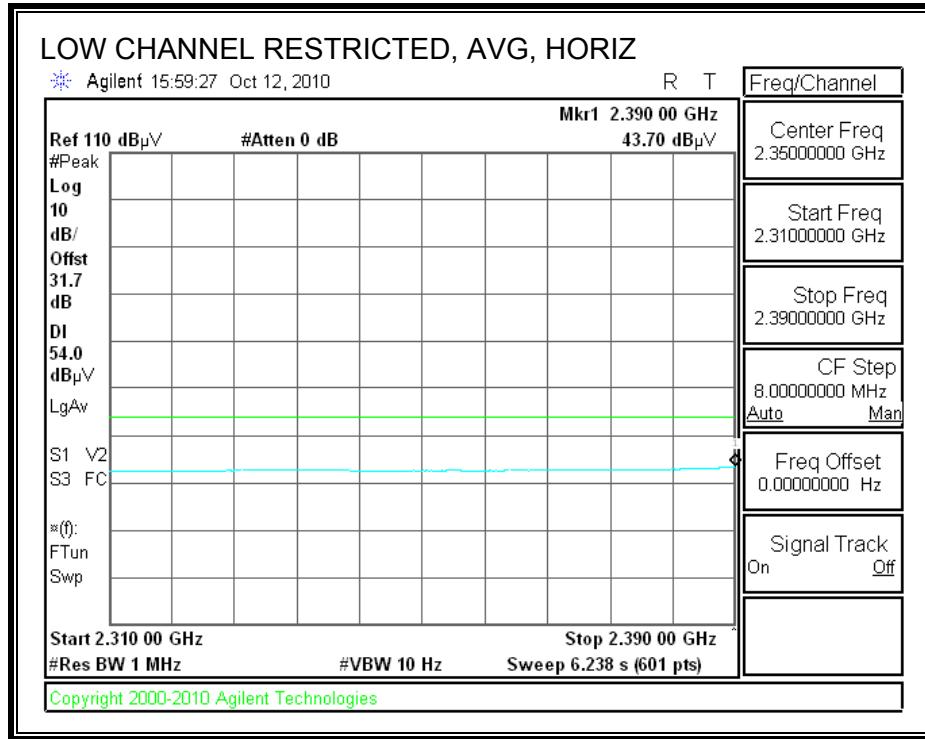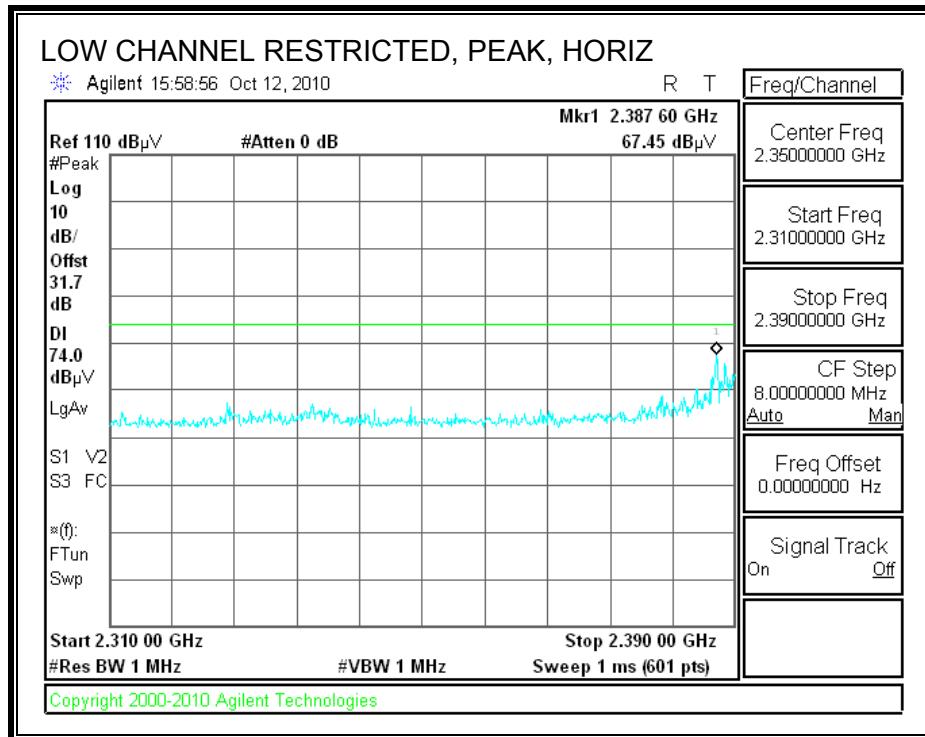



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

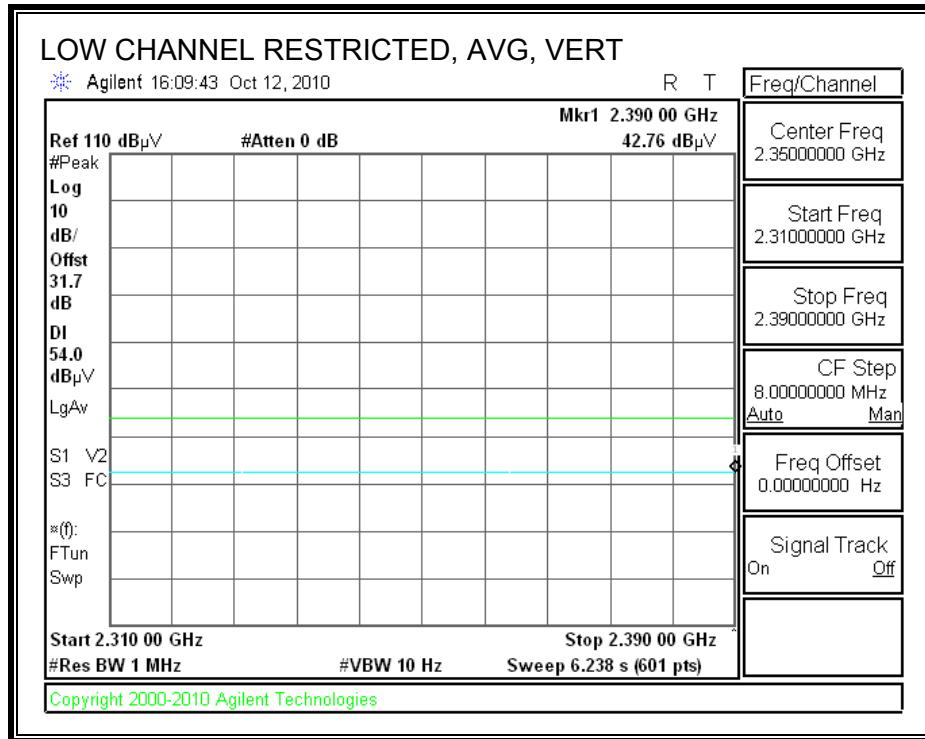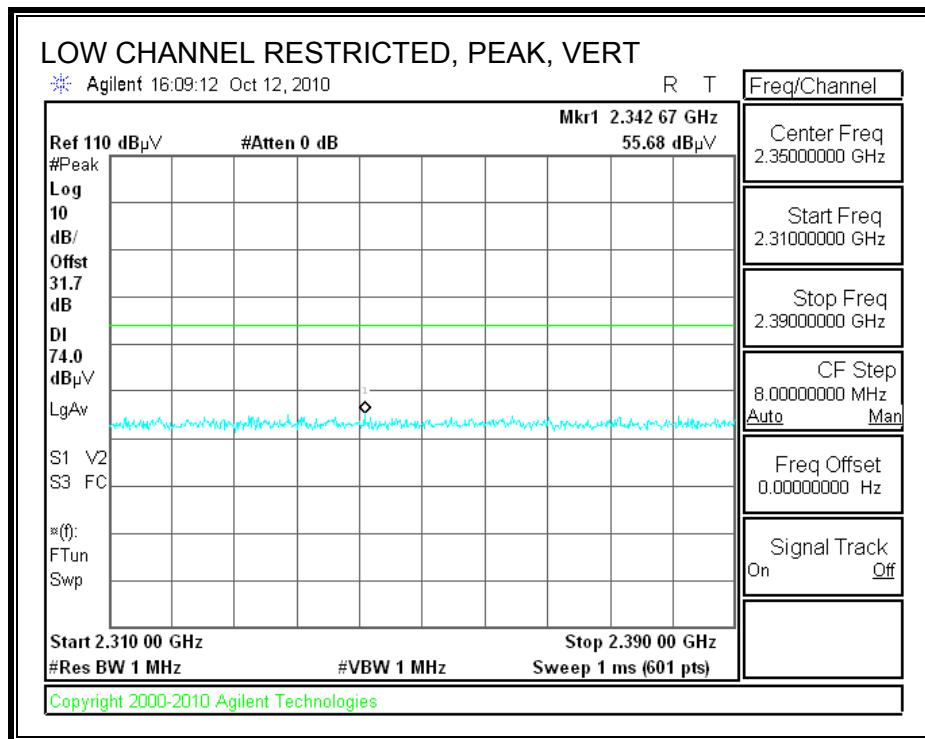

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

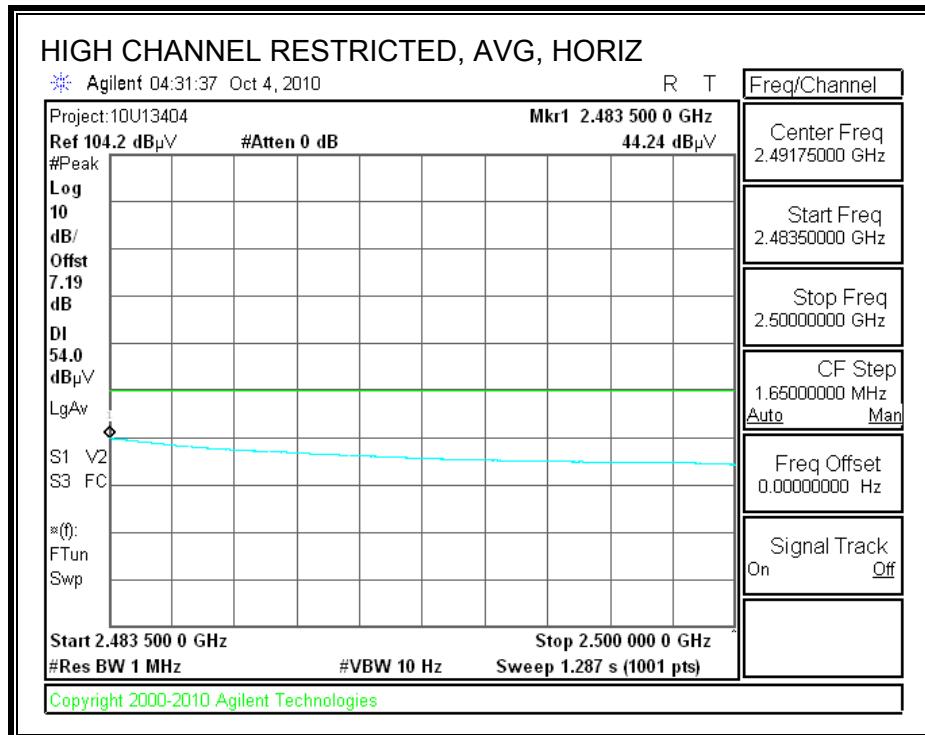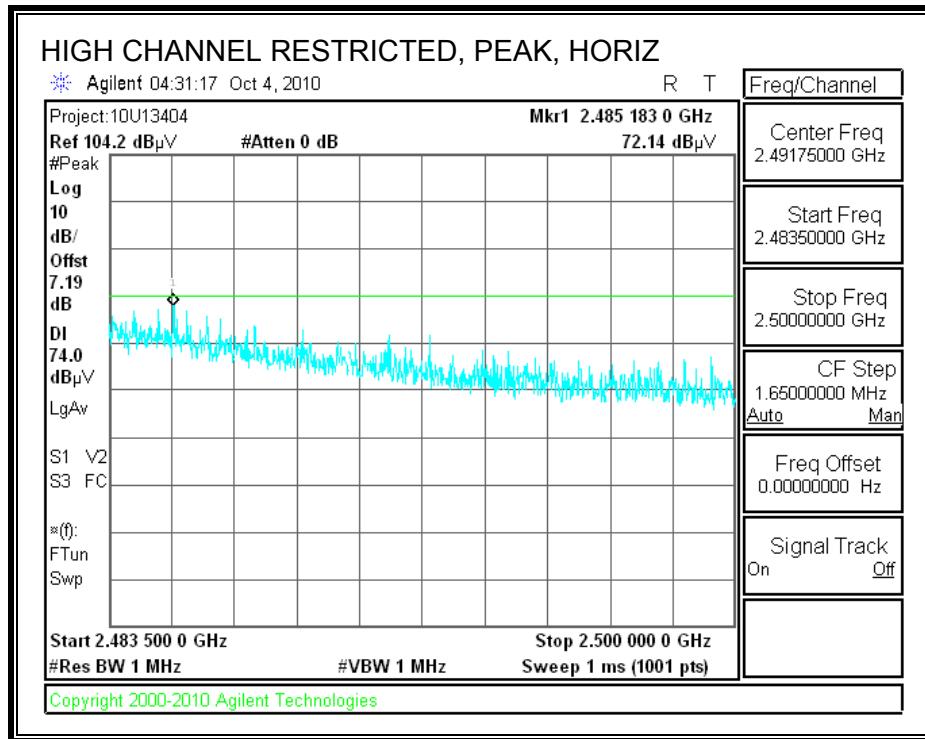

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

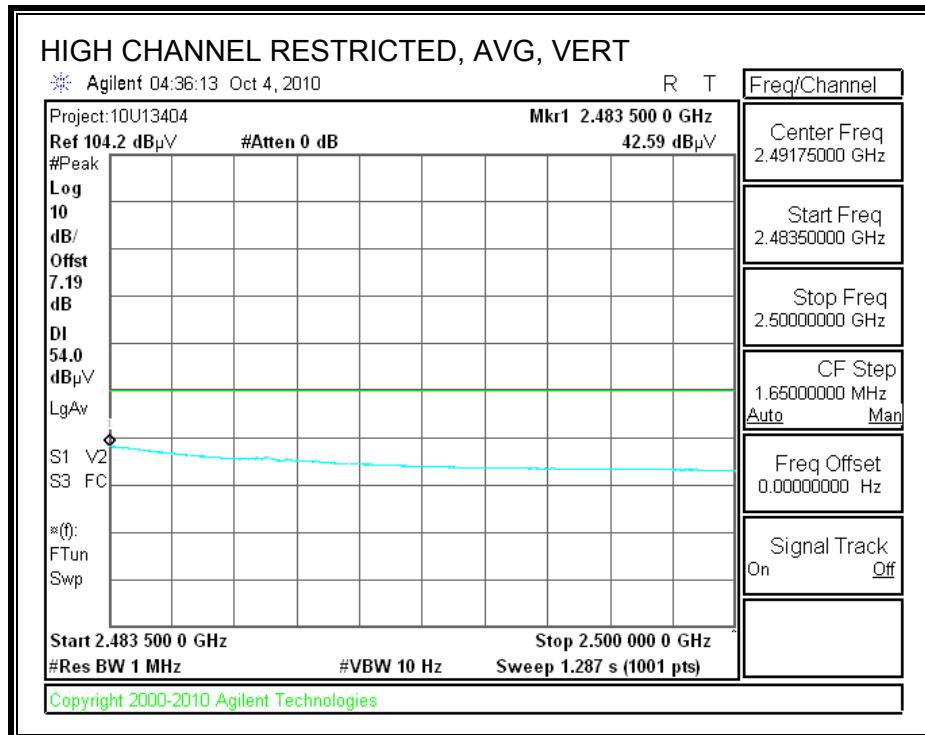
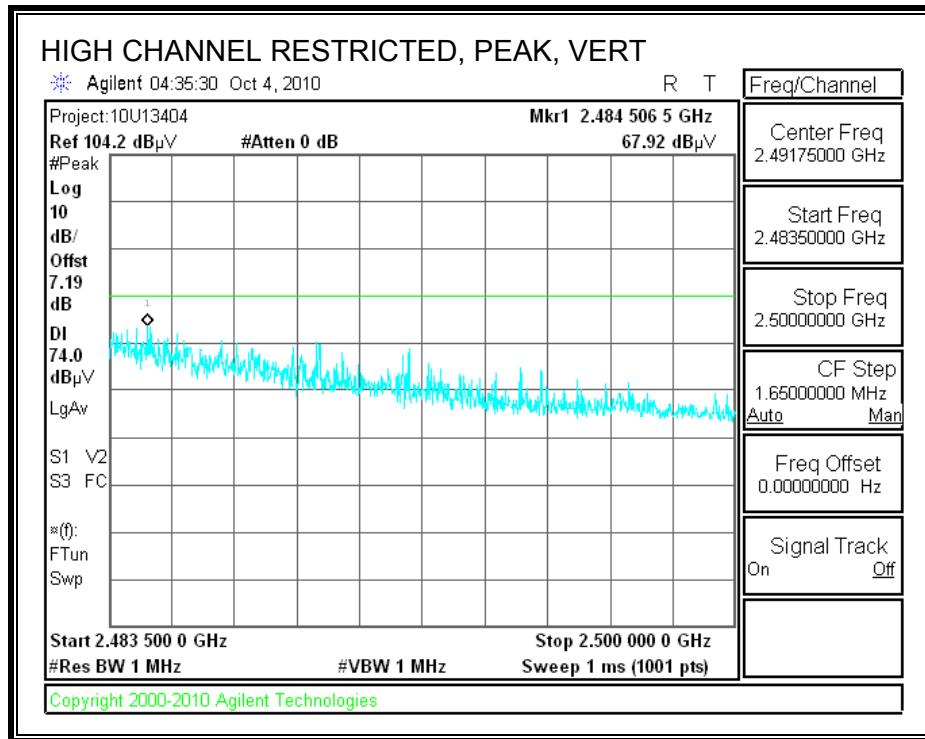


## HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	BARNES & NOBEL														
Project #:	10U13404														
Date:	10/3/2010														
Test Engineer:	MENGISTU MEKURIA														
Configuration:	EUT, HEADSET, AND AC ADAPTER														
Mode:	g MODE														
<b>Test Equipment:</b>															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									FCC 15.209			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			40G_2210									Average Measurements RBW=1MHz ; VBW=10Hz
<b>f</b> GHz	<b>Dist</b> (m)	<b>Read Pk</b> dBuV	<b>Read Avg</b> dBuV	<b>AF</b> dB/m	<b>CL</b> dB	<b>Amp</b> dB	<b>D Corr</b> dB	<b>Fltr</b> dB	<b>Peak</b> dBuV/m	<b>Avg</b> dBuV/m	<b>Pk Lim</b> dBuV/m	<b>Avg Lim</b> dBuV/m	<b>Pk Mar</b> dB	<b>Avg Mar</b> dB	<b>Notes</b> (V/H)
Low Ch. (2412MHz)															
4.824	3.0	40.0	27.6	33.0	9.3	-36.5	0.0	0.0	45.9	33.4	74	54	-28.1	-20.6	V
4.824	3.0	39.5	26.8	33.0	9.3	-36.5	0.0	0.0	45.4	32.7	74	54	-28.6	-21.3	H
Mid Ch. (2437MHz)															
4.874	3.0	40.3	27.3	33.1	9.3	-36.5	0.0	0.0	46.3	33.2	74	54	-27.7	-20.8	V
4.874	3.0	39.3	27.5	33.1	9.3	-36.5	0.0	0.0	45.3	33.5	74	54	-28.7	-20.5	H
Hi Ch. (2462MHz)															
4.924	3.0	39.9	27.1	33.1	9.4	-36.5	0.0	0.0	46.0	33.1	74	54	-28.0	-20.9	V
4.924	3.0	39.4	26.6	33.1	9.4	-36.5	0.0	0.0	45.5	32.7	74	54	-28.5	-21.3	H
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF											

### 8.2.3. TRANSMITTER ABOVE 1 GHz FOR 802.11 HT20 SISO MODE IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

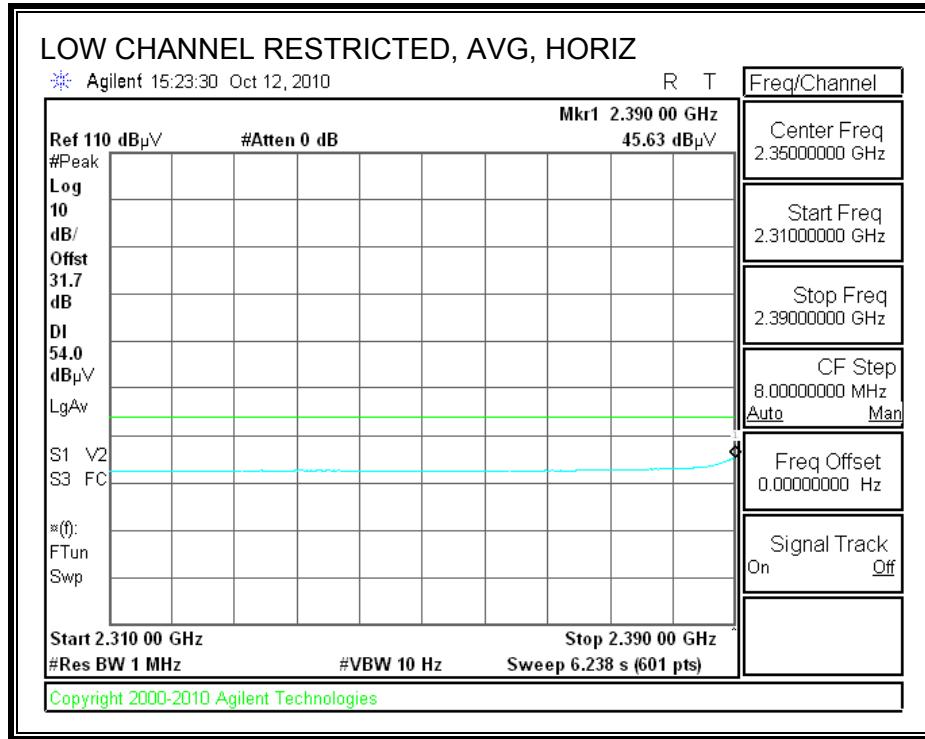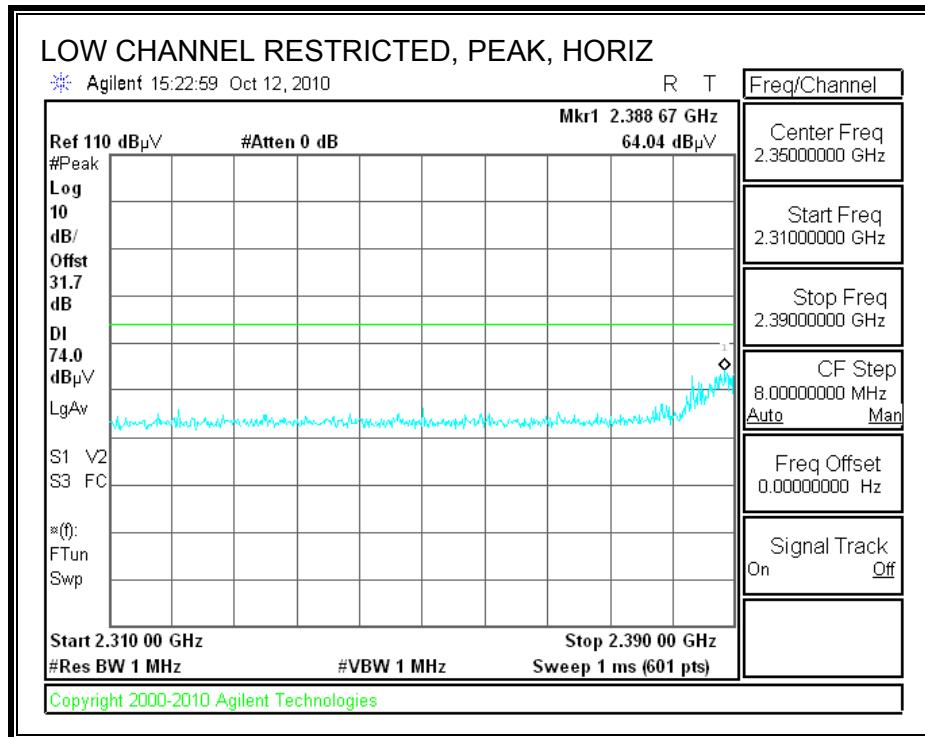



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

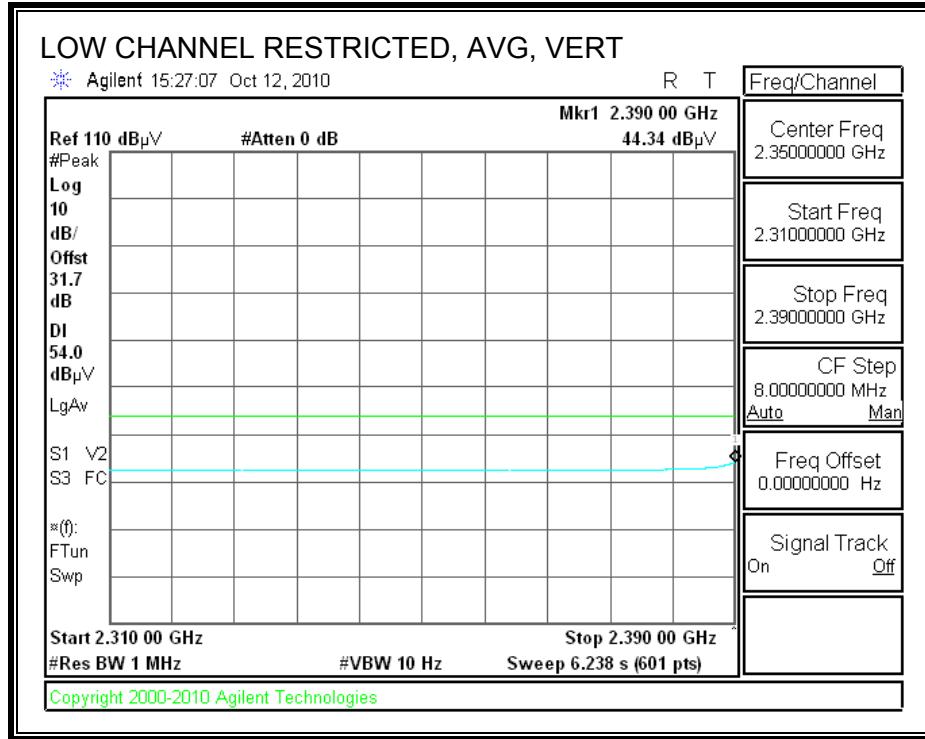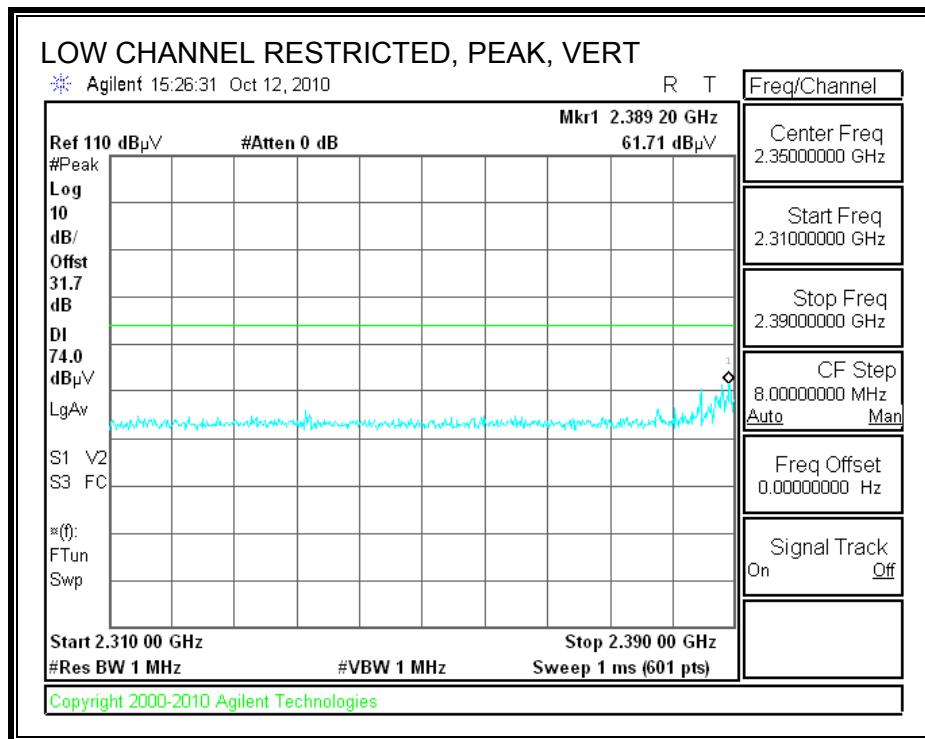

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

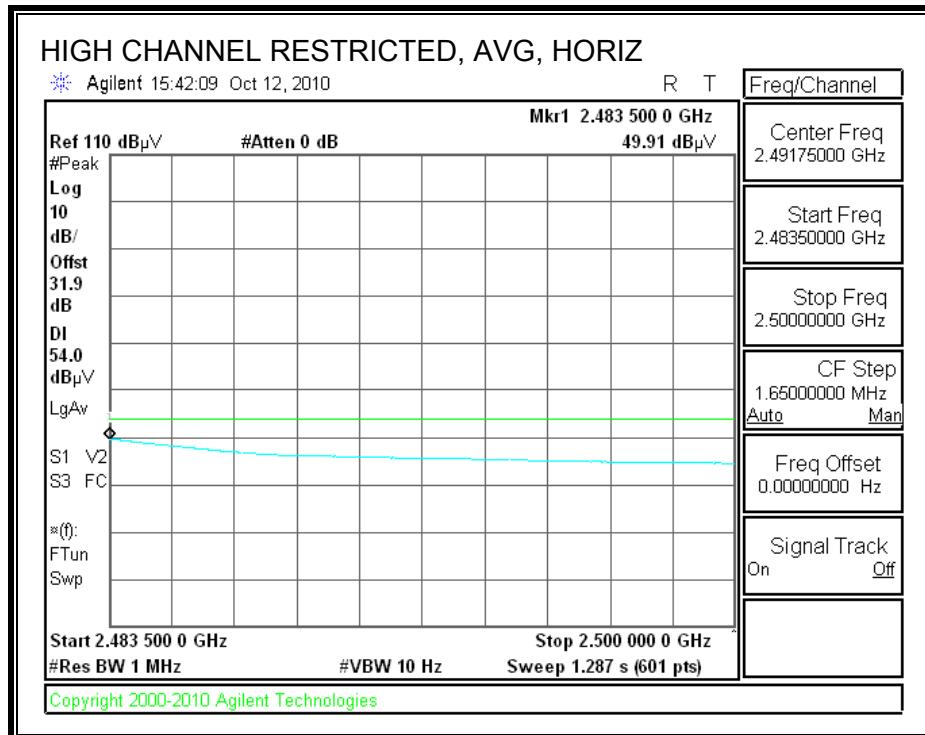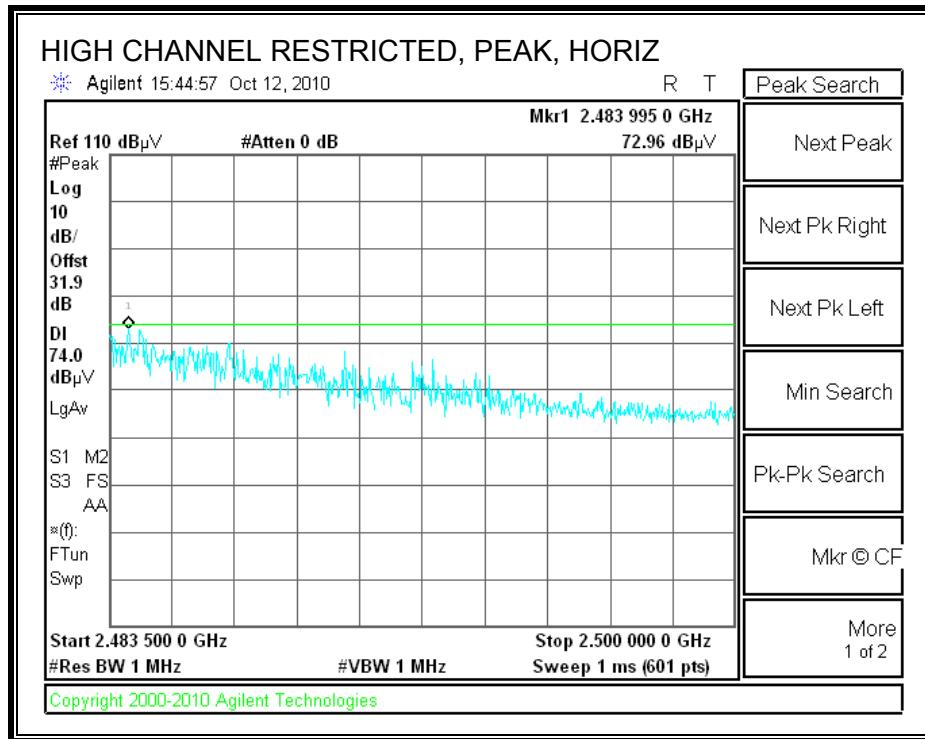

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

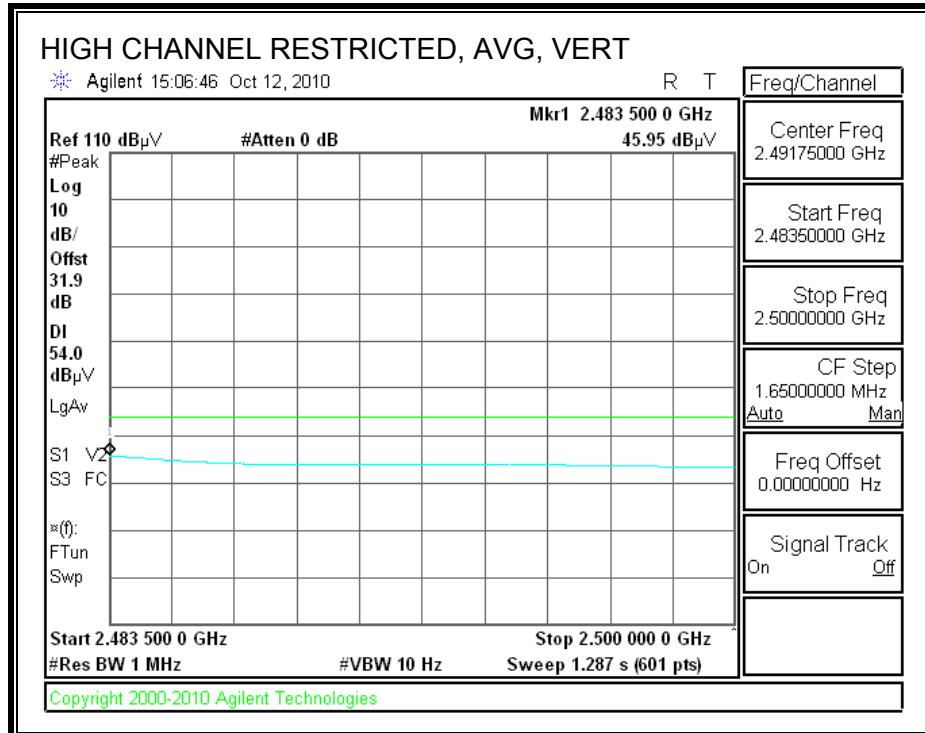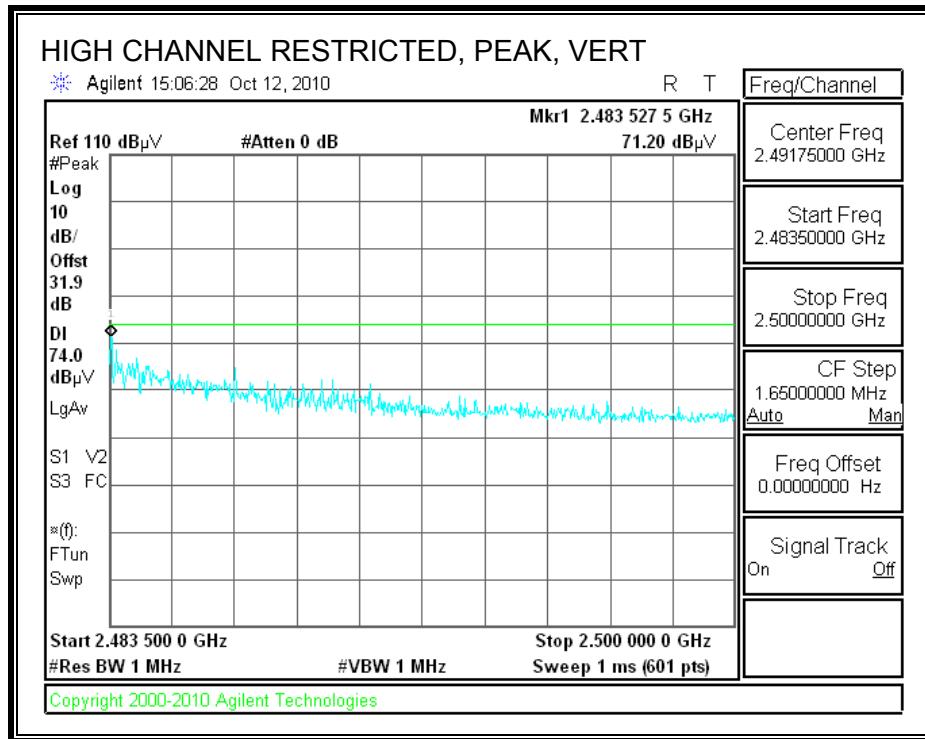

## HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																												
<p>Company: BARNES &amp; NOBEL Project #: 10U13404 Date: 10/3/2010 Test Engineer: MENGISTU MEKURIA Configuration: EUT, HEADSET, AND AC ADAPTER Mode: HT20 SISO MODE</p> <p><b>Test Equipment:</b></p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="3">Horn &gt; 18GHz</td><td>Limit</td></tr><tr><td>T73; S/N: 6717 @3m</td><td>T144 Miteq 3008A00931</td><td></td><td></td><td></td><td></td><td>FCC 15.209</td></tr><tr><td colspan="7">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td>HPF</td><td>Reject Filter</td><td colspan="2">Peak Measurements RBW=VBW=1MHz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>40G_2210</td><td></td><td></td><td colspan="2">Average Measurements RBW=1MHz ; VBW=10Hz</td></tr></table> <p><b>Measurement Data:</b></p> <table border="1"><thead><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Fltr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr></thead><tbody><tr><td colspan="15">Low Ch. (2412MHz)</td></tr><tr><td>4.824</td><td>3.0</td><td>39.7</td><td>26.7</td><td>33.0</td><td>9.3</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.6</td><td>32.5</td><td>74</td><td>54</td><td>-28.4</td><td>-21.5</td><td>V</td></tr><tr><td>4.824</td><td>3.0</td><td>39.1</td><td>26.4</td><td>33.0</td><td>9.3</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.0</td><td>32.3</td><td>74</td><td>54</td><td>-29.0</td><td>-21.7</td><td>H</td></tr><tr><td colspan="15">Mid Ch. (2437MHz)</td></tr><tr><td>4.874</td><td>3.0</td><td>39.9</td><td>27.3</td><td>33.1</td><td>9.3</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.8</td><td>33.3</td><td>74</td><td>54</td><td>-28.2</td><td>-20.7</td><td>V</td></tr><tr><td>4.874</td><td>3.0</td><td>39.2</td><td>27.1</td><td>33.1</td><td>9.3</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.2</td><td>33.1</td><td>74</td><td>54</td><td>-28.8</td><td>-20.9</td><td>H</td></tr><tr><td colspan="15">Hi Ch. (2462MHz)</td></tr><tr><td>4.924</td><td>3.0</td><td>39.7</td><td>26.9</td><td>33.1</td><td>9.4</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.7</td><td>32.9</td><td>74</td><td>54</td><td>-28.3</td><td>-21.1</td><td>V</td></tr><tr><td>4.924</td><td>3.0</td><td>39.4</td><td>26.5</td><td>33.1</td><td>9.4</td><td>-36.5</td><td>0.0</td><td>0.0</td><td>45.5</td><td>32.6</td><td>74</td><td>54</td><td>-28.5</td><td>-21.4</td><td>H</td></tr></tbody></table> <p>Rev. 07.22.09</p> <p><b>Definitions:</b></p> <table><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit	T73; S/N: 6717 @3m	T144 Miteq 3008A00931					FCC 15.209	Hi Frequency Cables							3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz		3' cable 22807700	12' cable 22807600	40G_2210			Average Measurements RBW=1MHz ; VBW=10Hz		f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch. (2412MHz)															4.824	3.0	39.7	26.7	33.0	9.3	-36.5	0.0	0.0	45.6	32.5	74	54	-28.4	-21.5	V	4.824	3.0	39.1	26.4	33.0	9.3	-36.5	0.0	0.0	45.0	32.3	74	54	-29.0	-21.7	H	Mid Ch. (2437MHz)															4.874	3.0	39.9	27.3	33.1	9.3	-36.5	0.0	0.0	45.8	33.3	74	54	-28.2	-20.7	V	4.874	3.0	39.2	27.1	33.1	9.3	-36.5	0.0	0.0	45.2	33.1	74	54	-28.8	-20.9	H	Hi Ch. (2462MHz)															4.924	3.0	39.7	26.9	33.1	9.4	-36.5	0.0	0.0	45.7	32.9	74	54	-28.3	-21.1	V	4.924	3.0	39.4	26.5	33.1	9.4	-36.5	0.0	0.0	45.5	32.6	74	54	-28.5	-21.4	H	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit																																																																																																																																																																																																																																						
T73; S/N: 6717 @3m	T144 Miteq 3008A00931					FCC 15.209																																																																																																																																																																																																																																						
Hi Frequency Cables																																																																																																																																																																																																																																												
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																							
3' cable 22807700	12' cable 22807600	40G_2210			Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																							
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																													
Low Ch. (2412MHz)																																																																																																																																																																																																																																												
4.824	3.0	39.7	26.7	33.0	9.3	-36.5	0.0	0.0	45.6	32.5	74	54	-28.4	-21.5	V																																																																																																																																																																																																																													
4.824	3.0	39.1	26.4	33.0	9.3	-36.5	0.0	0.0	45.0	32.3	74	54	-29.0	-21.7	H																																																																																																																																																																																																																													
Mid Ch. (2437MHz)																																																																																																																																																																																																																																												
4.874	3.0	39.9	27.3	33.1	9.3	-36.5	0.0	0.0	45.8	33.3	74	54	-28.2	-20.7	V																																																																																																																																																																																																																													
4.874	3.0	39.2	27.1	33.1	9.3	-36.5	0.0	0.0	45.2	33.1	74	54	-28.8	-20.9	H																																																																																																																																																																																																																													
Hi Ch. (2462MHz)																																																																																																																																																																																																																																												
4.924	3.0	39.7	26.9	33.1	9.4	-36.5	0.0	0.0	45.7	32.9	74	54	-28.3	-21.1	V																																																																																																																																																																																																																													
4.924	3.0	39.4	26.5	33.1	9.4	-36.5	0.0	0.0	45.5	32.6	74	54	-28.5	-21.4	H																																																																																																																																																																																																																													
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																							
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																							
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																							
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																							
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																									


### 8.3. RECEIVER ABOVE 1 GHz

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																											
Company: BARNES & NOBEL Project #: 10U13404 Date: 10/3/2010 Test Engineer: MENIGSTU MEKURIA Configuration: EUT, HEADSET, AND AC ADAPTER Mode: RX MODE																																																																																																																																																																																																																																											
<b>Test Equipment:</b> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">Horn 1-18GHz</td> <td style="width: 20%;">Pre-amplifier 1-26GHz</td> <td style="width: 20%;">Pre-amplifier 26-40GHz</td> <td colspan="4" style="width: 40%;">Horn &gt; 18GHz</td> <td style="width: 10%;">Limit</td> </tr> <tr> <td>T59; S/N: 3245 @3m</td> <td>T145 Agilent 3008A005</td> <td></td> <td colspan="4"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="18">Hi Frequency Cables</td> </tr> <tr> <td colspan="2">3' cable 22807700</td> <td colspan="2">12' cable 22807600</td> <td colspan="2">20' cable 22807500</td> <td colspan="2">40G_2210</td> <td colspan="2">HPF</td> <td colspan="2">Reject Filter</td> <td colspan="6">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td colspan="2">3' cable 22807700</td> <td colspan="2">12' cable 22807600</td> <td colspan="2">40G_2210</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="6">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> <tr> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">f GHz</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Dist (m)</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Read Pk dBuV</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Read Avg. dBuV</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">AF dB/m</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">CL dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Amp dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">D Corr dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Fltr dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Peak dBuV/m</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Avg dBuV/m</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Pk Lim dBuV/m</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Avg Lim dBuV/m</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Pk Mar dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Avg Mar dB</td> <td style="border-top: 1px solid black; border-bottom: 1px solid black;">Notes (V/H)</td> </tr> <tr> <td>2.000</td> <td>3.0</td> <td>47.4</td> <td>41.6</td> <td>27.6</td> <td>5.3</td> <td>35.4</td> <td>0.0</td> <td>0.0</td> <td>44.9</td> <td>39.1</td> <td>74</td> <td>54</td> <td>29.1</td> <td>14.9</td> <td>H</td> </tr> <tr> <td>1.320</td> <td>3.0</td> <td>46.1</td> <td>38.1</td> <td>25.1</td> <td>3.1</td> <td>-35.9</td> <td>0.0</td> <td>0.0</td> <td>38.4</td> <td>30.4</td> <td>74</td> <td>54</td> <td>35.6</td> <td>-23.6</td> <td>H</td> </tr> <tr> <td>1.430</td> <td>3.0</td> <td>46.6</td> <td>38.9</td> <td>25.5</td> <td>3.4</td> <td>-35.8</td> <td>0.0</td> <td>0.0</td> <td>39.7</td> <td>31.9</td> <td>74</td> <td>54</td> <td>34.3</td> <td>-22.1</td> <td>H</td> </tr> <tr> <td>1.200</td> <td>3.0</td> <td>48.8</td> <td>43.3</td> <td>24.7</td> <td>2.8</td> <td>-36.0</td> <td>0.0</td> <td>0.0</td> <td>40.2</td> <td>34.8</td> <td>74</td> <td>54</td> <td>33.8</td> <td>-19.2</td> <td>V</td> </tr> <tr> <td>1.320</td> <td>3.0</td> <td>47.1</td> <td>29.0</td> <td>25.1</td> <td>3.1</td> <td>-35.9</td> <td>0.0</td> <td>0.0</td> <td>39.5</td> <td>21.3</td> <td>74</td> <td>54</td> <td>34.5</td> <td>-32.7</td> <td>V</td> </tr> <tr> <td>1.404</td> <td>3.0</td> <td>44.9</td> <td>36.0</td> <td>25.4</td> <td>3.3</td> <td>-35.8</td> <td>0.0</td> <td>0.0</td> <td>37.8</td> <td>28.8</td> <td>74</td> <td>54</td> <td>36.2</td> <td>-25.2</td> <td>V</td> </tr> <tr> <td colspan="18" style="text-align: center;">Rev. 07.22.09</td> </tr> <tr> <td colspan="6">                     f Measurement Frequency                      Dist Distance to Antenna                      Read Analyzer Reading                      AF Antenna Factor                      CL Cable Loss                 </td> <td colspan="6">                     Amp Preamp Gain                      D Corr Distance Correct to 3 meters                      Avg Average Field Strength @ 3 m                      Peak Calculated Peak Field Strength                      HPF High Pass Filter                 </td> <td colspan="6">                     Avg Lim Average Field Strength Limit                      Pk Lim Peak Field Strength Limit                      Avg Mar Margin vs. Average Limit                      Pk Mar Margin vs. Peak Limit                 </td> </tr> </table>																		Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T59; S/N: 3245 @3m	T145 Agilent 3008A005						FCC 15.209	Hi Frequency Cables																		3' cable 22807700		12' cable 22807600		20' cable 22807500		40G_2210		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz						3' cable 22807700		12' cable 22807600		40G_2210								Average Measurements RBW=1MHz ; VBW=10Hz						f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	2.000	3.0	47.4	41.6	27.6	5.3	35.4	0.0	0.0	44.9	39.1	74	54	29.1	14.9	H	1.320	3.0	46.1	38.1	25.1	3.1	-35.9	0.0	0.0	38.4	30.4	74	54	35.6	-23.6	H	1.430	3.0	46.6	38.9	25.5	3.4	-35.8	0.0	0.0	39.7	31.9	74	54	34.3	-22.1	H	1.200	3.0	48.8	43.3	24.7	2.8	-36.0	0.0	0.0	40.2	34.8	74	54	33.8	-19.2	V	1.320	3.0	47.1	29.0	25.1	3.1	-35.9	0.0	0.0	39.5	21.3	74	54	34.5	-32.7	V	1.404	3.0	44.9	36.0	25.4	3.3	-35.8	0.0	0.0	37.8	28.8	74	54	36.2	-25.2	V	Rev. 07.22.09																		f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss						Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter						Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit					
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																				
T59; S/N: 3245 @3m	T145 Agilent 3008A005						FCC 15.209																																																																																																																																																																																																																																				
Hi Frequency Cables																																																																																																																																																																																																																																											
3' cable 22807700		12' cable 22807600		20' cable 22807500		40G_2210		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																															
3' cable 22807700		12' cable 22807600		40G_2210								Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																												
2.000	3.0	47.4	41.6	27.6	5.3	35.4	0.0	0.0	44.9	39.1	74	54	29.1	14.9	H																																																																																																																																																																																																																												
1.320	3.0	46.1	38.1	25.1	3.1	-35.9	0.0	0.0	38.4	30.4	74	54	35.6	-23.6	H																																																																																																																																																																																																																												
1.430	3.0	46.6	38.9	25.5	3.4	-35.8	0.0	0.0	39.7	31.9	74	54	34.3	-22.1	H																																																																																																																																																																																																																												
1.200	3.0	48.8	43.3	24.7	2.8	-36.0	0.0	0.0	40.2	34.8	74	54	33.8	-19.2	V																																																																																																																																																																																																																												
1.320	3.0	47.1	29.0	25.1	3.1	-35.9	0.0	0.0	39.5	21.3	74	54	34.5	-32.7	V																																																																																																																																																																																																																												
1.404	3.0	44.9	36.0	25.4	3.3	-35.8	0.0	0.0	37.8	28.8	74	54	36.2	-25.2	V																																																																																																																																																																																																																												
Rev. 07.22.09																																																																																																																																																																																																																																											
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss						Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter						Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																																																																																																																																																																																															


Note:

## 8.4. WORST-CASE BELOW 1 GHz

### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

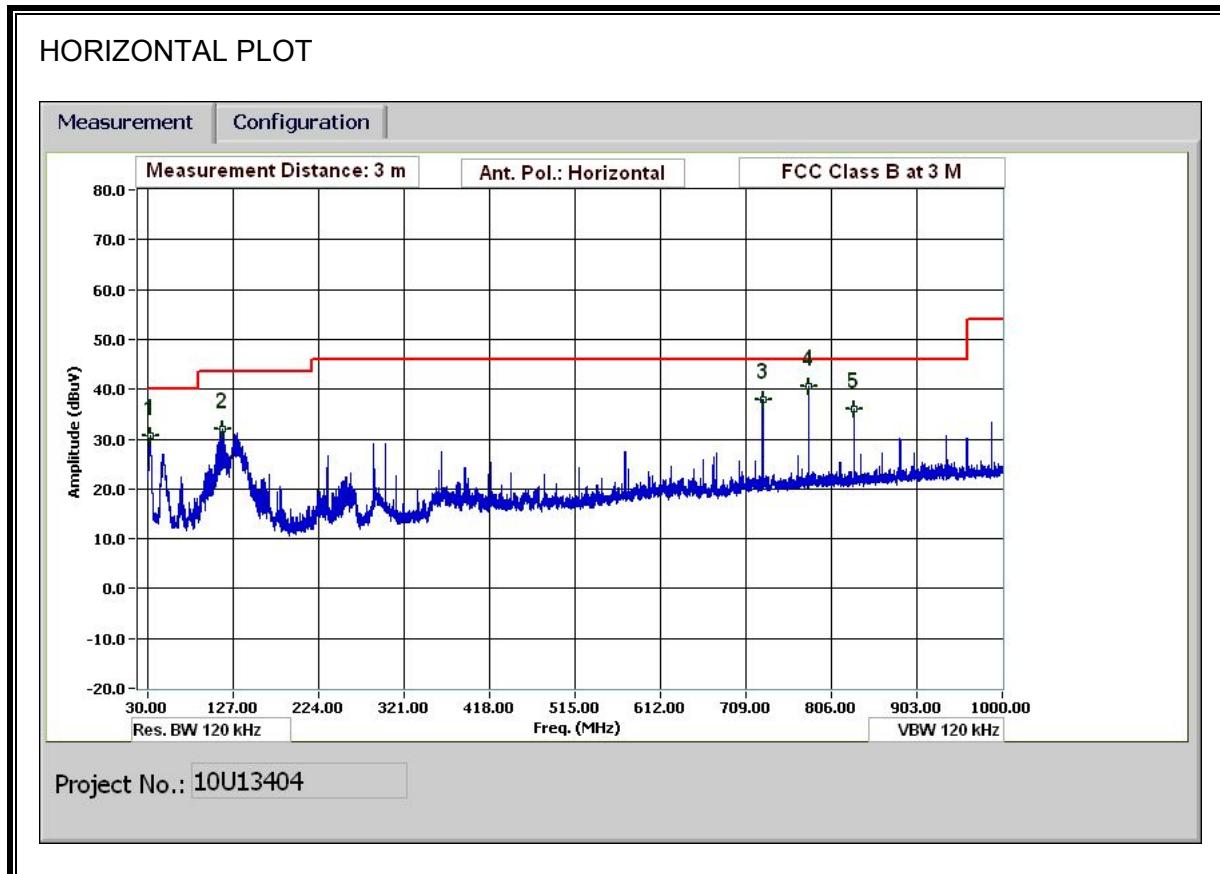

VERTICAL PLOT

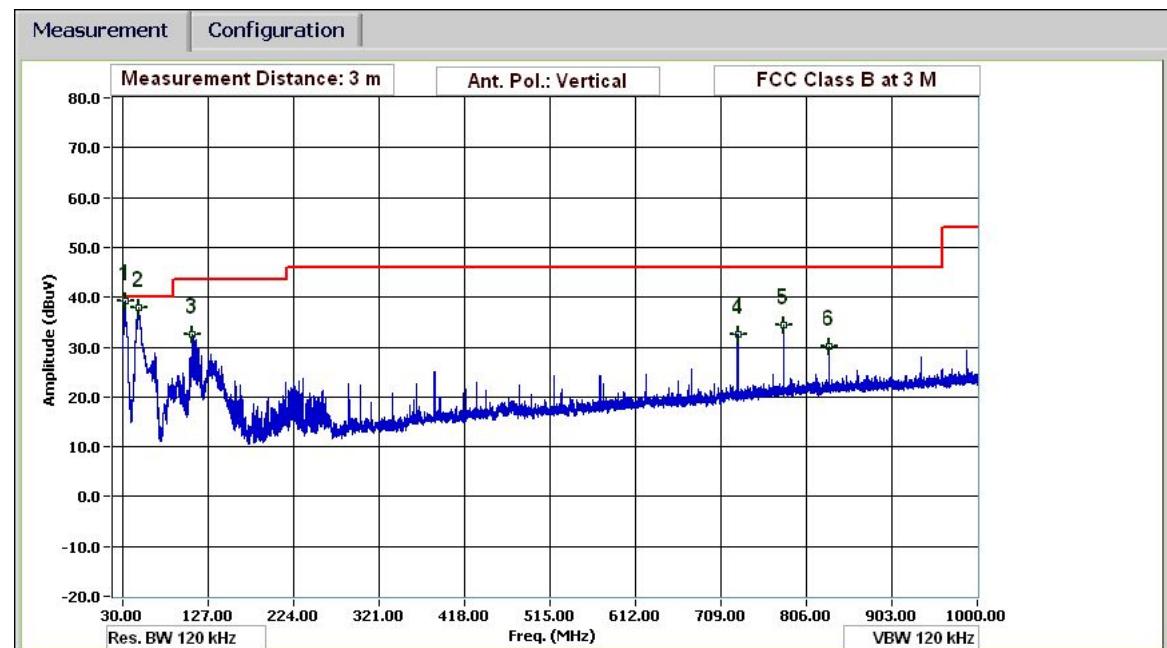

Project No.: 10U13404

## HORIZONTAL AND VERTICAL DATA

## 30-1000MHz Frequency Measurement

Test Engr: MENGISTU MEKURIA  
Date: 10/03/10  
Project #: 10U13404  
Company: BARNES & NOBLE  
Test Target: FCC CLASS B  
Mode Oper: IX, WORST-CASE

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Cor.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE


ANSI C63.4

### RESULTS


**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP	AV	
0.21	49.83	--	31.65	0.00	63.41	53.41	-13.58	-21.76	L1
0.64	45.12	--	21.38	0.00	56.00	46.00	-10.88	-24.62	L1
0.86	45.08	--	23.15	0.00	56.00	46.00	-10.92	-22.85	L1
0.42	47.72	--	29.38	0.00	57.37	47.37	-9.65	-17.99	L2
0.53	47.30	--	27.14	0.00	56.00	46.00	-8.70	-18.86	L2
0.74	46.41	--	25.23	0.00	56.00	46.00	-9.59	-20.77	L2
6 Worst Data									

**LINE 1 RESULTS**

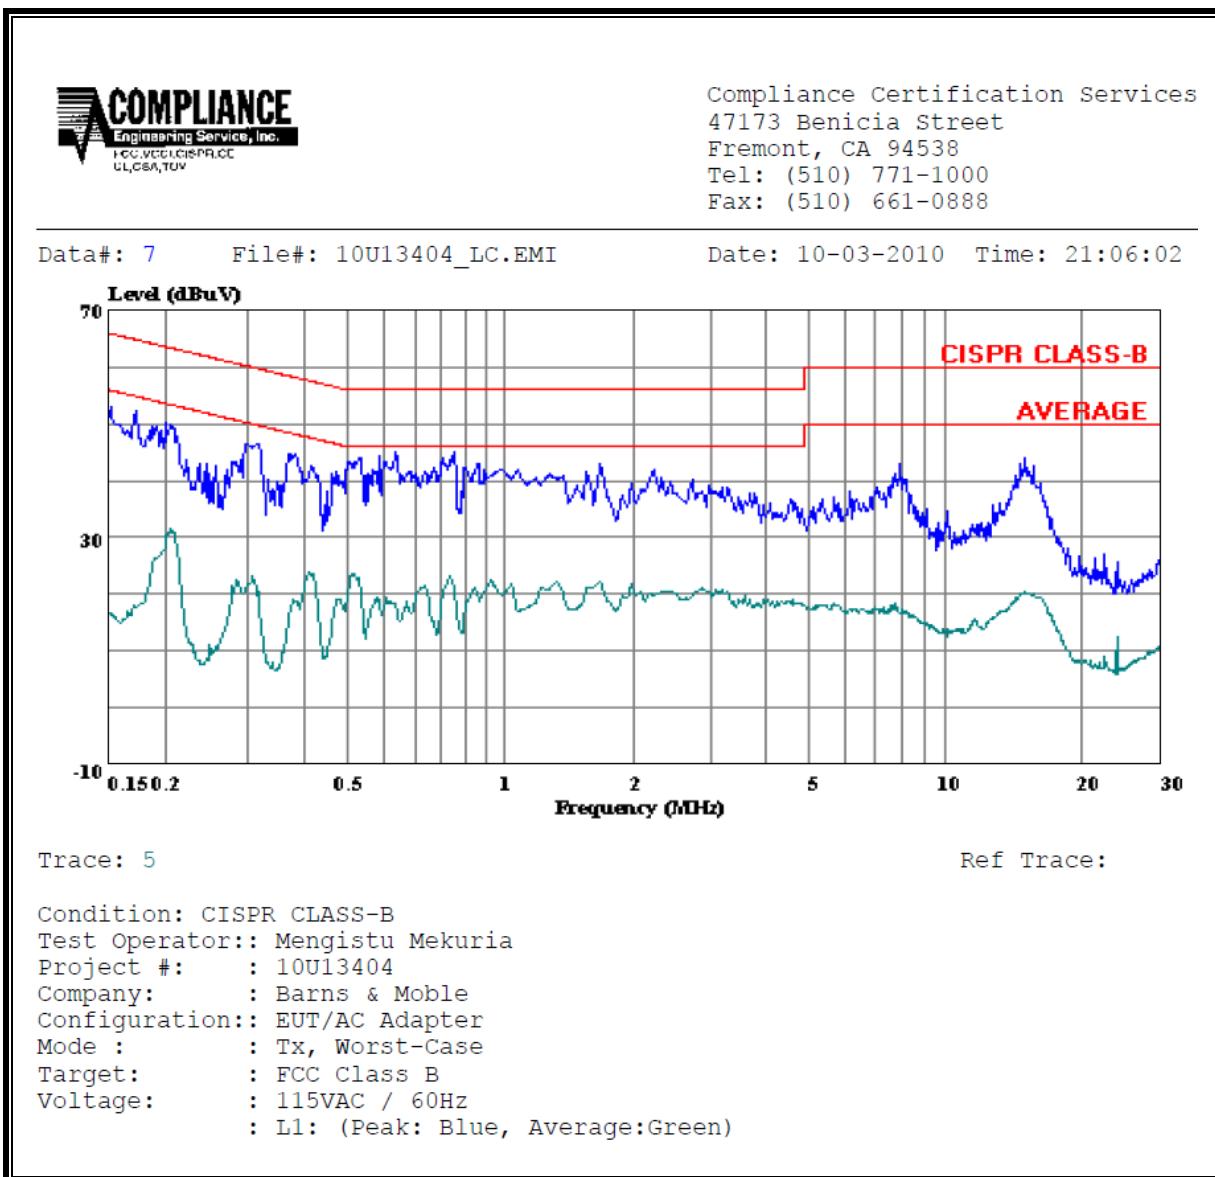

**LINE 2 RESULTS**

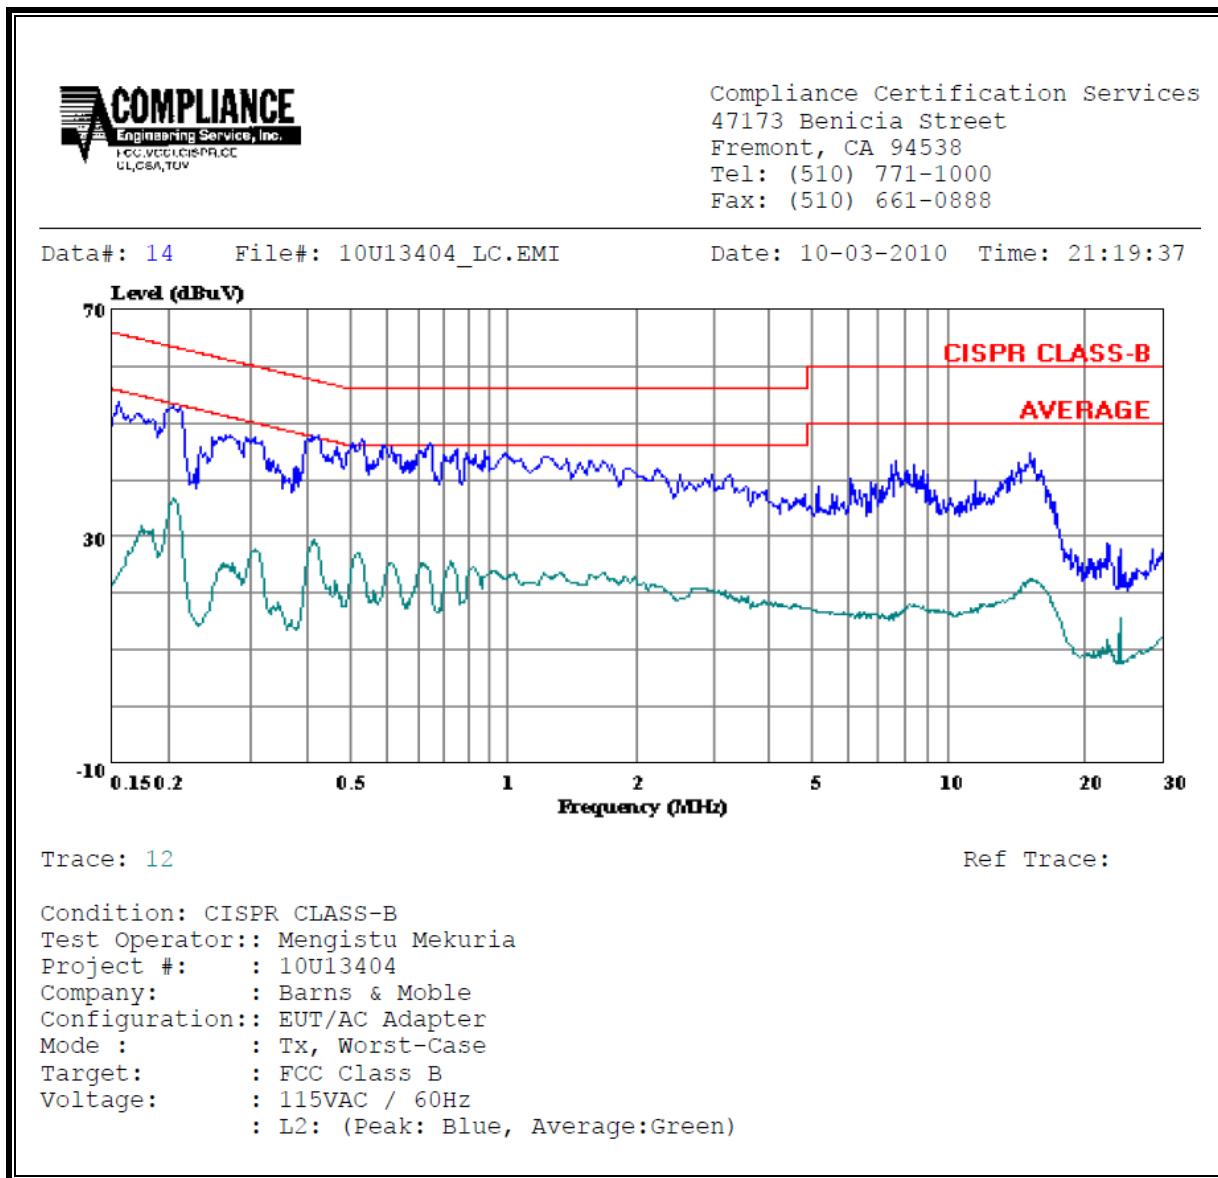

## 10. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5**  
**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/f	2.19/f		6
10–30	28	2.19/f		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

\* Power density limit is applicable at frequencies greater than 100 MHz.

**Notes:** 1. Frequency,  $f$ , is in MHz.  
2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.  
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla ( $\mu$ T) or 12.57 milligauss (mG).

## EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m<sup>2</sup> is converted to units of mW/cm<sup>2</sup> by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m<sup>2</sup>

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power \* Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

## LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

## RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m <sup>2</sup> )	FCC Power Density (mW/cm <sup>2</sup> )
2.4 GHz	WLAN	0.20	27.08	1.62	1.48	0.148