

# FCC & IC Radio Test Report

**FCC ID: XHM-K948D35****IC: 9263A-K948D35**This report concerns (check one): Original Grant Class II Change

**Project No.** : 1605081  
**Equipment** : Panel PC  
**Test Model** : K948(D35)  
**Applicant** : FLYTECH Technology Co., Ltd.  
**Address** : 1F, No. 168, Sing-Ai Rd., NeiHu District 11494,  
Taipei, Taiwan

**Date of Receipt** : Aug. 08, 2016  
**Date of Test** : Aug. 08, 2016 ~ Aug. 30, 2016  
**Issued Date** : Sep. 01, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** : Rush Kao  
(Rush Kao)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

## **B T L I N C .**

B1, No.37, Lane 365, Yang Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.  
TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

## Table of Contents

REPORT ISSUED HISTORY	5
1 CERTIFICATION	6
2 SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 CONDUCTED EMISSION	12
4.1 LIMITS	12
4.2 TEST PROCEDURES	12
4.3 TEST SETUP LAYOUT	13
4.4 DEVIATION FROM TEST STANDARD	13
4.5 EUT OPERATING CONDITIONS	13
4.6 EUT TEST CONDITIONS	13
4.7 TEST RESULTS	13
5 RADIATED EMISSION	14
5.1 LIMITS	14
5.2 TEST PROCEDURE	15
5.3 DEVIATION FROM TEST STANDARD	16
5.4 TEST SETUP	16
5.5 EUT OPERATING CONDITIONS	16
5.6 EUT TEST CONDITIONS	17
5.7 TEST RESULTS (BELOW 30MHZ)	17
5.8 TEST RESULTS - (30-1000MHZ)	17
5.9 TEST RESULTS- FCC PART 15.225 / RSS-210 Annex B, Section B.6 (a),(b),(c)	17
6 FREQUENCY STABILITY	18
6.1 LIMITS	18
6.2 TEST PROCEDURE	18
6.3 DEVIATION FROM TEST STANDARD	18
6.4 EUT OPERATING CONDITIONS	18
6.5 EUT TEST CONDITIONS	18
6.6 TEST RESULTS	18
7 . OCCUPIED BANDWIDTH TEST	19
7.1 TEST PROCEDURE	19
7.2 DEVIATION FROM STANDARD	19

## Table of Contents

7.3 TEST SETUP	19
7.4 EUT OPERATION CONDITIONS	19
7.5 EUT TEST CONDITIONS	19
7.6 TEST RESULTS	19
8 . MEASUREMENT INSTRUMENTS LIST	20
9 EUT TEST PHOTO	21
ATTACHMENT A - CONDUCTED EMISSION	26
ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)	31
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	36
ATTACHMENT D - RADIATED EMISSION (FCC PART 15.225 / RSS-210 ANNEX B, SECTION B.6 (A),(B),(C))	41
ATTACHMENT E - FREQUENCY STABILITY MEASUREMENT	44
ATTACHMENT F - OCCUPIED BANDWIDTH	46

### REPORT ISSUED HISTORY

Issue No.	Description	Issued Date
BTL-FICP-1-1605081	Original Issue.	Sep. 01, 2016

## 1 CERTIFICATION

Equipment : Panel PC  
Brand Name : FLYTECH  
Test Model : K948(D35)  
Applicant : FLYTECH Technology Co., Ltd.  
Date of Test : Aug. 08, 2016 ~ Aug. 30, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart C (15.225)  
ANSI C63.10-2013  
RSS-210 Issue 9, August 2016  
RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-1-1605081) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Standard Section		Test Item	Result
RSS-210	FCC		
RSS-GEN 8.8	15.207	Conducted emission	PASS
RSS-210 Annex B, Section B.6 (a),(b),(c)	15.35 / 15.205 / 15.209 / 15.225	Radiated emission	PASS
RSS-210 Annex B, Section B.6 (d).	15.225(e)	Frequency Stability	PASS
-	15.203	Antenna Requirement	PASS
RSS-GEN 6.6	-	Occupied Bandwidth	PASS

NOTE:

(1) N/A denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

### Conducted emission Test:

**C05:** (VCCI RN: C-4742; FCC RN:949005; FCC DN:TW1082)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

### Radiated emission Test:

**CB15:** (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 2.2 MEASUREMENT UNCERTAINTY

**The measurement uncertainty is not specified by Innovation, Science and Economic Development Canada rules and for reference only.**

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{CISPR}$  requirement.

### A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
C05	CISPR	150 kHz ~ 30MHz	3.06

### B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.74

Test Site	Method	Measurement Frequency Range	Ant.	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.76
		30MHz ~ 200MHz	H	4.28
		200MHz ~ 1,000MHz	V	5.08
		200MHz ~ 1,000MHz	H	4.50

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) - 150 kHz - 30 MHz: 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz - 1000 MHz: 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Panel PC	
Brand Name	FLYTECH	
Test Model	K948(D35)	
Model Difference	N/A	
Product Description	Operation Frequency	13.56 MHz
	Antenna Designation	LOOP Antenna
Power Source	DC Voltage supplied from AC/DC adapter. #1 DELTA/ADP-65JH HB #2 FSP/FSP065-DBBM1	
Power Rating	#1 I/P: 100-240V~ 1.5A 50-60Hz O/P: 19V_____ 3.42A #2 I/P: 100-240V 2.0-1.0A 50-60Hz O/P: 19.0V_____ 3.43A MAX	
Product Covered	1 * M/B: D35 1 * CPU: INTEL/ATOM N2930 1.83 GHz 1 * Smart card+RFID: Castle/EZM710AU 1 * Smart card: Castle/EZM110PU-FR 1 * Main Display: AUO/M185XTN01 1 * 2D scanner: Opticon/MD1000 5 * 2.5" HDD/SSD: (1) WD/320GB (2) Toshiba/320GB (3) Toshiba/500GB (4) INNODISK/64GB (5) INNODISK/128GB 2 * Adapter: (1) DELTA/ADP-65JH HB (2) FSP/FSP065-DBBM1	

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	13.56MHz Transmit


Conducted emission test	
Final Test Mode	Description
Mode 1	13.56MHz Transmit

Radiated emission test	
Final Test Mode	Description
Mode 1	13.56MHz Transmit

Frequency Stability test	
Final Test Mode	Description
Mode 1	13.56MHz Transmit

Occupied Bandwidth test	
Final Test Mode	Description
Mode 1	13.56MHz Transmit

**3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**

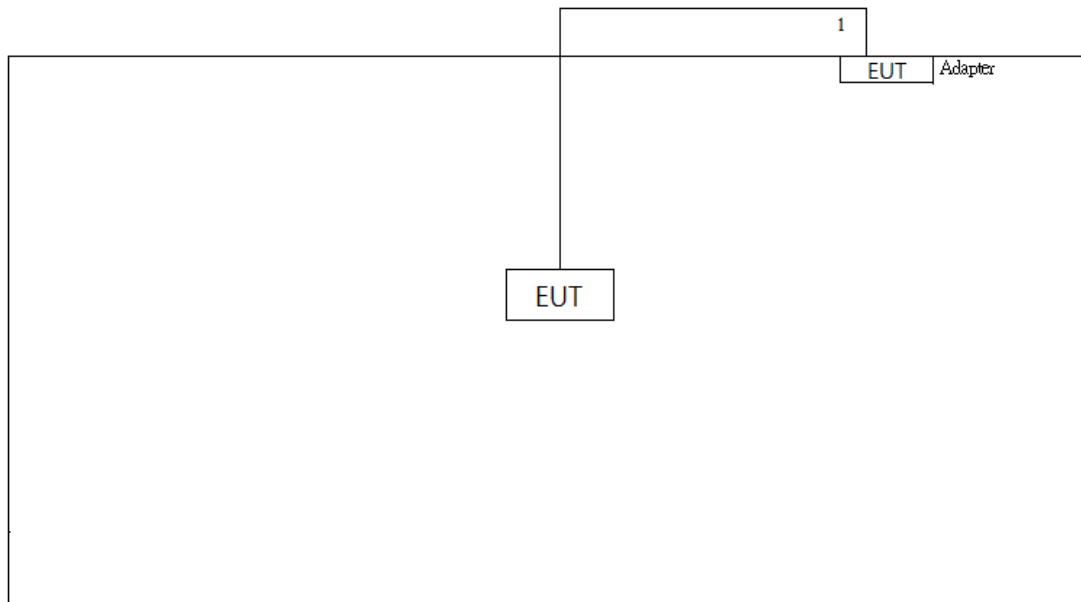

**3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.0m	Power Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4 CONDUCTED EMISSION

### 4.1 LIMITS

FREQUENCY (MHz)	(dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56.00	46.00
5.0 - 30.0	60.00	50.00

**NOTE:**

1. The tighter limit applies at the band edges.
2. The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


### 4.2 TEST PROCEDURES

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**NOTE:**

- a. Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- b. All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

### 4.3 TEST SETUP LAYOUT

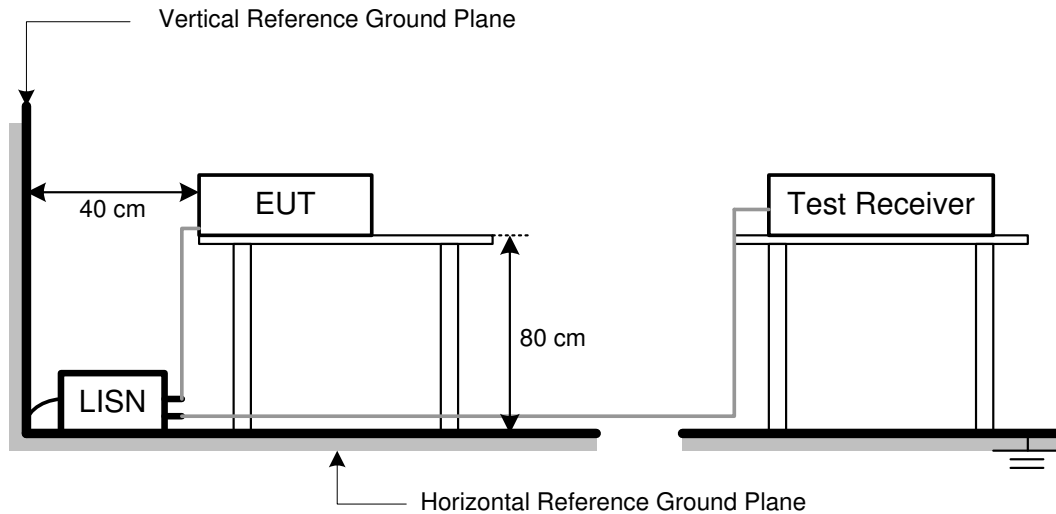

### 4.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5 EUT OPERATING CONDITIONS

The EUT used during radiated and/or conducted emission measurement was designed to exercise in a manner similar to a typical use.

### 4.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

### 4.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 5 RADIATED EMISSION

### 5.1 LIMITS

FCC Part 15.209 / RSS-GEN 7.2.5				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500
FCC Part 15.225(a)/(b)/(c) / RSS-210 Annex B, Section B.6 (a),(b),(c)				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
13.553 – 13.567	15,848	30 m	15,848*100	124
13.567 – 13.710	334	30 m	334*100	90.5
13.110 – 13.410 13.710 – 14.010	106	30 m	106*100	80.5

NOTE:

- (1) The tighter limit shall apply at the boundary between two frequency range.
- (2) Limitation expressed in dBuV/m is calculated by 20log Emission Level (uV/m).
- (3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $L_{d1} = L_{d2} * (d_2/d_1)^2$ .  
Example:  
F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as  $L_{d1} = L_1 = 30uV/m * (10)^2 = 100 * 30 uV/m$
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
Margin Level = Measurement Value – Limit Value

## 5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**NOTE: (FCC PART 15.209 / RSS-GEN 7.2.5)**

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

**NOTE: (FCC PART 15.225 / RSS-210 Annex B, Section B.6 (a),(b),(c))**


- a. Spectrum Setting:
  - 9 KHz – 150 KHz, RBW= 200Hz, VBW=200Hz, Sweep time = 200 ms.
  - 150 K Hz – 30 MHz, RBW= 10 KHz, VBW=10 KHz, Sweep time = 200 ms.
  - 30 MHz – 1000 MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- c. The Log-Bicon Antenna will use to test frequency range from 30MHz to 1000MHz and the Loop Antenna will use to test frequency below 30MHz.

**5.3 DEVIATION FROM TEST STANDARD**


No deviation

**5.4 TEST SETUP**

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

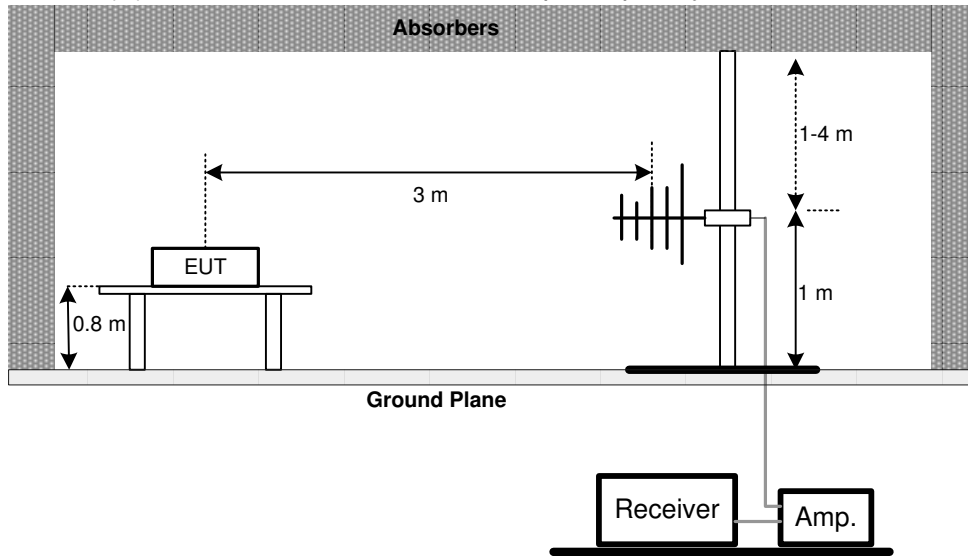

(B) For radiated emissions below 30MHz

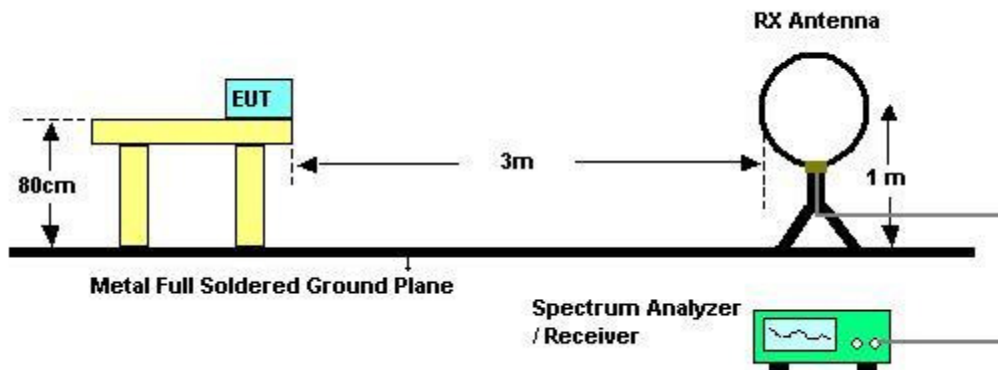

**5.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.



## **5.6 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 65%

Test Voltage: AC 120V/60Hz

## **5.7 TEST RESULTS (BELOW 30MHZ)**

Please refer to the Attachment B.

## **5.8 TEST RESULTS - (30-1000MHZ)**

Please refer to the Attachment C.

## **5.9 TEST RESULTS- FCC PART 15.225 / RSS-210 Annex B, Section B.6 (a),(b),(c)**

Please refer to the Attachment D.

## 6 FREQUENCY STABILITY

### 6.1 LIMITS

<b>FCC Part 15.225(e) / RSS-210 Annex B, Section B.6 (d) &amp; RSS-Gen 8.11</b>
---

The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of - 20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery.

### 6.2 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber.  
After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- b. At room temperature (25±5°C), an external variable AC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

### 6.3 DEVIATION FROM TEST STANDARD

No deviation

### 6.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.5 EUT TEST CONDITIONS

Temperature: 22°C

Relative Humidity: 66%

Test Voltage: AC 120V/60Hz

### 6.6 TEST RESULTS

Please refer to the Attachment E.

## 7. OCCUPIED BANDWIDTH TEST

### 7.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1KHz, VBW=1KHz, Sweep time = Auto.

### 7.2 DEVIATION FROM STANDARD

No deviation.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 7.5 EUT TEST CONDITIONS

Temperature: 22°C  
 Relative Humidity: 66%  
 Test Voltage: AC 120V/60Hz

### 7.6 TEST RESULTS

Please refer to the Attachment F

## 8. MEASUREMENT INSTRUMENTS LIST


Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 26, 2017
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 15, 2017
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 10, 2016
4	Measurement Software	EZ	EZ_EMG (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168-352	9168-352	Feb. 04, 2017
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-546	Nov. 05, 2017
3	Pre-Amplifier	HP	8447D	2944A08891	Mar. 09 2017
4	Pre-Amplifier	Agilent	8449B	3008A02331	Jan. 24, 2017
5	Test Cable	EMCI	EMC8D-NM-NM-8000	150301	Mar. 09, 2017
6	Test Cable	EMCI	EMC104-SM-SM-2500	150303	Mar. 09, 2017
7	Test Cable	EMCI	EMC104-NM-SM-1000	150304	Mar. 09, 2017
8	Test Cable	EMCI	EMC104-SM-SM-5000	150302	Mar. 29, 2017
9	Test Cable	EMCI	EMC104-SM-SM-800	150305	Mar. 29, 2017
10	EXA Spectrum Analyzer	Agilent	N9010A	MY52220990	Feb. 24, 2017
11	EMI Test Receiver	Agilent	N9038A	MY51210215	Jan. 08, 2017
12	Loop Antenna	EMCO	6502	00042960	Nov. 24, 2017

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Jan. 18, 2017


Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY51160196	Jul. 21, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.


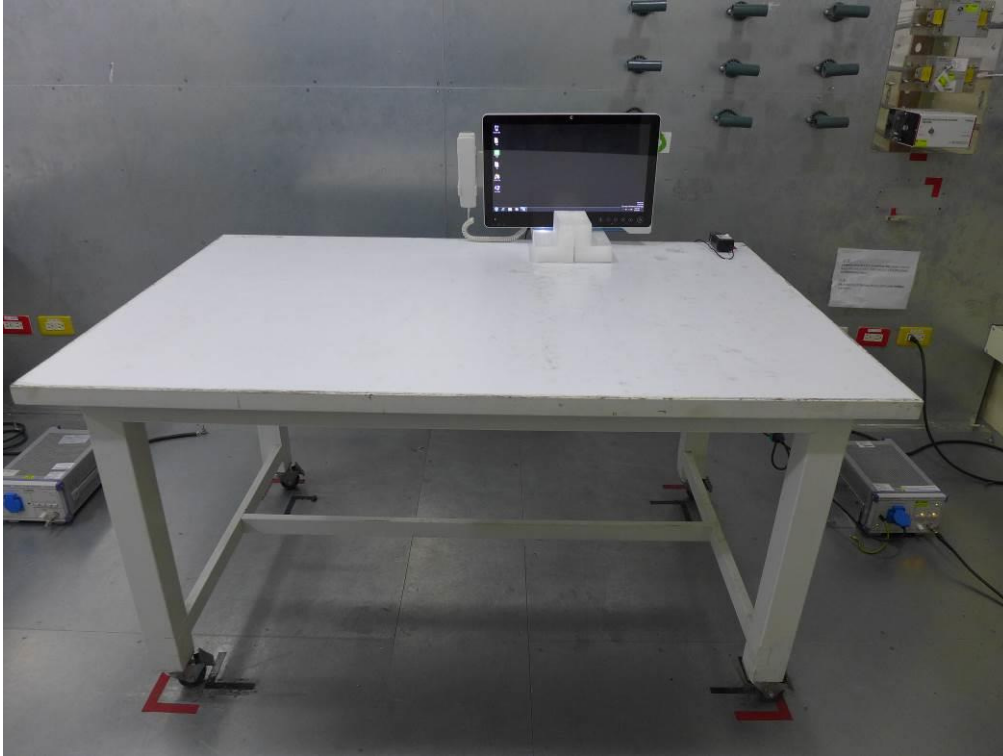
**9 EUT TEST PHOTO****Conducted emission test photos****Adapter: ADP-65JH HB**

### Conducted emission test photos

Adapter: FSP065-DBBM1


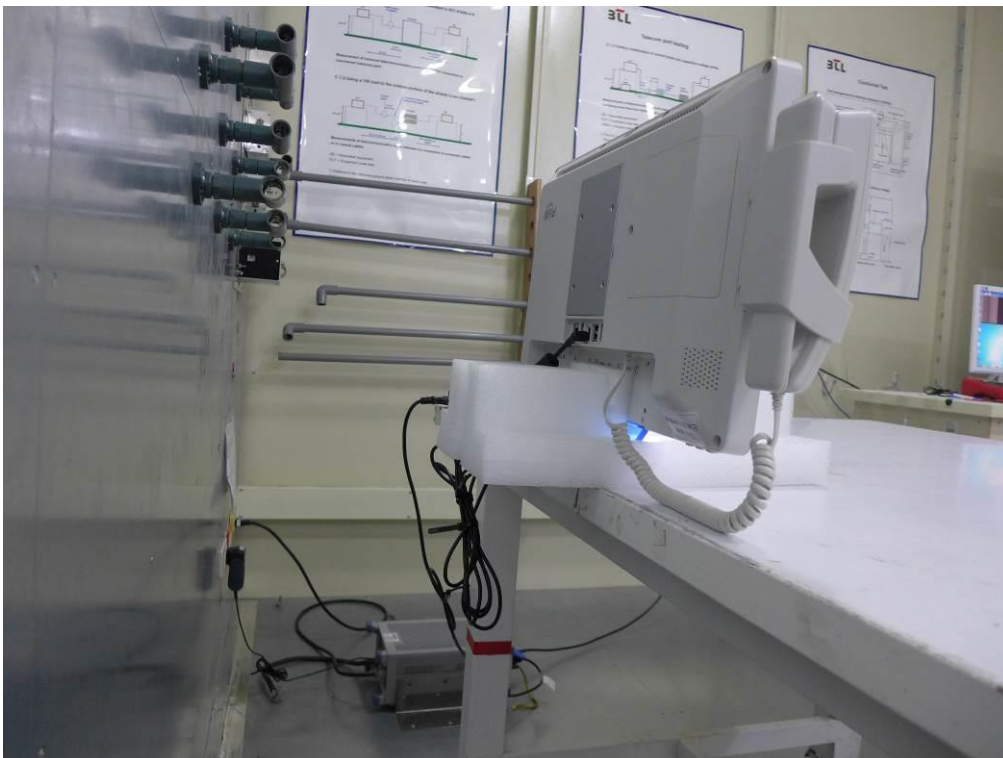


**Radiated emission test photos**  
**9KHz to 30MHz**  
**Adapter: ADP-65JH HB**

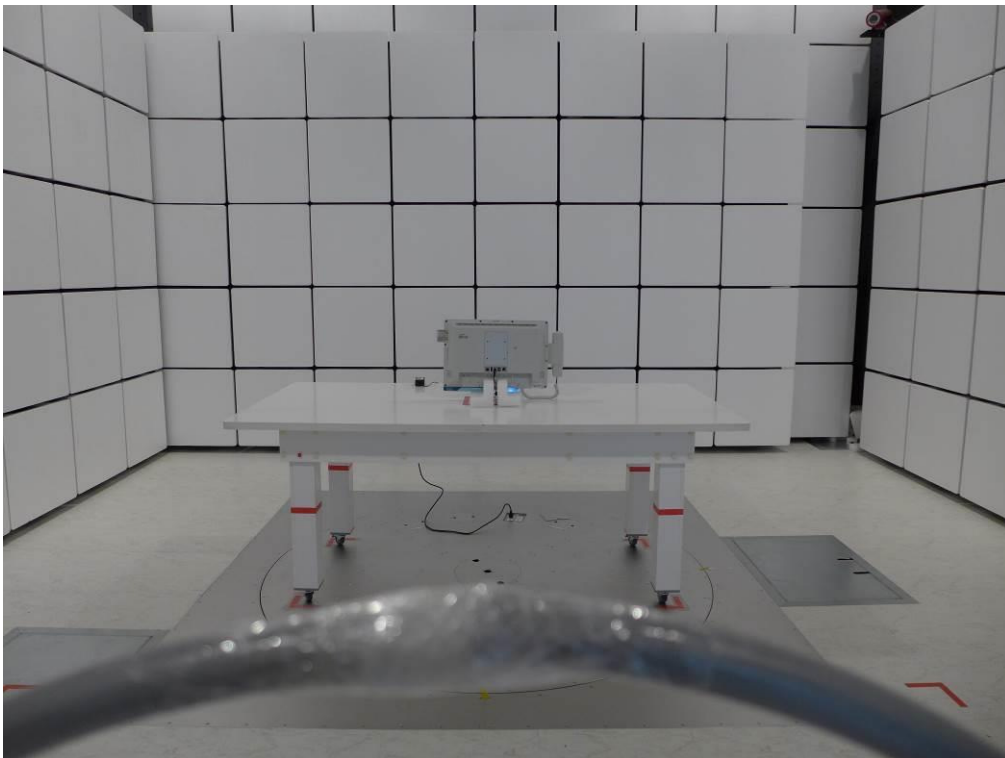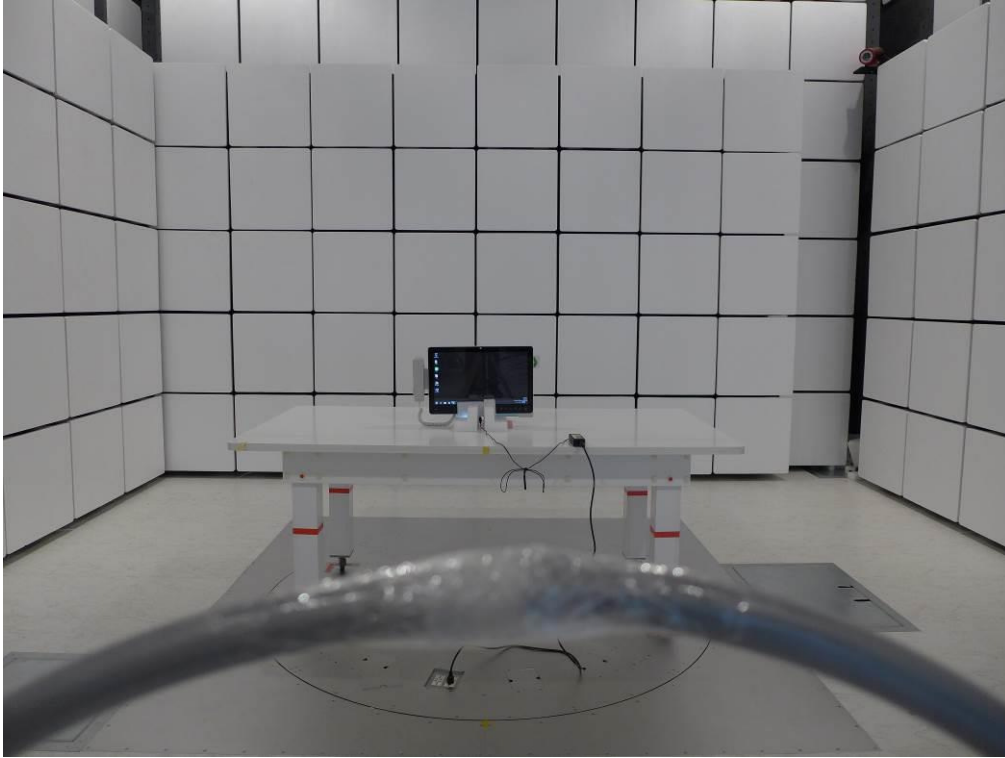





**Radiated emission test photos**  
**30MHz to 1000MHz**  
**Adapter: ADP-65JH HB**

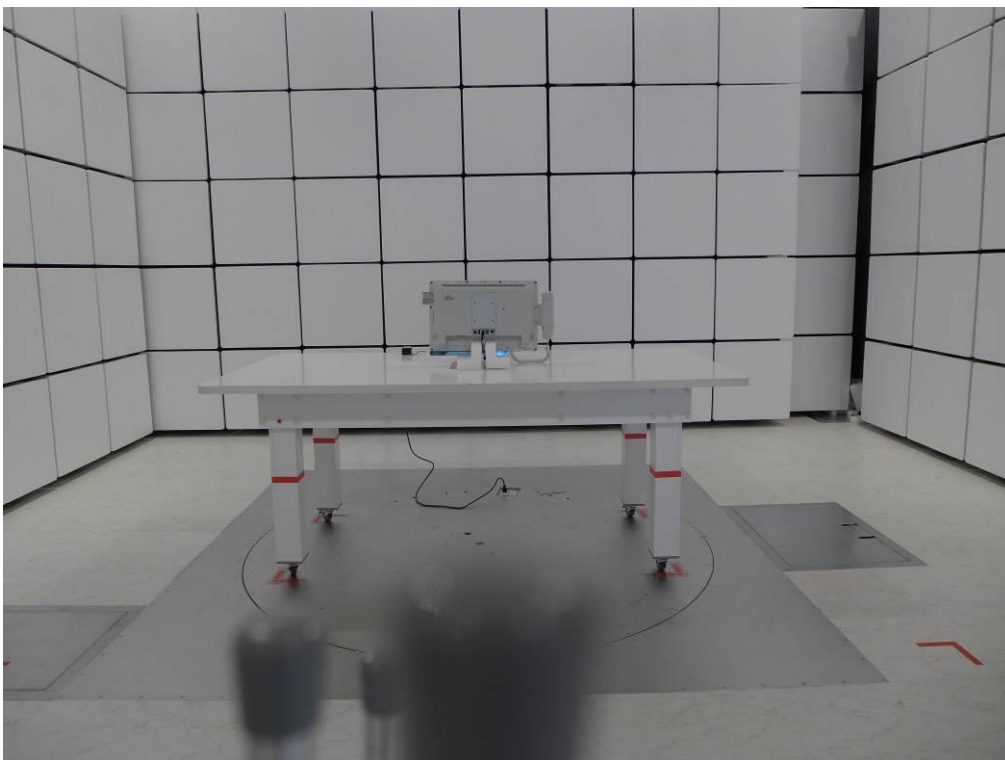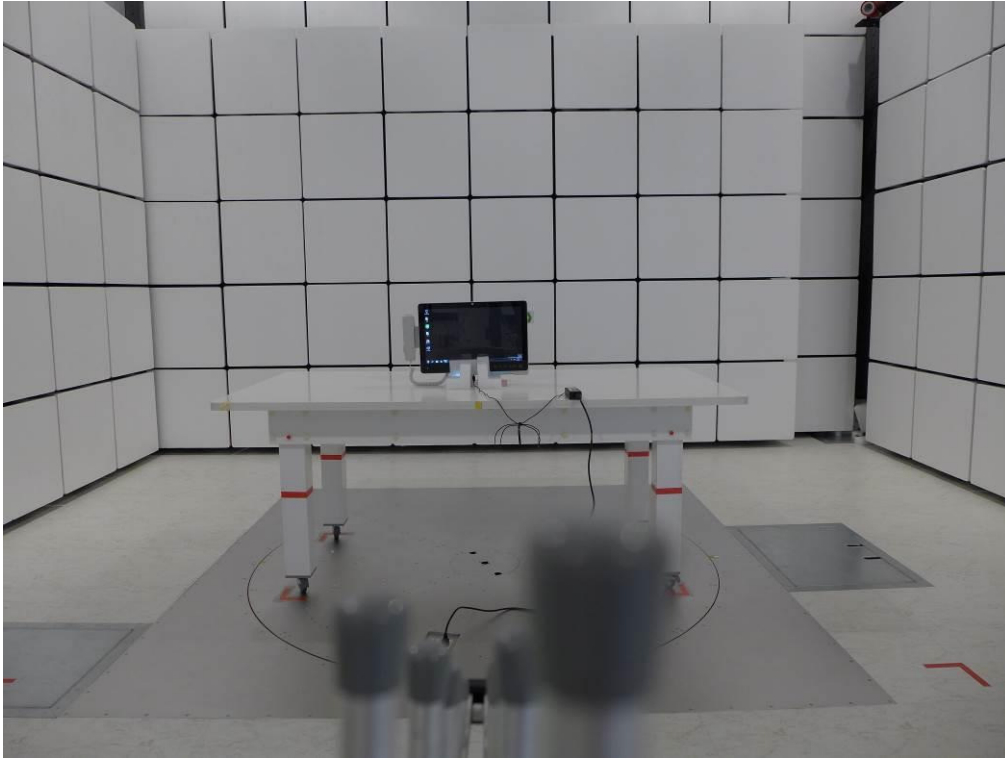




**Radiated emission test photos**  
**30MHz to 1000MHz**  
**Adapter: FSP065-DBBM1**

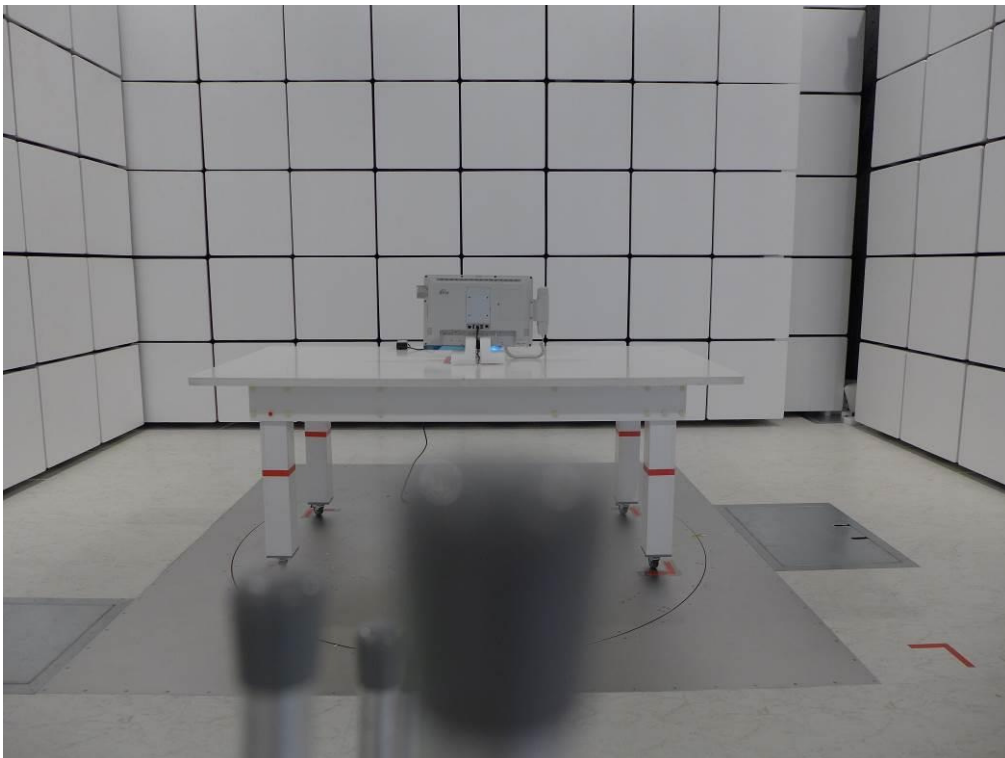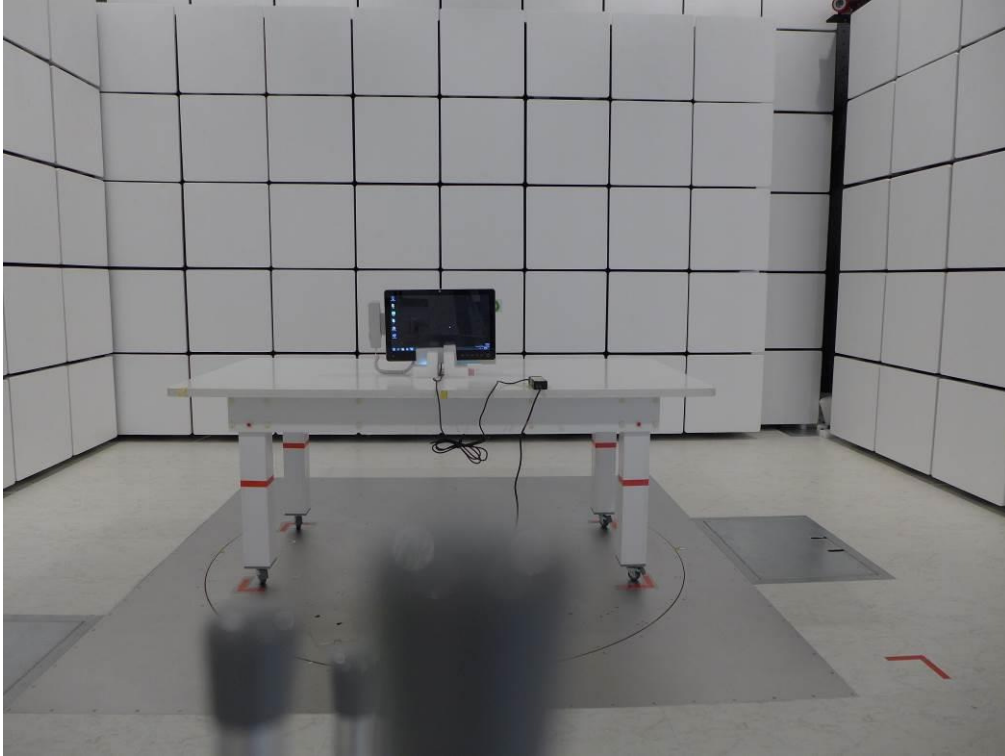

## ATTACHMENT A - CONDUCTED EMISSION

Test Mode : 13.56MHz Transmit\_Adapter: ADP-65JH HB


### Line

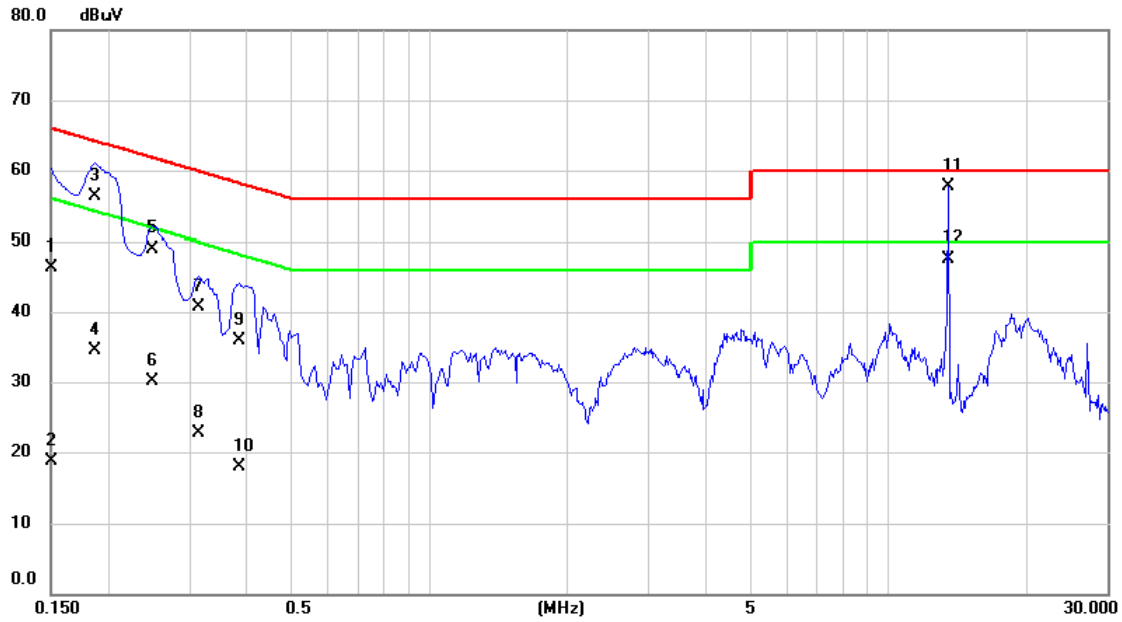

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.60	9.66	46.26	66.00	-19.74	QP	
2		0.1500	9.00	9.66	18.66	56.00	-37.34	AVG	
3		0.1870	46.70	9.66	56.36	64.17	-7.81	QP	
4		0.1870	24.80	9.66	34.46	54.17	-19.71	AVG	
5		0.2494	39.20	9.66	48.86	61.78	-12.92	QP	
6		0.2494	20.50	9.66	30.16	51.78	-21.62	AVG	
7		0.3144	31.00	9.66	40.66	59.85	-19.19	QP	
8		0.3144	13.00	9.66	22.66	49.85	-27.19	AVG	
9		0.3860	26.20	9.66	35.86	58.15	-22.29	QP	
10		0.3860	8.20	9.66	17.86	48.15	-30.29	AVG	
11	*	13.5500	47.90	9.90	57.80	60.00	-2.20	QP	
12		13.5500	37.70	9.90	47.60	50.00	-2.40	AVG	

Test Mode : 13.56MHz Transmit\_Adapter: ADP-65JH HB


### Neutral

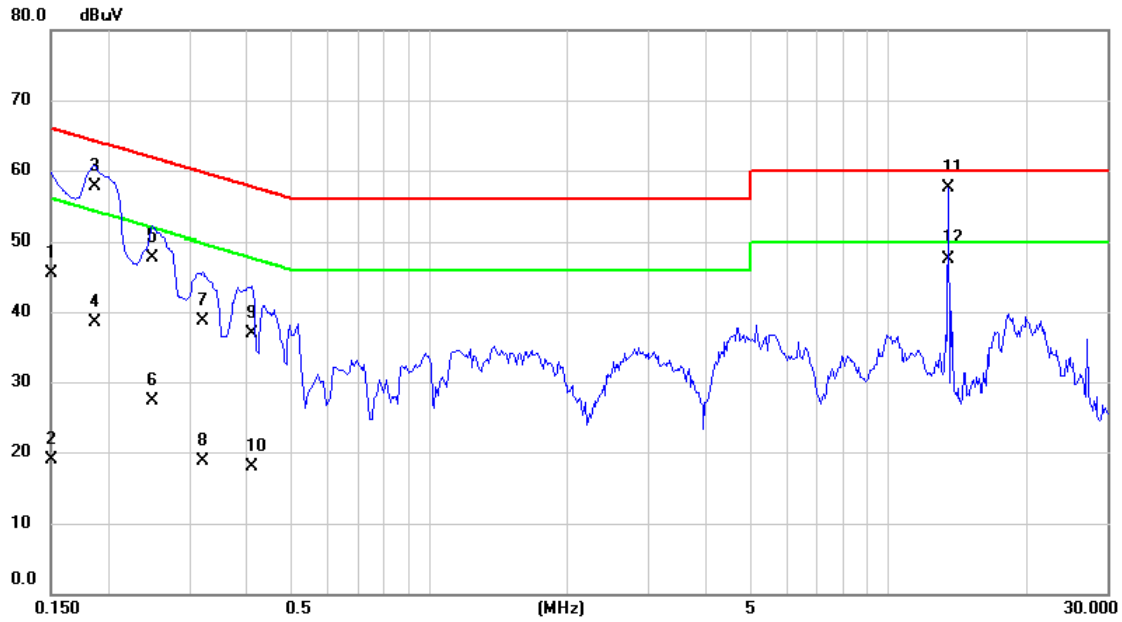

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.80	9.67	45.47	66.00	-20.53	QP	
2		0.1500	9.20	9.67	18.87	56.00	-37.13	AVG	
3		0.1870	48.00	9.66	57.66	64.17	-6.51	QP	
4		0.1870	28.80	9.66	38.46	54.17	-15.71	AVG	
5		0.2487	38.10	9.66	47.76	61.80	-14.04	QP	
6		0.2487	17.70	9.66	27.36	51.80	-24.44	AVG	
7		0.3208	29.00	9.66	38.66	59.69	-21.03	QP	
8		0.3208	9.10	9.66	18.76	49.69	-30.93	AVG	
9		0.4104	27.20	9.66	36.86	57.64	-20.78	QP	
10		0.4104	8.20	9.66	17.86	47.64	-29.78	AVG	
11	*	13.5500	47.70	9.90	57.60	60.00	-2.40	QP	
12		13.5500	37.60	9.90	47.50	50.00	-2.50	AVG	

Test Mode : 13.56MHz Transmit\_Adapter: FSP065-DBBM1


### Line

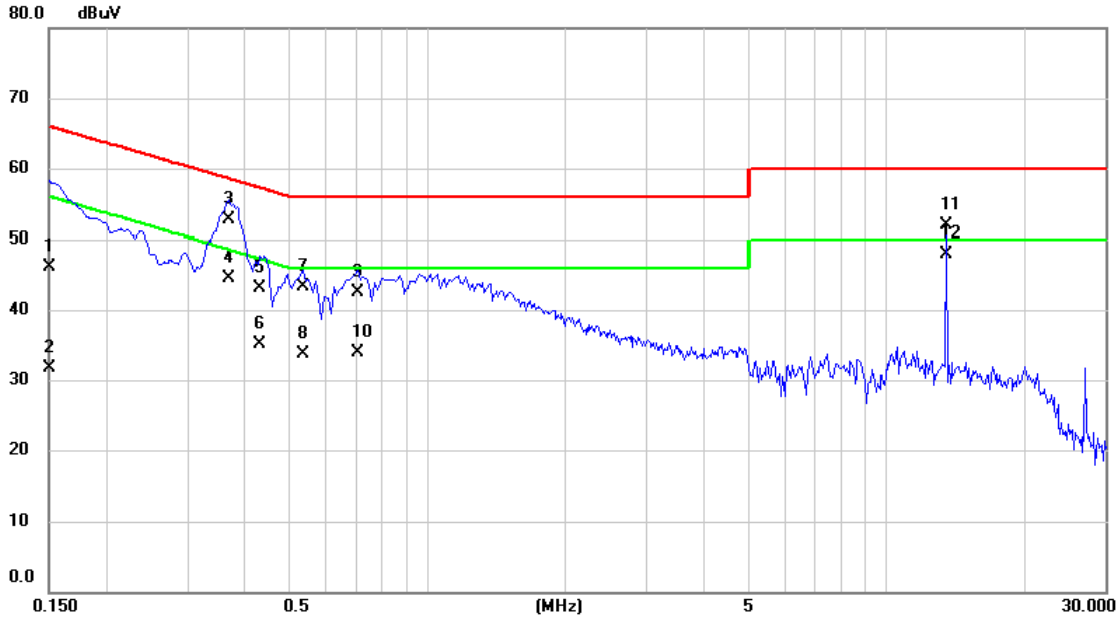

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.40	9.66	46.06	66.00	-19.94	QP	
2		0.1500	22.00	9.66	31.66	56.00	-24.34	AVG	
3		0.3704	43.10	9.66	52.76	58.49	-5.73	QP	
4		0.3704	34.80	9.66	44.46	48.49	-4.03	AVG	
5		0.4321	33.50	9.67	43.17	57.21	-14.04	QP	
6		0.4321	25.50	9.67	35.17	47.21	-12.04	AVG	
7		0.5360	33.70	9.67	43.37	56.00	-12.63	QP	
8		0.5360	24.00	9.67	33.67	46.00	-12.33	AVG	
9		0.7070	32.80	9.67	42.47	56.00	-13.53	QP	
10		0.7070	24.20	9.67	33.87	46.00	-12.13	AVG	
11		13.5500	42.10	9.90	52.00	60.00	-8.00	QP	
12	*	13.5500	38.10	9.90	48.00	50.00	-2.00	AVG	

Test Mode : 13.56MHz Transmit\_Adapter: FSP065-DBBM1


### Neutral

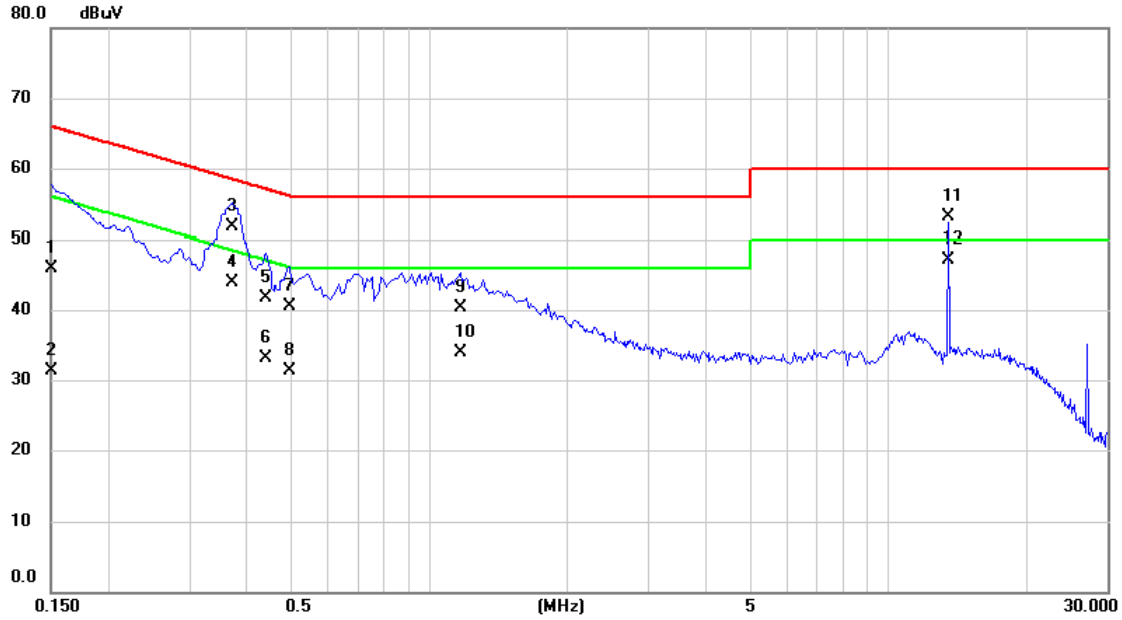

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	36.20	9.67	45.87	66.00	-20.13	QP	
2		0.1500	21.70	9.67	31.37	56.00	-24.63	AVG	
3		0.3720	42.10	9.66	51.76	58.46	-6.70	QP	
4		0.3720	34.20	9.66	43.86	48.46	-4.60	AVG	
5		0.4398	32.10	9.67	41.77	57.07	-15.30	QP	
6		0.4398	23.40	9.67	33.07	47.07	-14.00	AVG	
7		0.4972	30.90	9.67	40.57	56.05	-15.48	QP	
8		0.4972	21.70	9.67	31.37	46.05	-14.68	AVG	
9		1.1660	30.70	9.69	40.39	56.00	-15.61	QP	
10		1.1660	24.30	9.69	33.99	46.00	-12.01	AVG	
11		13.5500	43.20	9.90	53.10	60.00	-6.90	QP	
12	*	13.5500	37.30	9.90	47.20	50.00	-2.80	AVG	

## ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)


Test Mode: 13.56MHz Transmit - Open

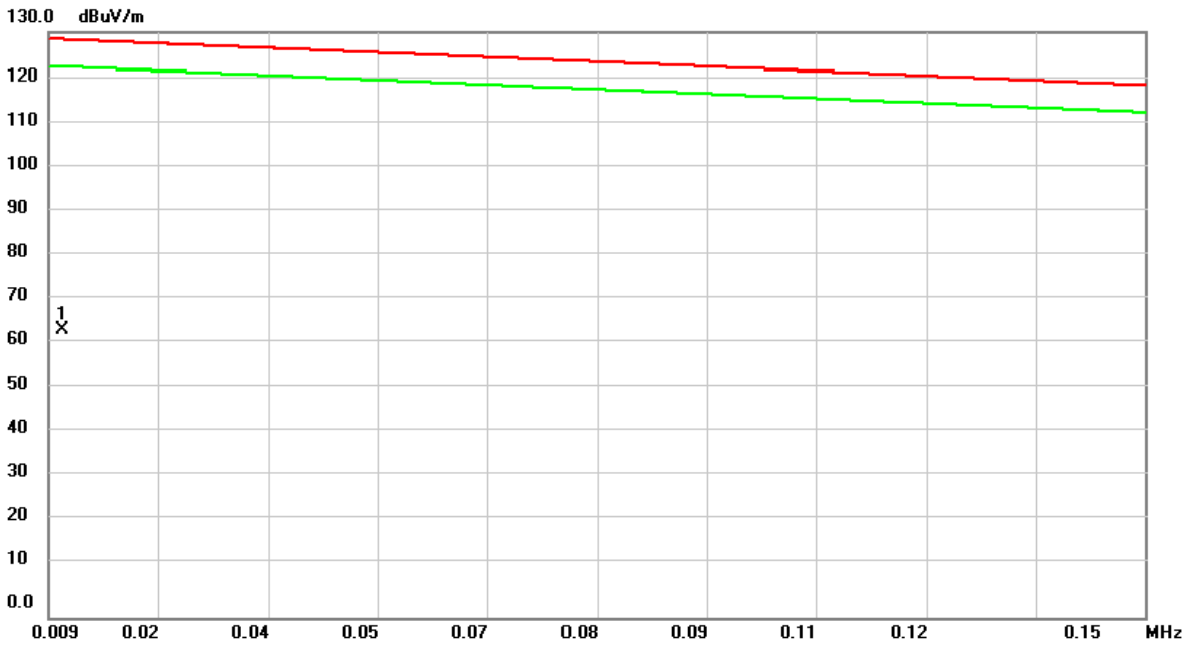

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0107	43.65	20.31	63.96	128.40	-64.44	peak	




Test Mode: 13.56MHz Transmit - Open

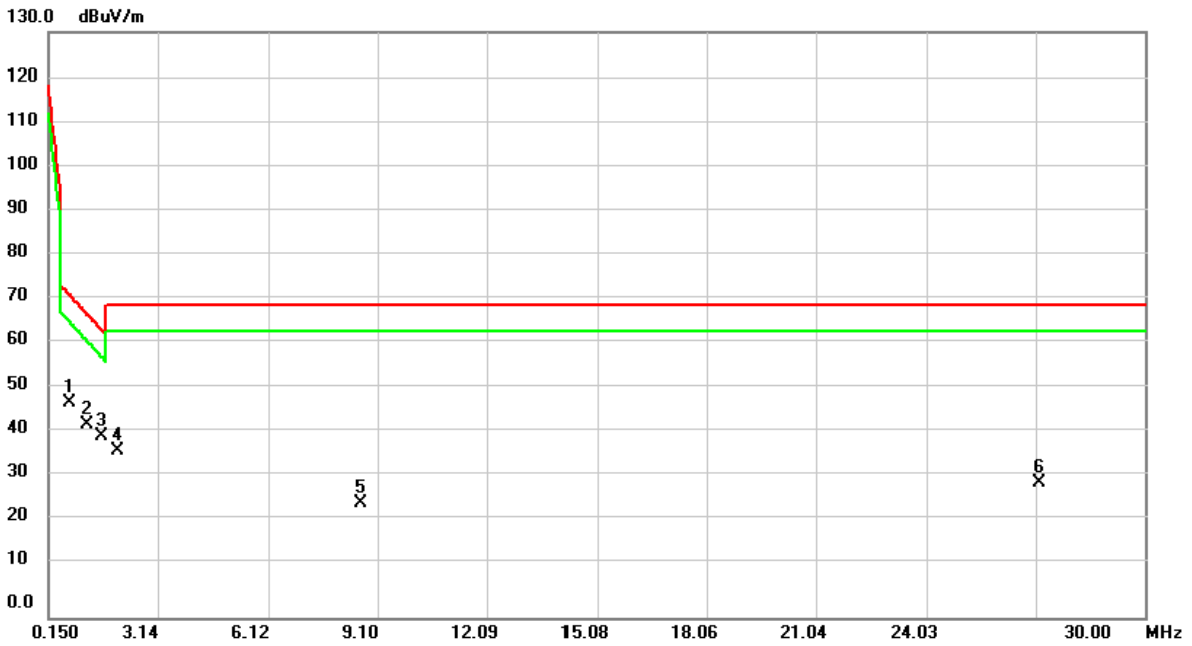


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.7171	36.14	11.89	48.03	71.78	-23.75	peak	
2		1.1947	31.31	11.91	43.22	67.52	-24.30	peak	
3	*	1.6126	28.63	11.72	40.35	63.79	-23.44	peak	
4		2.0305	25.73	11.54	37.27	69.54	-32.27	peak	
5		8.6570	14.23	11.33	25.56	69.54	-43.98	peak	
6		27.1341	20.48	9.72	30.20	69.54	-39.34	peak	

Test Mode: 13.56MHz Transmit - Close

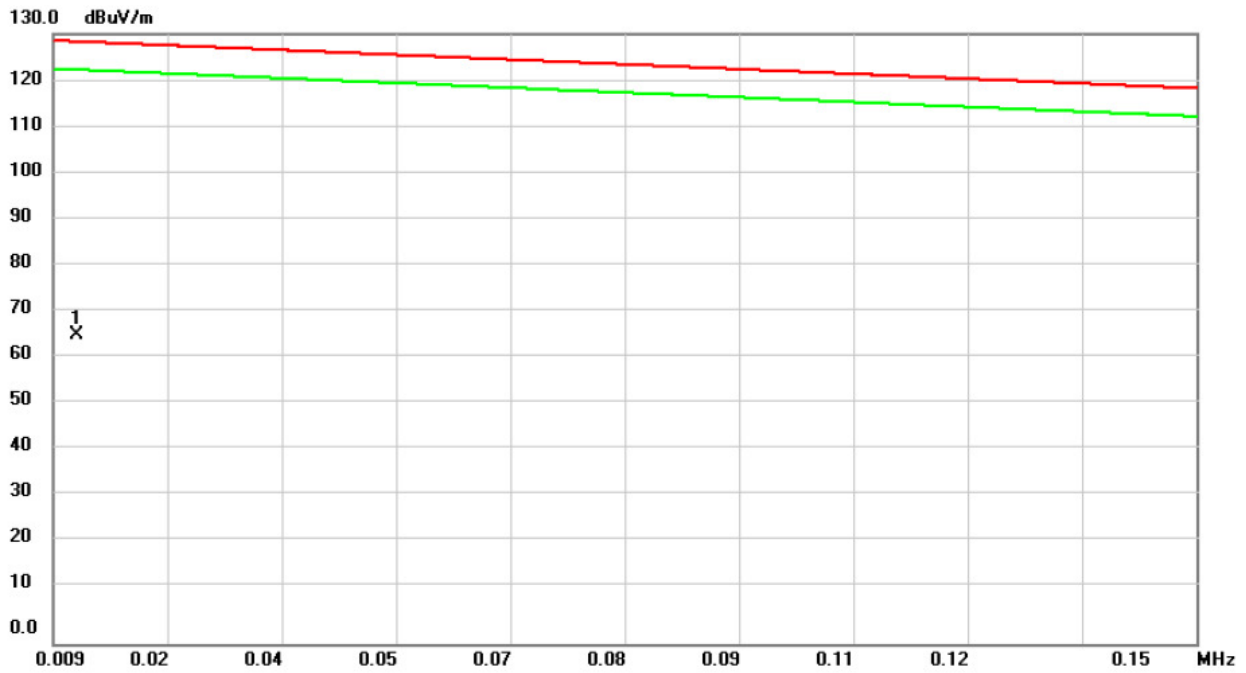

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0120	42.82	19.95	62.77	128.30	-65.53	peak	

Test Mode: 13.56MHz Transmit - Close

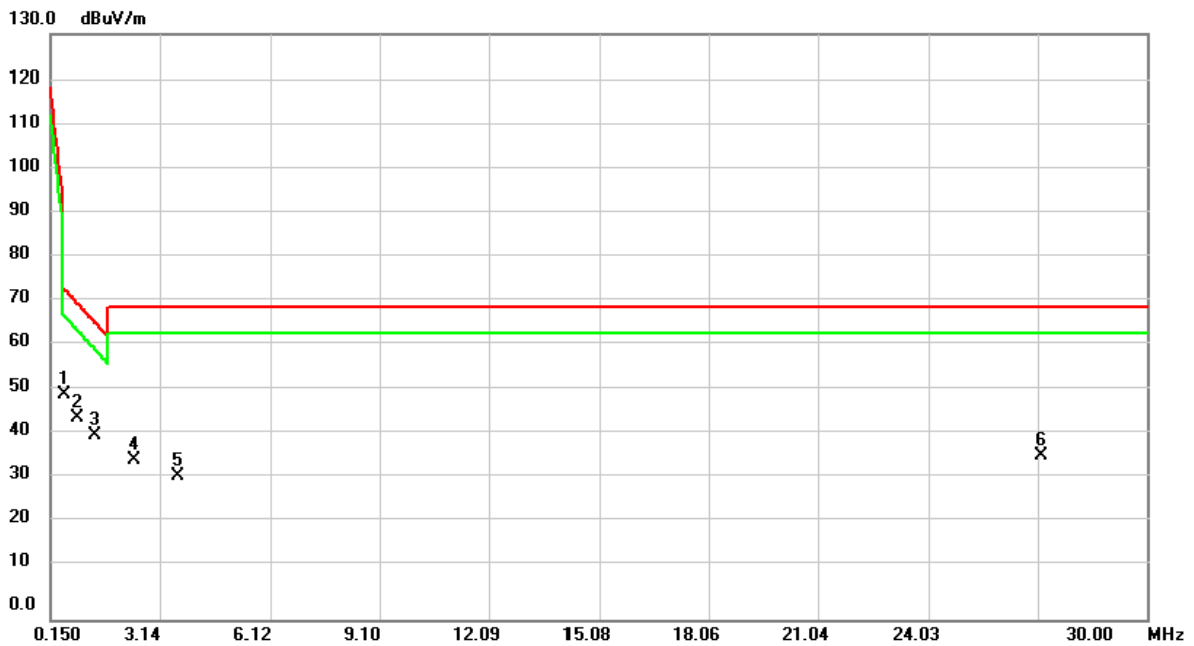


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.5381	38.24	11.82	50.06	73.37	-23.31	peak	
2		0.8961	33.08	11.96	45.04	70.18	-25.14	peak	
3		1.3440	29.21	11.85	41.06	66.19	-25.13	peak	
4		2.4483	24.38	11.35	35.73	69.54	-33.81	peak	
5		3.6425	20.69	11.20	31.89	69.54	-37.65	peak	
6		27.1342	26.70	9.72	36.42	69.54	-33.12	peak	

# ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: 13.56MHz Transmit\_Adapter: ADP-65JH HB


Vertical

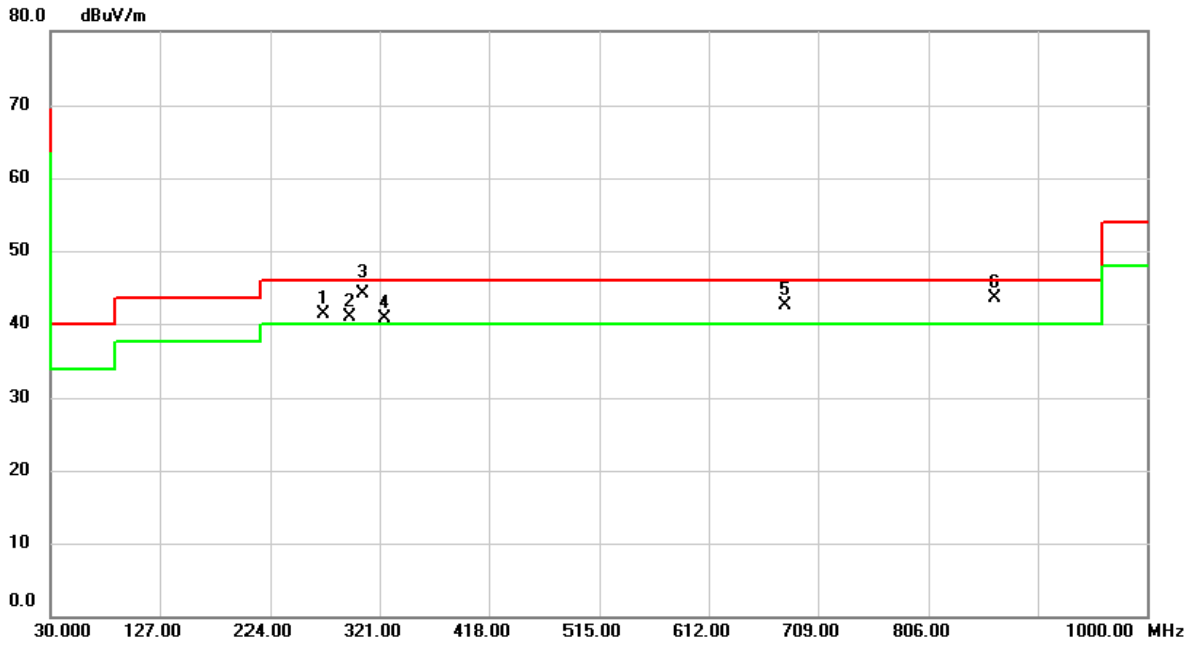

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	271.5300	49.60	-8.30	41.30	46.00	-4.70	peak	
2	!	294.8100	48.41	-7.56	40.85	46.00	-5.15	peak	
3	*	306.4500	51.43	-7.31	44.12	46.00	-1.88	QP	
4	!	324.8800	47.41	-6.75	40.66	46.00	-5.34	peak	
5	!	679.9000	41.58	0.85	42.43	46.00	-3.57	peak	
6	!	864.2000	39.69	3.89	43.58	46.00	-2.42	peak	

Test Mode: 13.56MHz Transmit\_Adapter: ADP-65JH HB


### Horizontal

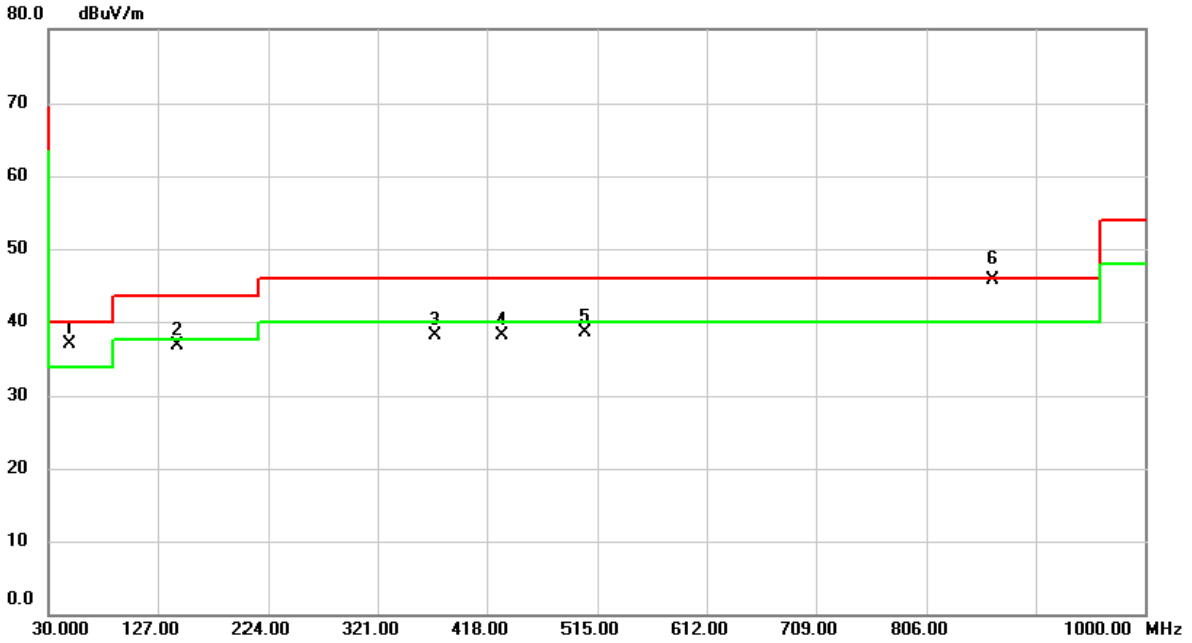

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	48.4300	45.08	-8.25	36.83	40.00	-3.17	peak	
2		144.4600	45.31	-8.69	36.62	43.50	-6.88	peak	
3		372.4100	43.62	-5.50	38.12	46.00	-7.88	peak	
4		431.5800	42.03	-4.02	38.01	46.00	-7.99	peak	
5		504.3300	40.97	-2.55	38.42	46.00	-7.58	peak	
6	*	864.2000	41.79	3.89	45.68	46.00	-0.32	QP	

Test Mode: 13.56MHz Transmit\_Adapter: FSP065-DBBM1


**Vertical**

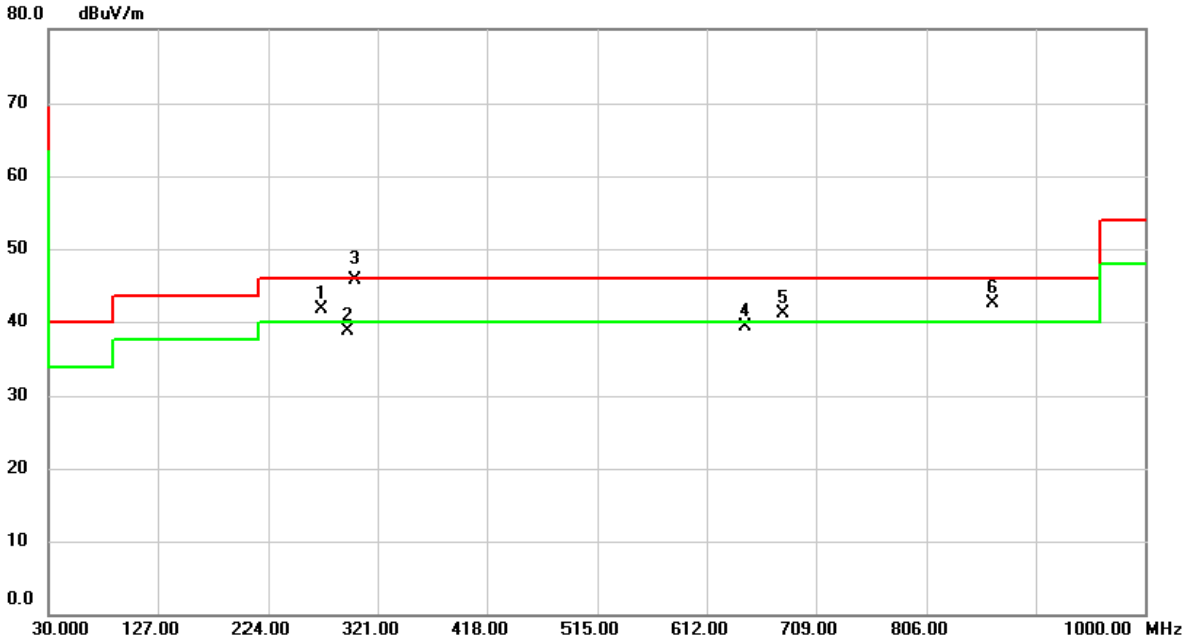

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	271.5300	50.07	-8.30	41.77	46.00	-4.23	peak	
2		294.8100	46.30	-7.56	38.74	46.00	-7.26	peak	
3	*	300.6300	53.24	-7.48	45.76	46.00	-0.24	QP	
4		645.9500	39.19	0.15	39.34	46.00	-6.66	peak	
5	!	679.9000	40.33	0.85	41.18	46.00	-4.82	peak	
6	!	864.2000	38.59	3.89	42.48	46.00	-3.52	peak	

Test Mode: 13.56MHz Transmit\_Adapter: FSP065-DBBM1

### Horizontal

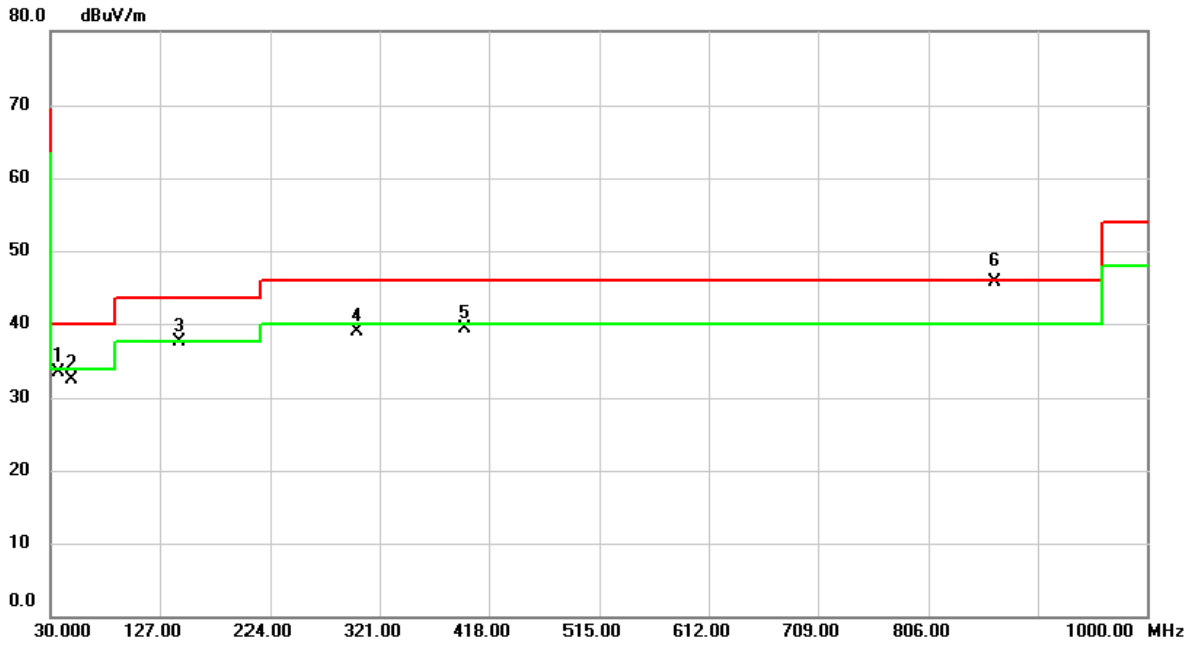


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		36.7900	42.44	-8.87	33.57	40.00	-6.43	peak	
2		48.4300	40.82	-8.25	32.57	40.00	-7.43	peak	
3	!	144.4600	46.21	-8.69	37.52	43.50	-5.98	peak	
4		300.6300	46.29	-7.48	38.81	46.00	-7.19	peak	
5		396.6600	44.31	-4.99	39.32	46.00	-6.68	peak	
6	*	864.2000	41.73	3.89	45.62	46.00	-0.38	QP	




**ATTACHMENT D - RADIATED EMISSION  
(FCC PART 15.225 / RSS-210 Annex B, Section B.6 (a),(b),(c))**

Test Mode: 13.56MHz Transmit - Open

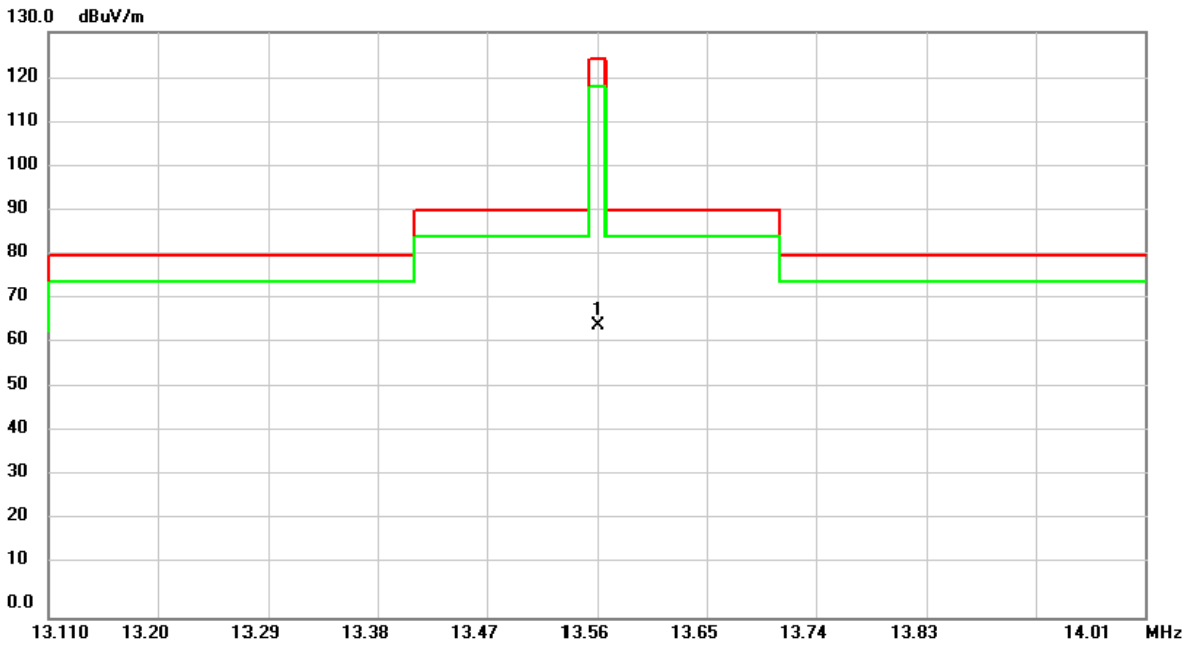

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13.5600	53.71	11.19	64.90	124.00	-59.10	peak	

Test Mode: 13.56MHz Transmit - Close

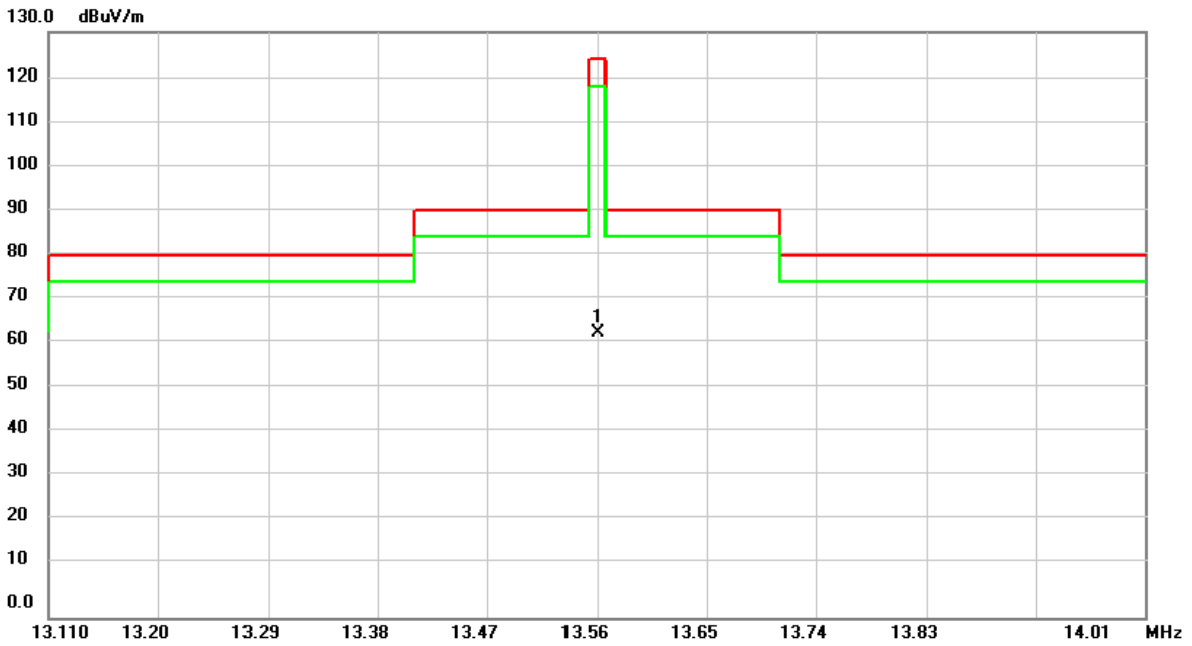

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	13.5600	51.90	11.19	63.09	124.00	-60.91	peak	

# ATTACHMENT E - FREQUENCY STABILITY MEASUREMENT

Test Mode:	13.56MHz Transmit
------------	-------------------

Frequency Stability Versus Environmental Temperature						
	Temperature (°C)	Voltage (AC)	Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
	20	120V	13.56076	-	-	-
0 min	50	120V	13.55966	-1.100	+/- 1.356	PASS
	-20	120V	13.55978	-0.980	+/- 1.356	PASS
2 min	50	120V	13.55978	-0.980	+/- 1.356	PASS
	-20	120V	13.55986	-0.900	+/- 1.356	PASS
5 min	50	120V	13.55986	-0.900	+/- 1.356	PASS
	-20	120V	13.55982	-0.940	+/- 1.356	PASS
10 min	50	120V	13.55978	-0.980	+/- 1.356	PASS
	-20	120V	13.55986	-0.900	+/- 1.356	PASS

Frequency Stability Versus Input Voltage						
Temperature (°C)	Voltage (AC)		Frequency (MHz)	Frequency Error (kHz)	Limit (kHz)	Result
20	V-nom	120	13.55982	-	-	-
20	V-min	102	13.55978	-0.04	+/- 1.356	PASS
20	V-max	138	13.55974	-0.08	+/- 1.356	PASS

## ATTACHMENT F - OCCUPIED BANDWIDTH

Test Mode: 13.56MHz Transmit

Frequency (MHz)	99% Occupied BW (kHz)
13.56	3.056

13.56MHz Transmit

