

FCC Test Report

FCC ID : XHM-MP82D22
Equipment : Mobile PC
Brand Name : Flytech
Model Name : M284
**Applicant/
Manufacturer** : FLYTECH TECHNOLOGY CO., Ltd.
No. 168, Sing-Ai Rd., Neihu District 11494, Taipei City,
Taiwan
Standard : 47 CFR FCC Part 15.225

The product was received on Nov. 01, 2019, and testing was started from Nov. 21, 2019 and completed on Nov. 25, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty7

2 TEST CONFIGURATION OF EUT.....8

2.1 Test Condition8

2.2 The Worst Case Modulation Configuration8

2.3 Test Channel Frequencies Configuration.....8

2.4 The Worst Case Measurement Configuration9

2.5 Accessories and Support Equipment10

2.6 Test Setup Diagram11

3 TRANSMITTER TEST RESULT12

3.1 AC Power-line Conducted Emissions12

3.2 Emission Bandwidth16

3.3 Field Strength of Fundamental Emissions and Spectrum Mask18

3.4 Transmitter Radiated Unwanted Emissions20

3.5 Frequency Stability29

4 TEST EQUIPMENT AND CALIBRATION DATA.....31

Appendix A. Test Photos

Photographs of EUT V01



Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.215(c)	Emission Bandwidth	PASS	Fall in band $F_L \geq 13.553$ MHz $F_H \leq 13.567$ MHz
3.3	15.225(a)-(d)	Field Strength of Fundamental Emissions and Spectrum Mask	PASS	124 dBuV/m at 3m
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	PASS	FCC 15.209
3.5	15.225(e)	Frequency Stability	PASS	$\pm 0.01\%$ (100ppm)

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Ben Tseng

Report Producer: Kate Lo

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range	Modulation Mode	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	ISO 14443-3B (ASK)	13.56	1	55.66
Note 1: Field strength performed peak level at 3m.				

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Loop

1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
<input type="checkbox"/>	Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
<input type="checkbox"/>	Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction	
The transmitter is used for	The transmitter is operated
<input checked="" type="checkbox"/> Inductive applications	<input checked="" type="checkbox"/> Automatically triggered
<input type="checkbox"/> Duty cycle fixed mode	<input checked="" type="checkbox"/> Duty cycle random mode
<input checked="" type="checkbox"/> Duty cycle mode - NFC-A (ISO 14443-3A)	
Declare transmitter duty cycle / 1 hour =	100%
<input checked="" type="checkbox"/> Duty cycle mode - NFC-B (ISO 14443-3B)	
Declare transmitter duty cycle / 1 hour =	100%
<input type="checkbox"/> Duty cycle mode - NFC-F (ISO 18092)	
Declare transmitter duty cycle / 1 hour =	100%
<input type="checkbox"/> Duty cycle mode - NFC-V (ISO 15693)	
Declare transmitter duty cycle / 1 hour =	100%

1.1.5 Table for Multiple Listing

No.	EUT with Credit Card Readers	Description
1	EUT with VP3300	All the EUT are identical. The only difference is that there are four Credit card readers that can be chosen.
2	EUT with Augusta	
3	EUT with MSR	
4	EUT with Mini Smart Card 2	

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 174176 D01 v01r01

1.3 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward	20.1~23.9°C / 64~68%	22/Nov/2019
RF Conducted	TH06-HY	Raven	21.5~23.9°C / 60~64%	21/Nov/2019
Radiated Emission	03CH02-HY	Streak	21.4~23.1°C / 51.6~52.7%	22/Nov/2019~ 25/Nov/2019

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

Condition Item	Abbreviation/Remark	Remark
Frequency Stability	Tnom	20°C
-	Tmin	-20°C
-	Tmax	50°C
-	Vnom	115V
-	Vmin	132.25V
-	Vmax	97.75V

2.2 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3 m)
NFC	55.66




2.3 Test Channel Frequencies Configuration

Modulation Mode	Test Channel Frequencies (MHz)
NFC	13.56

2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	<input checked="" type="checkbox"/> Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Frequency Stability
Test Condition	Conducted measurement

The Worst Case Mode for Following Conformance Tests			
Tests Item	Field Strength of Fundamental Emissions, Spectrum Mask, Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
Pretest Mode	<input checked="" type="checkbox"/> 1. NFC-A (ISO 14443-3A)		
	<input checked="" type="checkbox"/> 2. NFC-B (ISO 14443-3B)		
Mode 2 configuration was pretested and found to be the worst case and measured during the test.			
Operating Mode	<input checked="" type="checkbox"/> Adapter Mode		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	


2.5 Accessories and Support Equipment

Accessories Information				
AC Adapter	Brand Name	Asian Power Devices	Model Name	WA-36A12R
	Power Rating	I/P: 100 - 240Vac, 0.9A, O/P: 12Vdc, 3A		
	Power Cord	1.8meter, Non-Shielded cable, with w/o ferrite core		
Battery 1	Brand Name	SMP	Model Name	BA750000
	Power Rating	3.85Vdc, 7454mAh, 28.69Wh	Type	Li-ion
Battery 2	Brand Name	Formosa	Model Name	HL502430
	Power Rating	3.7Vdc, 300mAh, 1.11Wh	Type	Li-ion
LCD Panel	Brand Name	Interchangeable	Model Name	Interchangeable
MSR	Brand Name	Flytech	Model Name	P-2M301
Mini Smart Card 2	Brand Name	Flytech	Model Name	P-2M302
VP3300	Brand Name	Flytech	Model Name	P-2M303
Augusta	Brand Name	Flytech	Model Name	P-2M305

Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	AC Power Source	GW	APS-9102

2.6 Test Setup Diagram

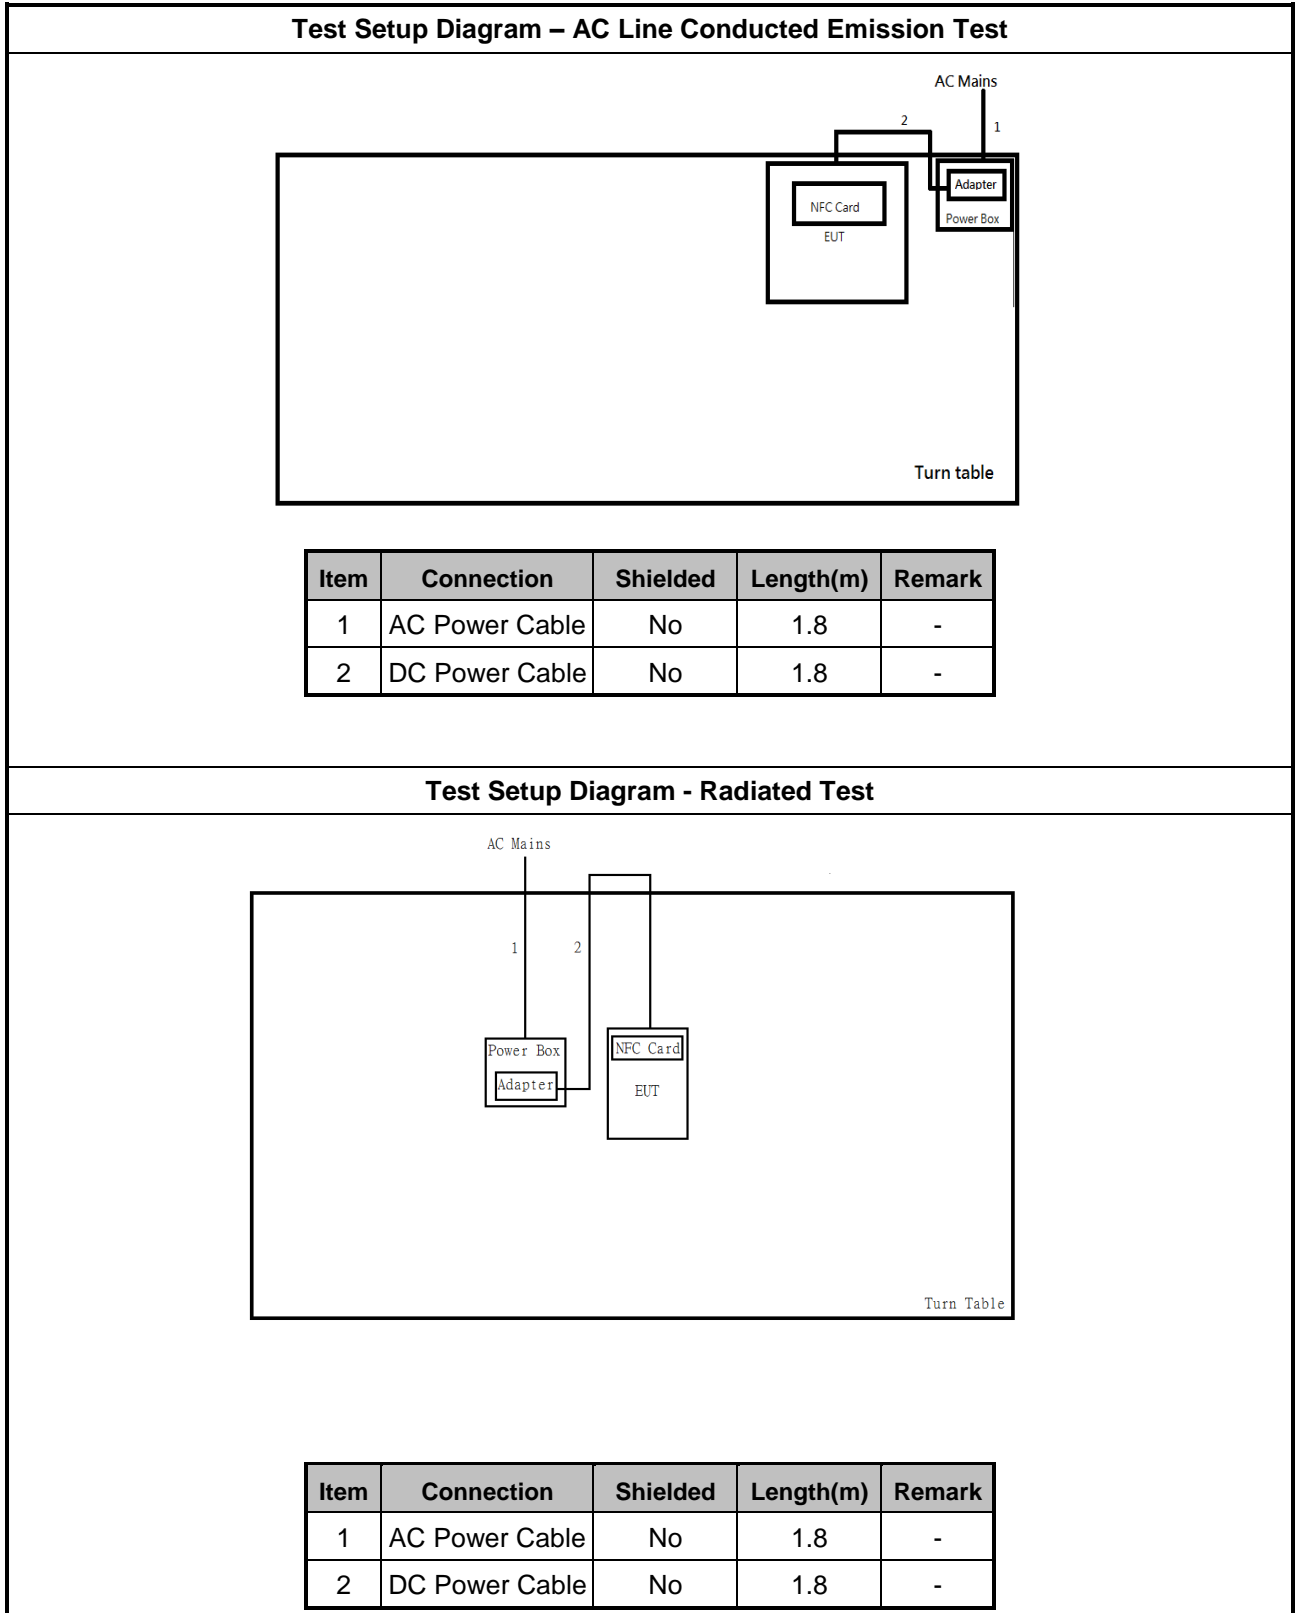

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

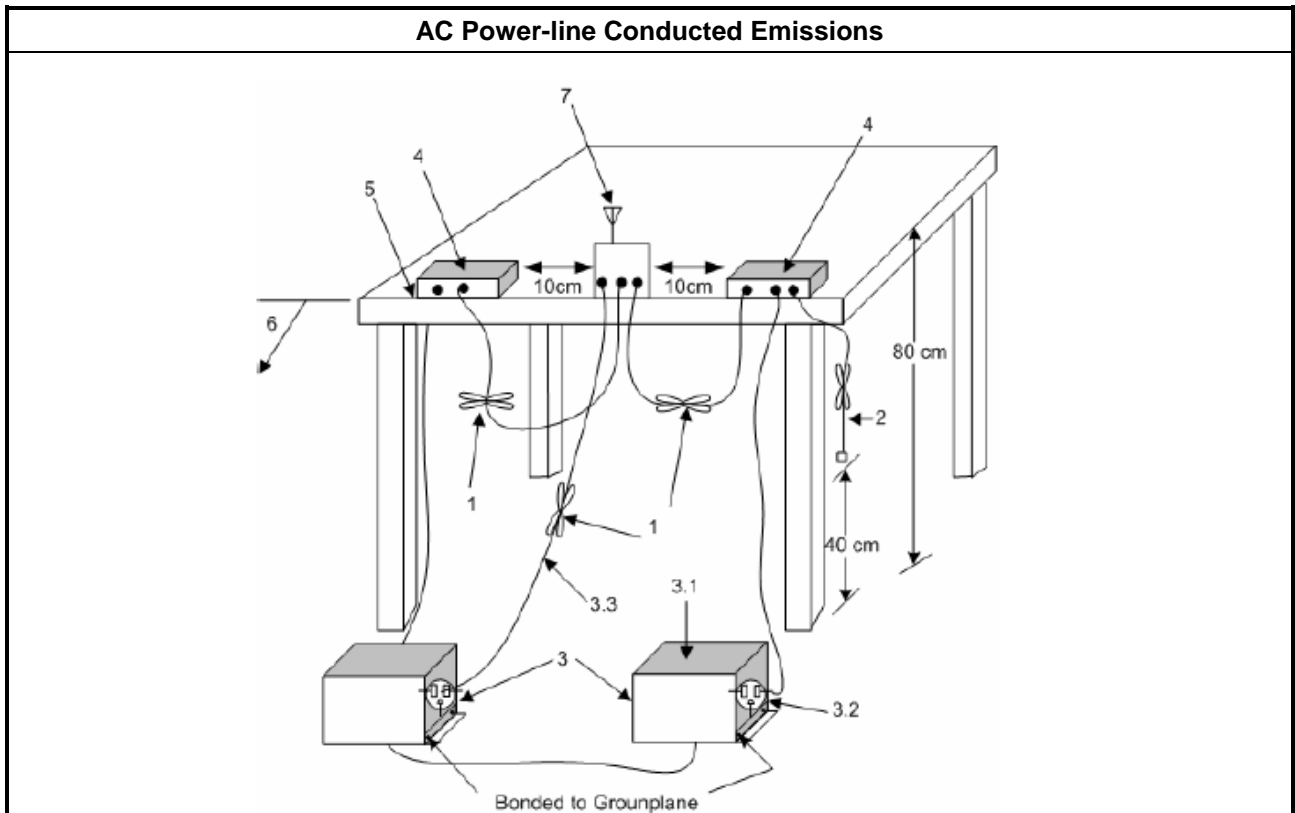

3.1.5 Test Result of AC Power-line Conducted Emissions

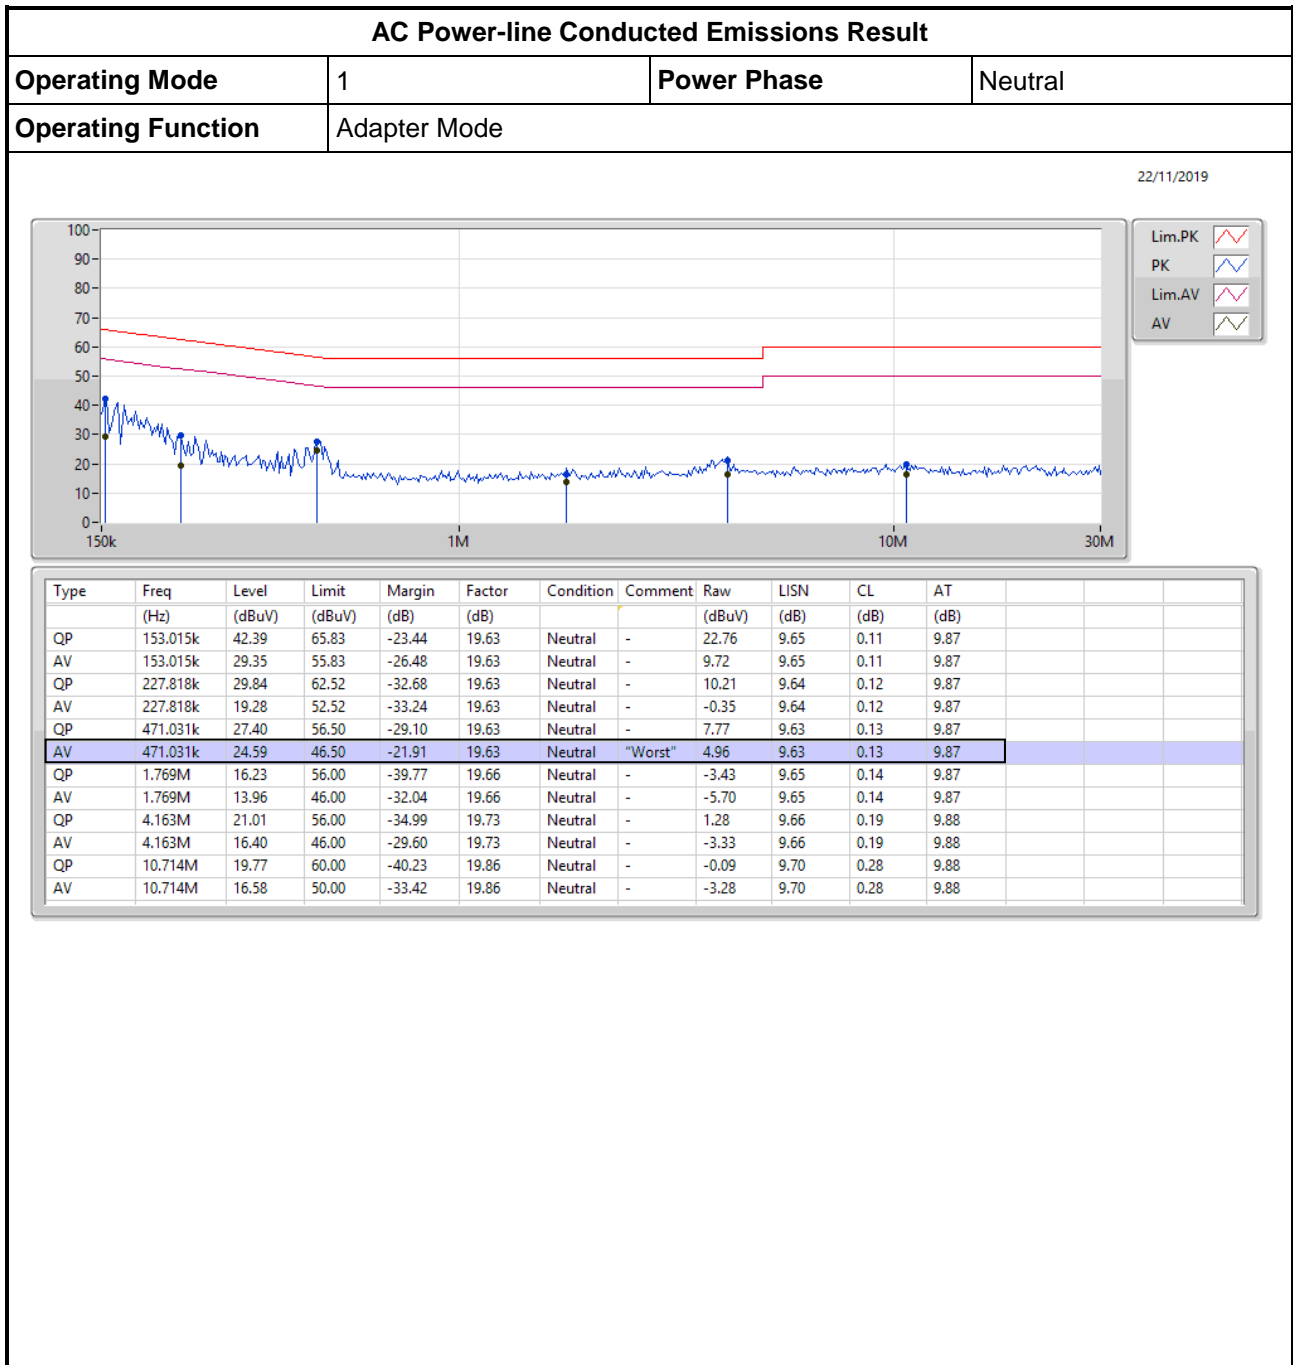

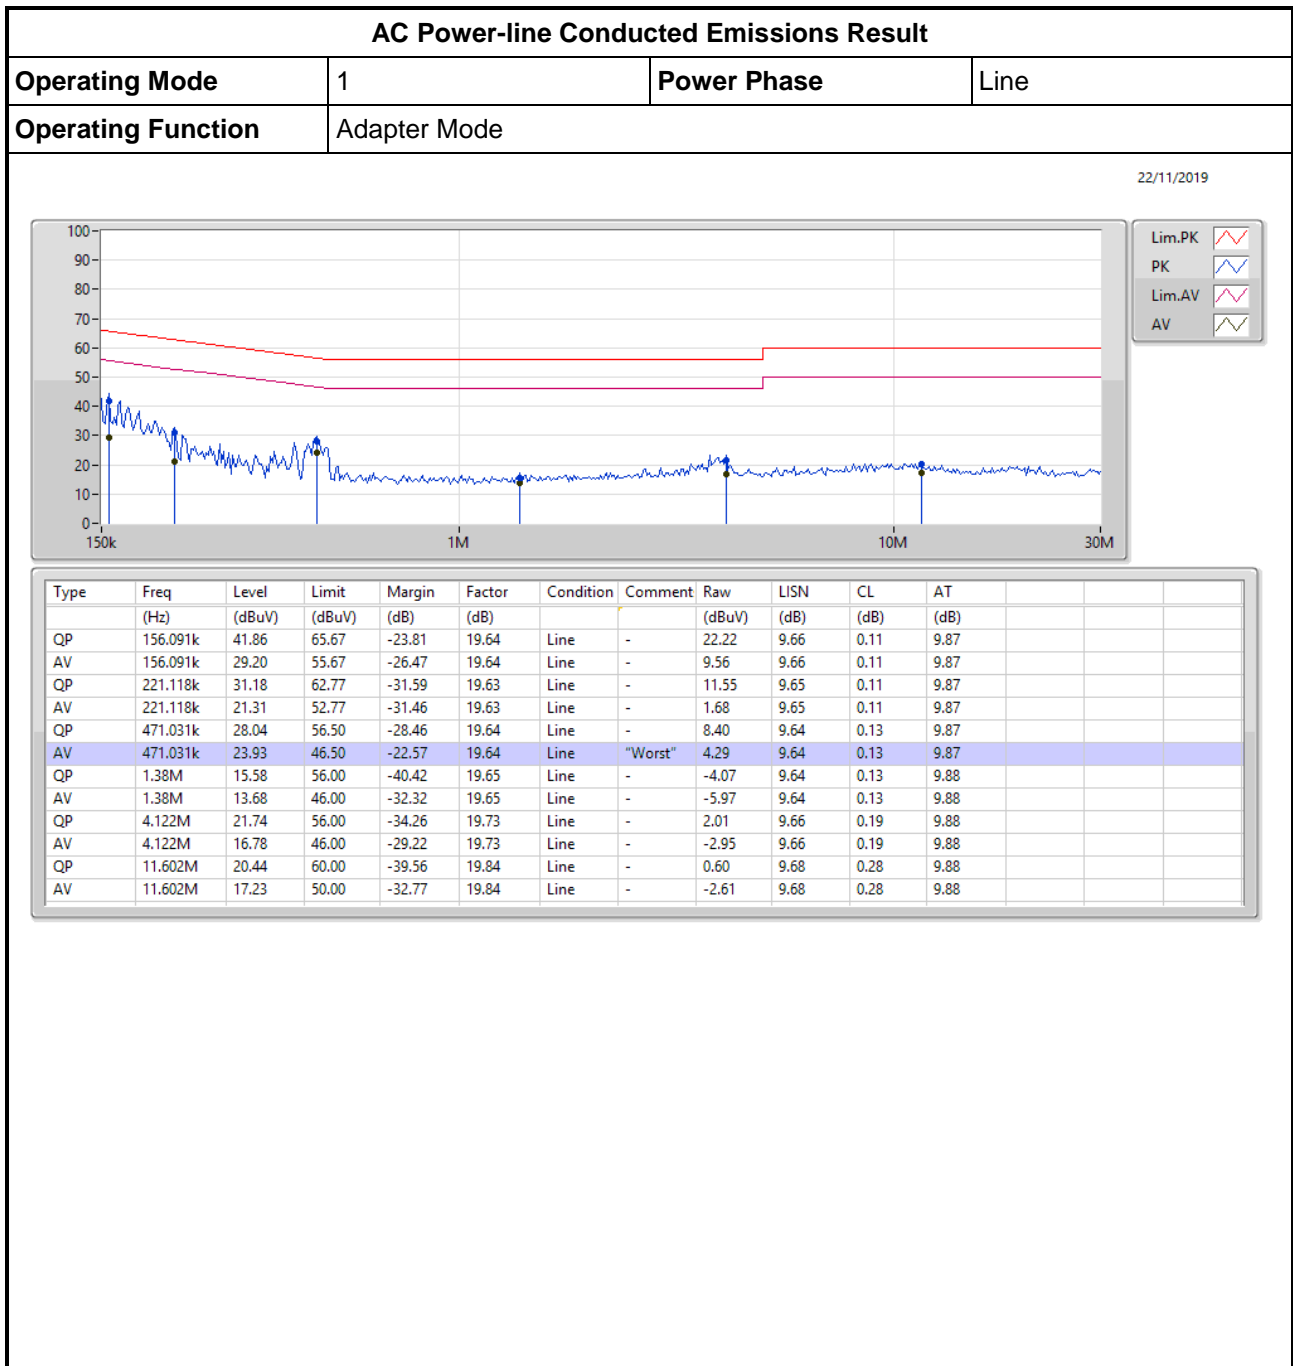

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit	
<input checked="" type="checkbox"/>	Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures



Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.2.4 Test Setup

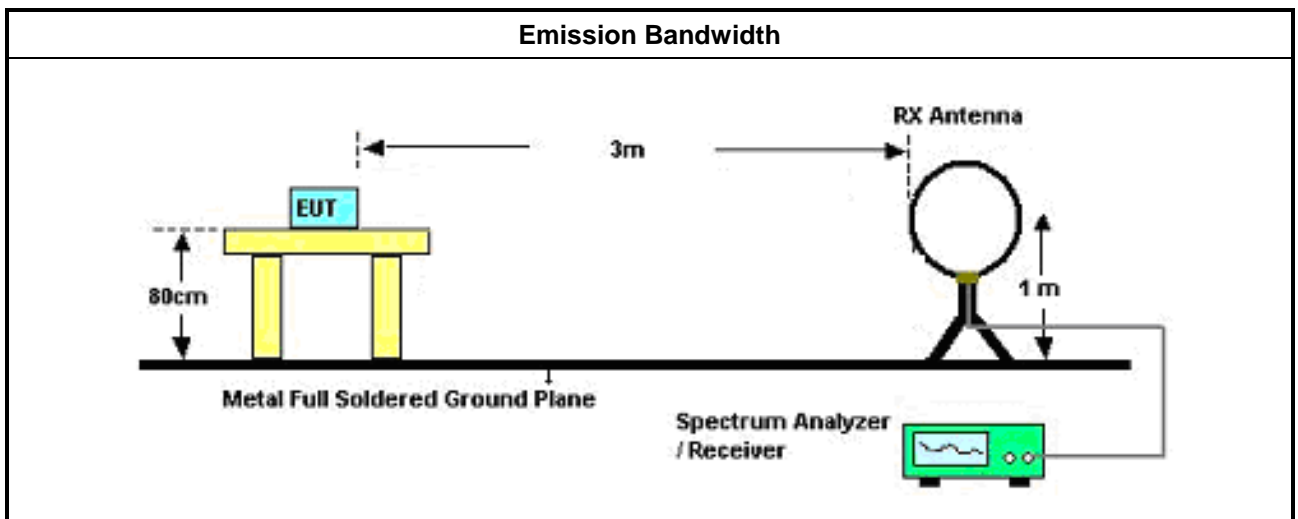

3.2.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
NFC	13.56	2.47500	2.09841	13.55852	13.56098
Limit		N/A	N/A	13.553	13.567
Result		Complied			

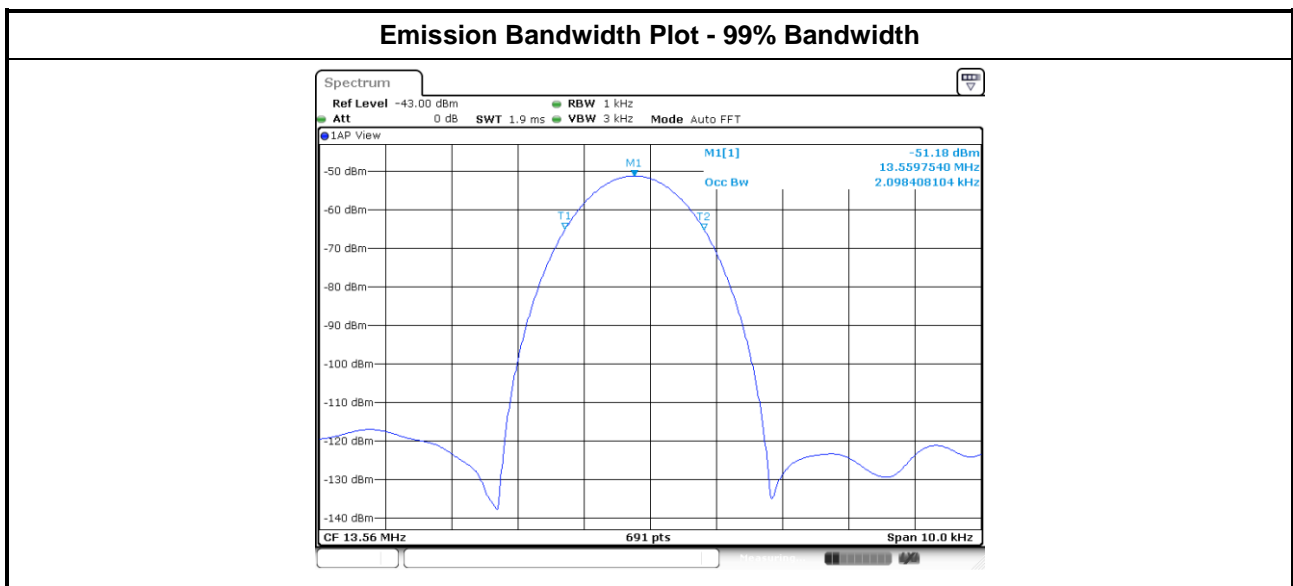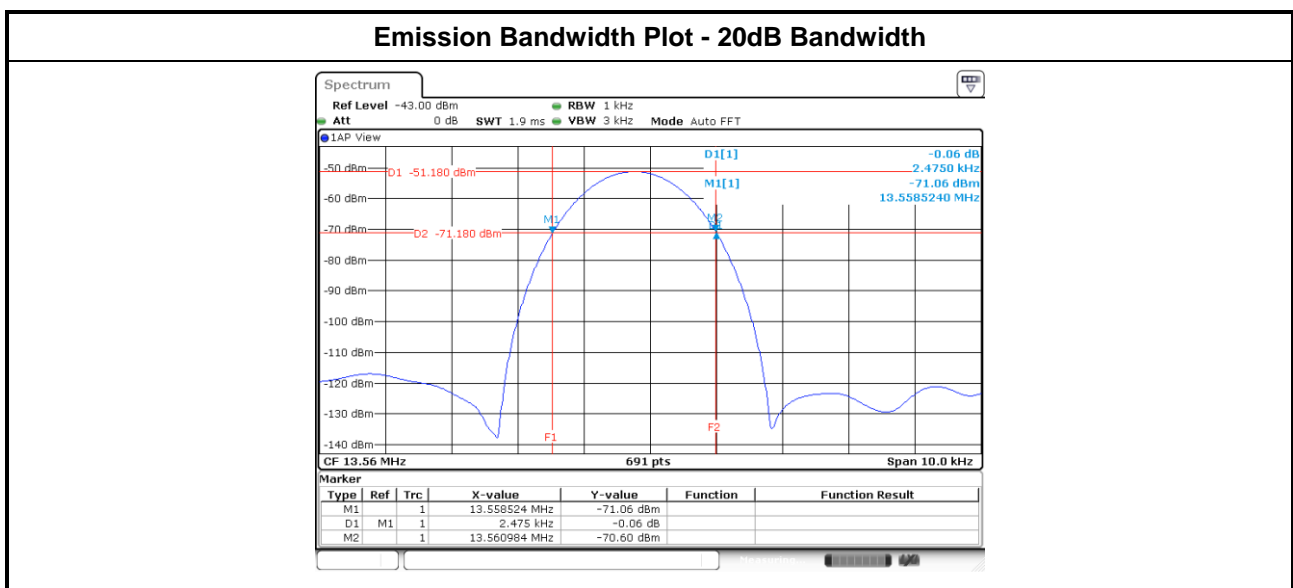

3.3 Field Strength of Fundamental Emissions and Spectrum Mask

3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions For FCC					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask For FCC					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.3.4 Test Setup

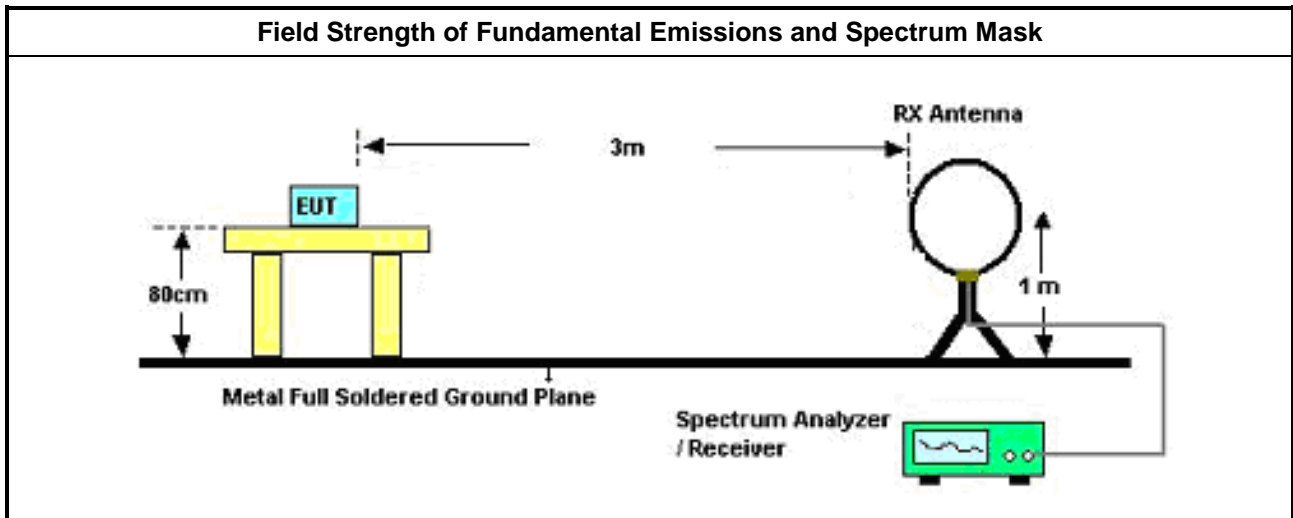

3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC	13.56	55.66	H	-68.34	124.00
Result		Complied			

Note 1: Measurement worst emissions of receive antenna polarization: H(Horizontal).

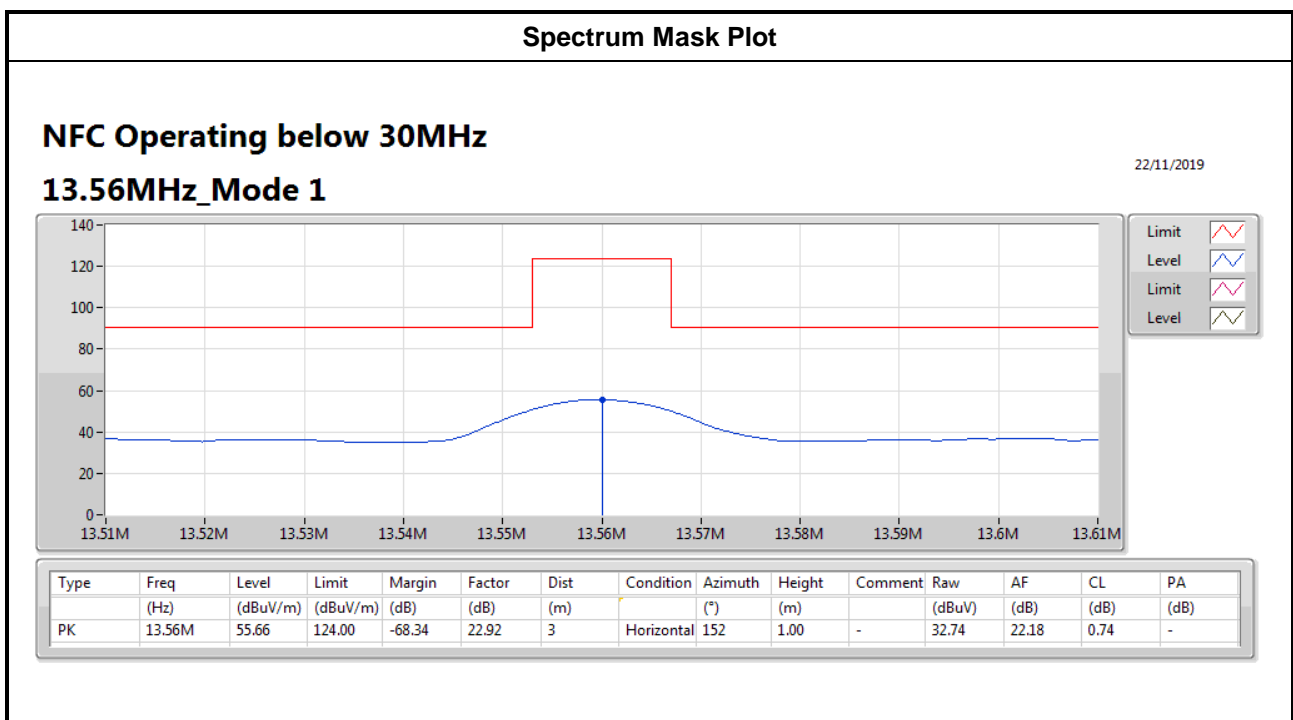

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.



3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

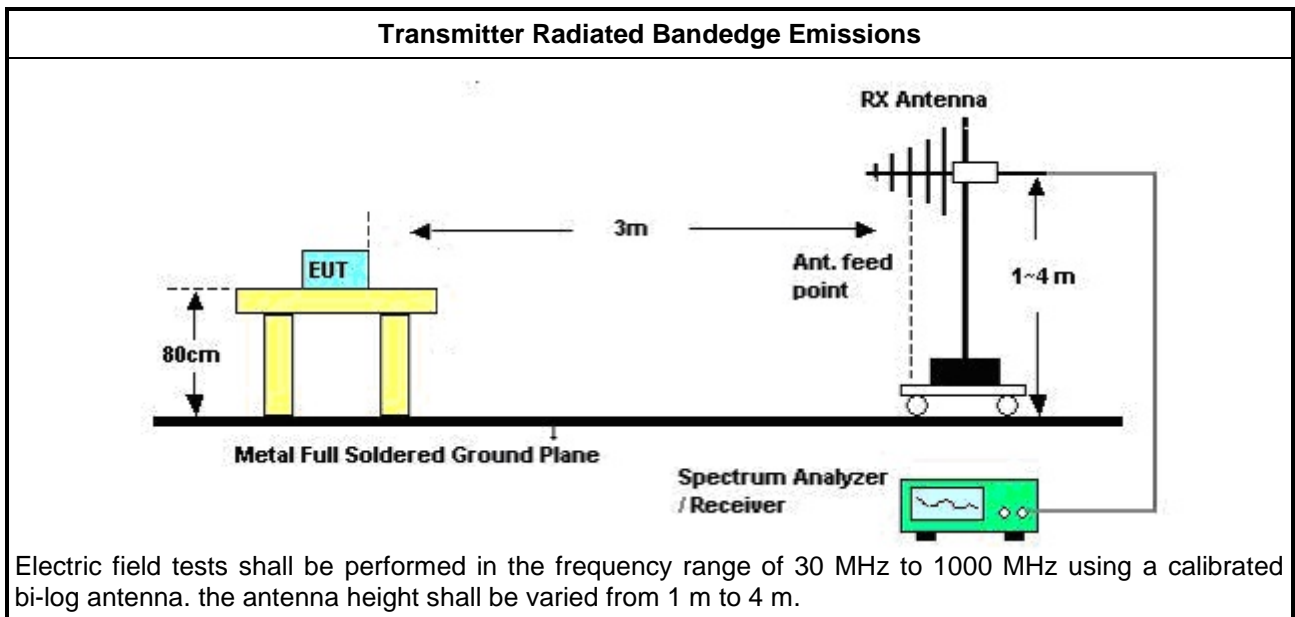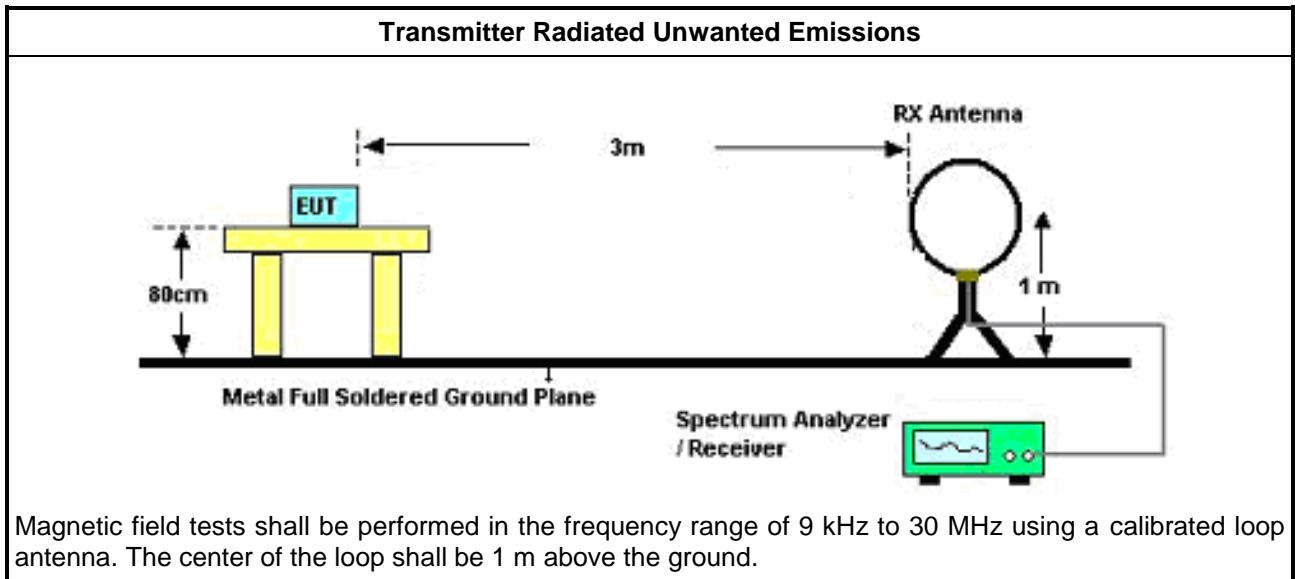



3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comm ents
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	3.178M	39.11	69.50	-30.39	20.36	3	0	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/ m)	Limit (dBuV/ m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comm ents
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	13.56M	55.66	124.00	-68.34	22.92	3	152	1.00	-
13.56MHz_Mode 1	Pass	PK	25.961k	27.59	119.31	-91.72	20.15	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	52.322k	31.08	113.21	-82.13	20.47	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	76.026k	33.23	109.97	-76.74	20.09	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	452.826k	41.57	94.48	-52.91	20.69	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	2.183M	37.51	69.50	-31.99	20.51	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	3.178M	39.11	69.50	-30.39	20.36	3	0	1.00	-

NFC Operating below 30MHz

22/11/2019

13.56MHz_Mode 1

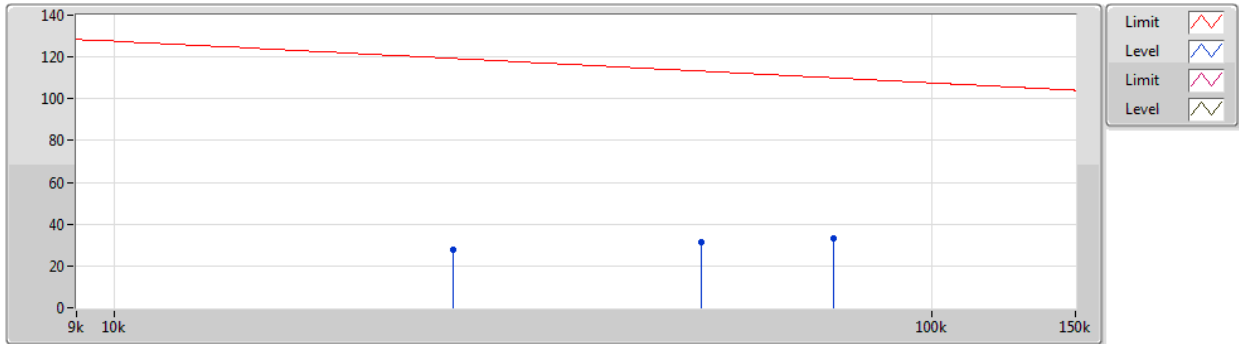


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	25.961k	27.59	119.31	-91.72	20.15	3	Horizontal	360	1.00	-	7.44	20.14	0.01	-
PK	52.322k	31.08	113.21	-82.13	20.47	3	Horizontal	360	1.00	-	10.61	20.46	0.01	-
PK	76.026k	33.23	109.97	-76.74	20.09	3	Horizontal	360	1.00	-	13.14	20.08	0.01	-



NFC Operating below 30MHz

22/11/2019

13.56MHz_Mode 1

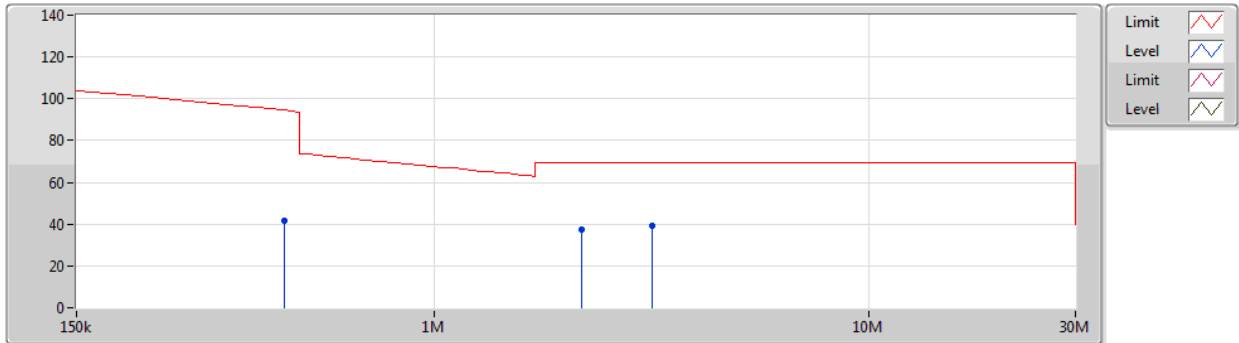

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	452.826k	41.57	94.48	-52.91	20.69	3	Horizontal	0	1.00	-	20.88	20.53	0.16	-
PK	2.183M	37.51	69.50	-31.99	20.51	3	Horizontal	0	1.00	-	17.00	20.15	0.36	-
PK	3.178M	39.11	69.50	-30.39	20.36	3	Horizontal	0	1.00	-	18.75	19.97	0.39	-



3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	39.7M	34.48	40.00	-5.52	-9.60	3	360	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	39.7M	34.48	40.00	-5.52	-9.60	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	66.86M	26.36	40.00	-13.64	-15.36	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	191.02M	26.72	43.50	-16.78	-10.99	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	383.08M	38.66	46.00	-7.34	-4.47	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	575.14M	37.54	46.00	-8.46	-1.26	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	747.8M	34.55	46.00	-11.45	0.56	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	43.58M	29.67	40.00	-10.33	-11.42	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	191.02M	29.23	43.50	-14.27	-10.99	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	239.52M	27.91	46.00	-18.09	-8.14	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	482.02M	32.49	46.00	-13.51	-2.40	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	722.58M	34.43	46.00	-11.57	0.05	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	800.18M	33.25	46.00	-12.75	0.83	3	0	1.00	-

NFC Operating above 30MHz

25/11/2019

13.56MHz_Mode 1

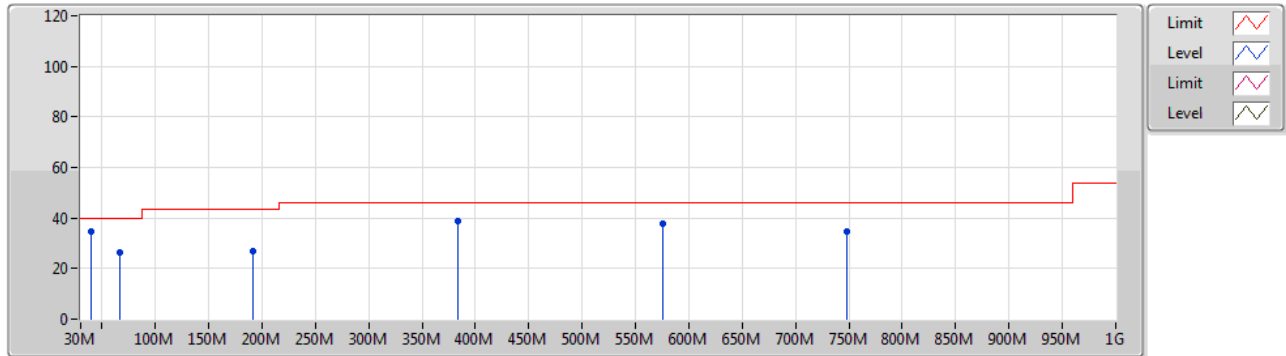


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	39.7M	34.48	40.00	-5.52	-9.60	3	Vertical	360	1.00	-	44.08	17.44	0.64	27.68
PK	66.86M	26.36	40.00	-13.64	-15.36	3	Vertical	360	1.00	-	41.72	11.32	1.03	27.71
PK	191.02M	26.72	43.50	-16.78	-10.99	3	Vertical	360	1.00	-	37.71	14.18	2.26	27.43
PK	383.08M	38.66	46.00	-7.34	-4.47	3	Vertical	360	1.00	-	43.13	20.11	3.16	27.74
PK	575.14M	37.54	46.00	-8.46	-1.26	3	Vertical	360	1.00	-	38.80	23.68	3.63	28.57
PK	747.8M	34.55	46.00	-11.45	0.56	3	Vertical	360	1.00	-	33.99	24.78	4.12	28.34



NFC Operating above 30MHz

25/11/2019

13.56MHz_Mode 1

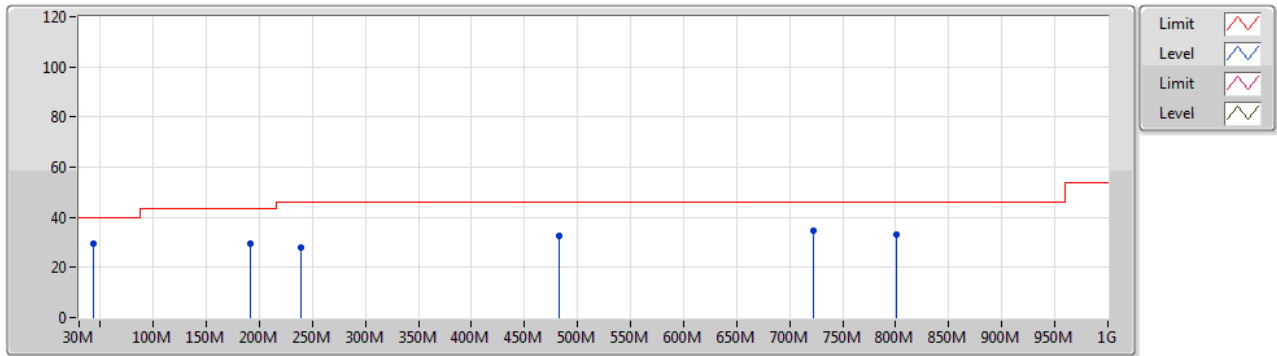

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	43.58M	29.67	40.00	-10.33	-11.42	3	Horizontal	0	1.00	-	41.09	15.54	0.72	27.68
PK	191.02M	29.23	43.50	-14.27	-10.99	3	Horizontal	0	1.00	-	40.22	14.18	2.26	27.43
PK	239.52M	27.91	46.00	-18.09	-8.14	3	Horizontal	0	1.00	-	36.05	16.40	2.68	27.22
PK	482.02M	32.49	46.00	-13.51	-2.40	3	Horizontal	0	1.00	-	34.89	22.69	3.28	28.37
PK	722.58M	34.43	46.00	-11.57	0.05	3	Horizontal	0	1.00	-	34.38	24.33	4.08	28.36
PK	800.18M	33.25	46.00	-12.75	0.83	3	Horizontal	0	1.00	-	32.42	24.81	4.17	28.15

3.5 Frequency Stability

3.5.1 Frequency Stability Limit

Frequency Stability Limit	
<input checked="" type="checkbox"/>	Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.5.4 Test Setup

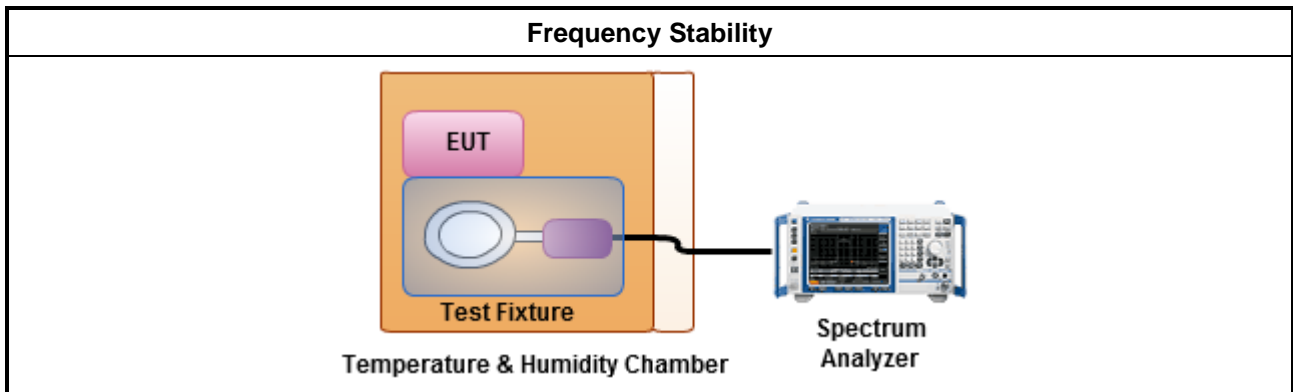

3.5.5 Test Result of Frequency Stability

Frequency Stability Result									
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)							
		Test Frequency (MHz)				Frequency Stability (ppm)			
		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min
T _{20°C} V _{max}	13.56	13.55977	13.55977	13.55977	13.55976	-17.26	-16.89	-16.74	-17.55
T _{20°C} V _{min}	13.56	13.55974	13.55977	13.55977	13.55974	-19.32	-17.33	-16.89	-18.95
T _{50°C} V _{nom}	13.56	13.55979	13.55976	13.55973	13.55977	-15.63	-17.77	-19.69	-17.26
T _{40°C} V _{nom}	13.56	13.55976	13.55974	13.55975	13.55976	-17.55	-18.88	-18.81	-17.99
T _{30°C} V _{nom}	13.56	13.55976	13.55974	13.55978	13.55976	-17.48	-19.10	-16.59	-17.92
T _{20°C} V _{nom}	13.56	13.55977	13.55977	13.55977	13.55978	-16.81	-16.74	-16.89	-16.37
T _{10°C} V _{nom}	13.56	13.55976	13.55979	13.55979	13.55980	-17.48	-15.41	-15.63	-14.68
T _{0°C} V _{nom}	13.56	13.55979	13.55980	13.55980	13.55978	-15.71	-14.68	-14.75	-16.52
T _{-10°C} V _{nom}	13.56	13.55979	13.55978	13.55979	13.55978	-15.56	-15.93	-15.56	-16.15
T _{-20°C} V _{nom}	13.56	13.55979	13.55978	13.55979	13.55981	-15.63	-16.52	-15.78	-13.79
Limit (ppm)		-				100			
Result		Complied							
Note 1: Measure at 85 % [V _{min}] and 115 % [V _{max}] of the nominal voltage [V _{nom}]. The nominal voltage refer test report clause 2.1 for EUT operational condition. Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.									



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz~3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV216	101295	9kHz~30MHz	04/Nov/2019	05/Nov/2020
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz~200MHz	12/Sep/2019	11/Sep/2020
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz~30MHz	24/Sep/2019	23/Sep/2020

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	10Hz~40GHz	13/Mar/2019	12/Mar/2020
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	15/Mar/2019	14/Mar/2020
*TEMP & humidity Chamber	Giant Force	GTH-225-40-CP-AR	MAA1611-005	-40~100°C 10~98%RH	04/Dec/2018	03/Dec/2019

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3m	29/Aug/2019	28/Aug/2020
Amplifier	Agilent	8447D	2944A11149	100kHz~1.3GHz	02/Jul/2019	01/Jul/2020
Spectrum Analyzer	Rohde & Schwarz	FSP40	100593	9KHz~40GHz	27/Dec/2018	26/Dec/2019
EMI Test Receiver	R&S	ESR3	102052	9kHz~3.6GHz	09/Apr/2019	08/Apr/2020
RF Cable-R03m	Jye Bao	RG142	CB017	9kHz~1GHz	26/Mar/2019	25/Mar/2020
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112D / MTJ6102-05	2678 / 001	30MHz~2GHz	06/Jul/2019	05/Jul/2020
Loop Antenna	TESEQ	HLA 6120	31244	9k~30MHz	15/Mar/2019	14/Mar/2020