


RFA-25-AP923-4B-385

Electrical Specifications


Frequency range	2400-2500 MHz	5150-5875 MHz
Peak gain	1.39 dBi	2.17 dBi
Average gain	-4.27 dBi	-4.18 dBi
VSWR(in Device)	3.5 : 1 Max.	2.0: 1 Max.
Polarization	Linear, vertical	
Power handling	1W (cw)	
Impedance	50 Ω	
Connector	IPEX MHF4	
Cable	$\varnothing 1.13$	

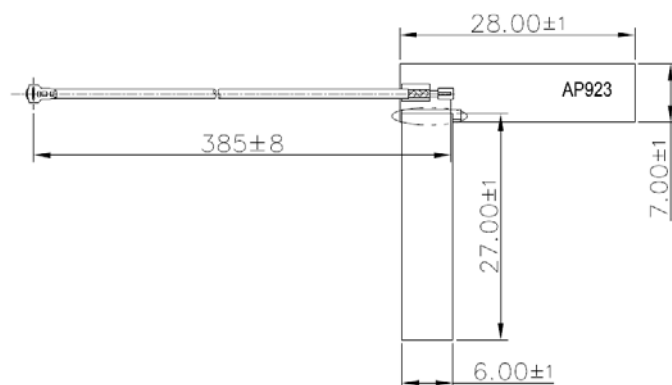

Environmental & Mechanical Characteristics


Temperature	- 10°C to +55°C
Humidity	95% @ 25°C

VSWR

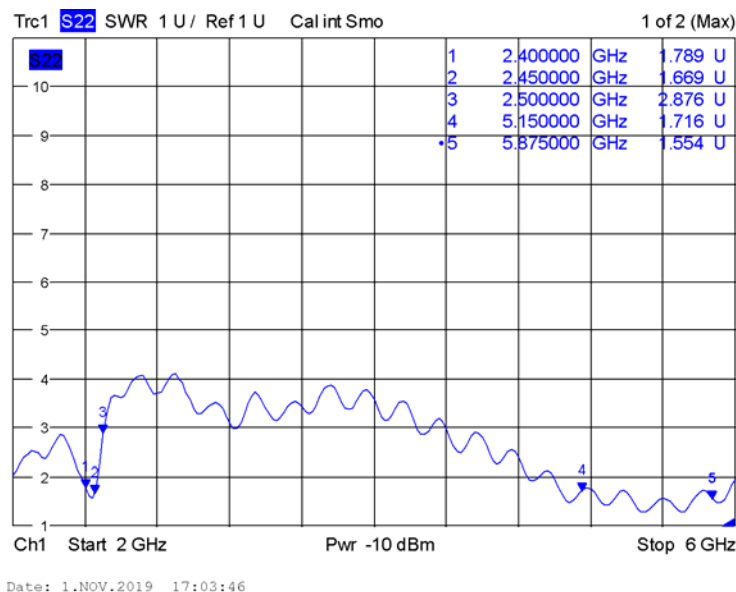

Radiation Pattern

2G Band = 2400 - 2500 MHz % 2G Band

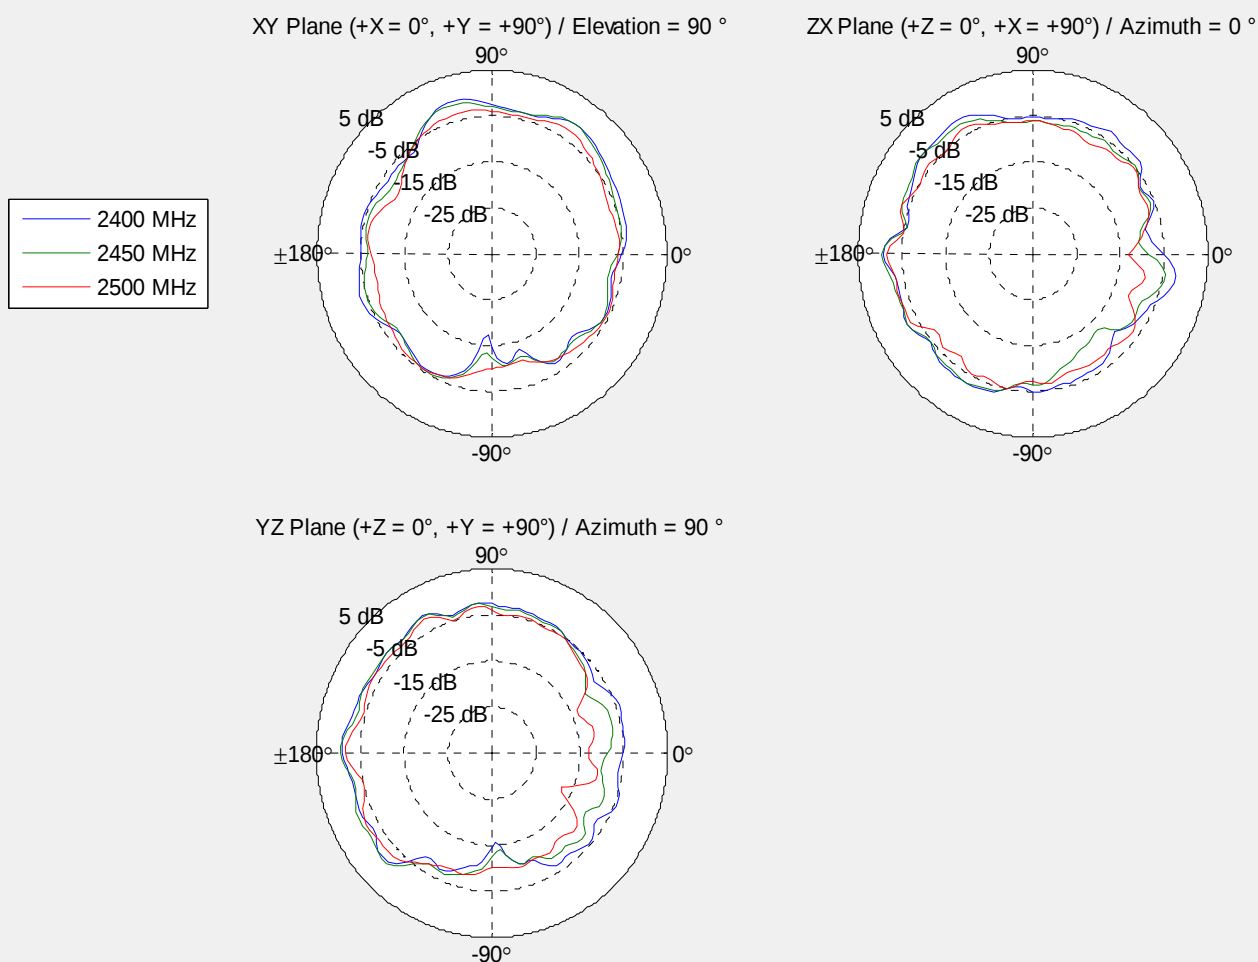

Radiation Pattern

5G Band = 4400 - 6000 MHz

