

Test Report of FCC Part 15 C for FCC Certificate

On Behalf of

Guangdong Yinrun Industry Co., LTD.

FCC ID: XHT8038-T27M
Product Description: TOY-R/C TRANS ROBOT CAR
Model No.: 8038

Prepared for: **Guangdong Yinrun Industry CO., LTD.**
Yinrun Ind. Garden, Laimei Zone, Chenghai, Shantou City,
Guangdong, China

Prepared by: **Bontek Compliance Testing Laboratory Ltd**
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028


Report No.: BCT10JR-1746E

Issue Date: November 03, 2010


Test Date: October 01 ~ November 03, 2010

Test by:

Reviewed By:



Kendy Wang



Tony Wu

TABLE OF CONTENTS

1- GENERAL INFORMATION 3

- 1.1 Product Description for Equipment Under Test (EUT).....3
- 1.2 Related Submittal(s) / Grant (s).....3
- 1.3 Test Methodology3
- 1.4 Test Facility.....4

2- SYSTEM TEST CONFIGURATION..... 5

- 2.1 EUT Configuration5
- 2.2 EUT Exercise5
- 2.3 General Test Procedures5
- 2.4 List of Measuring Equipments Used6

3- SUMMARY OF TEST RESULTS 8

4- TEST OF CONDUCTED EMISSION 9

- 4.1 Applicable Standard.....9
- 4.2 Test Setup Diagram.....9

5- RADIATED EMISSIONS..... 10

- 5.1 Limit of Radiated Emissions10
- 5.2 EUT Setup10
- 5.3 Test Procedure11
- 5.4 Test Result.....12

6- EMISSIONS WITHIN BAND EDGES 17

- 6.1 Limit of Emissions within Band Edges17
- 6.2 Test Procedure17
- 6.3 Emissions within Band Edges Test Result.....17

1- GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant: **Guangdong Yinrun Industry CO., LTD.**
Address of applicant: Yinrun Ind, Garden, Laimei Zone, Chenghai, Shantou City, Guangdong, China
Manufacturer: **Guangdong Yinrun Industry CO., LTD.**
Address of manufacturer: Yinrun Ind, Garden, Laimei Zone, Chenghai, Shantou City, Guangdong, China

EUT Description:	TOY-R/C TRANS ROBOT CAR
Trade Name:	N/A
Model No.:	8038
Rated Voltage	DC 9V laminated battery for transmitter
Frequency range	27.145MHz
Number of channels	1
Channel Separation	None
Product Class:	Low Power Communication Device Transmitter
Measurement Procedure	ANSI C63.4-2003

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.227 rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD , EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March, 2008.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on August 2009.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

The acceptance letter from the CNAS is maintained in our files: Registration:L3923,February,2009.

TUV - Registration No.: UA 50145371-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD An assessment of the laboratory was conducted according to the"Procedures and Conditions for EMC Test Laboratories"with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-001

2- SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used

Test equipments list of BONTEK COMPLIANCE TESTING LABORATORY LTD.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2010-4-14	2011-4-13
2	EMI Test Receiver	R&S	ESPI	100097	2010-4-14	2011-4-13
3	Amplifier	HP	8447D	1937A02492	2010-4-14	2011-4-13
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2010-4-14	2011-4-13
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2010-4-14	2011-4-13
6	Power Clamp	SCHWARZBECK	MDS-21	3812	2010-4-14	2011-4-13
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2010-4-14	2011-4-13
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2010-4-14	2011-4-13
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	31485	2010-4-14	2011-4-13
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2010-4-14	2011-4-13
13	N/A	N/A	N/A	N/A	N/A	N/A
14	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2010-4-14	2011-4-13
15	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2010-4-14	2012-4-13
16	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2010-4-14	2012-4-13
17	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2010-4-14	2012-4-13
18	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2010-4-14	2012-4-13
19	Horn Antenna	SCHWARZBECK	BBHA9120A	B08000991-0001	2010-4-14	2012-4-13
20	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	D-69250	2010-4-14	2011-4-13
21	10dB attenuator	SCHWARZBECK	MTAIMP-136	R65.90.0001#06	2010-4-14	2011-4-13

22	Electric bridge	Zentech	100 LCR METER	803024	N/A	N/A
23	RF Current Probe	FCC	F-33-4	80	2010-4-14	2011-4-13
24	SIGNAL GENERATOR	HP	8647A	3349A02296	2010-4-14	2011-4-13
25	MICROWAVE AMPLIFIER	HP	8349B	2627A00994	2010-4-14	2011-4-13
26	Triple-Loop Antenna	EVERFINE	LLA-2	607004	2010-4-14	2011-4-13
27	CDN	FRANKONIA	M2+M3	A3027019	2010-10-20	2011-10-19
28	6dB Attenuator	FRANKONIA	75-A-FFN-06	1001698	2010-10-20	2011-10-19
29	EMV-Mess-Systeme GMBH	FRANKONIA	FLL-75	1020A1109	2010-10-20	2011-10-19
30	EM Injection Clamp	FCC	F-203I-13mm	091536	2010-10-20	2011-10-19
31	9KHz-2.4GHz Signal generator	MARCONI INSTRUMENTS	2024	112260/042	2010-10-20	2011-10-19

3- SUMMARY OF TEST RESULTS

EUT Fundamental Frequency	FCC Rules	Description of Test	Result
27.145MHz	15.207	Disturbance Voltage at The Mains Terminals	N/A, without AC power supply
	15.227	Radiation Emission	Pass
	15.227	Emissions within Band Edges	Pass


4- TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

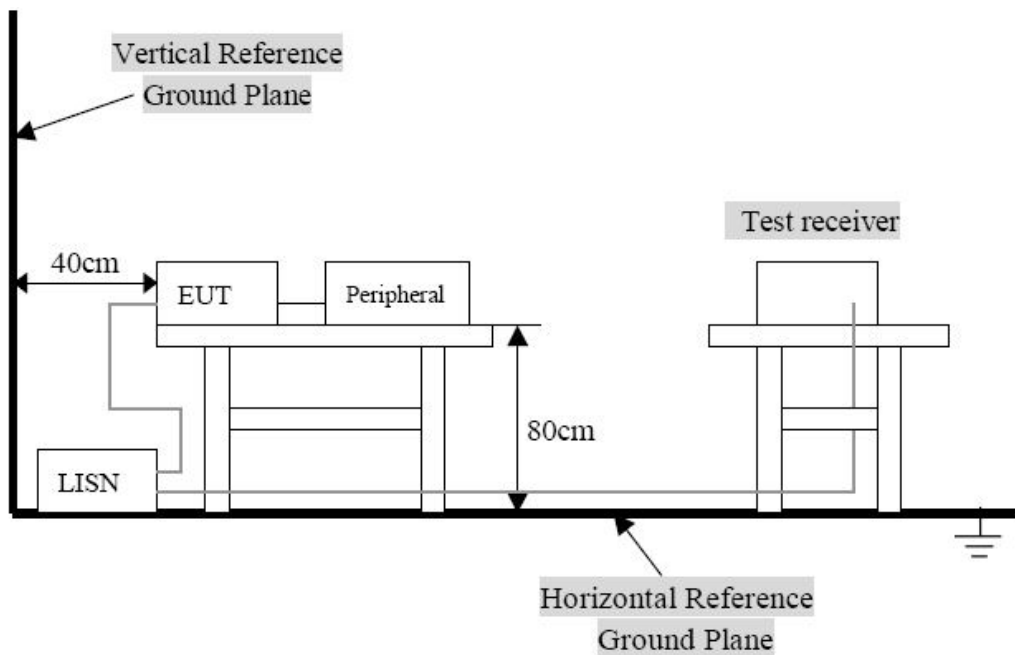

Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

2. The EUT is excluded from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by DC 9V laminated battery. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5- RADIATED EMISSIONS

5.1 Limit of Radiated Emissions

Limit of Field Strength of Fundamental Emissions (FCC 47CFR 15.227):

Frequency Range (MHz)	Field Strength of Fundamental Emission (Peak) ($\mu\text{V}/\text{m}$)	Field Strength of Fundamental Emission (Average) ($\mu\text{V}/\text{m}$)
26.96-27.28	100,000 $\mu\text{V}/\text{m}$ (100dB $\mu\text{V}/\text{m}$)	10,000 $\mu\text{V}/\text{m}$ (80dB $\mu\text{V}/\text{m}$)

Limits of Spurious Emissions (FCC 47 CFR 15.209 Class B):

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB $\mu\text{V}/\text{m}$)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

5.2 EUT Setup

Radiated Measurement Setup

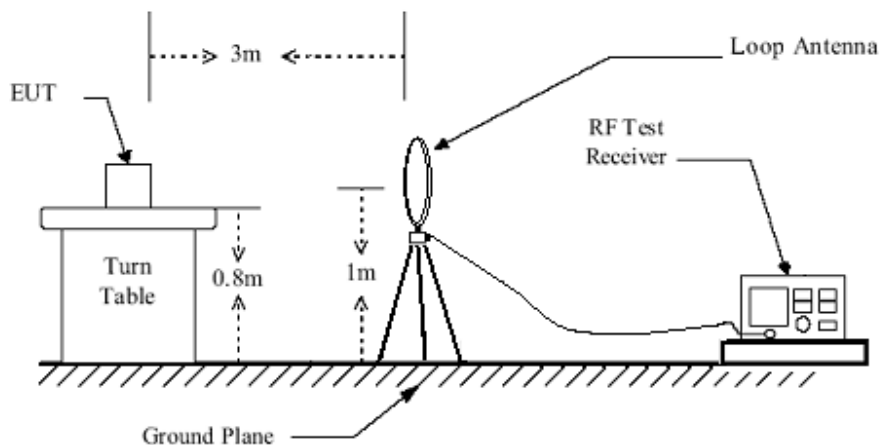


Figure 2 : Frequencies measured below 30 MHz configuration

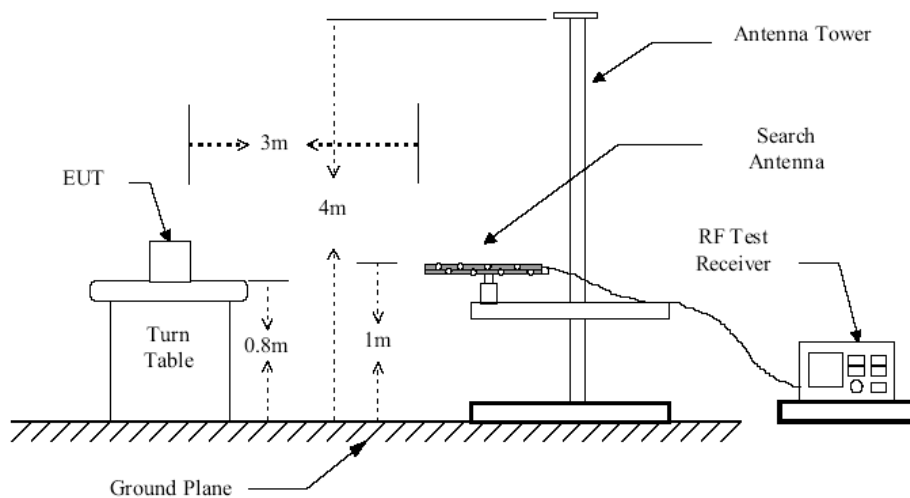


Figure 1 : Frequencies measured below 1 GHz configuration

5.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). For Spurious Emissions test, The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 6). For Field Strength of Fundamental Emissions test, Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT.

5.4 Test Result

Temperature (°C) : 22~23	EUT: TOY-R/C TRANS ROBOT CAR
Humidity (%RH) : 50~54	M/N: 8038
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous Transmitting

Fundamental Emission Test Data


Frequency (MHz)	Read Value dB μ V	Transd	Result dB μ V/m	Limit (dB μ V/m)	Margin (dB)	Polarization
Peak Measurement						
27.1454	73.4	8.5	81.9	100	18.1	Vertical
27.1454	65.9	8.5	74.4	100	25.6	Horizontal
Average Measurement						
27.1454	67.9	8.5	76.4	80	3.6	Vertical
27.1454	60.4	8.5	68.9	80	11.1	Horizontal

Result: The field strength of any emission within the operation band did not exceed 80(dB μ V/m) for average value or 100 dB(dB μ V/m)for peak value.

Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: TOY-R/C TRANS ROBOT CAR
M/N: 8038
Operating Condition: TX
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 9.0V
Comment: Polarization: Horizontal

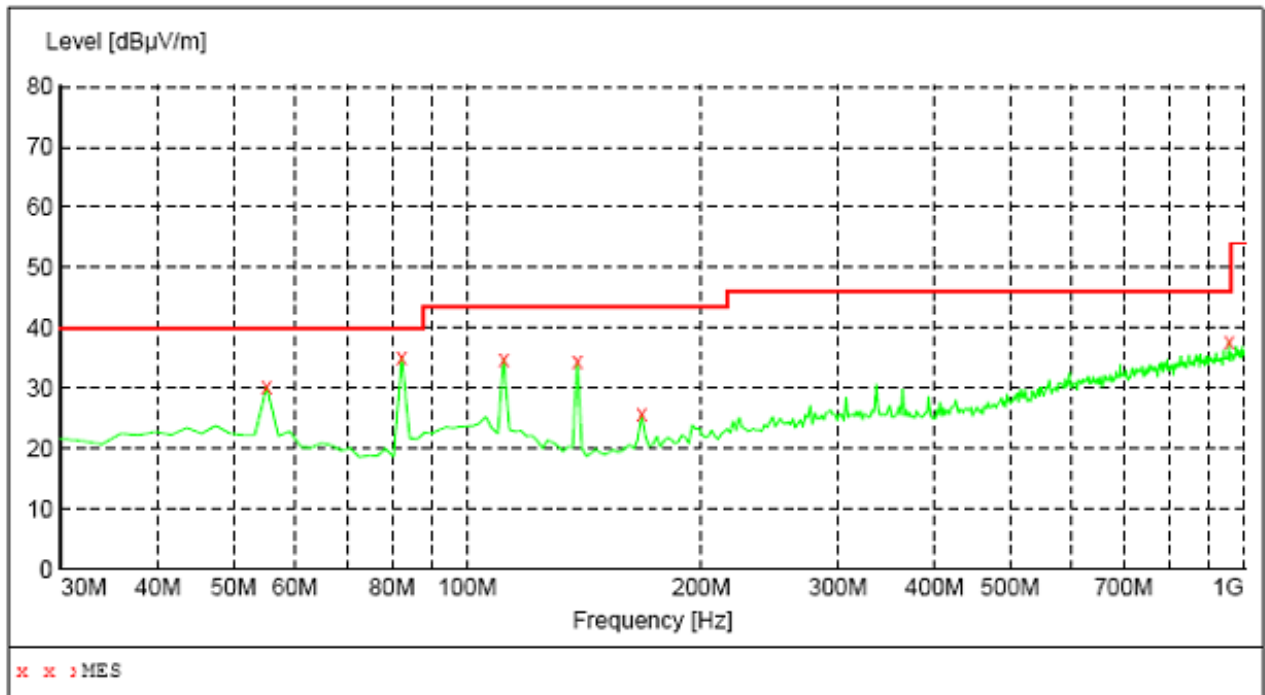


MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	30.20	16.5	40.0	9.8	QP	100.0	0.00	HORIZONTAL
82.380000	35.10	14.4	40.0	4.9	QP	100.0	0.00	HORIZONTAL
111.480000	34.90	17.3	43.5	8.6	QP	100.0	0.00	HORIZONTAL
138.640000	34.30	14.0	43.5	9.2	QP	100.0	0.00	HORIZONTAL
167.740000	25.60	14.9	43.5	17.9	QP	100.0	0.00	HORIZONTAL
957.320000	37.80	29.7	46.0	8.2	QP	100.0	0.00	HORIZONTAL

Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: TOY-R/C TRANS ROBOT CAR
M/N: 8038
Operating Condition: TX
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 9.0V
Comment: Polarization: Vertical

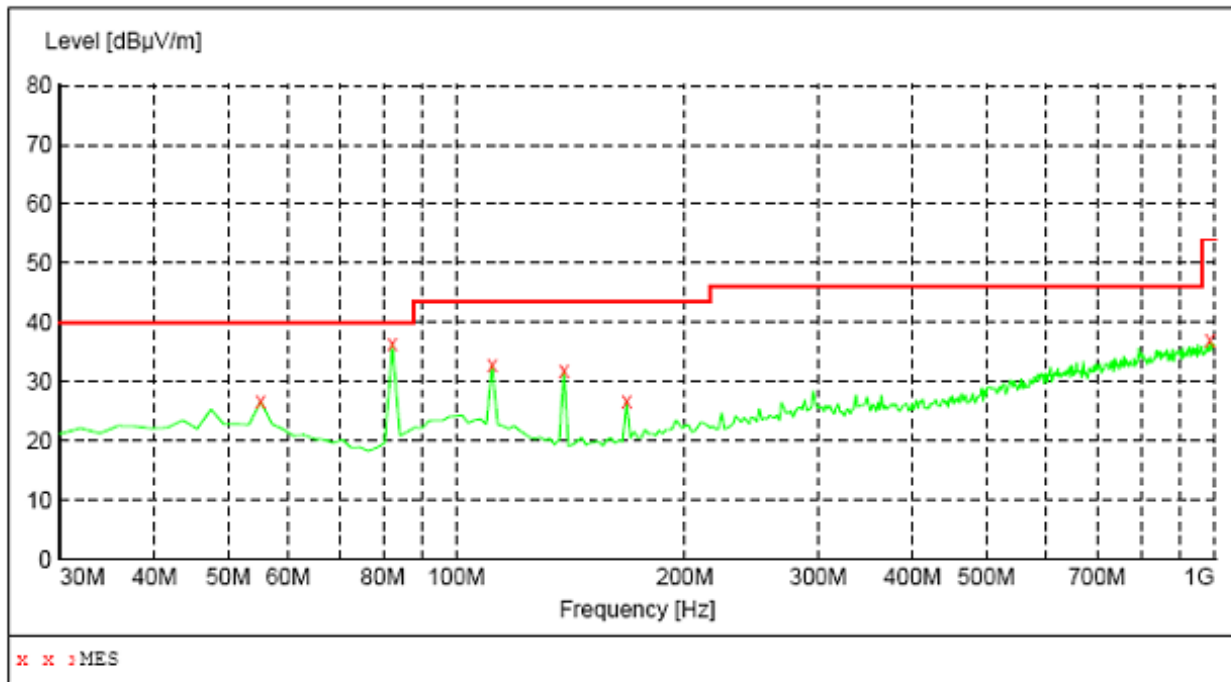

MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
55.220000	26.60	16.5	40.0	13.4	QP	100.0	0.00	VERTICAL
82.380000	36.30	14.4	40.0	3.7	QP	100.0	0.00	VERTICAL
111.480000	32.80	17.3	43.5	10.7	QP	100.0	0.00	VERTICAL
138.640000	31.80	14.0	43.5	11.7	QP	100.0	0.00	VERTICAL
167.740000	26.70	14.9	43.5	16.8	QP	100.0	0.00	VERTICAL
986.420000	36.90	30.0	46.0	9.1	QP	100.0	0.00	VERTICAL

6- EMISSIONS WITHIN BAND EDGES

6.1 Limit of Emissions within Band Edges

According to the section 15.227 of FCC Part 15 Subpart C, The field strength of any emission within this band shall not exceed 10,000 microvolts/ meter at 3 meter. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

6.2 Test Procedure

Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT. (Details refer to the relevant sections of the standard ANSI C63.4-2003 'Methods of Measurement of Radio Noise Emissions from Low –Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.)

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

6.3 Emissions within Band Edges Test Result


Temperature (°C) : 22~23	EUT: TOY-R/C TRANS ROBOT CAR
Humidity (%RH) : 50~54	M/N: 8038
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous Transmitting

Test plots see following:



Ref 97 dB μ V *Att 0 dB RBW 30 kHz Delta 3 [T1]
VBW 100 kHz -20.49 dB
SWT 2.5 ms 50.948000000 kHz

1 PK
MAXH

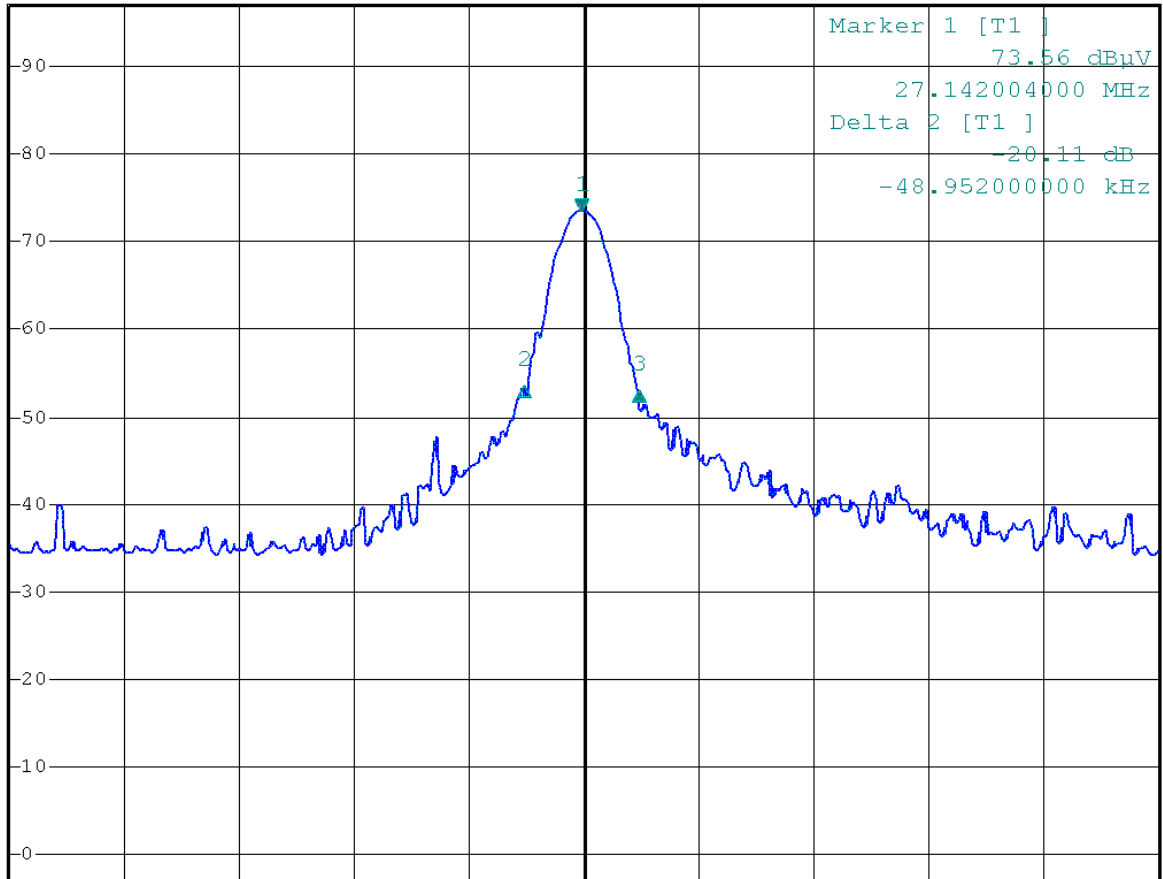

Center 27.145 MHz 99.9 kHz/ Span 999 kHz