

FCC Test Report

(Class II Permissive Change)

Product Name	Intel® Wireless-AC 9260
Model No.	9260NGW
FCC ID.	XHU-GCU040864

Applicant	Sorenson Communications, LLC
Address	4192 South Riverboat Road, Salt Lake City, Utah 84123

Date of Receipt	Dec. 21, 2020
Issued Date	Mar. 23, 2021
Report No.	20C0795R-E3032110108
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report


Issued Date: Mar. 23, 2021

Report No.: 20C0795R-E3032110108




Product Name	Intel® Wireless-AC 9260
Applicant	Sorenson Communications, LLC
Address	4192 South Riverboat Road, Salt Lake City, Utah 84123
Manufacturer	INTEL CORPORATION SAS
Model No.	9260NGW
FCC ID.	XHU-GCU040864
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	DC 3.3V (Power By Test Fixture)
Trade Name	Intel
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Leven Huang)

Tested By :



(Senior Engineer / Ivan Chuang)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Equipment.....	9
1.7. Uncertainty	10
2. PEAK POWER OUTPUT	11
2.1. Test Setup	11
2.2. Limit	11
2.3. Test Procedure	11
2.4. Test Result of Peak Power Output.....	12
3. RADIATED EMISSION	15
3.1. Test Setup	15
3.2. Limits.....	16
3.3. Test Procedure	17
3.4. Test Result of Radiated Emission.....	18
4. BAND EDGE	32
4.1. Test Setup	32
4.2. Limit	33
4.3. Test Procedure	33
4.4. Test Result of Band Edge	34
5. DUTY CYCLE	42
5.1. Test Setup	42
5.2. Test Result of Duty Cycle.....	43
6. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	45
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

Revision History

Report No.	Version	Description	Issued Date
20C0795R-E3032110108	V1.0	Initial issue of report.	2021-03-23

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Intel® Wireless-AC 9260
Trade Name	Intel
Model No.	9260NGW
FCC ID.	XHU-GCU040864
Frequency Range	2402-2480MHz
Channel Number	79
Type of Modulation	FHSS: GFSK(1Mbps) / π /4DQPSK(2Mbps) / 8DPSK(3Mbps)
Antenna type	Dipole Antenna
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Molex	1461531050	Dipole Antenna	3.2dBi for 2.4GHz

Note: The antenna of EUT conforms to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

Note:

1. The EUT is an Intel® Wireless-AC 9260 with a built-in WLAN (802.11a/b/g/n/ac) with Bluetooth (5.0 and BT3.0+HS) combo card module, this report for Bluetooth V3.0,V2.1+EDR.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. This is to request a Class II permissive change for FCC ID: XHU-GCU040864.
The major change filed under this application is:
Change #1: Addition a Dipole Antenna, the antenna type is different with the original application.

Test Mode	Mode 1: Transmit - 1Mbps Mode 2: Transmit - 2Mbps Mode 3: Transmit - 3Mbps
-----------	--


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord	
1	Power Adapter	GIGA-BYTE	THX-120400KV	N/A	Non-Shielded, 1.8m
2	SSD	Corsair	Force LE 200	N/A	N/A
3	Notebook PC	ASUS	S1300	24NP035390	Non-Shielded, 1.8m
4	Test Fixture	Sorenson	GCU040864	N/A	N/A

Signal Cable Type	Signal cable Description	
A	Power Cable	Non-Shielded, 1.8m
B	USB Cable	Shielded, 0.4m
C	LAN Cable	Non-Shielded, 2m
D	Power Cable	Non-Shielded, 1m

1.3. Configuration of Tested System

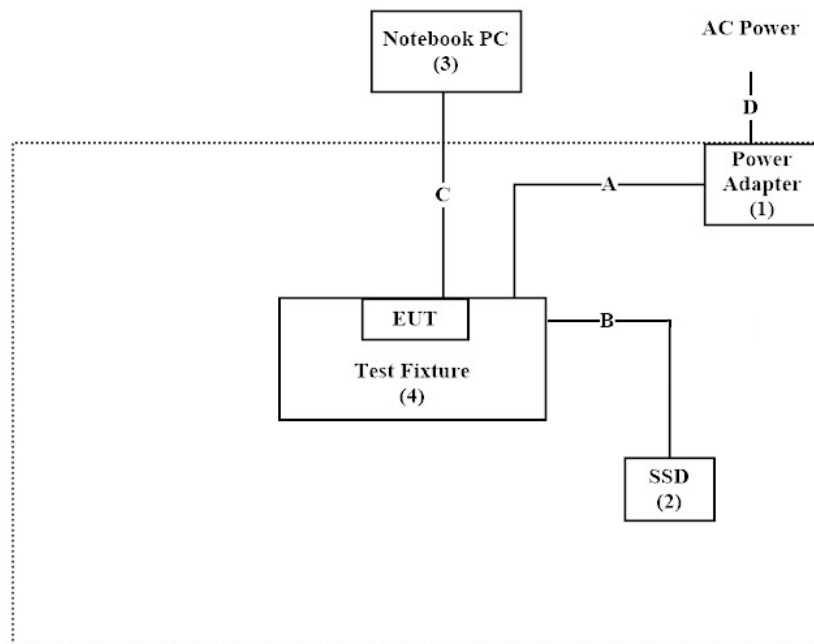

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “DRTU v12. 1947.0-10428” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.3°C
	Humidity (%RH)	10~90 %	58%
Conductive	Temperature (°C)	10~40 °C	22°C
	Humidity (%RH)	10~90 %	55%

USA : FCC Registration Number: TW0031

Canada : IC Registration Number: 26443

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 6, Lane 75, Wenlin St., Linkou Dist.,
New Taipei City 24457, Taiwan, R.O.C.

Phone number : 886-2-2602-7968
Fax number : 866-2-2602-3286
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conducted measurements /AC3

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2020.05.13	2021.05.12
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2020.05.22	2021.05.21
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2020.05.22	2021.05.21
	Bluetooth Tester	R&S	CBT	101238	2019.01.21	2020.01.20

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5.

For Radiated measurements /AC3

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	56736	2020.03.19	2021.03.18
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	01125	2020.07.31	2021.07.30
X	Horn Antenna	ETS-Lindgren	3117	00227709	2020.11.03	2021.11.02
	Horn Antenna	Com-Power	AH-840	10090014	2020.08.05	2021.08.04
X	Pre-Amplifier	SGH	EM330	060736	2020.08.03	2021.08.02
X	Pre-Amplifier	SGH	PRAMP118	20200701	2020.08.03	2021.08.02
X	Pre-Amplifier	SGH	PRAMP0510	20200703	2020.08.03	2021.08.02
	Pre-Amplifier	SGH	PRAMP184	20200705	2020.08.04	2021.08.03
X	Filter	MICRO TRONICS	BRM50702	G249	2020.08.25	2021.08.24
	Filter	MICRO TRONICS	BRM50716	G187	2020.08.25	2021.08.24
X	EMI Test Receiver	R&S	ESR7	101601	2021.01.04	2022.01.03
X	Spectrum Analyzer	R&S	FSV40	101148	2020.03.16	2021.03.15
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF003	2020.09.18	2021.09.17
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2020.06.10	2021.06.09
	Wireless Connectivity Tester	R&S	CMW270	100978	2020.06.17	2021.06.16

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Peak Power Output	± 0.91 dB	
Radiated Emission	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Band Edge	Under 1GHz ± 4.06 dB	Above 1GHz ± 3.73 dB
Duty Cycle	± 2.31 ms	

2. Peak Power Output

2.1. Test Setup

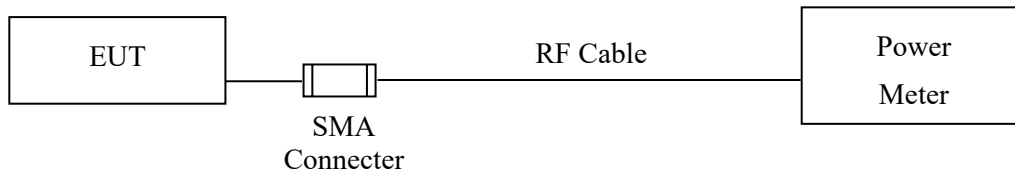

2.2. Limit

The maximum peak power shall be less 1Watt.

2.3. Test Procedure

Tested according to FHSS test procedure of KDB 558074 section 9 (b for compliance to FCC 47CFR 15.247 requirements.

2.4. Test Result of Peak Power Output

Product : Intel® Wireless-AC 9260
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit - 1Mbps
Test Date : 2021/03/23

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.41	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.93	1 Watt= 30 dBm	Pass
Channel 78	2480.00	11.51	1 Watt= 30 dBm	Pass

Product : Intel® Wireless-AC 9260
Test Item : Peak Power Output
Test Mode : Mode 2: Transmit - 2Mbps
Test Date : 2021/03/23

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.13	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.43	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.87	1 Watt= 30 dBm	Pass


Product : Intel® Wireless-AC 9260
Test Item : Peak Power Output
Test Mode : Mode 3: Transmit - 3Mbps
Test Date : 2021/03/23

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	10.18	1 Watt= 30 dBm	Pass
Channel 39	2441.00	10.40	1 Watt= 30 dBm	Pass
Channel 78	2480.00	10.92	1 Watt= 30 dBm	Pass


3. Radiated Emission

3.1. Test Setup


Radiated Emission Under 30MHz

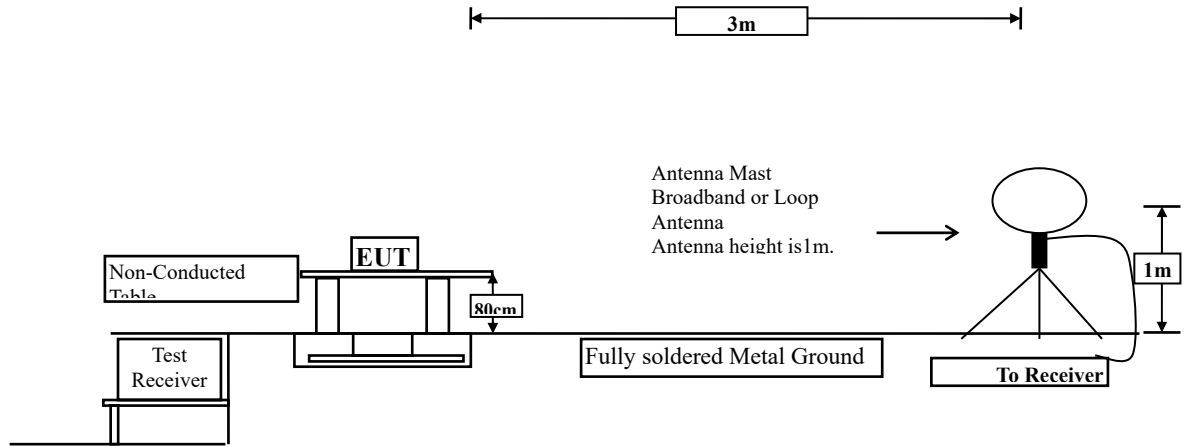

Radiated Emission Below 1GHz

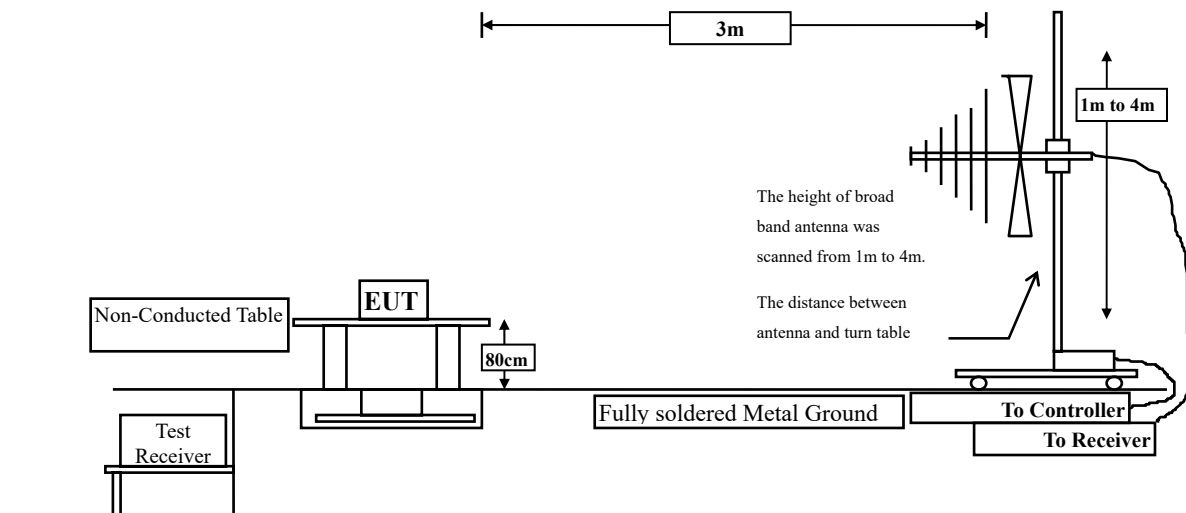

Radiated Emission Above 1GHz

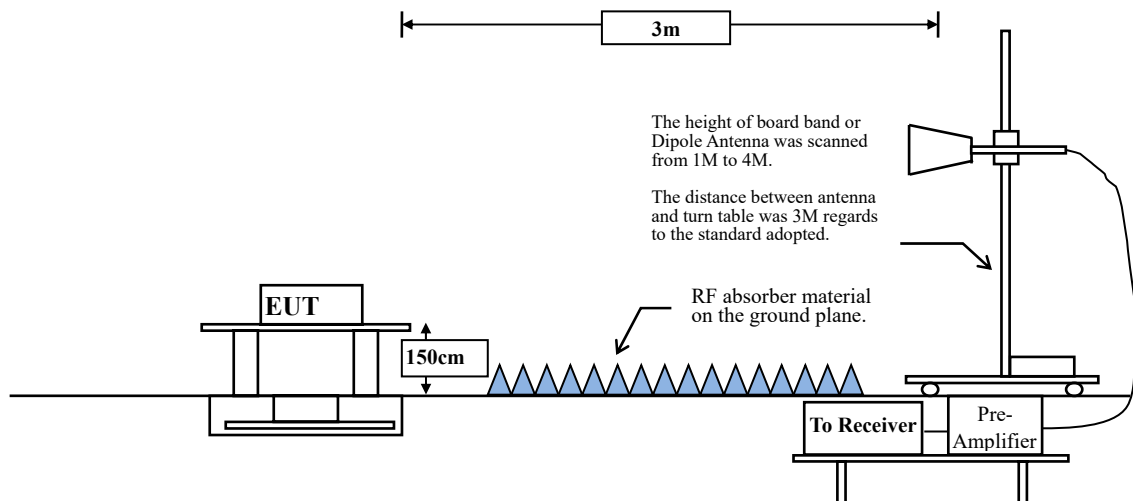

3.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.


The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.4. Test Result of Radiated Emission

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/06

Horizontal

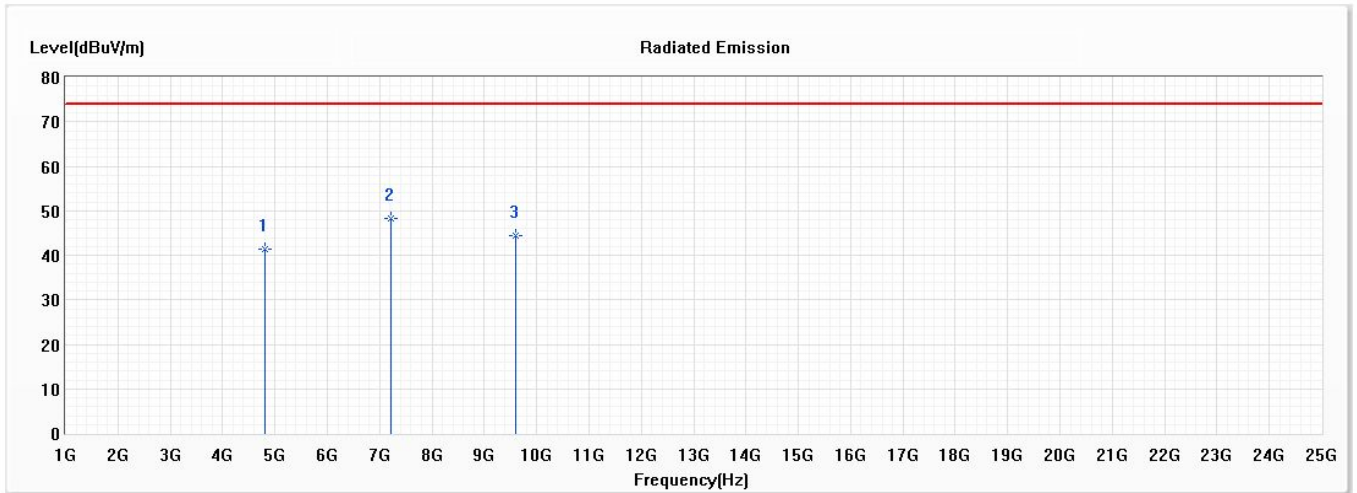

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	41.45	74.00	-32.55	53.14	-11.69	PK
* 2	7206.000	48.26	74.00	-25.74	54.91	-6.65	PK
3	9608.000	44.29	74.00	-29.71	49.04	-4.75	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Emission Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.


Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
--	--	--	--	--	74.000	54.000

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/06

Vertical

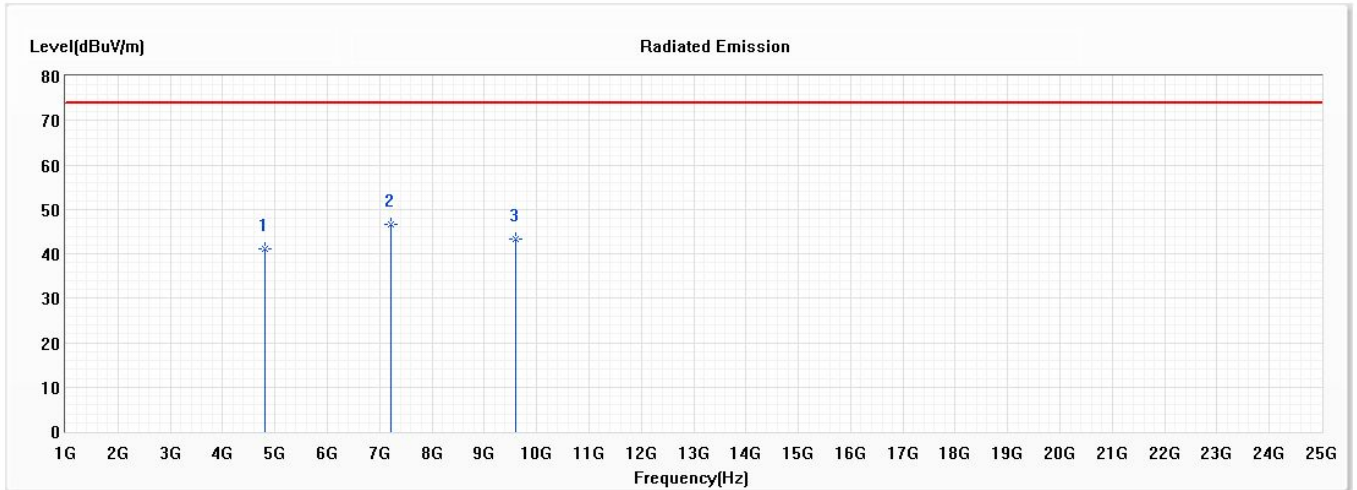

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	41.23	74.00	-32.77	52.92	-11.69	PK
* 2	7206.000	46.66	74.00	-27.34	53.31	-6.65	PK
3	9608.000	43.26	74.00	-30.74	48.01	-4.75	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency	Peak Measurement	Duty Cycle Factor	Average Measurement	Margin	Peak Limit	Average Limit
MHz	dBμV/m	dB	dBμV/m	dB	dBμV/m	dBμV/m

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/06

Horizontal

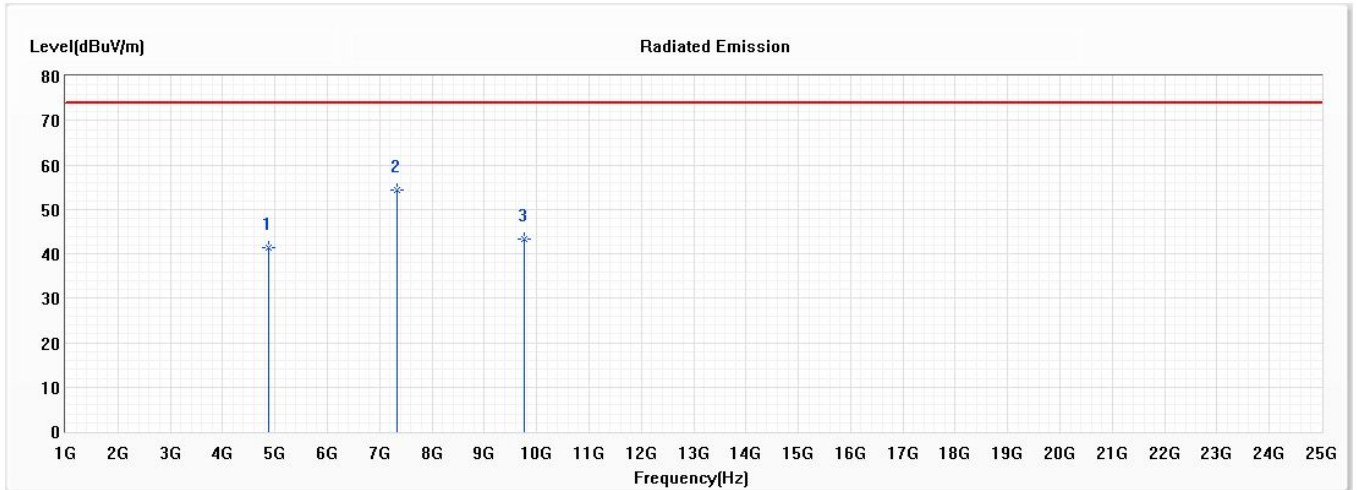

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	41.44	74.00	-32.56	52.83	-11.39	PK
* 2	7323.000	54.35	74.00	-19.65	61.04	-6.69	PK
3	9764.000	43.42	74.00	-30.58	47.71	-4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


7323	54.35	-2.456	51.894	-2.106	74.000	54.000
------	-------	--------	--------	--------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2441MHz)
 Test Date : 2021/01/06

Vertical

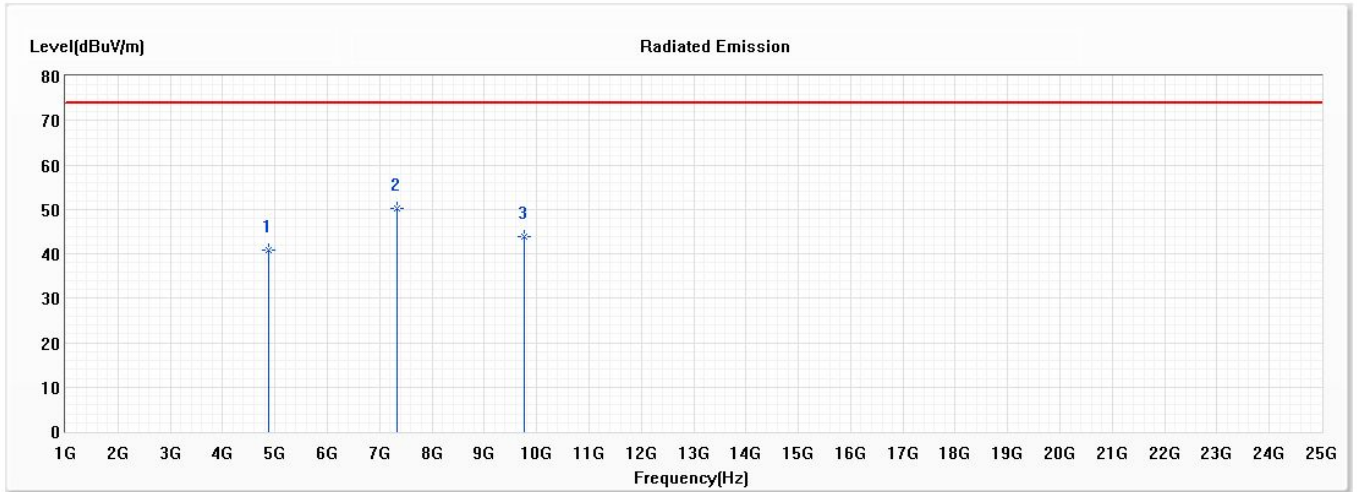

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	40.92	74.00	-33.08	52.31	-11.39	PK
* 2	7323.000	50.30	74.00	-23.70	56.99	-6.69	PK
3	9764.000	43.75	74.00	-30.25	48.04	-4.29	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Emission Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/06

Horizontal

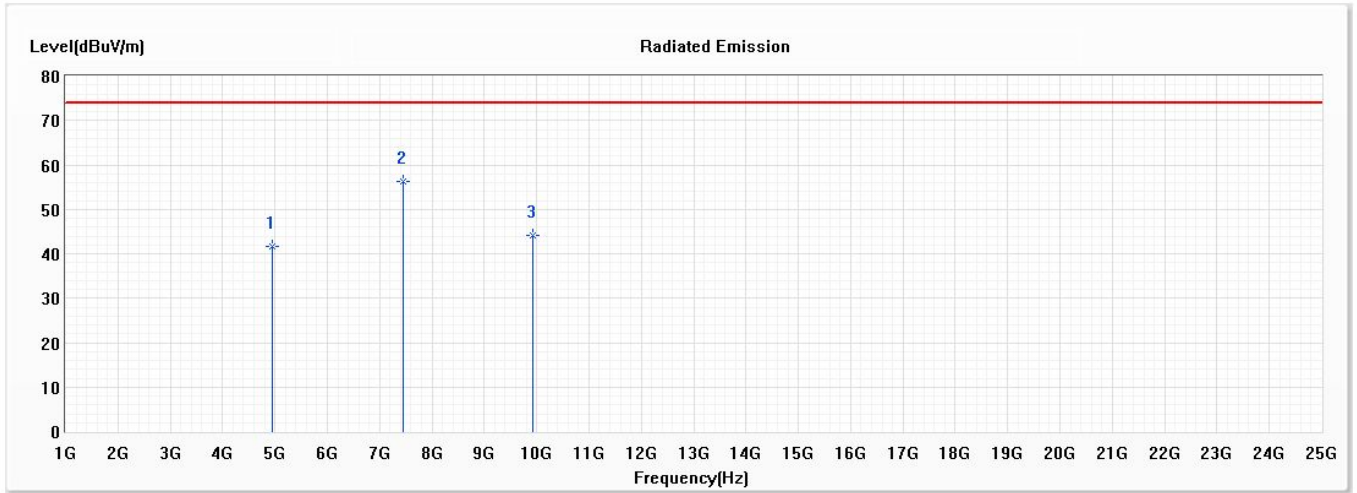

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	41.67	74.00	-32.33	52.92	-11.25	PK
* 2	7440.000	56.25	74.00	-17.75	62.84	-6.59	PK
3	9920.000	44.12	74.00	-29.88	48.06	-3.94	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


7440	56.25	-2.456	53.794	-0.206	74.000	54.000
------	-------	--------	--------	--------	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/06

Vertical

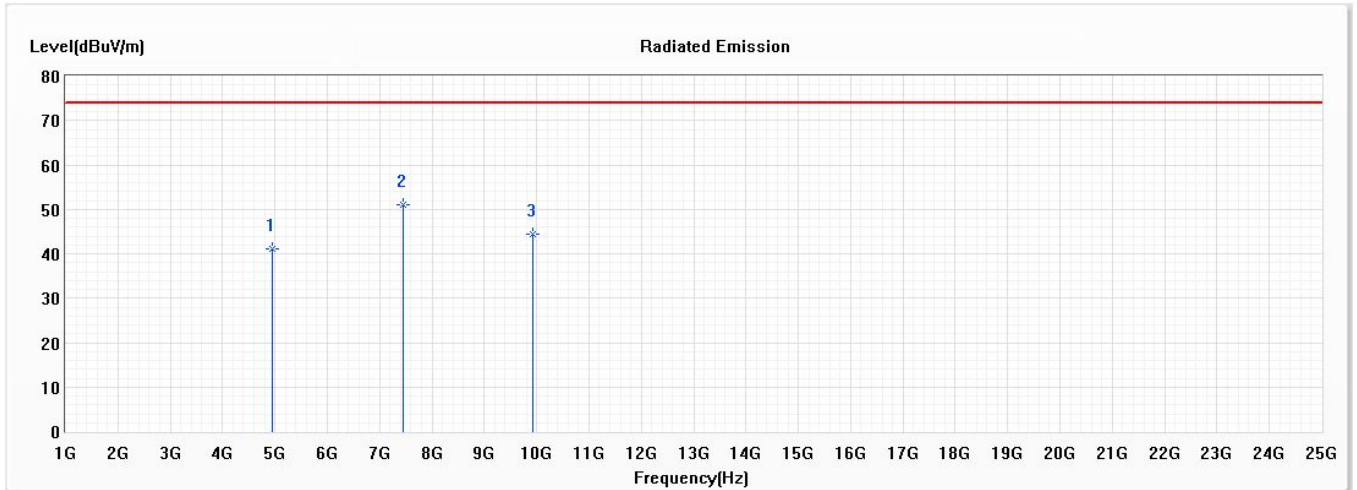

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	40.99	74.00	-33.01	52.24	-11.25	PK
* 2	7440.000	51.09	74.00	-22.91	57.68	-6.59	PK
3	9920.000	44.49	74.00	-29.51	48.43	-3.94	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Emission Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/06

Horizontal

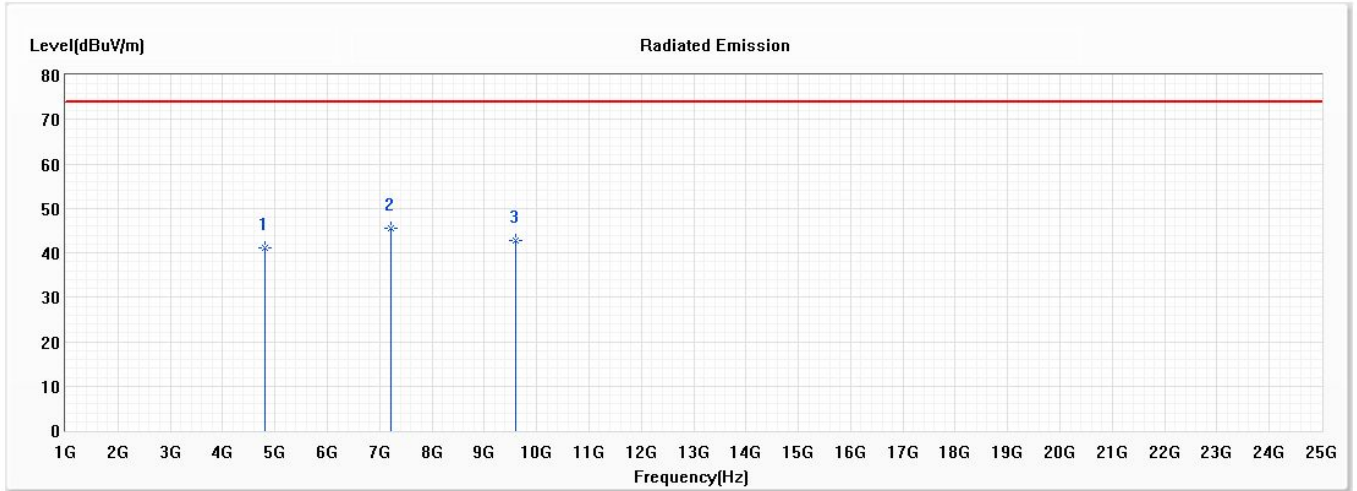

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	41.06	74.00	-32.94	52.75	-11.69	PK
* 2	7206.000	45.58	74.00	-28.42	52.23	-6.65	PK
3	9608.000	42.88	74.00	-31.12	47.63	-4.75	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Emission Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/06

Vertical

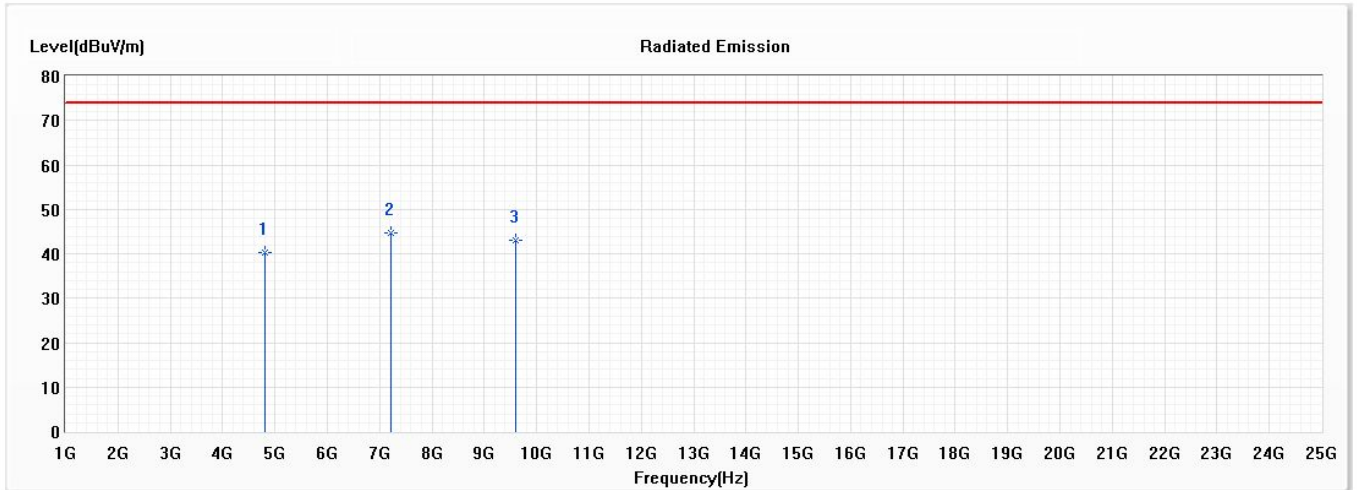

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4804.000	40.40	74.00	-33.60	52.09	-11.69	PK
* 2	7206.000	44.81	74.00	-29.19	51.46	-6.65	PK
3	9608.000	43.17	74.00	-30.83	47.92	-4.75	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/06

Horizontal

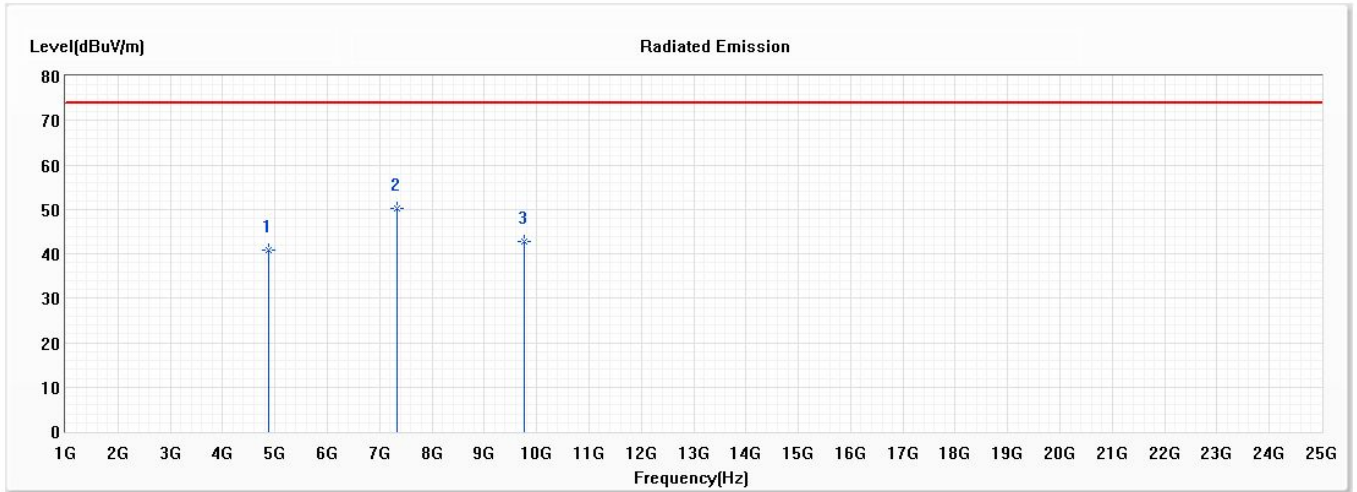

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	40.69	74.00	-33.31	52.08	-11.39	PK
* 2	7323.000	50.21	74.00	-23.79	56.90	-6.69	PK
3	9764.000	42.69	74.00	-31.31	46.98	-4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/06

Vertical

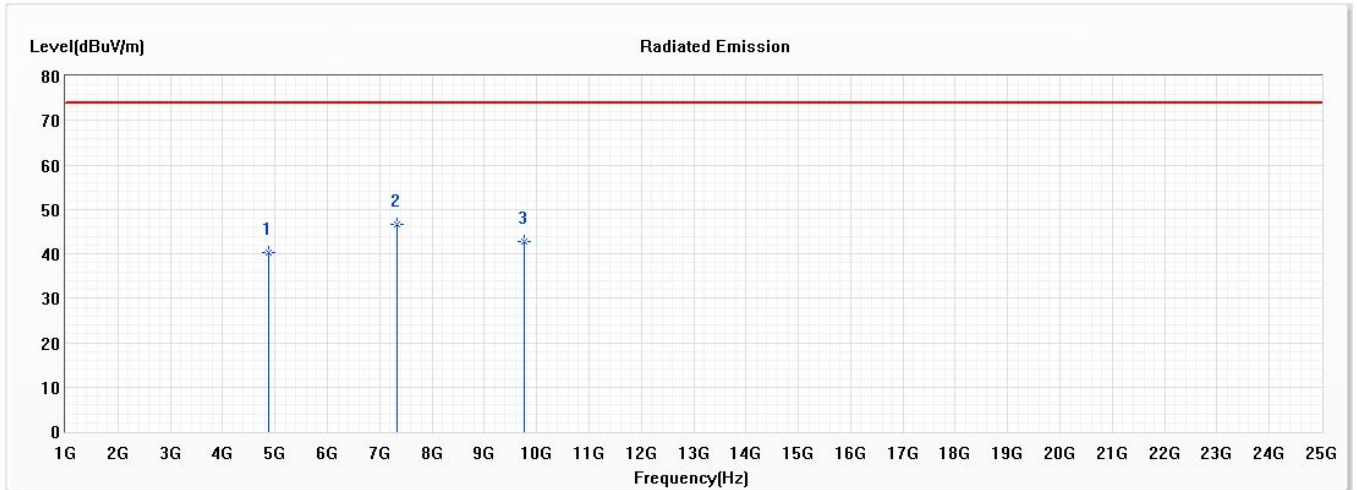

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4882.000	40.17	74.00	-33.83	51.56	-11.39	PK
* 2	7323.000	46.54	74.00	-27.46	53.23	-6.69	PK
3	9764.000	42.69	74.00	-31.31	46.98	-4.29	PK

Note:

- All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
- Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
- Emission Level = Reading Level + Correct Factor.
- Correct Factor = Antenna factor + Cable loss – Amplifier gain.
- The average measurement was not performed when the peak measured data under the limit of average detection.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

- AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
- The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/06

Horizontal

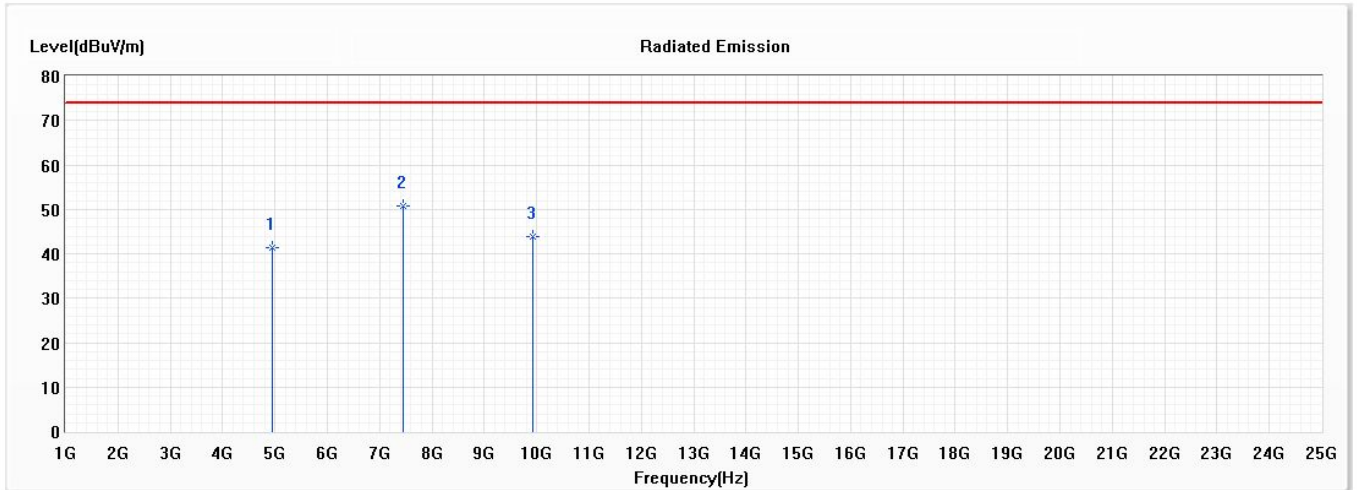

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	41.37	74.00	-32.63	52.62	-11.25	PK
* 2	7440.000	50.66	74.00	-23.34	57.25	-6.59	PK
3	9920.000	43.74	74.00	-30.26	47.68	-3.94	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/06

Vertical

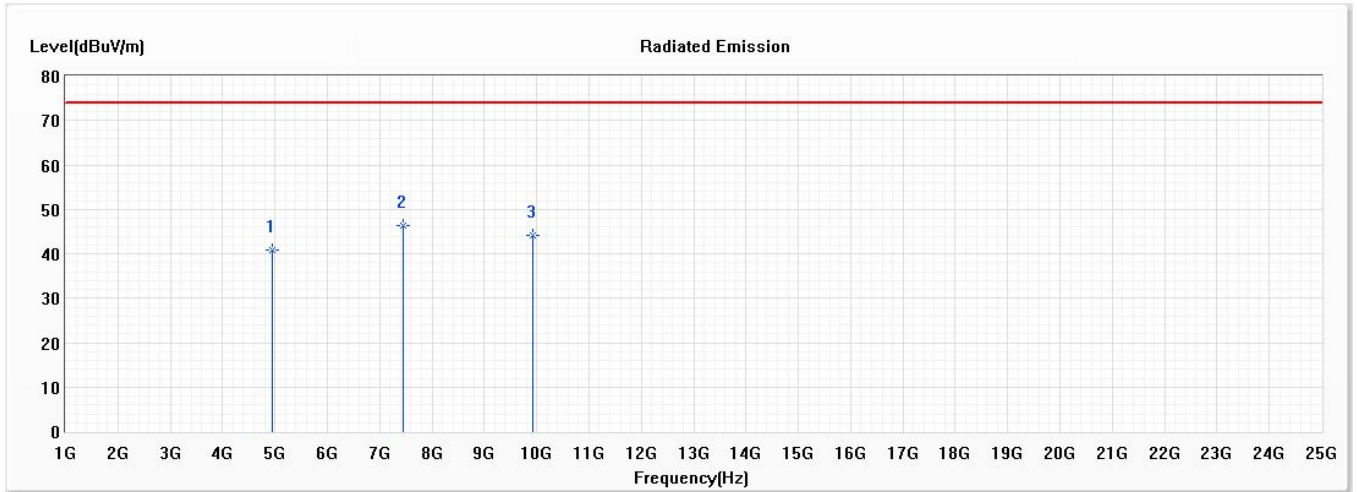

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4960.000	40.96	74.00	-33.04	52.21	-11.25	PK
* 2	7440.000	46.45	74.00	-27.55	53.04	-6.59	PK
3	9920.000	44.02	74.00	-29.98	47.96	-3.94	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. The emission levels of other frequencies are very lower than the limit and not show in test report.

Frequency MHz	Peak Measurement dBμV/m	Duty Cycle Factor dB	Average Measurement dBμV/m	Margin dB	Peak Limit dBμV/m	Average Limit dBμV/m
---------------	-------------------------	----------------------	----------------------------	-----------	-------------------	----------------------

Average Detector:


--	--	--	--	--	74.000	54.000
----	----	----	----	----	--------	--------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/08

Horizontal

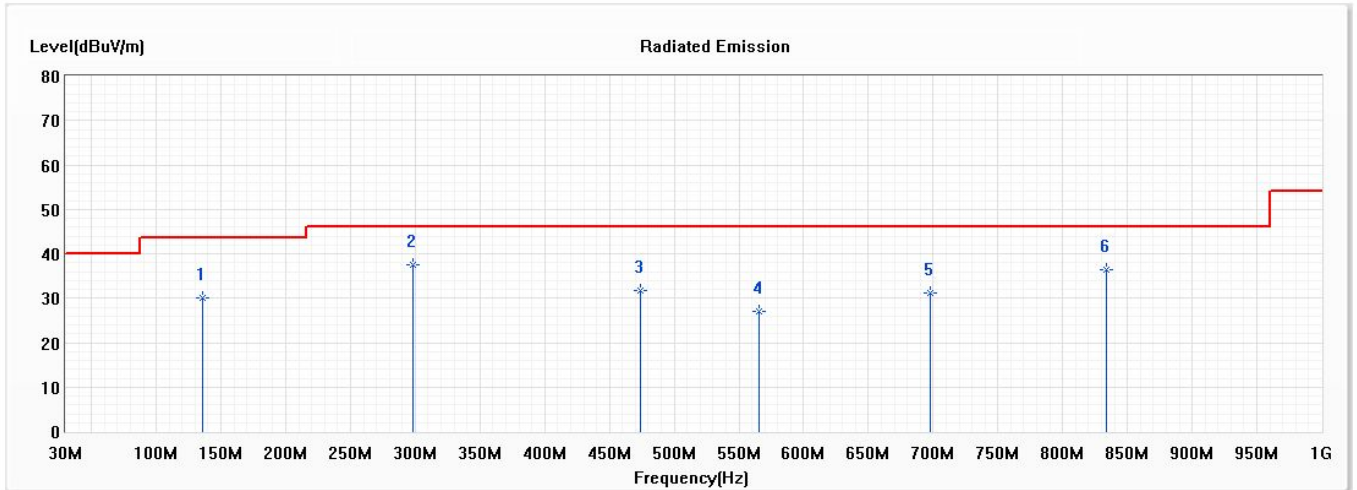


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	135.435	30.09	43.50	-13.41	49.41	-19.32	QP
* 2	298.507	37.43	46.00	-8.57	55.67	-18.24	QP
3	474.232	31.86	46.00	-14.14	45.70	-13.84	QP
4	565.609	27.02	46.00	-18.98	39.12	-12.10	QP
5	697.754	31.20	46.00	-14.80	40.90	-9.70	QP
6	834.116	36.37	46.00	-9.63	37.84	-1.47	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Mode : Mode 3: Transmit - 3Mbps (2441MHz)
 Test Date : 2021/01/08

Vertical

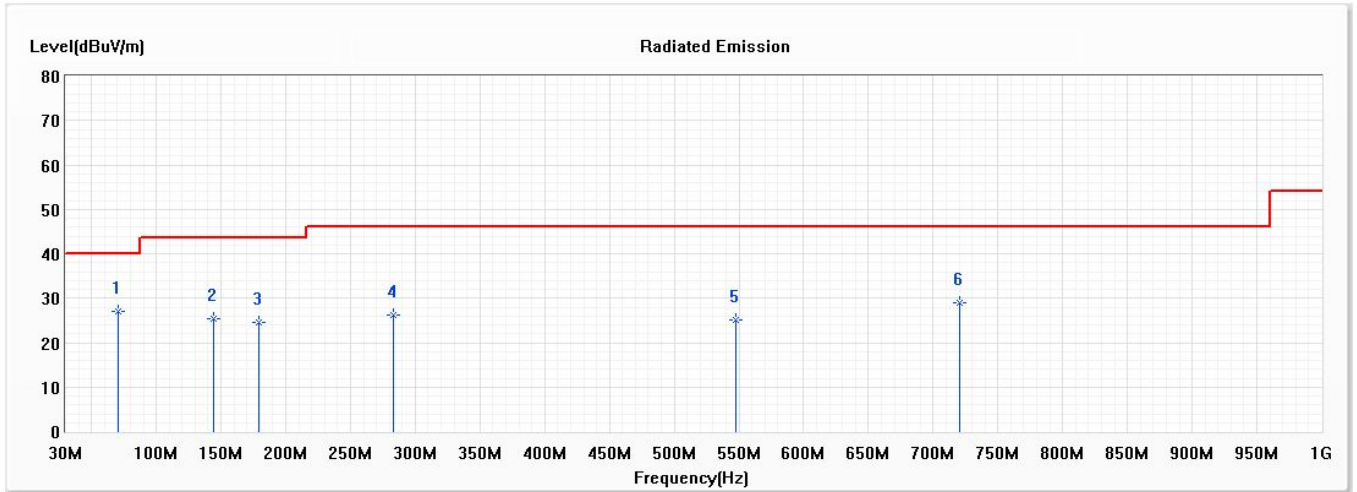

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	70.768	27.13	40.00	-12.87	48.87	-21.74	QP
2	143.870	25.41	43.50	-18.09	44.49	-19.08	QP
3	179.014	24.52	43.50	-18.98	44.87	-20.35	QP
4	283.043	26.17	46.00	-19.83	44.78	-18.61	QP
5	547.333	25.05	46.00	-20.95	37.43	-12.38	QP
6	720.246	29.09	46.00	-16.91	36.54	-7.45	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.


4. Band Edge

4.1. Test Setup

RF Conducted Measurement

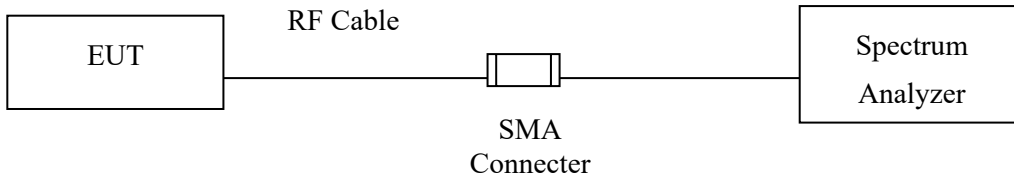

RF Radiated Measurement:

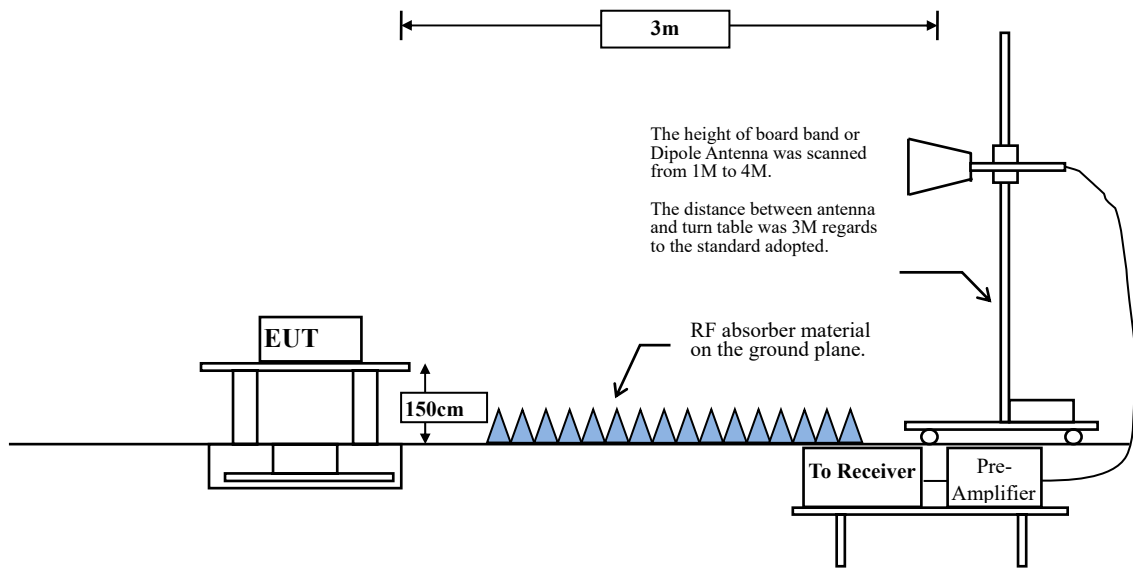

4.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.4. Test Result of Band Edge

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/05

Horizontal

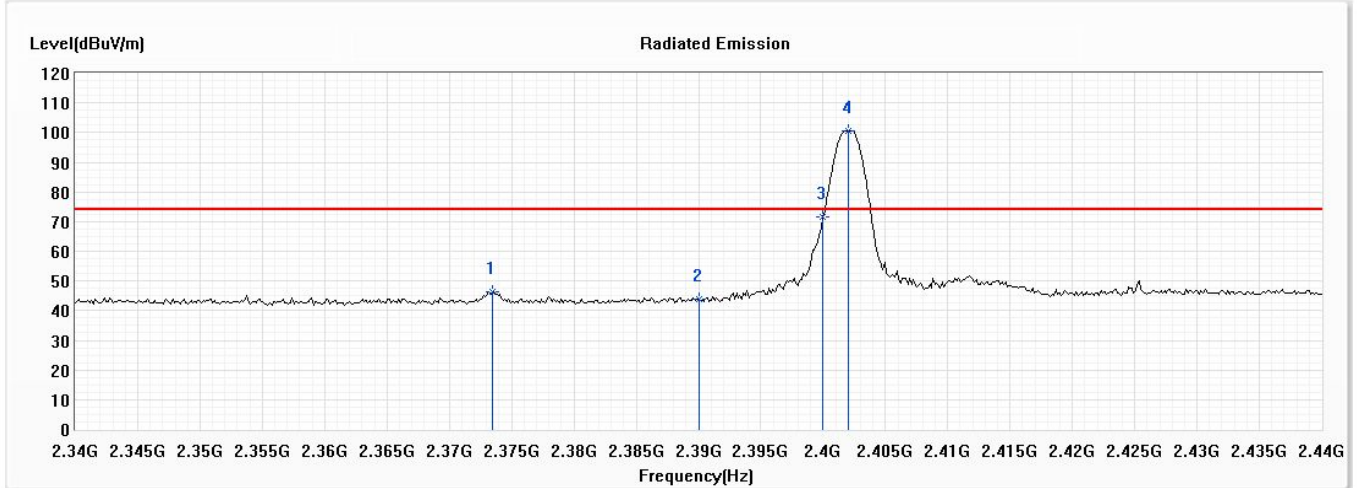

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2373.478	46.27	74.00	-27.73	33.66	12.61	PK
2	2390.000	43.78	74.00	-30.22	31.23	12.55	PK
3	2400.000	71.70	--	--	59.17	12.53	PK
! 4	2402.029	100.71	--	--	88.16	12.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
00 (Average)	2373.478	46.27	-2.456	43.814	-10.186	54.000	Pass
00 (Average)	2390	43.78	-2.456	41.324	-12.676	54.000	Pass
00 (Average)	2400	71.7	-2.456	69.244	--	--	Pass
00 (Average)	2402.029	100.71	-2.456	98.254	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2402MHz)
 Test Date : 2021/01/05

Vertical

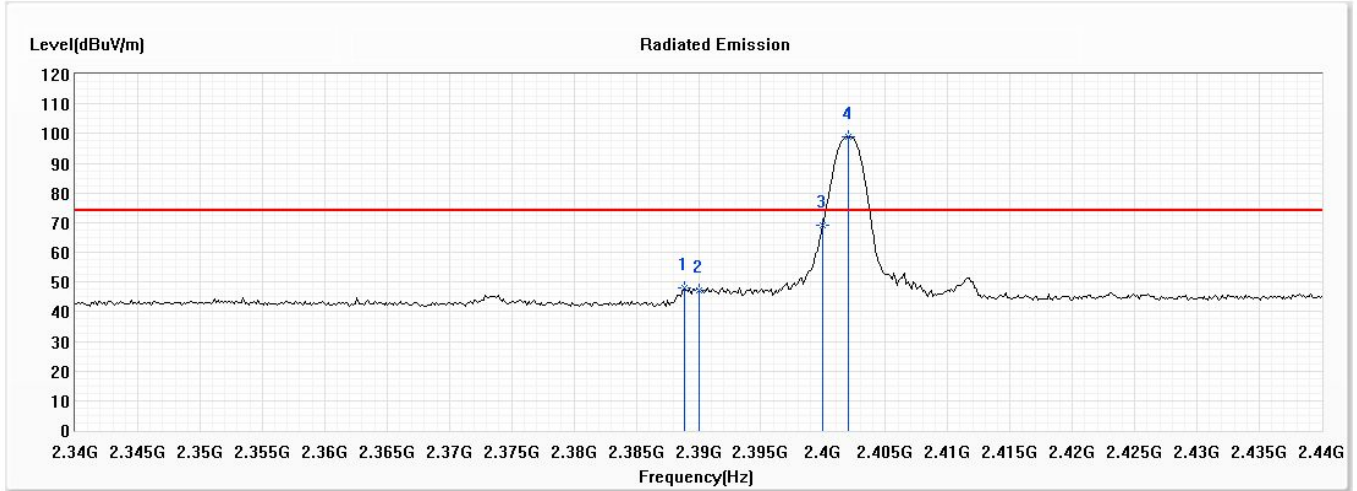

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.841	47.82	74.00	-26.18	35.26	12.56	PK
2	2390.000	47.33	74.00	-26.67	34.78	12.55	PK
3	2400.000	69.27	--	--	56.74	12.53	PK
! 4	2402.029	98.77	--	--	86.22	12.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
00 (Average)	2388.841	47.82	-2.456	45.364	-8.636	54.000	Pass
00 (Average)	2390	47.33	-2.456	44.874	-9.126	54.000	Pass
00 (Average)	2400	69.27	-2.456	66.814	--	--	Pass
00 (Average)	2402.029	98.77	-2.456	96.314	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/05

Horizontal

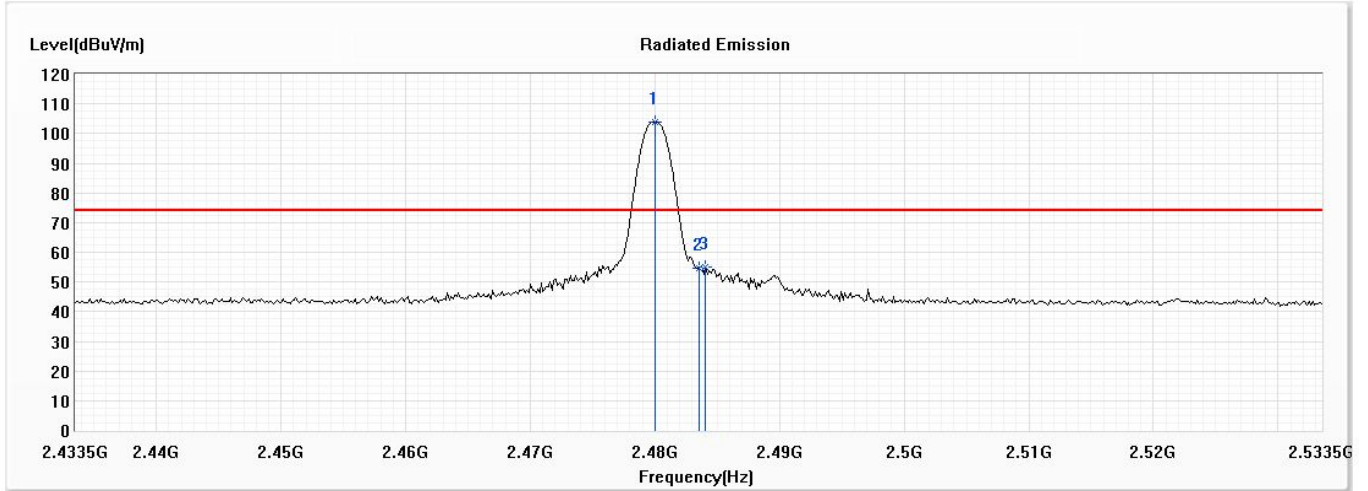

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.022	103.87	--	--	91.05	12.82	PK
2	2483.500	54.58	74.00	-19.42	41.78	12.80	PK
3	2484.080	55.18	74.00	-18.82	42.38	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
78 (Average)	2480.022	103.87	-2.456	101.414	--	--	Pass
78 (Average)	2483.5	54.58	-2.456	52.124	-1.876	54.000	Pass
78 (Average)	2484.08	55.18	-2.456	52.724	-1.276	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit - 1Mbps (2480MHz)
 Test Date : 2021/01/05

Vertical

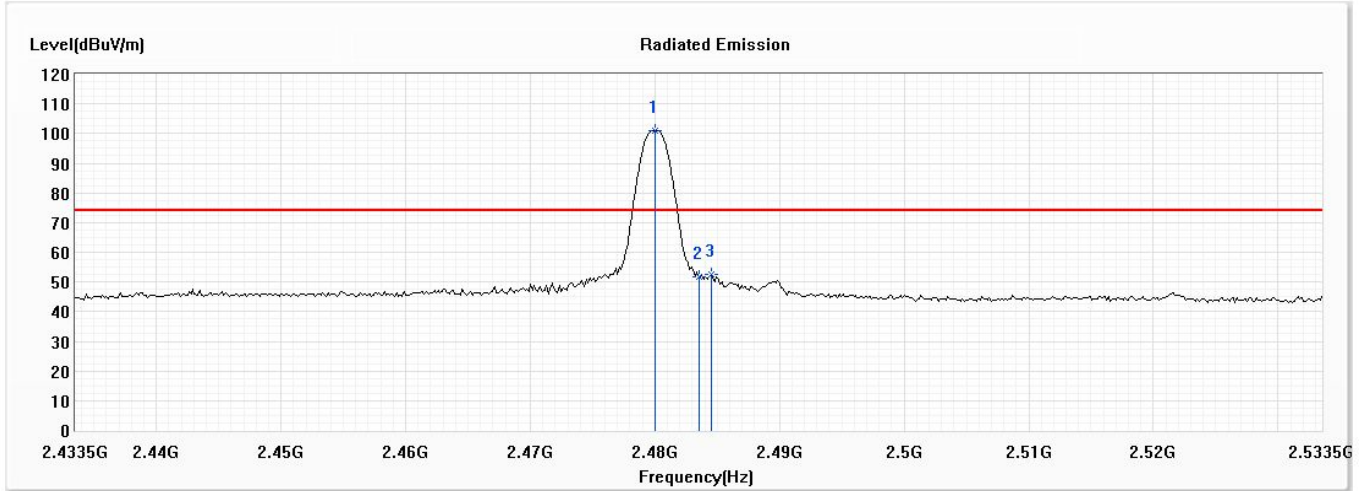

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.022	101.14	--	--	88.32	12.82	PK
2	2483.500	51.69	74.00	-22.31	38.89	12.80	PK
3	2484.514	52.48	74.00	-21.52	39.69	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
78 (Average)	2480.022	101.14	-2.456	98.684	--	--	Pass
78 (Average)	2483.5	51.69	-2.456	49.234	-4.766	54.000	Pass
78 (Average)	2484.514	52.48	-2.456	50.024	-3.976	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/05

Horizontal

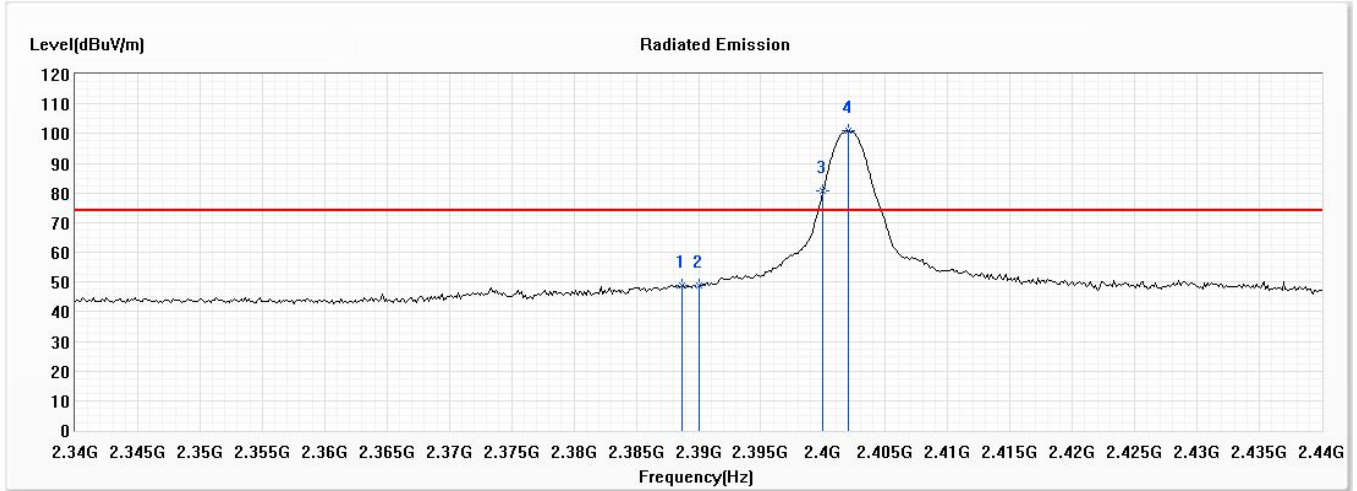

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.696	48.77	74.00	-25.23	36.20	12.57	PK
2	2390.000	48.75	74.00	-25.25	36.20	12.55	PK
! 3	2400.000	80.51	--	--	67.98	12.53	PK
! 4	2402.029	100.84	--	--	88.29	12.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBµV/m)	Duty Cycle Factor (dB)	Average Measurement (dBµV/m)	Margin (dB)	Average Limit (dBµV/m)	Result
00 (Average)	2388.696	48.77	-2.456	46.314	-7.686	54.000	Pass
00 (Average)	2390	48.75	-2.456	46.294	-7.706	54.000	Pass
00 (Average)	2400	80.51	-2.456	78.054	--	--	Pass
00 (Average)	2402.029	100.84	-2.456	98.384	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2402MHz)
 Test Date : 2021/01/05

Vertical

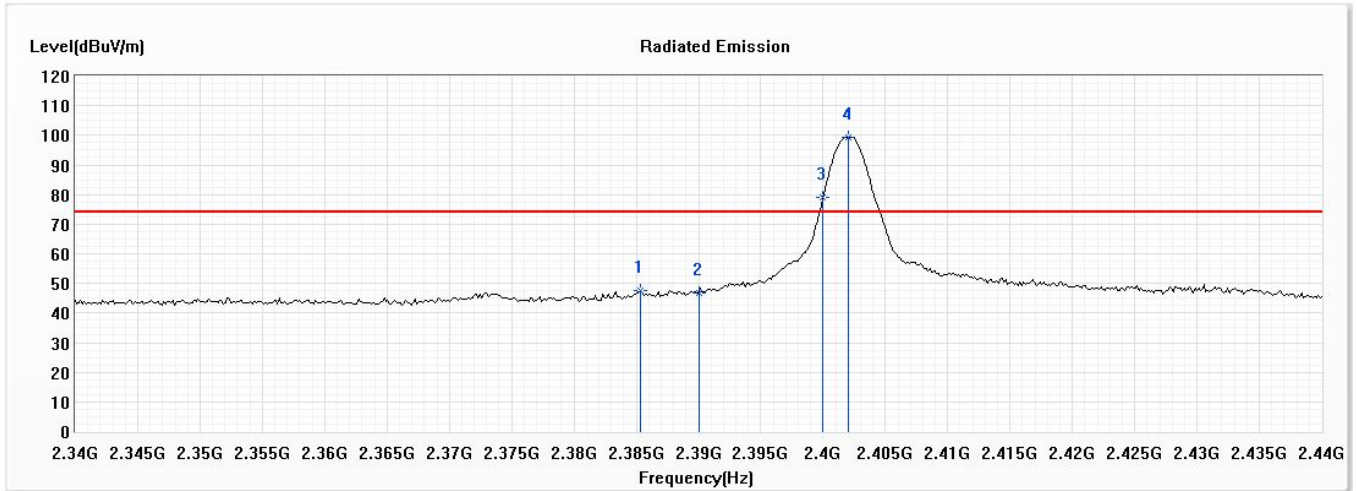

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2385.362	47.46	74.00	-26.54	34.89	12.57	PK
2	2390.000	46.57	74.00	-27.43	34.02	12.55	PK
! 3	2400.000	78.88	--	--	66.35	12.53	PK
! 4	2402.029	99.32	--	--	86.77	12.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
00 (Average)	2385.362	47.46	-2.456	45.004	-8.996	54.000	Pass
00 (Average)	2390	46.57	-2.456	44.114	-9.886	54.000	Pass
00 (Average)	2400	78.88	-2.456	76.424	--	--	Pass
00 (Average)	2402.029	99.32	-2.456	96.864	--	--	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/06

Horizontal

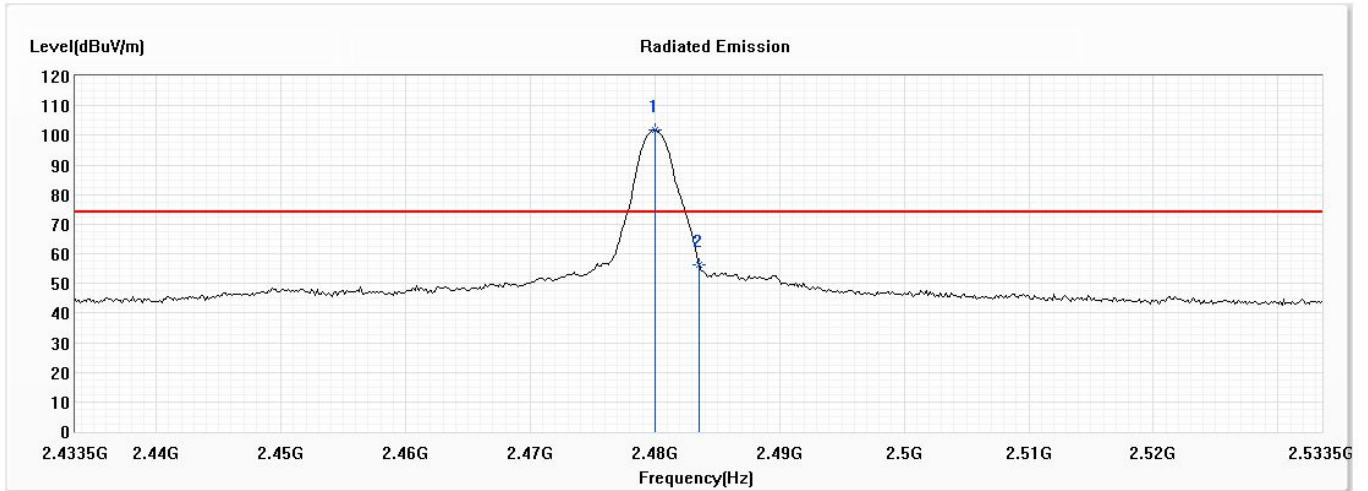

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.022	101.65	--	--	88.83	12.82	PK
2	2483.500	56.33	74.00	-17.67	43.53	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
78 (Average)	2480.022	101.65	-2.456	99.194	--	--	Pass
78 (Average)	2483.5	56.33	-2.456	53.874	-0.126	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Mode : Mode 3: Transmit - 3Mbps (2480MHz)
 Test Date : 2021/01/06

Vertical

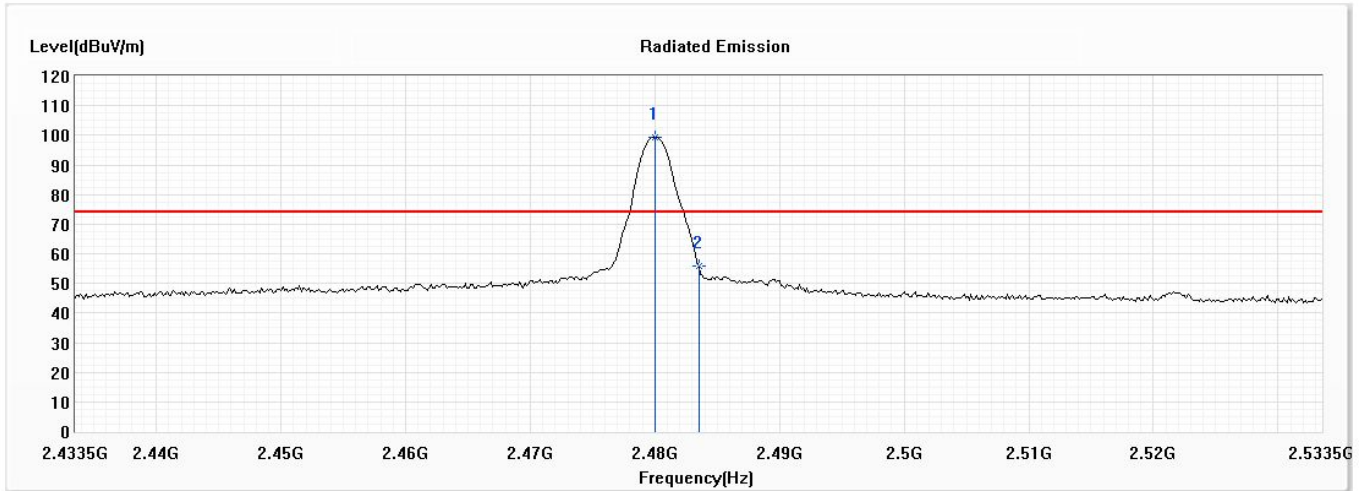

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2480.022	99.49	--	--	86.67	12.82	PK
2	2483.500	55.73	74.00	-18.27	42.93	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.


Channel No.	Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Average Measurement (dBμV/m)	Margin (dB)	Average Limit (dBμV/m)	Result
78 (Average)	2480.022	99.49	-2.456	97.034	--	--	Pass
78 (Average)	2483.5	55.73	-2.456	53.274	-0.726	54.000	Pass

Note:

1. Average Measurement=Peak Measurement + Duty Cycle Factor
2. The Duty Cycle is refer to section 5.


5. Duty Cycle

5.1. Test Setup

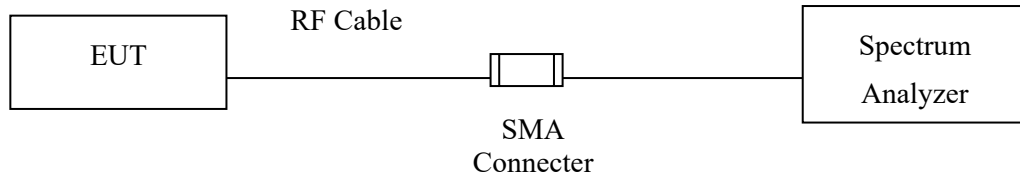

5.2. Test Result of Duty Cycle

Product : Intel® Wireless-AC 9260
 Test Item : Duty Cycle Data
 Test Mode : Mode 1: Transmit - 1Mbps

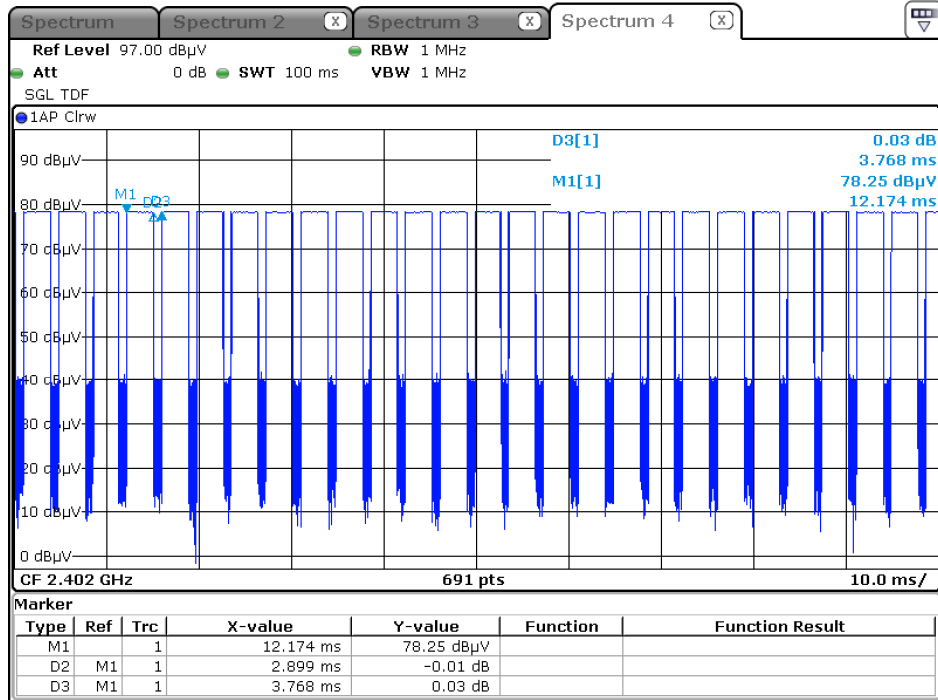

Date: 5.JAN.2021 10:02:58


Time on of 100ms= 2.899ms*26= 75.374ms

Duty Cycle=75.374ms / 100ms= 0.75374

Duty Cycle correction factor= 20 LOG 0.75374= -2.456 dB

Duty Cycle correction factor	-2.456	dB
-------------------------------------	---------------	-----------

Product : Intel® Wireless-AC 9260
 Test Item : Duty Cycle Data
 Test Mode : Mode 1: Transmit - 3Mbps

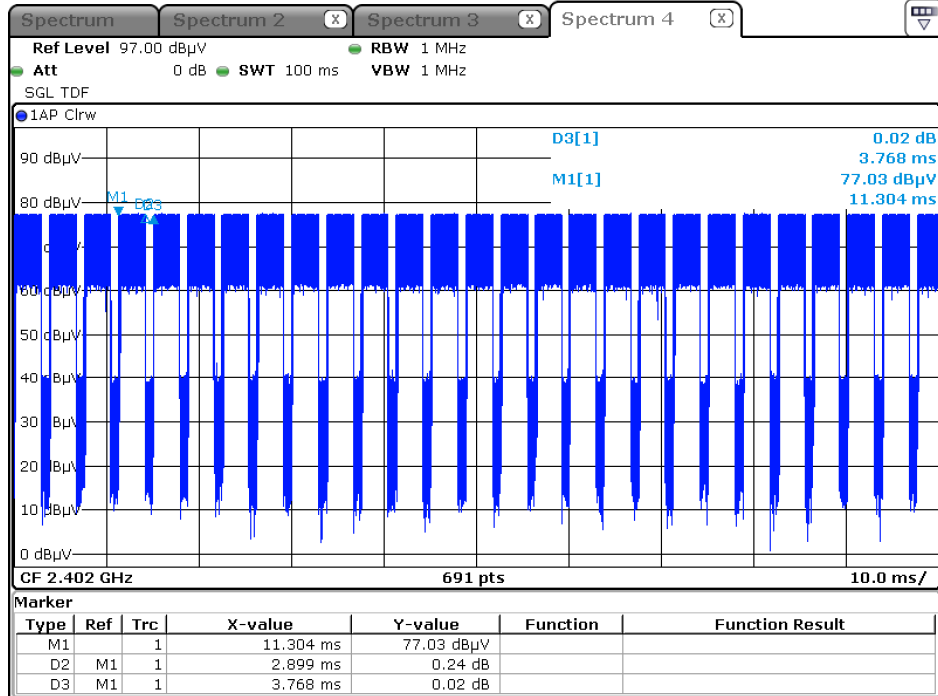

Date: 5.JAN.2021 10:06:57

Time on of 100ms= 2.899ms*26= 75.374ms
 Duty Cycle=75.374ms / 100ms= 0.75374
 Duty Cycle correction factor= 20 LOG 0.75374= -2.456 dB

Duty Cycle correction factor	-2.456	dB
-------------------------------------	---------------	-----------

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.