


Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Vertical

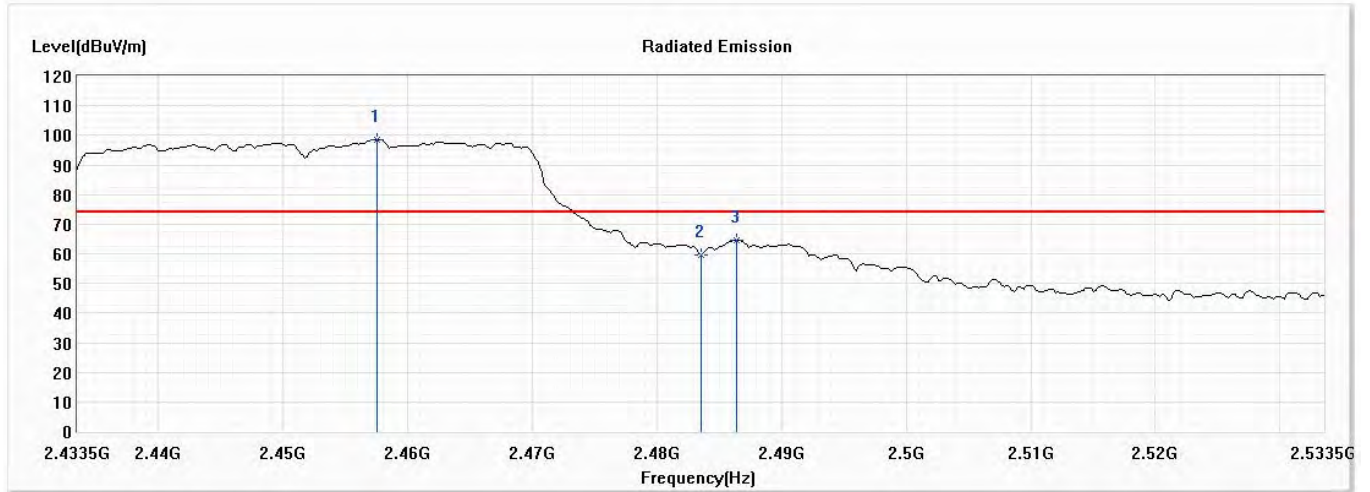


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2457.558	98.59	--	--	85.65	12.94	PK
2	2483.500	59.47	74.00	-14.53	46.67	12.80	PK
3	2486.399	64.56	74.00	-9.44	51.77	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Vertical

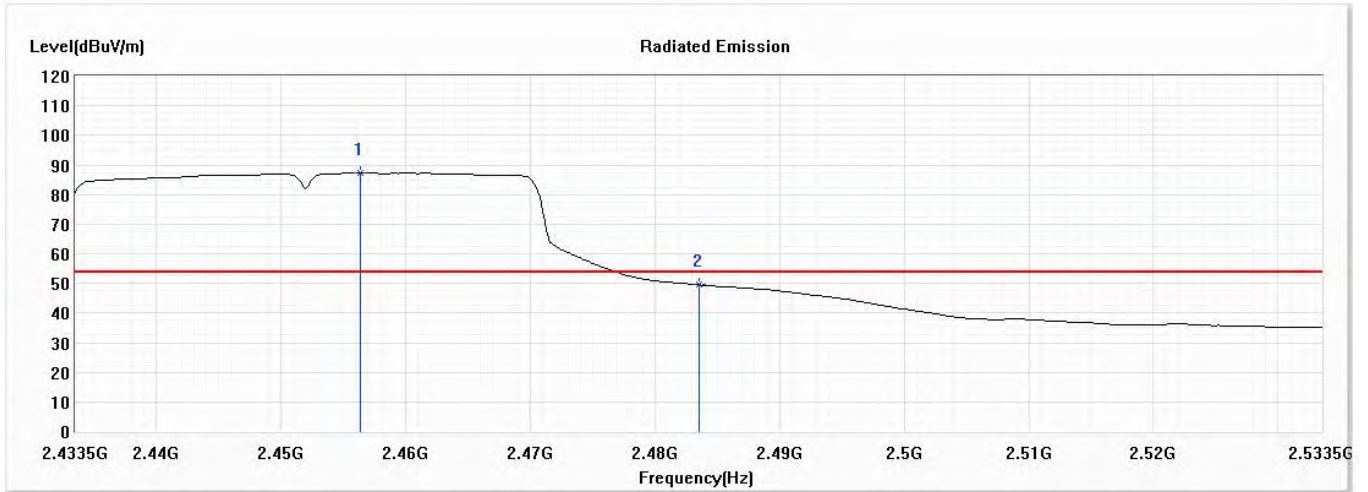


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.399	87.18	--	--	74.24	12.94	AV
2	2483.500	49.52	54.00	-4.48	36.72	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Horizontal

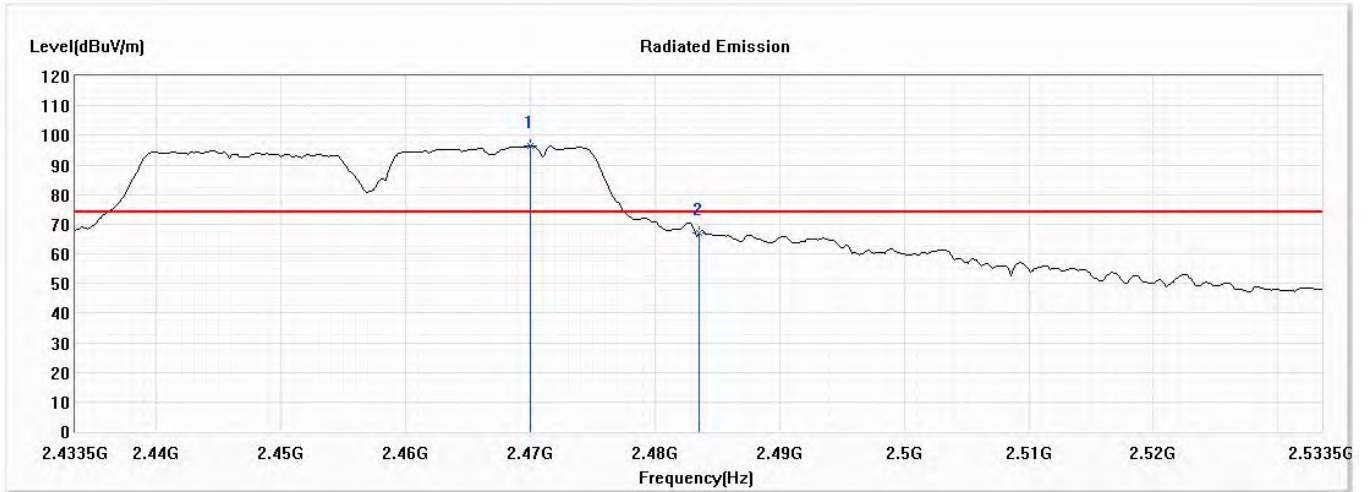


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2470.022	96.39	--	--	83.52	12.87	PK
2	2483.500	66.88	74.00	-7.12	54.08	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Horizontal

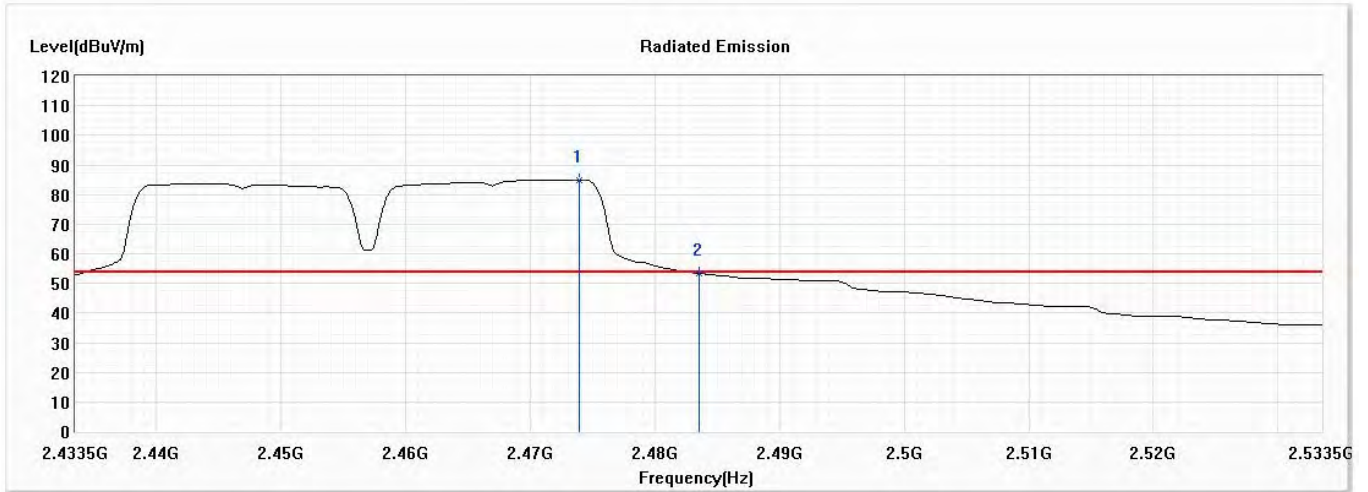


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2473.935	84.87	--	--	72.02	12.85	AV
2	2483.500	53.39	54.00	-0.61	40.59	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Vertical

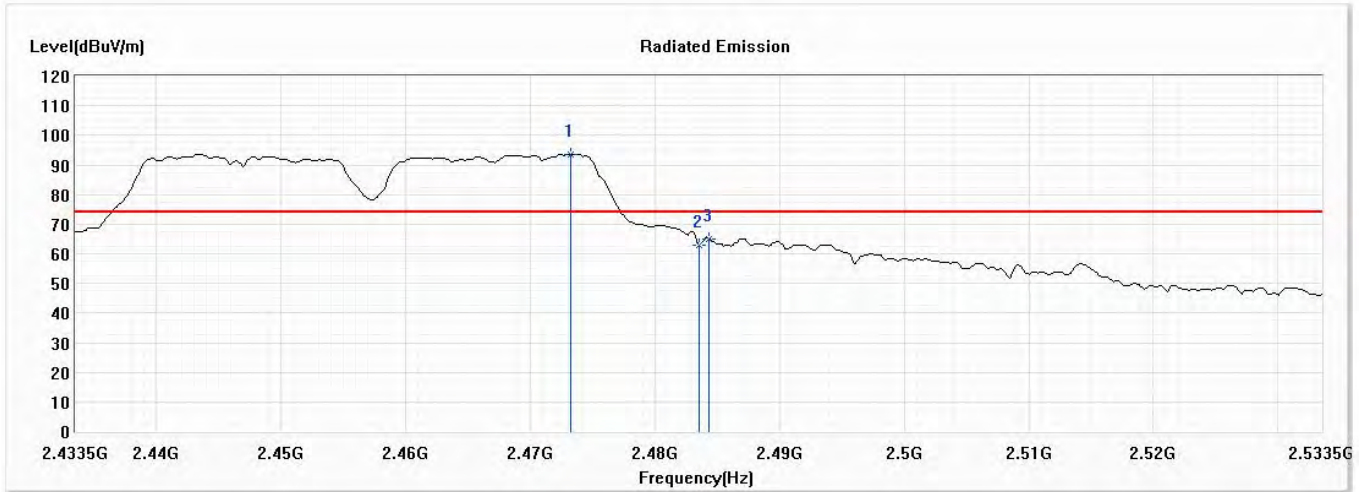


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2473.210	93.69	--	--	80.84	12.85	PK
2	2483.500	62.83	74.00	-11.17	50.03	12.80	PK
3	2484.370	65.04	74.00	-8.96	52.25	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/20
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Vertical

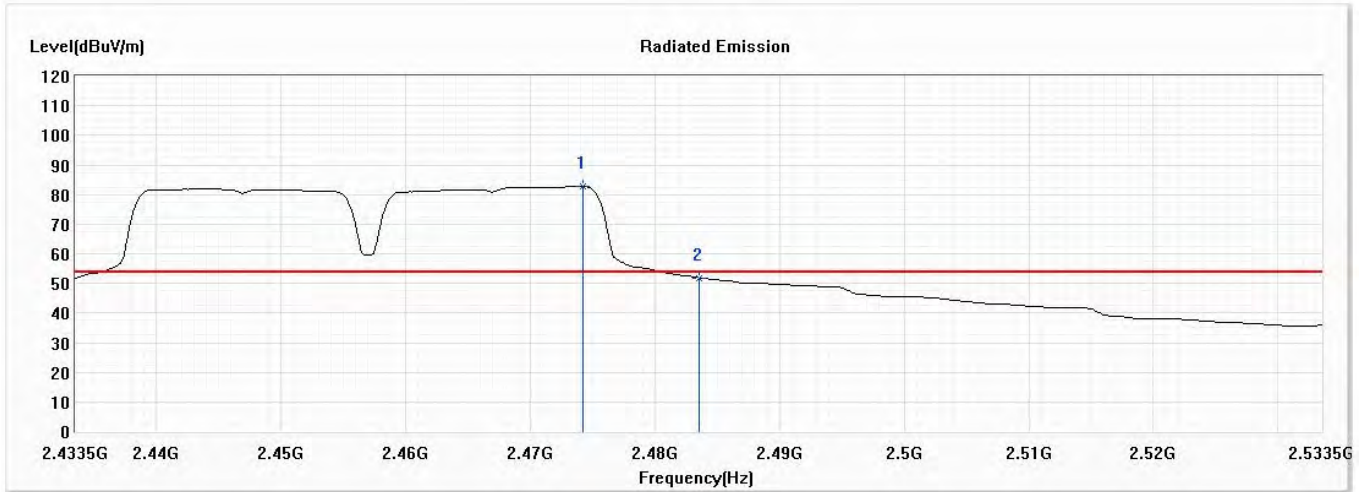


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2474.225	82.73	--	--	69.89	12.84	AV
2	2483.500	51.92	54.00	-2.08	39.12	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/21
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Horizontal

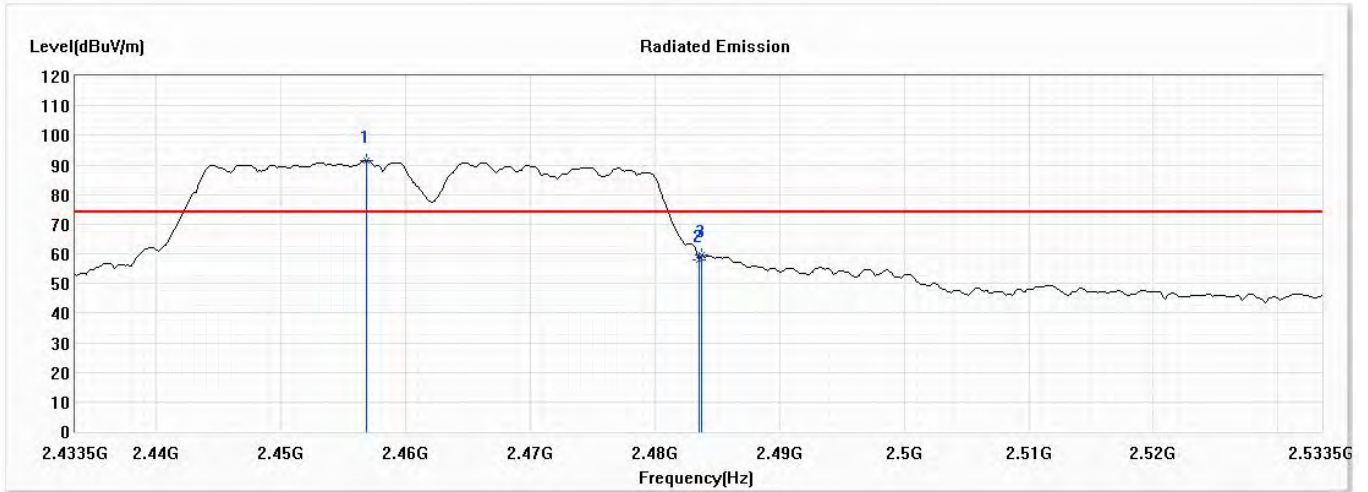


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.833	91.47	--	--	78.53	12.94	PK
2	2483.500	57.93	74.00	-16.07	45.13	12.80	PK
3	2483.790	59.62	74.00	-14.38	46.82	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/21
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Horizontal

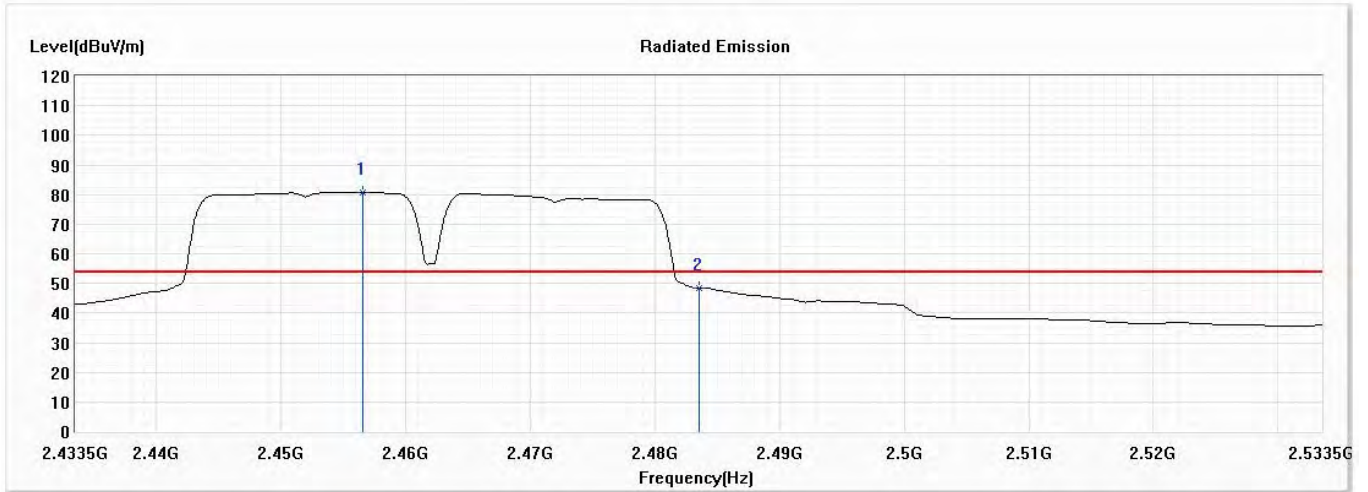


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.543	80.67	--	--	67.73	12.94	AV
2	2483.500	48.31	54.00	-5.69	35.51	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/21
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Vertical

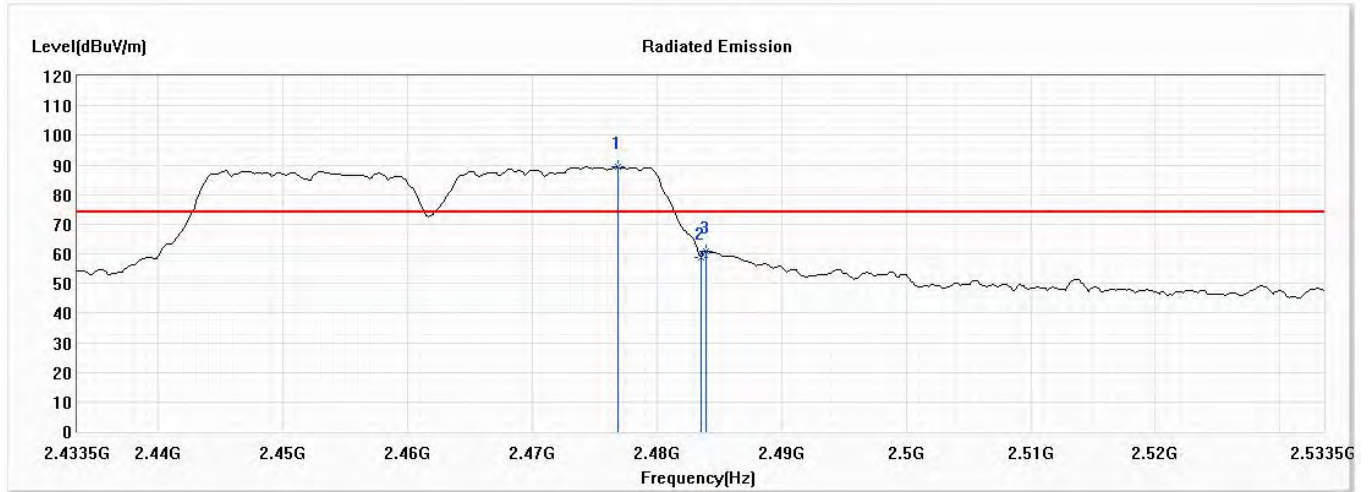


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2476.833	89.25	--	--	76.41	12.84	PK
2	2483.500	58.84	74.00	-15.16	46.04	12.80	PK
3	2483.935	61.01	74.00	-12.99	48.21	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/21
 Test Mode : Mode 4 SISO A: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Vertical

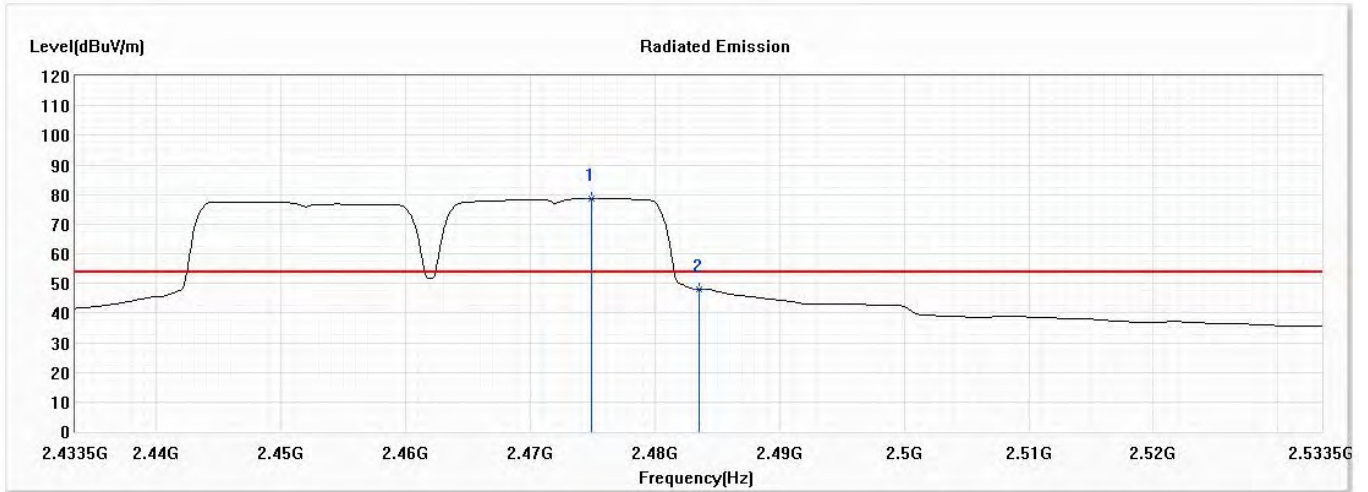


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2474.949	78.73	--	--	65.89	12.84	AV
2	2483.500	47.91	54.00	-6.09	35.11	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2412MHz)

Horizontal

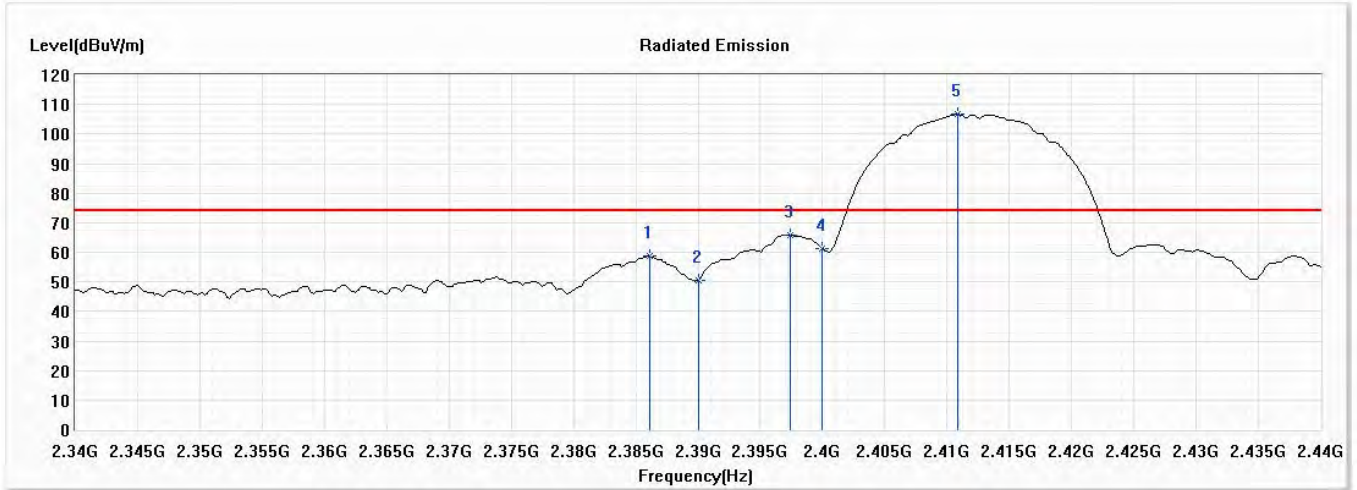


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.087	58.58	74.00	-15.42	46.01	12.57	PK
2	2390.000	50.62	74.00	-23.38	38.07	12.55	PK
3	2397.391	65.87	--	--	53.33	12.54	PK
4	2400.000	61.29	--	--	48.76	12.53	PK
! 5	2410.870	106.57	--	--	93.95	12.62	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2412MHz)

Horizontal

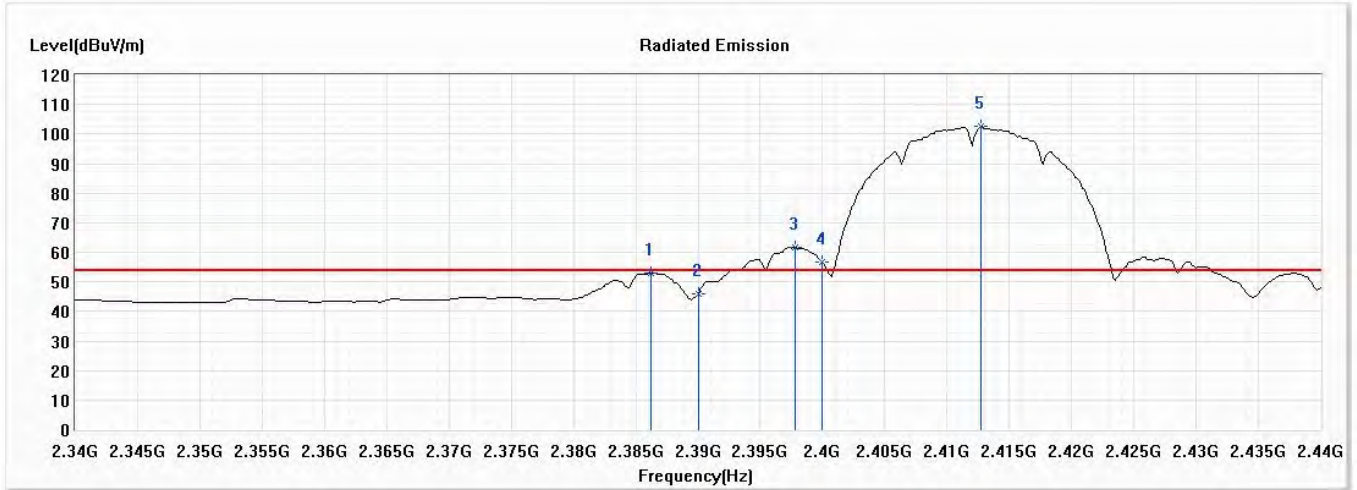


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.232	53.05	54.00	-0.95	40.48	12.57	AV
2	2390.000	46.13	54.00	-7.87	33.58	12.55	AV
! 3	2397.826	61.71	--	--	49.17	12.54	AV
! 4	2400.000	56.68	--	--	44.15	12.53	AV
! 5	2412.754	102.46	--	--	89.83	12.63	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2412MHz)

Vertical

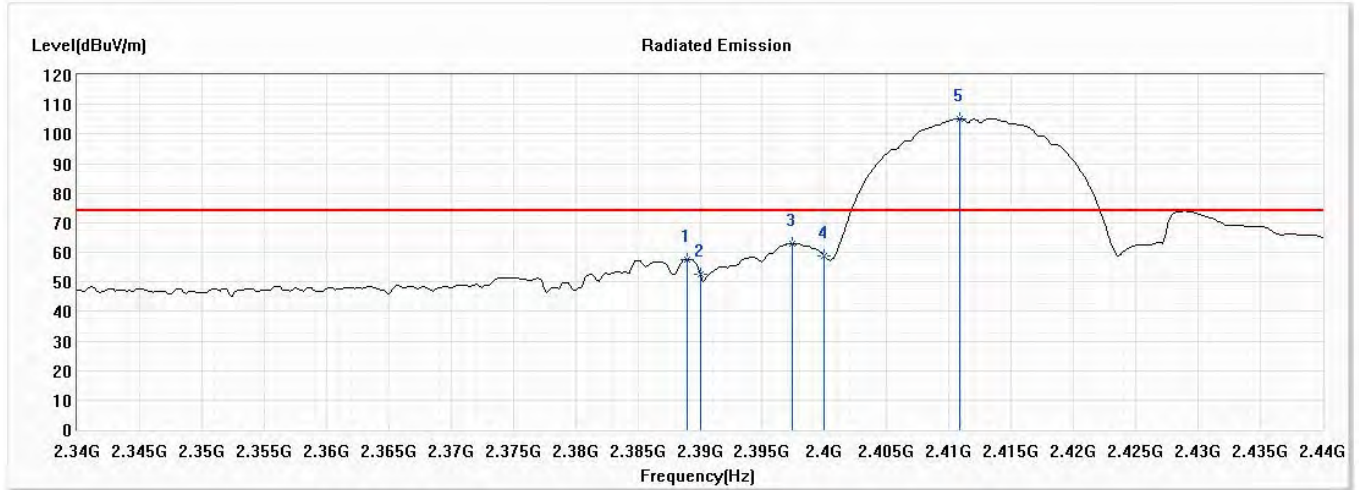


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.986	57.67	74.00	-16.33	45.11	12.56	PK
2	2390.000	52.66	74.00	-21.34	40.11	12.55	PK
3	2397.391	62.92	--	--	50.38	12.54	PK
4	2400.000	58.67	--	--	46.14	12.53	PK
! 5	2410.870	105.14	--	--	92.52	12.62	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2412MHz)

Vertical

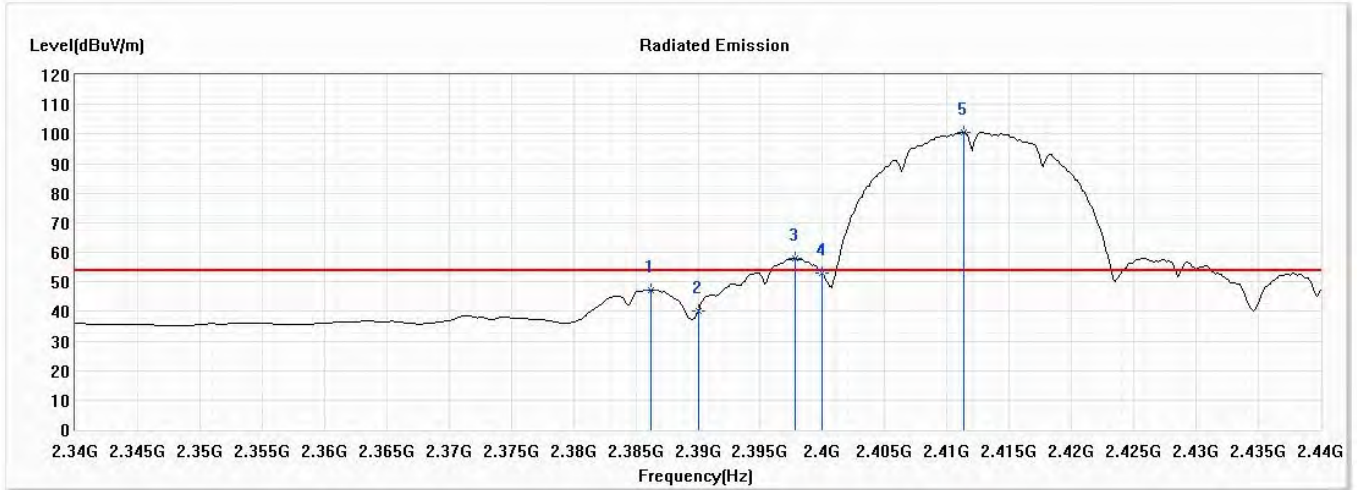


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.232	47.37	54.00	-6.63	34.80	12.57	AV
2	2390.000	40.08	54.00	-13.92	27.53	12.55	AV
! 3	2397.826	57.85	--	--	45.31	12.54	AV
4	2400.000	52.89	--	--	40.36	12.53	AV
! 5	2411.304	100.66	--	--	88.04	12.62	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2462MHz)

Horizontal

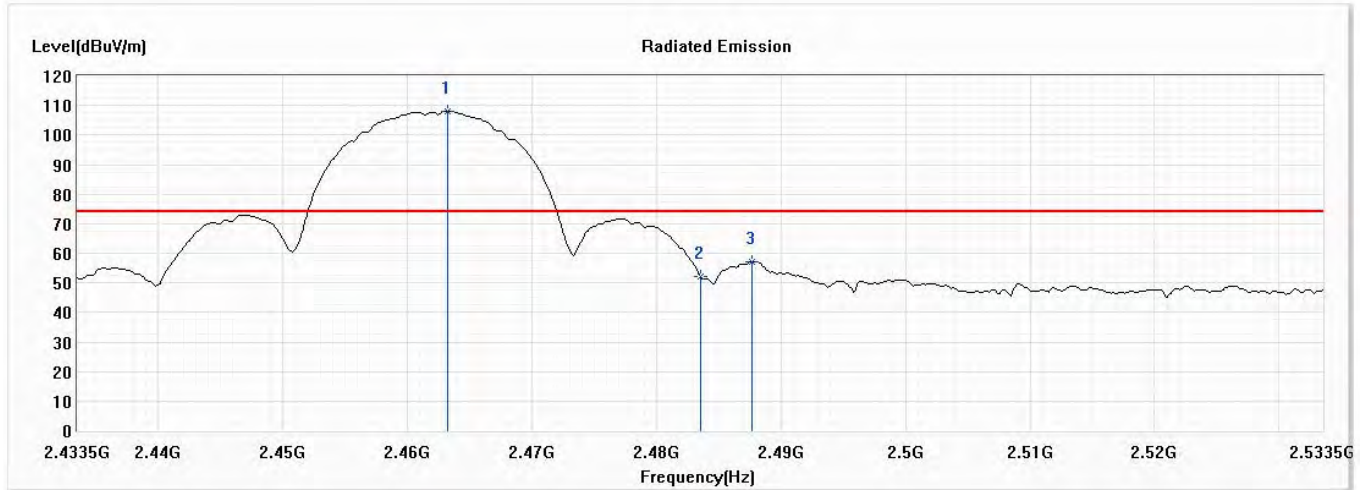


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2463.210	107.99	--	--	95.08	12.91	PK
2	2483.500	52.04	74.00	-21.96	39.24	12.80	PK
3	2487.703	57.16	74.00	-16.84	44.38	12.78	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2462MHz)

Horizontal

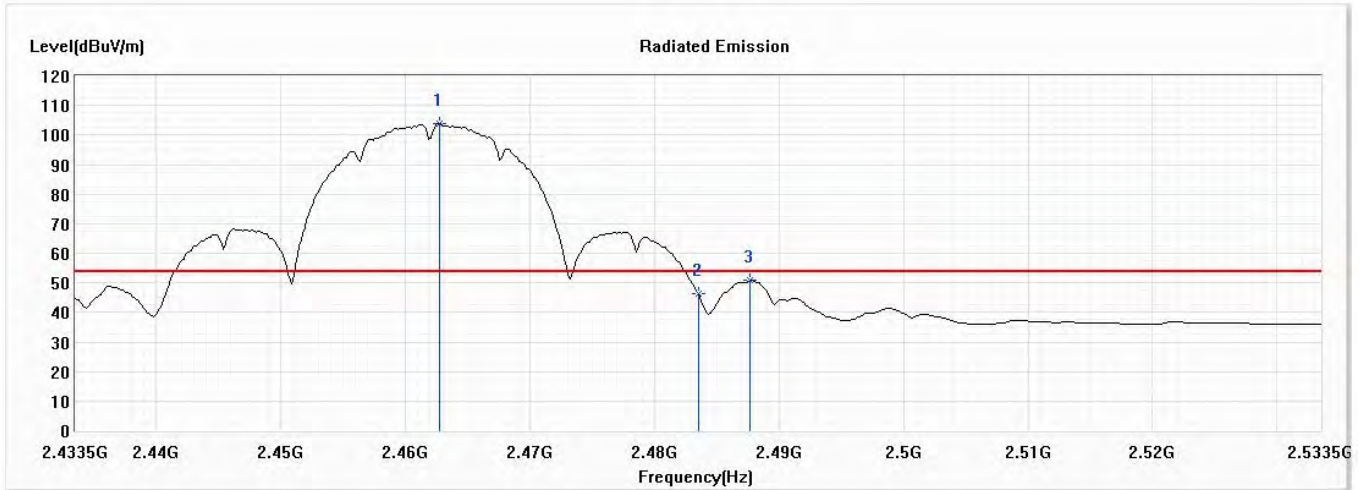


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.775	103.77	--	--	90.86	12.91	AV
2	2483.500	46.40	54.00	-7.60	33.60	12.80	AV
3	2487.703	50.73	54.00	-3.27	37.95	12.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2462MHz)

Vertical

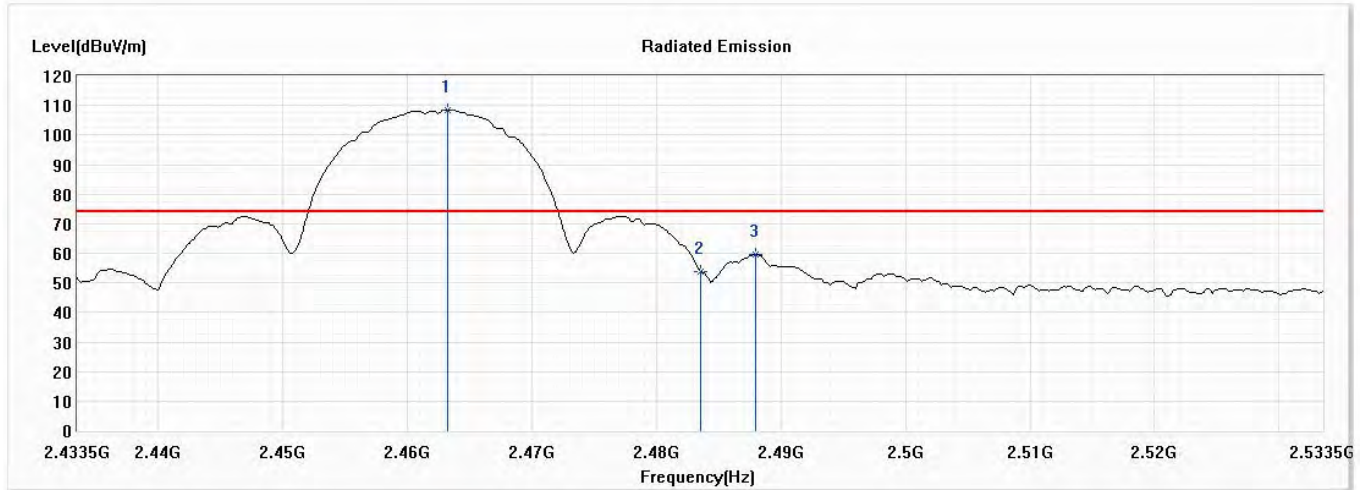


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2463.210	108.61	--	--	95.70	12.91	PK
2	2483.500	53.71	74.00	-20.29	40.91	12.80	PK
3	2487.993	59.60	74.00	-14.40	46.82	12.78	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2462MHz)

Vertical

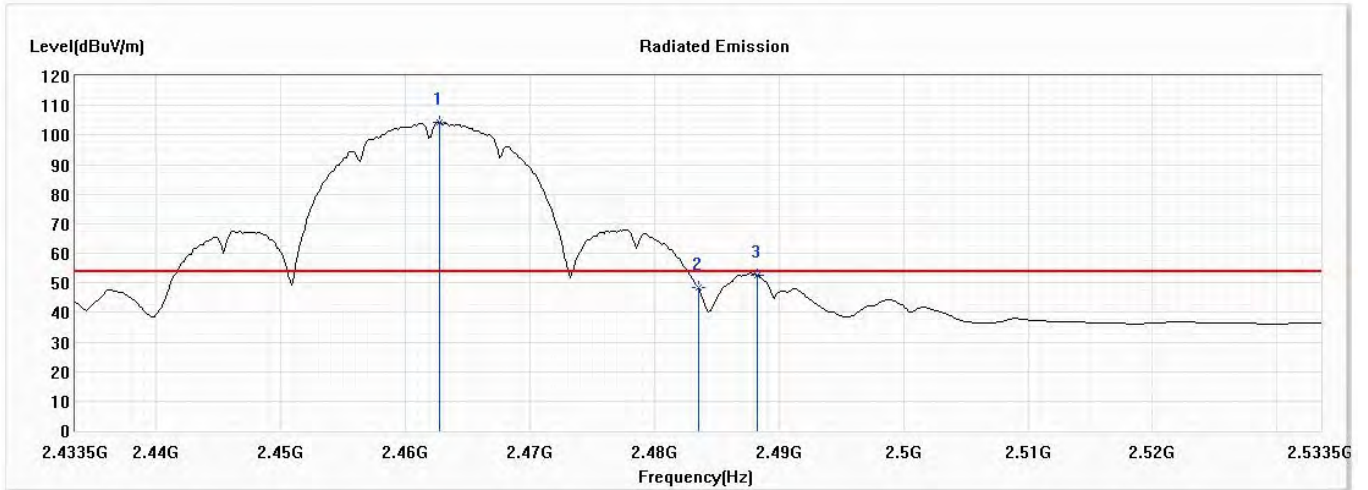


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.775	104.31	--	--	91.40	12.91	AV
2	2483.500	48.32	54.00	-5.68	35.52	12.80	AV
3	2488.283	52.67	54.00	-1.33	39.89	12.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2467MHz)

Horizontal

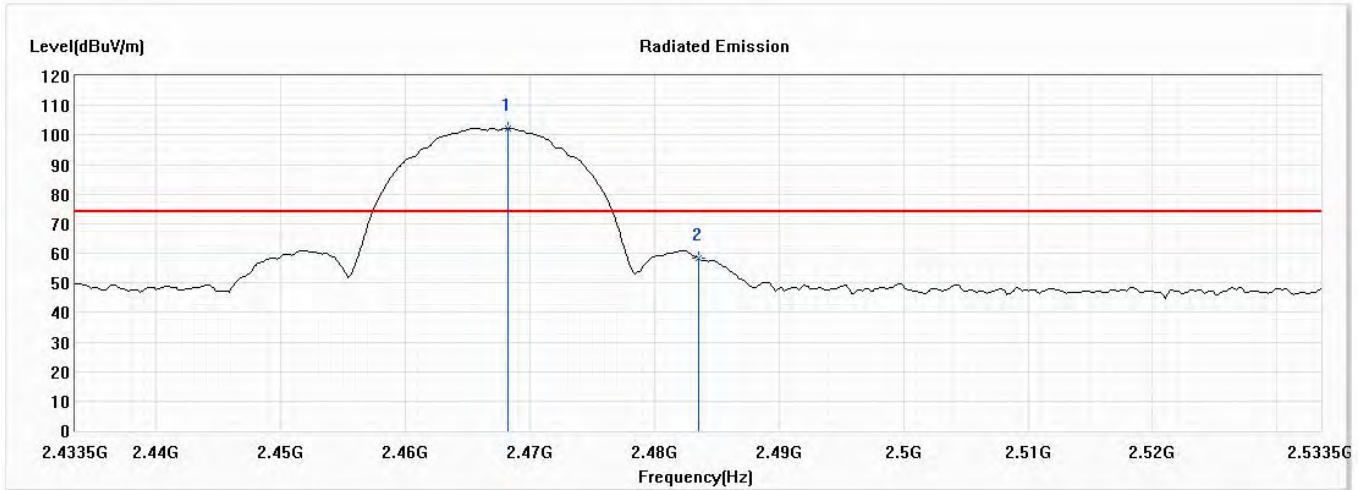


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2468.283	102.39	--	--	89.50	12.89	PK
2	2483.500	58.44	74.00	-15.56	45.64	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2467MHz)

Horizontal

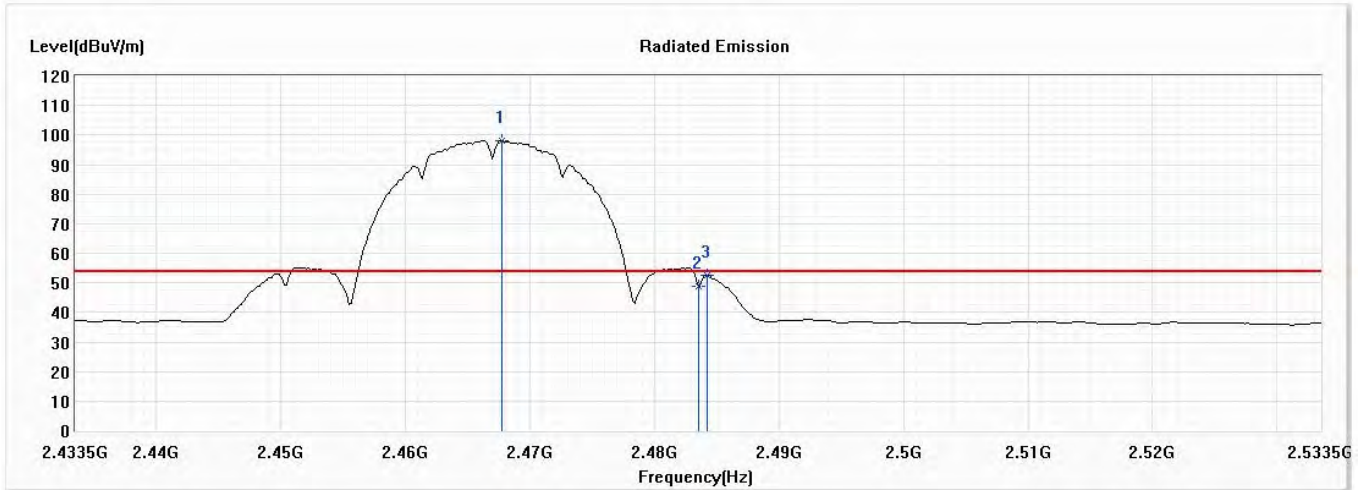


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2467.703	98.23	--	--	85.34	12.89	AV
2	2483.500	49.02	54.00	-4.98	36.22	12.80	AV
3	2484.225	52.57	54.00	-1.43	39.78	12.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2467MHz)

Vertical

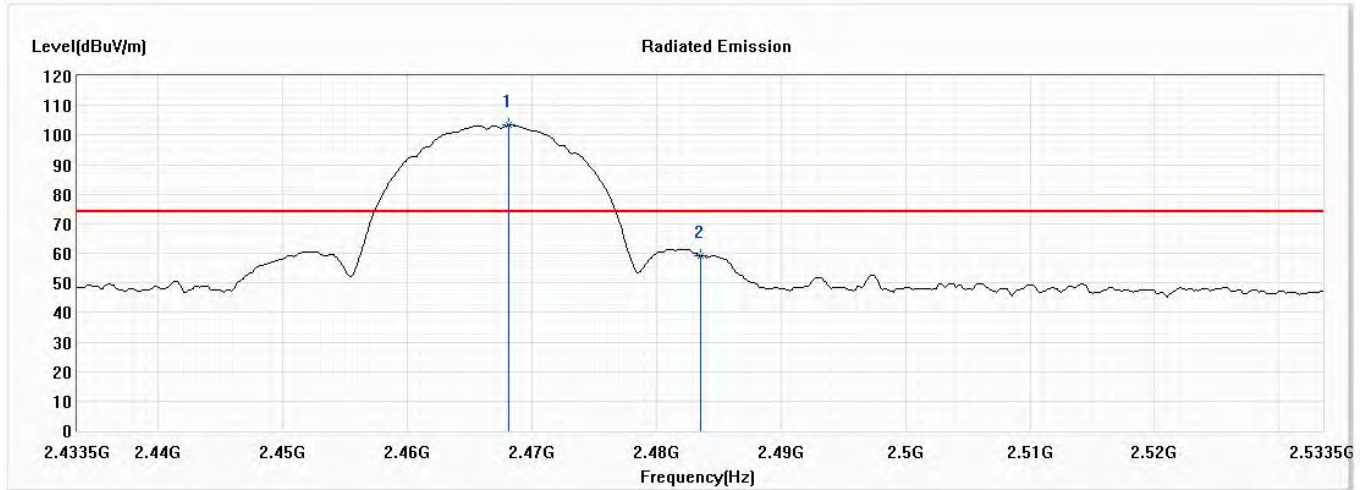


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2468.138	103.30	--	--	90.41	12.89	PK
2	2483.500	59.31	74.00	-14.69	46.51	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2467MHz)

Vertical

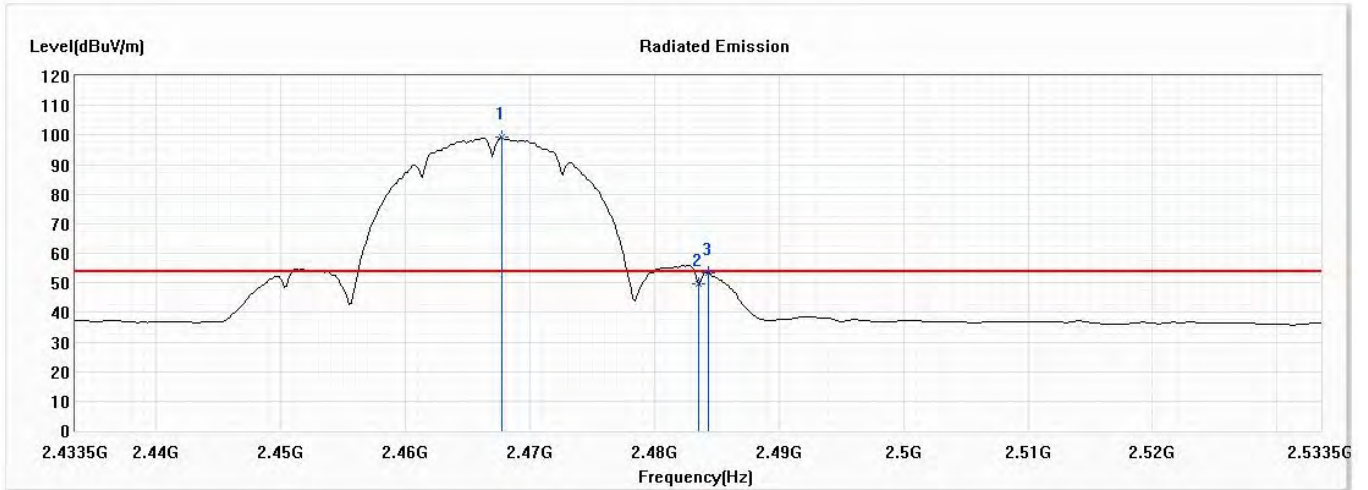


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2467.703	99.13	--	--	86.24	12.89	AV
2	2483.500	49.80	54.00	-4.20	37.00	12.80	AV
3	2484.370	53.38	54.00	-0.62	40.59	12.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2472MHz)

Horizontal

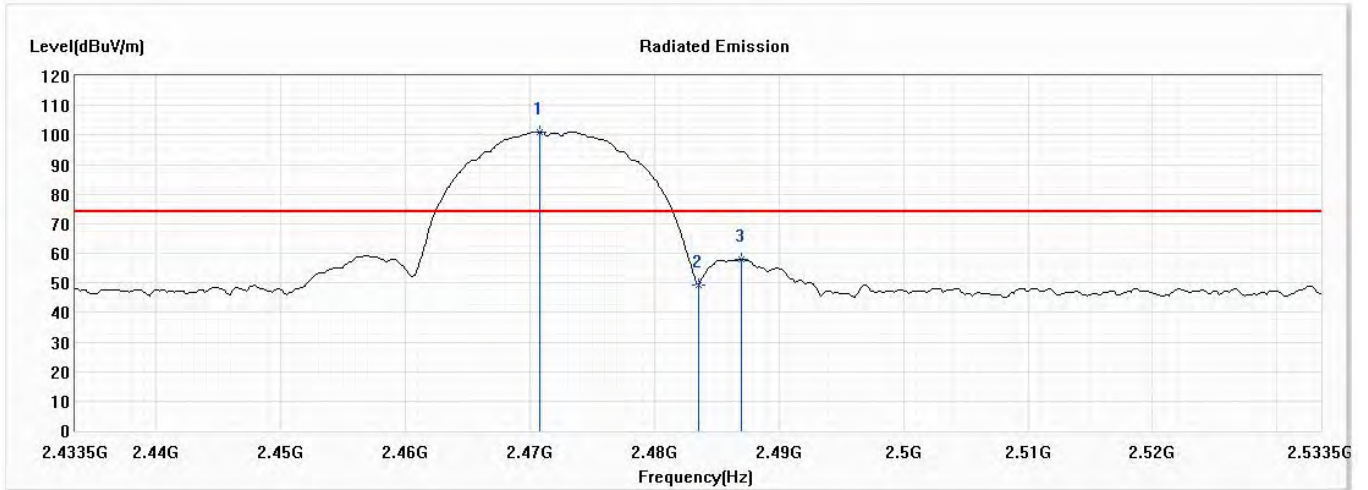


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2470.746	101.08	--	--	88.21	12.87	PK
2	2483.500	49.39	74.00	-24.61	36.59	12.80	PK
3	2486.978	57.86	74.00	-16.14	45.07	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2472MHz)

Horizontal

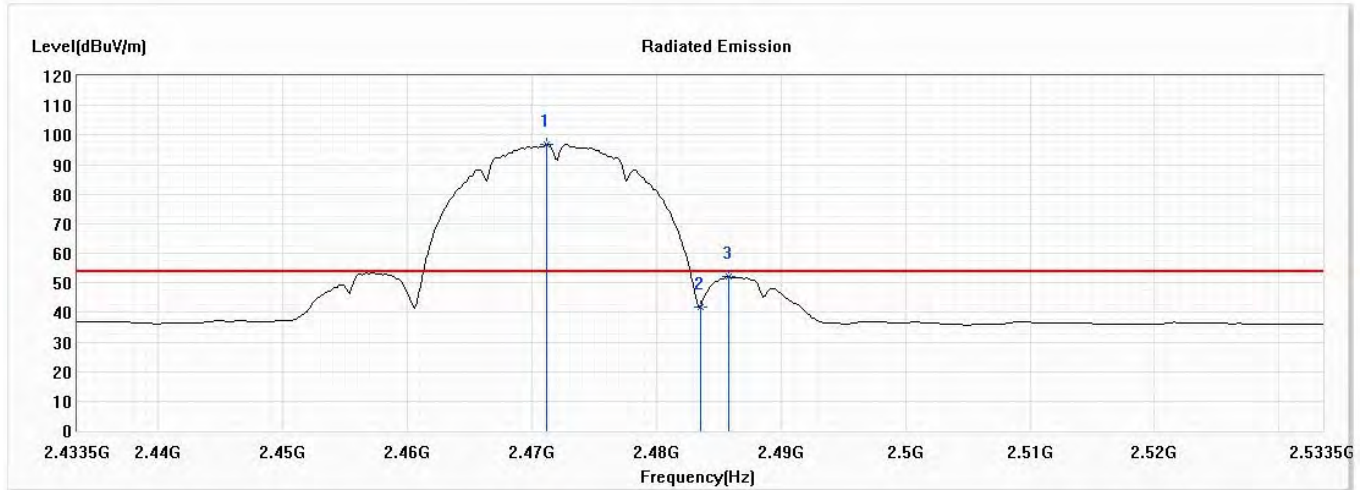


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2471.181	96.75	--	--	83.89	12.86	AV
2	2483.500	41.78	54.00	-12.22	28.98	12.80	AV
3	2485.819	52.04	54.00	-1.96	39.24	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2472MHz)

Vertical

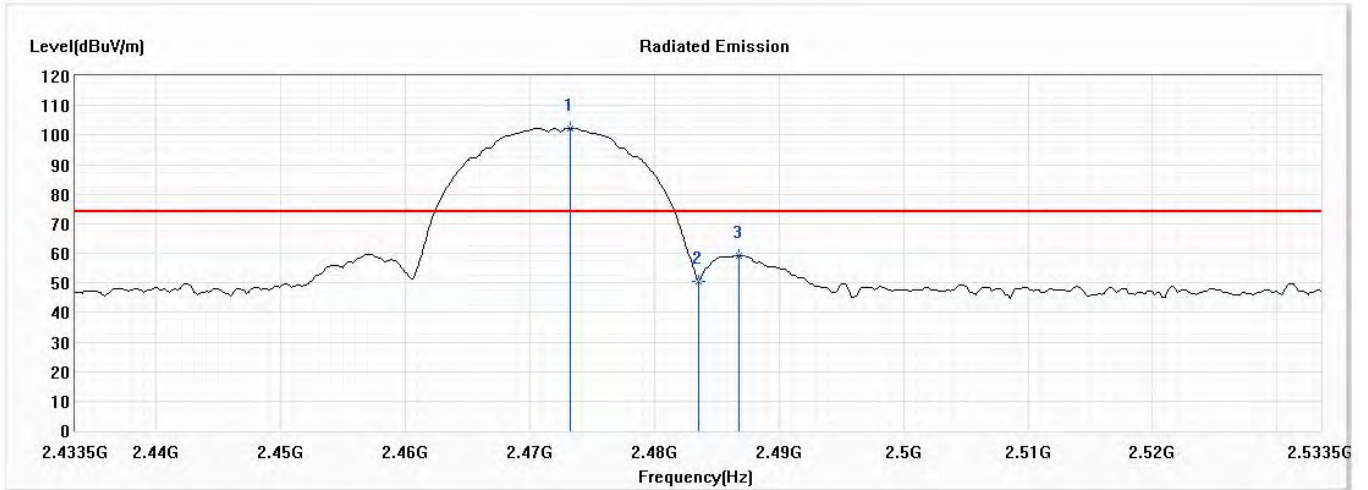


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2473.210	102.25	--	--	89.40	12.85	PK
2	2483.500	50.45	74.00	-23.55	37.65	12.80	PK
3	2486.833	59.27	74.00	-14.73	46.48	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 5 SISO B: Transmit (802.11b_1Mbps) (2472MHz)

Vertical

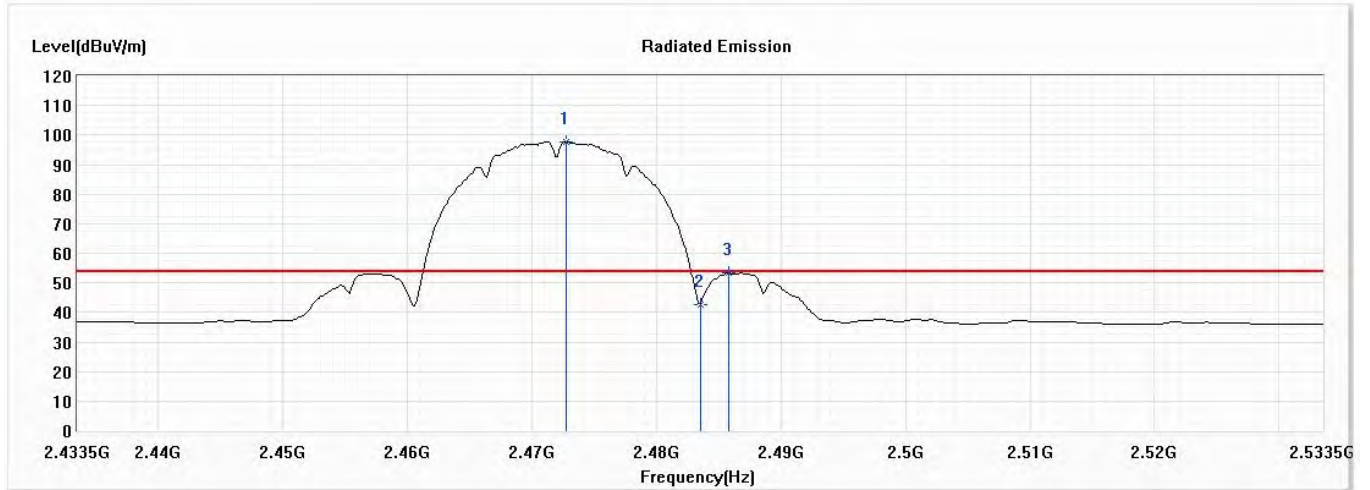


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2472.775	97.84	--	--	84.99	12.85	AV
2	2483.500	42.72	54.00	-11.28	29.92	12.80	AV
3	2485.819	53.30	54.00	-0.70	40.50	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2412MHz)

Horizontal

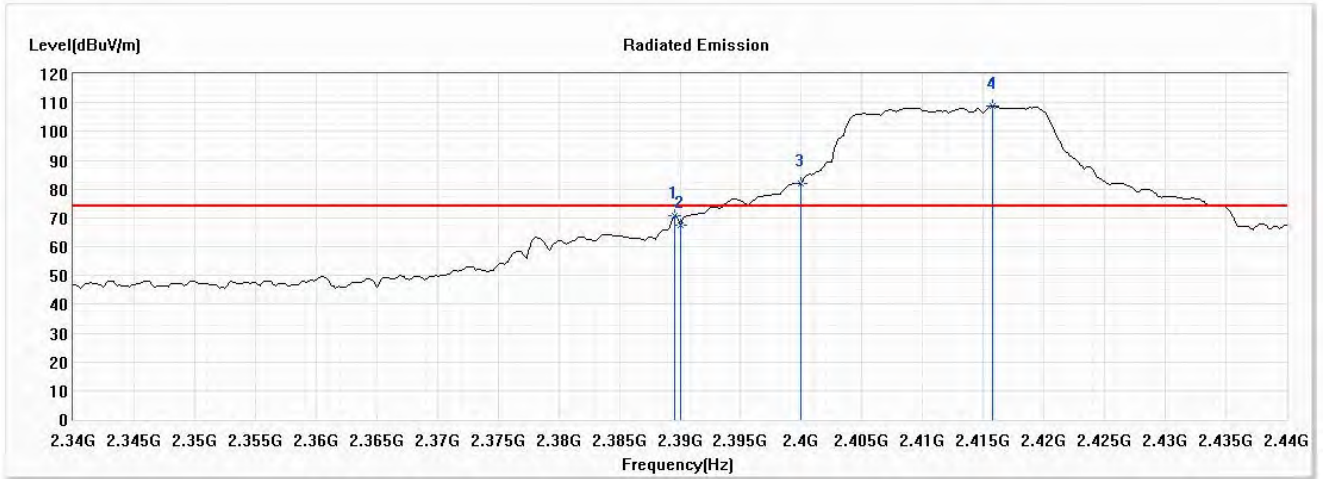


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2389.565	70.62	74.00	-3.38	58.06	12.56	PK
2	2390.000	67.25	74.00	-6.75	54.70	12.55	PK
! 3	2400.000	82.08	--	--	69.55	12.53	PK
! 4	2415.797	108.97	--	--	96.30	12.67	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2412MHz)

Horizontal

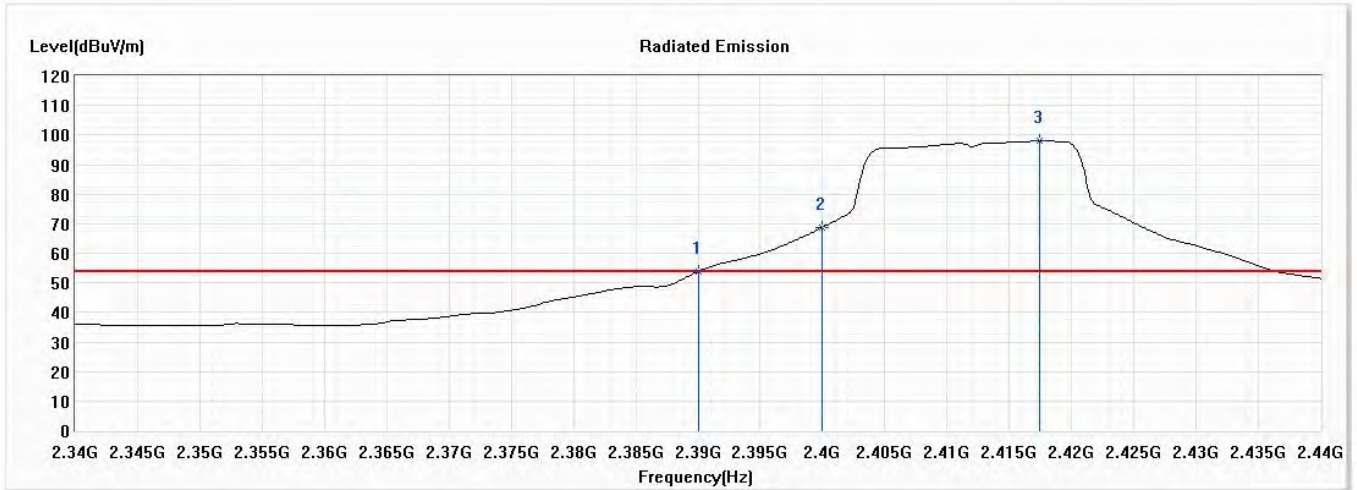


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	53.71	54.00	-0.29	41.16	12.55	AV
! 2	2400.000	68.78	--	--	56.25	12.53	AV
! 3	2417.391	97.99	--	--	85.31	12.68	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2412MHz)

Vertical

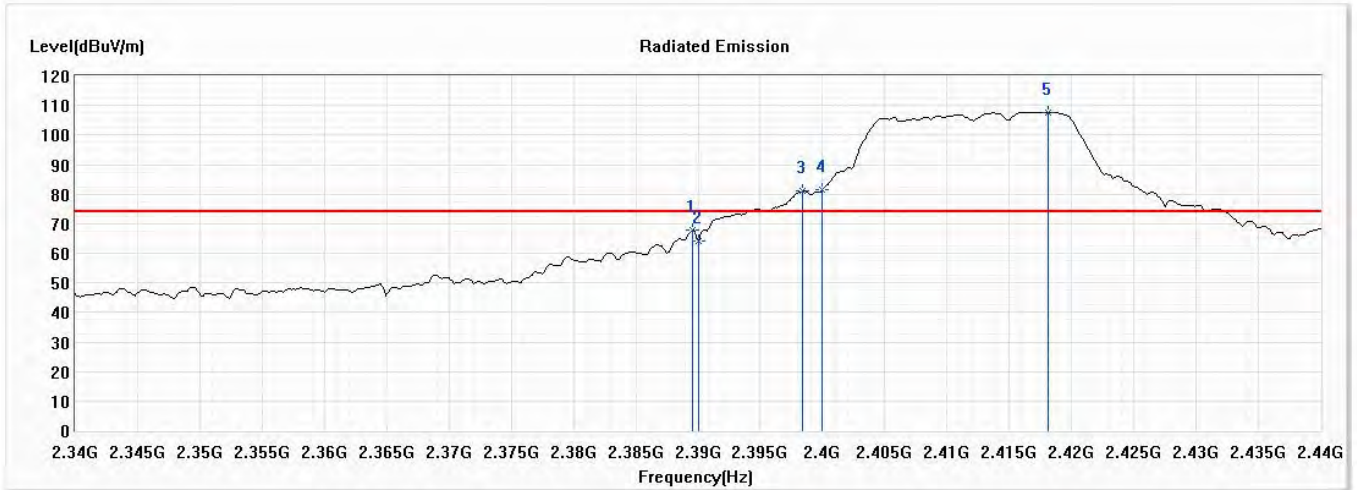


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2389.565	67.74	74.00	-6.26	55.18	12.56	PK
2	2390.000	64.11	74.00	-9.89	51.56	12.55	PK
! 3	2398.406	80.96	--	--	68.42	12.54	PK
! 4	2400.000	81.51	--	--	68.98	12.53	PK
! 5	2418.116	107.76	--	--	95.08	12.68	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2412MHz)

Vertical

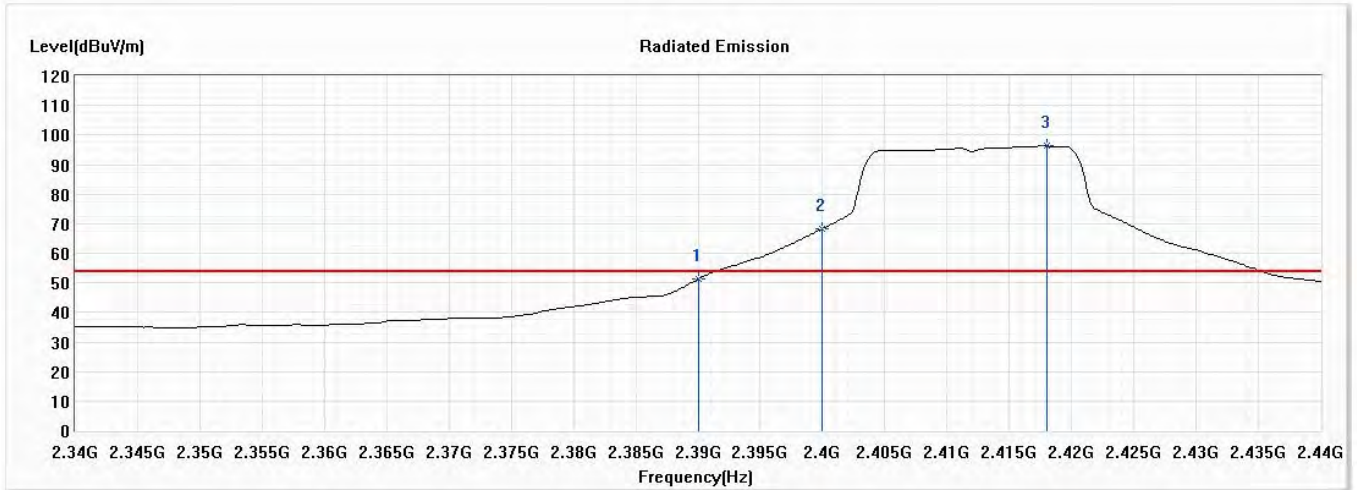


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	51.23	54.00	-2.77	38.68	12.55	AV
! 2	2400.000	68.25	--	--	55.72	12.53	AV
! 3	2417.971	96.23	--	--	83.55	12.68	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2462MHz)

Horizontal

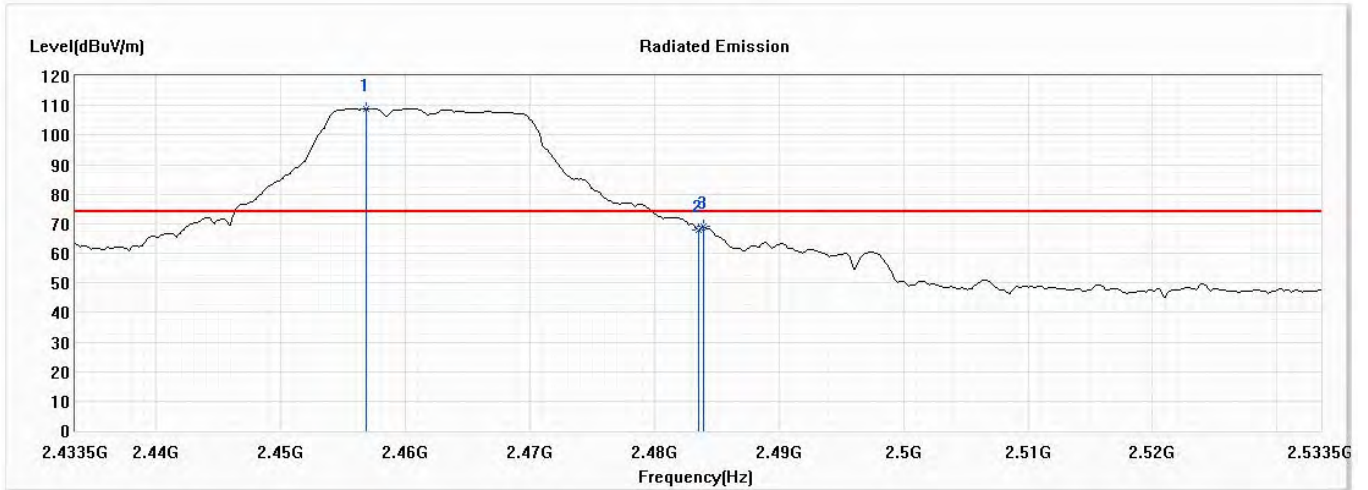


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.833	109.01	--	--	96.07	12.94	PK
2	2483.500	67.68	74.00	-6.32	54.88	12.80	PK
3	2483.935	68.94	74.00	-5.06	56.14	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2462MHz)

Horizontal

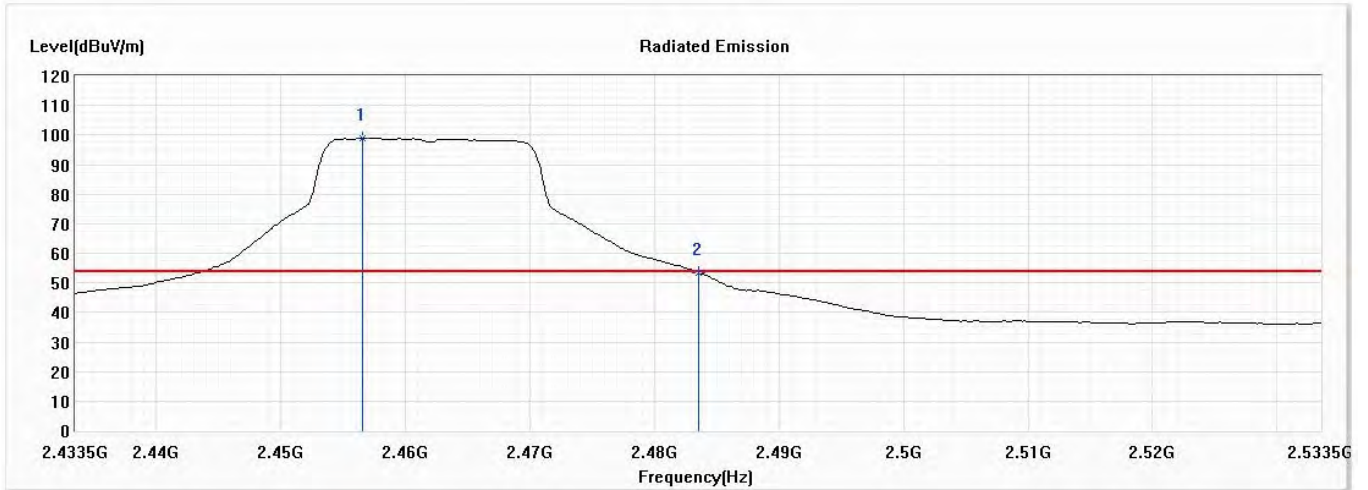


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.543	98.90	--	--	85.96	12.94	AV
2	2483.500	53.42	54.00	-0.58	40.62	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2462MHz)

Vertical

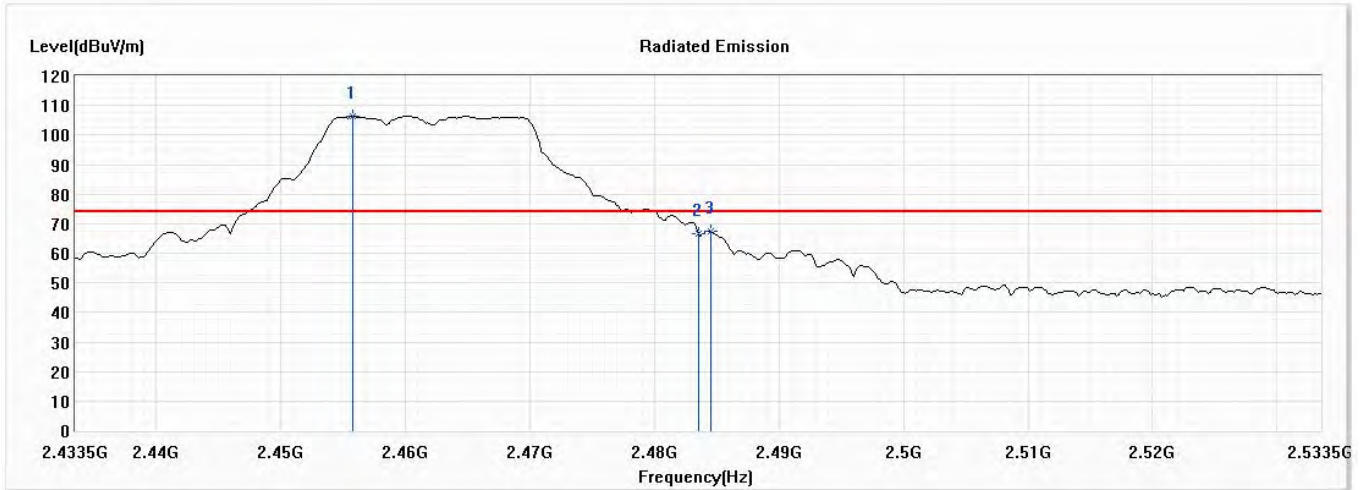


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2455.819	106.28	--	--	93.33	12.95	PK
2	2483.500	66.82	74.00	-7.18	54.02	12.80	PK
3	2484.514	67.27	74.00	-6.73	54.48	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2462MHz)

Vertical

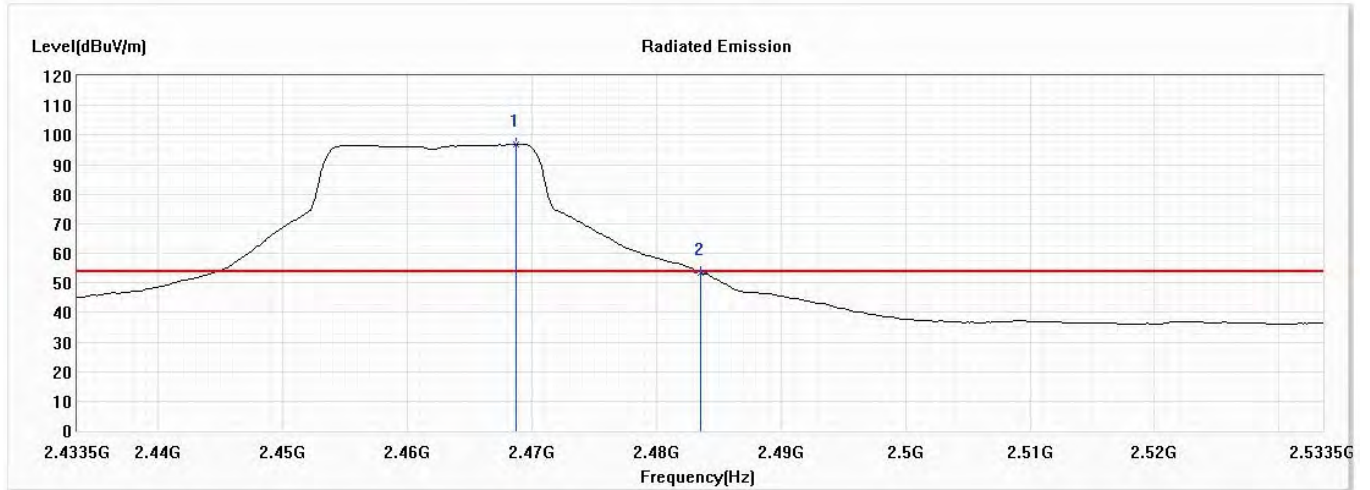


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2468.717	96.84	--	--	83.95	12.89	AV
2	2483.500	53.37	54.00	-0.63	40.57	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2467MHz)

Horizontal

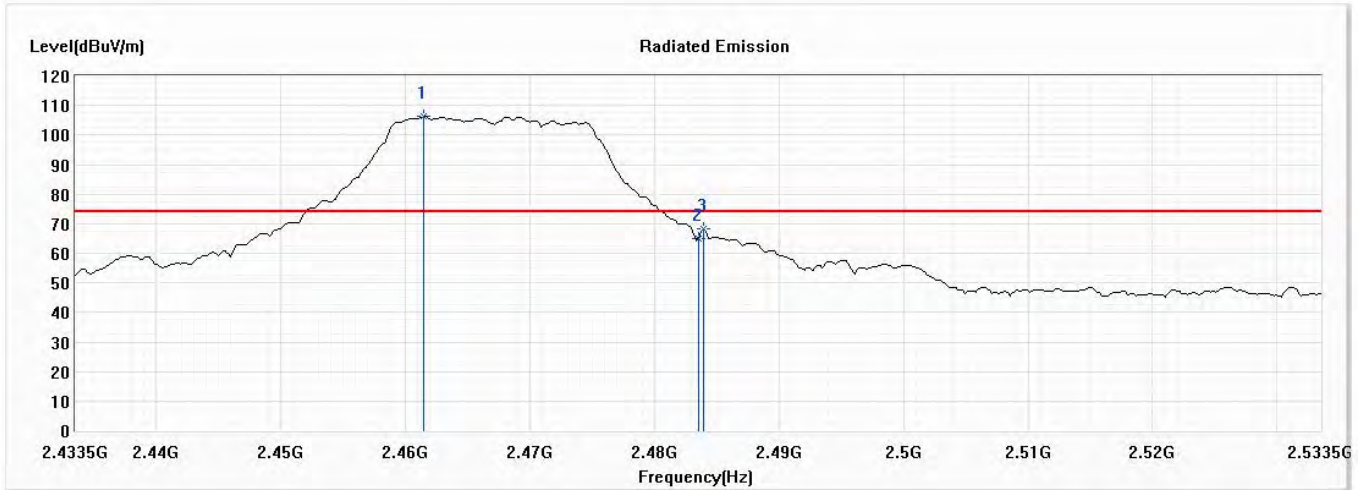


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2461.471	106.24	--	--	93.32	12.92	PK
2	2483.500	65.13	74.00	-8.87	52.33	12.80	PK
3	2483.935	68.07	74.00	-5.93	55.27	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2467MHz)

Horizontal

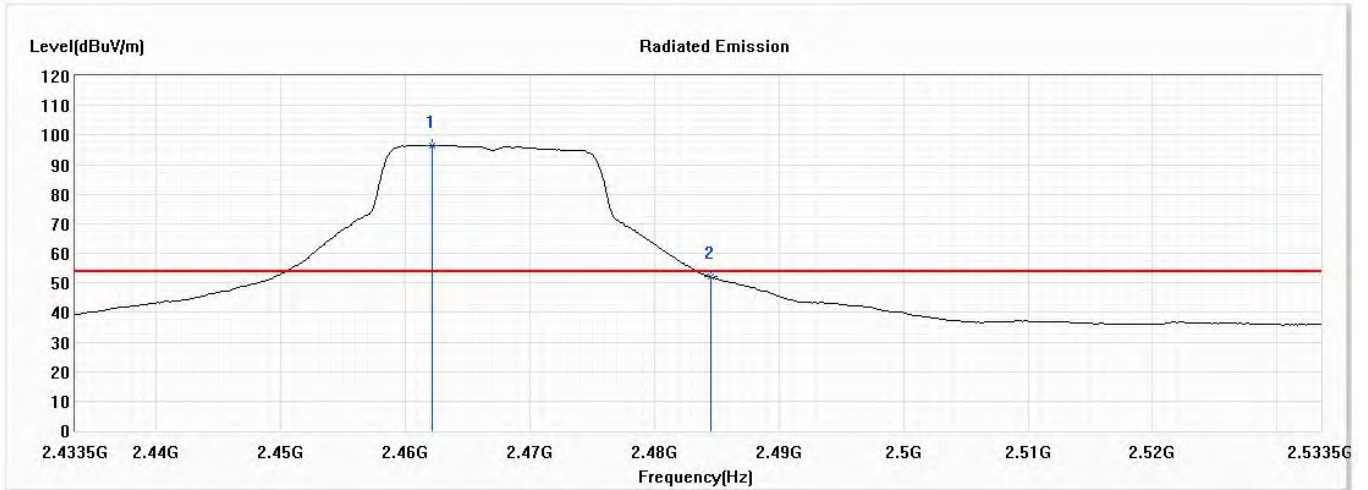


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.196	96.55	--	--	83.63	12.92	AV
2	2484.514	52.03	54.00	-1.97	39.24	12.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2467MHz)

Vertical

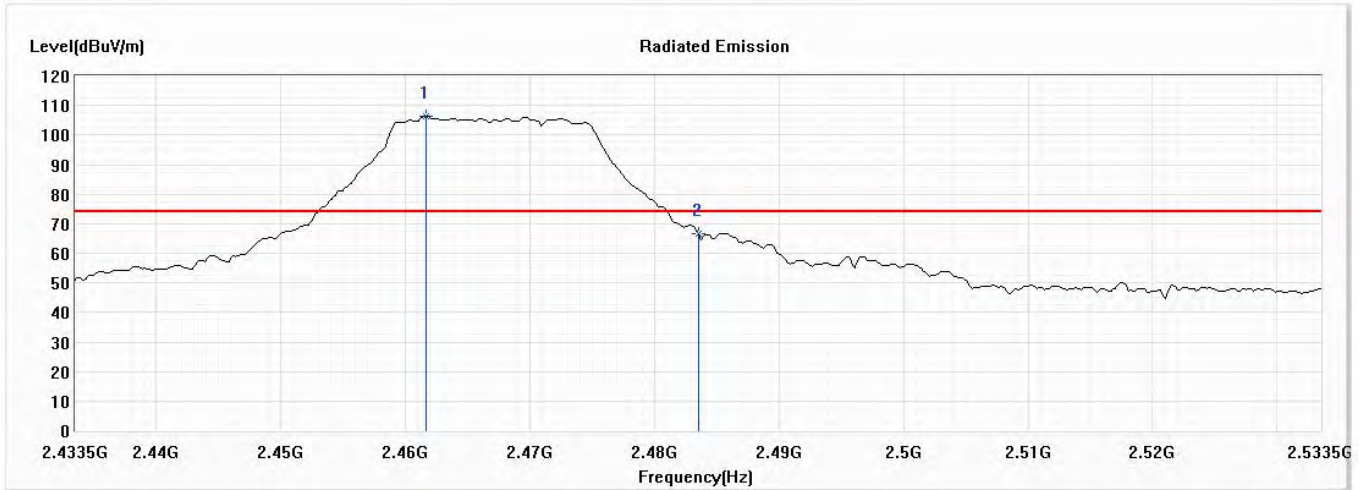


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2461.616	106.50	--	--	93.58	12.92	PK
2	2483.500	66.74	74.00	-7.26	53.94	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2467MHz)

Vertical

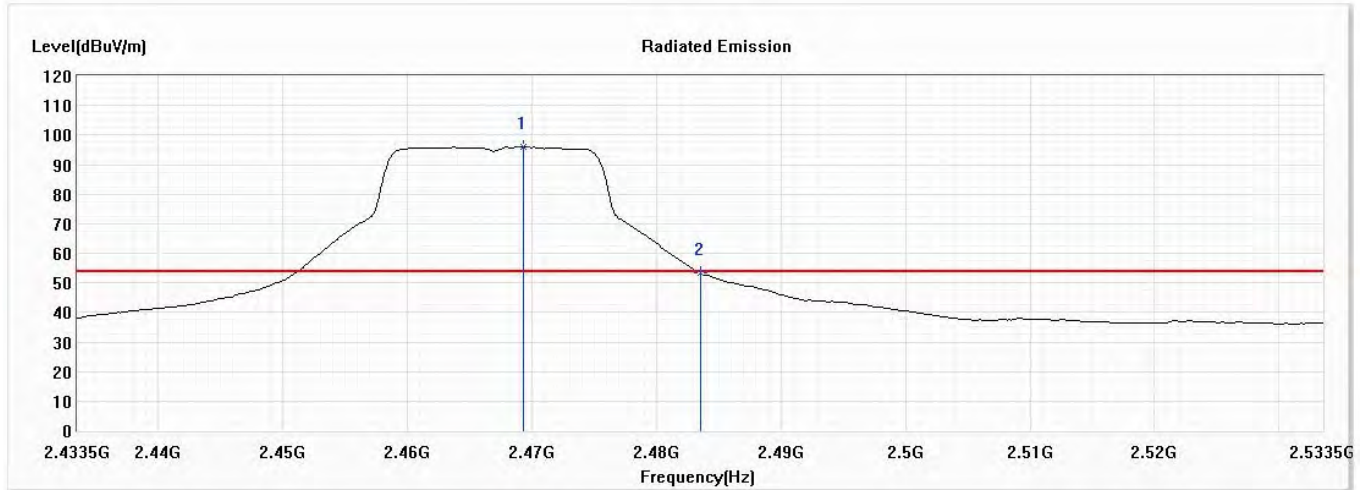


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2469.297	95.86	--	--	82.98	12.88	AV
2	2483.500	53.33	54.00	-0.67	40.53	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2472MHz)

Horizontal

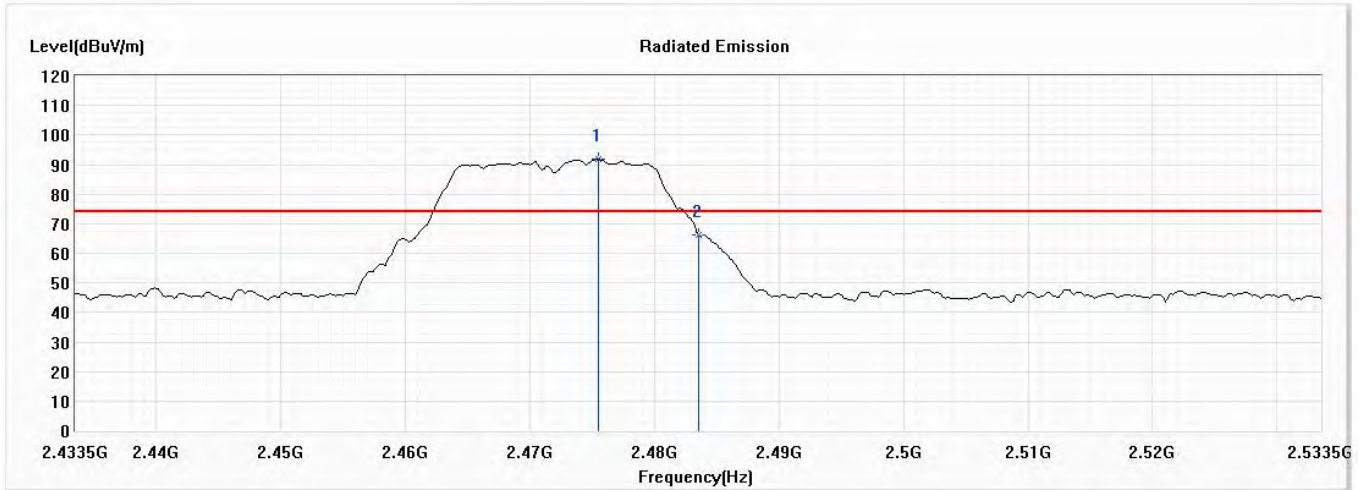


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2475.529	91.75	--	--	78.91	12.84	PK
2	2483.500	66.24	74.00	-7.76	53.44	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2472MHz)

Horizontal

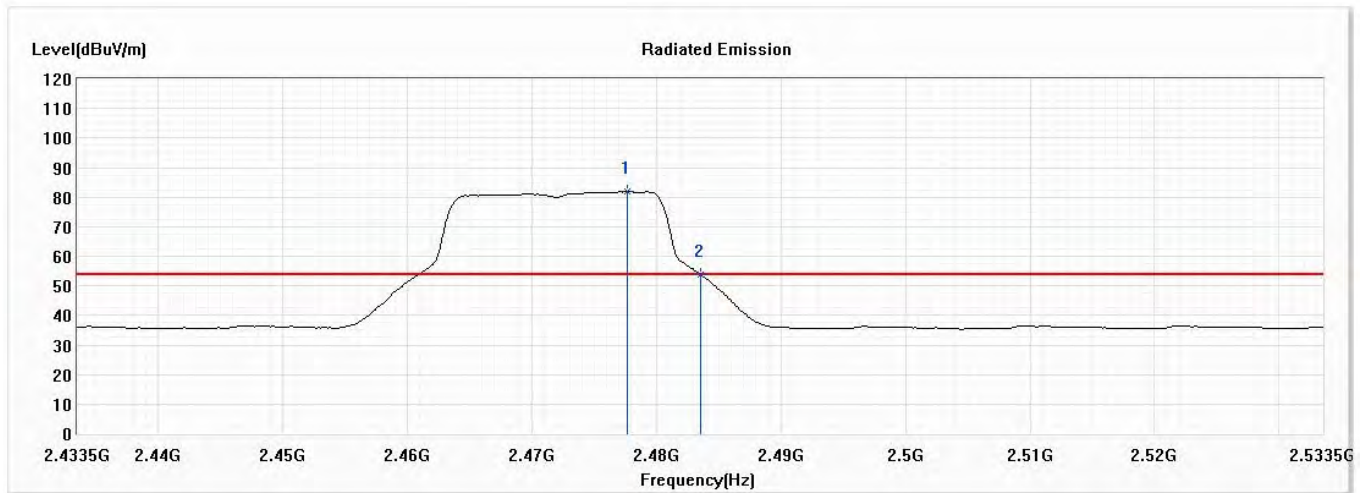


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2477.703	81.86	--	--	69.03	12.83	AV
2	2483.500	53.62	54.00	-0.38	40.82	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2472MHz)

Vertical

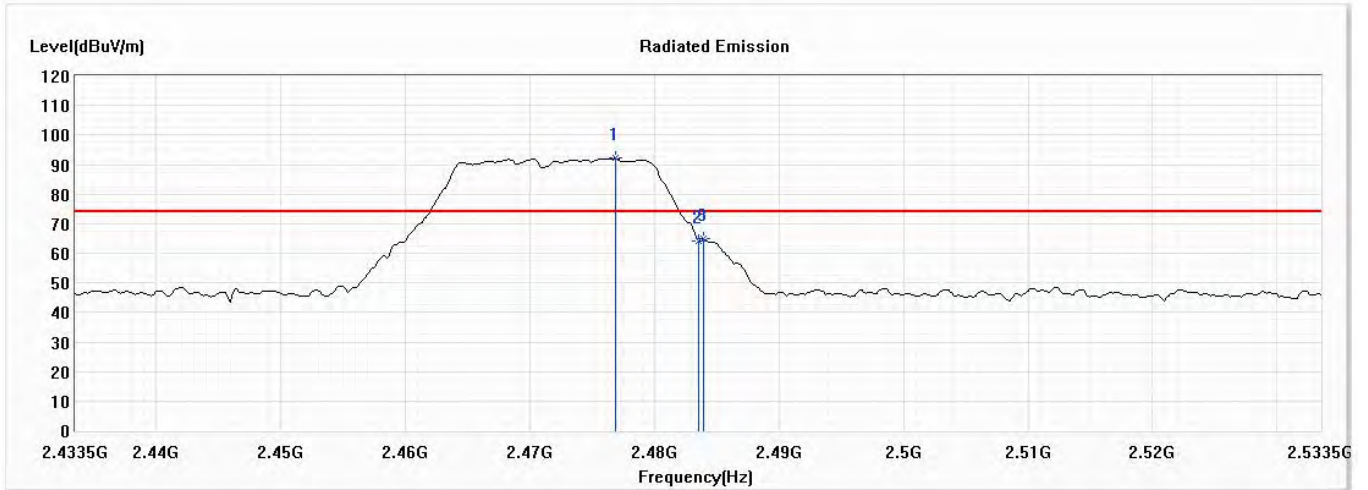


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2476.833	92.10	--	--	79.26	12.84	PK
2	2483.500	64.15	74.00	-9.85	51.35	12.80	PK
3	2483.935	64.98	74.00	-9.02	52.18	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/15
 Test Mode : Mode 6 SISO B: Transmit (802.11g_6Mbps) (2472MHz)

Vertical

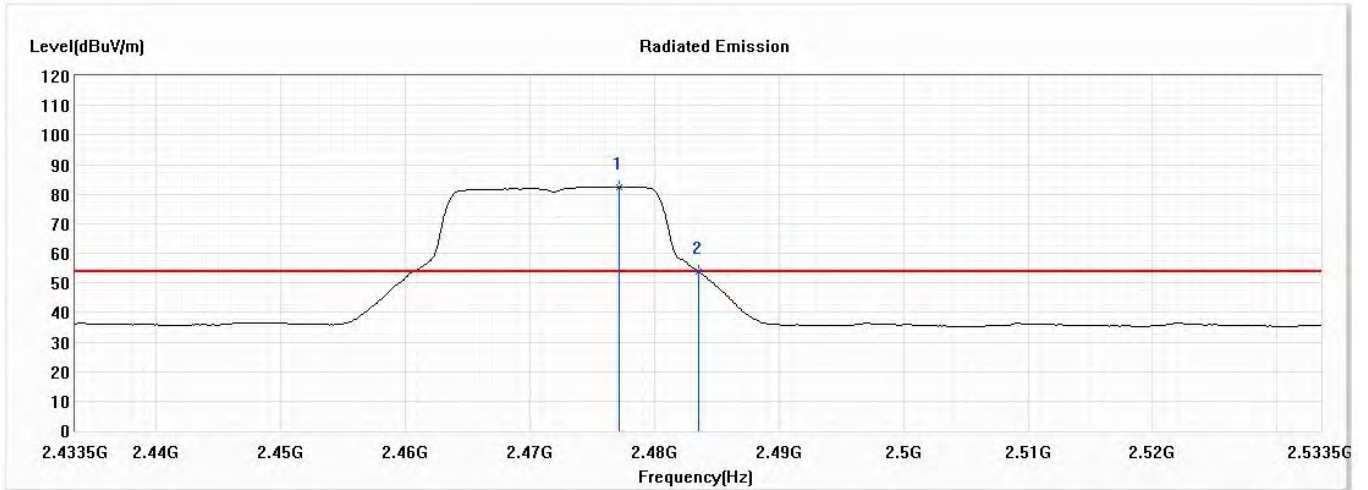


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2477.123	82.55	--	--	69.71	12.84	AV
2	2483.500	53.68	54.00	-0.32	40.88	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2412MHz)

Horizontal

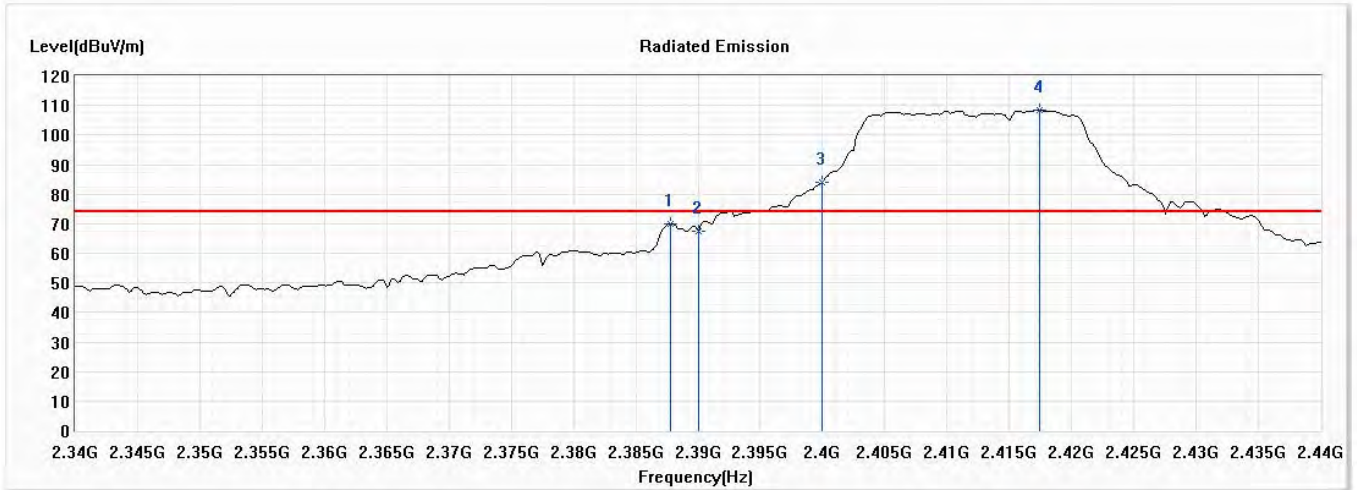


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2387.826	69.80	74.00	-4.20	57.23	12.57	PK
2	2390.000	67.42	74.00	-6.58	54.87	12.55	PK
! 3	2400.000	84.15	--	--	71.62	12.53	PK
! 4	2417.391	108.31	--	--	95.63	12.68	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2412MHz)

Horizontal

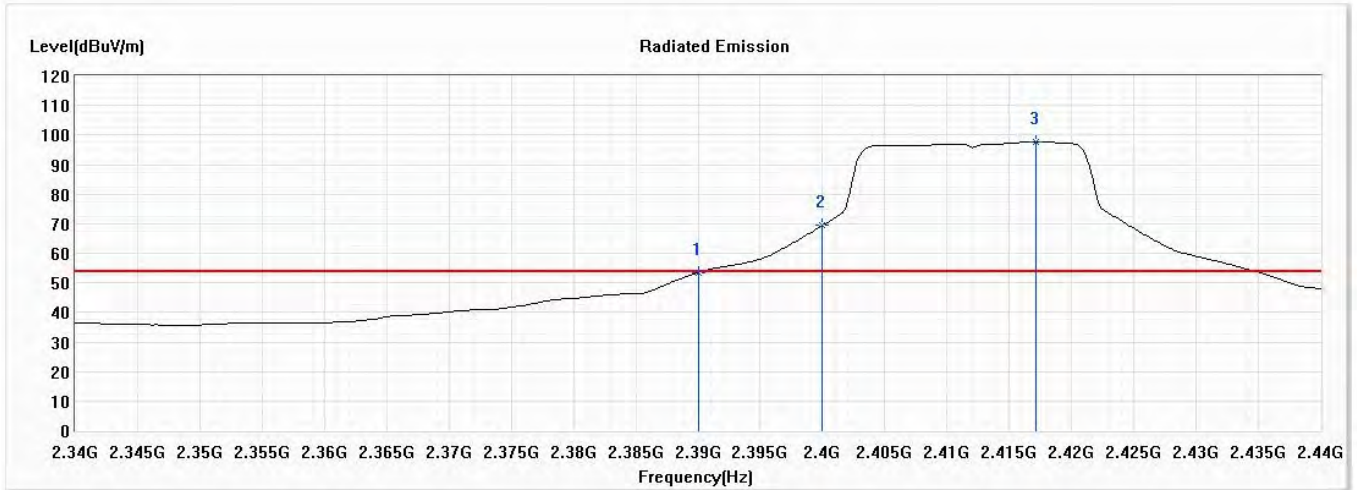


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	53.43	54.00	-0.57	40.88	12.55	AV
! 2	2400.000	69.36	--	--	56.83	12.53	AV
! 3	2417.101	97.65	--	--	84.97	12.68	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2412MHz)

Vertical

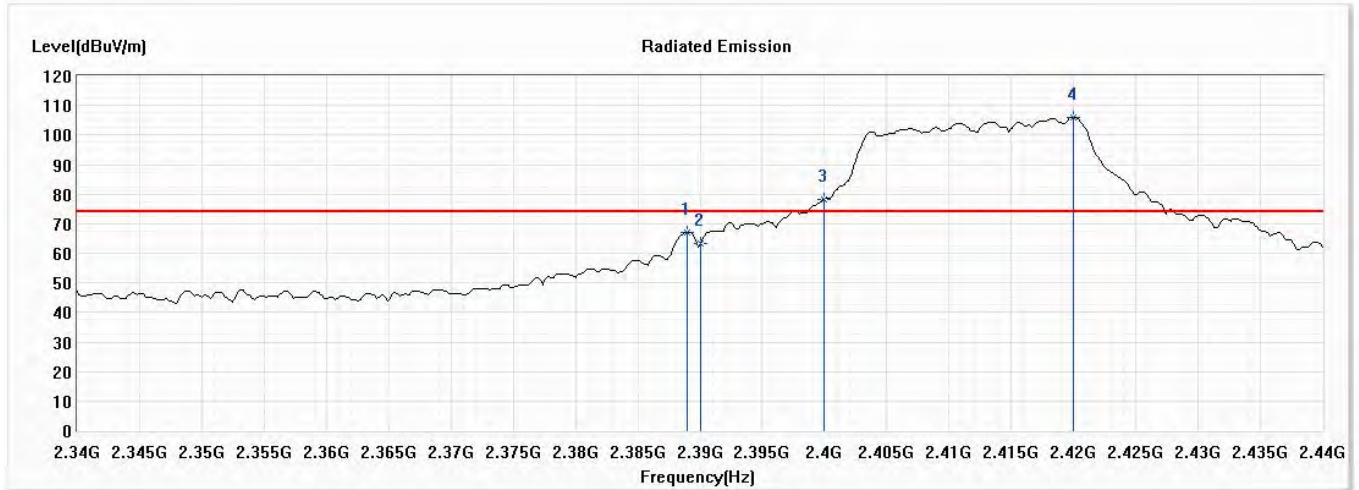


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.986	67.06	74.00	-6.94	54.50	12.56	PK
2	2390.000	63.18	74.00	-10.82	50.63	12.55	PK
! 3	2400.000	78.22	--	--	65.69	12.53	PK
! 4	2420.000	106.06	--	--	93.36	12.70	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2412MHz)

Vertical

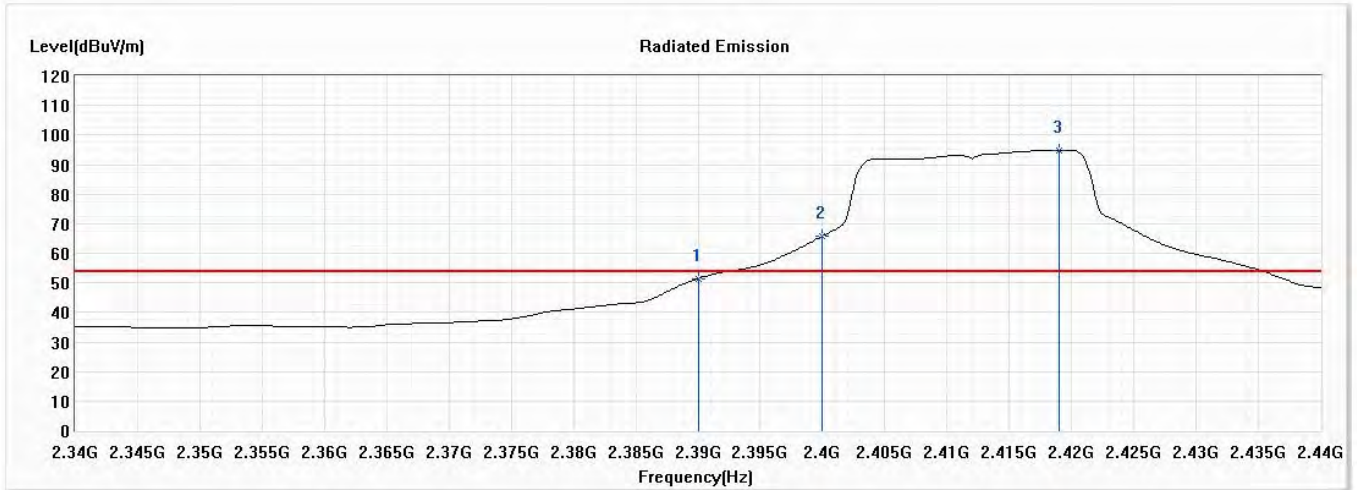


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	51.45	54.00	-2.55	38.90	12.55	AV
! 2	2400.000	65.76	--	--	53.23	12.53	AV
! 3	2418.986	94.89	--	--	82.20	12.69	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2462MHz)

Horizontal

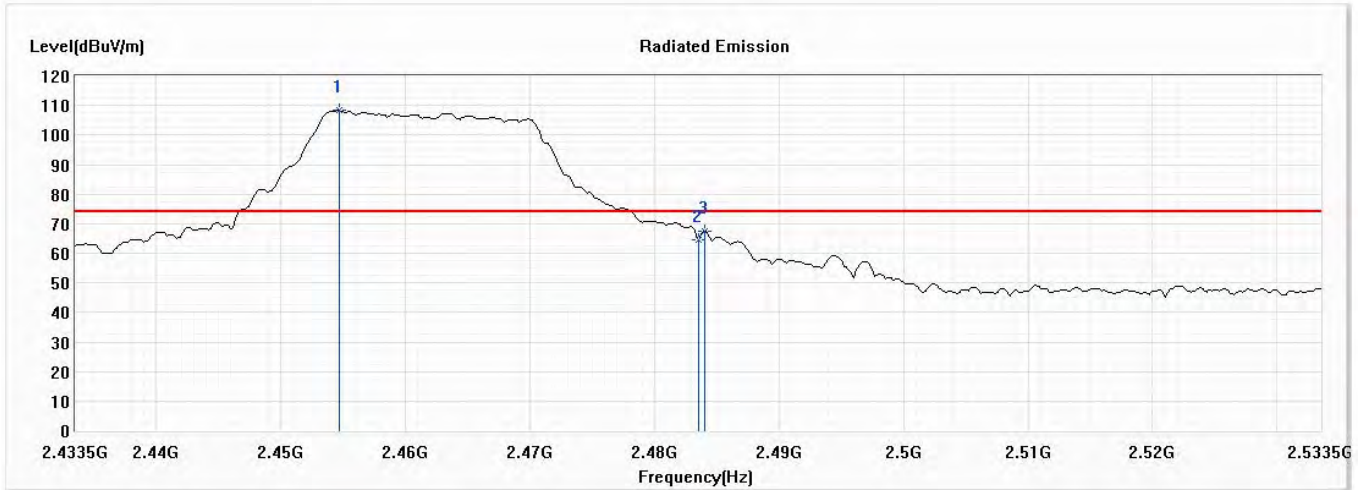


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2454.659	108.29	--	--	95.34	12.95	PK
2	2483.500	64.55	74.00	-9.45	51.75	12.80	PK
3	2484.080	67.62	74.00	-6.38	54.82	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2462MHz)

Horizontal

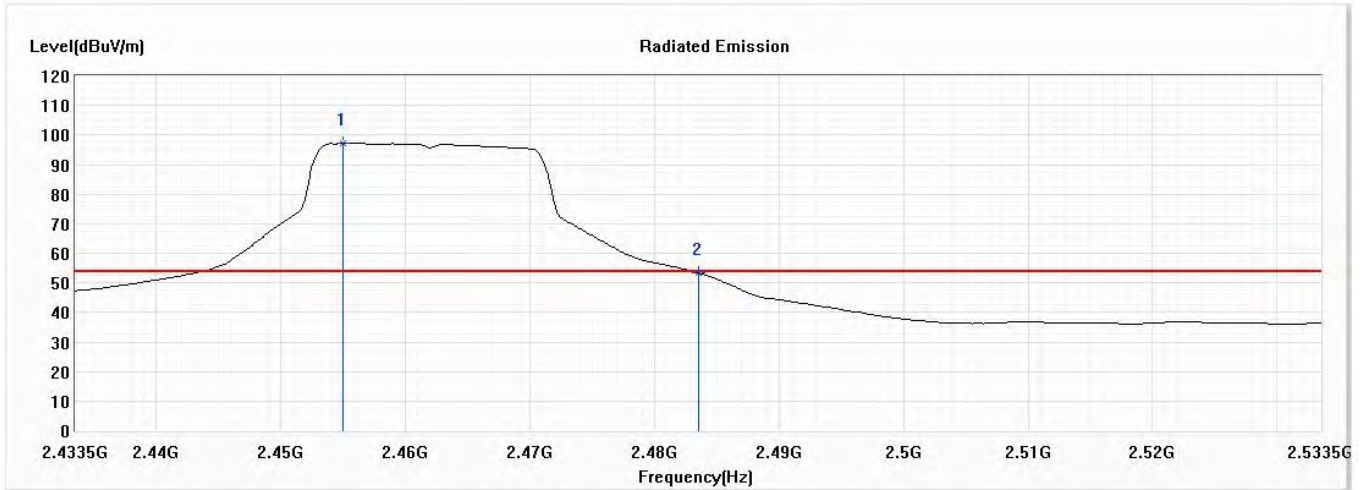


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2454.949	97.12	--	--	84.17	12.95	AV
2	2483.500	53.41	54.00	-0.59	40.61	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2462MHz)

Vertical

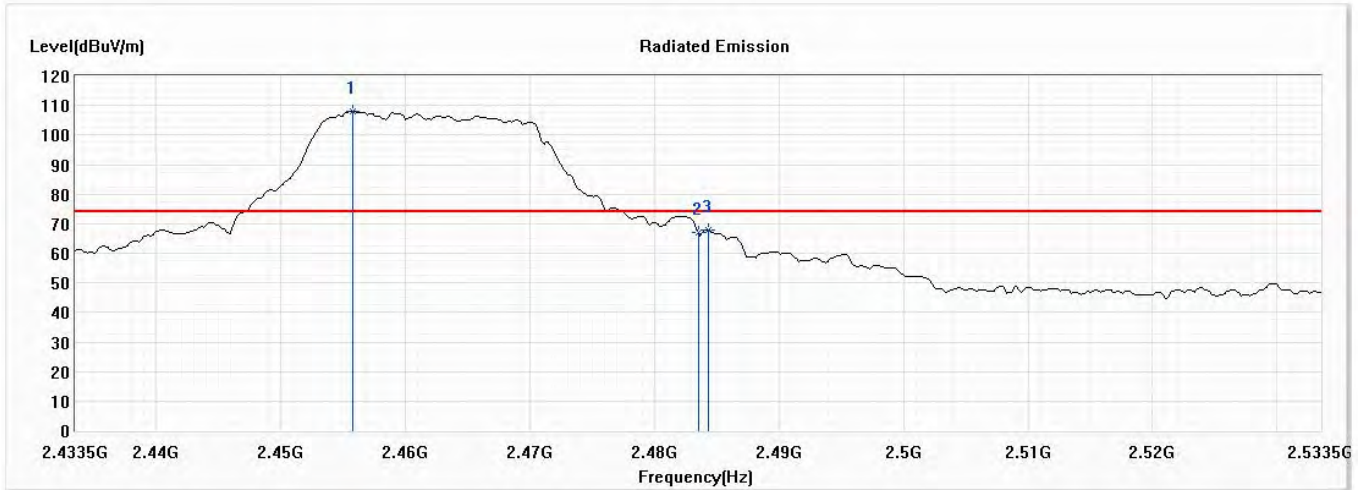


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2455.819	107.99	--	--	95.04	12.95	PK
2	2483.500	67.16	74.00	-6.84	54.36	12.80	PK
3	2484.370	67.73	74.00	-6.27	54.94	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2462MHz)

Vertical

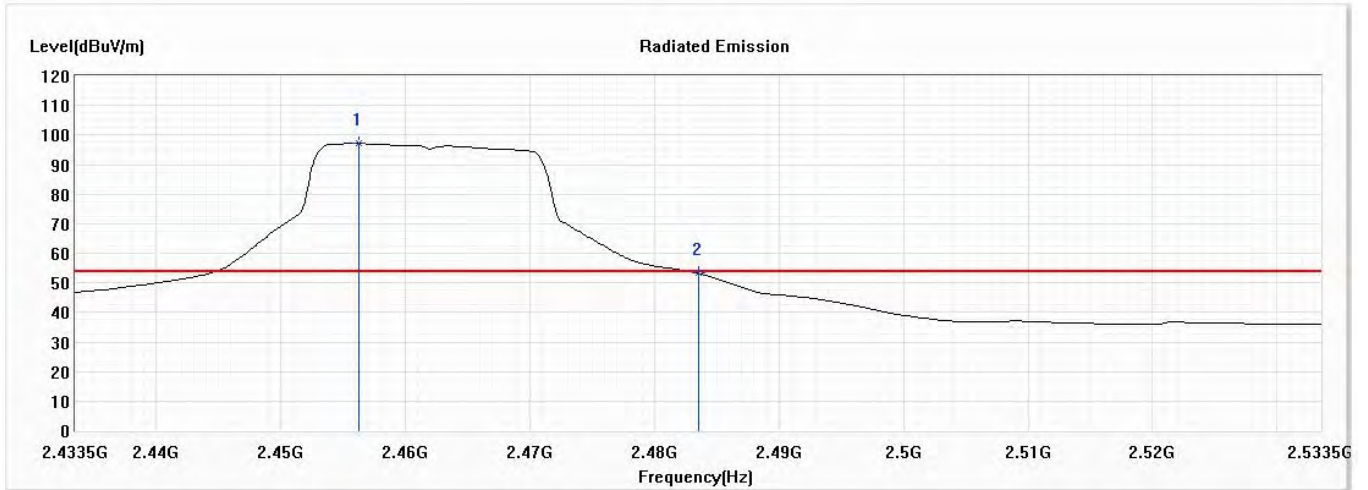


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.254	97.07	--	--	84.13	12.94	AV
2	2483.500	53.19	54.00	-0.81	40.39	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2467MHz)

Horizontal

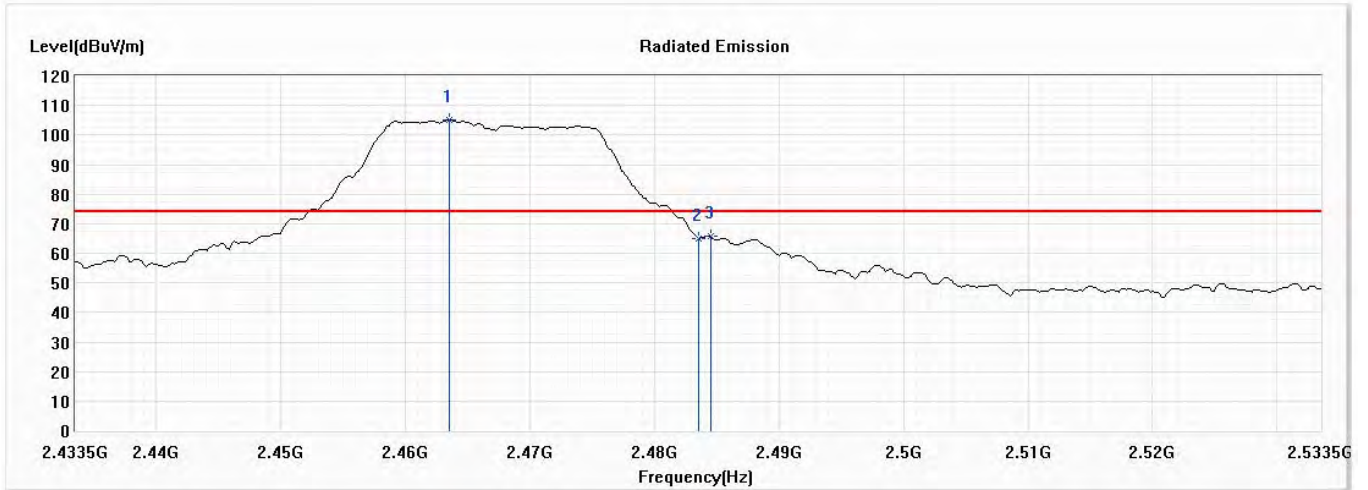


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2463.500	104.94	--	--	92.03	12.91	PK
2	2483.500	64.86	74.00	-9.14	52.06	12.80	PK
3	2484.514	65.60	74.00	-8.40	52.81	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2467MHz)

Horizontal

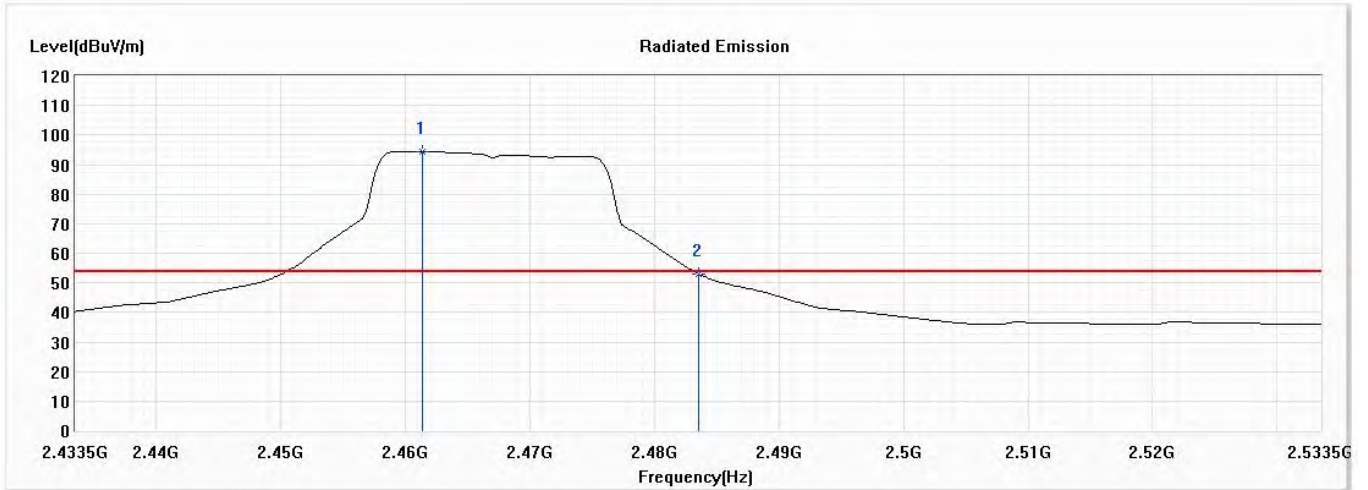


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2461.326	94.34	--	--	81.42	12.92	AV
2	2483.500	53.06	54.00	-0.94	40.26	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2467MHz)

Vertical

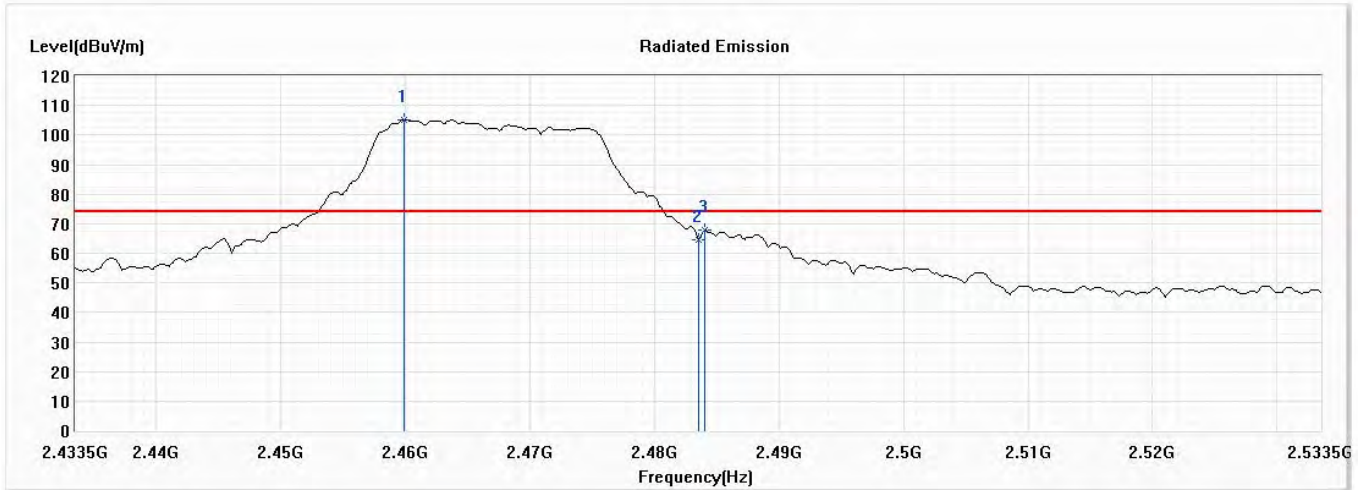


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2459.877	105.05	--	--	92.12	12.93	PK
2	2483.500	64.42	74.00	-9.58	51.62	12.80	PK
3	2484.080	67.74	74.00	-6.26	54.94	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2467MHz)

Vertical

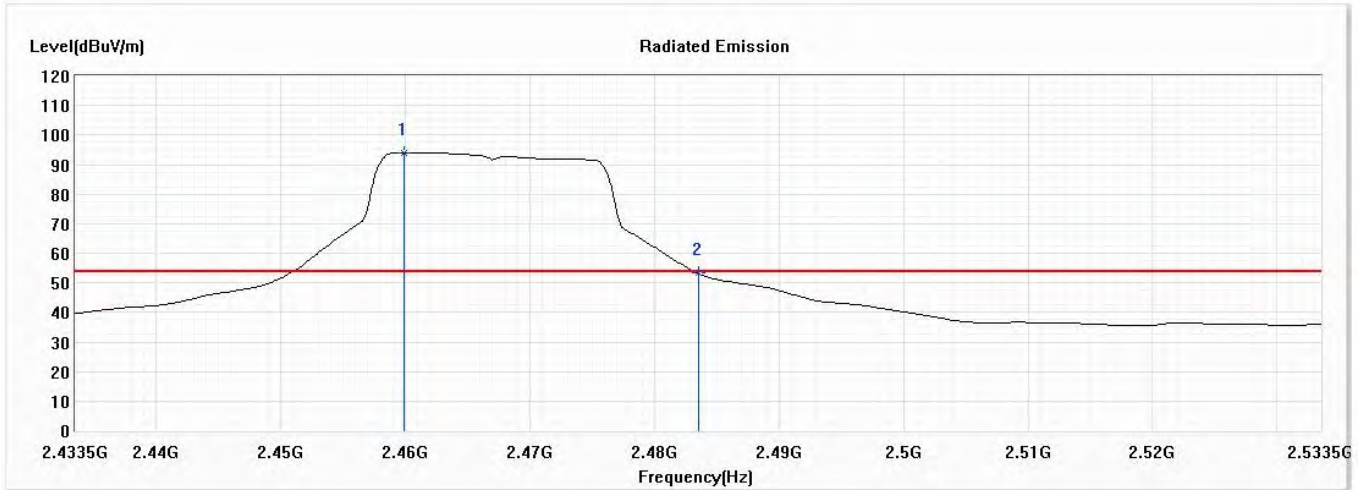


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2459.877	93.92	--	--	80.99	12.93	AV
2	2483.500	53.24	54.00	-0.76	40.44	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2472MHz)

Horizontal

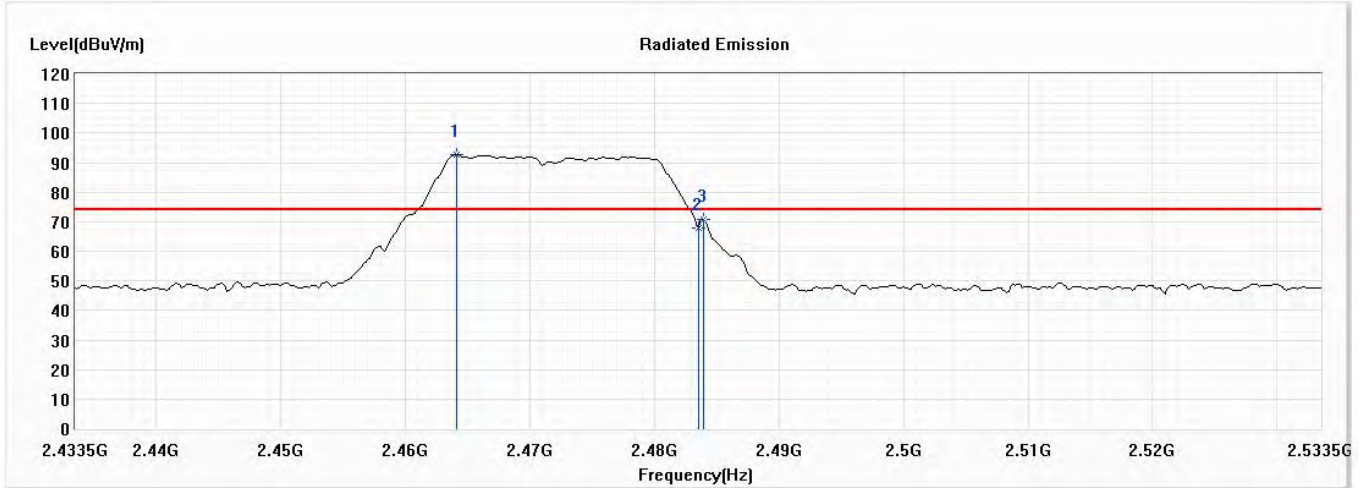


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.080	92.68	--	--	79.77	12.91	PK
2	2483.500	68.02	74.00	-5.98	55.22	12.80	PK
3	2483.935	70.78	74.00	-3.22	57.98	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2472MHz)

Horizontal

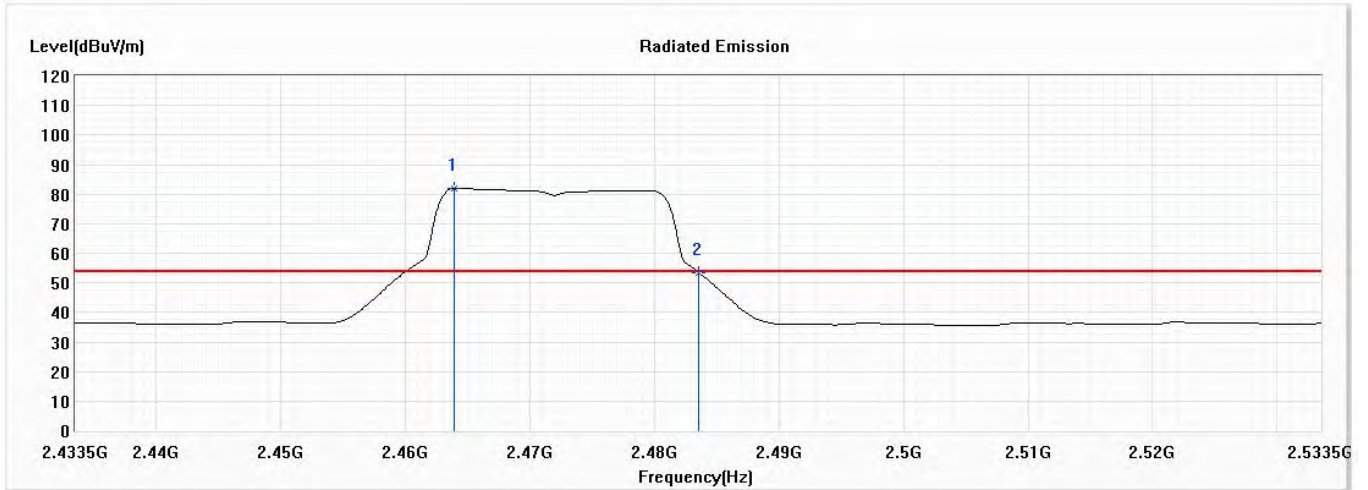


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2463.935	81.93	--	--	69.02	12.91	AV
2	2483.500	53.49	54.00	-0.51	40.69	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2472MHz)

Vertical

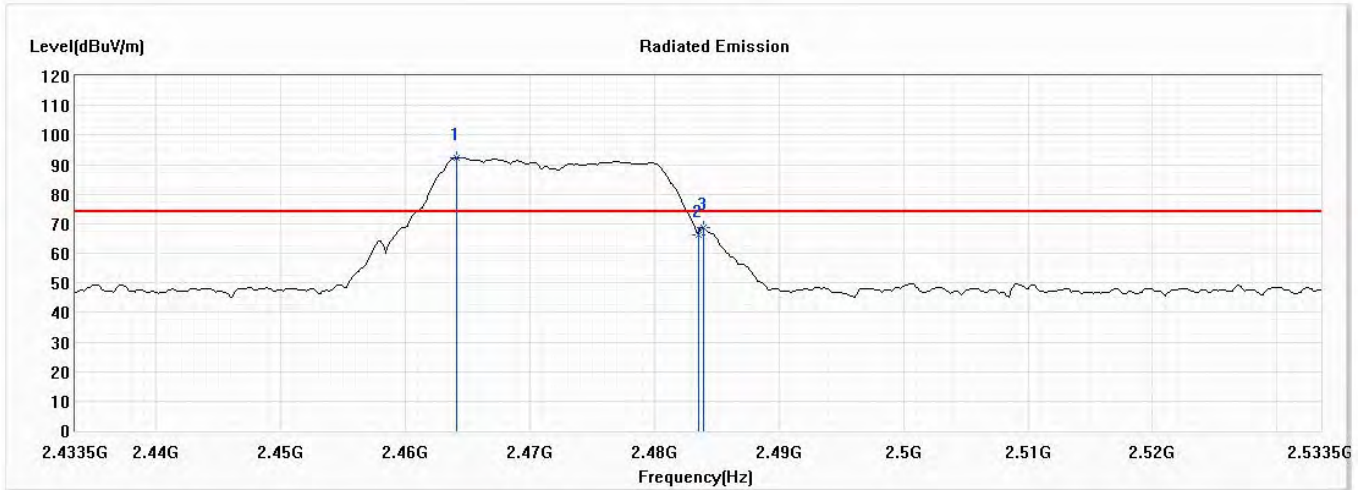


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.080	92.27	--	--	79.36	12.91	PK
2	2483.500	66.25	74.00	-7.75	53.45	12.80	PK
3	2483.935	68.73	74.00	-5.27	55.93	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (2472MHz)

Vertical

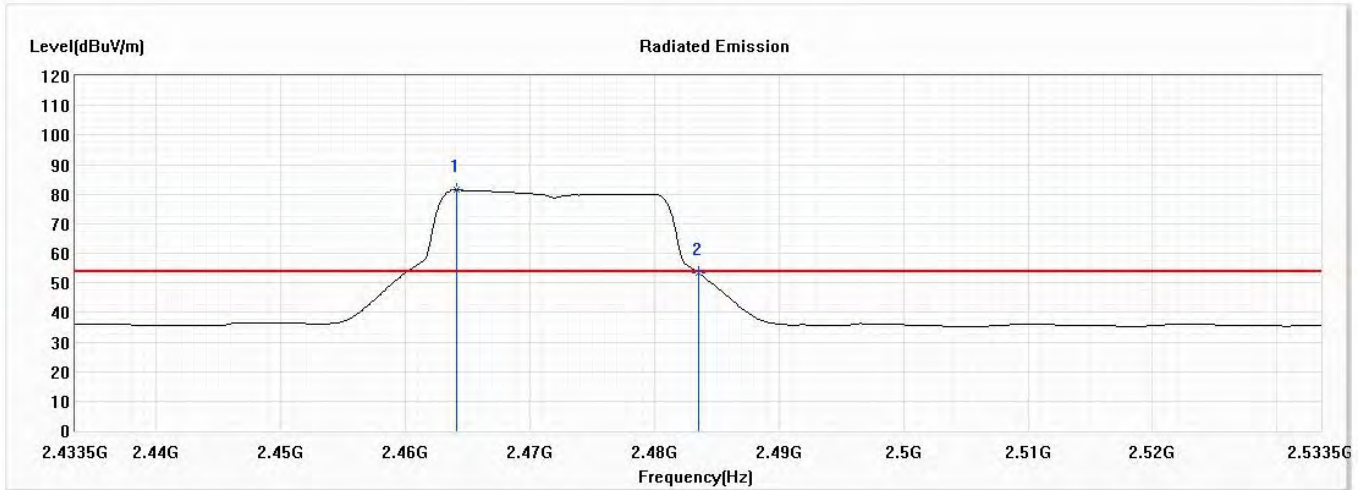


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.080	81.40	--	--	68.49	12.91	AV
2	2483.500	53.31	54.00	-0.69	40.51	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2422MHz)

Horizontal

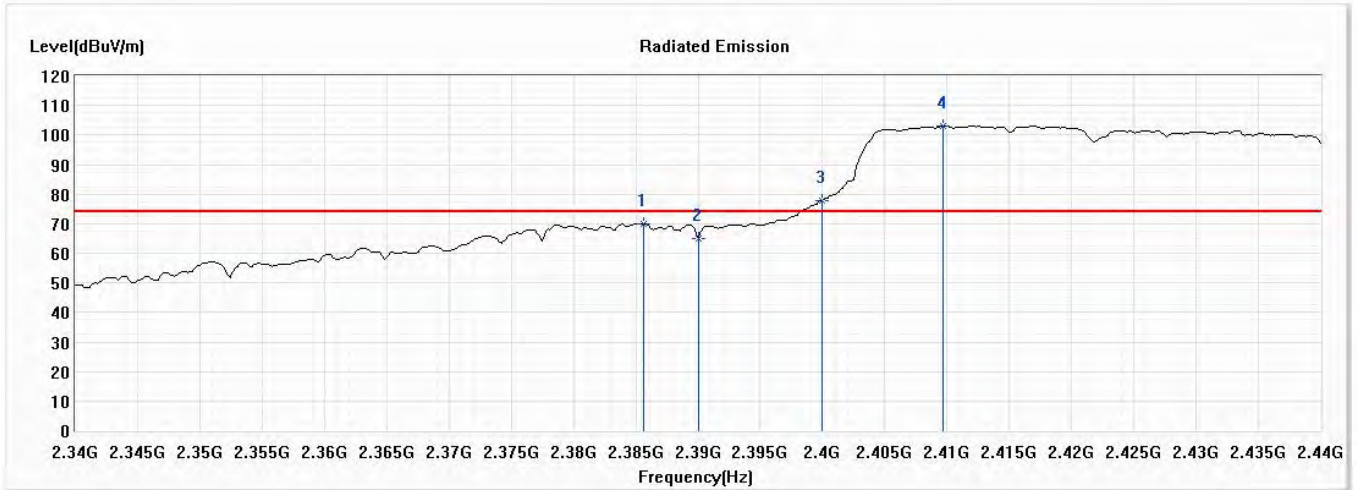


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2385.652	69.85	74.00	-4.15	57.28	12.57	PK
2	2390.000	65.13	74.00	-8.87	52.58	12.55	PK
! 3	2400.000	77.81	--	--	65.28	12.53	PK
! 4	2409.710	102.97	--	--	90.35	12.62	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2422MHz)

Horizontal

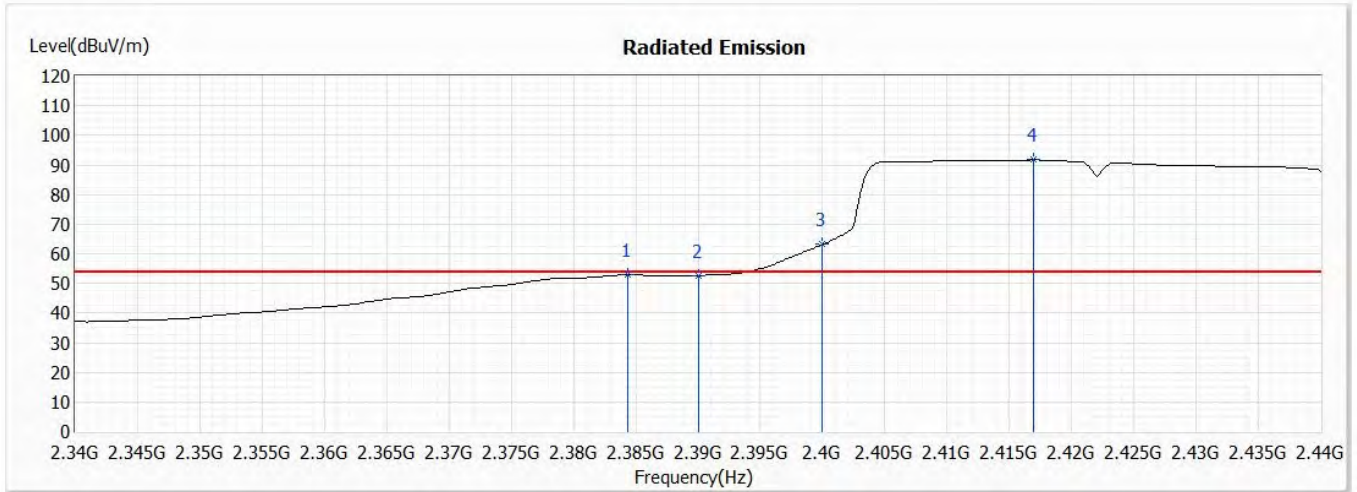


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2384.348	52.90	54.00	-1.10	40.33	12.57	AV
2	2390.000	52.65	54.00	-1.35	40.10	12.55	AV
! 3	2400.000	63.15	--	--	50.62	12.53	AV
! 4	2416.957	91.67	--	--	78.99	12.68	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2422MHz)

Vertical

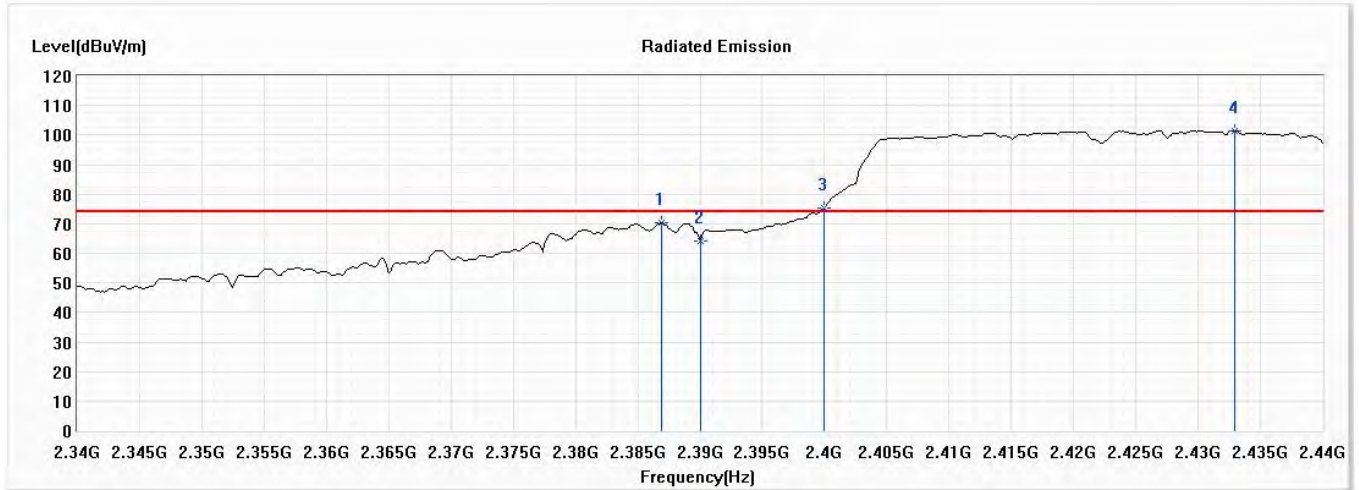


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.957	70.31	74.00	-3.69	57.74	12.57	PK
2	2390.000	64.26	74.00	-9.74	51.71	12.55	PK
! 3	2400.000	75.49	--	--	62.96	12.53	PK
! 4	2432.899	101.56	--	--	88.75	12.81	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2422MHz)

Vertical

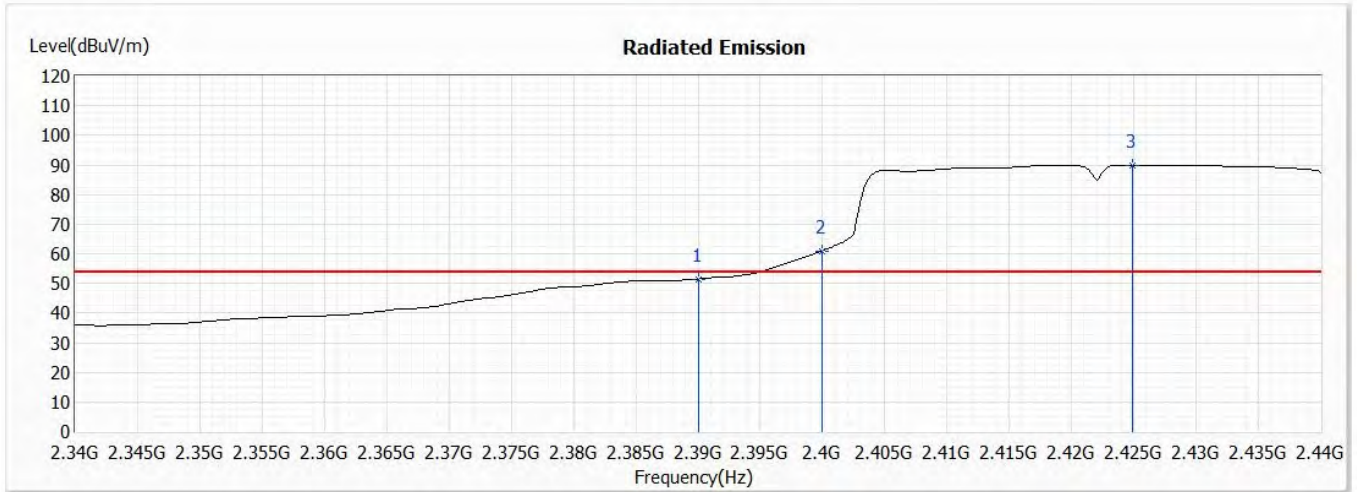


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	51.50	54.00	-2.50	38.95	12.55	AV
! 2	2400.000	61.03	--	--	48.50	12.53	AV
! 3	2424.928	89.99	--	--	77.24	12.75	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Horizontal

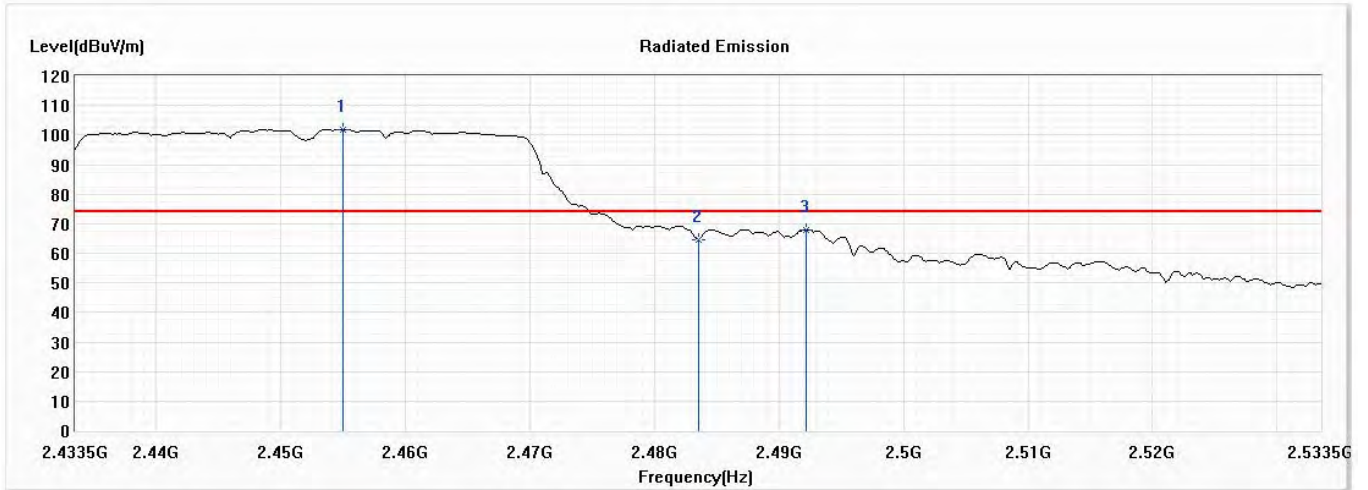


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2454.949	101.91	--	--	88.96	12.95	PK
2	2483.500	64.48	74.00	-9.52	51.68	12.80	PK
3	2492.196	68.04	74.00	-5.96	55.29	12.75	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Horizontal

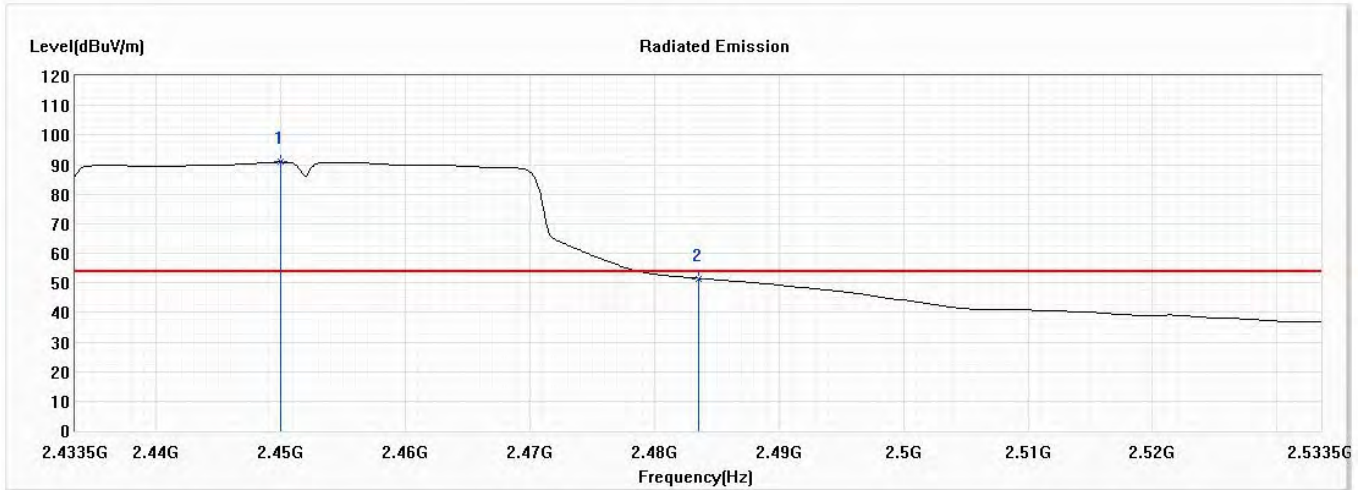


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2450.022	90.84	--	--	77.87	12.97	AV
2	2483.500	51.47	54.00	-2.53	38.67	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Vertical

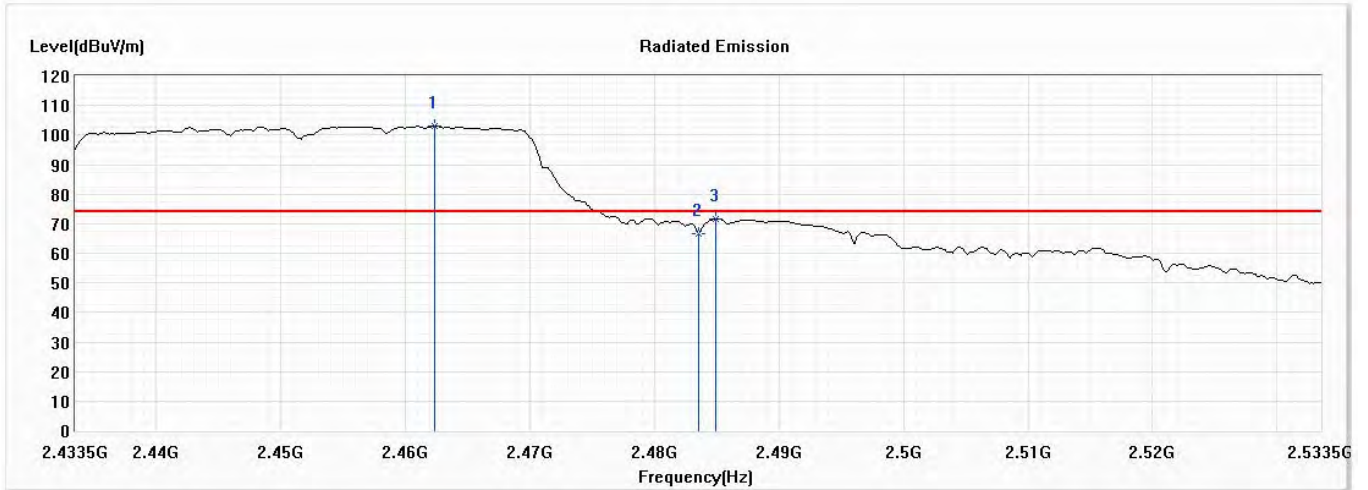


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.341	102.98	--	--	90.06	12.92	PK
2	2483.500	66.42	74.00	-7.58	53.62	12.80	PK
3	2484.949	71.56	74.00	-2.44	58.76	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2452MHz)

Vertical

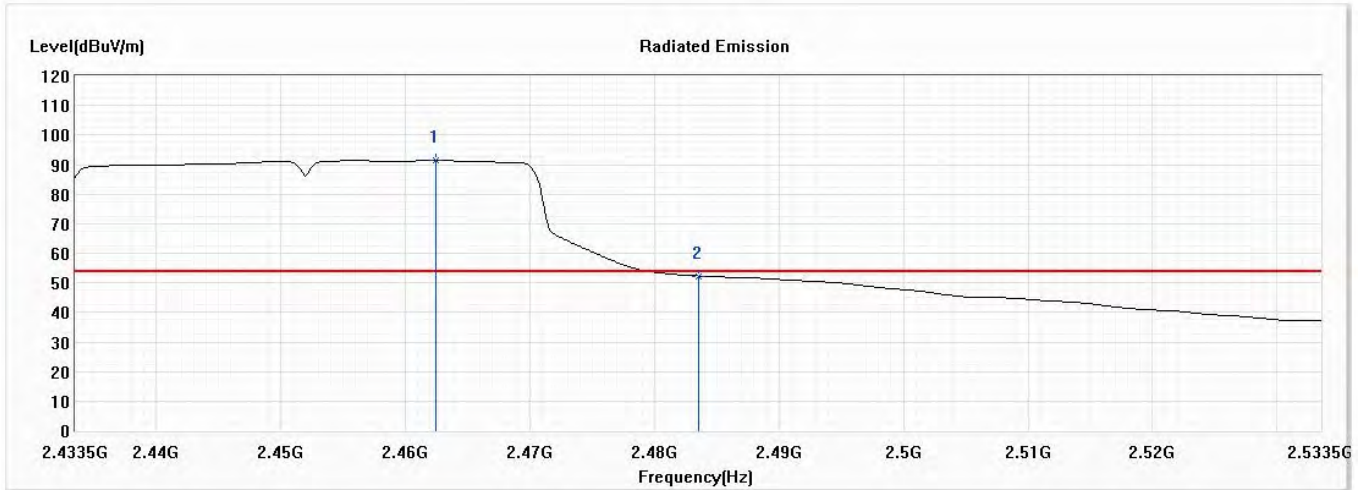


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.486	91.39	--	--	78.47	12.92	AV
2	2483.500	52.31	54.00	-1.69	39.51	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Horizontal

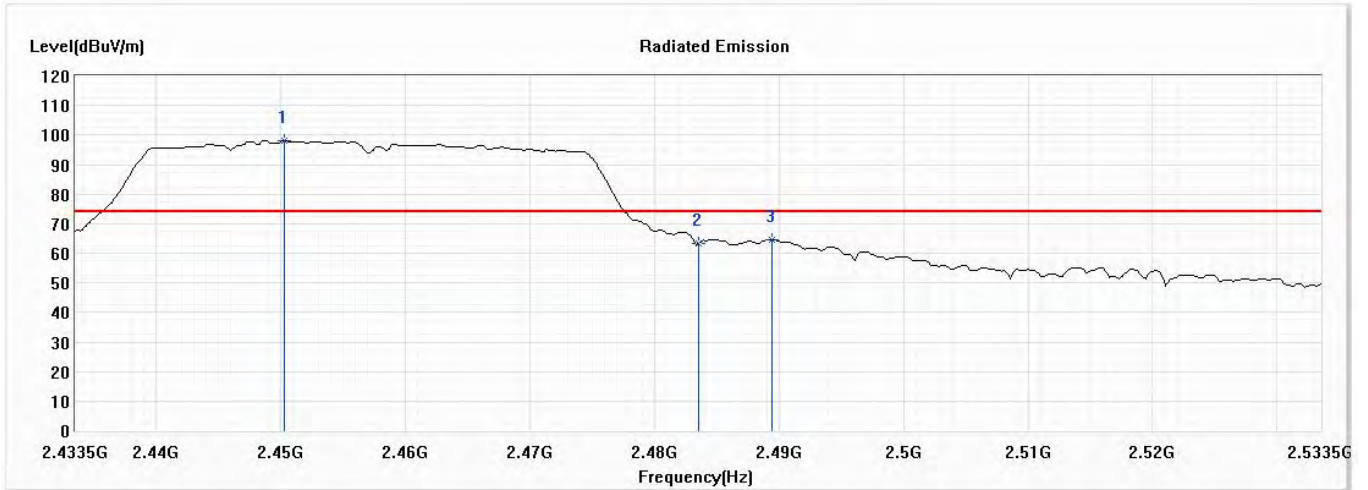


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2450.312	98.03	--	--	85.06	12.97	PK
2	2483.500	63.46	74.00	-10.54	50.66	12.80	PK
3	2489.442	64.57	74.00	-9.43	51.80	12.77	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Horizontal

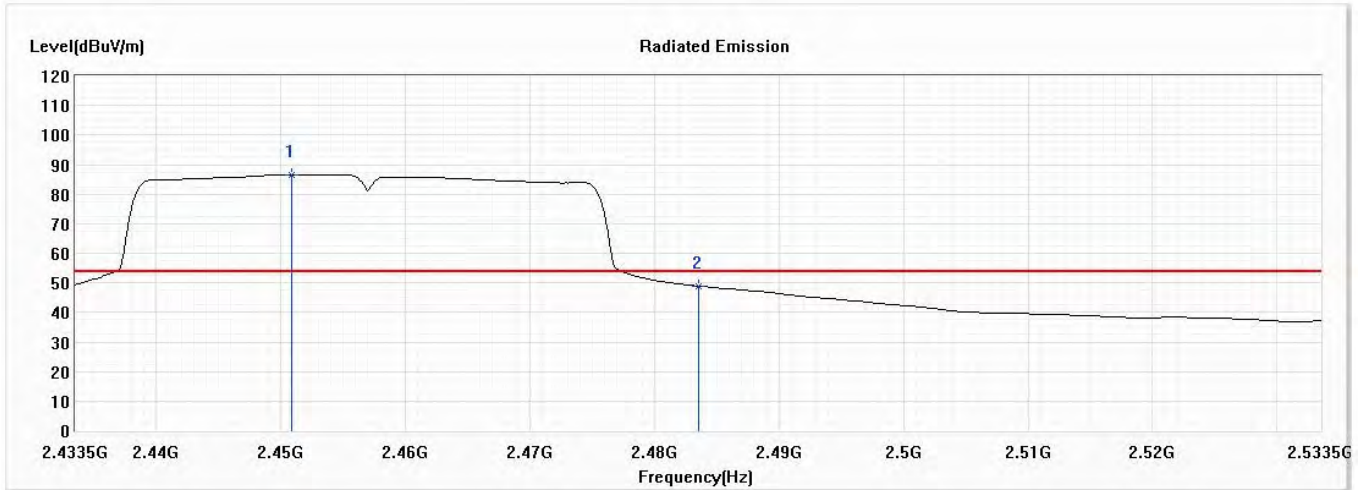


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2450.891	86.63	--	--	73.67	12.96	AV
2	2483.500	48.88	54.00	-5.12	36.08	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Vertical

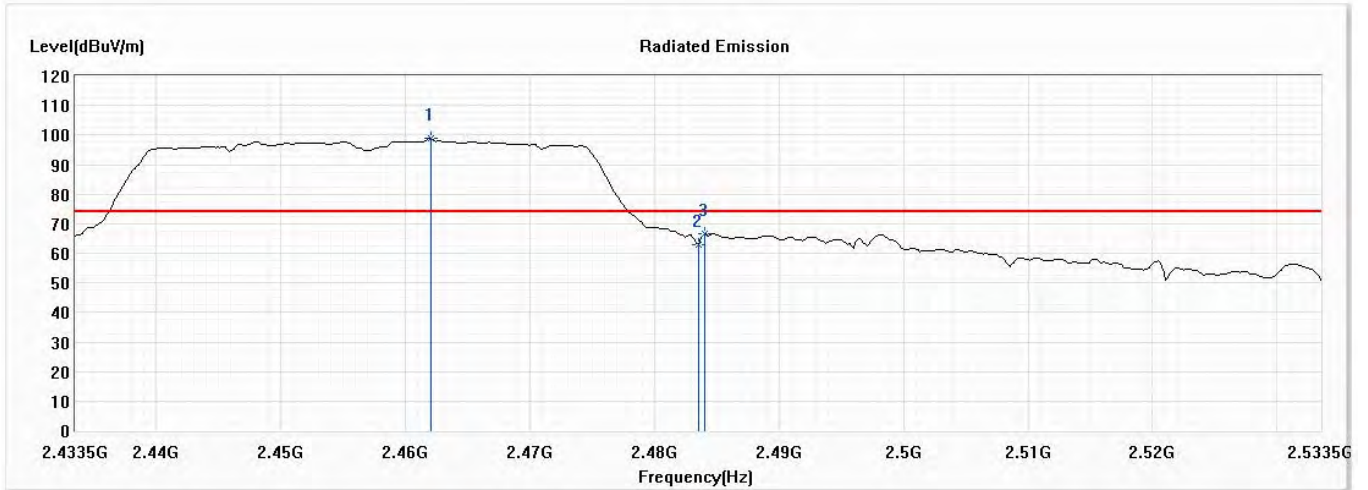


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.051	98.71	--	--	85.79	12.92	PK
2	2483.500	62.80	74.00	-11.20	50.00	12.80	PK
3	2484.080	66.63	74.00	-7.37	53.83	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2457MHz)

Vertical

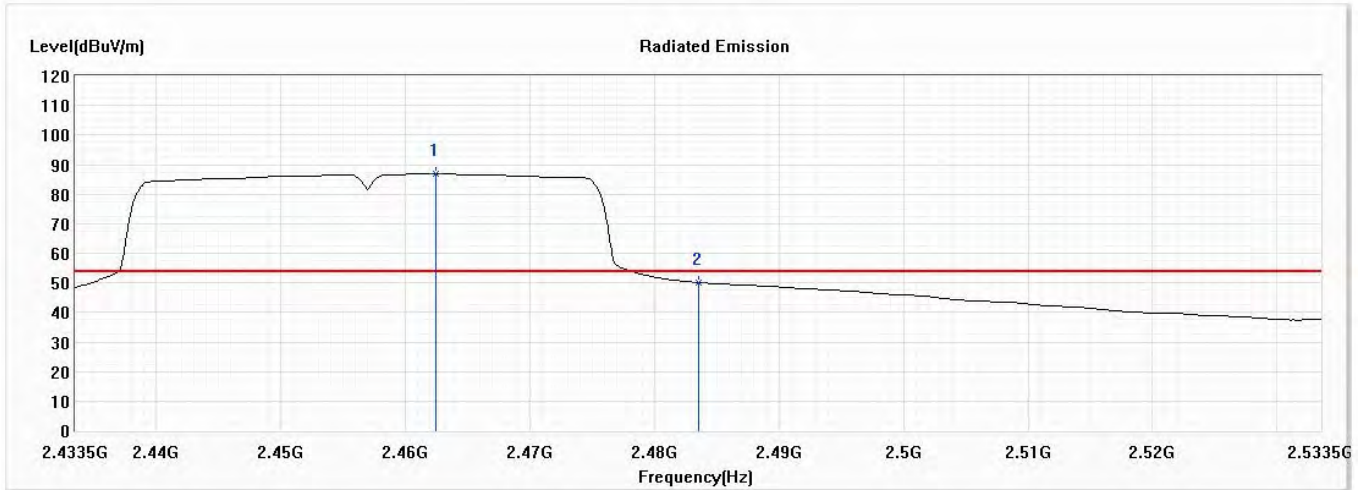


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2462.486	86.94	--	--	74.02	12.92	AV
2	2483.500	50.06	54.00	-3.94	37.26	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Horizontal

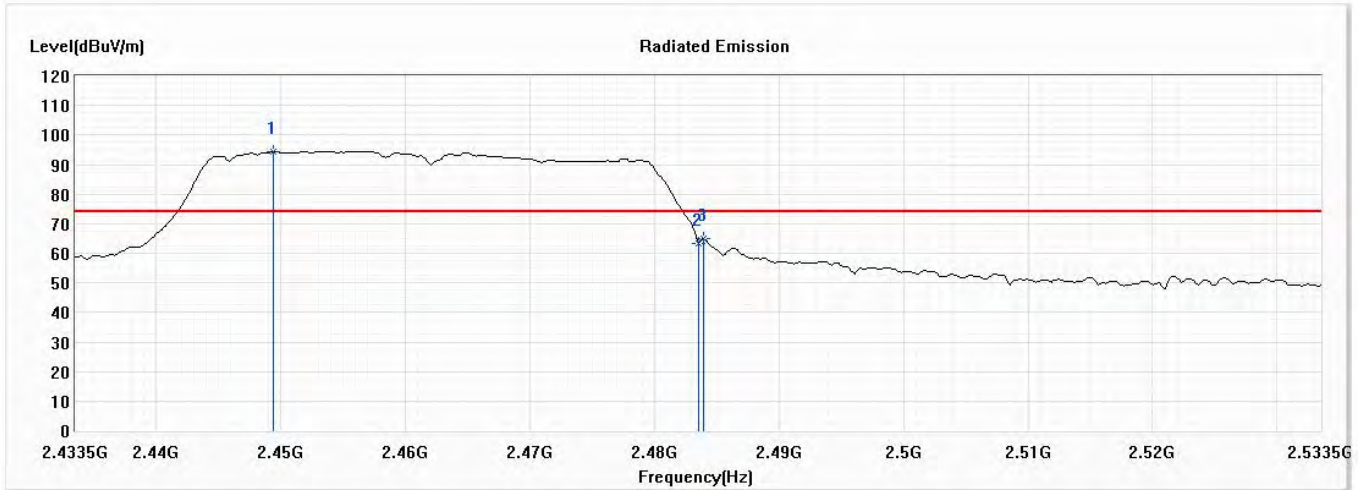


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2449.442	94.48	--	--	81.50	12.98	PK
2	2483.500	63.36	74.00	-10.64	50.56	12.80	PK
3	2483.935	64.94	74.00	-9.06	52.14	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Horizontal

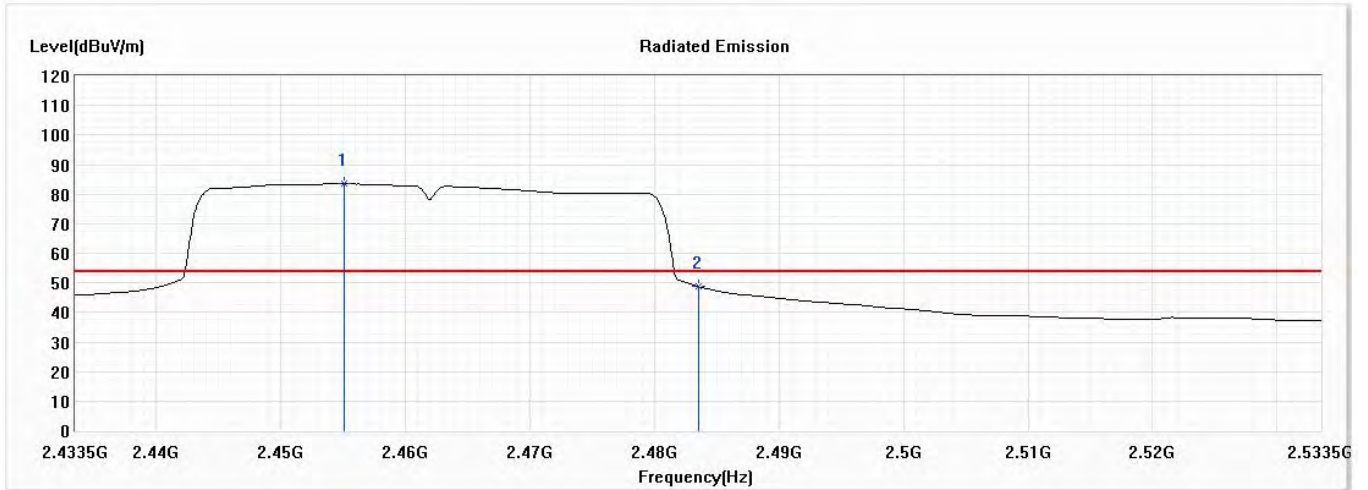


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2455.094	83.46	--	--	70.51	12.95	AV
2	2483.500	48.72	54.00	-5.28	35.92	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Vertical

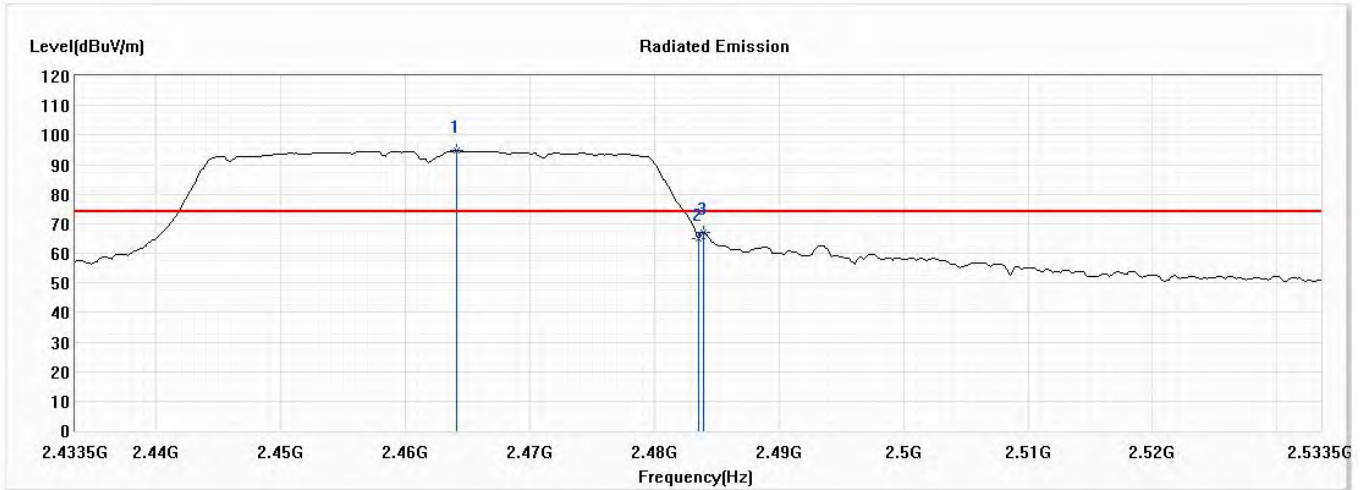


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.080	94.57	--	--	81.66	12.91	PK
2	2483.500	64.90	74.00	-9.10	52.10	12.80	PK
3	2483.935	67.20	74.00	-6.80	54.40	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW_15Mbps) (2462MHz)

Vertical

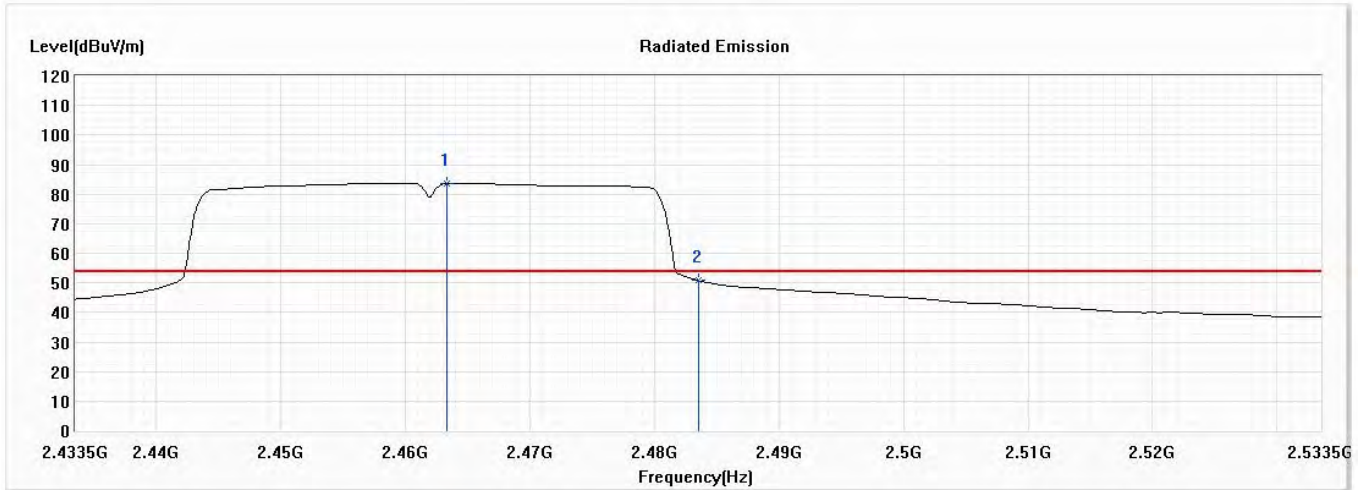


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2463.355	83.73	--	--	70.82	12.91	AV
2	2483.500	50.82	54.00	-3.18	38.02	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2412MHz)

Horizontal

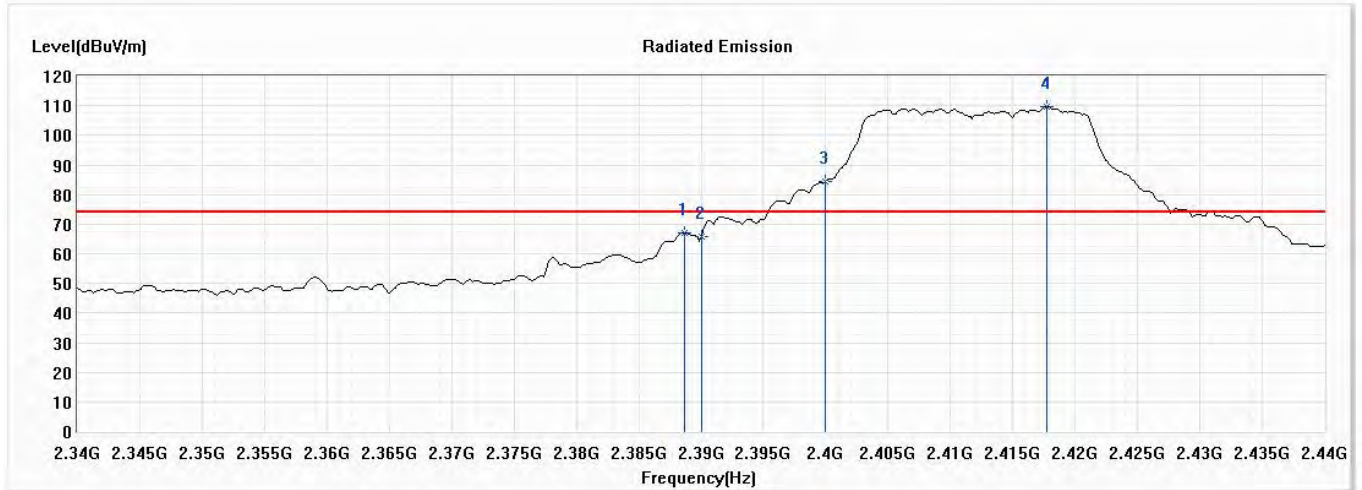


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2388.696	67.23	74.00	-6.77	54.66	12.57	PK
2	2390.000	65.65	74.00	-8.35	53.10	12.55	PK
! 3	2400.000	84.32	--	--	71.79	12.53	PK
! 4	2417.681	109.62	--	--	96.94	12.68	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2412MHz)

Horizontal

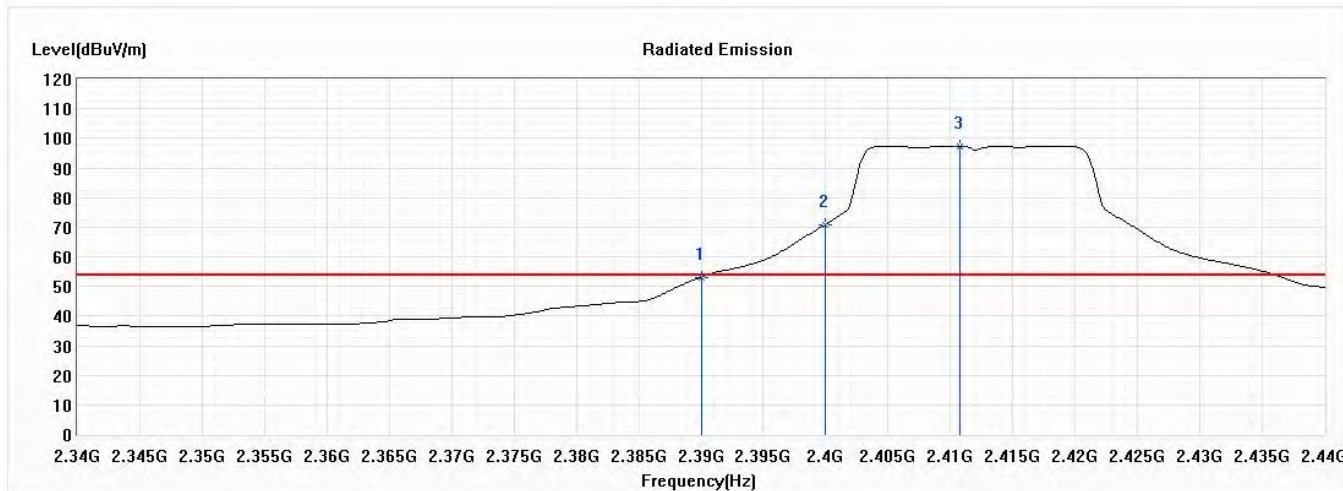


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	53.13	54.00	-0.87	40.58	12.55	AV
! 2	2400.000	70.90	--	--	58.37	12.53	AV
! 3	2410.725	97.41	--	--	84.79	12.62	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2412MHz)

Vertical

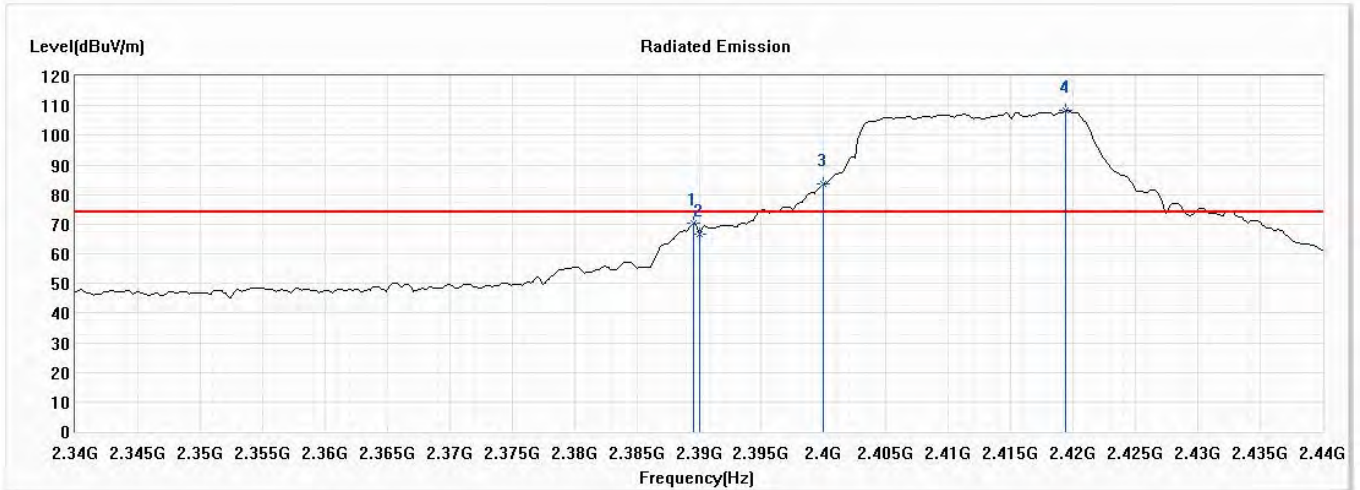


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2389.565	70.16	74.00	-3.84	57.60	12.56	PK
2	2390.000	66.57	74.00	-7.43	54.02	12.55	PK
! 3	2400.000	83.41	--	--	70.88	12.53	PK
! 4	2419.420	108.42	--	--	95.72	12.70	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2412MHz)

Vertical

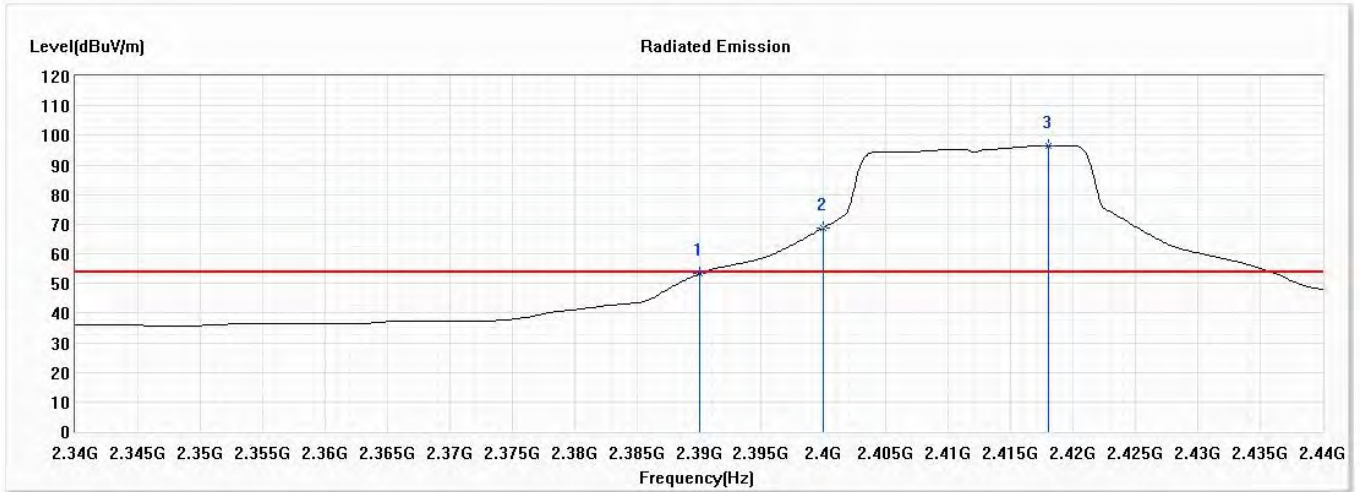


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	53.22	54.00	-0.78	40.67	12.55	AV
! 2	2400.000	68.75	--	--	56.22	12.53	AV
! 3	2417.971	96.55	--	--	83.87	12.68	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2462MHz)

Horizontal

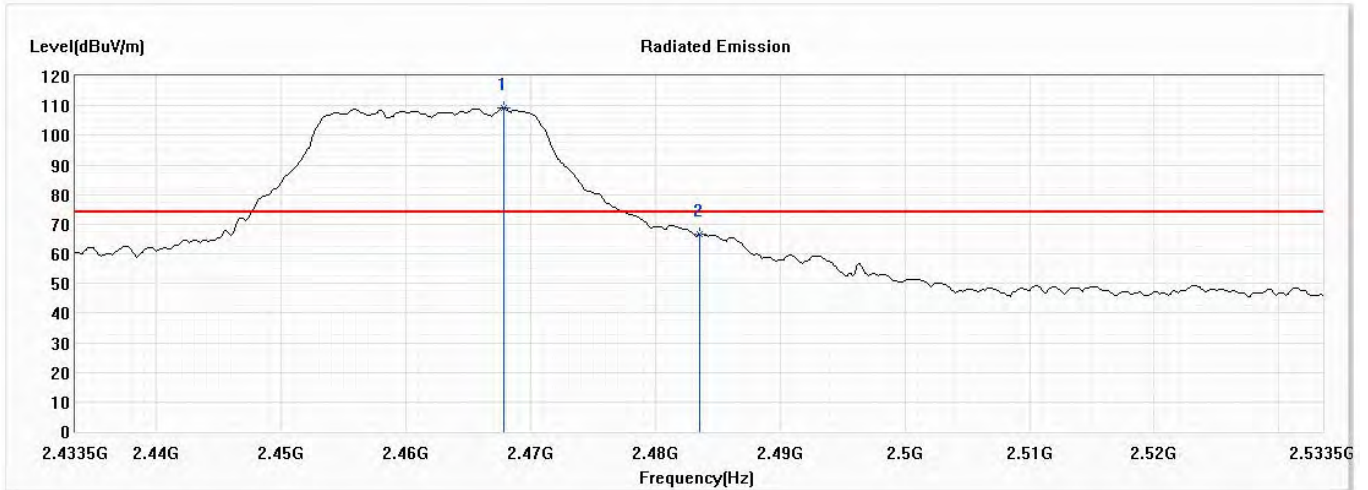


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2467.848	109.24	--	--	96.35	12.89	PK
2	2483.500	66.44	74.00	-7.56	53.64	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2462MHz)

Horizontal

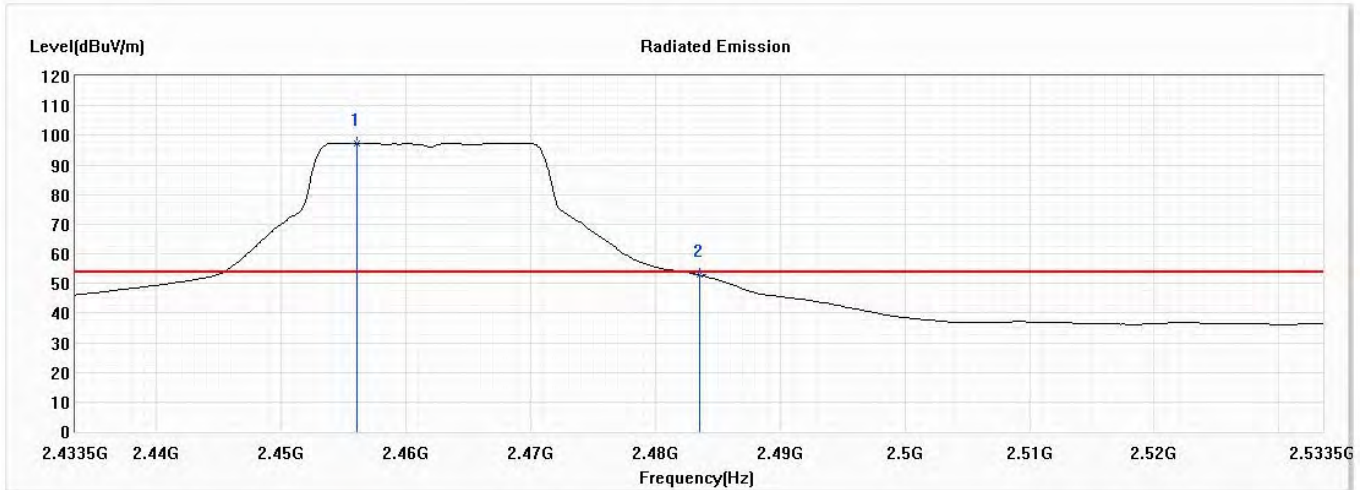


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2456.109	97.35	--	--	84.41	12.94	AV
2	2483.500	52.80	54.00	-1.20	40.00	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2462MHz)

Vertical

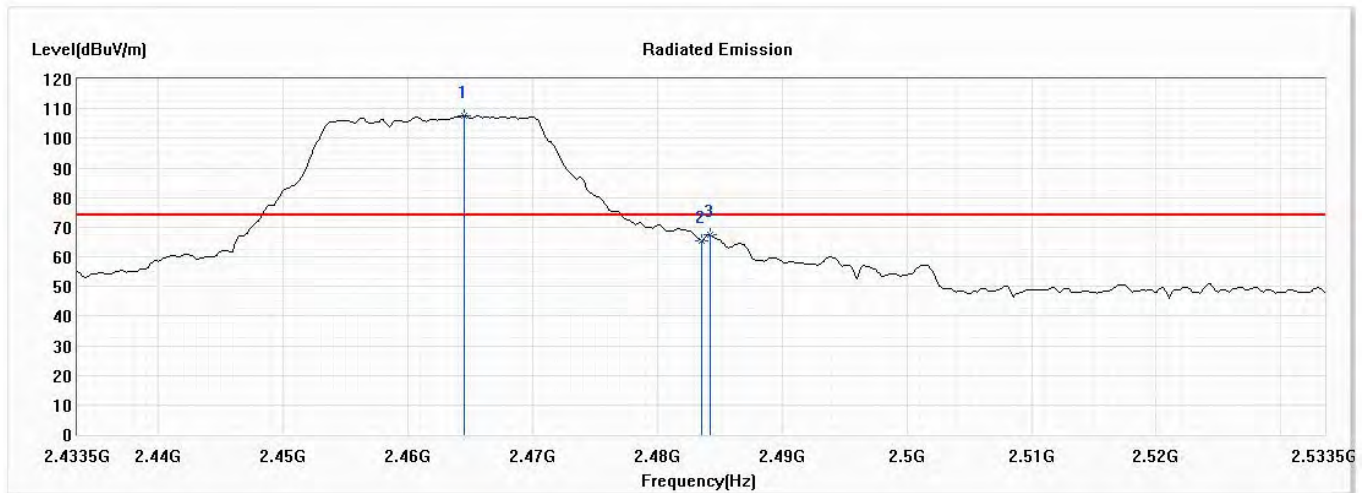


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.514	107.62	--	--	94.72	12.90	PK
2	2483.500	65.19	74.00	-8.81	52.39	12.80	PK
3	2484.225	67.37	74.00	-6.63	54.58	12.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2462MHz)

Vertical

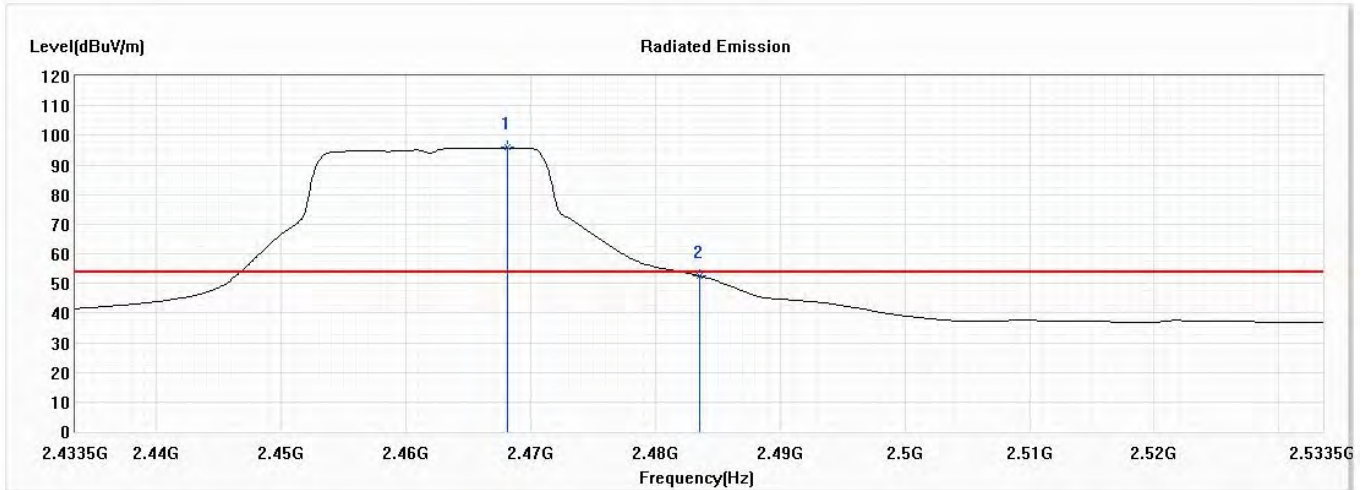


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2468.138	95.80	--	--	82.91	12.89	AV
2	2483.500	52.59	54.00	-1.41	39.79	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2467MHz)

Horizontal

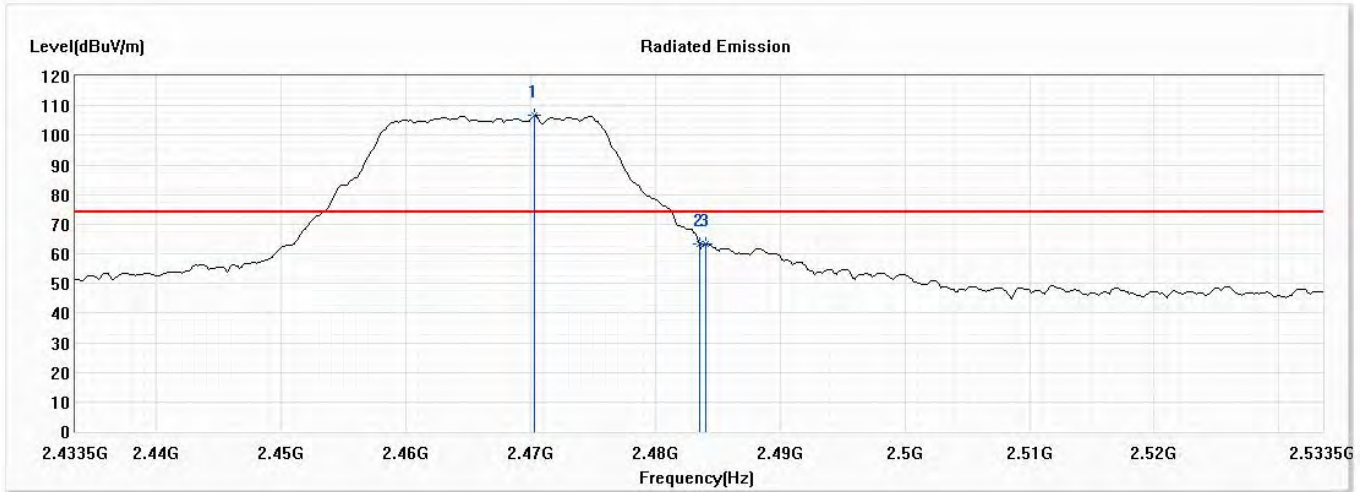


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2470.312	106.58	--	--	93.71	12.87	PK
2	2483.500	63.37	74.00	-10.63	50.57	12.80	PK
3	2484.080	63.47	74.00	-10.53	50.67	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2467MHz)

Horizontal

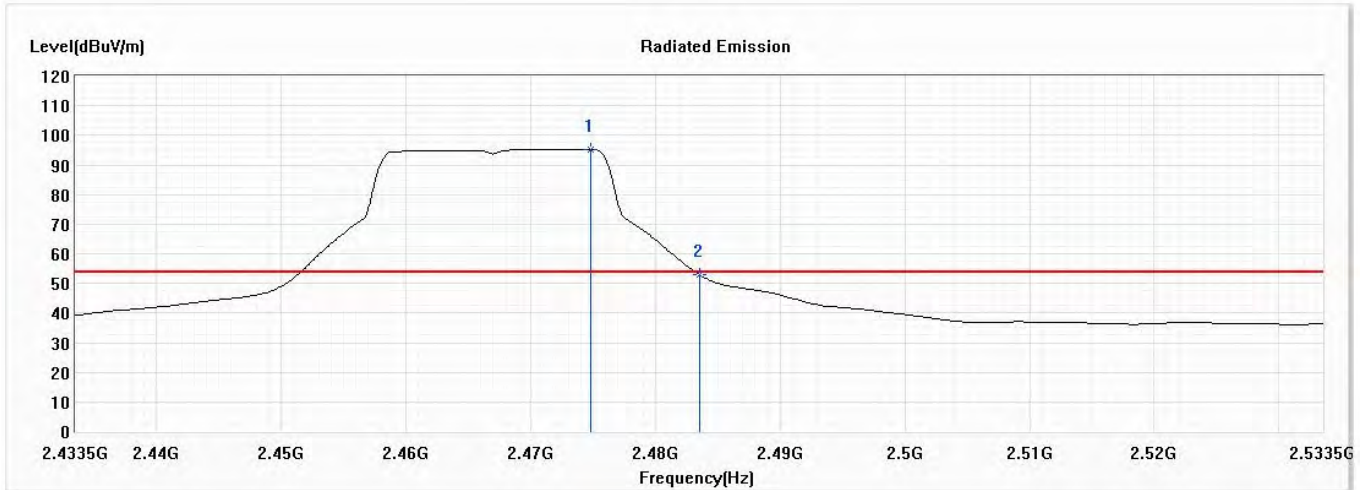


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2474.804	95.34	--	--	82.50	12.84	AV
2	2483.500	52.88	54.00	-1.12	40.08	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2467MHz)

Vertical

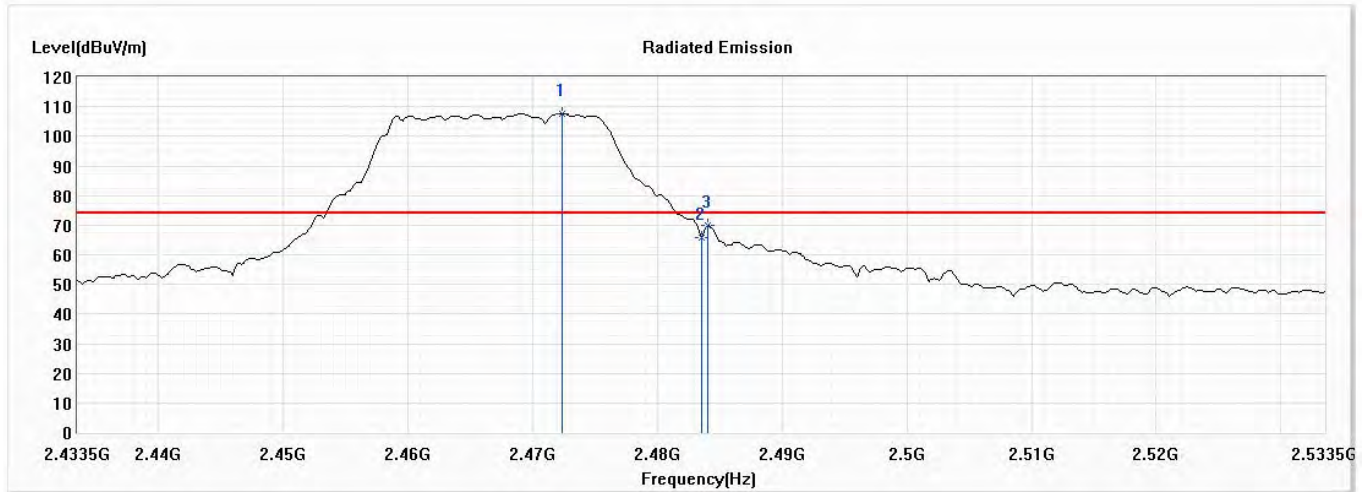


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2472.341	107.79	--	--	94.93	12.86	PK
2	2483.500	65.77	74.00	-8.23	52.97	12.80	PK
3	2484.080	69.96	74.00	-4.04	57.16	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2467MHz)

Vertical

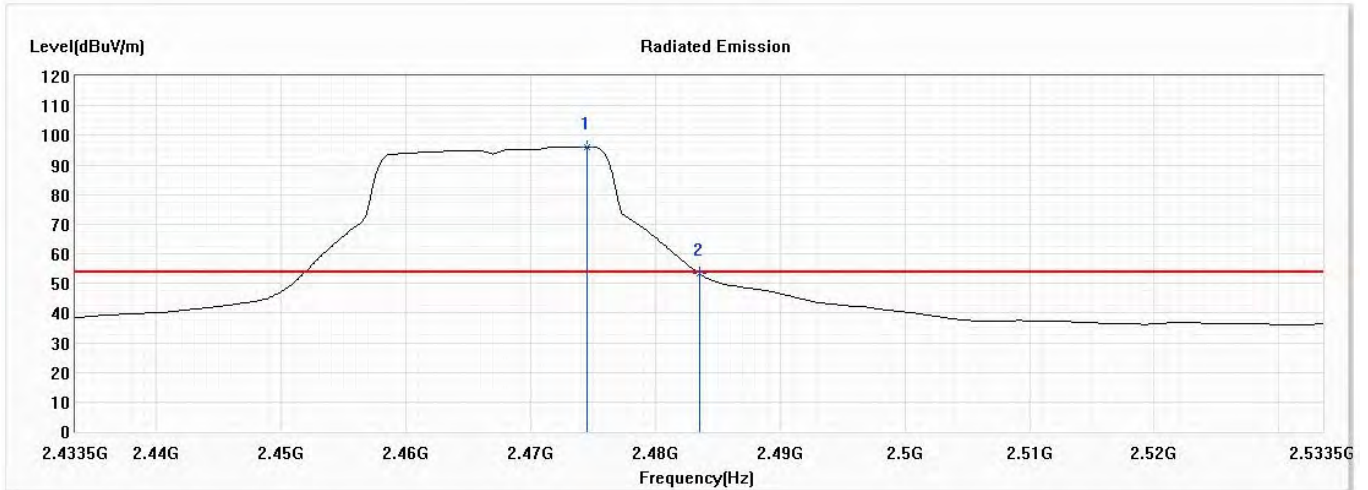


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2474.514	96.19	--	--	83.35	12.84	AV
2	2483.500	53.28	54.00	-0.72	40.48	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2472MHz)

Horizontal

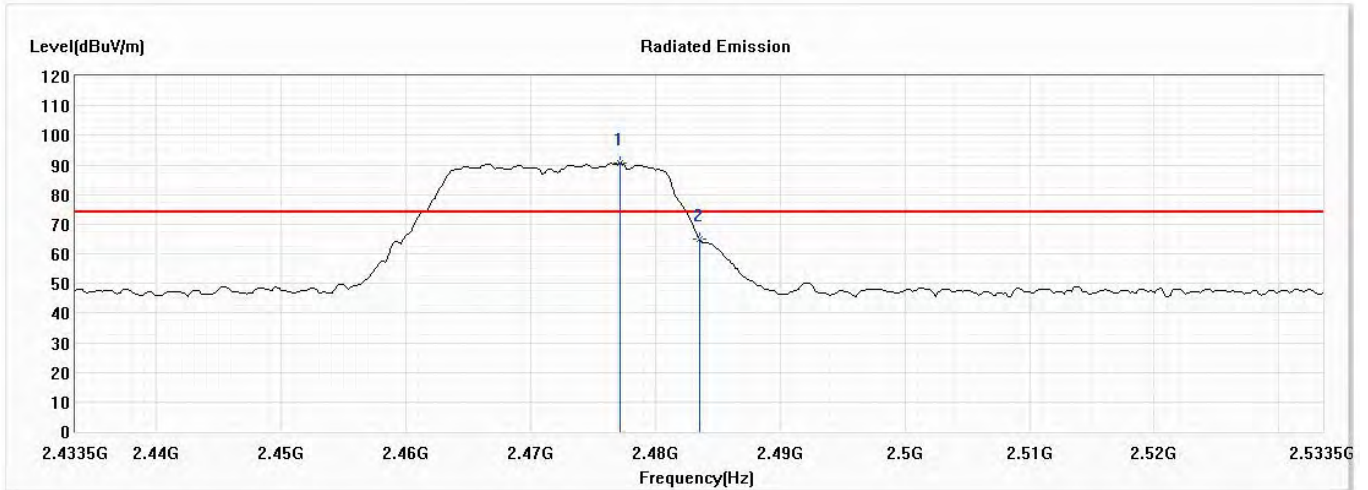


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2477.123	90.46	--	--	77.62	12.84	PK
2	2483.500	65.15	74.00	-8.85	52.35	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2472MHz)

Horizontal

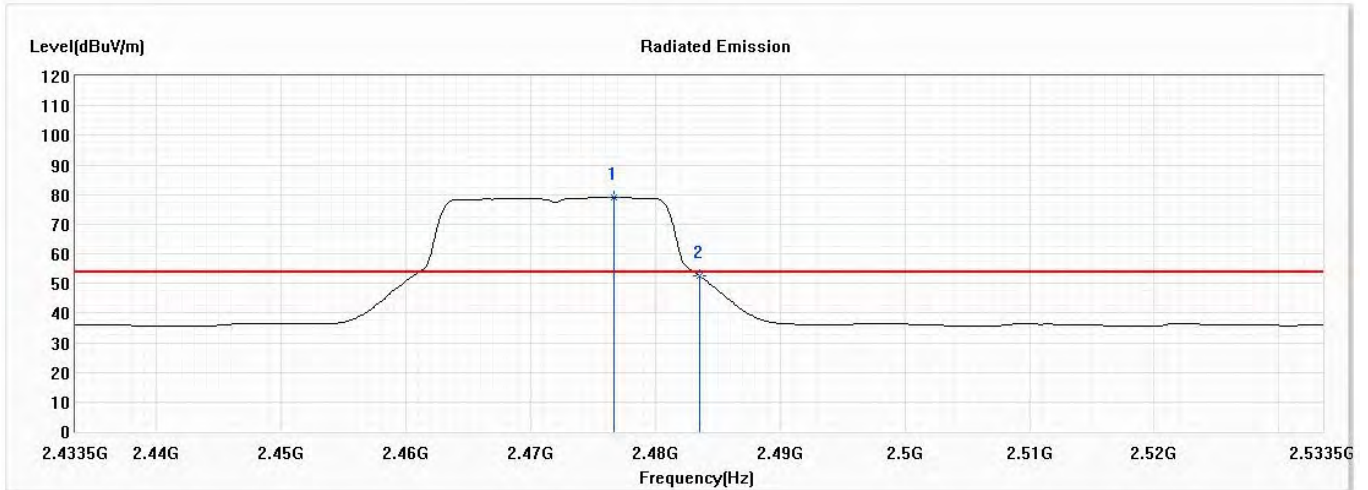


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2476.688	78.97	--	--	66.13	12.84	AV
2	2483.500	52.59	54.00	-1.41	39.79	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2472MHz)

Vertical

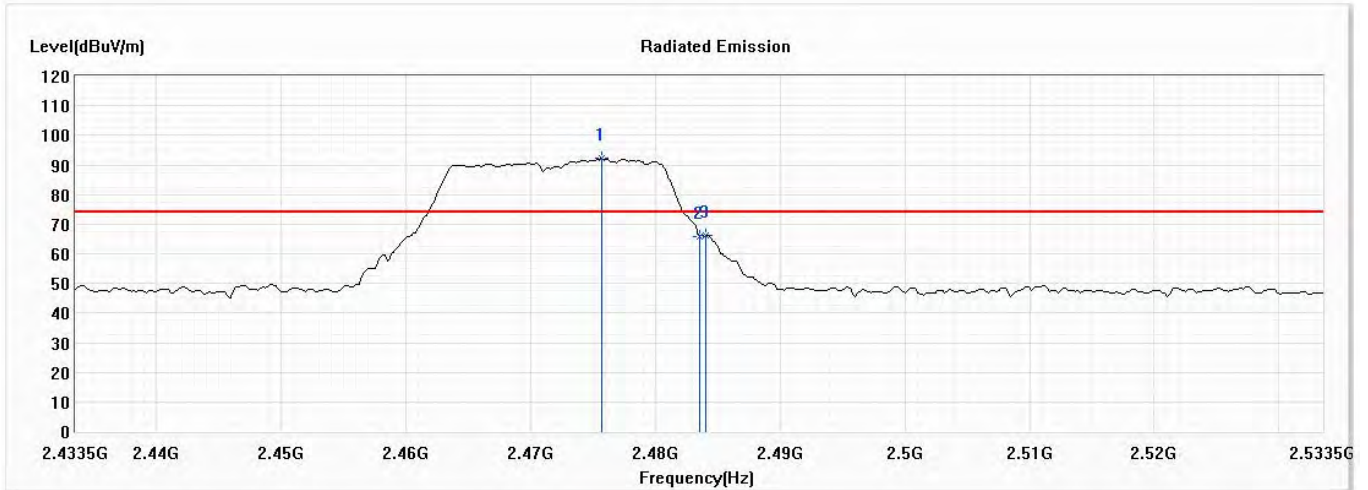


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2475.674	92.08	--	--	79.24	12.84	PK
2	2483.500	65.73	74.00	-8.27	52.93	12.80	PK
3	2484.080	66.24	74.00	-7.76	53.44	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/18
 Test Mode : Mode 9 MIMO: Transmit (802.11n-20BW_14.4Mbps) (2472MHz)

Vertical

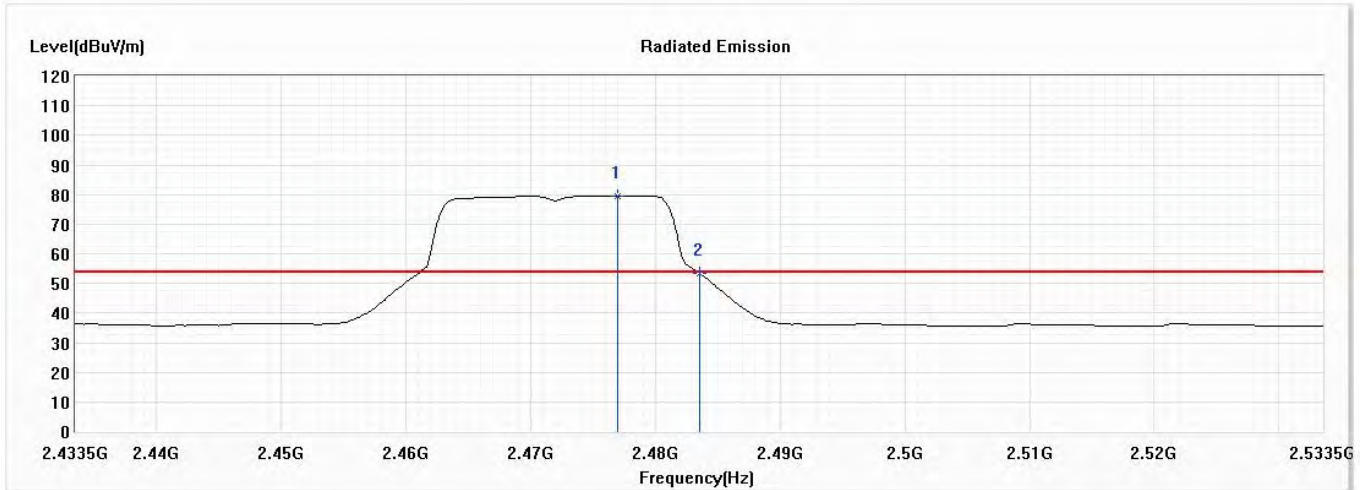


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2476.978	79.58	--	--	66.74	12.84	AV
2	2483.500	53.39	54.00	-0.61	40.59	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2422MHz)

Horizontal

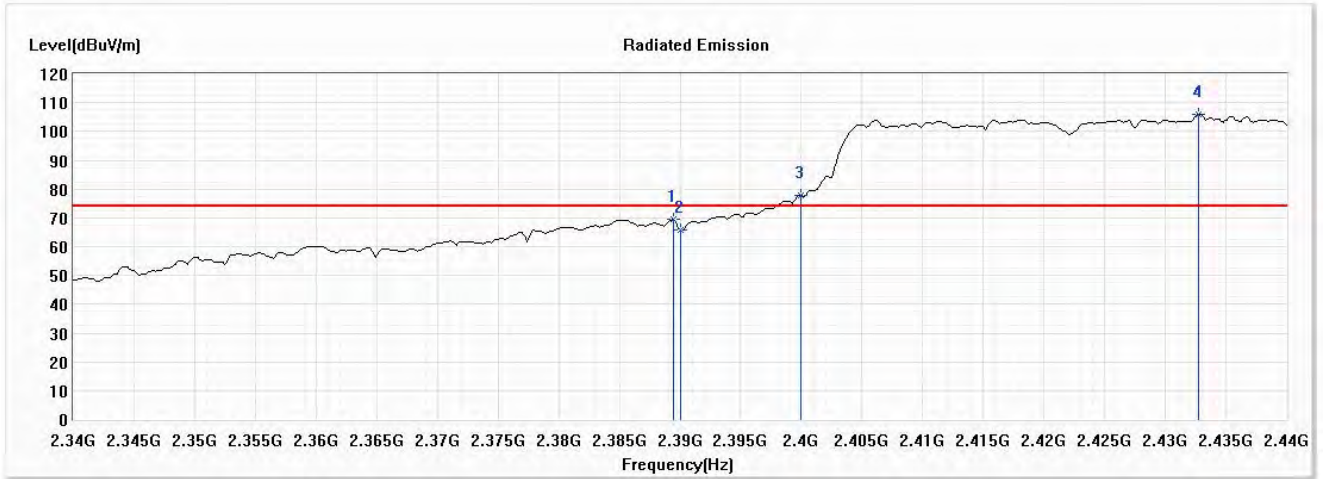


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2389.420	69.42	74.00	-4.58	56.86	12.56	PK
2	2390.000	65.74	74.00	-8.26	53.19	12.55	PK
! 3	2400.000	77.60	--	--	65.07	12.53	PK
! 4	2432.754	105.93	--	--	93.12	12.81	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2422MHz)

Horizontal

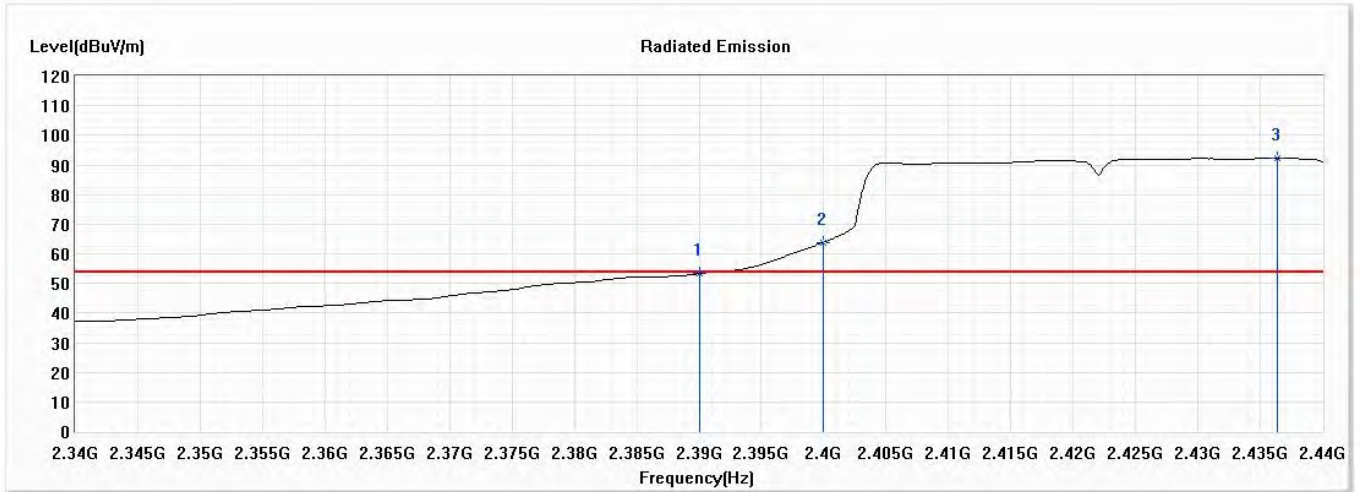


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	53.33	54.00	-0.67	40.78	12.55	AV
! 2	2400.000	63.85	--	--	51.32	12.53	AV
! 3	2436.377	92.22	--	--	79.37	12.85	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2422MHz)

Vertical

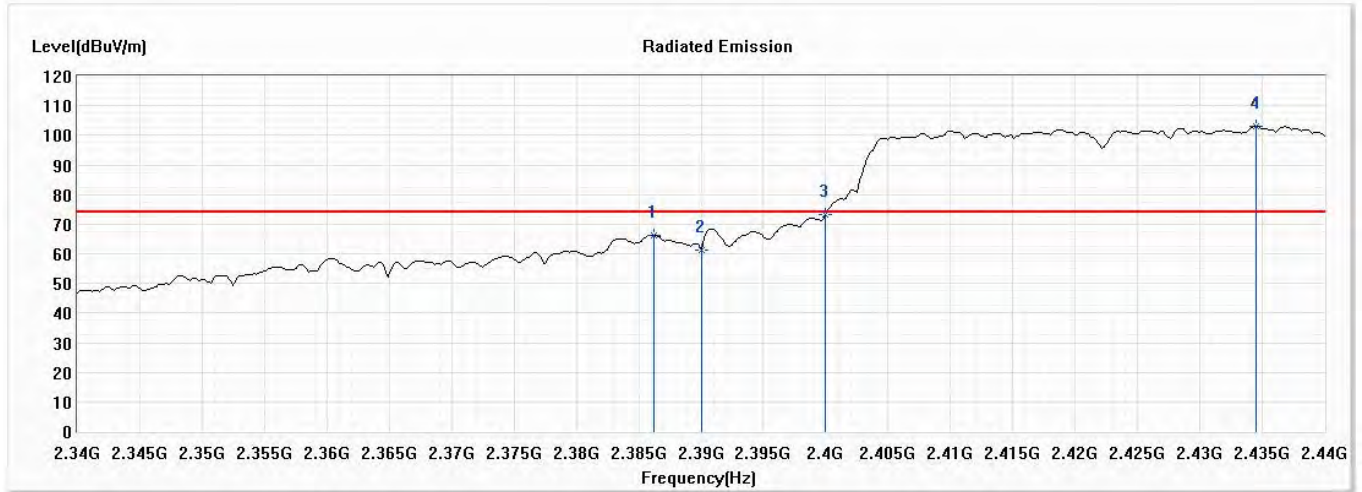


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2386.232	66.24	74.00	-7.76	53.67	12.57	PK
2	2390.000	61.22	74.00	-12.78	48.67	12.55	PK
3	2400.000	73.29	--	--	60.76	12.53	PK
! 4	2434.493	103.05	--	--	90.22	12.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2422MHz)

Vertical

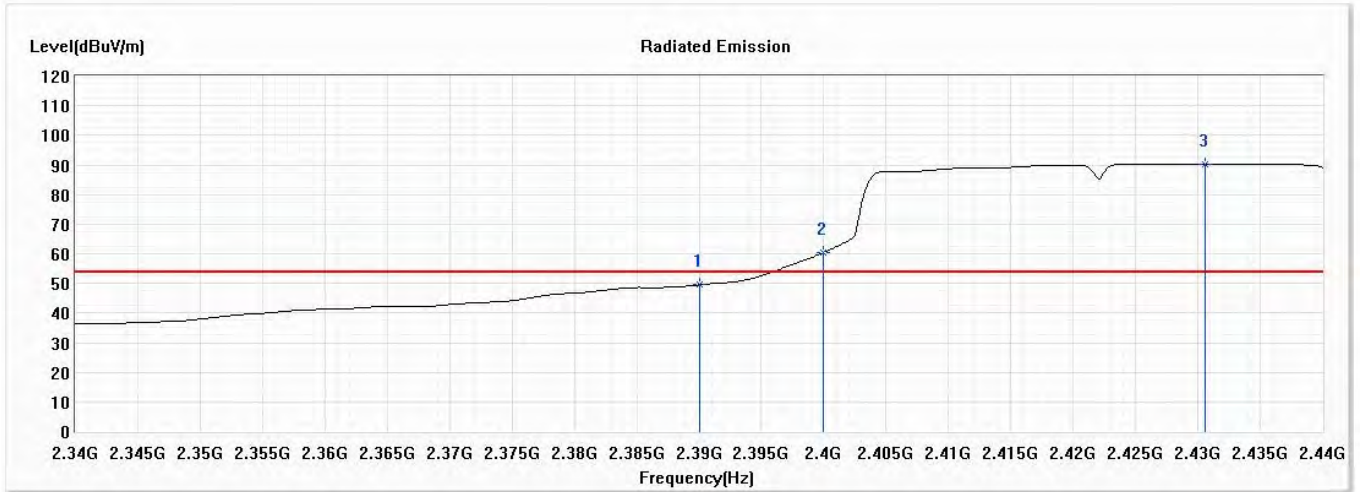


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2390.000	49.48	54.00	-4.52	36.93	12.55	AV
! 2	2400.000	60.43	--	--	47.90	12.53	AV
! 3	2430.580	90.38	--	--	77.59	12.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2452MHz)

Horizontal

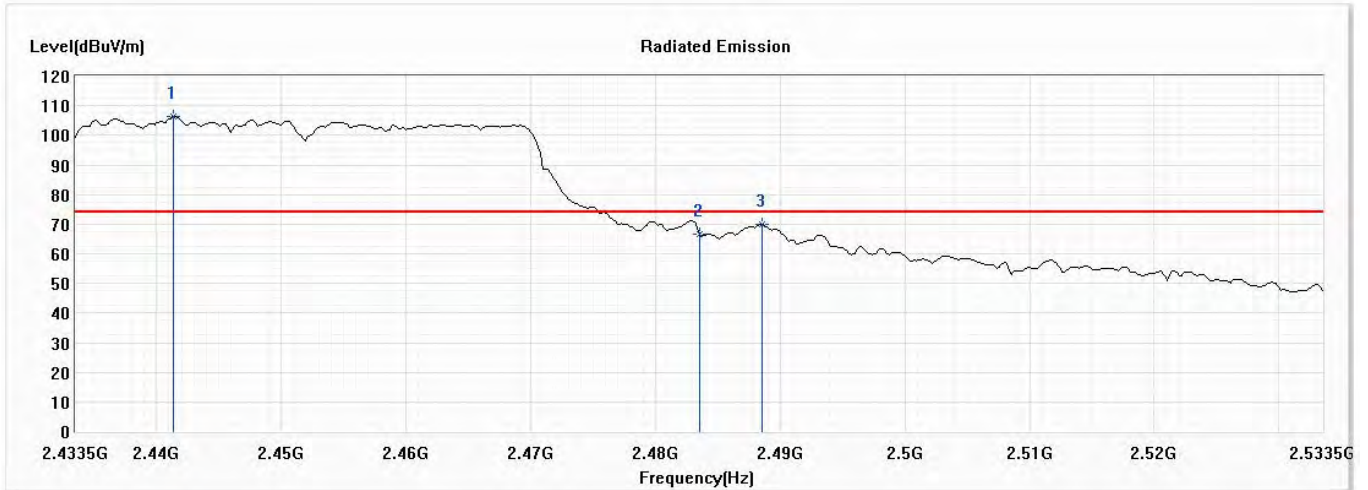


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2441.326	106.22	--	--	93.33	12.89	PK
2	2483.500	66.55	74.00	-7.45	53.75	12.80	PK
3	2488.572	69.84	74.00	-4.16	57.06	12.78	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2452MHz)

Horizontal

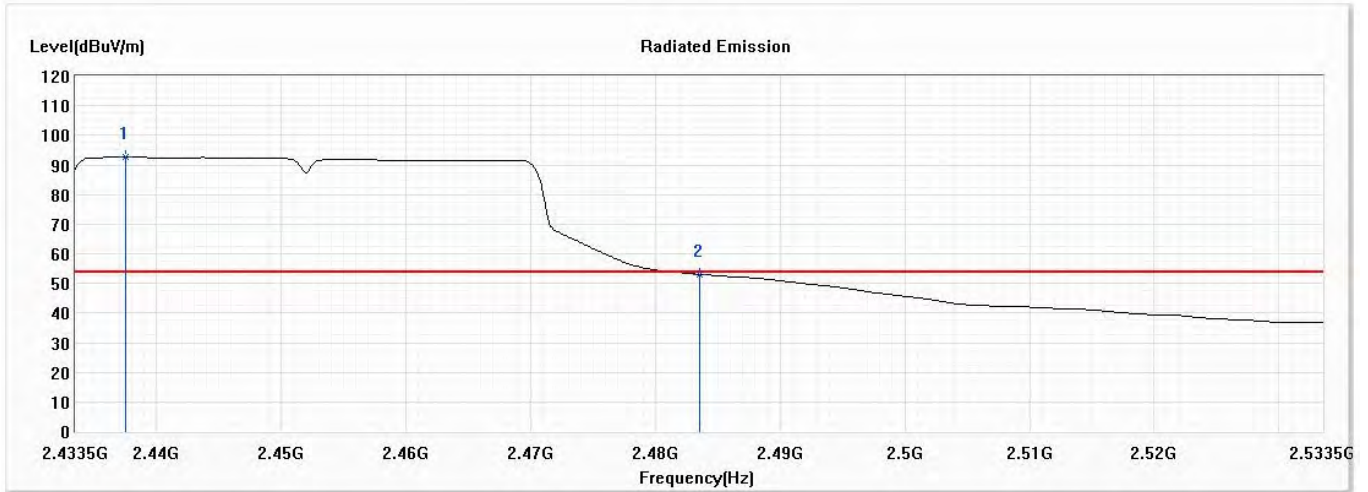


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2437.558	92.65	--	--	79.79	12.86	AV
2	2483.500	53.05	54.00	-0.95	40.25	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2452MHz)

Vertical

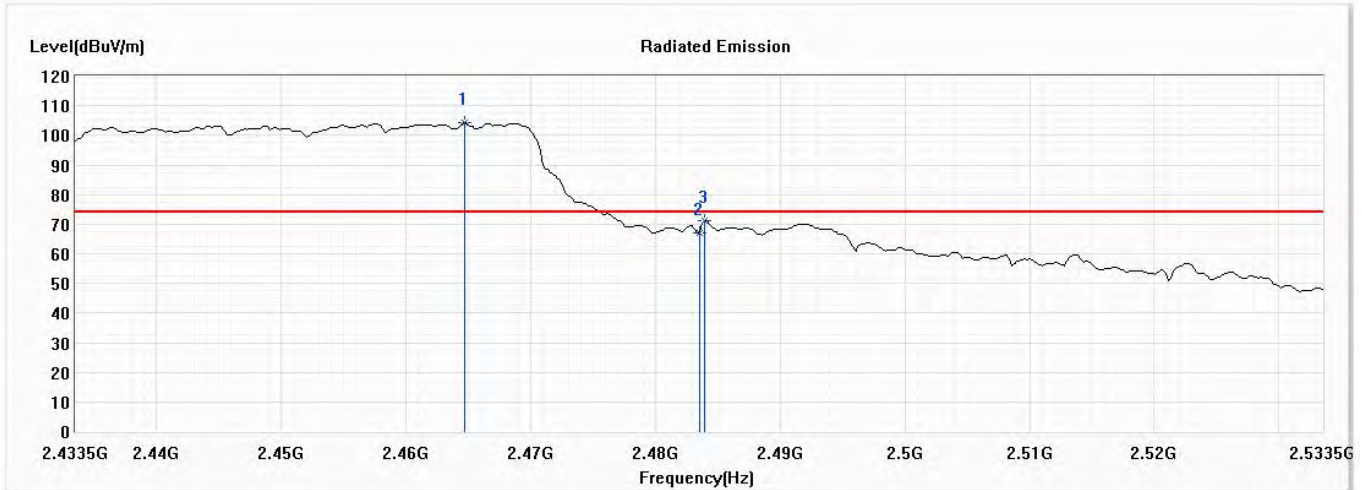


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.659	104.18	--	--	91.28	12.90	PK
2	2483.500	67.17	74.00	-6.83	54.37	12.80	PK
3	2483.935	71.09	74.00	-2.91	58.29	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2452MHz)

Vertical

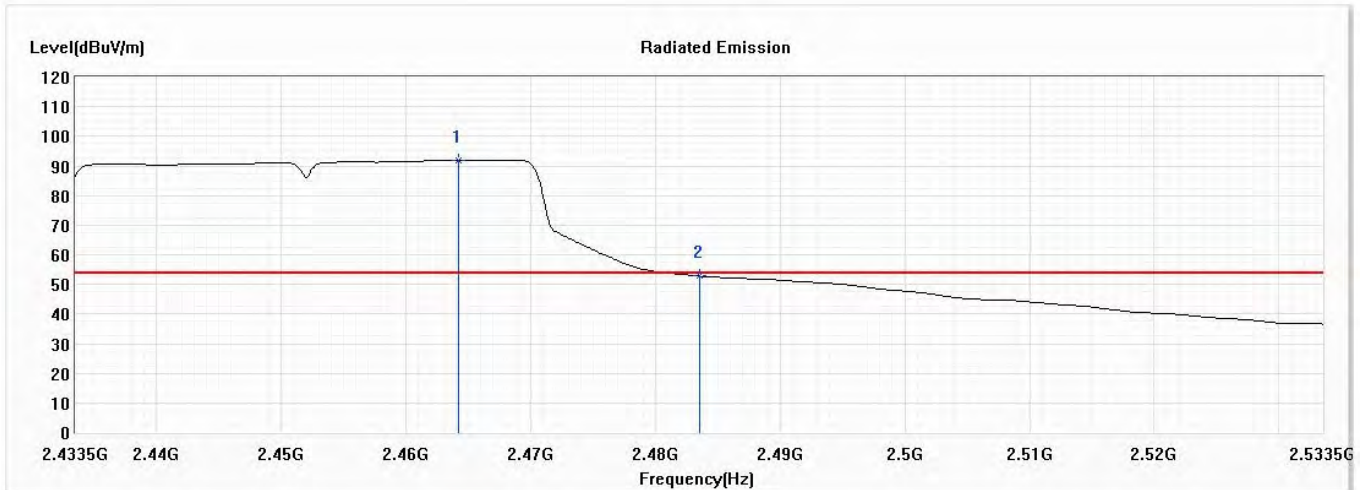


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2464.225	91.97	--	--	79.07	12.90	AV
2	2483.500	52.79	54.00	-1.21	39.99	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2457MHz)

Horizontal

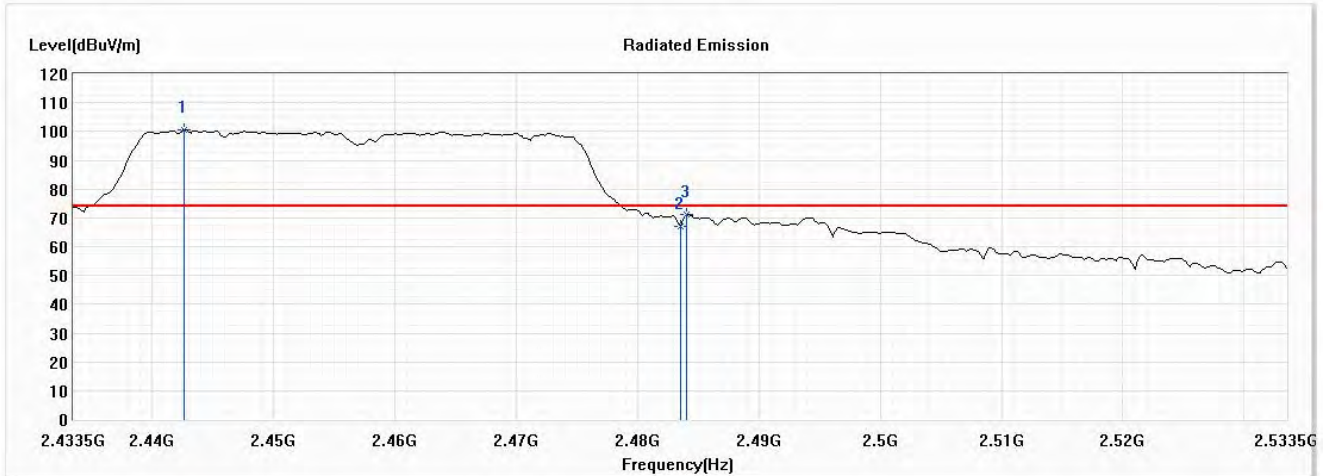


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2442.630	100.54	--	--	87.63	12.91	PK
2	2483.500	67.17	74.00	-6.83	54.37	12.80	PK
3	2484.080	71.15	74.00	-2.85	58.35	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2457MHz)

Horizontal

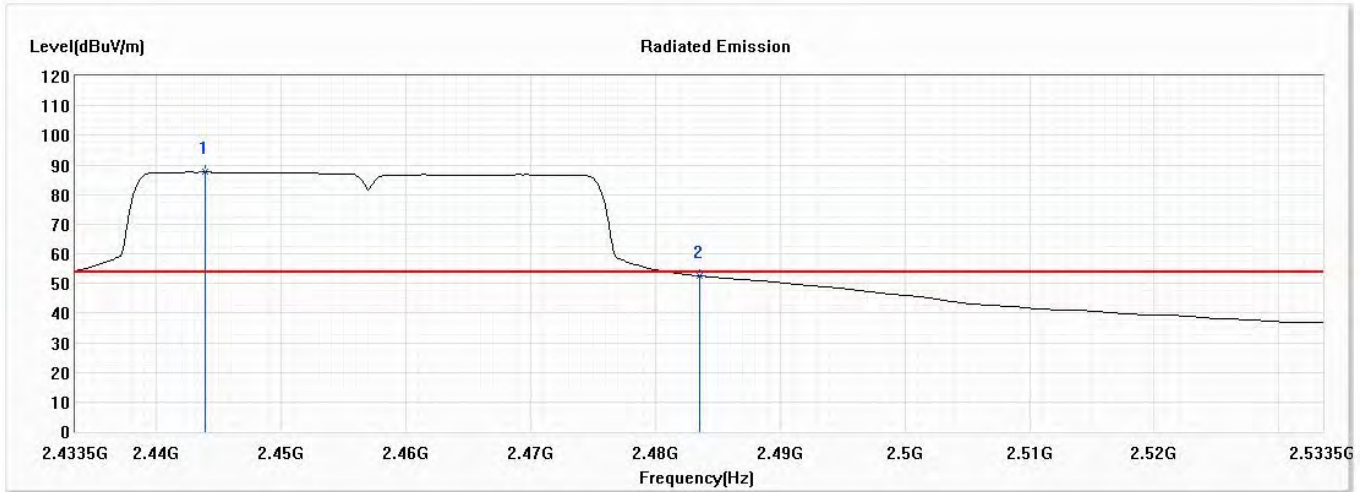


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2443.935	87.57	--	--	74.65	12.92	AV
2	2483.500	52.49	54.00	-1.51	39.69	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2457MHz)

Vertical

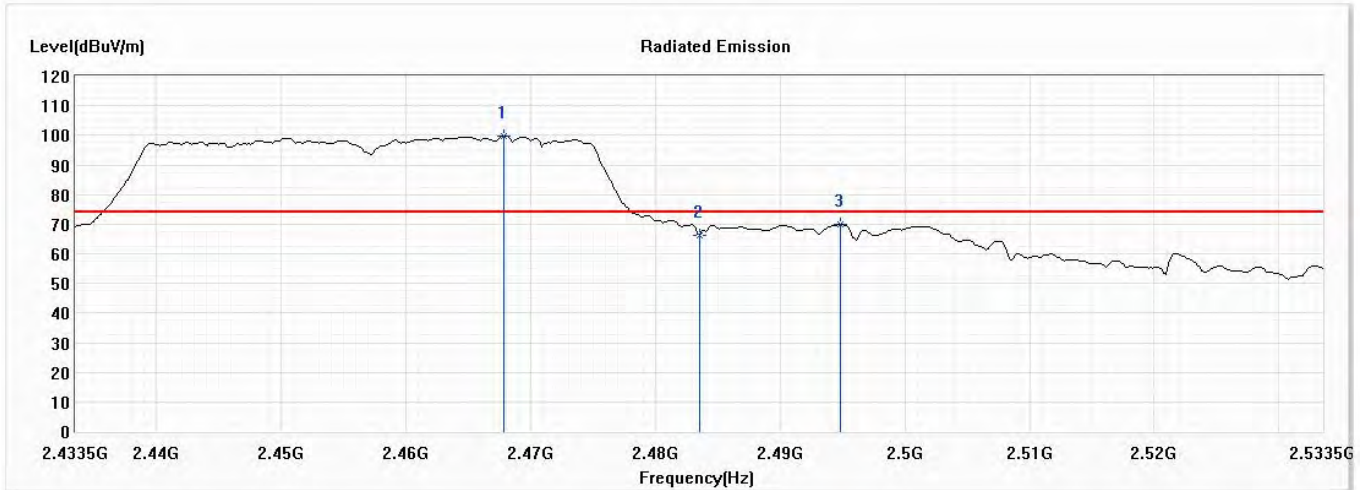


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2467.848	99.88	--	--	86.99	12.89	PK
2	2483.500	66.29	74.00	-7.71	53.49	12.80	PK
3	2494.804	69.77	74.00	-4.23	57.03	12.74	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2457MHz)

Vertical

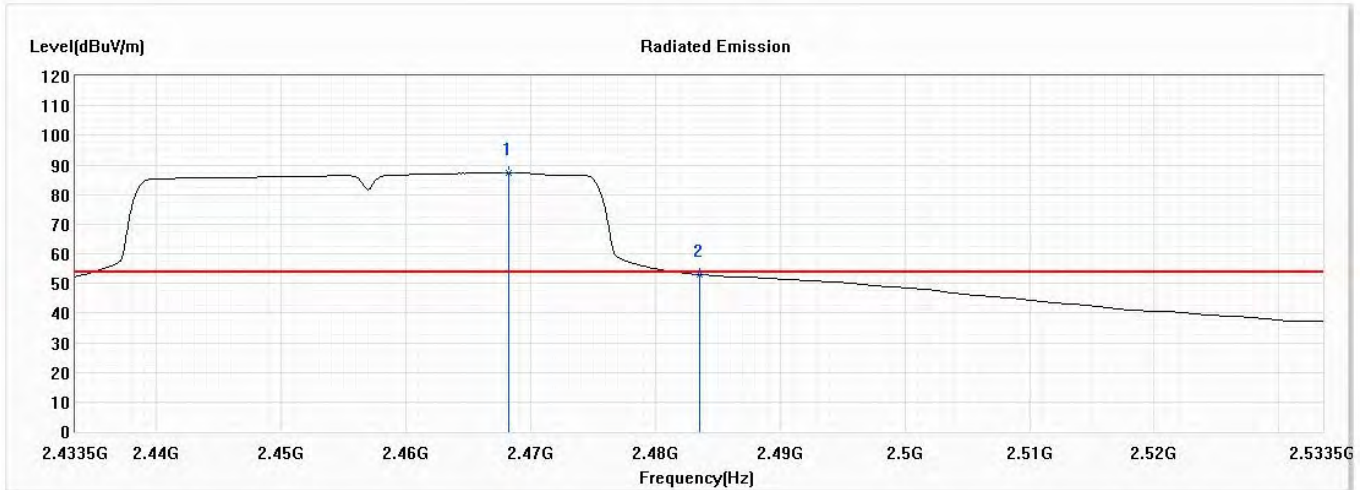


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2468.283	87.20	--	--	74.31	12.89	AV
2	2483.500	53.01	54.00	-0.99	40.21	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2462MHz)

Horizontal

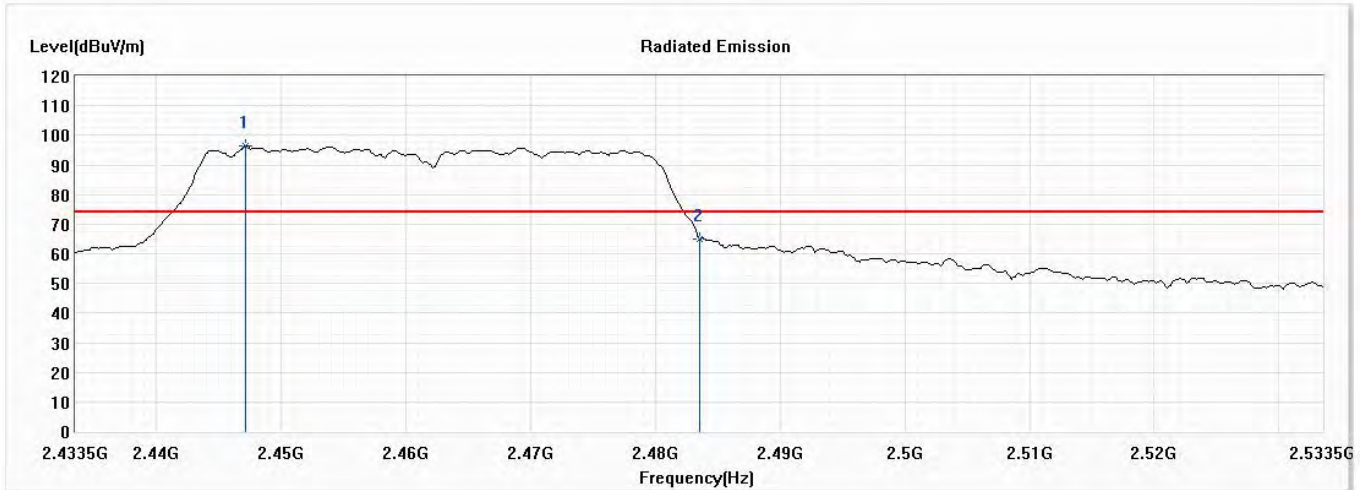


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2447.123	96.22	--	--	83.26	12.96	PK
2	2483.500	64.98	74.00	-9.02	52.18	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2462MHz)

Horizontal

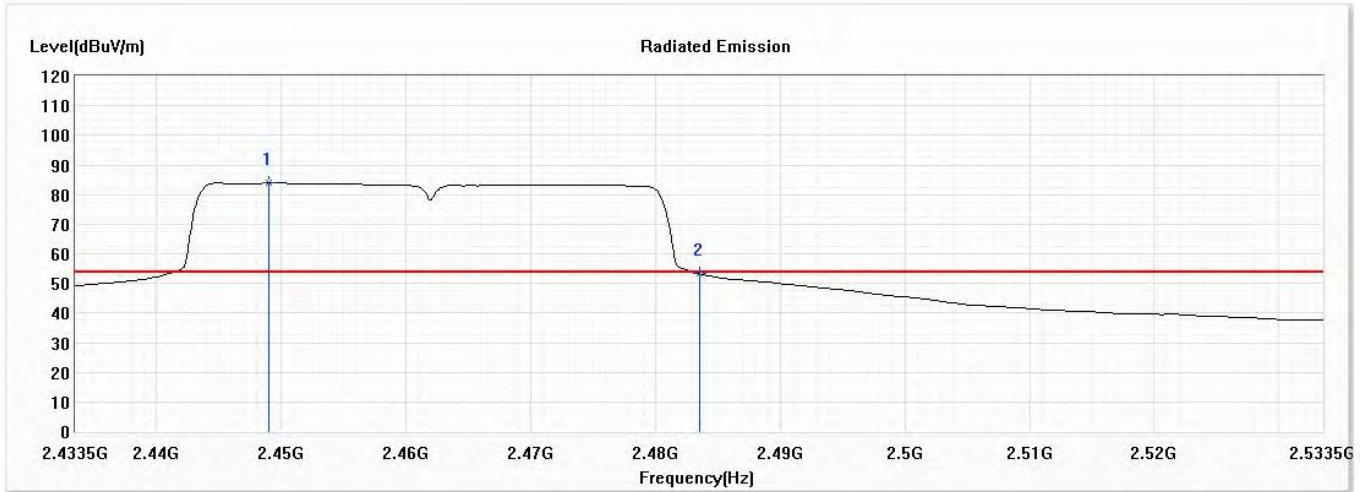


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2449.007	83.89	--	--	70.92	12.97	AV
2	2483.500	53.24	54.00	-0.76	40.44	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2462MHz)

Vertical

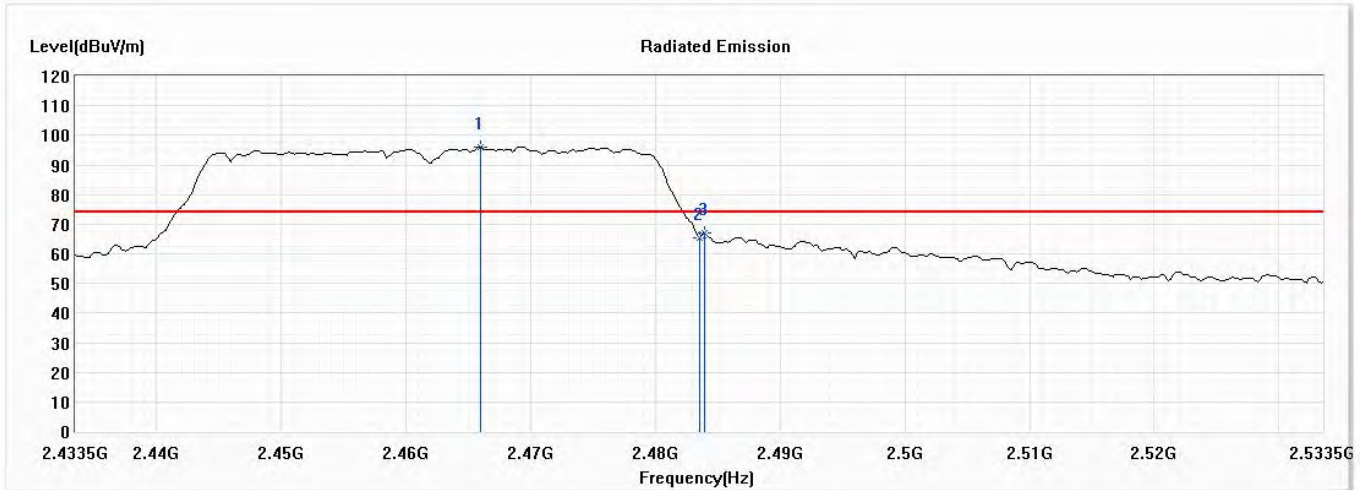


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2465.964	95.95	--	--	83.06	12.89	PK
2	2483.500	65.44	74.00	-8.56	52.64	12.80	PK
3	2483.935	66.90	74.00	-7.10	54.10	12.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge
 Test Date : 2021/01/19
 Test Mode : Mode 10 MIMO: Transmit (802.11n-40BW_30Mbps) (2462MHz)

Vertical

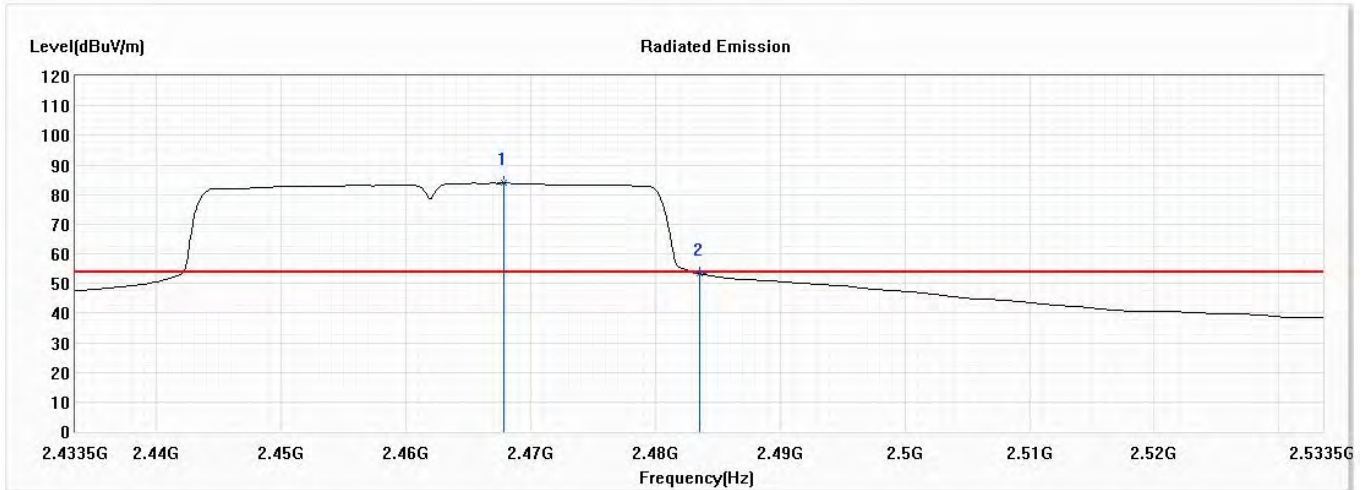


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	2467.848	83.85	--	--	70.96	12.89	AV
2	2483.500	53.36	54.00	-0.64	40.56	12.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

5. Duty Cycle

5.1. Test Setup



5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

5.3. Test Result of Duty Cycle

Product : Intel® Wireless-AC 9260
Test Item : Duty Cycle
Test Mode : Mode 11 SISO A: Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	12.3478	12.4783	98.95	0.05
802.11g	2.0507	2.0797	98.61	0.06
802.11n20	1.0000	1.0000	100.00	0.00
802.11n40	17.8261	18.0435	98.80	0.05

802.11b (SISO A)

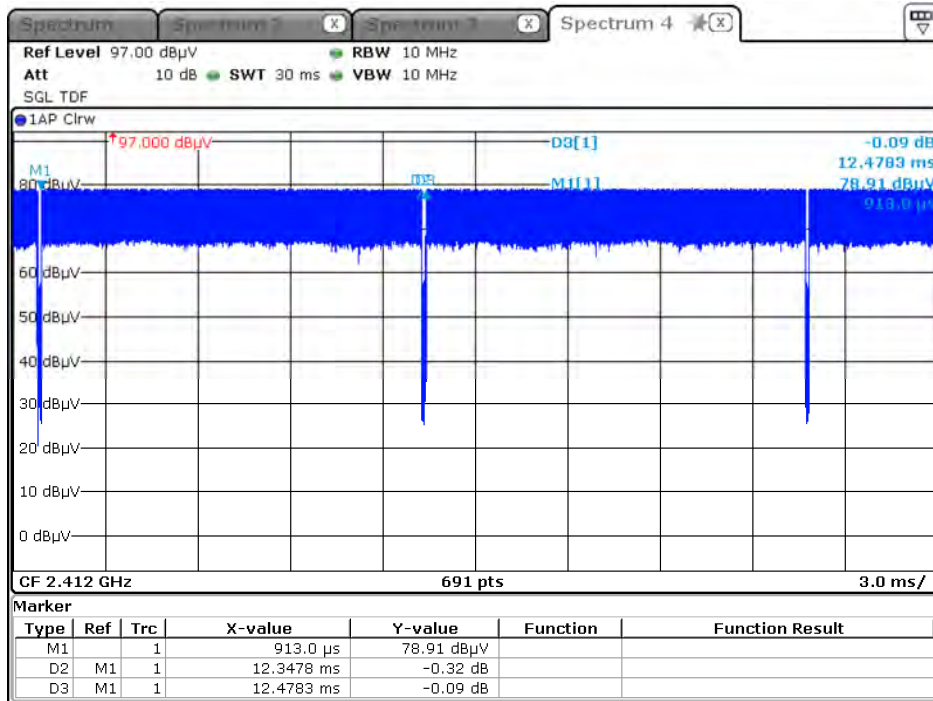


Date: 20.JAN.2021 03:47:04

802.11g (SISO A)

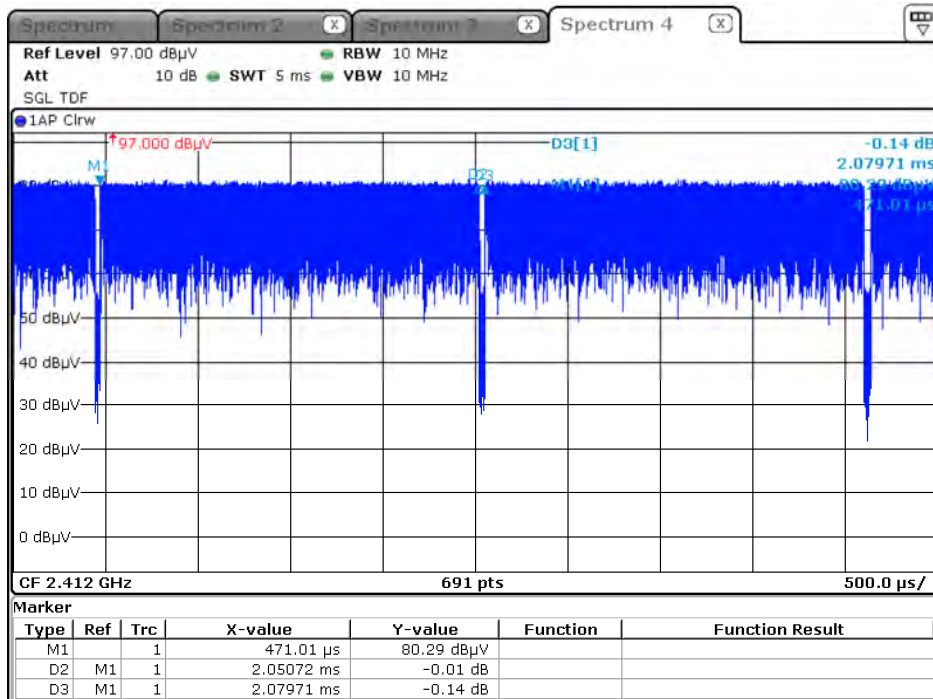


Date: 20.JAN.2021 03:40:54

802.11n20 (SISO A)

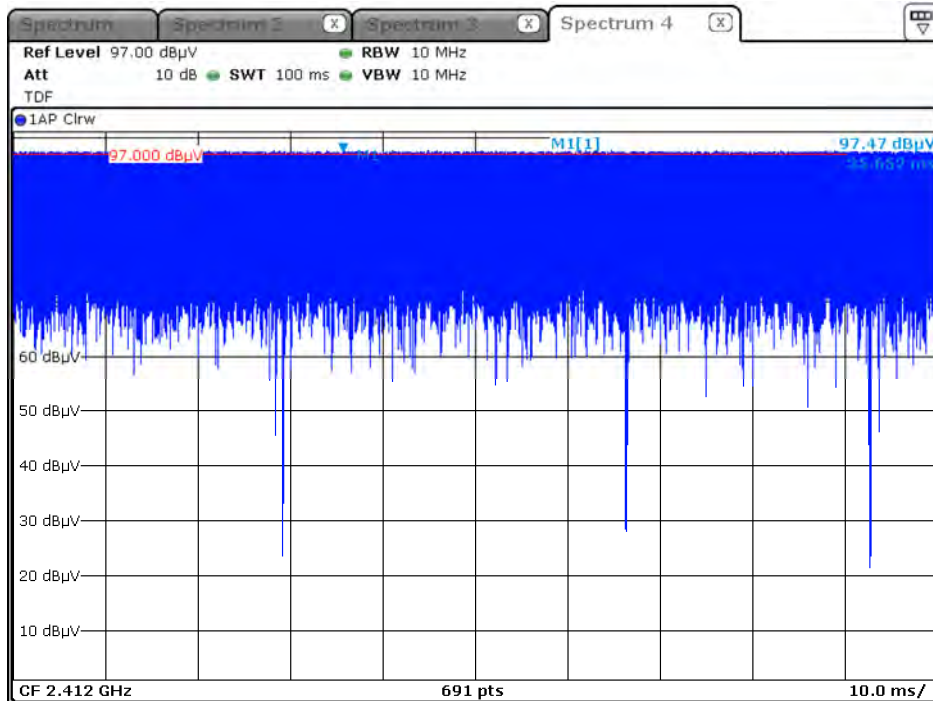

Date: 20.JAN.2021 03:36:50

802.11n40 (SISO A)

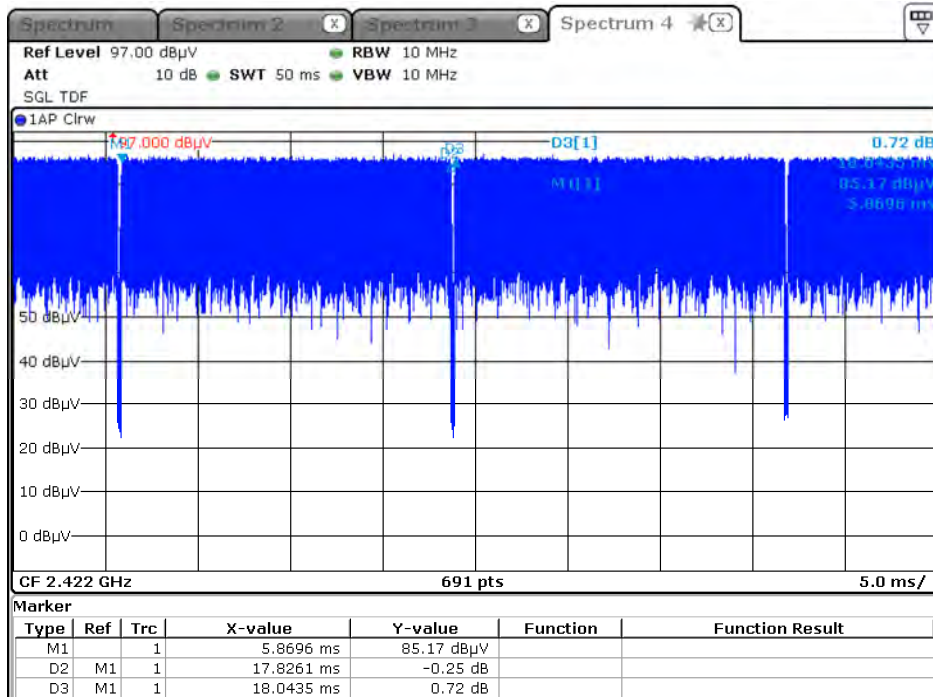

Date: 20.JAN.2021 03:43:53

Product : Intel® Wireless-AC 9260
Test Item : Duty Cycle
Test Mode : Mode 12 SISO B: Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	12.3500	12.4500	99.20	0.04
802.11g	2.0450	2.0900	97.85	0.09
802.11n20	1.0000	1.0000	100.00	0.00
802.11n40	17.8261	18.1159	98.40	0.07

802.11b (SISO B)

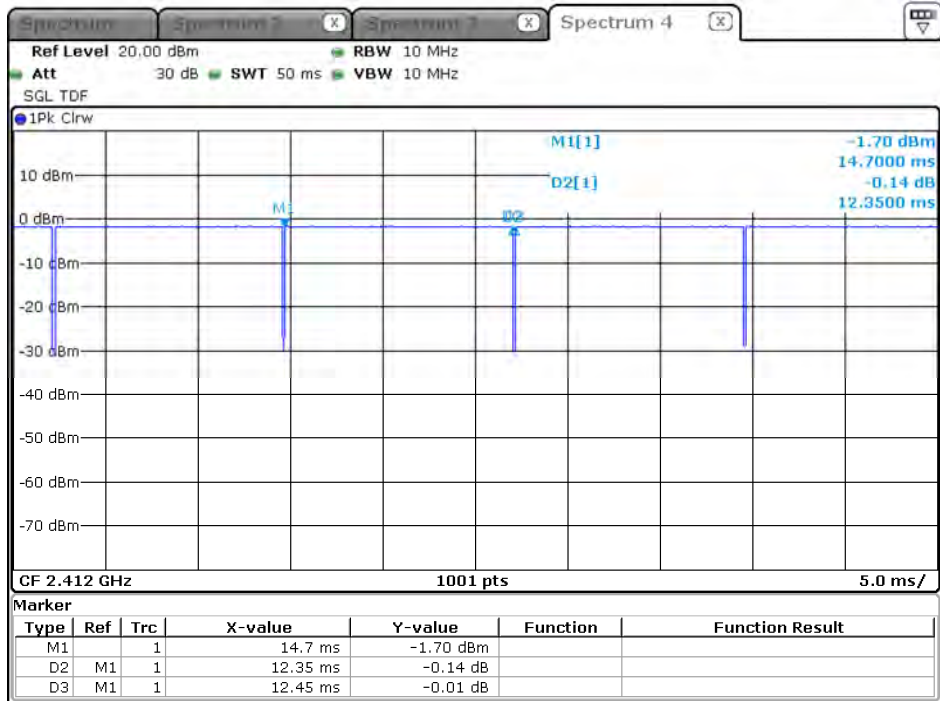


Date: 15.JAN.2021 07:36:32

802.11g (SISO B)

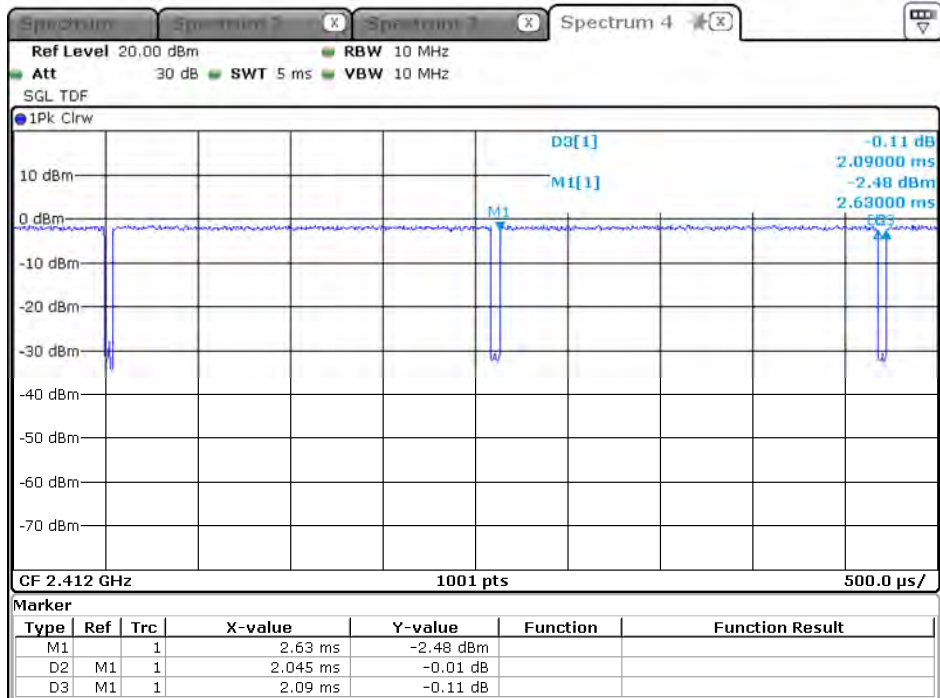


Date: 15.JAN.2021 07:34:41

802.11n20 (SISO B)

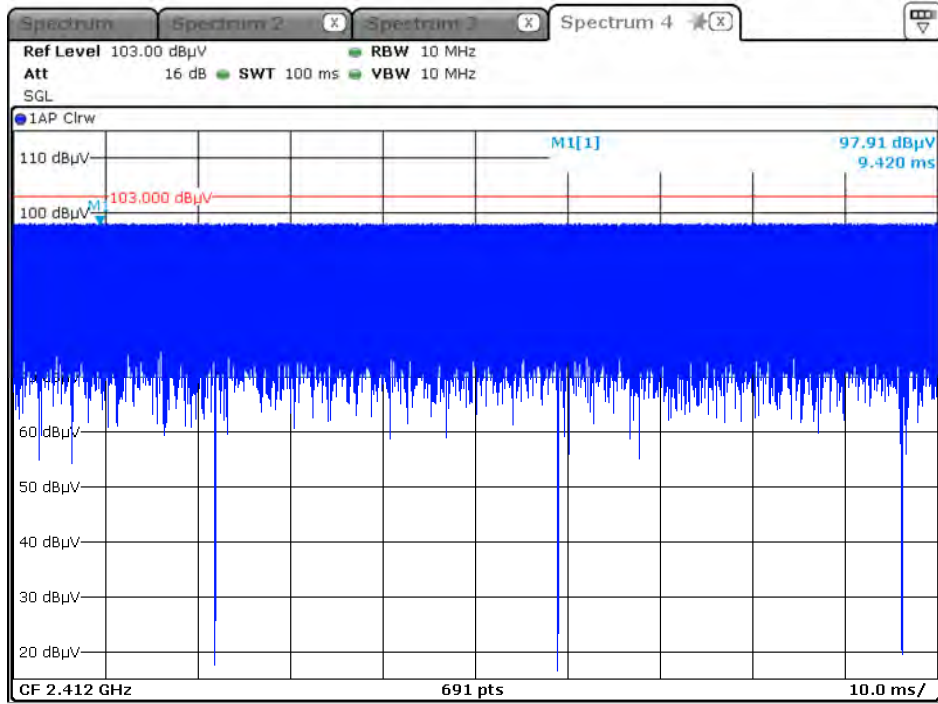

Date: 19.JAN.2021 09:17:09

802.11n40 (SISO B)

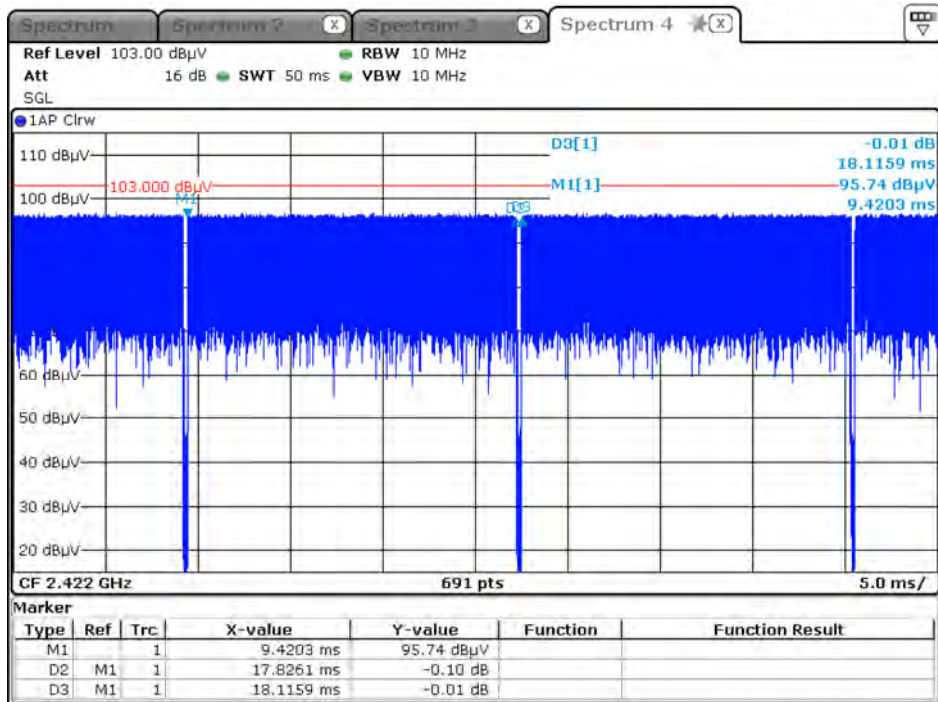

Date: 19.JAN.2021 09:13:45

Product : Intel® Wireless-AC 9260
Test Item : Duty Cycle
Test Mode : Mode 13 MIMO: Transmit

Duty Cycle Formula:


$Duty\ Cycle = Ton / (Ton + Toff)$

$Duty\ Factor = 10\ Log\ (1/Duty\ Cycle)$

Results:


2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	18.5507	18.7681	98.84	0.05
802.11n40	8.8841	9.0290	98.40	0.07

802.11n20 (MIMO)

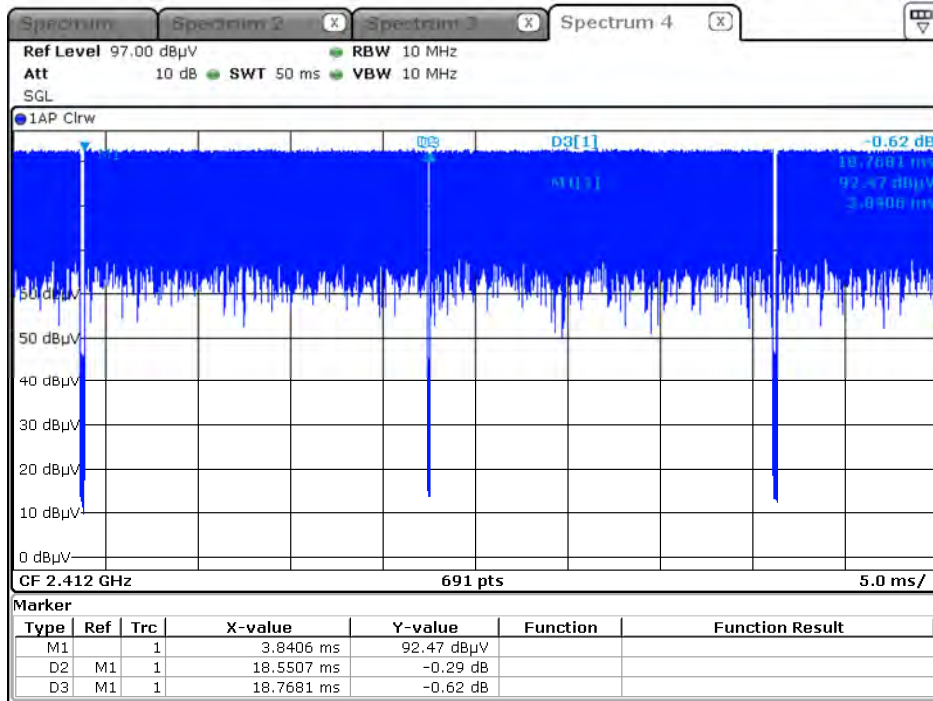

Date: 19.JAN.2021 08:51:45

802.11n40 (MIMO)

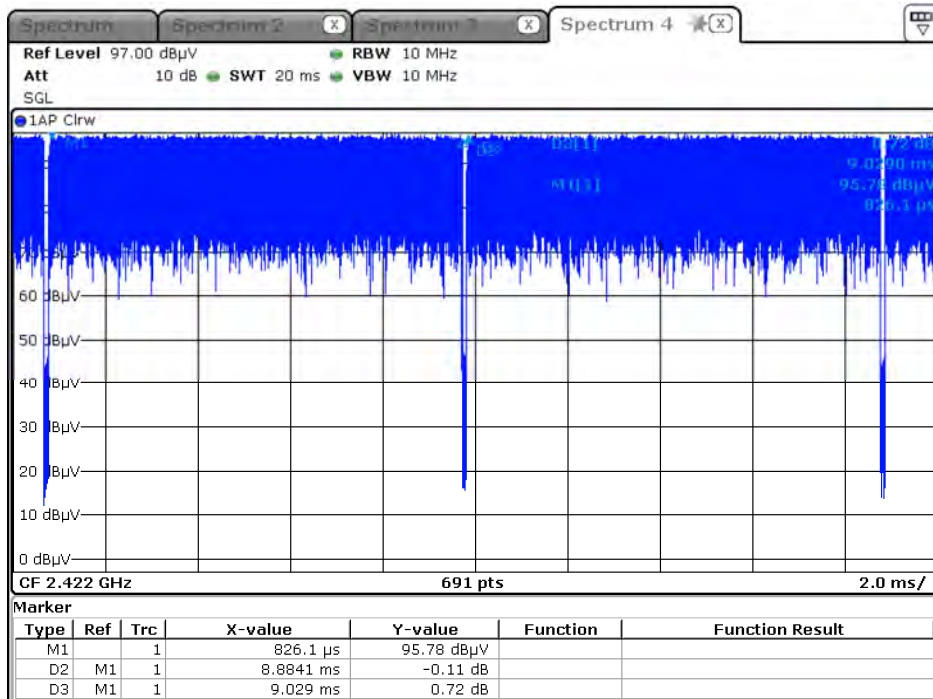

Date: 19.JAN.2021 08:56:54

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.