


Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5300MHz)

Vertical

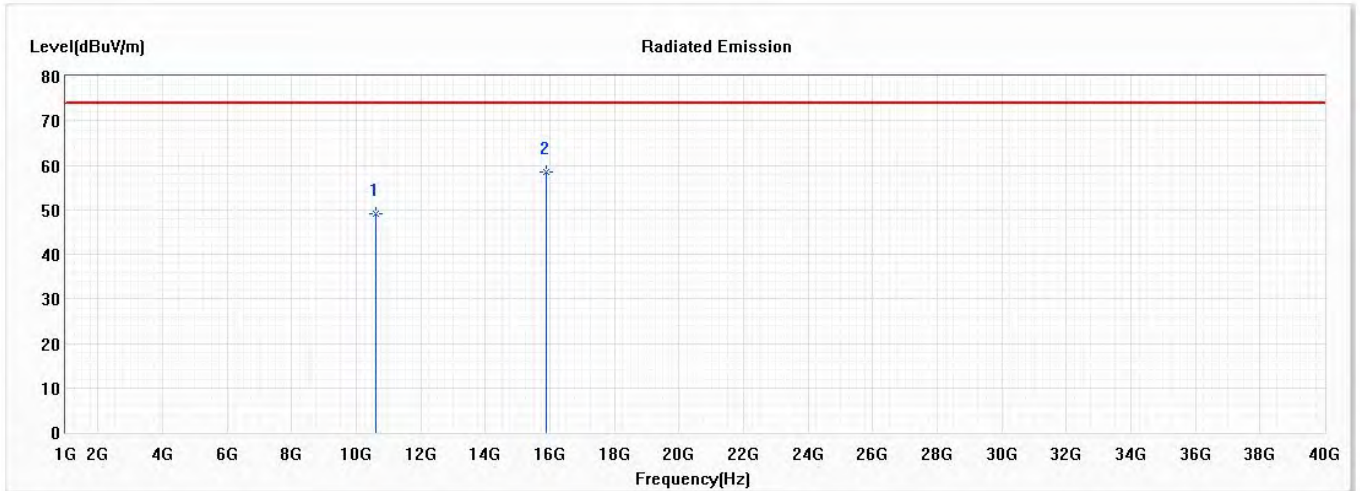


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	49.10	74.00	-24.90	49.77	-0.67	PK
* 2	15900.000	58.61	74.00	-15.39	55.99	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5300MHz)

Vertical

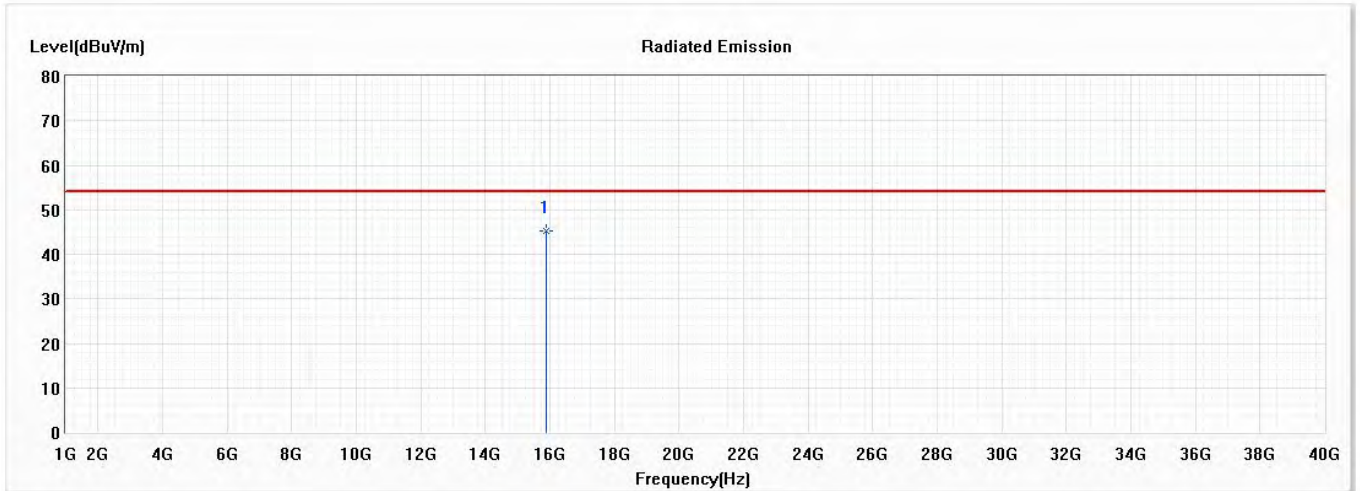


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15900.000	45.37	54.00	-8.63	42.75	2.62	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5320MHz)

Horizontal

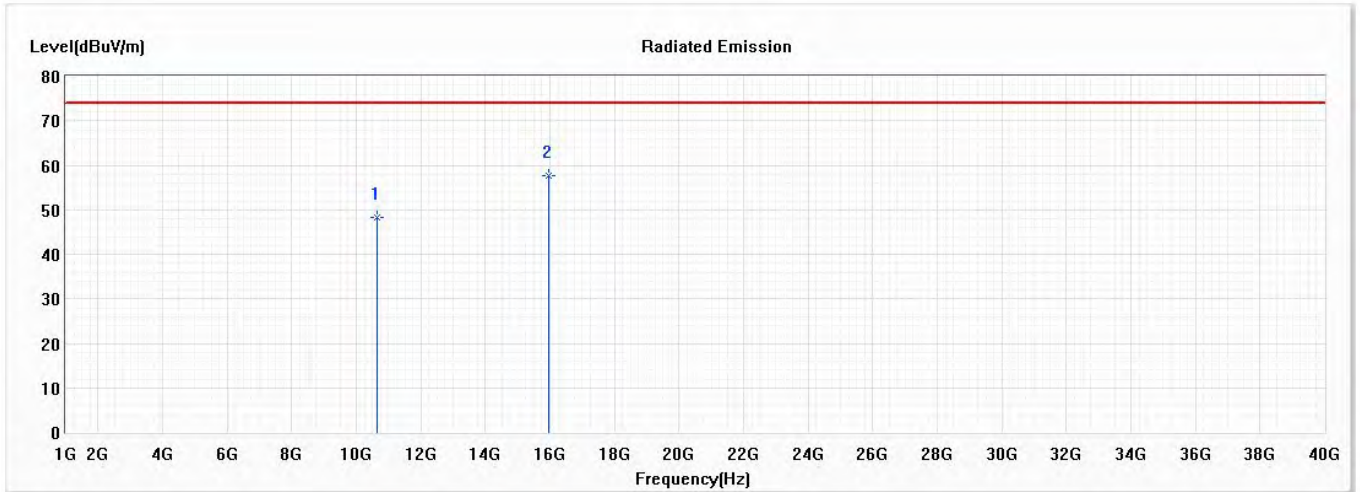


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	48.18	74.00	-25.82	48.78	-0.60	PK
* 2	15960.000	57.58	74.00	-16.42	54.89	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5320MHz)

Horizontal

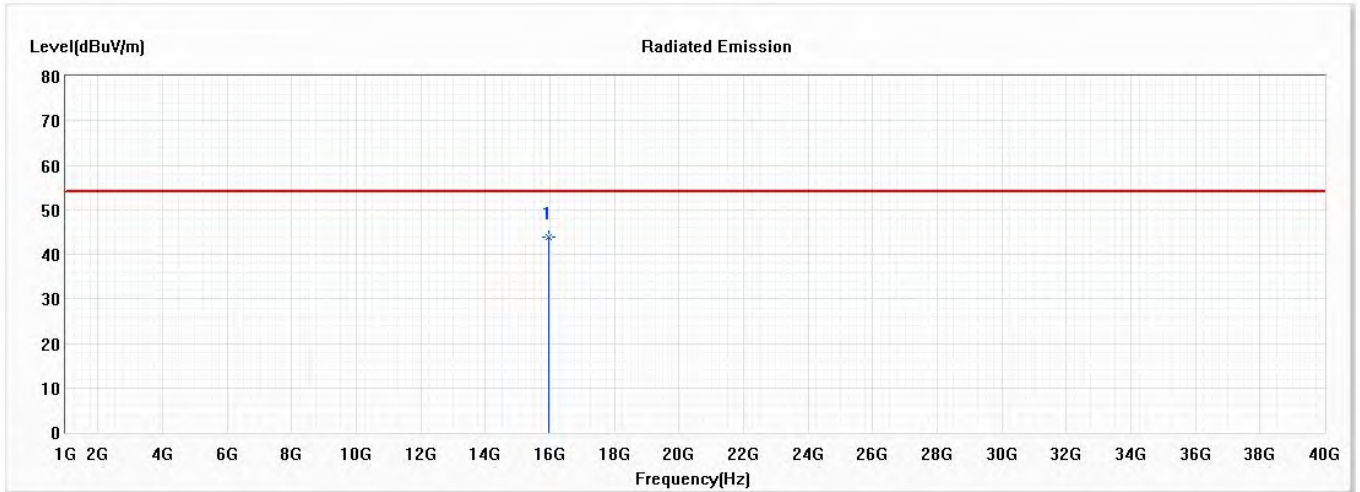


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	43.83	54.00	-10.17	41.14	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5320MHz)

Vertical

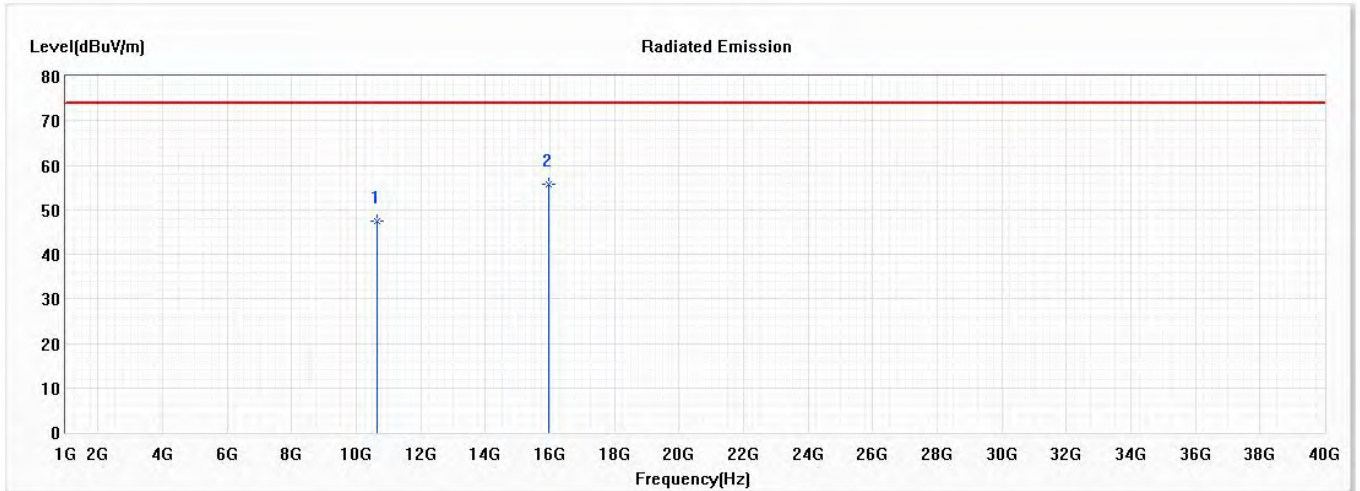


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	47.57	74.00	-26.43	48.17	-0.60	PK
* 2	15960.000	55.71	74.00	-18.29	53.02	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5320MHz)

Vertical

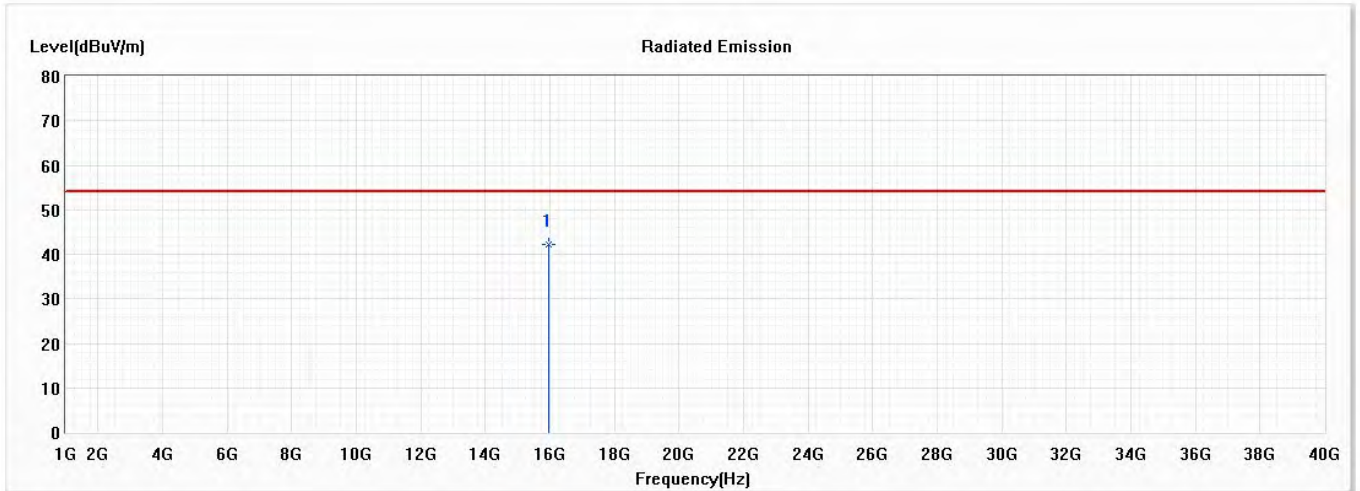


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	42.19	54.00	-11.81	39.50	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5500MHz)

Horizontal

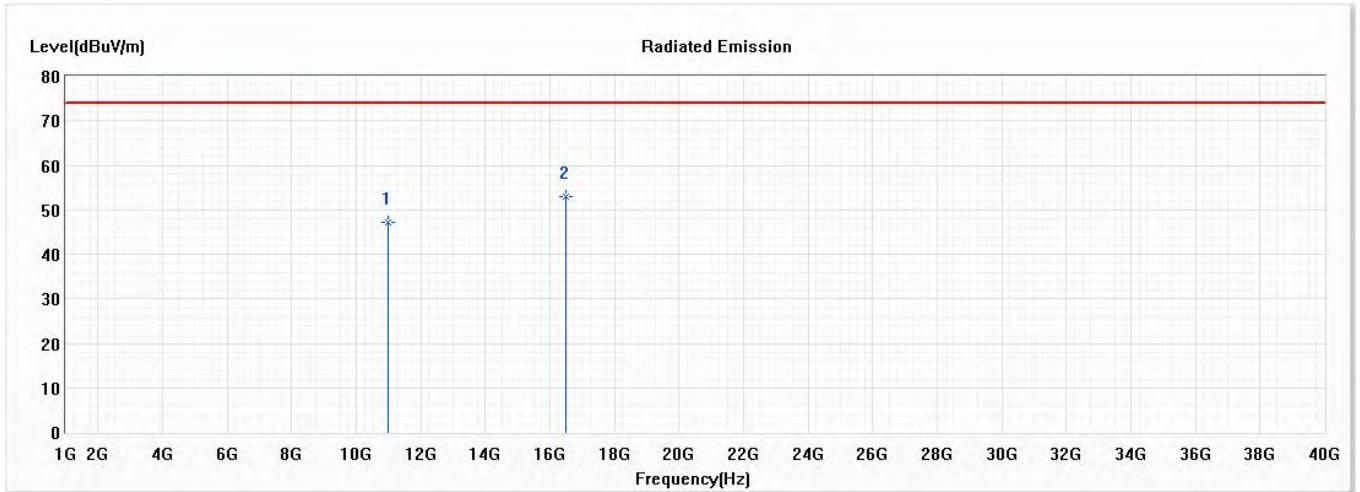


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	47.24	74.00	-26.76	47.18	0.06	PK
* 2	16500.000	52.92	74.00	-21.08	48.63	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5500MHz)

Vertical

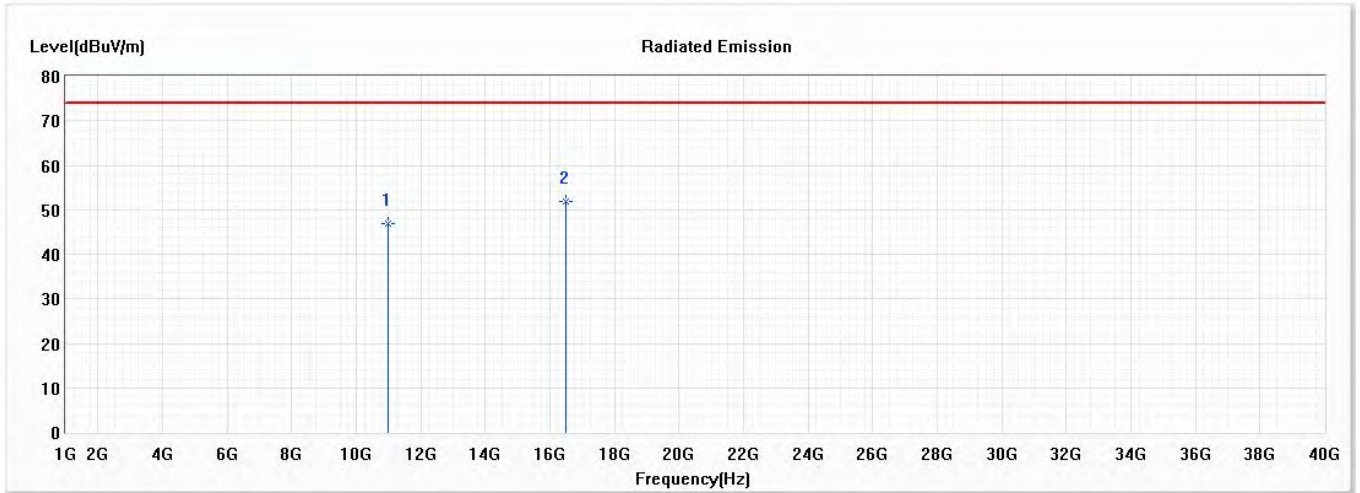


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	47.00	74.00	-27.00	46.94	0.06	PK
* 2	16500.000	51.99	74.00	-22.01	47.70	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5580MHz)

Horizontal

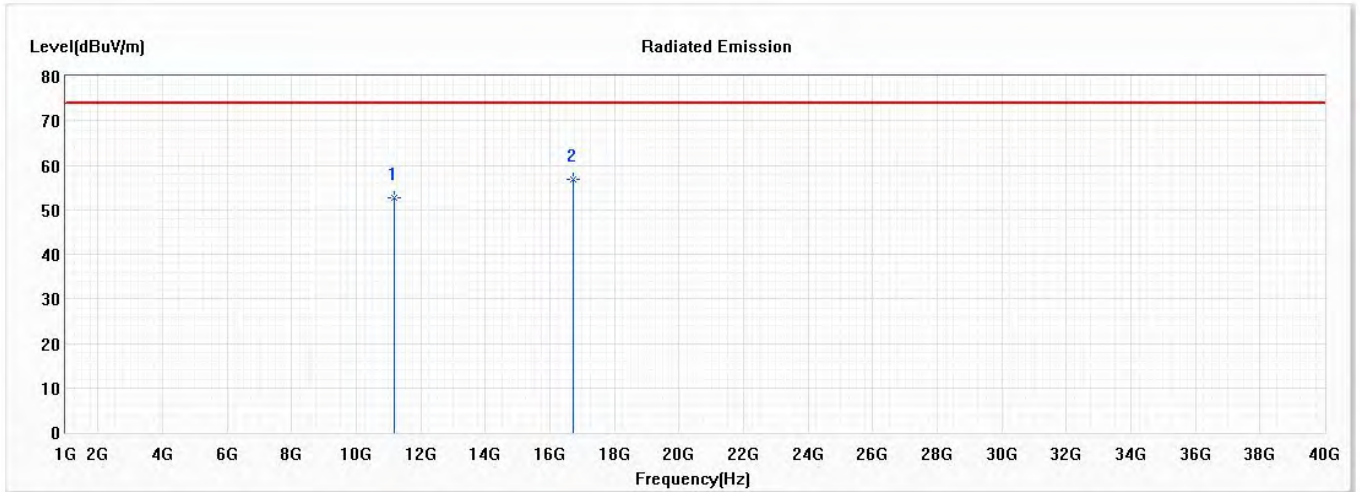


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	52.77	74.00	-21.23	52.30	0.47	PK
* 2	16740.000	56.80	74.00	-17.20	51.70	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5580MHz)

Horizontal

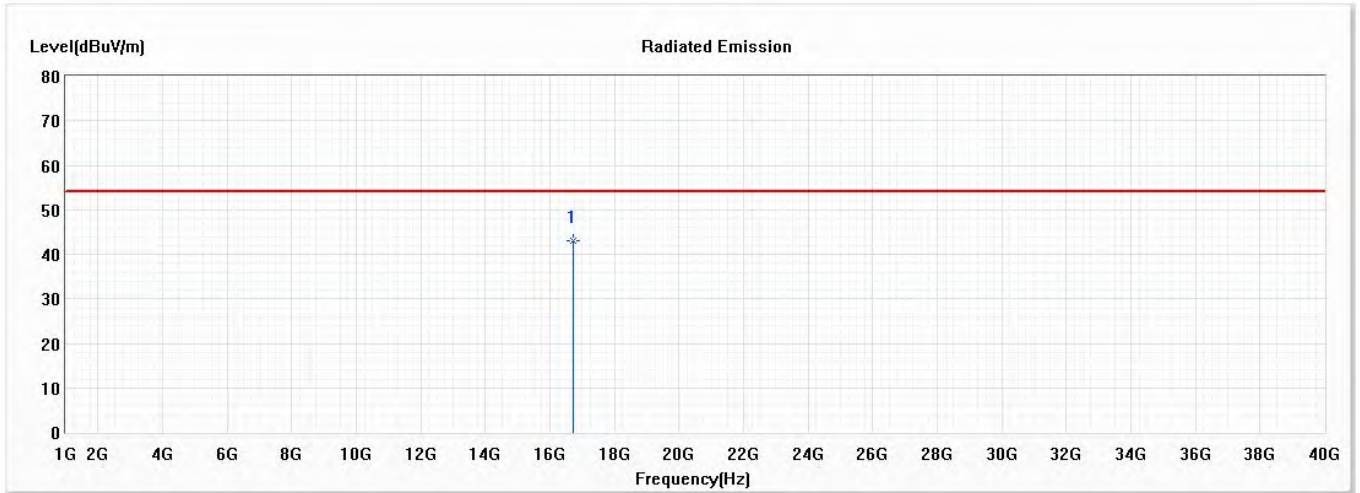


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16740.000	43.09	54.00	-10.91	37.99	5.10	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5580MHz)

Vertical

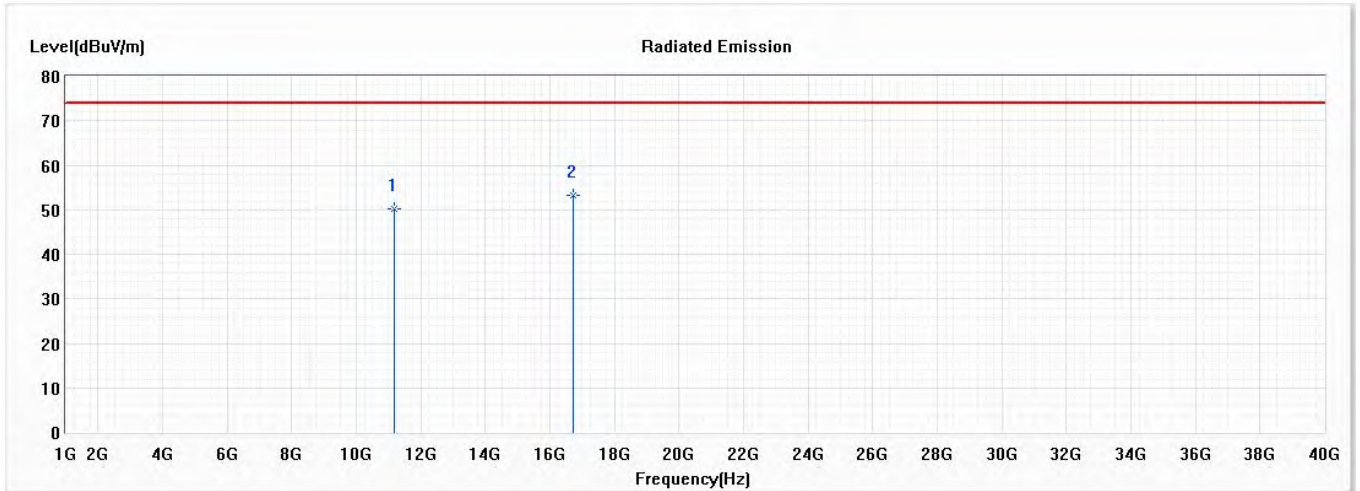


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	50.07	74.00	-23.93	49.60	0.47	PK
* 2	16740.000	53.17	74.00	-20.83	48.07	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5700MHz)

Horizontal

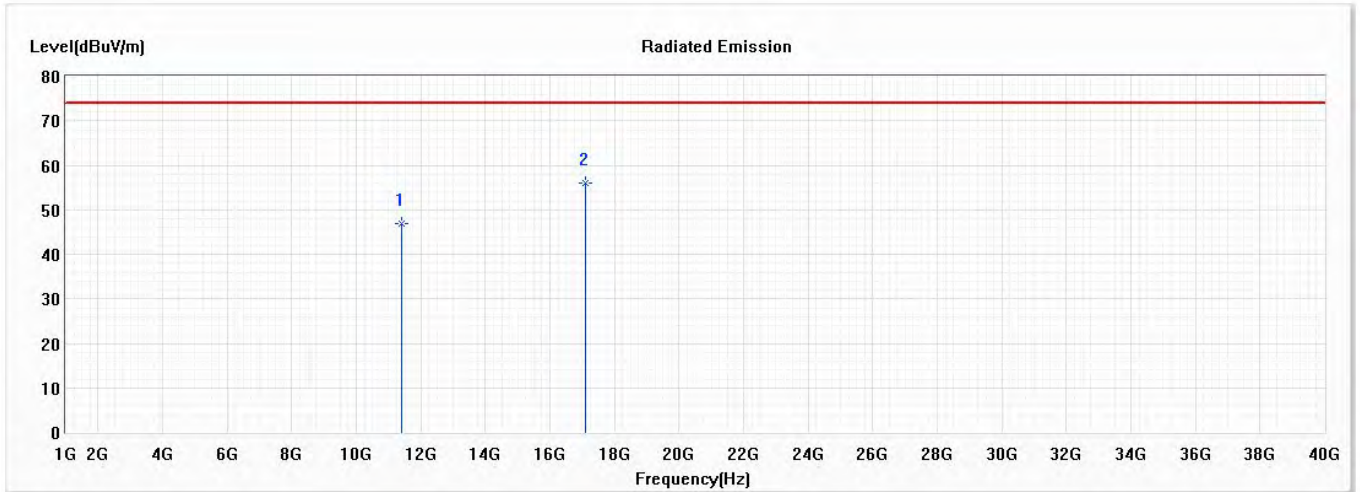


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	46.90	74.00	-27.10	45.92	0.98	PK
* 2	17100.000	55.90	74.00	-18.10	50.75	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5700MHz)

Horizontal

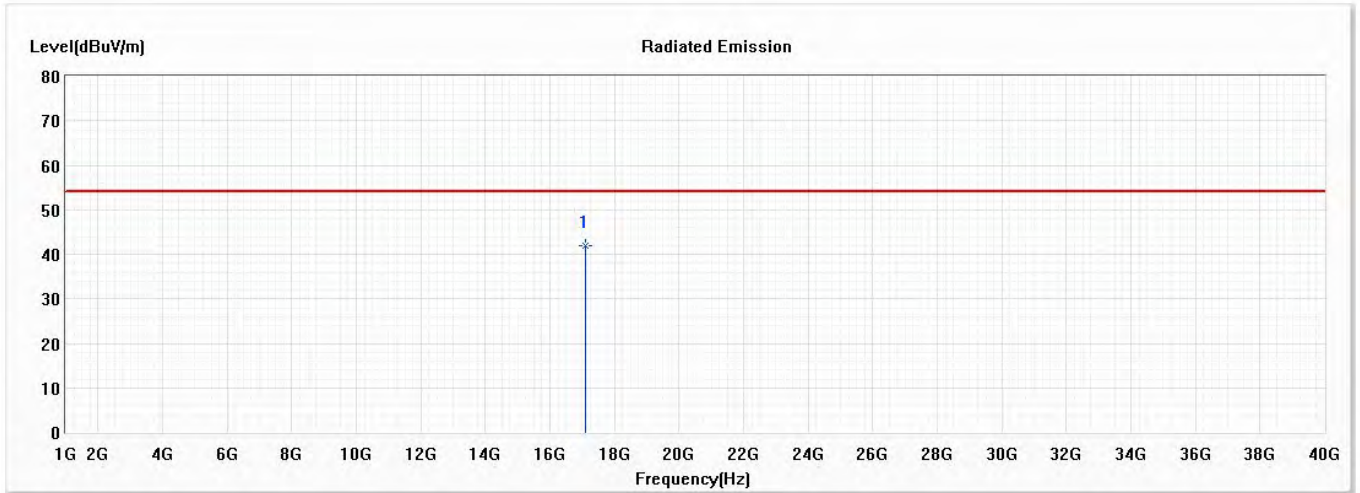


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17100.000	41.81	54.00	-12.19	36.66	5.15	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5700MHz)

Vertical

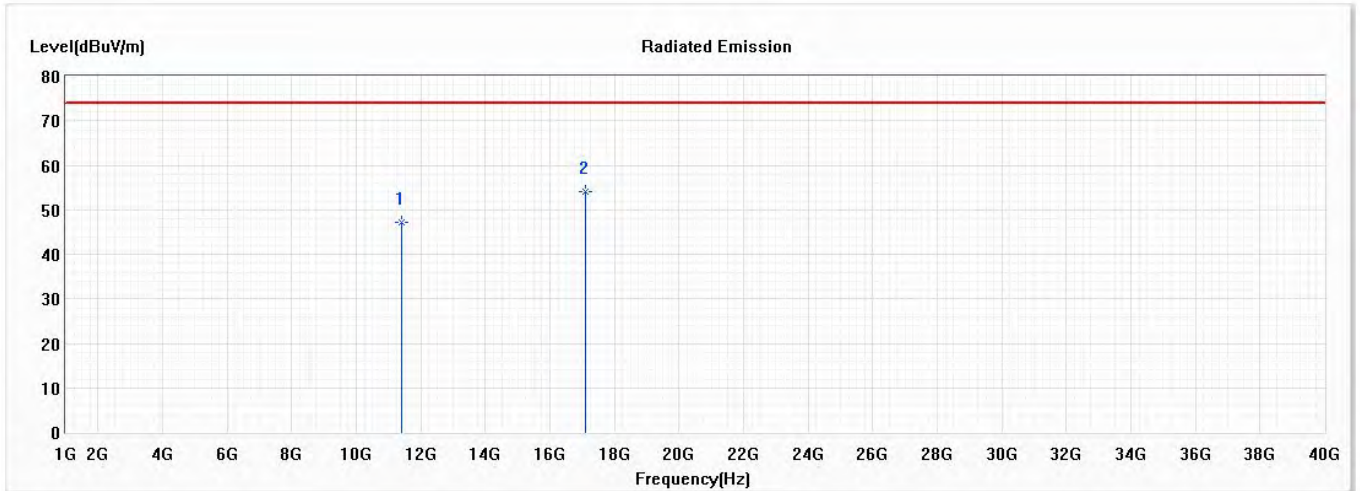


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	47.06	74.00	-26.94	46.08	0.98	PK
* 2	17100.000	54.14	74.00	-19.86	48.99	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5700MHz)

Vertical

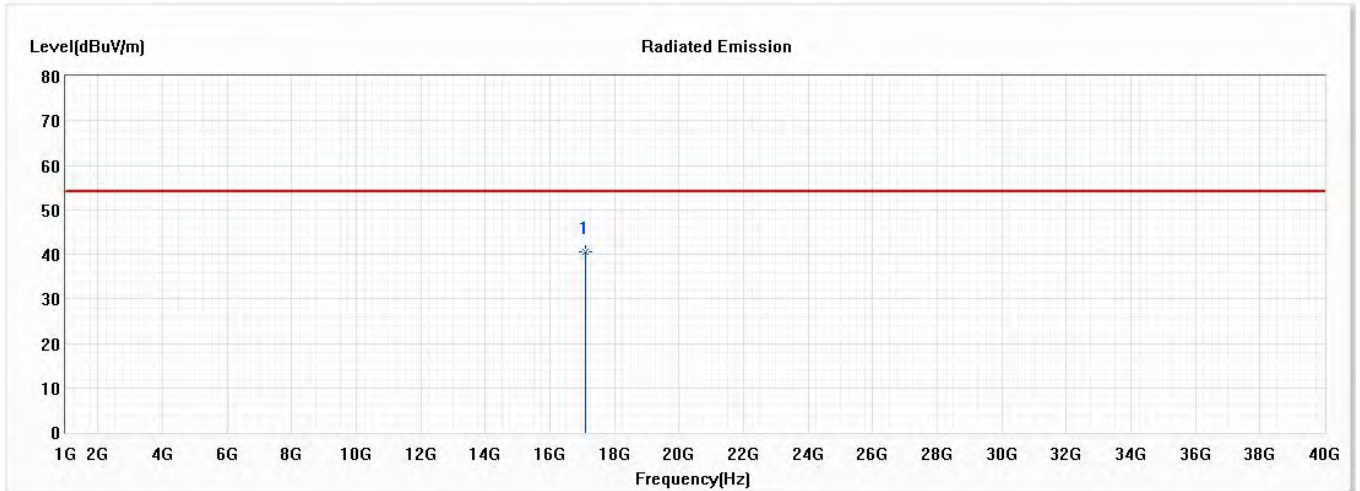


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17100.000	40.46	54.00	-13.54	35.31	5.15	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5745MHz)

Horizontal

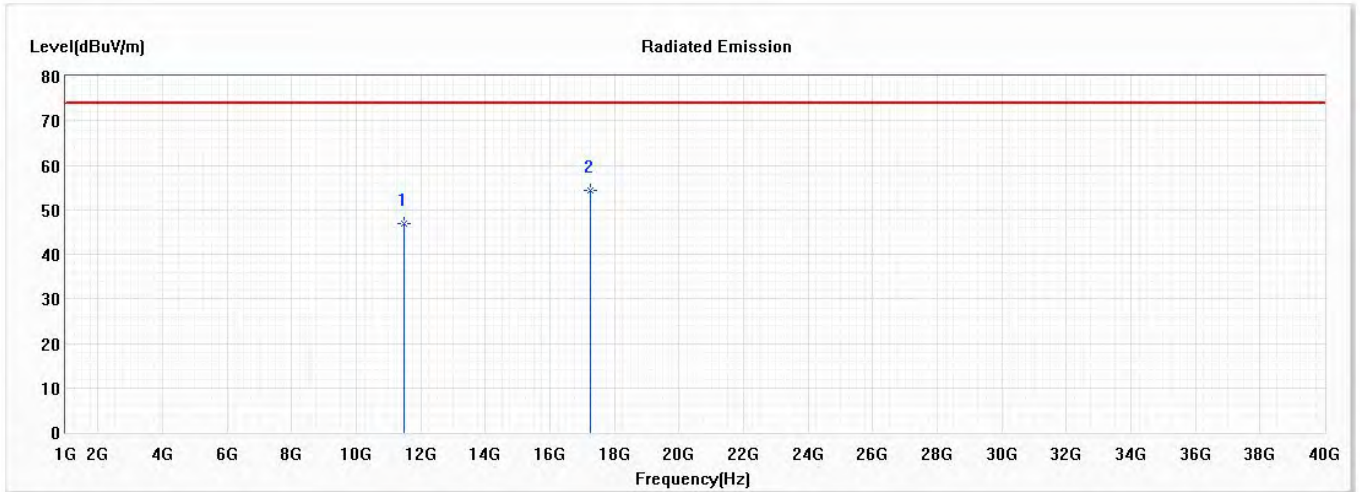


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	46.88	74.00	-27.12	45.70	1.18	PK
* 2	17235.000	54.40	74.00	-19.60	49.41	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5745MHz)

Horizontal

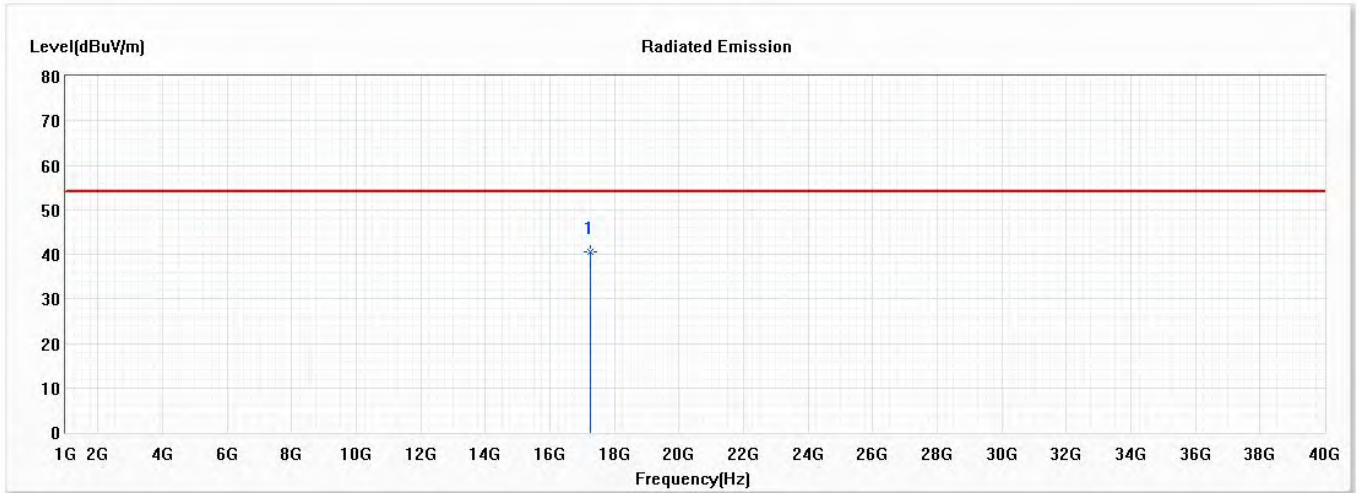


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17235.000	40.49	54.00	-13.51	35.50	4.99	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5745MHz)

Vertical

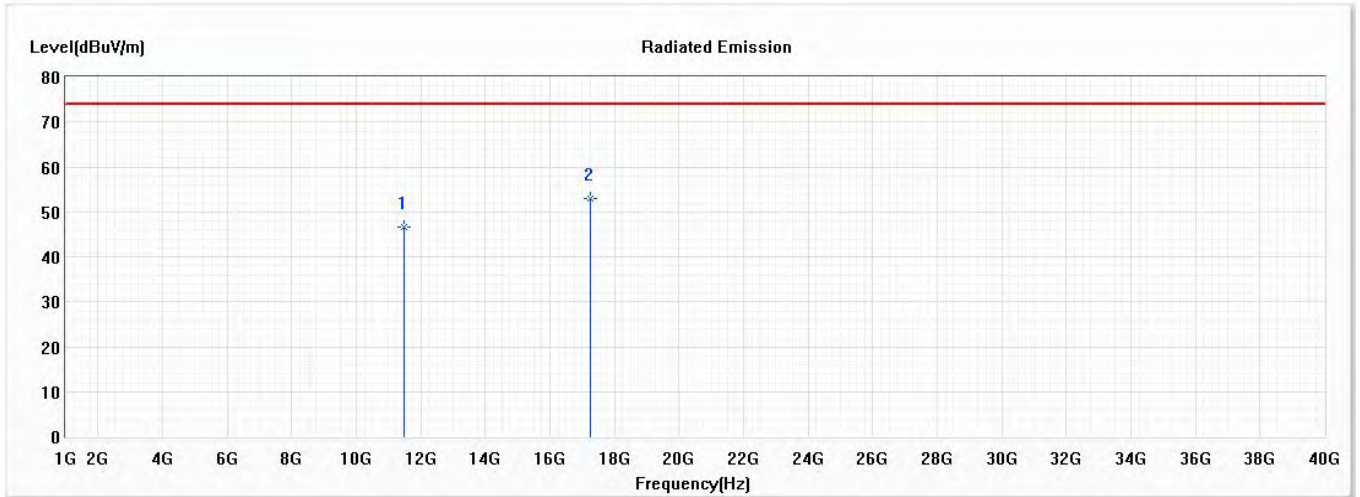


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	46.51	74.00	-27.49	45.33	1.18	PK
* 2	17235.000	52.87	74.00	-21.13	47.88	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

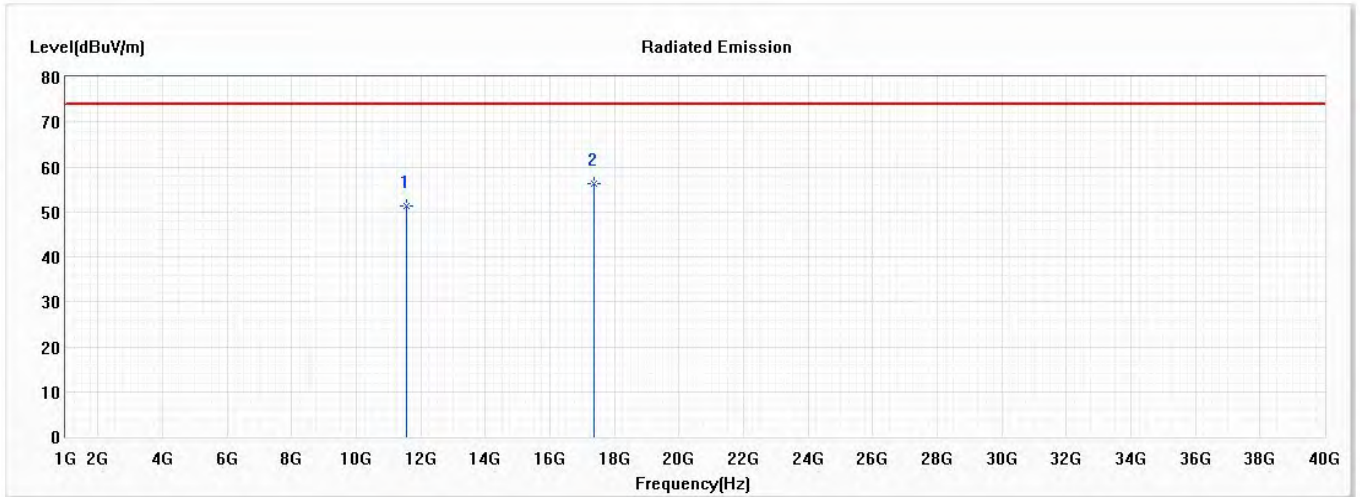


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	51.26	74.00	-22.74	49.86	1.40	PK
* 2	17355.000	56.26	74.00	-17.74	51.26	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

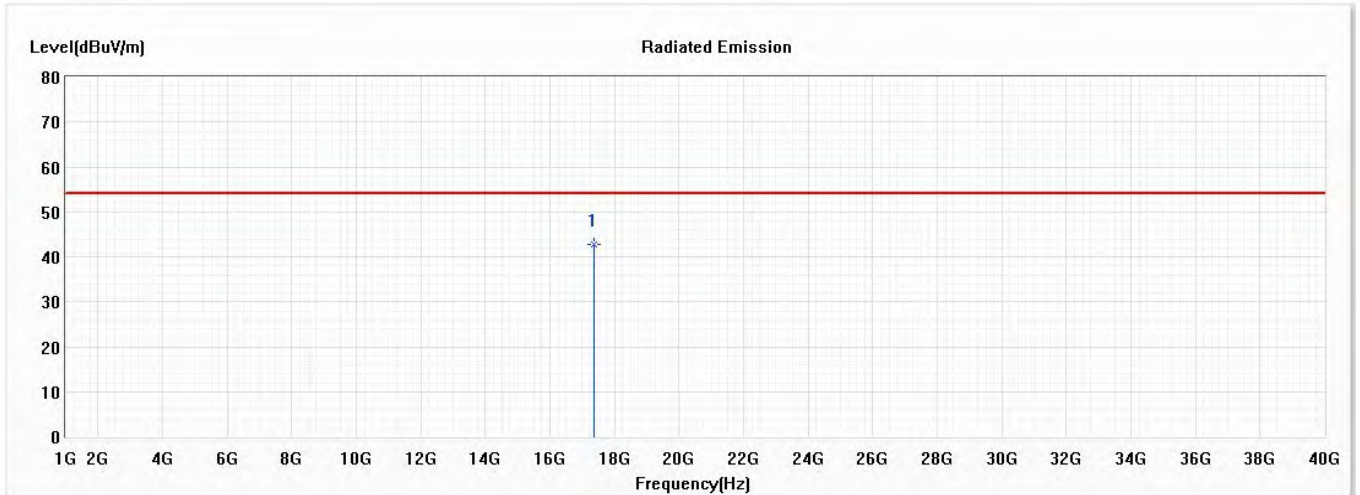


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	42.87	54.00	-11.13	37.87	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5785MHz)

Vertical

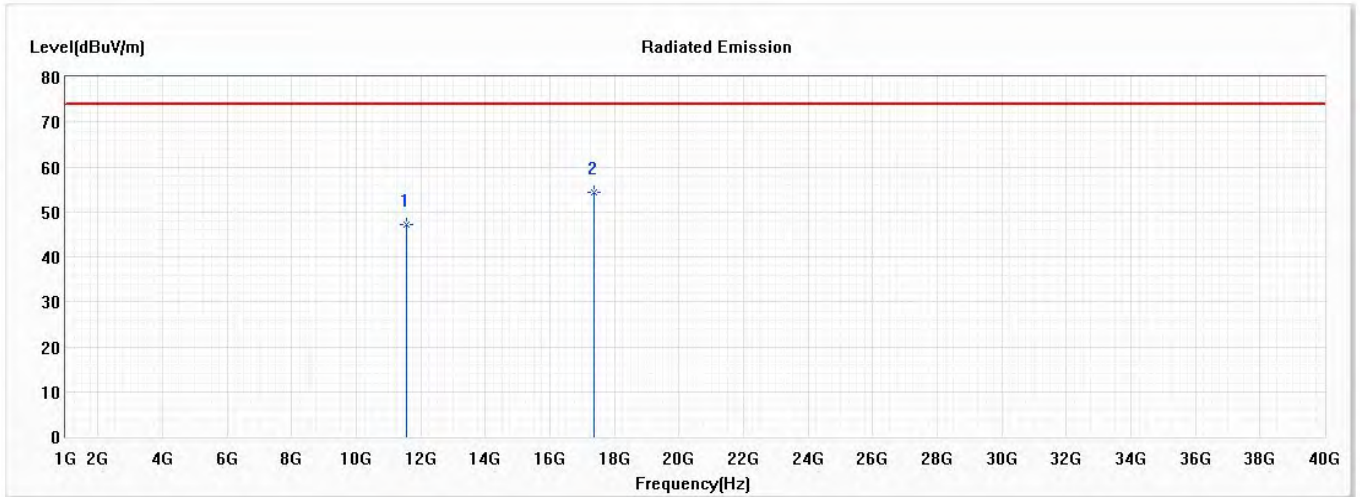


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	47.10	74.00	-26.90	45.70	1.40	PK
* 2	17355.000	54.39	74.00	-19.61	49.39	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5785MHz)

Vertical

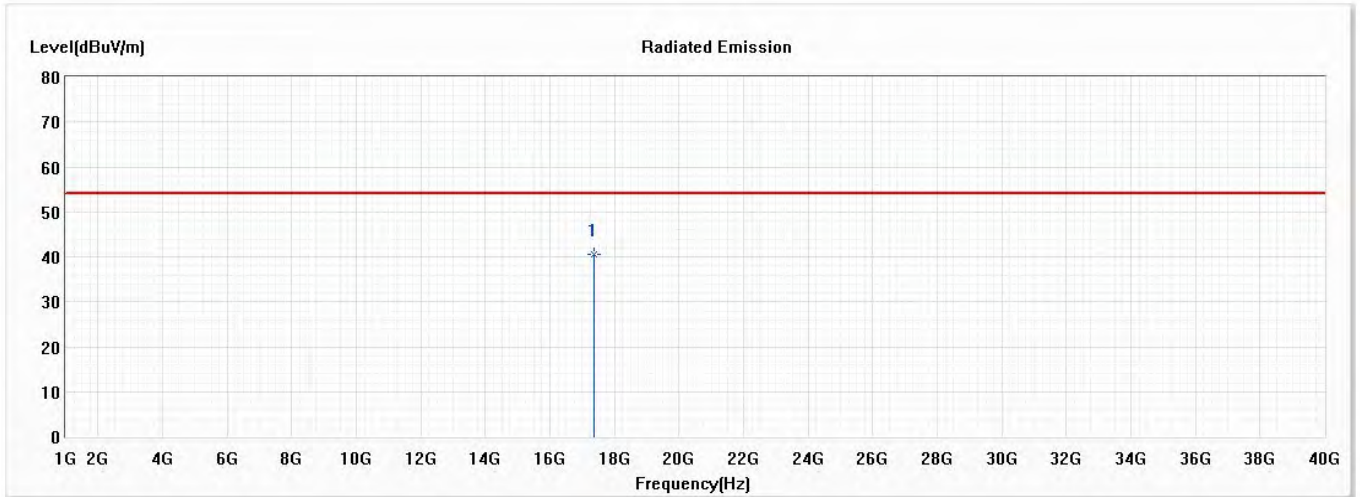


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	40.60	54.00	-13.40	35.60	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5825MHz)

Horizontal

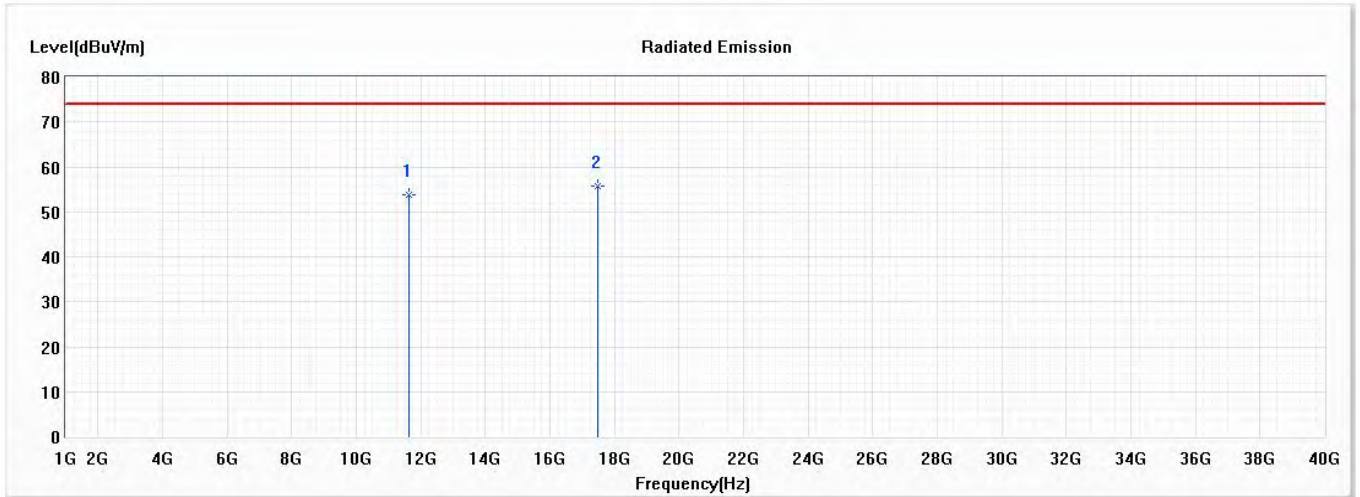


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	53.91	74.00	-20.09	52.34	1.57	PK
* 2	17475.000	55.67	74.00	-18.33	50.79	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5825MHz)

Horizontal

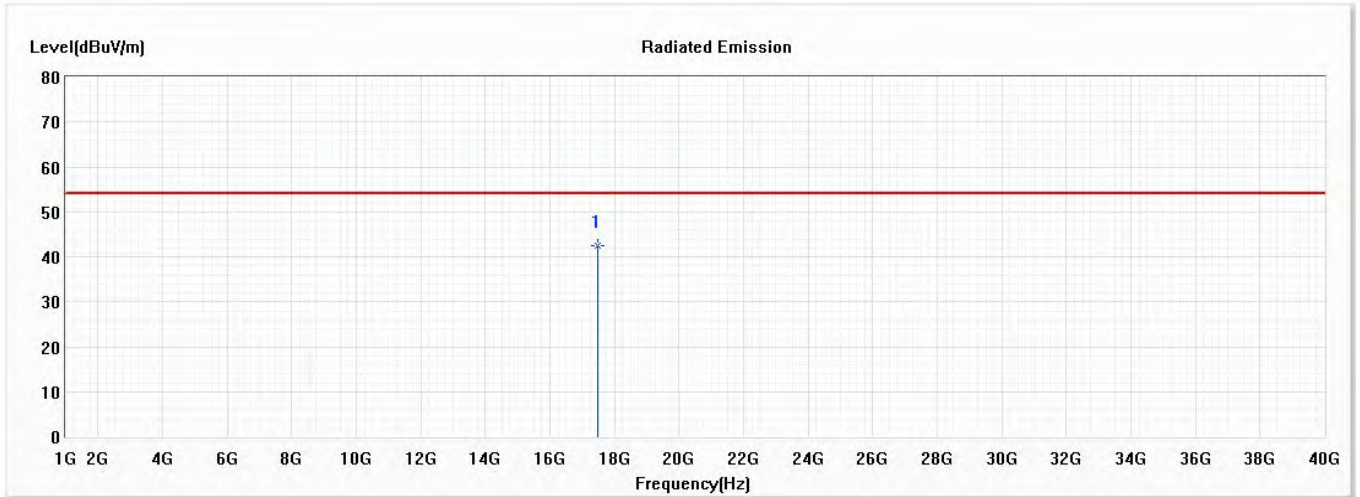


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	42.43	54.00	-11.57	37.55	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5825MHz)

Vertical

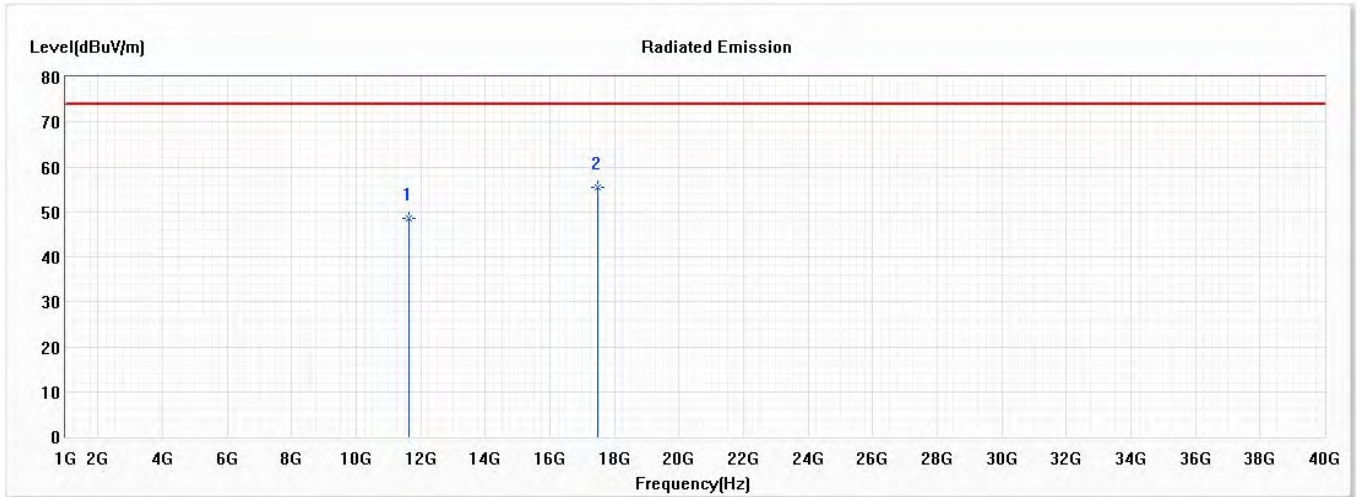


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	48.48	74.00	-25.52	46.91	1.57	PK
* 2	17475.000	55.58	74.00	-18.42	50.70	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps) (5825MHz)

Vertical

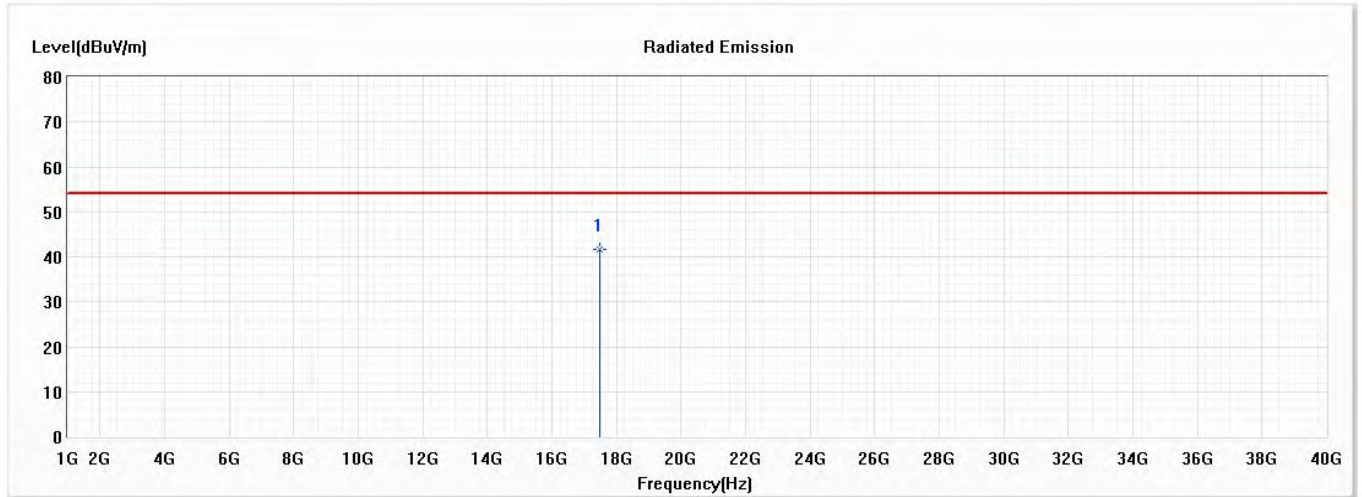


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	41.77	54.00	-12.23	36.89	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Horizontal

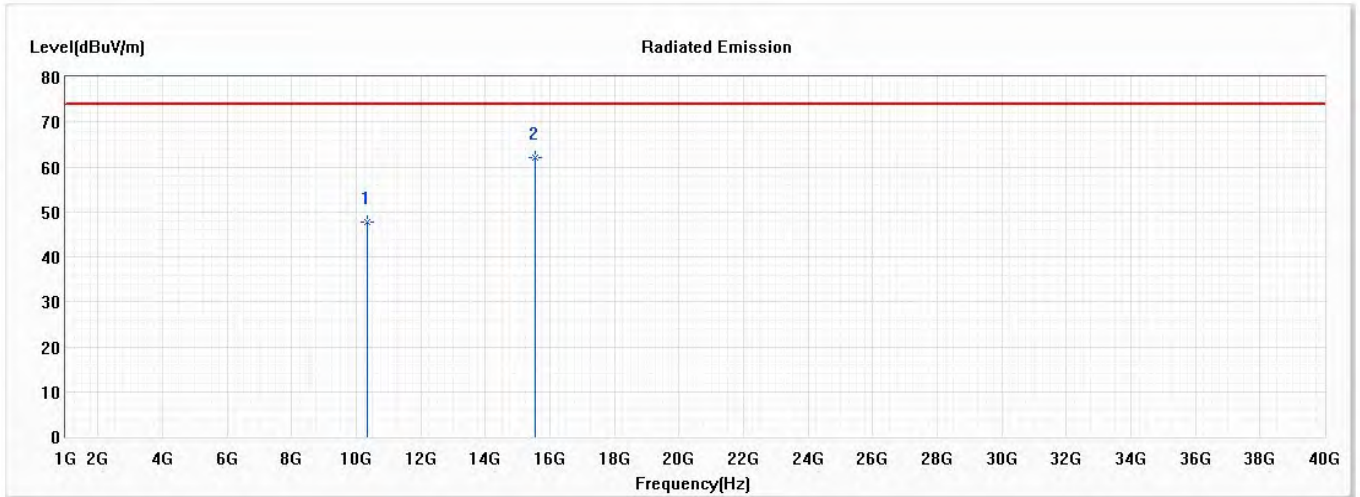


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.69	74.00	-26.31	48.98	-1.29	PK
* 2	15540.000	62.12	74.00	-11.88	59.81	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Horizontal

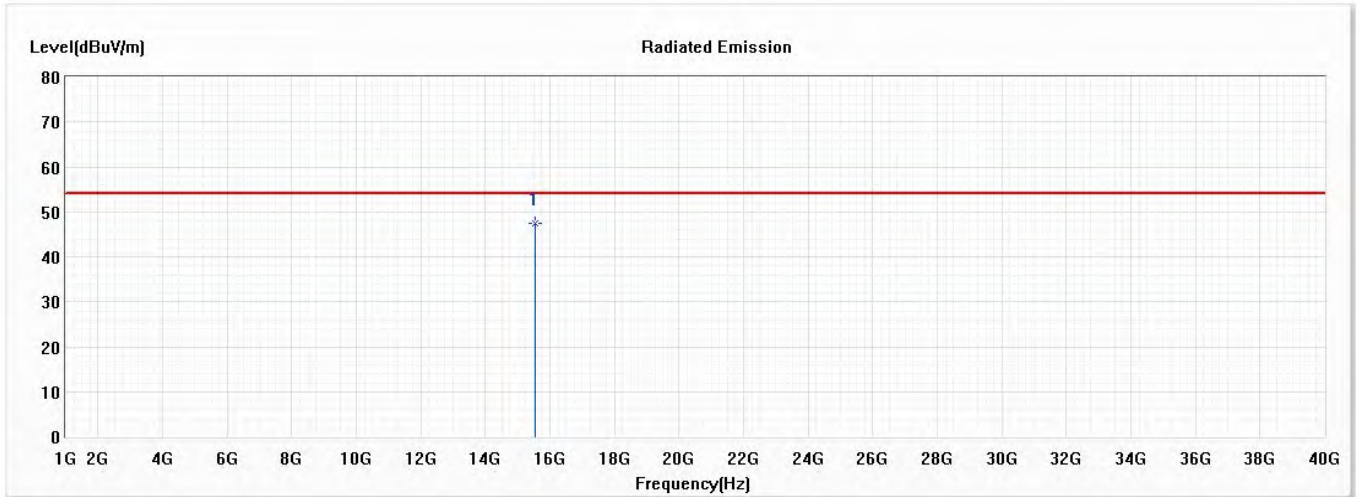


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	47.52	54.00	-6.48	45.21	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Vertical

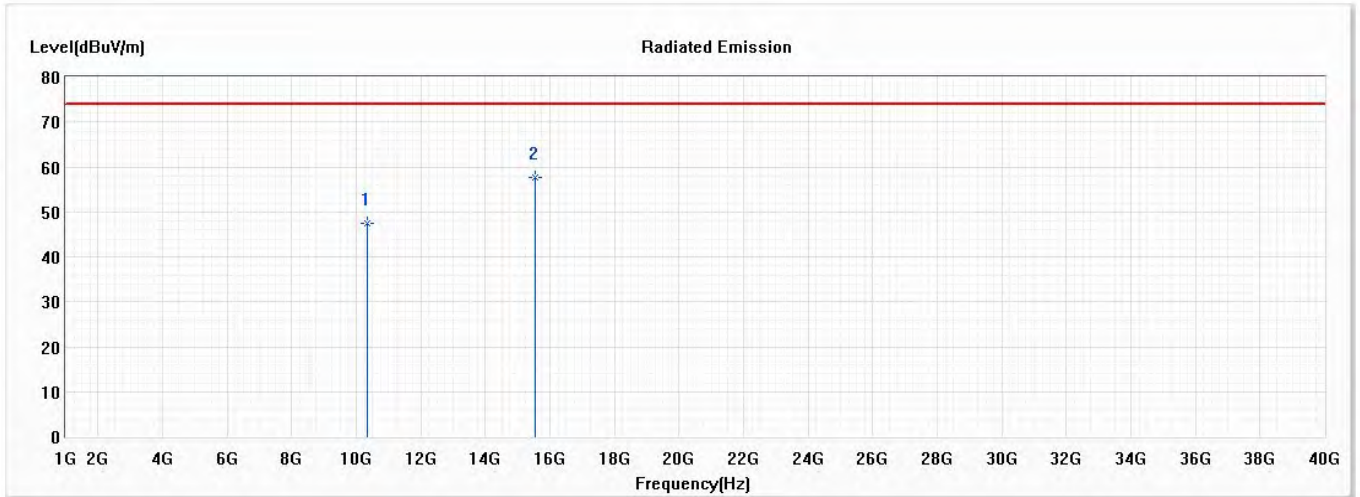


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.52	74.00	-26.48	48.81	-1.29	PK
* 2	15540.000	57.79	74.00	-16.21	55.48	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Vertical

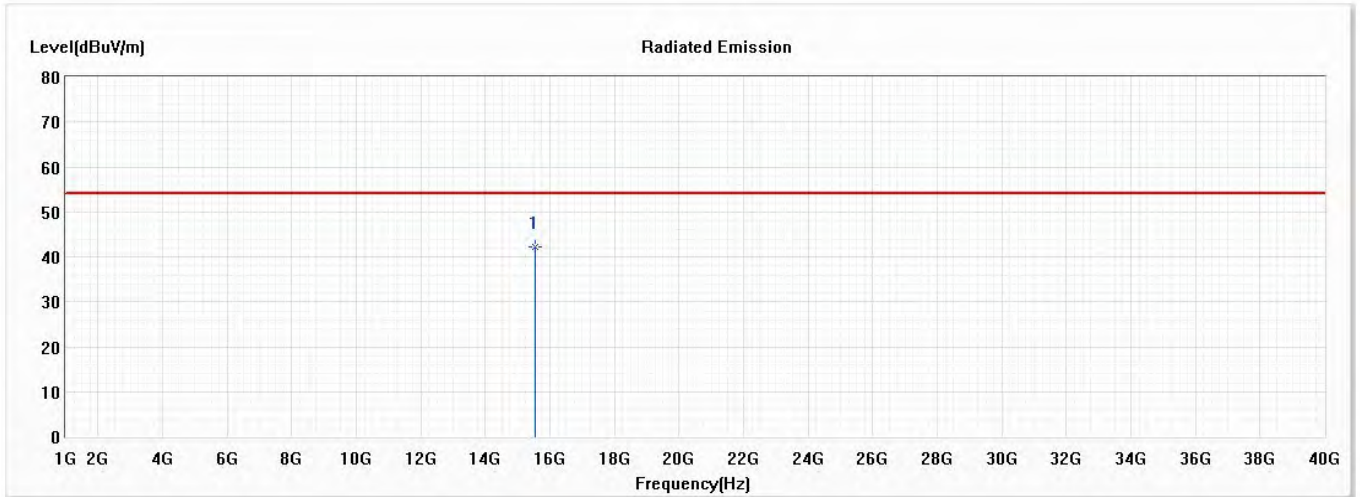


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	42.29	54.00	-11.71	39.98	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Horizontal

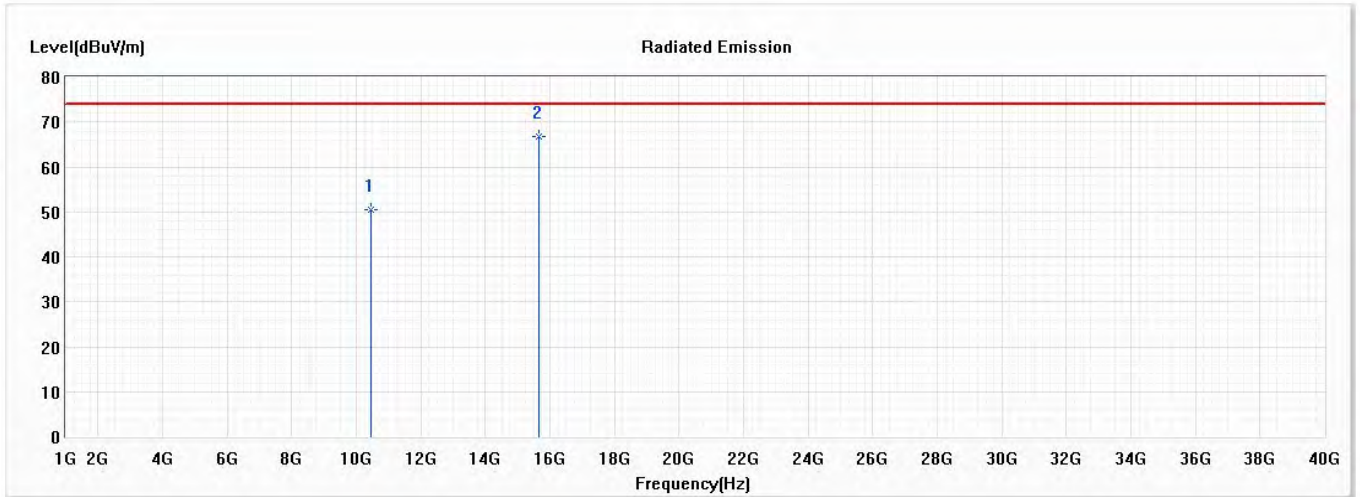


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	50.35	74.00	-23.65	51.38	-1.03	PK
* 2	15660.000	66.88	74.00	-7.12	64.53	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Horizontal

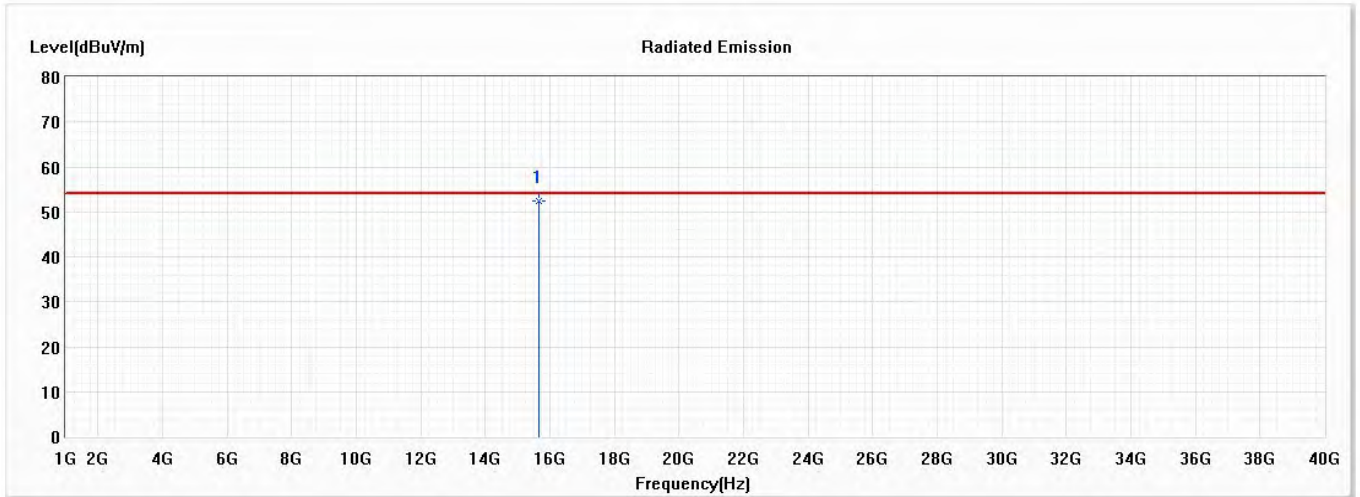


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	52.45	54.00	-1.55	50.10	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Vertical

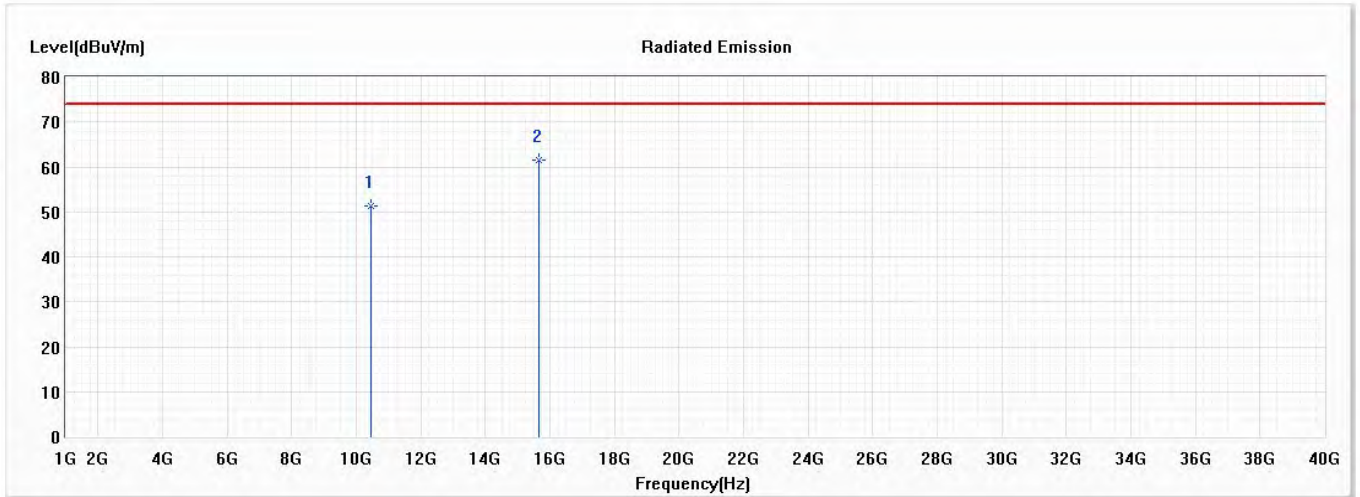


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	51.30	74.00	-22.70	52.33	-1.03	PK
* 2	15660.000	61.46	74.00	-12.54	59.11	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Vertical

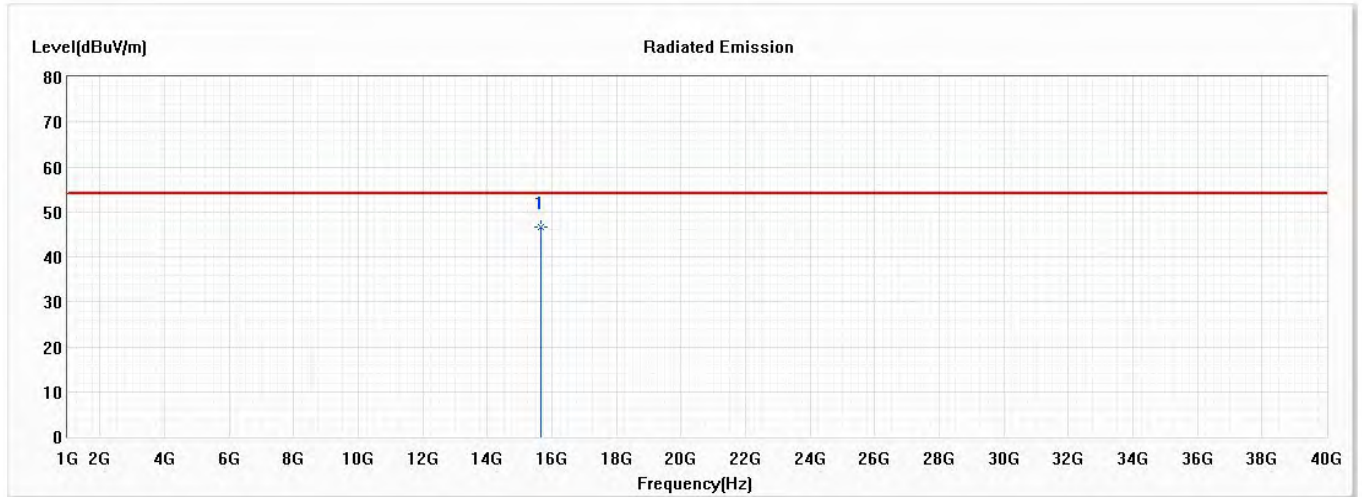


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	46.67	54.00	-7.33	44.32	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Horizontal

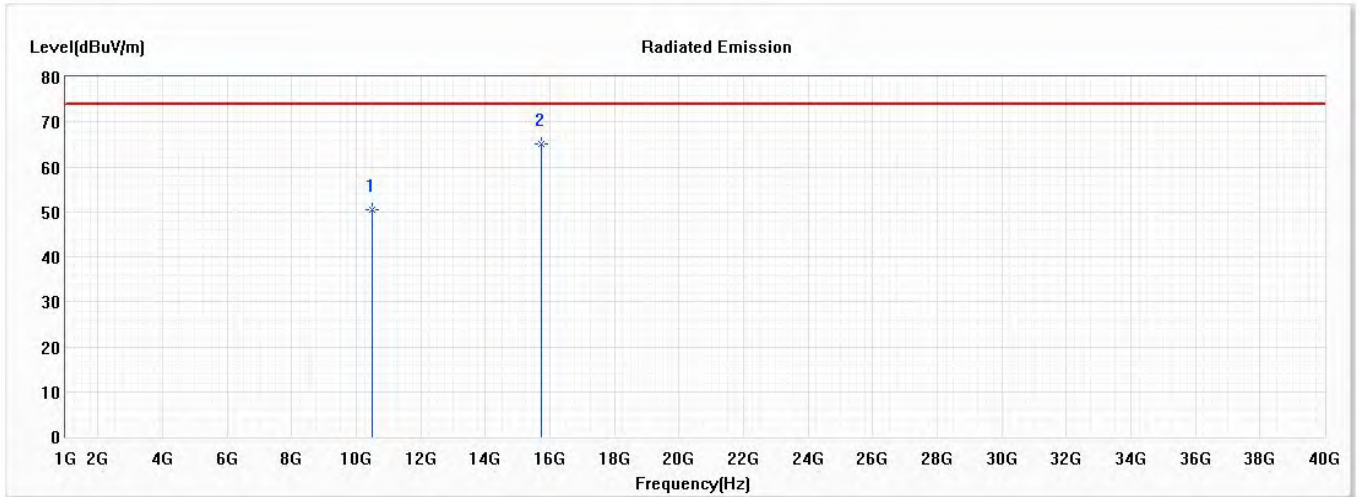


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	50.35	74.00	-23.65	51.24	-0.89	PK
* 2	15720.000	65.10	74.00	-8.90	62.64	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Horizontal

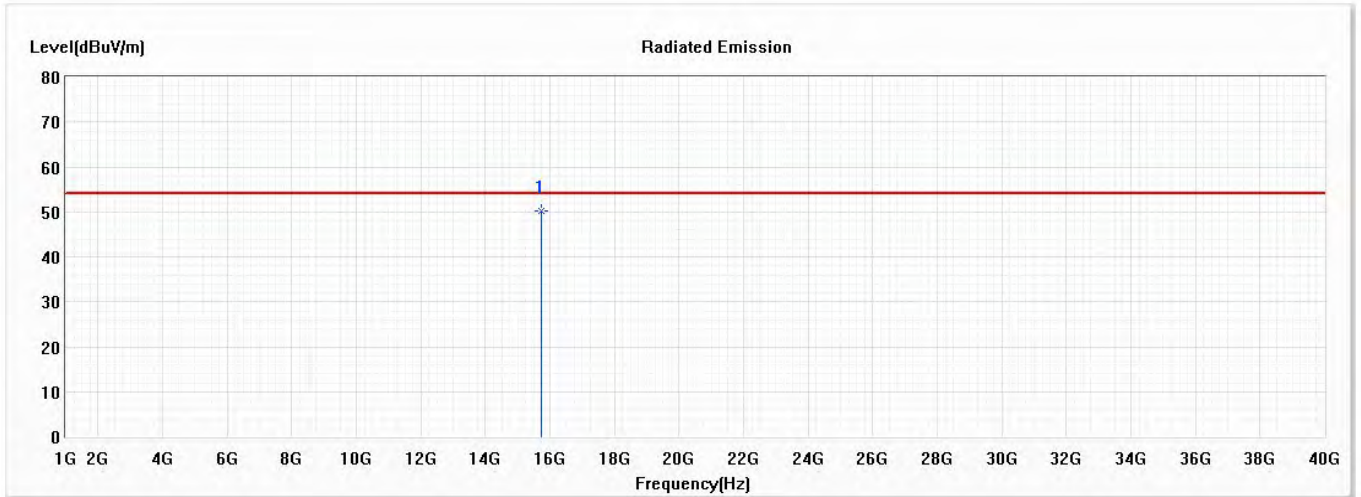


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	50.23	54.00	-3.77	47.77	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Vertical

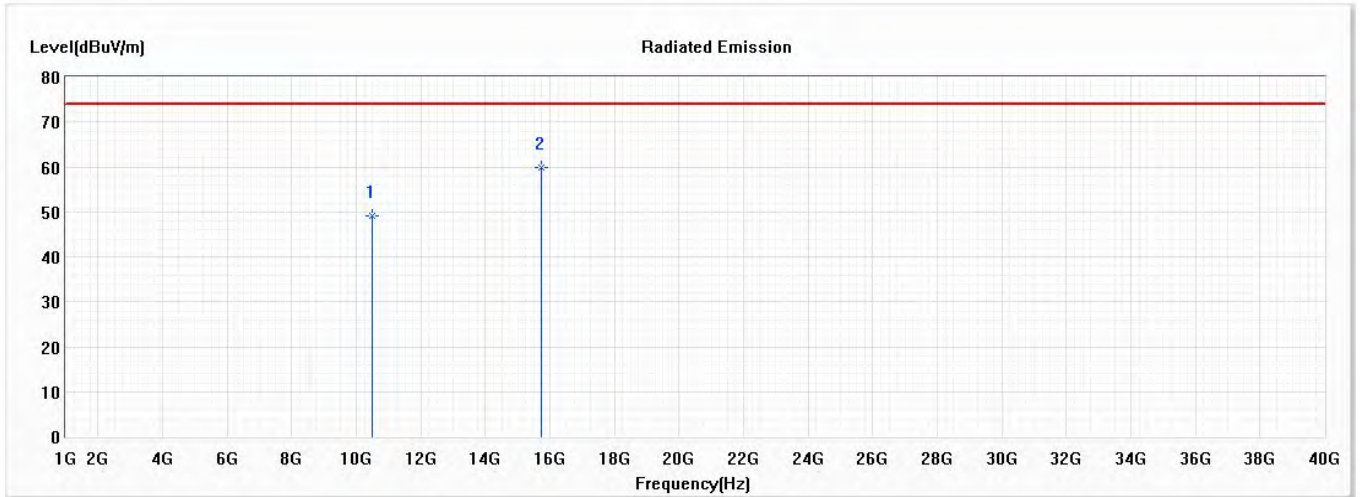


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	49.03	74.00	-24.97	49.92	-0.89	PK
* 2	15720.000	59.92	74.00	-14.08	57.46	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Vertical

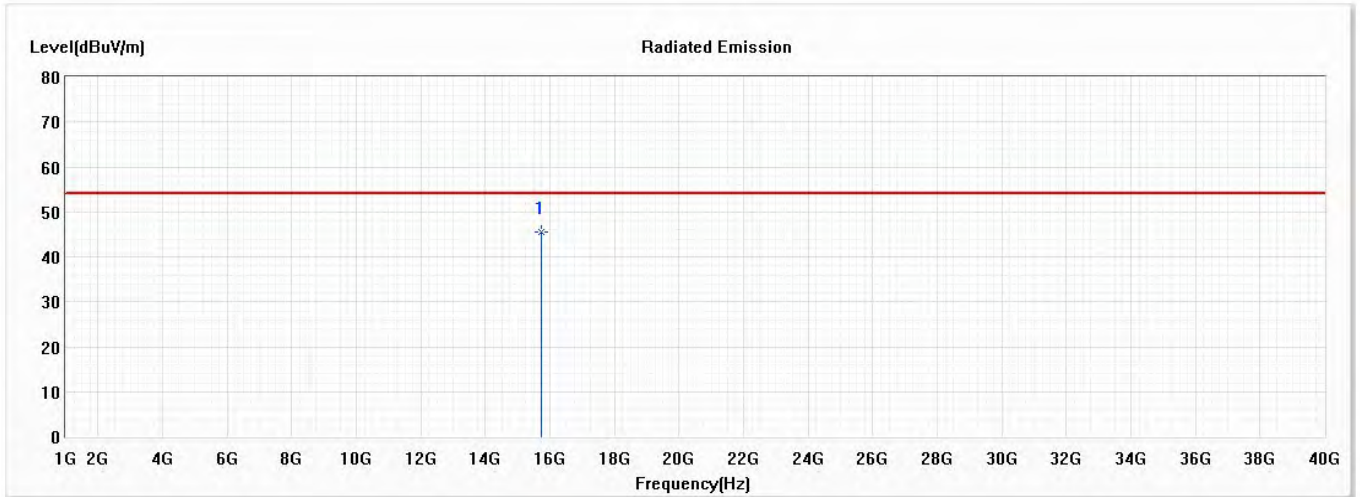


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	45.61	54.00	-8.39	43.15	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Horizontal

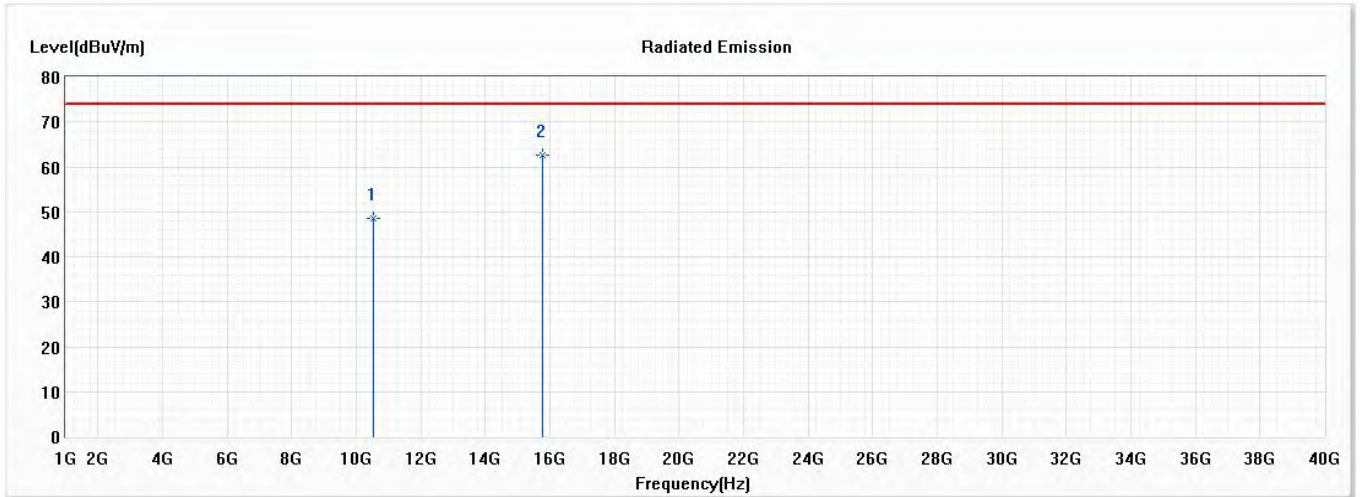


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	48.49	74.00	-25.51	49.26	-0.77	PK
* 2	15780.000	62.73	74.00	-11.27	60.28	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Horizontal

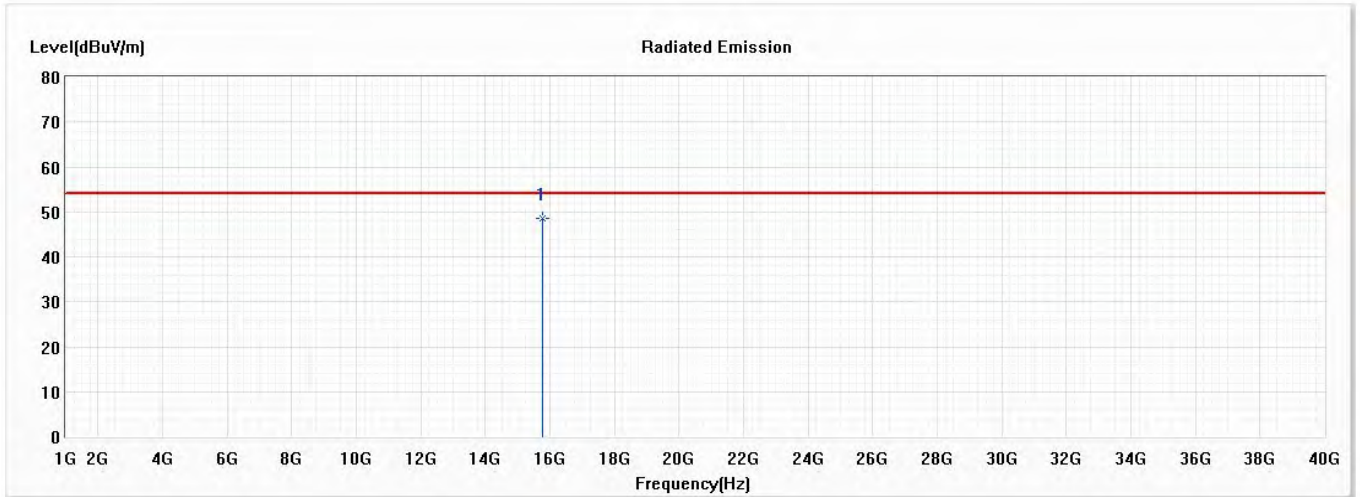


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	48.48	54.00	-5.52	46.03	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Vertical

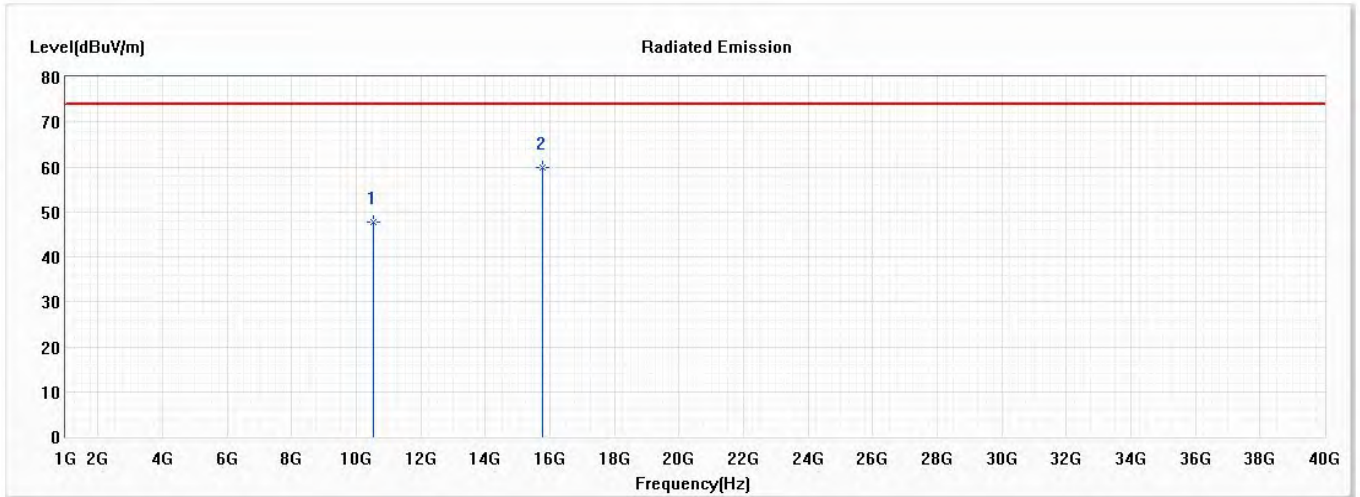


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	47.77	74.00	-26.23	48.54	-0.77	PK
* 2	15780.000	59.85	74.00	-14.15	57.40	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Vertical

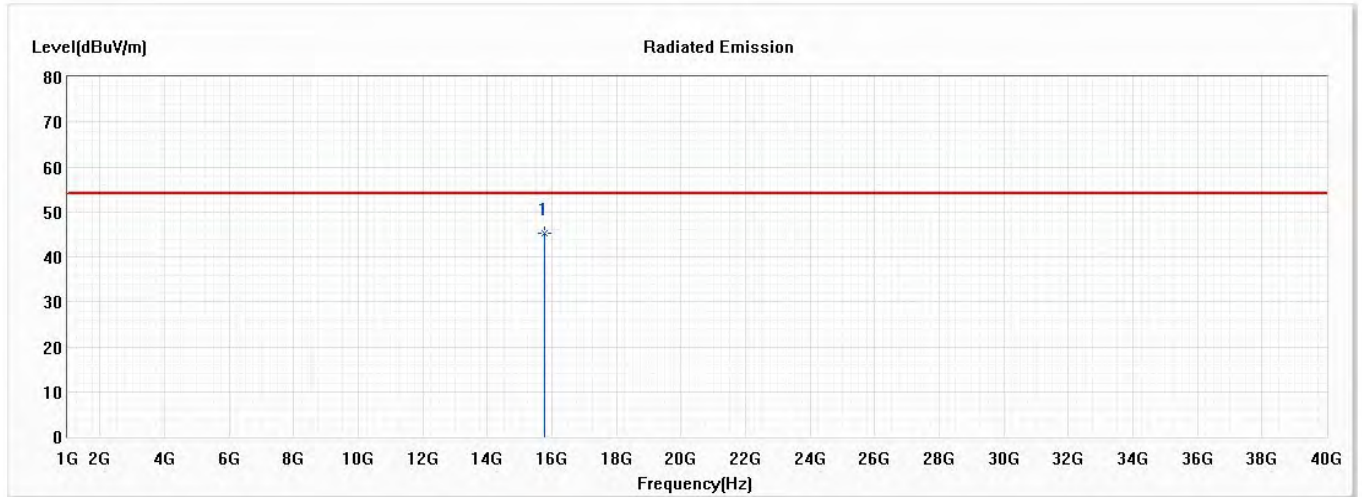


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	45.12	54.00	-8.88	42.67	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Horizontal

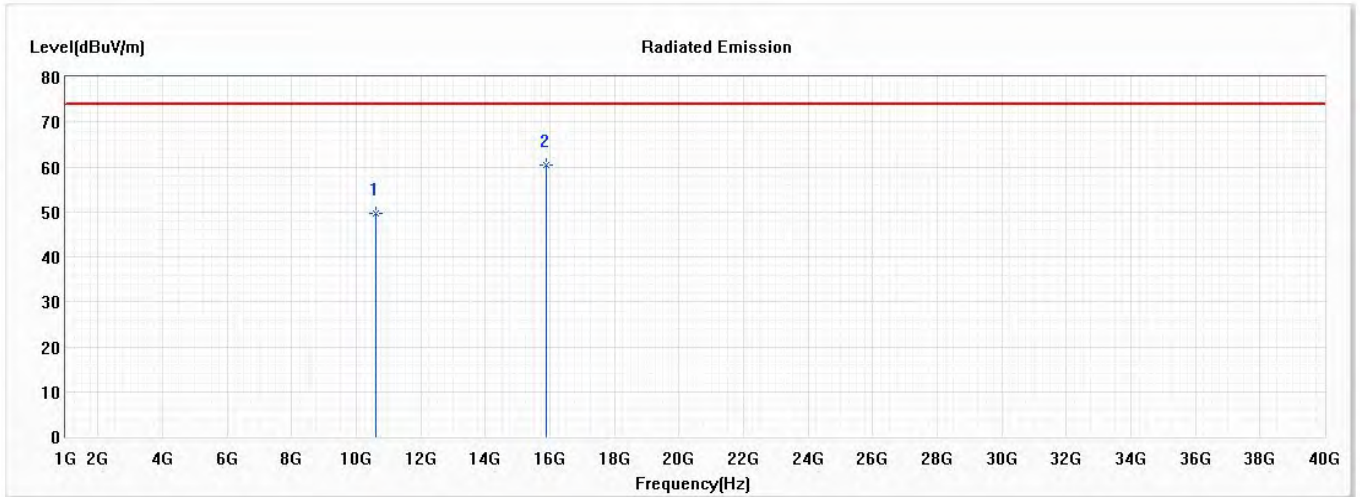


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	49.52	74.00	-24.48	50.19	-0.67	PK
* 2	15900.000	60.46	74.00	-13.54	57.84	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Horizontal

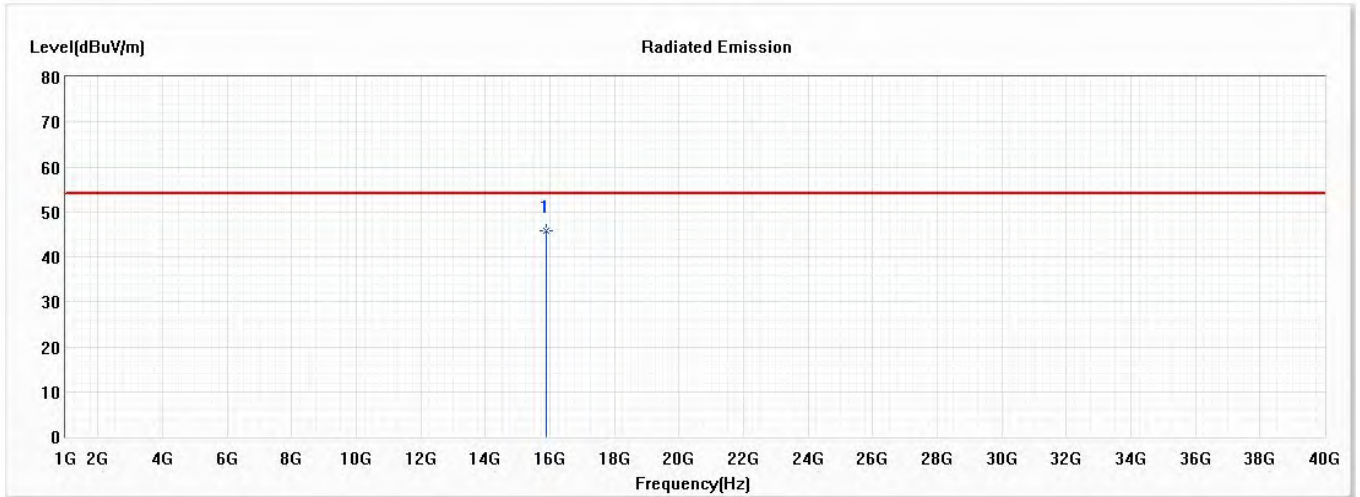


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15900.000	45.92	54.00	-8.08	43.30	2.62	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Vertical

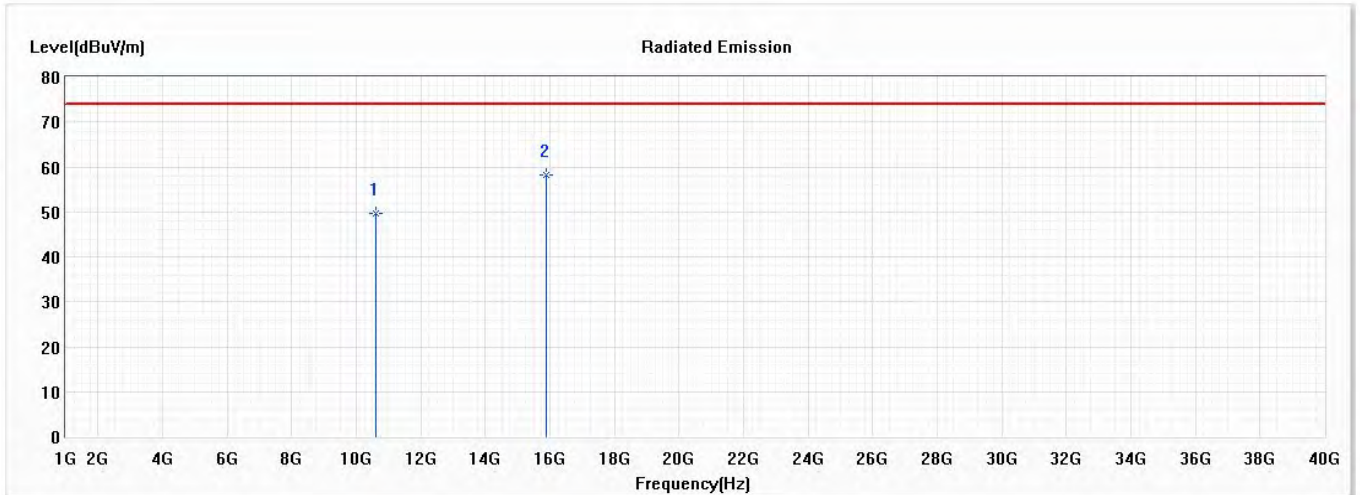


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	49.64	74.00	-24.36	50.31	-0.67	PK
* 2	15900.000	58.17	74.00	-15.83	55.55	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Vertical

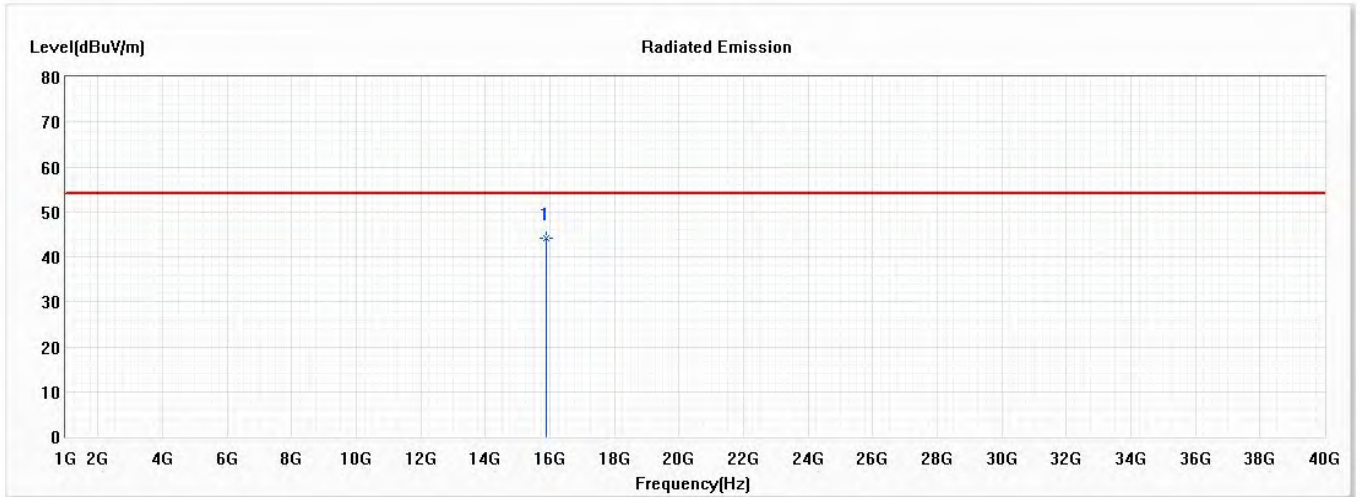


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15900.000	44.25	54.00	-9.75	41.63	2.62	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Horizontal

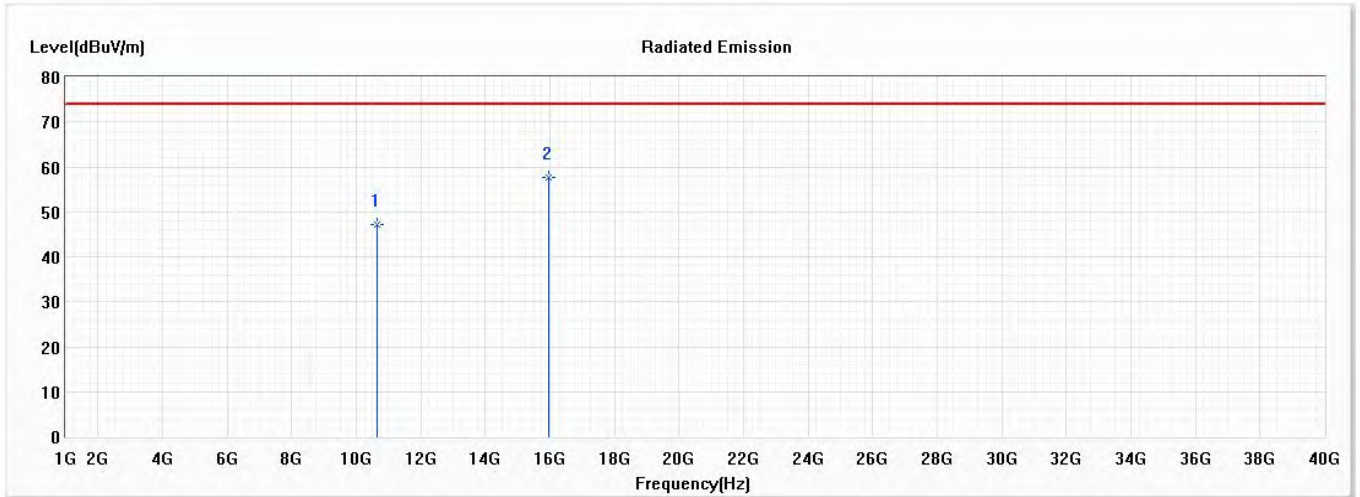


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	47.23	74.00	-26.77	47.83	-0.60	PK
* 2	15960.000	57.71	74.00	-16.29	55.02	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Horizontal

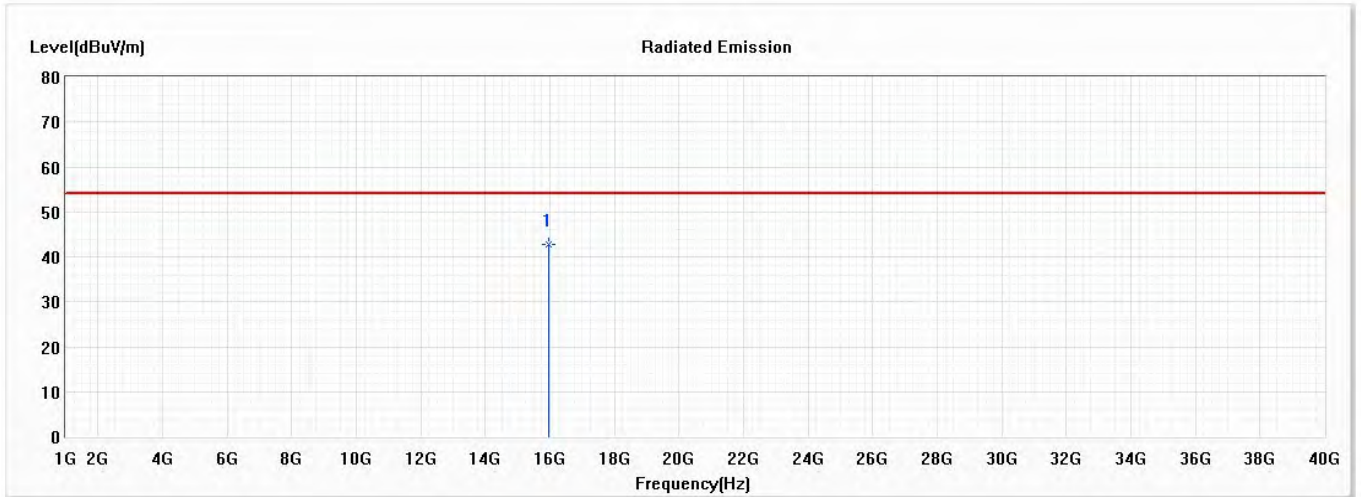


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	42.80	54.00	-11.20	40.11	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Vertical

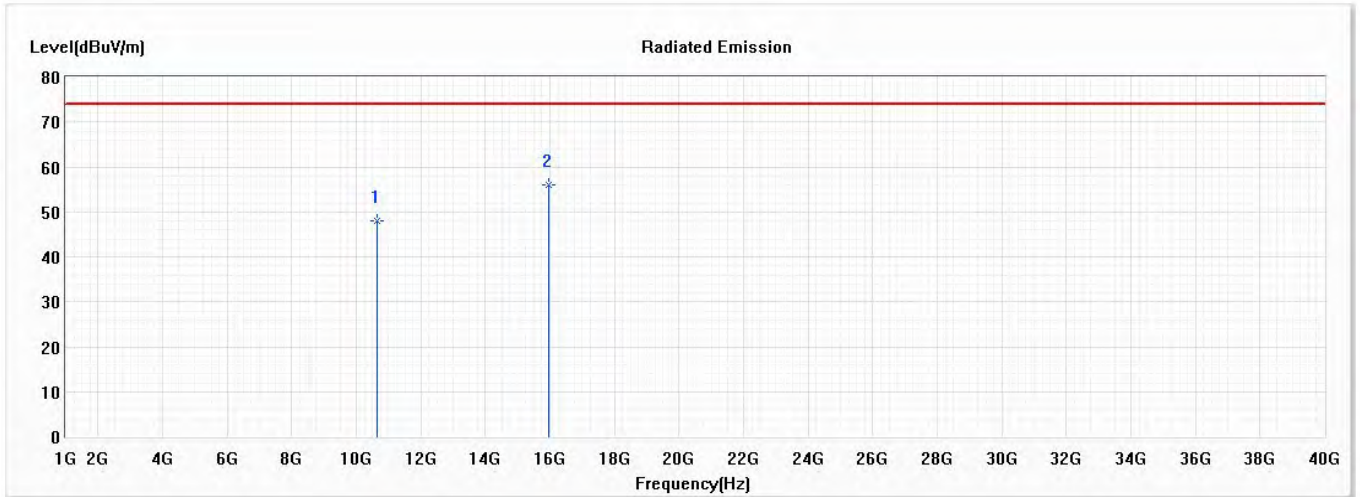


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	47.93	74.00	-26.07	48.53	-0.60	PK
* 2	15960.000	56.08	74.00	-17.92	53.39	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5320MHz)

Vertical

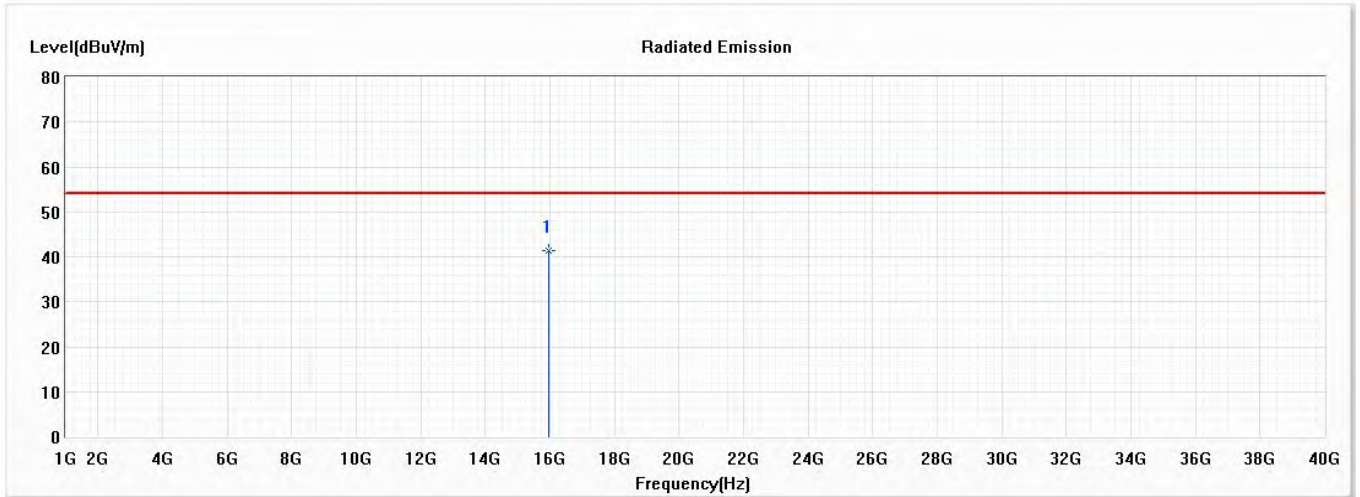


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	41.25	54.00	-12.75	38.56	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5500MHz)

Horizontal

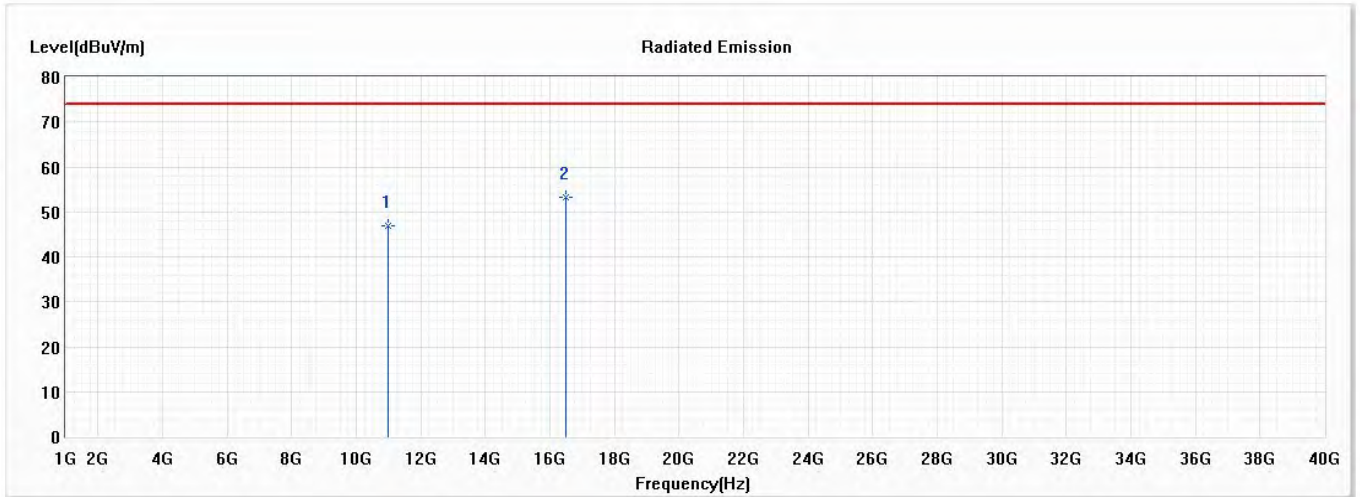


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	46.87	74.00	-27.13	46.81	0.06	PK
* 2	16500.000	53.18	74.00	-20.82	48.89	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5500MHz)

Vertical

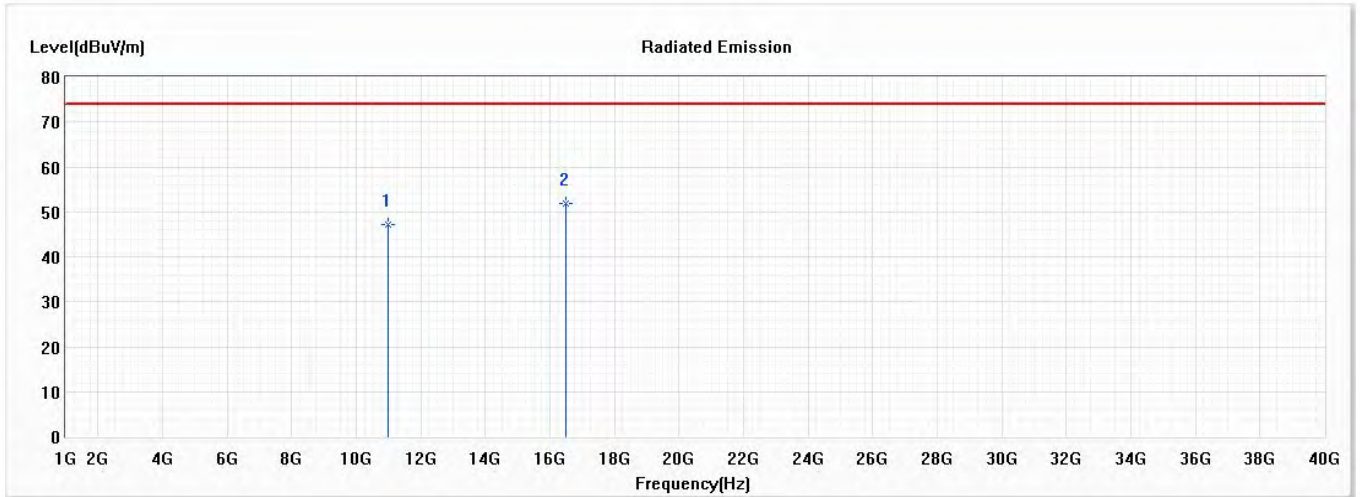


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	47.04	74.00	-26.96	46.98	0.06	PK
* 2	16500.000	51.76	74.00	-22.24	47.47	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5580MHz)

Horizontal

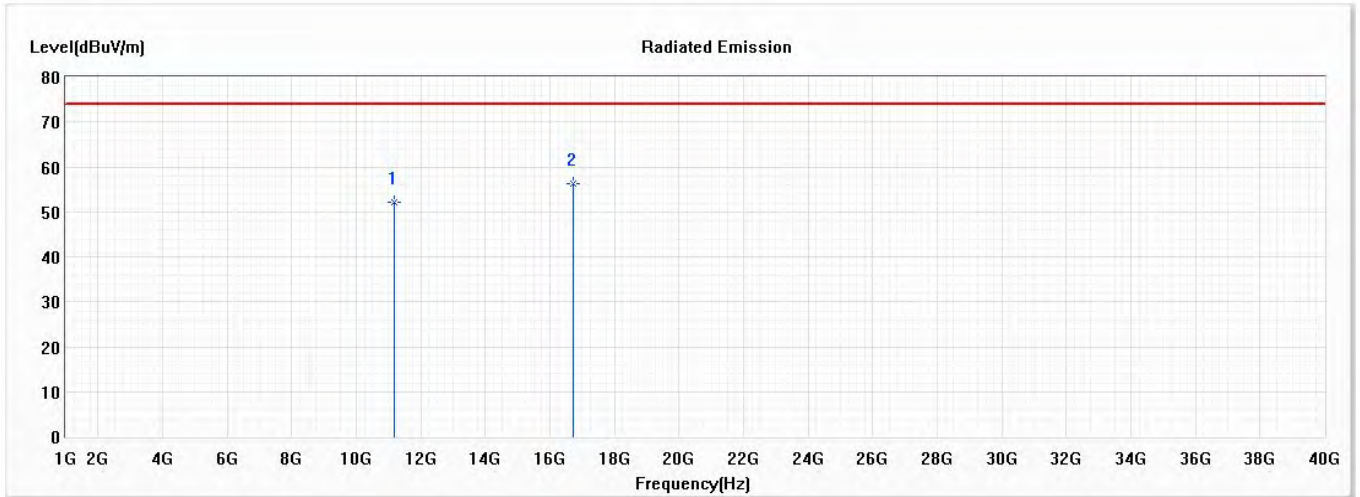


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	52.12	74.00	-21.88	51.65	0.47	PK
* 2	16740.000	56.31	74.00	-17.69	51.21	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5580MHz)

Horizontal

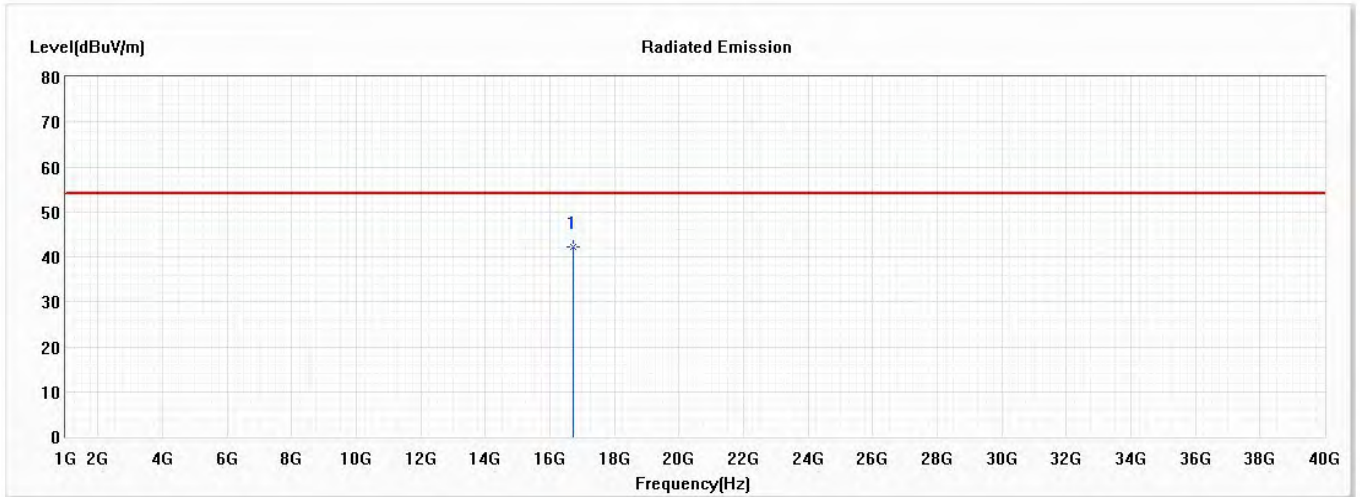


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16740.000	42.27	54.00	-11.73	37.17	5.10	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5580MHz)

Vertical

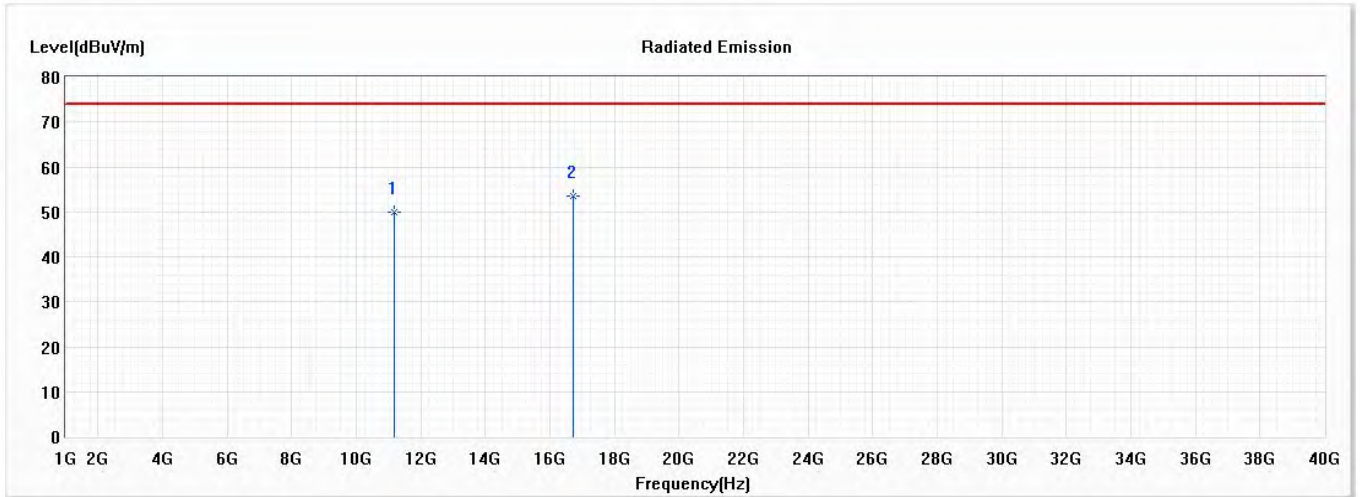


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	49.99	74.00	-24.01	49.52	0.47	PK
* 2	16740.000	53.64	74.00	-20.36	48.54	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5700MHz)

Horizontal

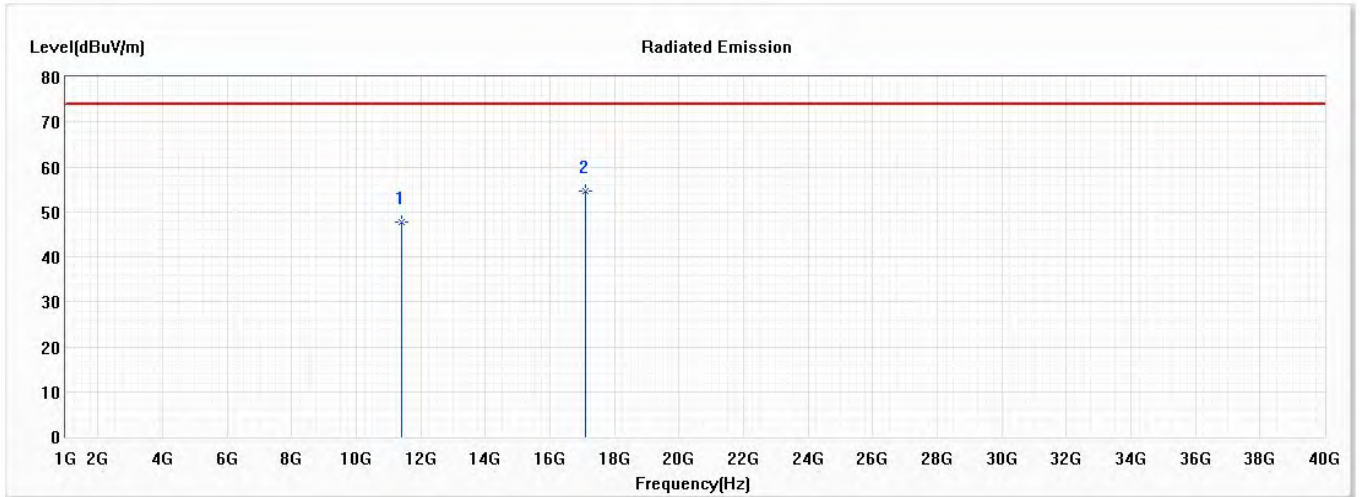


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	47.64	74.00	-26.36	46.66	0.98	PK
* 2	17100.000	54.62	74.00	-19.38	49.47	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5700MHz)

Horizontal

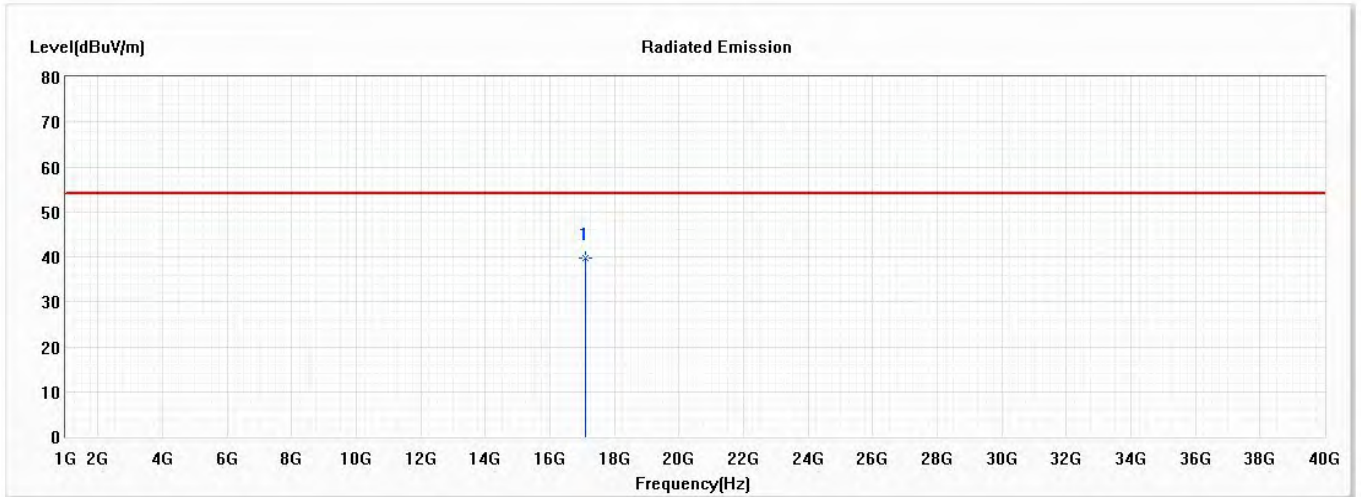


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17100.000	39.60	54.00	-14.40	34.45	5.15	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5700MHz)

Vertical

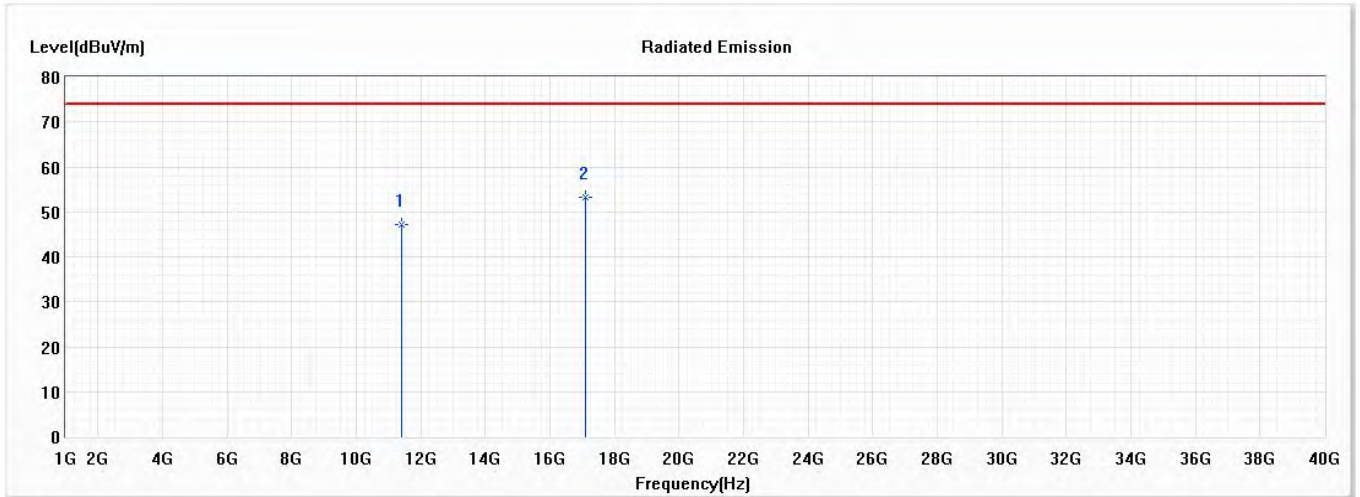


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	47.16	74.00	-26.84	46.18	0.98	PK
* 2	17100.000	53.34	74.00	-20.66	48.19	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5745MHz)

Horizontal

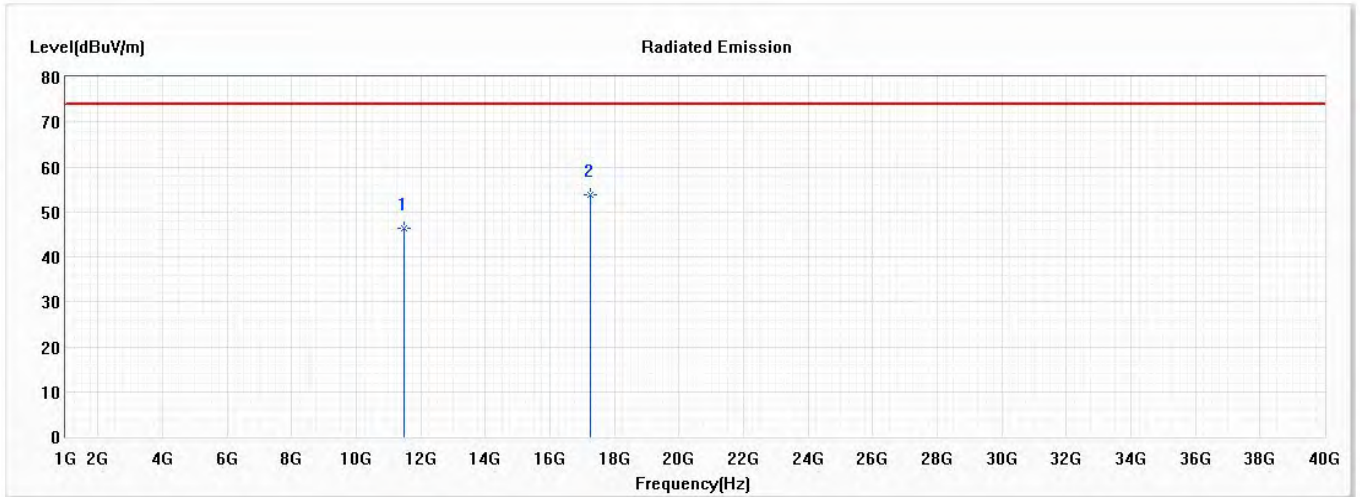


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	46.43	74.00	-27.57	45.25	1.18	PK
* 2	17235.000	53.75	74.00	-20.25	48.76	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5745MHz)

Vertical

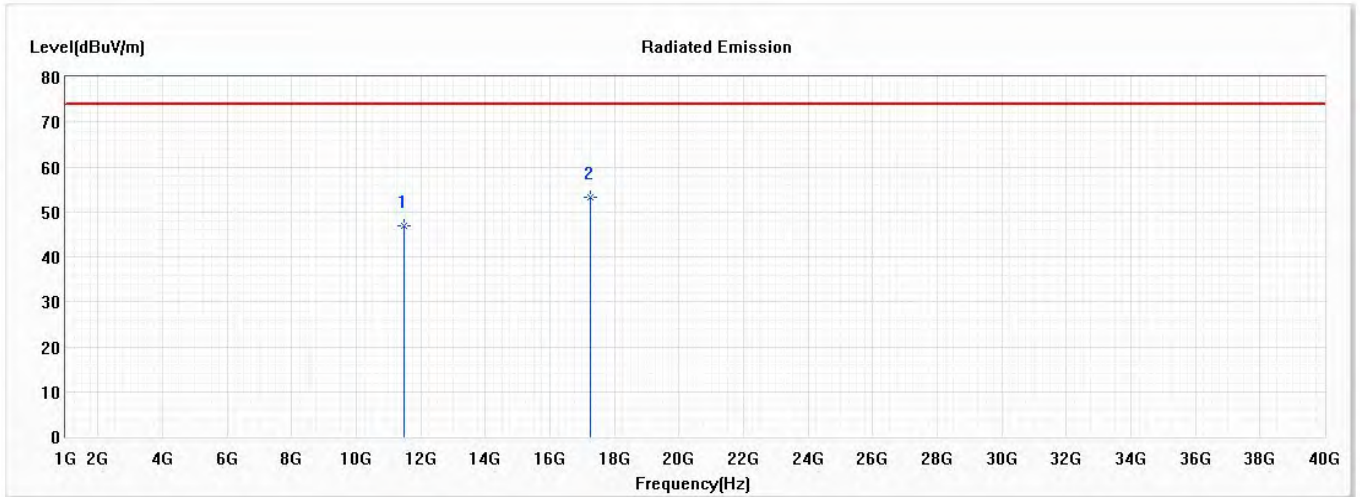


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	46.86	74.00	-27.14	45.68	1.18	PK
* 2	17235.000	53.33	74.00	-20.67	48.34	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Horizontal

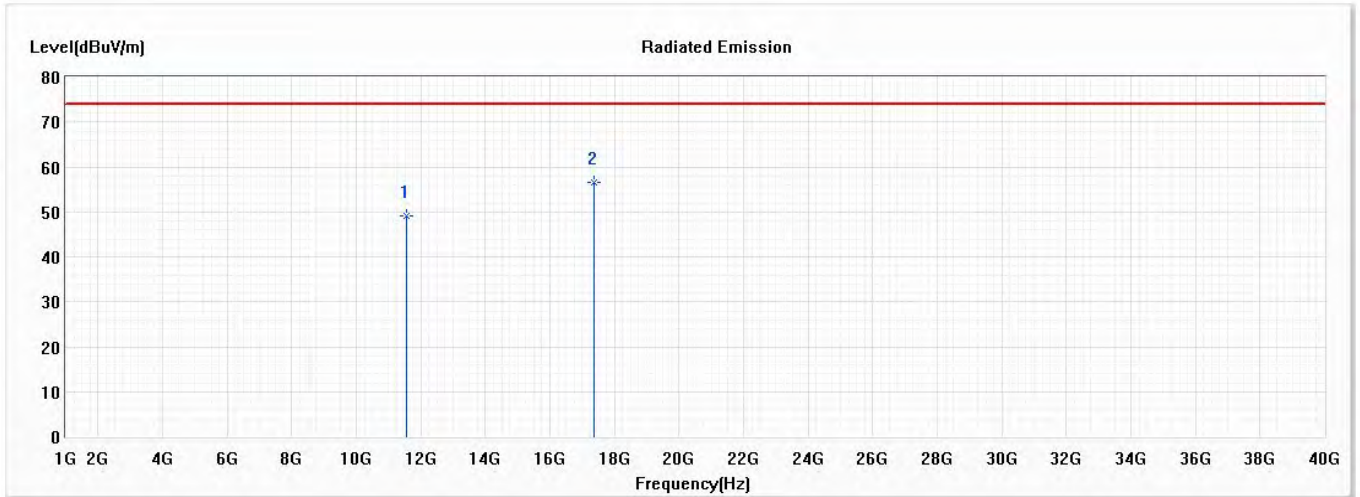


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	49.14	74.00	-24.86	47.74	1.40	PK
* 2	17355.000	56.43	74.00	-17.57	51.43	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Horizontal

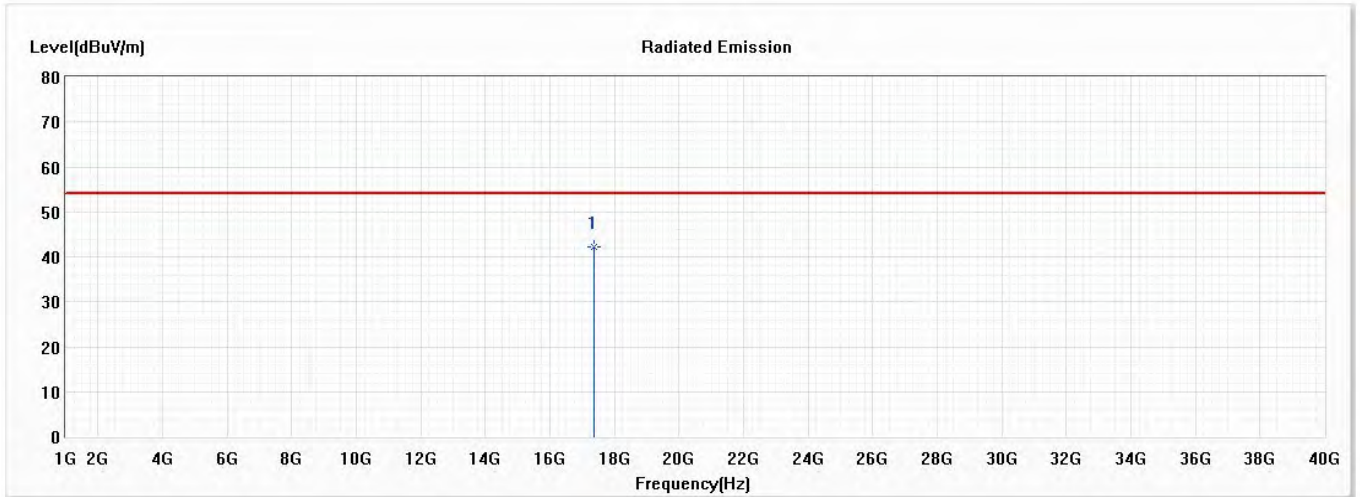


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	42.09	54.00	-11.91	37.09	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Vertical

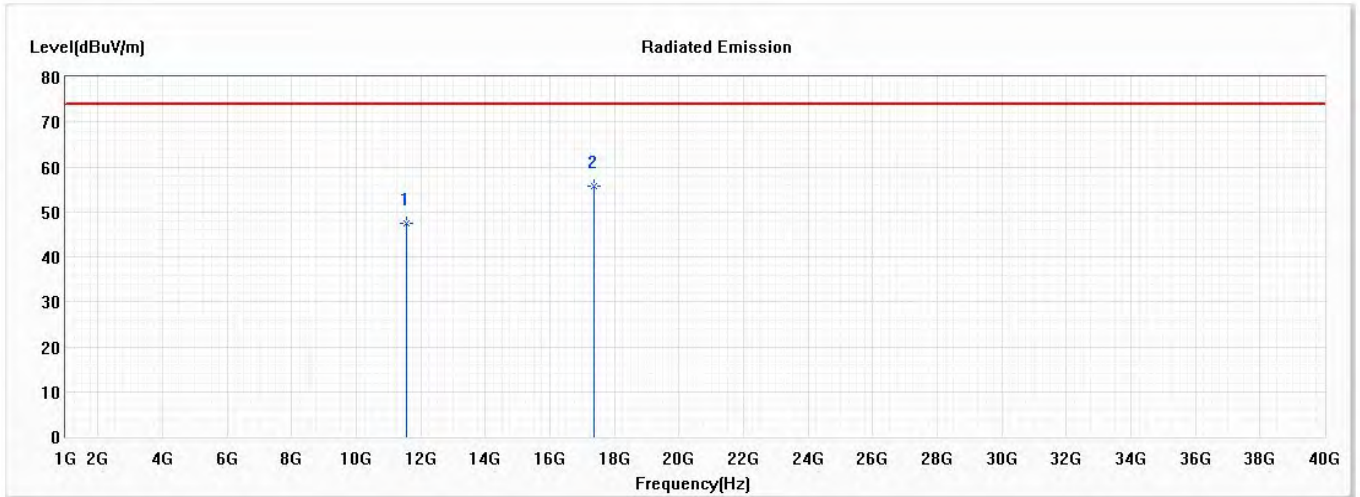


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	47.38	74.00	-26.62	45.98	1.40	PK
* 2	17355.000	55.85	74.00	-18.15	50.85	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5785MHz)

Vertical

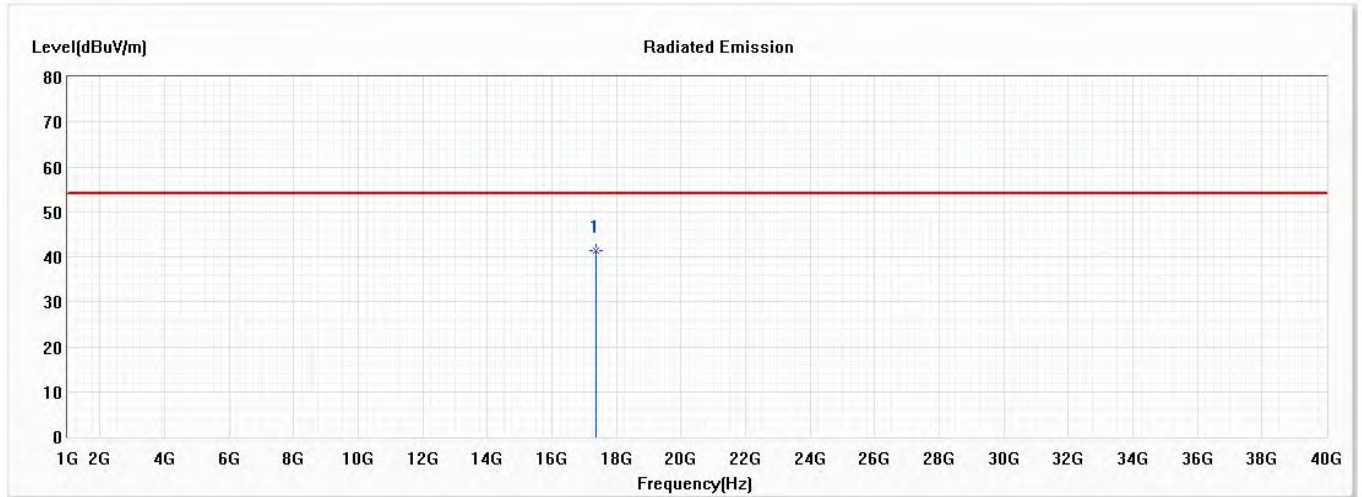


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	41.37	54.00	-12.63	36.37	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Horizontal

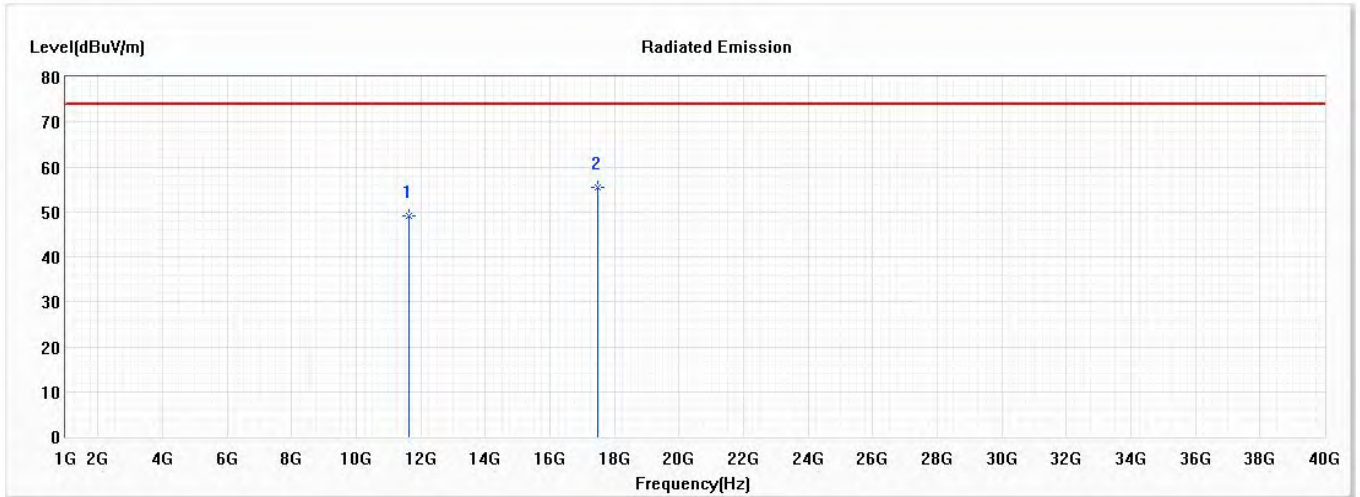


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	49.10	74.00	-24.90	47.53	1.57	PK
* 2	17475.000	55.45	74.00	-18.55	50.57	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Horizontal

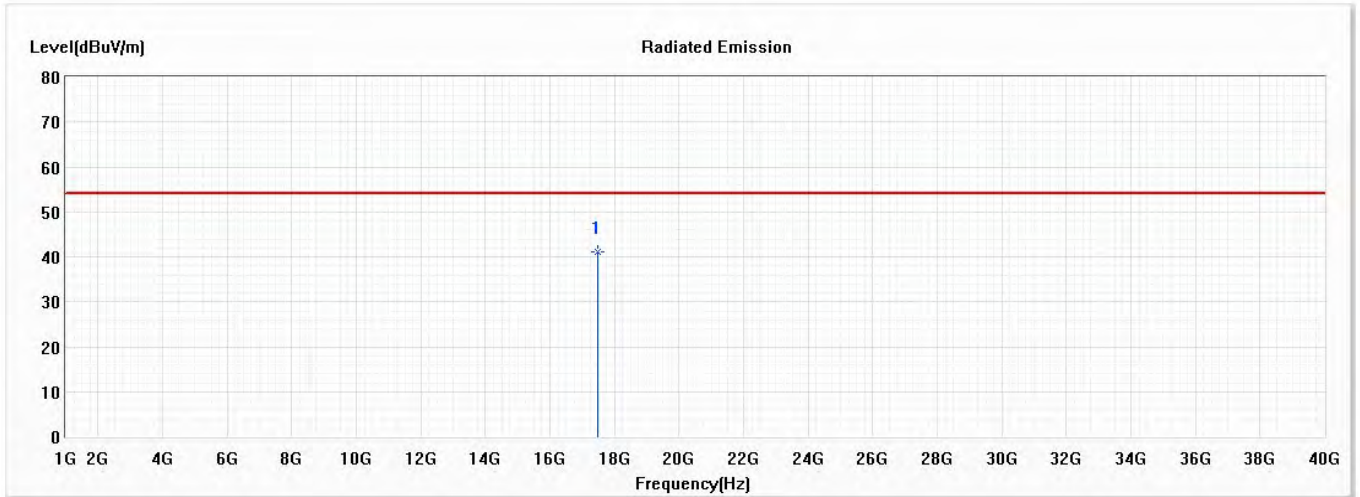


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	41.12	54.00	-12.88	36.24	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Vertical

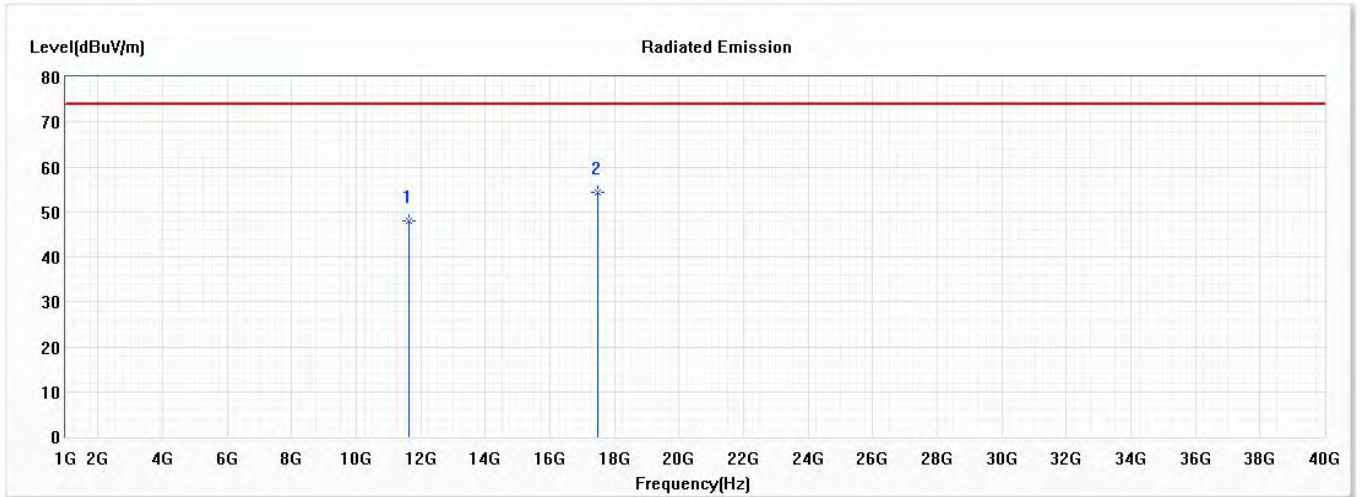


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	48.02	74.00	-25.98	46.45	1.57	PK
* 2	17475.000	54.39	74.00	-19.61	49.51	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps) (5825MHz)

Vertical

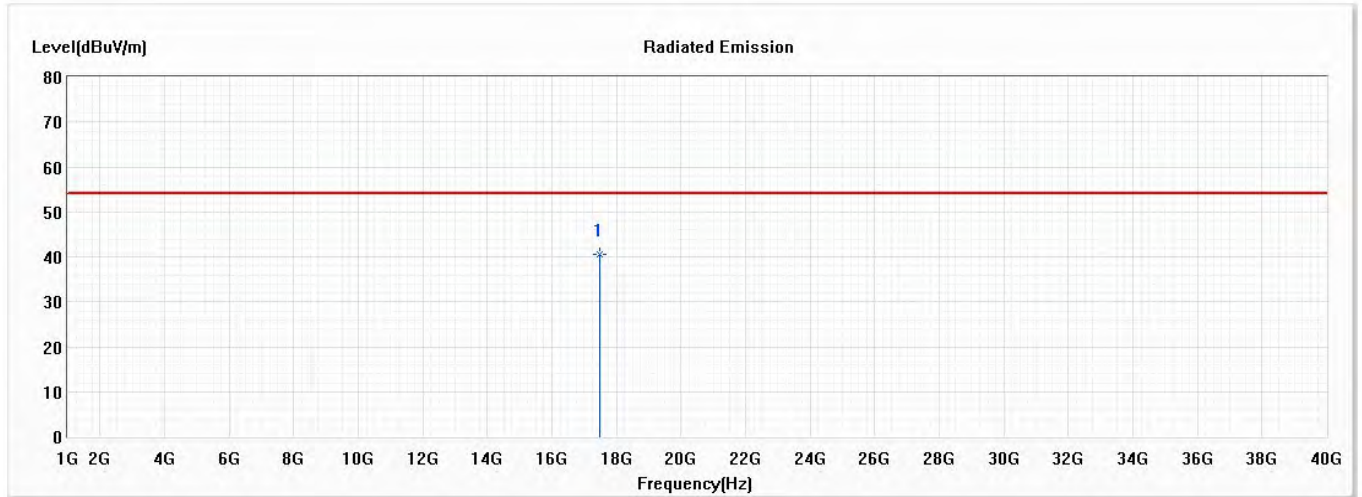


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	40.66	54.00	-13.34	35.78	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5190MHz)

Horizontal

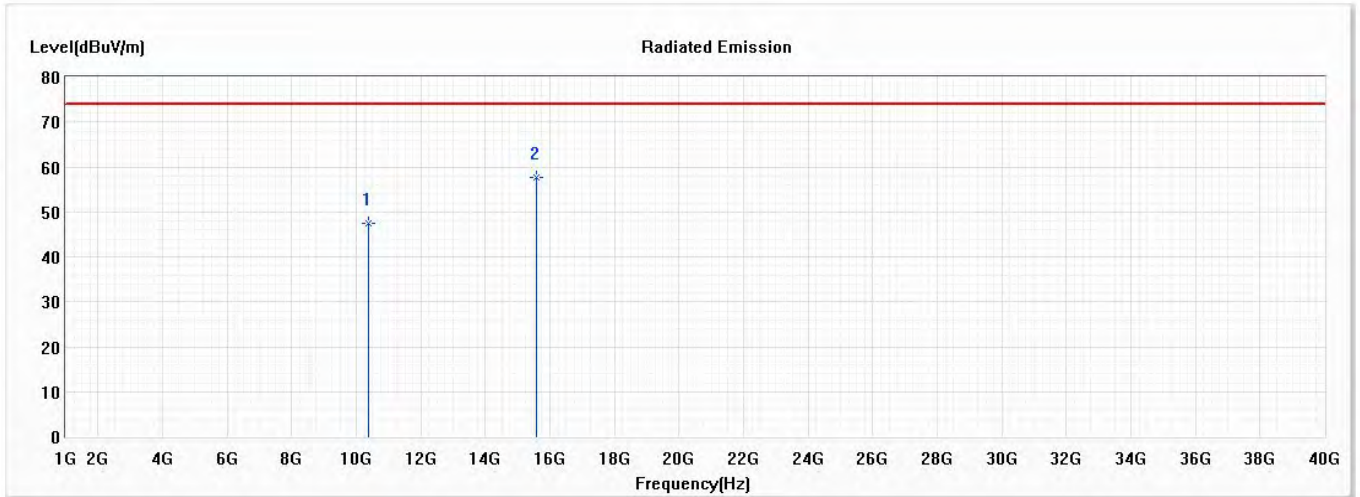


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10380.000	47.35	74.00	-26.65	48.57	-1.22	PK
* 2	15570.000	57.56	74.00	-16.44	55.27	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5190MHz)

Horizontal

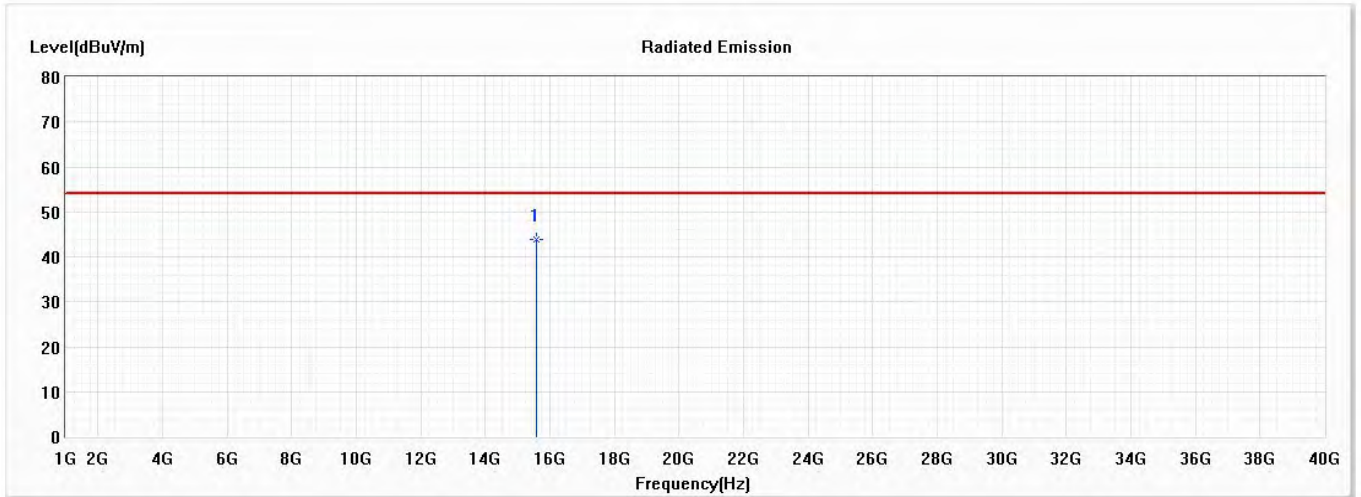


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15570.000	43.75	54.00	-10.25	41.46	2.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5190MHz)

Vertical

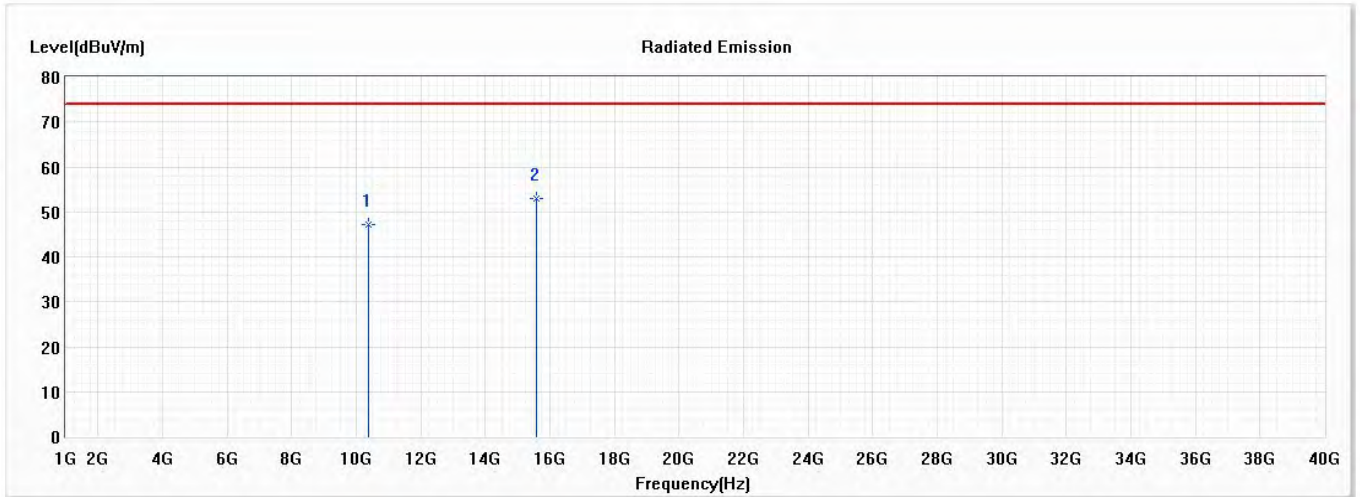


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10380.000	47.07	74.00	-26.93	48.29	-1.22	PK
* 2	15570.000	53.10	74.00	-20.90	50.81	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Horizontal

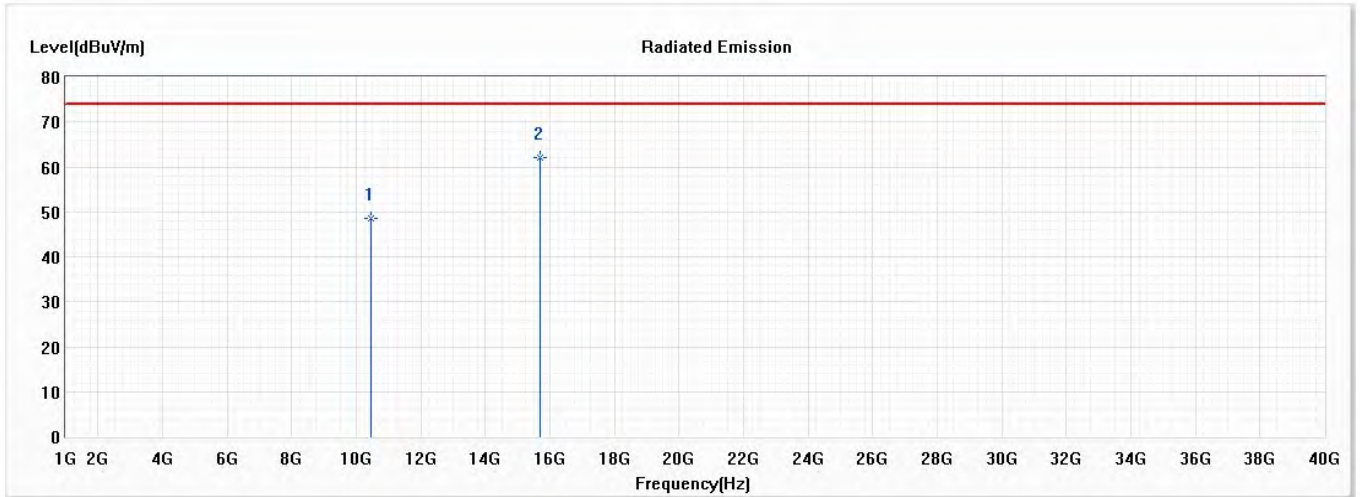


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10460.000	48.46	74.00	-25.54	49.43	-0.97	PK
* 2	15690.000	61.96	74.00	-12.04	59.50	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Horizontal

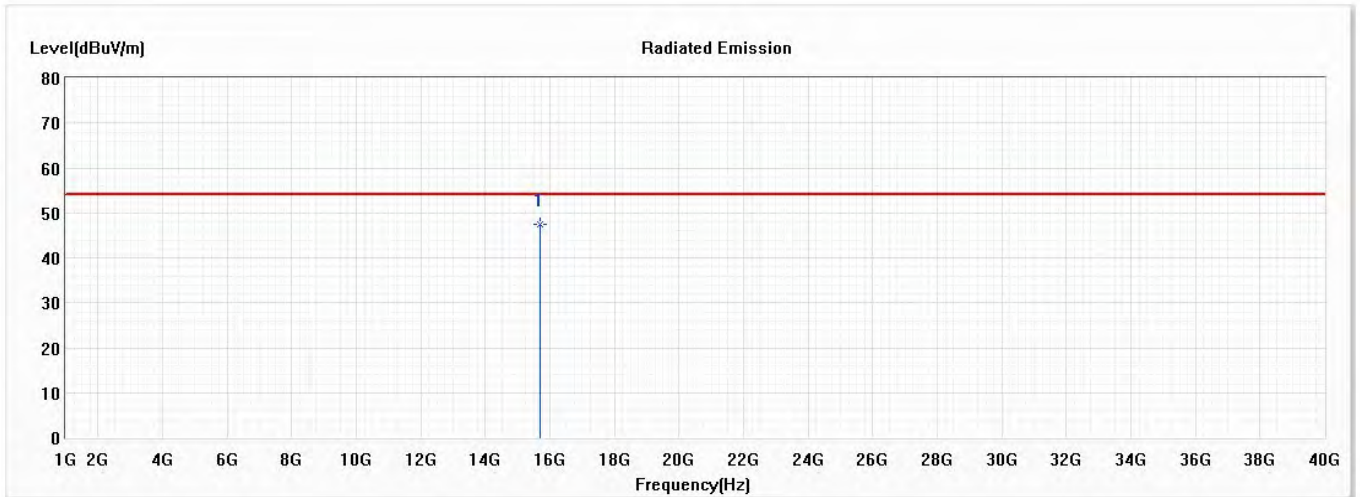


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15690.000	47.58	54.00	-6.42	45.12	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Vertical

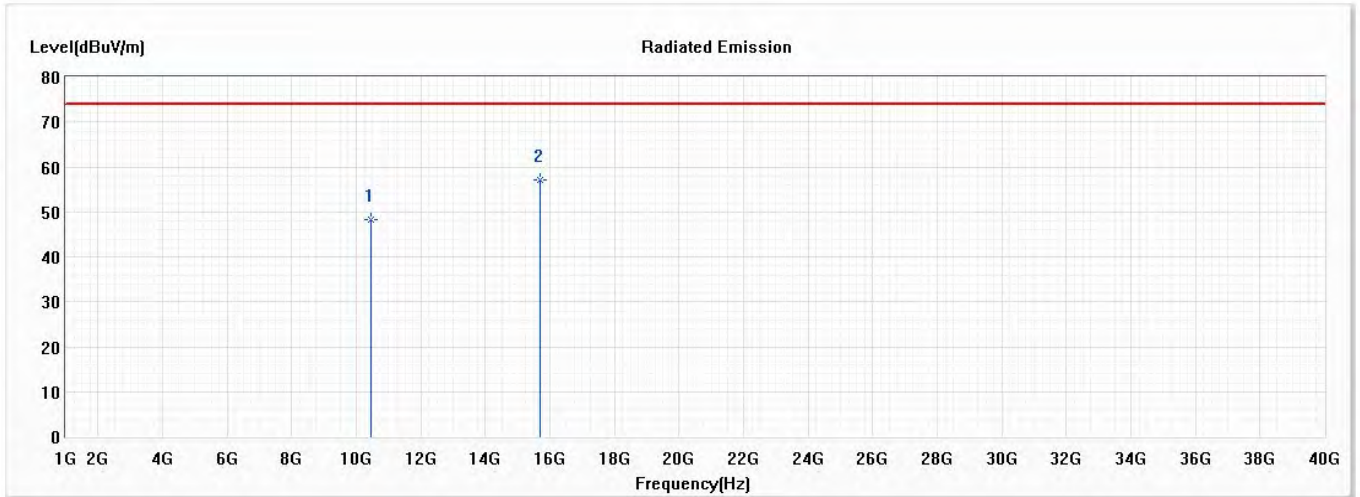


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10460.000	48.25	74.00	-25.75	49.22	-0.97	PK
* 2	15690.000	57.14	74.00	-16.86	54.68	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5230MHz)

Vertical

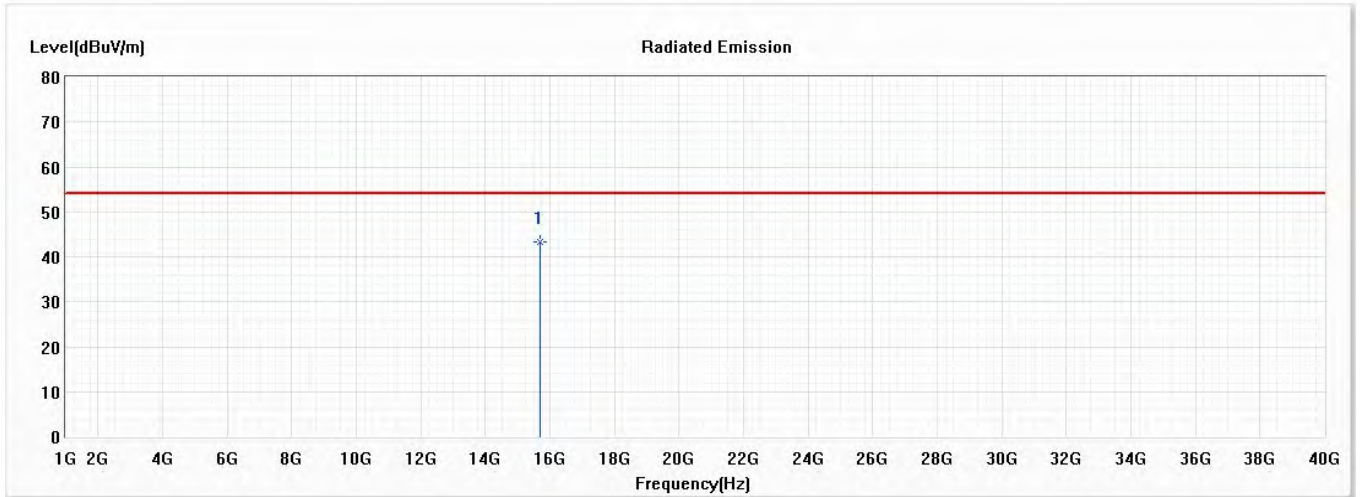


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15690.000	43.38	54.00	-10.62	40.92	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Horizontal

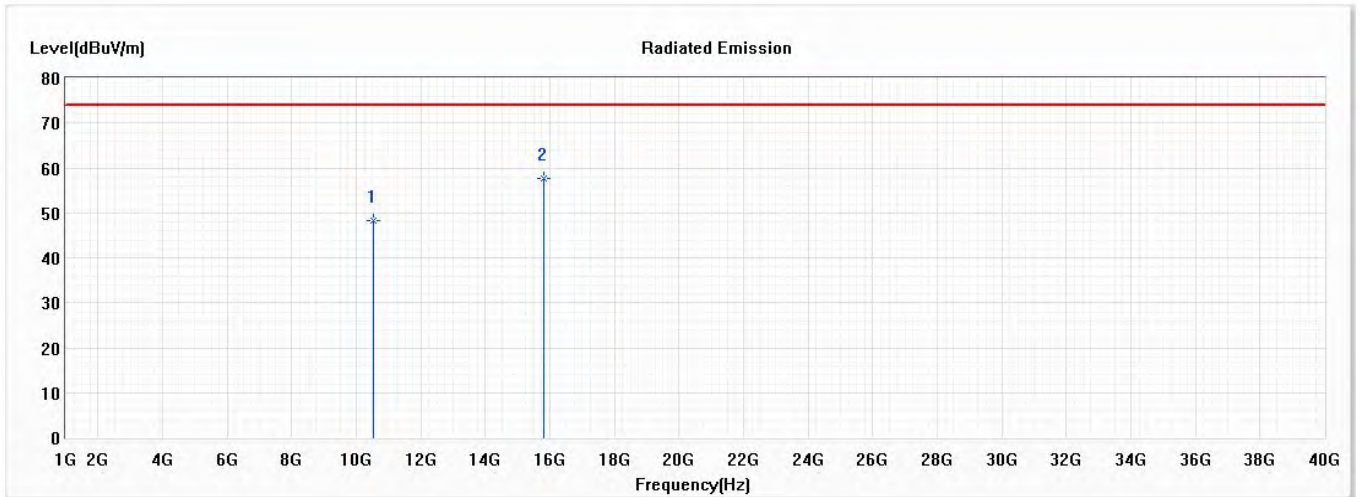


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10540.000	48.16	74.00	-25.84	48.92	-0.76	PK
* 2	15810.000	57.54	74.00	-16.46	55.20	2.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Horizontal

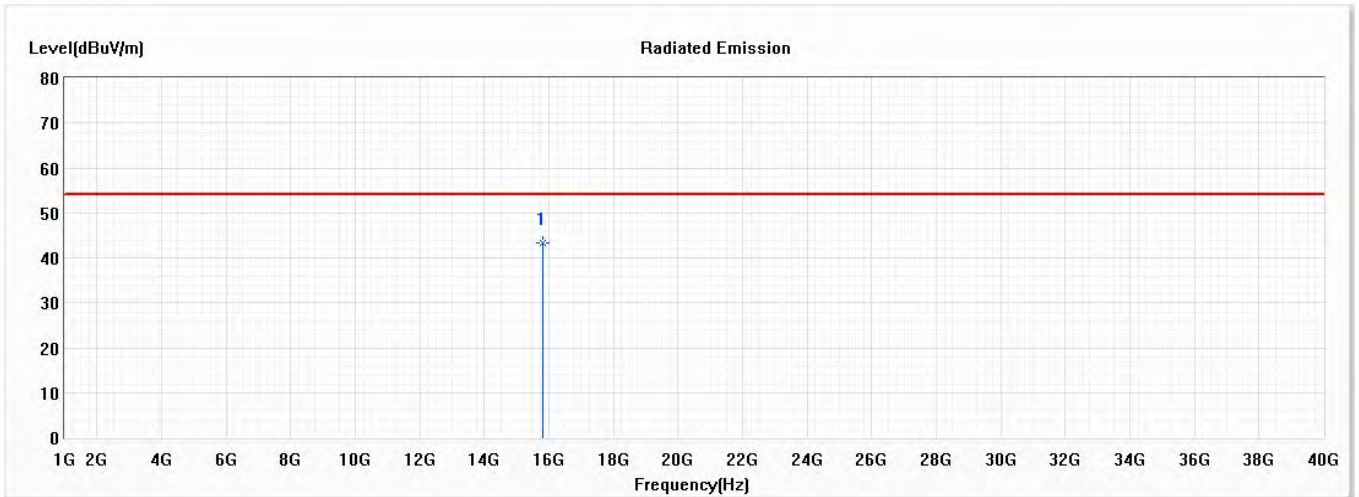


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15810.000	43.37	54.00	-10.63	41.03	2.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Vertical

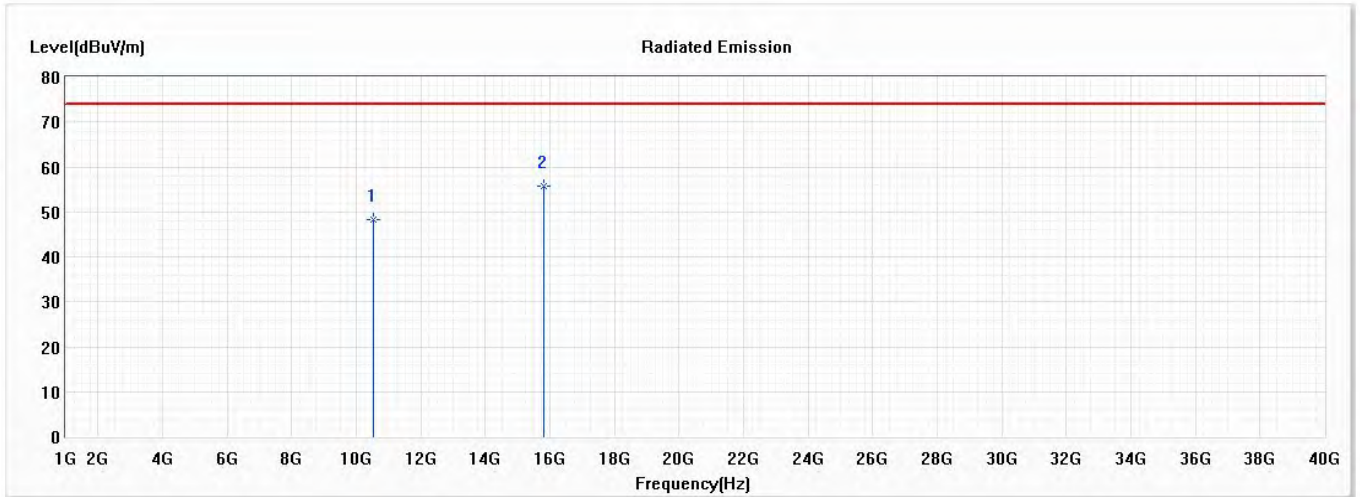


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10540.000	48.28	74.00	-25.72	49.04	-0.76	PK
* 2	15810.000	55.76	74.00	-18.24	53.42	2.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5270MHz)

Vertical

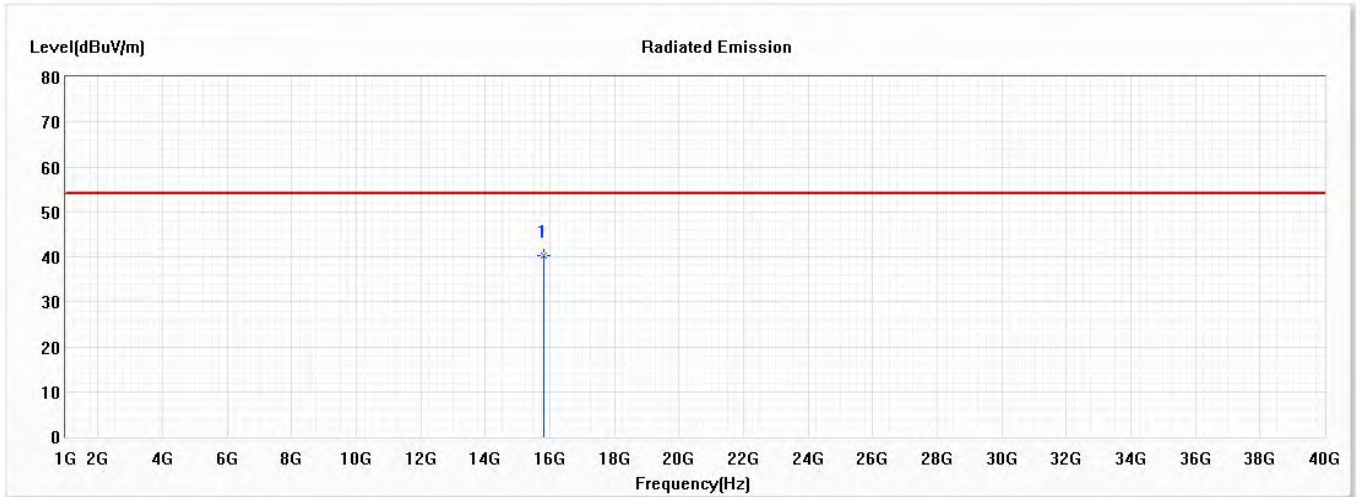


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15810.000	40.36	54.00	-13.64	38.02	2.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Horizontal

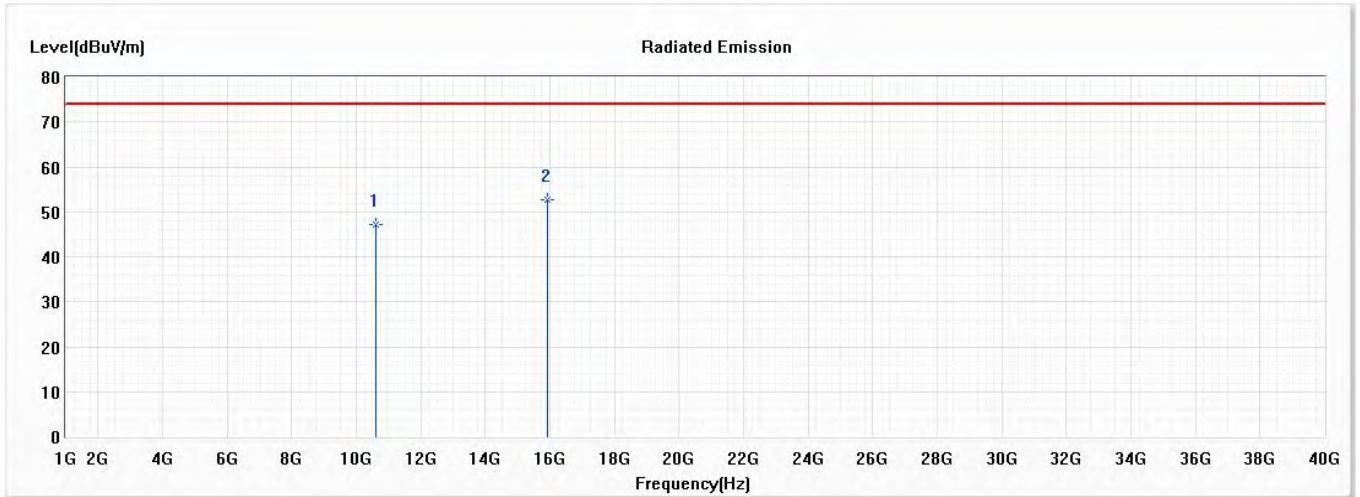


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10620.000	47.04	74.00	-26.96	47.68	-0.64	PK
* 2	15930.000	52.62	74.00	-21.38	49.94	2.68	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5310MHz)

Vertical

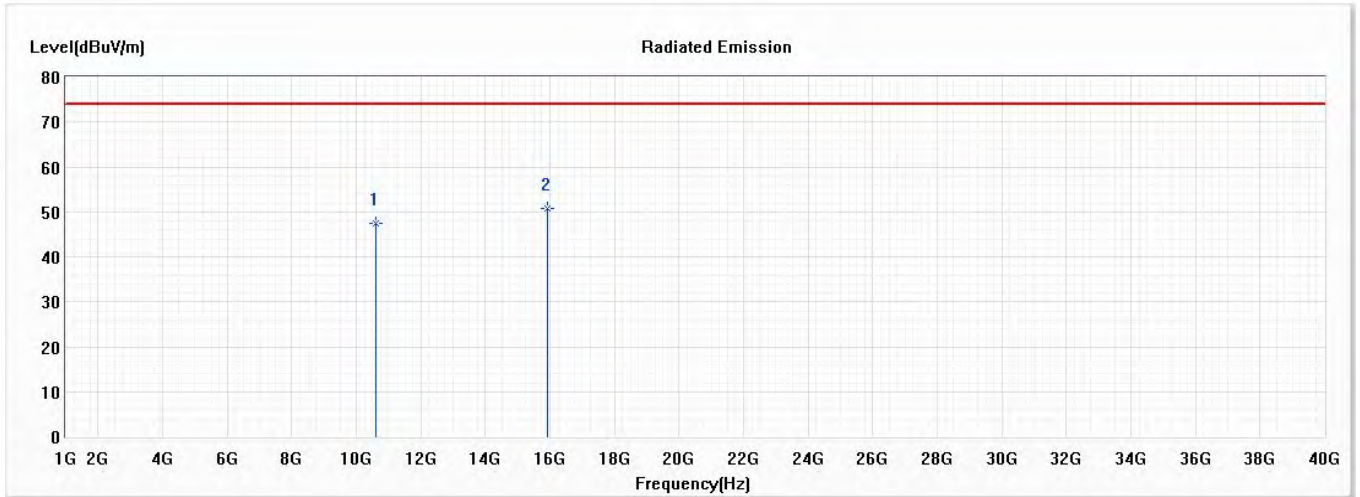


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10620.000	47.50	74.00	-26.50	48.14	-0.64	PK
* 2	15930.000	50.79	74.00	-23.21	48.11	2.68	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5510MHz)

Horizontal

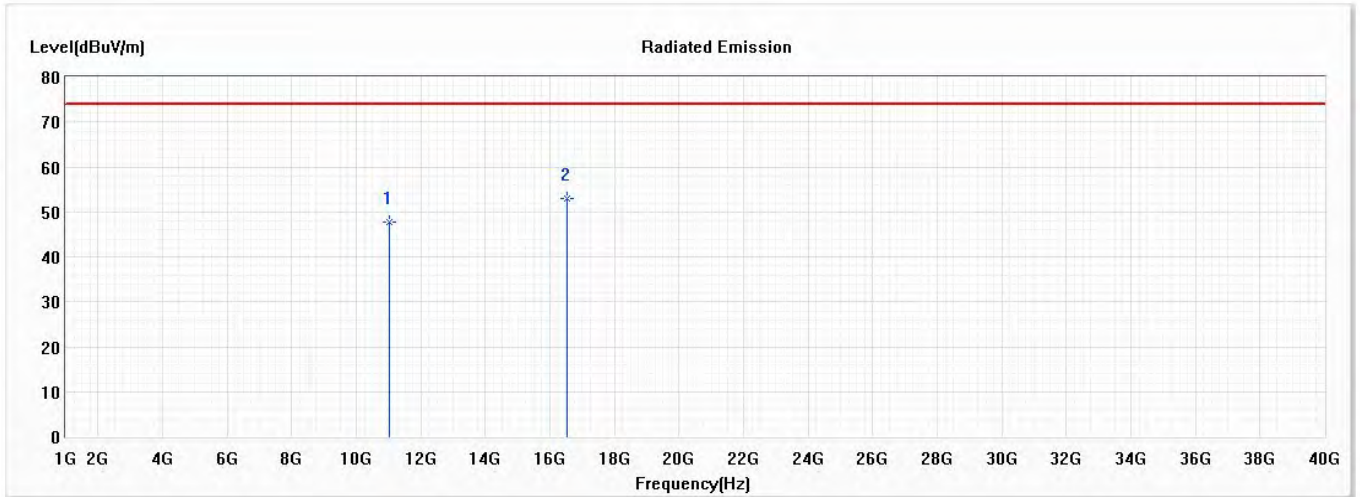


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11020.000	47.80	74.00	-26.20	47.67	0.13	PK
* 2	16530.000	52.92	74.00	-21.08	48.48	4.44	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5510MHz)

Vertical

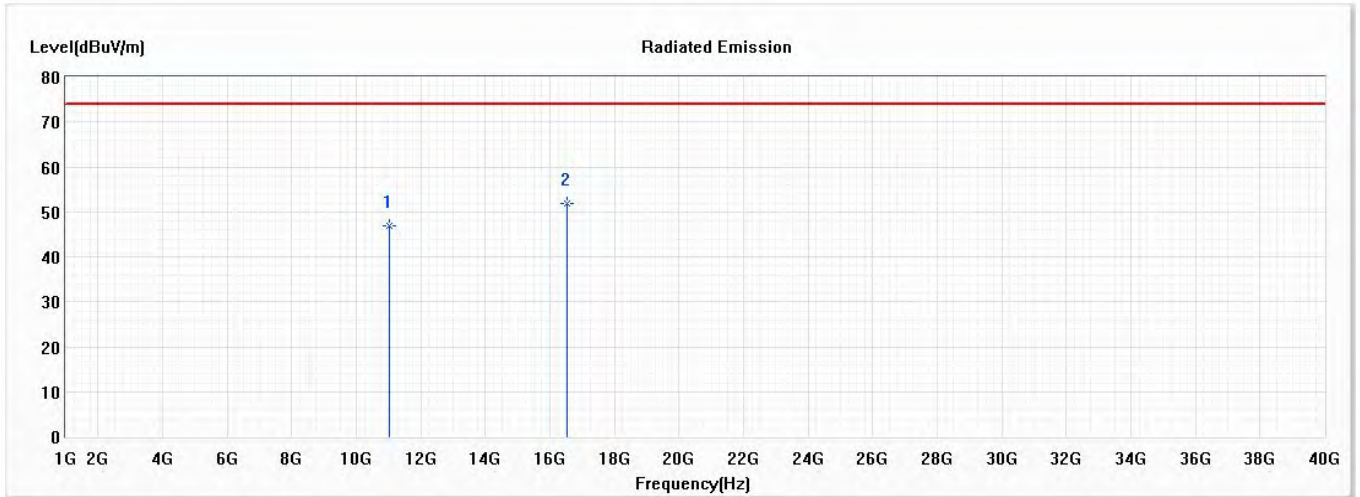


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11020.000	46.93	74.00	-27.07	46.80	0.13	PK
* 2	16530.000	51.97	74.00	-22.03	47.53	4.44	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5550MHz)

Horizontal

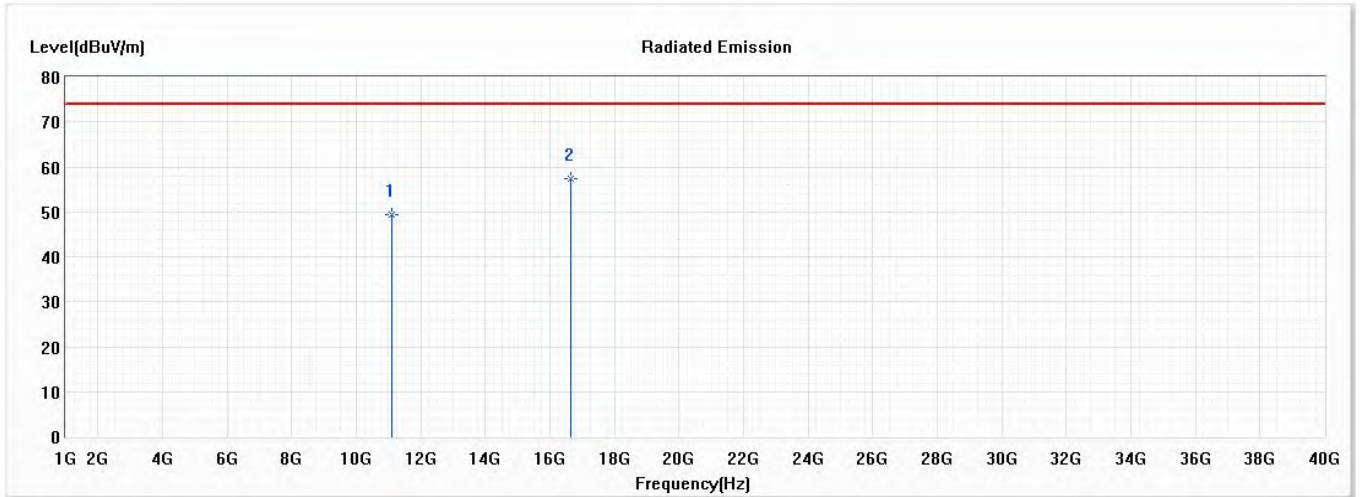


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11100.000	49.31	74.00	-24.69	48.88	0.43	PK
* 2	16650.000	57.42	74.00	-16.58	52.49	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5550MHz)

Horizontal

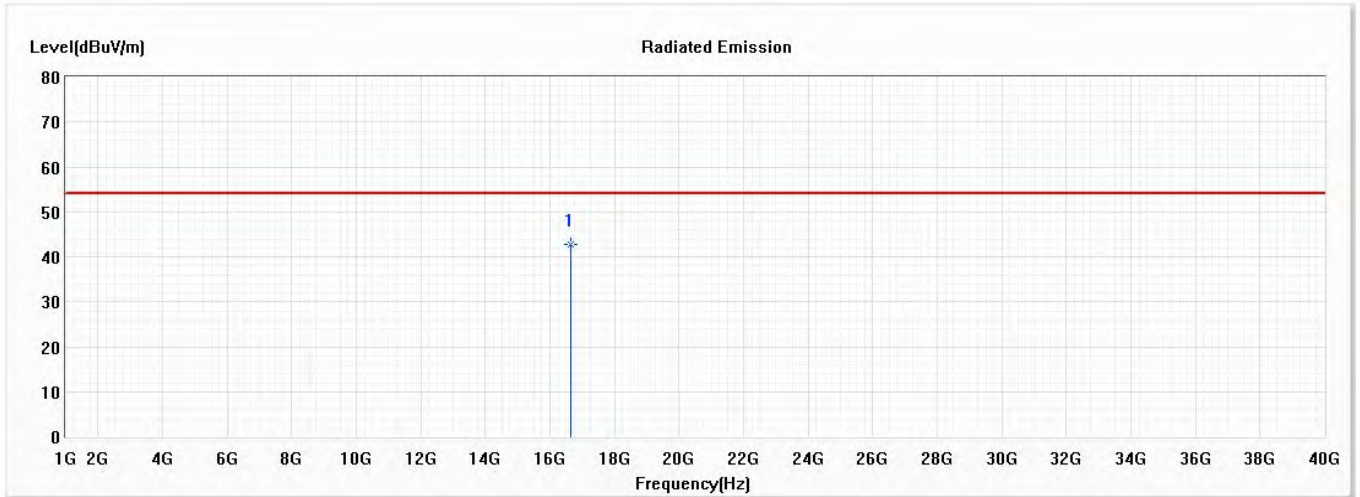


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16650.000	42.69	54.00	-11.31	37.76	4.93	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5550MHz)

Vertical

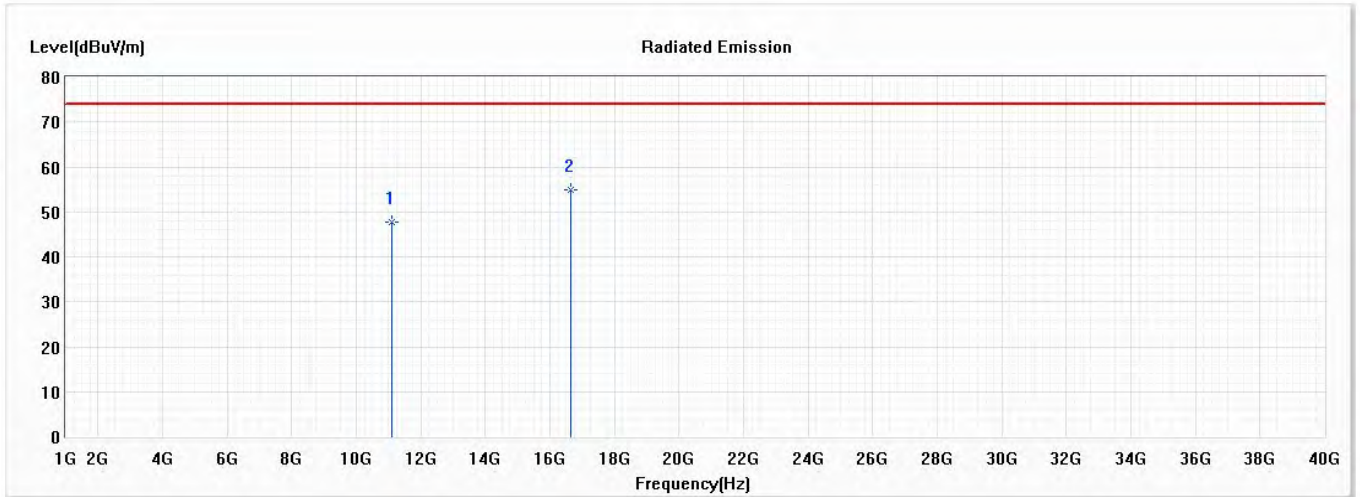


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11100.000	47.60	74.00	-26.40	47.17	0.43	PK
* 2	16650.000	55.03	74.00	-18.97	50.10	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5550MHz)

Vertical

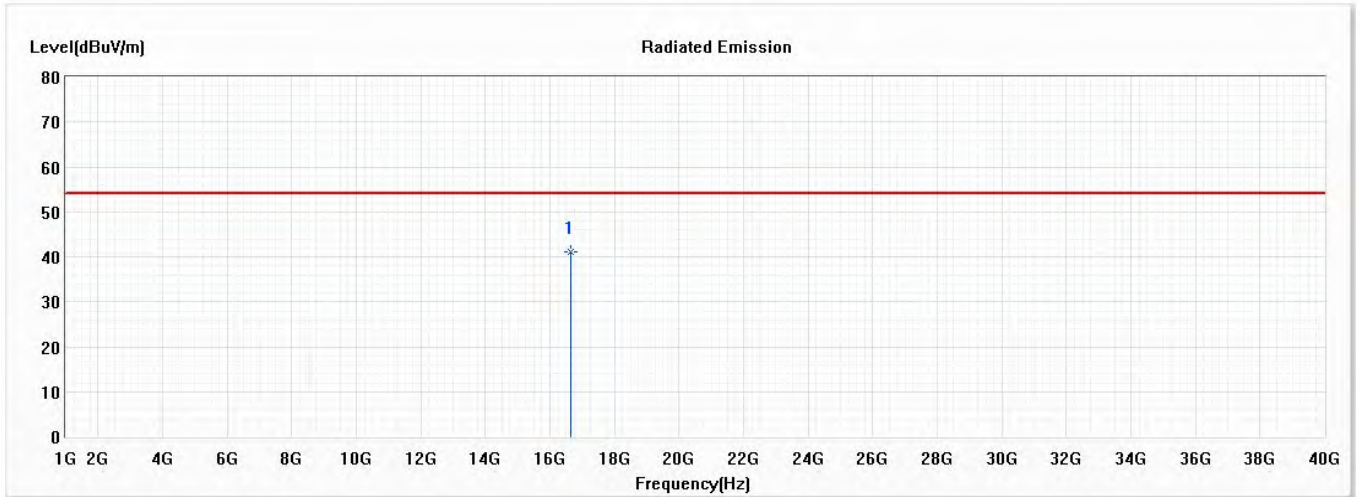


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16650.000	41.11	54.00	-12.89	36.18	4.93	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Horizontal

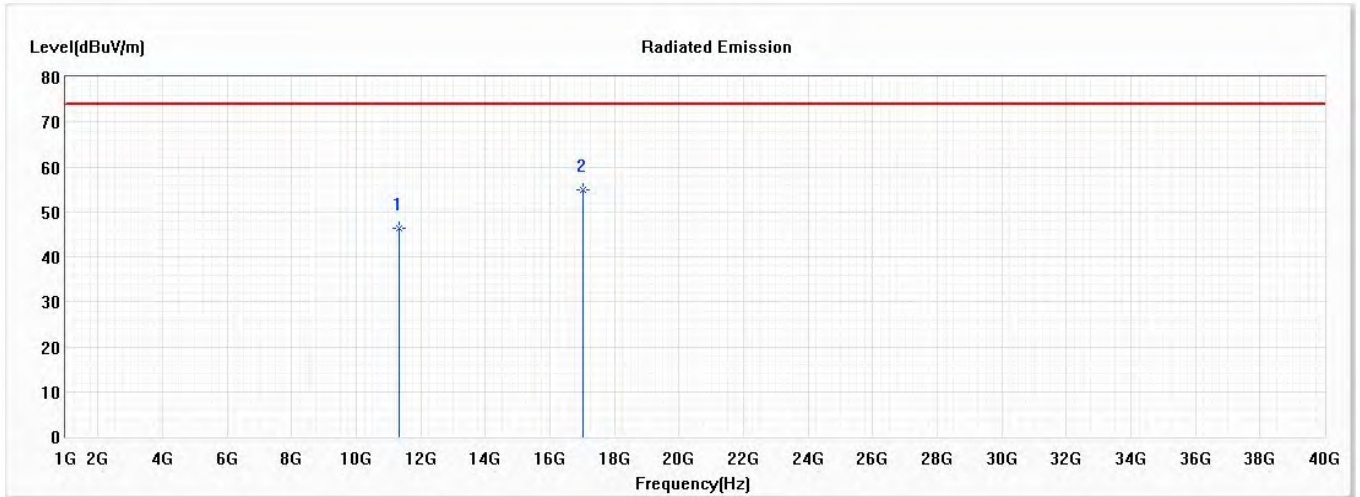


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11340.000	46.36	74.00	-27.64	45.58	0.78	PK
* 2	17010.000	54.85	74.00	-19.15	49.51	5.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Horizontal

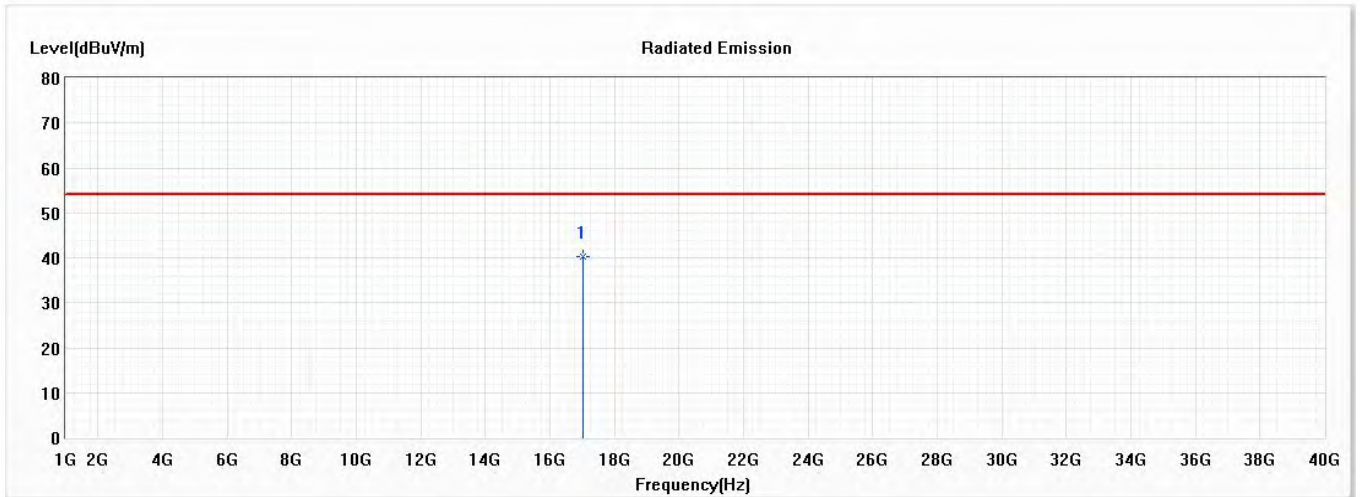


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17010.000	40.35	54.00	-13.65	35.01	5.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Vertical

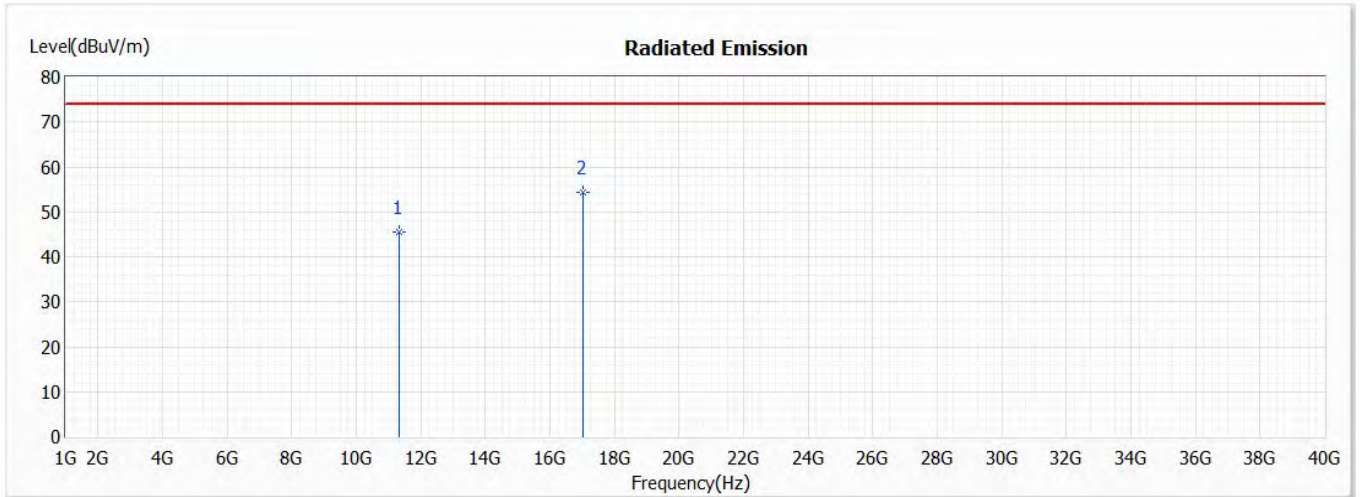


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11340.000	45.62	74.00	-28.38	44.84	0.78	PK
* 2	17010.000	54.43	74.00	-19.57	49.09	5.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5670MHz)

Vertical

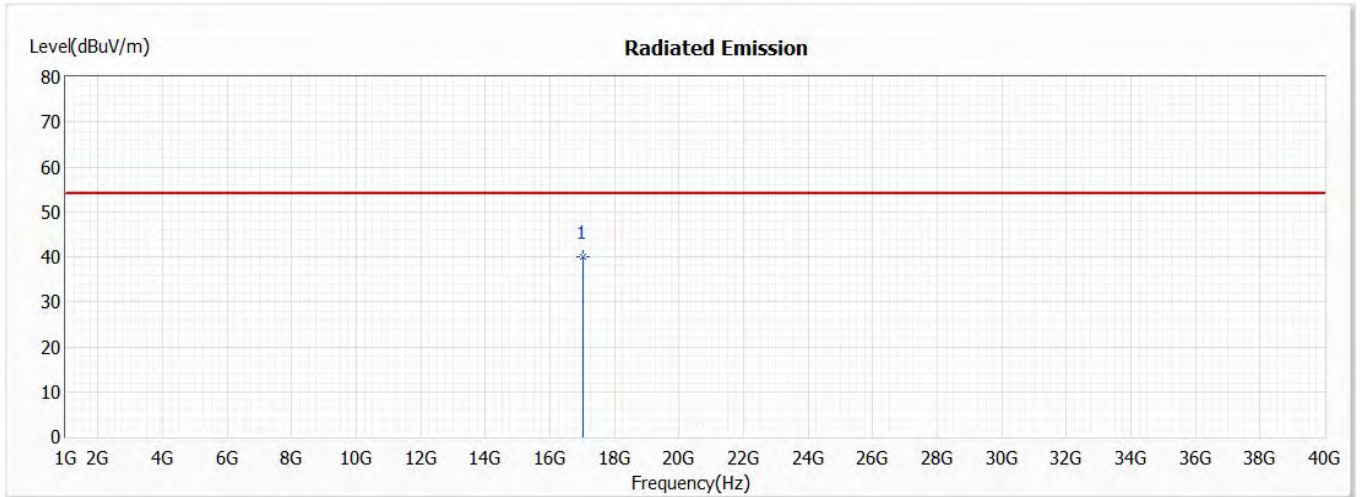


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17010.000	39.87	54.00	-14.13	34.53	5.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5755MHz)

Horizontal

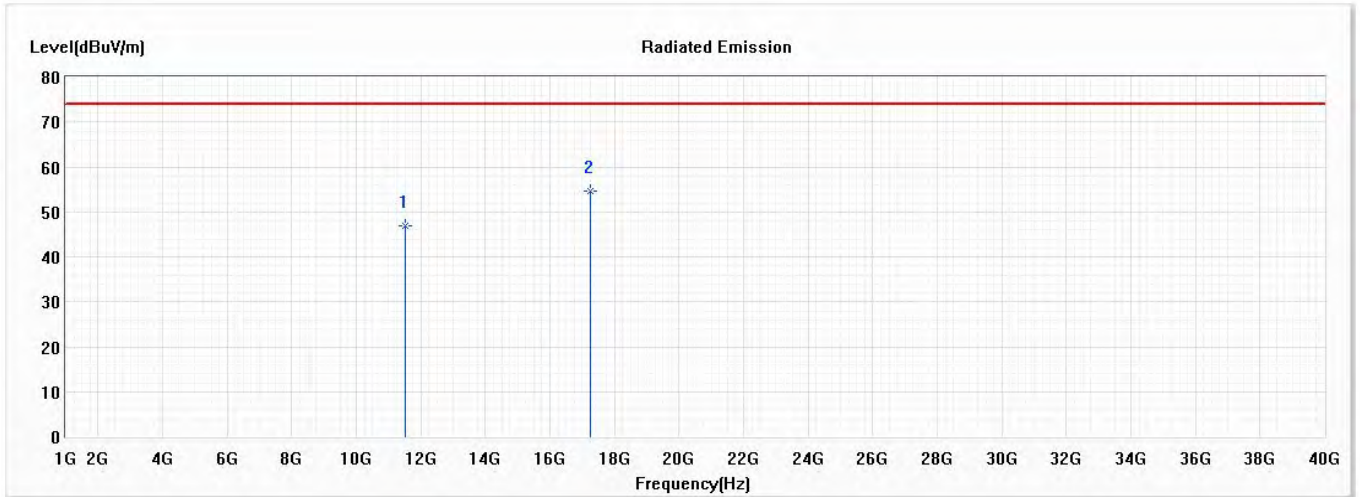


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11510.000	46.89	74.00	-27.11	45.65	1.24	PK
* 2	17265.000	54.51	74.00	-19.49	49.50	5.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5755MHz)

Horizontal

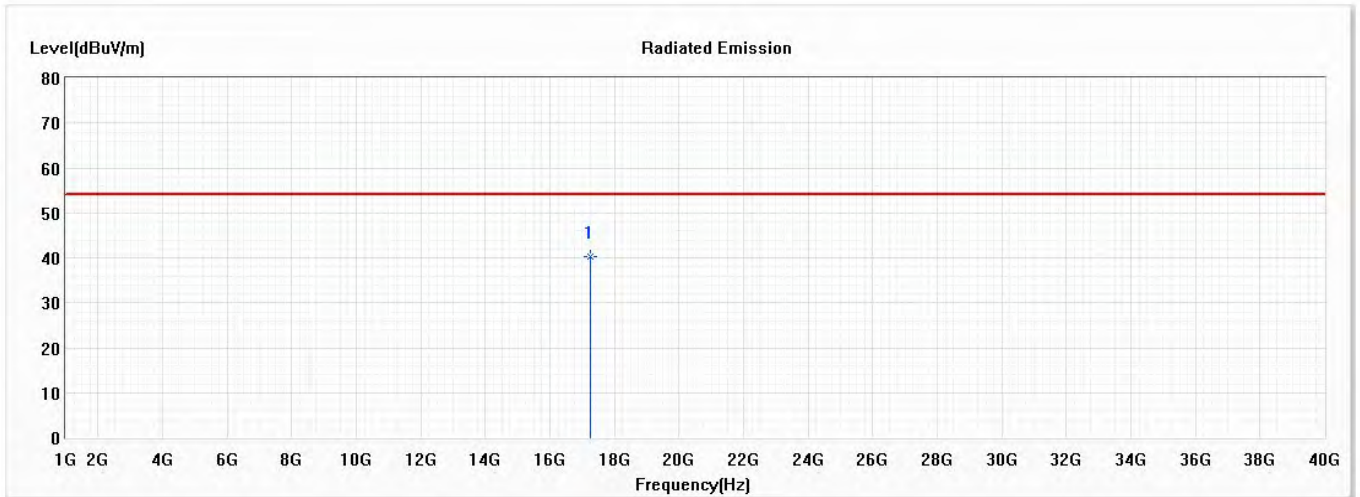


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17265.000	40.31	54.00	-13.69	35.30	5.01	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5755MHz)

Vertical

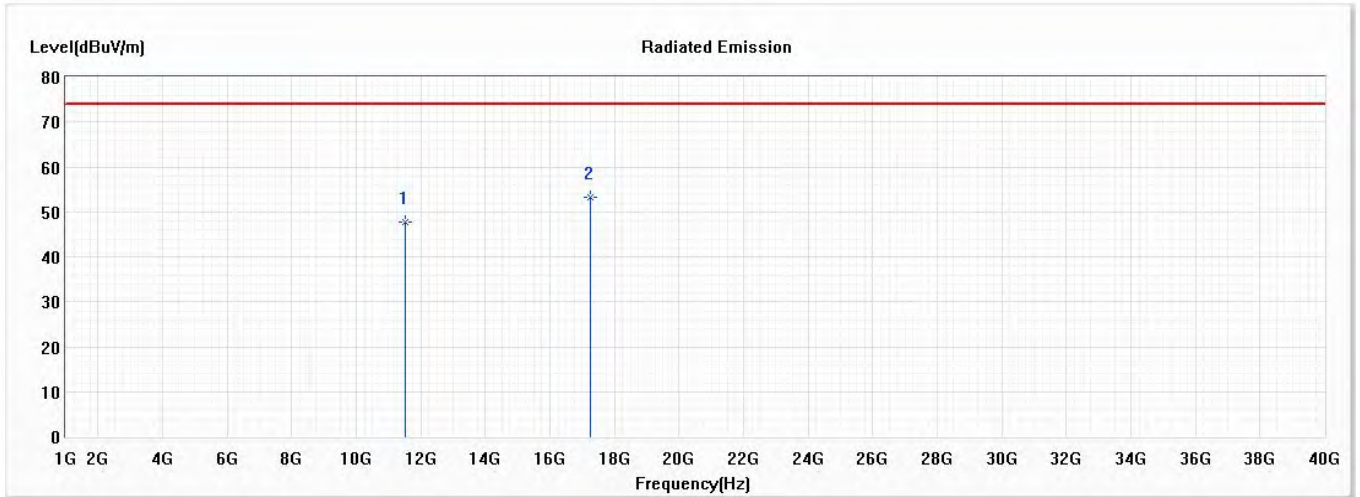


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11510.000	47.68	74.00	-26.32	46.44	1.24	PK
* 2	17265.000	53.28	74.00	-20.72	48.27	5.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Horizontal

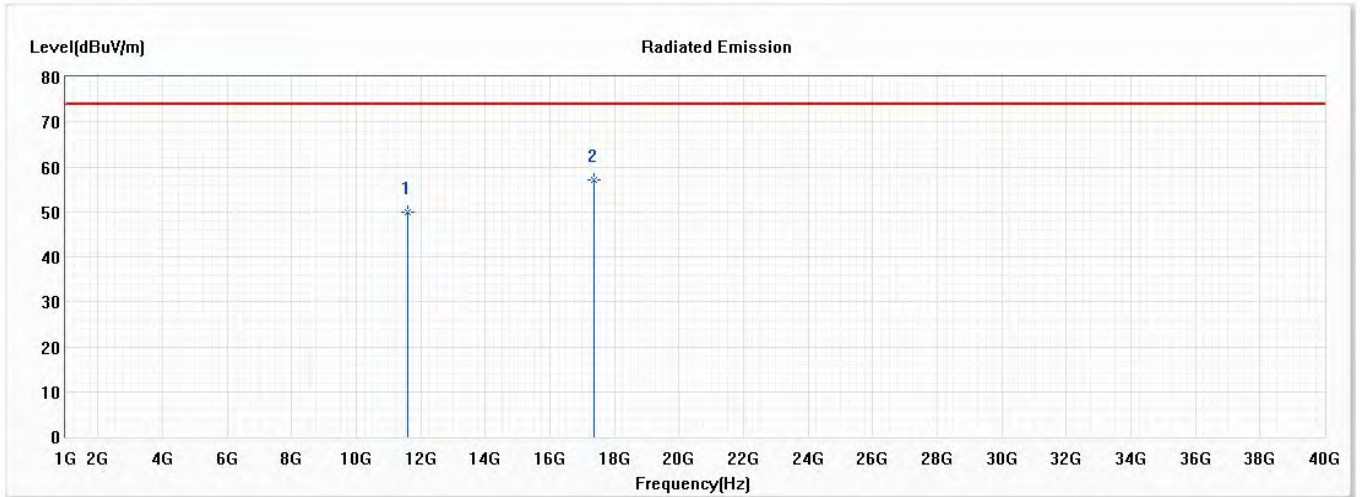


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11590.000	49.80	74.00	-24.20	48.35	1.45	PK
* 2	17385.000	56.98	74.00	-17.02	52.08	4.90	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Horizontal

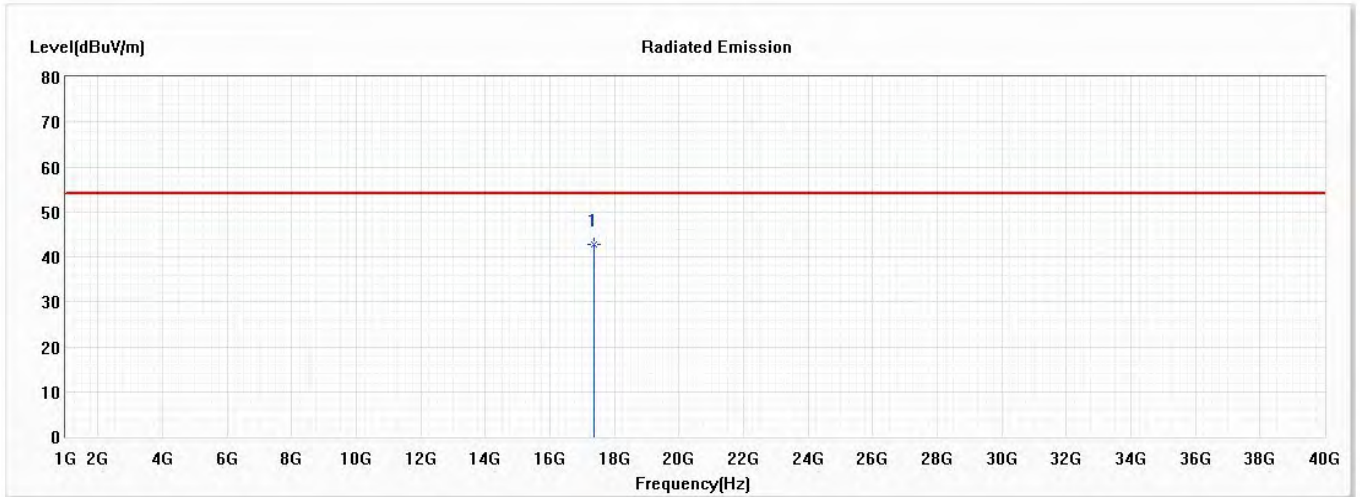


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17385.000	42.69	54.00	-11.31	37.79	4.90	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

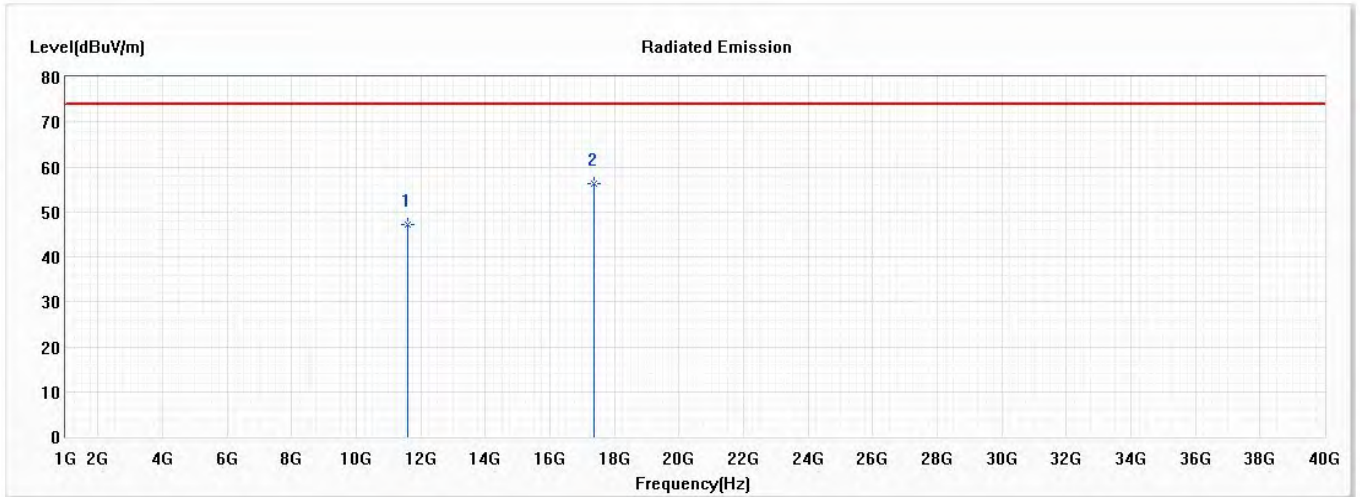


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11590.000	47.22	74.00	-26.78	45.77	1.45	PK
* 2	17385.000	56.38	74.00	-17.62	51.48	4.90	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps) (5795MHz)

Vertical

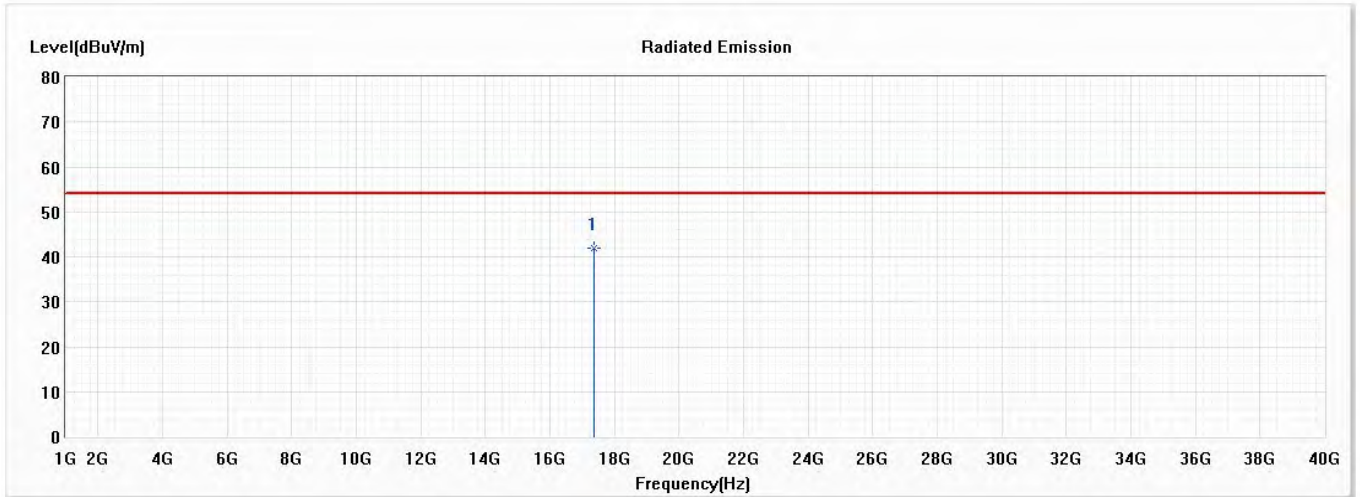


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17385.000	41.97	54.00	-12.03	37.07	4.90	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Horizontal

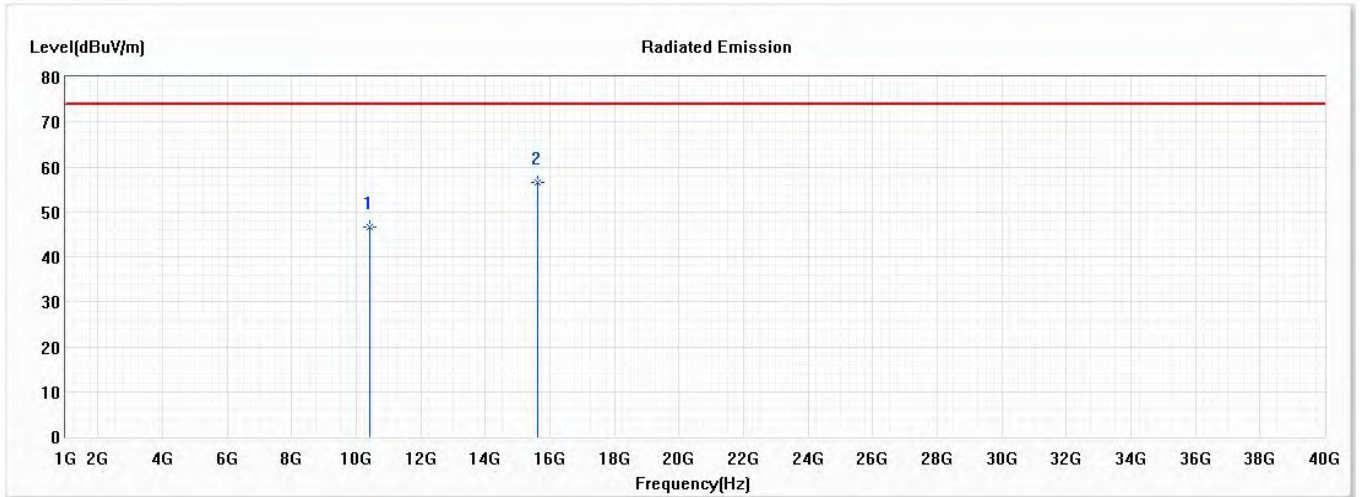


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10420.000	46.73	74.00	-27.27	47.84	-1.11	PK
* 2	15630.000	56.64	74.00	-17.36	54.35	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Horizontal

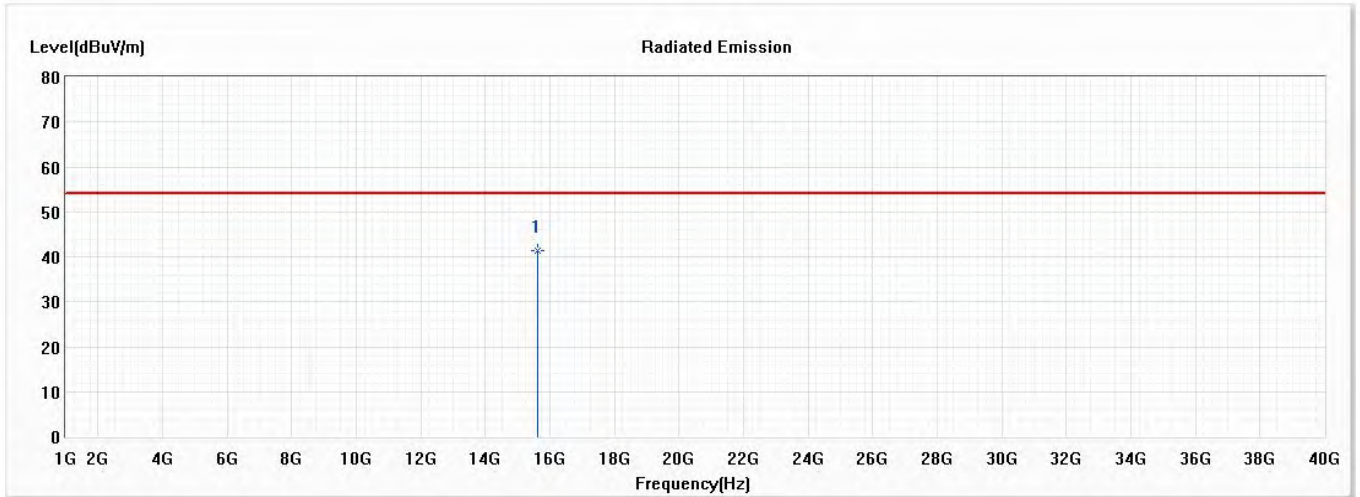


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15630.000	41.39	54.00	-12.61	39.10	2.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5210MHz)

Vertical

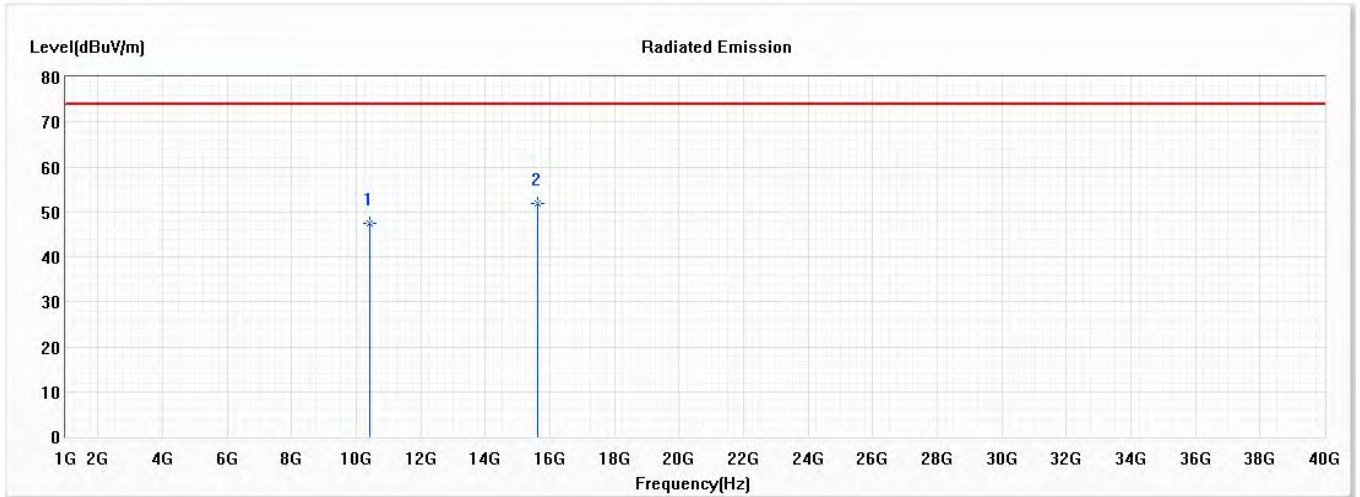


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10420.000	47.46	74.00	-26.54	48.57	-1.11	PK
* 2	15630.000	51.86	74.00	-22.14	49.57	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Horizontal

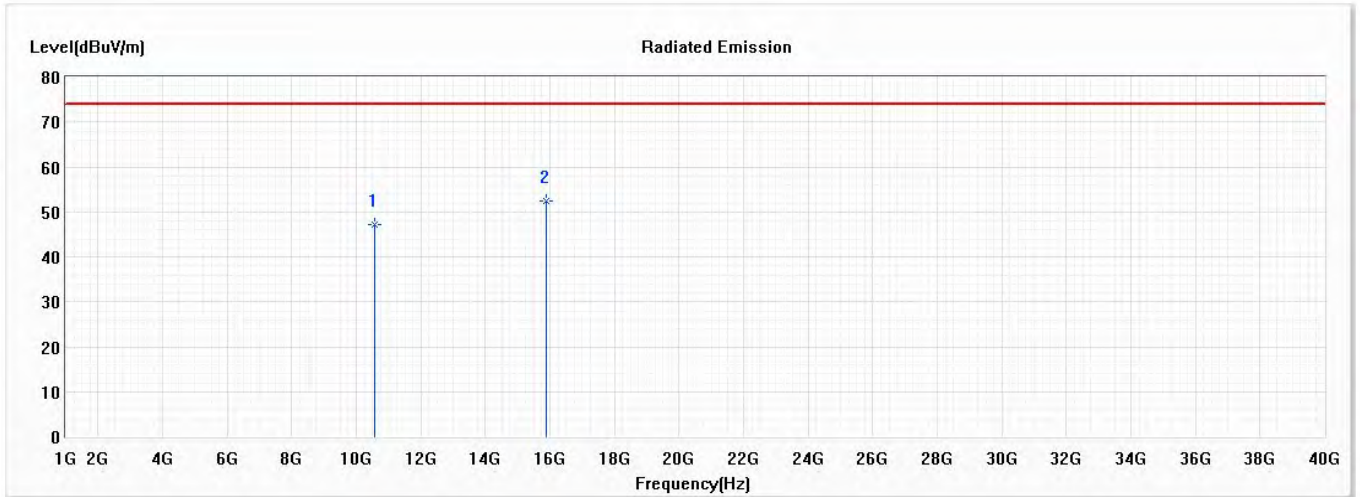


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10580.000	47.05	74.00	-26.95	47.73	-0.68	PK
* 2	15870.000	52.54	74.00	-21.46	50.01	2.53	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5290MHz)

Vertical

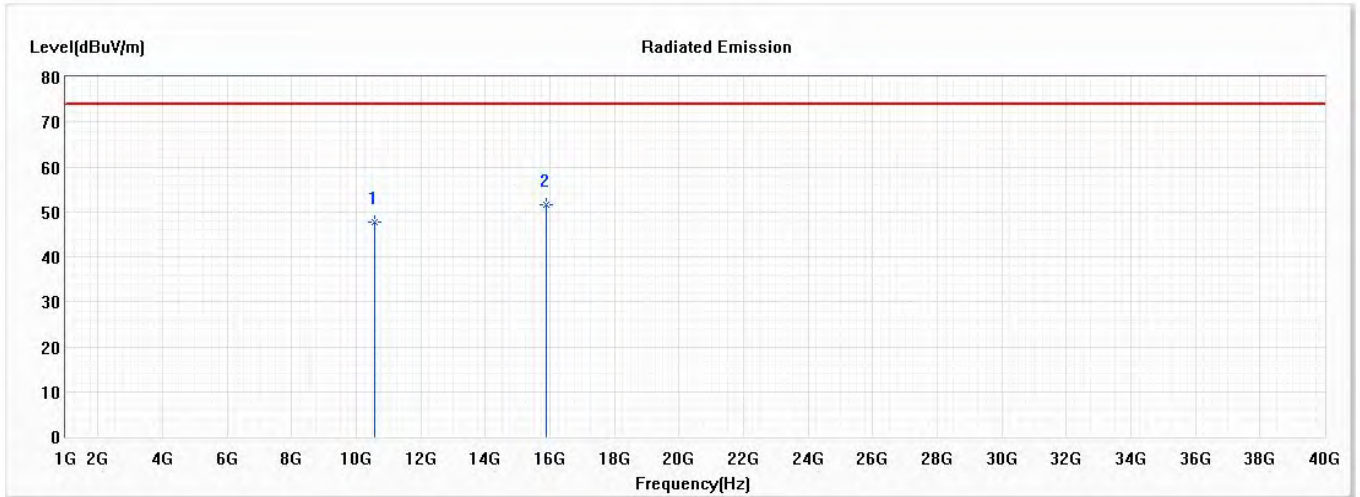


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10580.000	47.69	74.00	-26.31	48.37	-0.68	PK
* 2	15870.000	51.53	74.00	-22.47	49.00	2.53	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Horizontal

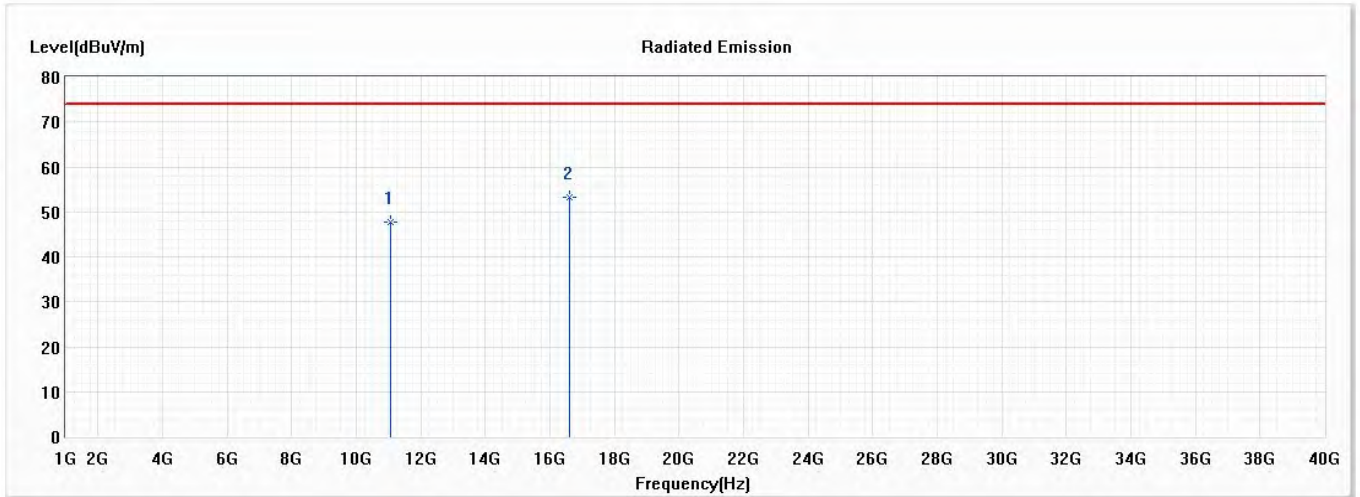


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11060.000	47.74	74.00	-26.26	47.45	0.29	PK
* 2	16590.000	53.14	74.00	-20.86	48.34	4.80	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5530MHz)

Vertical

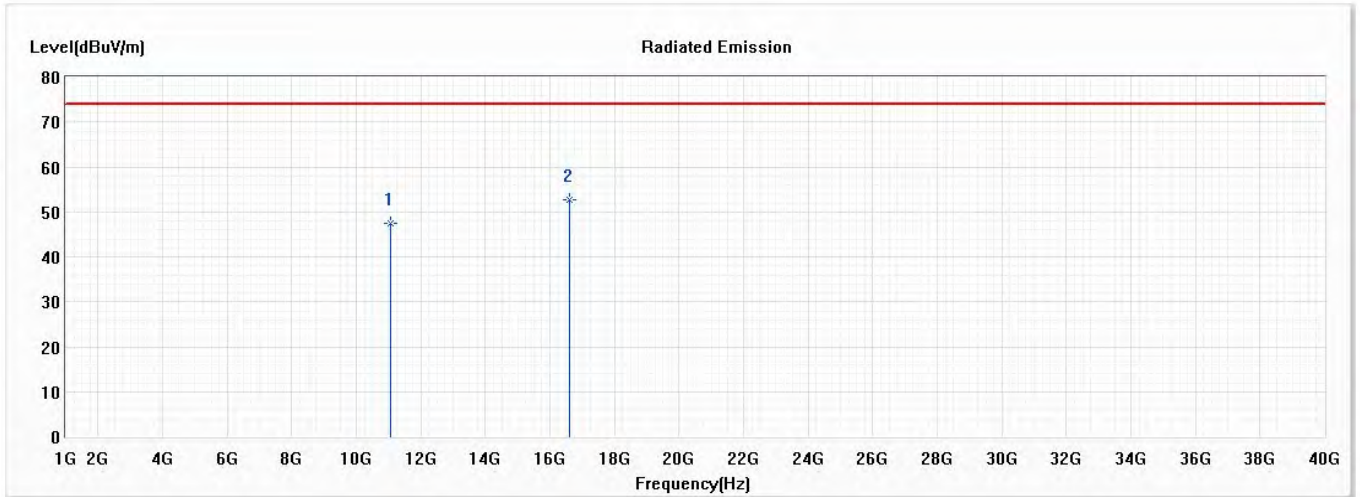


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11060.000	47.58	74.00	-26.42	47.29	0.29	PK
* 2	16590.000	52.56	74.00	-21.44	47.76	4.80	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5610MHz)

Horizontal

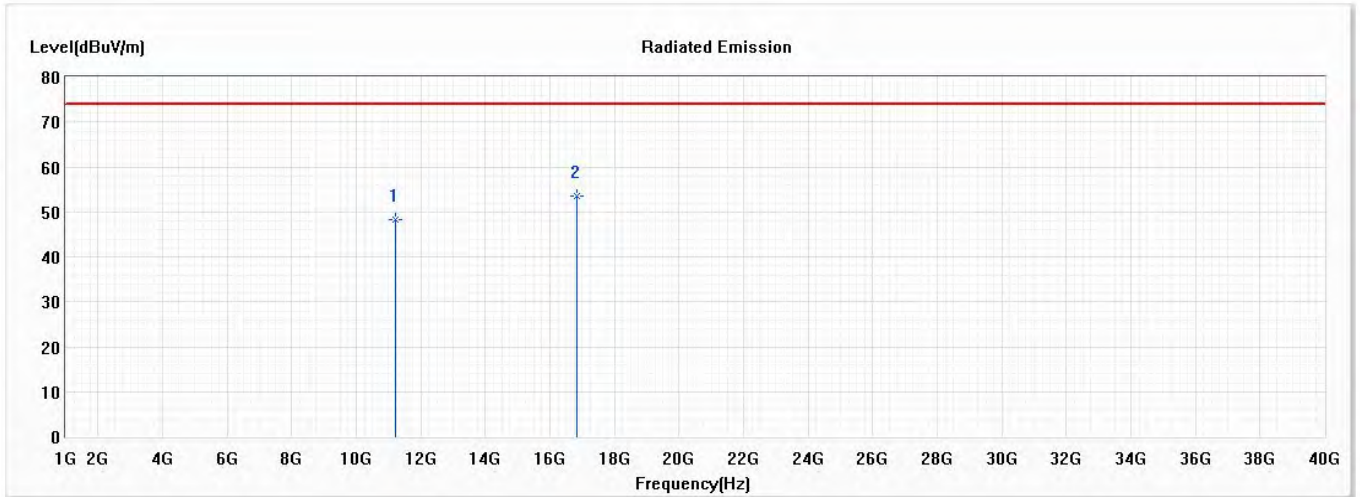


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11220.000	48.29	74.00	-25.71	47.76	0.53	PK
* 2	16830.000	53.65	74.00	-20.35	48.30	5.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5610MHz)

Vertical

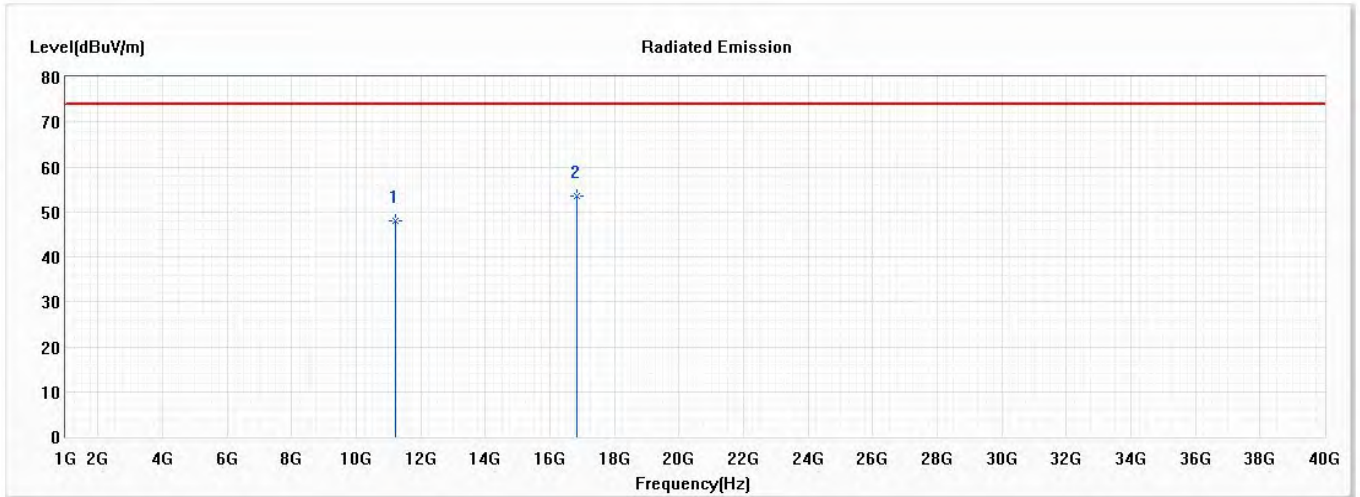


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11220.000	48.06	74.00	-25.94	47.53	0.53	PK
* 2	16830.000	53.61	74.00	-20.39	48.26	5.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5690MHz)

Horizontal

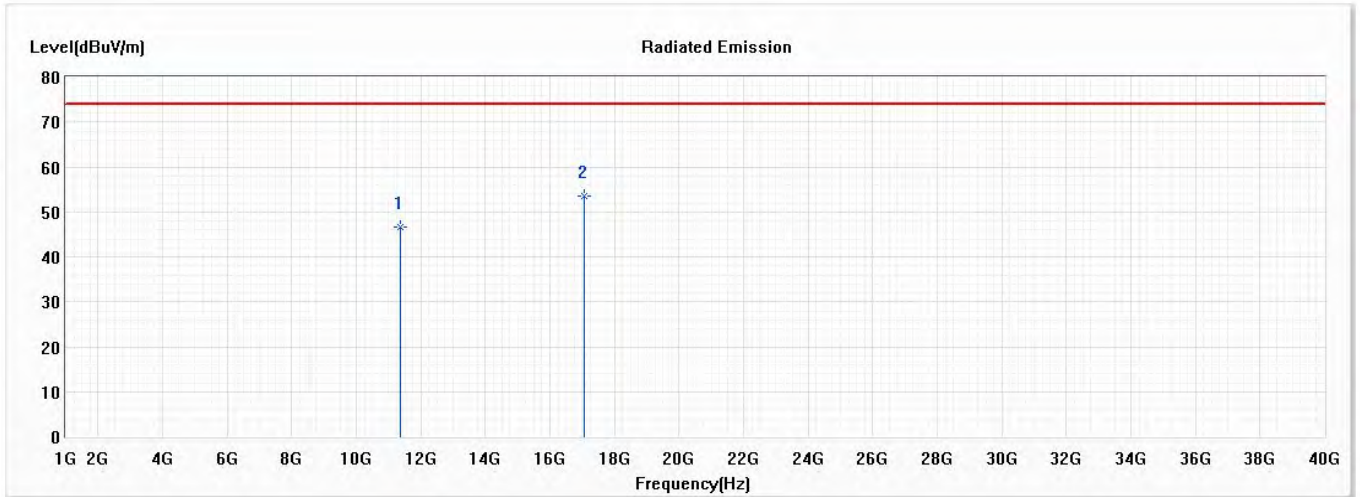


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11380.000	46.65	74.00	-27.35	45.69	0.96	PK
* 2	17070.000	53.43	74.00	-20.57	48.18	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5690MHz)

Vertical

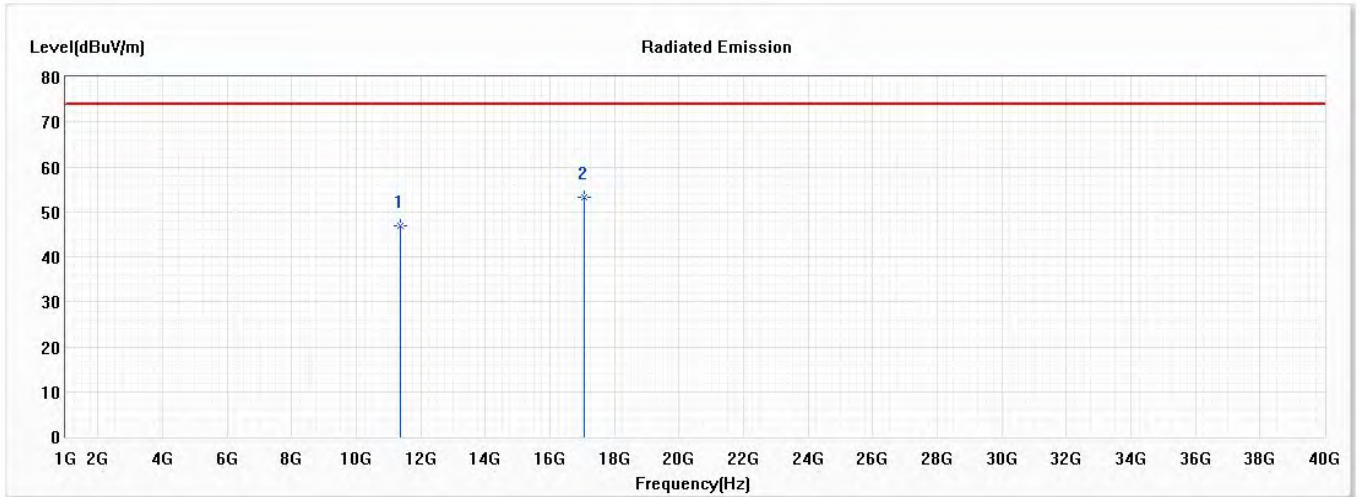


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11380.000	46.94	74.00	-27.06	45.98	0.96	PK
* 2	17070.000	53.22	74.00	-20.78	47.97	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Horizontal

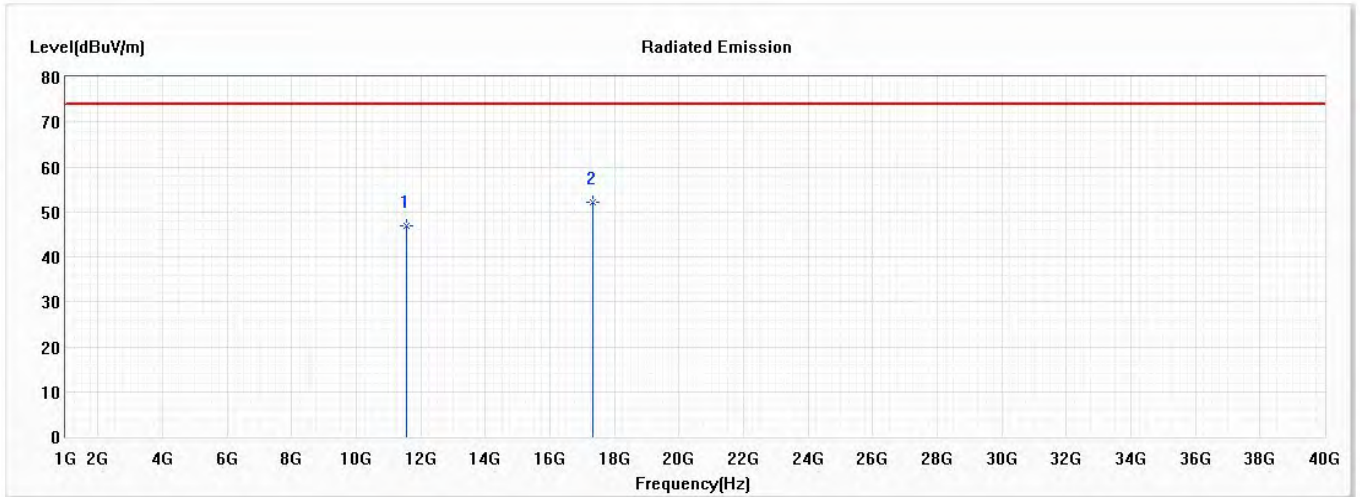


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11550.000	46.92	74.00	-27.08	45.58	1.34	PK
* 2	17325.000	52.19	74.00	-21.81	47.11	5.08	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps) (5775MHz)

Vertical

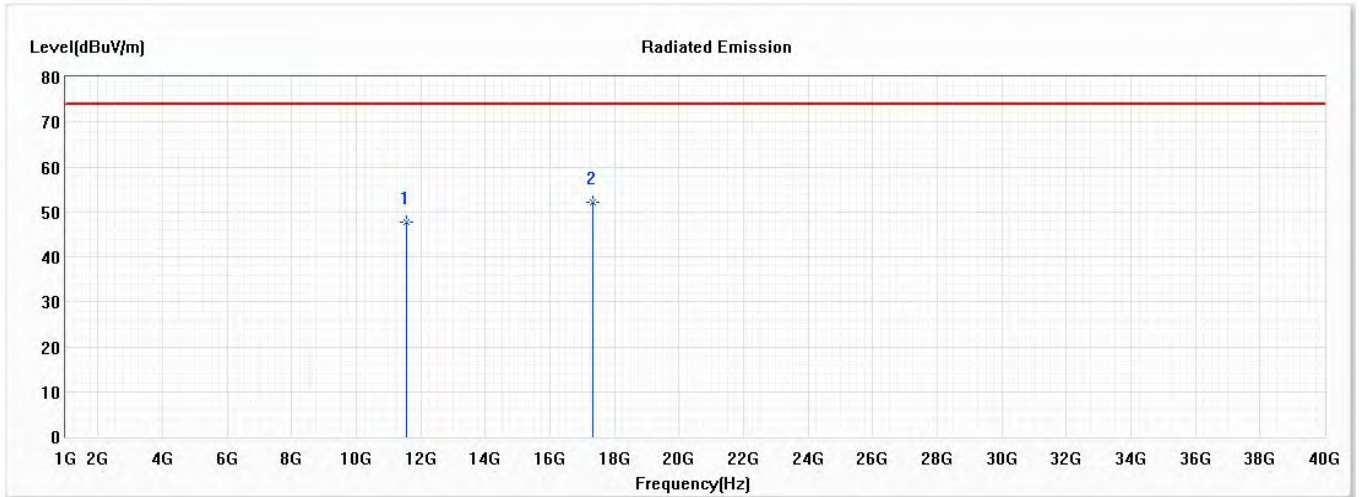


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11550.000	47.59	74.00	-26.41	46.25	1.34	PK
* 2	17325.000	52.20	74.00	-21.80	47.12	5.08	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Horizontal

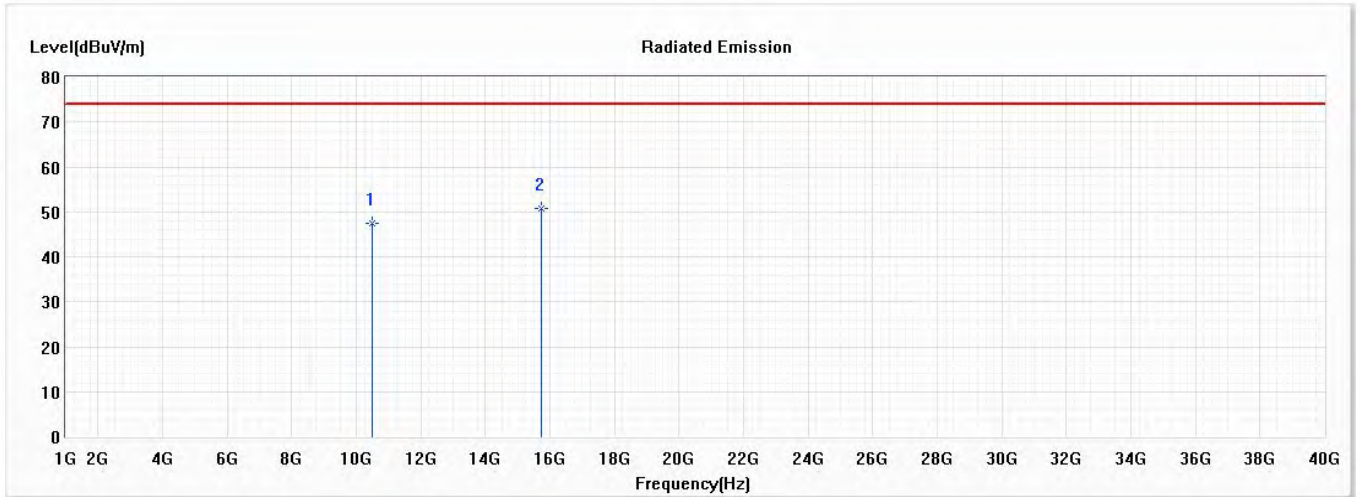


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10500.000	47.41	74.00	-26.59	48.23	-0.82	PK
* 2	15750.000	50.81	74.00	-23.19	48.35	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Vertical

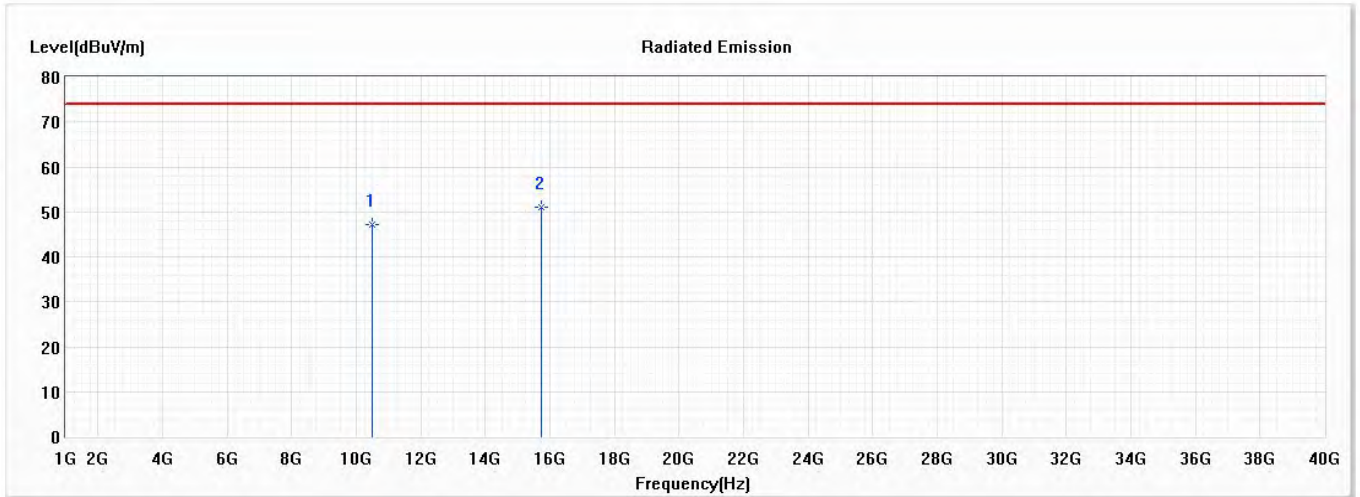


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10500.000	47.31	74.00	-26.69	48.13	-0.82	PK
* 2	15750.000	51.03	74.00	-22.97	48.57	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Horizontal

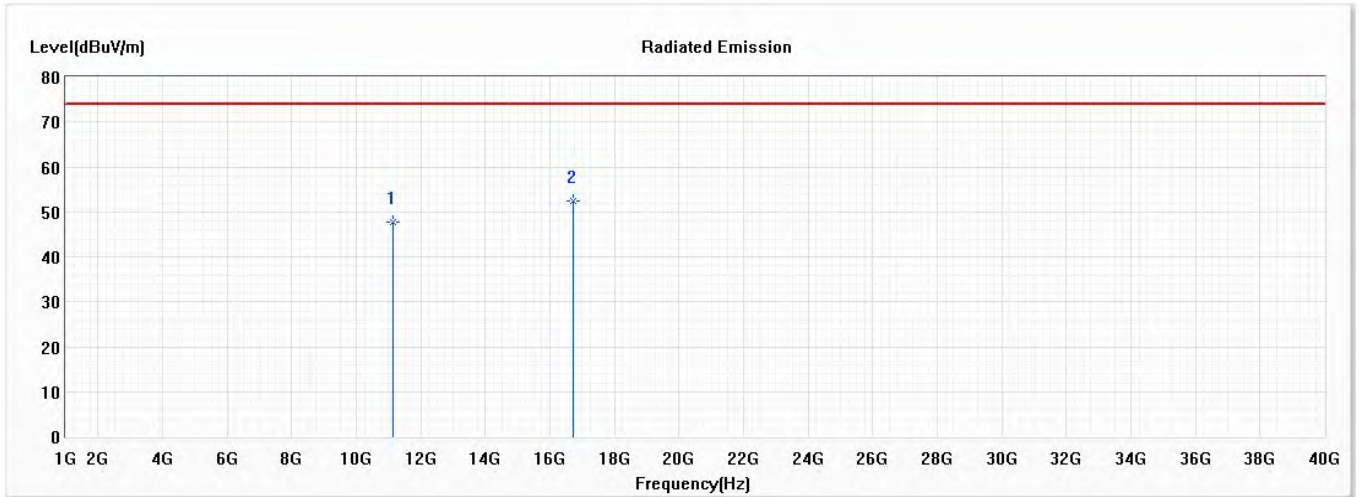


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11140.000	47.61	74.00	-26.39	47.15	0.46	PK
* 2	16710.000	52.44	74.00	-21.56	47.32	5.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5570MHz)

Vertical

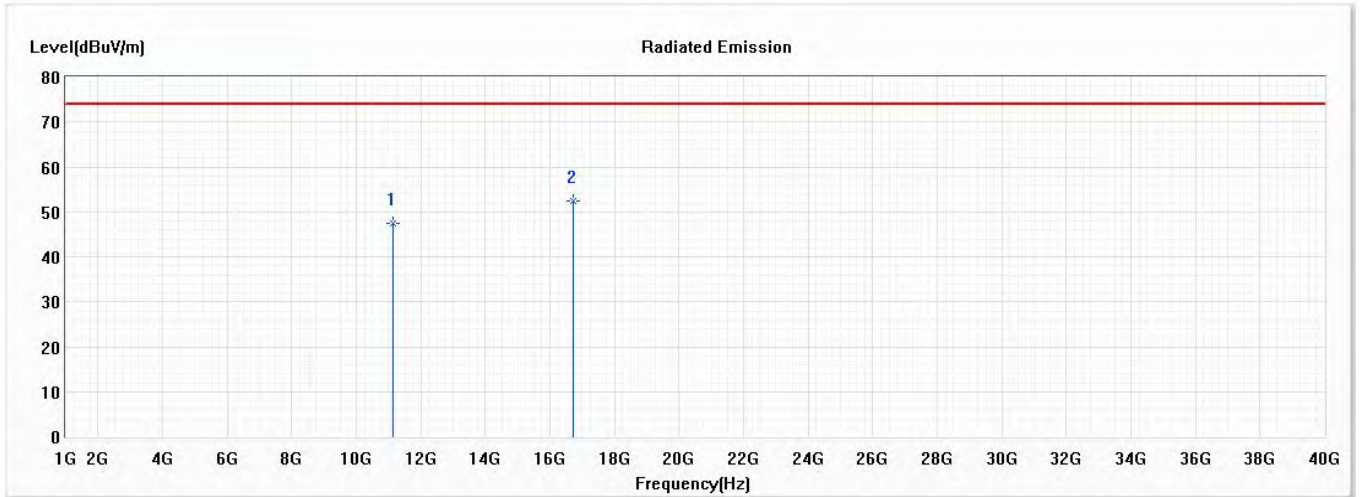


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11140.000	47.47	74.00	-26.53	47.01	0.46	PK
* 2	16710.000	52.40	74.00	-21.60	47.28	5.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5180MHz)

Horizontal

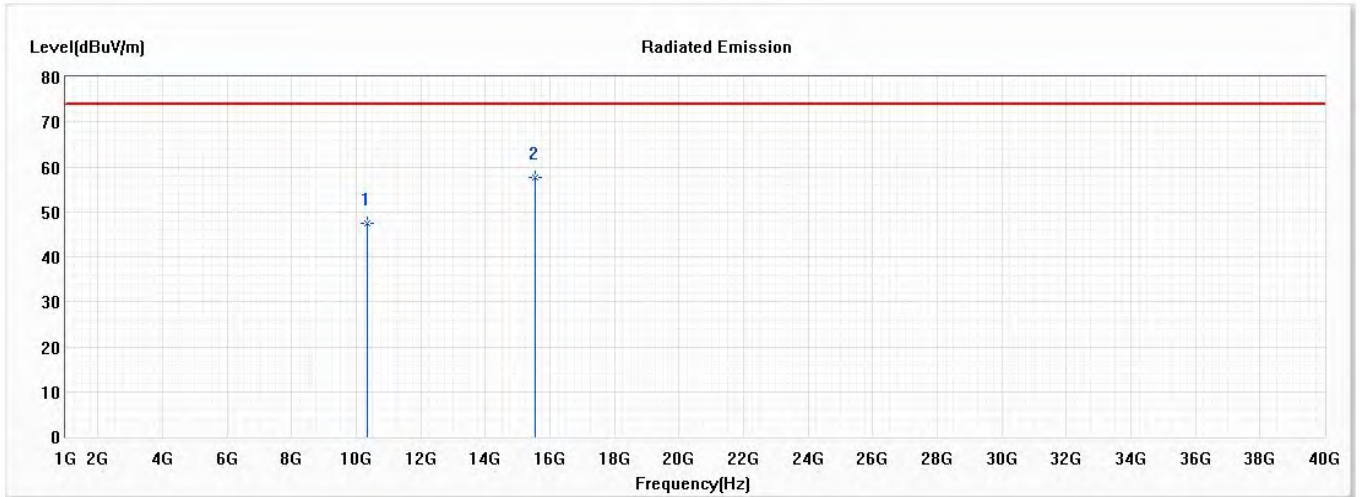


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.36	74.00	-26.64	48.65	-1.29	PK
* 2	15540.000	57.57	74.00	-16.43	55.26	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5180MHz)

Horizontal

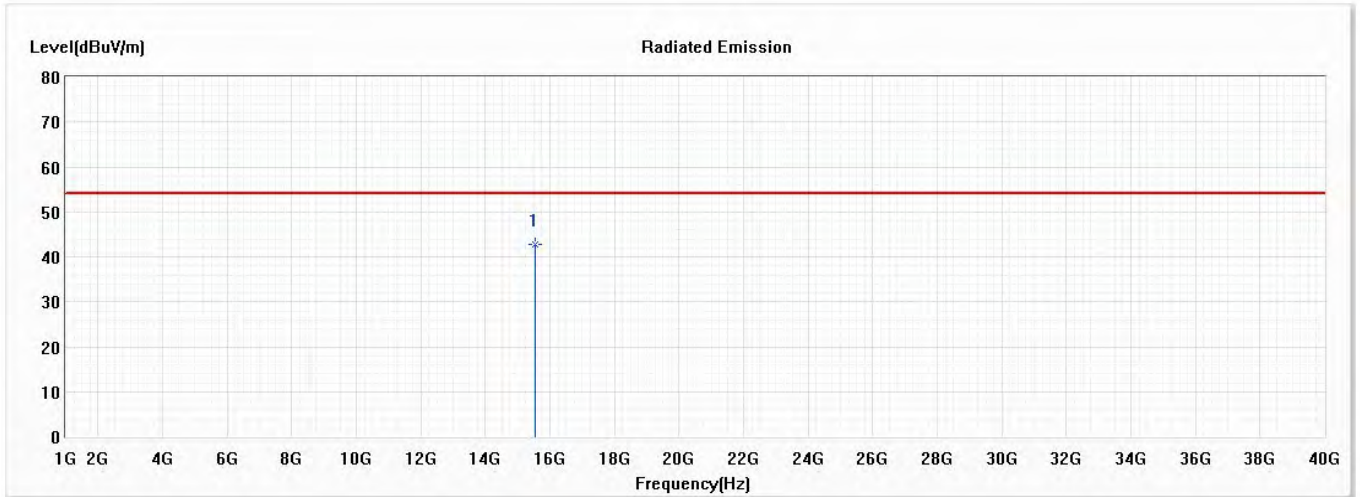


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	42.89	54.00	-11.11	40.58	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5180MHz)

Vertical

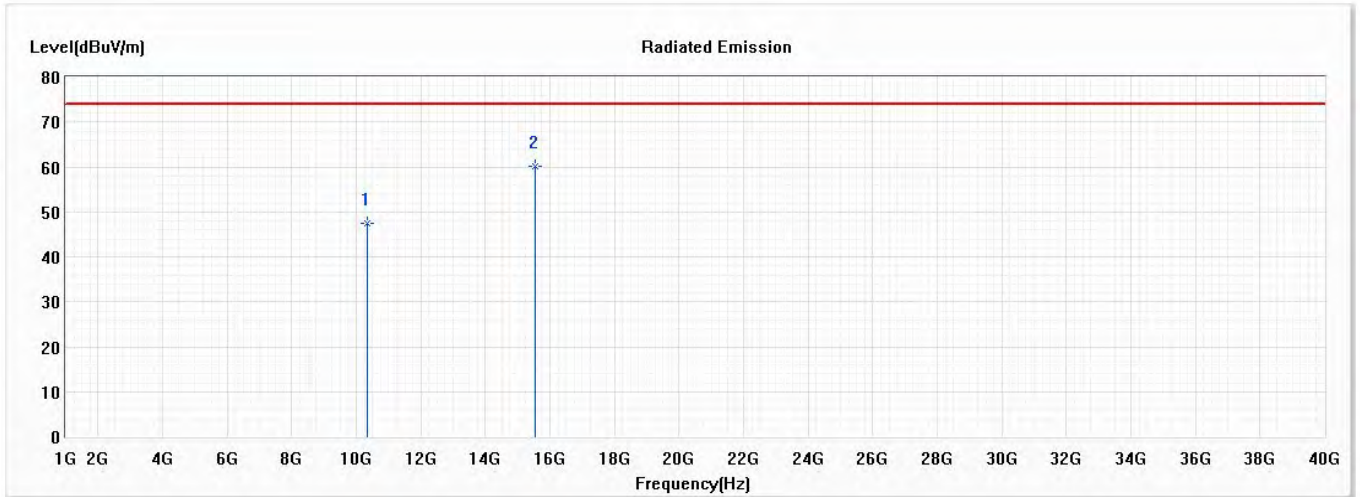


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.43	74.00	-26.57	48.72	-1.29	PK
* 2	15540.000	60.01	74.00	-13.99	57.70	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5180MHz)

Vertical

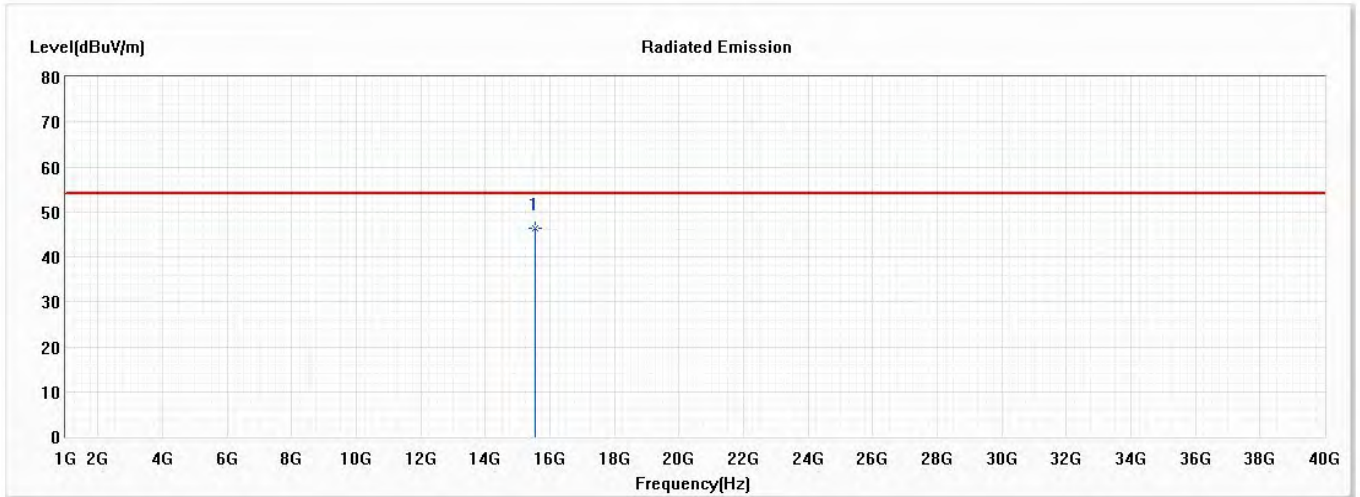


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	46.36	54.00	-7.64	44.05	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5220MHz)

Horizontal

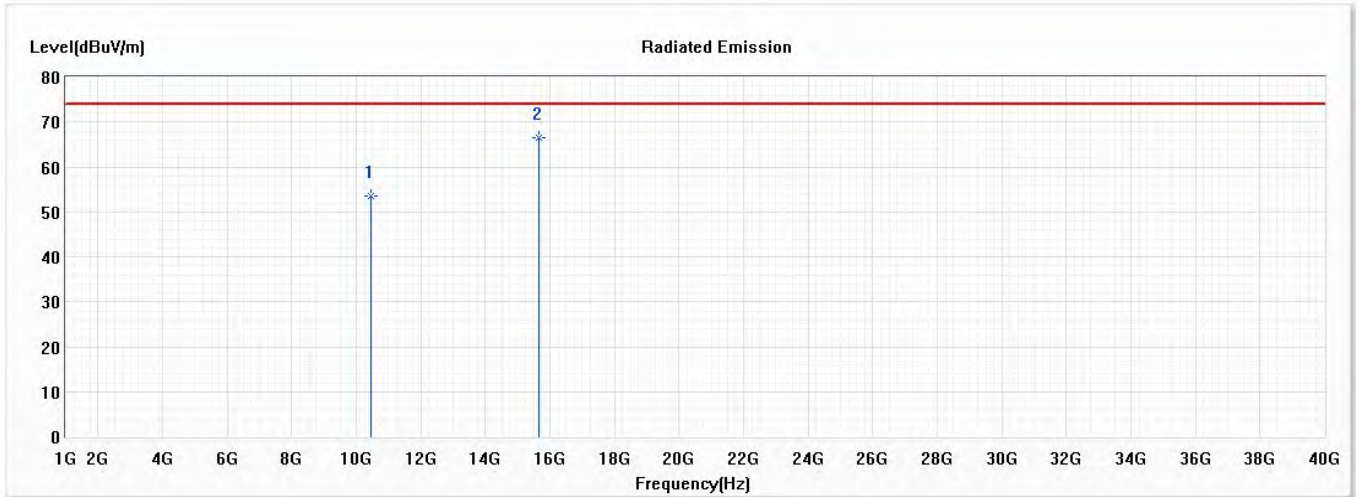


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	53.60	74.00	-20.40	54.63	-1.03	PK
* 2	15660.000	66.38	74.00	-7.62	64.03	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5220MHz)

Horizontal

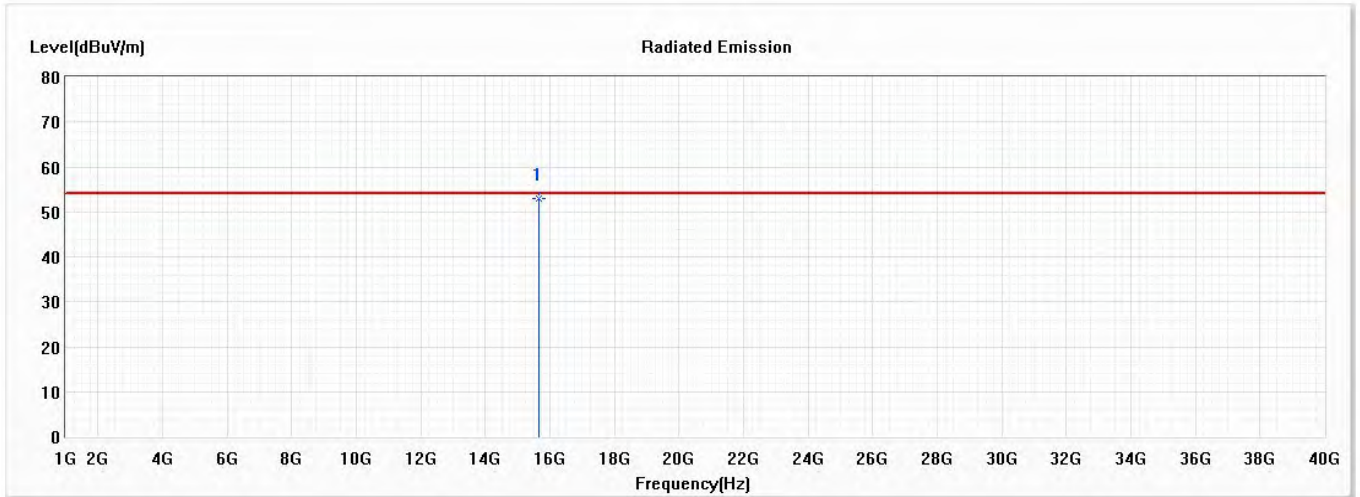


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	52.95	54.00	-1.05	50.60	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5220MHz)

Vertical

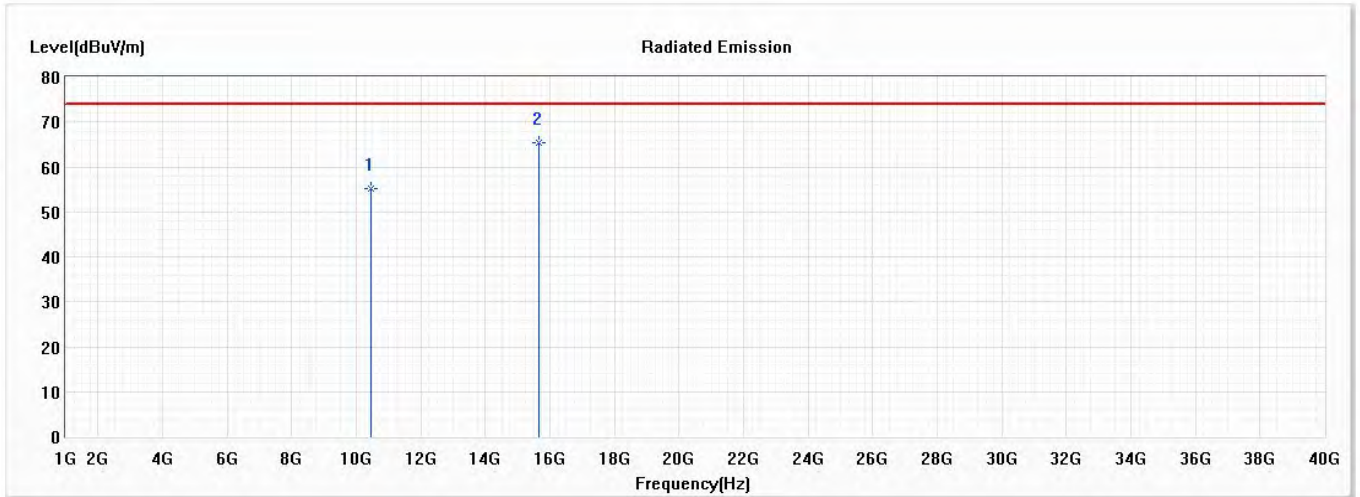


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	55.15	74.00	-18.85	56.18	-1.03	PK
* 2	15660.000	65.42	74.00	-8.58	63.07	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5220MHz)

Vertical

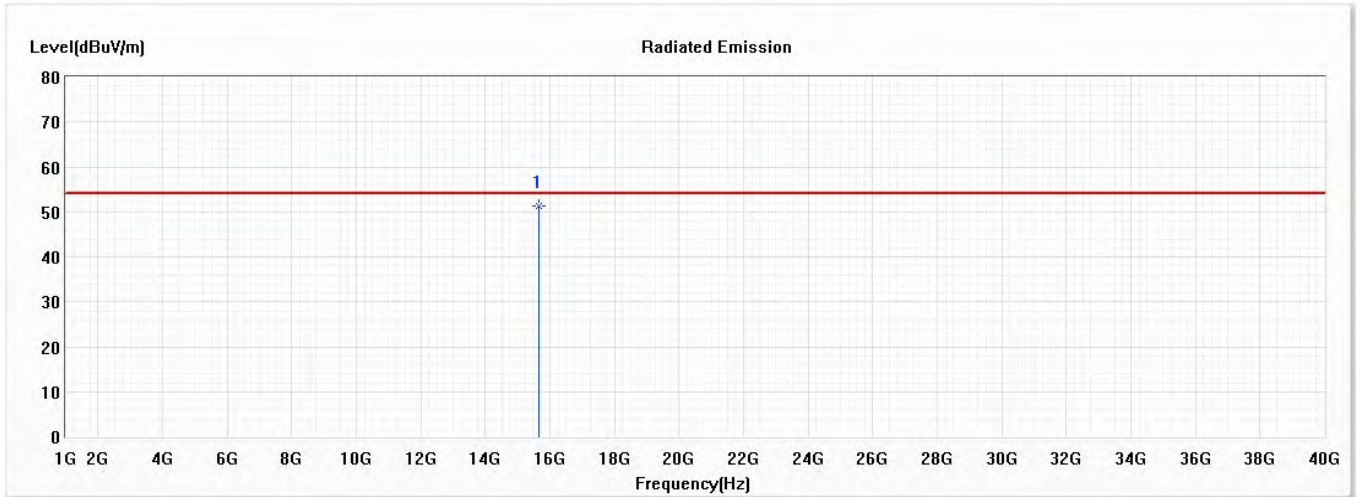


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	51.23	54.00	-2.77	48.88	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5240MHz)

Horizontal

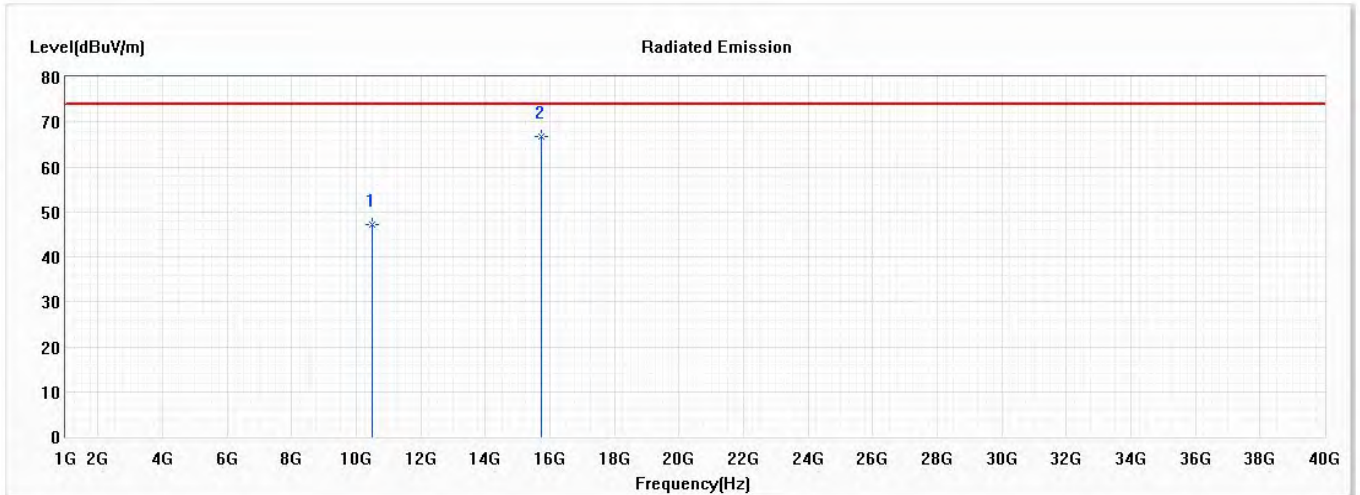


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	47.26	74.00	-26.74	48.15	-0.89	PK
* 2	15720.000	66.68	74.00	-7.32	64.22	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5240MHz)

Horizontal

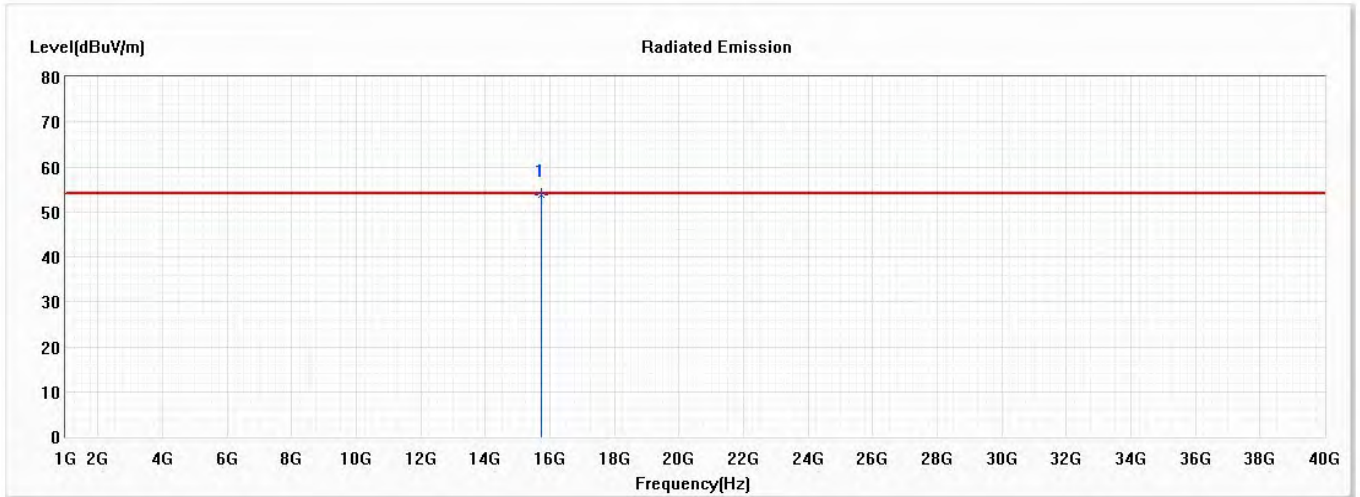


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	53.89	54.00	-0.11	51.43	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5240MHz)

Vertical

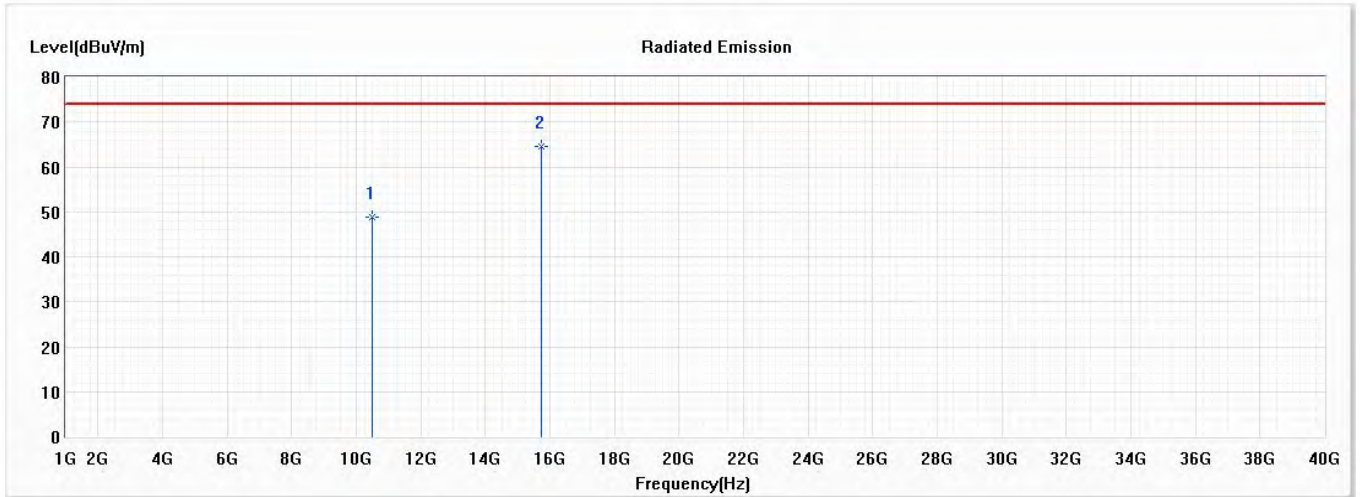


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	48.90	74.00	-25.10	49.79	-0.89	PK
* 2	15720.000	64.52	74.00	-9.48	62.06	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5240MHz)

Vertical

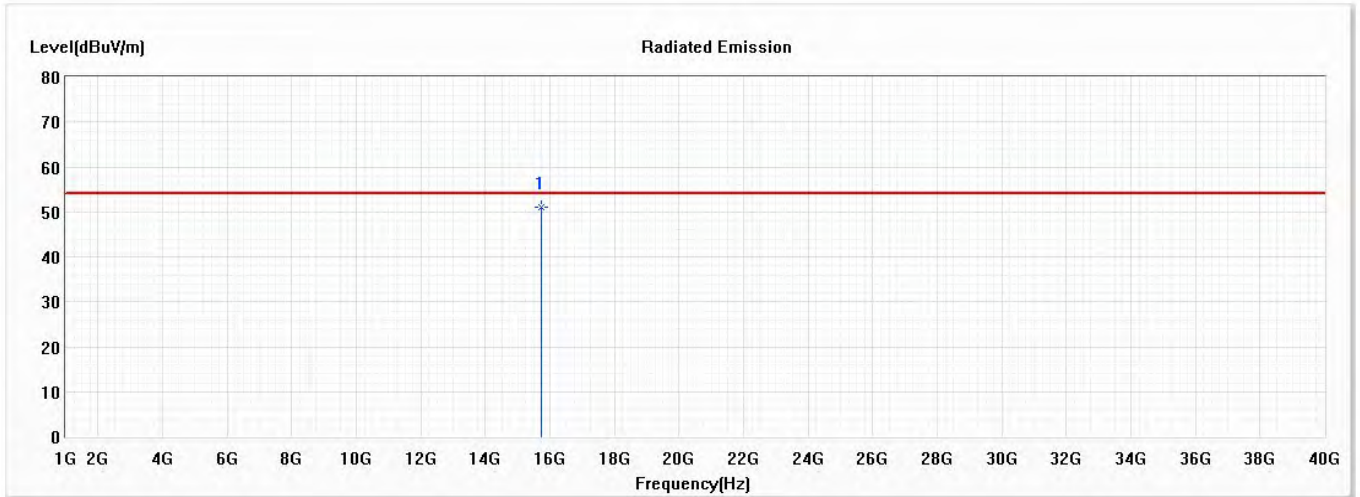


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	51.04	54.00	-2.96	48.58	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5260MHz)

Horizontal

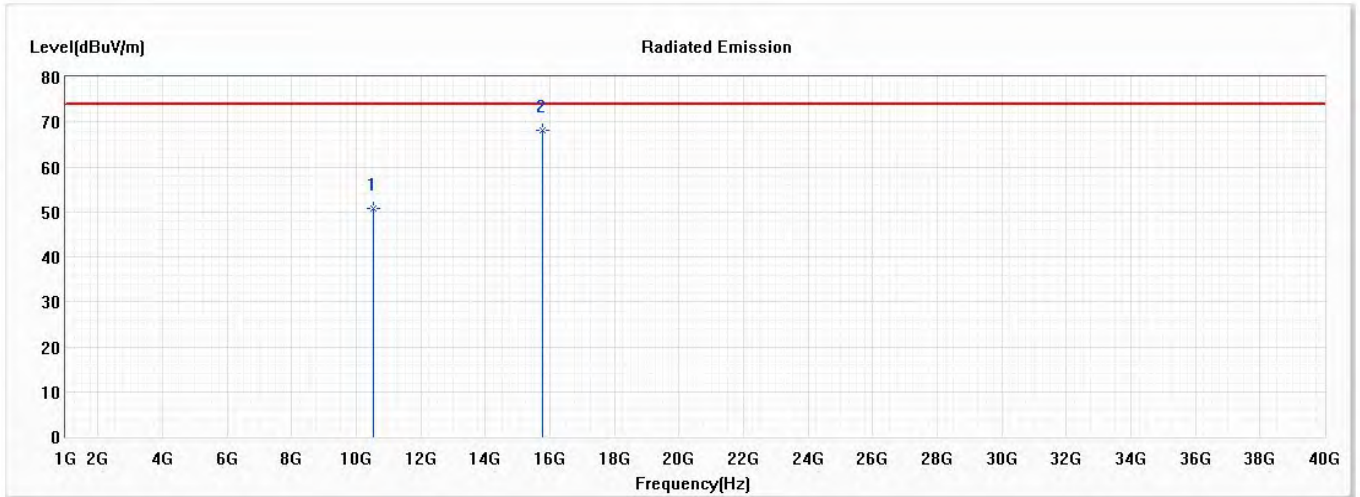


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	50.69	74.00	-23.31	51.46	-0.77	PK
* 2	15780.000	68.07	74.00	-5.93	65.62	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5260MHz)

Horizontal

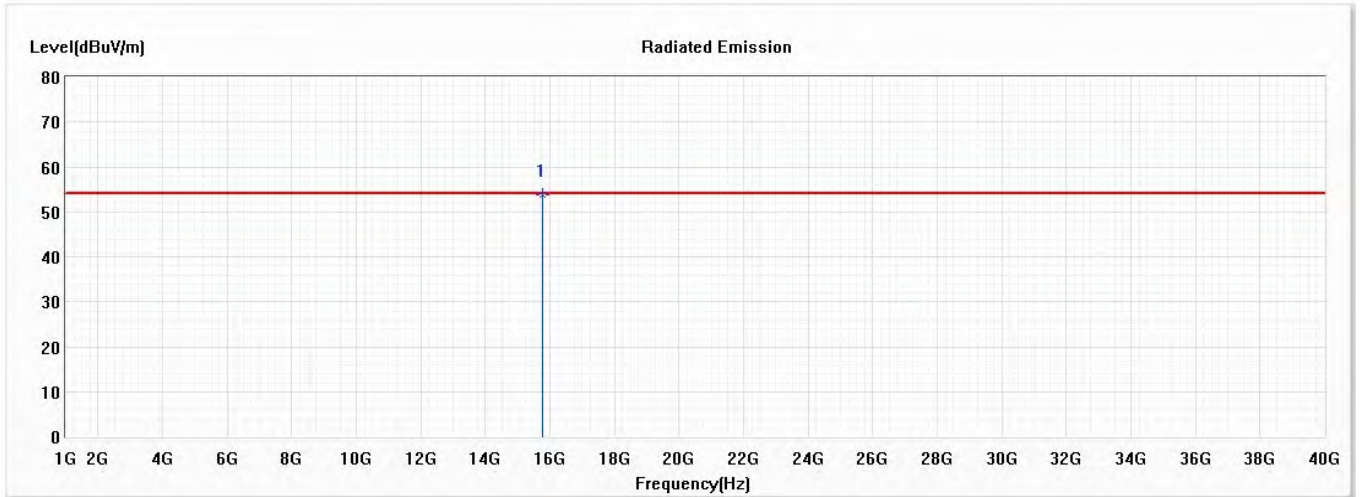


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	53.85	54.00	-0.15	51.40	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5260MHz)

Vertical

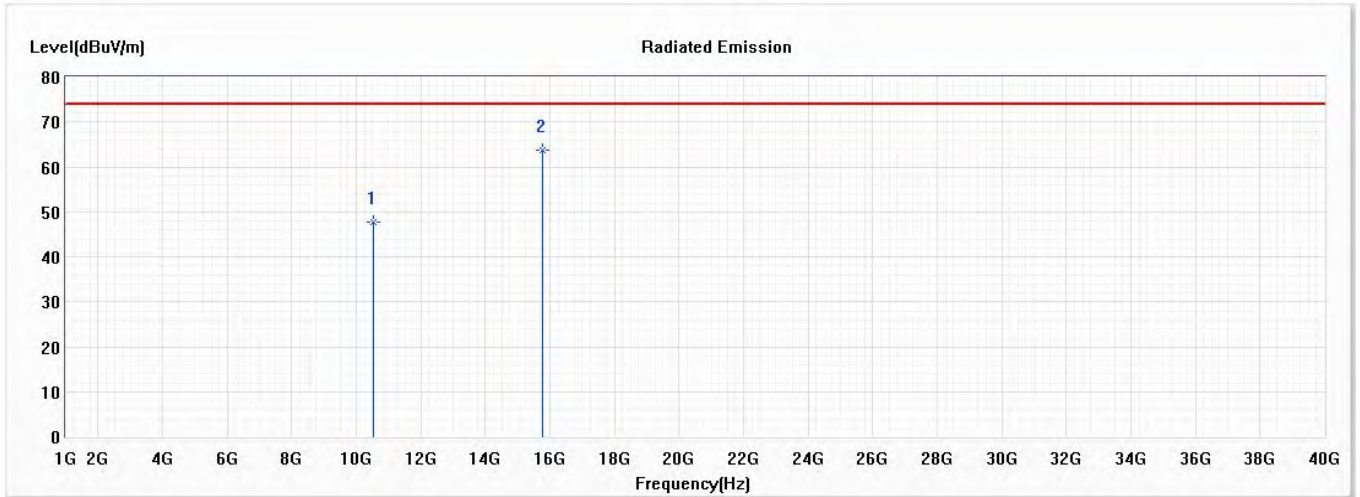


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	47.67	74.00	-26.33	48.44	-0.77	PK
* 2	15780.000	63.60	74.00	-10.40	61.15	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5260MHz)

Vertical

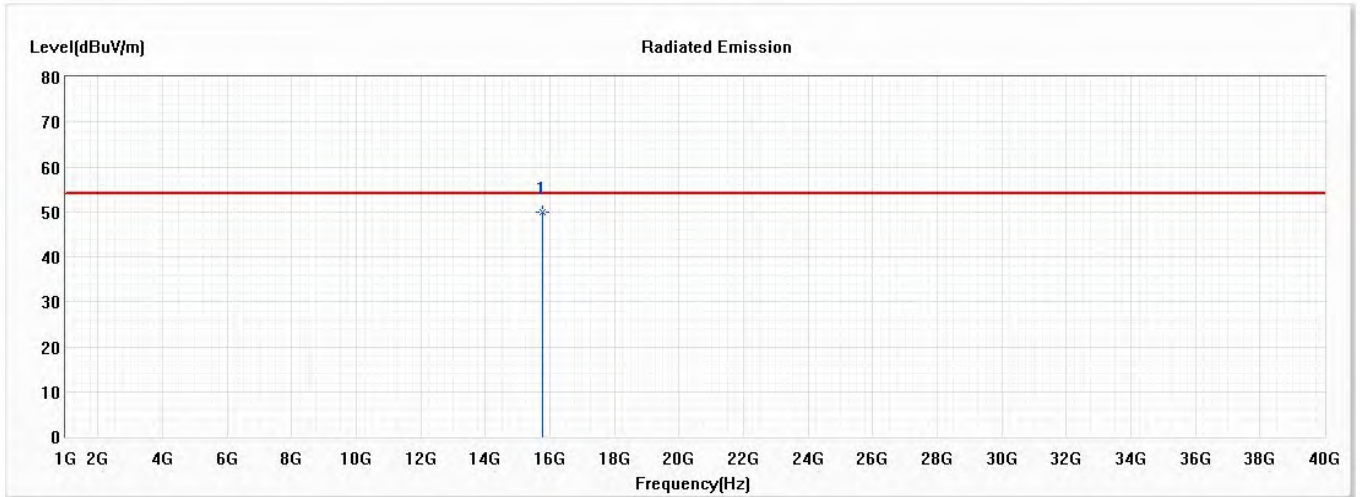


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	50.02	54.00	-3.98	47.57	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Horizontal

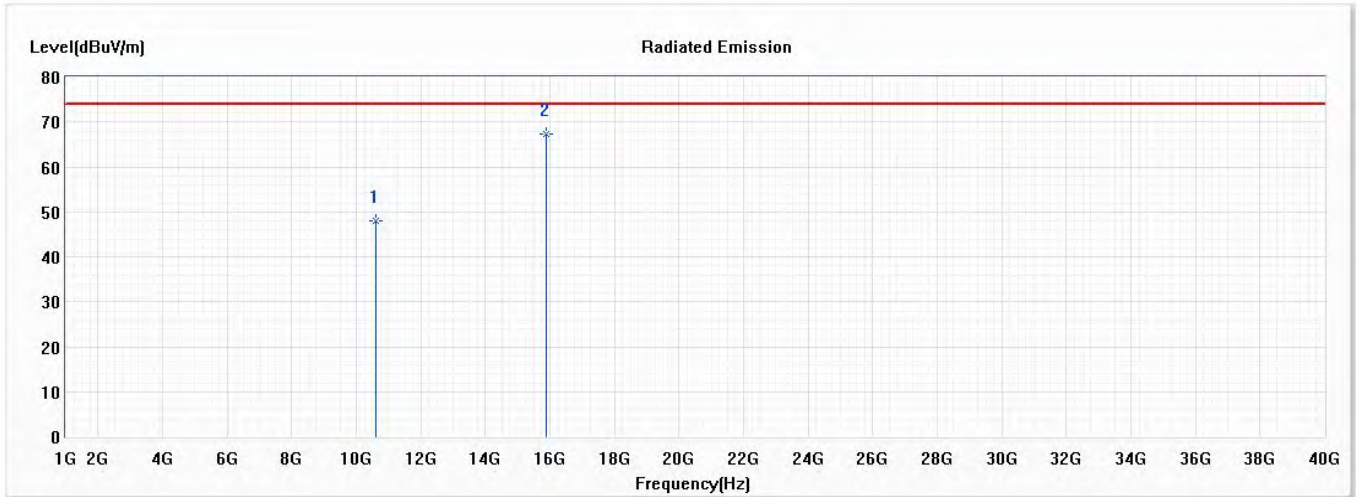


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	48.07	74.00	-25.93	48.74	-0.67	PK
* 2	15900.000	67.29	74.00	-6.71	64.67	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Horizontal

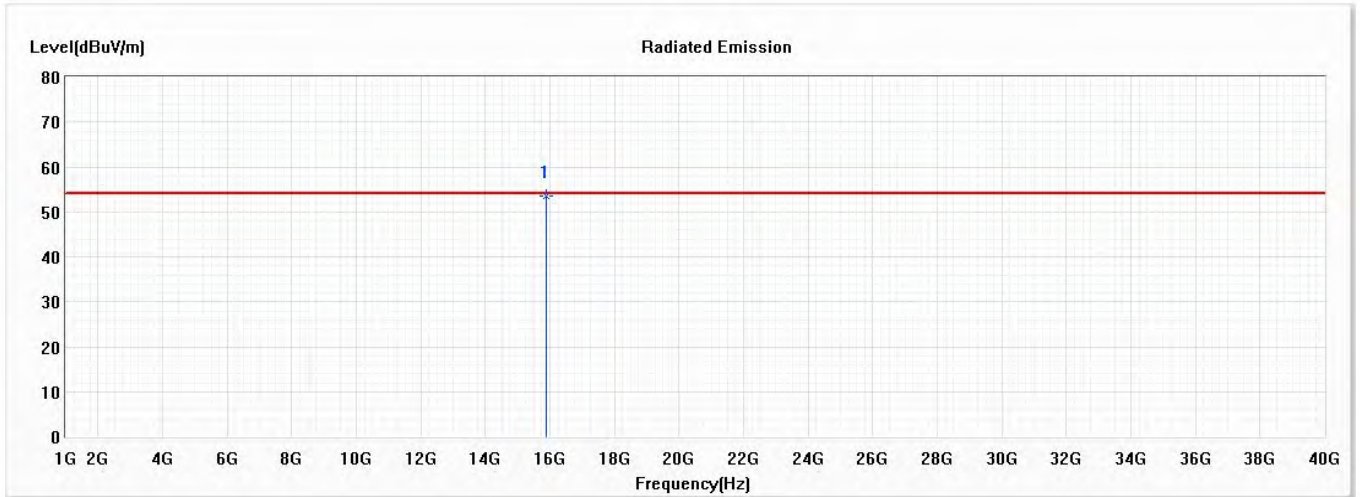


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15900.000	53.57	54.00	-0.43	50.95	2.62	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Vertical

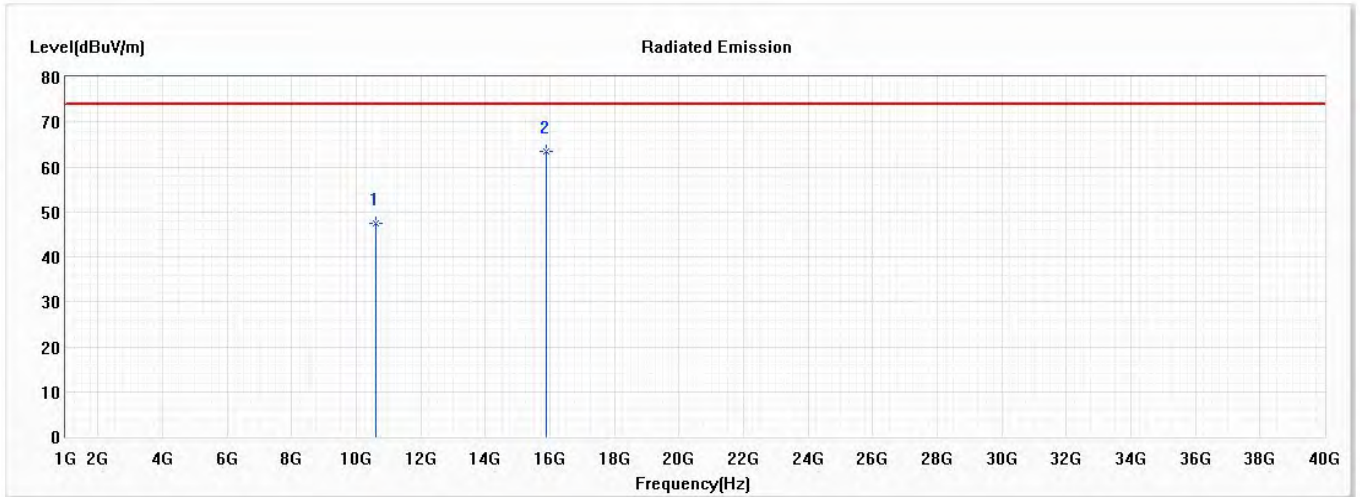


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	47.44	74.00	-26.56	48.11	-0.67	PK
* 2	15900.000	63.51	74.00	-10.49	60.89	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5300MHz)

Vertical

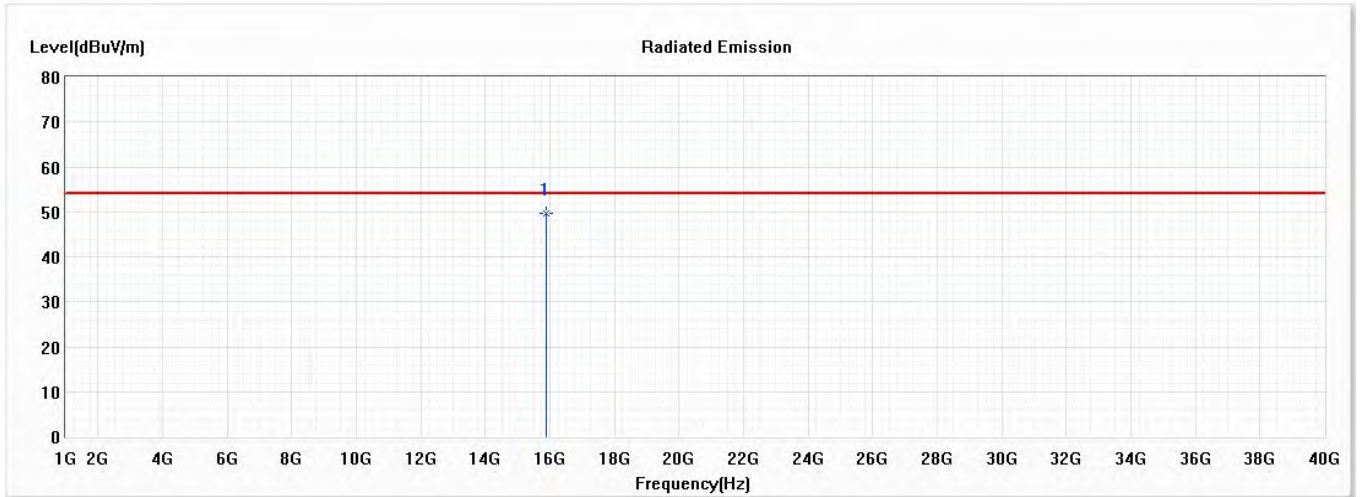


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15900.000	49.53	54.00	-4.47	46.91	2.62	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5320MHz)

Horizontal

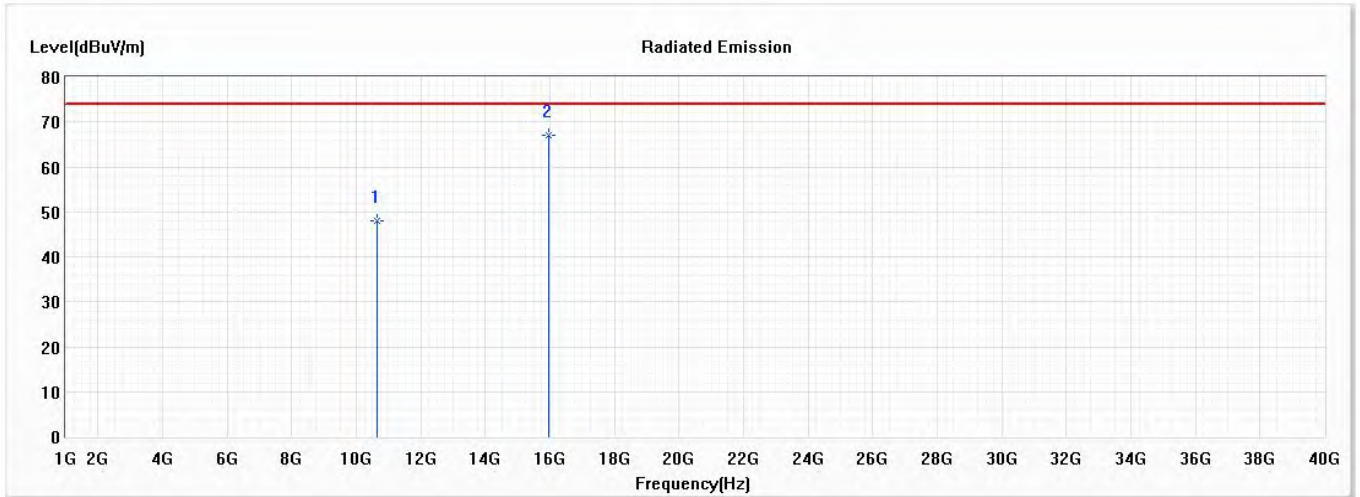


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	48.11	74.00	-25.89	48.71	-0.60	PK
* 2	15960.000	67.05	74.00	-6.95	64.36	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5320MHz)

Horizontal

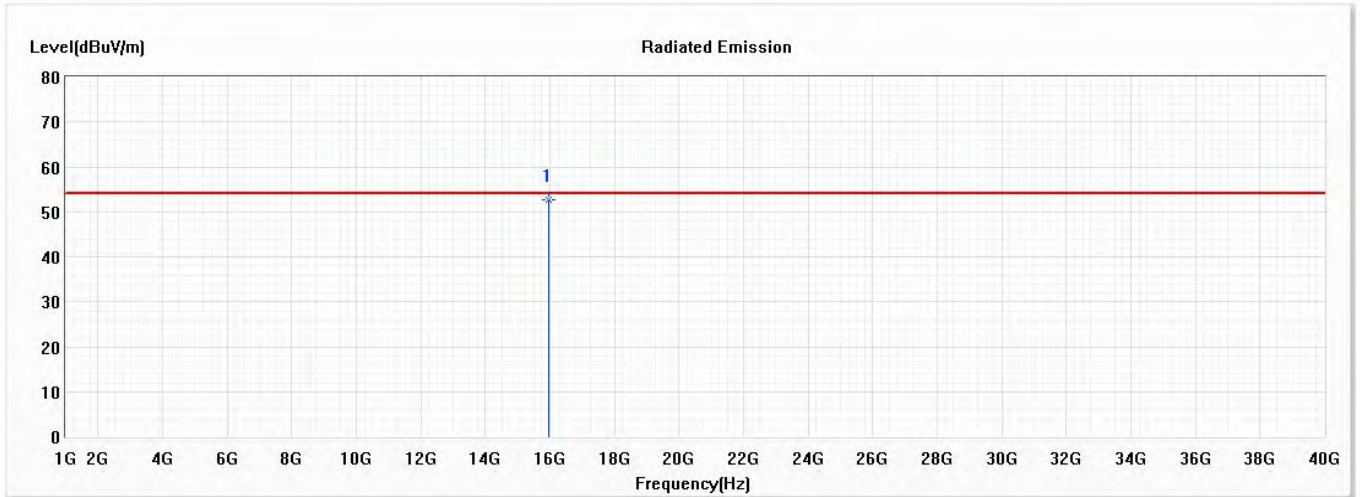


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	52.77	54.00	-1.23	50.08	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5320MHz)

Vertical

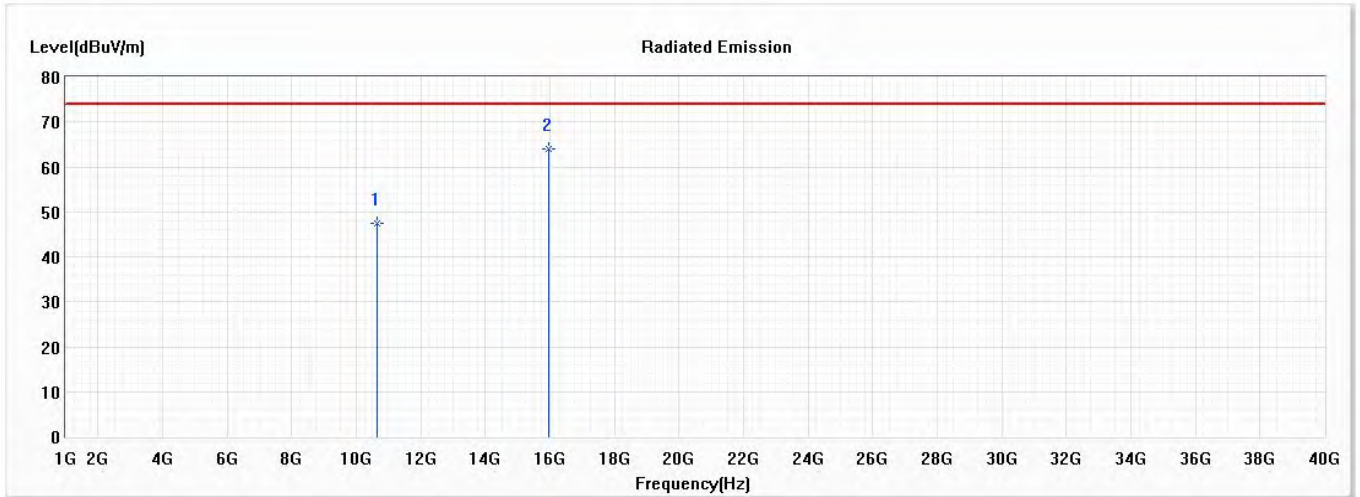


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10640.000	47.35	74.00	-26.65	47.95	-0.60	PK
* 2	15960.000	63.90	74.00	-10.10	61.21	2.69	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5320MHz)

Vertical

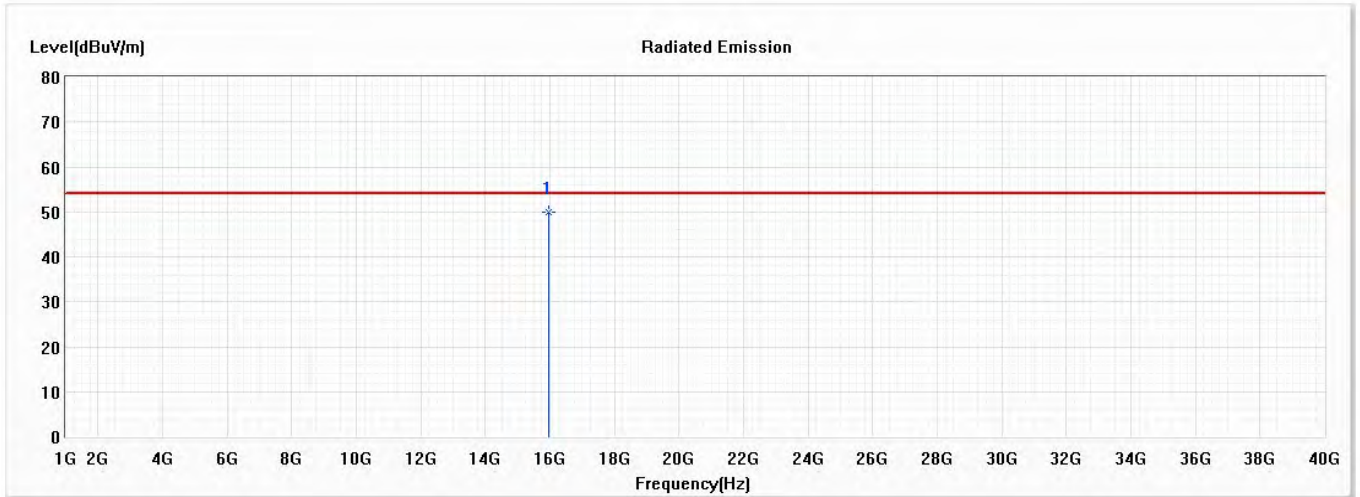


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15960.000	50.02	54.00	-3.98	47.33	2.69	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5500MHz)

Horizontal

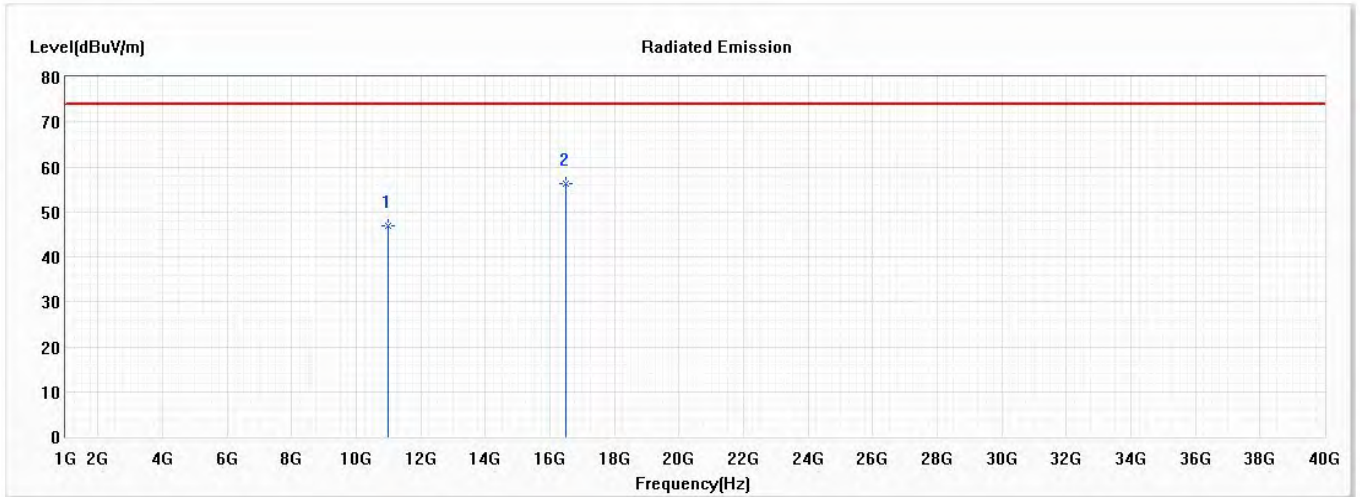


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	46.97	74.00	-27.03	46.91	0.06	PK
* 2	16500.000	56.41	74.00	-17.59	52.12	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5500MHz)

Horizontal

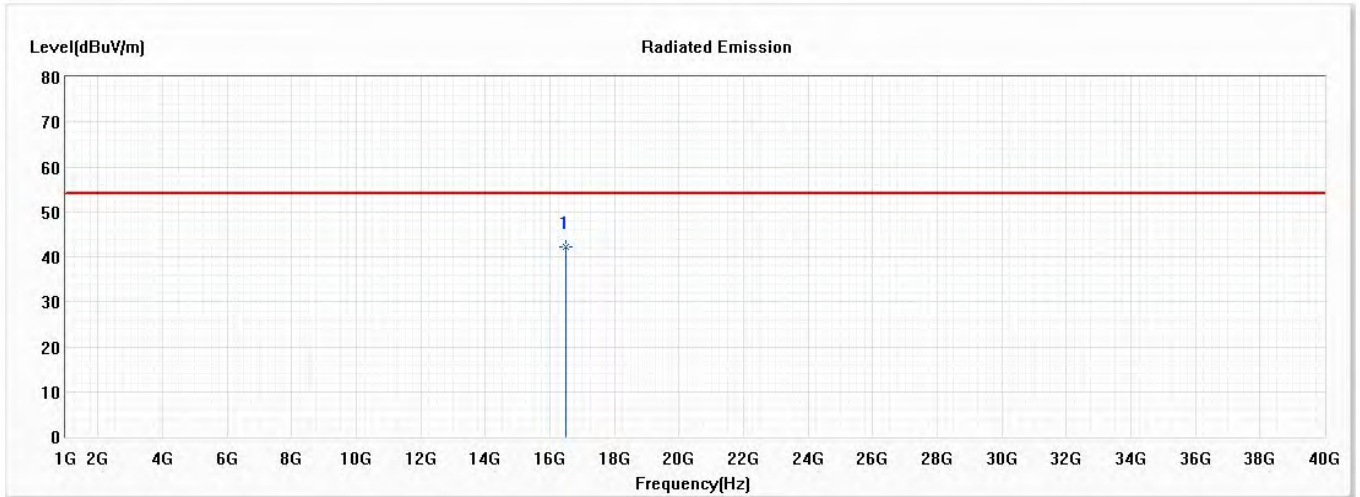


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16500.000	42.24	54.00	-11.76	37.95	4.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5500MHz)

Vertical

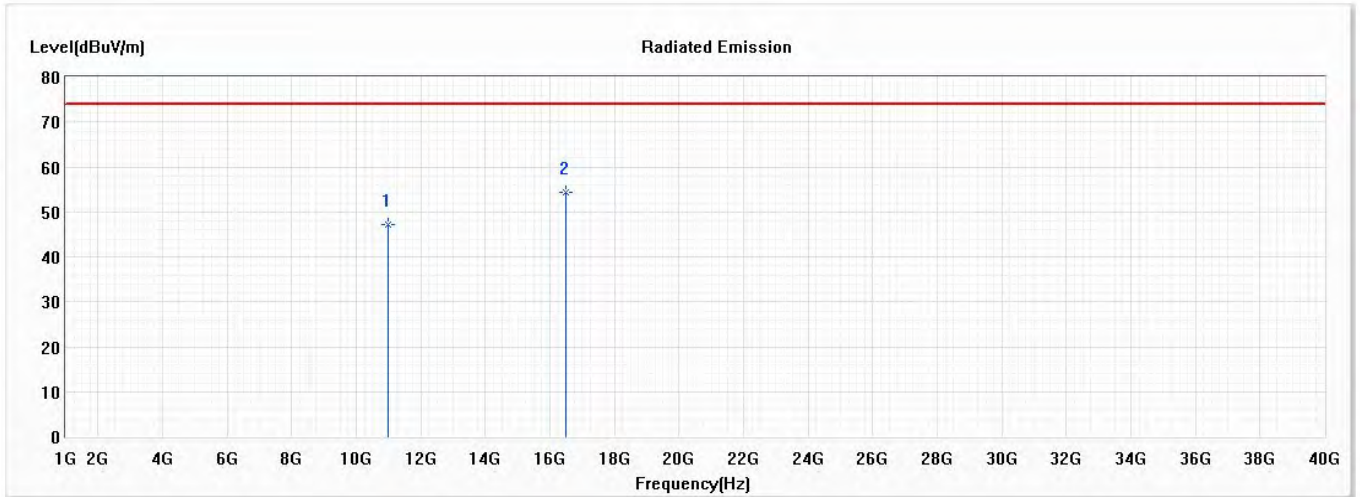


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11000.000	47.07	74.00	-26.93	47.01	0.06	PK
* 2	16500.000	54.28	74.00	-19.72	49.99	4.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5500MHz)

Vertical

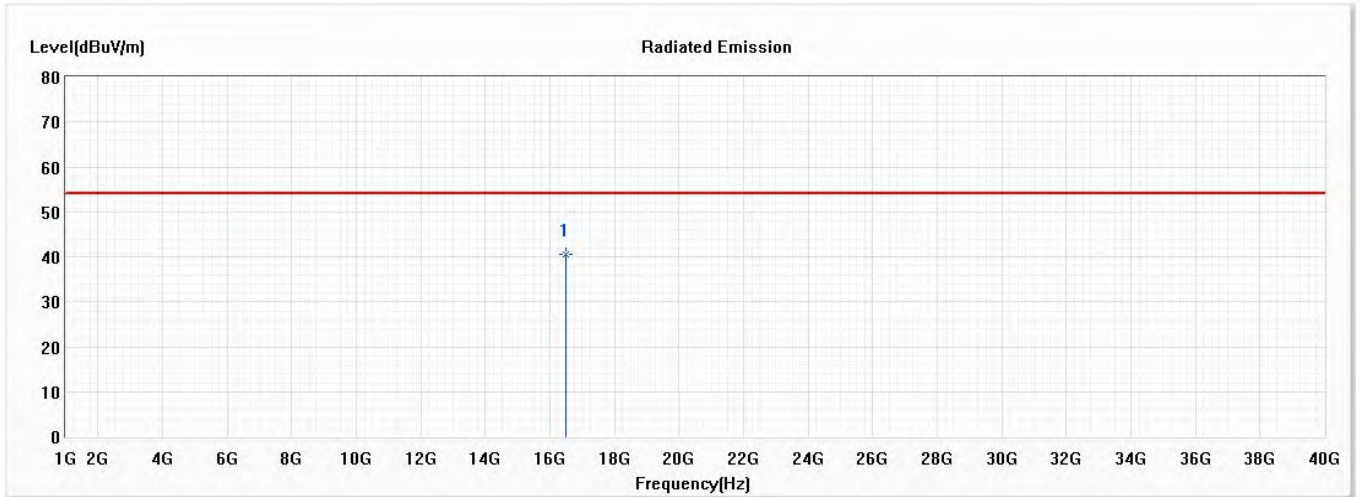


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16500.000	40.58	54.00	-13.42	36.29	4.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5580MHz)

Horizontal

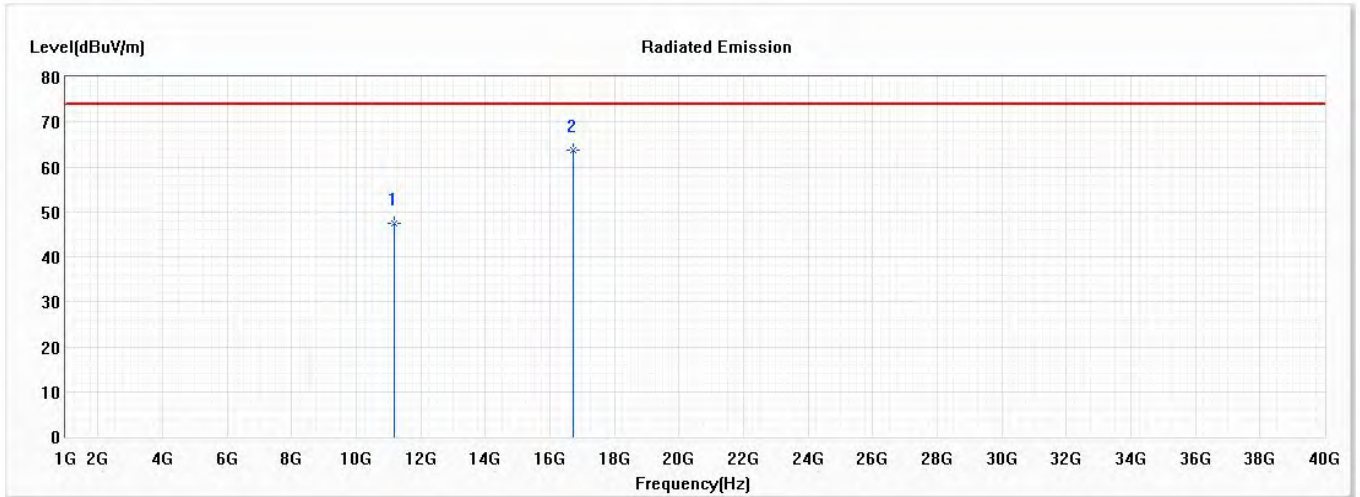


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	47.56	74.00	-26.44	47.09	0.47	PK
* 2	16740.000	63.74	74.00	-10.26	58.64	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5580MHz)

Horizontal

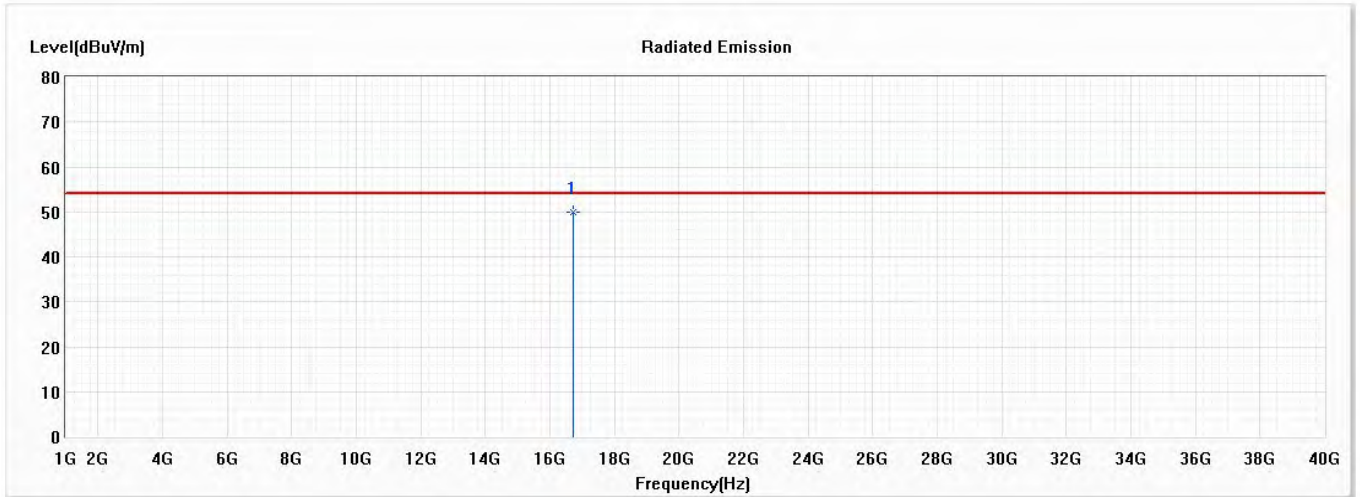


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16740.000	49.81	54.00	-4.19	44.71	5.10	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5580MHz)

Vertical

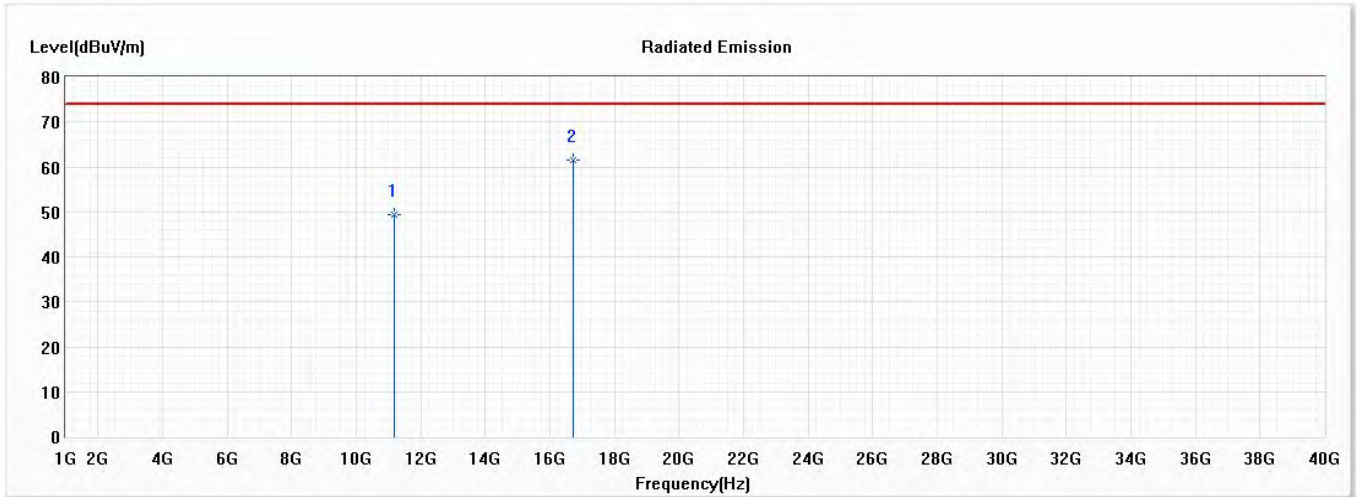


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11160.000	49.38	74.00	-24.62	48.91	0.47	PK
* 2	16740.000	61.53	74.00	-12.47	56.43	5.10	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5580MHz)

Vertical

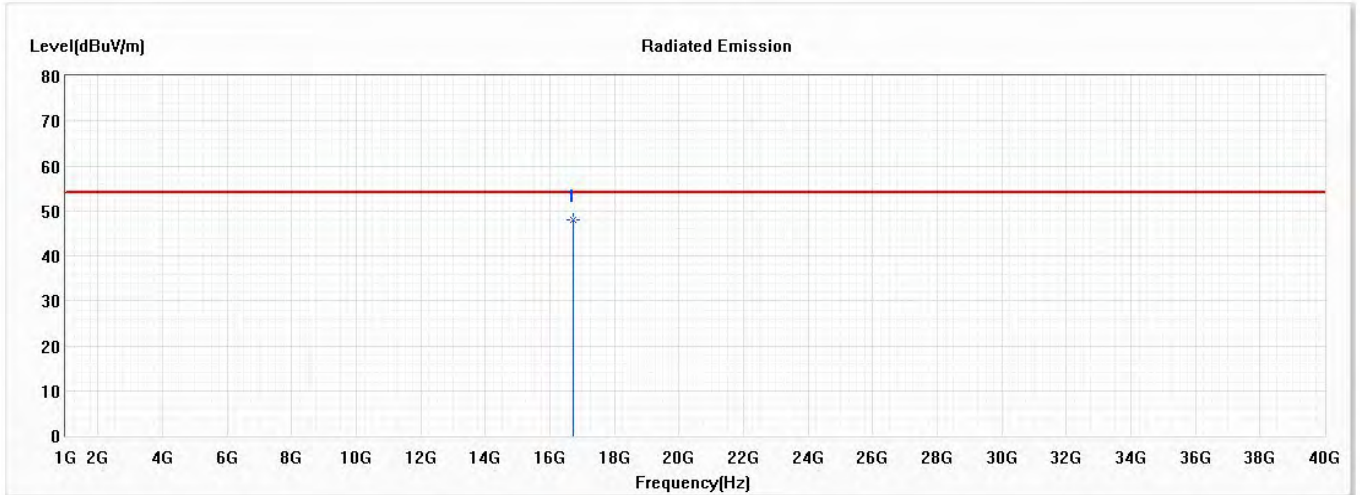


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16740.000	47.91	54.00	-6.09	42.81	5.10	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5700MHz)

Horizontal

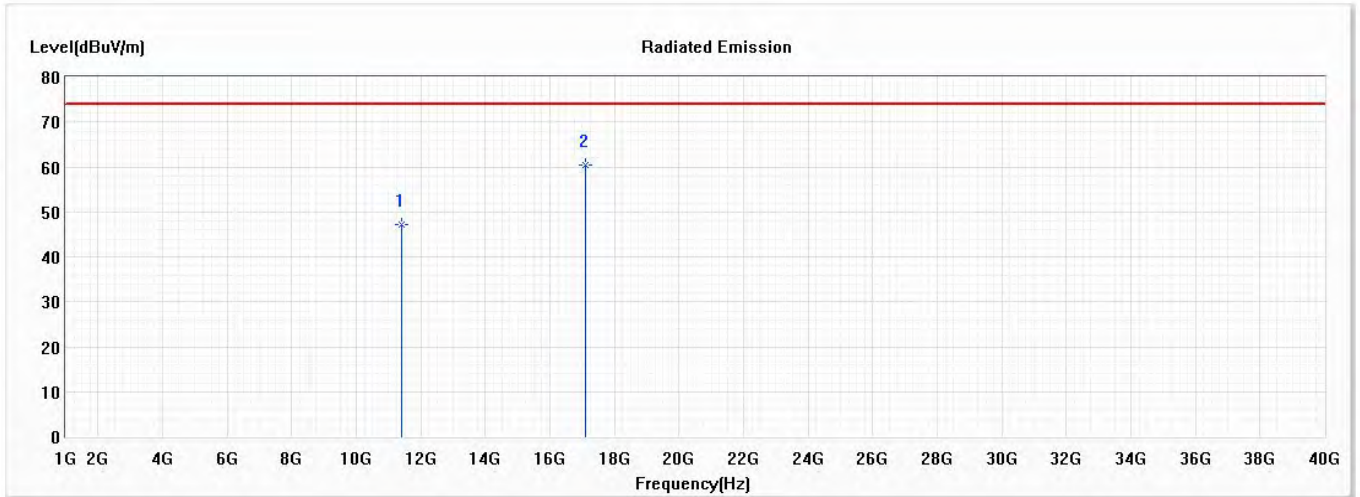


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	47.12	74.00	-26.88	46.14	0.98	PK
* 2	17100.000	60.50	74.00	-13.50	55.35	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5700MHz)

Horizontal

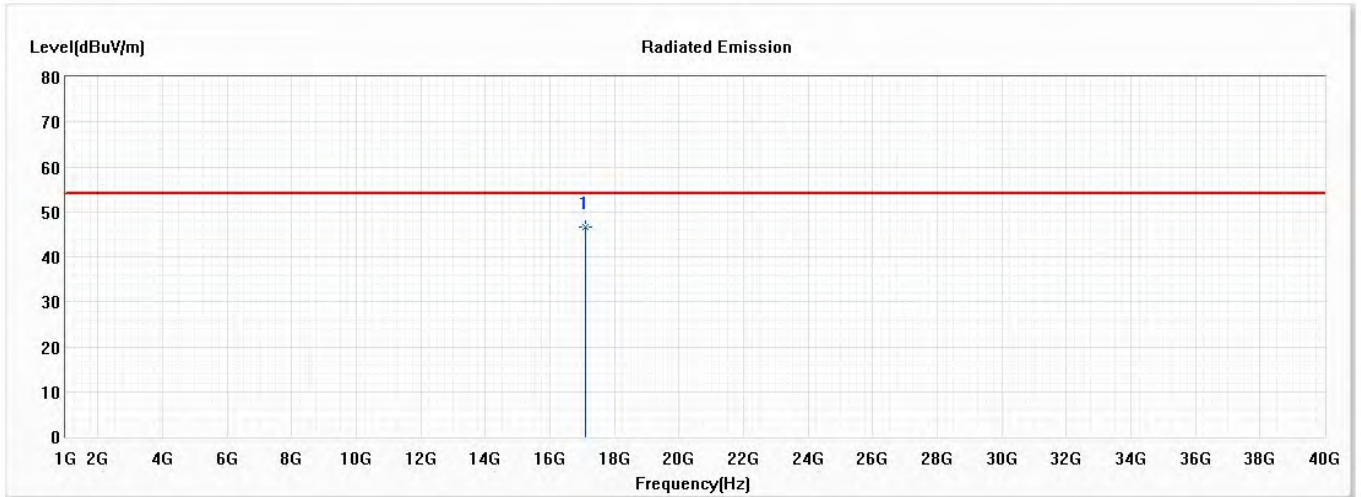


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17100.000	46.60	54.00	-7.40	41.45	5.15	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5700MHz)

Vertical

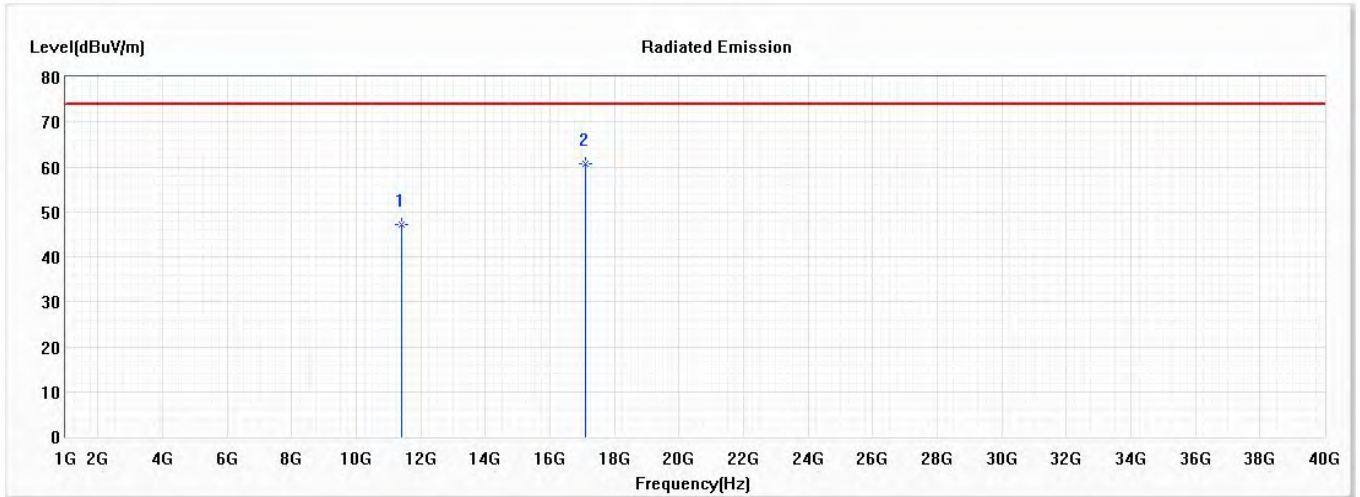


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11400.000	47.24	74.00	-26.76	46.26	0.98	PK
* 2	17100.000	60.81	74.00	-13.19	55.66	5.15	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5700MHz)

Vertical

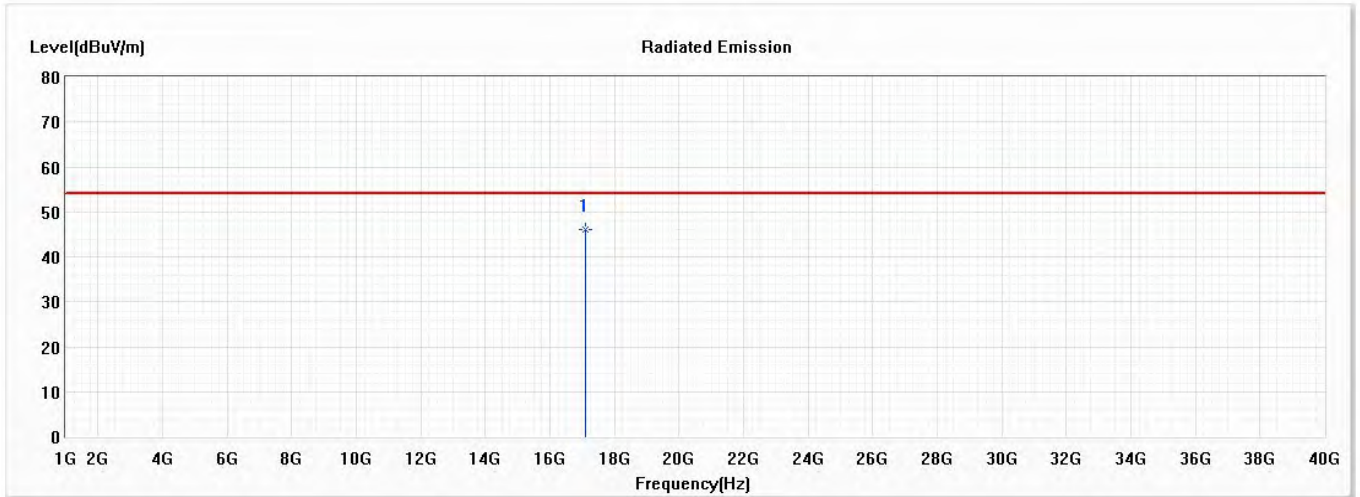


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17100.000	46.06	54.00	-7.94	40.91	5.15	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5745MHz)

Horizontal

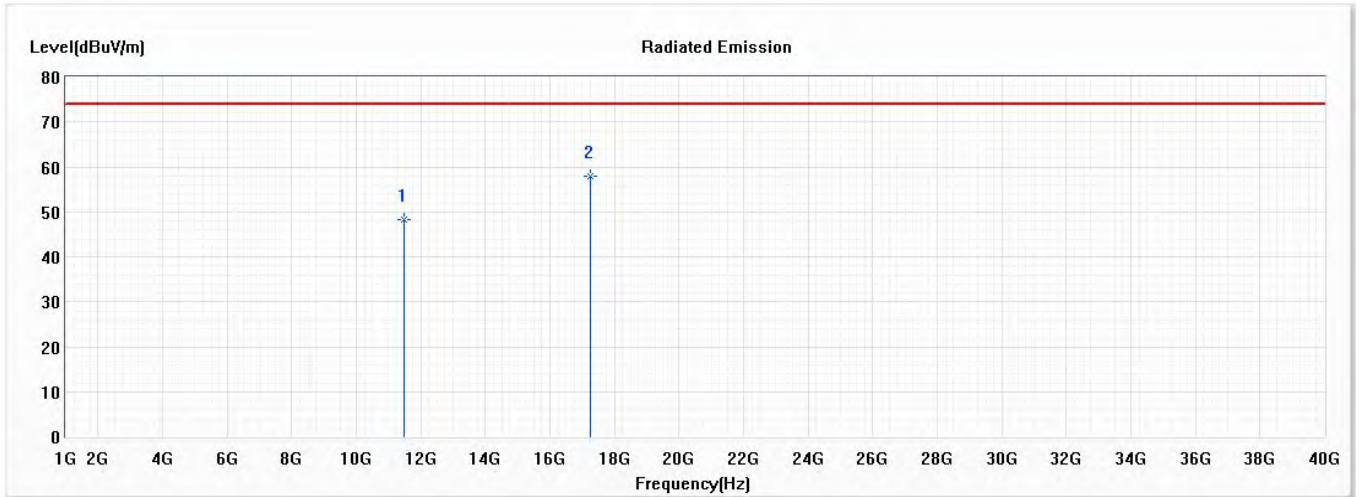


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	48.15	74.00	-25.85	46.97	1.18	PK
* 2	17235.000	58.02	74.00	-15.98	53.03	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5745MHz)

Horizontal

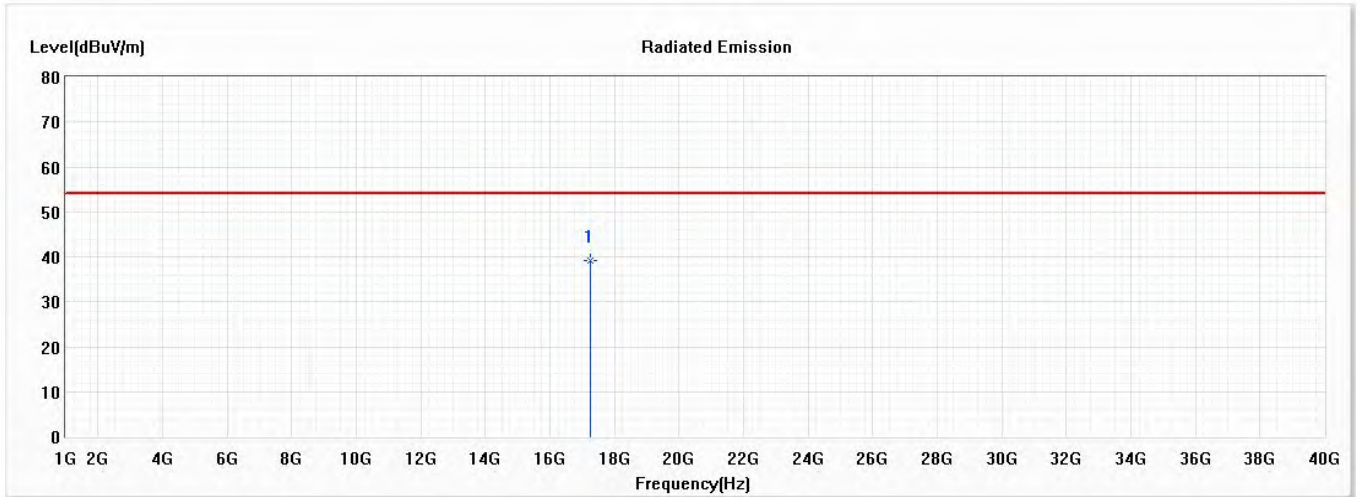


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17235.000	39.24	54.00	-14.76	34.25	4.99	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5745MHz)

Vertical

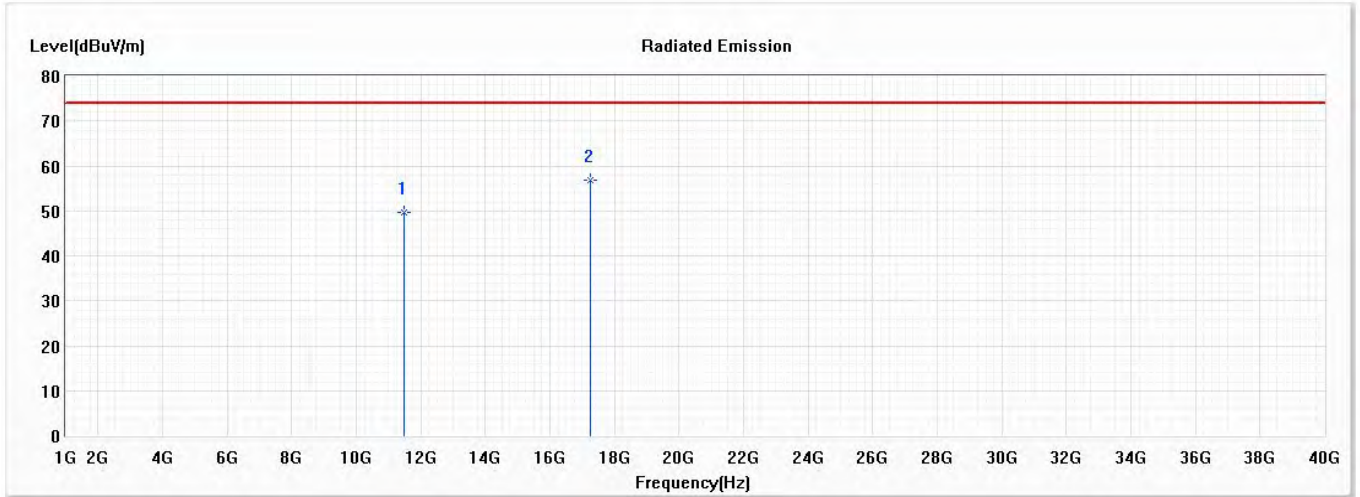


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11490.000	49.70	74.00	-24.30	48.52	1.18	PK
* 2	17235.000	56.89	74.00	-17.11	51.90	4.99	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5745MHz)

Vertical

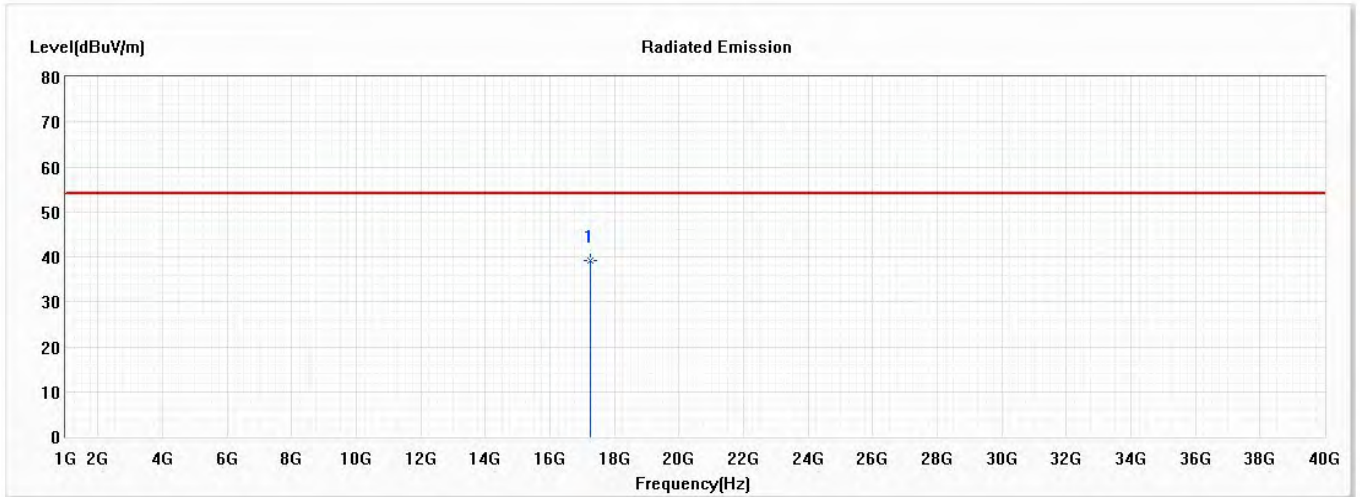


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17235.000	39.24	54.00	-14.76	34.25	4.99	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

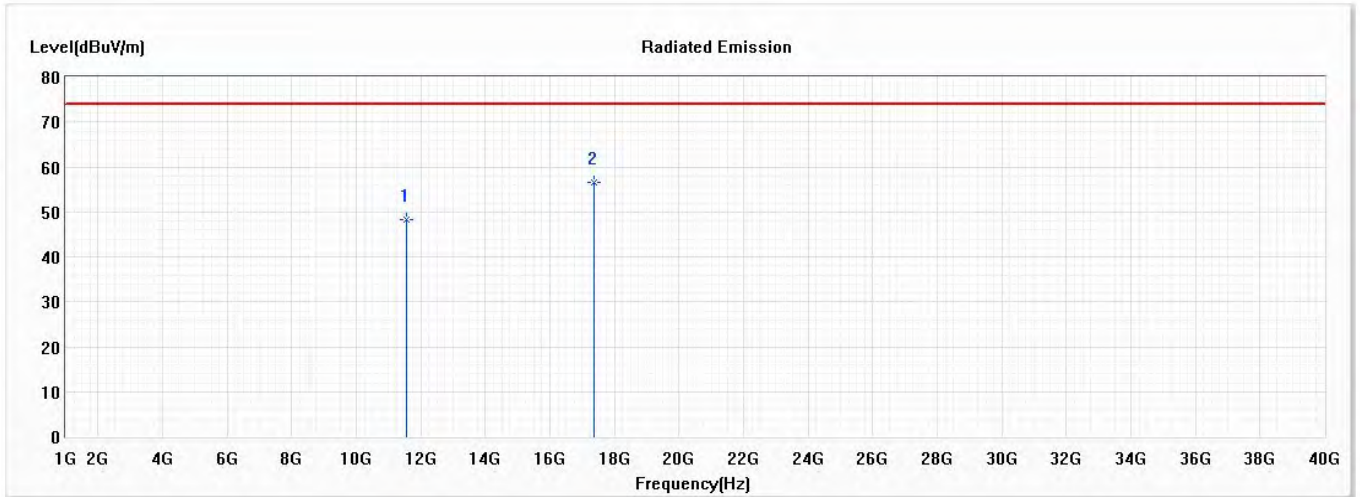


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	48.29	74.00	-25.71	46.89	1.40	PK
* 2	17355.000	56.48	74.00	-17.52	51.48	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Horizontal

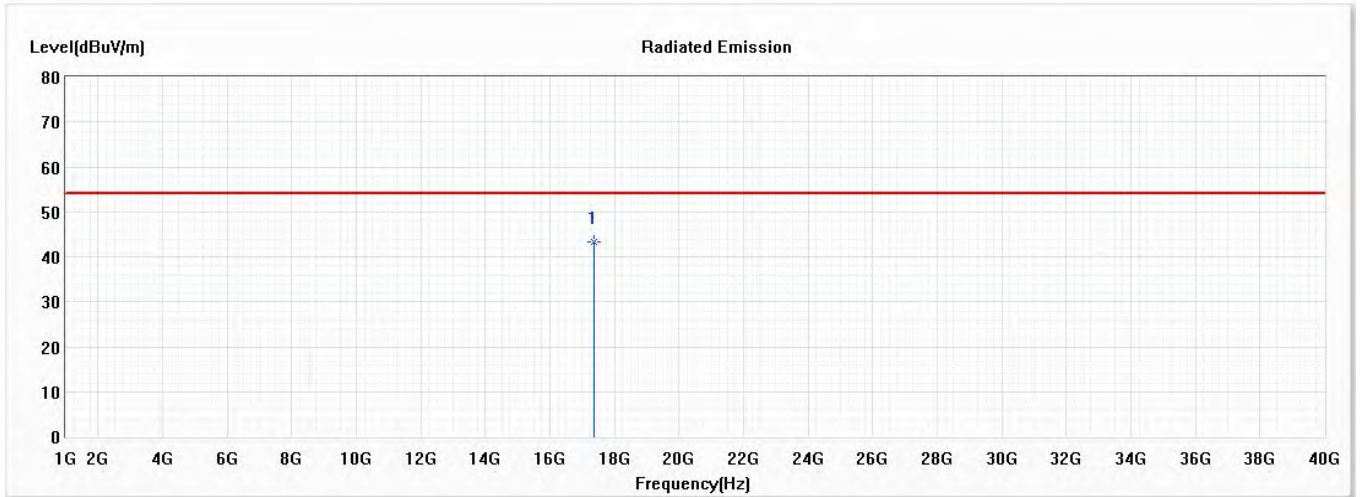


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	43.32	54.00	-10.68	38.32	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Vertical

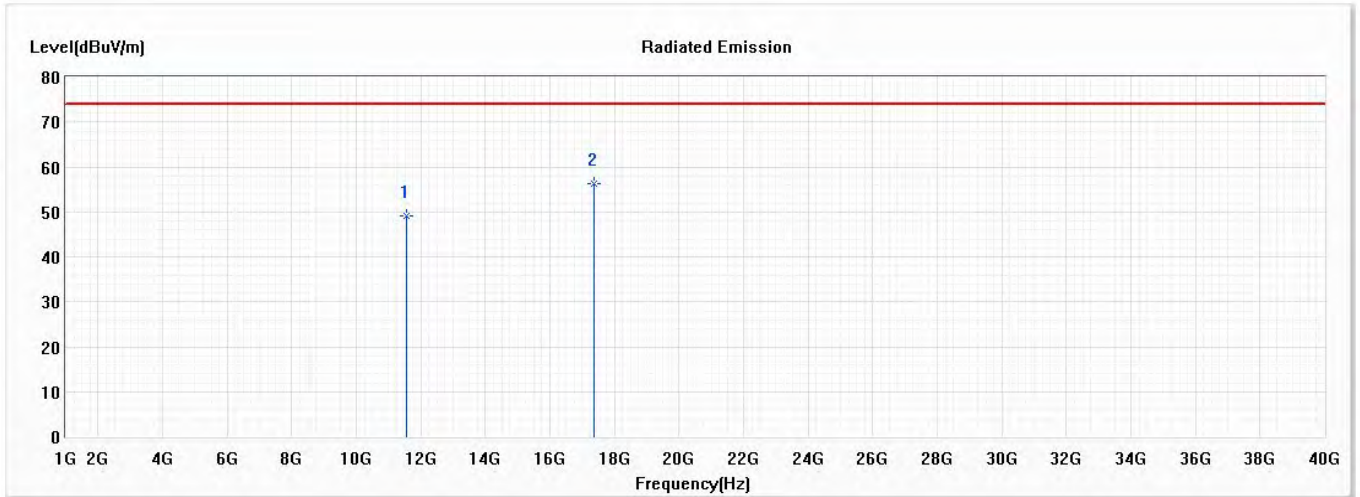


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11570.000	49.01	74.00	-24.99	47.61	1.40	PK
* 2	17355.000	56.25	74.00	-17.75	51.25	5.00	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5785MHz)

Vertical

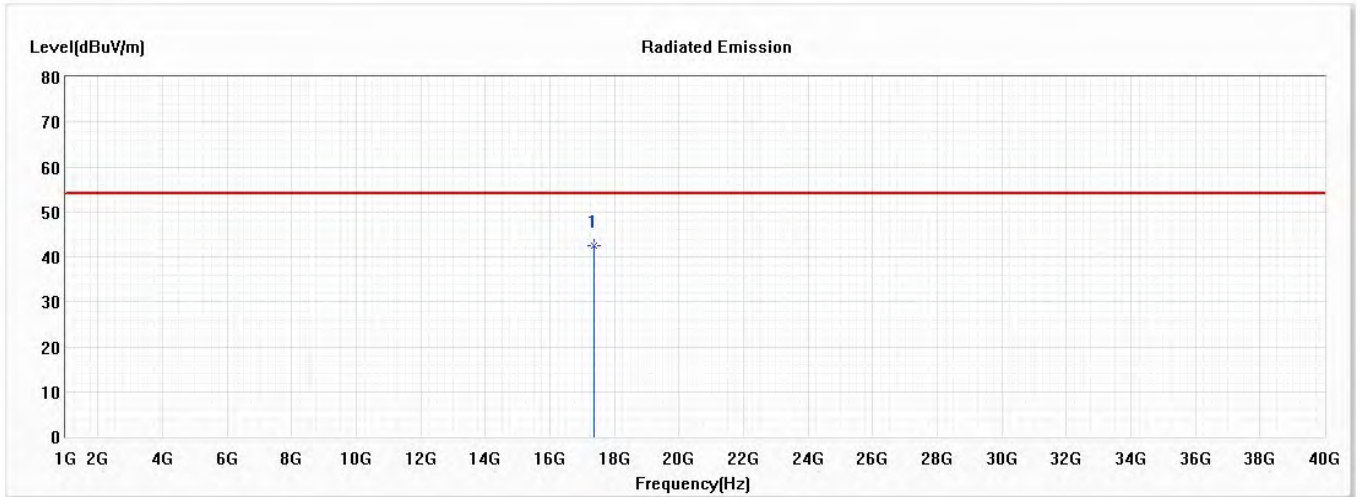


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17355.000	42.43	54.00	-11.57	37.43	5.00	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5825MHz)

Horizontal

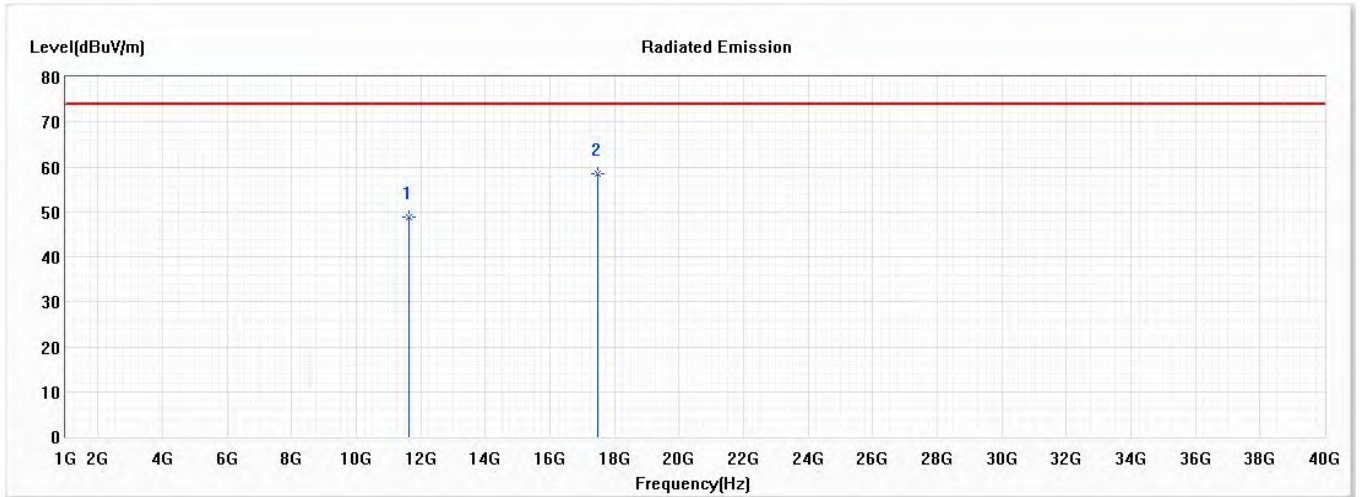


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	48.73	74.00	-25.27	47.16	1.57	PK
* 2	17475.000	58.50	74.00	-15.50	53.62	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5825MHz)

Horizontal

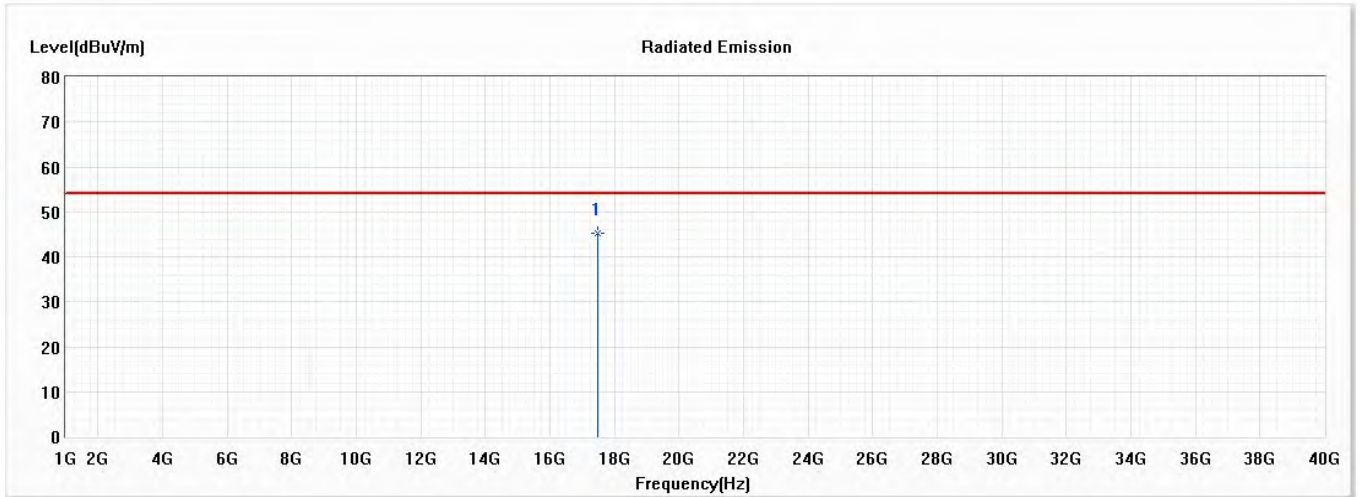


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	45.31	54.00	-8.69	40.43	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5825MHz)

Vertical

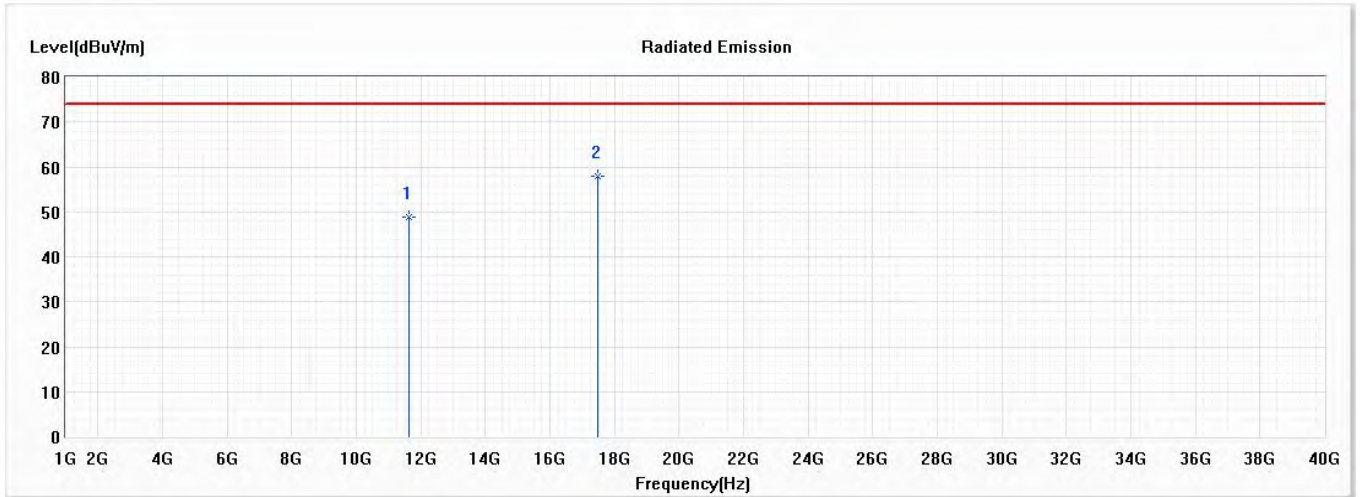


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11650.000	48.84	74.00	-25.16	47.27	1.57	PK
* 2	17475.000	57.95	74.00	-16.05	53.07	4.88	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps) (5825MHz)

Vertical

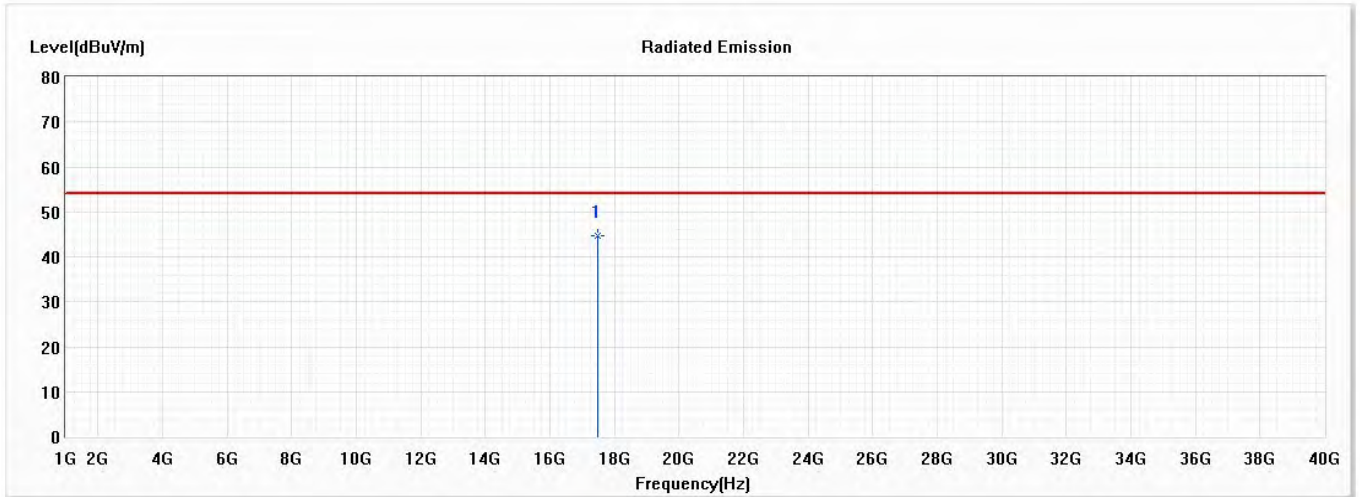


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17475.000	44.59	54.00	-9.41	39.71	4.88	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Horizontal

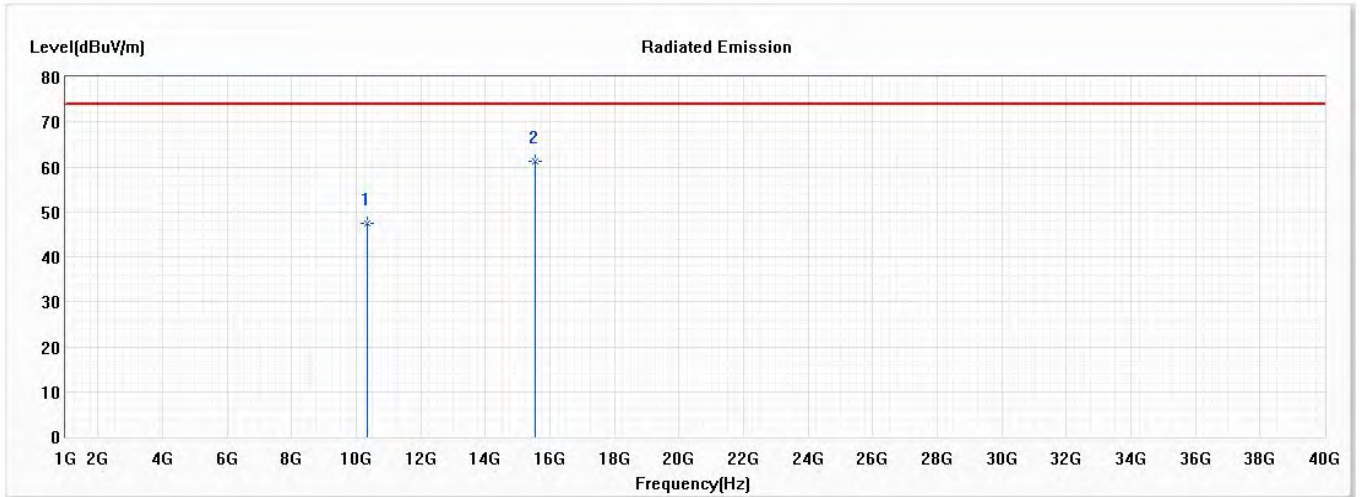


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.54	74.00	-26.46	48.83	-1.29	PK
* 2	15540.000	61.37	74.00	-12.63	59.06	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Horizontal

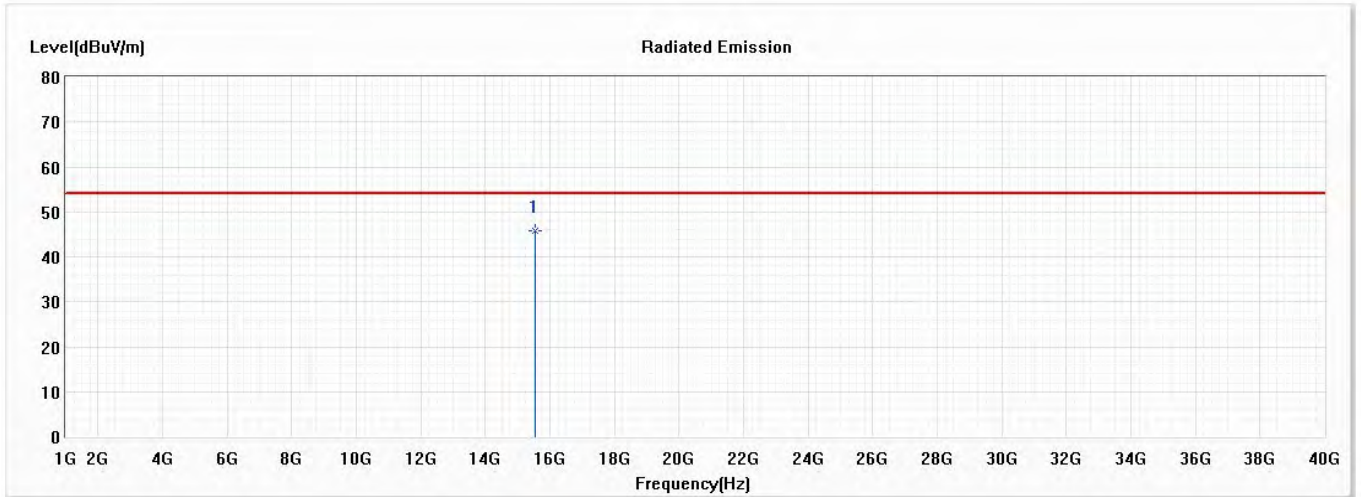


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	45.81	54.00	-8.19	43.50	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Vertical

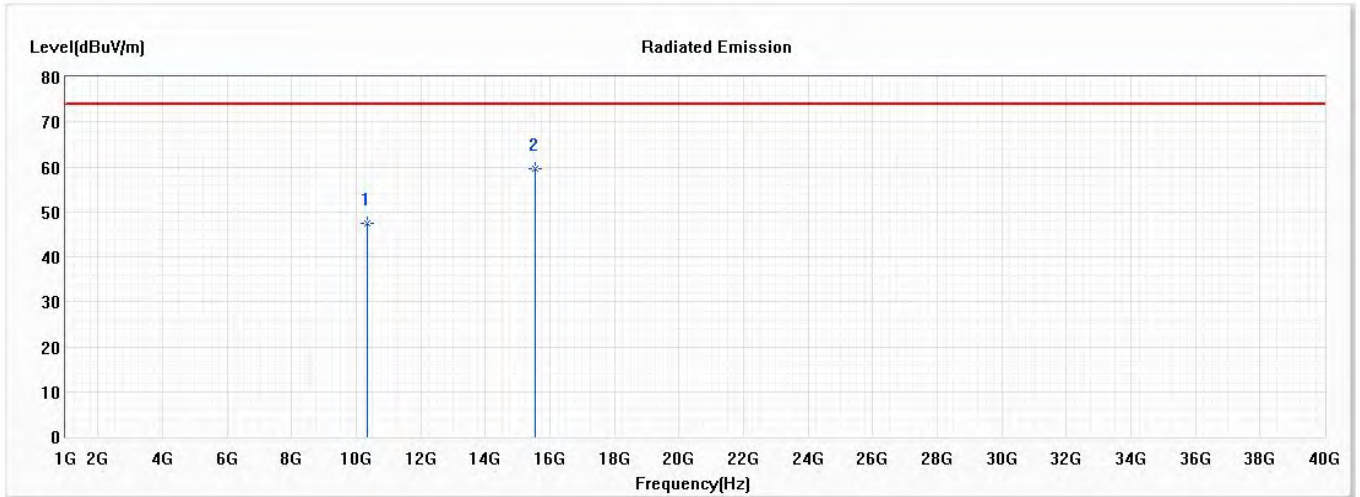


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10360.000	47.57	74.00	-26.43	48.86	-1.29	PK
* 2	15540.000	59.65	74.00	-14.35	57.34	2.31	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5180MHz)

Vertical

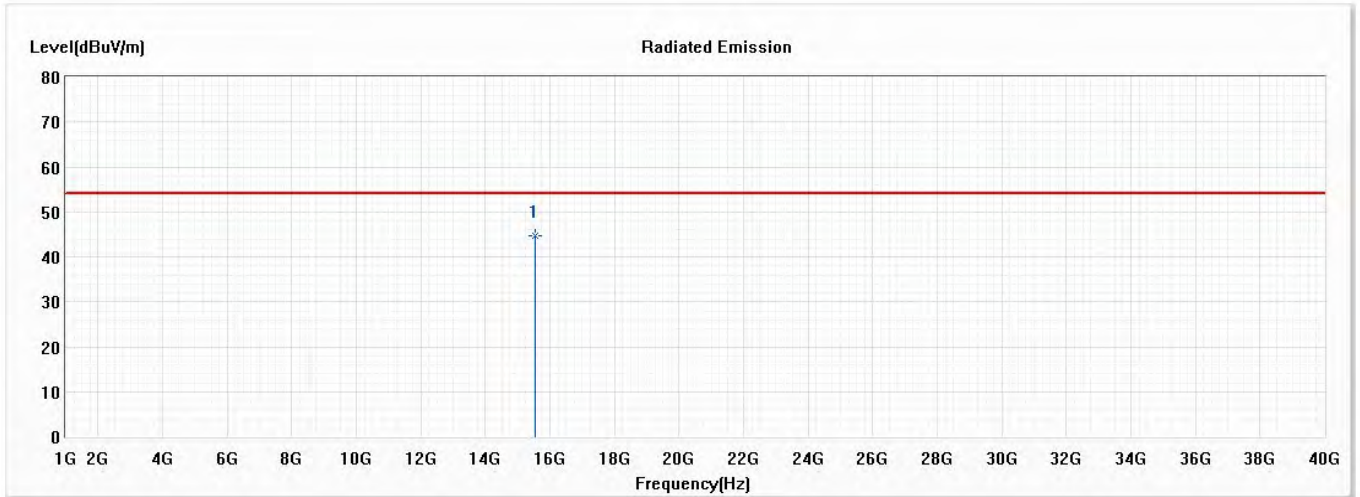


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15540.000	44.77	54.00	-9.23	42.46	2.31	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Horizontal

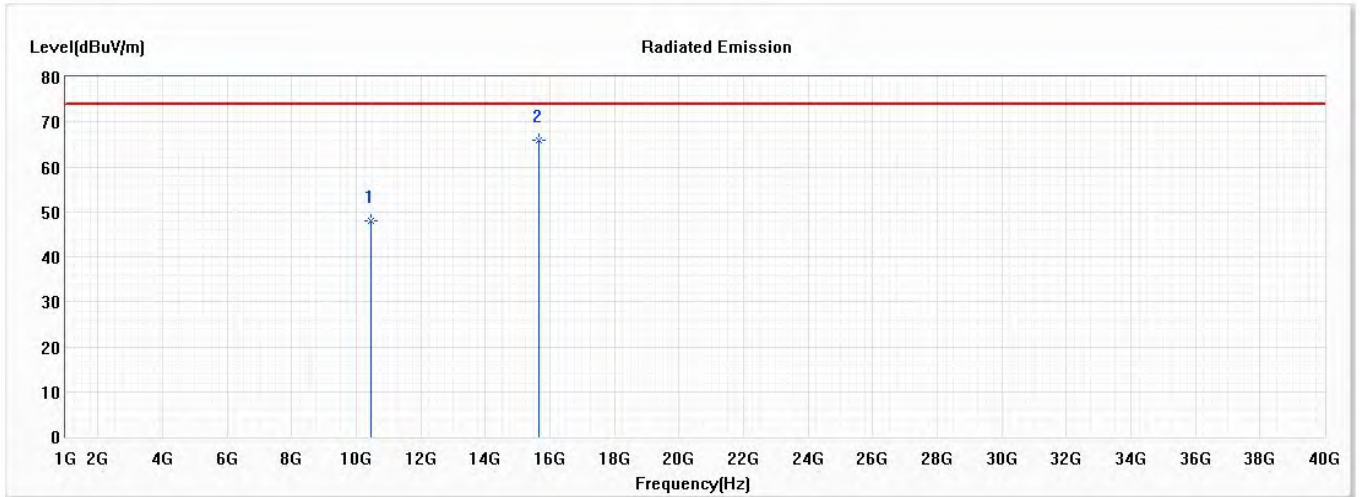


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	48.12	74.00	-25.88	49.15	-1.03	PK
* 2	15660.000	66.04	74.00	-7.96	63.69	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Horizontal

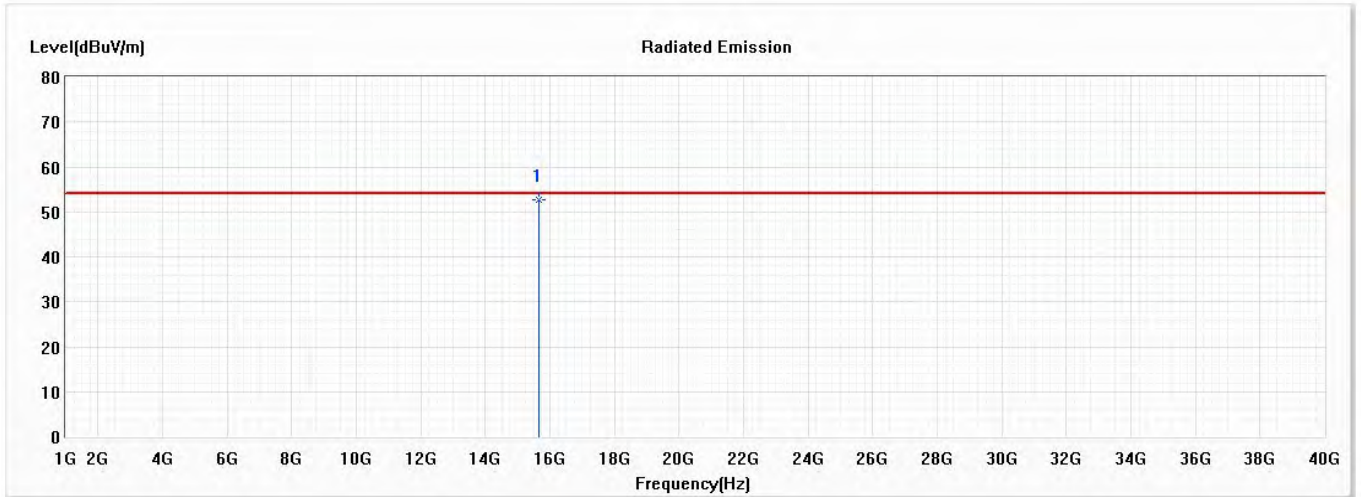


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	52.59	54.00	-1.41	50.24	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Vertical

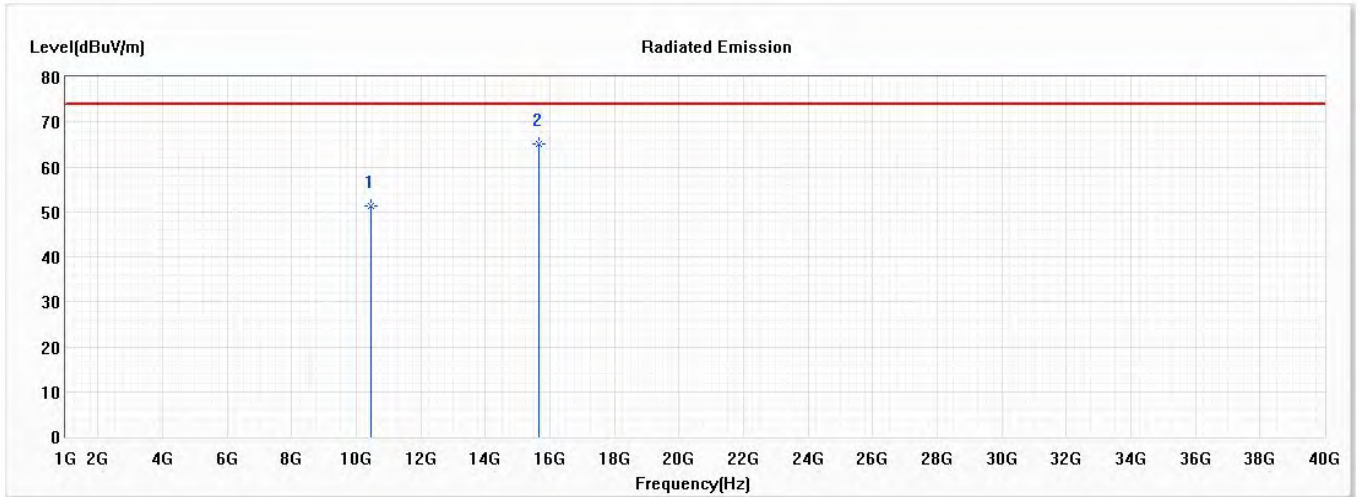


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10440.000	51.24	74.00	-22.76	52.27	-1.03	PK
* 2	15660.000	64.99	74.00	-9.01	62.64	2.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/08
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5220MHz)

Vertical

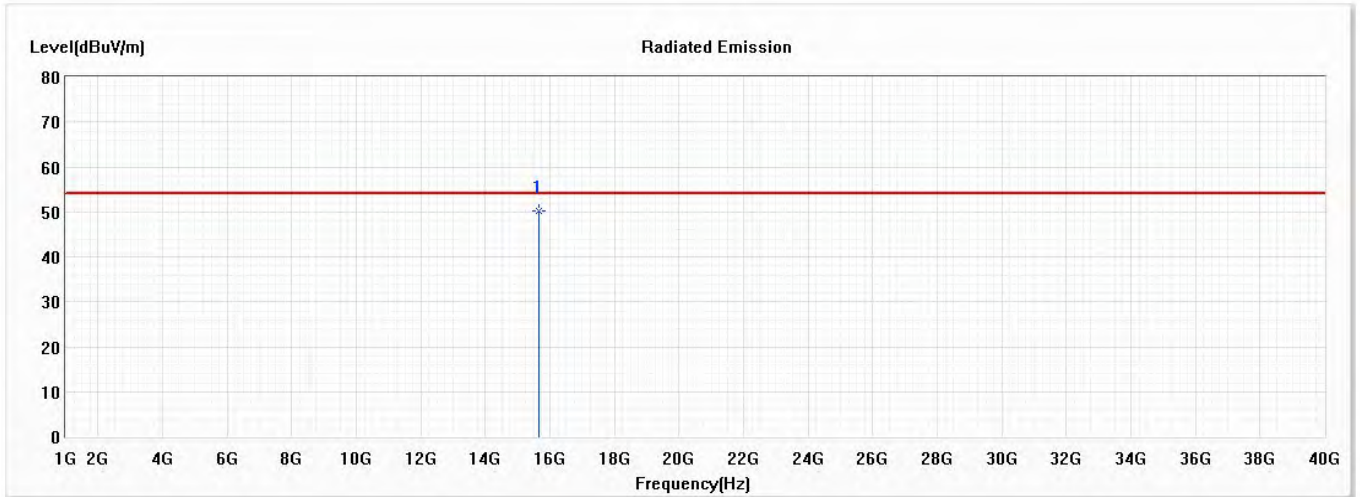


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15660.000	50.27	54.00	-3.73	47.92	2.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Horizontal

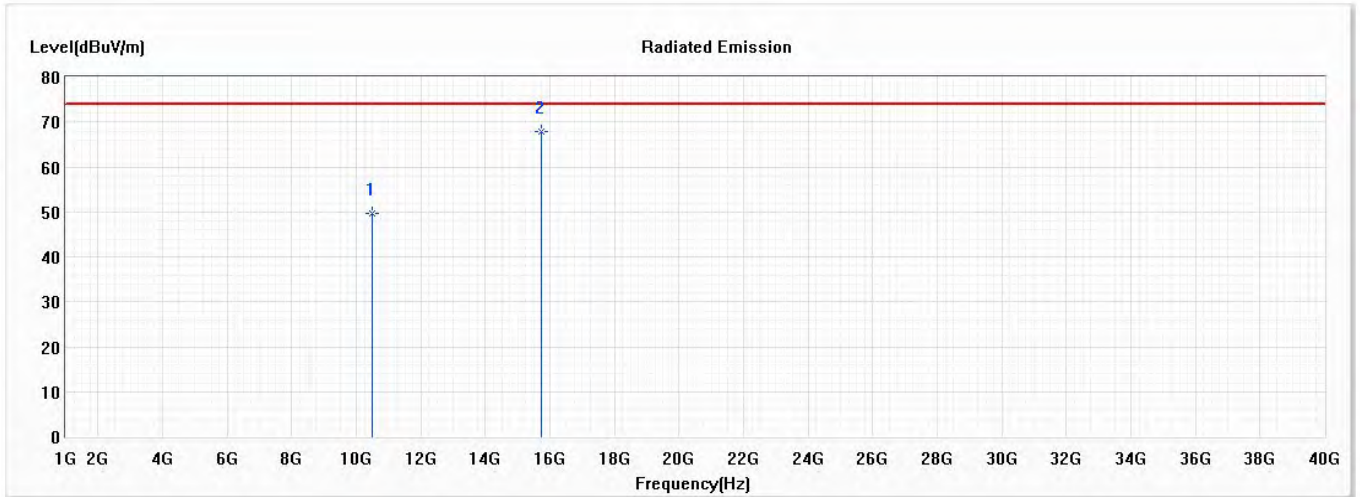


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	49.79	74.00	-24.21	50.68	-0.89	PK
* 2	15720.000	67.75	74.00	-6.25	65.29	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Horizontal

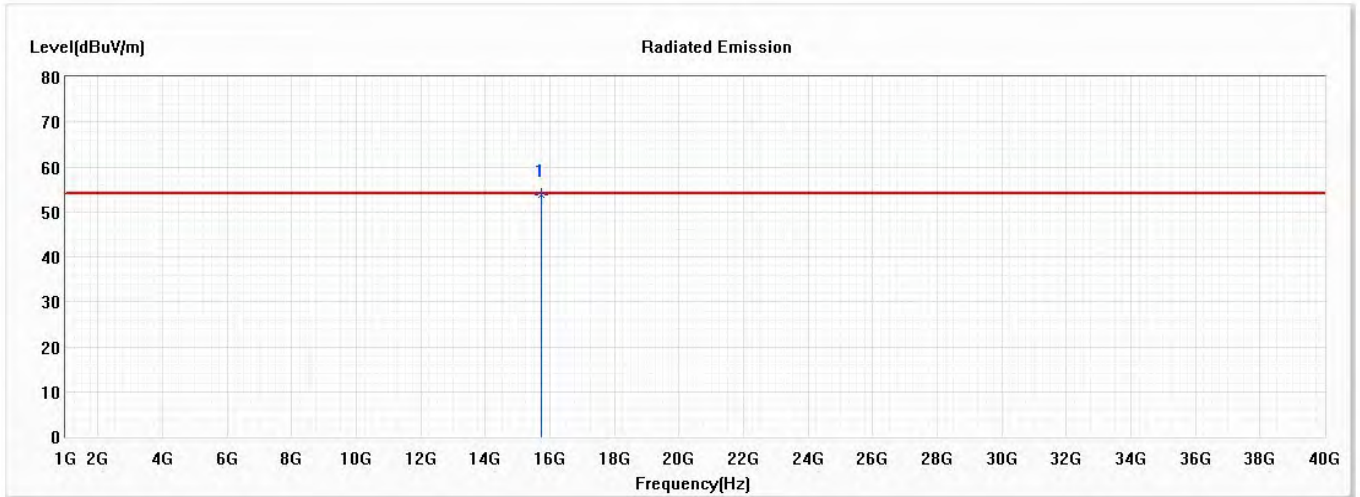


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	53.86	54.00	-0.14	51.40	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Vertical

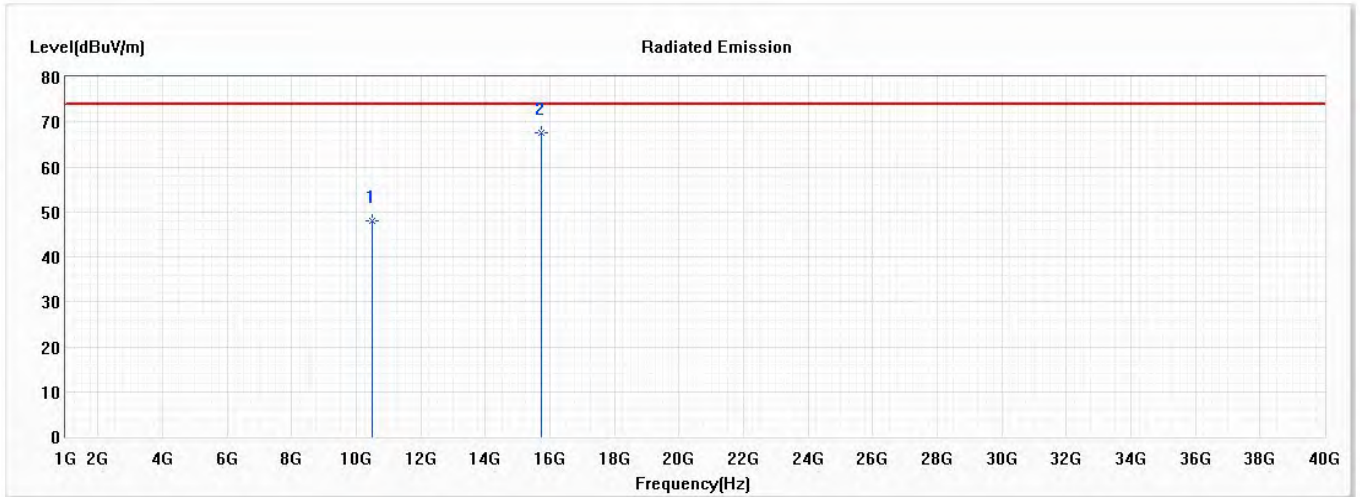


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10480.000	48.12	74.00	-25.88	49.01	-0.89	PK
* 2	15720.000	67.53	74.00	-6.47	65.07	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5240MHz)

Vertical

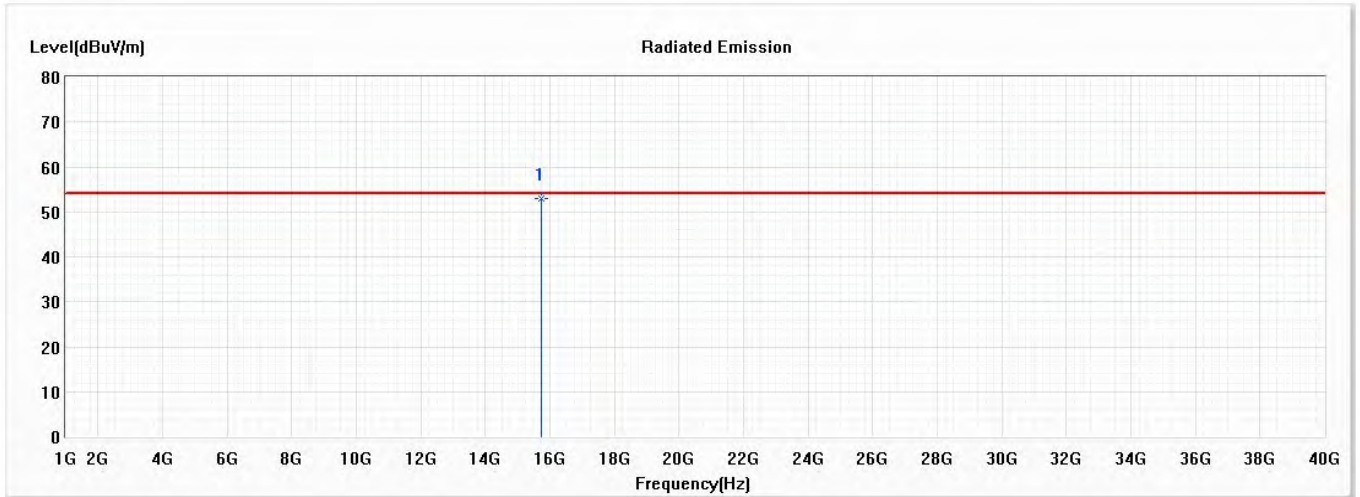


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15720.000	52.98	54.00	-1.02	50.52	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Horizontal

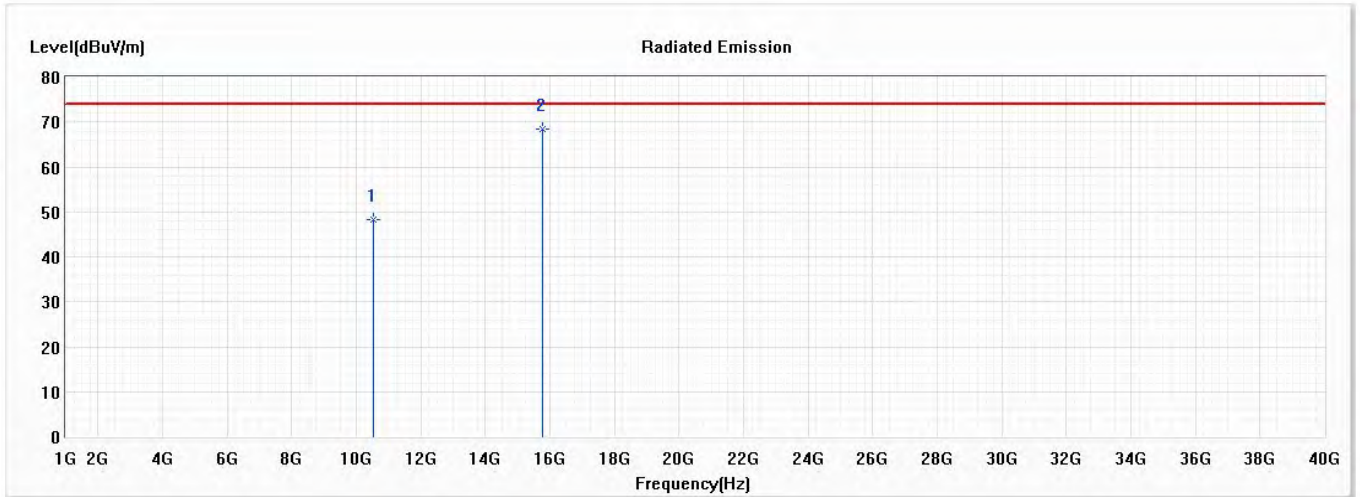


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	48.23	74.00	-25.77	49.00	-0.77	PK
* 2	15780.000	68.46	74.00	-5.54	66.01	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Horizontal

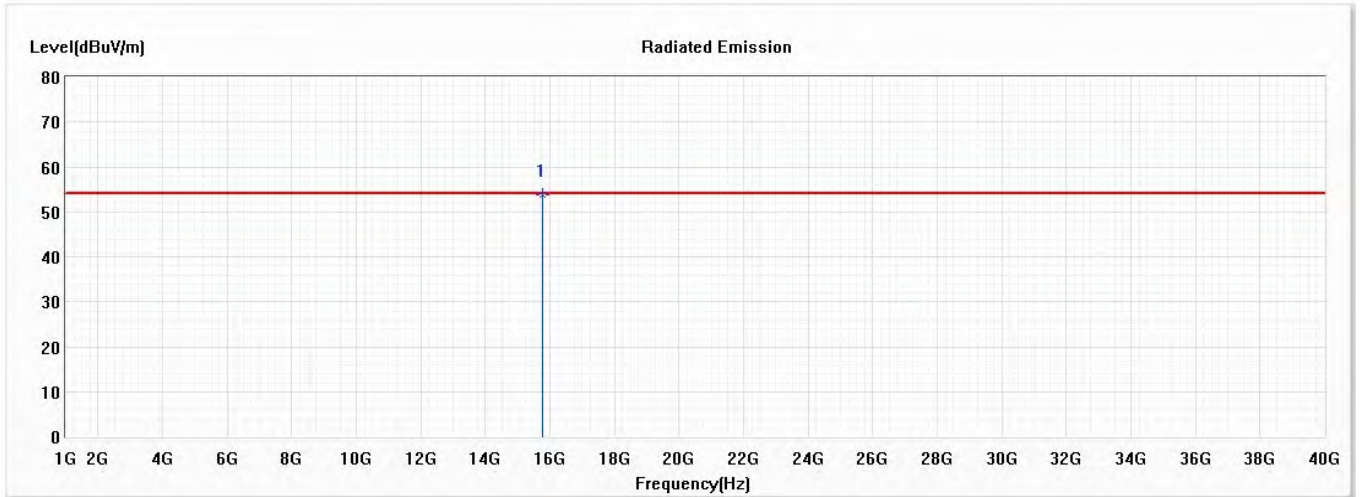


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	53.73	54.00	-0.27	51.28	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Vertical

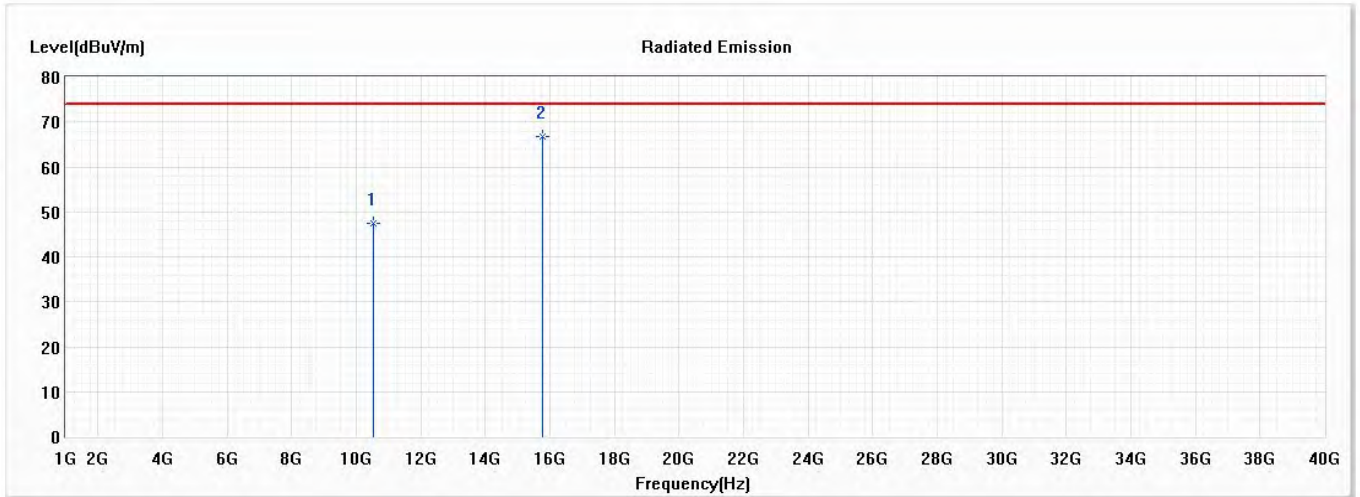


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10520.000	47.49	74.00	-26.51	48.26	-0.77	PK
* 2	15780.000	66.64	74.00	-7.36	64.19	2.45	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5260MHz)

Vertical

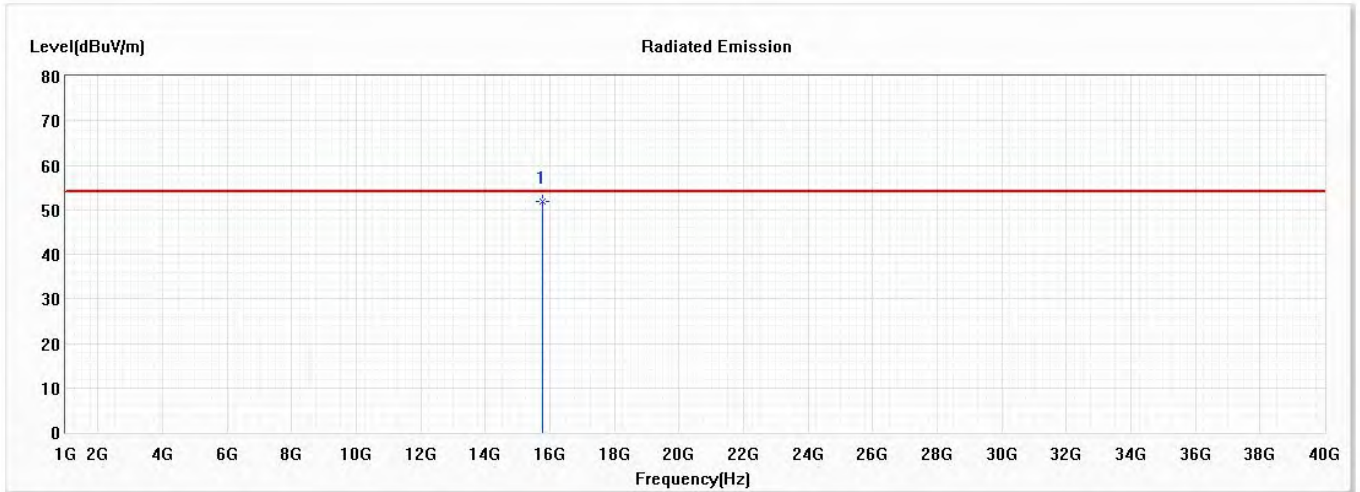


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15780.000	51.95	54.00	-2.05	49.50	2.45	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/09
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW_7.2Mbps) (5300MHz)

Horizontal

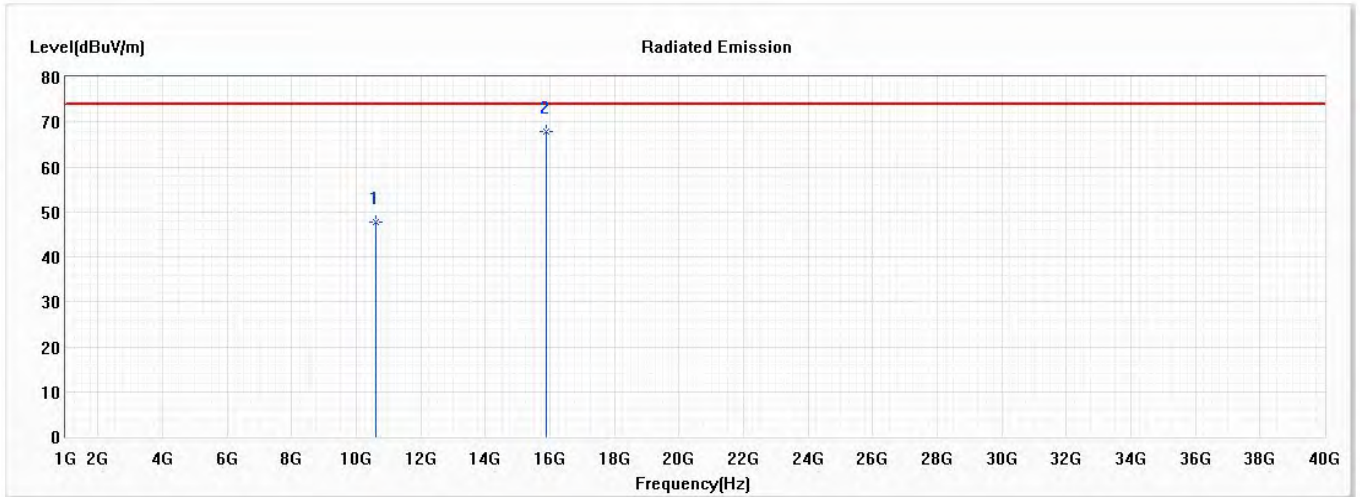

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10600.000	47.80	74.00	-26.20	48.47	-0.67	PK
* 2	15900.000	67.97	74.00	-6.03	65.35	2.62	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.