


Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5510MHz)

Horizontal

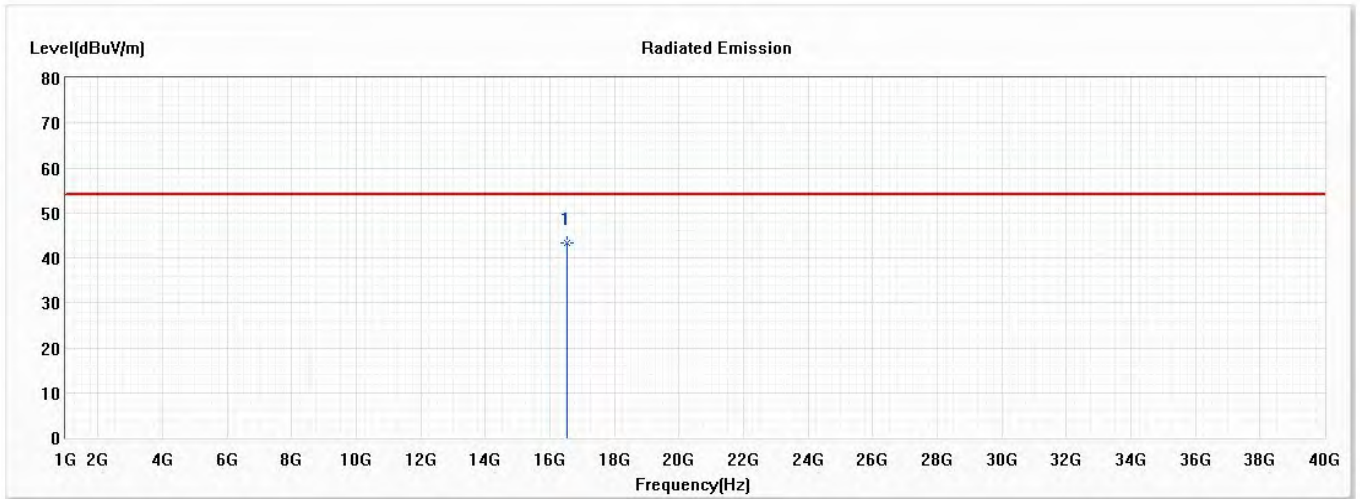


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16530.000	43.42	54.00	-10.58	38.98	4.44	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5510MHz)

Vertical

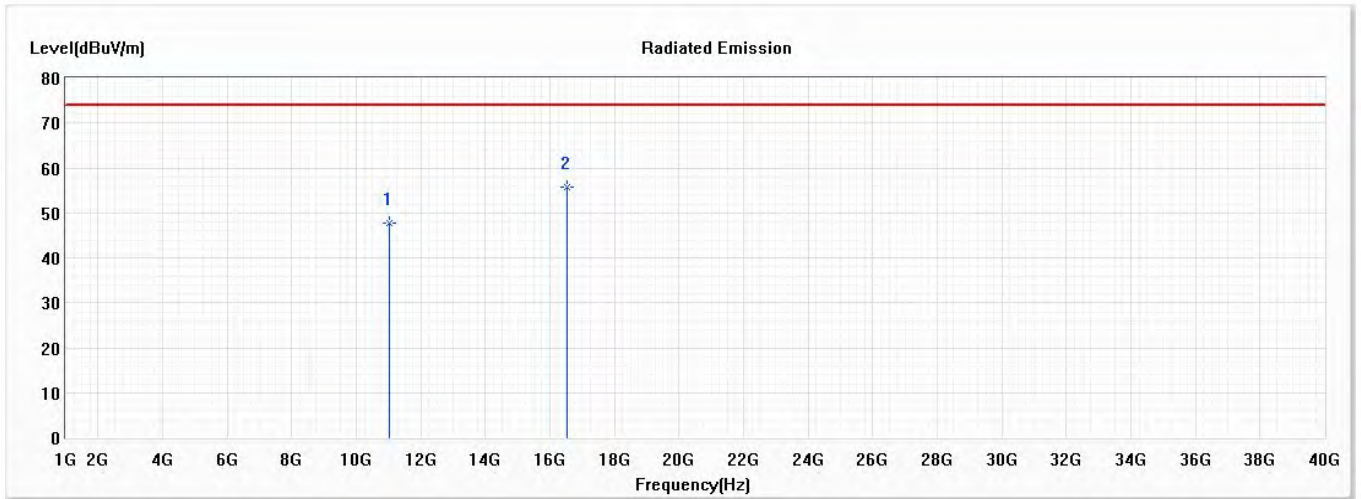


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11020.000	47.74	74.00	-26.26	47.61	0.13	PK
* 2	16530.000	55.76	74.00	-18.24	51.32	4.44	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5510MHz)

Vertical

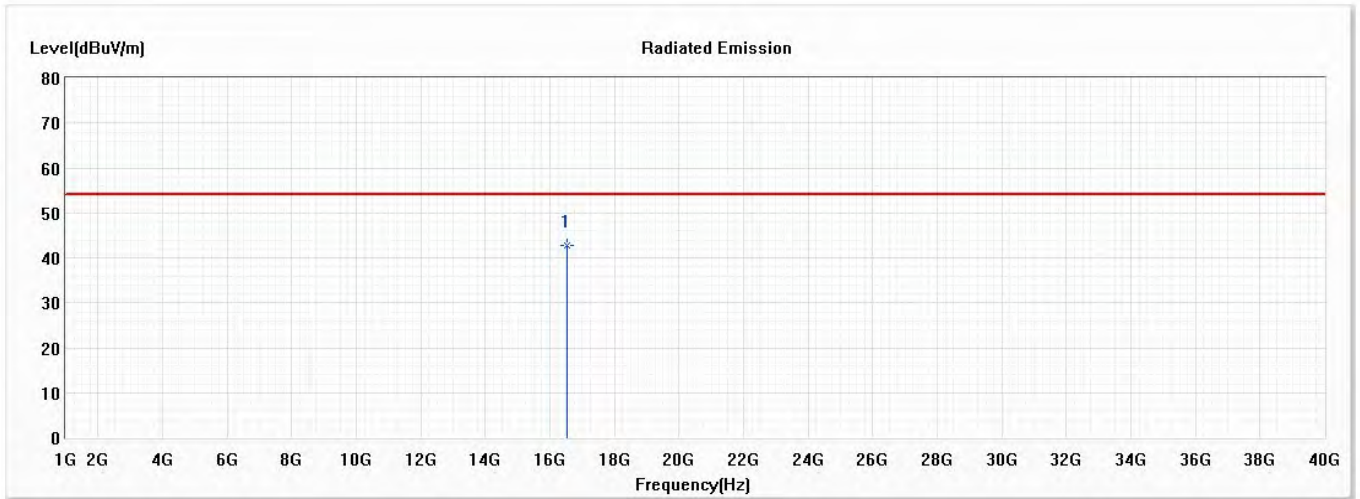


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16530.000	42.81	54.00	-11.19	38.37	4.44	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5550MHz)

Horizontal

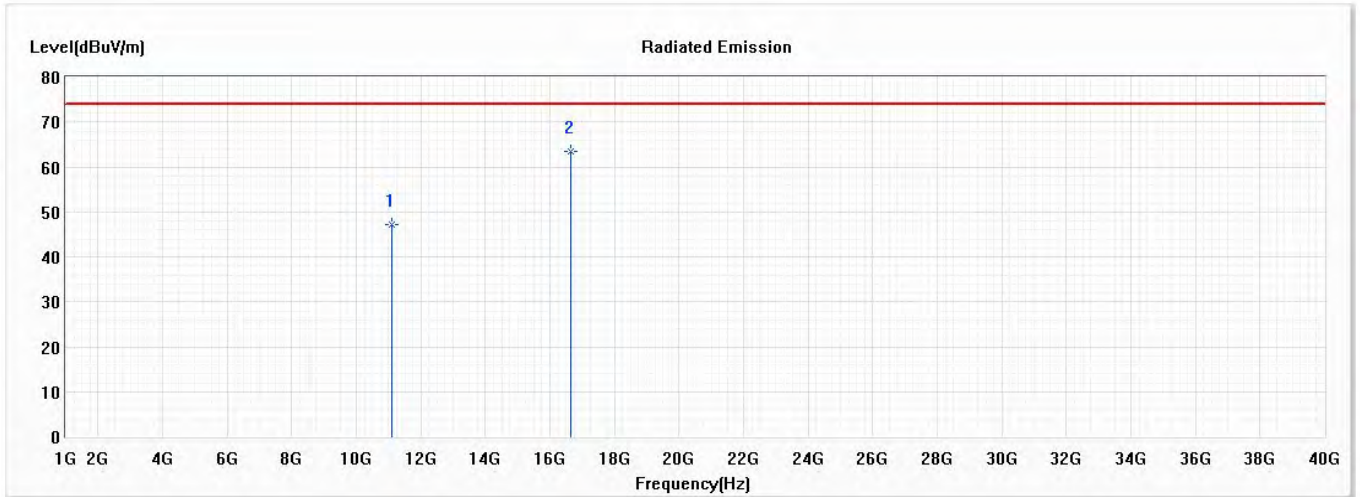


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11100.000	47.08	74.00	-26.92	46.65	0.43	PK
* 2	16650.000	63.36	74.00	-10.64	58.43	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5550MHz)

Horizontal

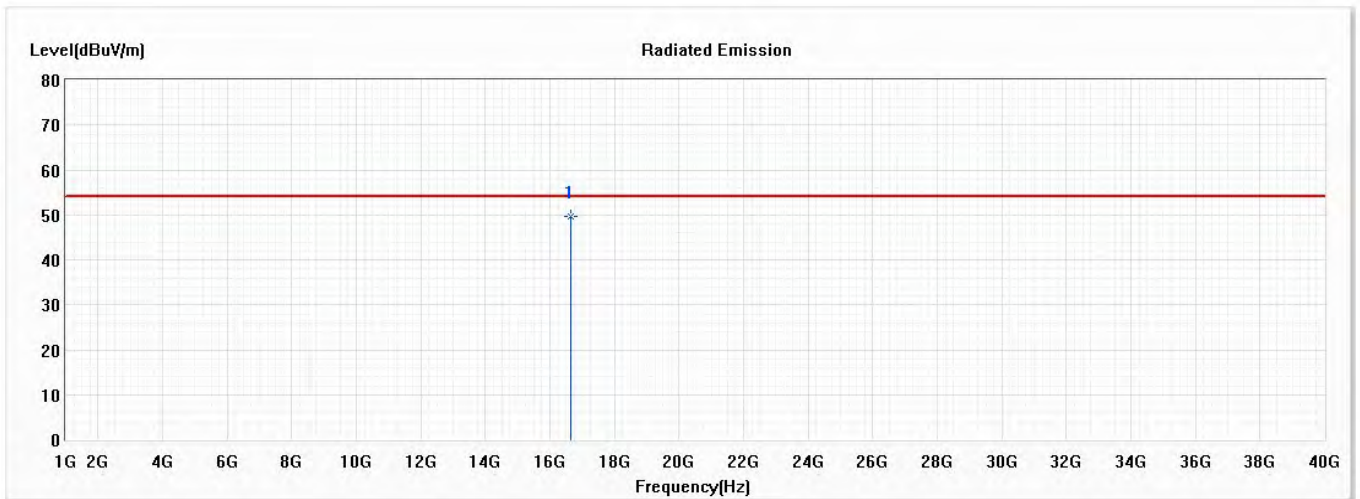


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16650.000	49.52	54.00	-4.48	44.59	4.93	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5550MHz)

Vertical

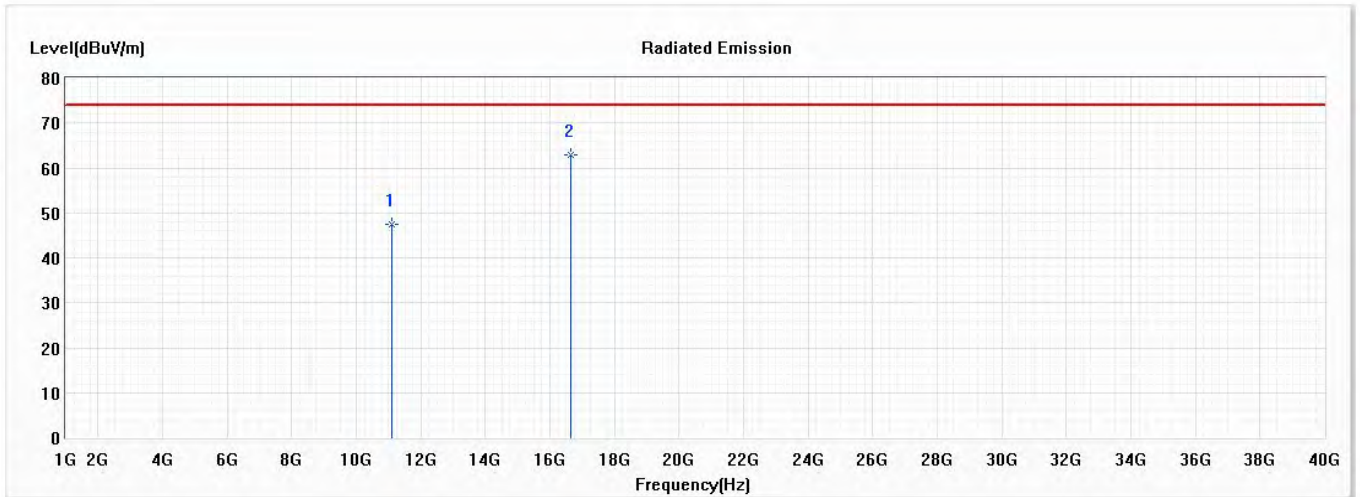


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11100.000	47.46	74.00	-26.54	47.03	0.43	PK
* 2	16650.000	62.76	74.00	-11.24	57.83	4.93	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5550MHz)

Vertical

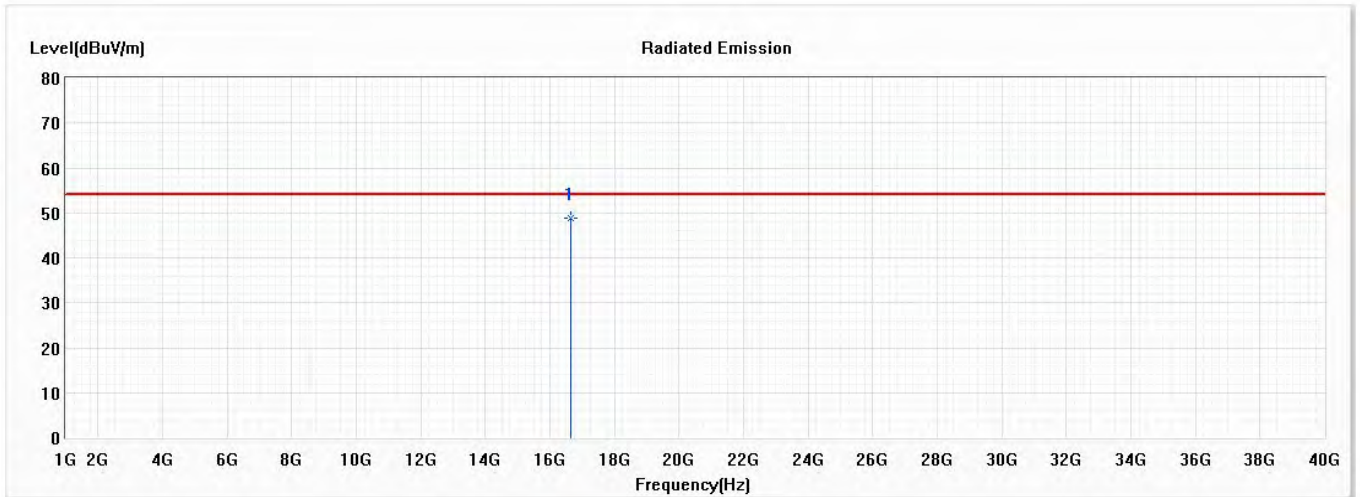


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16650.000	48.73	54.00	-5.27	43.80	4.93	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Horizontal

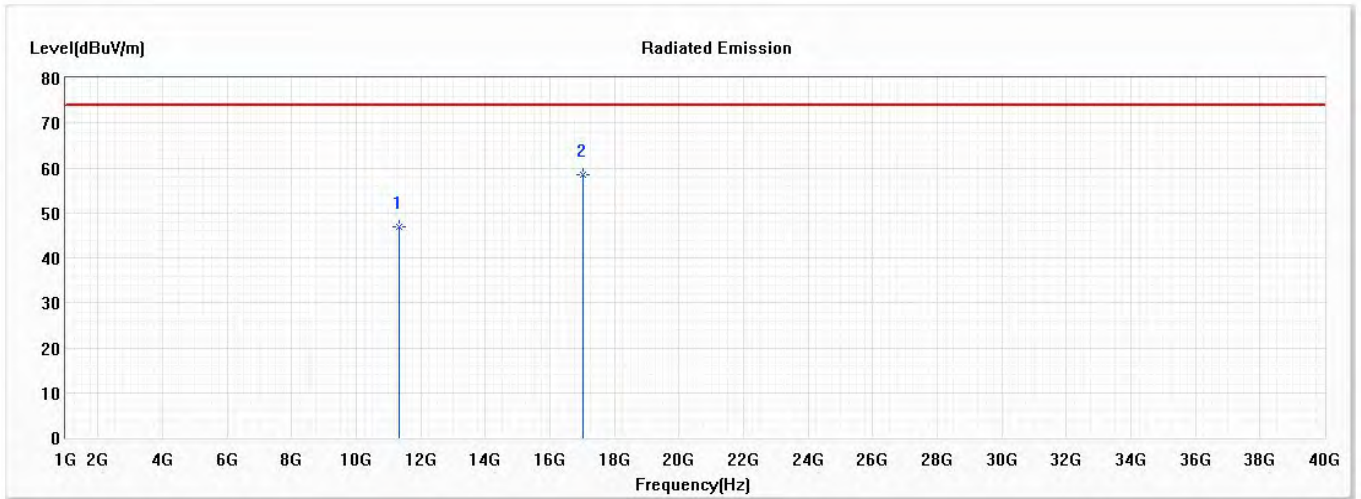


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11340.000	47.03	74.00	-26.97	46.25	0.78	PK
* 2	17010.000	58.49	74.00	-15.51	53.15	5.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Horizontal

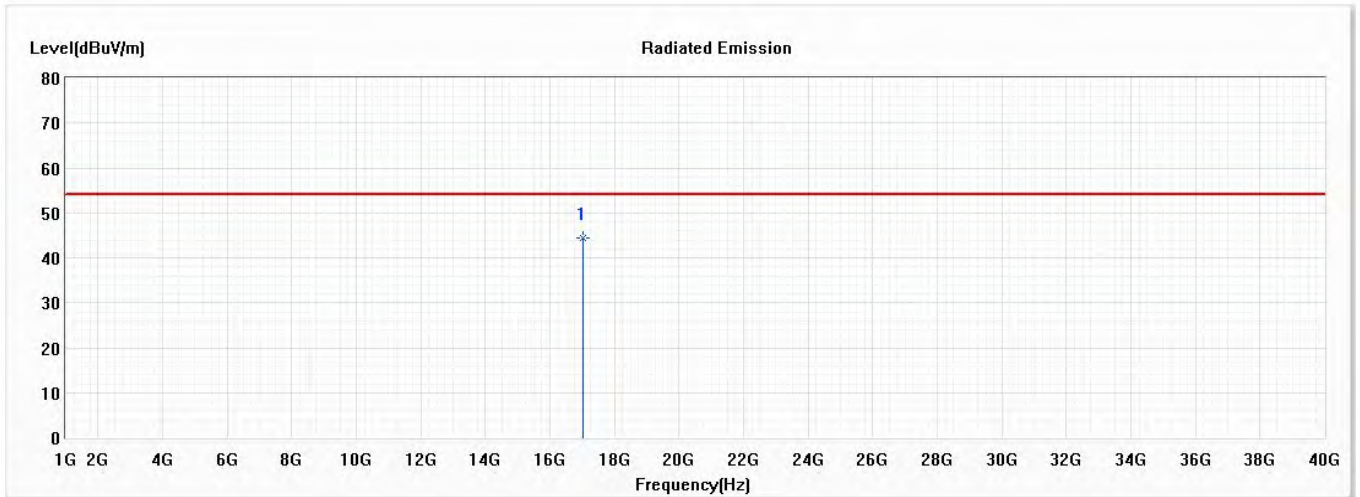


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17010.000	44.34	54.00	-9.66	39.00	5.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Vertical

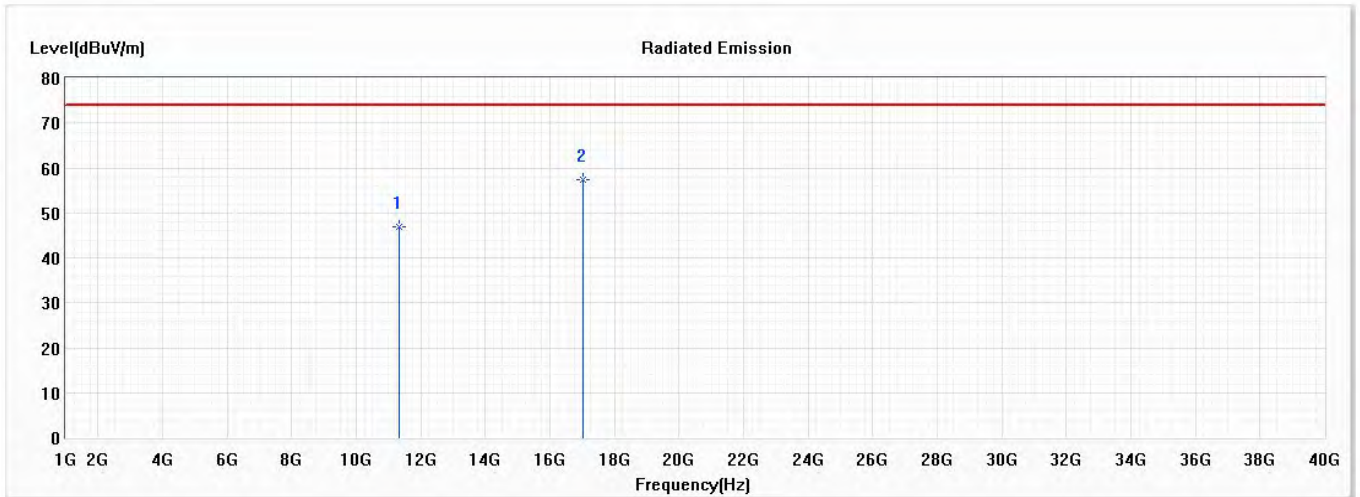


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11340.000	46.82	74.00	-27.18	46.04	0.78	PK
* 2	17010.000	57.46	74.00	-16.54	52.12	5.34	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5670MHz)

Vertical

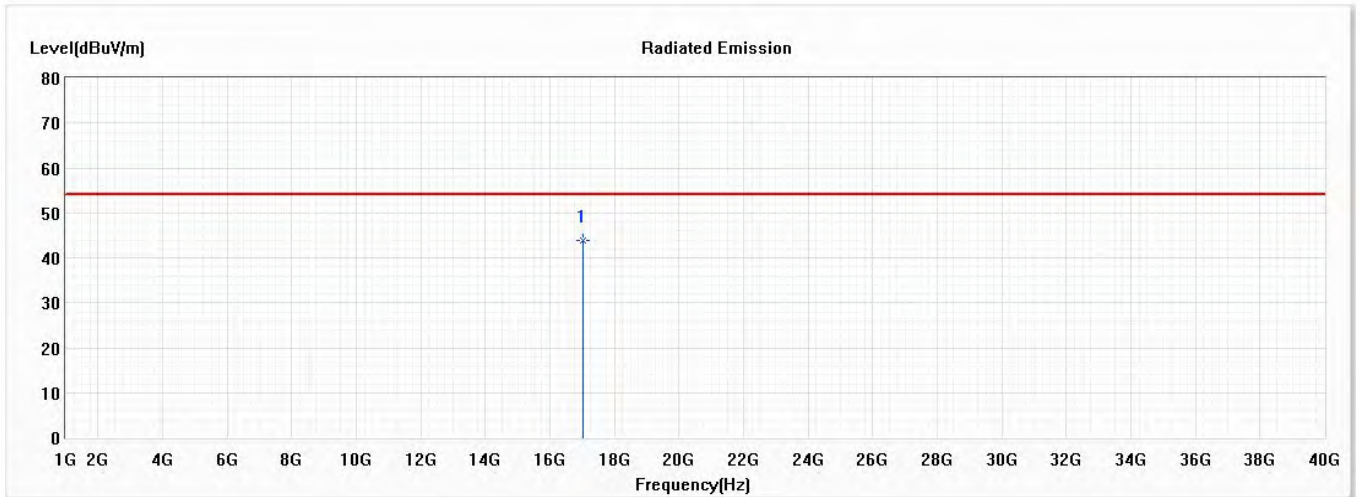


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17010.000	43.95	54.00	-10.05	38.61	5.34	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Horizontal

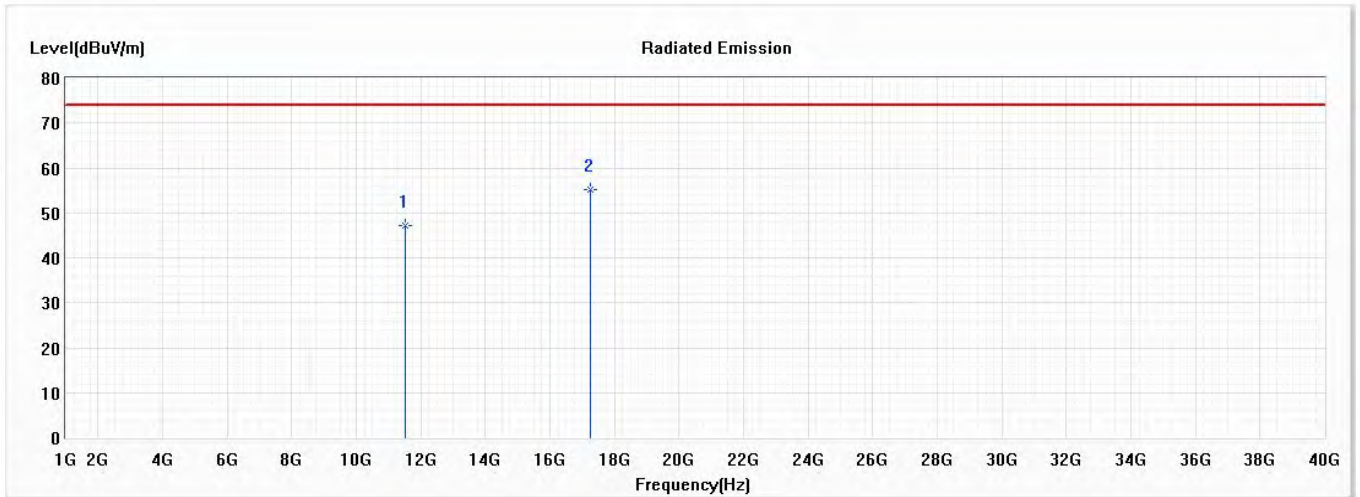


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11510.000	47.24	74.00	-26.76	46.00	1.24	PK
* 2	17265.000	55.24	74.00	-18.76	50.23	5.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Horizontal

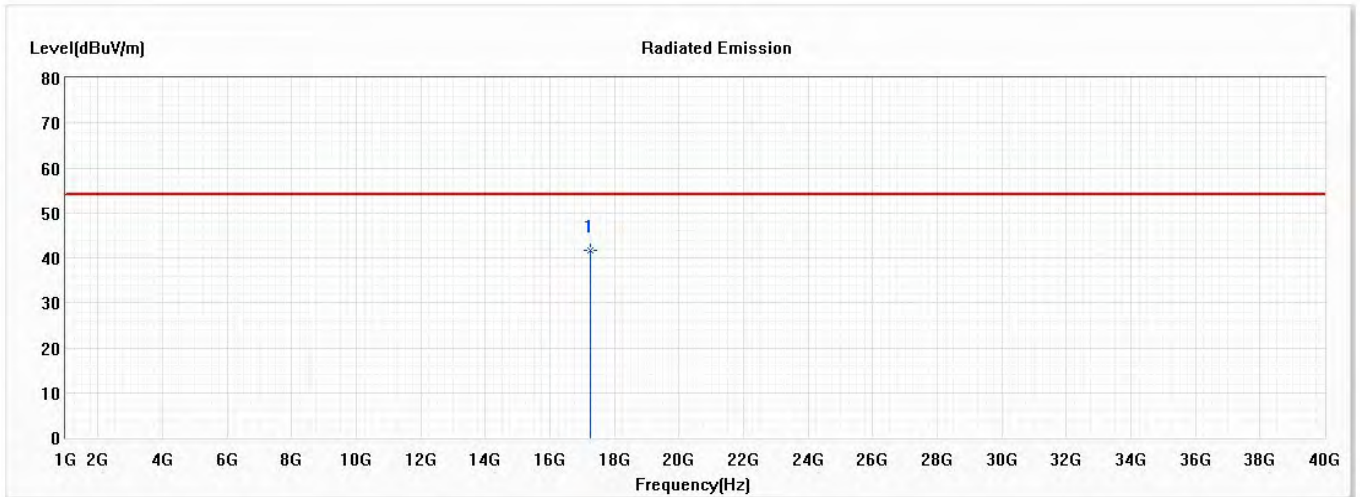


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17265.000	41.62	54.00	-12.38	36.61	5.01	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Vertical

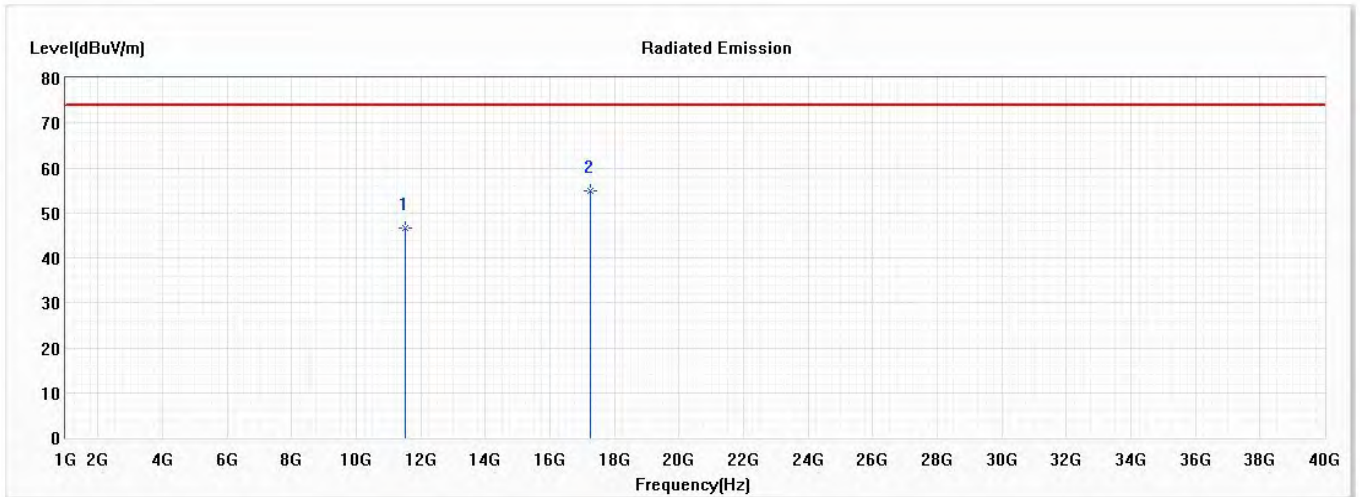


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11510.000	46.53	74.00	-27.47	45.29	1.24	PK
* 2	17265.000	54.76	74.00	-19.24	49.75	5.01	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5755MHz)

Vertical

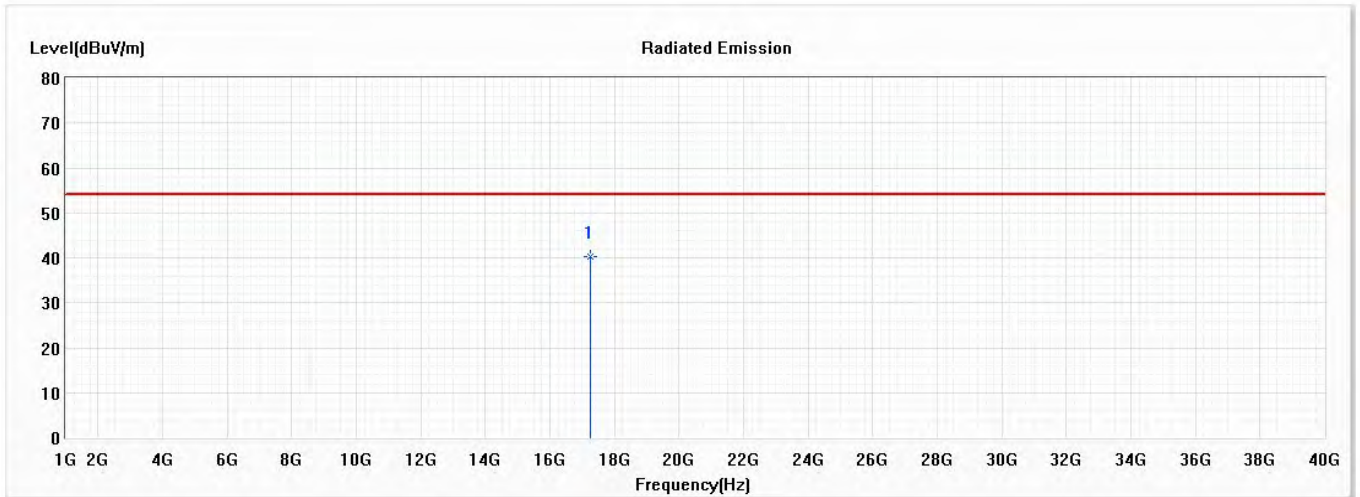


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17265.000	40.38	54.00	-13.62	35.37	5.01	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Horizontal

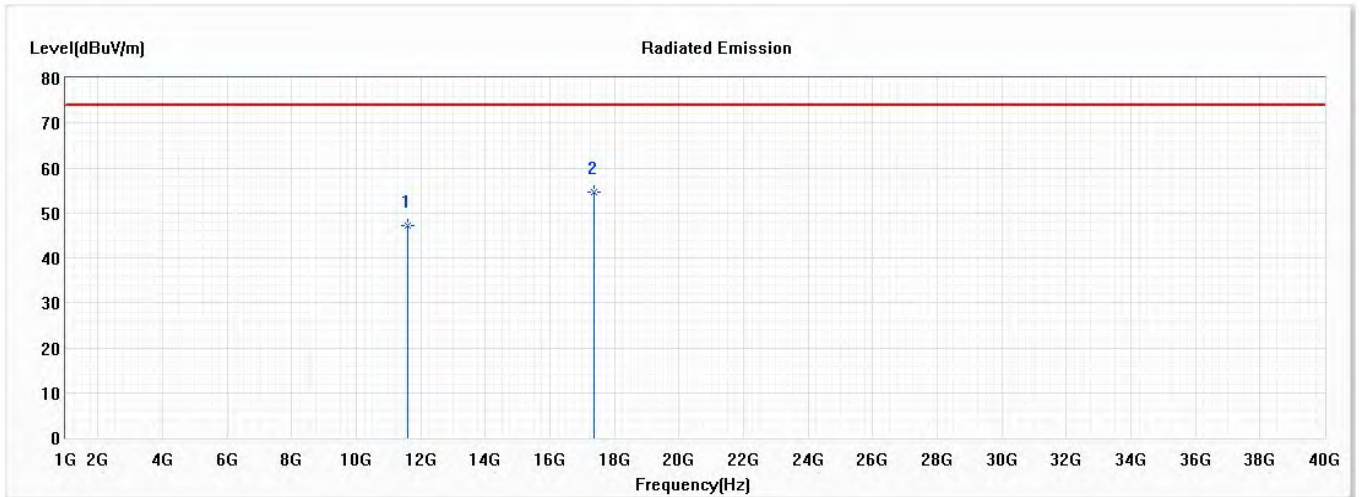


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11590.000	47.30	74.00	-26.70	45.85	1.45	PK
* 2	17385.000	54.67	74.00	-19.33	49.77	4.90	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Horizontal

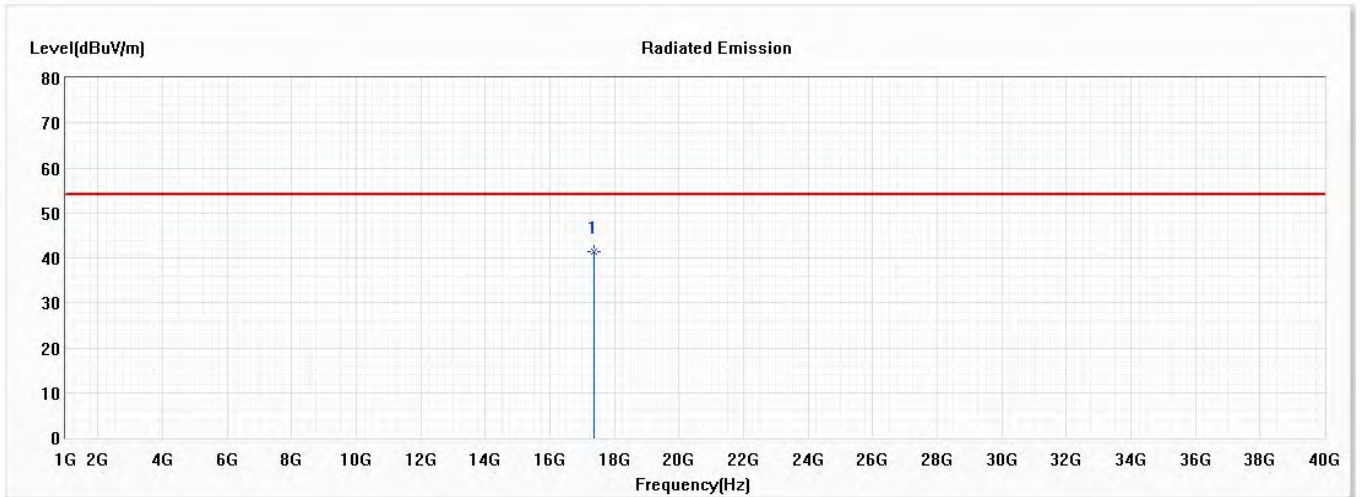


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17385.000	41.29	54.00	-12.71	36.39	4.90	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW_30Mbps) (5795MHz)

Vertical

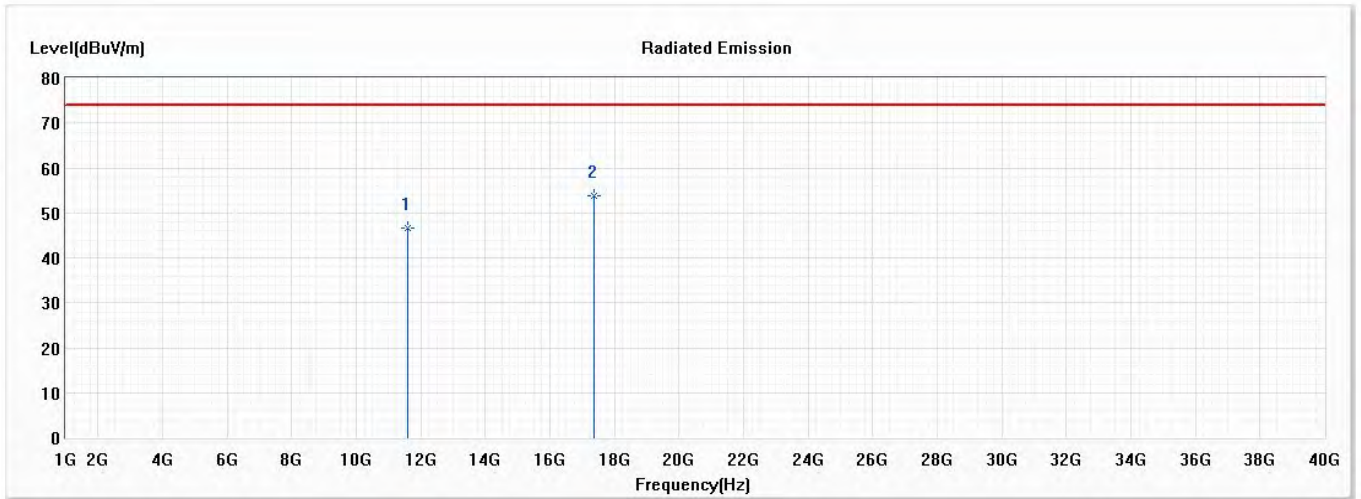


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11590.000	46.49	74.00	-27.51	45.04	1.45	PK
* 2	17385.000	53.87	74.00	-20.13	48.97	4.90	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Horizontal

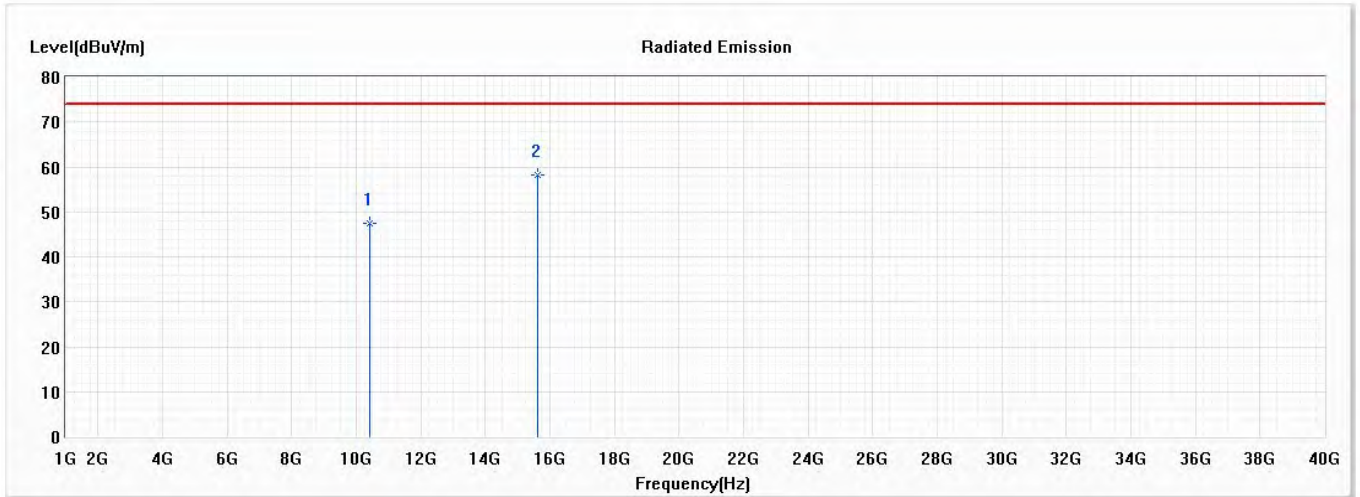


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10420.000	47.56	74.00	-26.44	48.67	-1.11	PK
* 2	15630.000	58.08	74.00	-15.92	55.79	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Horizontal

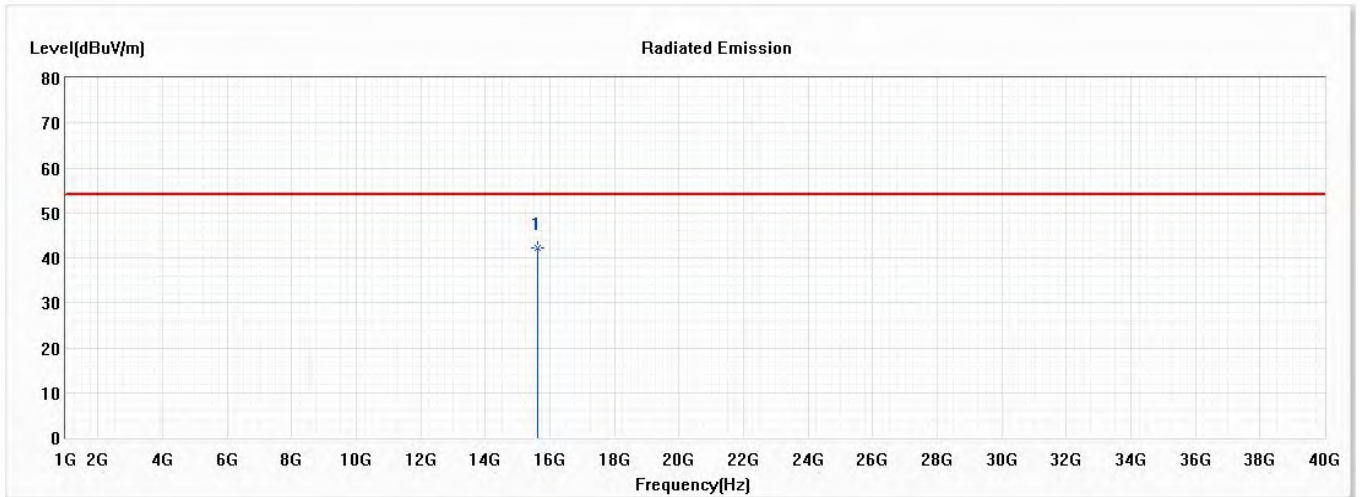


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15630.000	42.34	54.00	-11.66	40.05	2.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Vertical

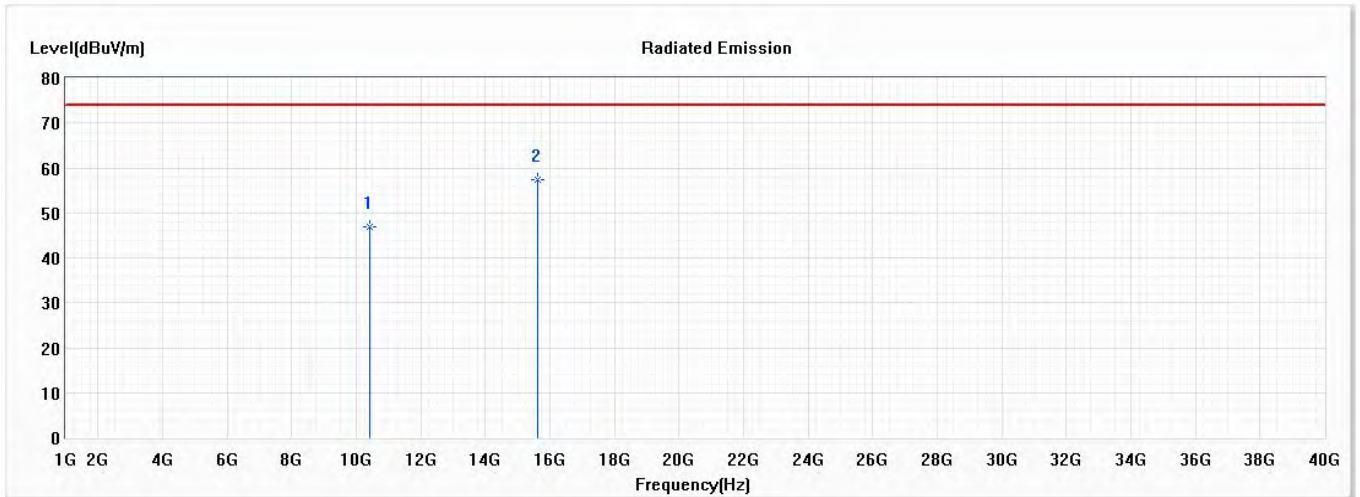


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10420.000	46.78	74.00	-27.22	47.89	-1.11	PK
* 2	15630.000	57.36	74.00	-16.64	55.07	2.29	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5210MHz)

Vertical

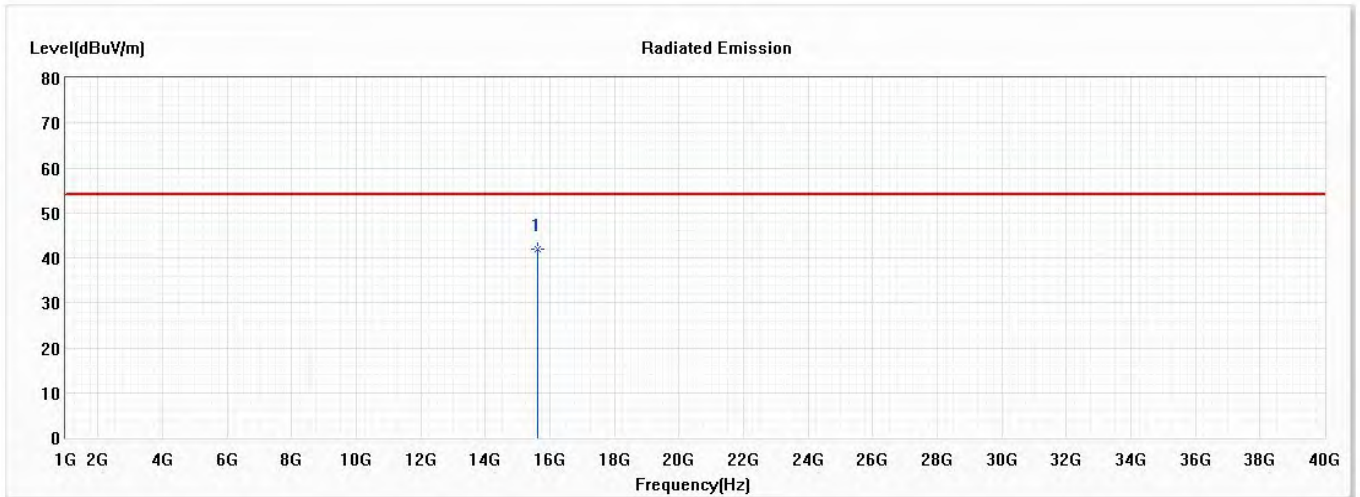


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15630.000	41.94	54.00	-12.06	39.65	2.29	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Horizontal

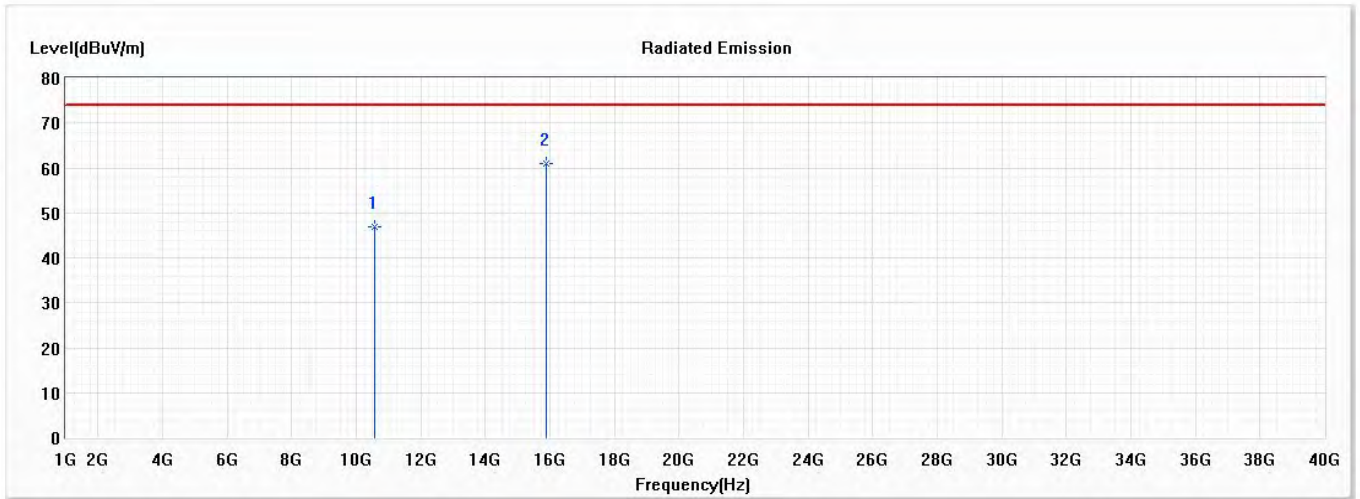


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10580.000	46.89	74.00	-27.11	47.57	-0.68	PK
* 2	15870.000	61.08	74.00	-12.92	58.55	2.53	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Horizontal

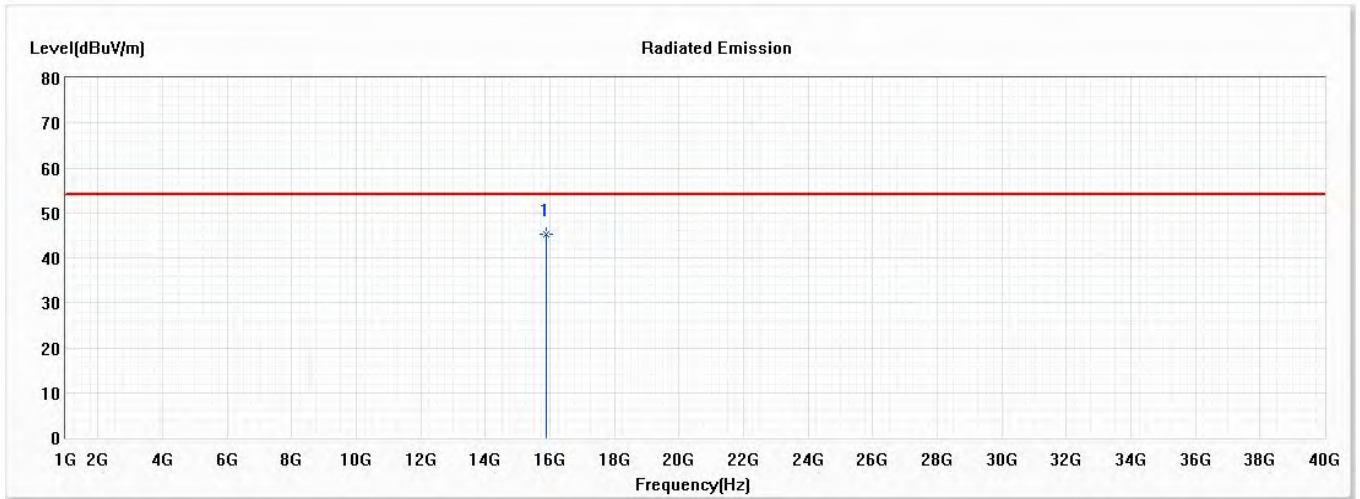


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15870.000	45.14	54.00	-8.86	42.61	2.53	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Vertical

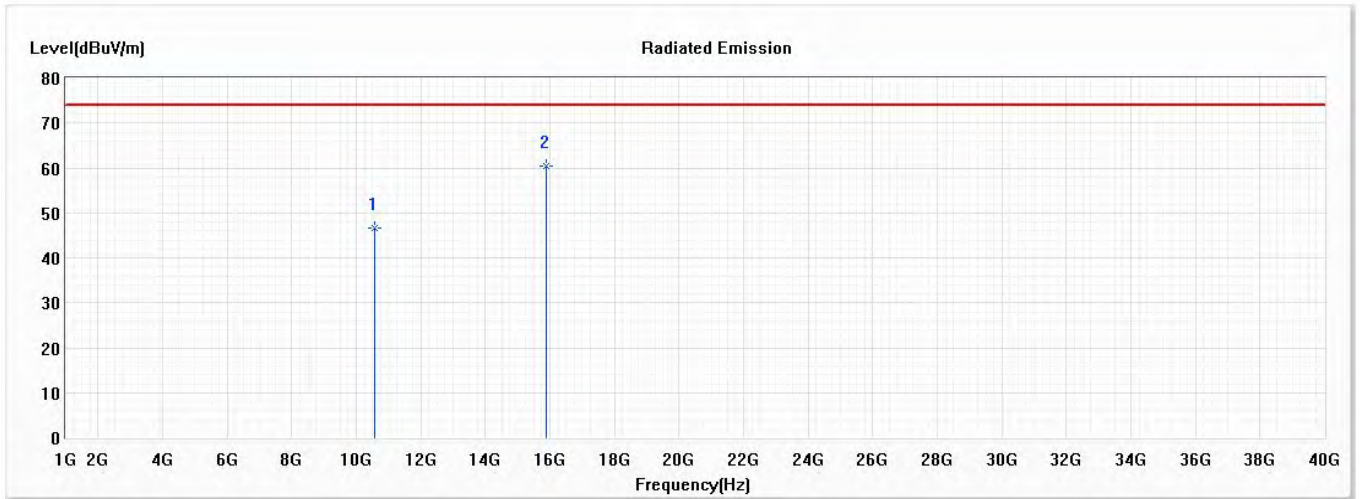


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10580.000	46.49	74.00	-27.51	47.17	-0.68	PK
* 2	15870.000	60.37	74.00	-13.63	57.84	2.53	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5290MHz)

Vertical

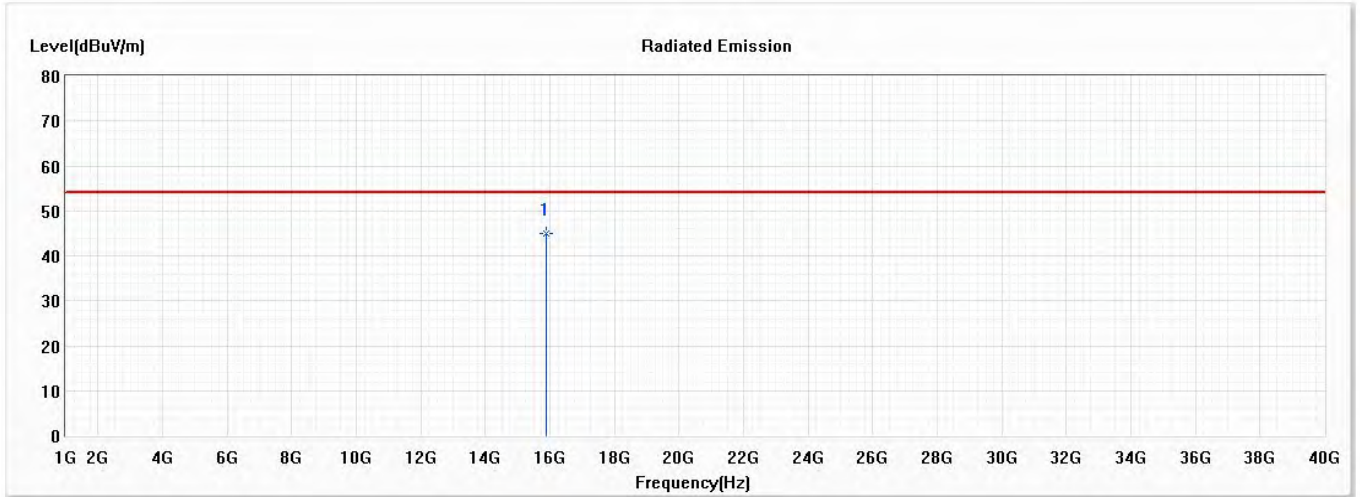


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15870.000	44.91	54.00	-9.09	42.38	2.53	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Horizontal

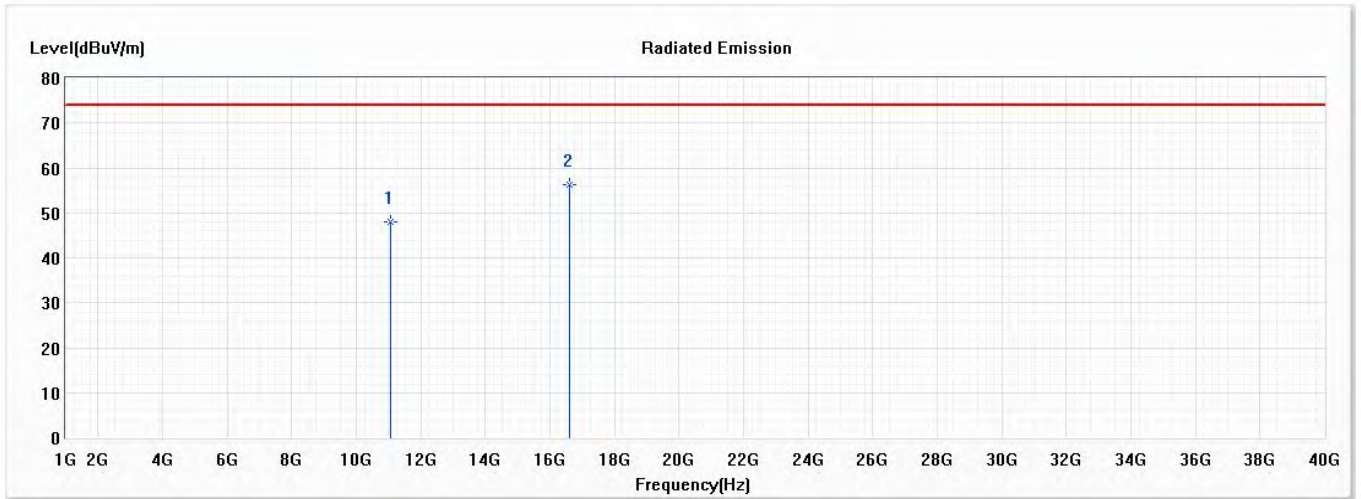


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11060.000	48.07	74.00	-25.93	47.78	0.29	PK
* 2	16590.000	56.23	74.00	-17.77	51.43	4.80	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Horizontal

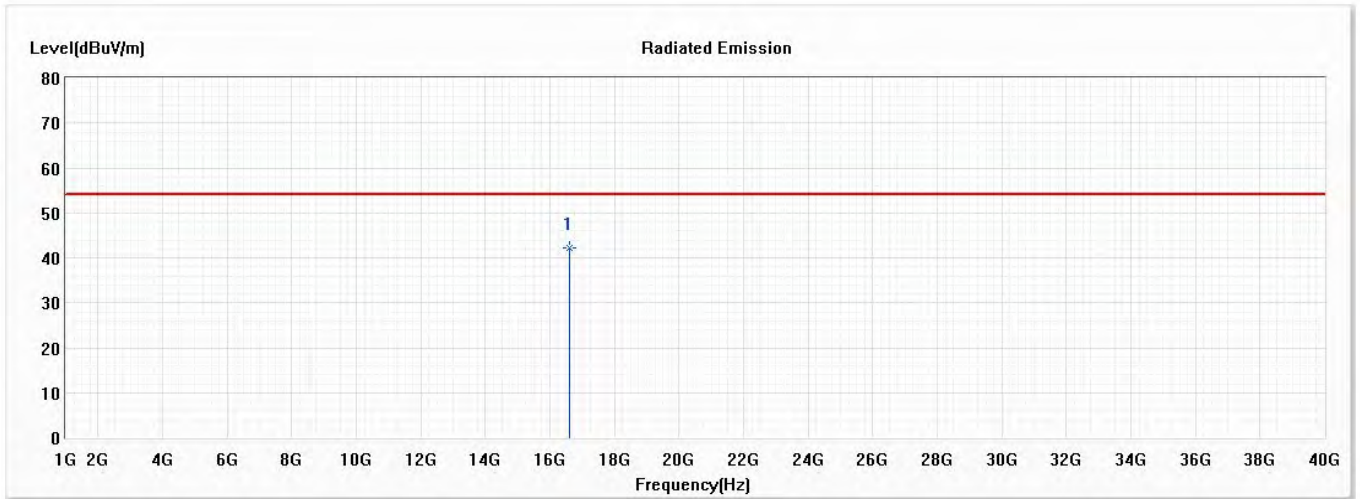


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16590.000	42.23	54.00	-11.77	37.43	4.80	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Vertical

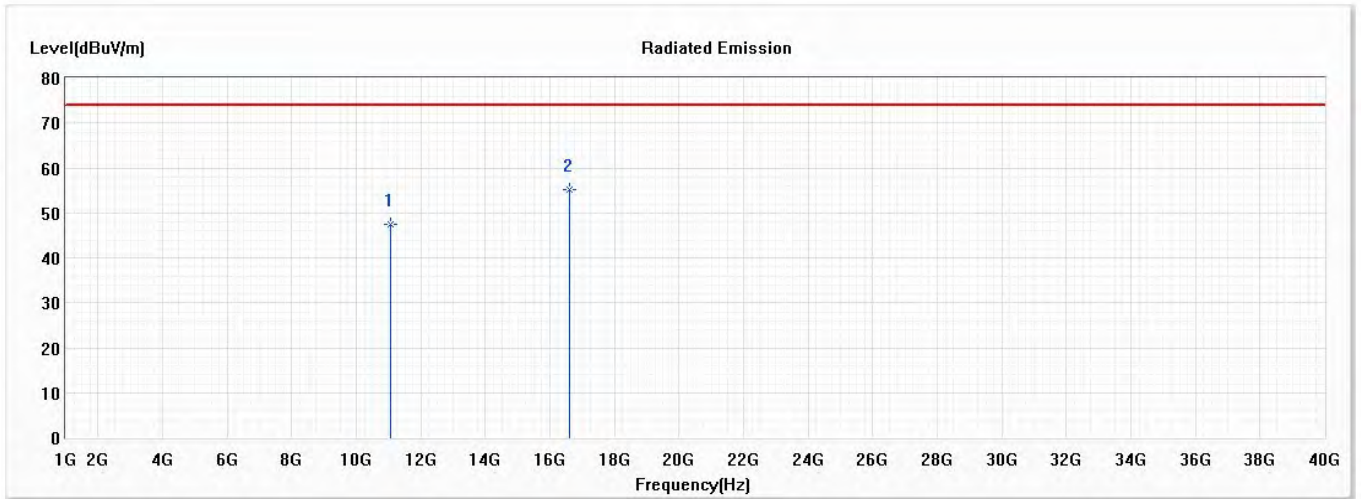


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11060.000	47.54	74.00	-26.46	47.25	0.29	PK
* 2	16590.000	55.27	74.00	-18.73	50.47	4.80	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5530MHz)

Vertical

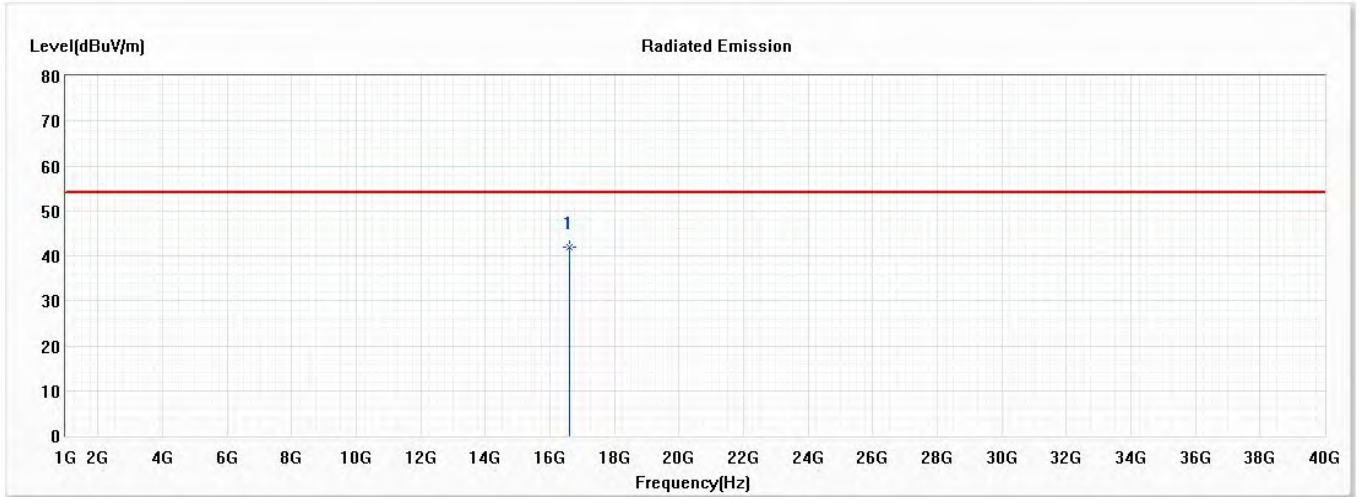


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16590.000	41.83	54.00	-12.17	37.03	4.80	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5610MHz)

Horizontal

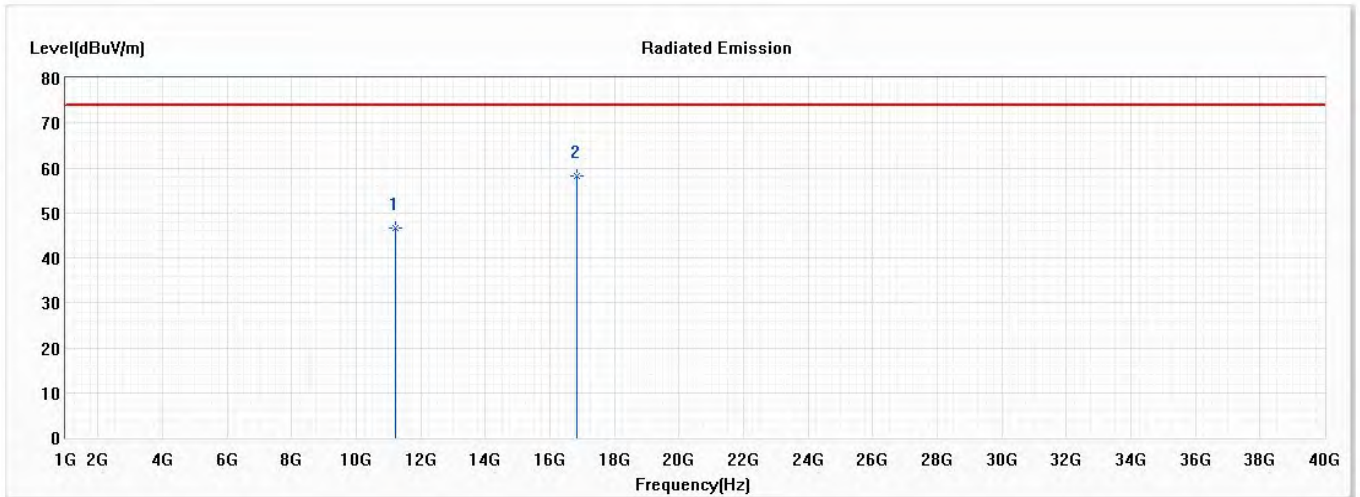


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11220.000	46.71	74.00	-27.29	46.18	0.53	PK
* 2	16830.000	58.18	74.00	-15.82	52.83	5.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5610MHz)

Horizontal

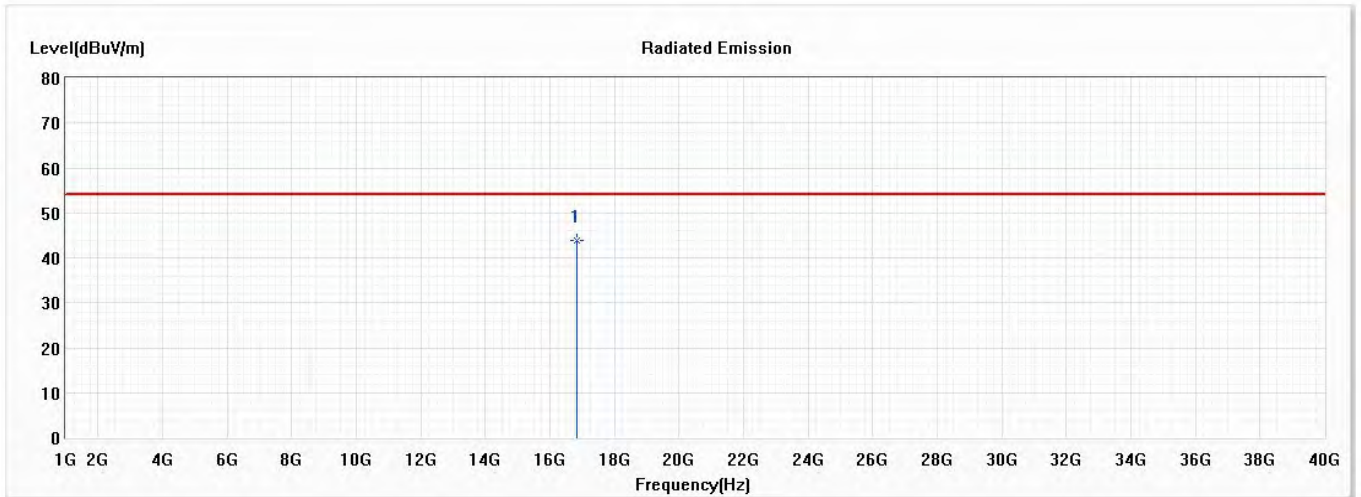


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16830.000	43.88	54.00	-10.12	38.53	5.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5610MHz)

Vertical

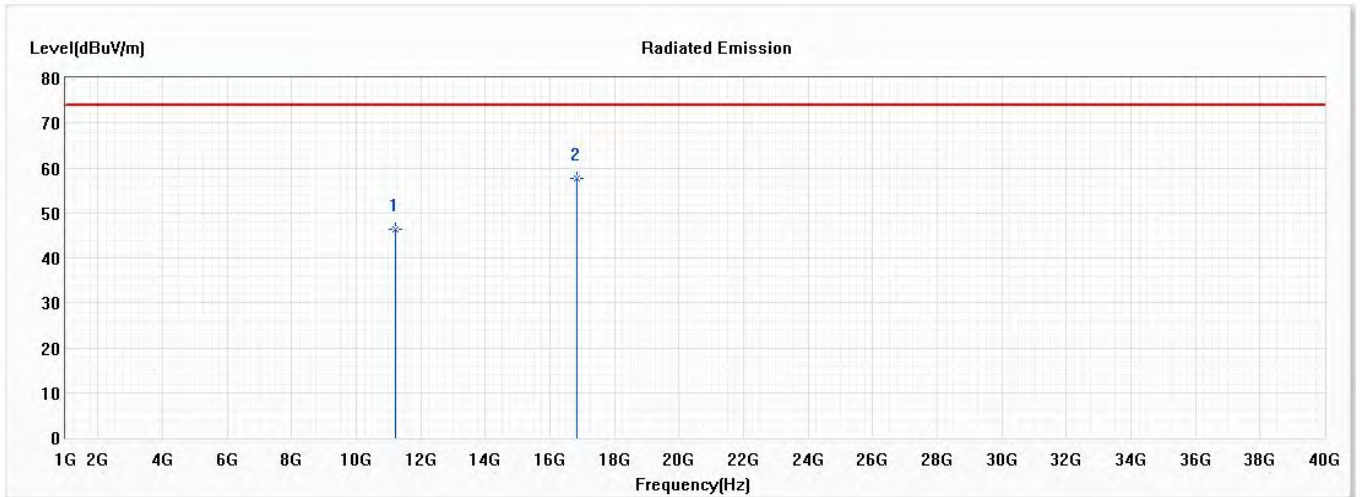


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11220.000	46.48	74.00	-27.52	45.95	0.53	PK
* 2	16830.000	57.64	74.00	-16.36	52.29	5.35	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5610MHz)

Vertical

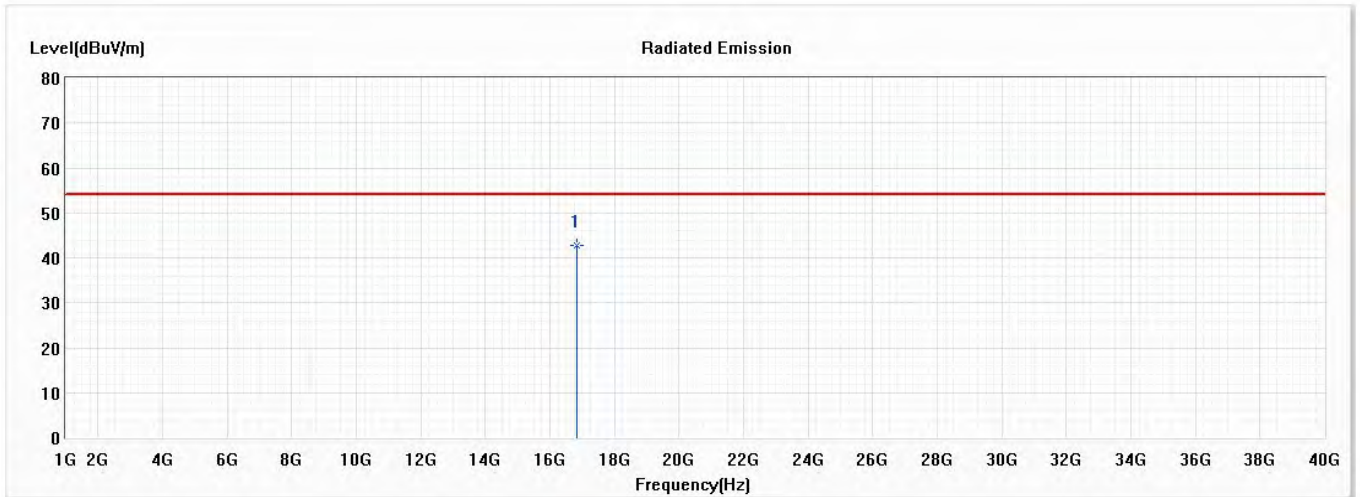


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16830.000	42.67	54.00	-11.33	37.32	5.35	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5690MHz)

Horizontal

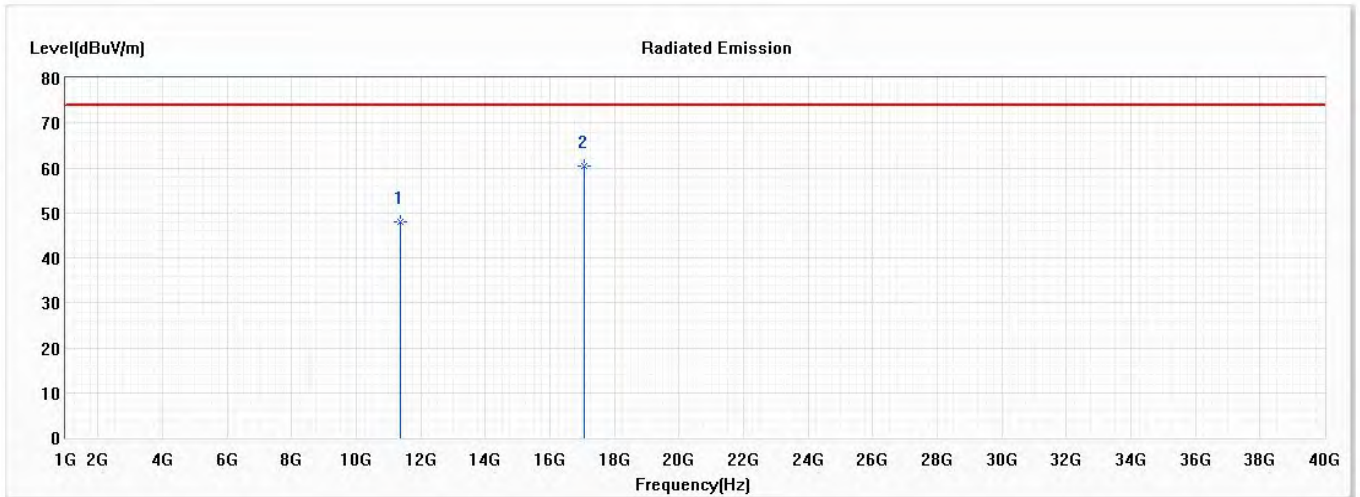


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11380.000	48.07	74.00	-25.93	47.11	0.96	PK
* 2	17070.000	60.44	74.00	-13.56	55.19	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5690MHz)

Horizontal

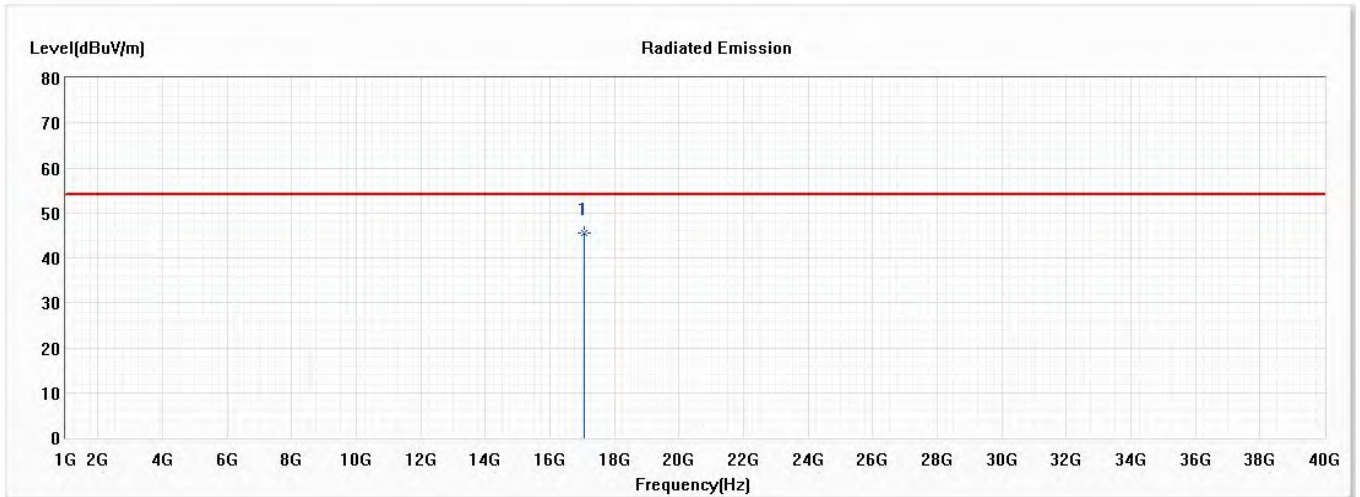


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17070.000	45.57	54.00	-8.43	40.32	5.25	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5690MHz)

Vertical

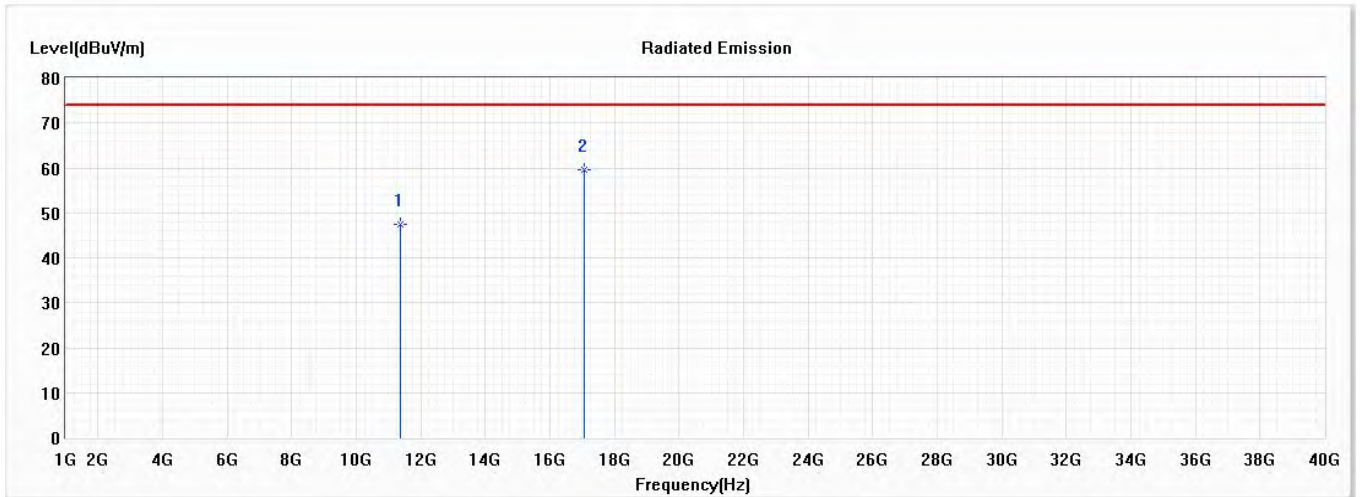


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11380.000	47.56	74.00	-26.44	46.60	0.96	PK
* 2	17070.000	59.68	74.00	-14.32	54.43	5.25	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5690MHz)

Vertical

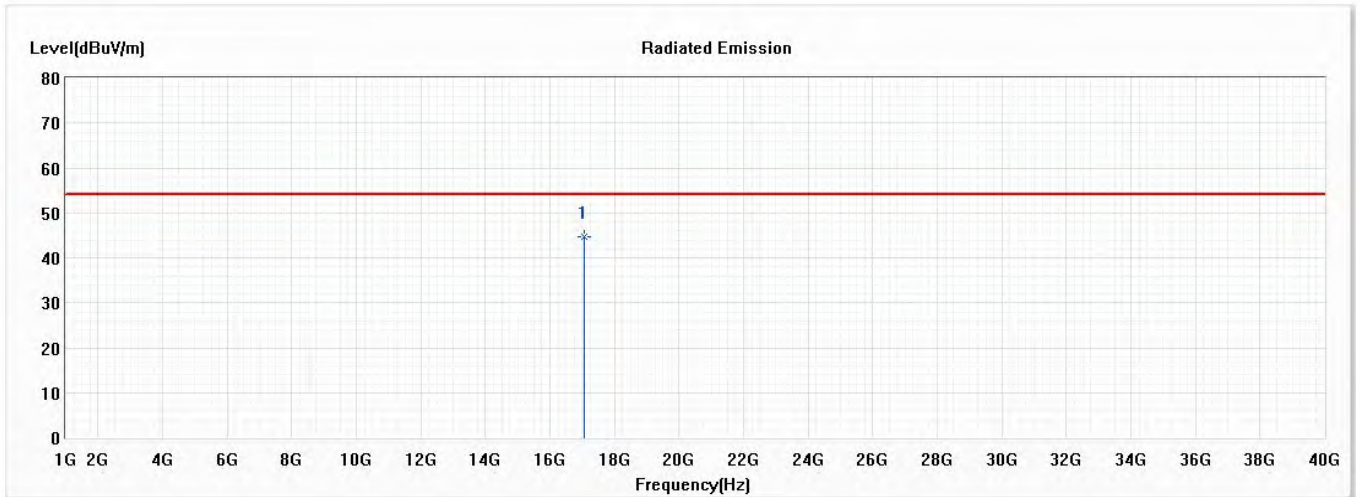


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	17070.000	44.76	54.00	-9.24	39.51	5.25	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5775MHz)

Horizontal

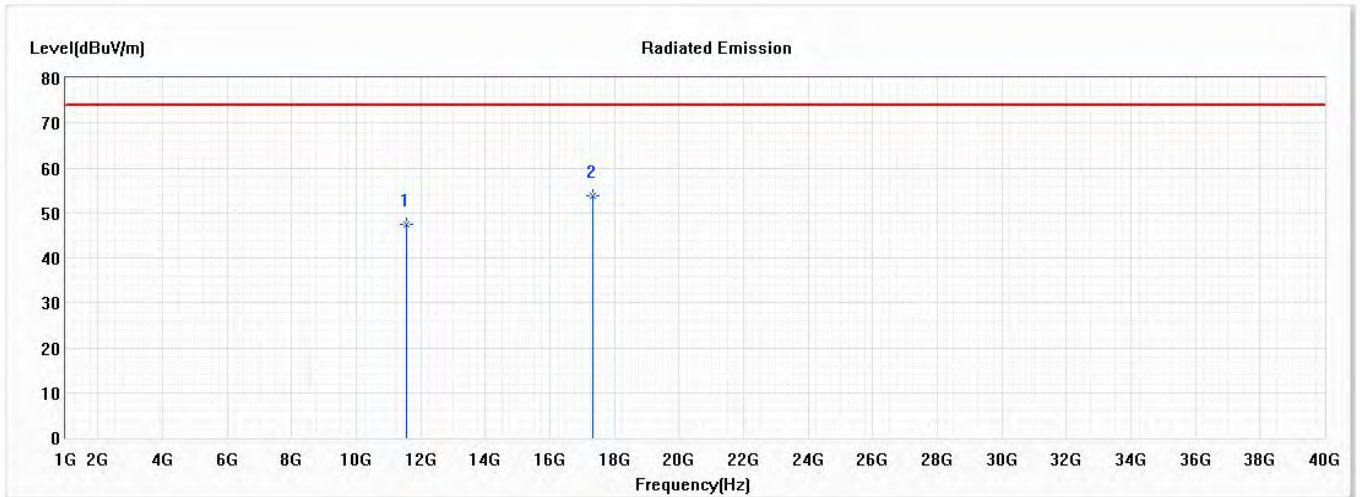


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11550.000	47.36	74.00	-26.64	46.02	1.34	PK
* 2	17325.000	53.70	74.00	-20.30	48.62	5.08	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW_65Mbps) (5775MHz)

Vertical

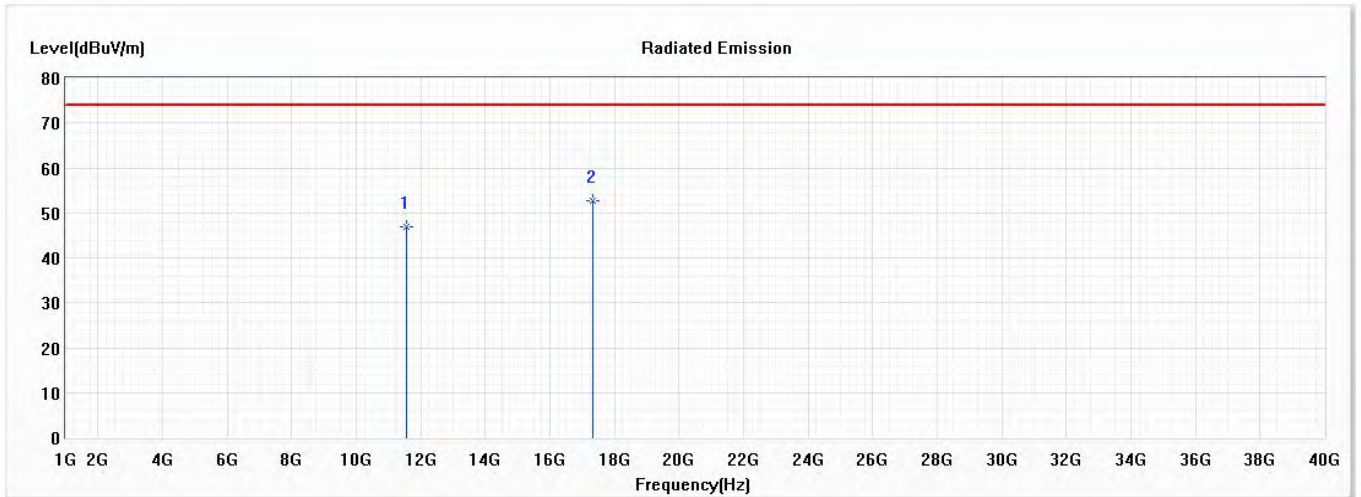


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11550.000	46.84	74.00	-27.16	45.50	1.34	PK
* 2	17325.000	52.72	74.00	-21.28	47.64	5.08	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Horizontal

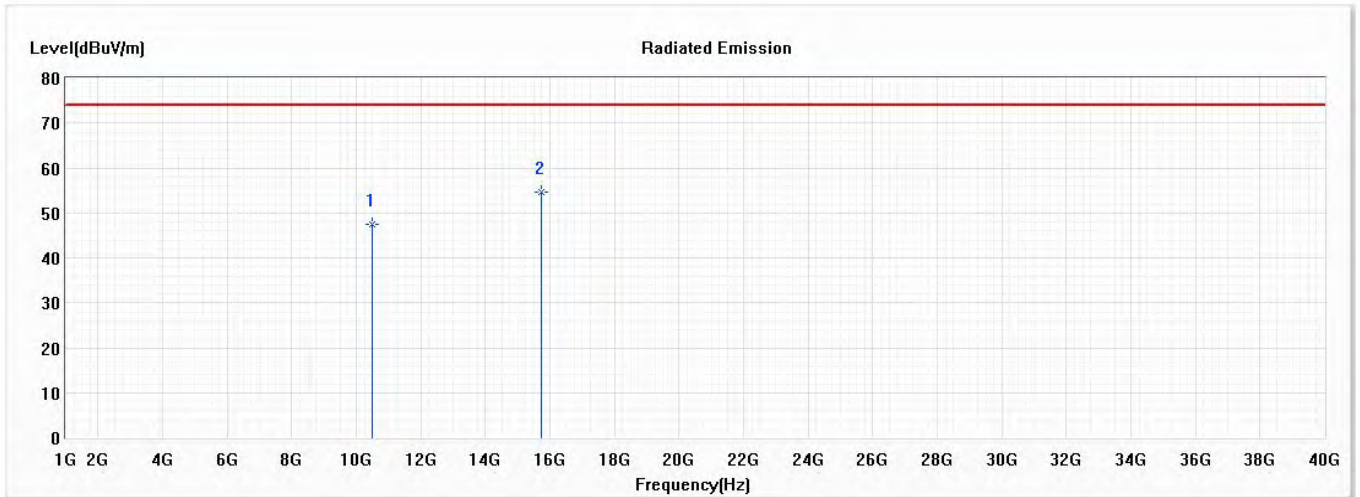


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10500.000	47.54	74.00	-26.46	48.36	-0.82	PK
* 2	15750.000	54.65	74.00	-19.35	52.19	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Horizontal

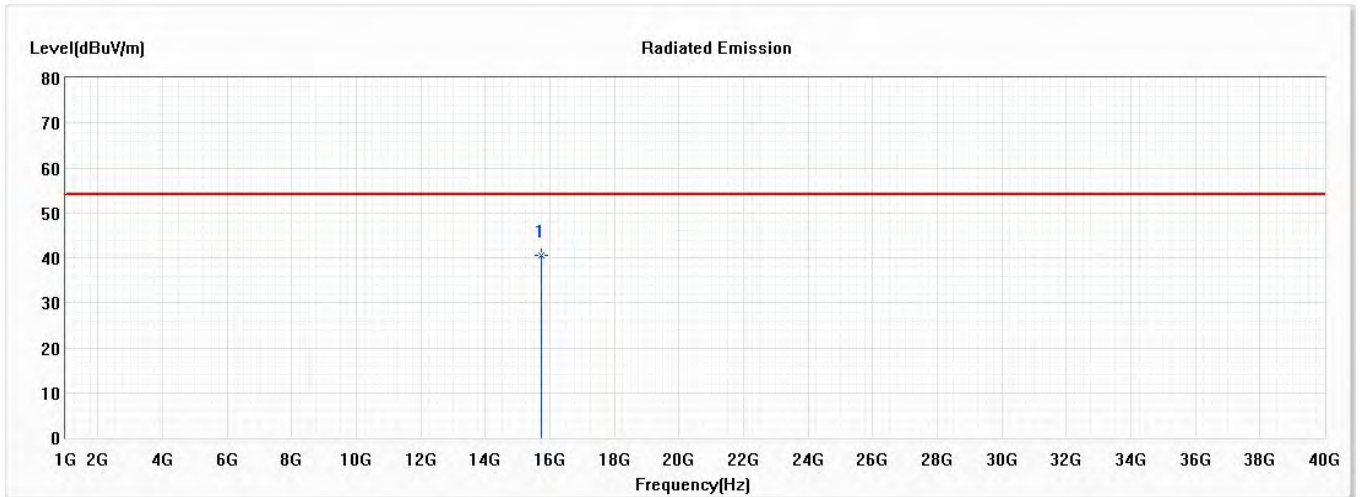


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	15750.000	40.45	54.00	-13.55	37.99	2.46	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Vertical

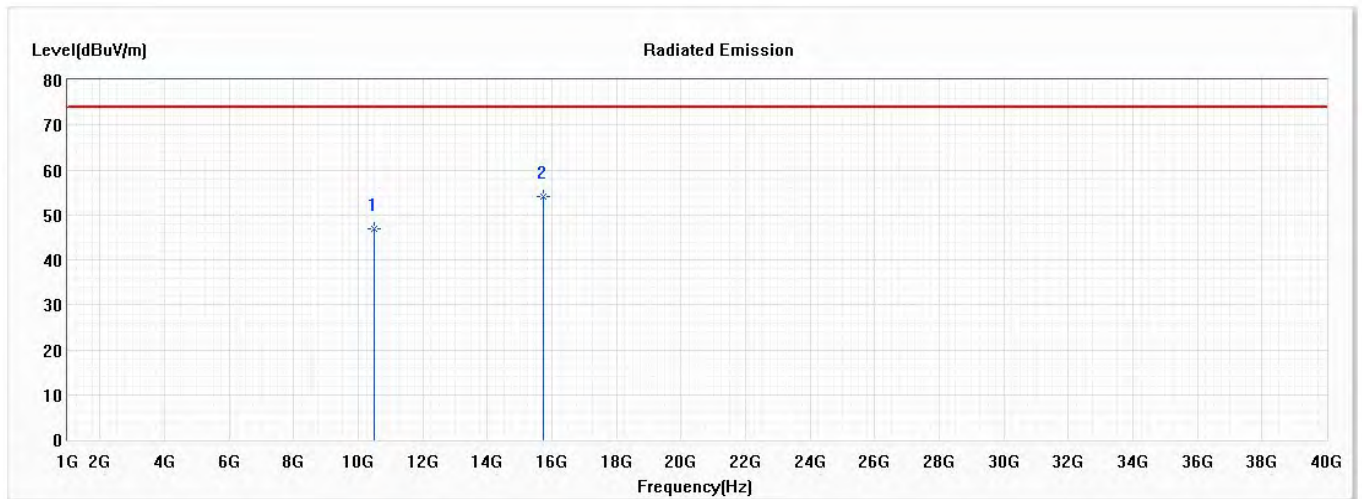


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	10500.000	46.85	74.00	-27.15	47.67	-0.82	PK
* 2	15750.000	53.95	74.00	-20.05	51.49	2.46	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Horizontal

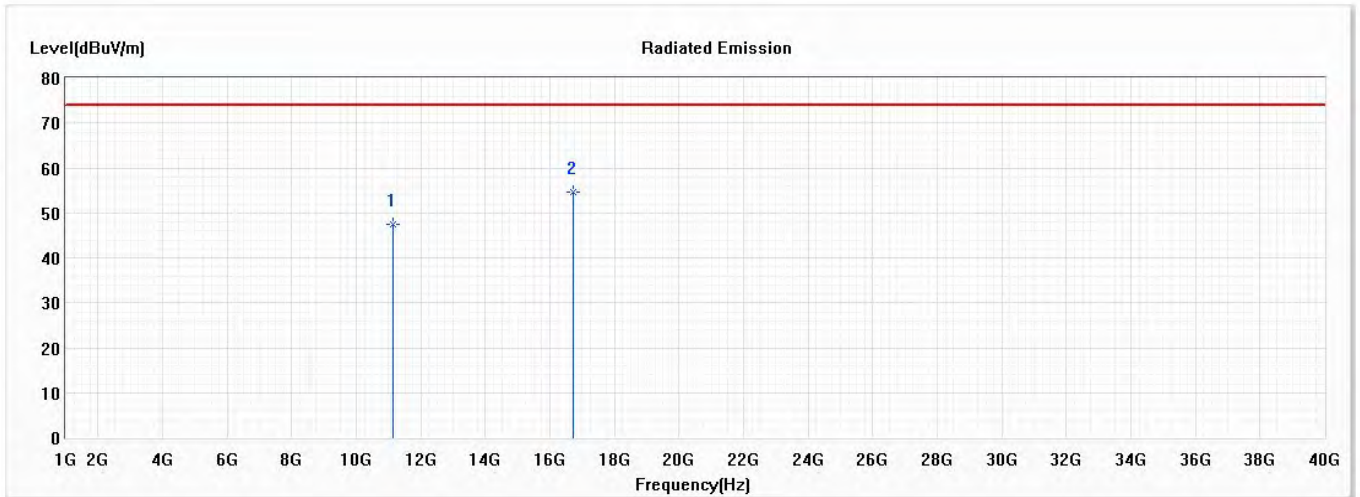


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11140.000	47.35	74.00	-26.65	46.89	0.46	PK
* 2	16710.000	54.74	74.00	-19.26	49.62	5.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Horizontal

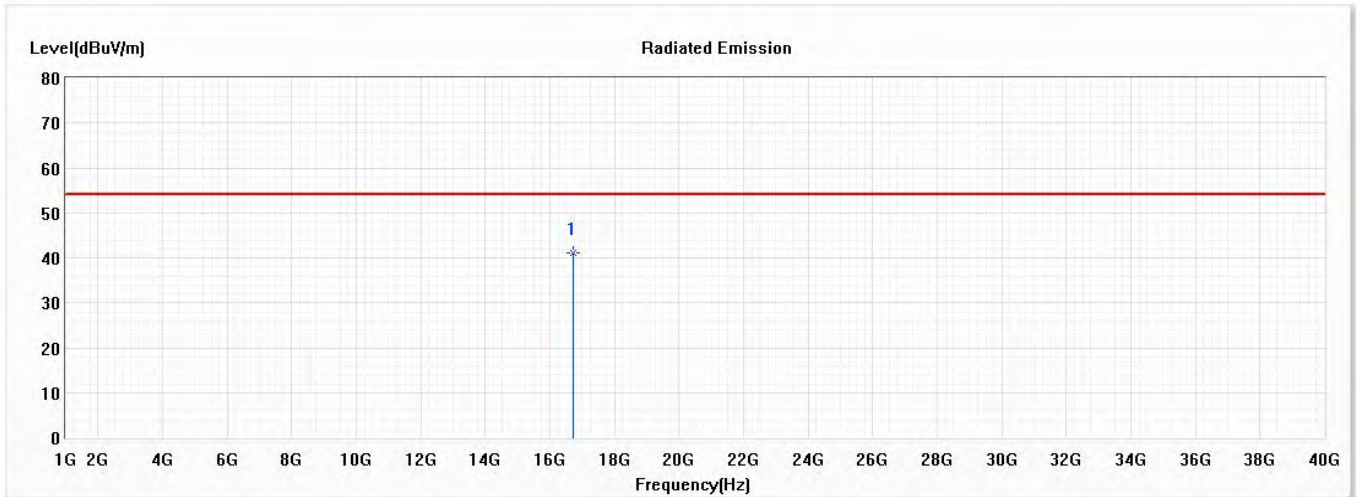


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16710.000	41.21	54.00	-12.79	36.09	5.12	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Vertical

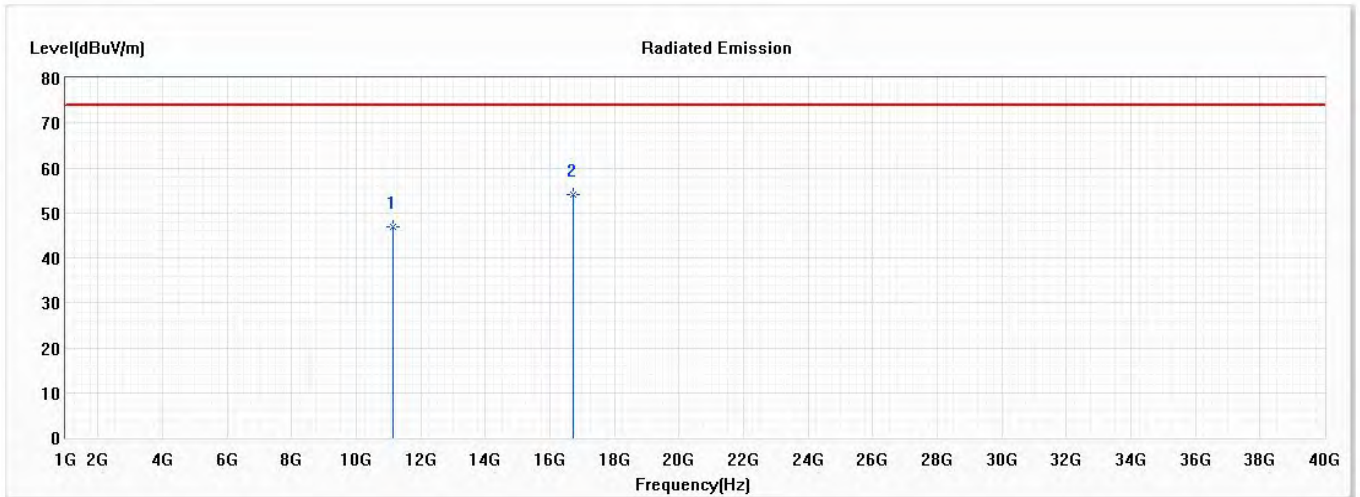


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	11140.000	46.81	74.00	-27.19	46.35	0.46	PK
* 2	16710.000	54.16	74.00	-19.84	49.04	5.12	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : Harmonic Radiated Emission Data
 Test Date : 2021/03/10
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5570MHz)

Vertical

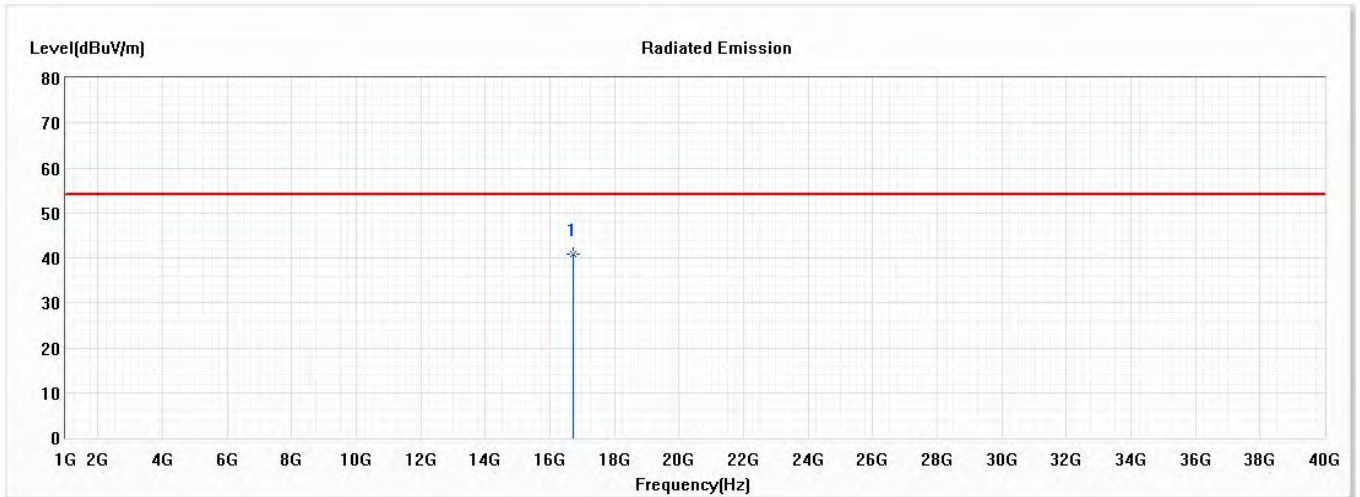


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	16710.000	40.76	54.00	-13.24	35.64	5.12	AV

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Horizontal

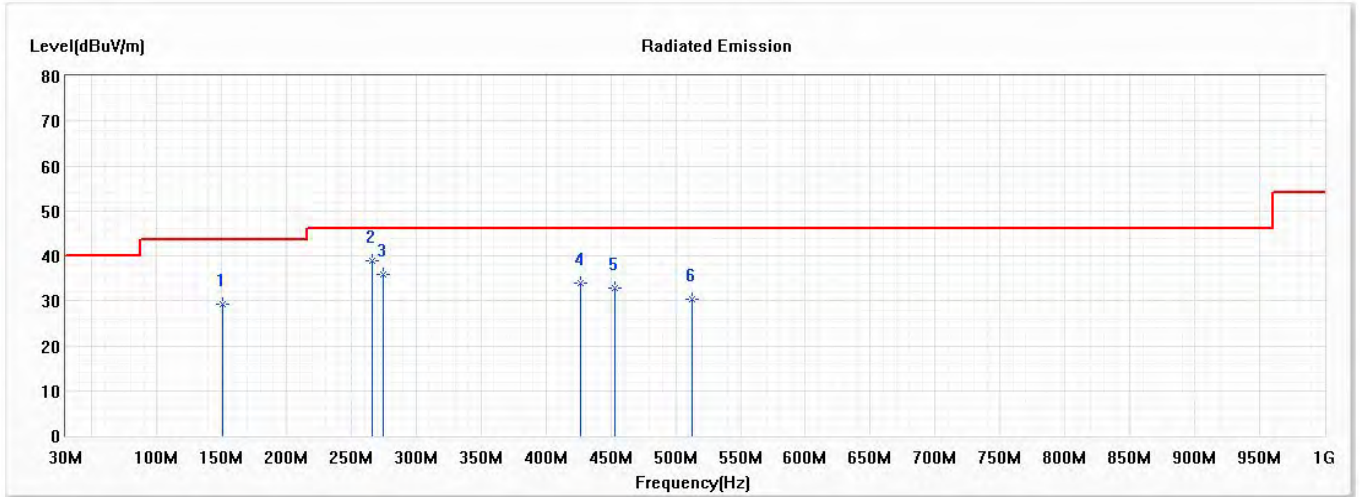


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	150.899	29.36	43.50	-14.14	48.33	-18.97	QP
* 2	266.174	38.83	46.00	-7.17	58.05	-19.22	QP
3	274.609	35.92	46.00	-10.08	54.60	-18.68	QP
4	426.435	33.97	46.00	-12.03	48.70	-14.73	QP
5	453.145	32.79	46.00	-13.21	46.92	-14.13	QP
6	512.188	30.42	46.00	-15.58	43.33	-12.91	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Vertical

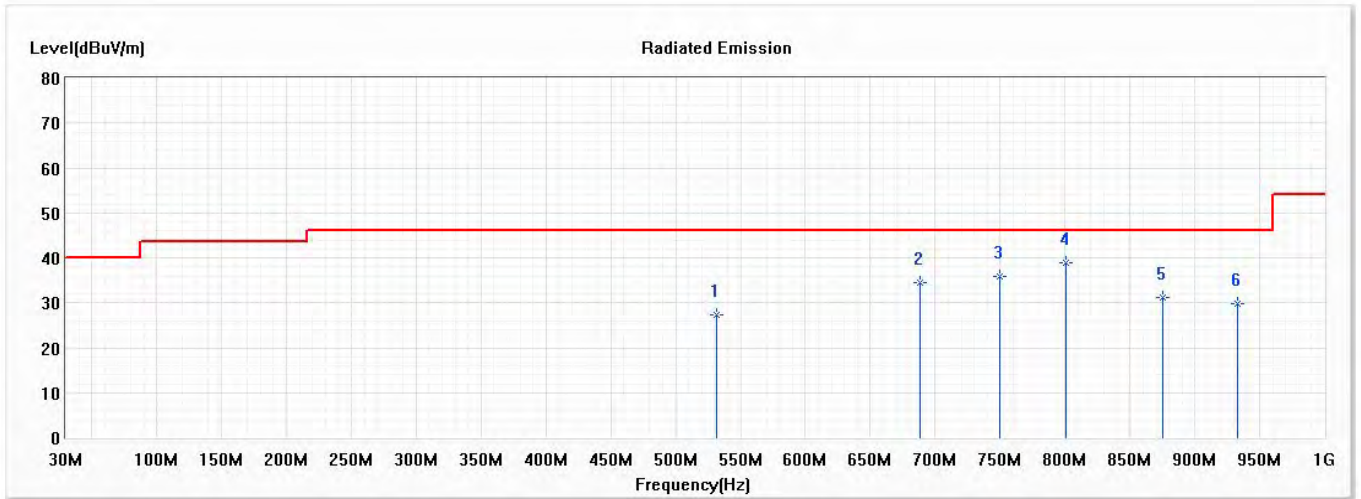


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	531.870	27.19	46.00	-18.81	39.73	-12.54	QP
2	687.913	34.60	46.00	-11.40	44.34	-9.74	QP
3	749.768	35.85	46.00	-10.15	39.57	-3.72	QP
* 4	800.377	38.86	46.00	-7.14	37.10	1.76	QP
5	874.884	31.04	46.00	-14.96	35.66	-4.62	QP
6	932.522	29.88	46.00	-16.12	36.14	-6.26	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Horizontal

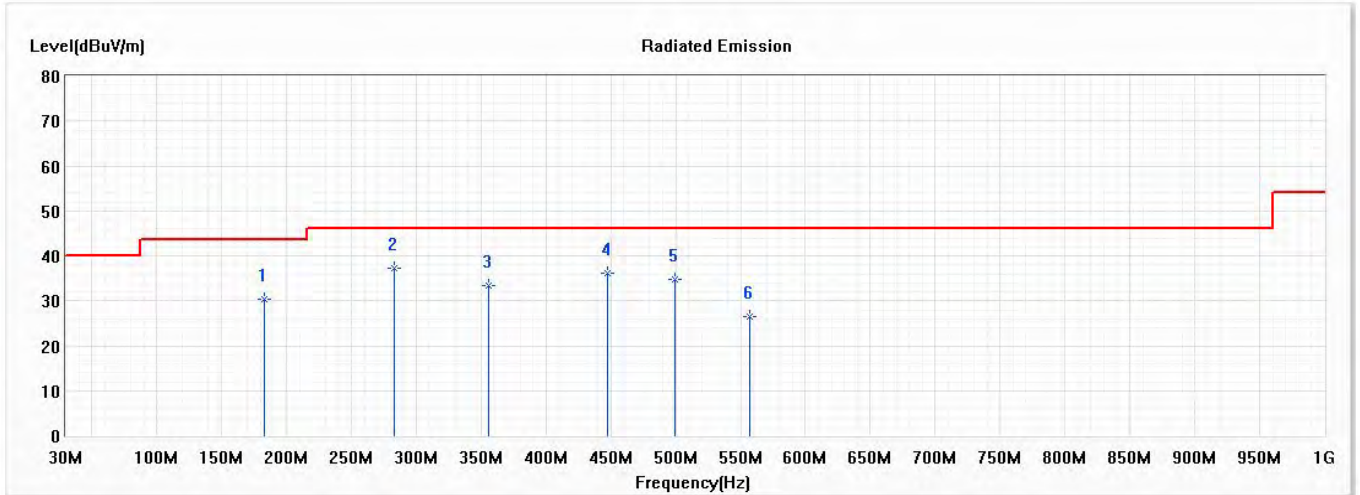


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	183.232	30.22	43.50	-13.28	50.90	-20.68	QP
* 2	283.043	37.19	46.00	-8.81	55.66	-18.47	QP
3	356.145	33.48	46.00	-12.52	50.14	-16.66	QP
4	447.522	36.27	46.00	-9.73	50.52	-14.25	QP
5	499.536	34.79	46.00	-11.21	48.14	-13.35	QP
6	557.174	26.53	46.00	-19.47	38.58	-12.05	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW_65Mbps) (5250MHz)

Vertical

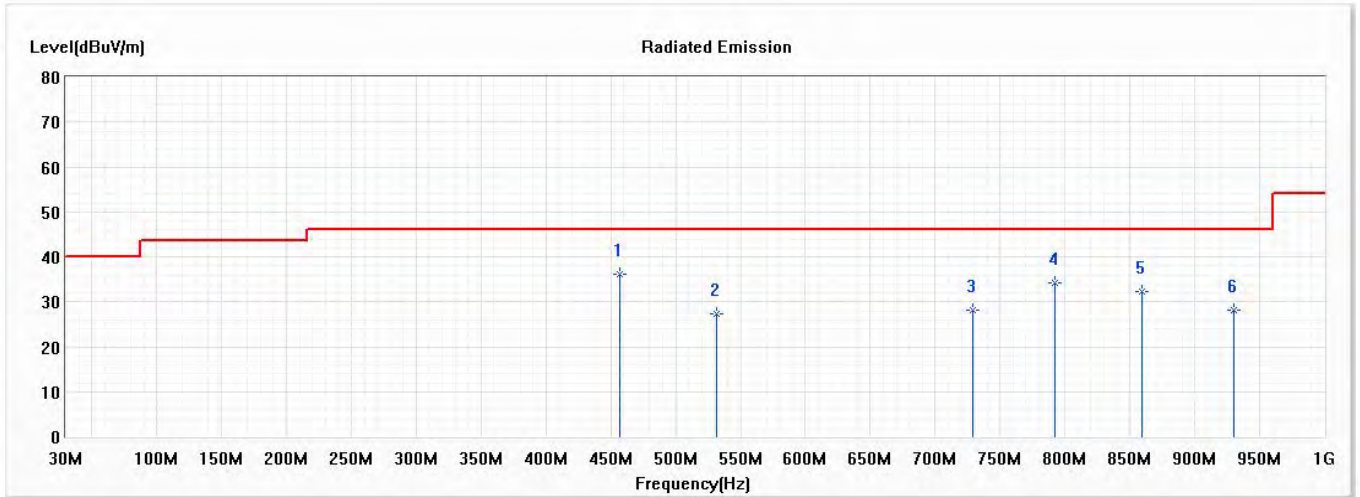


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	457.362	36.25	46.00	-9.75	50.27	-14.02	QP
2	531.870	27.41	46.00	-18.59	39.95	-12.54	QP
3	728.681	28.03	46.00	-17.97	34.31	-6.28	QP
4	791.942	34.09	46.00	-11.91	33.17	0.92	QP
5	859.420	32.27	46.00	-13.73	35.71	-3.44	QP
6	929.710	28.27	46.00	-17.73	34.59	-6.32	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Horizontal

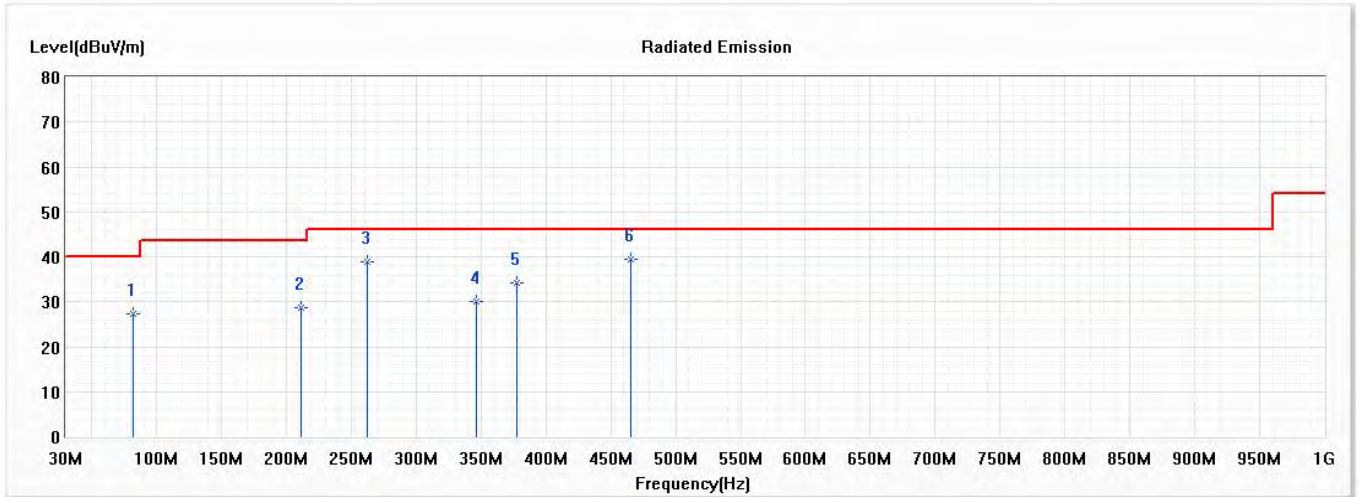


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	82.014	27.18	40.00	-12.82	50.82	-23.64	QP
2	211.348	28.65	43.50	-14.85	49.83	-21.18	QP
3	261.957	39.03	46.00	-6.97	58.46	-19.43	QP
4	346.304	30.15	46.00	-15.85	46.96	-16.81	QP
5	377.232	34.20	46.00	-11.80	50.16	-15.96	QP
* 6	465.797	39.51	46.00	-6.49	53.34	-13.83	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wireless-AC 9260
 Test Item : General Radiated Emission
 Test Date : 2021/03/09
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW_130Mbps) (5250MHz)

Vertical

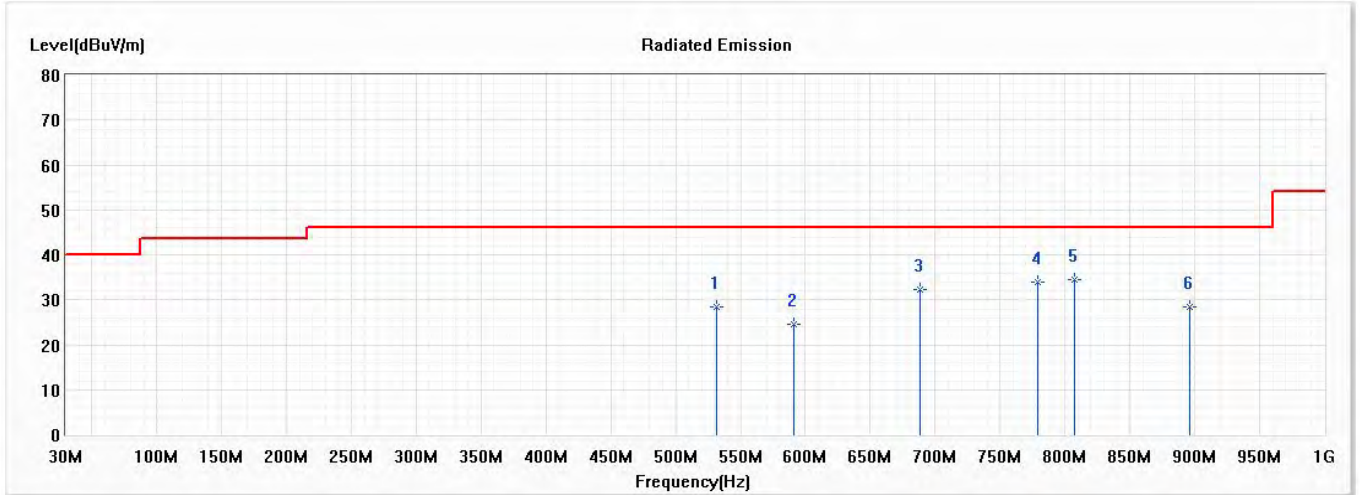


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	531.870	28.42	46.00	-17.58	40.96	-12.54	QP
2	590.913	24.44	46.00	-21.56	35.67	-11.23	QP
3	687.913	32.29	46.00	-13.71	42.03	-9.74	QP
4	779.290	33.88	46.00	-12.12	34.29	-0.41	QP
* 5	807.406	34.60	46.00	-11.40	33.42	1.18	QP
6	895.971	28.30	46.00	-17.70	34.64	-6.34	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

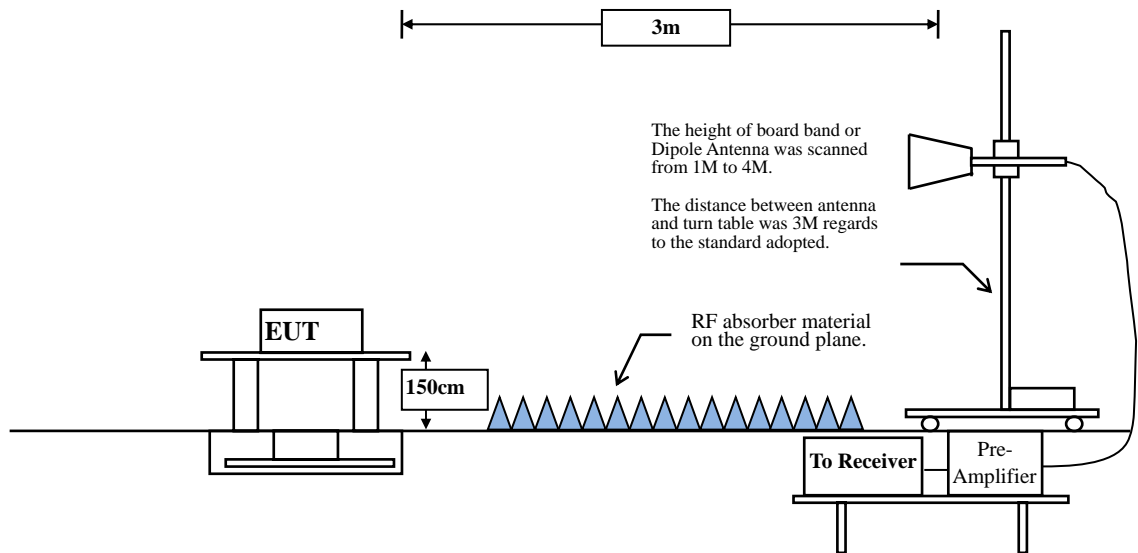

4.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dB μ V/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

SISO A

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	97.52	2.0522	487	500
802.11n20	100.00	1.0000	1000	10
802.11n40	98.79	17.8232	56	10
802.11ac80	98.92	11.0000	91	10
802.11ac160	98.92	5.5100	181	10

Note: Duty Cycle Refer to Section 5

SISO B

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	97.92	2.0522	487	500
802.11n20	100.00	1.0000	1000	10
802.11n40	98.40	17.8261	56	10
802.11ac80	98.92	11.0100	91	10
802.11ac160	98.92	5.5100	181	10

Note: Duty Cycle Refer to Section 5

MIMO


5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11n20	98.84	18.5507	54	10
802.11n40	98.40	17.8261	56	10
802.11ac80	98.57	5.5220	181	10
802.11ac160	98.24	2.7860	359	10

Note: Duty Cycle Refer to Section 5

4.4. Test Result of Band Edge

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

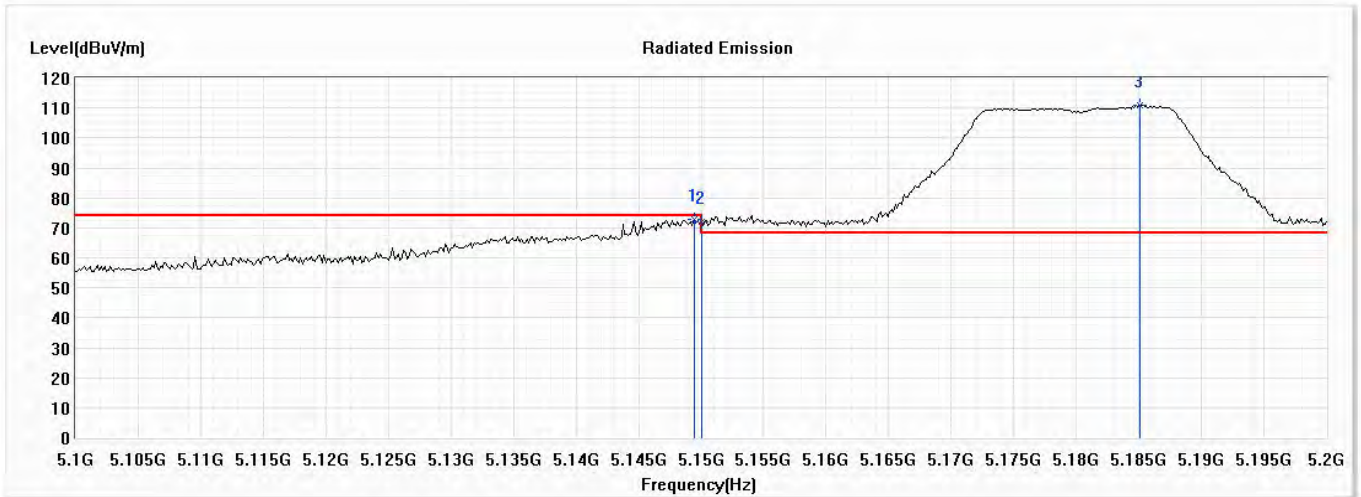


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.420	72.95	74.00	-1.05	54.51	18.44	PK
2	5150.000	72.08	74.00	-1.92	53.64	18.44	PK
!3	5185.072	111.08	--	--	92.57	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

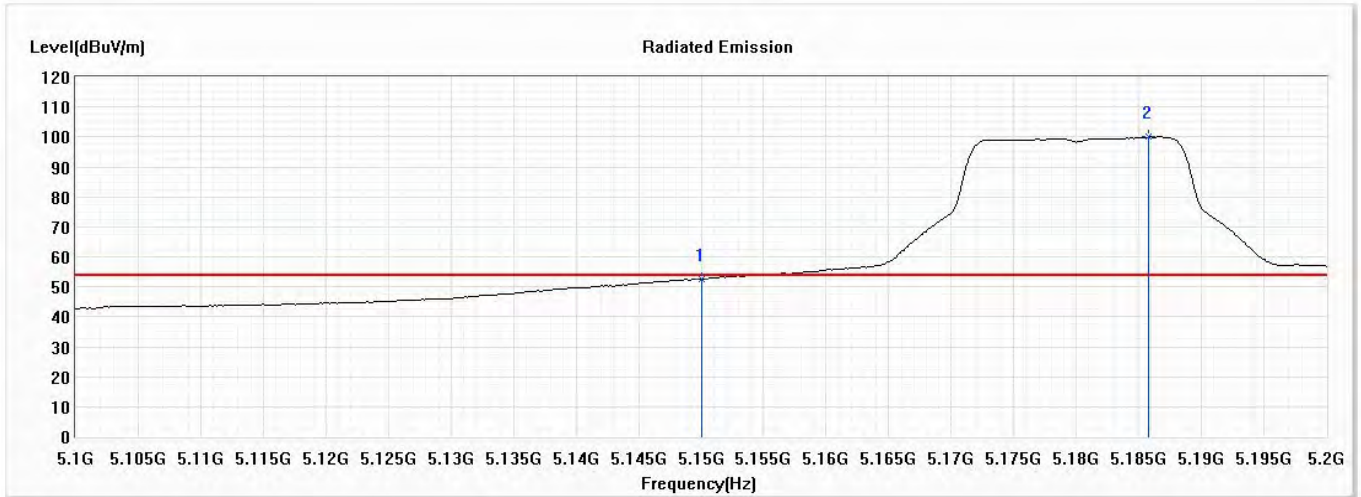


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.61	54.00	-1.39	34.17	18.44	AV
! 2	5185.797	99.99	--	--	81.48	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

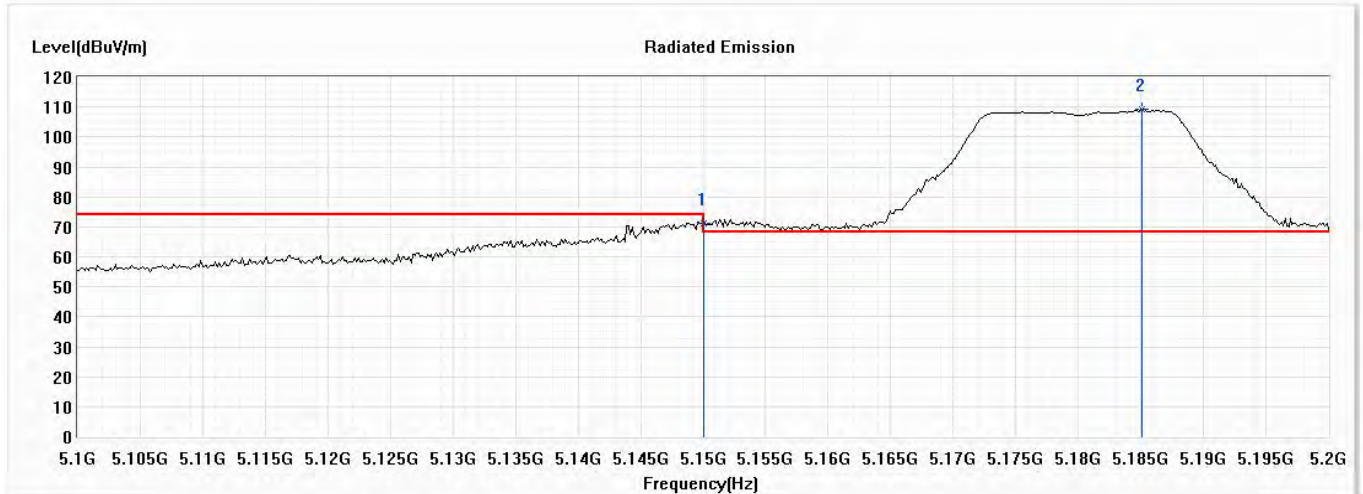


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	71.05	74.00	-2.95	52.61	18.44	PK
! 2	5185.072	109.31	--	--	90.80	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

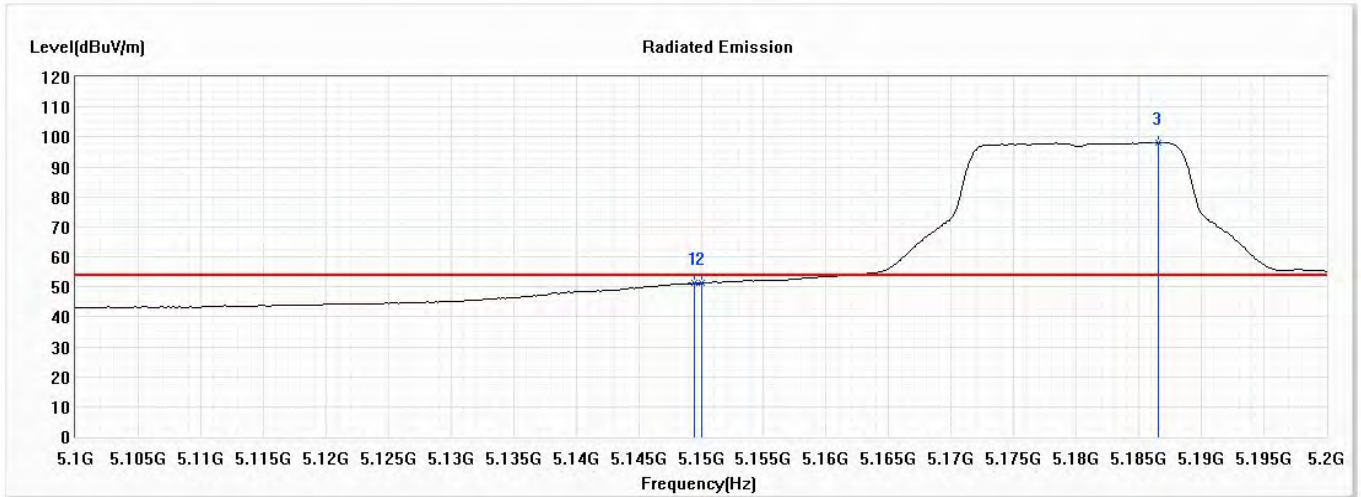


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.420	51.31	54.00	-2.69	32.87	18.44	AV
2	5150.000	51.18	54.00	-2.82	32.74	18.44	AV
! 3	5186.522	98.14	--	--	79.63	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

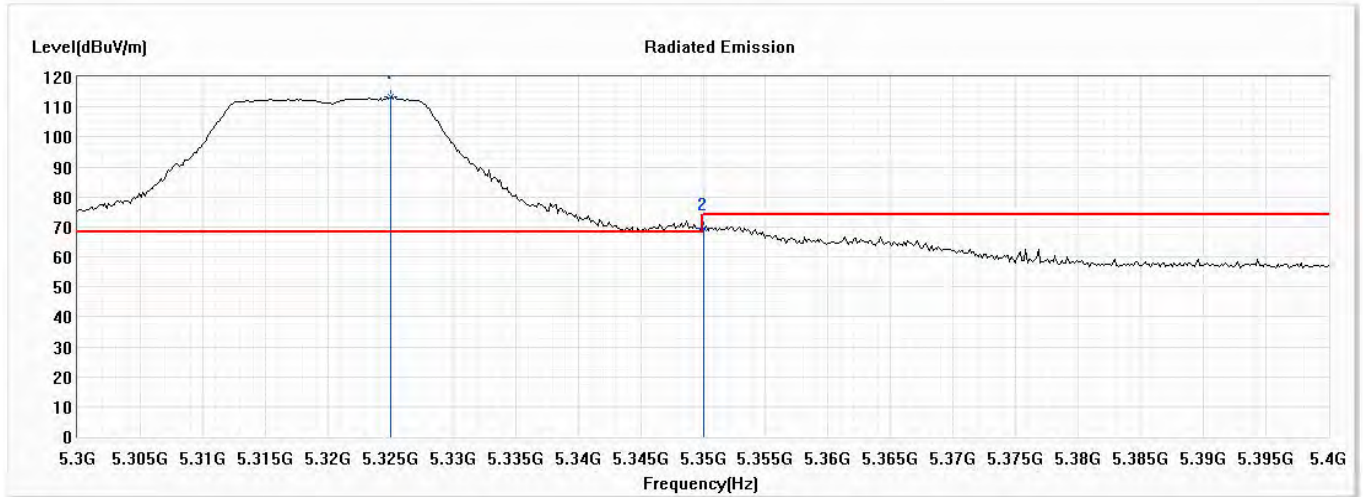


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5325.072	113.40	--	--	94.47	18.93	PK
2	5350.000	69.45	74.00	-4.55	50.49	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

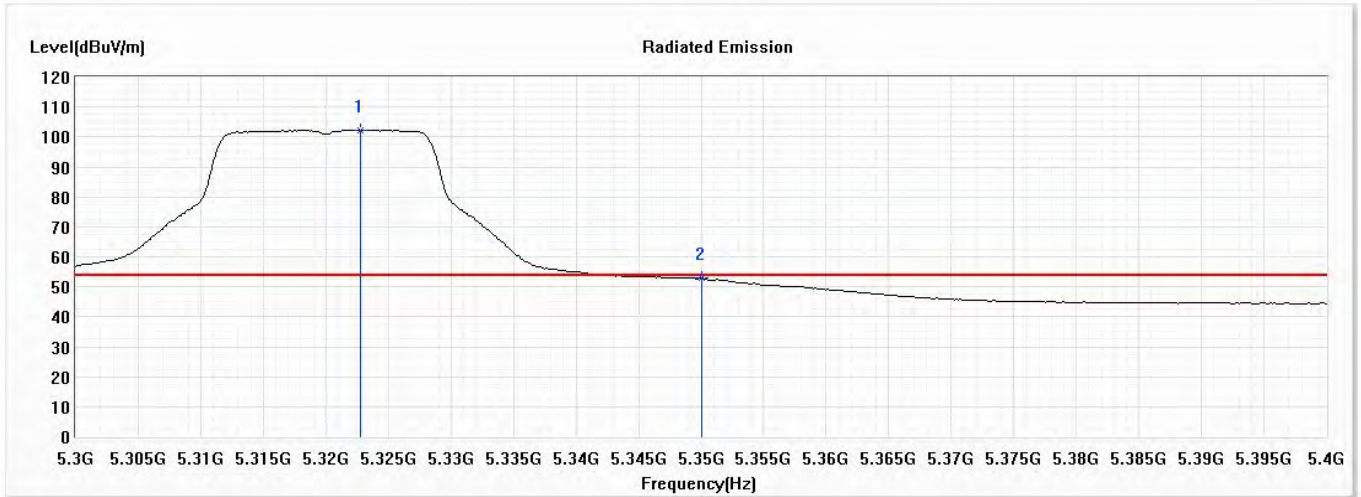


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5322.754	102.20	--	--	83.27	18.93	AV
2	5350.000	52.78	54.00	-1.22	33.82	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

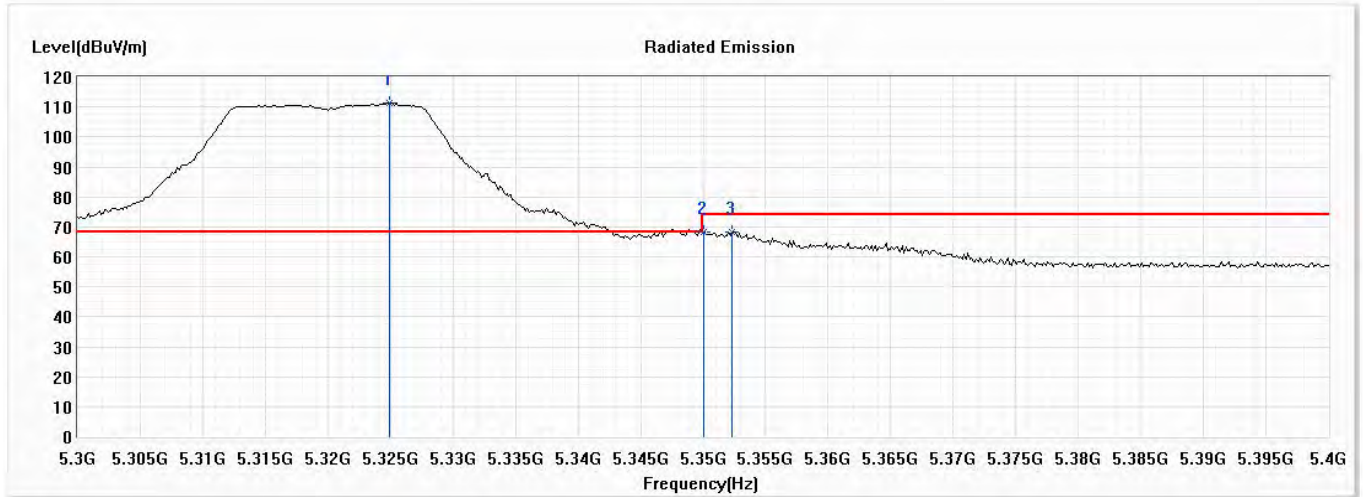


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5324.928	111.31	--	--	92.38	18.93	PK
2	5350.000	68.41	74.00	-5.59	49.45	18.96	PK
3	5352.319	68.47	74.00	-5.53	49.51	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

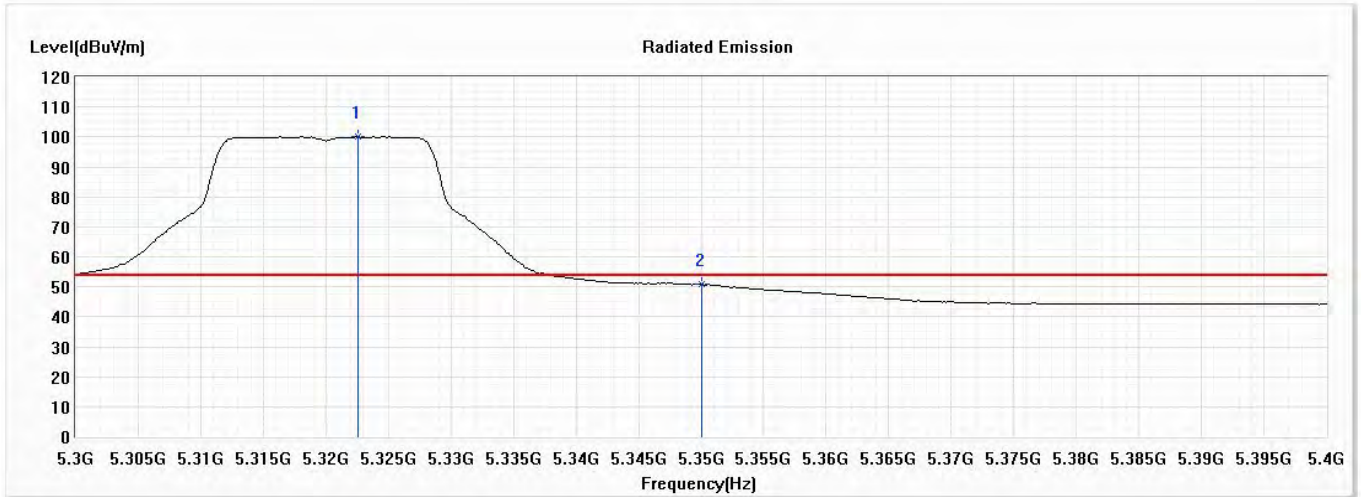


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5322.609	100.02	--	--	81.09	18.93	AV
2	5350.000	50.73	54.00	-3.27	31.77	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

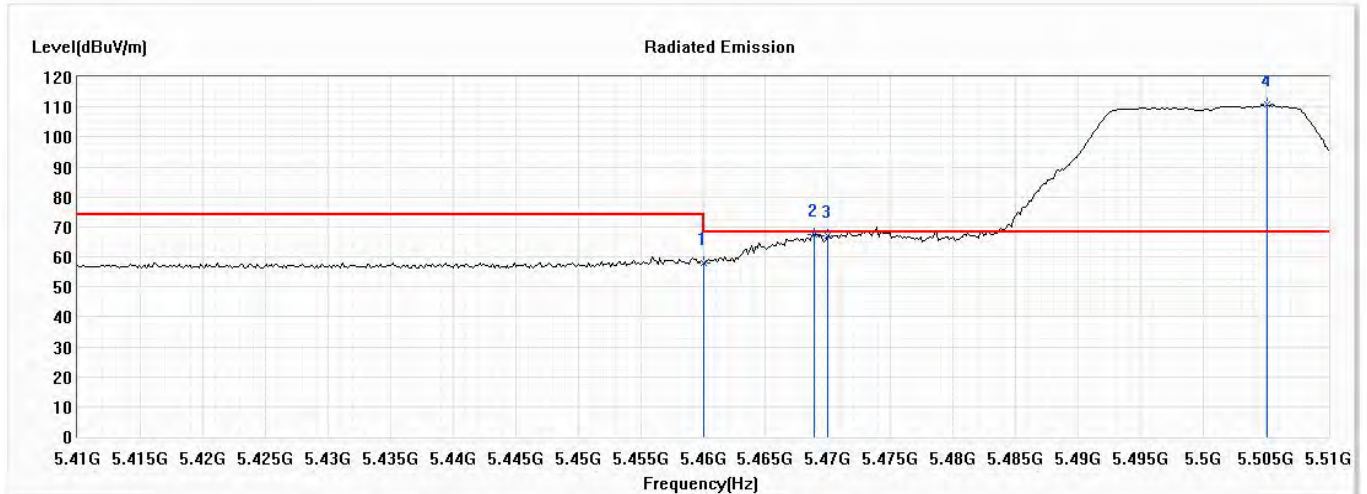


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.10	74.00	-15.90	39.17	18.93	PK
2	5468.841	67.58	68.22	-0.64	48.68	18.90	PK
3	5470.000	67.08	68.22	-1.14	48.18	18.90	PK
! 4	5505.072	110.73	--	--	91.90	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

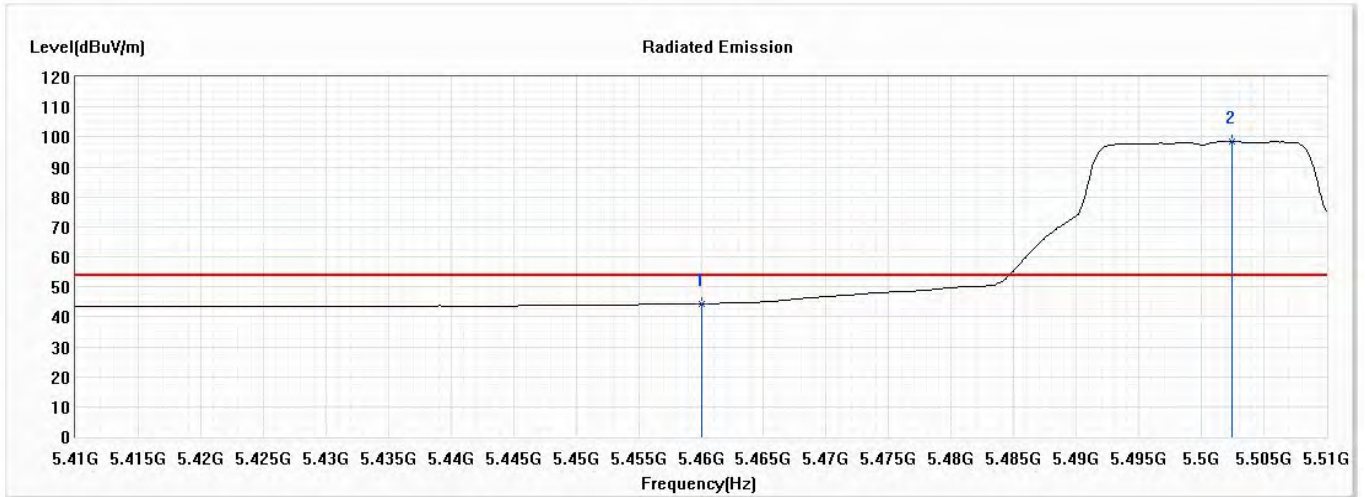


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.34	54.00	-9.66	25.41	18.93	AV
! 2	5502.464	98.40	--	--	79.57	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

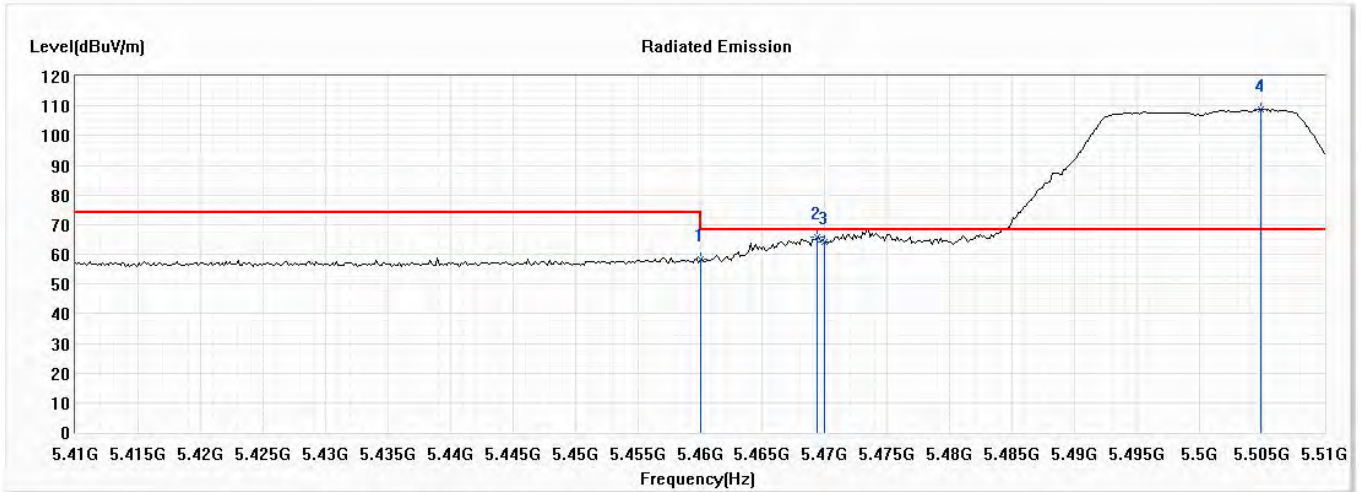


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.43	74.00	-15.57	39.50	18.93	PK
2	5469.420	65.80	68.22	-2.42	46.90	18.90	PK
3	5470.000	64.30	68.22	-3.92	45.40	18.90	PK
! 4	5504.928	109.02	--	--	90.19	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

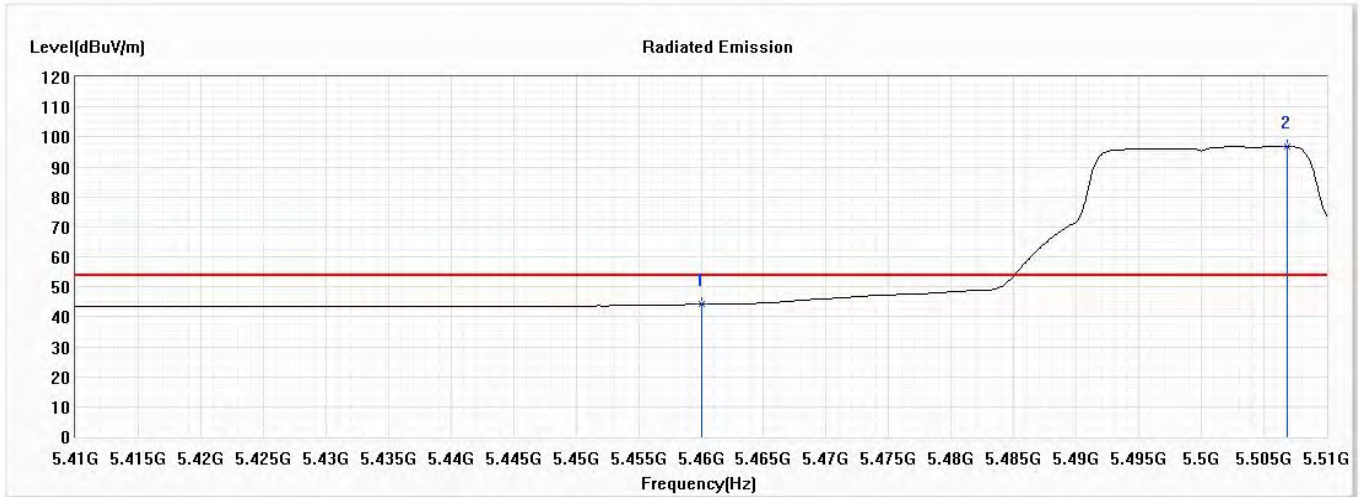


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.18	54.00	-9.82	25.25	18.93	AV
!2	5506.812	96.72	--	--	77.89	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Horizontal

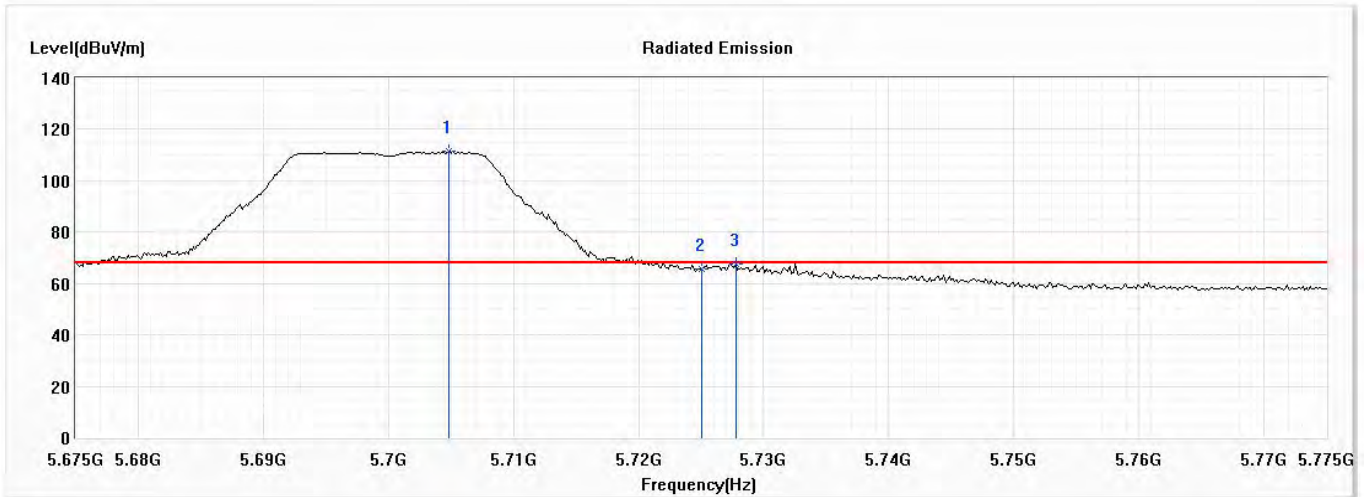

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5704.855	111.64	--	--	92.50	19.14	PK
2	5725.000	65.56	68.22	-2.66	46.38	19.18	PK
3	5727.754	67.50	68.22	-0.72	48.31	19.19	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Vertical

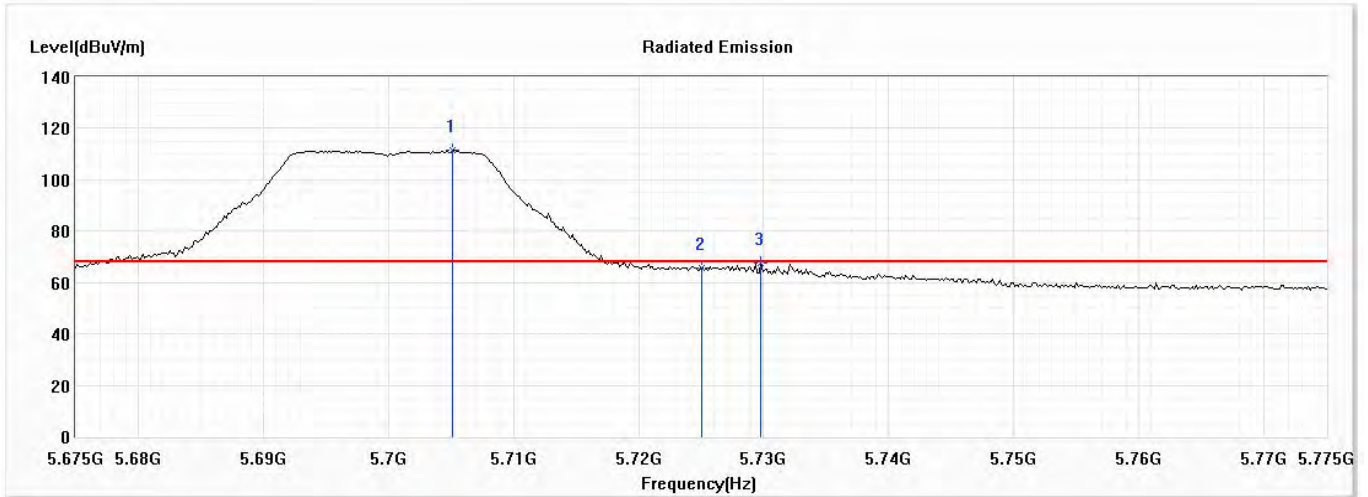

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5705.145	111.40	--	--	92.26	19.14	PK
2	5725.000	65.47	68.22	-2.75	46.29	19.18	PK
3	5729.783	67.46	68.22	-0.76	48.26	19.20	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

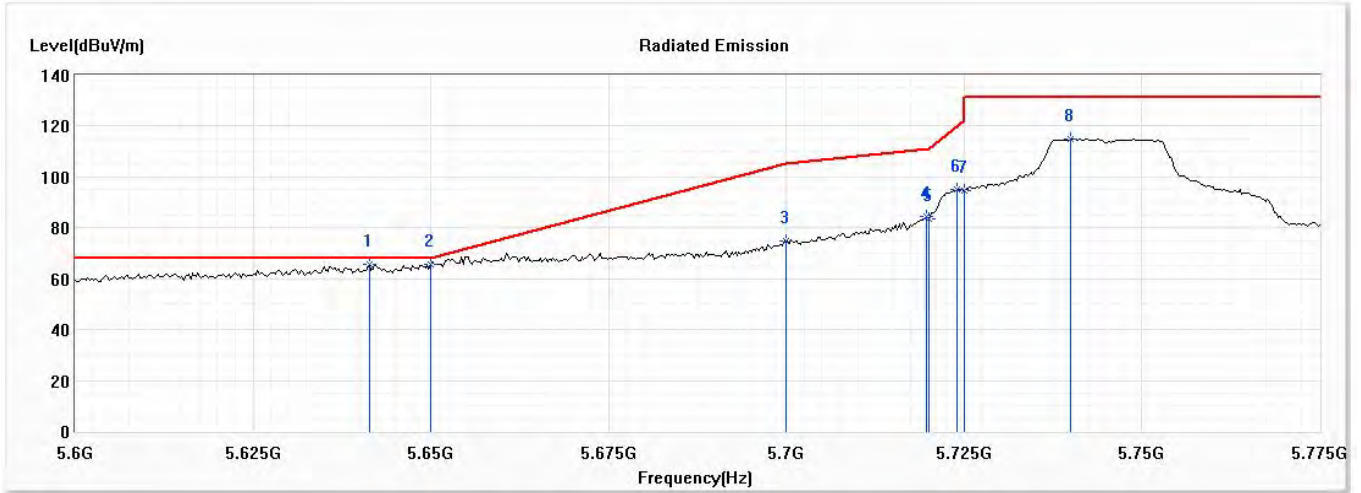

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5641.341	65.80	68.22	-2.42	46.72	19.08	PK
2	5650.000	65.49	68.22	-2.73	46.38	19.11	PK
3	5700.000	74.97	105.20	-30.23	55.84	19.13	PK
4	5719.710	84.27	110.72	-26.45	65.10	19.17	PK
5	5720.000	83.66	110.80	-27.14	64.49	19.17	PK
6	5724.022	94.96	119.97	-25.01	75.78	19.18	PK
7	5725.000	94.72	122.20	-27.48	75.54	19.18	PK
8	5740.000	114.85	131.20	-16.35	95.61	19.24	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

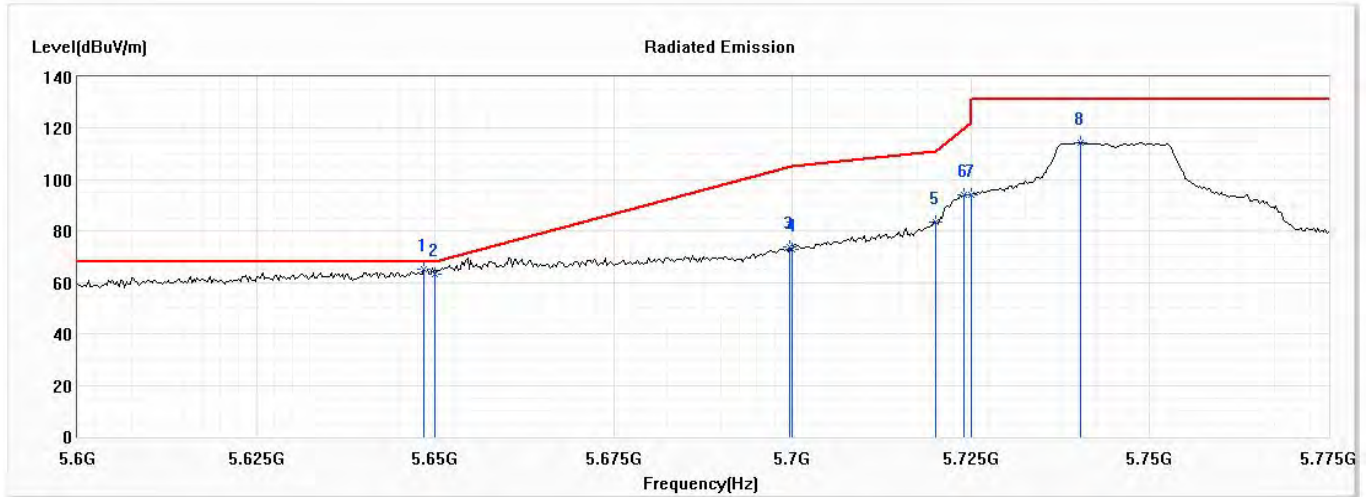

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5648.442	65.38	68.22	-2.84	46.27	19.11	PK
2	5650.000	63.34	68.22	-4.88	44.23	19.11	PK
3	5699.674	74.08	104.96	-30.88	54.95	19.13	PK
4	5700.000	73.01	105.20	-32.19	53.88	19.13	PK
5	5720.000	83.56	110.80	-27.24	64.39	19.17	PK
6	5724.022	94.30	119.97	-25.67	75.12	19.18	PK
7	5725.000	94.26	122.20	-27.94	75.08	19.18	PK
8	5740.254	114.23	131.20	-16.97	94.99	19.24	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Horizontal

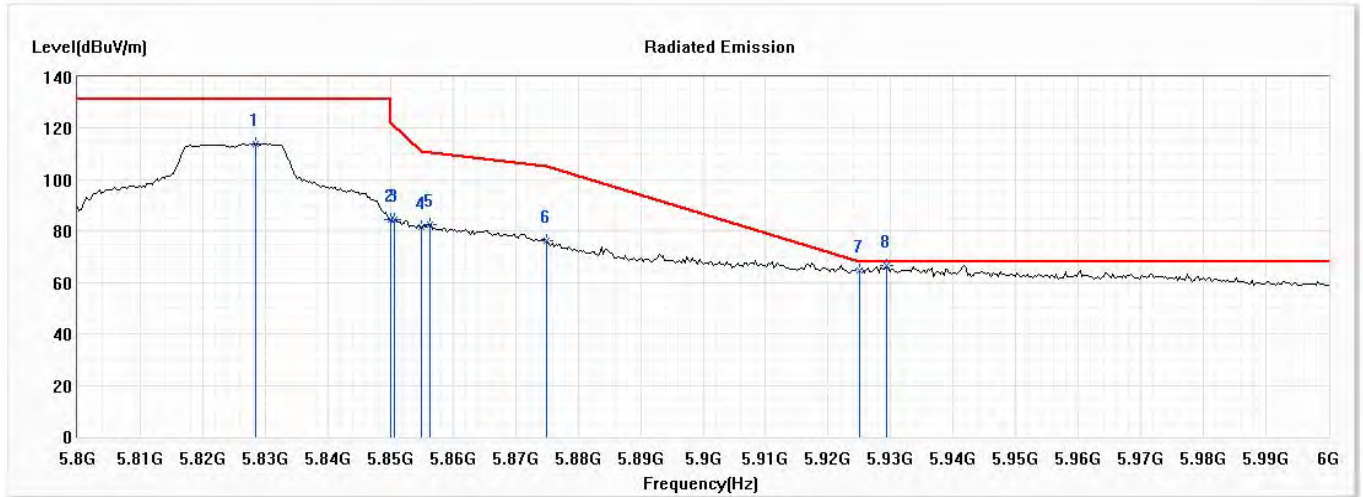

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5828.406	113.97	131.20	-17.23	94.34	19.63	PK
2	5850.000	84.33	122.20	-37.87	64.63	19.70	PK
3	5850.725	84.55	120.55	-35.99	64.85	19.70	PK
4	5855.000	81.71	110.80	-29.09	61.98	19.73	PK
5	5856.232	82.47	110.45	-27.99	62.73	19.74	PK
6	5875.000	76.24	105.20	-28.96	56.40	19.84	PK
7	5925.000	64.64	68.20	-3.56	44.62	20.02	PK
* 8	5929.275	66.66	68.20	-1.54	46.63	20.03	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Vertical

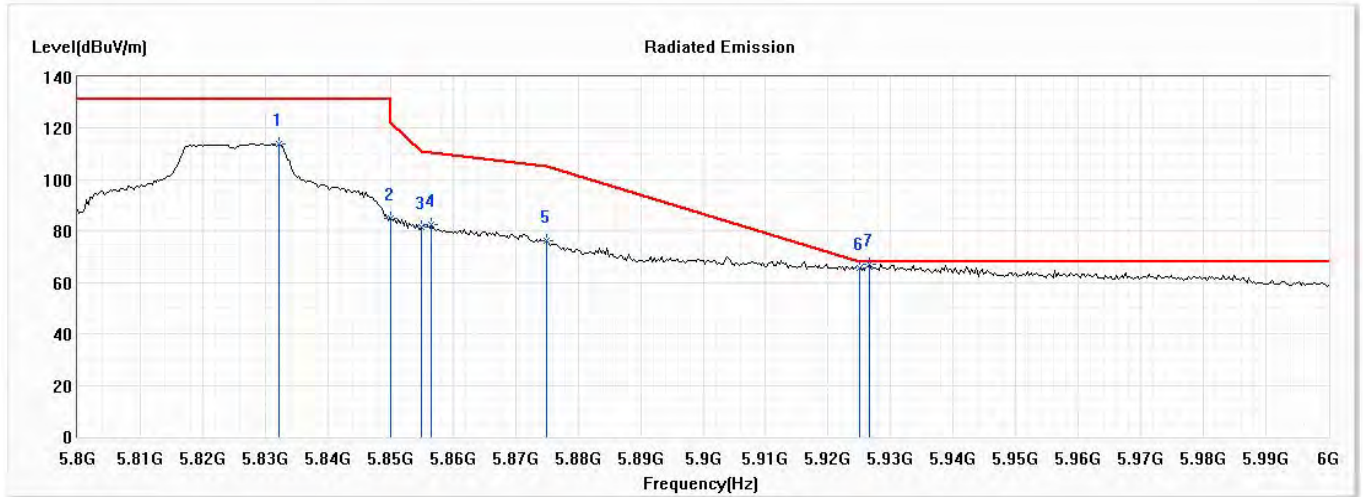

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5832.174	113.88	131.20	-17.32	94.24	19.64	PK
2	5850.000	84.84	122.20	-37.36	65.14	19.70	PK
3	5855.000	81.60	110.80	-29.20	61.87	19.73	PK
4	5856.522	82.48	110.37	-27.90	62.73	19.75	PK
5	5875.000	76.26	105.20	-28.94	56.42	19.84	PK
6	5925.000	65.68	68.20	-2.52	45.66	20.02	PK
* 7	5926.667	67.04	68.20	-1.16	47.02	20.02	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

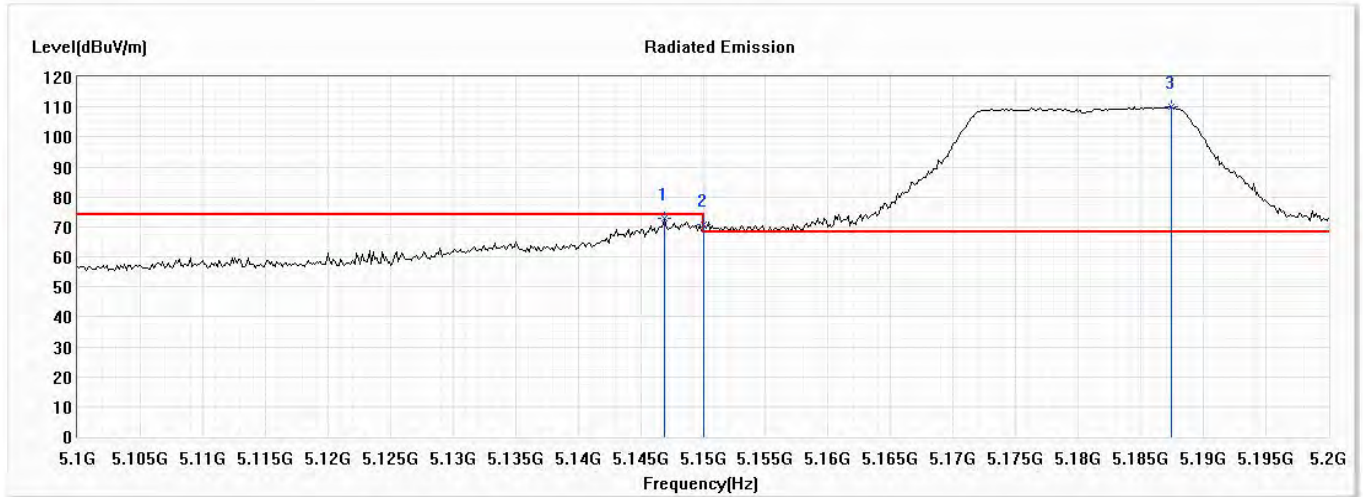


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5146.957	72.97	74.00	-1.03	54.55	18.42	PK
2	5150.000	70.83	74.00	-3.17	52.39	18.44	PK
! 3	5187.391	109.95	--	--	91.44	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

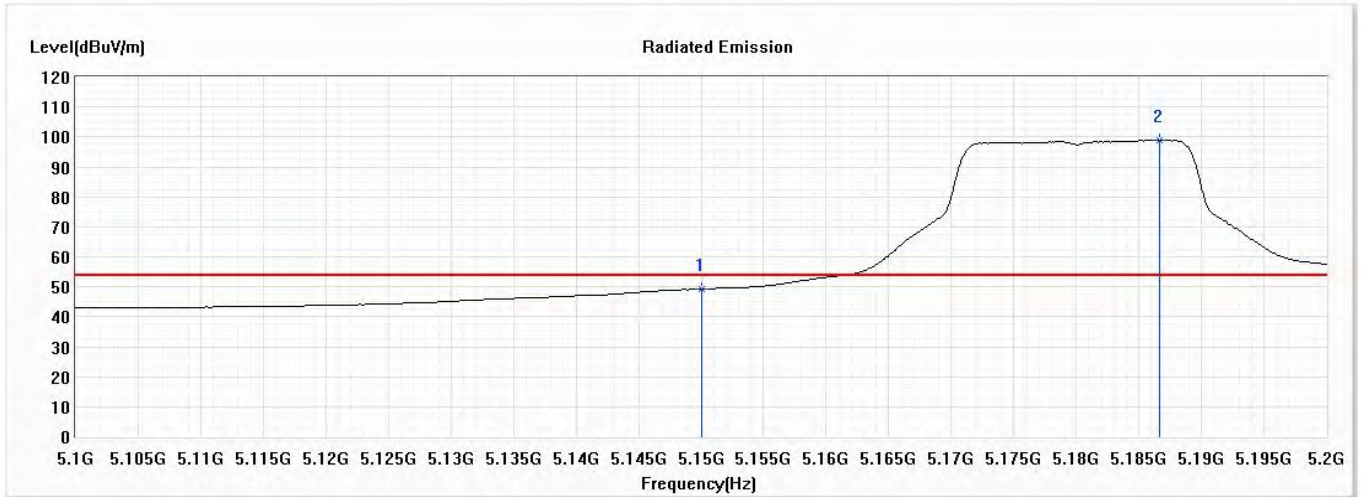


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	49.19	54.00	-4.81	30.75	18.44	AV
! 2	5186.667	98.92	--	--	80.41	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

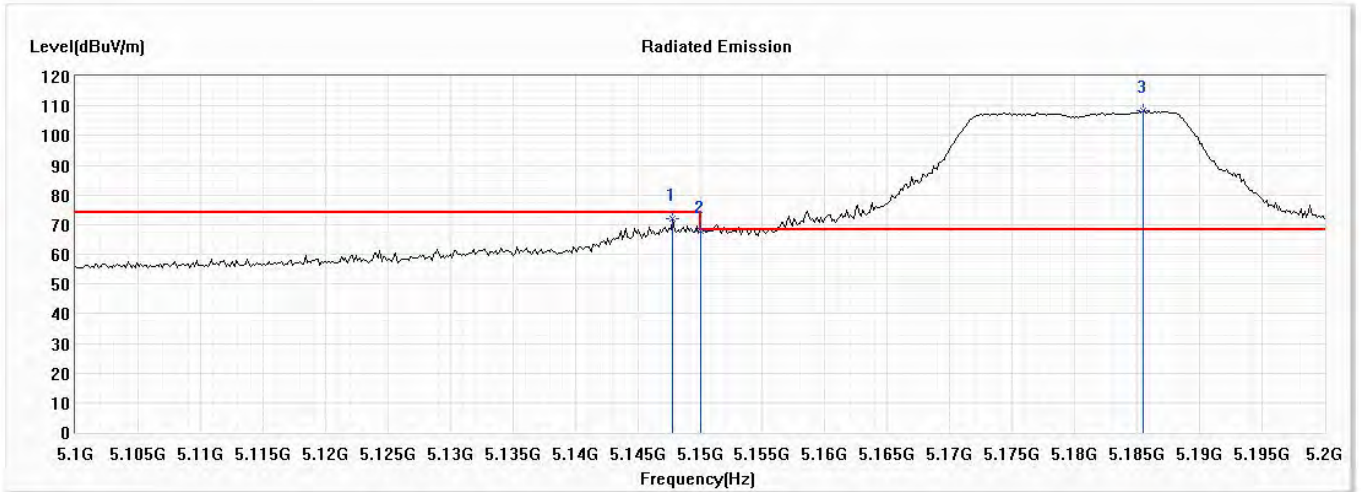


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5147.826	72.12	74.00	-1.88	53.70	18.42	PK
2	5150.000	67.99	74.00	-6.01	49.55	18.44	PK
! 3	5185.507	108.48	--	--	89.97	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

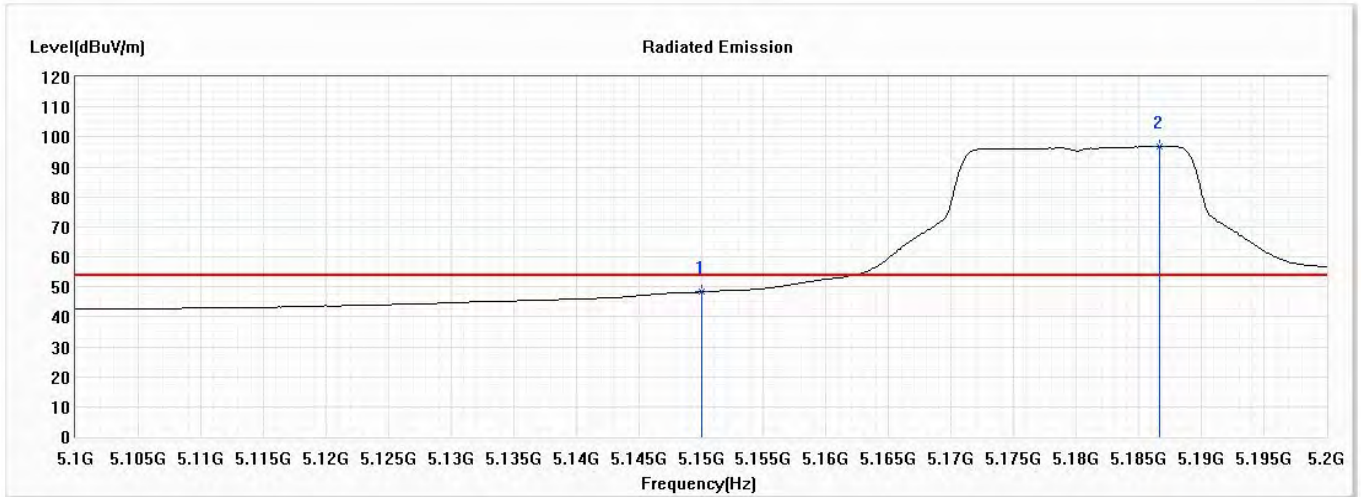


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	48.26	54.00	-5.74	29.82	18.44	AV
! 2	5186.667	97.00	--	--	78.49	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

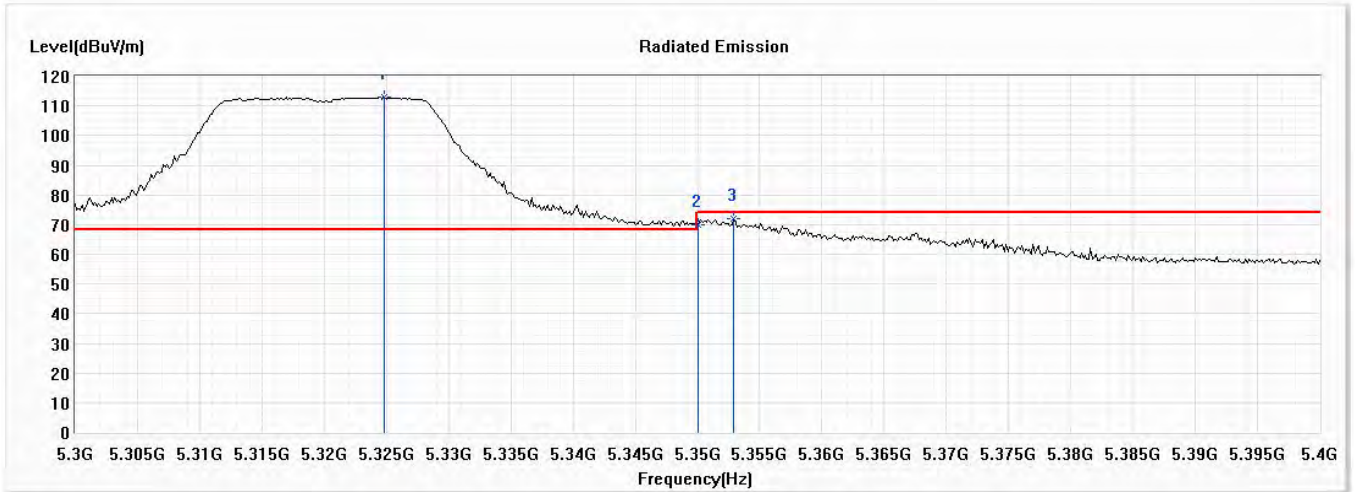


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5324.783	112.94	--	--	94.01	18.93	PK
2	5350.000	69.87	74.00	-4.13	50.91	18.96	PK
3	5352.899	71.98	74.00	-2.02	53.02	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

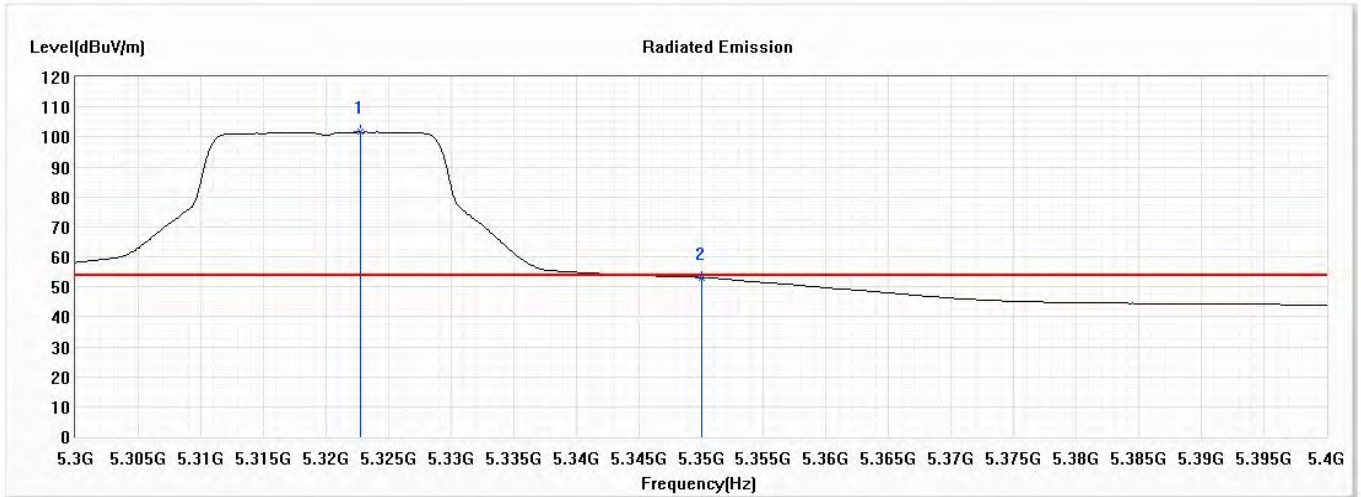


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5322.754	101.63	--	--	82.70	18.93	AV
2	5350.000	53.15	54.00	-0.85	34.19	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

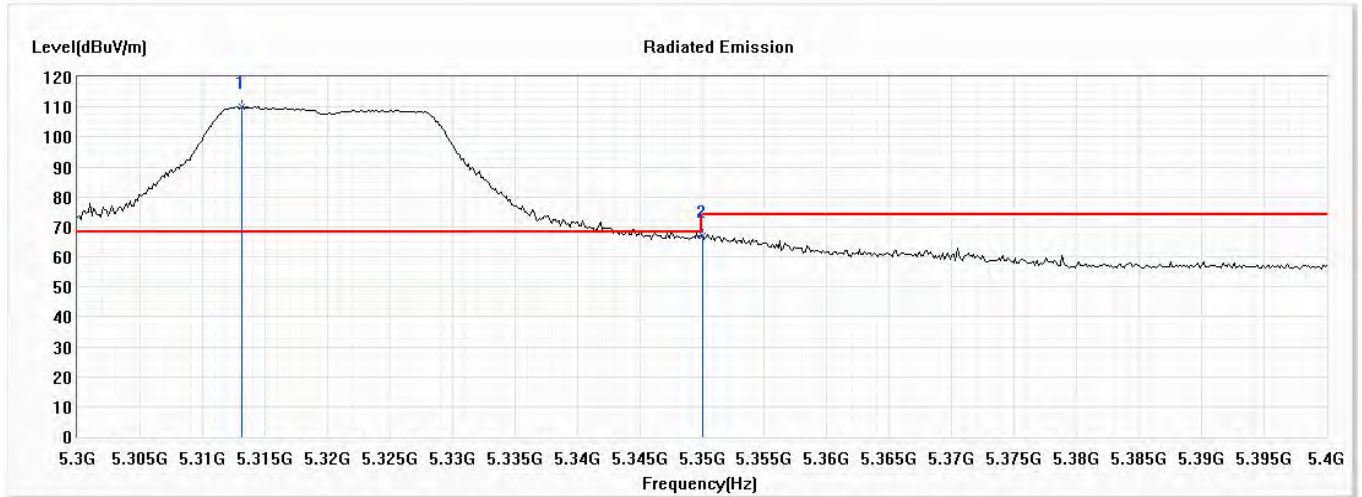


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5313.188	110.12	--	--	91.21	18.91	PK
2	5350.000	66.89	74.00	-7.11	47.93	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Vertical

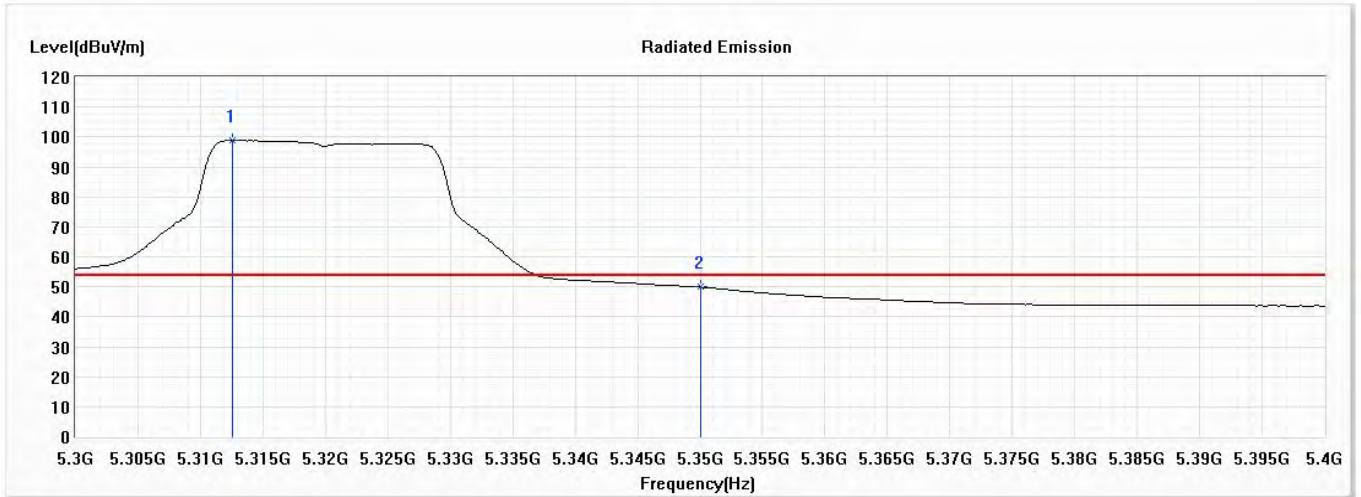


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5312.609	98.82	--	--	79.91	18.91	AV
2	5350.000	49.89	54.00	-4.11	30.93	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

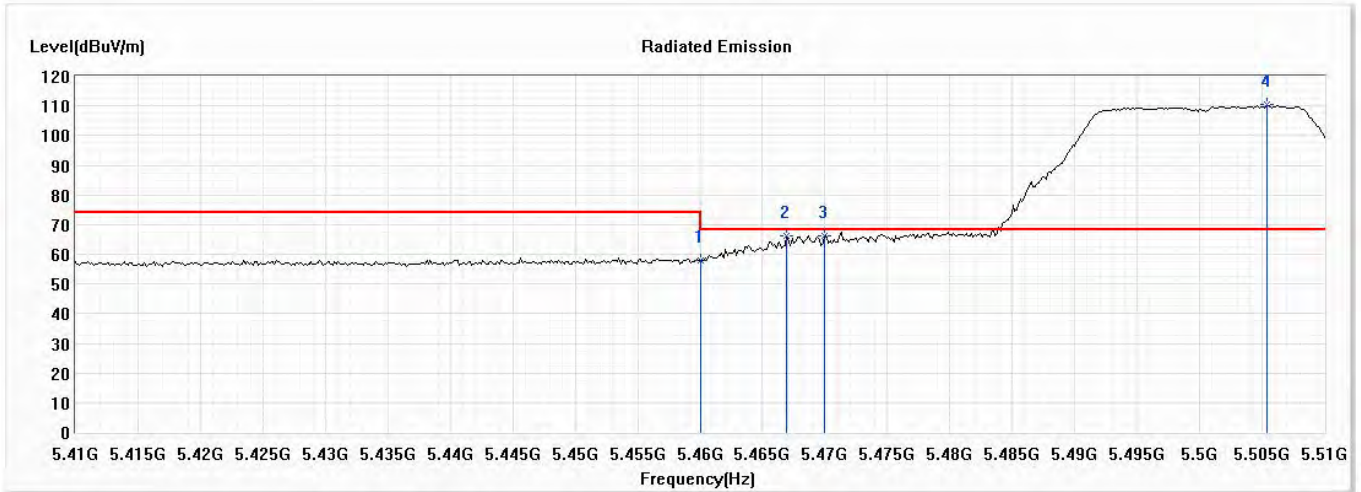


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.06	74.00	-15.94	39.13	18.93	PK
2	5466.957	66.29	68.22	-1.93	47.38	18.91	PK
3	5470.000	66.25	68.22	-1.97	47.35	18.90	PK
! 4	5505.362	110.54	--	--	91.71	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

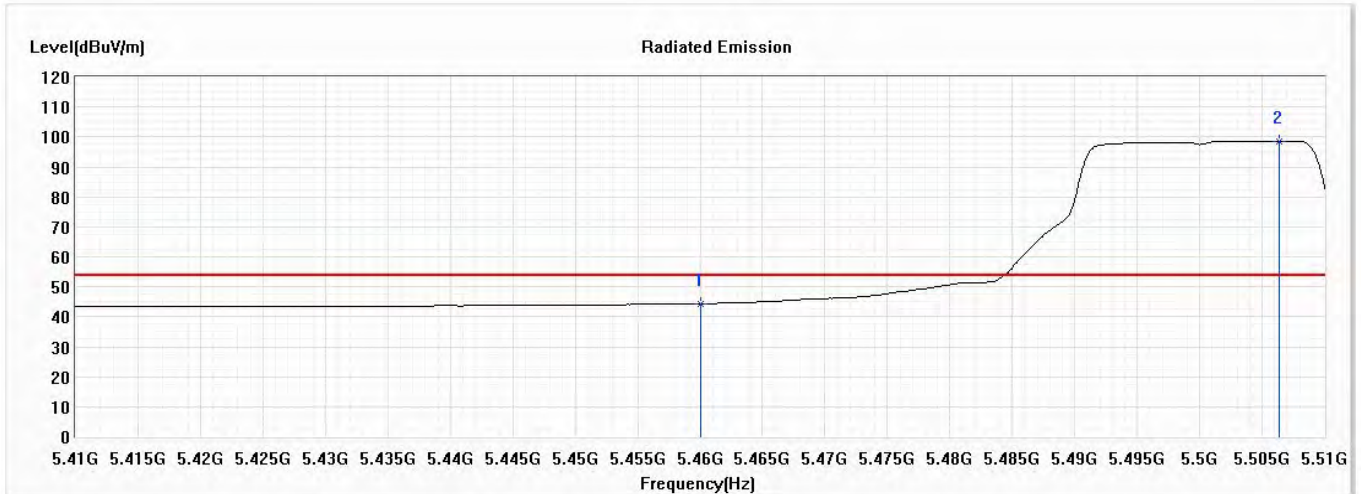


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.32	54.00	-9.68	25.39	18.93	AV
! 2	5506.377	98.66	--	--	79.83	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

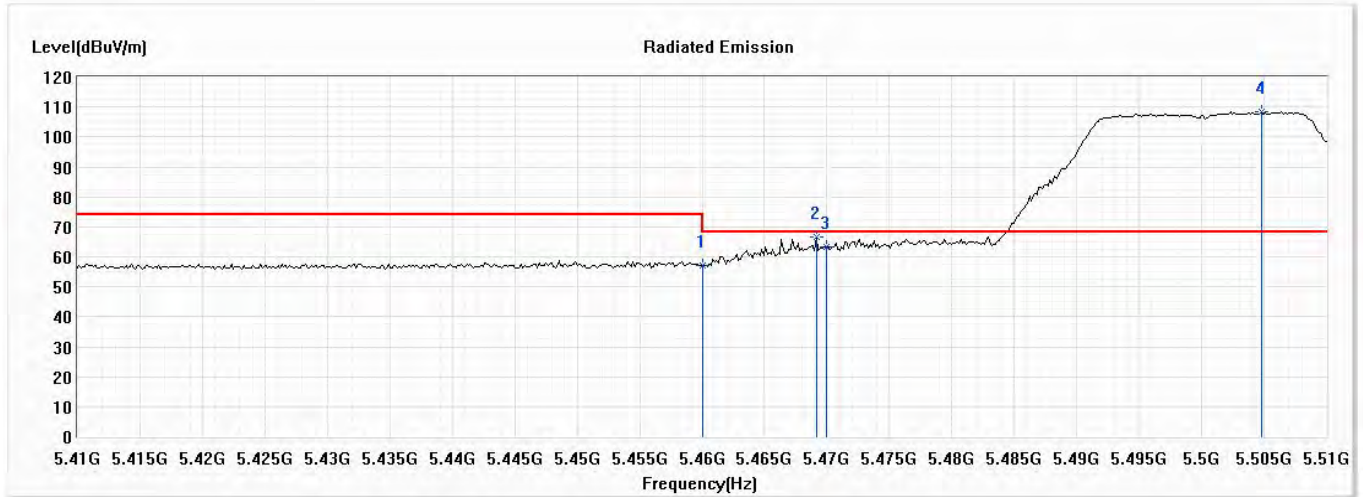


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	57.06	74.00	-16.94	38.13	18.93	PK
2	5469.130	66.43	68.22	-1.79	47.53	18.90	PK
3	5470.000	63.34	68.22	-4.88	44.44	18.90	PK
! 4	5504.783	108.62	--	--	89.79	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

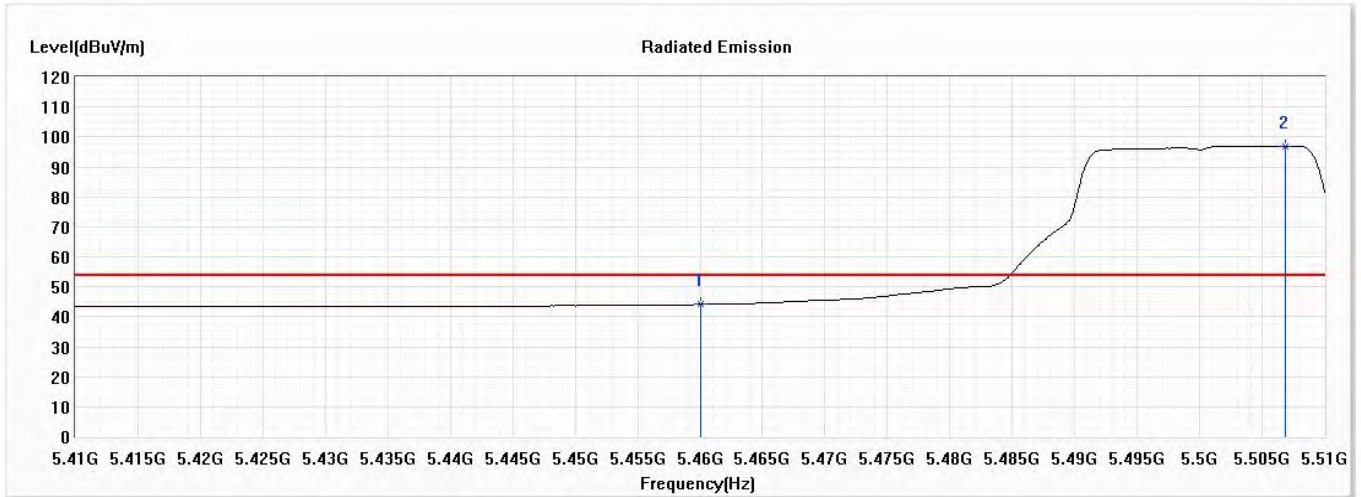


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.07	54.00	-9.93	25.14	18.93	AV
! 2	5506.812	97.03	--	--	78.20	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Horizontal

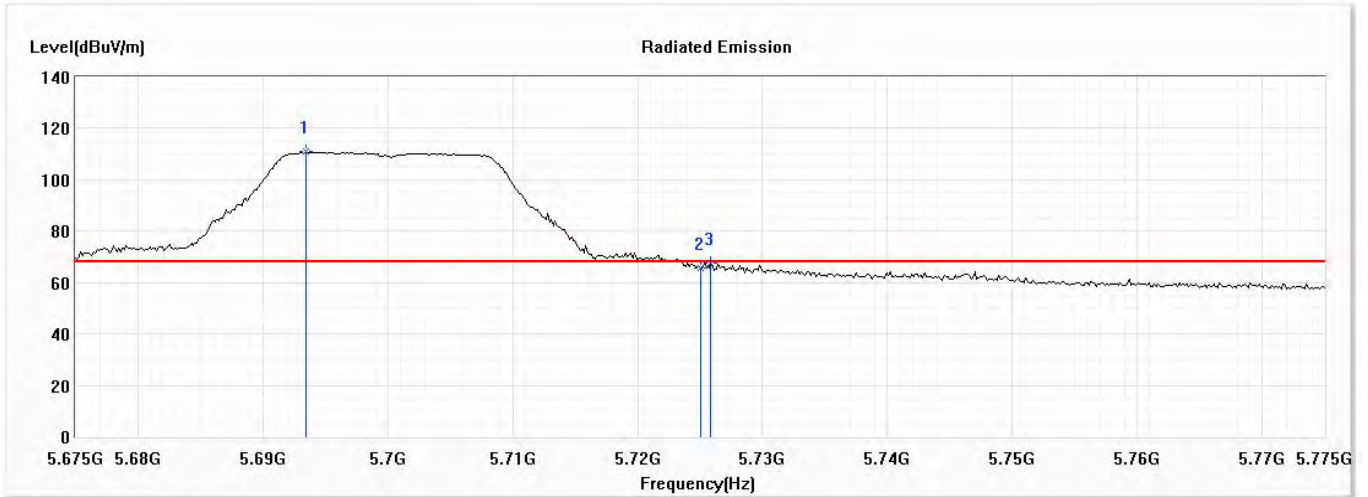

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5693.406	110.99	--	--	91.87	19.12	PK
2	5725.000	65.69	68.22	-2.53	46.51	19.18	PK
3	5725.870	67.55	68.22	-0.67	48.37	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)


Vertical

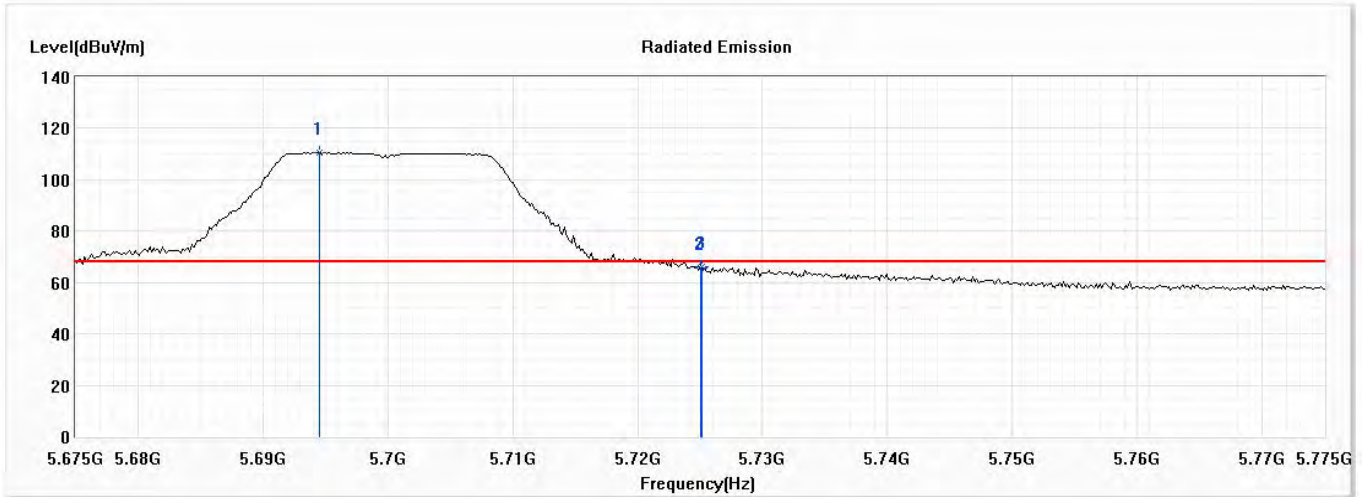

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5694.565	110.78	--	--	91.66	19.12	PK
2	5725.000	65.86	68.22	-2.36	46.68	19.18	PK
3	5725.145	66.16	68.22	-2.06	46.98	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Horizontal

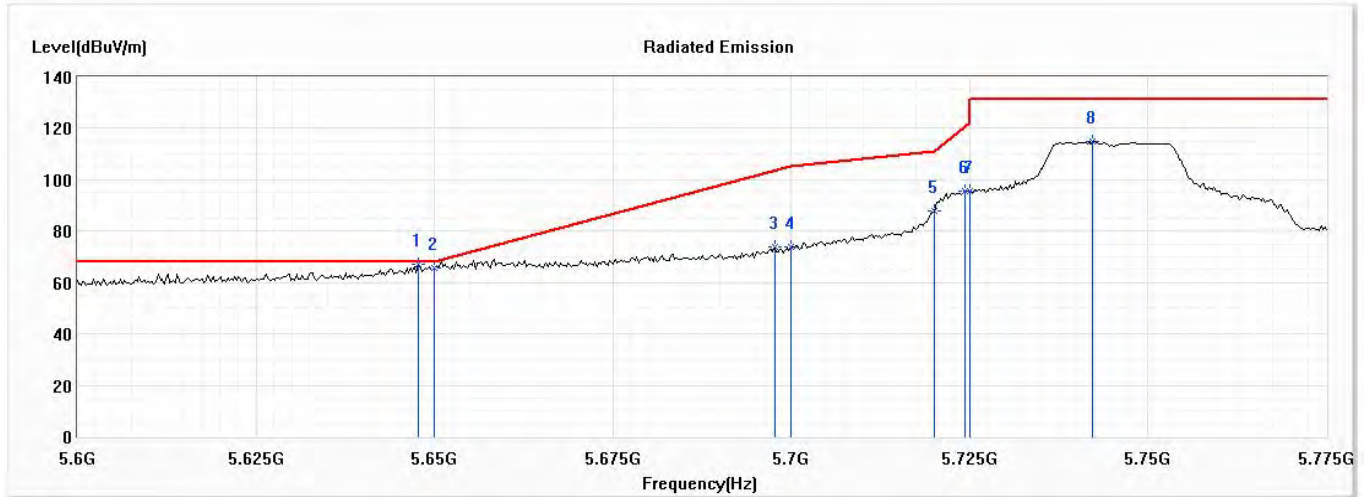

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5647.681	66.93	68.22	-1.29	47.82	19.11	PK
2	5650.000	65.60	68.22	-2.62	46.49	19.11	PK
3	5697.645	73.94	103.47	-29.52	54.82	19.12	PK
4	5700.000	73.78	105.20	-31.42	54.65	19.13	PK
5	5720.000	87.79	110.80	-23.01	68.62	19.17	PK
6	5724.275	95.66	120.55	-24.89	76.48	19.18	PK
7	5725.000	95.60	122.20	-26.60	76.42	19.18	PK
8	5742.283	115.01	131.20	-16.19	95.77	19.24	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Vertical

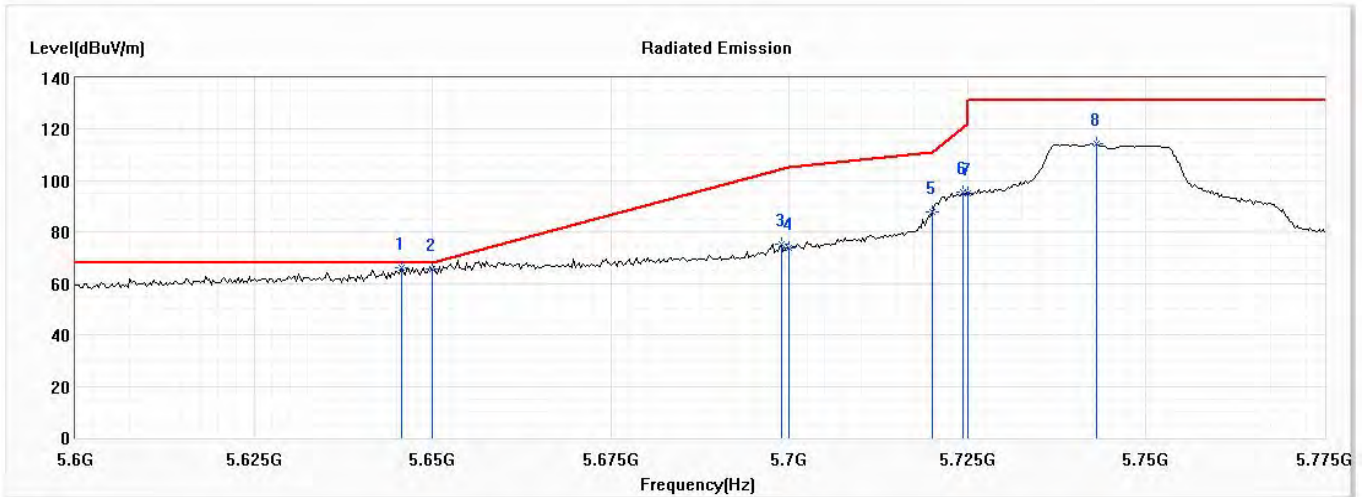

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5645.652	66.17	68.22	-2.05	47.08	19.09	PK
2	5650.000	65.52	68.22	-2.70	46.41	19.11	PK
3	5698.913	75.22	104.40	-29.18	56.10	19.12	PK
4	5700.000	73.79	105.20	-31.41	54.66	19.13	PK
5	5720.000	87.64	110.80	-23.16	68.47	19.17	PK
6	5724.275	95.44	120.55	-25.11	76.26	19.18	PK
7	5725.000	94.89	122.20	-27.31	75.71	19.18	PK
8	5743.043	114.45	131.20	-16.75	95.20	19.25	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Horizontal

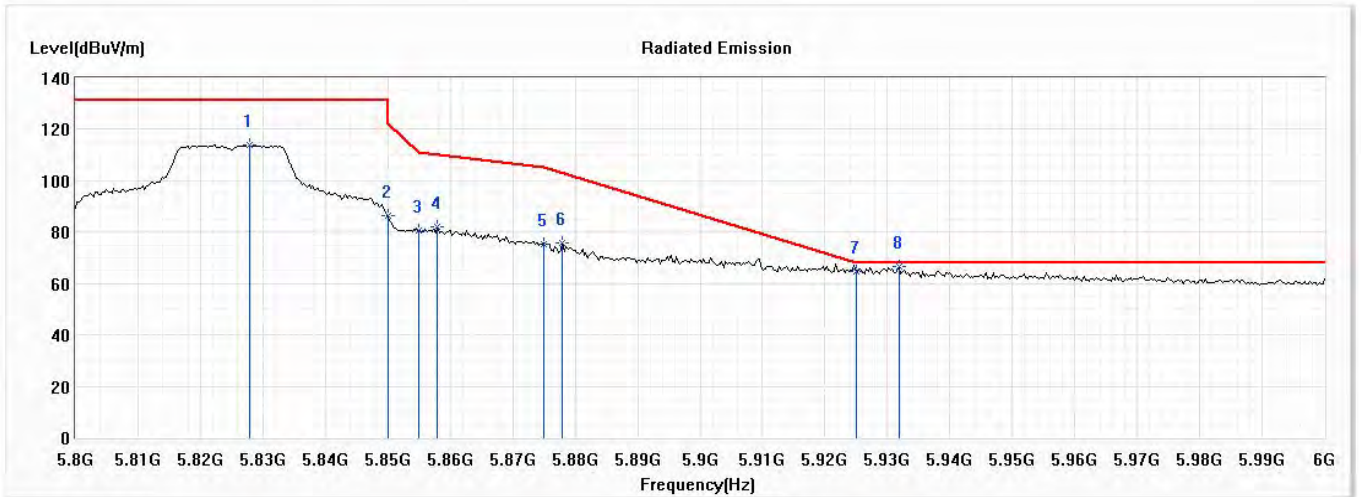

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5827.826	113.97	131.20	-17.23	94.34	19.63	PK
2	5850.000	86.39	122.20	-35.81	66.69	19.70	PK
3	5855.000	80.50	110.80	-30.30	60.77	19.73	PK
4	5857.971	81.86	109.97	-28.10	62.11	19.75	PK
5	5875.000	75.48	105.20	-29.72	55.64	19.84	PK
6	5877.971	75.65	102.99	-27.34	55.80	19.85	PK
7	5925.000	64.76	68.20	-3.44	44.74	20.02	PK
* 8	5931.884	66.69	68.20	-1.51	46.66	20.03	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Vertical

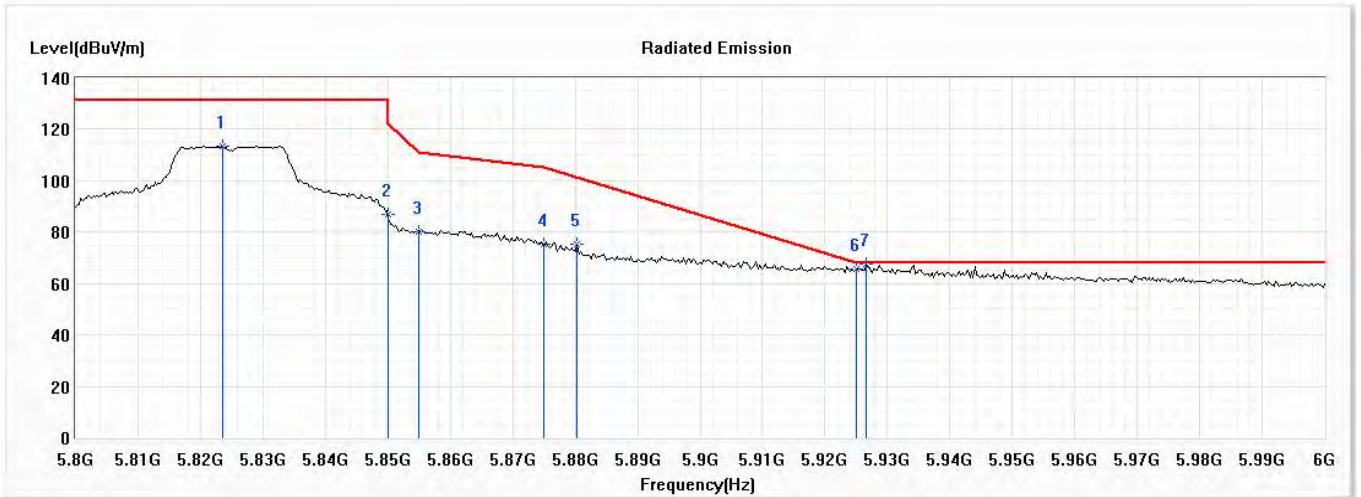

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5823.478	113.32	131.20	-17.88	93.70	19.62	PK
2	5850.000	86.96	122.20	-35.24	67.26	19.70	PK
3	5855.000	80.08	110.80	-30.72	60.35	19.73	PK
4	5875.000	75.22	105.20	-29.98	55.38	19.84	PK
5	5880.290	75.35	101.27	-25.92	55.48	19.87	PK
6	5925.000	65.80	68.20	-2.40	45.78	20.02	PK
* 7	5926.667	67.57	68.20	-0.63	47.55	20.02	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

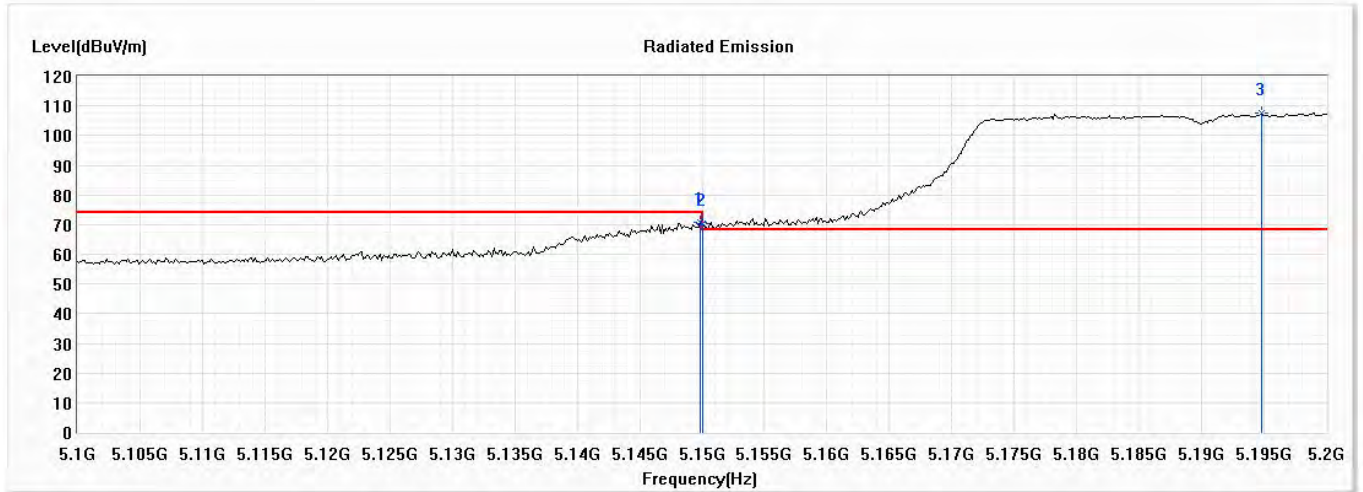


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.855	70.87	74.00	-3.13	52.43	18.44	PK
2	5150.000	70.43	74.00	-3.57	51.99	18.44	PK
! 3	5194.783	107.44	--	--	88.90	18.54	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

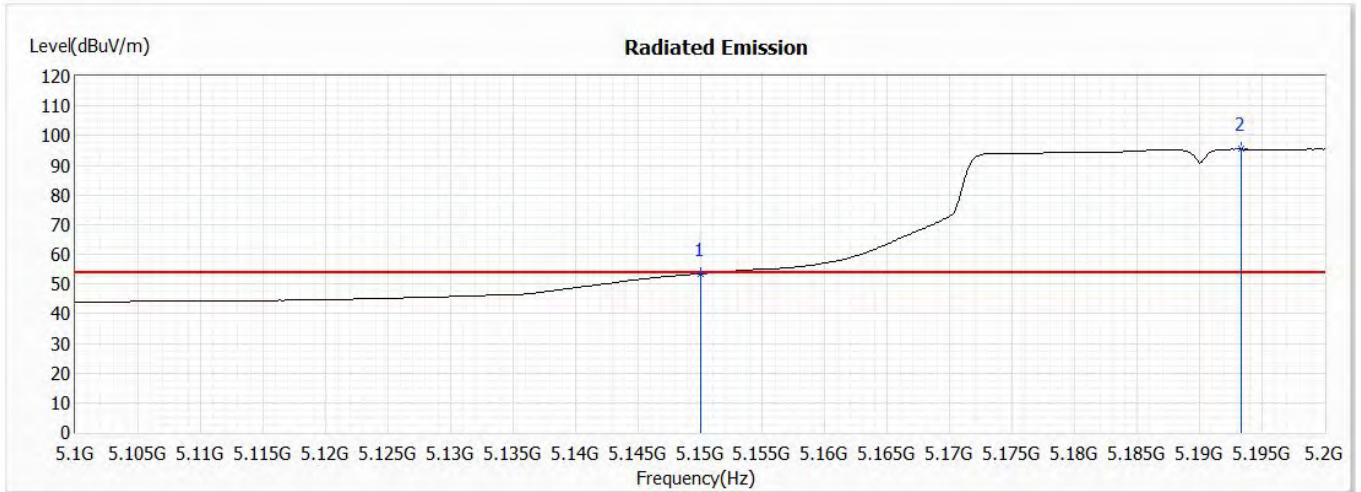


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	53.39	54.00	-0.61	34.95	18.44	AV
!2	5193.333	95.41	--	--	76.87	18.54	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

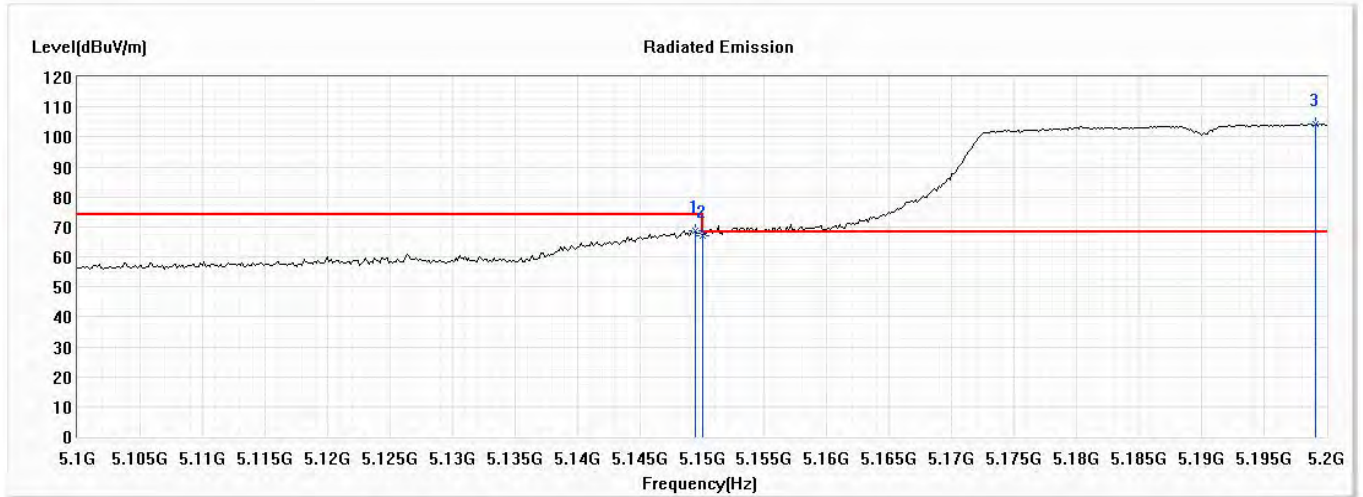


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.420	68.84	74.00	-5.16	50.40	18.44	PK
2	5150.000	67.21	74.00	-6.79	48.77	18.44	PK
!3	5199.130	104.43	--	--	85.88	18.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/23
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

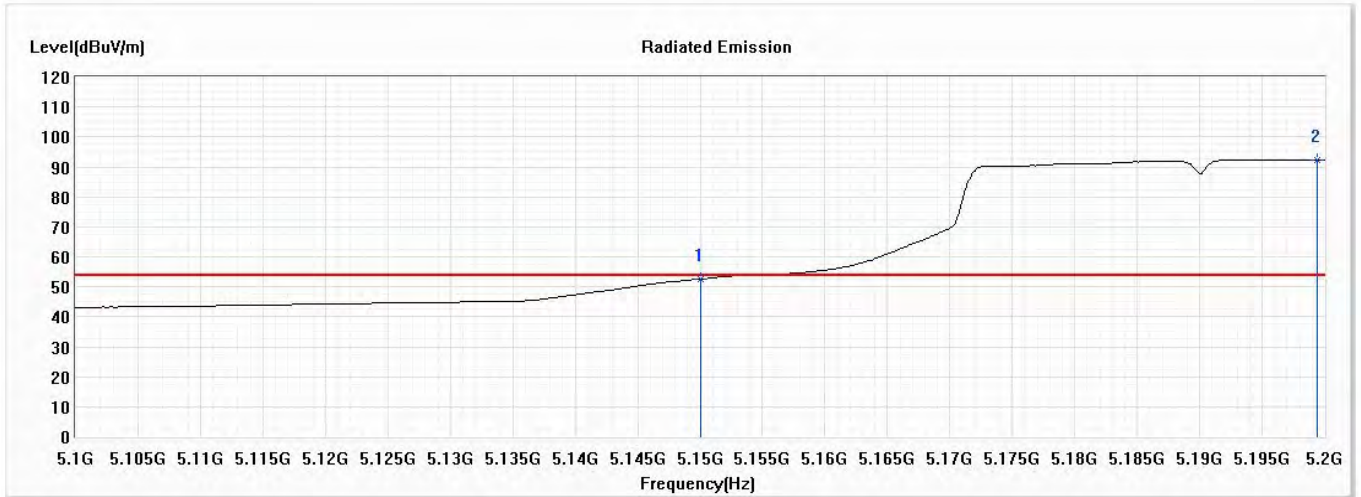


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.55	54.00	-1.45	34.11	18.44	AV
! 2	5199.420	92.45	--	--	73.90	18.55	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

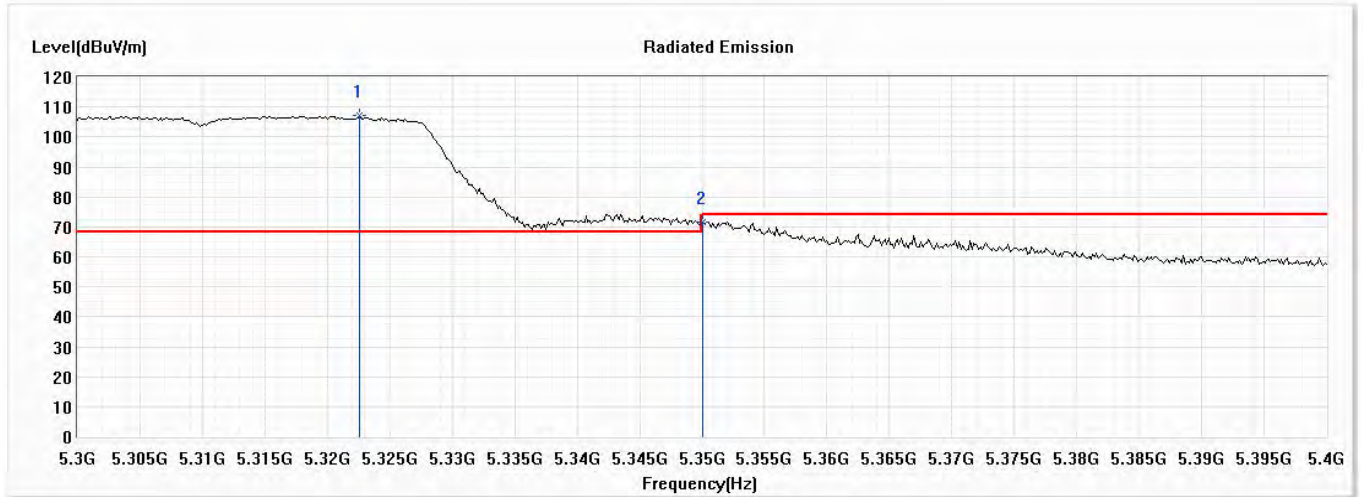


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5322.609	107.04	--	--	88.11	18.93	PK
2	5350.000	71.79	74.00	-2.21	52.83	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

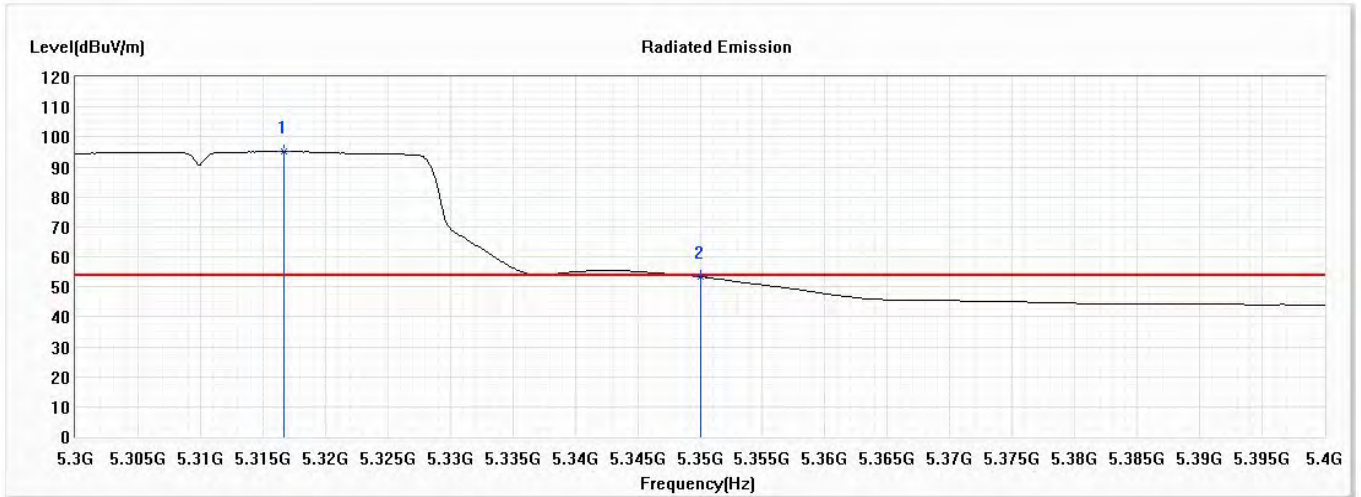


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5316.667	95.08	--	--	76.16	18.92	AV
2	5350.000	53.30	54.00	-0.70	34.34	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

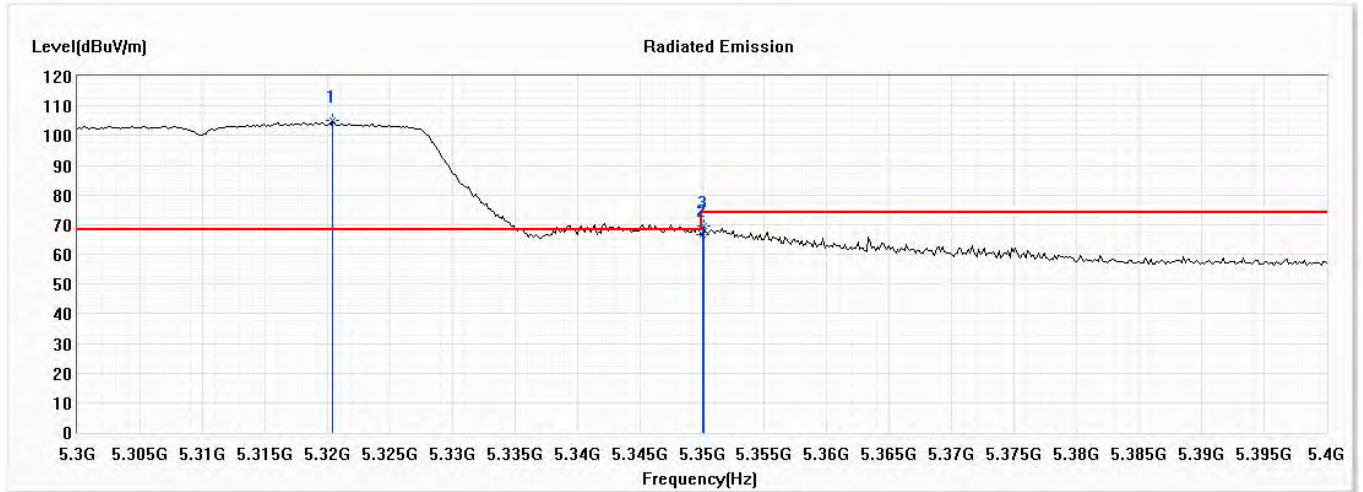


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5320.435	105.07	--	--	86.15	18.92	PK
2	5350.000	66.67	74.00	-7.33	47.71	18.96	PK
3	5350.145	69.50	74.00	-4.50	50.54	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

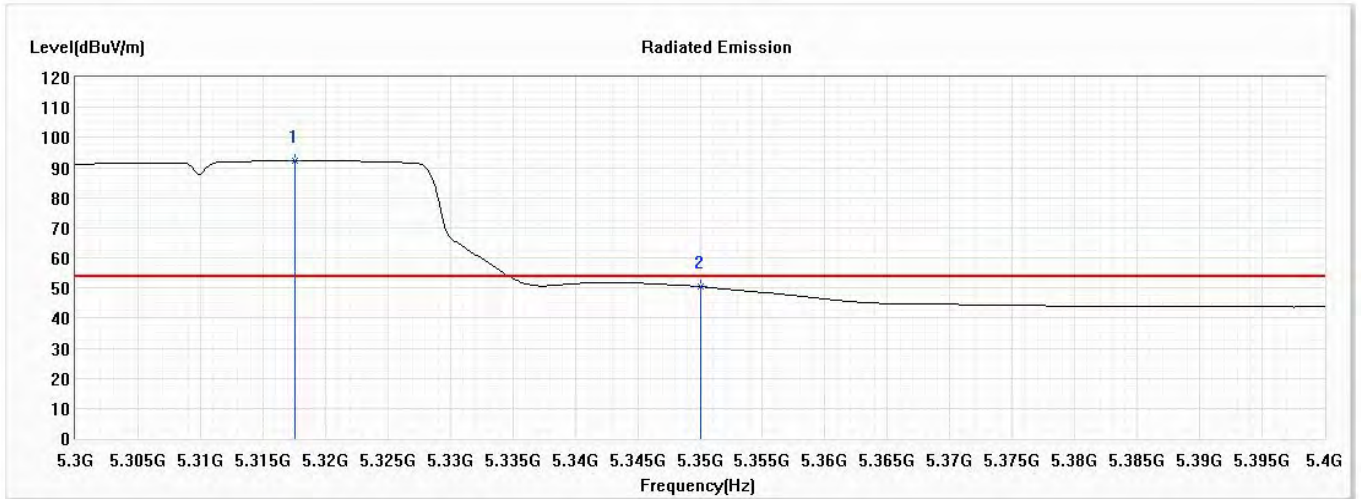


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5317.536	92.41	--	--	73.49	18.92	AV
2	5350.000	50.44	54.00	-3.56	31.48	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

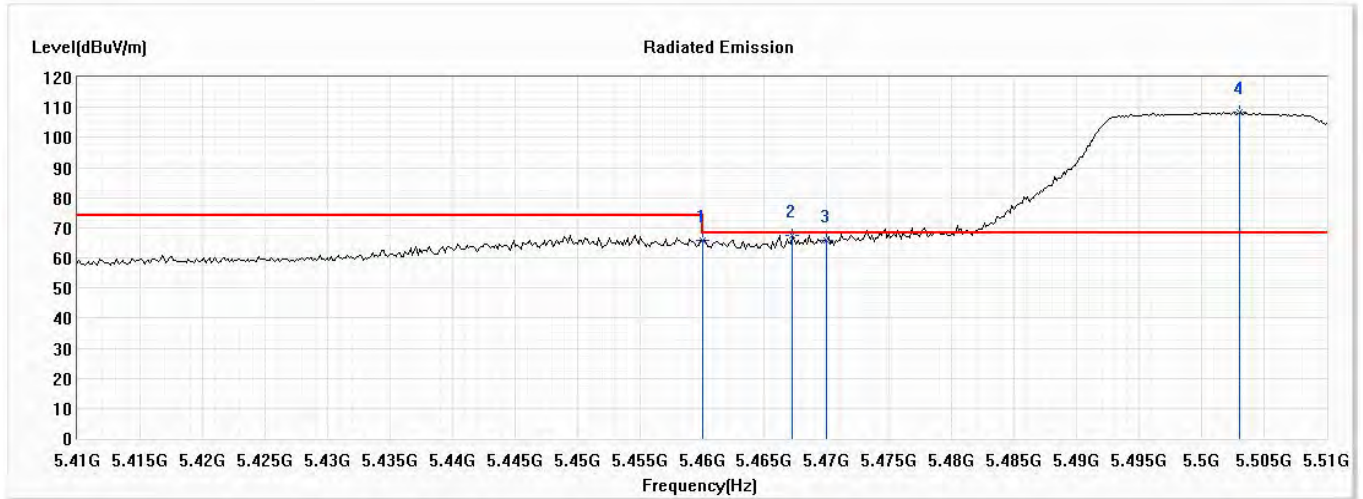


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	65.73	74.00	-8.27	46.80	18.93	PK
2	5467.246	67.64	68.22	-0.58	48.73	18.91	PK
3	5470.000	65.77	68.22	-2.45	46.87	18.90	PK
! 4	5503.043	108.33	--	--	89.50	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

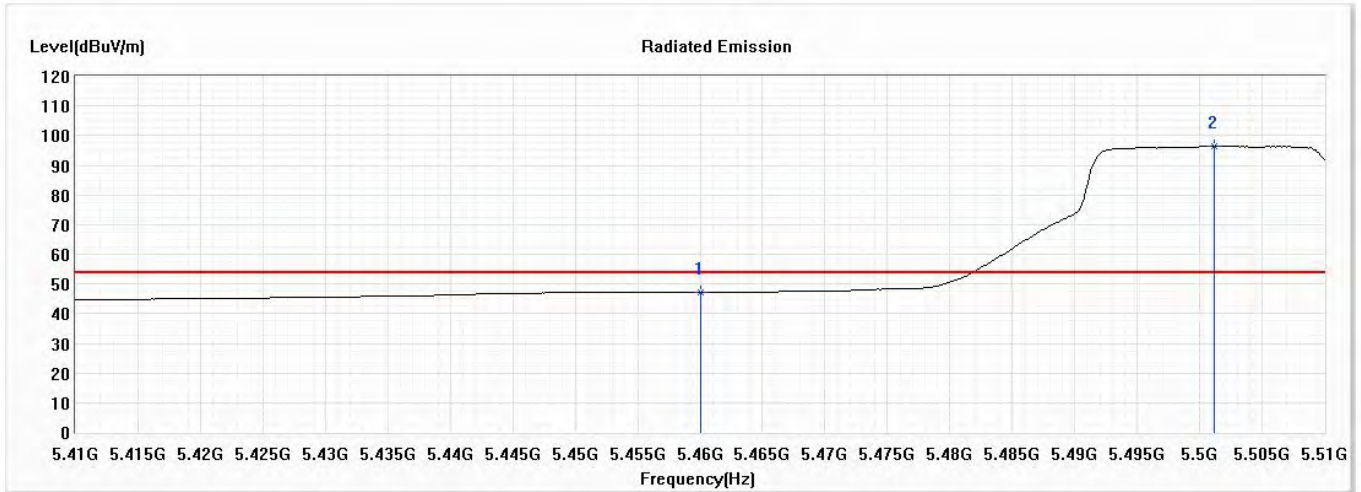


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	47.21	54.00	-6.79	28.28	18.93	AV
!2	5501.159	96.37	--	--	77.54	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

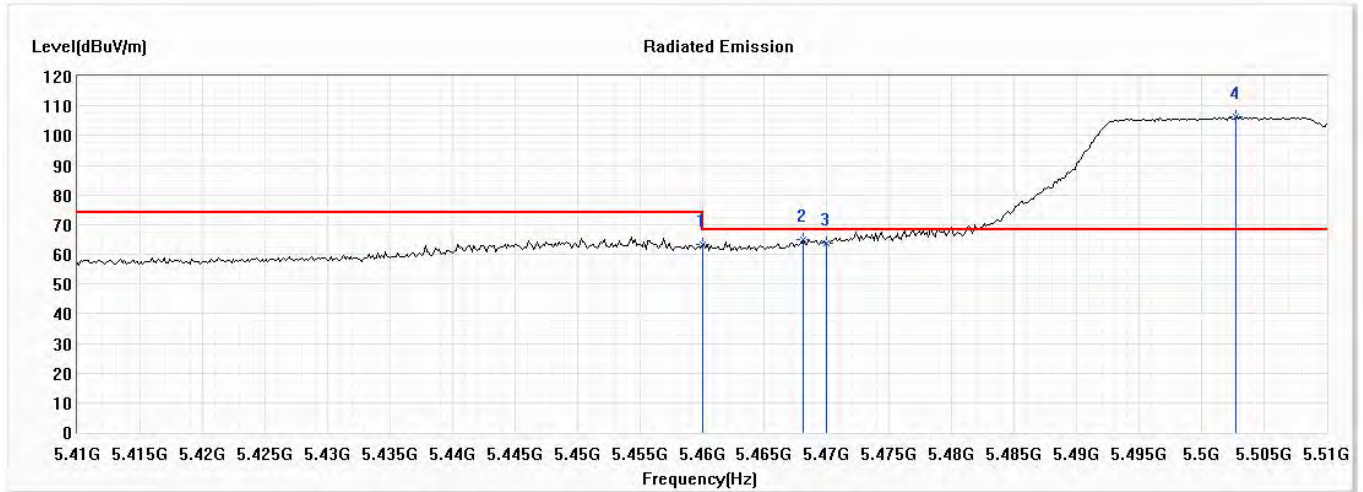


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	63.40	74.00	-10.60	44.47	18.93	PK
2	5468.116	65.17	68.22	-3.05	46.27	18.90	PK
3	5470.000	63.74	68.22	-4.48	44.84	18.90	PK
! 4	5502.754	106.42	--	--	87.59	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Vertical

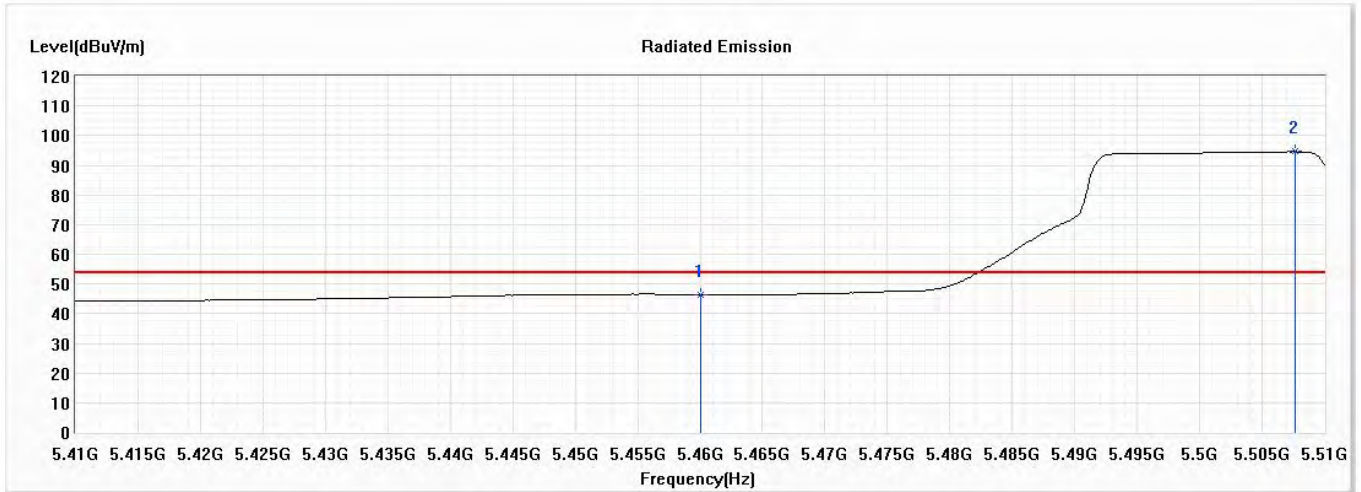


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	46.37	54.00	-7.63	27.44	18.93	AV
! 2	5507.681	94.58	--	--	75.75	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Horizontal

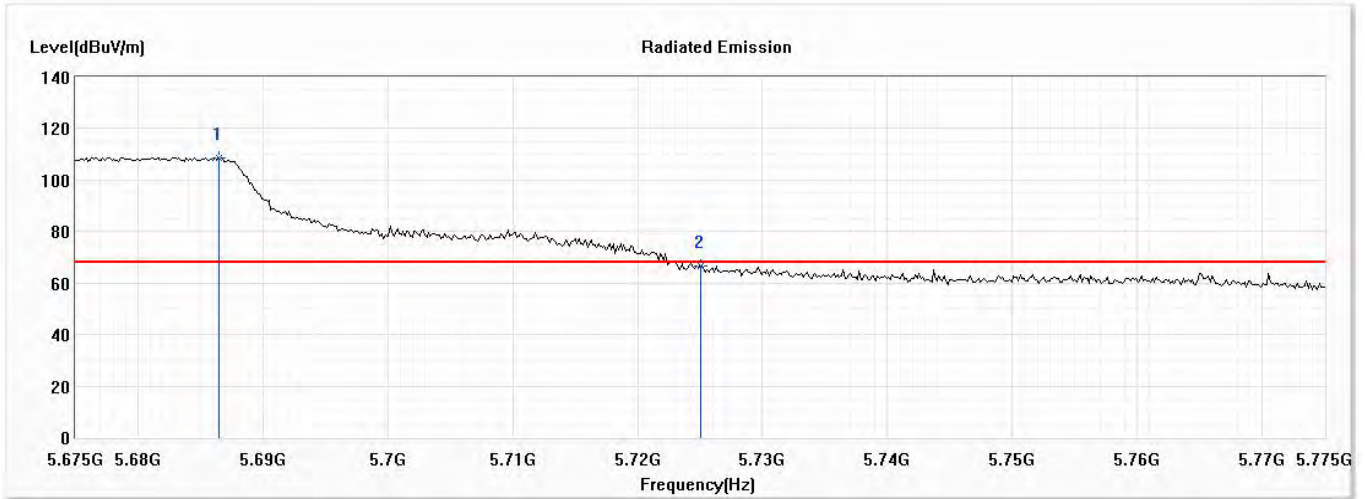

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5686.449	108.83	--	--	89.72	19.11	PK
2	5725.000	66.81	68.22	-1.41	47.63	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Vertical

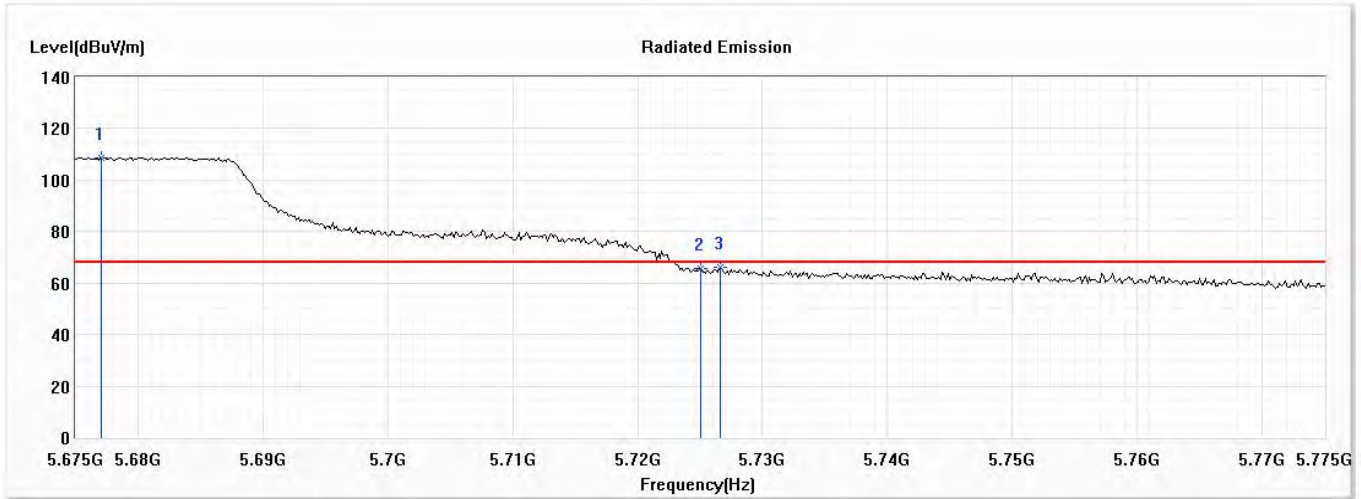

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5677.029	108.79	--	--	89.68	19.11	PK
2	5725.000	65.42	68.22	-2.80	46.24	19.18	PK
3	5726.594	66.14	68.22	-2.08	46.96	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Horizontal

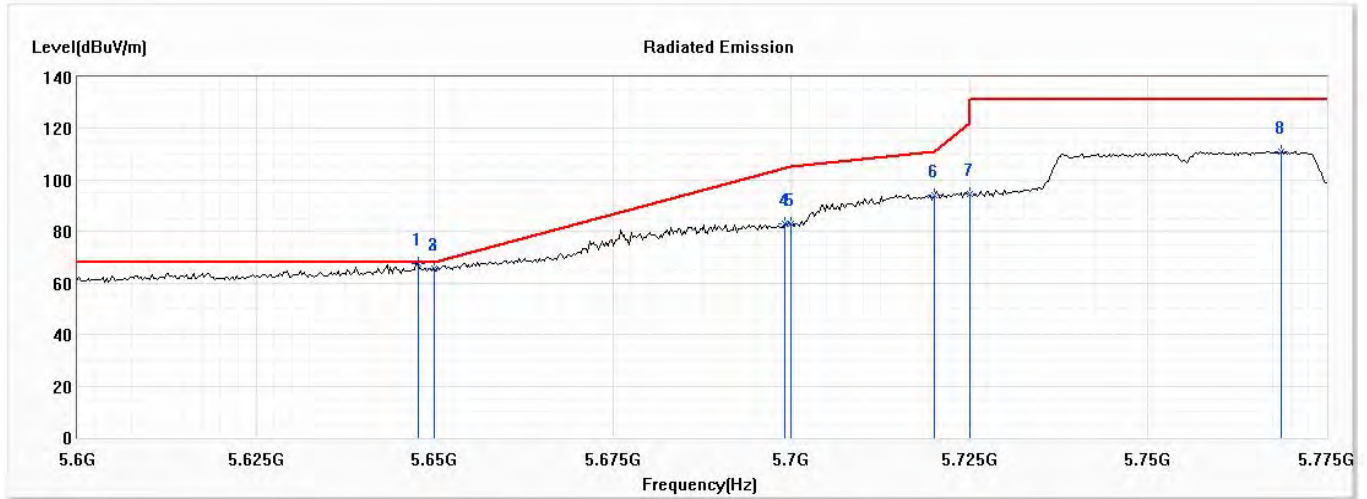

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5647.681	67.55	68.22	-0.67	48.44	19.11	PK
2	5650.000	65.49	68.22	-2.73	46.38	19.11	PK
3	5650.000	65.49	68.22	-2.73	46.38	19.11	PK
4	5699.167	83.22	104.59	-21.36	64.10	19.12	PK
5	5700.000	82.98	105.20	-22.22	63.85	19.13	PK
6	5720.000	94.30	110.80	-16.50	75.13	19.17	PK
7	5725.000	94.57	122.20	-27.63	75.39	19.18	PK
8	5768.659	111.23	131.20	-19.97	91.91	19.32	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)


Vertical

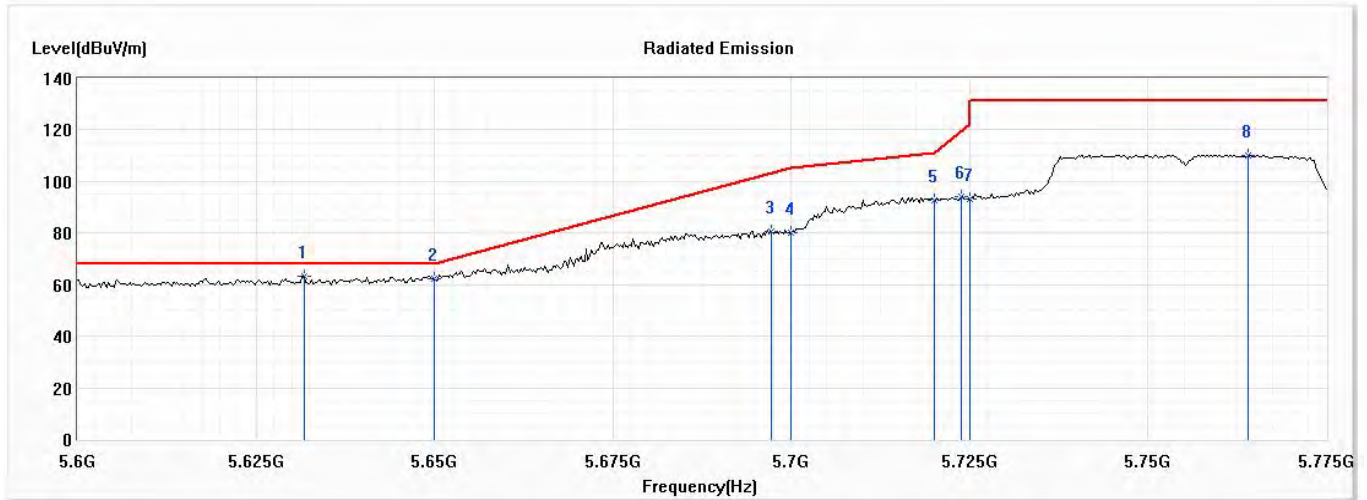

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5631.703	63.02	68.22	-5.20	43.96	19.06	PK
2	5650.000	62.05	68.22	-6.17	42.94	19.11	PK
3	5697.138	80.49	103.09	-22.60	61.37	19.12	PK
4	5700.000	80.18	105.20	-25.02	61.05	19.13	PK
5	5720.000	92.59	110.80	-18.21	73.42	19.17	PK
6	5723.768	94.00	119.39	-25.40	74.82	19.18	PK
7	5725.000	93.00	122.20	-29.20	73.82	19.18	PK
8	5764.094	110.22	131.20	-20.98	90.91	19.31	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Horizontal

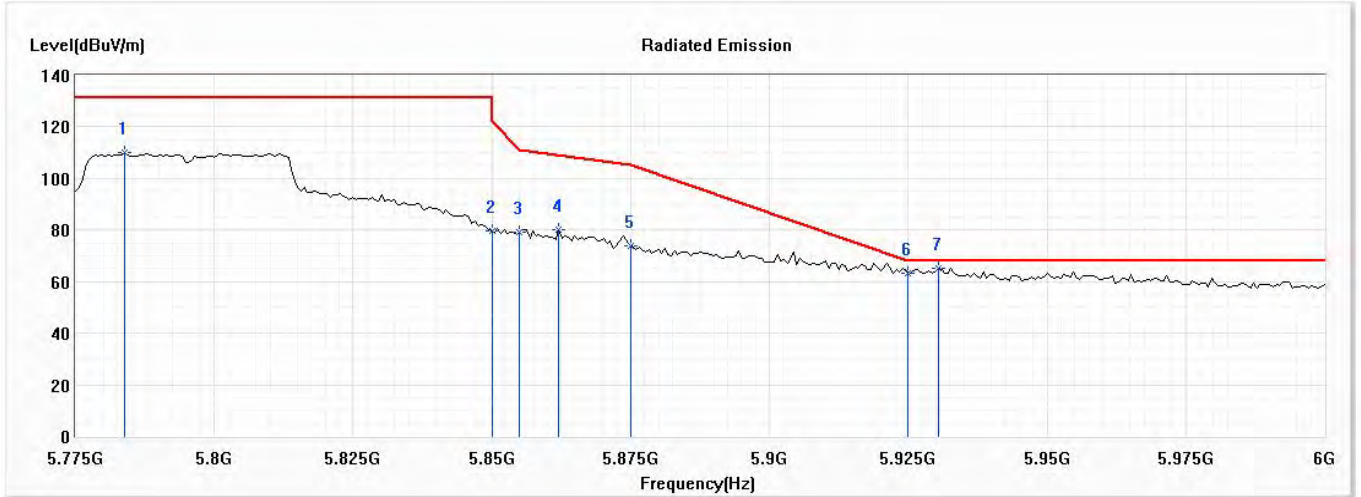

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5783.768	110.03	131.20	-21.17	90.61	19.42	PK
2	5850.000	79.58	122.20	-42.62	59.88	19.70	PK
3	5855.000	79.32	110.80	-31.48	59.59	19.73	PK
4	5862.029	80.28	108.83	-28.55	60.50	19.78	PK
5	5875.000	73.83	105.20	-31.37	53.99	19.84	PK
6	5925.000	63.39	68.20	-4.81	43.37	20.02	PK
* 7	5930.435	65.26	68.20	-2.94	45.23	20.03	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Vertical

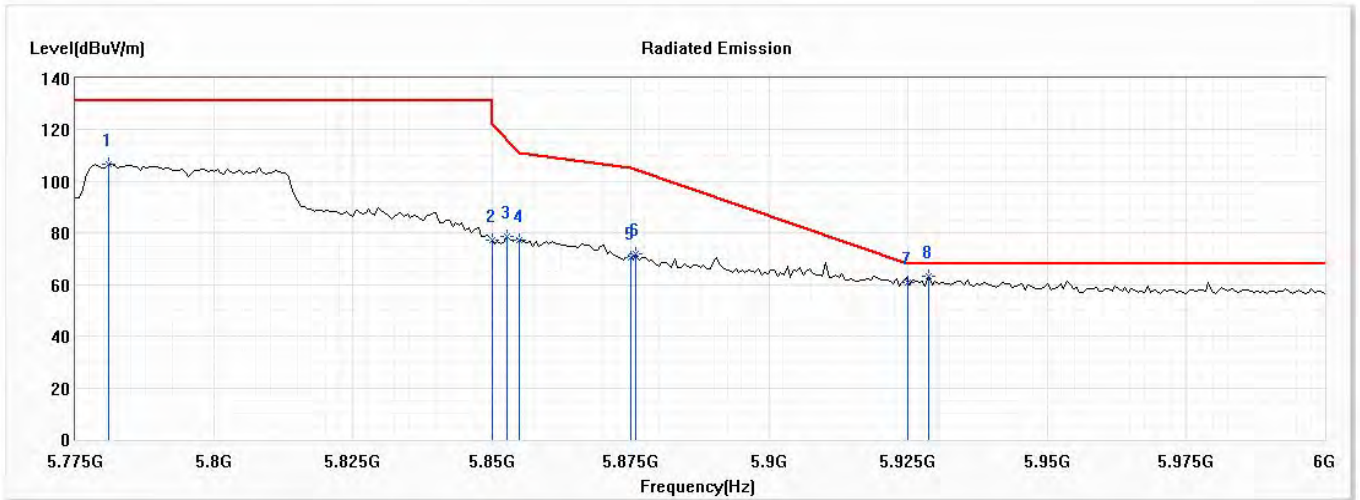

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5780.870	106.68	131.20	-24.52	87.29	19.39	PK
2	5850.000	77.09	122.20	-45.11	57.39	19.70	PK
3	5852.754	78.63	115.92	-37.29	58.92	19.71	PK
4	5855.000	77.20	110.80	-33.60	57.47	19.73	PK
5	5875.000	70.51	105.20	-34.69	50.67	19.84	PK
6	5875.942	71.69	104.50	-32.81	51.85	19.84	PK
7	5925.000	61.04	68.20	-7.16	41.02	20.02	PK
* 8	5928.696	63.19	68.20	-5.01	43.16	20.03	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

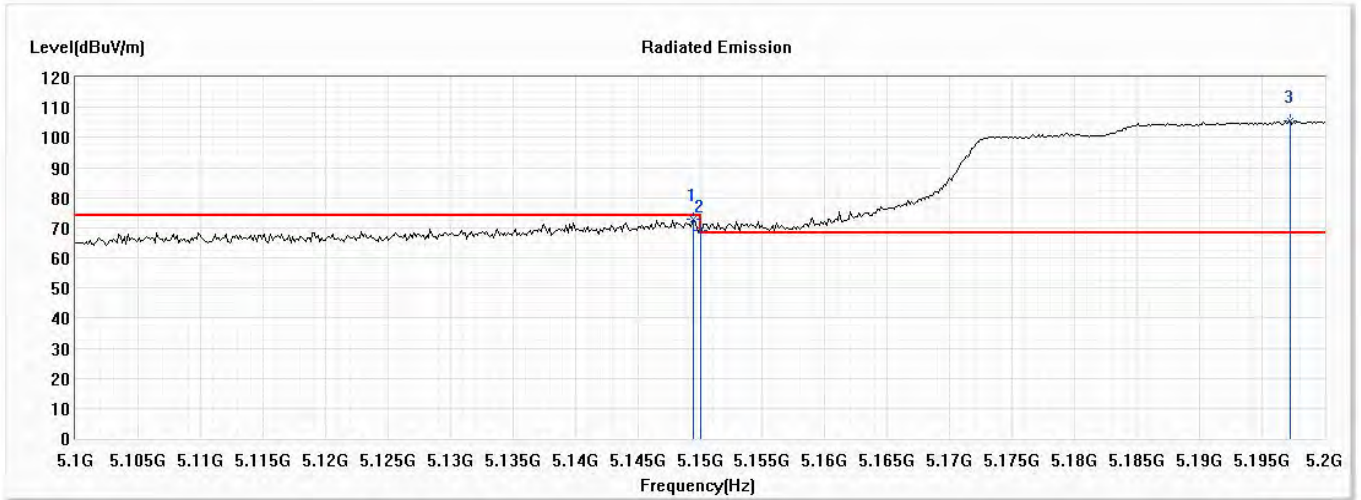


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.420	72.98	74.00	-1.02	54.54	18.44	PK
2	5150.000	69.14	74.00	-4.86	50.70	18.44	PK
! 3	5197.246	105.54	--	--	87.00	18.54	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

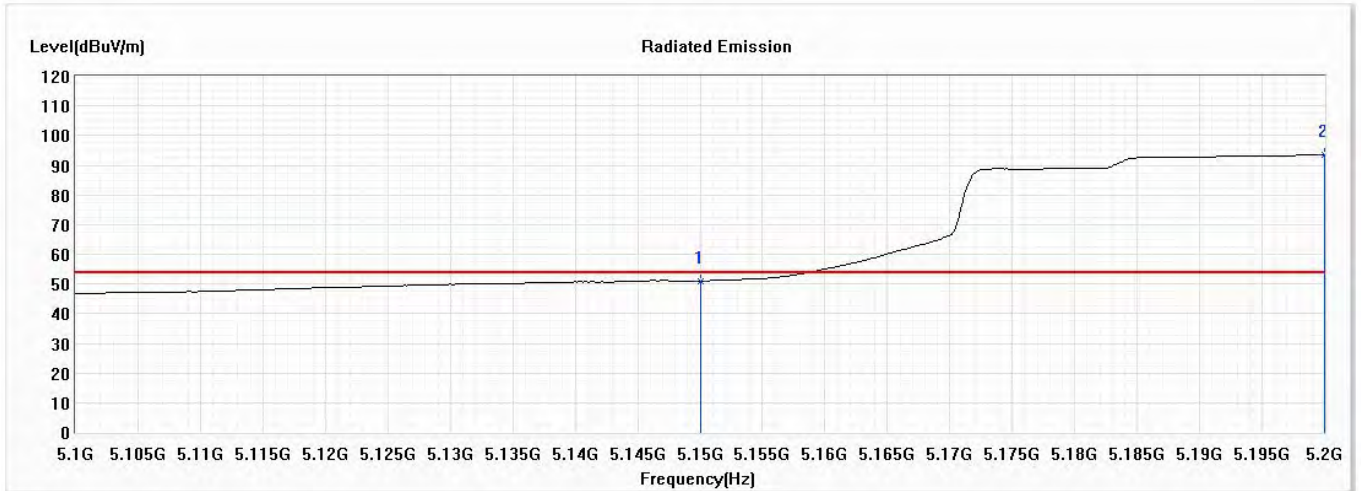


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	51.01	54.00	-2.99	32.57	18.44	AV
! 2	5200.000	93.56	--	--	75.01	18.55	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

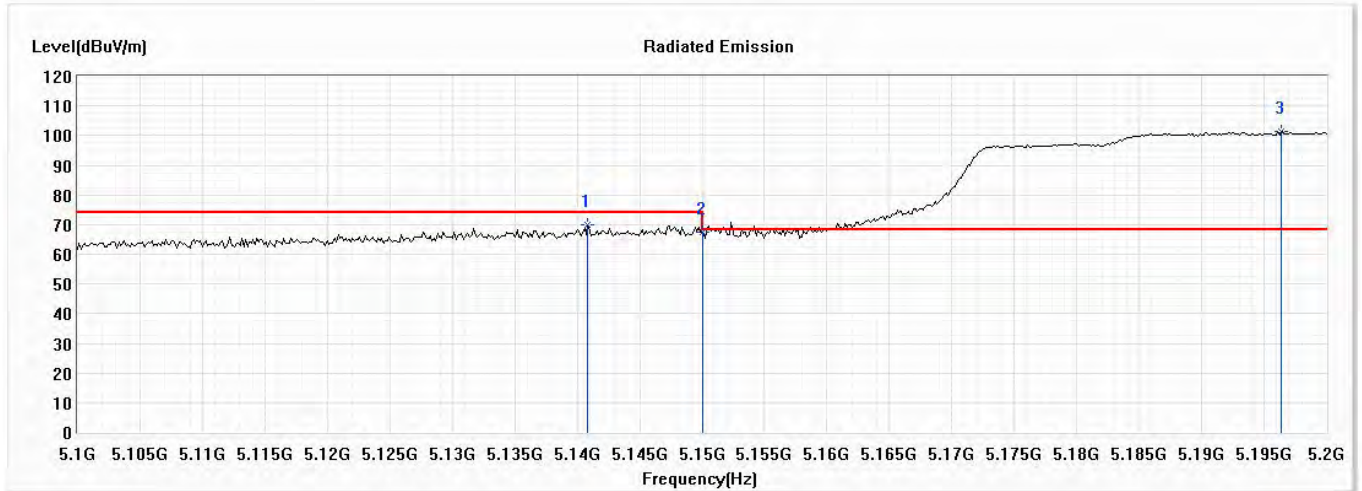


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5140.870	69.90	74.00	-4.10	51.52	18.38	PK
2	5150.000	67.43	74.00	-6.57	48.99	18.44	PK
! 3	5196.377	101.24	--	--	82.70	18.54	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Vertical

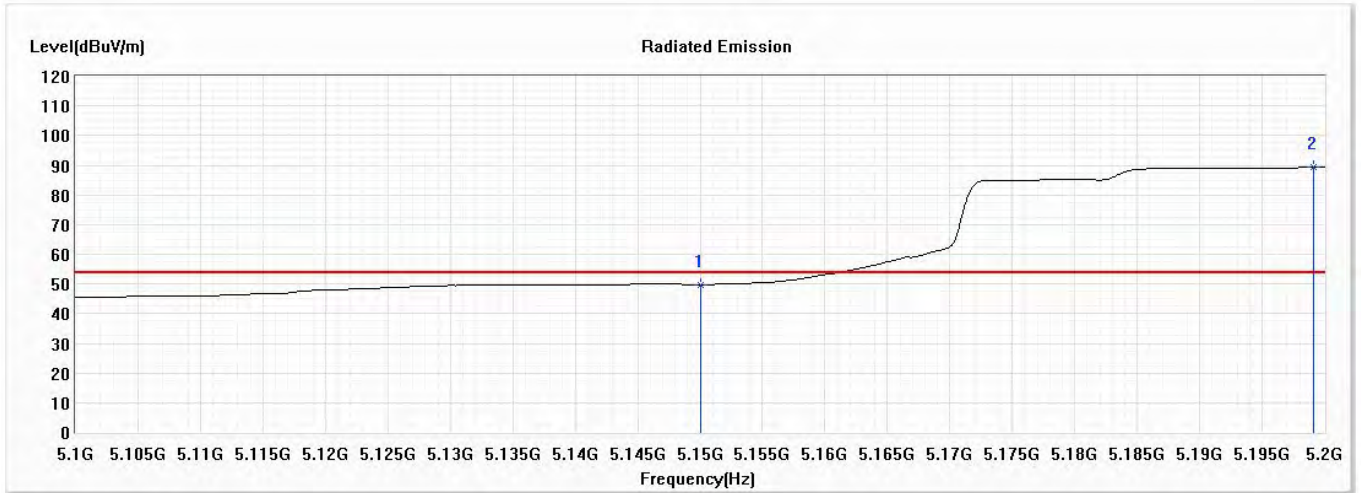


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	49.74	54.00	-4.26	31.30	18.44	AV
! 2	5199.130	89.37	--	--	70.82	18.55	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

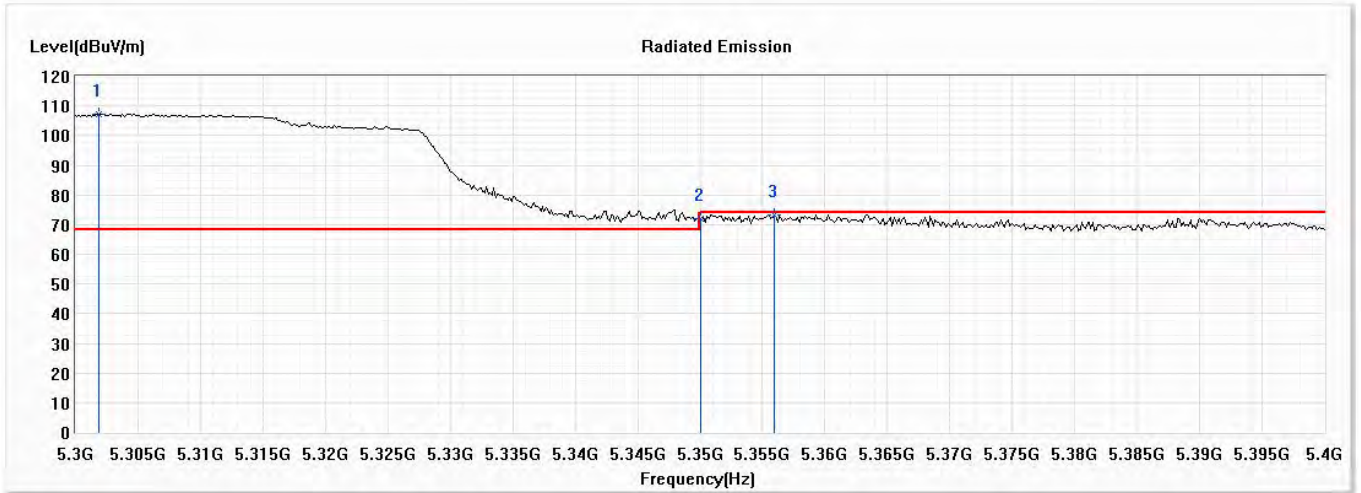


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5301.884	107.36	--	--	88.48	18.88	PK
2	5350.000	71.90	74.00	-2.10	52.94	18.96	PK
3	5355.942	73.41	74.00	-0.59	54.45	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

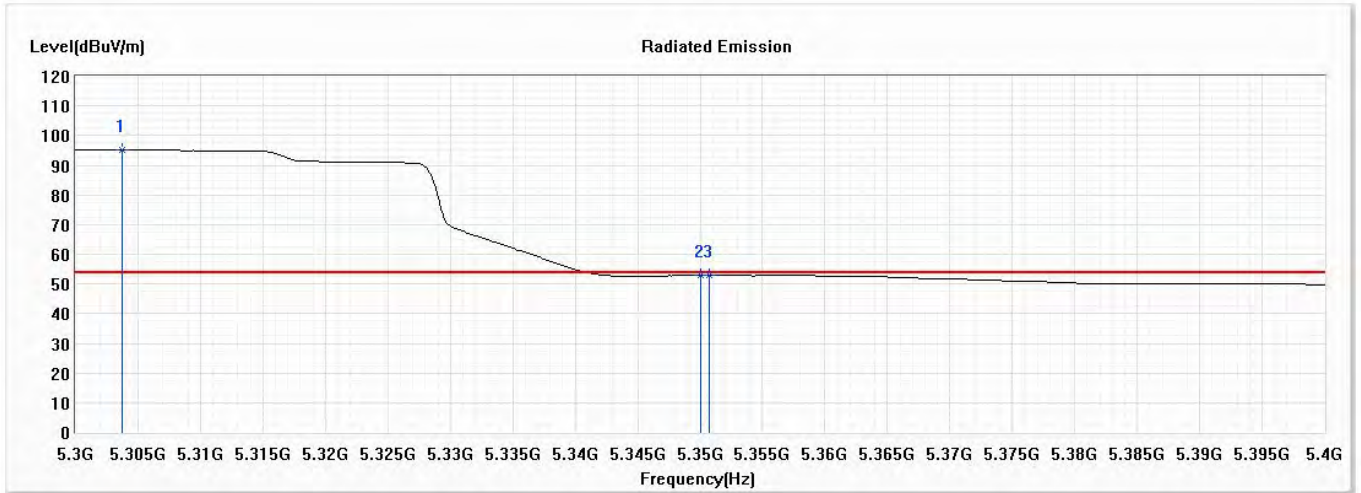


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5303.768	95.22	--	--	76.34	18.88	AV
2	5350.000	52.99	54.00	-1.01	34.03	18.96	AV
3	5350.725	53.02	54.00	-0.98	34.06	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

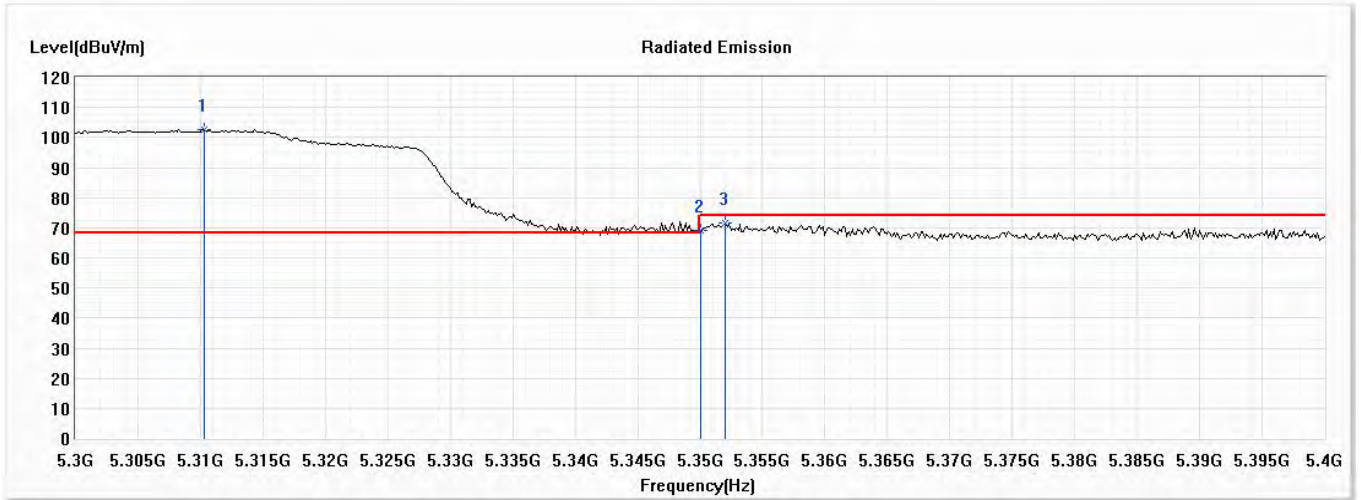


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5310.290	102.62	--	--	83.71	18.91	PK
2	5350.000	69.06	74.00	-4.94	50.10	18.96	PK
3	5352.029	71.75	74.00	-2.25	52.79	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Vertical

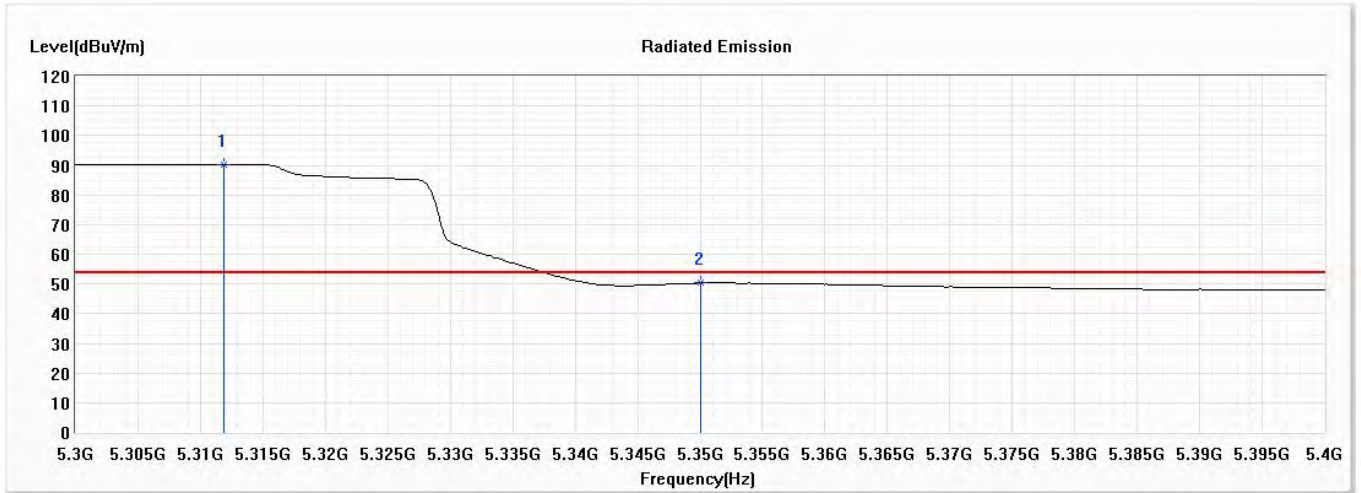


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5311.884	90.34	--	--	71.43	18.91	AV
2	5350.000	50.30	54.00	-3.70	31.34	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

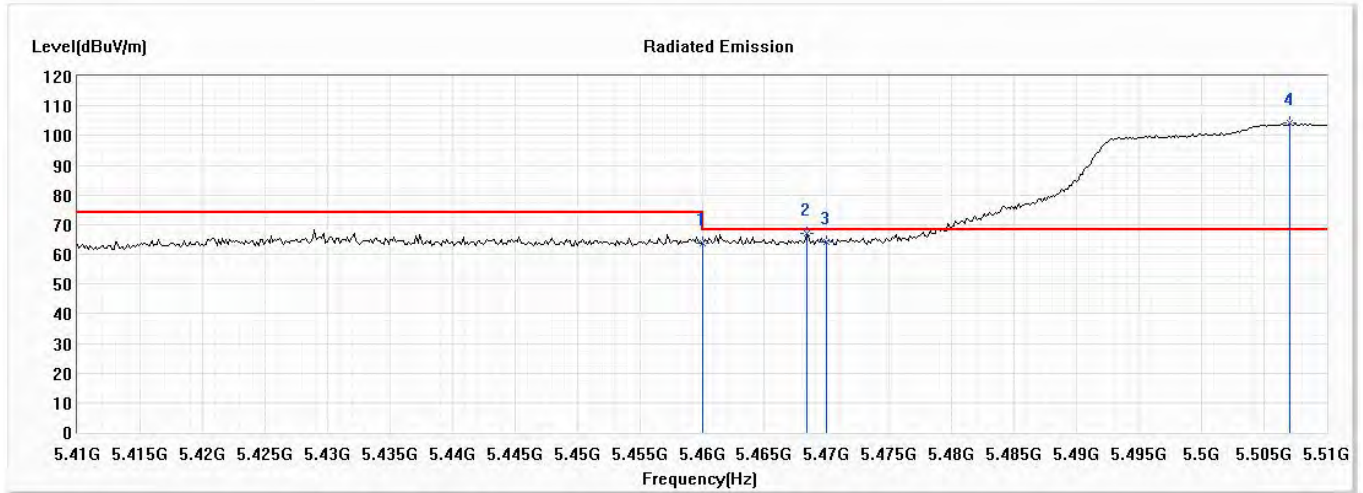


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	63.61	74.00	-10.39	44.68	18.93	PK
2	5468.406	67.17	68.22	-1.05	48.27	18.90	PK
3	5470.000	64.26	68.22	-3.96	45.36	18.90	PK
!4	5507.101	104.09	--	--	85.26	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

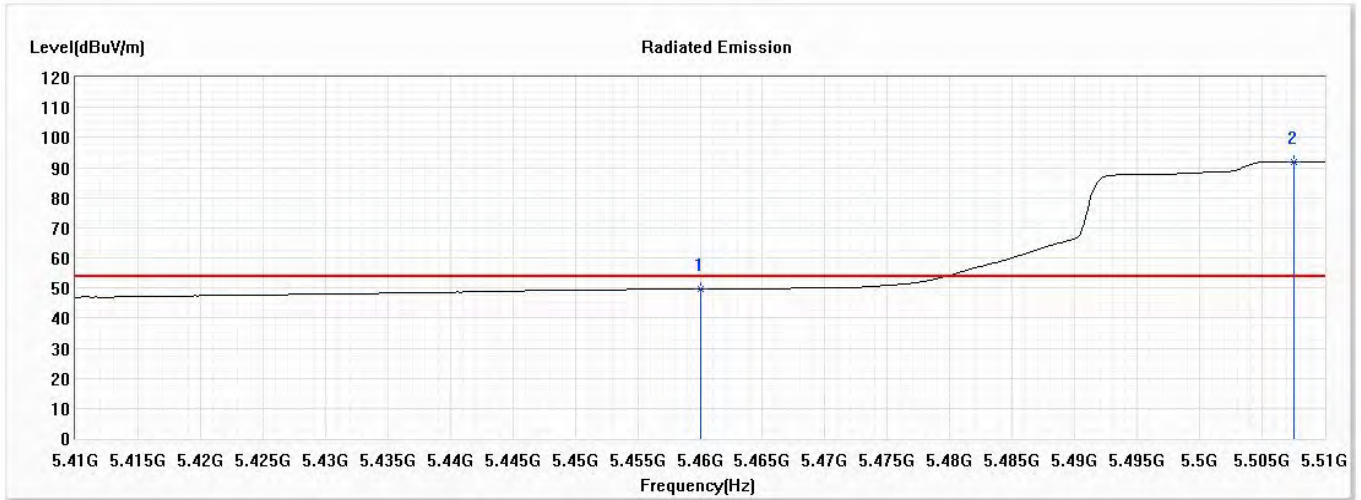


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	49.70	54.00	-4.30	30.77	18.93	AV
! 2	5507.536	91.98	--	--	73.15	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

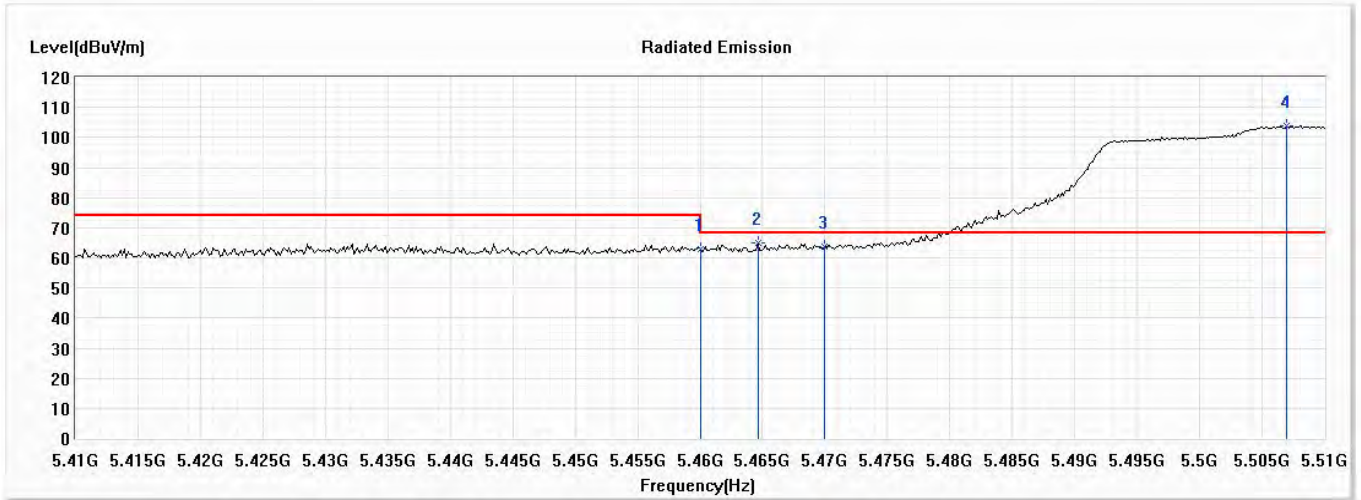


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	62.89	74.00	-11.11	43.96	18.93	PK
2	5464.638	65.12	68.22	-3.10	46.20	18.92	PK
3	5470.000	63.67	68.22	-4.55	44.77	18.90	PK
!4	5506.957	103.99	--	--	85.16	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

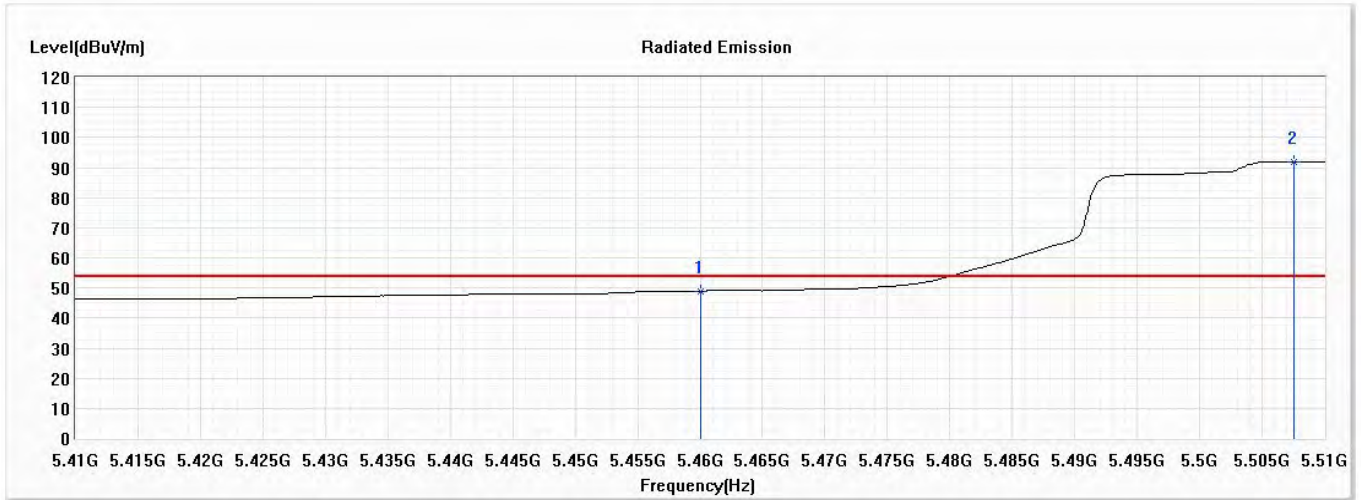


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	48.96	54.00	-5.04	30.03	18.93	AV
! 2	5507.536	91.99	--	--	73.16	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Horizontal

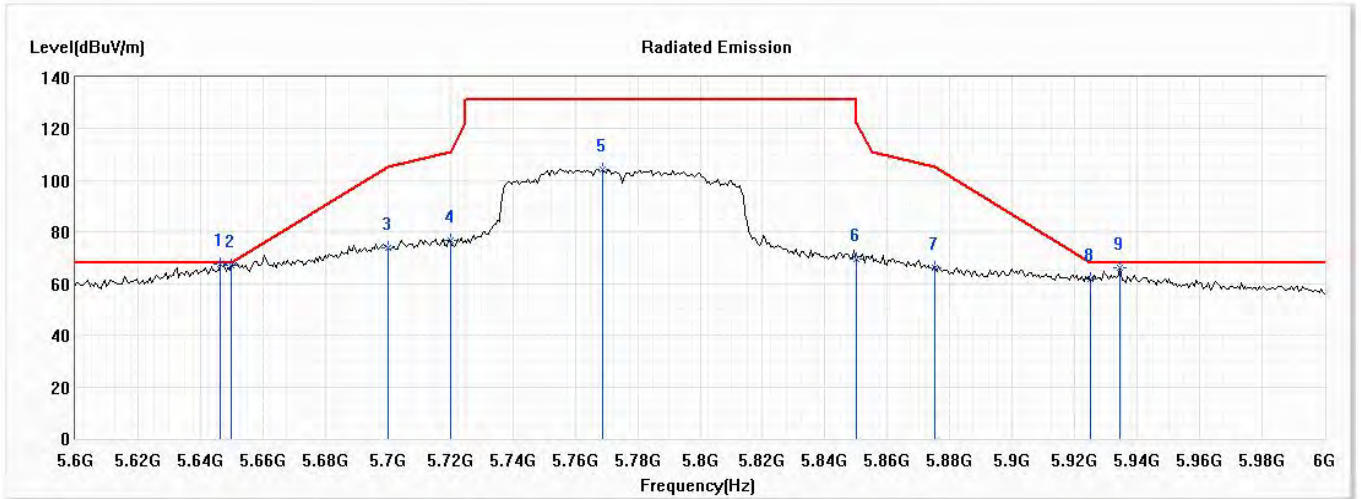

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5646.377	67.45	68.22	-0.77	48.35	19.10	PK
2	5650.000	66.94	68.22	-1.28	47.83	19.11	PK
3	5700.000	73.94	105.20	-31.26	54.81	19.13	PK
4	5720.000	76.76	110.80	-34.04	57.59	19.17	PK
5	5768.696	104.24	131.20	-26.96	84.92	19.32	PK
6	5850.000	69.50	122.20	-52.70	49.80	19.70	PK
7	5875.000	66.13	105.20	-39.07	46.29	19.84	PK
8	5925.000	61.59	68.20	-6.61	41.57	20.02	PK
9	5934.493	65.90	68.20	-2.30	45.85	20.05	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Vertical

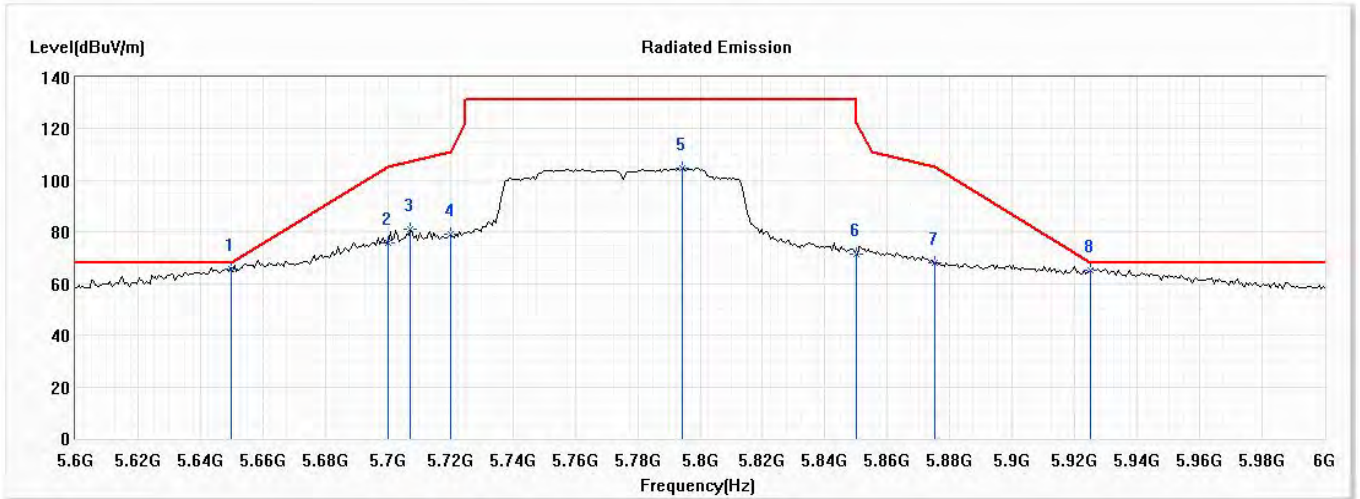

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	65.66	68.22	-2.56	46.55	19.11	PK
2	5700.000	75.77	105.20	-29.43	56.64	19.13	PK
3	5707.246	80.96	107.23	-26.27	61.82	19.14	PK
4	5720.000	79.25	110.80	-31.55	60.08	19.17	PK
5	5794.203	104.64	131.20	-26.56	85.16	19.48	PK
6	5850.000	71.33	122.20	-50.87	51.63	19.70	PK
7	5875.000	68.18	105.20	-37.02	48.34	19.84	PK
8	5925.000	64.94	68.20	-3.26	44.92	20.02	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

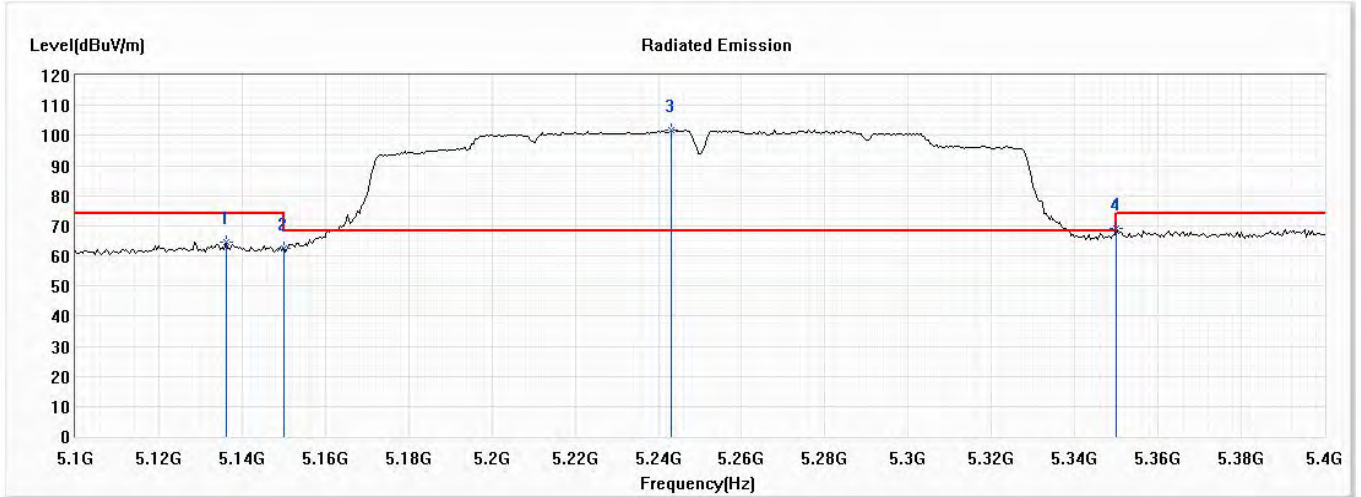


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5136.087	64.55	74.00	-9.45	46.20	18.35	PK
2	5150.000	62.65	74.00	-11.35	44.21	18.44	PK
! 3	5243.043	101.89	--	--	83.25	18.64	PK
4	5350.000	68.93	74.00	-5.07	49.97	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

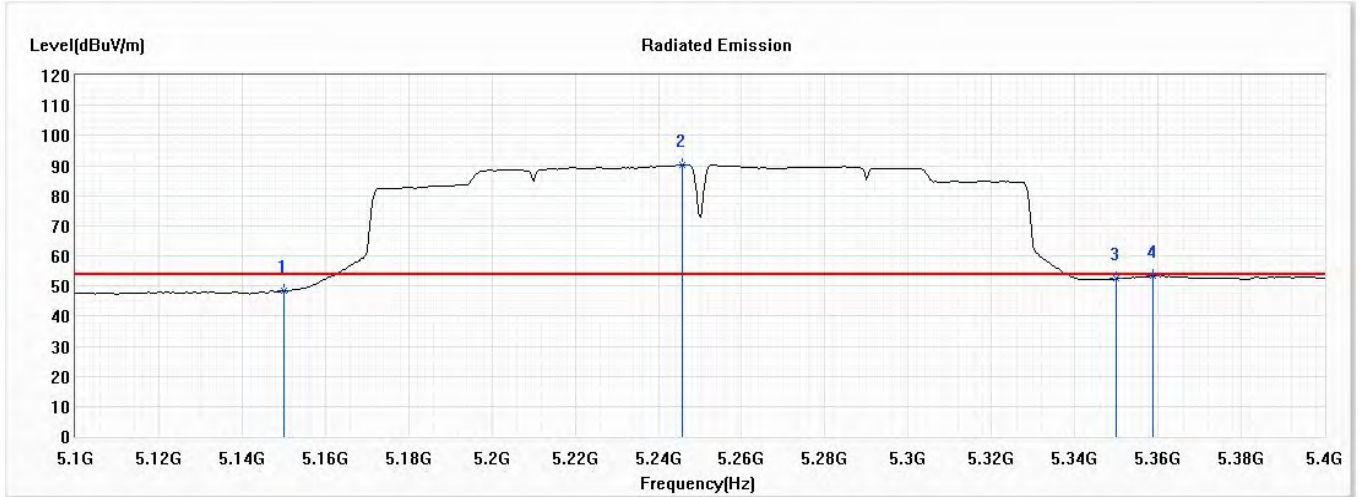


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	48.30	54.00	-5.70	29.86	18.44	AV
! 2	5245.652	90.24	--	--	71.59	18.65	AV
3	5350.000	52.40	54.00	-1.60	33.44	18.96	AV
4	5358.696	53.28	54.00	-0.72	34.31	18.97	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

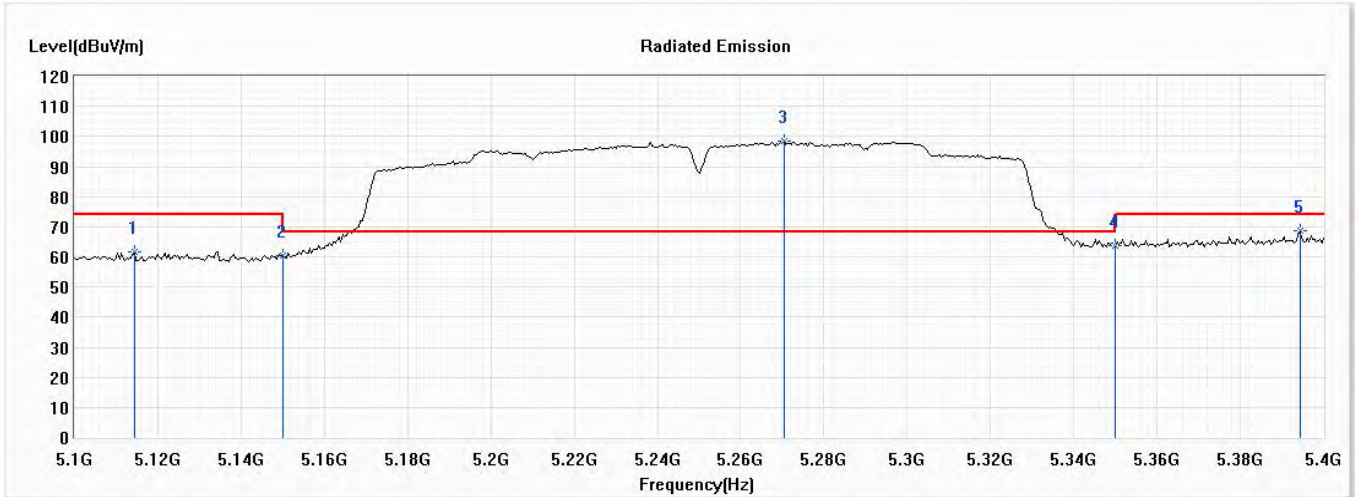


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5114.348	61.54	74.00	-12.46	43.33	18.21	PK
2	5150.000	60.53	74.00	-13.47	42.09	18.44	PK
! 3	5270.435	98.29	--	--	79.54	18.75	PK
4	5350.000	63.58	74.00	-10.42	44.62	18.96	PK
5	5394.348	68.51	74.00	-5.49	49.50	19.01	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Vertical

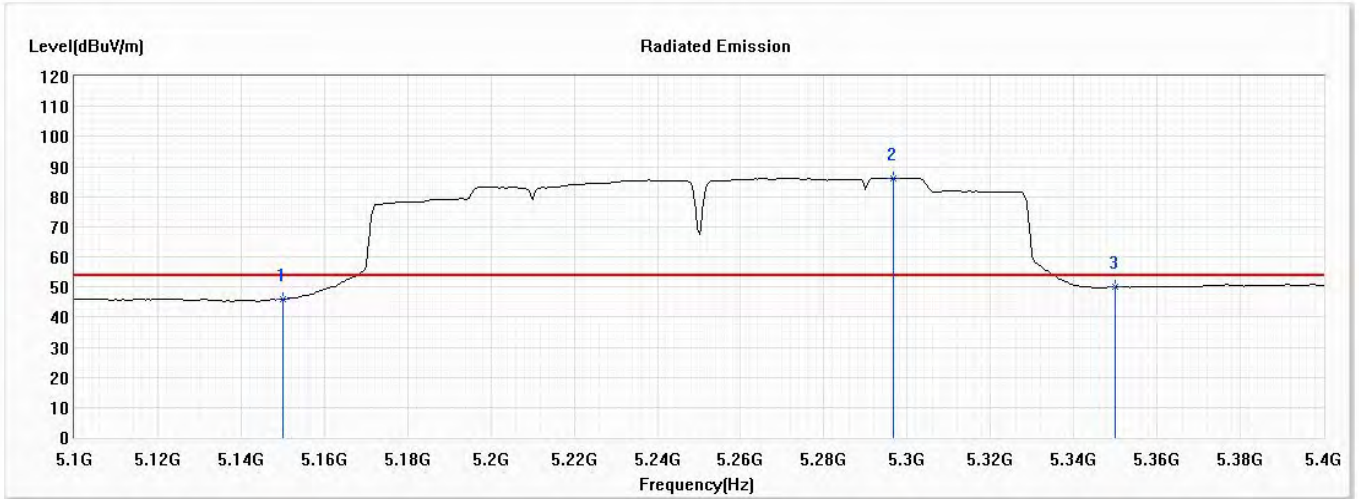


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	46.06	54.00	-7.94	27.62	18.44	AV
! 2	5296.522	86.21	--	--	67.35	18.86	AV
3	5350.000	49.88	54.00	-4.12	30.92	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

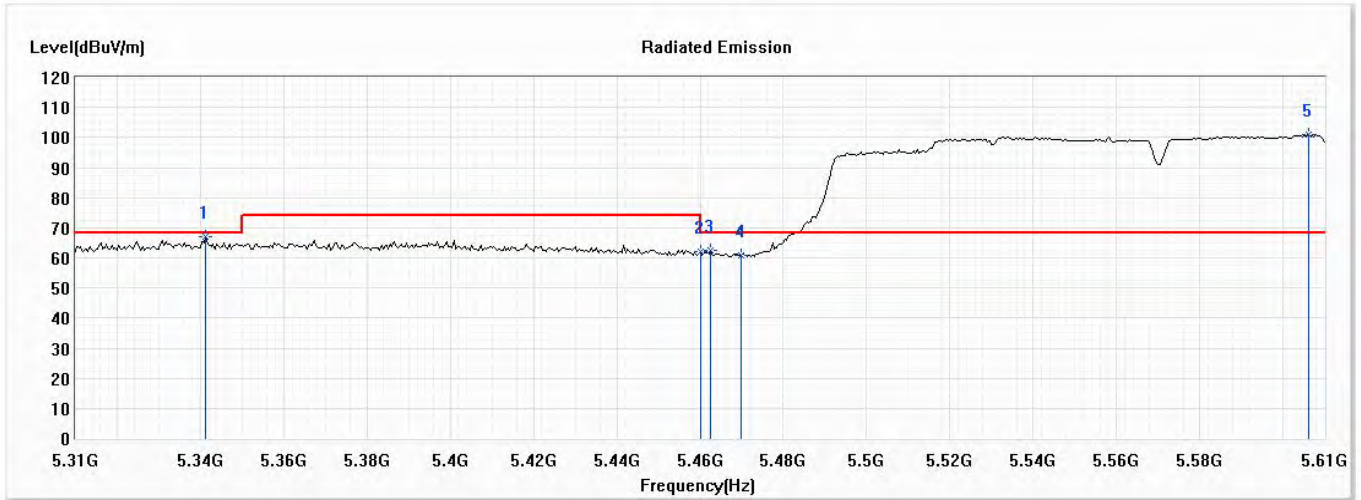


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5341.304	66.95	68.22	-1.27	47.99	18.96	PK
2	5460.000	61.90	74.00	-12.10	42.97	18.93	PK
3	5462.609	62.57	68.22	-5.65	43.65	18.92	PK
4	5470.000	60.67	68.22	-7.55	41.77	18.90	PK
! 5	5606.087	100.95	--	--	81.92	19.03	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

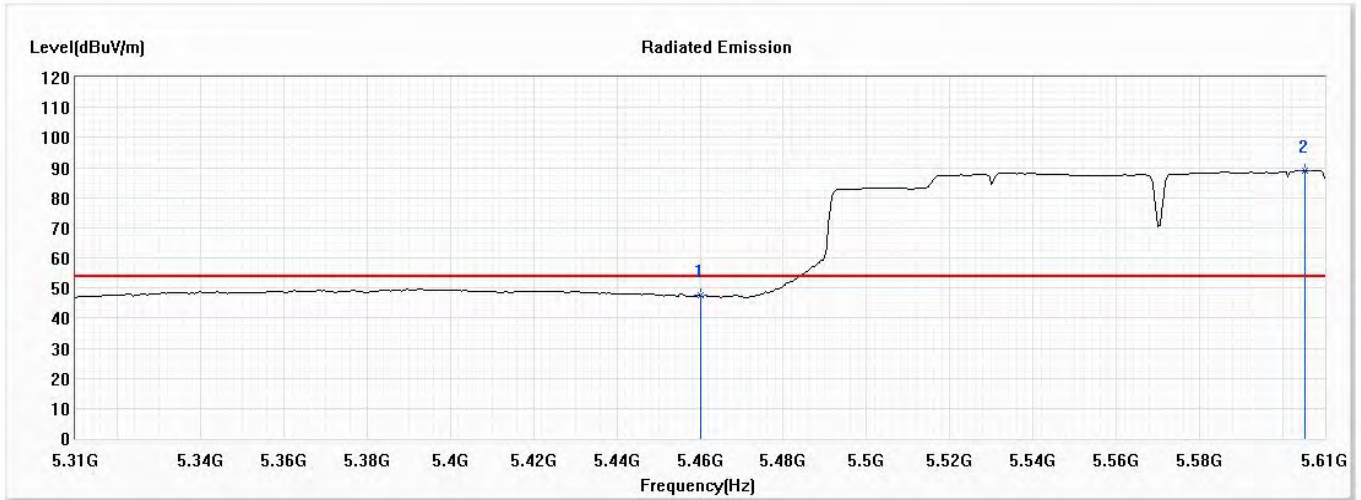


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	47.53	54.00	-6.47	28.60	18.93	AV
! 2	5605.217	89.01	--	--	69.98	19.03	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

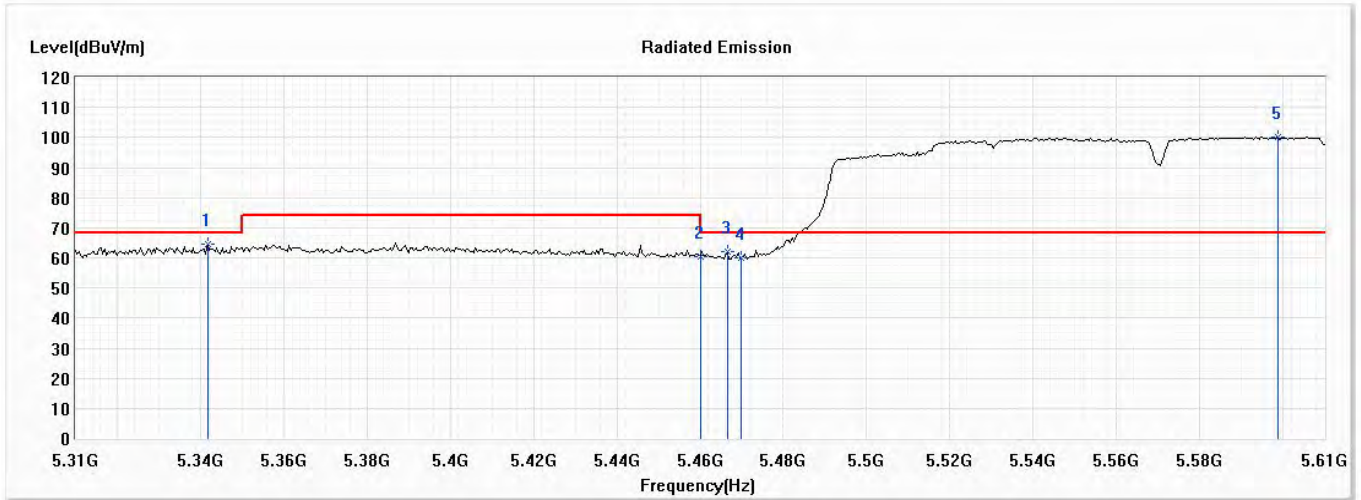


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5341.739	64.44	68.22	-3.78	45.48	18.96	PK
2	5460.000	60.51	74.00	-13.49	41.58	18.93	PK
3	5466.522	62.07	68.22	-6.15	43.16	18.91	PK
4	5470.000	59.83	68.22	-8.39	40.93	18.90	PK
! 5	5598.696	100.21	--	--	81.21	19.00	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Vertical

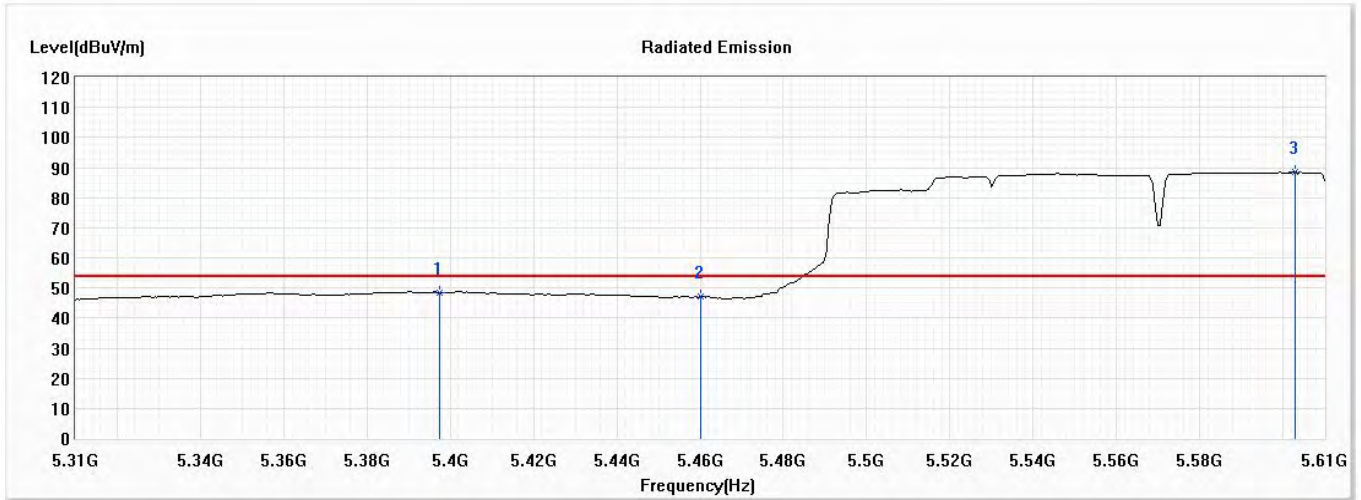


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5397.391	48.51	54.00	-5.49	29.49	19.02	AV
2	5460.000	47.07	54.00	-6.93	28.14	18.93	AV
! 3	5603.043	88.41	--	--	69.39	19.02	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

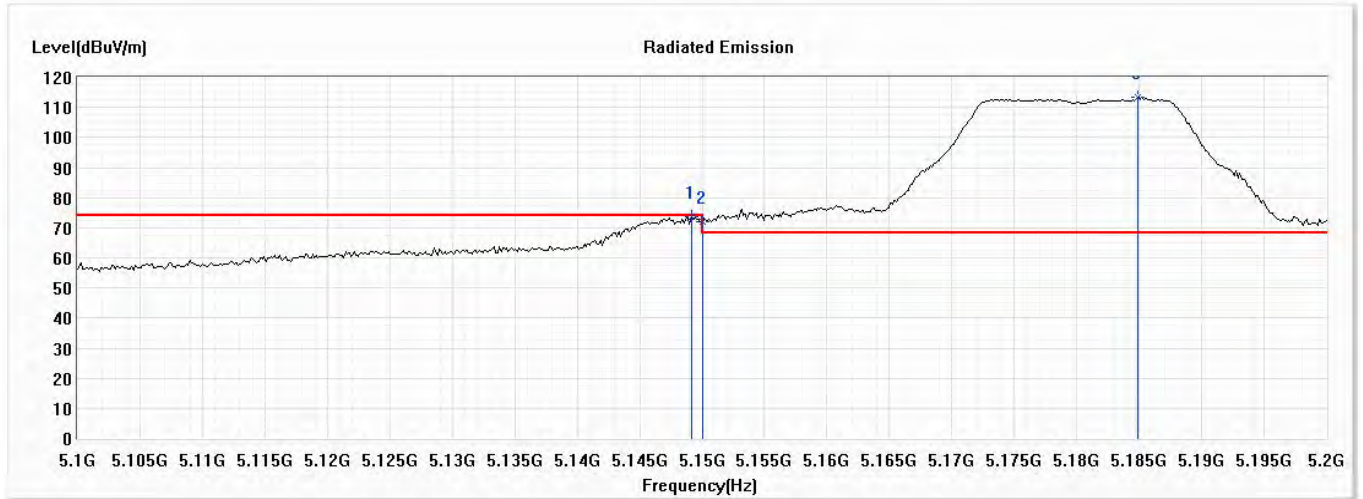


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.130	73.49	74.00	-0.51	55.06	18.43	PK
2	5150.000	72.10	74.00	-1.90	53.66	18.44	PK
! 3	5184.928	113.21	--	--	94.70	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

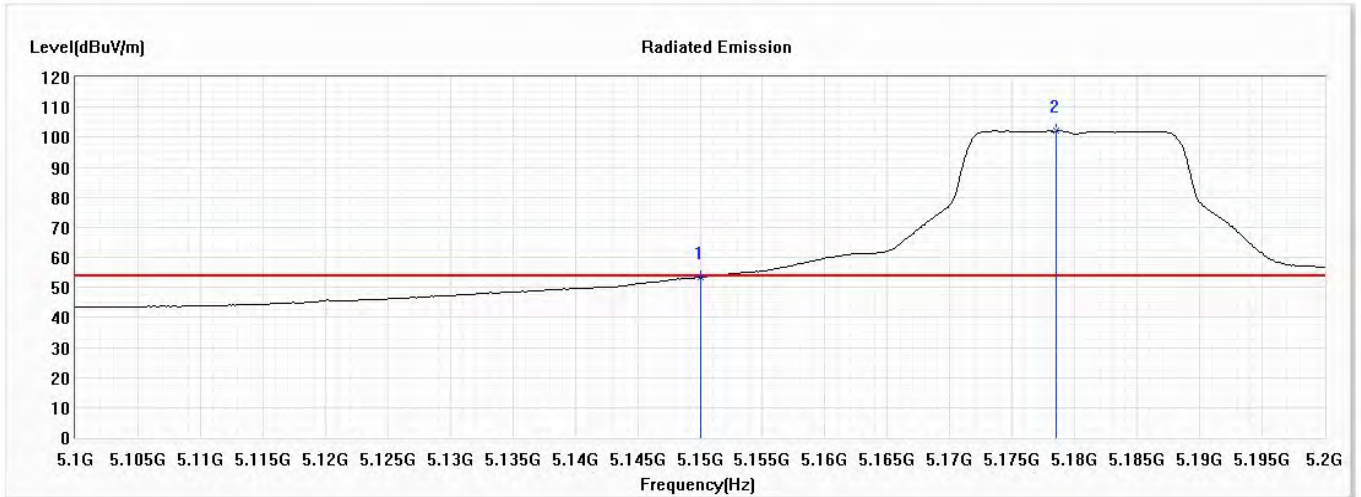


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	53.39	54.00	-0.61	34.95	18.44	AV
! 2	5178.551	102.17	--	--	83.67	18.50	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

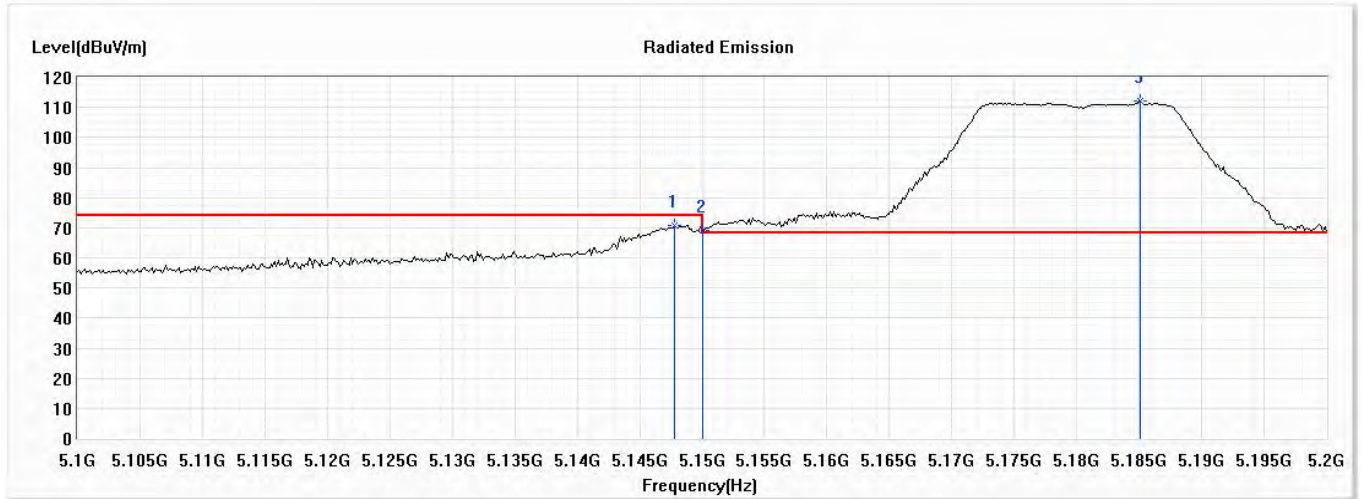


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5147.826	70.86	74.00	-3.14	52.44	18.42	PK
2	5150.000	69.05	74.00	-4.95	50.61	18.44	PK
!3	5185.072	111.98	--	--	93.47	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

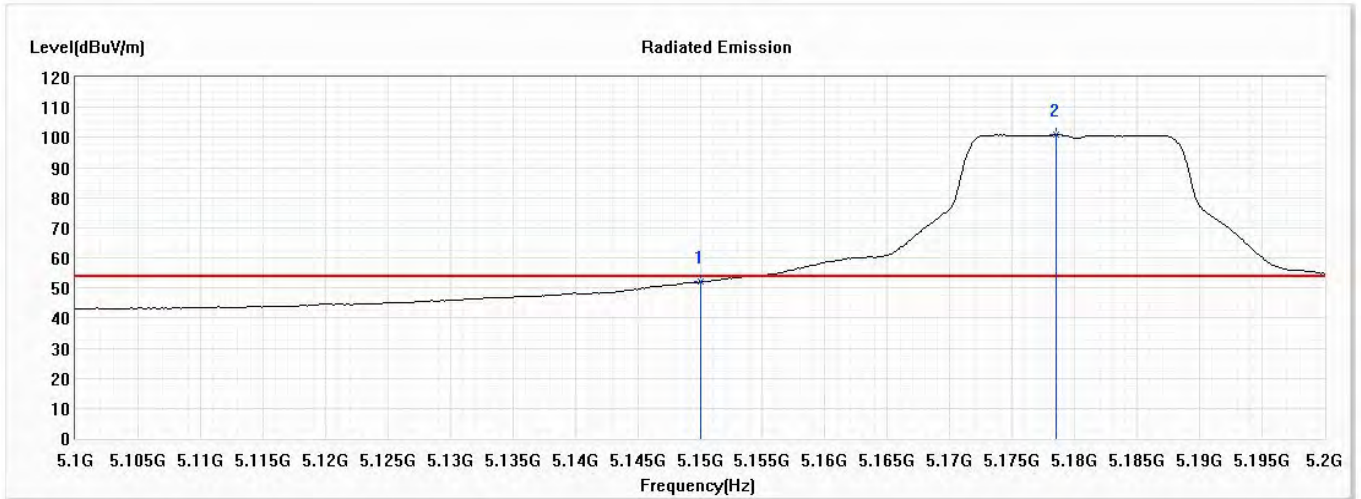


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	51.98	54.00	-2.02	33.54	18.44	AV
! 2	5178.551	100.99	--	--	82.49	18.50	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

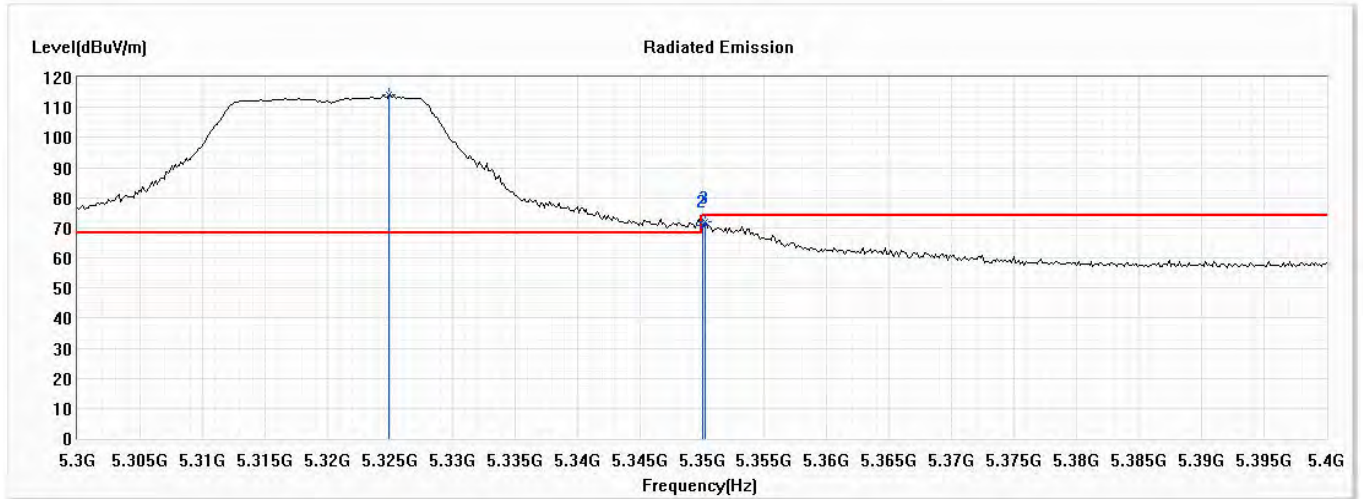


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5324.928	114.03	--	--	95.10	18.93	PK
2	5350.000	70.91	74.00	-3.09	51.95	18.96	PK
3	5350.290	72.11	74.00	-1.89	53.15	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

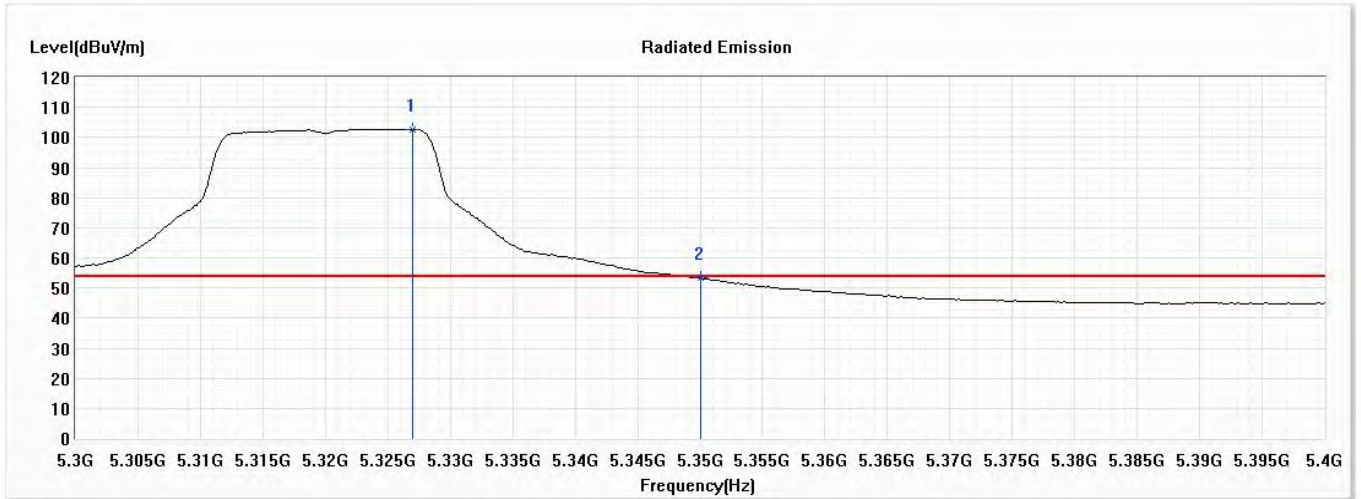


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5326.957	102.79	--	--	83.86	18.93	AV
2	5350.000	53.50	54.00	-0.50	34.54	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

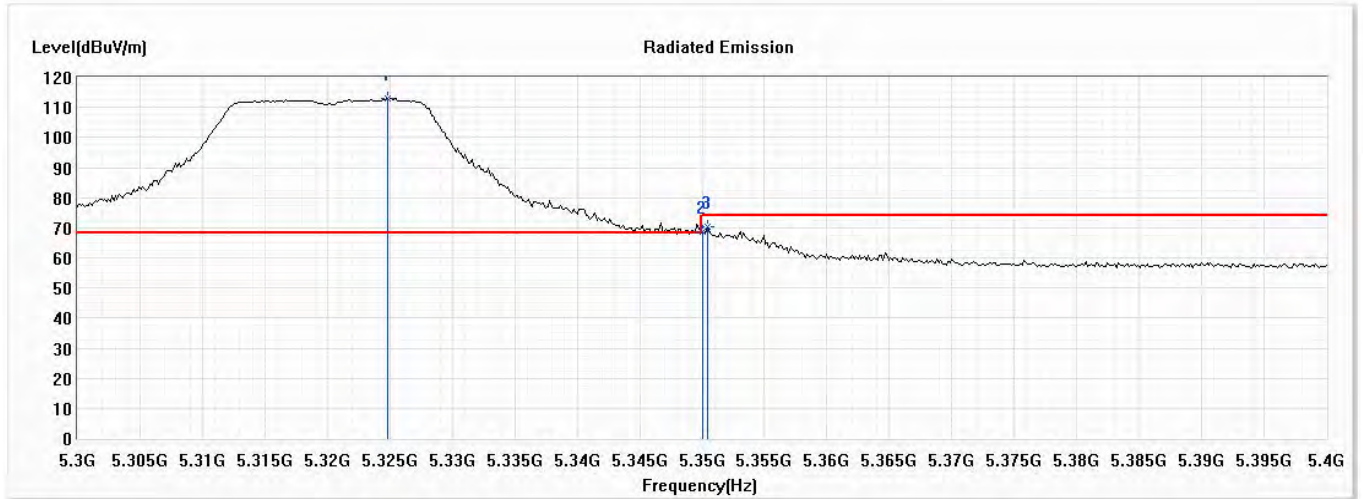


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5324.783	112.97	--	--	94.04	18.93	PK
2	5350.000	68.65	74.00	-5.35	49.69	18.96	PK
3	5350.435	70.53	74.00	-3.47	51.57	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

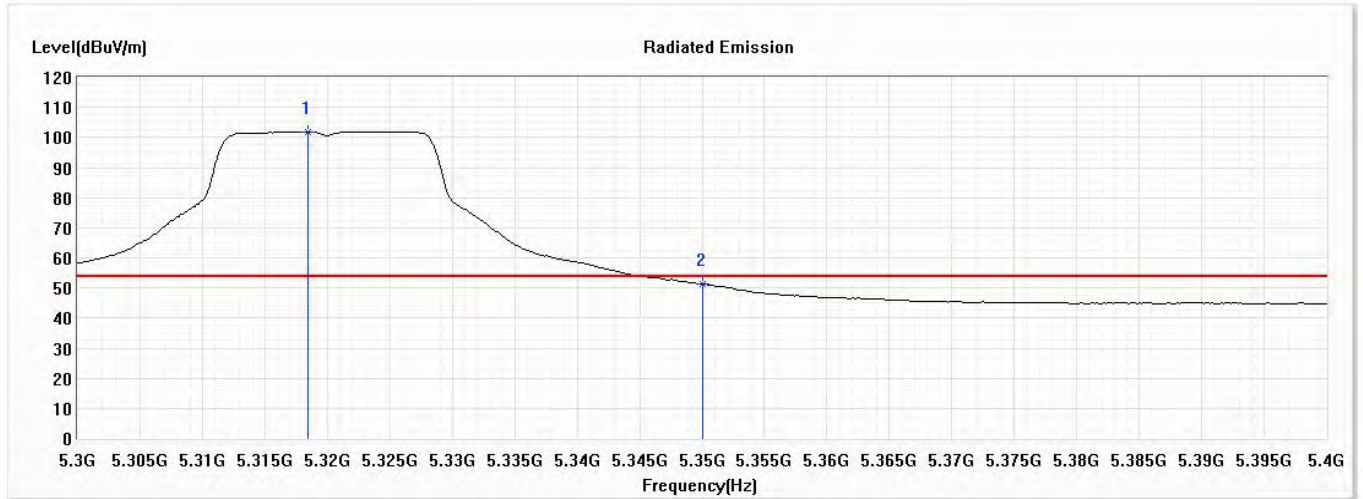


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5318.406	101.95	--	--	83.03	18.92	AV
2	5350.000	51.19	54.00	-2.81	32.23	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

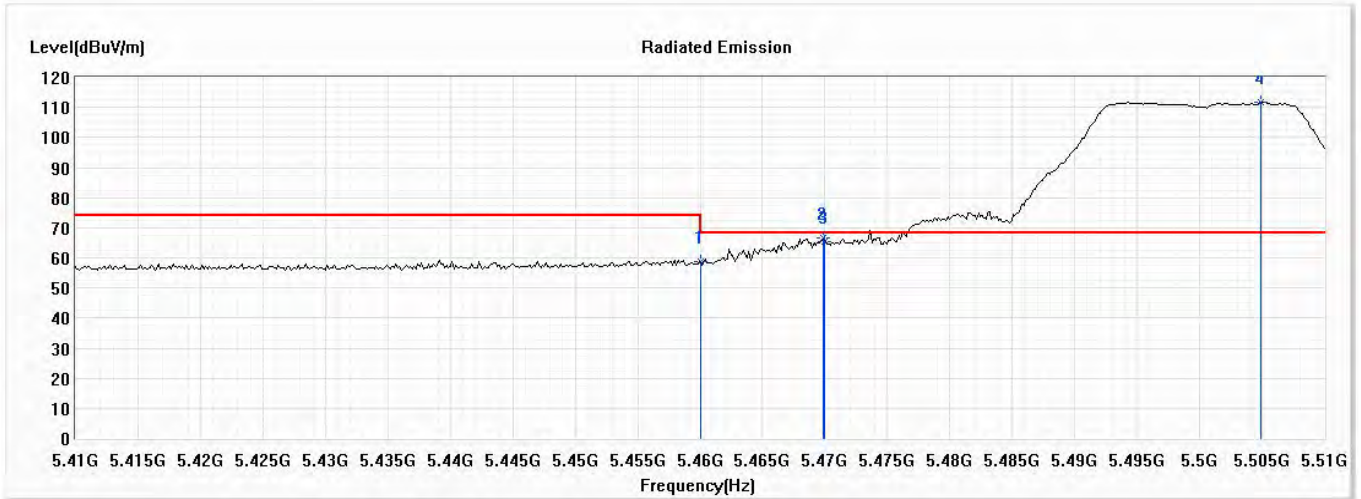


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.75	74.00	-15.25	39.82	18.93	PK
2	5469.855	66.53	68.22	-1.69	47.63	18.90	PK
3	5470.000	65.41	68.22	-2.81	46.51	18.90	PK
! 4	5504.928	111.84	--	--	93.01	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

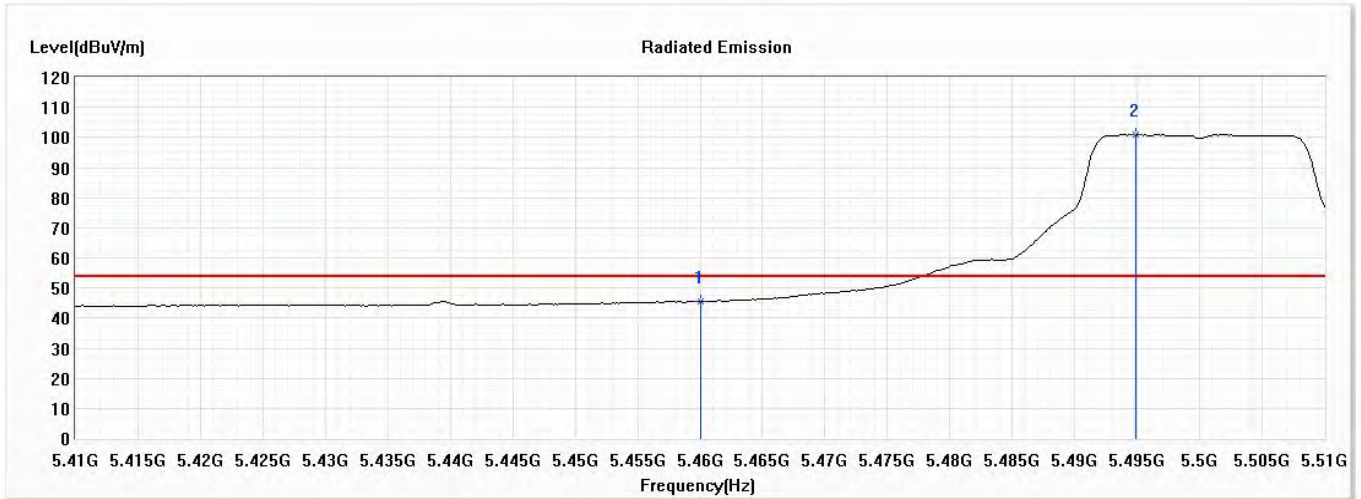


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	45.42	54.00	-8.58	26.49	18.93	AV
! 2	5494.928	101.04	--	--	82.20	18.84	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

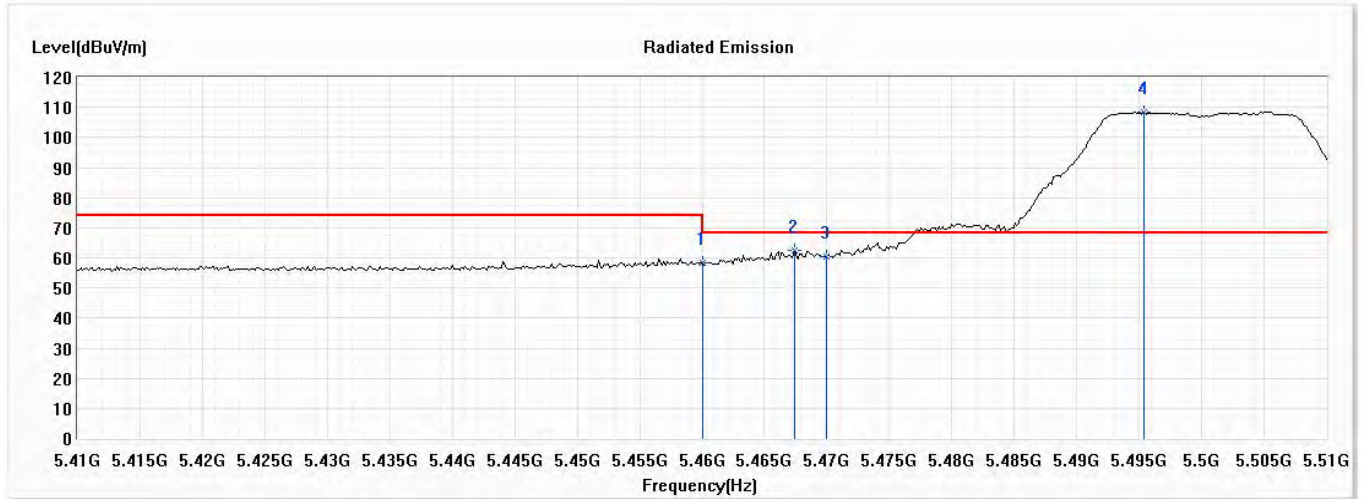


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.51	74.00	-15.49	39.58	18.93	PK
2	5467.391	62.41	68.22	-5.81	43.50	18.91	PK
3	5470.000	60.28	68.22	-7.94	41.38	18.90	PK
! 4	5495.362	108.46	--	--	89.62	18.84	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/02/24
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

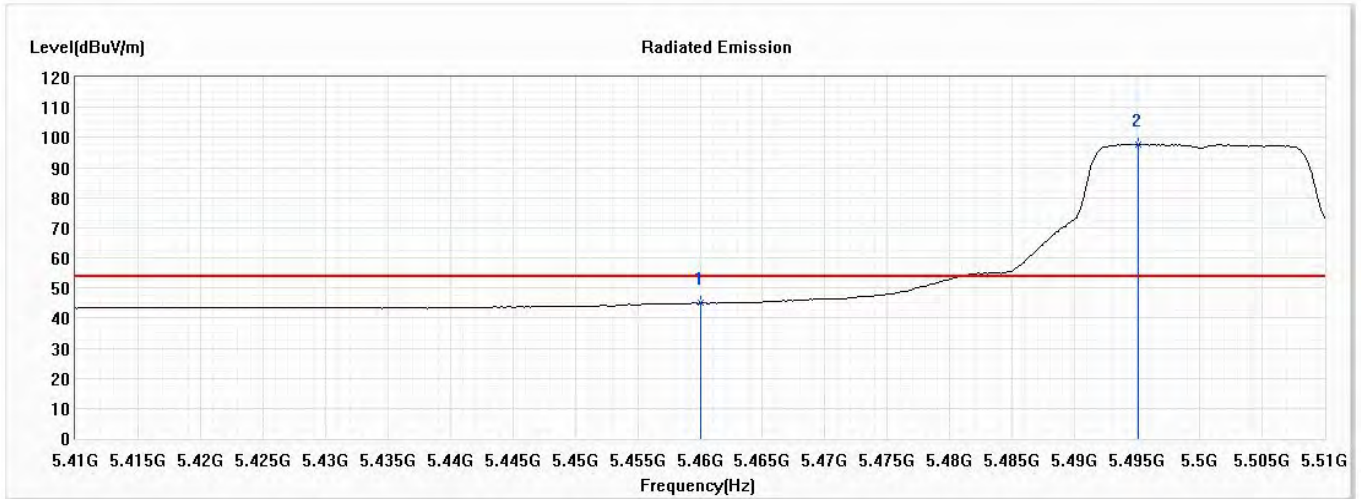


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.90	54.00	-9.10	25.97	18.93	AV
! 2	5495.072	97.70	--	--	78.86	18.84	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Horizontal

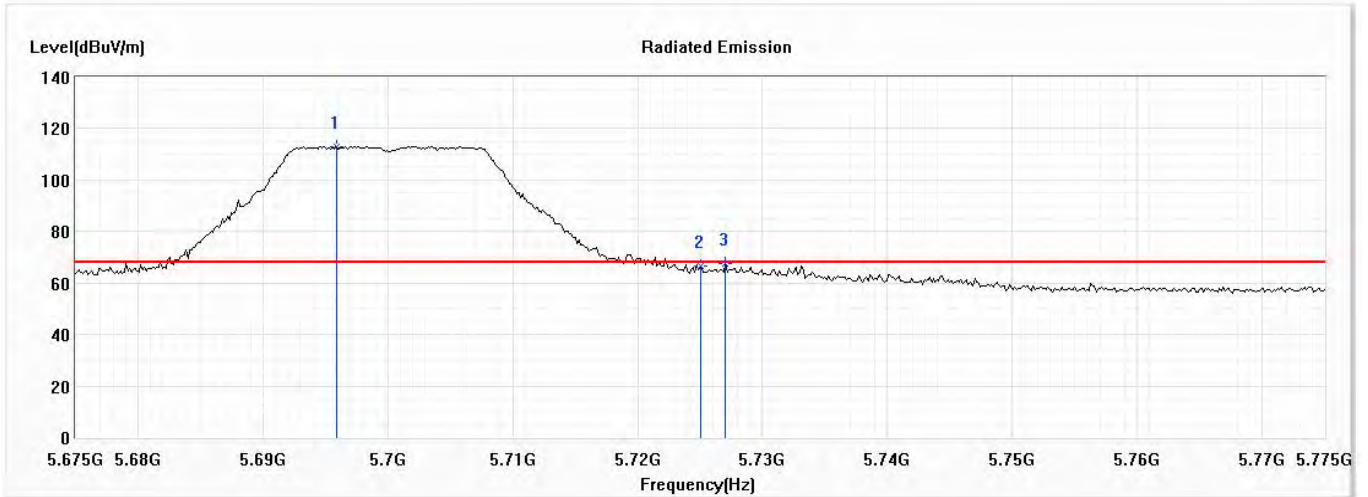

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5695.870	113.04	--	--	93.92	19.12	PK
2	5725.000	66.68	68.22	-1.54	47.50	19.18	PK
3	5727.029	67.47	68.22	-0.75	48.29	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Vertical

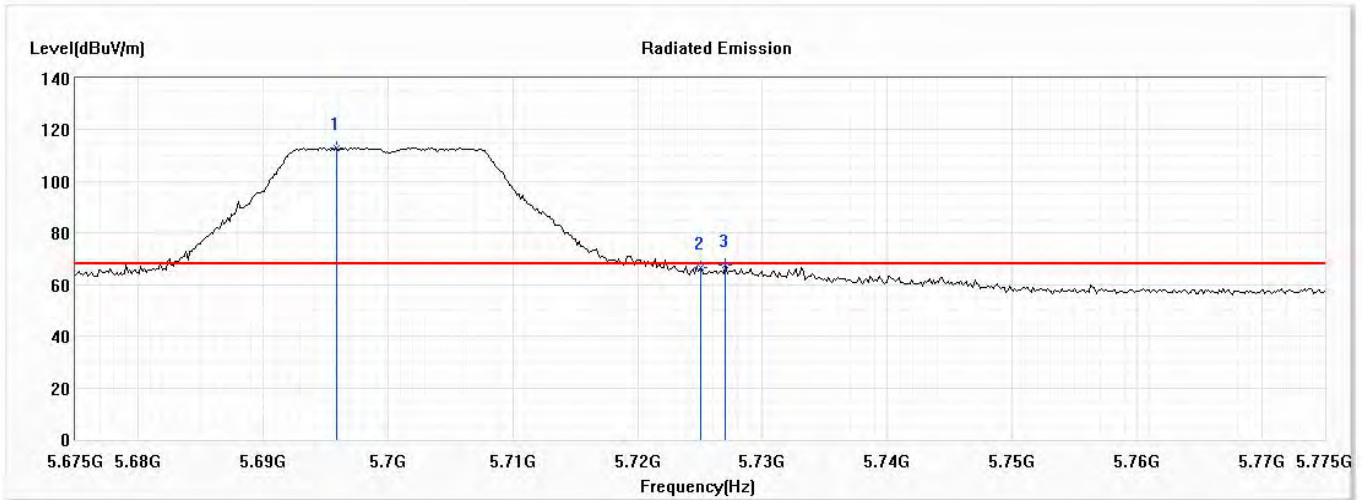

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5695.870	113.04	--	--	93.92	19.12	PK
2	5725.000	66.68	68.22	-1.54	47.50	19.18	PK
3	5727.029	67.47	68.22	-0.75	48.29	19.18	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

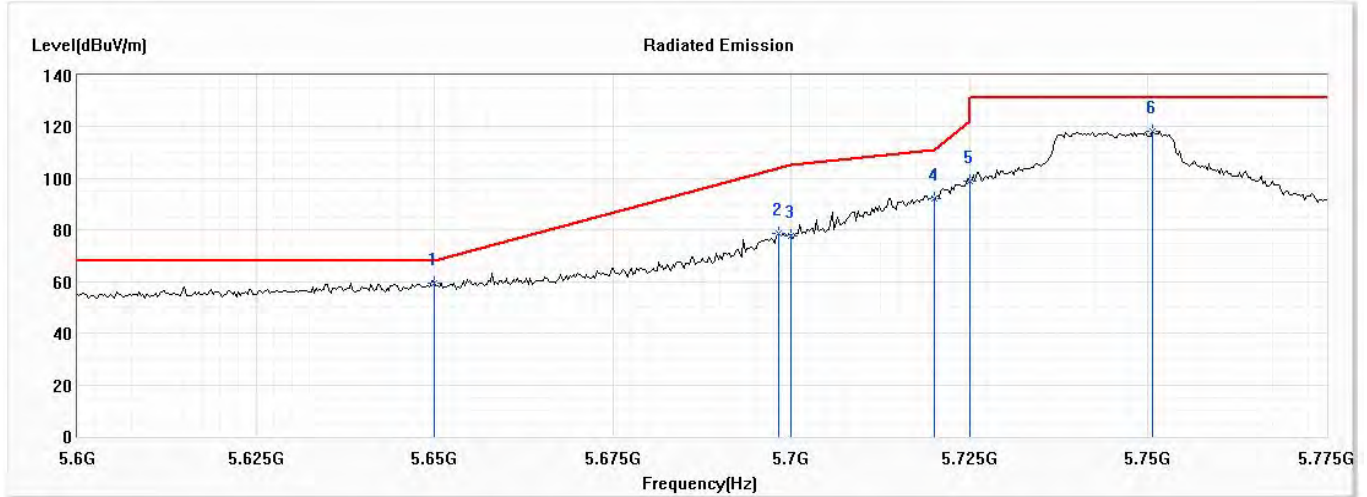

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	59.53	68.22	-8.69	40.42	19.11	PK
2	5698.152	78.89	103.84	-24.95	59.77	19.12	PK
3	5700.000	77.62	105.20	-27.58	58.49	19.13	PK
4	5720.000	92.43	110.80	-18.37	73.26	19.17	PK
5	5725.000	99.06	122.20	-23.14	79.88	19.18	PK
6	5750.652	118.28	131.20	-12.92	99.02	19.26	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

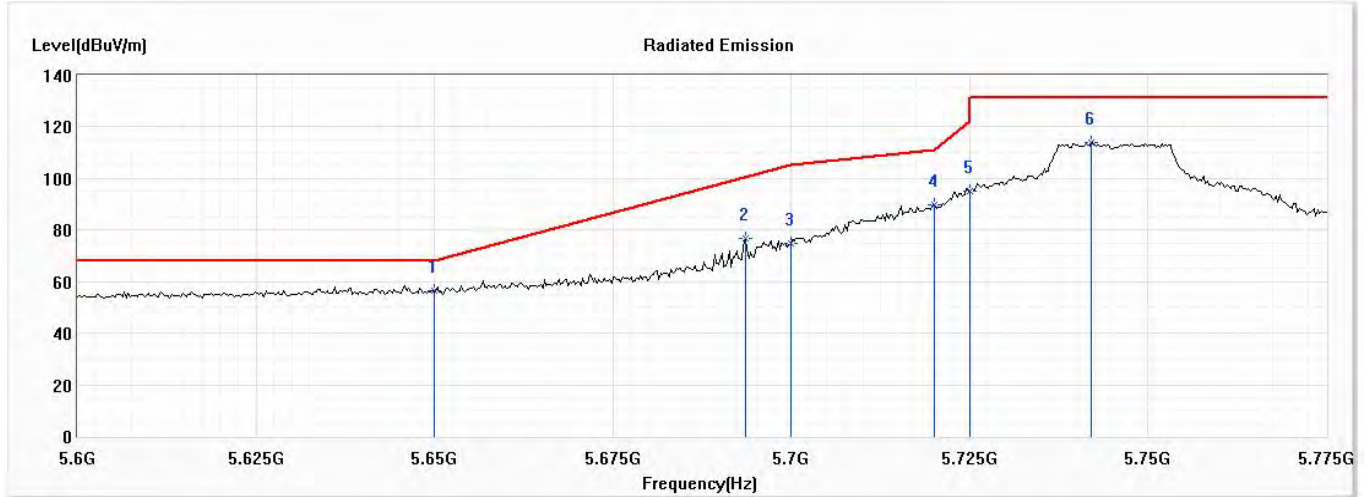

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	56.29	68.22	-11.93	37.18	19.11	PK
2	5693.587	76.82	100.48	-23.66	57.70	19.12	PK
3	5700.000	74.73	105.20	-30.47	55.60	19.13	PK
4	5720.000	89.86	110.80	-20.94	70.69	19.17	PK
5	5725.000	95.17	122.20	-27.03	75.99	19.18	PK
6	5742.029	113.93	131.20	-17.27	94.69	19.24	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Horizontal

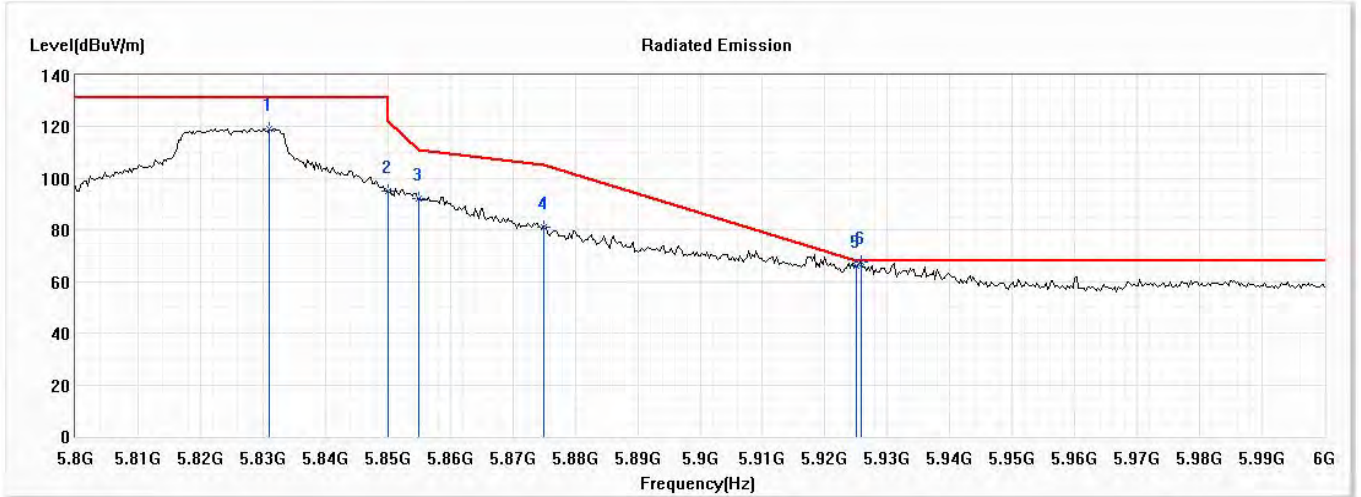

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5831.014	119.36	131.20	-11.84	99.72	19.64	PK
2	5850.000	95.16	122.20	-27.04	75.46	19.70	PK
3	5855.000	92.15	110.80	-18.65	72.42	19.73	PK
4	5875.000	81.28	105.20	-23.92	61.44	19.84	PK
5	5925.000	66.09	68.20	-2.11	46.07	20.02	PK
* 6	5925.797	67.60	68.20	-0.60	47.58	20.02	PK

Product : Intel® Wireless-AC 9260
 Test Item : Band Edge Data
 Test Date : 2021/03/05
 Test Mode : Mode 6 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)

Vertical

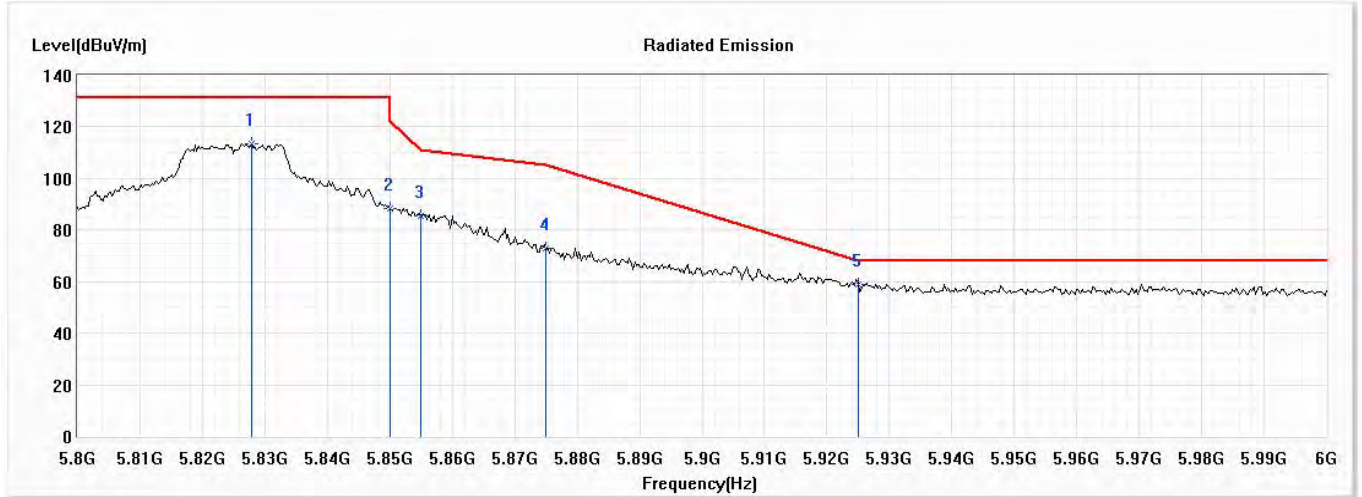

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5827.826	113.30	131.20	-17.90	93.67	19.63	PK
2	5850.000	88.53	122.20	-33.67	68.83	19.70	PK
3	5855.000	85.50	110.80	-25.30	65.77	19.73	PK
4	5875.000	72.94	105.20	-32.26	53.10	19.84	PK
* 5	5925.000	58.85	68.20	-9.35	38.83	20.02	PK