


Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 36 (5180MHz)

**Horizontal**

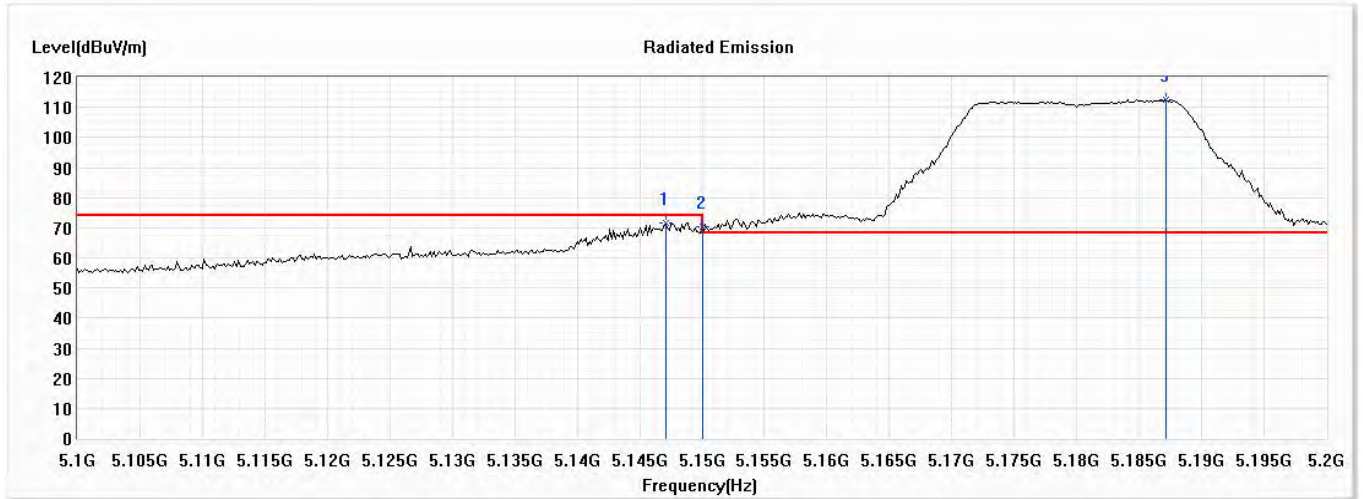


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5147.101	71.64	74.00	-2.36	53.22	18.42	PK
2	5150.000	70.19	74.00	-3.81	51.75	18.44	PK
! 3	5187.101	112.59	--	--	94.08	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 36 (5180MHz)

**Horizontal**

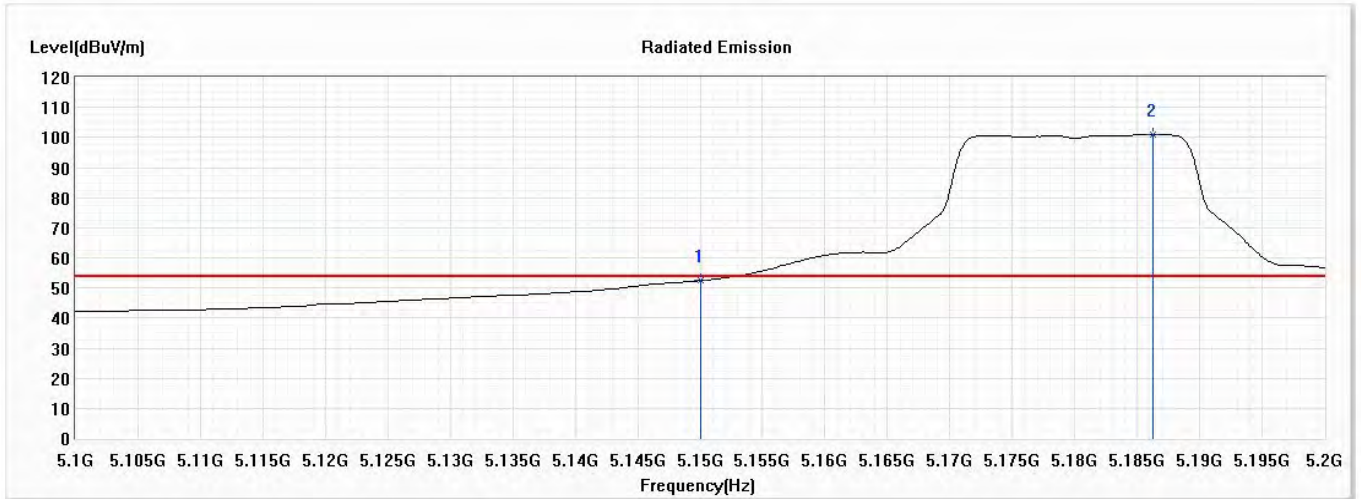


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.46	54.00	-1.54	34.02	18.44	AV
! 2	5186.232	101.00	--	--	82.49	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 36 (5180MHz)

**Vertical**

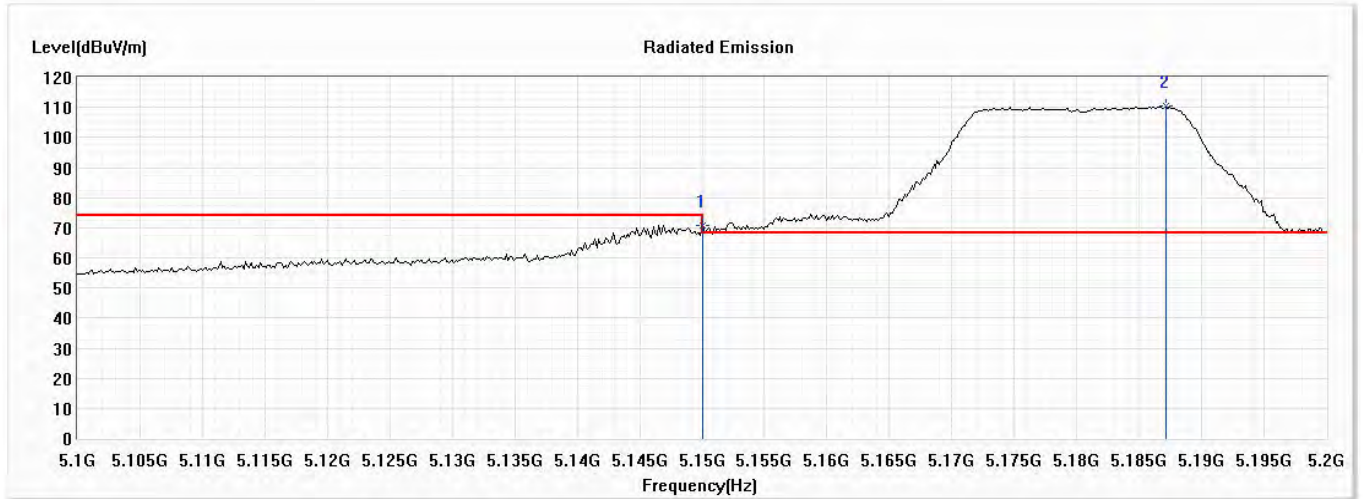


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	70.77	74.00	-3.23	52.33	18.44	PK
! 2	5187.101	110.33	--	--	91.82	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 36 (5180MHz)

**Vertical**

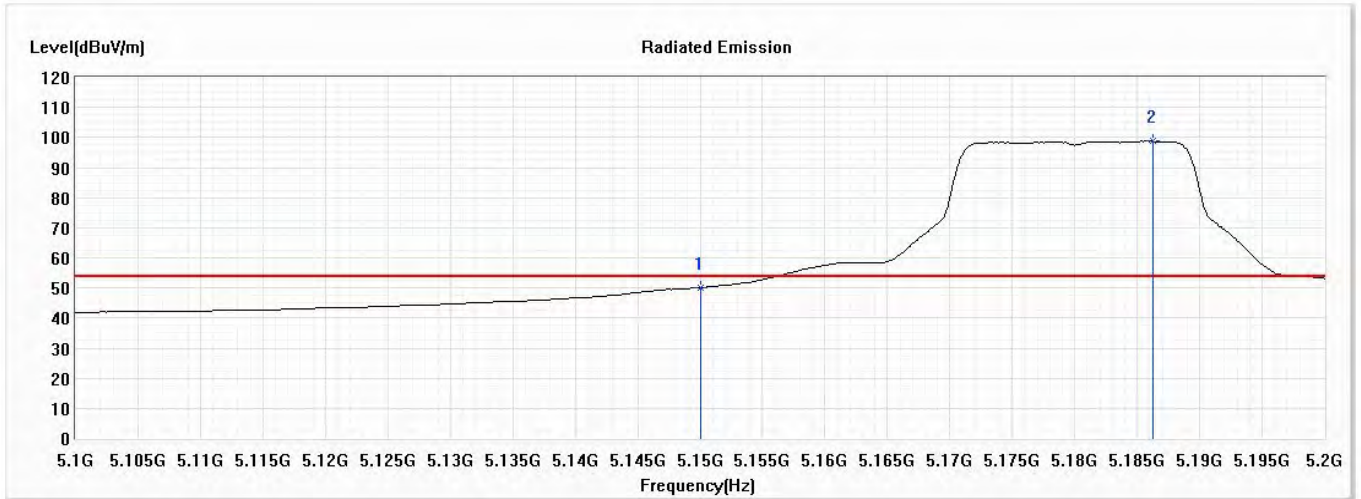


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.11	54.00	-3.89	31.67	18.44	AV
! 2	5186.232	98.73	--	--	80.22	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 64 (5320MHz)

**Horizontal**

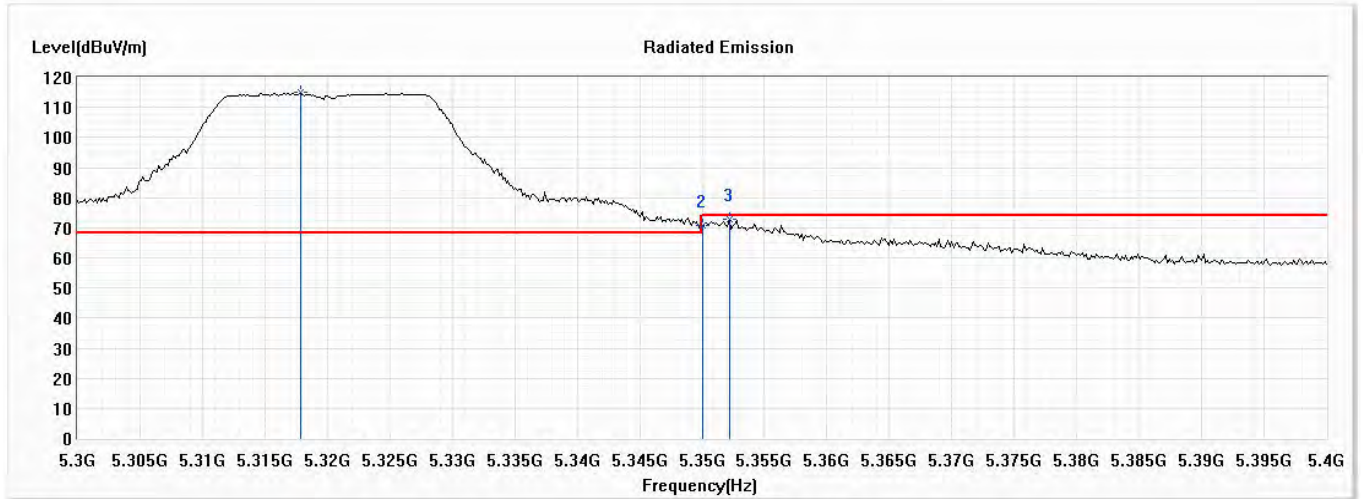


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5317.826	114.97	--	--	96.05	18.92	PK
2	5350.000	70.71	74.00	-3.29	51.75	18.96	PK
3	5352.174	72.92	74.00	-1.08	53.96	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 64 (5320MHz)

**Horizontal**

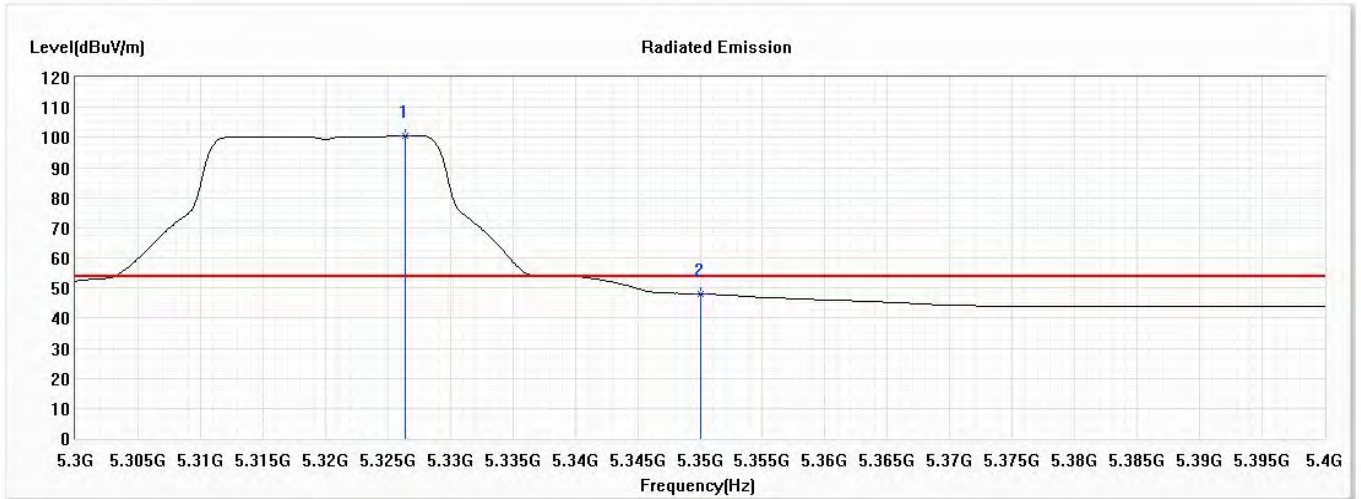


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5326.377	100.47	--	--	81.54	18.93	AV
2	5350.000	48.02	54.00	-5.98	29.06	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 64 (5320MHz)

**Vertical**

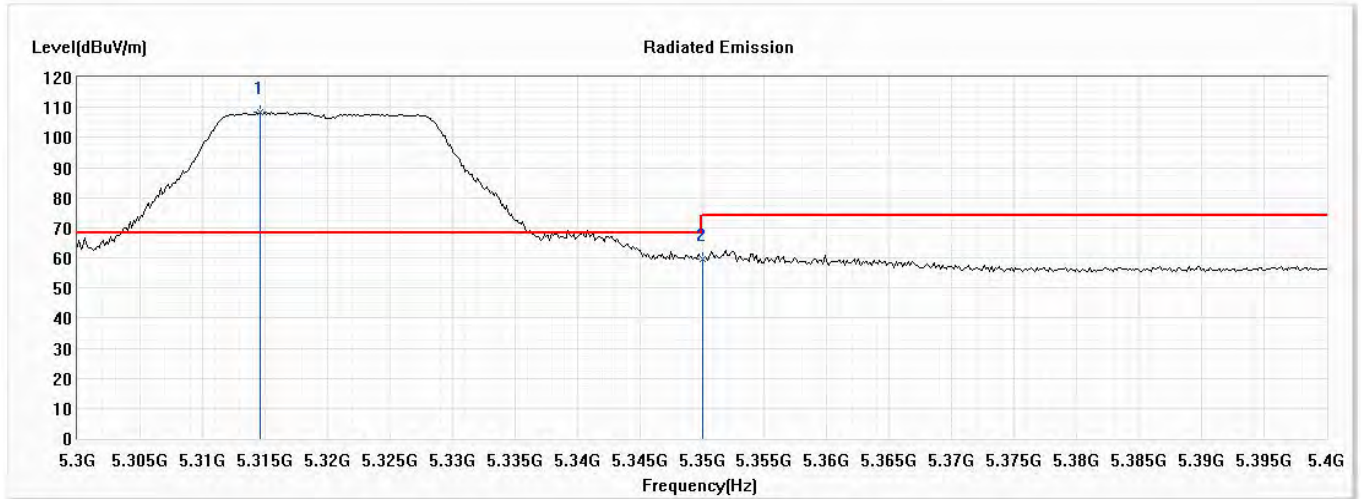


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5314.638	108.46	--	--	89.55	18.91	PK
2	5350.000	59.66	74.00	-14.34	40.70	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/02/25  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 64 (5320MHz)

**Vertical**

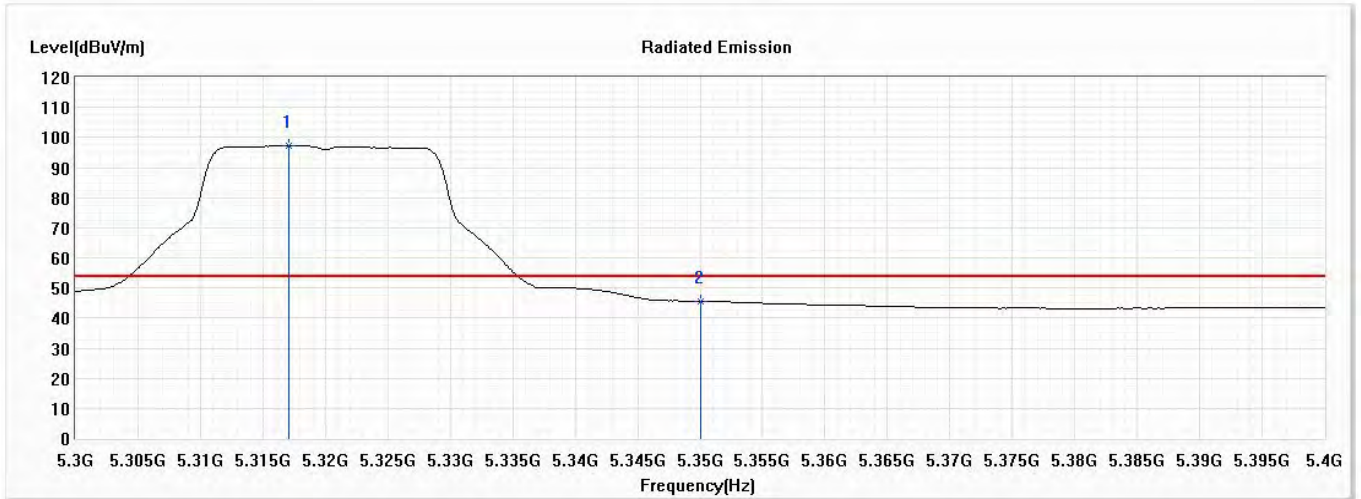

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5317.101	97.25	--	--	78.33	18.92	AV
2	5350.000	45.66	54.00	-8.34	26.70	18.96	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 100 (5500MHz)

**Horizontal**

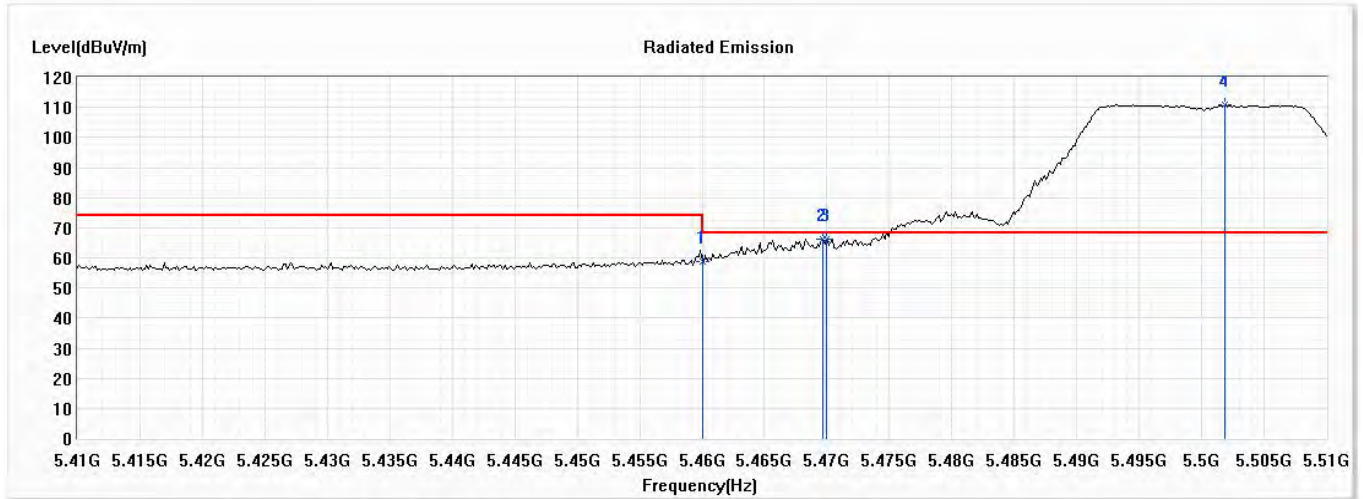


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.88	74.00	-15.12	39.95	18.93	PK
2	5469.710	66.40	68.22	-1.82	47.50	18.90	PK
3	5470.000	66.10	68.22	-2.12	47.20	18.90	PK
! 4	5501.884	110.91	--	--	92.08	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 100 (5500MHz)

**Horizontal**

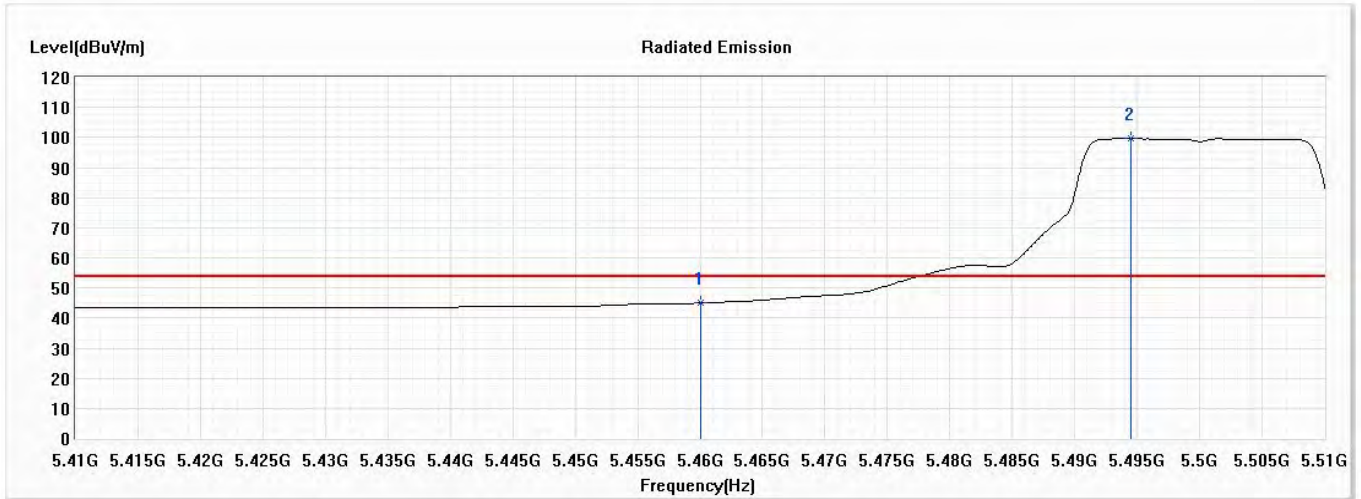


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.96	54.00	-9.04	26.03	18.93	AV
! 2	5494.493	99.69	--	--	80.85	18.84	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 100 (5500MHz)

**Vertical**

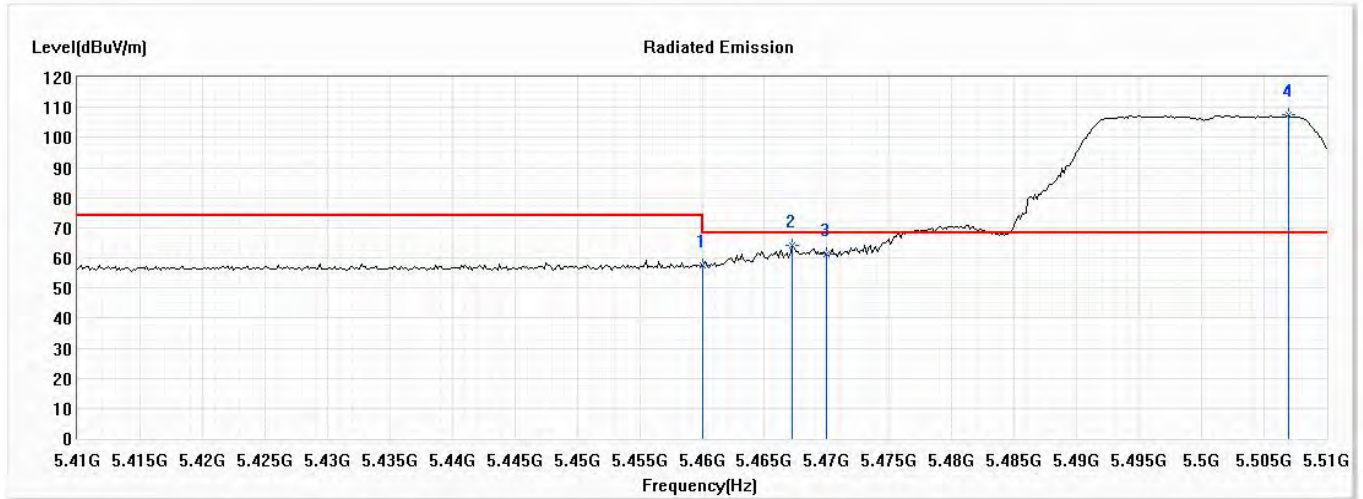


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	57.34	74.00	-16.66	38.41	18.93	PK
2	5467.246	63.94	68.22	-4.28	45.03	18.91	PK
3	5470.000	61.04	68.22	-7.18	42.14	18.90	PK
! 4	5506.957	107.41	--	--	88.58	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 100 (5500MHz)

**Vertical**

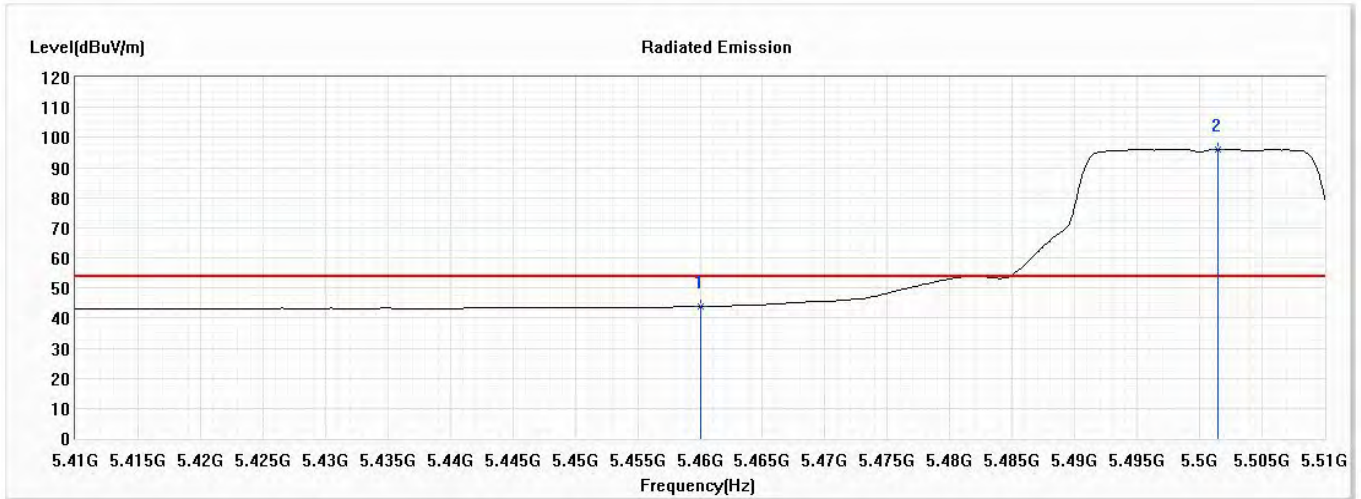


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	43.78	54.00	-10.22	24.85	18.93	AV
! 2	5501.449	96.07	--	--	77.24	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 140 (5700MHz)


**Horizontal**

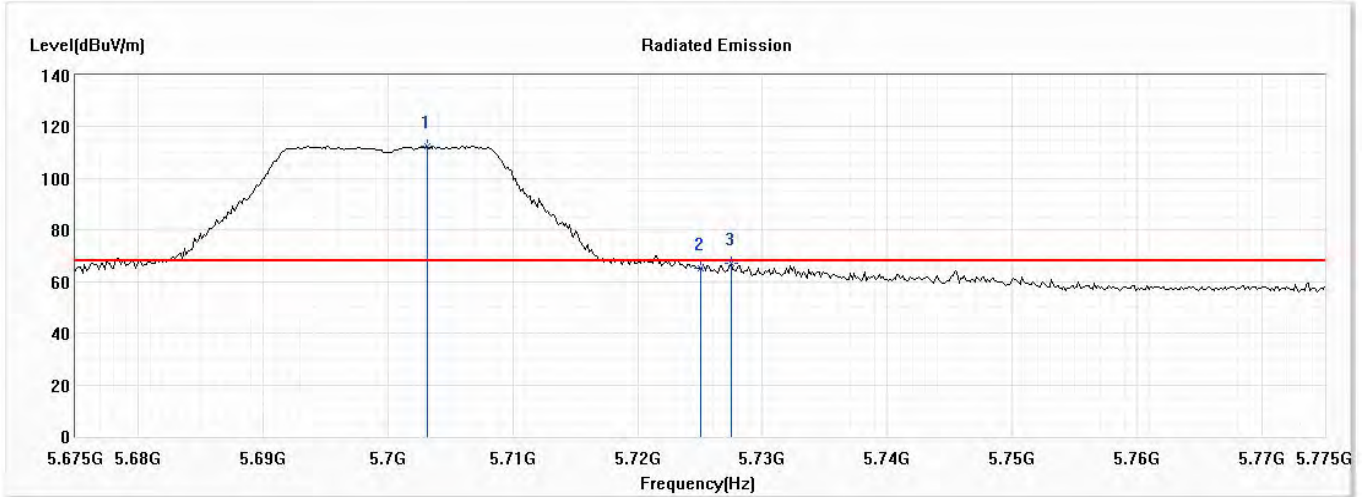

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5703.116	112.46	--	--	93.32	19.14	PK
2	5725.000	65.01	68.22	-3.21	45.83	19.18	PK
3	5727.464	67.06	68.22	-1.16	47.88	19.18	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 140 (5700MHz)


**Vertical**

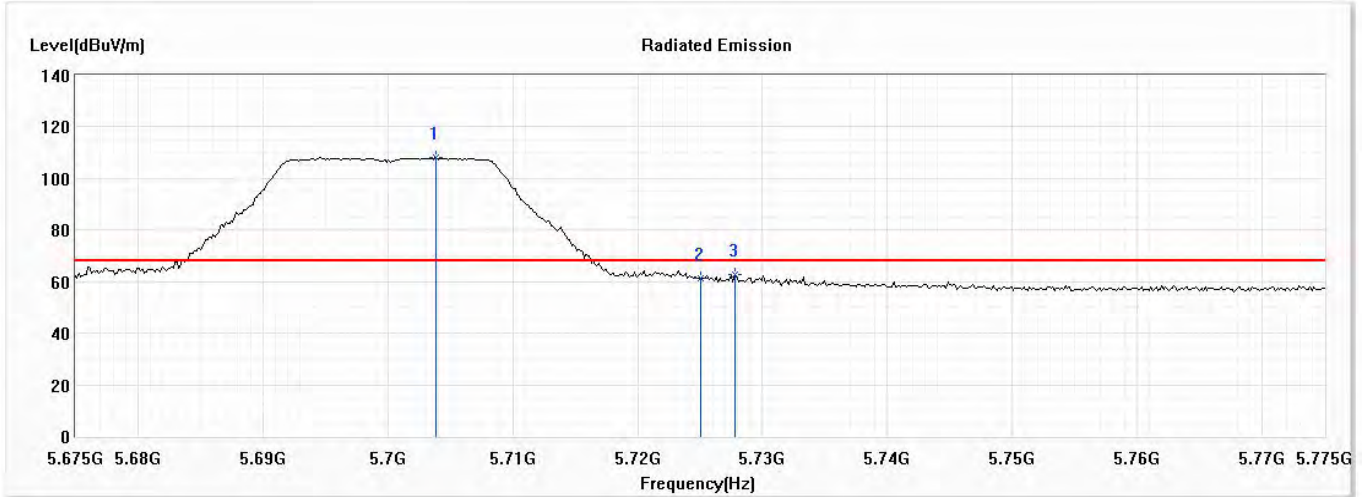

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5703.841	108.00	--	--	88.86	19.14	PK
2	5725.000	61.32	68.22	-6.90	42.14	19.18	PK
3	5727.754	62.94	68.22	-5.28	43.75	19.19	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 149 (5745MHz)


**Horizontal**

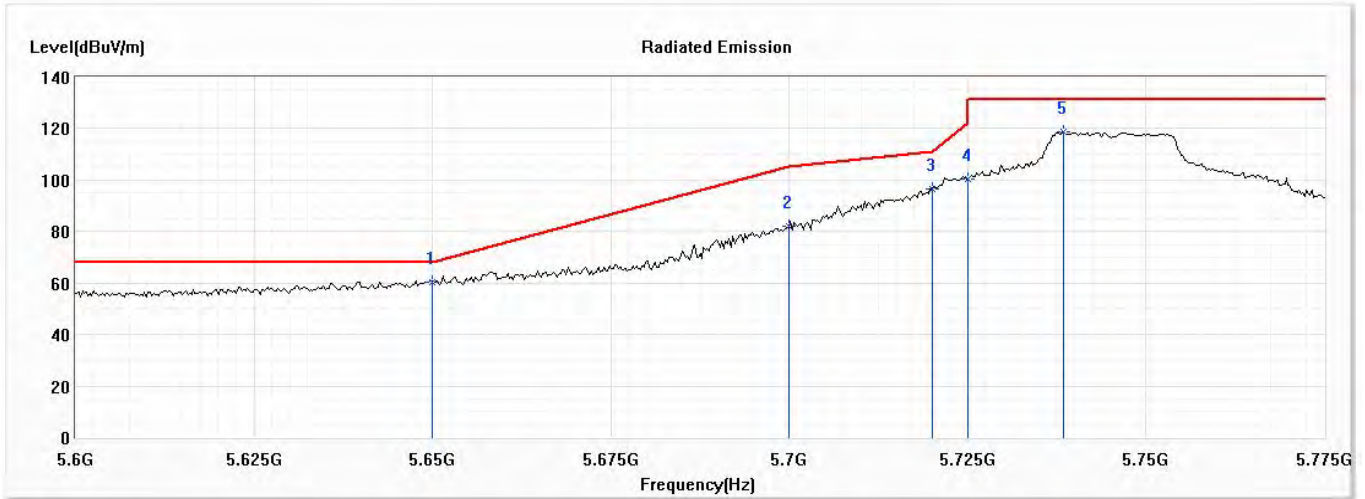

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	60.56	68.22	-7.66	41.45	19.11	PK
2	5700.000	81.99	105.20	-23.21	62.86	19.13	PK
3	5720.000	96.54	110.80	-14.26	77.37	19.17	PK
4	5725.000	100.59	122.20	-21.61	81.41	19.18	PK
5	5738.478	118.64	131.20	-12.56	99.41	19.23	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 149 (5745MHz)

**Vertical**

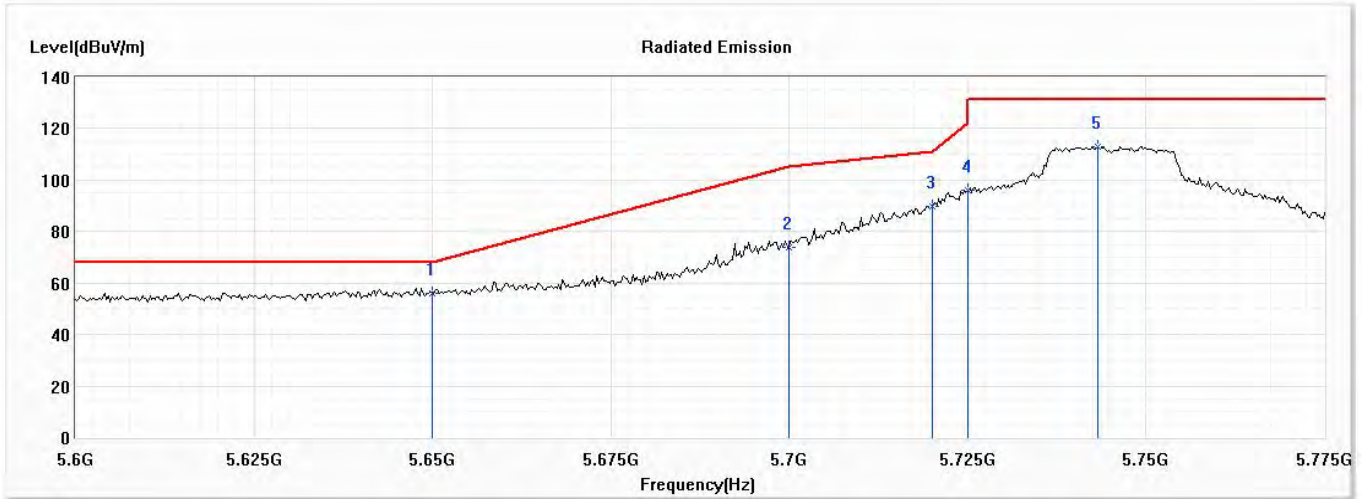


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	56.22	68.22	-12.00	37.11	19.11	PK
2	5700.000	74.04	105.20	-31.16	54.91	19.13	PK
3	5720.000	89.80	110.80	-21.00	70.63	19.17	PK
4	5725.000	95.96	122.20	-26.24	76.78	19.18	PK
5	5743.297	113.03	131.20	-18.17	93.78	19.25	PK



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 165 (5825MHz)


**Horizontal**

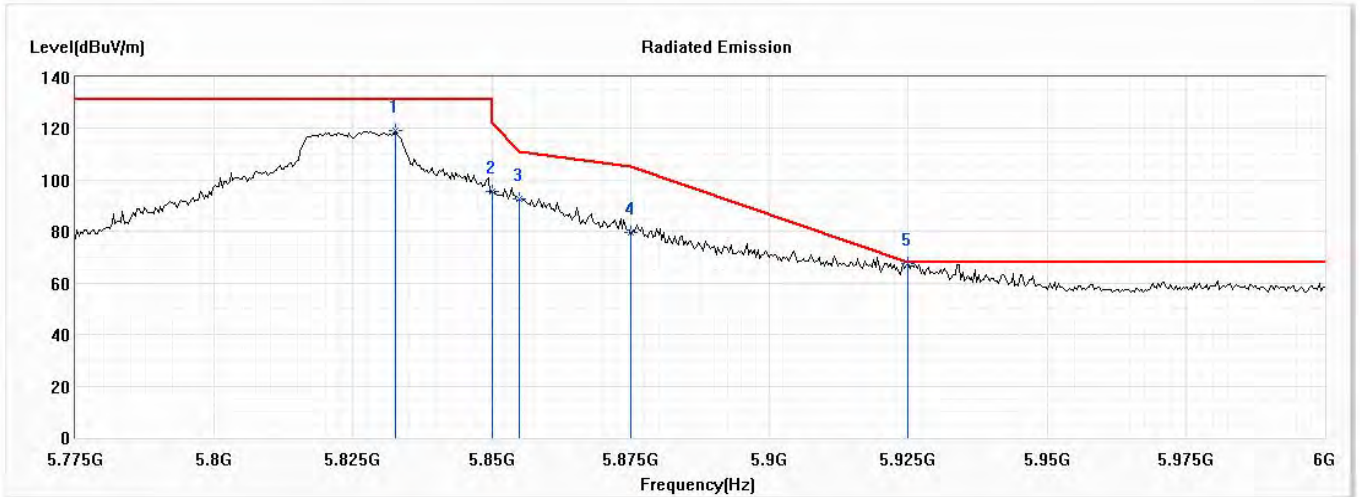

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5832.717	119.24	131.20	-11.96	99.59	19.65	PK
2	5850.000	95.59	122.20	-26.61	75.89	19.70	PK
3	5855.000	92.78	110.80	-18.02	73.05	19.73	PK
4	5875.000	79.43	105.20	-25.77	59.59	19.84	PK
* 5	5925.000	67.47	68.20	-0.73	47.45	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 7 SISO B: Transmit (802.11n-20BW\_7.2Mbps)-Channel 165 (5825MHz)


**Vertical**

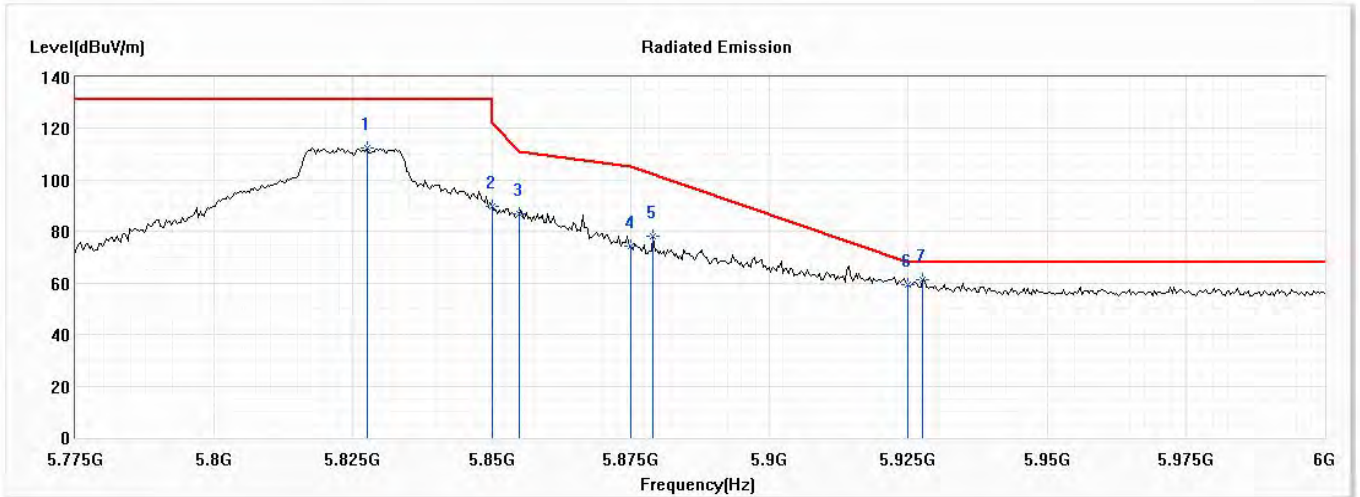

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5827.500	112.55	131.20	-18.65	92.93	19.62	PK
2	5850.000	89.97	122.20	-32.23	70.27	19.70	PK
3	5855.000	87.00	110.80	-23.80	67.27	19.73	PK
4	5875.000	74.24	105.20	-30.96	54.40	19.84	PK
5	5879.022	78.17	102.21	-24.04	58.31	19.86	PK
6	5925.000	59.43	68.20	-8.77	39.41	20.02	PK
* 7	5927.609	61.45	68.20	-6.75	41.42	20.03	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Horizontal**

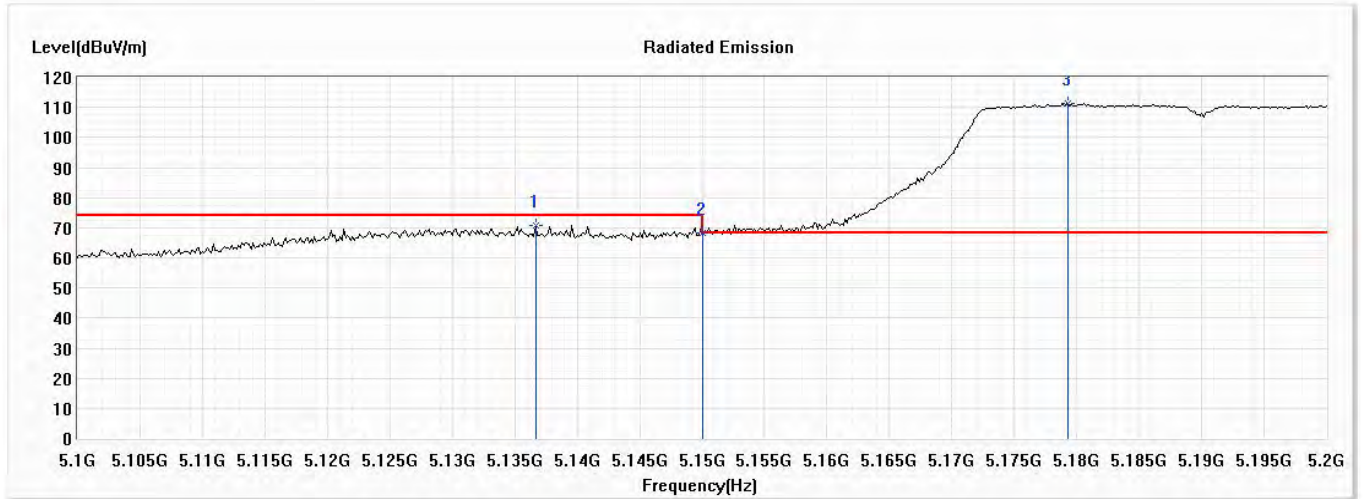


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5136.667	70.75	74.00	-3.25	52.39	18.36	PK
2	5150.000	68.39	74.00	-5.61	49.95	18.44	PK
! 3	5179.275	111.12	--	--	92.62	18.50	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Horizontal**

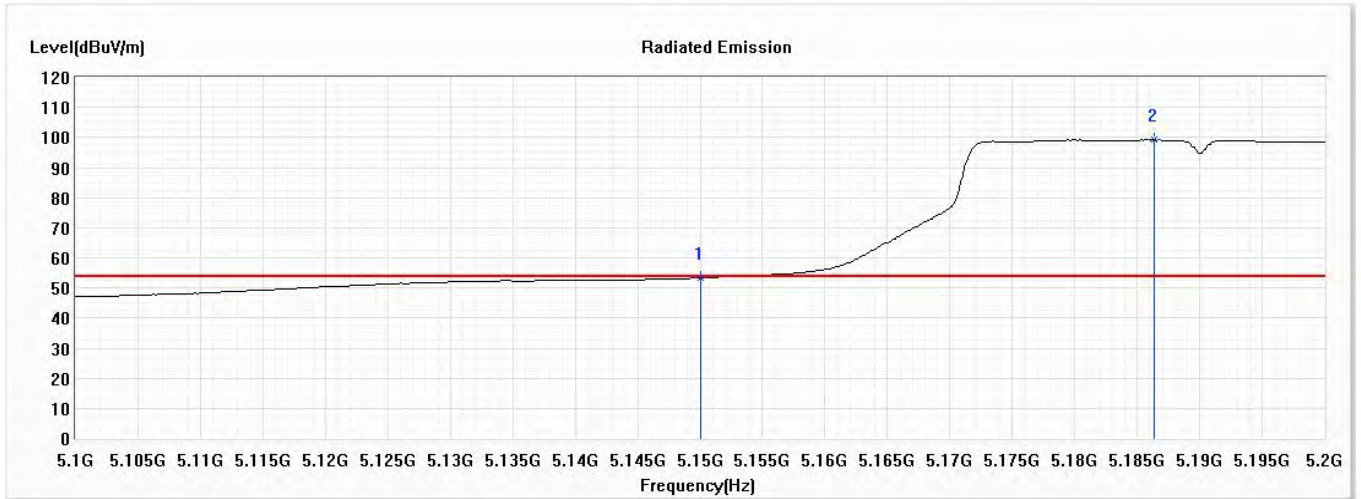


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	53.29	54.00	-0.71	34.85	18.44	AV
! 2	5186.377	99.15	--	--	80.64	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Vertical**

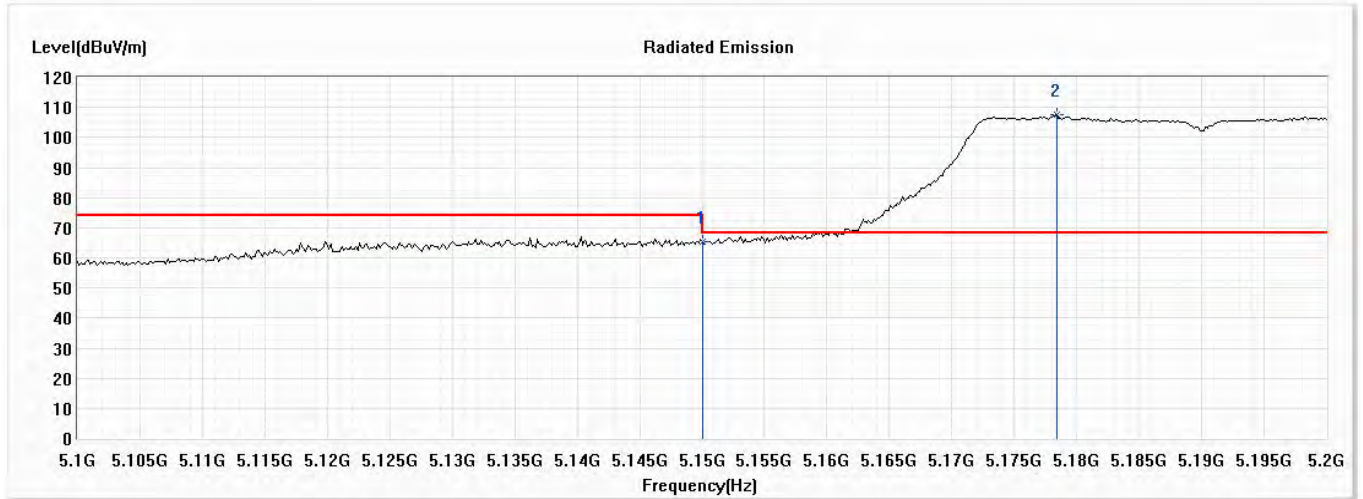


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	65.47	74.00	-8.53	47.03	18.44	PK
! 2	5178.406	107.41	--	--	88.91	18.50	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 38 (5190MHz)

**Vertical**

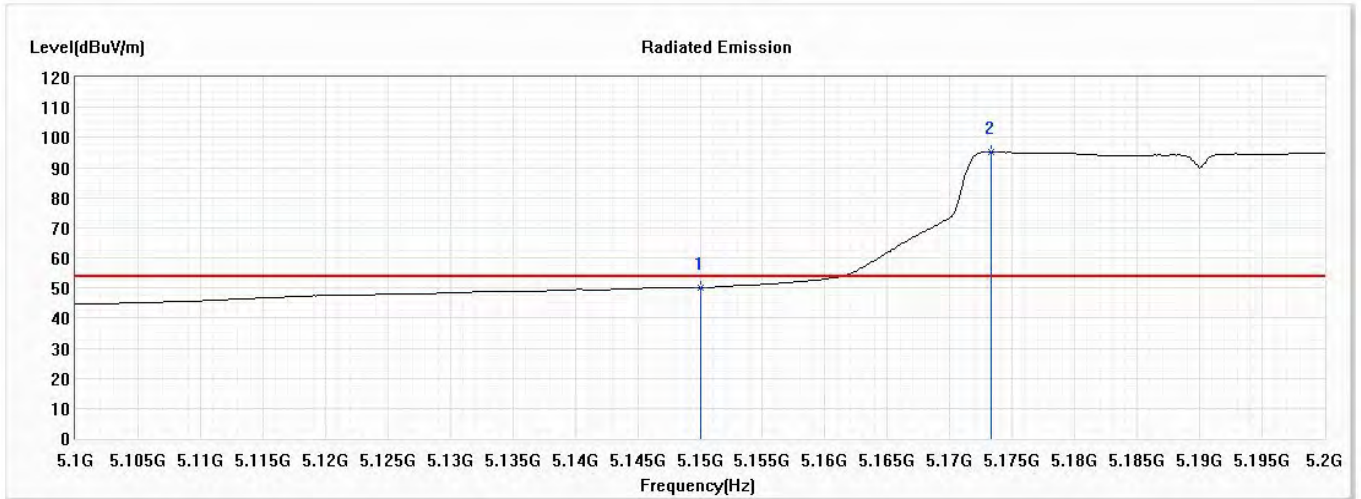


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.13	54.00	-3.87	31.69	18.44	AV
! 2	5173.333	95.27	--	--	76.77	18.50	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Horizontal**

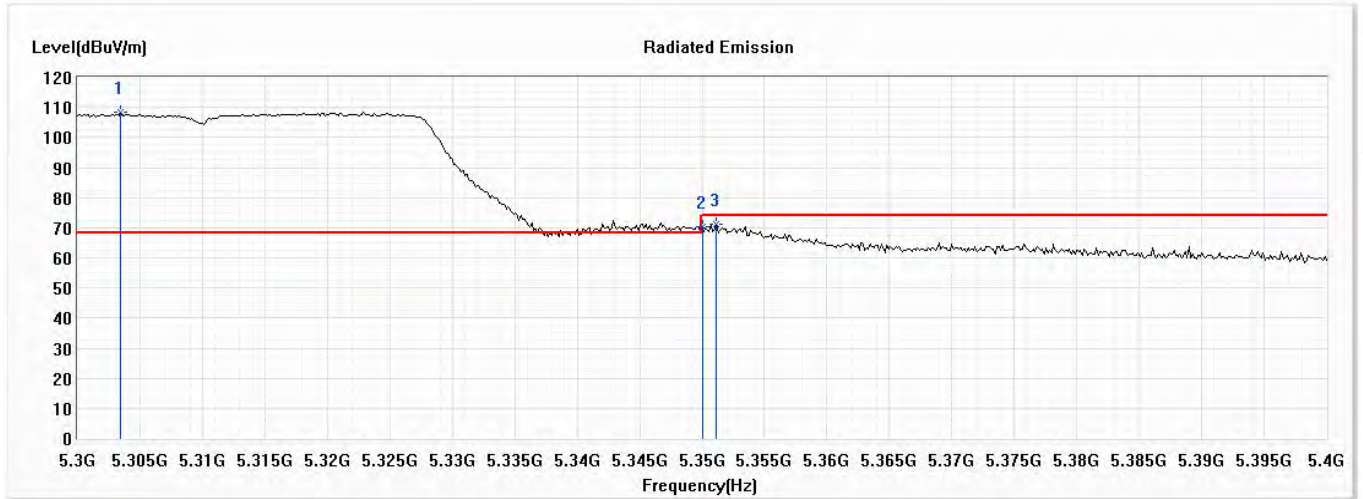


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5303.478	108.32	--	--	89.44	18.88	PK
2	5350.000	70.35	74.00	-3.65	51.39	18.96	PK
3	5351.159	71.37	74.00	-2.63	52.41	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Horizontal**

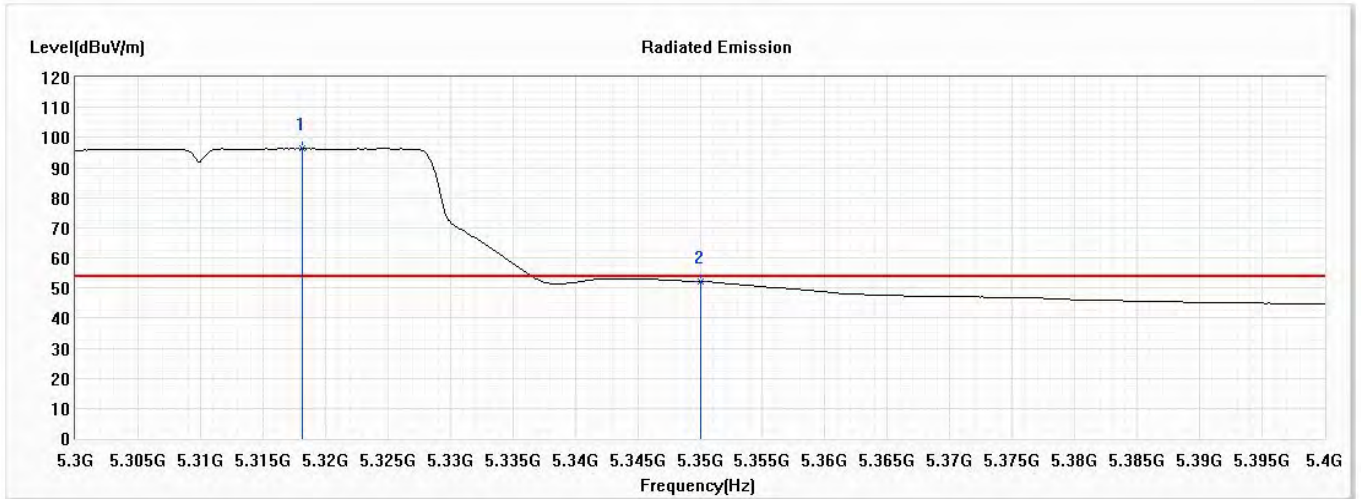

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5318.116	96.28	--	--	77.36	18.92	AV
2	5350.000	52.18	54.00	-1.82	33.22	18.96	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Vertical**

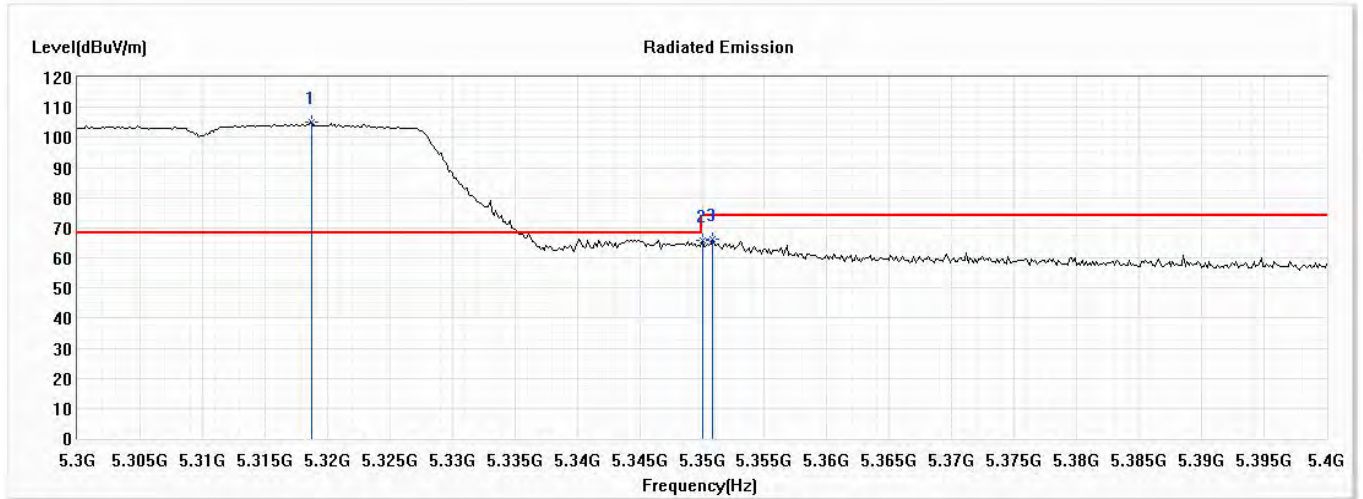


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5318.696	105.01	--	--	86.09	18.92	PK
2	5350.000	65.95	74.00	-8.05	46.99	18.96	PK
3	5350.870	66.25	74.00	-7.75	47.29	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 62 (5310MHz)

**Vertical**

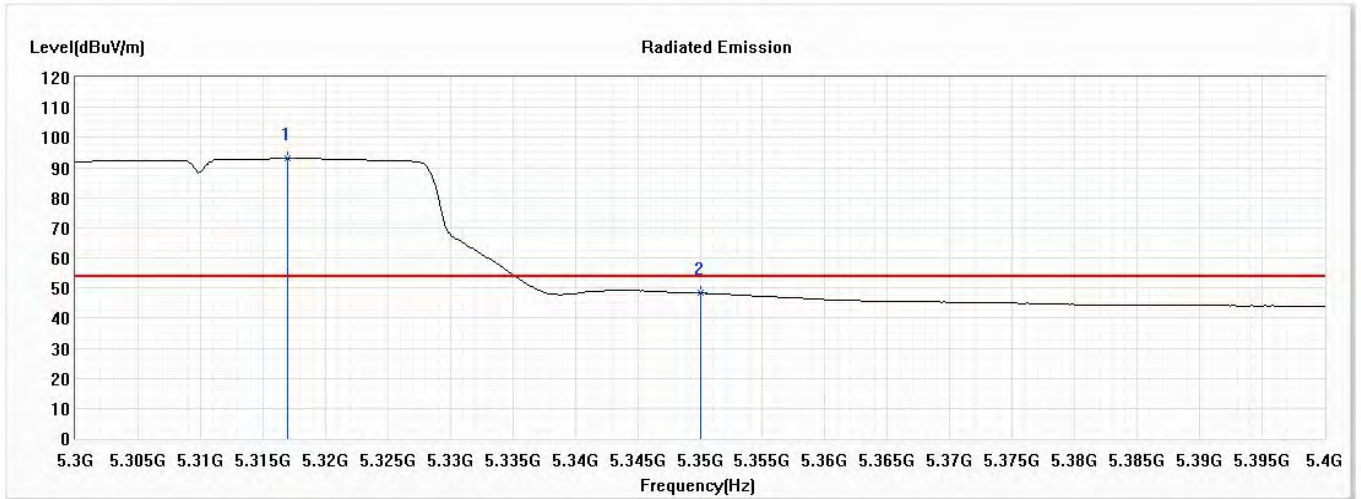


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5316.957	93.05	--	--	74.13	18.92	AV
2	5350.000	48.28	54.00	-5.72	29.32	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Horizontal**

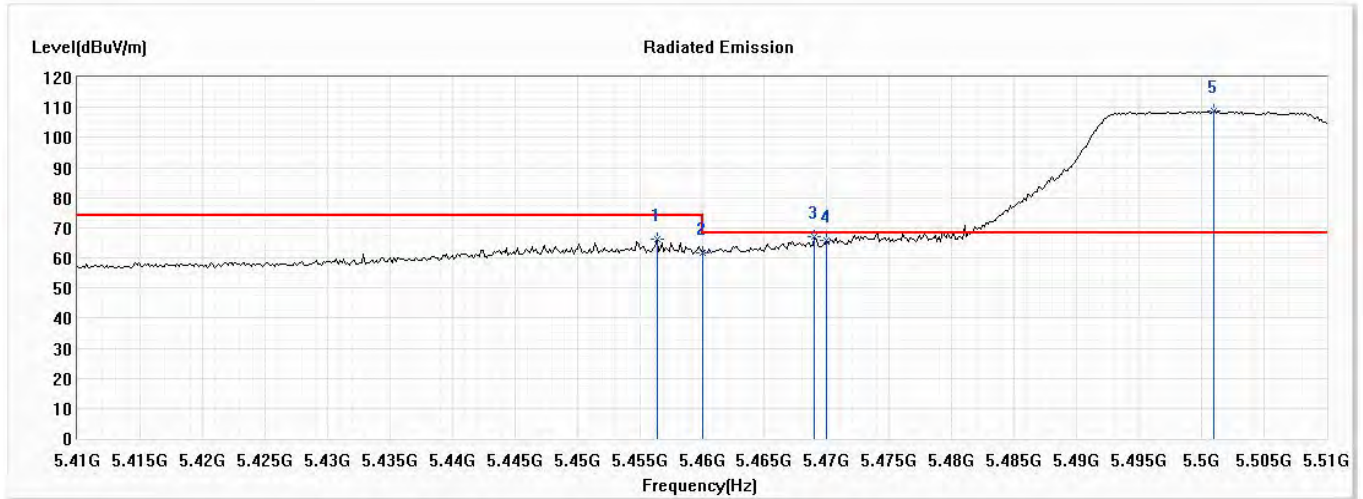


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5456.377	66.06	74.00	-7.94	47.12	18.94	PK
2	5460.000	61.68	74.00	-12.32	42.75	18.93	PK
3	5468.986	67.07	68.22	-1.15	48.17	18.90	PK
4	5470.000	65.67	68.22	-2.55	46.77	18.90	PK
!5	5501.014	108.74	--	--	89.91	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Horizontal**

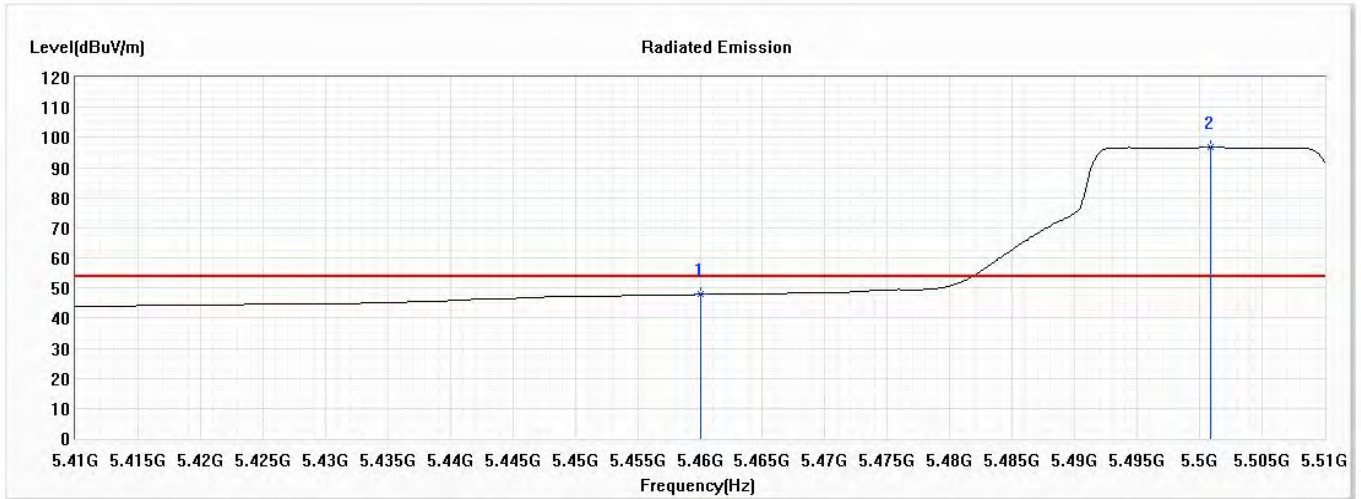


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	47.84	54.00	-6.16	28.91	18.93	AV
! 2	5500.870	96.70	--	--	77.87	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Vertical**

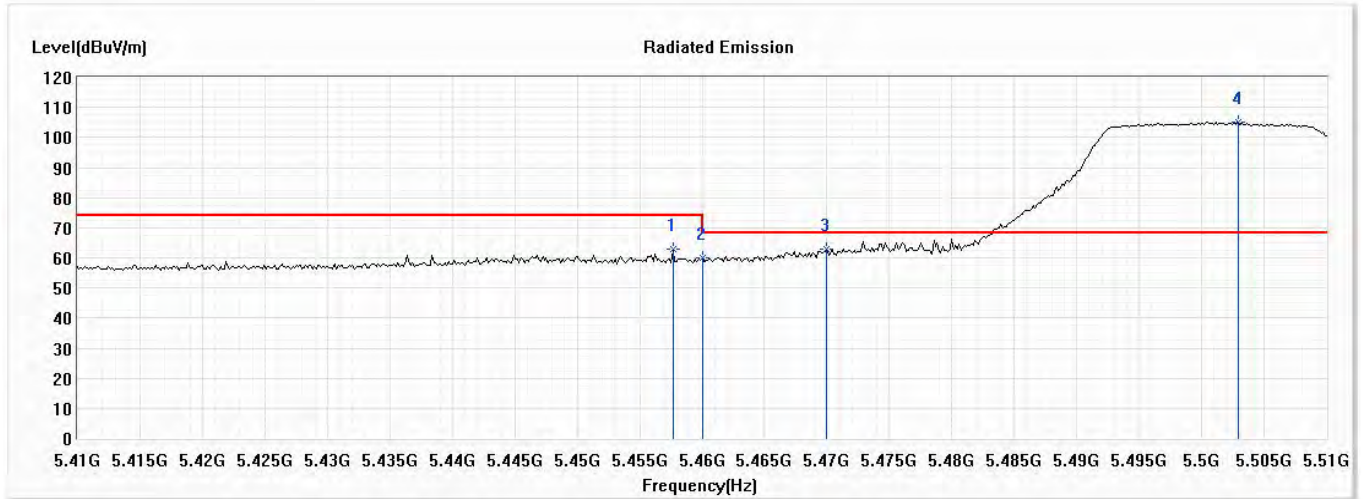


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5457.681	62.69	74.00	-11.31	43.76	18.93	PK
2	5460.000	59.88	74.00	-14.12	40.95	18.93	PK
3	5470.000	62.77	68.22	-5.45	43.87	18.90	PK
! 4	5502.899	105.22	--	--	86.39	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 102 (5510MHz)

**Vertical**

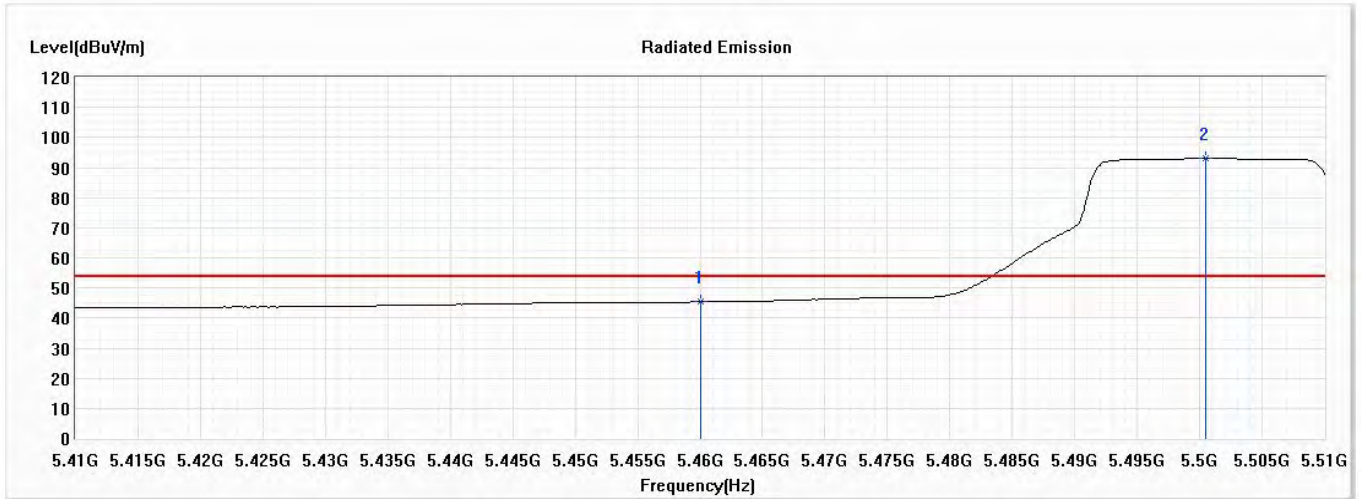


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	45.38	54.00	-8.62	26.45	18.93	AV
! 2	5500.435	93.17	--	--	74.34	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 134 (5670MHz)


**Horizontal**

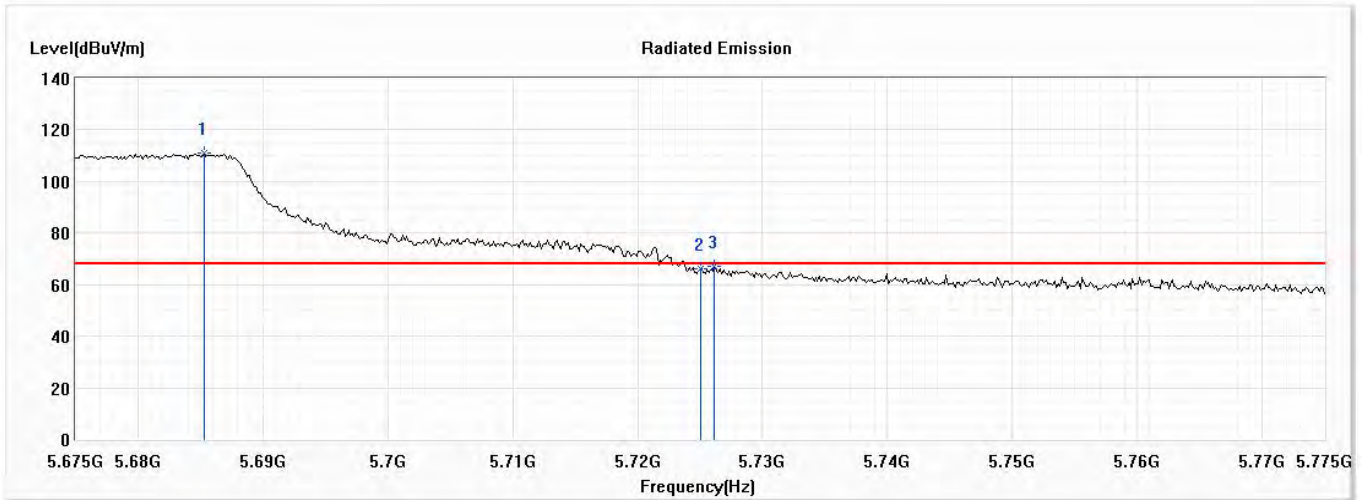

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5685.290	110.84	--	--	91.73	19.11	PK
2	5725.000	65.94	68.22	-2.28	46.76	19.18	PK
3	5726.159	67.02	68.22	-1.20	47.84	19.18	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 134 (5670MHz)

**Vertical**

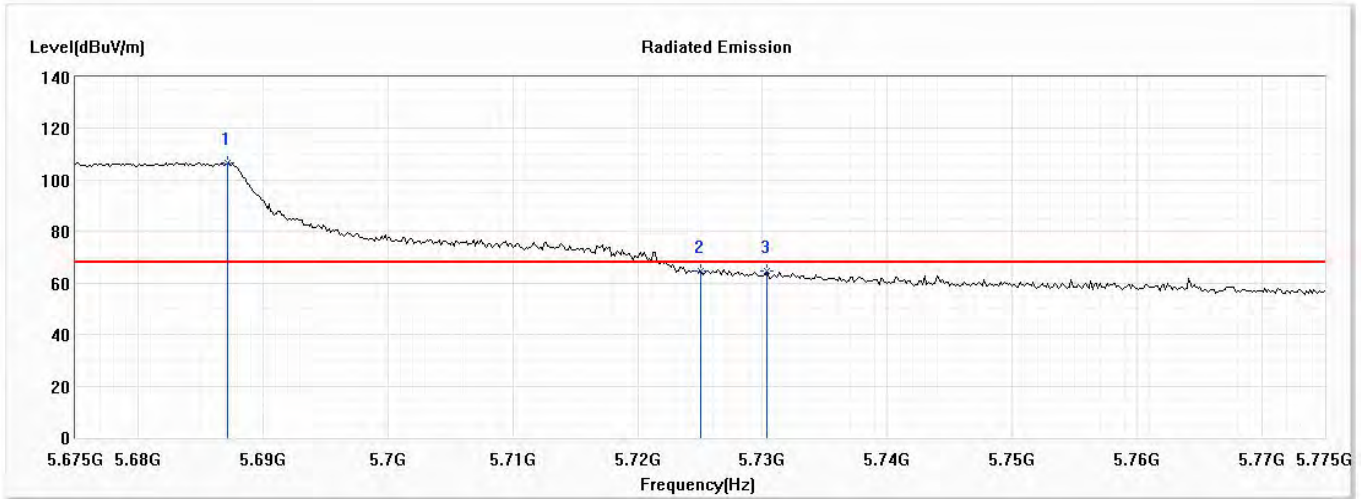


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5687.174	106.78	--	--	87.67	19.11	PK
2	5725.000	64.54	68.22	-3.68	45.36	19.18	PK
3	5730.362	64.74	68.22	-3.48	45.54	19.20	PK



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 151 (5755MHz)


**Horizontal**

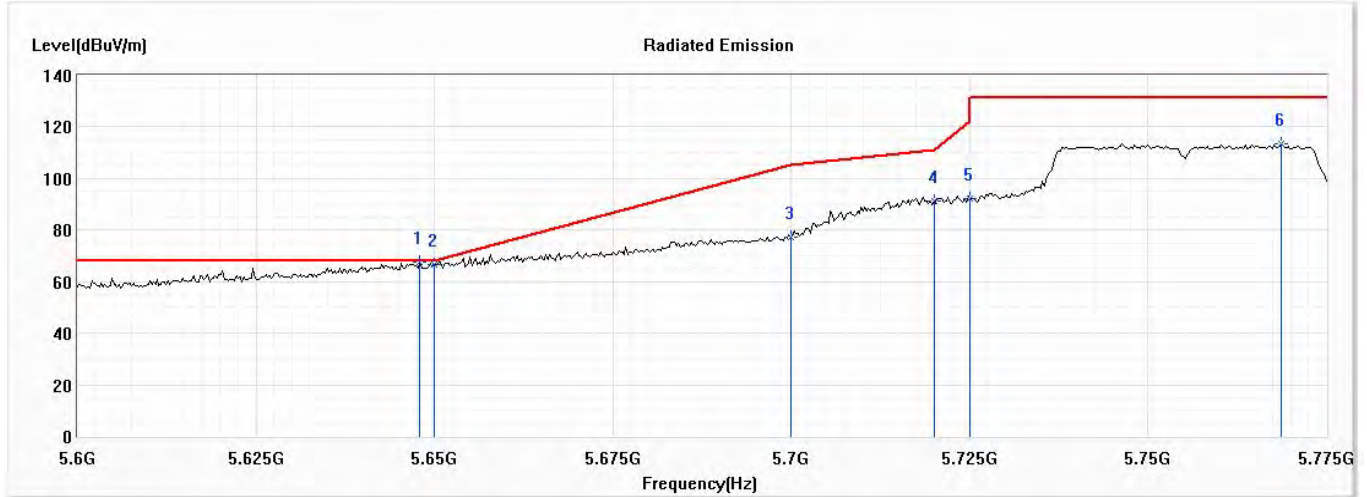

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5647.935	67.63	68.22	-0.59	48.52	19.11	PK
2	5650.000	66.48	68.22	-1.74	47.37	19.11	PK
3	5700.000	77.31	105.20	-27.89	58.18	19.13	PK
4	5720.000	91.13	110.80	-19.67	71.96	19.17	PK
5	5725.000	92.21	122.20	-29.99	73.03	19.18	PK
6	5768.659	113.49	131.20	-17.71	94.17	19.32	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 151 (5755MHz)


**Vertical**

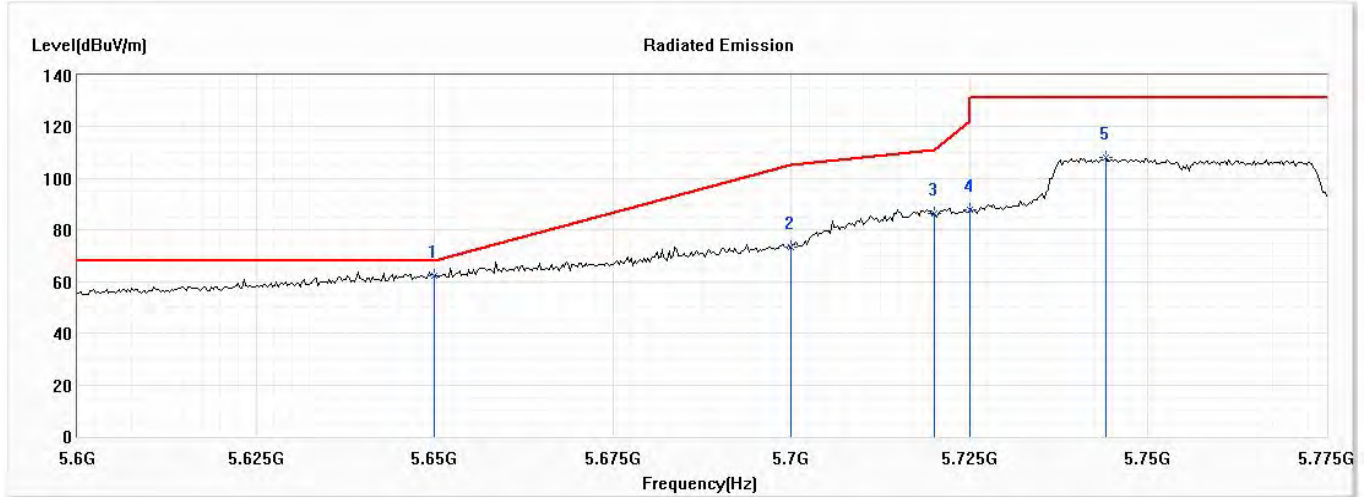

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	62.19	68.22	-6.03	43.08	19.11	PK
2	5700.000	73.32	105.20	-31.88	54.19	19.13	PK
3	5720.000	86.39	110.80	-24.41	67.22	19.17	PK
4	5725.000	87.95	122.20	-34.25	68.77	19.18	PK
5	5744.058	107.96	131.20	-23.24	88.71	19.25	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 159 (5795MHz)


**Horizontal**

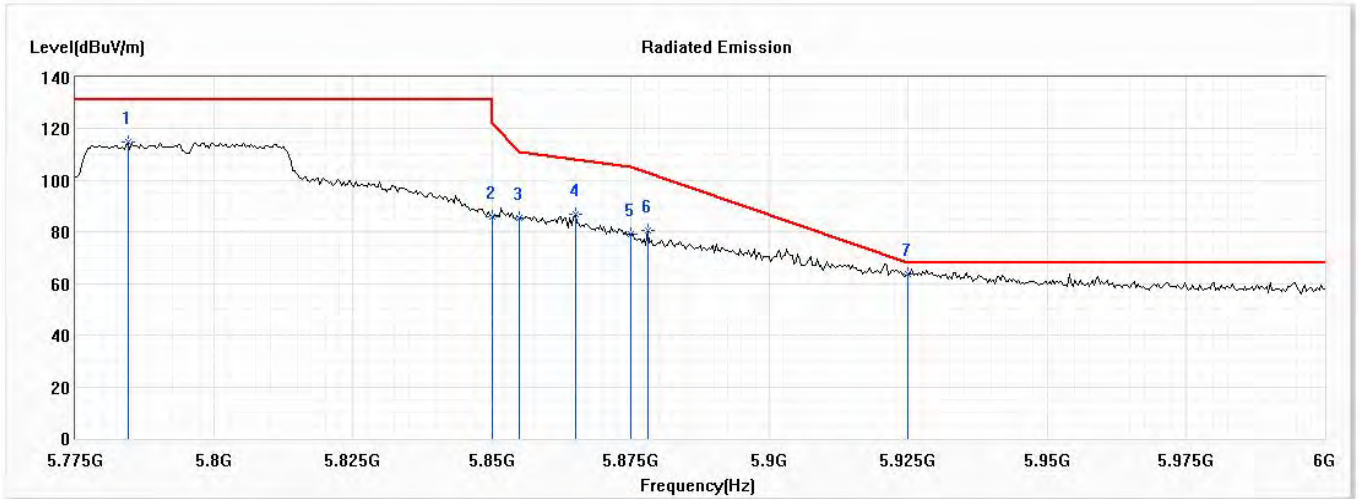

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5784.457	114.78	131.20	-16.42	95.36	19.42	PK
2	5850.000	86.17	122.20	-36.03	66.47	19.70	PK
3	5855.000	85.66	110.80	-25.14	65.93	19.73	PK
4	5865.000	86.92	108.00	-21.07	67.13	19.79	PK
5	5875.000	79.11	105.20	-26.09	59.27	19.84	PK
6	5878.043	80.66	102.94	-22.27	60.81	19.85	PK
* 7	5925.000	63.69	68.20	-4.51	43.67	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 8 SISO B: Transmit (802.11n-40BW\_15Mbps)-Channel 159 (5795MHz)


**Vertical**

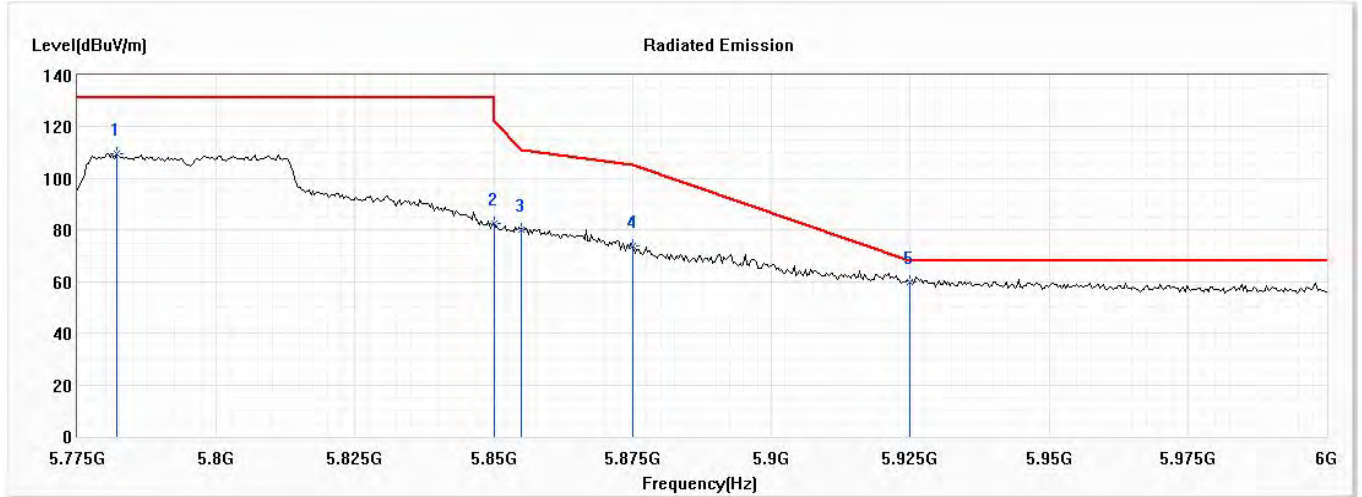

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5782.174	109.57	131.20	-21.63	90.17	19.40	PK
2	5850.000	82.47	122.20	-39.73	62.77	19.70	PK
3	5855.000	80.23	110.80	-30.57	60.50	19.73	PK
4	5875.000	73.81	105.20	-31.39	53.97	19.84	PK
* 5	5925.000	59.95	68.20	-8.25	39.93	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Horizontal**

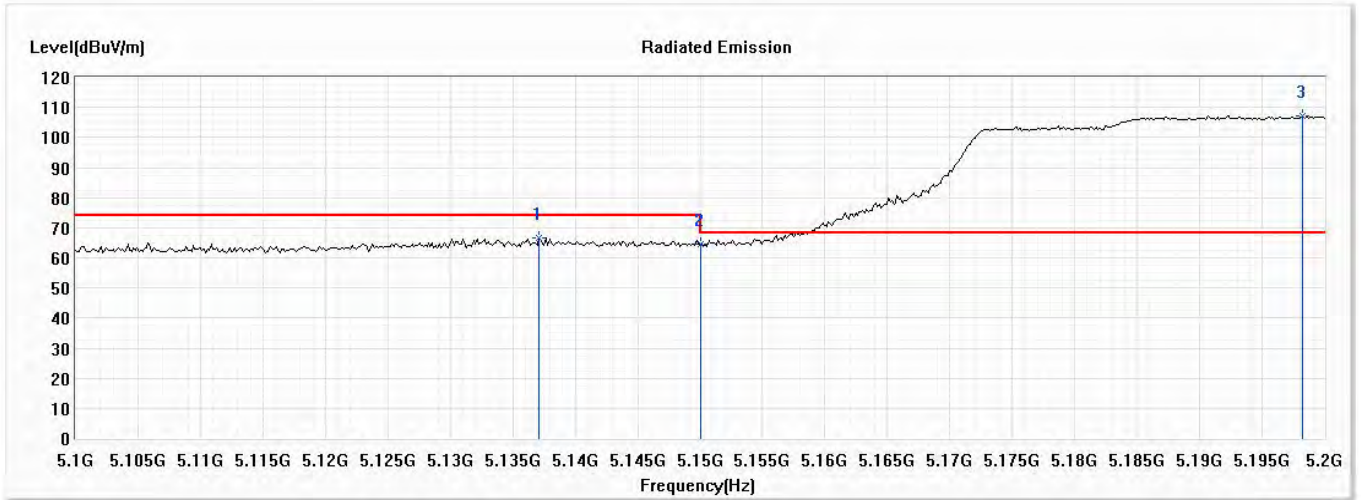


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5137.101	66.58	74.00	-7.42	48.22	18.36	PK
2	5150.000	64.65	74.00	-9.35	46.21	18.44	PK
! 3	5198.261	107.14	--	--	88.59	18.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Horizontal**

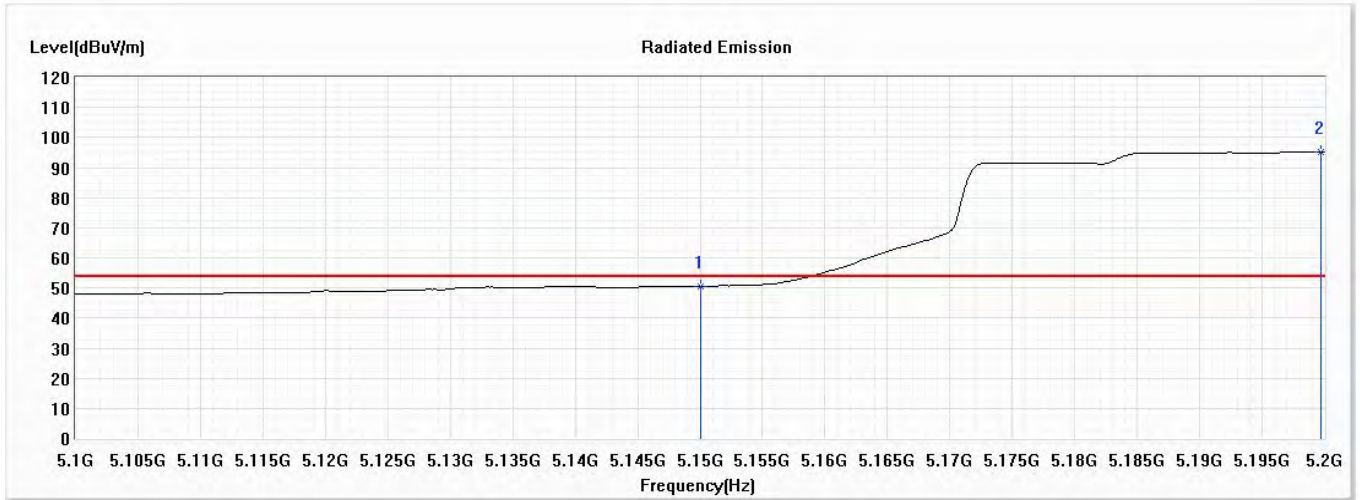


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.46	54.00	-3.54	32.02	18.44	AV
!2	5199.710	95.25	--	--	76.70	18.55	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Vertical**

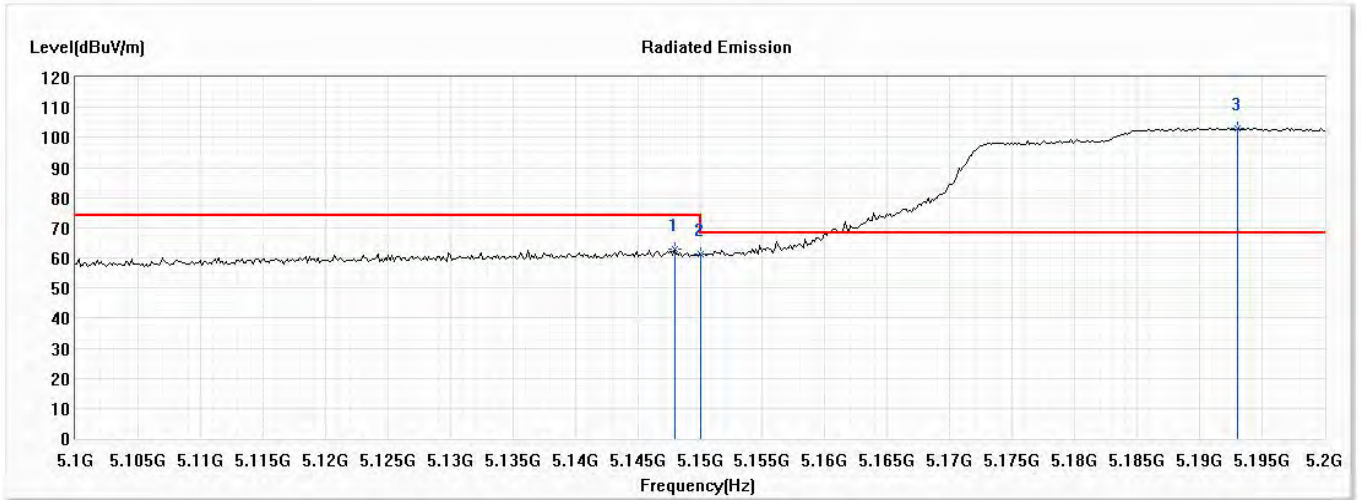


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5147.971	62.93	74.00	-11.07	44.51	18.42	PK
2	5150.000	61.29	74.00	-12.71	42.85	18.44	PK
! 3	5193.043	103.10	--	--	84.56	18.54	PK

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 42 (5210MHz)

**Vertical**

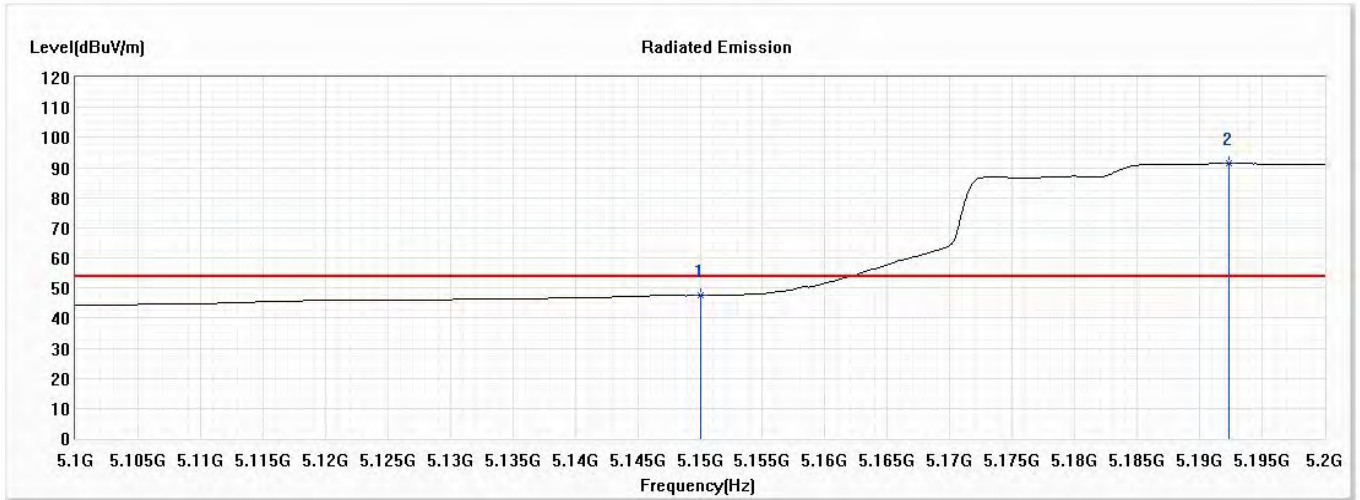

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	47.43	54.00	-6.57	28.99	18.44	AV
! 2	5192.319	91.53	--	--	73.00	18.53	AV


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Horizontal**

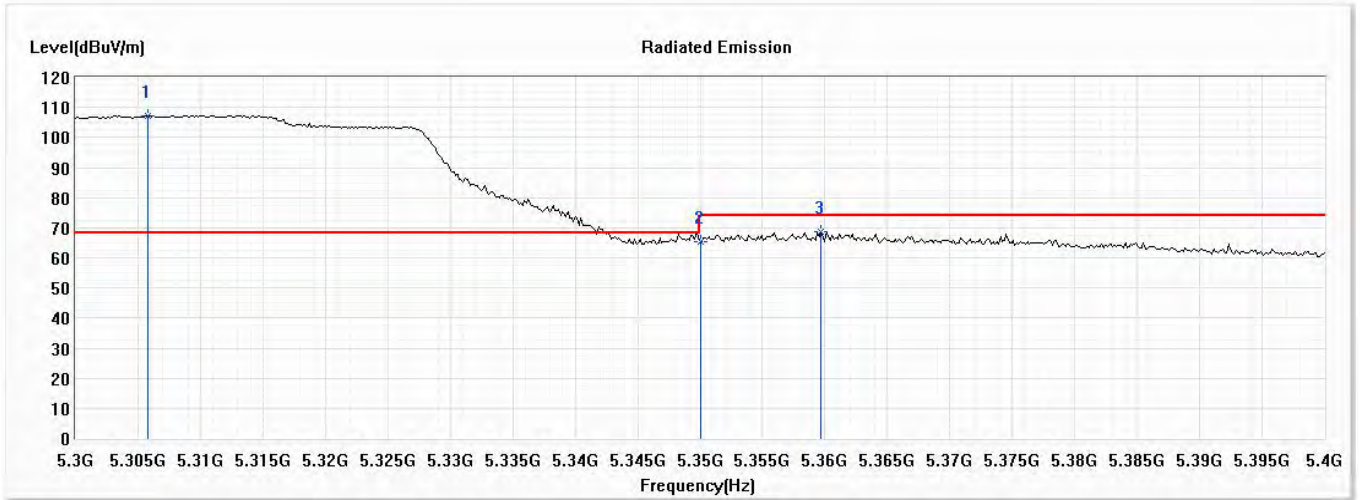


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5305.797	107.33	--	--	88.44	18.89	PK
2	5350.000	65.41	74.00	-8.59	46.45	18.96	PK
3	5359.710	68.68	74.00	-5.32	49.71	18.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Horizontal**

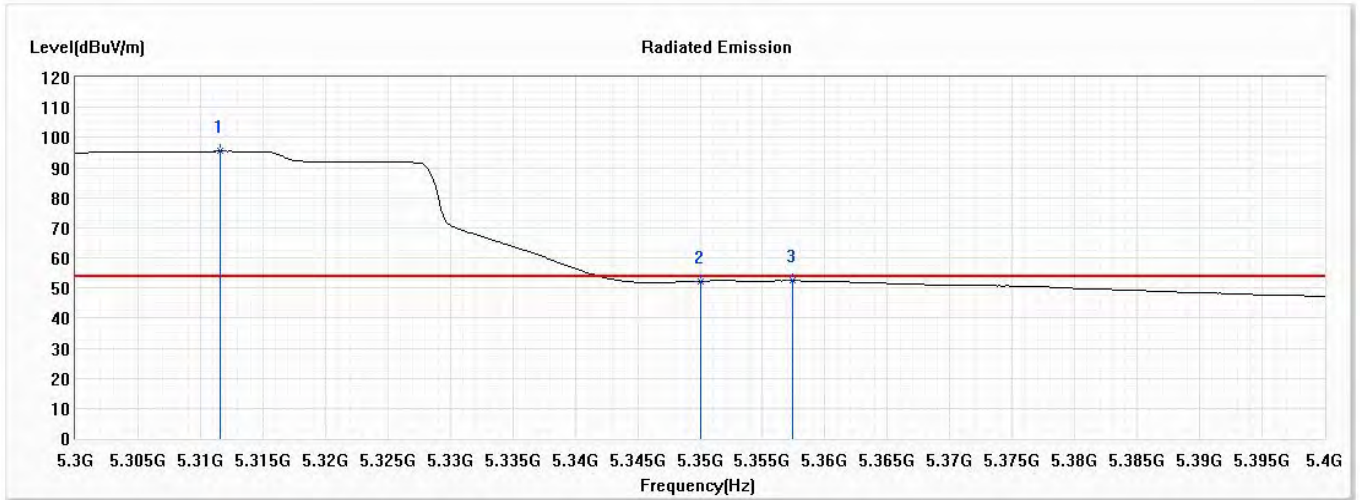


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5311.594	95.43	--	--	76.52	18.91	AV
2	5350.000	52.24	54.00	-1.76	33.28	18.96	AV
3	5357.391	52.41	54.00	-1.59	33.45	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Vertical**

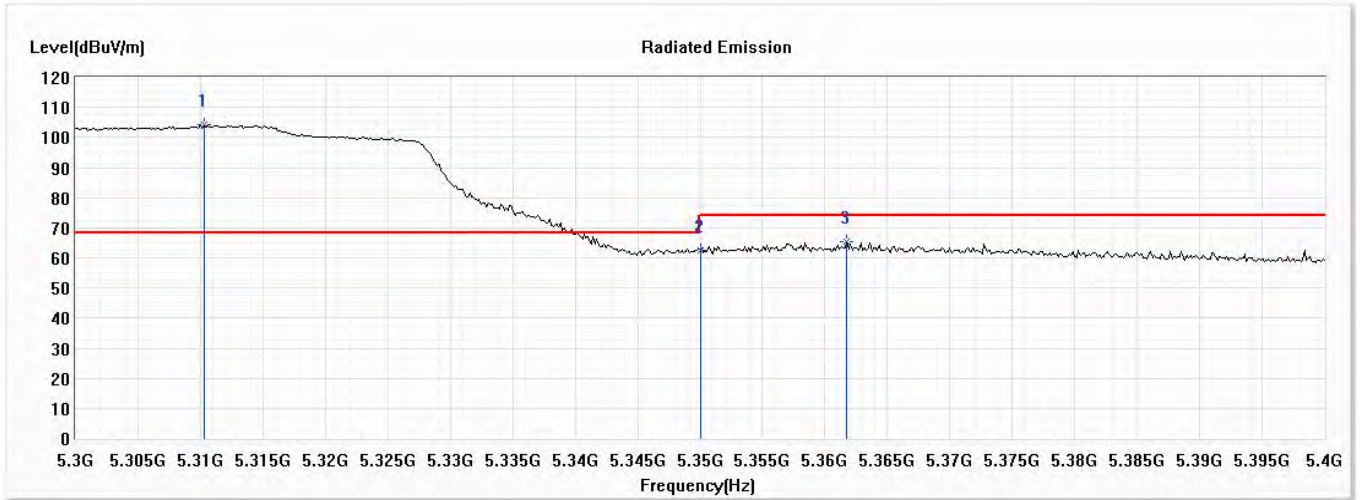


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5310.290	104.46	--	--	85.55	18.91	PK
2	5350.000	62.58	74.00	-11.42	43.62	18.96	PK
3	5361.739	65.32	74.00	-8.68	46.35	18.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 58 (5290MHz)

**Vertical**

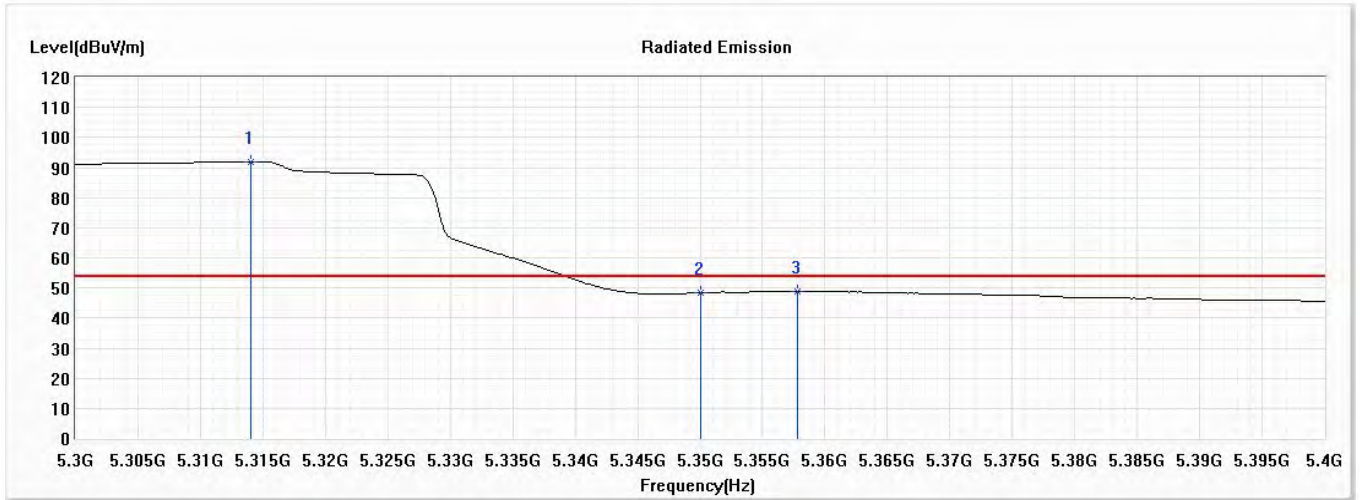


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5314.058	91.96	--	--	73.05	18.91	AV
2	5350.000	48.41	54.00	-5.59	29.45	18.96	AV
3	5357.826	48.80	54.00	-5.20	29.84	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Horizontal**

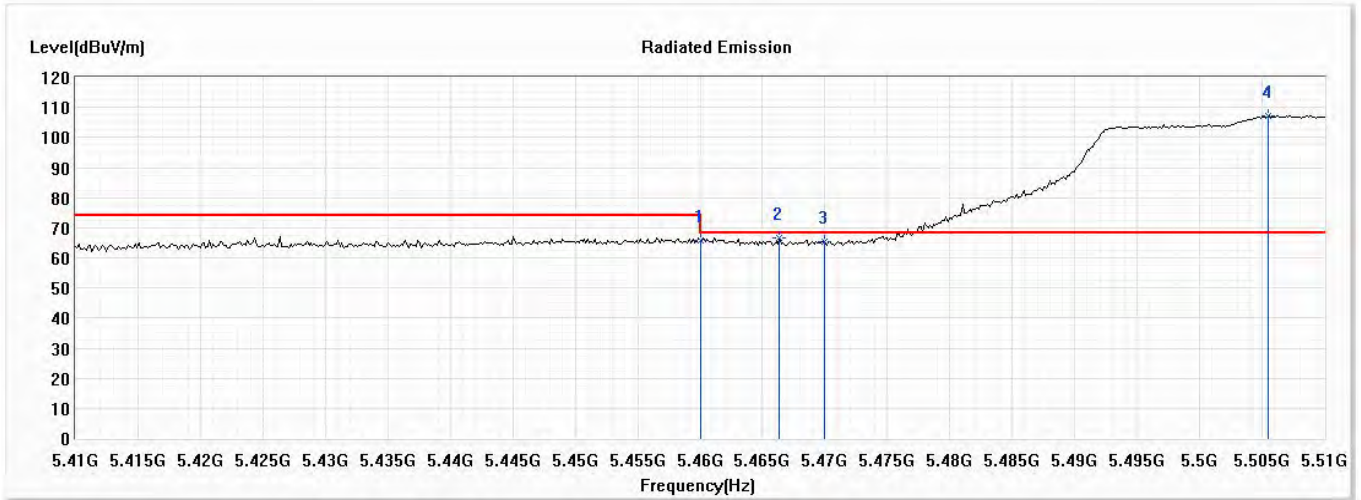


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	65.83	74.00	-8.17	46.90	18.93	PK
2	5466.377	66.52	68.22	-1.70	47.61	18.91	PK
3	5470.000	65.49	68.22	-2.73	46.59	18.90	PK
!4	5505.507	107.15	--	--	88.32	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Horizontal**

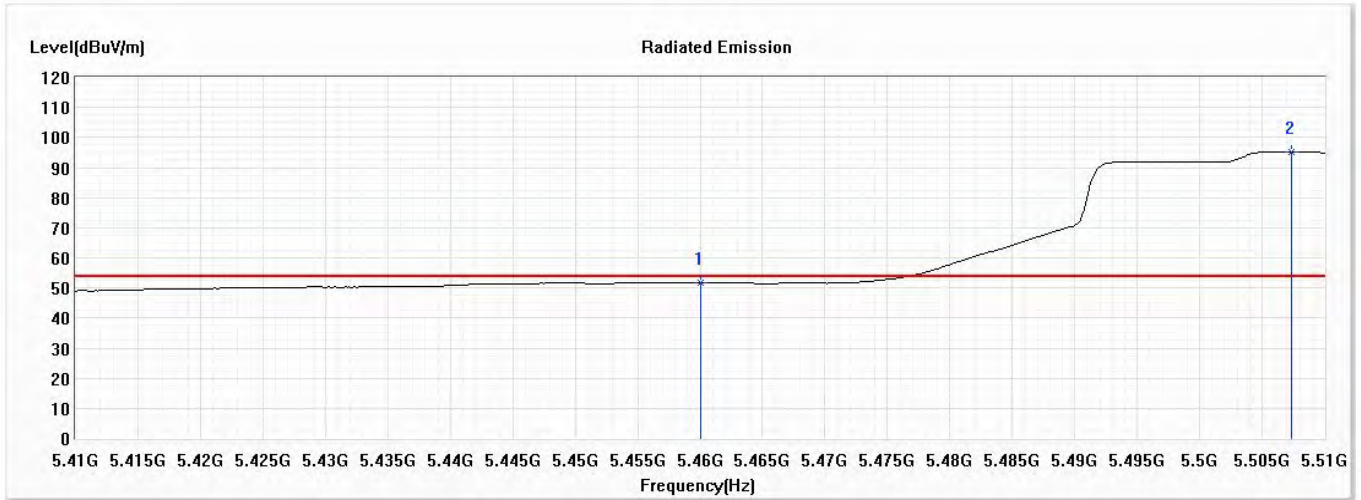


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	51.72	54.00	-2.28	32.79	18.93	AV
! 2	5507.391	95.32	--	--	76.49	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Vertical**

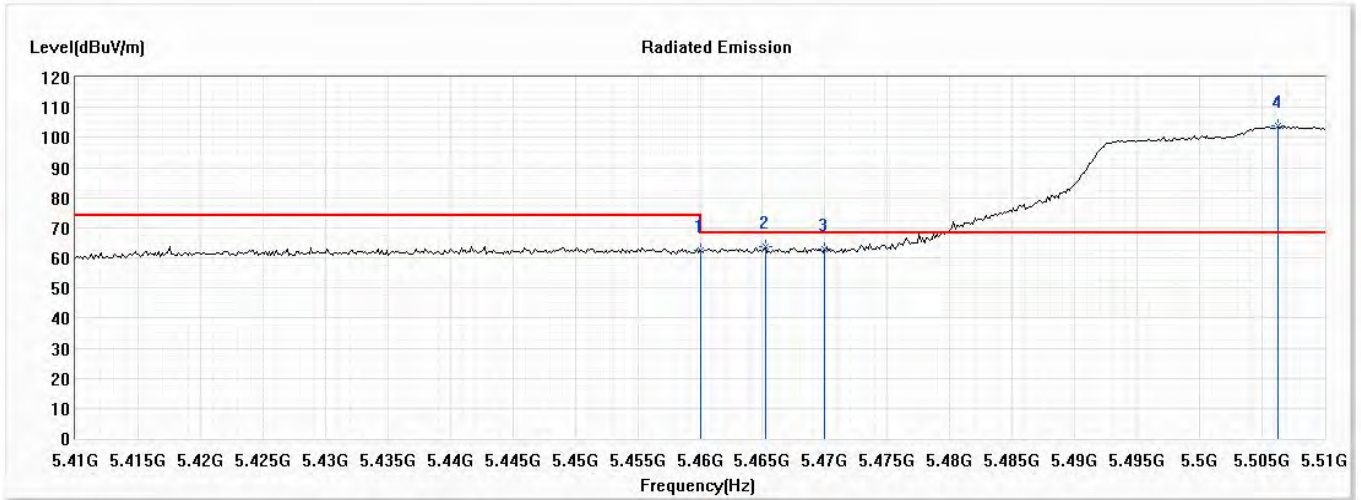


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	62.32	74.00	-11.68	43.39	18.93	PK
2	5465.217	63.92	68.22	-4.30	45.00	18.92	PK
3	5470.000	62.72	68.22	-5.50	43.82	18.90	PK
!4	5506.232	103.66	--	--	84.83	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 106 (5530MHz)

**Vertical**

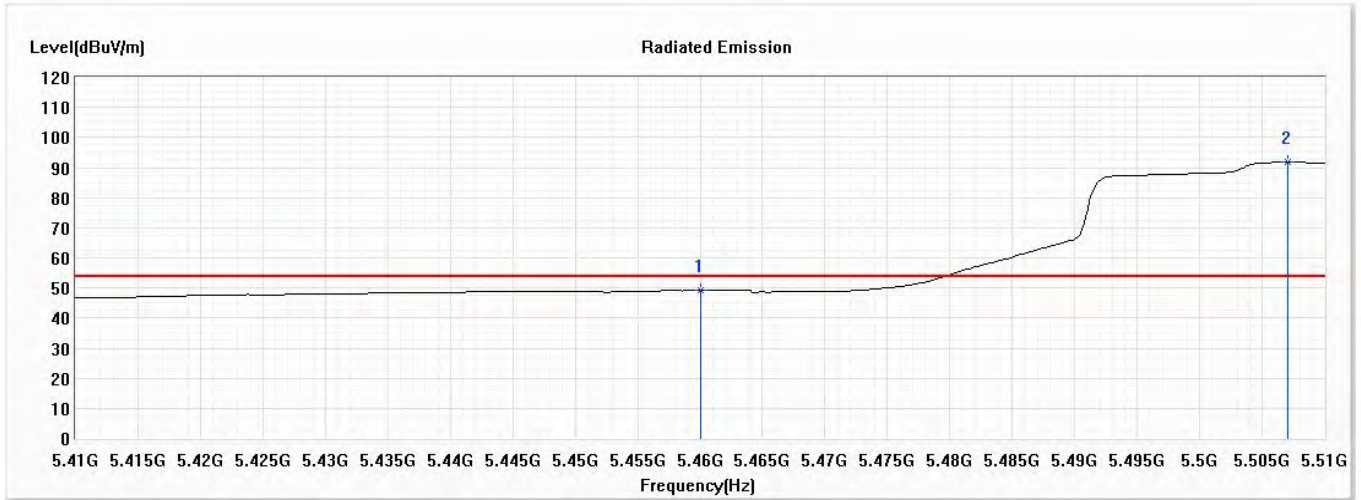

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	49.08	54.00	-4.92	30.15	18.93	AV
! 2	5507.101	91.77	--	--	72.94	18.83	AV


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 155 (5775MHz)


**Horizontal**

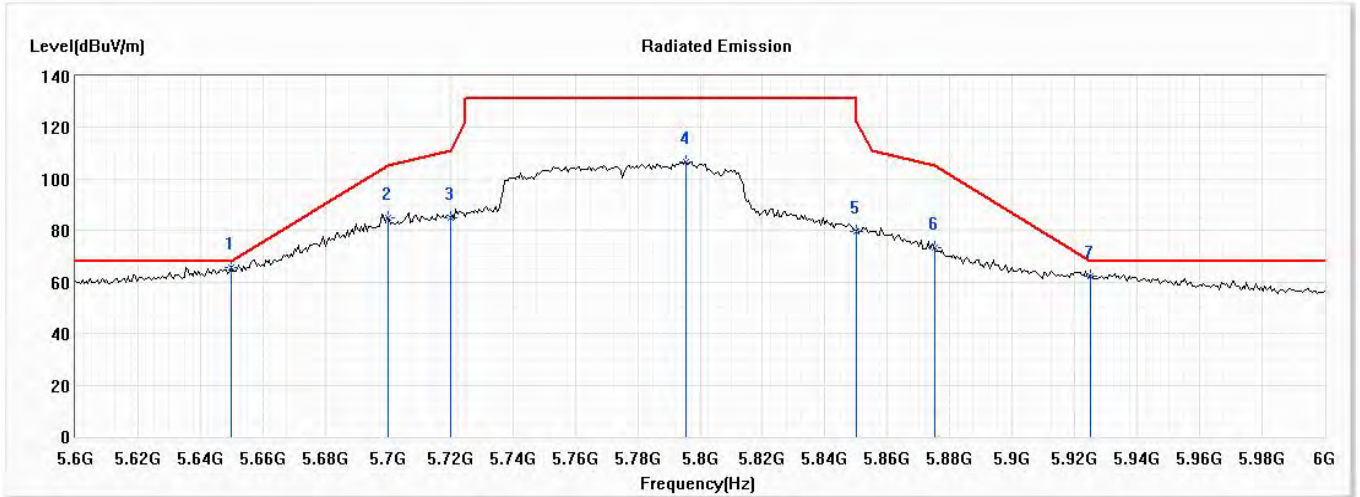

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	65.68	68.22	-2.54	46.57	19.11	PK
2	5700.000	84.88	105.20	-20.32	65.75	19.13	PK
3	5720.000	84.95	110.80	-25.85	65.78	19.17	PK
4	5795.362	106.73	131.20	-24.47	87.25	19.48	PK
5	5850.000	79.77	122.20	-42.43	60.07	19.70	PK
6	5875.000	73.39	105.20	-31.81	53.55	19.84	PK
7	5925.000	62.40	68.20	-5.80	42.38	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 9 SISO B: Transmit (802.11ac-80BW\_32.5Mbps)-Channel 155 (5775MHz)


**Vertical**

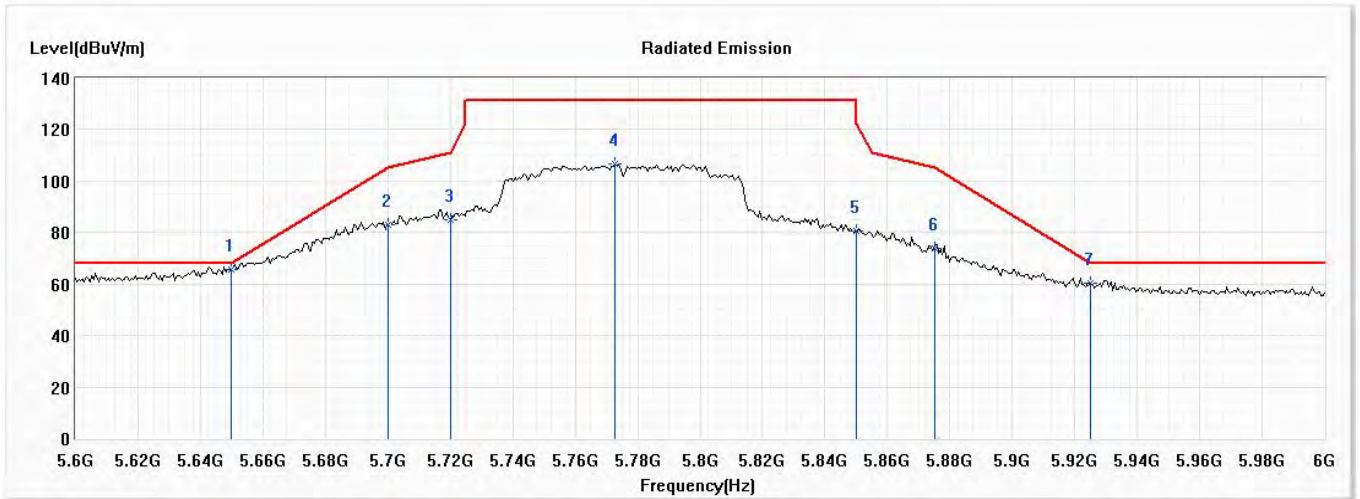

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	65.82	68.22	-2.40	46.71	19.11	PK
2	5700.000	83.02	105.20	-22.18	63.89	19.13	PK
3	5720.000	85.15	110.80	-25.65	65.98	19.17	PK
4	5772.754	106.78	131.20	-24.42	87.42	19.36	PK
5	5850.000	80.67	122.20	-41.53	60.97	19.70	PK
6	5875.000	74.10	105.20	-31.10	54.26	19.84	PK
7	5925.000	60.25	68.20	-7.95	40.23	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Horizontal**

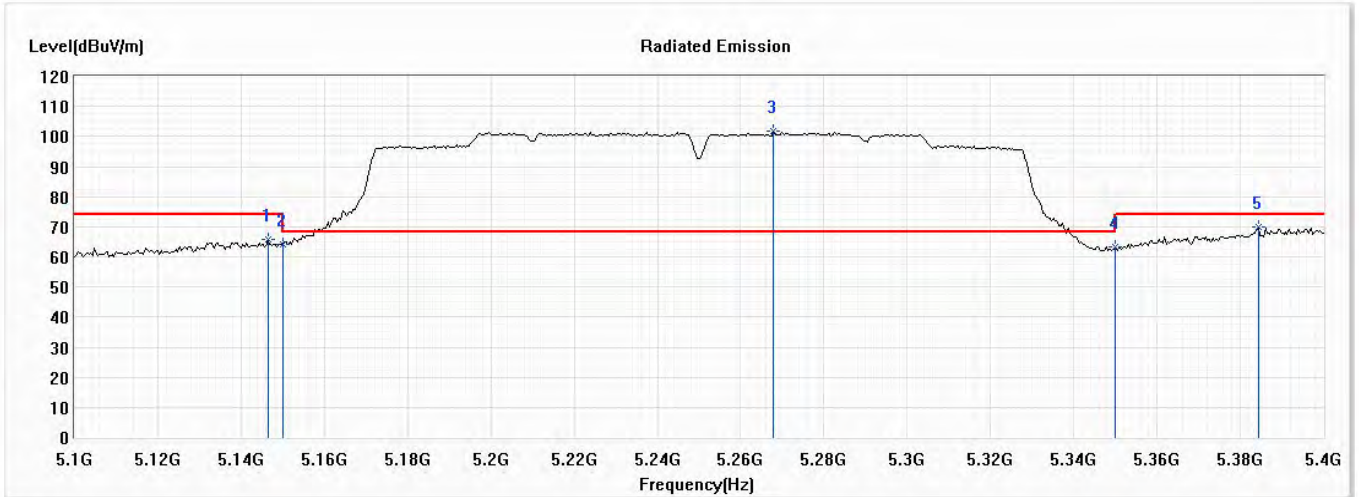


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5146.522	65.87	74.00	-8.13	47.45	18.42	PK
2	5150.000	64.02	74.00	-9.98	45.58	18.44	PK
! 3	5267.826	101.61	--	--	82.86	18.75	PK
4	5350.000	63.38	74.00	-10.62	44.42	18.96	PK
5	5384.348	69.85	74.00	-4.15	50.85	19.00	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Horizontal**

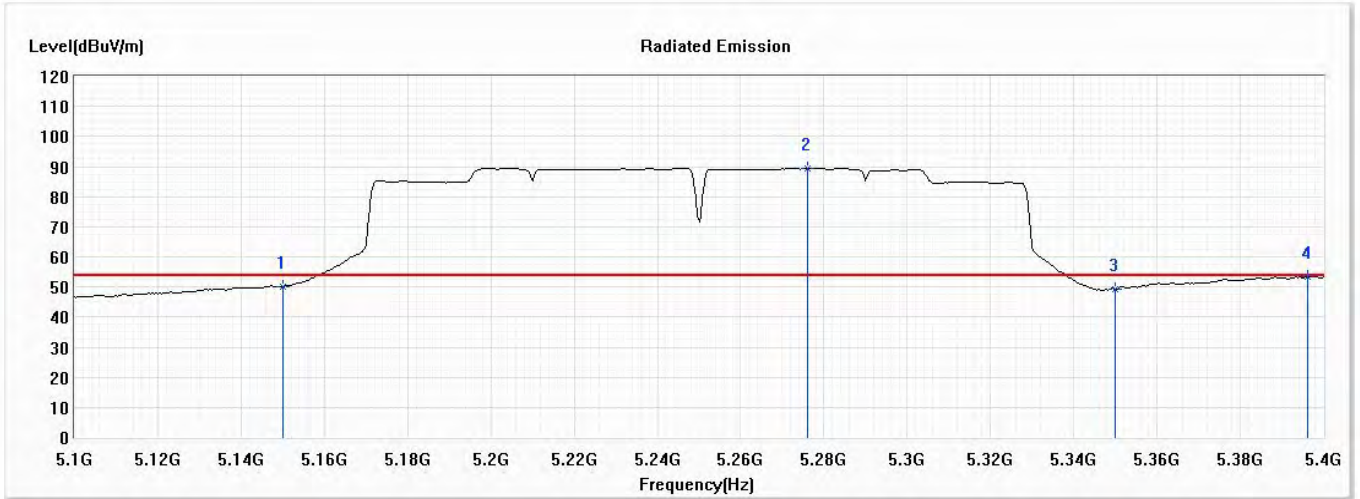


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.10	54.00	-3.90	31.66	18.44	AV
! 2	5276.087	89.53	--	--	70.75	18.78	AV
3	5350.000	49.21	54.00	-4.79	30.25	18.96	AV
4	5396.087	53.42	54.00	-0.58	34.41	19.01	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Vertical**

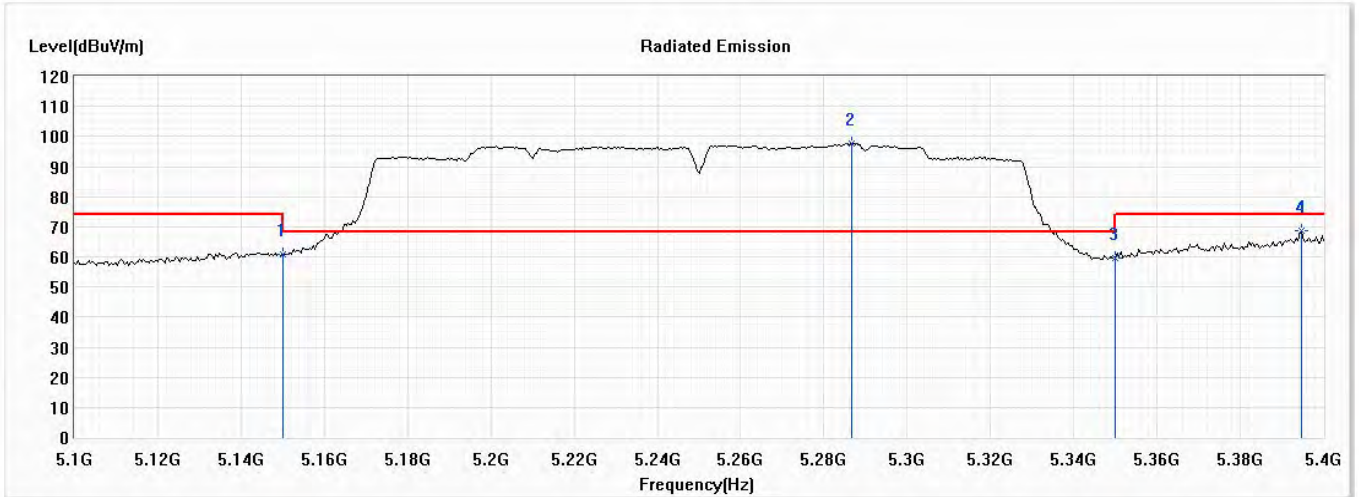


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	60.84	74.00	-13.16	42.40	18.44	PK
! 2	5286.522	97.70	--	--	78.87	18.83	PK
3	5350.000	59.72	74.00	-14.28	40.76	18.96	PK
4	5394.783	68.72	74.00	-5.28	49.71	19.01	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 50 (5250MHz)

**Vertical**

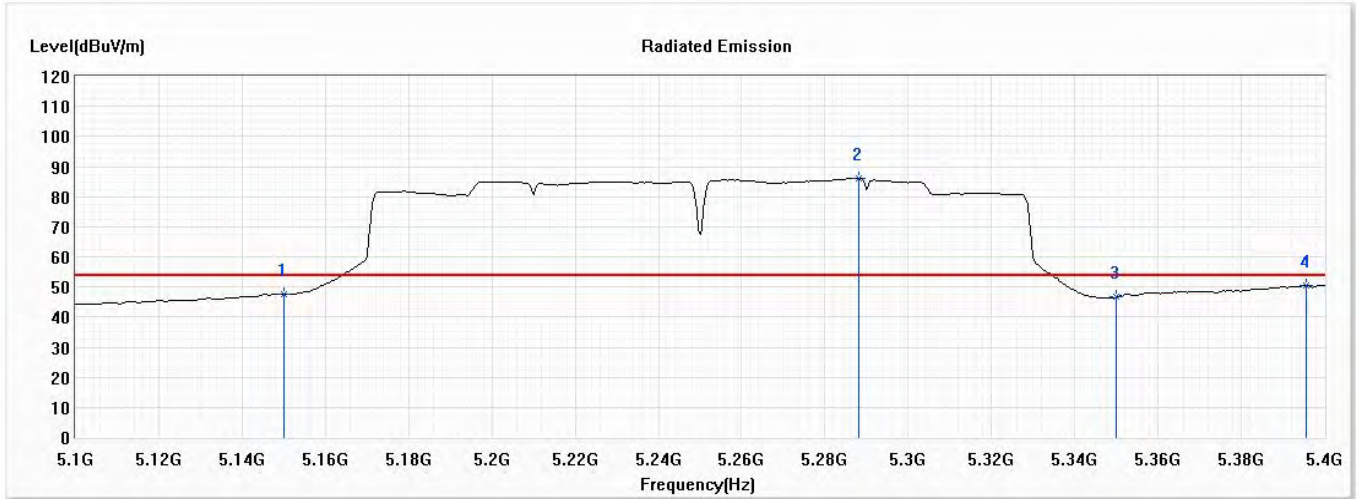


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	47.57	54.00	-6.43	29.13	18.44	AV
! 2	5288.261	86.05	--	--	67.21	18.84	AV
3	5350.000	46.77	54.00	-7.23	27.81	18.96	AV
4	5395.652	50.63	54.00	-3.37	31.62	19.01	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Horizontal**

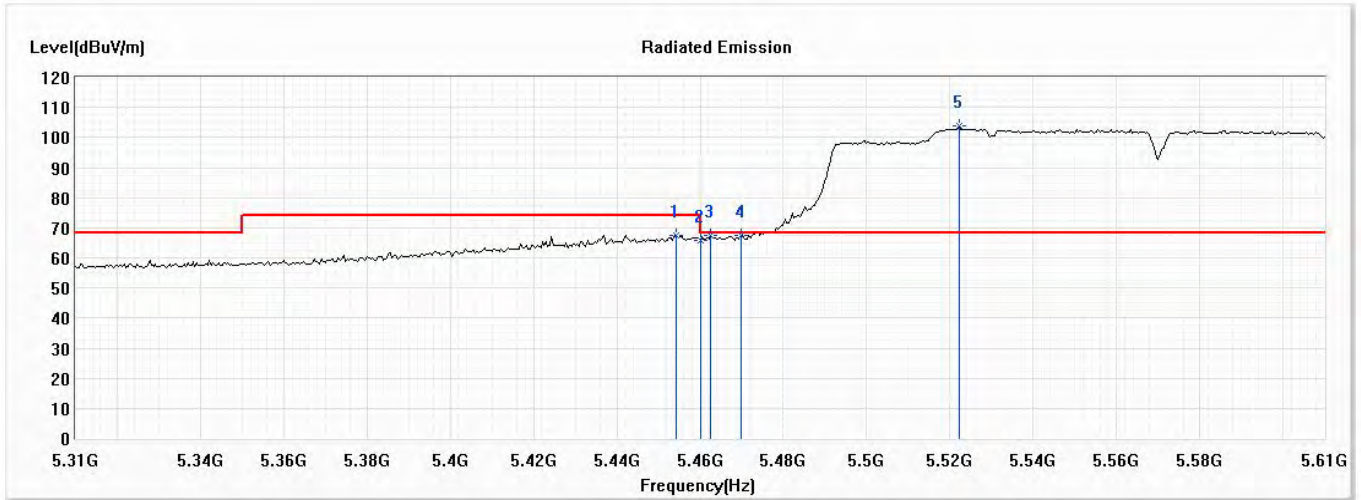


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5454.348	67.59	74.00	-6.41	48.66	18.93	PK
2	5460.000	65.93	74.00	-8.07	47.00	18.93	PK
3	5462.609	67.37	68.22	-0.85	48.45	18.92	PK
4	5470.000	67.30	68.22	-0.92	48.40	18.90	PK
! 5	5522.174	103.68	--	--	84.81	18.87	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Horizontal**

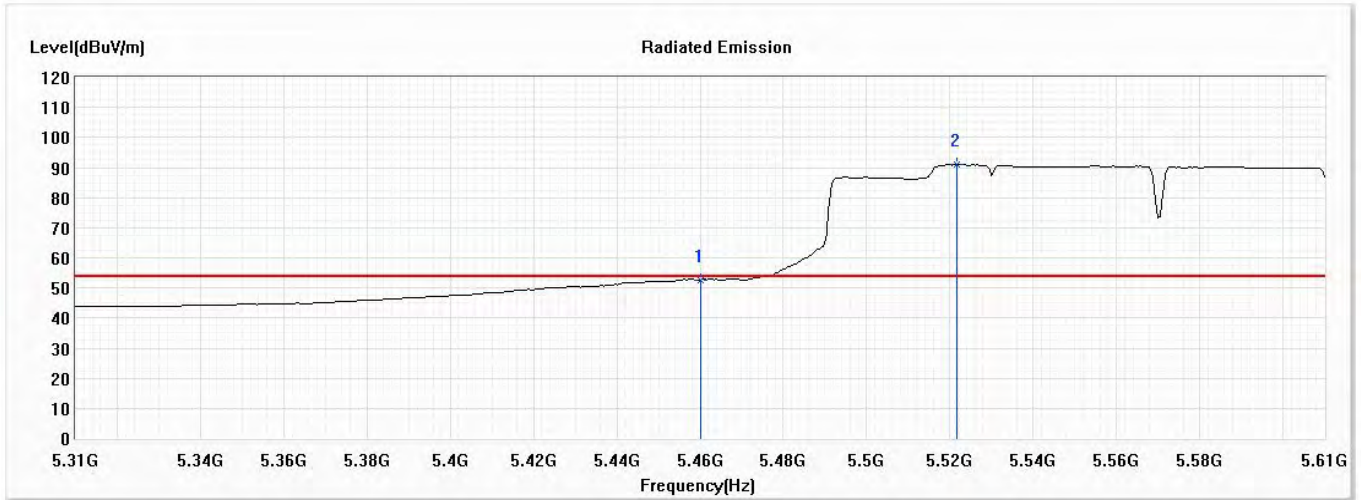

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	52.71	54.00	-1.29	33.78	18.93	AV
! 2	5521.739	90.93	--	--	72.06	18.87	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Vertical**

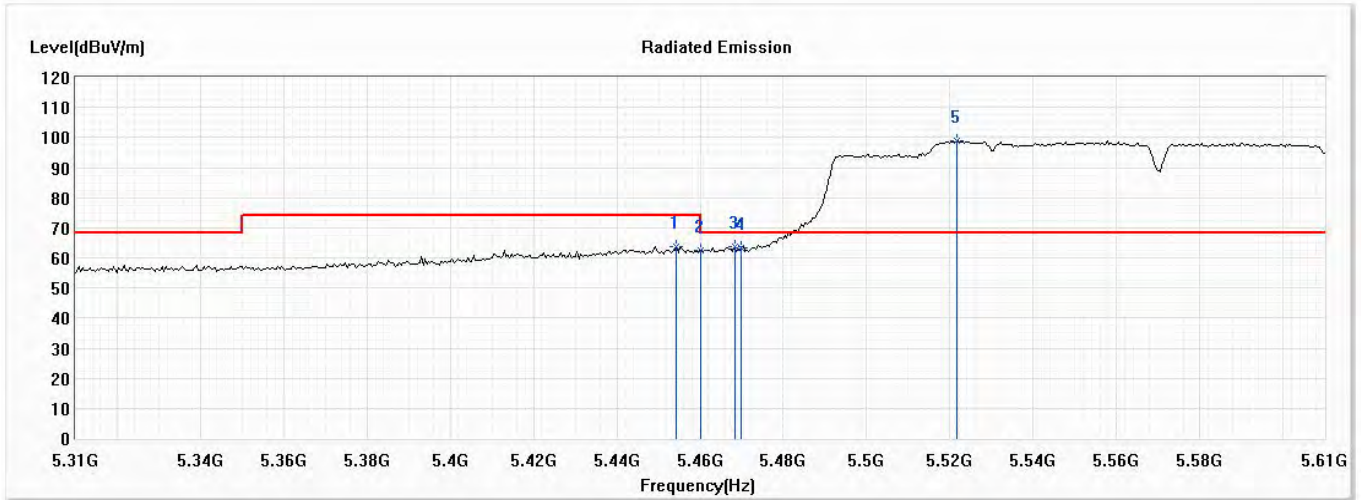


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5454.348	63.82	74.00	-10.18	44.89	18.93	PK
2	5460.000	62.30	74.00	-11.70	43.37	18.93	PK
3	5468.261	63.72	68.22	-4.50	44.82	18.90	PK
4	5470.000	63.22	68.22	-5.00	44.32	18.90	PK
! 5	5521.739	99.02	--	--	80.15	18.87	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 10 SISO B: Transmit (802.11ac-160BW\_65Mbps)-Channel 114 (5570MHz)

**Vertical**

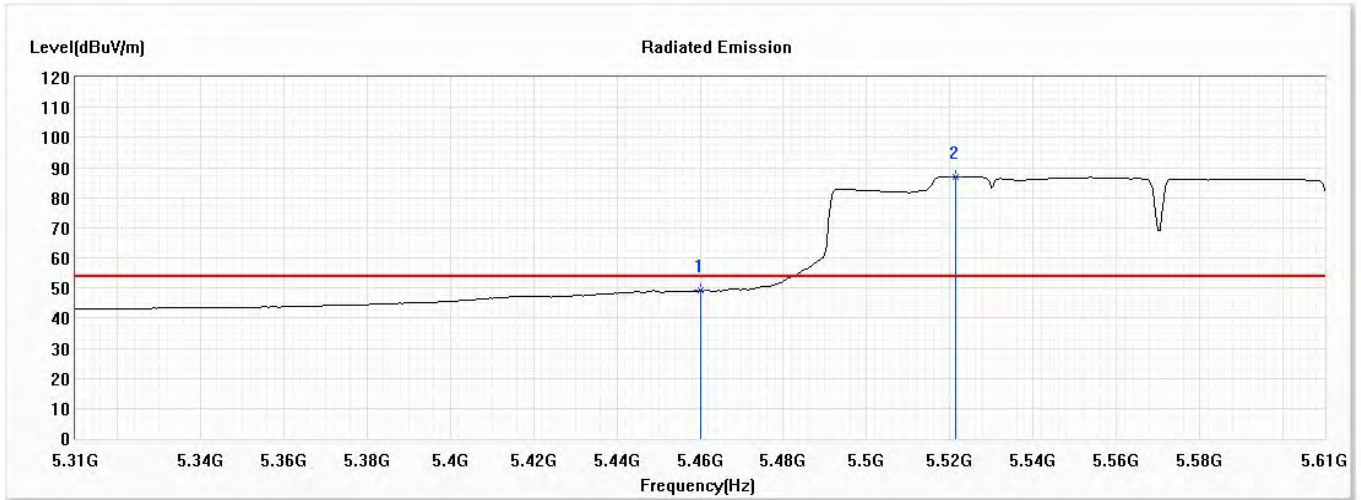


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	49.09	54.00	-4.91	30.16	18.93	AV
! 2	5521.304	86.97	--	--	68.10	18.87	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Horizontal**

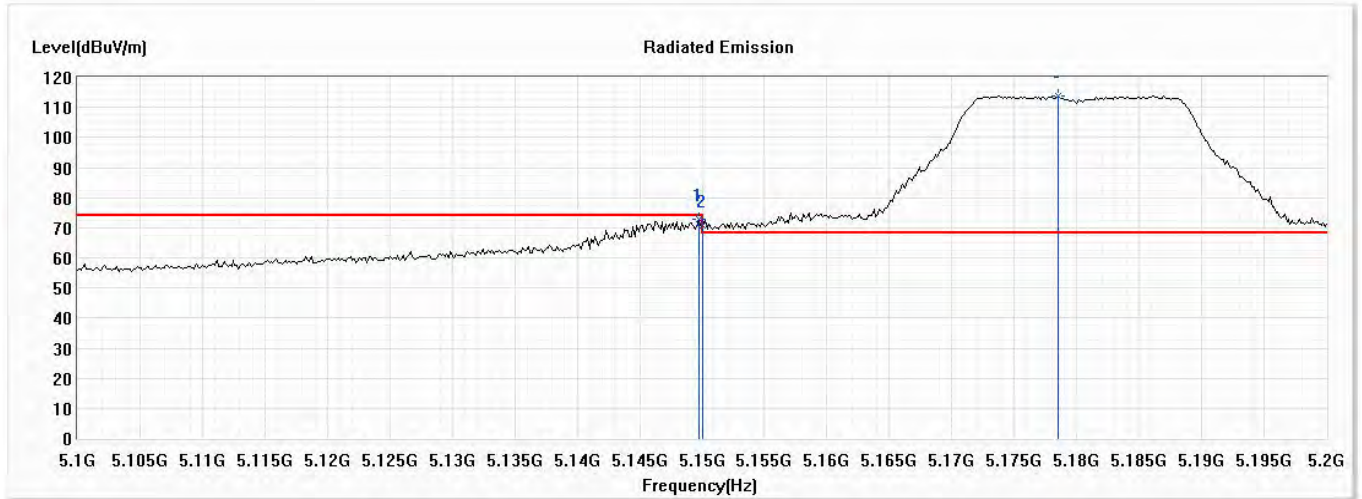


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5149.710	72.82	74.00	-1.18	54.38	18.44	PK
2	5150.000	70.76	74.00	-3.24	52.32	18.44	PK
!3	5178.551	113.75	--	--	95.25	18.50	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Horizontal**

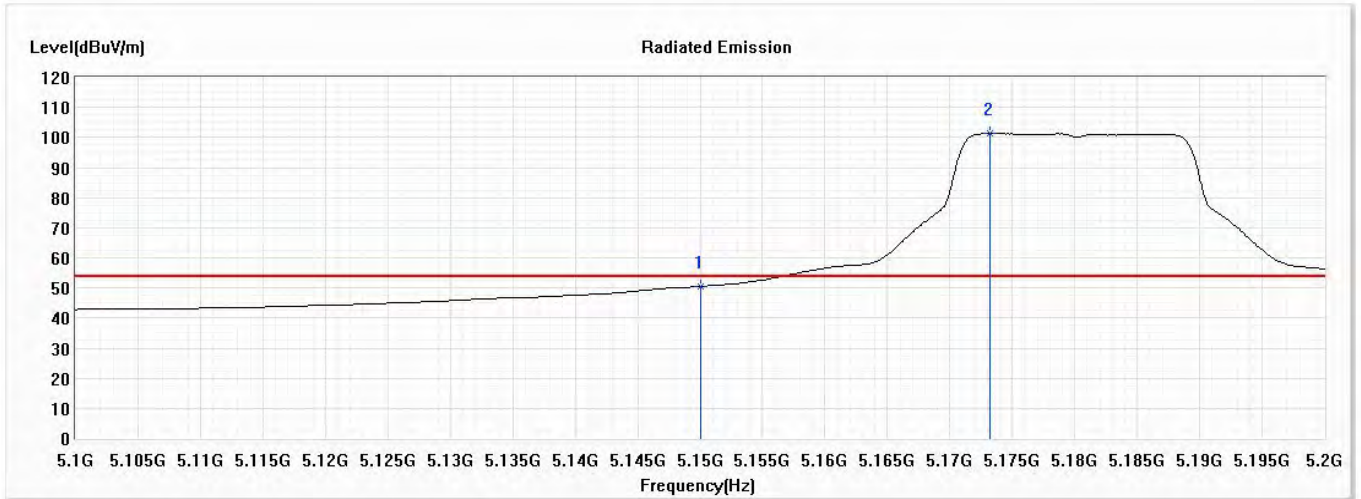


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.51	54.00	-3.49	32.07	18.44	AV
! 2	5173.188	101.26	--	--	82.76	18.50	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Vertical**

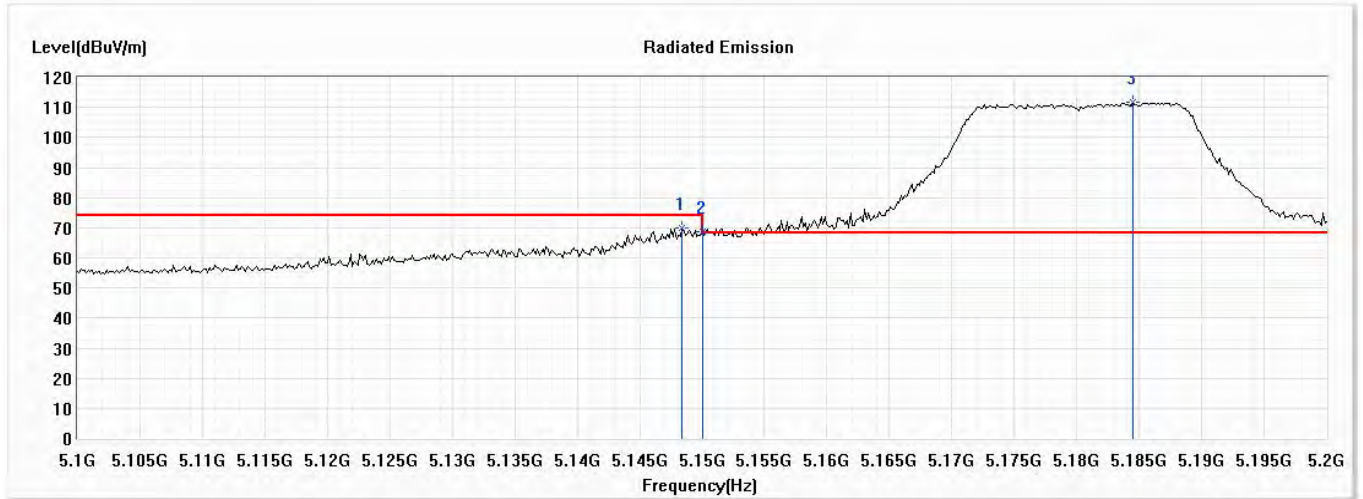


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5148.406	70.00	74.00	-4.00	51.58	18.42	PK
2	5150.000	68.50	74.00	-5.50	50.06	18.44	PK
!3	5184.493	111.72	--	--	93.21	18.51	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 36 (5180MHz)

**Vertical**

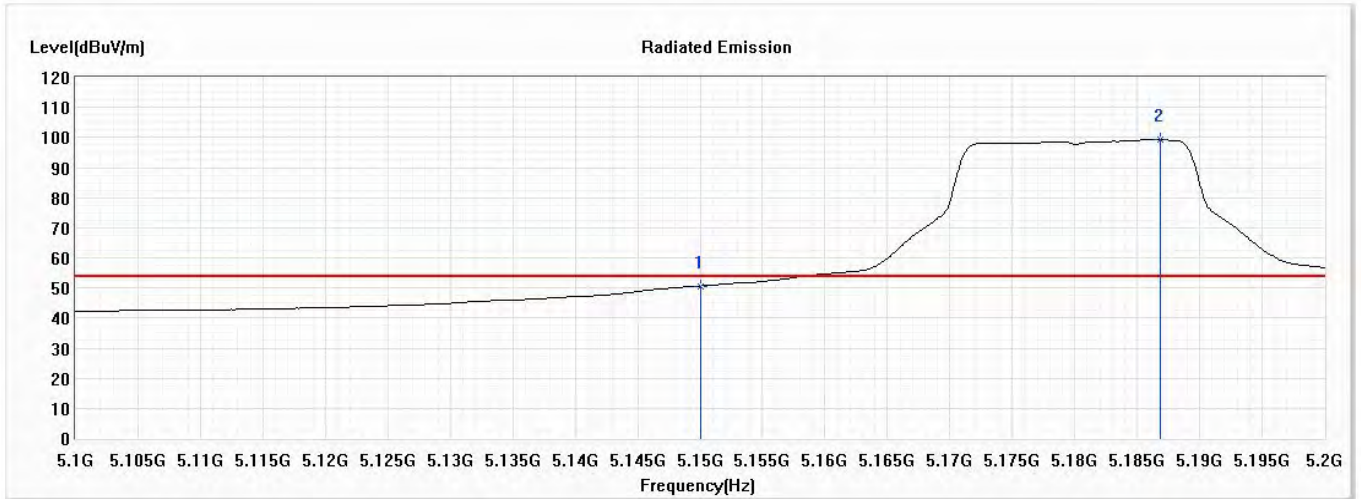


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.67	54.00	-3.33	32.23	18.44	AV
! 2	5186.812	99.20	--	--	80.69	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Horizontal**

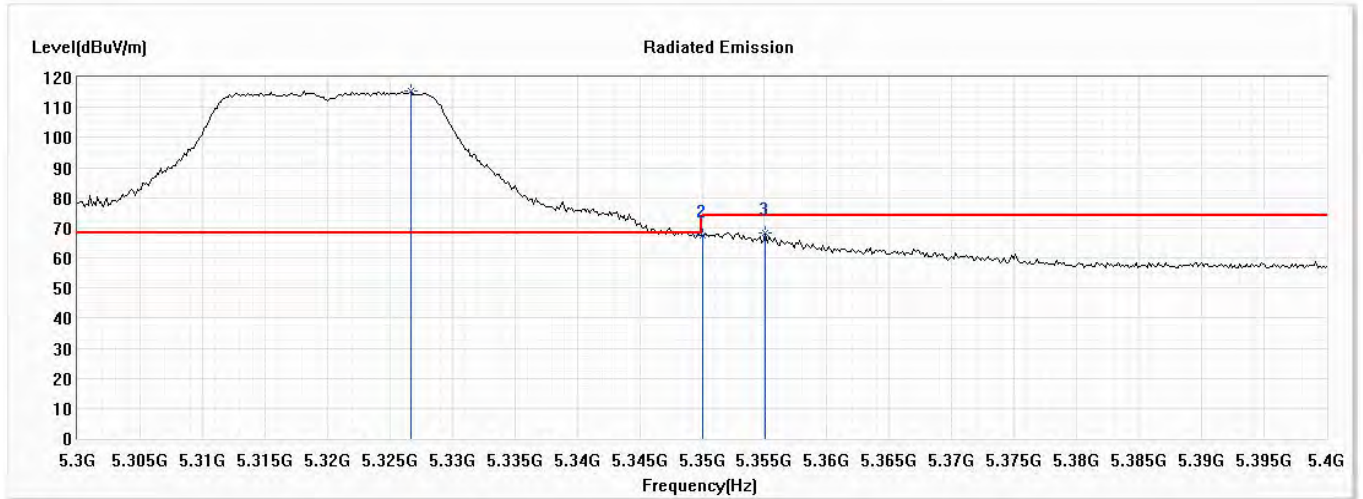


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5326.667	115.35	--	--	96.42	18.93	PK
2	5350.000	67.53	74.00	-6.47	48.57	18.96	PK
3	5355.072	68.08	74.00	-5.92	49.12	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Horizontal**

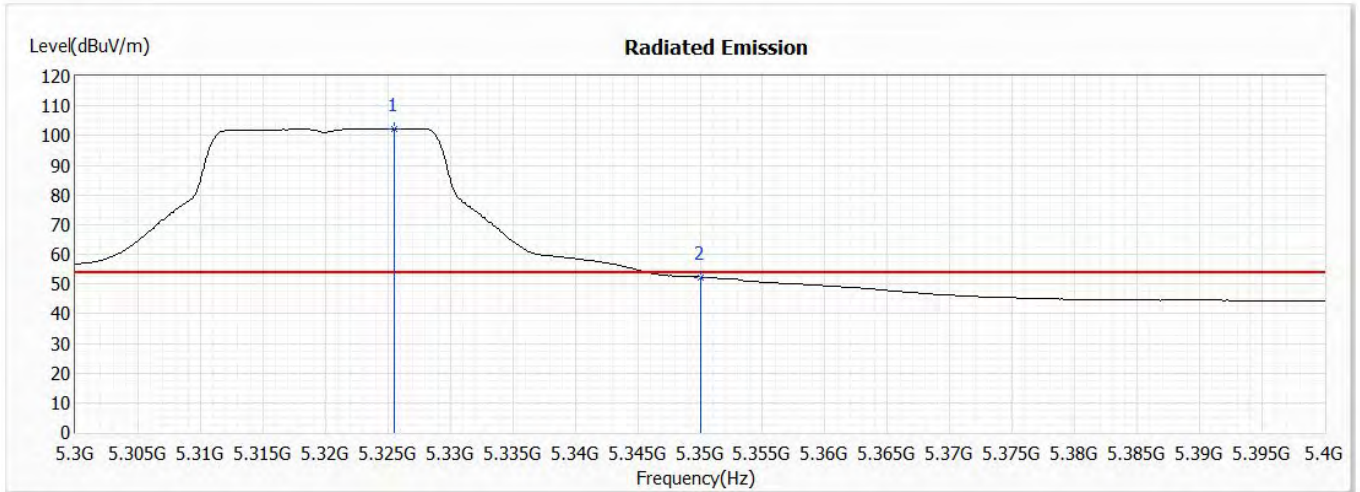

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5325.507	102.31	--	--	83.38	18.93	AV
2	5350.000	52.27	54.00	-1.73	33.31	18.96	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Vertical**

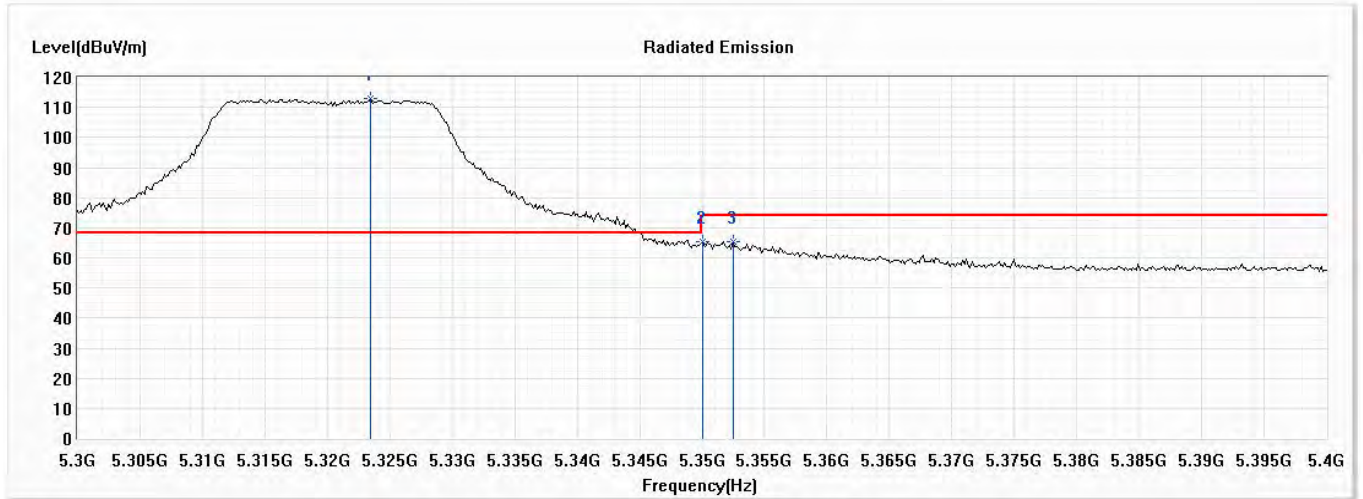


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5323.478	113.03	--	--	94.10	18.93	PK
2	5350.000	65.35	74.00	-8.65	46.39	18.96	PK
3	5352.464	65.53	74.00	-8.47	46.57	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 64 (5320MHz)

**Vertical**

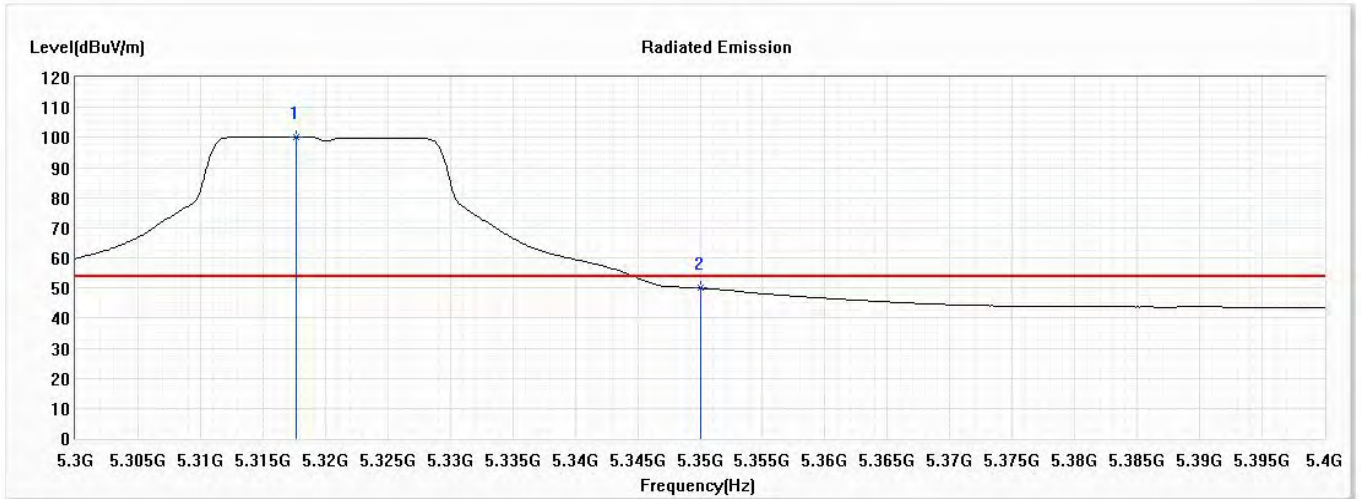


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5317.681	100.18	--	--	81.26	18.92	AV
2	5350.000	49.95	54.00	-4.05	30.99	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Horizontal**

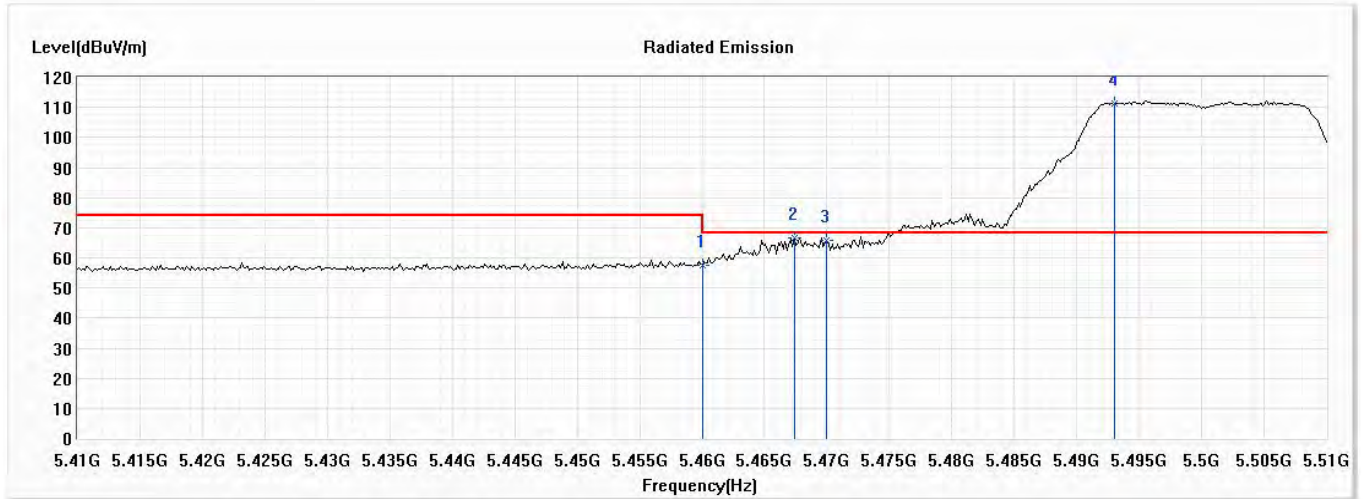


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	57.69	74.00	-16.31	38.76	18.93	PK
2	5467.391	66.71	68.22	-1.51	47.80	18.91	PK
3	5470.000	65.92	68.22	-2.30	47.02	18.90	PK
! 4	5493.043	111.20	--	--	92.36	18.84	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Horizontal**

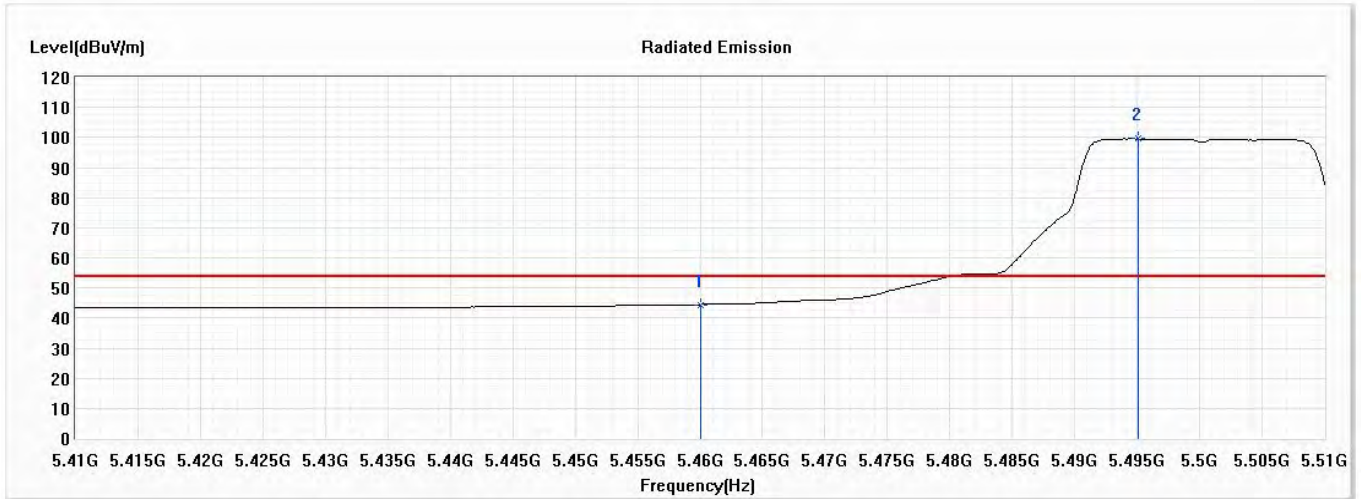


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.48	54.00	-9.52	25.55	18.93	AV
! 2	5495.072	99.56	--	--	80.72	18.84	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Vertical**

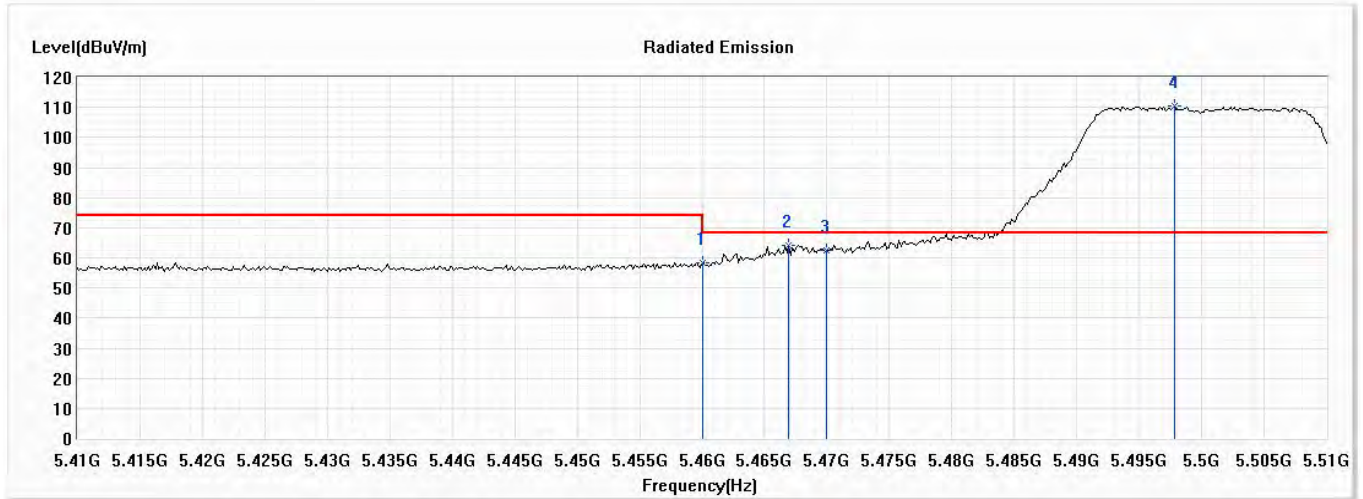


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	58.36	74.00	-15.64	39.43	18.93	PK
2	5466.957	64.24	68.22	-3.98	45.33	18.91	PK
3	5470.000	62.49	68.22	-5.73	43.59	18.90	PK
! 4	5497.826	110.63	--	--	91.80	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 100 (5500MHz)

**Vertical**

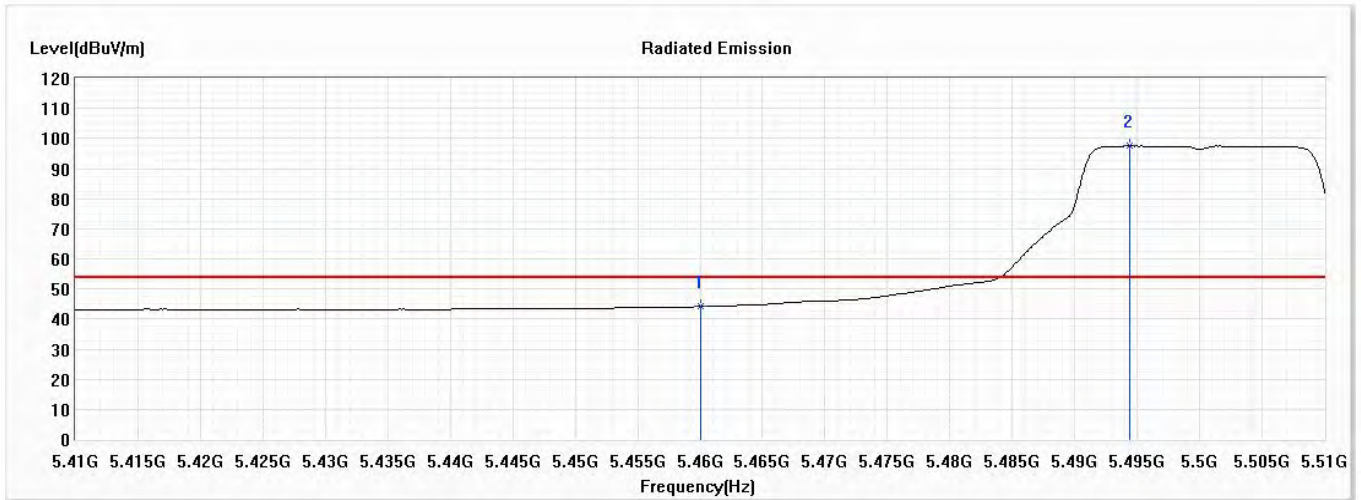


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	44.10	54.00	-9.90	25.17	18.93	AV
! 2	5494.348	97.50	--	--	78.66	18.84	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 140 (5700MHz)


**Horizontal**

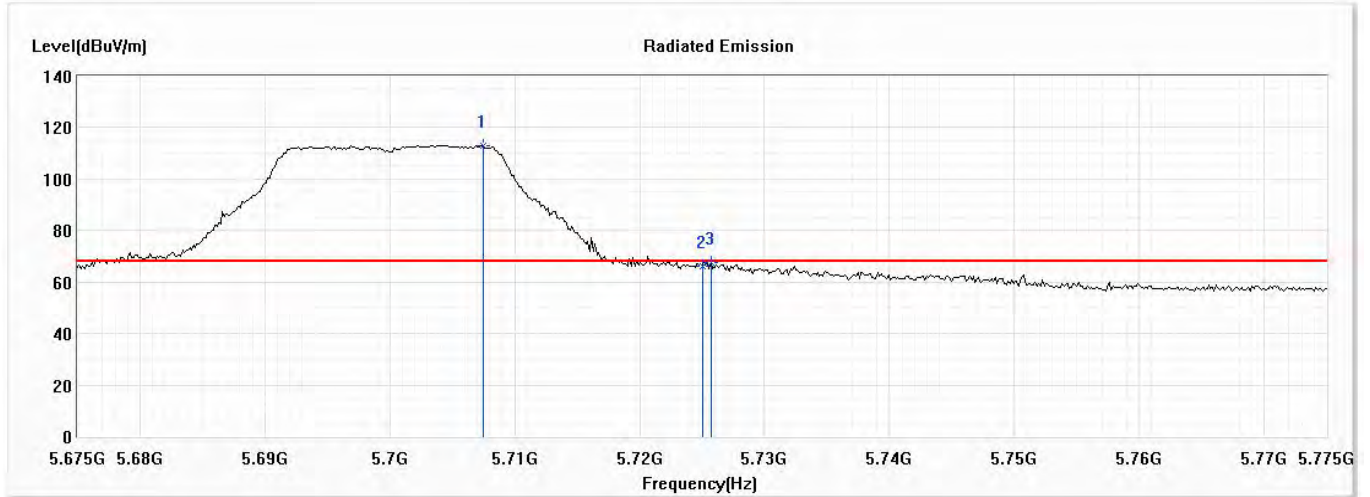

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5707.464	113.08	--	--	93.94	19.14	PK
2	5725.000	66.20	68.22	-2.02	47.02	19.18	PK
3	5725.725	67.41	68.22	-0.81	48.23	19.18	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 140 (5700MHz)

**Vertical**

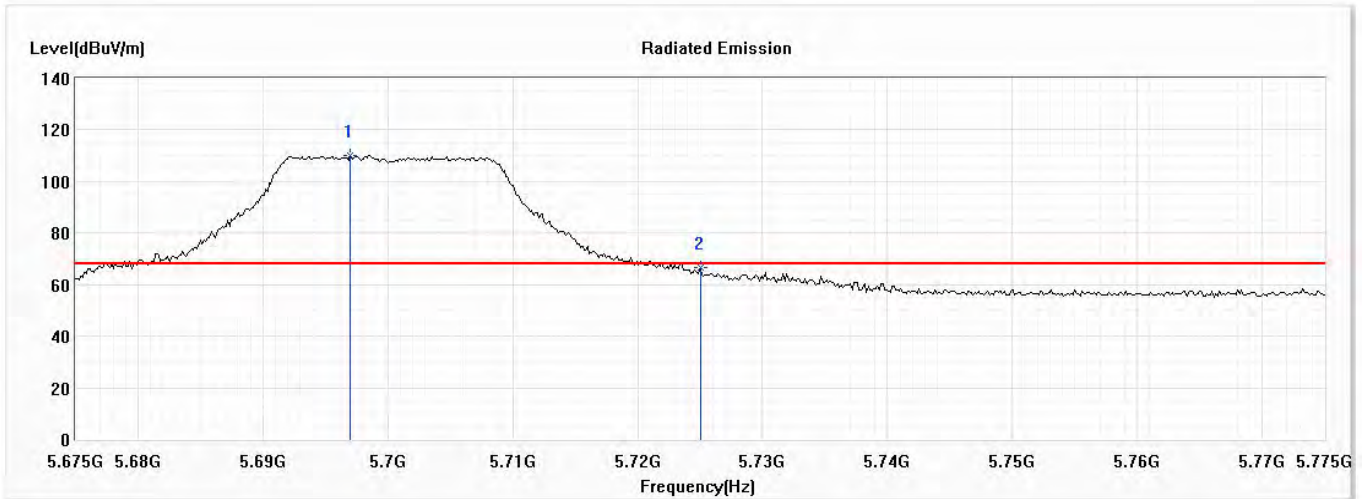


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5697.029	110.19	--	--	91.07	19.12	PK
2	5725.000	66.72	68.22	-1.50	47.54	19.18	PK



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 149 (5745MHz)


**Horizontal**

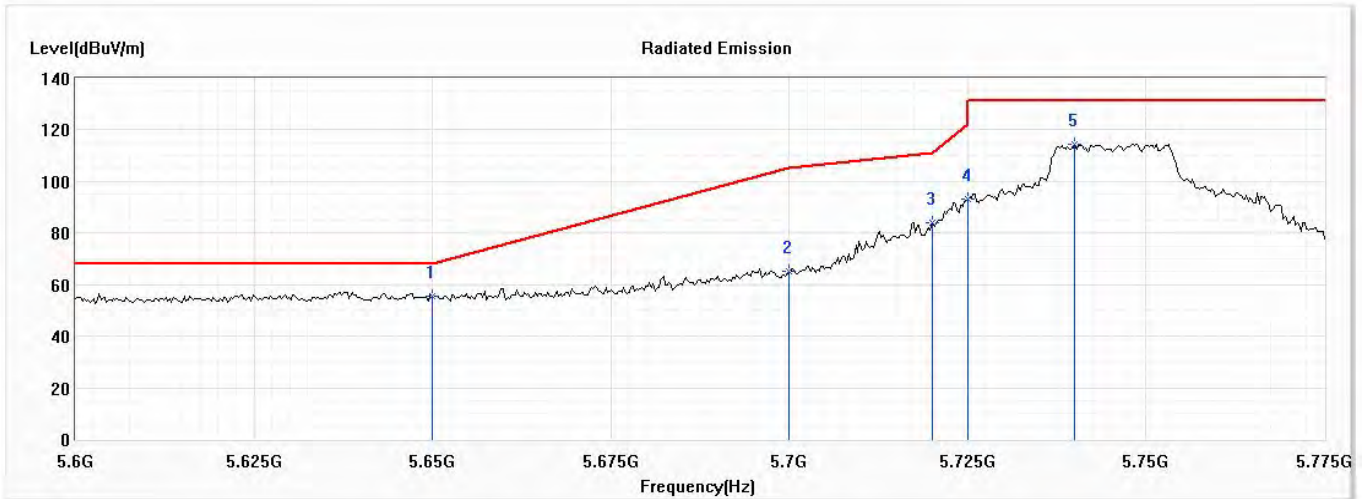

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	55.62	68.22	-12.60	36.51	19.11	PK
2	5700.000	65.00	105.20	-40.20	45.87	19.13	PK
3	5720.000	83.92	110.80	-26.88	64.75	19.17	PK
4	5725.000	93.31	122.20	-28.89	74.13	19.18	PK
5	5740.000	114.61	131.20	-16.59	95.37	19.24	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 149 (5745MHz)


**Vertical**

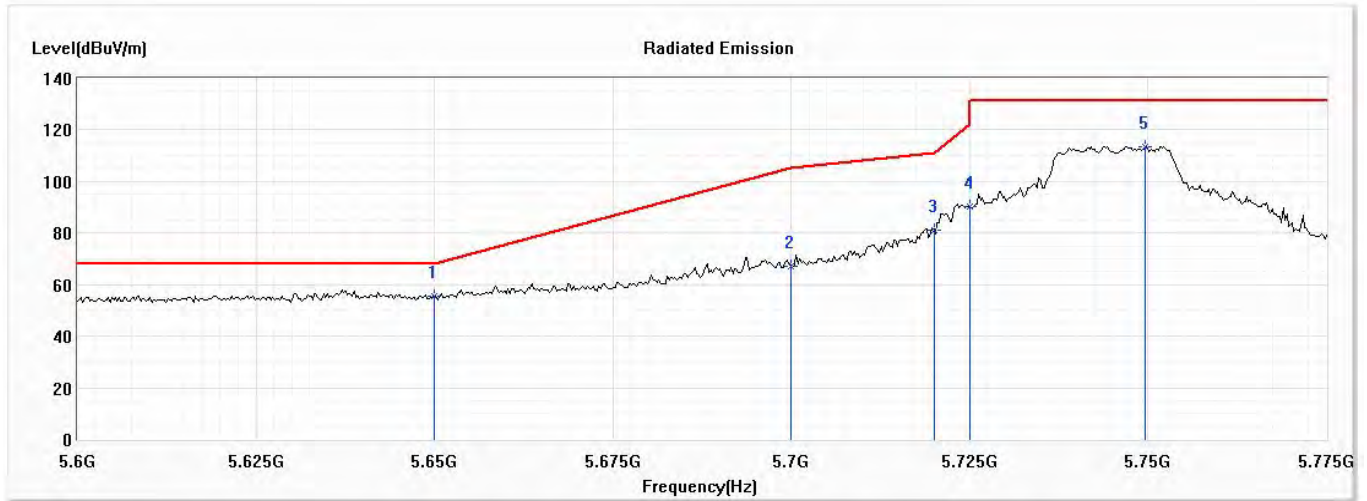

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	55.35	68.22	-12.87	36.24	19.11	PK
2	5700.000	67.24	105.20	-37.96	48.11	19.13	PK
3	5720.000	81.30	110.80	-29.50	62.13	19.17	PK
4	5725.000	90.09	122.20	-32.11	70.91	19.18	PK
5	5749.638	113.53	131.20	-17.67	94.27	19.26	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 165 (5825MHz)


**Horizontal**

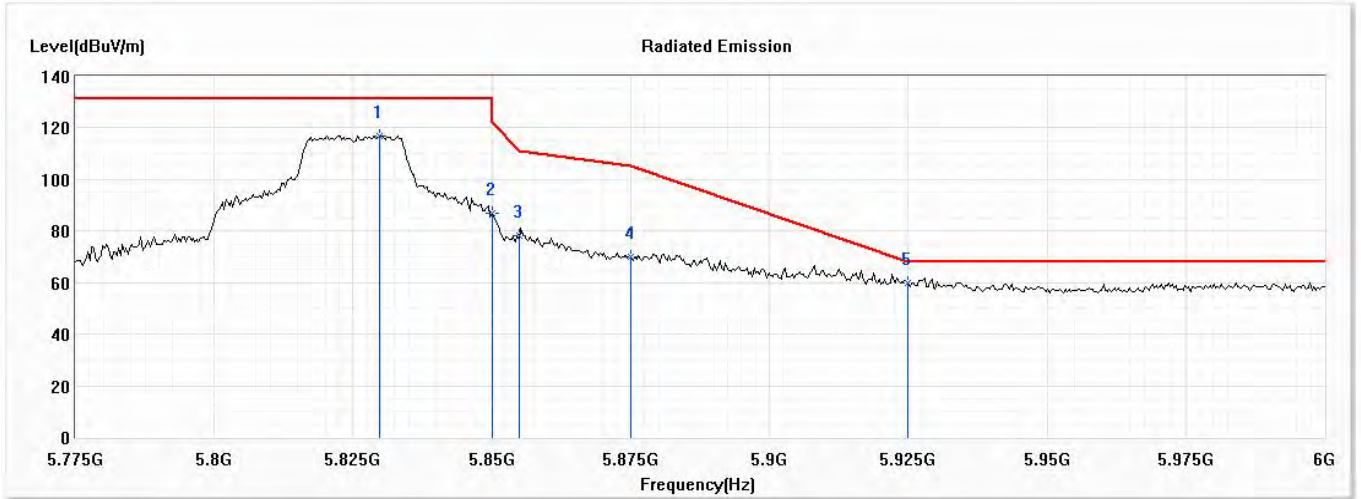

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5829.783	117.00	131.20	-14.20	97.37	19.63	PK
2	5850.000	86.66	122.20	-35.54	66.96	19.70	PK
3	5855.000	78.05	110.80	-32.75	58.32	19.73	PK
4	5875.000	70.03	105.20	-35.17	50.19	19.84	PK
* 5	5925.000	59.81	68.20	-8.39	39.79	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 11 MIMO: Transmit (802.11n-20BW\_14.4Mbps)-Channel 165 (5825MHz)


**Vertical**

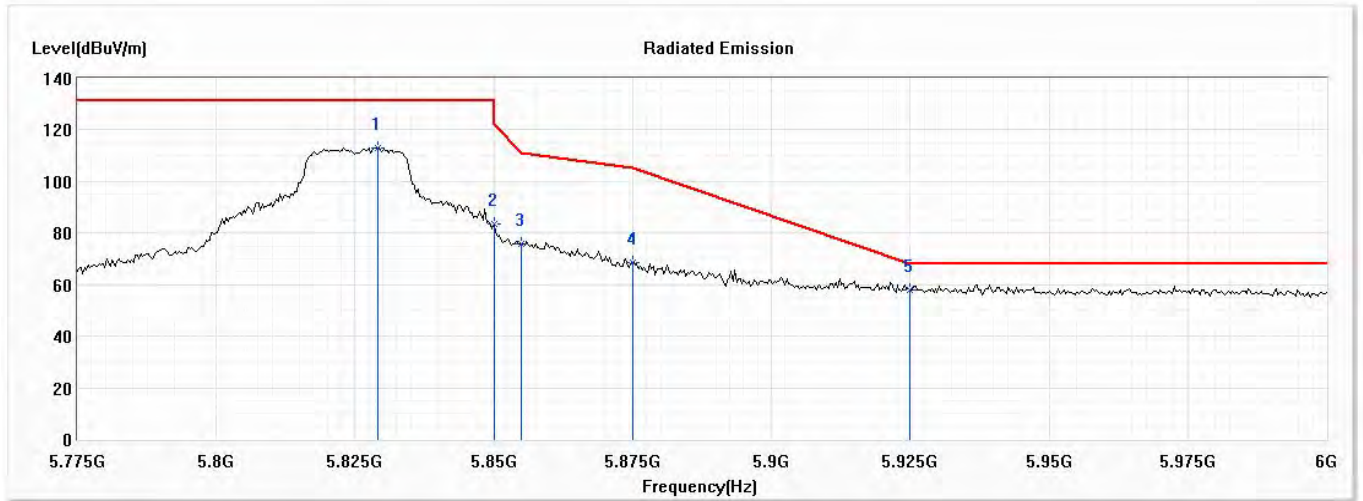

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5829.130	113.17	131.20	-18.03	93.54	19.63	PK
2	5850.000	83.68	122.20	-38.52	63.98	19.70	PK
3	5855.000	75.91	110.80	-34.89	56.18	19.73	PK
4	5875.000	68.57	105.20	-36.63	48.73	19.84	PK
* 5	5925.000	58.10	68.20	-10.10	38.08	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Horizontal**

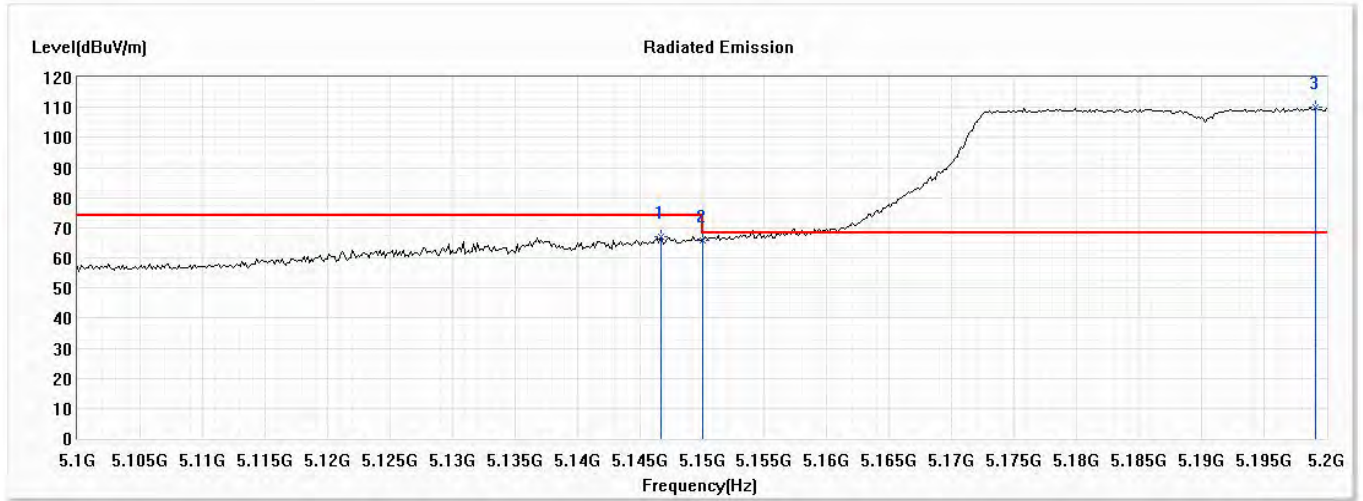


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5146.667	67.16	74.00	-6.84	48.74	18.42	PK
2	5150.000	66.00	74.00	-8.00	47.56	18.44	PK
! 3	5199.130	109.92	--	--	91.37	18.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Horizontal**

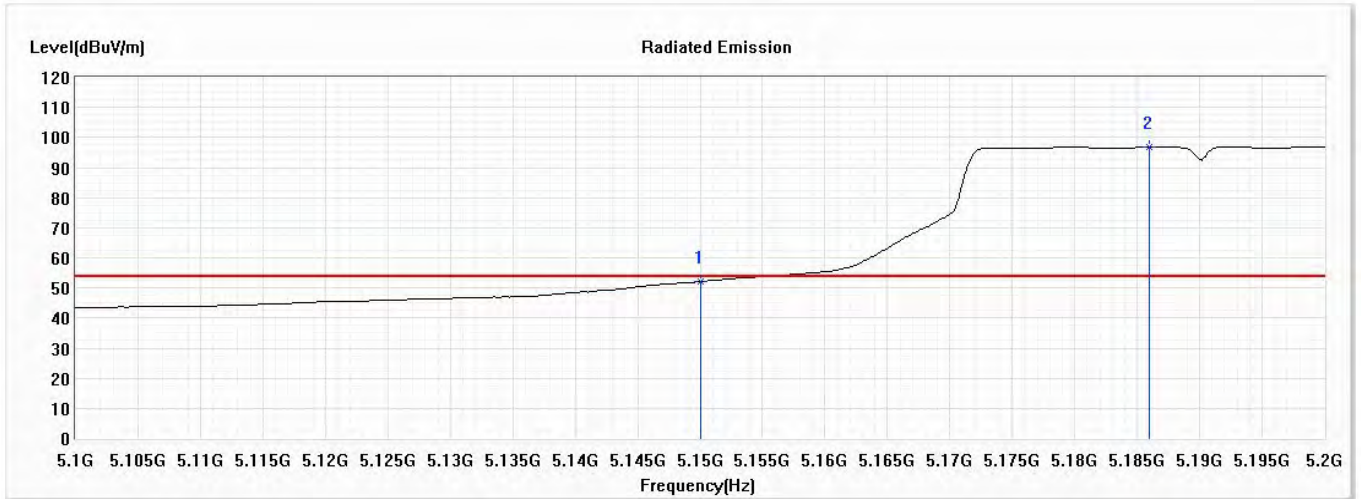


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.08	54.00	-1.92	33.64	18.44	AV
! 2	5185.942	96.83	--	--	78.32	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Vertical**

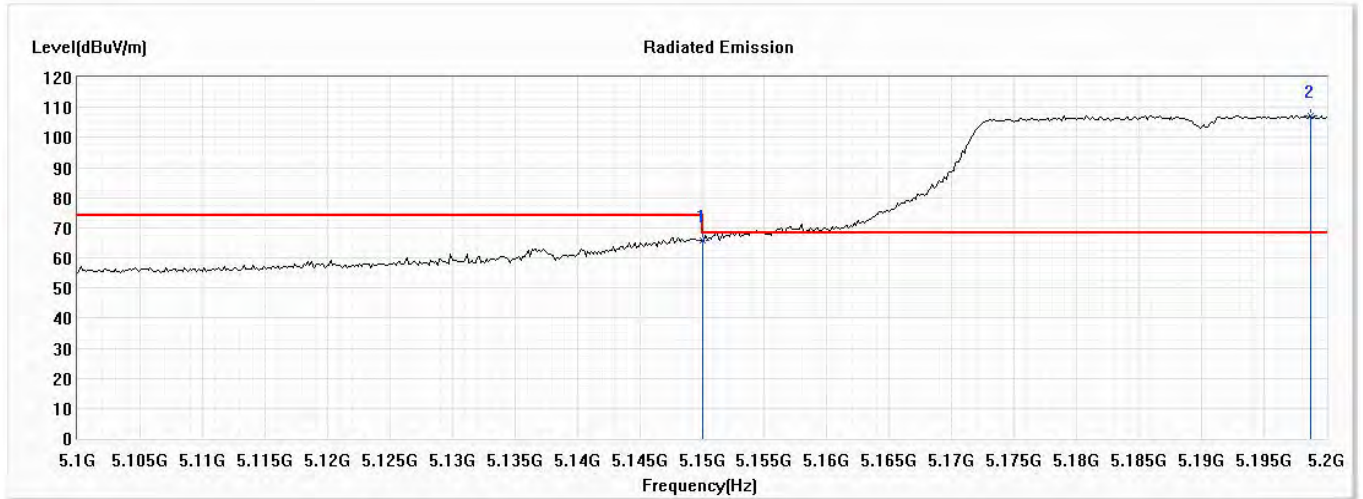


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	65.95	74.00	-8.05	47.51	18.44	PK
! 2	5198.696	107.27	--	--	88.72	18.55	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 38 (5190MHz)

**Vertical**

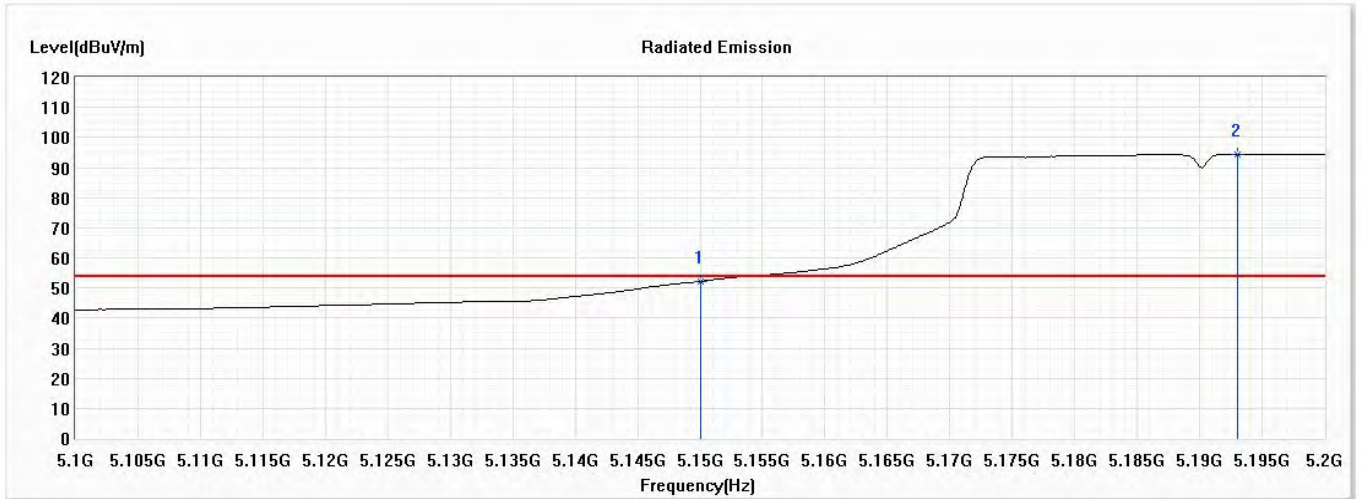

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.23	54.00	-1.77	33.79	18.44	AV
! 2	5193.043	94.52	--	--	75.98	18.54	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Horizontal**

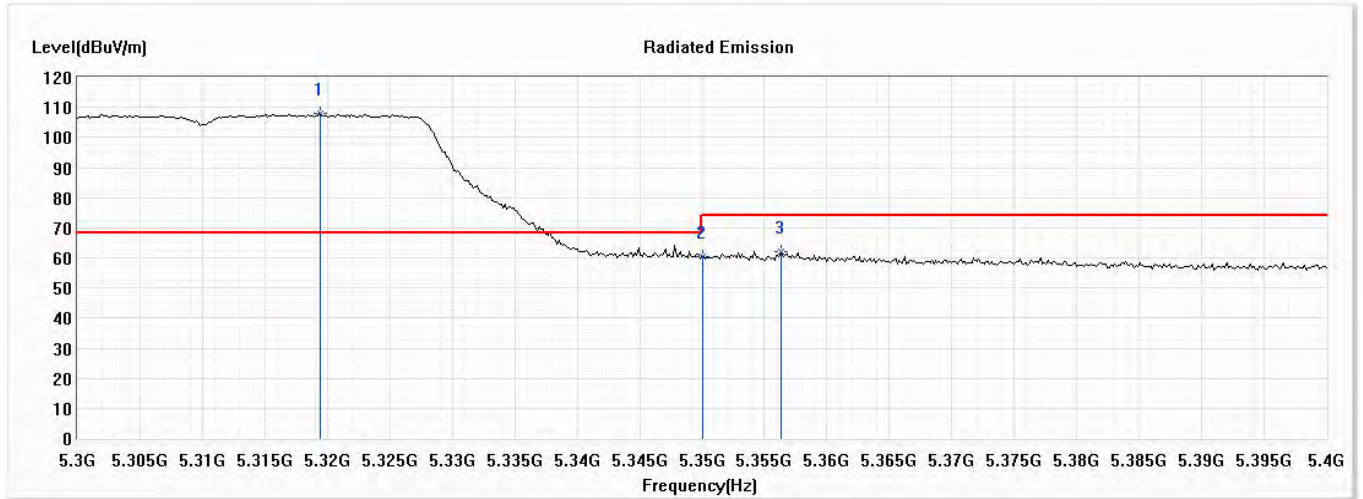


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5319.420	107.80	--	--	88.88	18.92	PK
2	5350.000	60.26	74.00	-13.74	41.30	18.96	PK
3	5356.377	62.00	74.00	-12.00	43.04	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Horizontal**

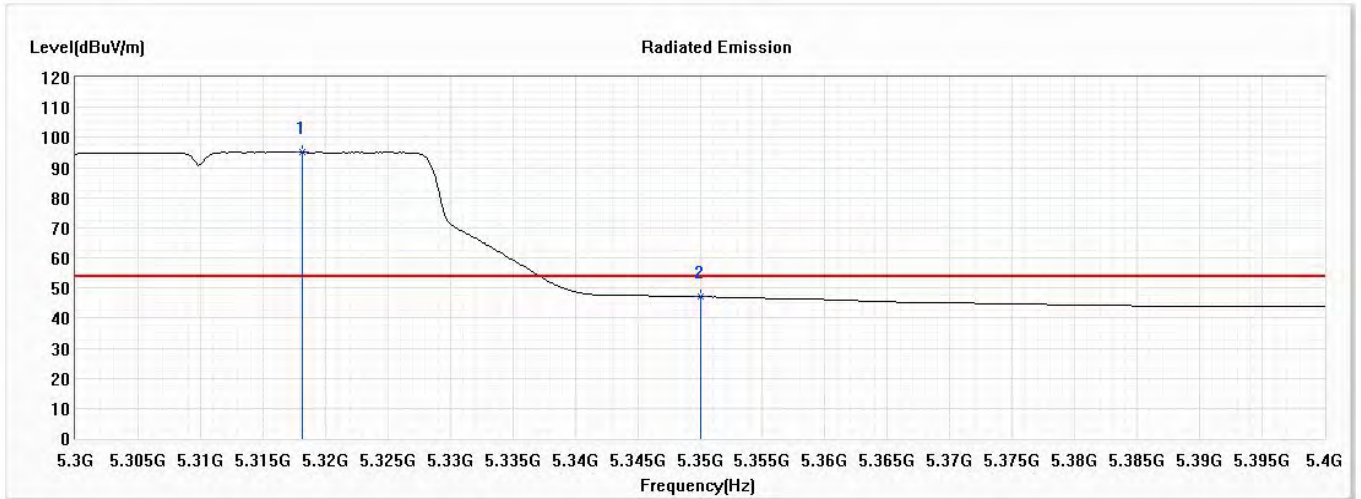


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5318.116	95.12	--	--	76.20	18.92	AV
2	5350.000	47.03	54.00	-6.97	28.07	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Vertical**

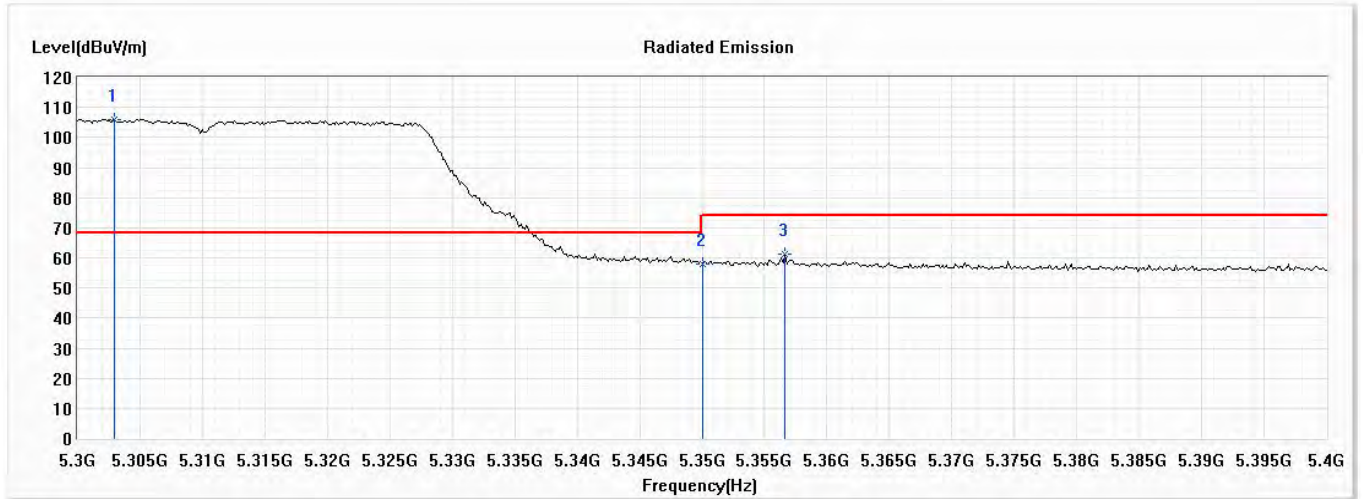


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5302.899	106.01	--	--	87.13	18.88	PK
2	5350.000	57.78	74.00	-16.22	38.82	18.96	PK
3	5356.667	61.10	74.00	-12.90	42.14	18.96	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 62 (5310MHz)

**Vertical**

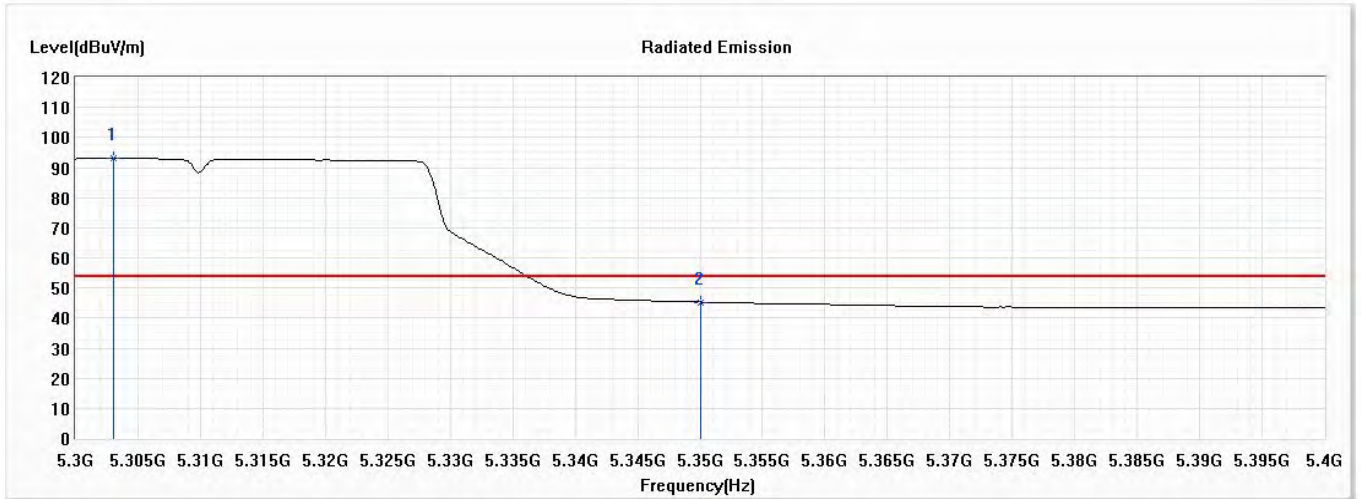


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5303.043	93.24	--	--	74.36	18.88	AV
2	5350.000	45.31	54.00	-8.69	26.35	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Horizontal**

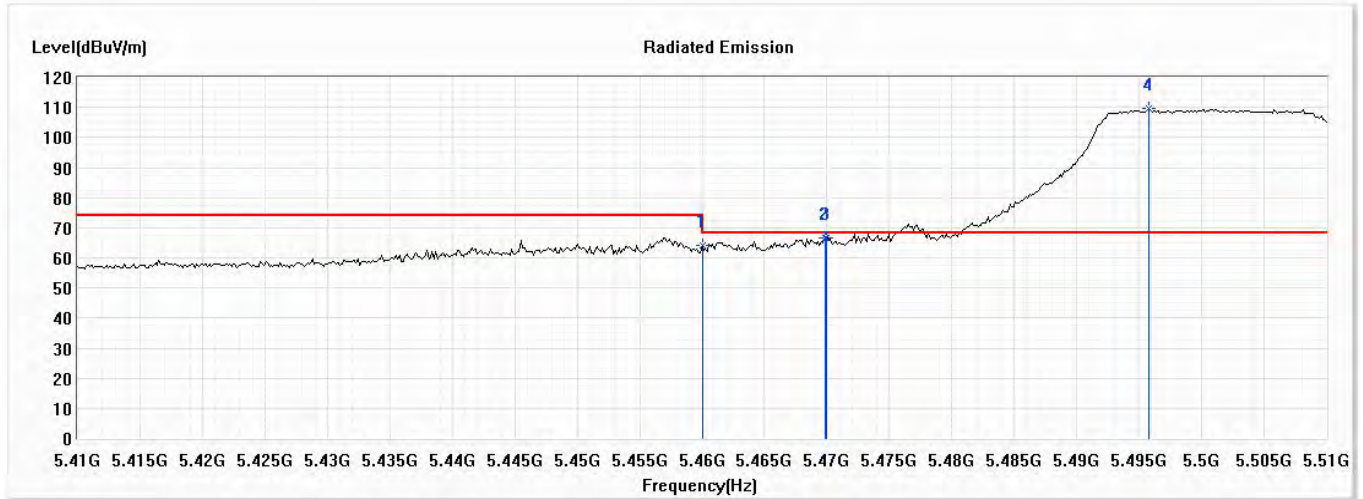


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	64.16	74.00	-9.84	45.23	18.93	PK
2	5469.855	66.79	68.22	-1.43	47.89	18.90	PK
3	5470.000	66.59	68.22	-1.63	47.69	18.90	PK
! 4	5495.797	109.56	--	--	90.72	18.84	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Horizontal**

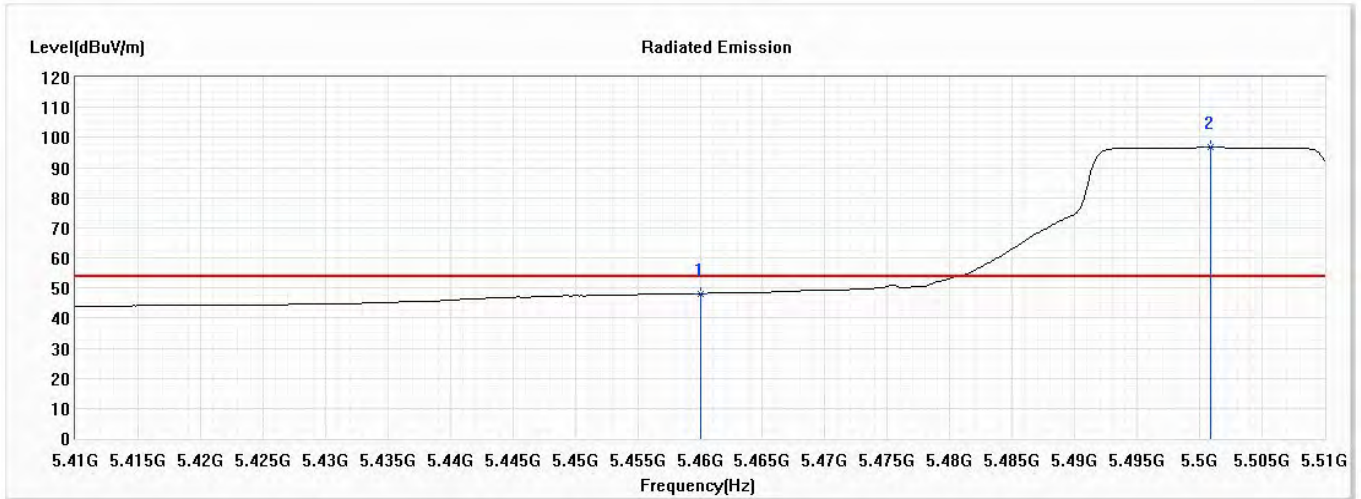


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	48.13	54.00	-5.87	29.20	18.93	AV
! 2	5500.870	96.76	--	--	77.93	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Vertical**

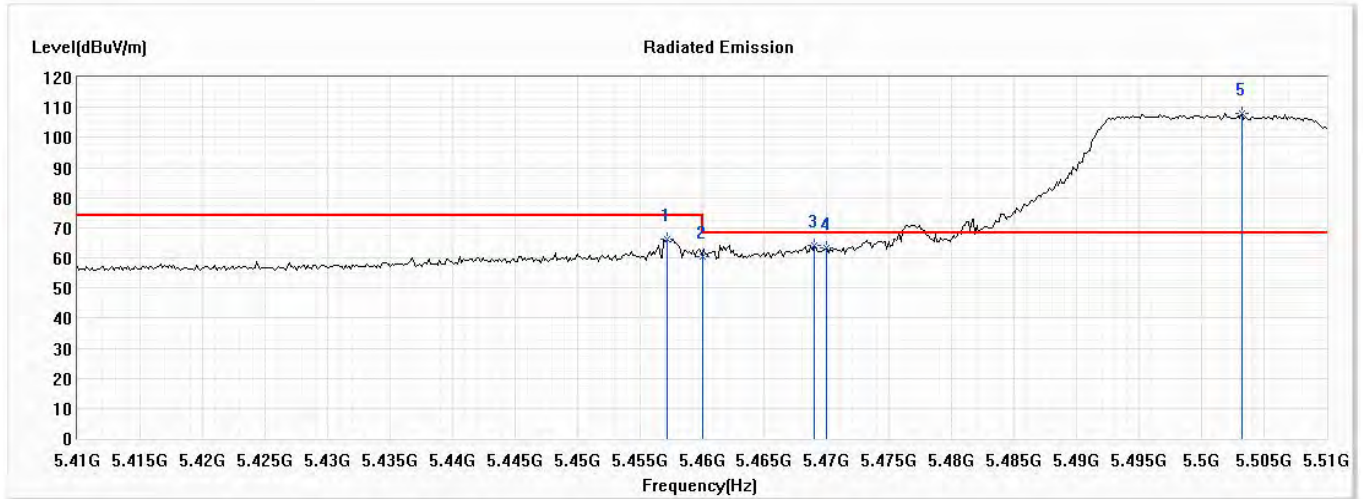


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5457.246	66.39	74.00	-7.61	47.45	18.94	PK
2	5460.000	60.32	74.00	-13.68	41.39	18.93	PK
3	5468.986	64.18	68.22	-4.04	45.28	18.90	PK
4	5470.000	63.15	68.22	-5.07	44.25	18.90	PK
! 5	5503.188	107.90	--	--	89.07	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/03  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 102 (5510MHz)

**Vertical**

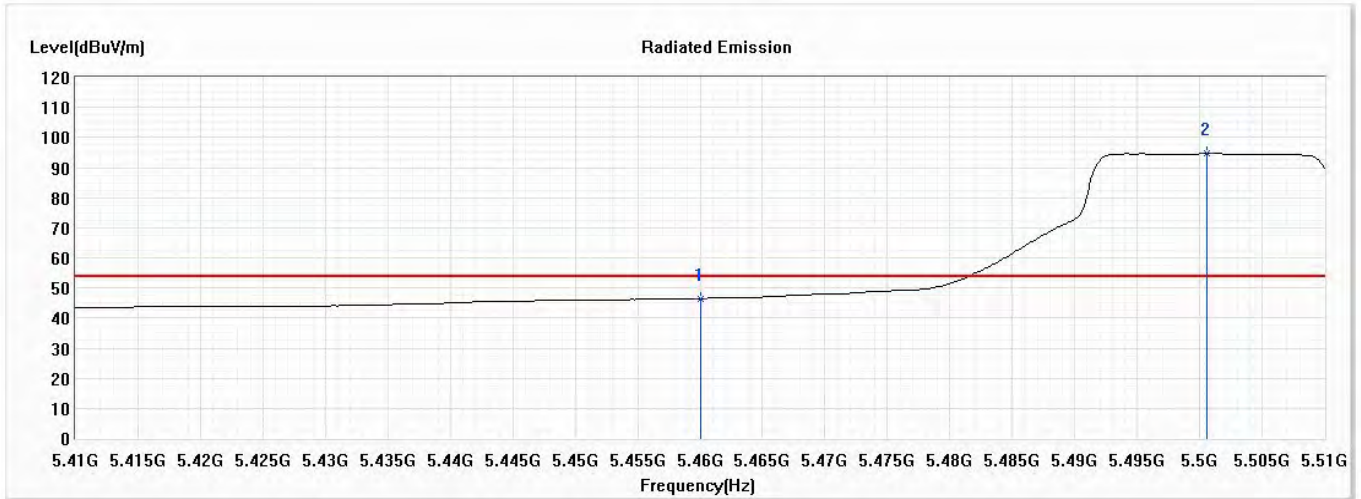

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	46.49	54.00	-7.51	27.56	18.93	AV
! 2	5500.580	94.65	--	--	75.82	18.83	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 134 (5670MHz)


**Horizontal**

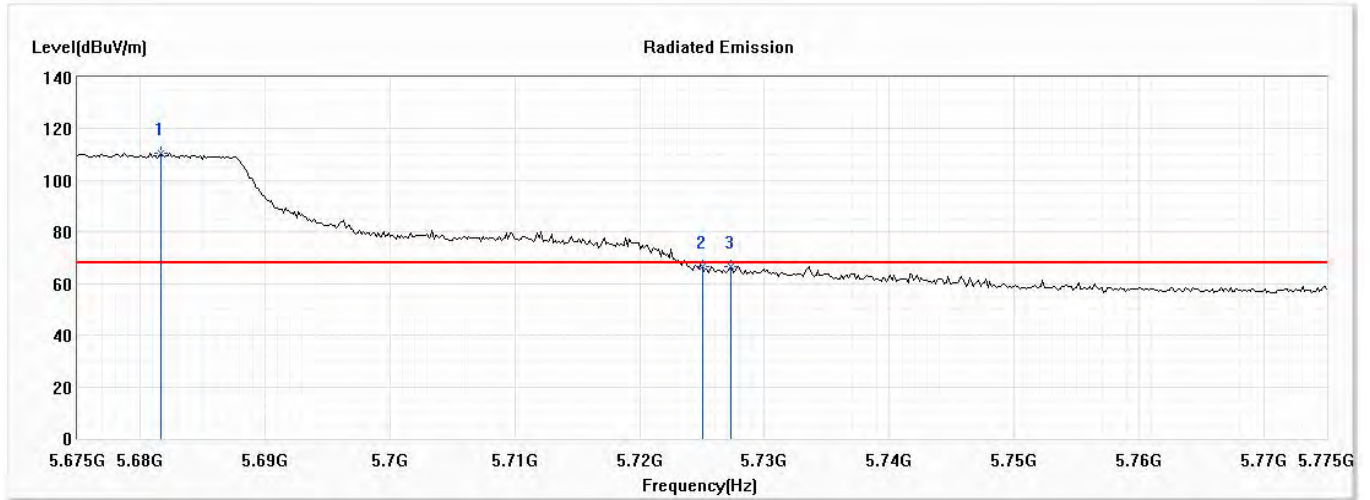

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5681.667	110.70	--	--	91.59	19.11	PK
2	5725.000	66.55	68.22	-1.67	47.37	19.18	PK
3	5727.319	66.81	68.22	-1.41	47.63	19.18	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 134 (5670MHz)


**Vertical**

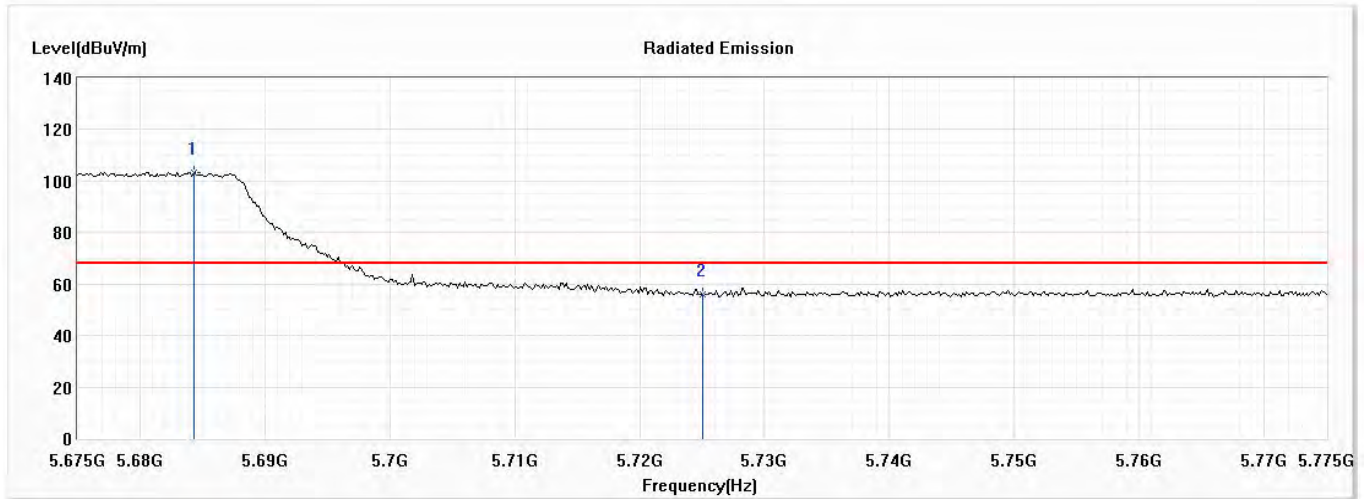

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5684.275	103.35	--	--	84.24	19.11	PK
2	5725.000	55.84	68.22	-12.38	36.66	19.18	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 151 (5755MHz)


**Horizontal**

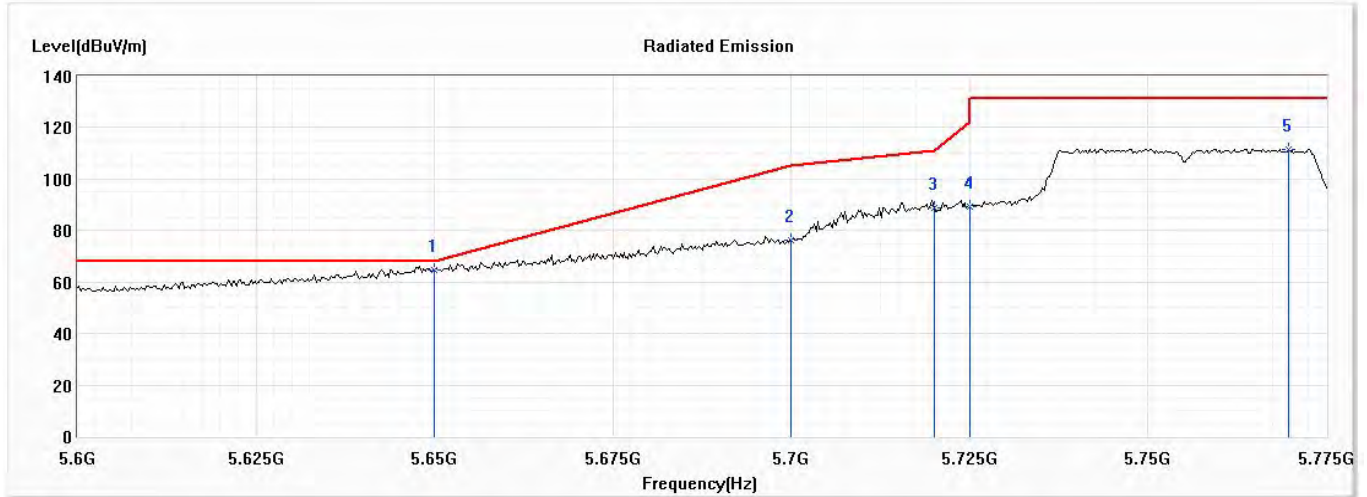

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	64.89	68.22	-3.33	45.78	19.11	PK
2	5700.000	76.35	105.20	-28.85	57.22	19.13	PK
3	5720.000	88.77	110.80	-22.03	69.60	19.17	PK
4	5725.000	89.30	122.20	-32.90	70.12	19.18	PK
5	5769.674	111.72	131.20	-19.48	92.39	19.33	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 151 (5755MHz)


**Vertical**

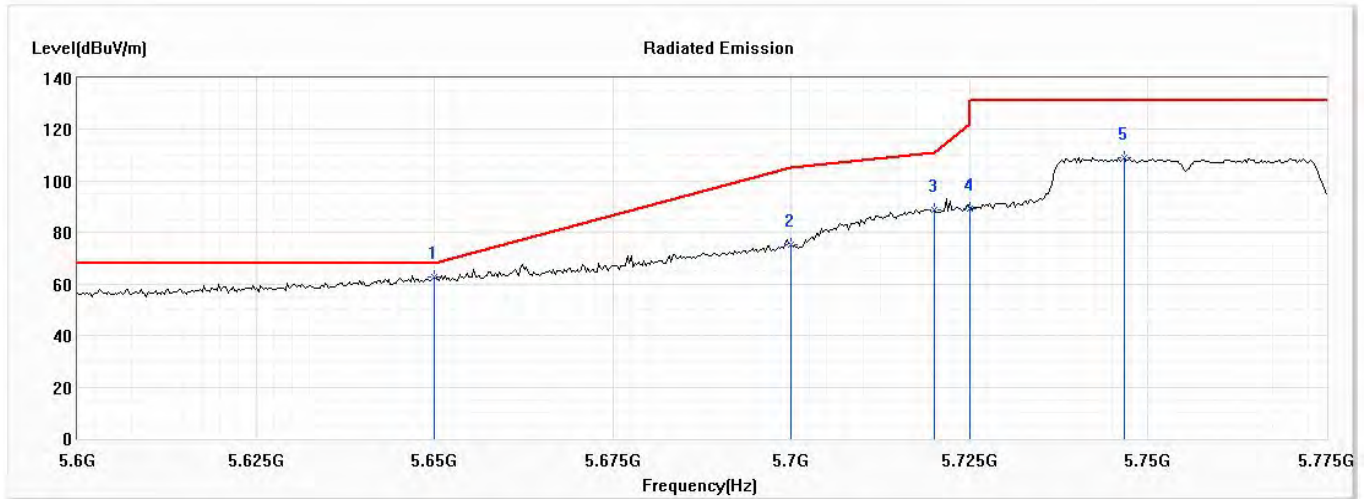

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	62.55	68.22	-5.67	43.44	19.11	PK
2	5700.000	75.21	105.20	-29.99	56.08	19.13	PK
3	5720.000	88.87	110.80	-21.93	69.70	19.17	PK
4	5725.000	89.46	122.20	-32.74	70.28	19.18	PK
5	5746.594	109.07	131.20	-22.13	89.82	19.25	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 159 (5795MHz)


**Horizontal**

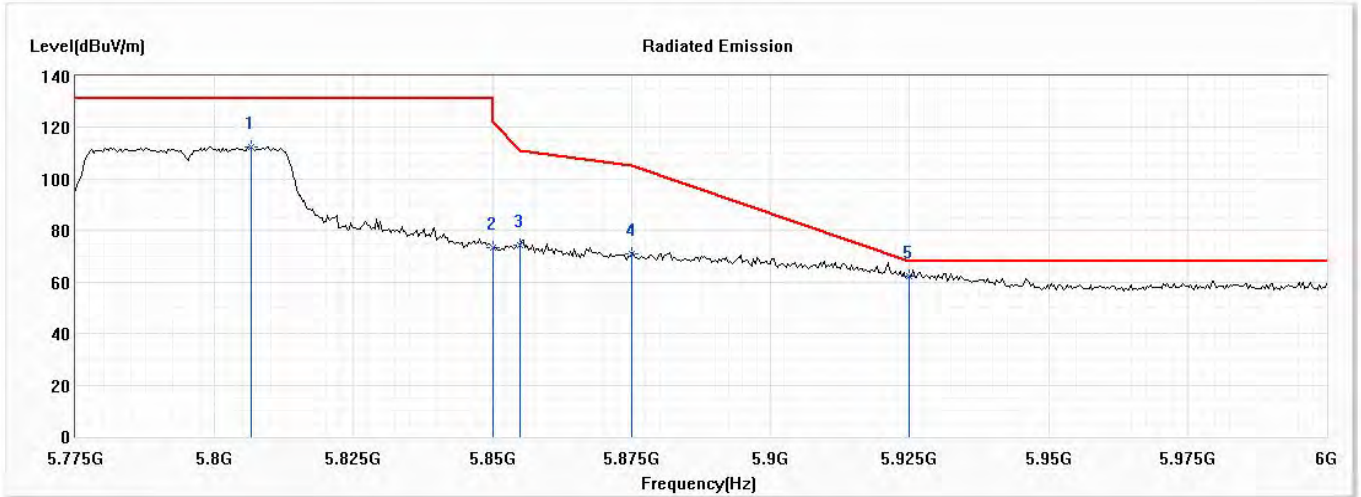

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5806.630	112.50	131.20	-18.70	92.96	19.54	PK
2	5850.000	73.43	122.20	-48.77	53.73	19.70	PK
3	5855.000	74.46	110.80	-36.34	54.73	19.73	PK
4	5875.000	70.88	105.20	-34.32	51.04	19.84	PK
* 5	5925.000	62.48	68.20	-5.72	42.46	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 12 MIMO: Transmit (802.11n-40BW\_30Mbps)-Channel 159 (5795MHz)


**Vertical**

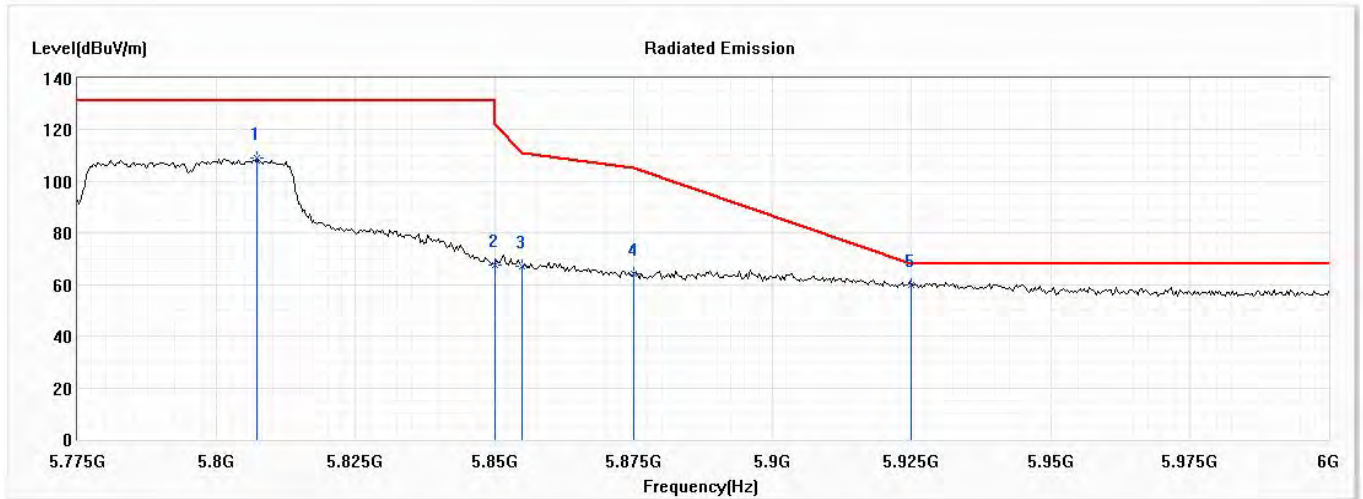

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5807.283	108.92	131.20	-22.28	89.38	19.54	PK
2	5850.000	67.66	122.20	-54.54	47.96	19.70	PK
3	5855.000	67.25	110.80	-43.55	47.52	19.73	PK
4	5875.000	64.21	105.20	-40.99	44.37	19.84	PK
* 5	5925.000	59.81	68.20	-8.39	39.79	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Horizontal**

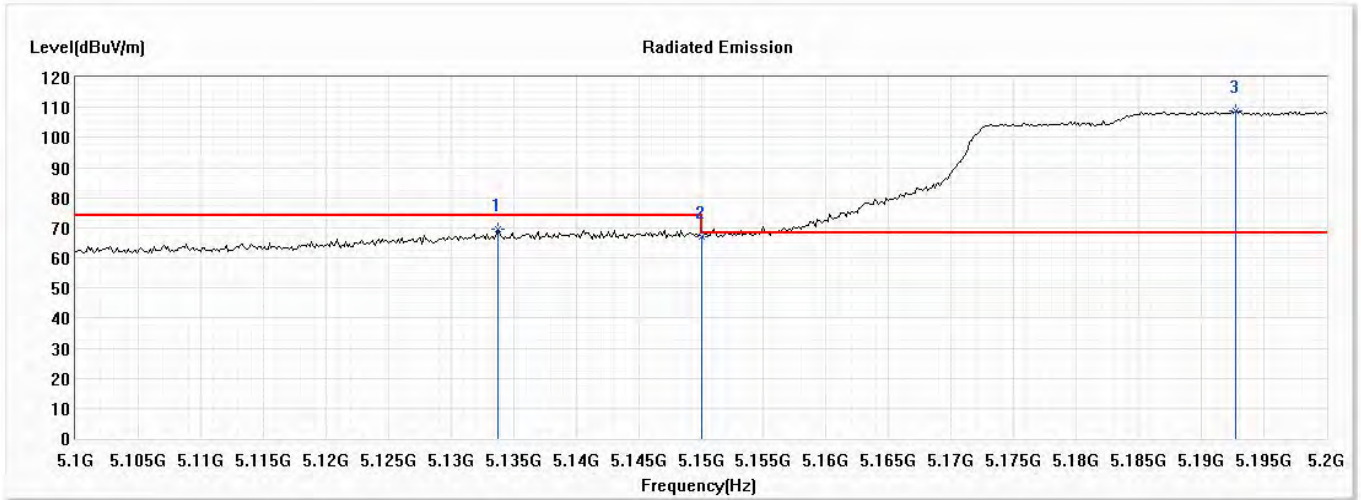


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5133.768	69.35	74.00	-4.65	51.01	18.34	PK
2	5150.000	67.21	74.00	-6.79	48.77	18.44	PK
! 3	5192.754	108.67	--	--	90.13	18.54	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Horizontal**

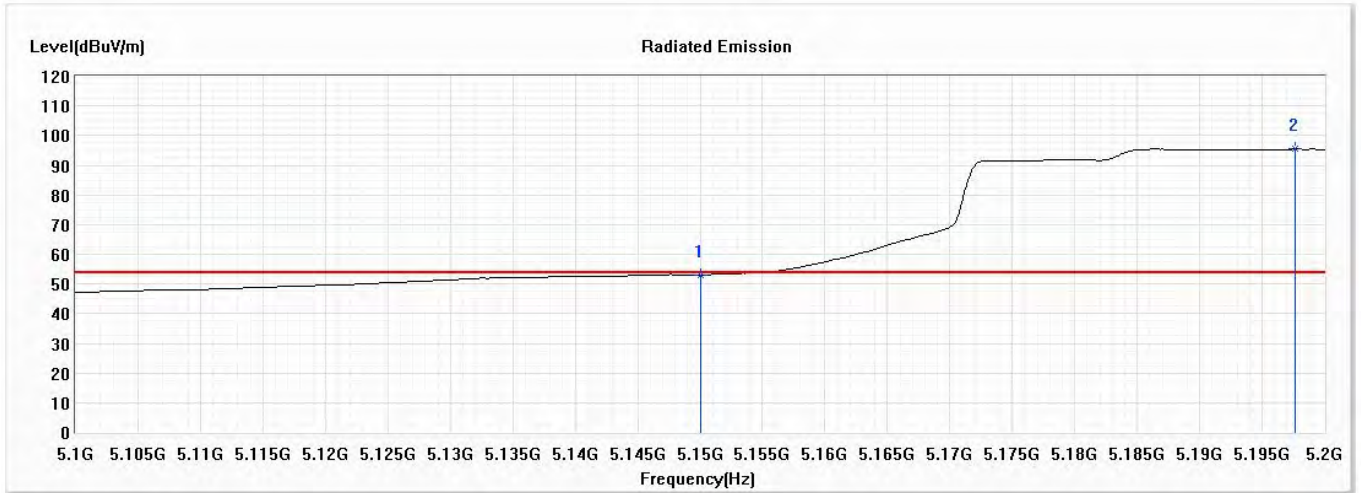

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	53.02	54.00	-0.98	34.58	18.44	AV
! 2	5197.681	95.68	--	--	77.13	18.55	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Vertical**

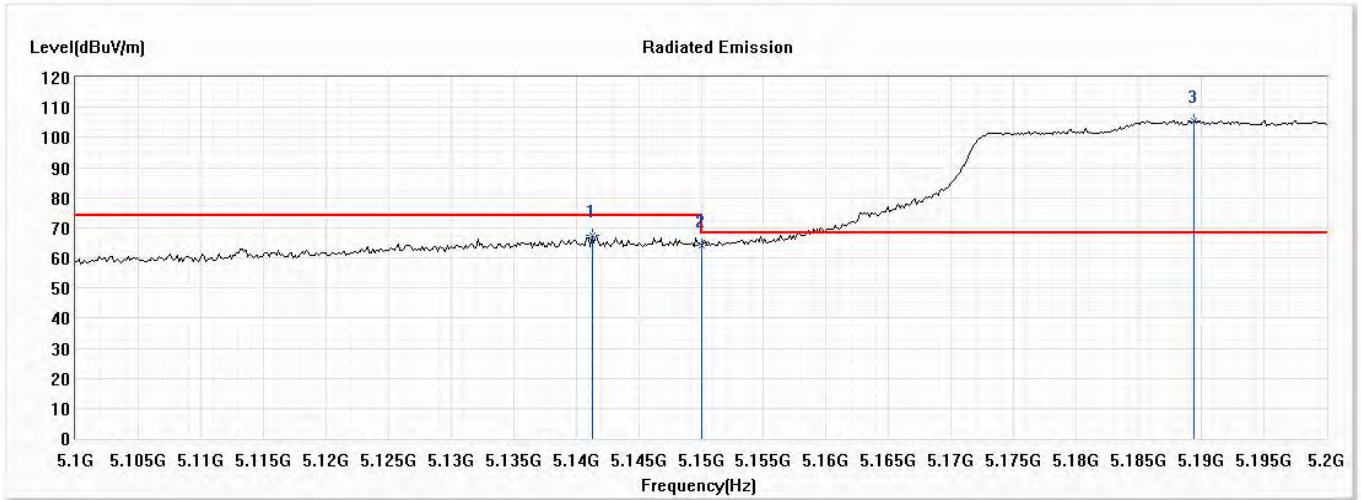


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5141.304	67.46	74.00	-6.54	49.07	18.39	PK
2	5150.000	63.94	74.00	-10.06	45.50	18.44	PK
! 3	5189.420	105.59	--	--	87.07	18.52	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 42 (5210MHz)

**Vertical**

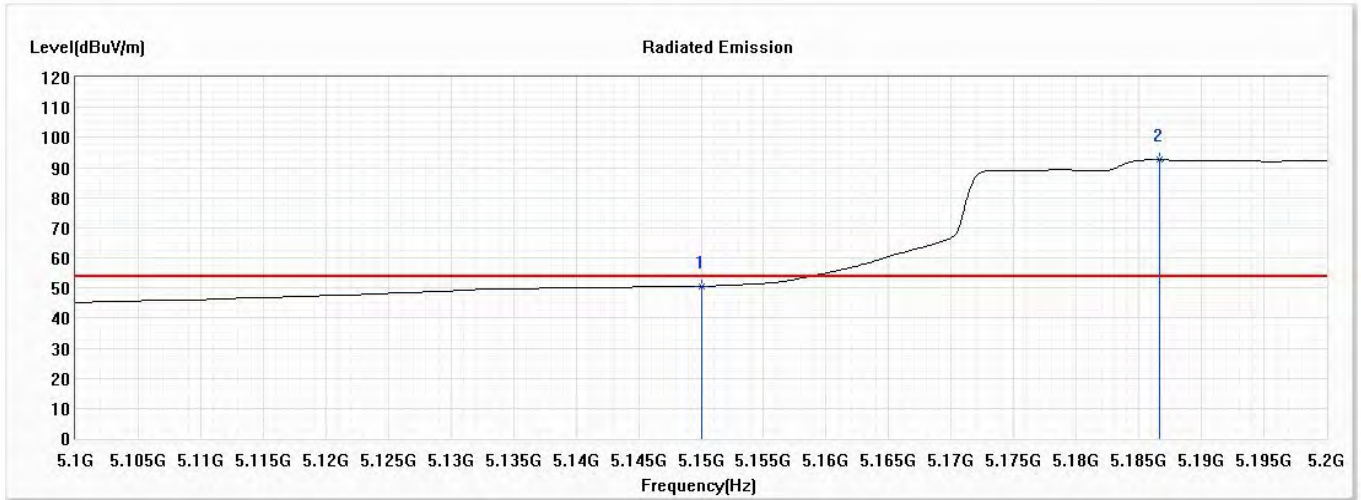


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	50.48	54.00	-3.52	32.04	18.44	AV
!2	5186.667	92.72	--	--	74.21	18.51	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Horizontal**

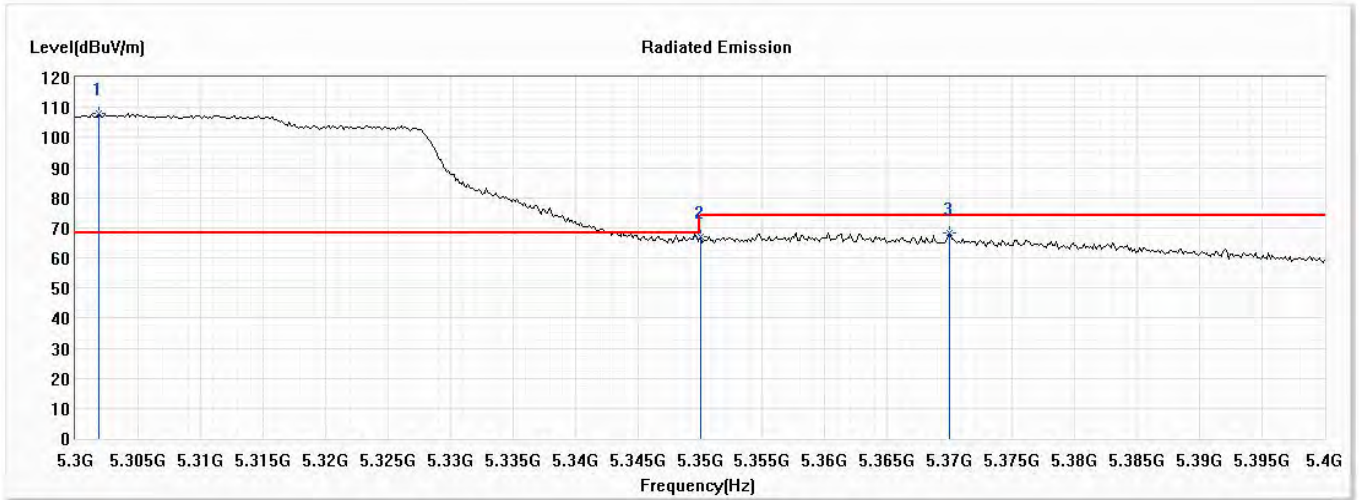


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5301.884	108.04	--	--	89.16	18.88	PK
2	5350.000	67.10	74.00	-6.90	48.14	18.96	PK
3	5370.000	68.32	74.00	-5.68	49.34	18.98	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Horizontal**

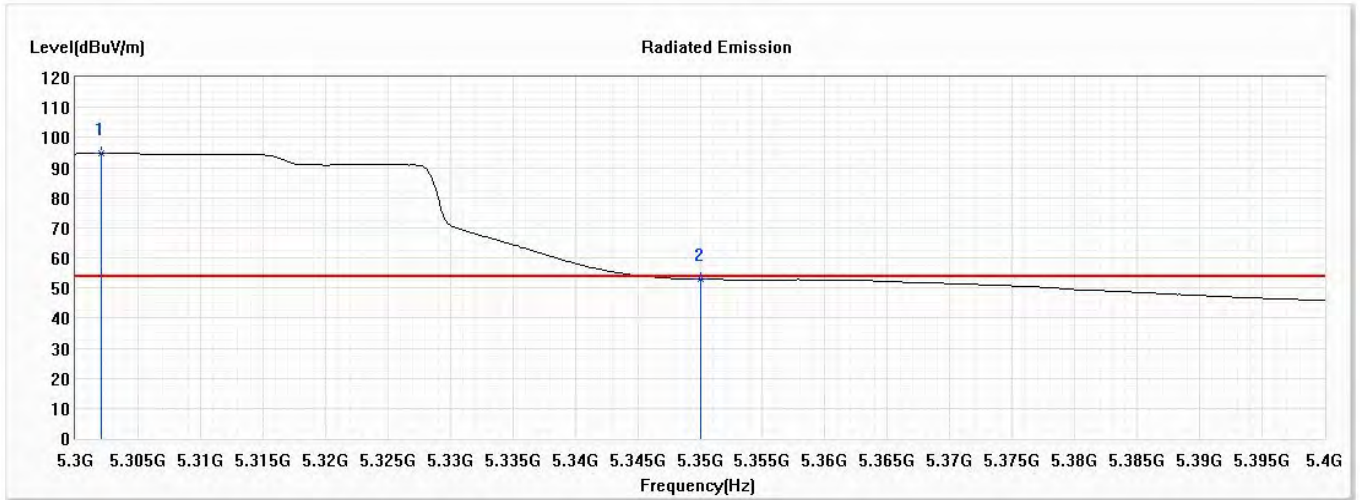


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5302.029	94.80	--	--	75.92	18.88	AV
2	5350.000	52.96	54.00	-1.04	34.00	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Vertical**

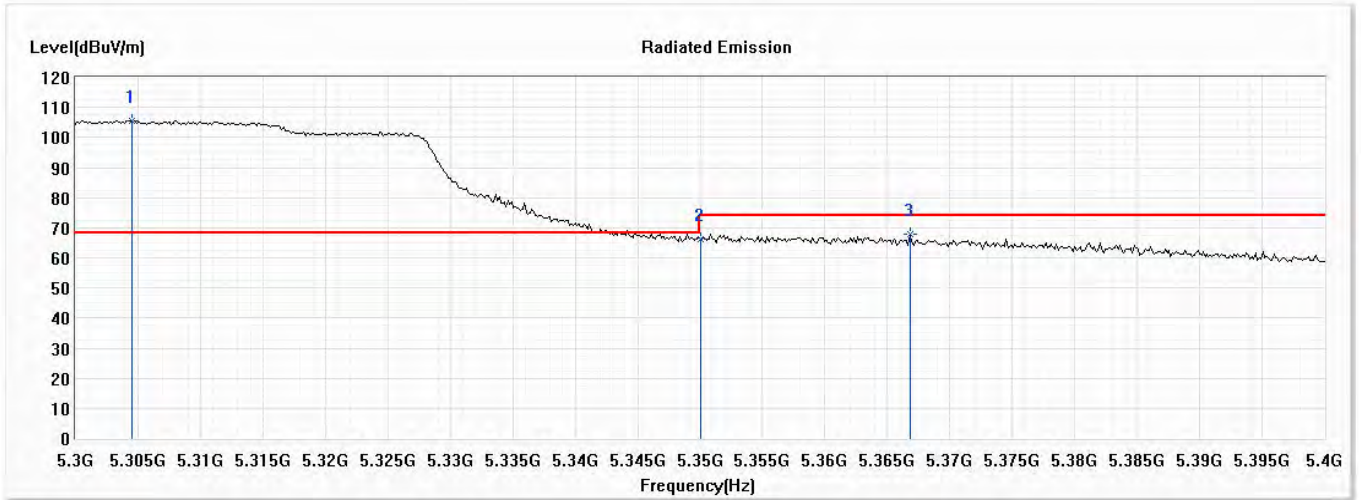


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5304.493	105.58	--	--	86.69	18.89	PK
2	5350.000	66.36	74.00	-7.64	47.40	18.96	PK
3	5366.812	67.76	74.00	-6.24	48.79	18.97	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 58 (5290MHz)

**Vertical**

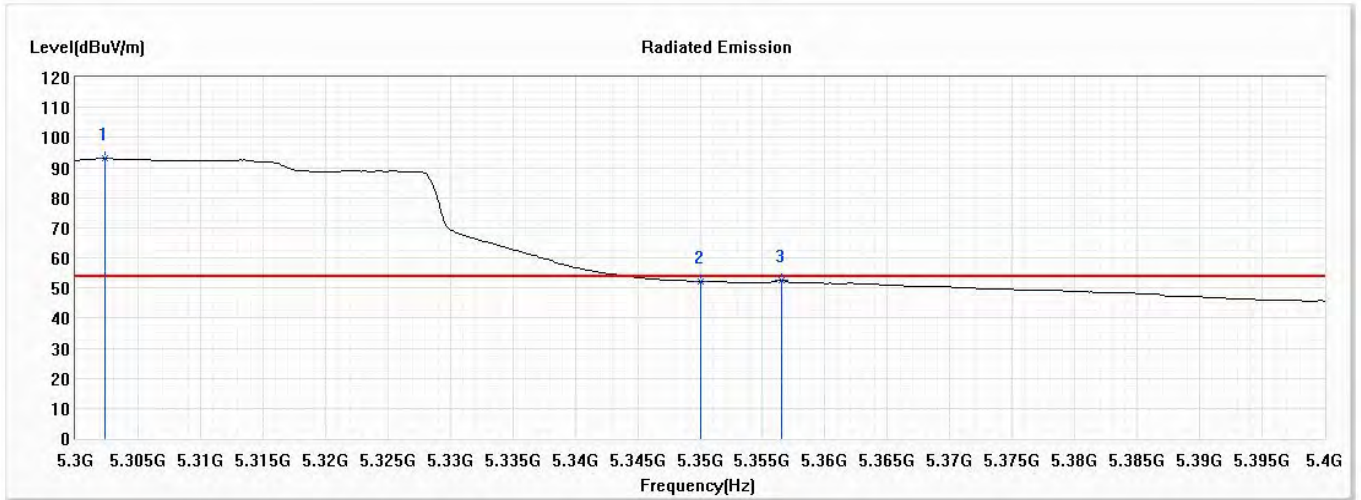


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	5302.319	93.20	--	--	74.32	18.88	AV
2	5350.000	52.21	54.00	-1.79	33.25	18.96	AV
3	5356.522	52.43	54.00	-1.57	33.47	18.96	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Horizontal**

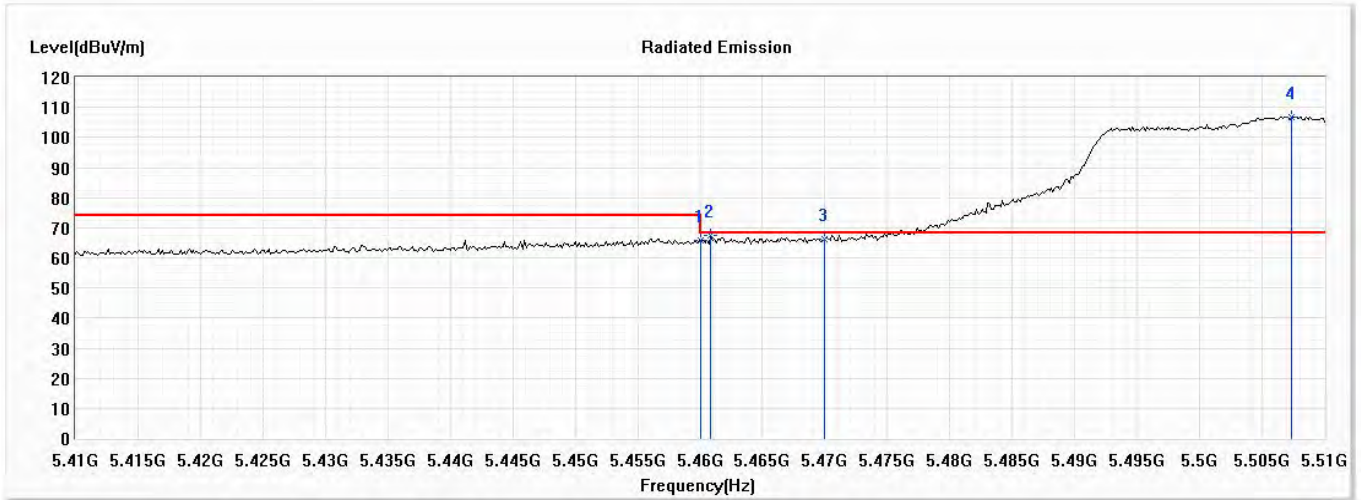


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	65.67	74.00	-8.33	46.74	18.93	PK
2	5460.870	67.54	68.22	-0.68	48.61	18.93	PK
3	5470.000	66.26	68.22	-1.96	47.36	18.90	PK
!4	5507.391	106.88	--	--	88.05	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Horizontal**

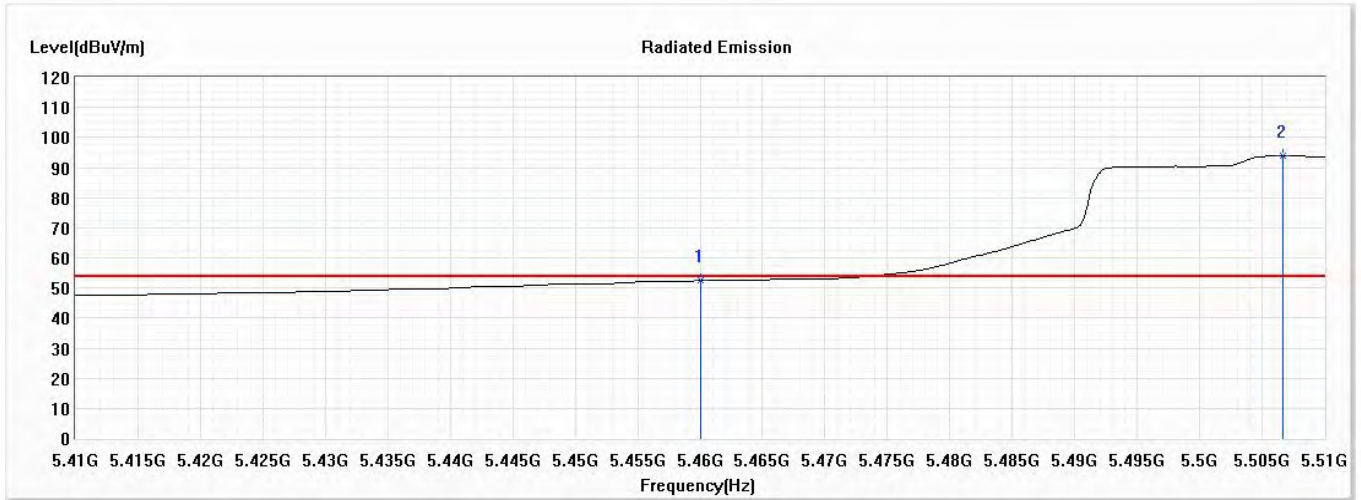

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	52.37	54.00	-1.63	33.44	18.93	AV
! 2	5506.667	93.97	--	--	75.14	18.83	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Vertical**

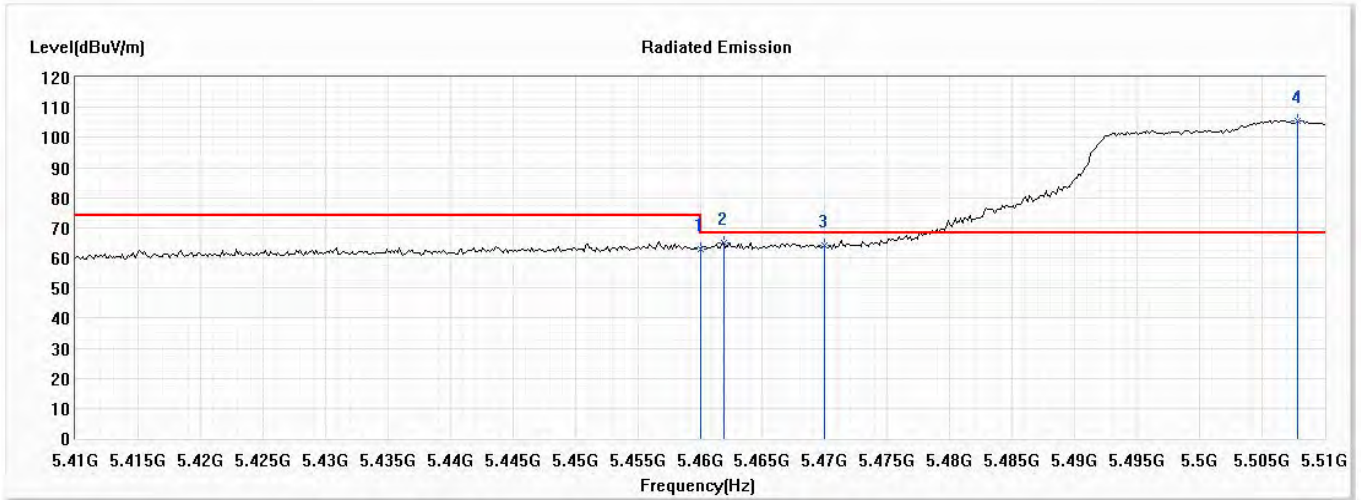


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	62.96	74.00	-11.04	44.03	18.93	PK
2	5461.884	65.07	68.22	-3.15	46.14	18.93	PK
3	5470.000	64.20	68.22	-4.02	45.30	18.90	PK
!4	5507.826	105.50	--	--	86.67	18.83	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 106 (5530MHz)

**Vertical**

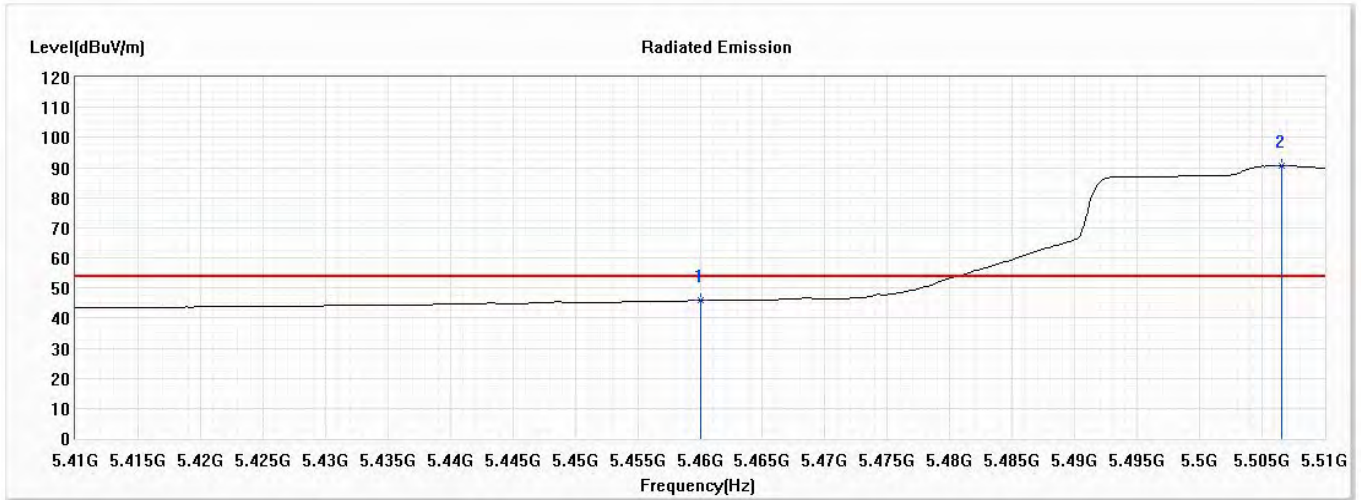


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	45.80	54.00	-8.20	26.87	18.93	AV
! 2	5506.522	90.71	--	--	71.88	18.83	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 st Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 155 (5775MHz)


**Horizontal**

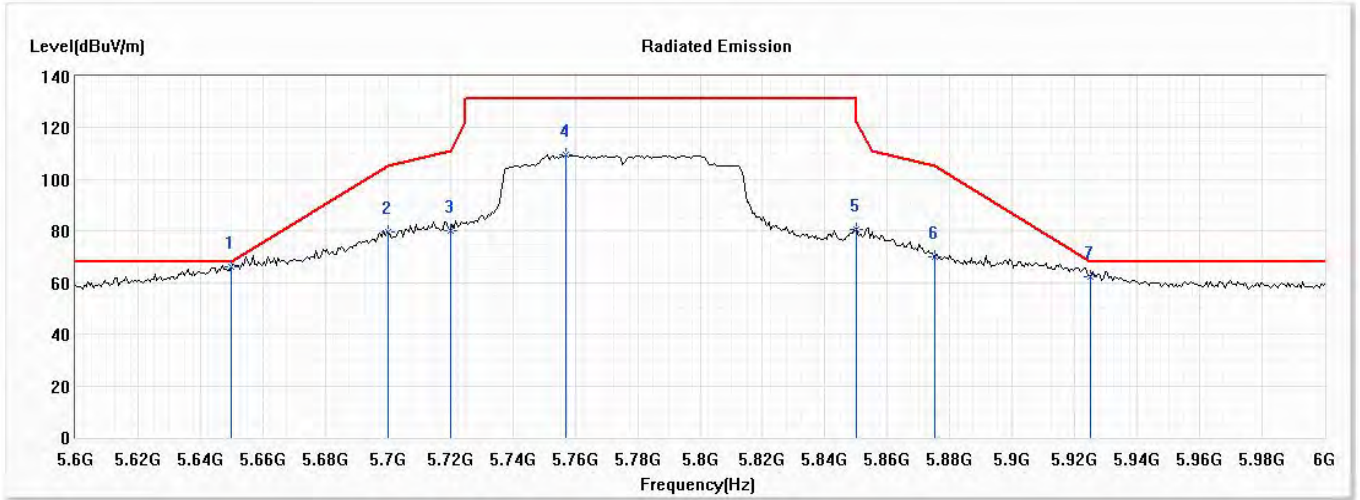

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	5650.000	66.03	68.22	-2.19	46.92	19.11	PK
2	5700.000	79.45	105.20	-25.75	60.32	19.13	PK
3	5720.000	80.36	110.80	-30.44	61.19	19.17	PK
4	5757.101	109.76	131.20	-21.44	90.48	19.28	PK
5	5850.000	80.63	122.20	-41.57	60.93	19.70	PK
6	5875.000	70.16	105.20	-35.04	50.32	19.84	PK
7	5925.000	62.42	68.20	-5.78	42.40	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/05  
 Test Mode : Mode 13 MIMO: Transmit (802.11ac-80BW\_65Mbps)-Channel 155 (5775MHz)


**Vertical**

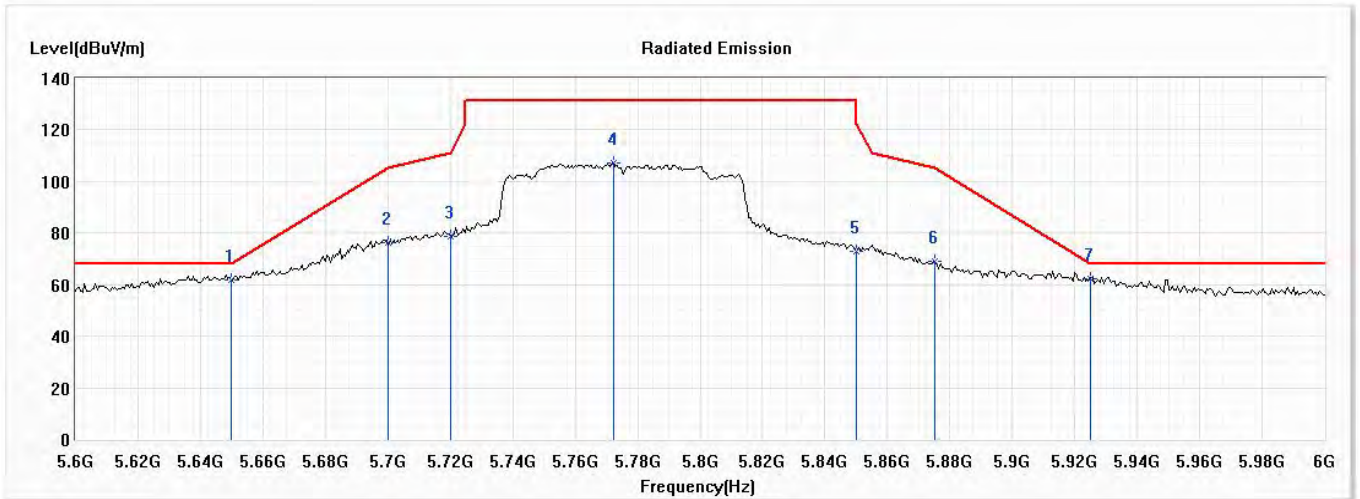

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5650.000	61.69	68.22	-6.53	42.58	19.11	PK
2	5700.000	76.38	105.20	-28.82	57.25	19.13	PK
3	5720.000	78.93	110.80	-31.87	59.76	19.17	PK
4	5772.174	107.33	131.20	-23.87	87.97	19.36	PK
5	5850.000	73.09	122.20	-49.11	53.39	19.70	PK
6	5875.000	68.90	105.20	-36.30	49.06	19.84	PK
* 7	5925.000	62.30	68.20	-5.90	42.28	20.02	PK

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Horizontal**

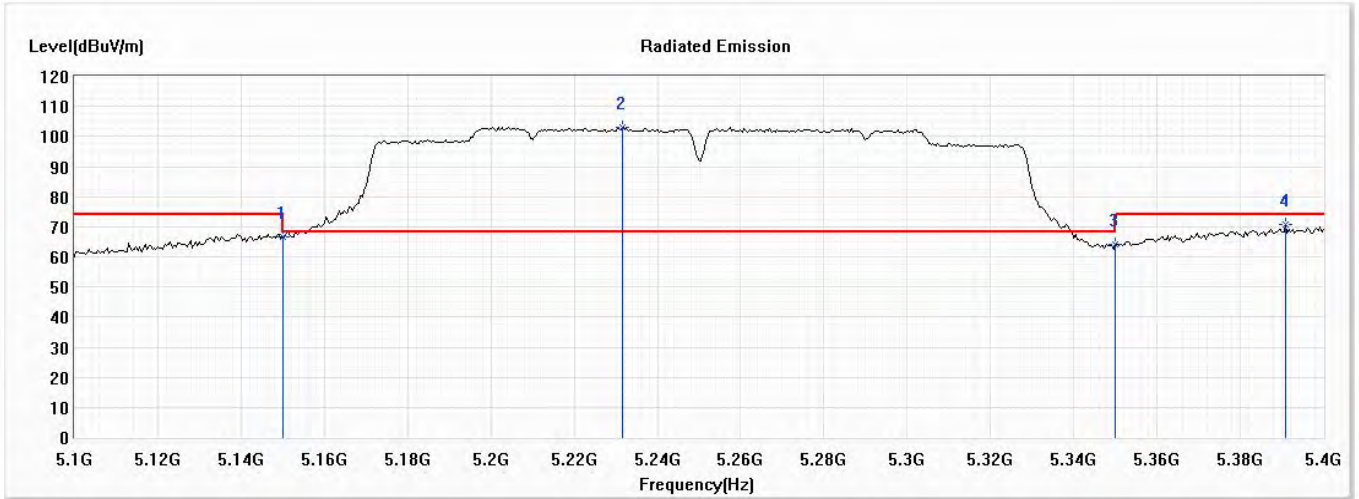


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	66.58	74.00	-7.42	48.14	18.44	PK
! 2	5231.739	103.10	--	--	84.48	18.62	PK
3	5350.000	64.24	74.00	-9.76	45.28	18.96	PK
4	5390.870	70.88	74.00	-3.12	51.87	19.01	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Horizontal**

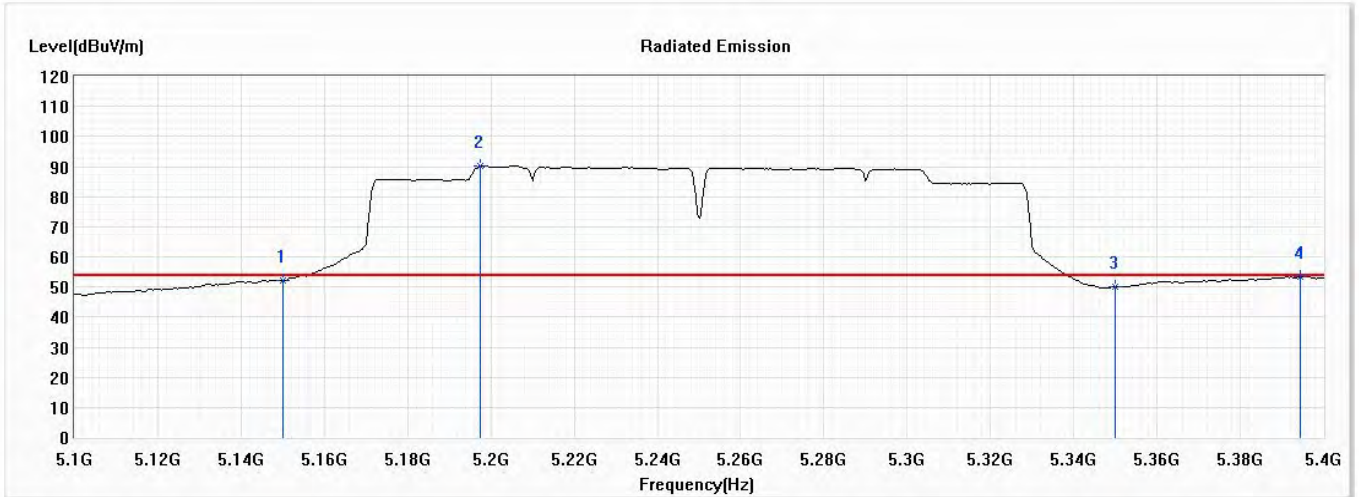


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	52.16	54.00	-1.84	33.72	18.44	AV
! 2	5197.391	90.15	--	--	71.61	18.54	AV
3	5350.000	49.91	54.00	-4.09	30.95	18.96	AV
4	5394.348	53.44	54.00	-0.56	34.43	19.01	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Vertical**

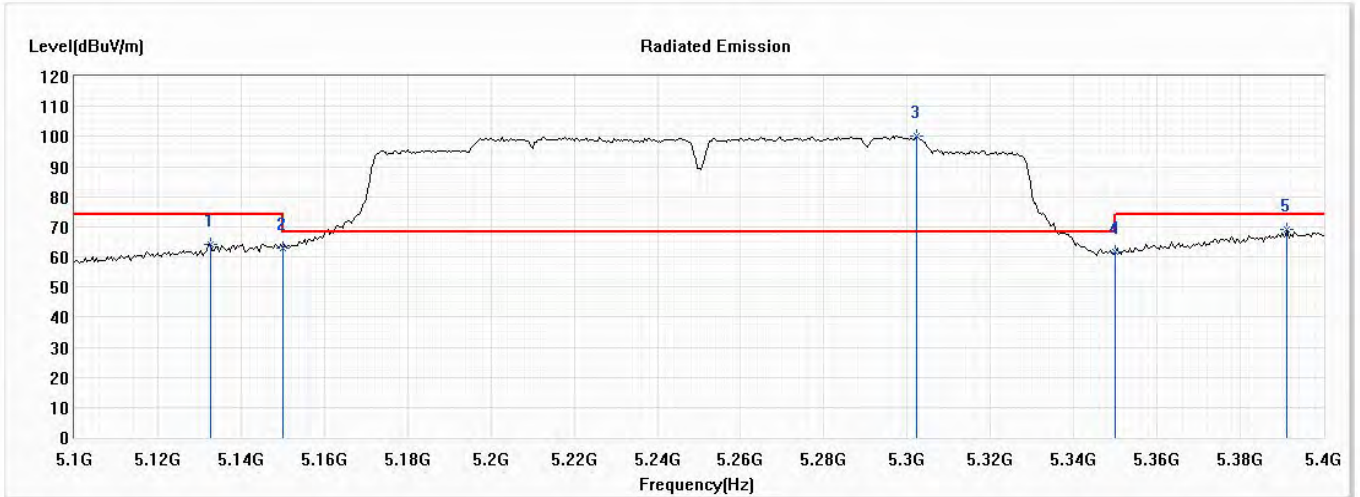


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5132.609	64.25	74.00	-9.75	45.92	18.33	PK
2	5150.000	62.92	74.00	-11.08	44.48	18.44	PK
! 3	5302.174	100.15	--	--	81.27	18.88	PK
4	5350.000	61.64	74.00	-12.36	42.68	18.96	PK
5	5391.304	68.98	74.00	-5.02	49.97	19.01	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 50 (5250MHz)

**Vertical**

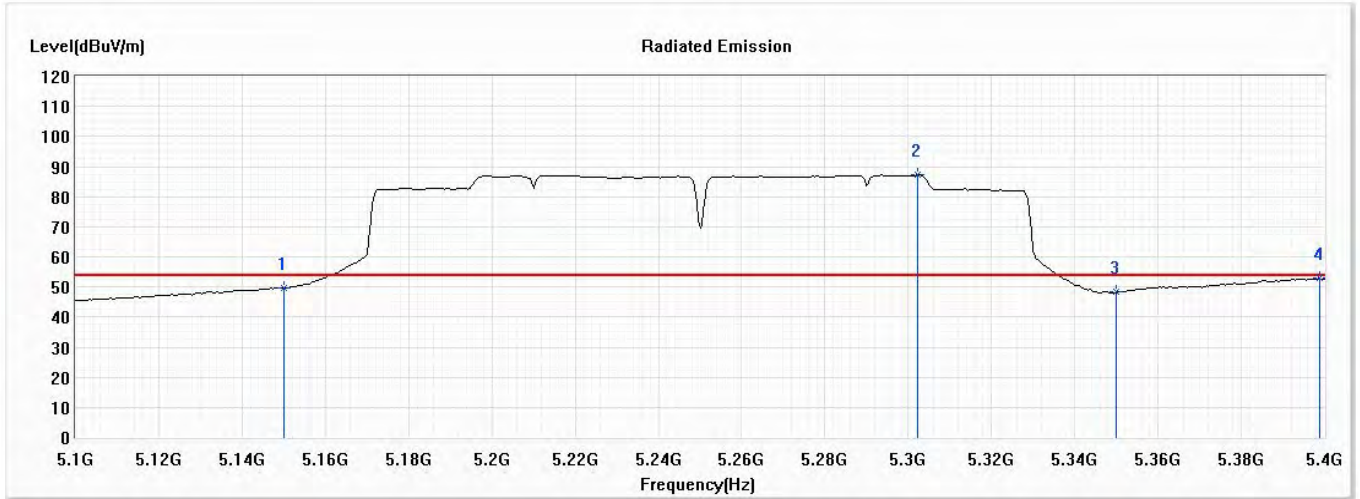

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5150.000	49.53	54.00	-4.47	31.09	18.44	AV
! 2	5302.174	87.44	--	--	68.56	18.88	AV
3	5350.000	48.21	54.00	-5.79	29.25	18.96	AV
4	5398.696	52.82	54.00	-1.18	33.79	19.03	AV


**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.



Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Horizontal**

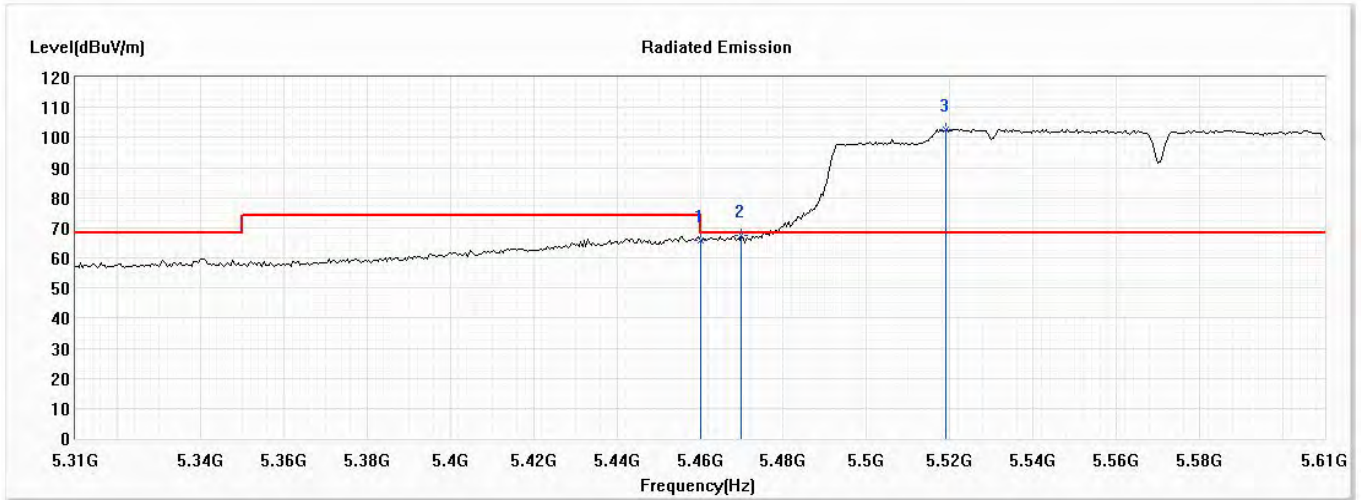


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	65.76	74.00	-8.24	46.83	18.93	PK
2	5470.000	67.46	68.22	-0.76	48.56	18.90	PK
! 3	5519.130	102.82	--	--	83.97	18.85	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Horizontal**

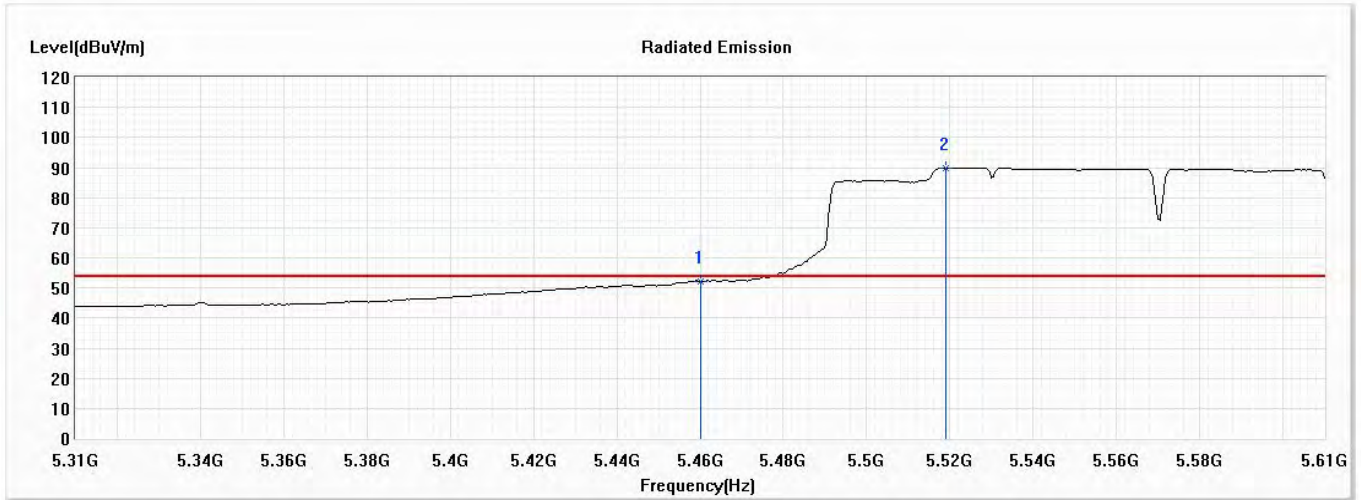


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	52.00	54.00	-2.00	33.07	18.93	AV
! 2	5519.130	89.93	--	--	71.08	18.85	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Vertical**

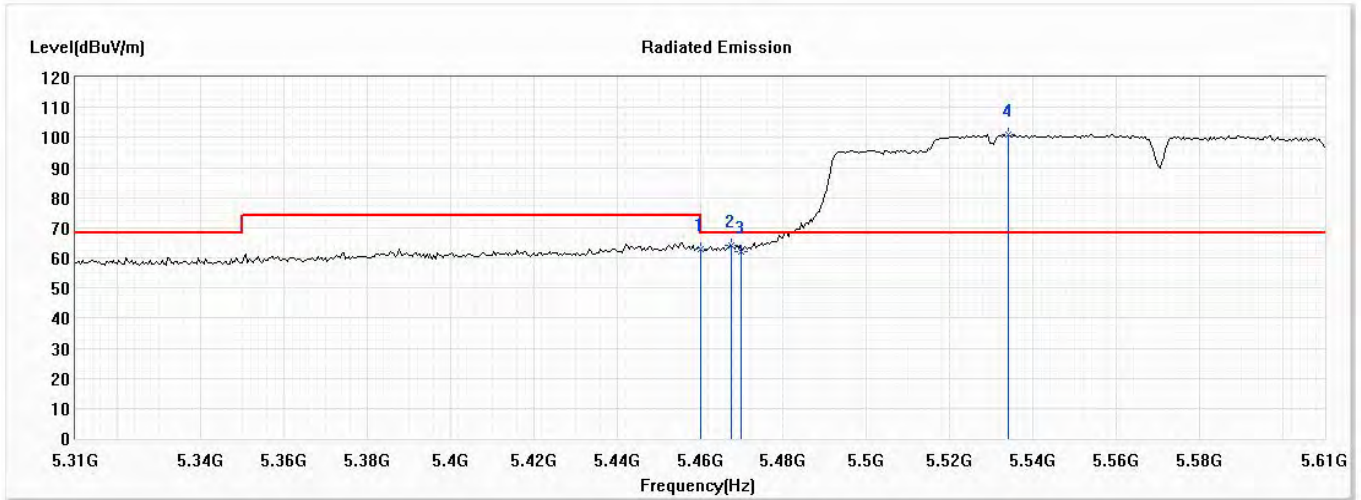


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	62.80	74.00	-11.20	43.87	18.93	PK
2	5467.391	64.25	68.22	-3.97	45.34	18.91	PK
3	5470.000	62.05	68.22	-6.17	43.15	18.90	PK
!4	5533.913	101.15	--	--	82.24	18.91	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

Product : Intel® Wireless-AC 9260  
 Test Item : Band Edge Data  
 Test Date : 2021/03/04  
 Test Mode : Mode 14 MIMO: Transmit (802.11ac-160BW\_130Mbps)-Channel 114 (5570MHz)

**Vertical**

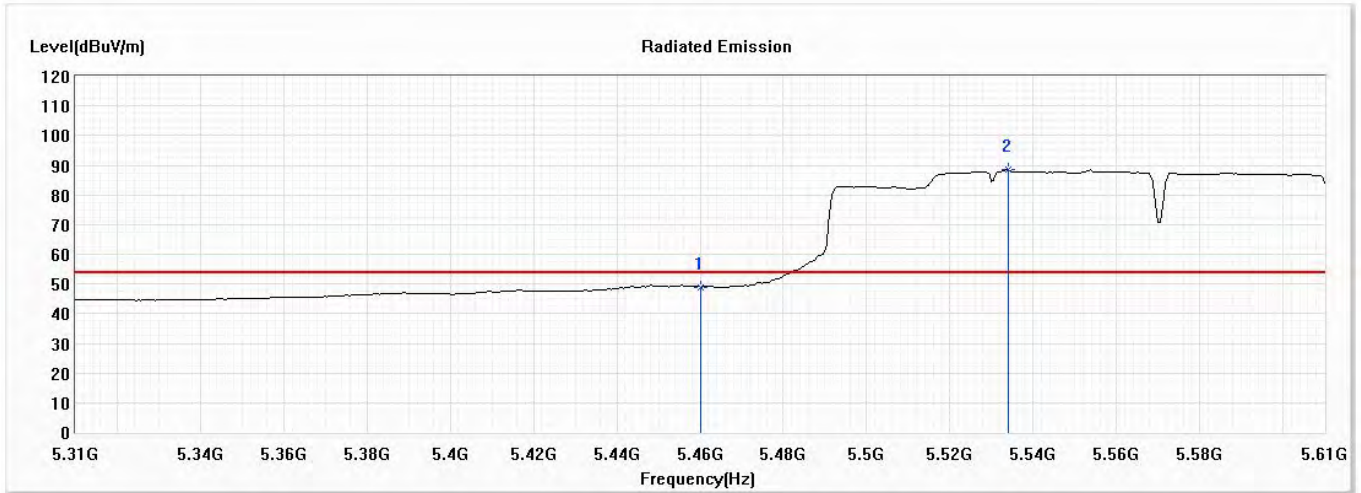


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5460.000	48.96	54.00	-5.04	30.03	18.93	AV
! 2	5533.913	88.58	--	--	69.67	18.91	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.

## 5. Duty Cycle

### 5.1. Test Setup

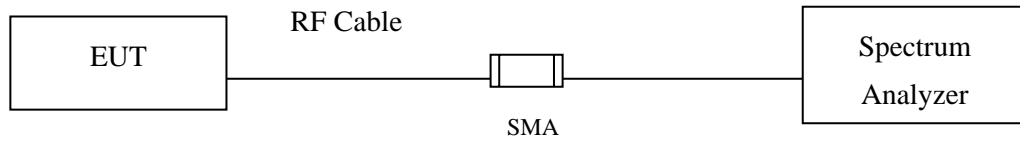

### 5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

### 5.3. Test Result of Duty Cycle

Product : Intel® Wireless-AC 9260  
Test Item : Duty Cycle  
Test Mode : Mode 15 Transmit-SISO A

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0522	2.1044	97.52	0.11
802.11n20	1.0000	1.0000	100.00	0.00
802.11n40	17.8232	18.0406	98.79	0.05
802.11ac80	11.0000	11.1200	98.92	0.05
802.11ac160	5.5100	5.5700	98.92	0.05

### 802.11a (SISO A)

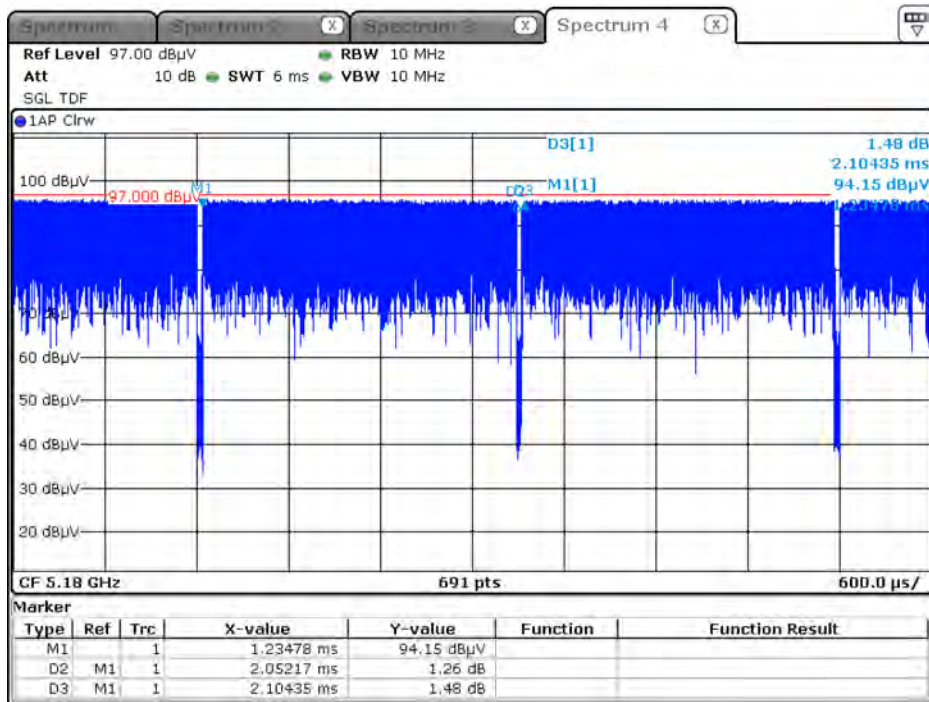


Date: 21.JAN.2021 06:49:41

### 802.11n20 (SISO A)

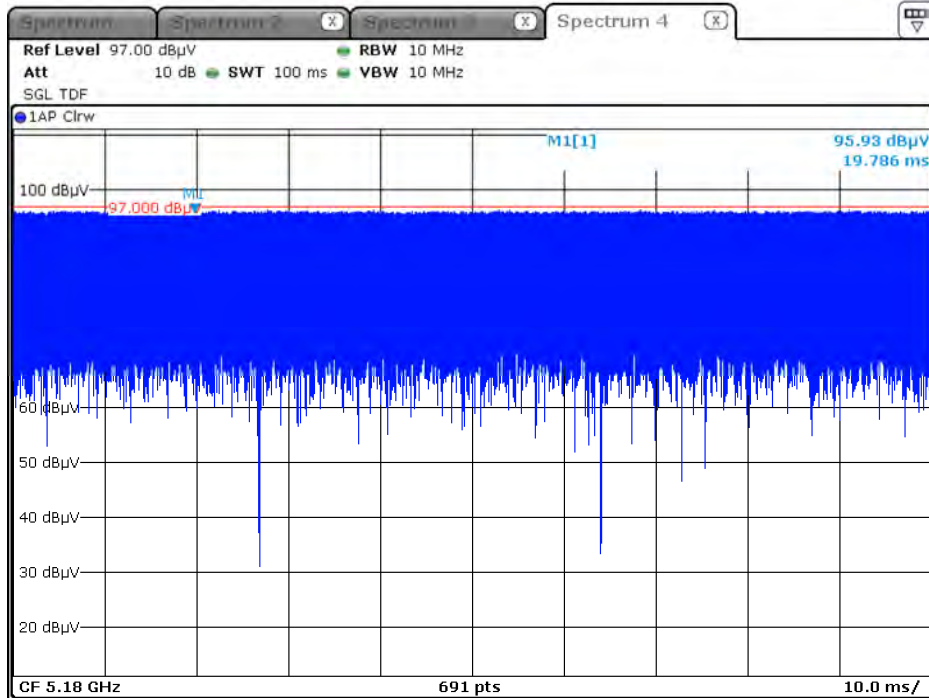


Date: 21.JAN.2021 06:53:50

802.11n40 (SISO A)

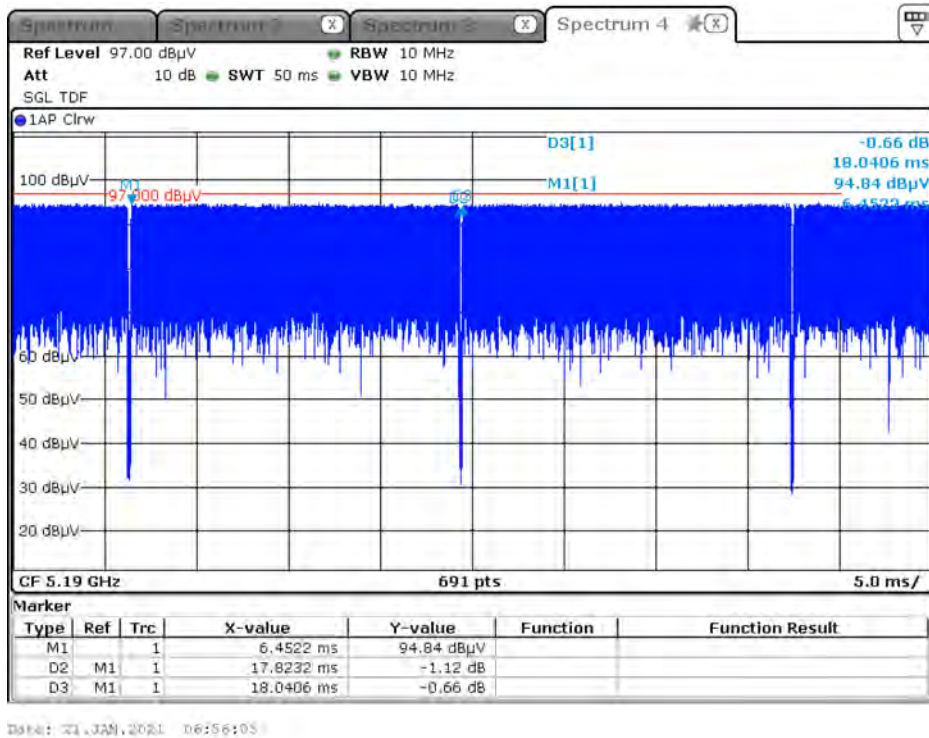


802.11ac80 (SISO A)

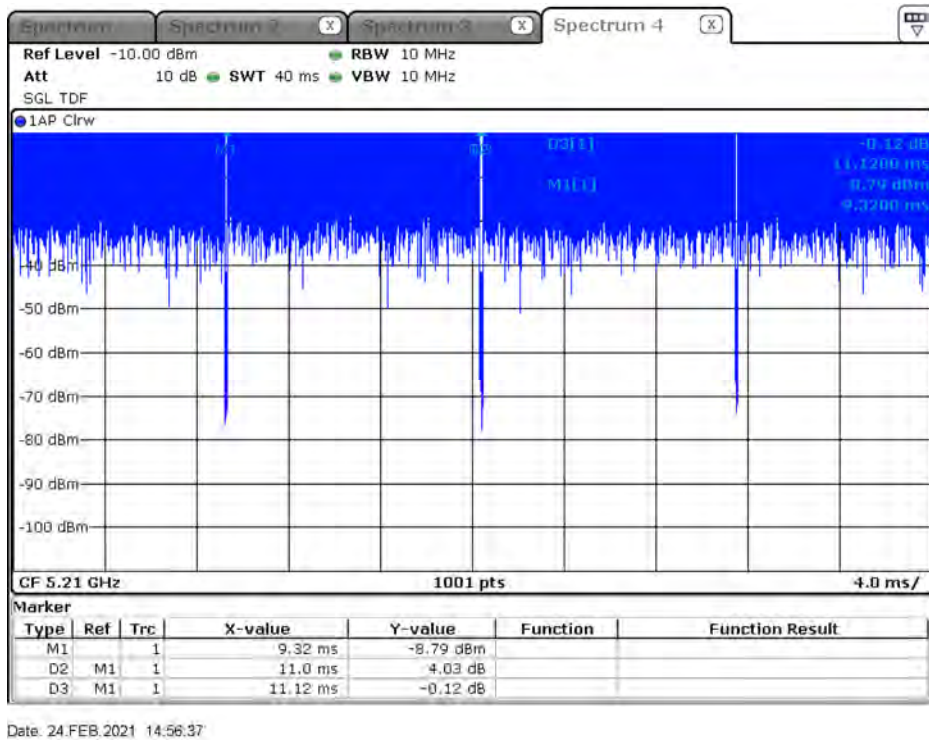



802.11ac160 (SISO A)

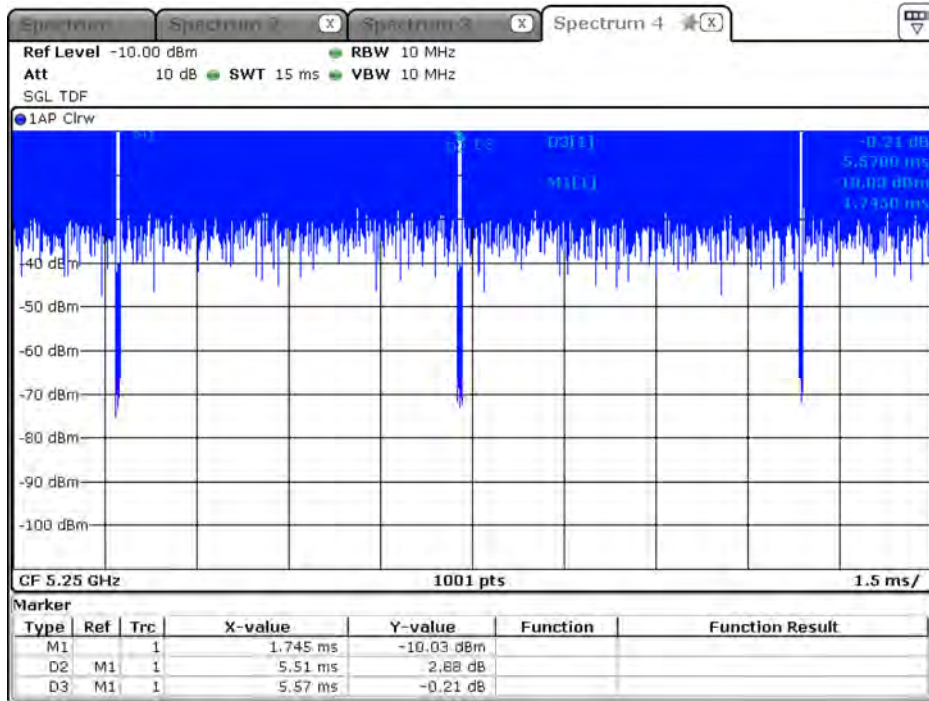

Date: 24.FEB.2021 18:11:28

Product : Intel® Wireless-AC 9260  
Test Item : Duty Cycle  
Test Mode : Mode 16 Transmit-SISO B

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0522	2.0957	97.92	0.09
802.11n20	1.0000	1.0000	100.00	0.00
802.11n40	17.8261	18.1159	98.40	0.07
802.11ac80	11.0100	11.1300	98.92	0.05
802.11ac160	5.5100	5.5700	98.92	0.05

802.11a (SISO B)

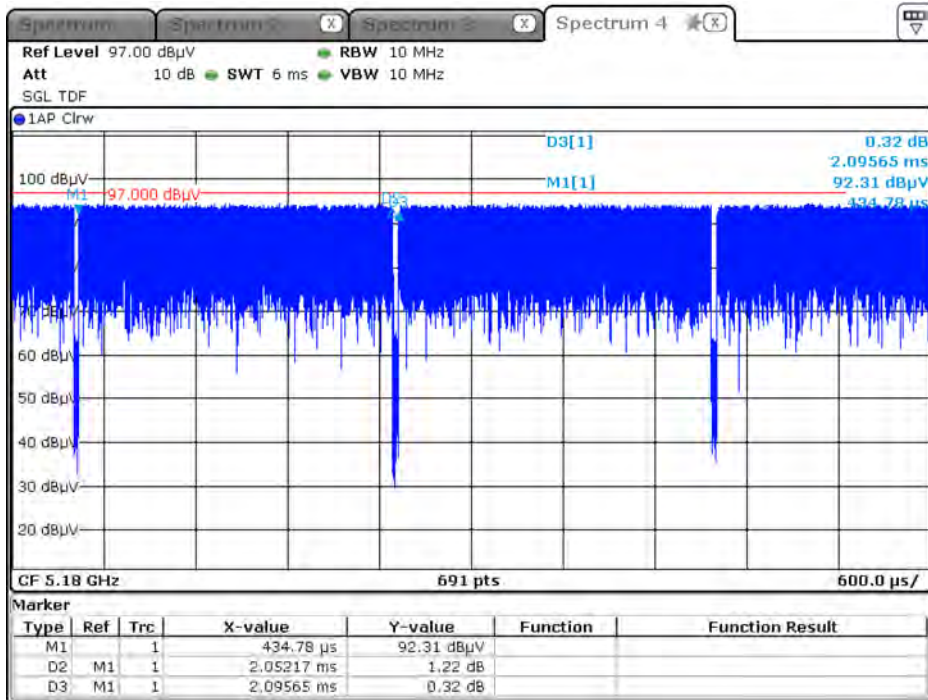


Date: 21.JAN.2021 06:47:17

802.11n20 (SISO B)

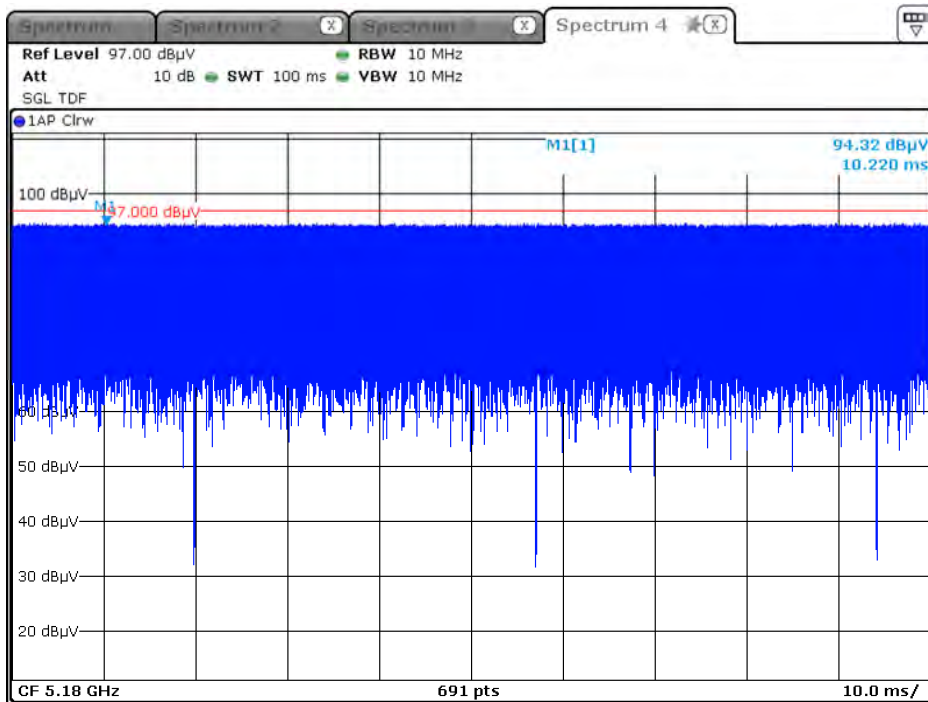


Date: 21.JAN.2021 06:57:43


### 802.11n40 (SISO B)

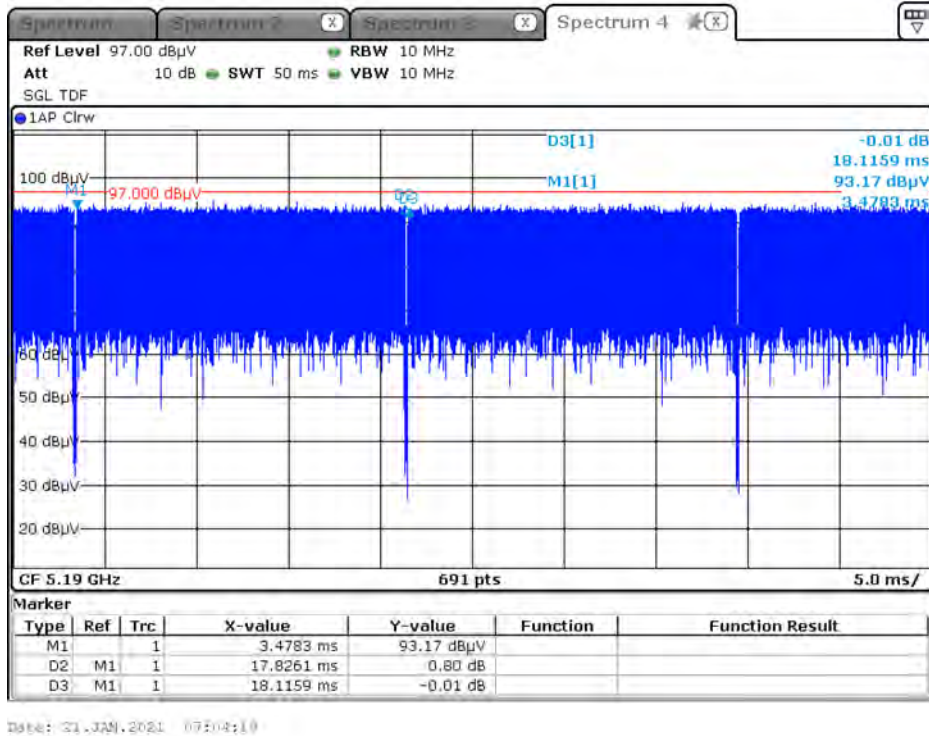

### 802.11ac80 (SISO B)

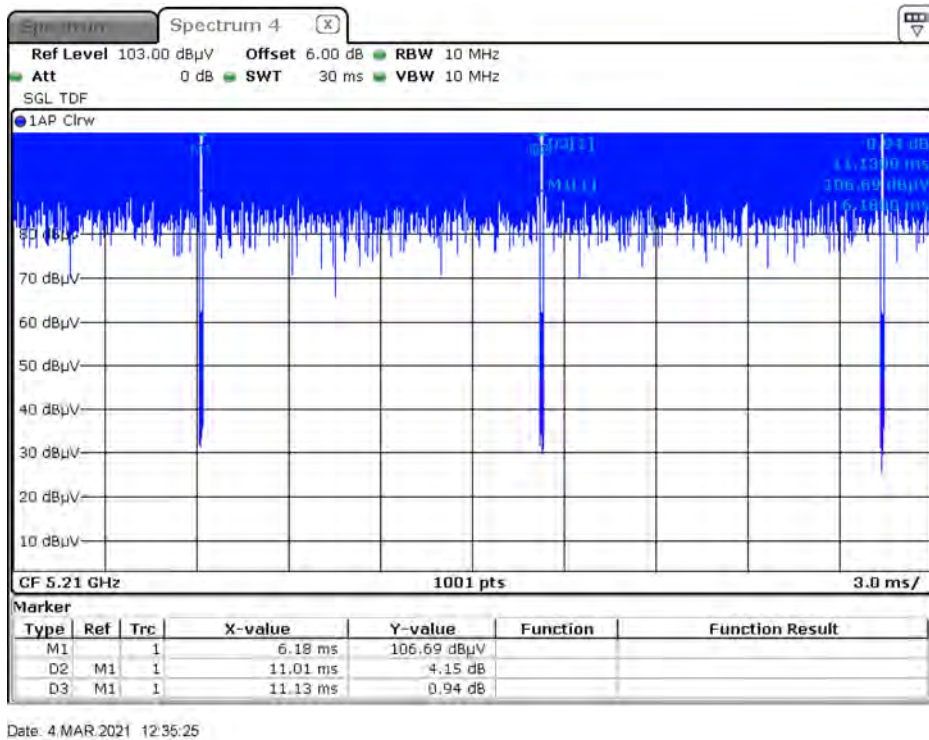

802.11ac160 (SISO B)

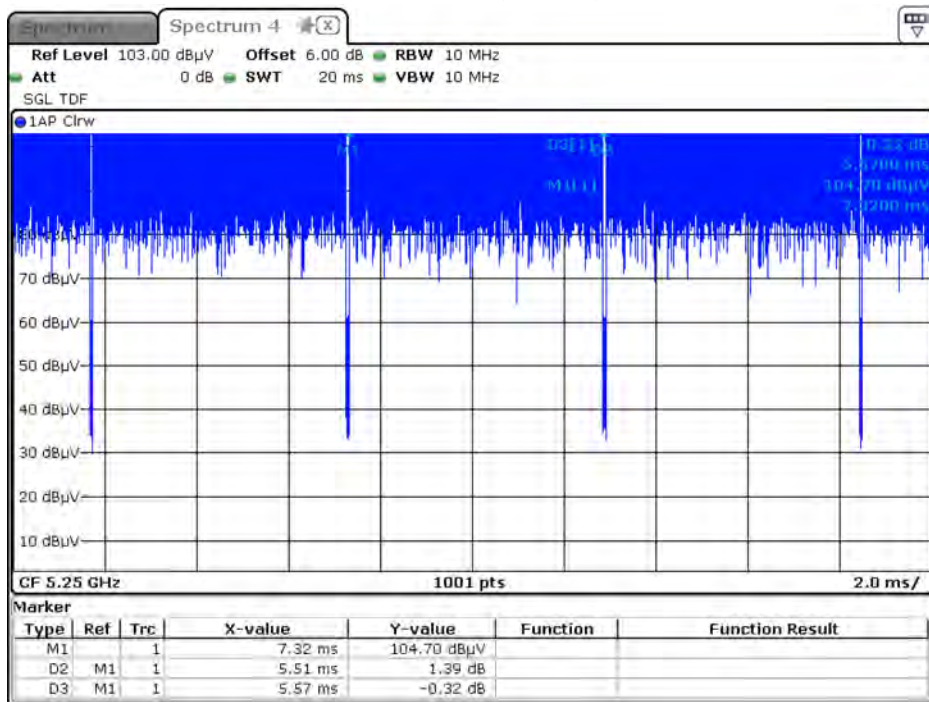

Date: 4.MAR.2021 12:37:42

Product : Intel® Wireless-AC 9260  
Test Item : Duty Cycle  
Test Mode : Mode 17 Transmit-MIMO

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	18.5507	18.7681	98.84	0.05
802.11n40	17.8261	18.1159	98.40	0.07
802.11ac80	5.5220	5.6020	98.57	0.06
802.11ac160	2.7860	2.8360	98.24	0.08

### 802.11n20 (MIMO)

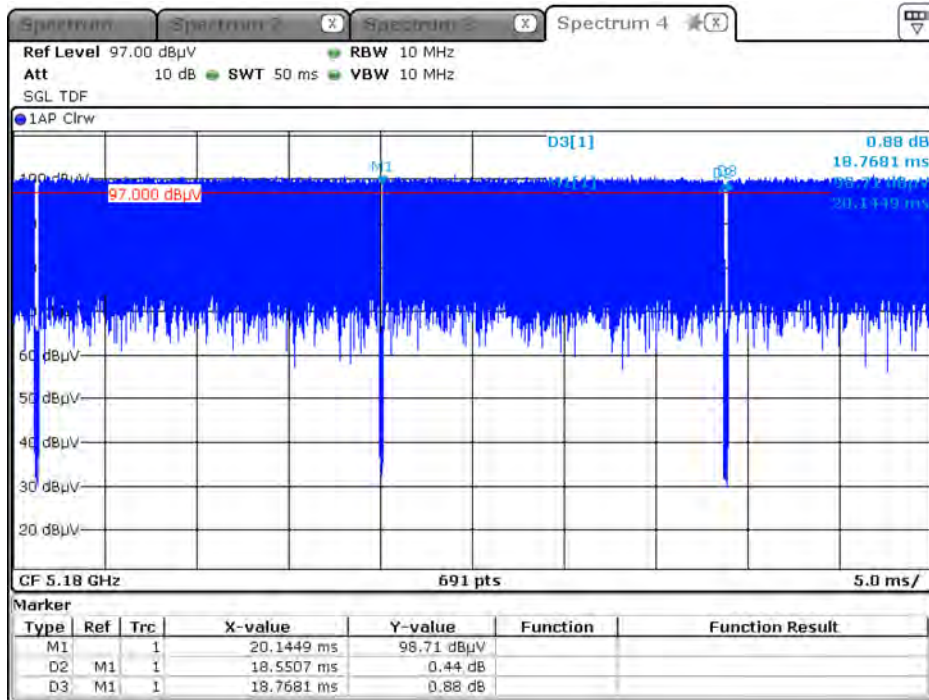


Date: 21.JAN.2021 07:09:16

### 802.11n40 (MIMO)

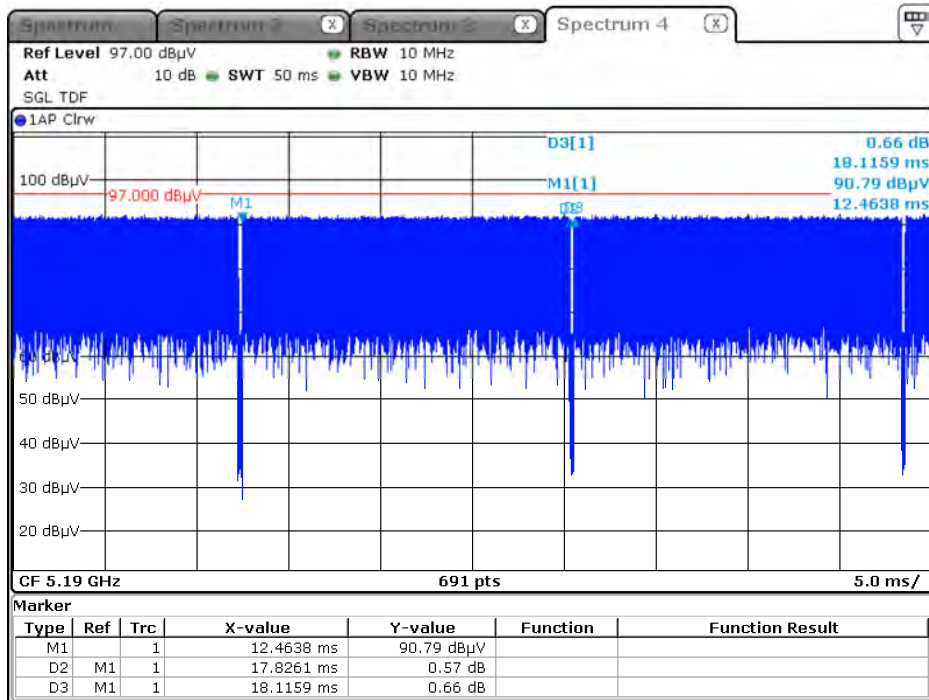


Date: 21.JAN.2021 07:06:26

### 802.11ac80 (MIMO)

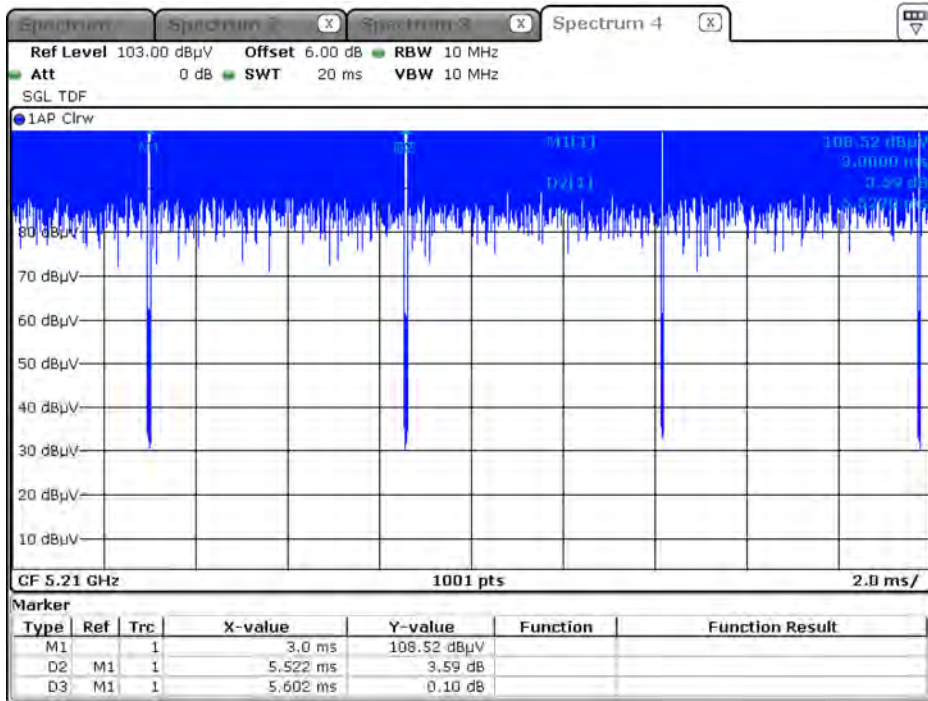

Date: 4 MAR 2021 13:00:30

### 802.11ac160 (MIMO)

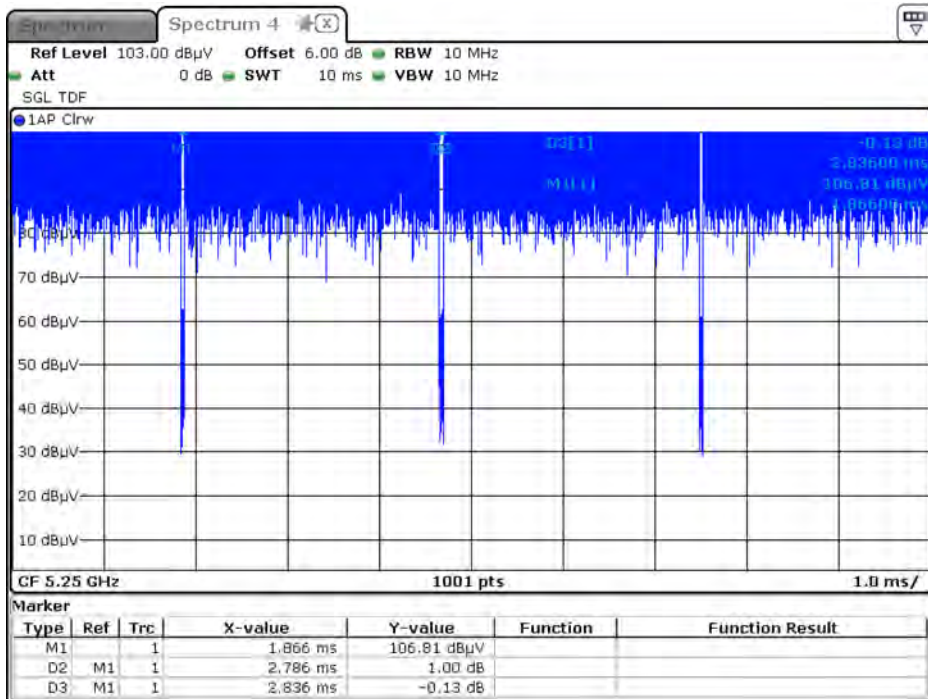

Date: 4 MAR 2021 12:49:46



---

**6. EMI Reduction Method During Compliance Testing**

No modification was made during testing.