


120.00 mm

100.00 mm



Rear of Unit

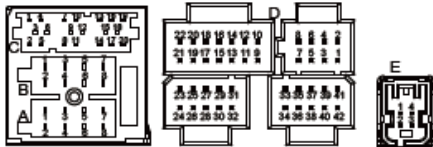

Section	PIN NO	Description	PIN NO	Description
A	1	NC	5	SPEED
	2	NC	6	ILL
	3	NC	7	B+
	4	ACC	8	GND
B	1	RR+	5	FL+
	2	RR-	6	FL-
	3	FR+	7	RL+
	4	FR-	8	RL-
C	1	CAMERA_CVBS-	11	SWC1_GND
	2	NC	12	SWC2
	3	NC	13	NC
	4	CAMERA_CVBS+	14	NC
	5	AGND	15	NC
	6	CVBS_OUT1	16	NC
	7	REVERSE	17	NC
	8	P.CONT	18	NC
	9	P.ARBING	19	NC
	10	SWC1	20	NC

12V GROUND 15A max

This product was produced using lead free technology. Help keep the world clean! Dispose properly!
 This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: XHW-SV260

Model NO.: Dakota BP800PLAY

PIN NO	Description	PIN NO	Description	
1	NC	22	AV1_CVBS_IN+	
2	MIC-	23	NC	
3	MIC+	24	NC	
4	NC	25	NC	
5	NC	26	NC	
6	NC	27	NC	
7	NC	28	NC	
8	NC	29	NC	
9	AGND	30	NC	
10	LINEOUT FL	31	NC	
11	LINEOUT FR	32	NC	
12	AGND	33	NC	
13	LINEOUT RL	34	NC	
14	LINEOUT RR	35	NC	
15	AGND	36	NC	
16	LINEOUT SUB1	37	NC	
17	LINEOUT SUB2	38	NC	
18	AGND	39	NC	
19	AUX1_L_IN	40	NC	
20	AUX1_R_IN	41	NC	
21	AUX1_CVBS_IN-	42	NC	
E	1	USBSV	3	D+
	2	D-	4	GND

Warnings:
 Warranty void if this unit is damaged due to misuse or unauthorized service attempting.
 Before making any electrical connections disconnect the vehicle battery's negative terminal and carefully read the unit's Owner's Manual.
 Connect each pair of speaker leads only to a single pair of speakers (or speaker system) that has an impedance of at least 4 ohms, as well as 50-watt power handling capability. Never allow the uninsulated part of any speaker leads to touch a metal part of the vehicle.
 Connect speaker leads to input of external amplifiers ONLY if indicated in amplifier's manual, otherwise this unit's internal amplifier will be damaged.

1270720026700/A0