



FCC RADIO TEST REPORT

FCC ID : XIA-CFW2832
Equipment : CBRS 5G Cat B Outdoor CPE
Brand Name : Casa Systems
Model Name : CFW-2832
Marketing Name : CBRS 5G Cat B Outdoor CPE
Applicant : Netcomm Wireless Pty Ltd
 Level 5, 18-20 Orion Road, Lane Cove, NSW,
 Australia, 2066
Manufacturer : Casa Systems
 100 Old River Road, Andover MA 01810 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 04, 2022 and testing was performed from Aug. 05, 2022 to Oct. 03, 2022. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
 1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements	34
4 List of Measuring Equipment	35
5 Uncertainty of Evaluation.....	37
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR220615003	01	Initial issue of report	Sep. 28, 2022
FR220615003	02	Add BLE 1M data	Oct. 05, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	0.59 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	6.55 dB under the limit at 6.412 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. Please refer to the section " Uncertainty of Evaluation " for measurement uncertainty.

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

5G NR, Bluetooth-LE

Product Feature	
Antenna Type	WWAN: Directional Antenna Bluetooth-LE: Omni Directional Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	7.43

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International (USA) Inc.		
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300		
Test Site No.	Sporton Site No.		
	TH01-CA	CO01-CA	03CH02-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US 1250

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: 5G NR n48 Link + Bluetooth-LE Link + GPS Rx + USB Cable Load + LAN Link + PoE Adapter

2.3 Connection Diagram of Test System

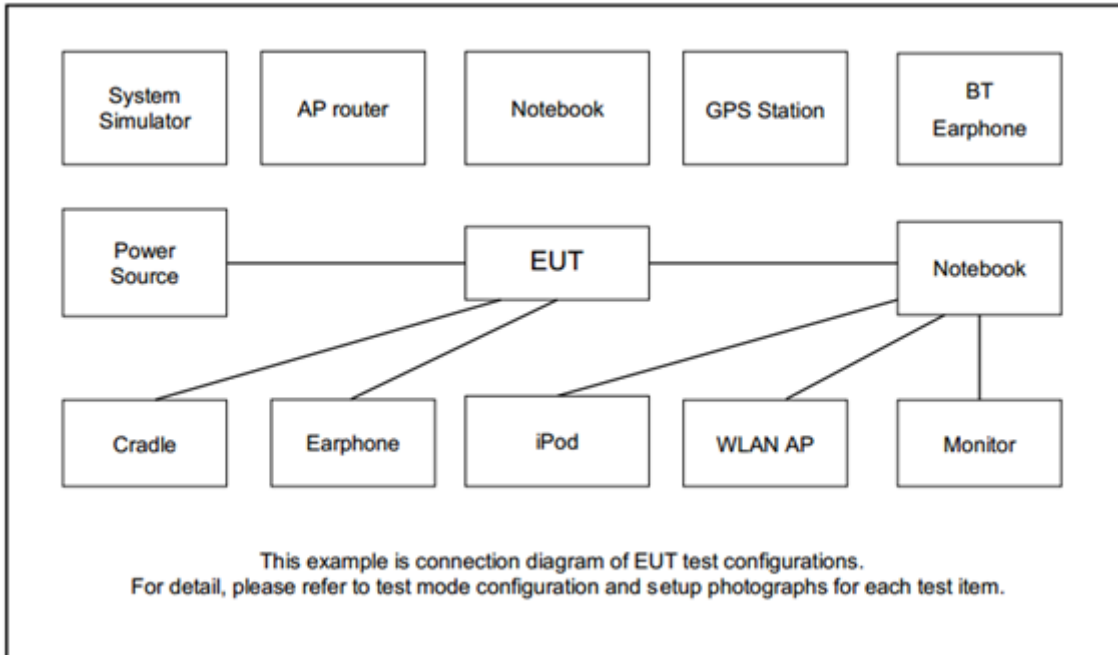

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	SL11H55466	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	Asus	Vivobook 15	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Acer	Altos PS548-G1	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “EspRFTestTool v2.8” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

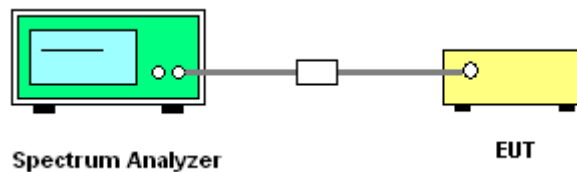




3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

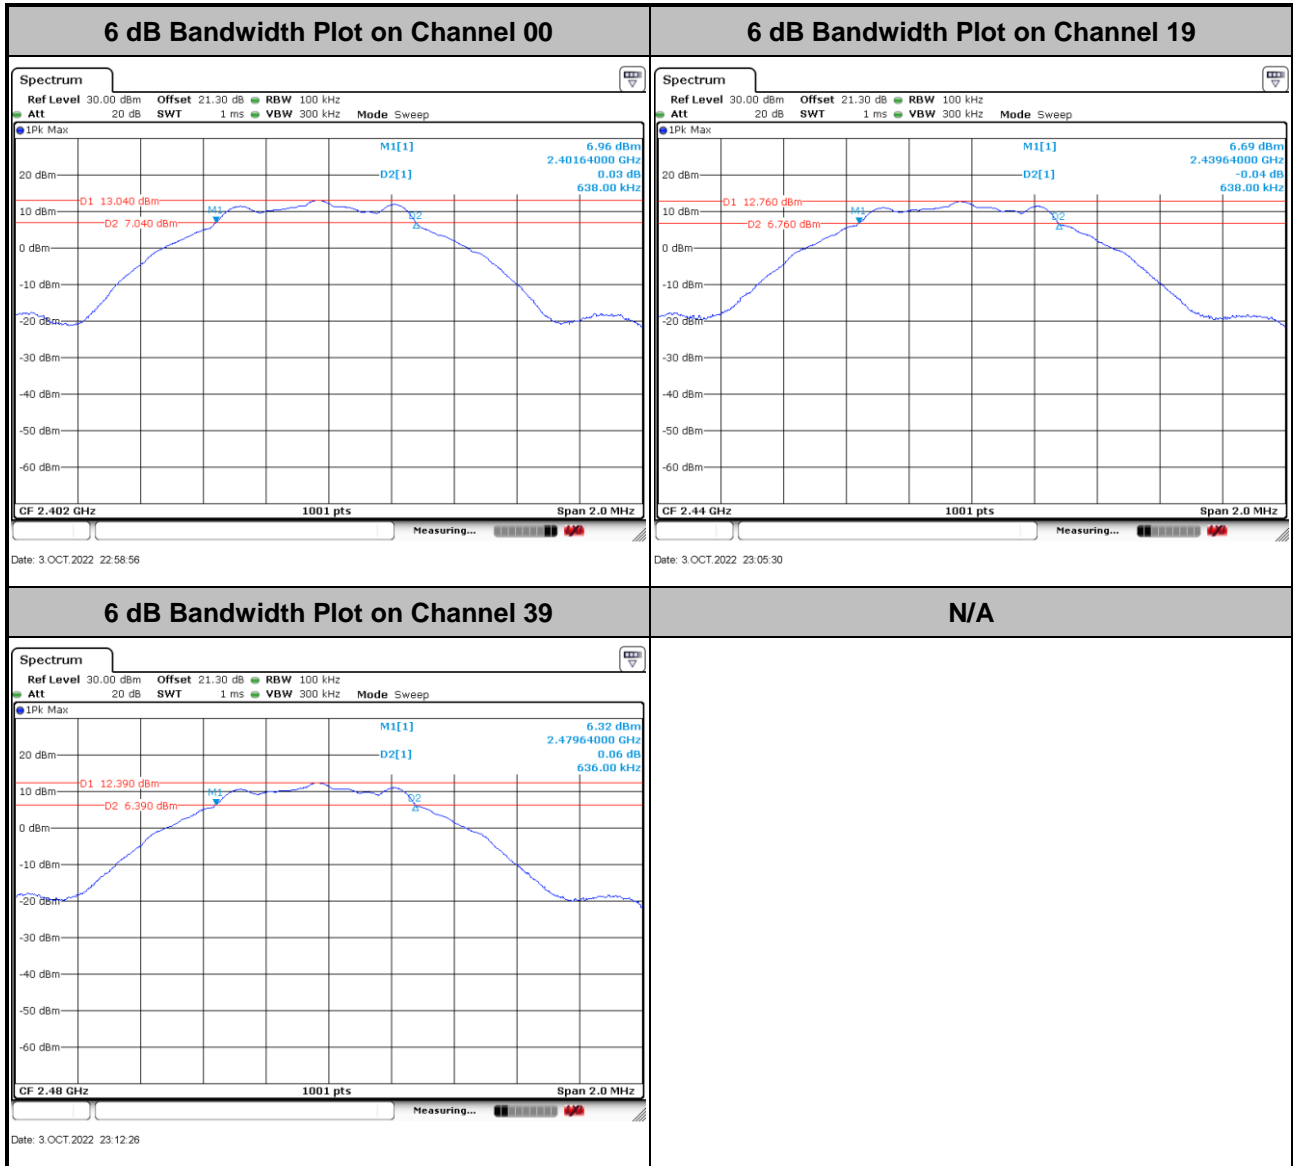



<2Mbps>

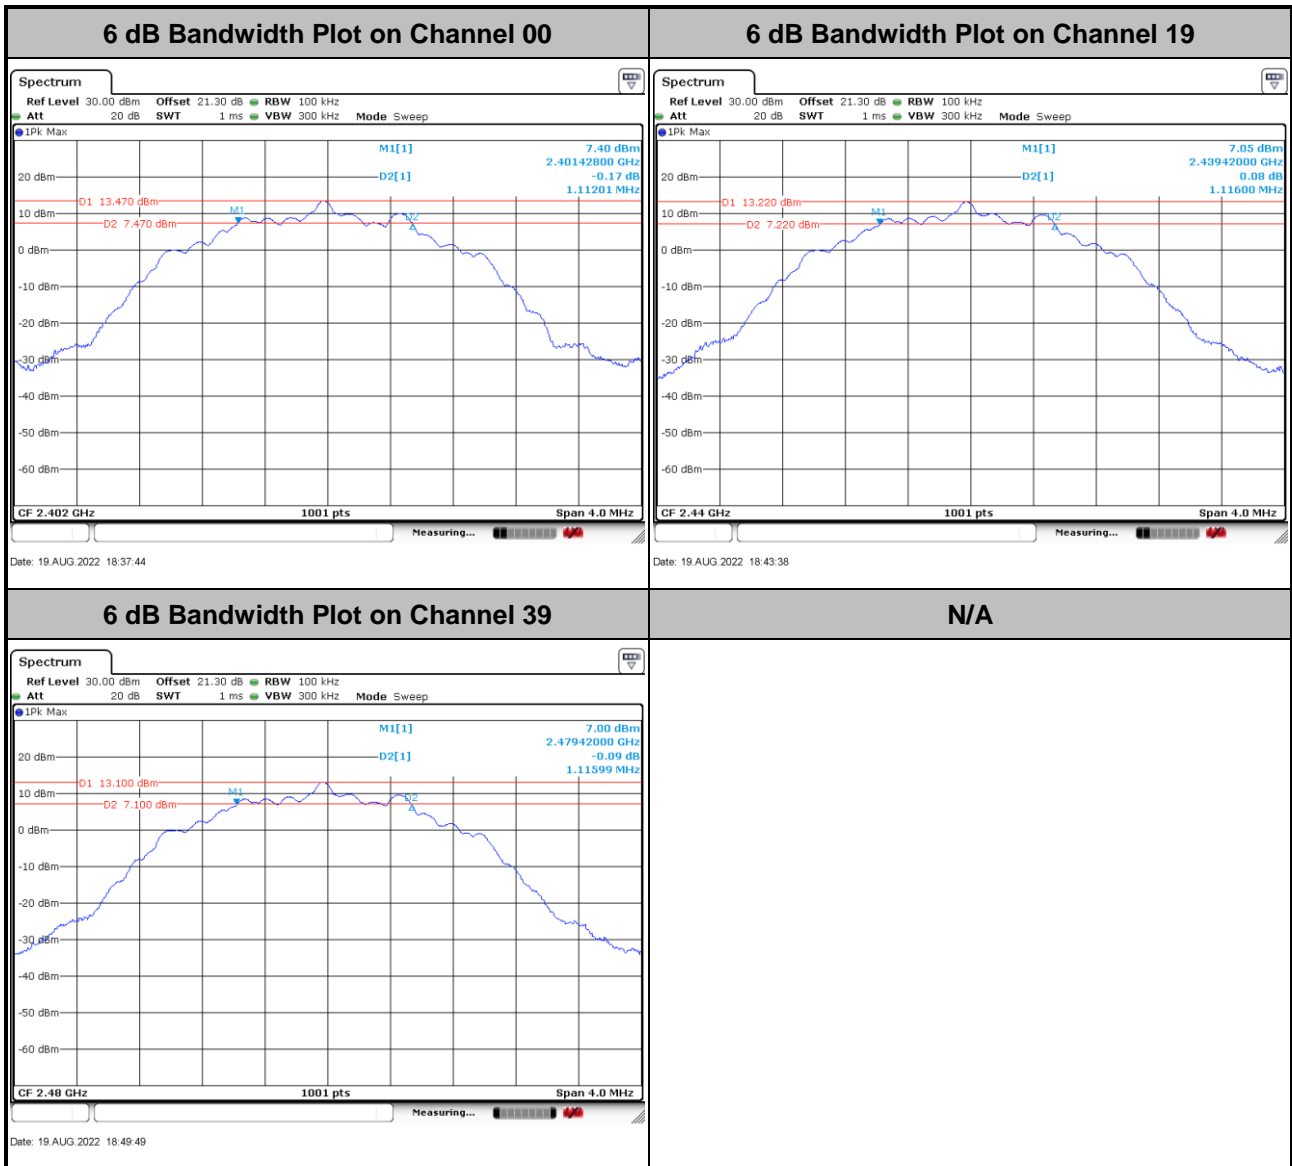




3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

<1Mbps>

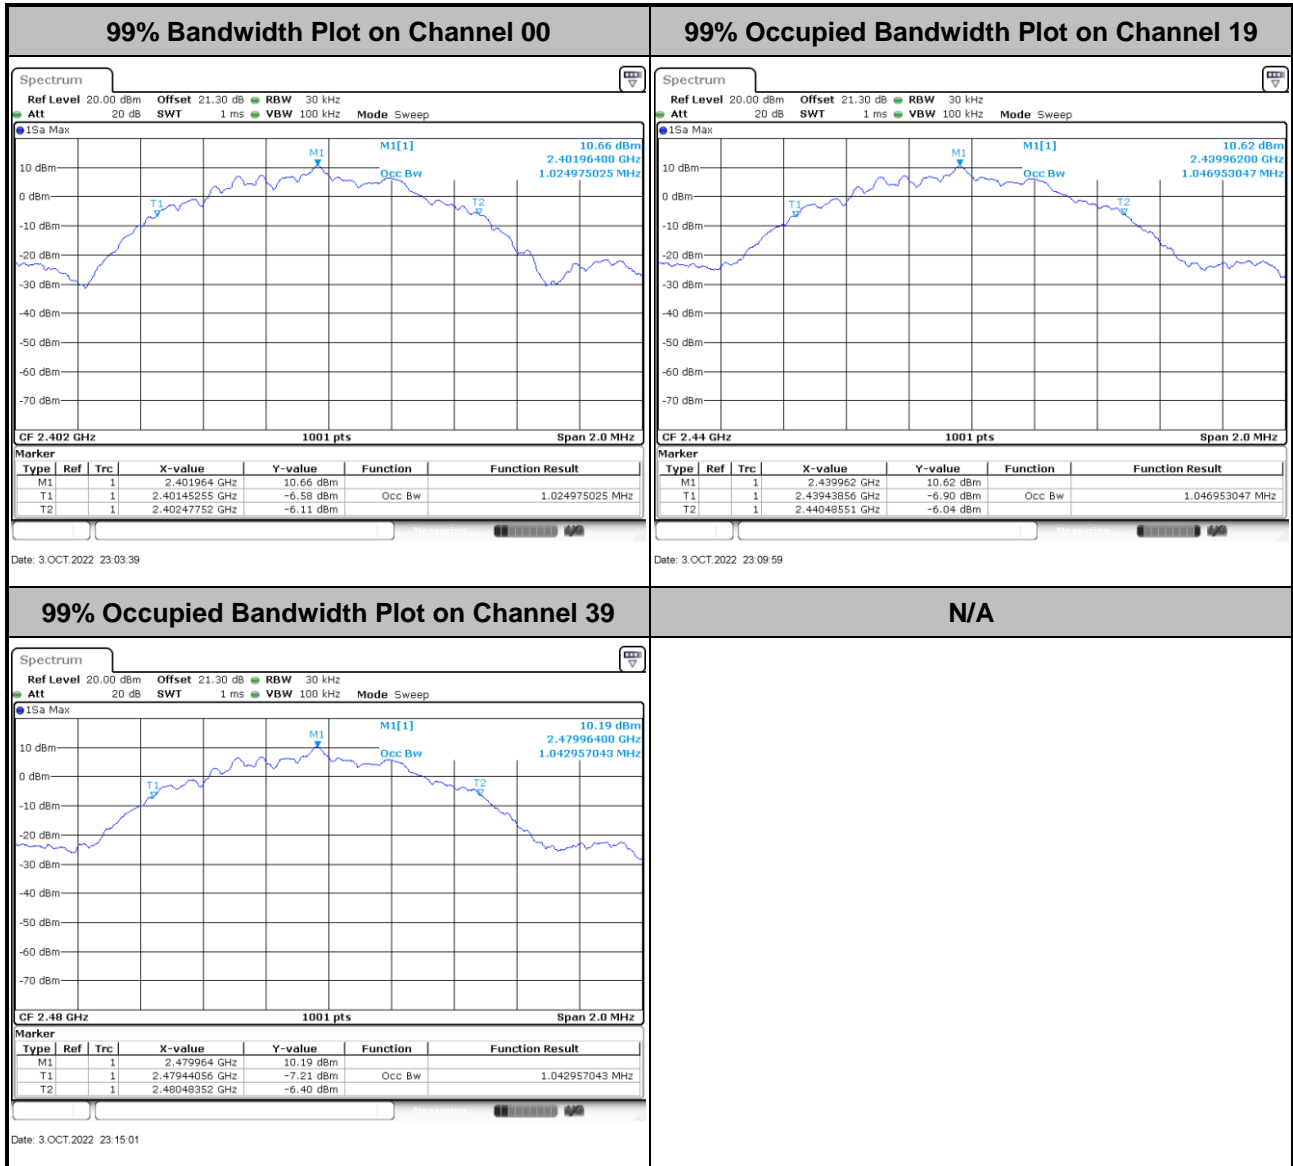



<2Mbps>

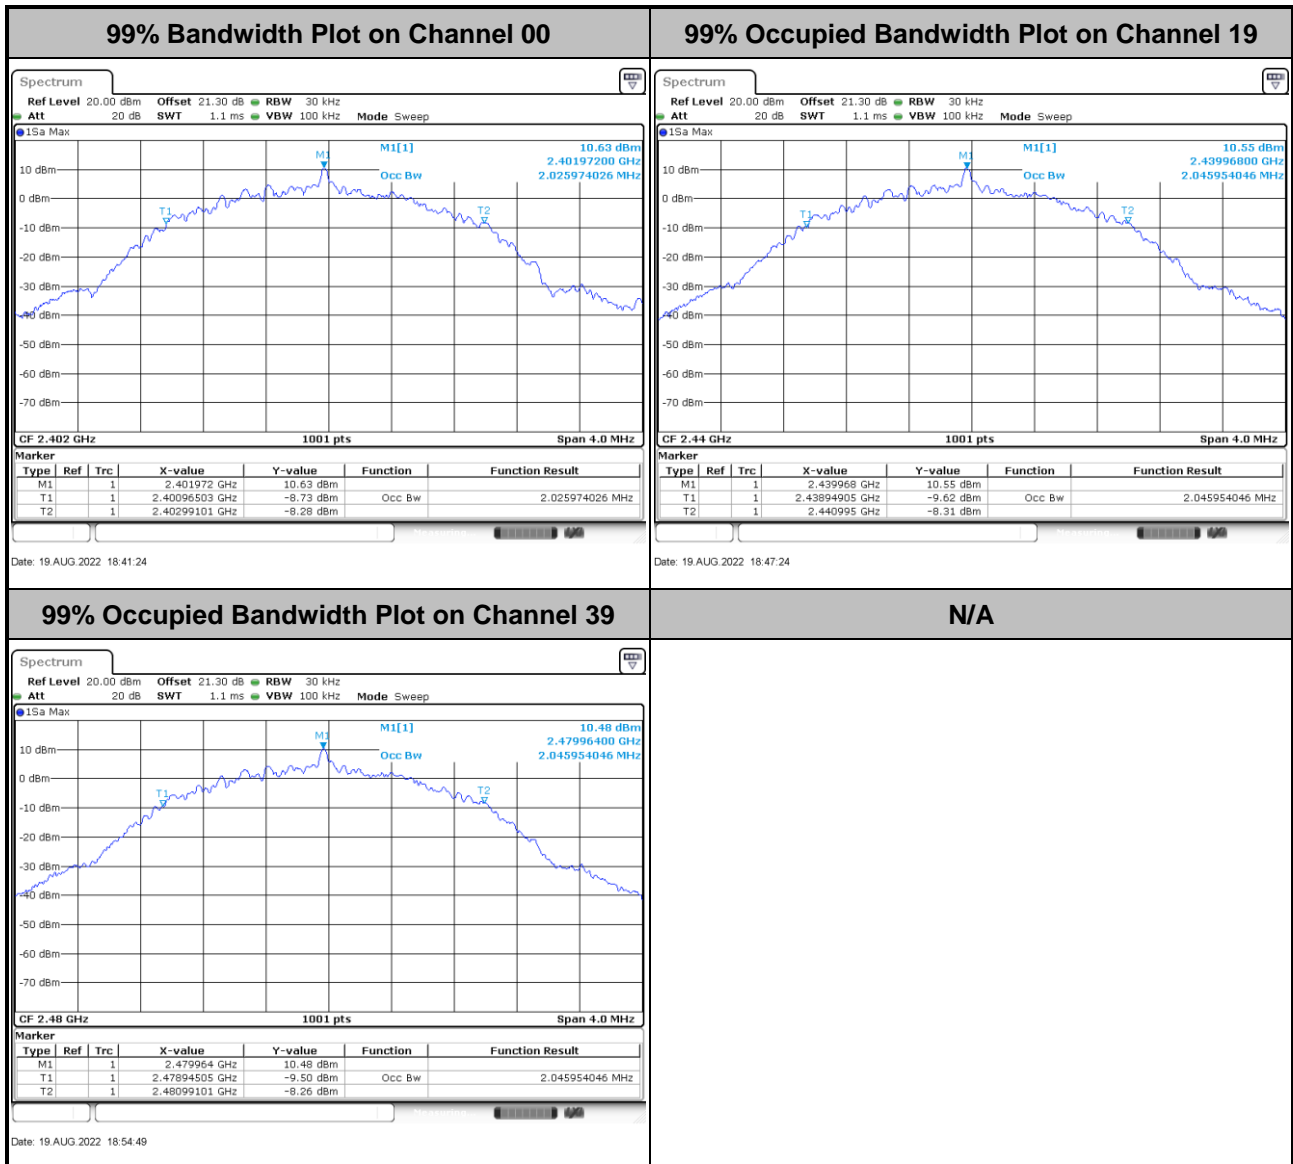

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

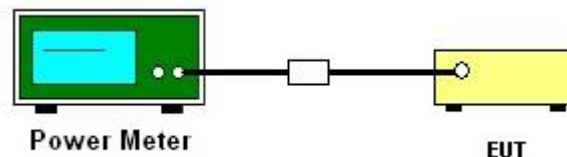

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

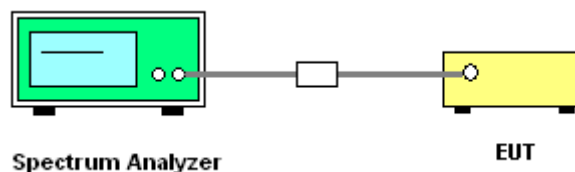


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

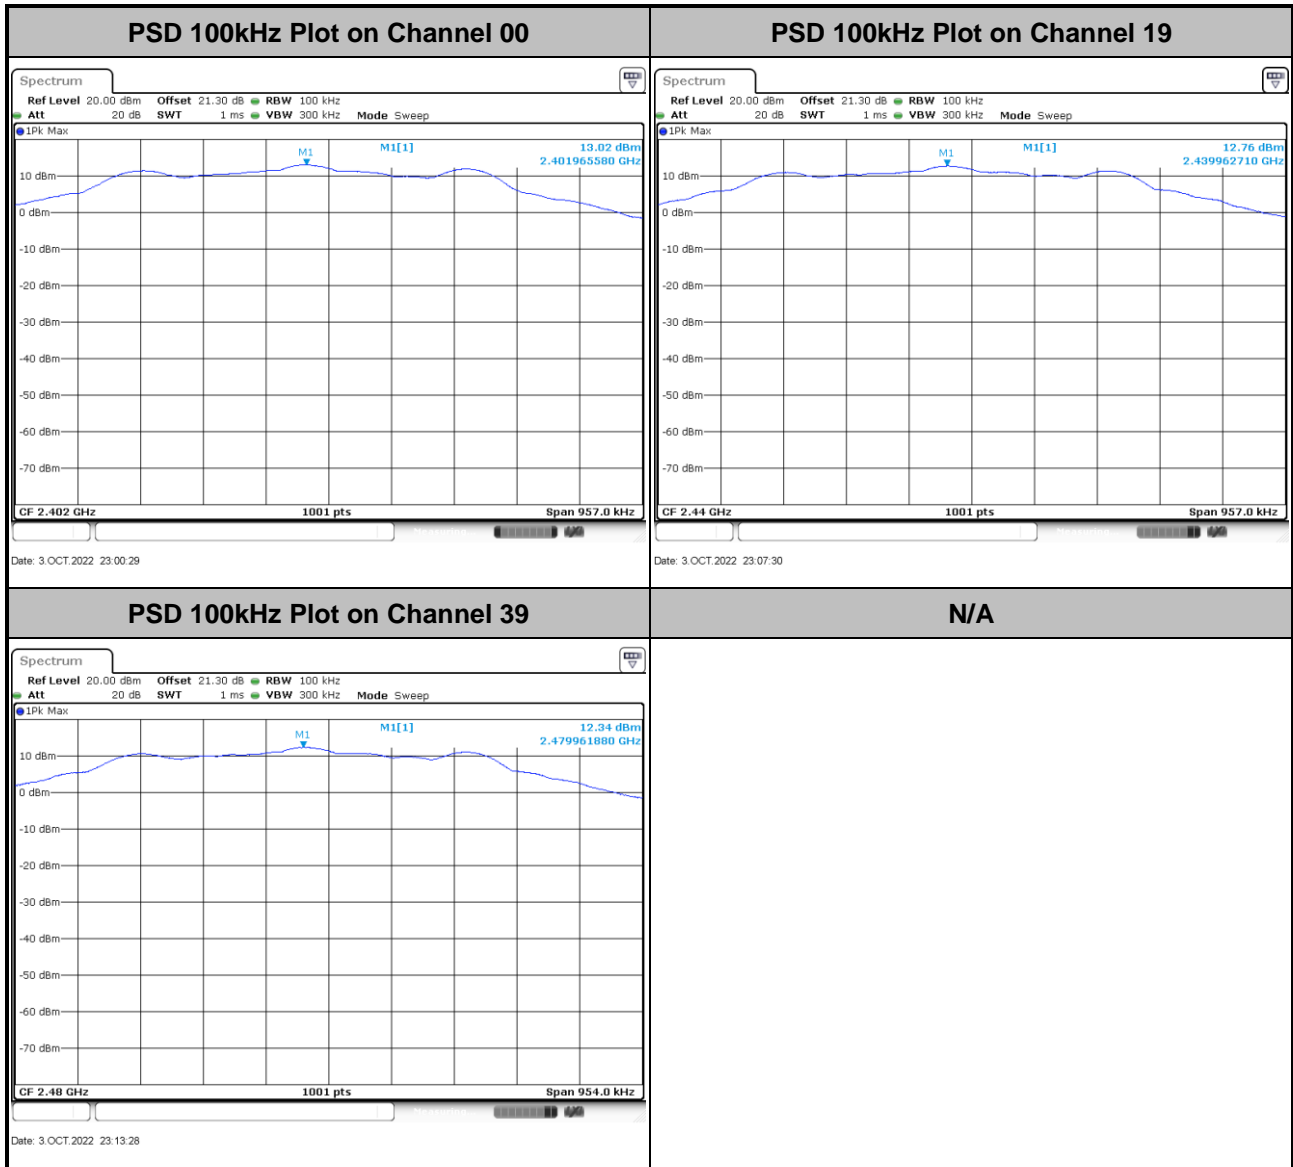




<2Mbps>

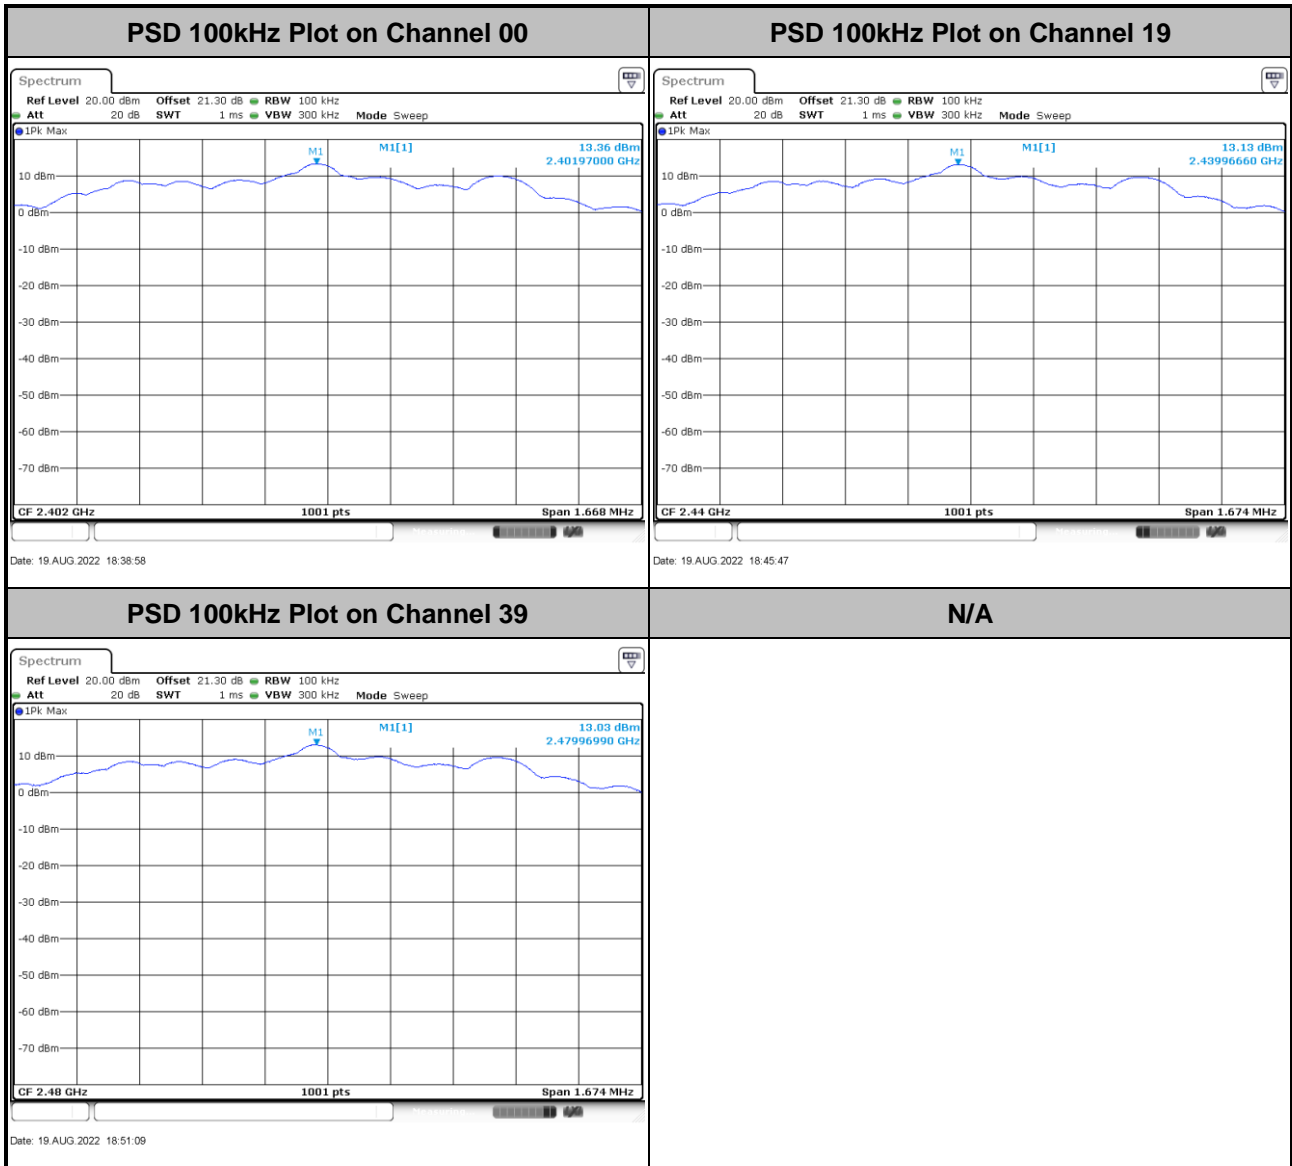




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

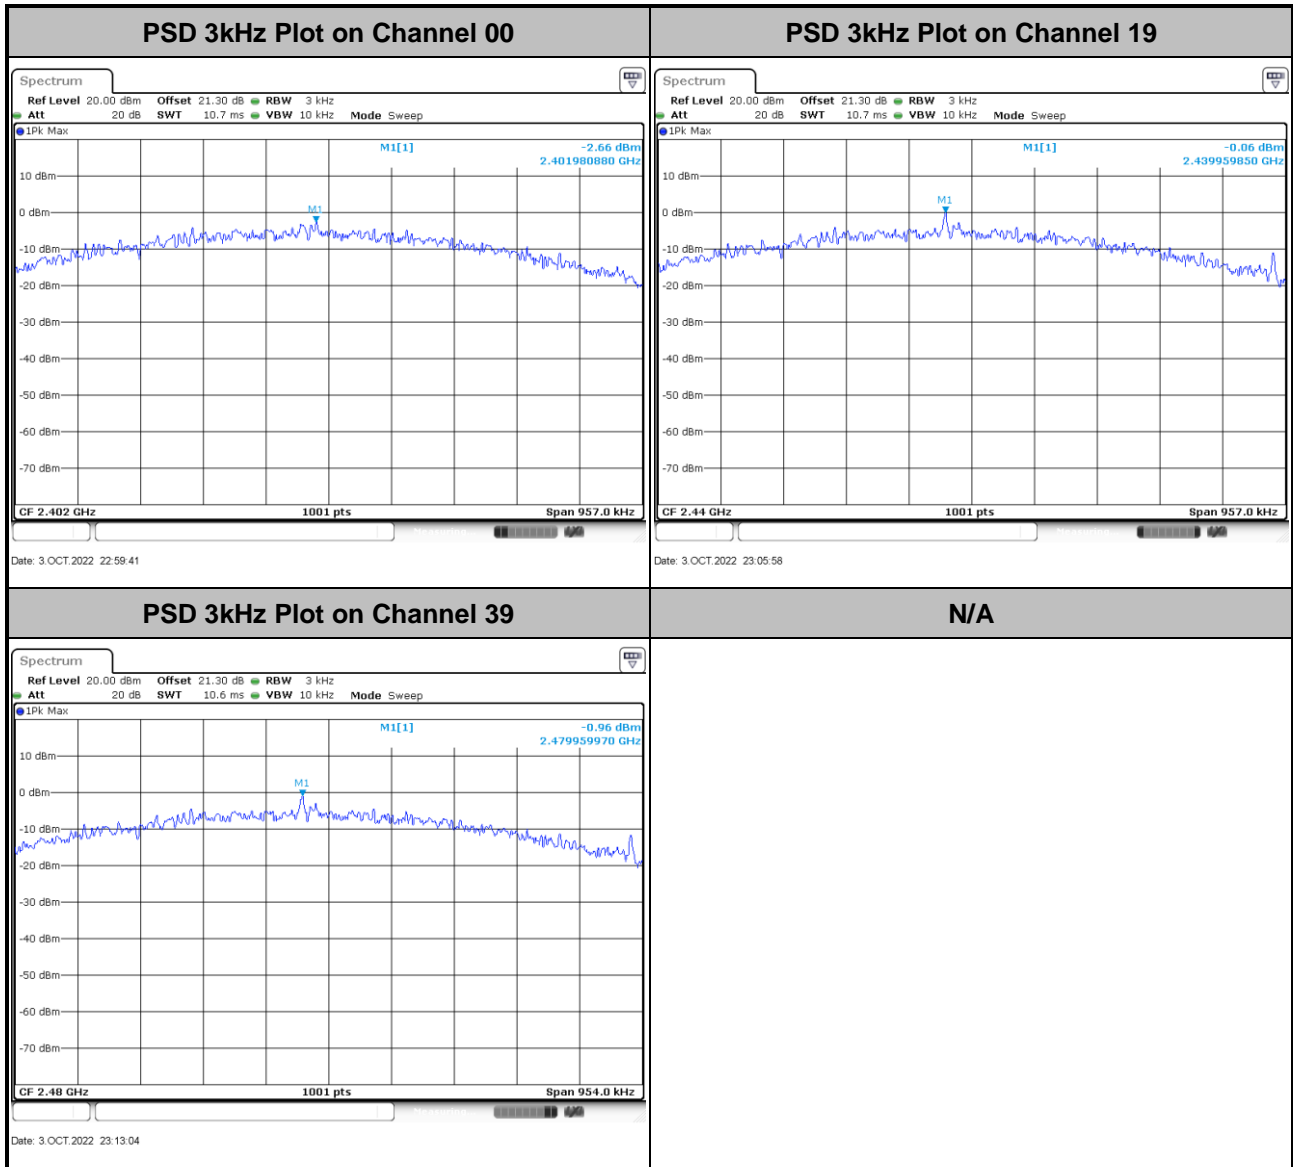



<2Mbps>

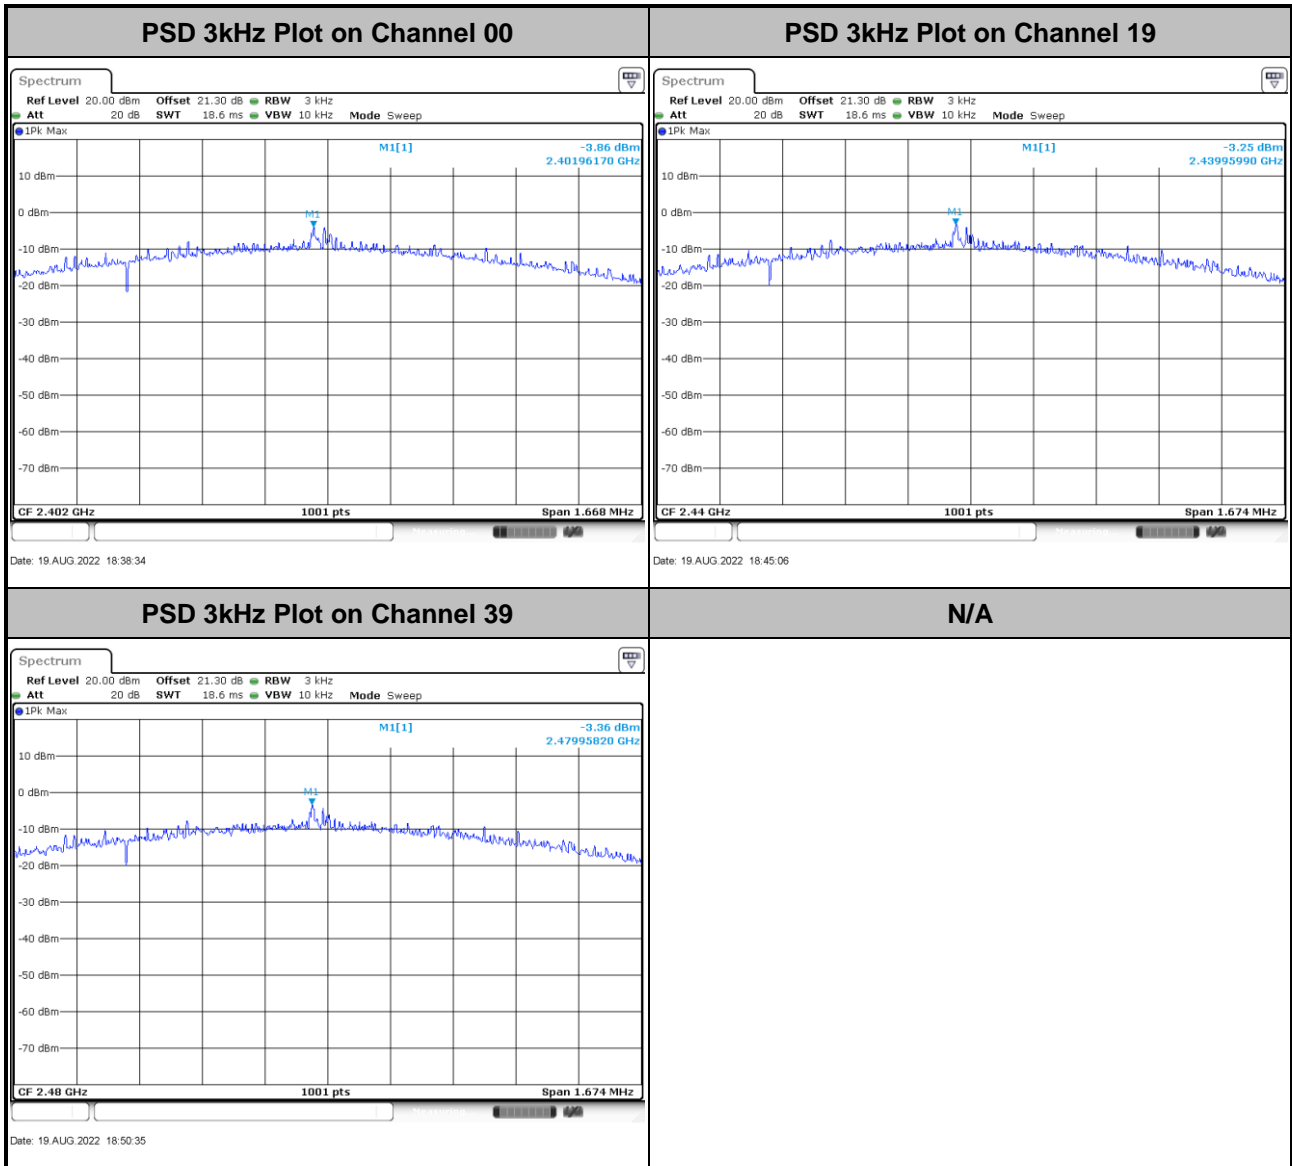

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

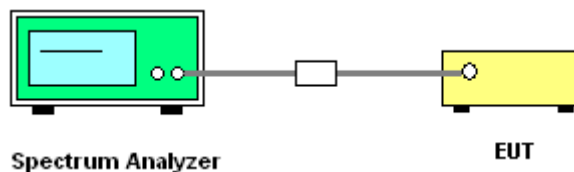




3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

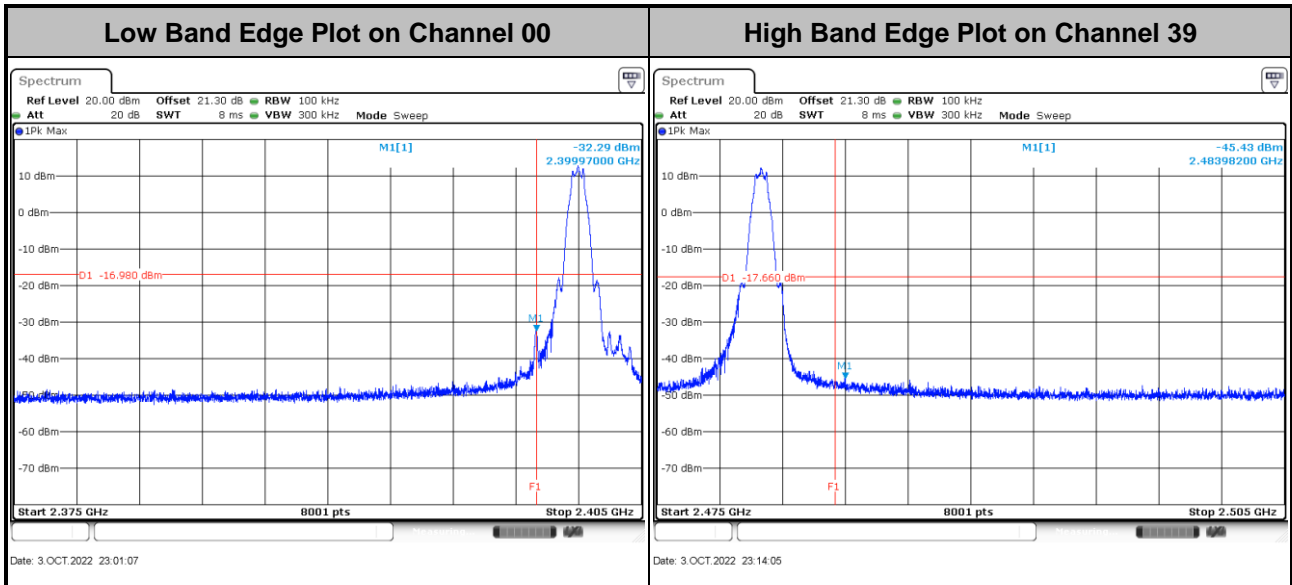




<2Mbps>

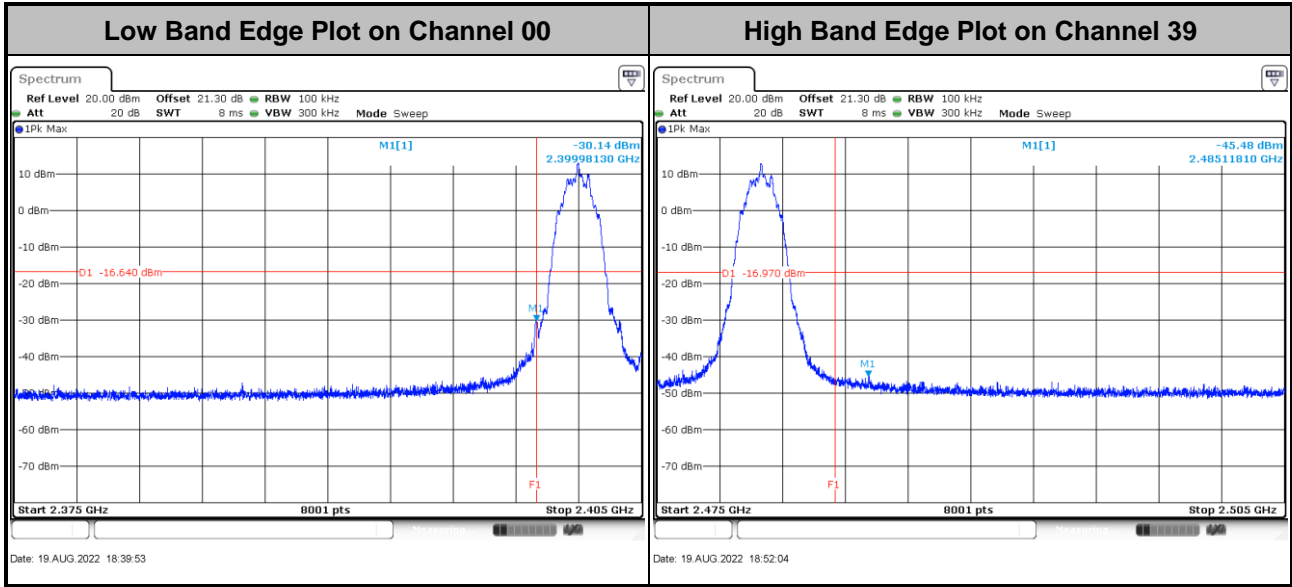




3.4.6 Test Result of Conducted Spurious Emission Plots


<1Mbps>

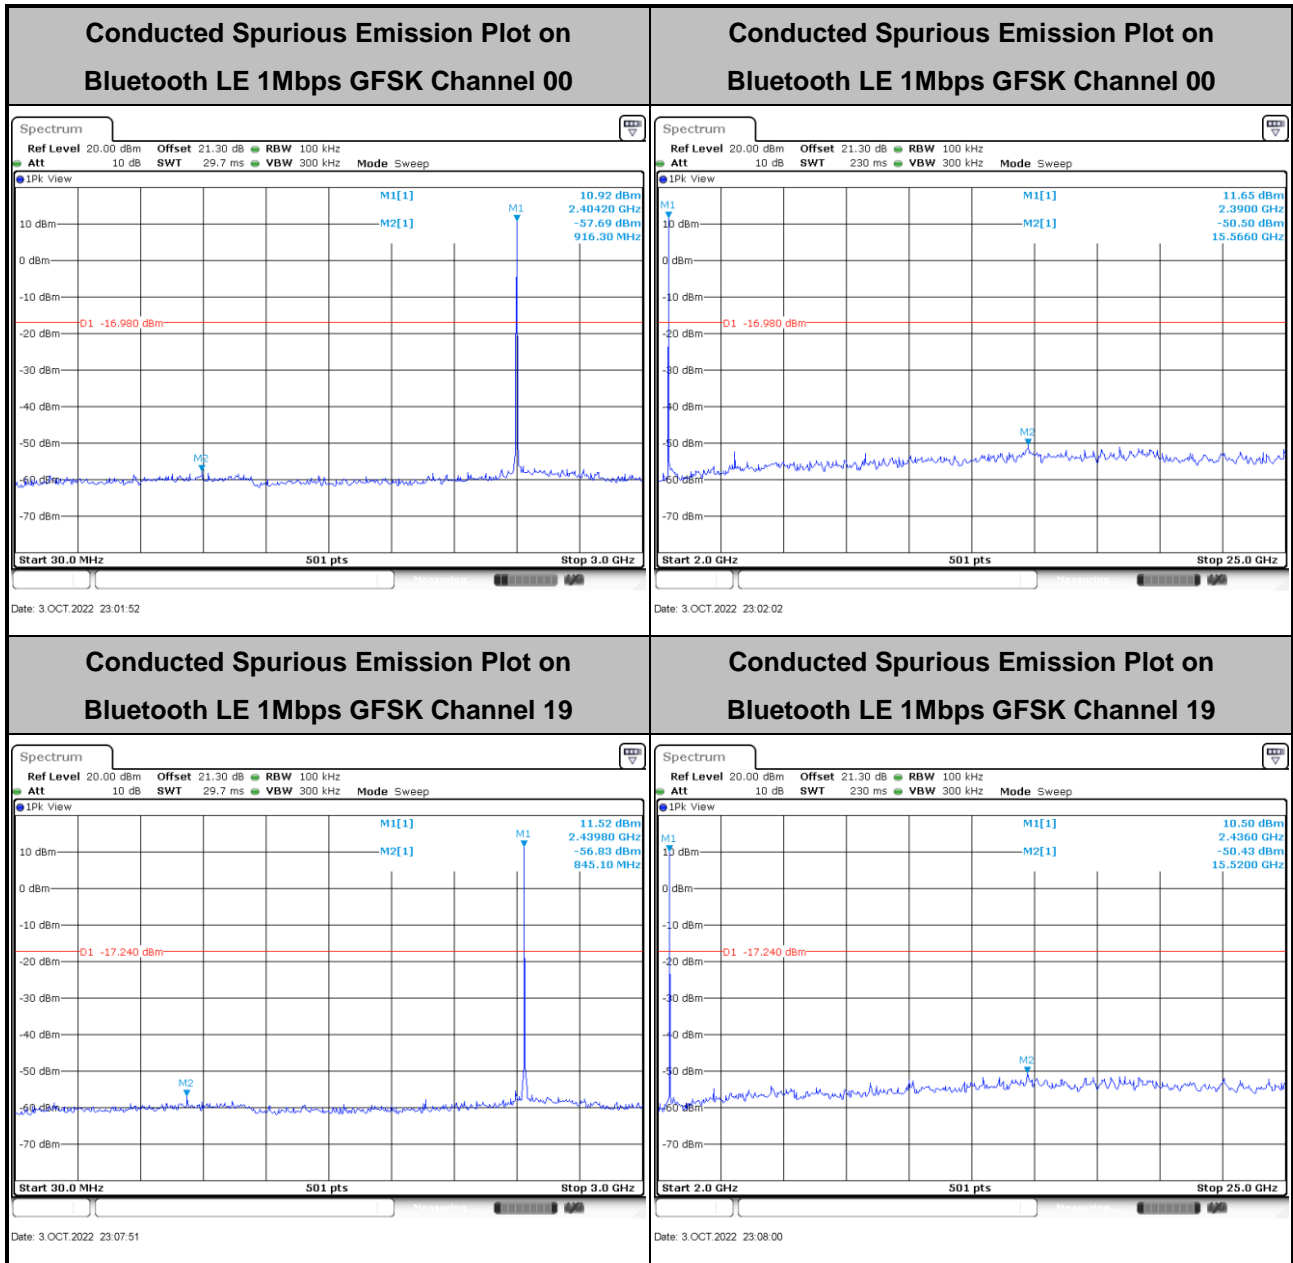


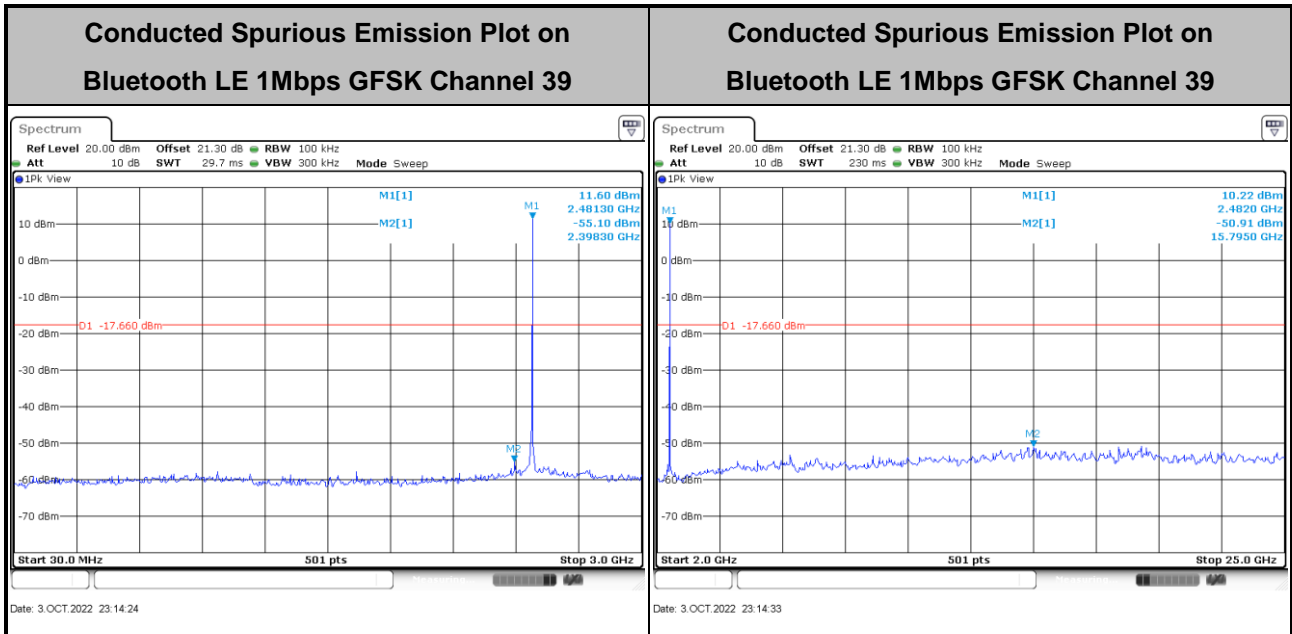



<2Mbps>

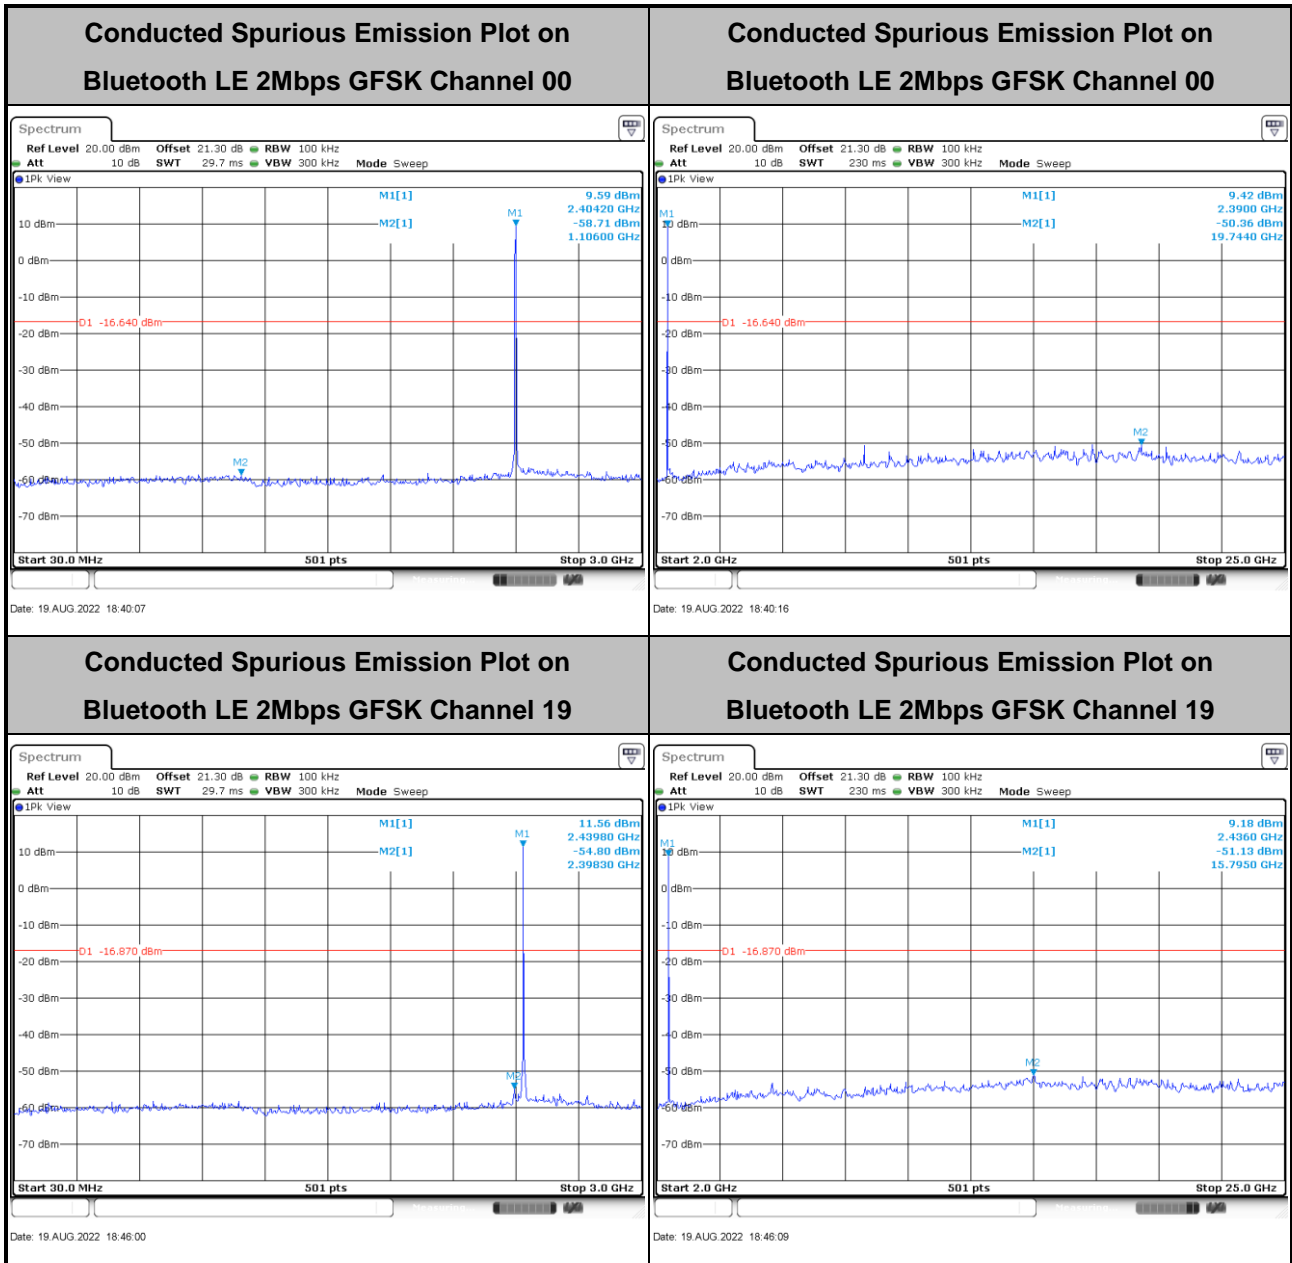

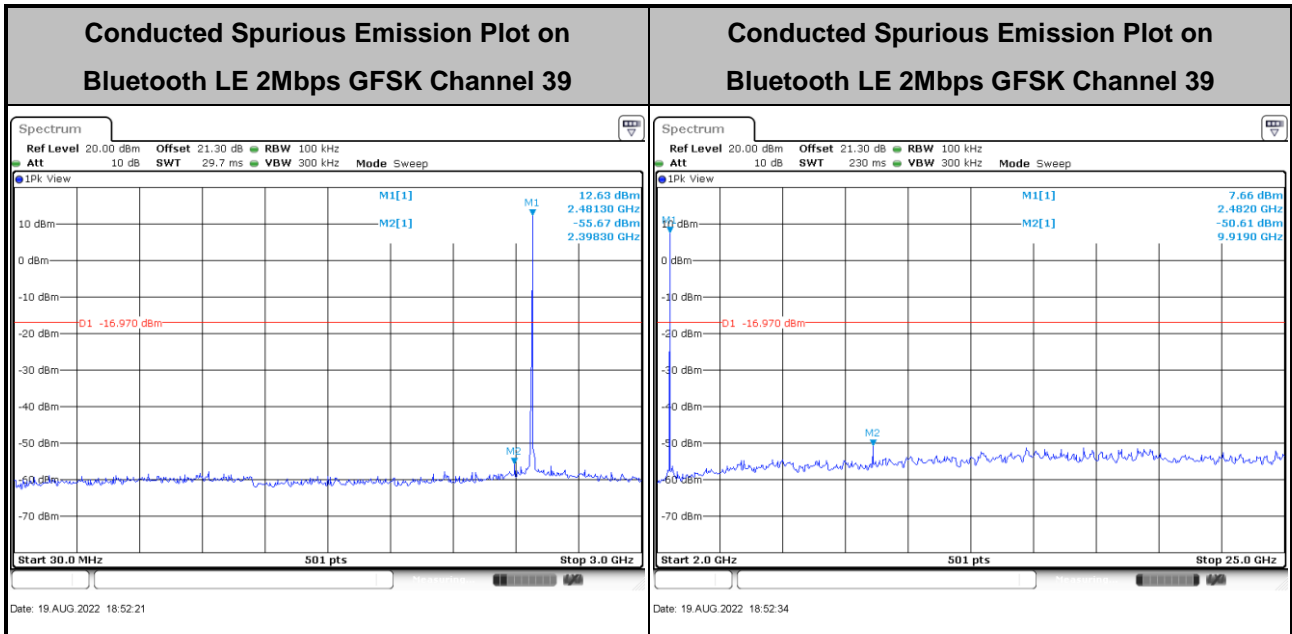



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

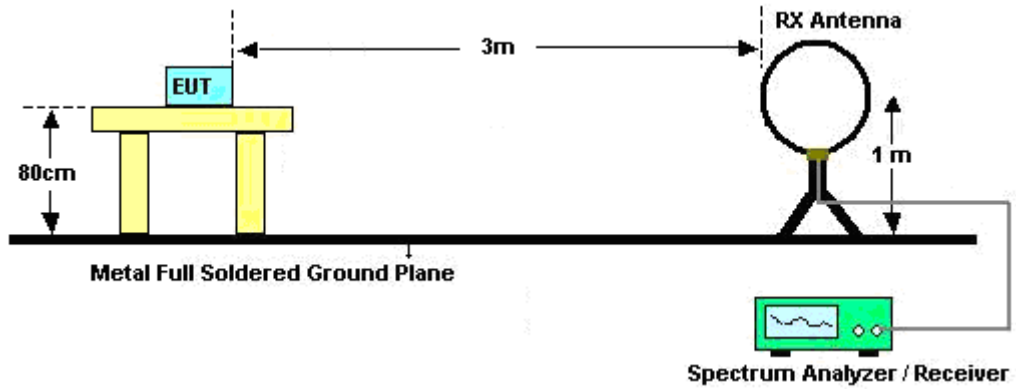

For radiated test from 30MHz to 1GHz

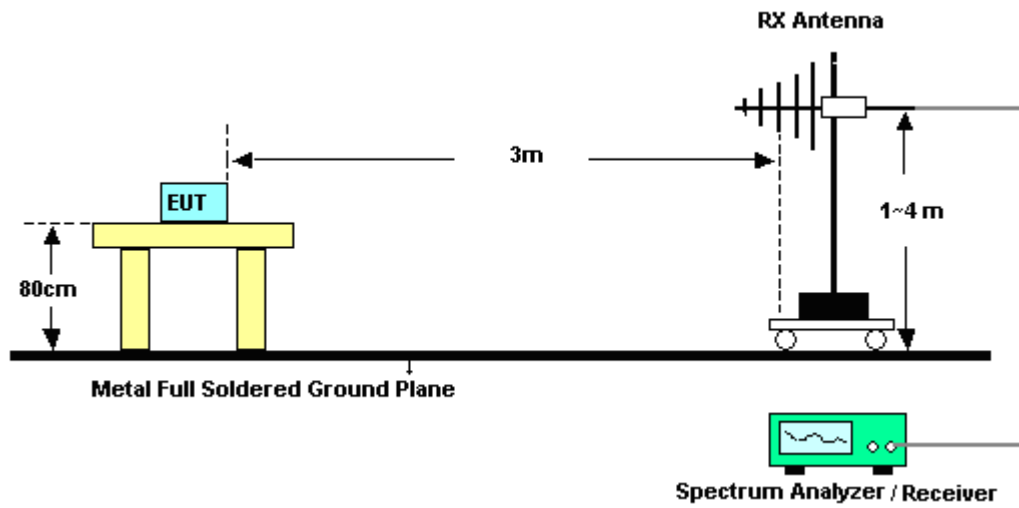

For radiated test above 18GHz

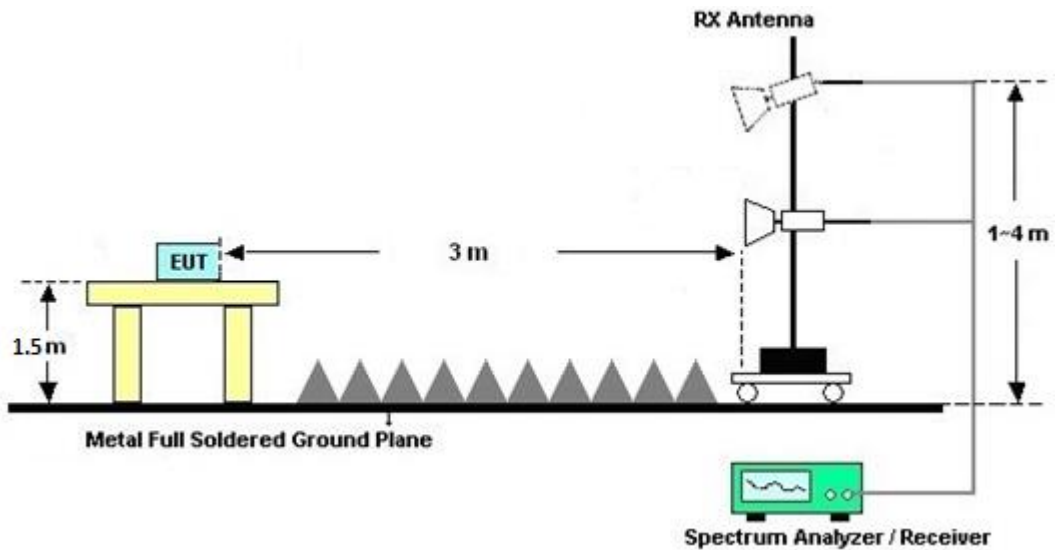



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The peak antenna gain is greater than 6 dBi, therefore, the peak output power limit is reduced accordingly.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100840	9kHz~30MHz	Jul. 05, 2022	Aug. 17, 2022~ Oct. 03, 2022	Jul. 04, 2023	Radiation (03CH02-CA)
Bilog Antenna	TESEQ	6111D	50392	30MHz~1GHz	Jul. 11, 2022	Aug. 17, 2022~ Oct. 03, 2022	Jul. 10, 2023	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	01895	1GHz~18GHz	Aug. 25, 2021	Aug. 17, 2022~ Aug. 19, 2022	Aug. 24, 2022	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	02113	1GHz~18GHz	Jun. 22, 2022	Oct. 03, 2022	Jun. 21, 2023	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBECK	BBHA 9170D	00841	18GHz~40GHz	Aug. 26, 2021	Aug. 17, 2022~ Aug. 19, 2022	Aug. 25, 2022	Radiation (03CH02-CA)
Horn Antenna	SCHWARZBECK	BBHA 9170D	00842	18GHz~40GHz	Aug. 16, 2022	Oct. 03, 2022	Aug. 15, 2023	Radiation (03CH02-CA)
Amplifier	SONOMA	310N	372240	N/A	May 10, 2022	Aug. 17, 2022~ Oct. 03, 2022	May 09, 2023	Radiation (03CH02-CA)
Preamplifier	Keysight	83017A	MY53270323	1GHz~26.5GHz	May 11, 2022	Aug. 17, 2022~ Oct. 03, 2022	May 10, 2023	Radiation (03CH02-CA)
Preamplifier	E-instrument	ERA-100M-18 G-56-01-A70	EC1900251	1GHz~18GHz	May 10, 2022	Aug. 17, 2022~ Oct. 03, 2022	May 09, 2023	Radiation (03CH02-CA)
Preamplifier	EMEC	EMC18G40G	060725	18GHz~40GHz	May 10, 2022	Aug. 17, 2022~ Oct. 03, 2022	May 09, 2023	Radiation (03CH02-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	8024032/2, 802406/2, 802875/2	N/A	Jun. 22, 2022	Aug. 17, 2022~ Oct. 03, 2022	Jun. 21, 2023	Radiation (03CH02-CA)
Spectrum Analyzer	Keysight	N9010A	MY57420221	10Hz~44GHz	Sep. 22, 2021	Aug. 17, 2022~ Aug. 19, 2022	Sep. 21, 2022	Radiation (03CH02-CA)
Spectrum Analyzer	Keysight	N9010A	MY57420221	10Hz~44GHz	Sep. 30, 2022	Oct. 03, 2022	Sep. 29, 2023	Radiation (03CH02-CA)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN10	3GHz High Pass Filter	Jul. 22, 2022	Aug. 17, 2022~ Oct. 03, 2022	Jul. 21, 2023	Radiation (03CH02-CA)
Filter	Wainwright	WLK12-1200-1 272-11000-40 SS	SN1	1.2GHz Low Pass Filter	Jul. 22, 2022	Aug. 17, 2022~ Oct. 03, 2022	Jul. 21, 2023	Radiation (03CH02-CA)
Hygrometer	TESEO	608-H1	45142602	N/A	Aug. 30, 2021	Aug. 17, 2022~ Aug. 19, 2022	Aug. 29, 2022	Radiation (03CH02-CA)
Hygrometer	TESEO	608-H1	45142602	N/A	Sep. 12, 2022	Oct. 03, 2022	Sep. 11, 2023	Radiation (03CH02-CA)
Controller	ChainTek	EM-1000	060876	NA	N/A	Aug. 17, 2022~ Oct. 03, 2022	N/A	Radiation (03CH02-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Aug. 17, 2022~ Oct. 03, 2022	N/A	Radiation (03CH02-CA)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Aug. 17, 2022~ Oct. 03, 2022	N/A	Radiation (03CH02-CA)
Software	Audix	E3	N/A	N/A	N/A	Aug. 17, 2022~ Oct. 03, 2022	N/A	Radiation (03CH02-CA)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	45141354	N/A	Jul. 27, 2022	Aug. 16, 2022~ Oct. 03, 2022	Jul. 26, 2023	Conducted (TH01-CA)
Power Sensor	DARE!!	RPR3006W	RPR6W-1901 026	10MHz-6GHz	May 10, 2022	Aug. 16, 2022~ Oct. 03, 2022	May 09, 2023	Conducted (TH01-CA)
Switch Box	EM Electronics	EMSW26	1090304	N/A	Mar. 30, 2022	Aug. 16, 2022~ Oct. 03, 2022	Mar. 29, 2023	Conducted (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101089	10Hz-40GHz	Jun 01, 2022	Aug. 16, 2022~ Oct. 03, 2022	May 31, 2023	Conducted (TH01-CA)
LISN	TESEQ	NNB51	47415	N/A	May 10, 2022	Aug. 05, 2022	May 09, 2023	Conduction (CO01-CA)
Pulse limiter with 10dB attenuation	SCHWARZBECK	VTSD 9561-F N	9561-F- N00412	N/A	Jul. 05, 2022	Aug. 05, 2022	Jul. 04, 2023	Conduction (CO01-CA)
EMI Test Receiver	R&S	ESR7	102177	7GHz	May 31, 2022	Aug. 05, 2022	May 30, 2023	Conduction (CO01-CA)
Radio Communication Test Station	Anritsu	MT8000A	6262208375	N/A	Jun.08, 2022	Aug. 05, 2022	Jun. 07, 2023	Conduction (CO01-CA)
GNSS Simulator	Spectracom	GSG-5	203130	N/A	May 09, 2022	Aug. 05, 2022	May 08, 2023	Conduction (CO01-CA)
Software	R&S	EMC32	N/A	Version 10.30.00	N/A	Aug. 05, 2022	N/A	Conduction (CO01-CA)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.70 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.20 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Liliana Gonzalez	Temperature:	21.1~24.9	°C
Test Date:	2022/08/16~2022/10/03	Relative Humidity:	43.8~51.9	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.025	0.638	0.50	Pass
BLE	1Mbps	1	19	2440	1.047	0.638	0.50	Pass
BLE	1Mbps	1	39	2480	1.043	0.636	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	12.91	28.57	7.43	20.34	36.00	Pass
BLE	1Mbps	1	19	2440	12.50	28.57	7.43	19.93	36.00	Pass
BLE	1Mbps	1	39	2480	12.13	28.57	7.43	19.56	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	13.02	-2.66	7.43	6.57	Pass
BLE	1Mbps	1	19	2440	12.76	-0.06	7.43	6.57	Pass
BLE	1Mbps	1	39	2480	12.34	-0.96	7.43	6.57	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.026	1.112	0.50	Pass
BLE	2Mbps	1	19	2440	2.046	1.116	0.50	Pass
BLE	2Mbps	1	39	2480	2.046	1.116	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	12.89	28.57	7.43	20.32	36.00	Pass
BLE	2Mbps	1	19	2440	12.94	28.57	7.43	20.37	36.00	Pass
BLE	2Mbps	1	39	2480	12.67	28.57	7.43	20.10	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	13.36	-3.86	7.43	6.57	Pass
BLE	2Mbps	1	19	2440	13.13	-3.25	7.43	6.57	Pass
BLE	2Mbps	1	39	2480	13.03	-3.36	7.43	6.57	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Abi Lin	Temperature :	20~23°C
		Relative Humidity :	41~43%

EUT Information

Test Site Location : CO01-CA
 Power: 120Vac/60Hz
 Mode: 1
 Type: Line

Full Spectrum

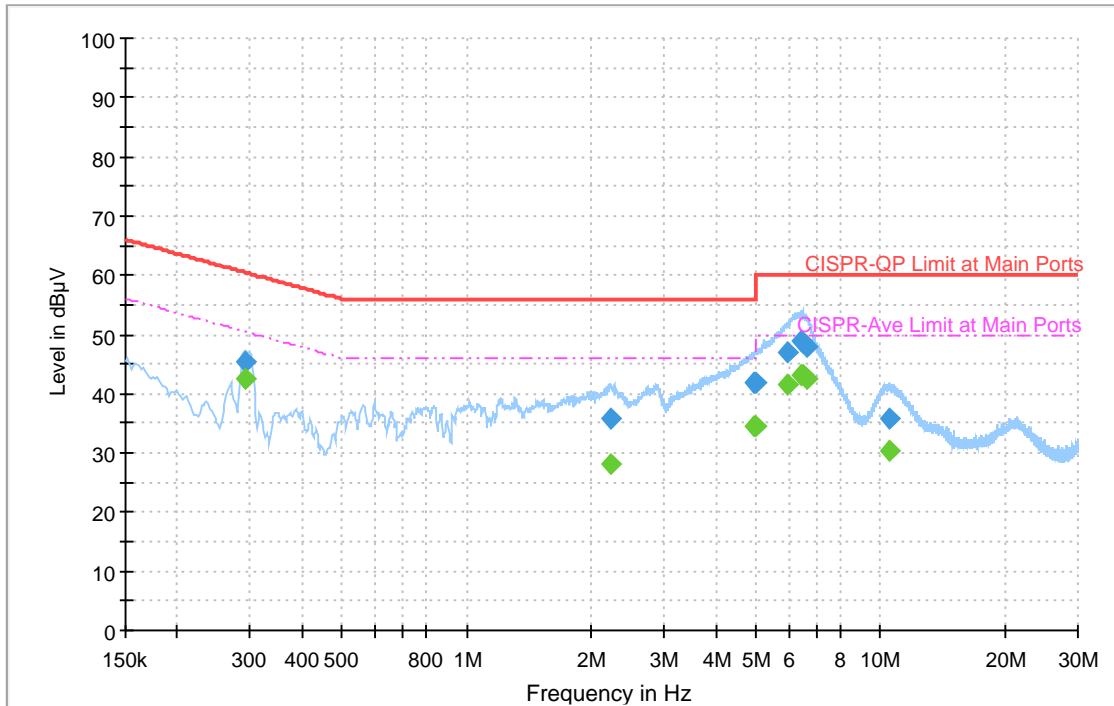


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.293172	45.26	---	60.43	15.17	L1	OFF	20.3
0.293172	---	42.58	50.43	7.85	L1	OFF	20.3
2.217084	35.83	---	56.00	20.17	L1	OFF	20.3
2.217084	---	28.00	46.00	18.00	L1	OFF	20.3
4.941942	41.70	---	56.00	14.30	L1	OFF	20.4
4.941942	---	34.41	46.00	11.59	L1	OFF	20.4
4.979634	41.83	---	56.00	14.17	L1	OFF	20.4
4.979634	---	34.46	46.00	11.54	L1	OFF	20.4
5.947611	47.01	---	60.00	12.99	L1	OFF	20.4
5.947611	---	41.49	50.00	8.51	L1	OFF	20.4
6.404649	49.00	---	60.00	11.00	L1	OFF	20.4
6.404649	---	43.17	50.00	6.83	L1	OFF	20.4
6.467838	48.69	---	60.00	11.31	L1	OFF	20.4
6.467838	---	43.07	50.00	6.93	L1	OFF	20.4
6.637569	47.98	---	60.00	12.02	L1	OFF	20.4
6.637569	---	42.39	50.00	7.61	L1	OFF	20.4
10.485672	35.79	---	60.00	24.21	L1	OFF	20.5
10.485672	---	30.43	50.00	19.57	L1	OFF	20.5

EUT Information

Test Site Location : CO01-CA
 Power: 120Vac/60Hz
 Mode: 1
 Type: Neutral

Full Spectrum

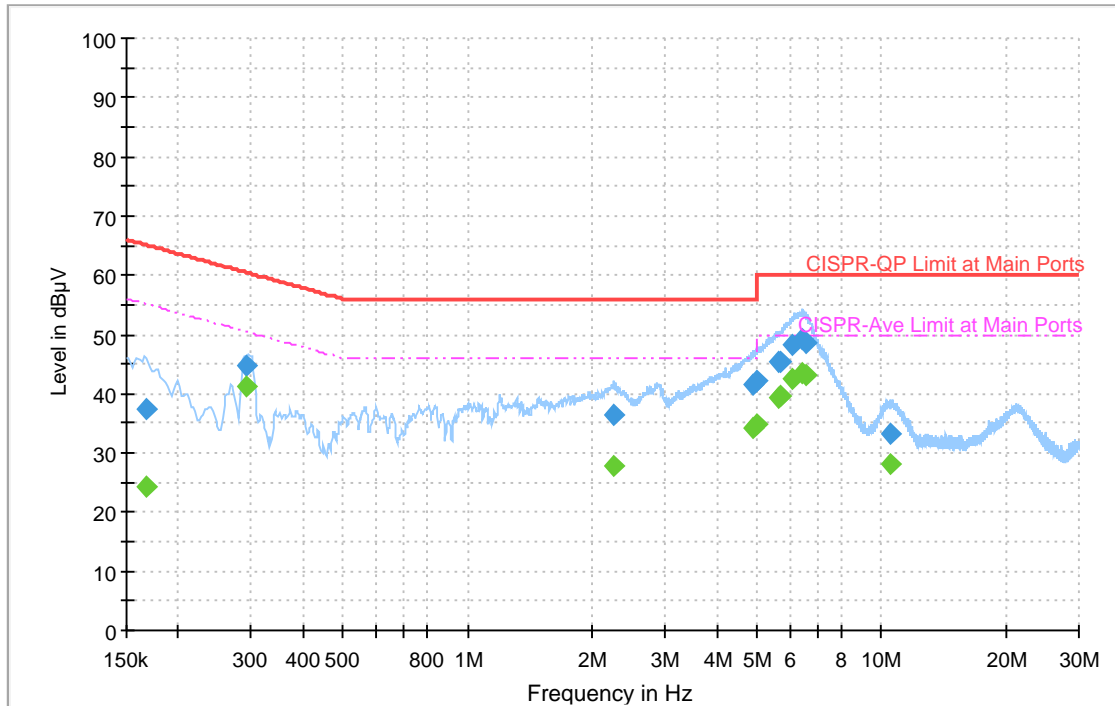

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.166884	---	24.13	55.11	30.98	N	OFF	20.3
0.166884	37.33	---	65.11	27.78	N	OFF	20.3
0.292047	---	41.13	50.47	9.34	N	OFF	20.3
0.292047	44.75	---	60.47	15.72	N	OFF	20.3
2.262336	---	27.71	46.00	18.29	N	OFF	20.3
2.262336	36.45	---	56.00	19.55	N	OFF	20.3
4.910748	---	34.24	46.00	11.76	N	OFF	20.4
4.910748	41.67	---	56.00	14.33	N	OFF	20.4
4.976817	---	34.78	46.00	11.22	N	OFF	20.4
4.976817	42.33	---	56.00	13.67	N	OFF	20.4
5.639253	---	39.41	50.00	10.59	N	OFF	20.4
5.639253	45.40	---	60.00	14.60	N	OFF	20.4
5.677962	---	39.66	50.00	10.34	N	OFF	20.4
5.677962	45.49	---	60.00	14.51	N	OFF	20.4
6.109962	---	42.61	50.00	7.39	N	OFF	20.4
6.109962	48.38	---	60.00	11.62	N	OFF	20.4
6.411867	---	43.45	50.00	6.55	N	OFF	20.4
6.411867	49.20	---	60.00	10.80	N	OFF	20.4
6.583704	---	43.04	50.00	6.96	N	OFF	20.4
6.583704	48.50	---	60.00	11.50	N	OFF	20.4
10.521312	---	28.05	50.00	21.95	N	OFF	20.4

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
10.521312	33.07	---	60.00	26.93	N	OFF	20.4



Appendix C. Radiated Spurious Emission

Test Engineer :	Fu Chen and Daniel Lee	Temperature :	20~23°C
		Relative Humidity :	42~47%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)	
BLE CH 00 2402MHz		2389.905	58.26	-15.74	74	45.05	27.29	17.42	31.5	257	118	P	H	
		2389.905	47.41	-6.59	54	34.2	27.29	17.42	31.5	257	118	A	H	
	*	2402	115.7	-	-	102.37	27.38	17.44	31.49	257	118	P	H	
	*	2402	114.71	-	-	101.38	27.38	17.44	31.49	257	118	A	H	
													H	
														H
			2351.58	55.54	-18.46	74	42.59	27.12	17.35	31.52	103	189	P	V
			2389.695	45.31	-8.69	54	32.1	27.29	17.42	31.5	103	189	A	V
	*		2402	106.97	-	-	93.64	27.38	17.44	31.49	103	189	P	V
	*		2402	106.07	-	-	92.74	27.38	17.44	31.49	103	189	A	V
														V
													V	
BLE CH 19 2440MHz		2318	55.84	-18.16	74	42.99	27.09	17.29	31.53	243	147	P	H	
		2384.56	45.55	-8.45	54	32.38	27.27	17.41	31.51	243	147	A	H	
	*	2440	115.64	-	-	102.15	27.46	17.5	31.47	243	147	P	H	
	*	2440	114.65	-	-	101.16	27.46	17.5	31.47	243	147	A	H	
			2496.24	55.74	-18.26	74	41.8	27.79	17.6	31.45	243	147	P	H
			2486.88	45.76	-8.24	54	31.92	27.71	17.59	31.46	243	147	A	H
			2386.8	55.22	-18.78	74	42.03	27.28	17.42	31.51	299	194	P	V
			2371.6	45.27	-8.73	54	32.19	27.21	17.39	31.52	299	194	A	V
	*		2440	109.11	-	-	95.62	27.46	17.5	31.47	299	194	P	V
	*		2440	108.17	-	-	94.68	27.46	17.5	31.47	299	194	A	V
			2490	55.12	-18.88	74	41.26	27.73	17.59	31.46	299	194	P	V
			2485.6	45.08	-8.92	54	31.24	27.71	17.59	31.46	299	194	A	V



BLE CH 39 2480MHz	*	2480	114.41	-	-	100.61	27.68	17.58	31.46	299	145	P	H
	*	2480	113.41	-	-	99.61	27.68	17.58	31.46	299	145	A	H
		2484.2	63.32	-10.68	74	49.5	27.7	17.58	31.46	299	145	P	H
		2483.52	53.41	-0.59	54	39.59	27.7	17.58	31.46	299	145	A	H
													H
													H
	*	2480	108.39	-	-	94.59	27.68	17.58	31.46	303	191	P	V
	*	2480	107.39	-	-	93.59	27.68	17.58	31.46	303	191	A	V
		2483.56	58.86	-15.14	74	45.04	27.7	17.58	31.46	303	191	P	V
		2483.6	48.5	-5.5	54	34.68	27.7	17.58	31.46	303	191	A	V
													V
													V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		3195	43.87	-30.13	74	71.91	29.66	9.99	67.69	-	-	P	H
		4804	54.5	-19.5	74	78.38	32.43	11.57	67.88	305	6	P	H
		4804	51.16	-2.84	54	75.04	32.43	11.57	67.88	305	6	A	H
		7206	52.7	-21.3	74	67.68	37	13.97	65.95	-	-	P	H
		9608	57.1	-16.9	74	71.74	38.46	15.94	69.04	-	-	P	H
		11385	49.53	-24.47	74	60.8	39.1	17.74	68.11	-	-	P	H
		11385	38.83	-15.17	54	50.1	39.1	17.74	68.11	-	-	A	H
		13440	51.8	-22.2	74	59.69	40.02	19.51	67.42	-	-	P	H
		13440	41.02	-12.98	54	48.91	40.02	19.51	67.42	-	-	A	H
		17940	53.4	-20.6	74	59.9	42.01	21.89	70.4	-	-	P	H
		17940	43.41	-10.59	54	49.91	42.01	21.89	70.4	-	-	A	H
													H
													H
													H
BLE													
CH 00													
2402MHz		3195	44.47	-29.53	74	72.51	29.66	9.99	67.69	-	-	P	V
		4804	54.45	-19.55	74	78.33	32.43	11.57	67.88	100	19	P	V
		4804	51.3	-2.7	54	75.18	32.43	11.57	67.88	100	19	A	V
		7206	49.44	-24.56	74	64.42	37	13.97	65.95	-	-	P	V
		9608	54.16	-19.84	74	68.8	38.46	15.94	69.04	-	-	P	V
		13500	51.95	-22.05	74	59.64	40.36	19.56	67.61	-	-	P	V
		13500	40.59	-13.41	54	48.28	40.36	19.56	67.61	-	-	A	V
		14790	52.15	-21.85	74	58.53	40.61	20.33	67.32	-	-	P	V
		14790	42.71	-11.29	54	49.09	40.61	20.33	67.32	-	-	A	V
		18000	54.01	-19.99	74	59.33	42.48	21.92	69.72	-	-	P	V
		18000	43.48	-10.52	54	48.8	42.48	21.92	69.72	-	-	A	V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 19 2440MHz		3255	44.62	-29.38	74	72.71	29.55	9.95	67.59	-	-	P	H	
		4880	55	-19	74	78.62	32.73	11.57	67.92	357	89	P	H	
		4880	52.87	-1.13	54	76.49	32.73	11.57	67.92	357	89	A	H	
		7320	52.99	-21.01	74	69.14	36.82	14.1	67.07	102	290	P	H	
		7320	49.67	-4.33	54	65.82	36.82	14.1	67.07	102	290	A	H	
		9760	58.34	-15.66	74	72.97	38.44	16.14	69.21	-	-	P	H	
		12105	49.74	-24.26	74	59.39	39.13	18.44	67.22	-	-	P	H	
		12105	38.95	-15.05	54	48.6	39.13	18.44	67.22	-	-	A	H	
		13365	51.76	-22.24	74	59.98	39.8	19.45	67.47	-	-	P	H	
		13365	40.77	-13.23	54	48.99	39.8	19.45	67.47	-	-	A	H	
		17970	52.99	-21.01	74	58.89	42.26	21.91	70.07	-	-	P	H	
		17970	43	-11	54	48.9	42.26	21.91	70.07	-	-	A	H	
														H
														H
			3255	44.49	-29.51	74	72.58	29.55	9.95	67.59	-	-	P	V
			4880	54.51	-19.49	74	78.13	32.73	11.57	67.92	191	15	P	V
			4880	52.39	-1.61	54	76.01	32.73	11.57	67.92	191	15	A	V
			7320	51.75	-22.25	74	67.9	36.82	14.1	67.07	364	360	P	V
			7320	46.63	-7.37	54	62.78	36.82	14.1	67.07	364	360	A	V
			9760	54.84	-19.16	74	69.47	38.44	16.14	69.21	-	-	P	V
			12540	50.67	-23.33	74	59.86	38.85	18.78	66.82	-	-	P	V
			12540	39.6	-14.4	54	48.79	38.85	18.78	66.82	-	-	A	V
			13470	51.29	-22.71	74	59.09	40.17	19.53	67.5	-	-	P	V
			13470	41.12	-12.88	54	48.92	40.17	19.53	67.5	-	-	A	V
		18000	52.76	-21.24	74	58.08	42.48	21.92	69.72	-	-	P	V	
		18000	43.4	-10.6	54	48.72	42.48	21.92	69.72	-	-	A	V	
													V	
													V	



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 39 2480MHz		3300	41.56	-32.44	74	69.61	29.52	9.91	67.48	-	-	P	H	
		4960	55.72	-18.28	74	79.12	33.08	11.58	68.06	335	300	P	H	
		4960	53.73	-0.27	54	77.13	33.08	11.58	68.06	335	300	A	H	
		7440	55.19	-18.81	74	71.89	36.33	14.2	67.23	179	33	P	H	
		7440	51.07	-2.93	54	67.77	36.33	14.2	67.23	179	33	A	H	
		9920	60.43	-13.57	74	75.02	38.32	16.29	69.2	-	-	P	H	
		13080	51.04	-22.96	74	60.23	39.6	19.22	68.01	-	-	P	H	
		13080	40.73	-13.27	54	49.92	39.6	19.22	68.01	-	-	A	H	
		14310	52.11	-21.89	74	58.86	40.82	20.1	67.67	-	-	P	H	
		14310	42.36	-11.64	54	49.11	40.82	20.1	67.67	-	-	A	H	
		17940	52.6	-21.4	74	59.1	42.01	21.89	70.4	-	-	P	H	
		17940	42.73	-11.27	54	49.23	42.01	21.89	70.4	-	-	A	H	
														H
			3300	42.13	-31.87	74	70.18	29.52	9.91	67.48	-	-	P	V
			4960	54.85	-19.15	74	78.25	33.08	11.58	68.06	204	12	P	V
			4960	52.1	-1.9	54	75.5	33.08	11.58	68.06	204	12	A	V
			7440	52.75	-21.25	74	69.45	36.33	14.2	67.23	199	34	P	V
			7440	47.83	-6.17	54	64.53	36.33	14.2	67.23	199	34	A	V
			9920	54.72	-19.28	74	69.31	38.32	16.29	69.2	-	-	P	V
			13320	51.47	-22.53	74	59.99	39.68	19.41	67.61	-	-	P	V
			13320	40.39	-13.61	54	48.91	39.68	19.41	67.61	-	-	A	V
			14325	51.5	-22.5	74	58.29	40.81	20.11	67.71	-	-	P	V
			14325	42.42	-11.58	54	49.21	40.81	20.11	67.71	-	-	A	V
			17970	52.71	-21.29	74	58.61	42.26	21.91	70.07	-	-	P	V
		17970	43.2	-10.8	54	49.1	42.26	21.91	70.07	-	-	A	V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE SHF		22718	37.38	-36.62	74	36.5	38.5	14.38	52	-	-	P	H	
		24580	38.24	-35.76	74	35.76	38.72	15.62	51.86	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
														H
														H
			23208	38.1	-35.9	74	36.62	38.68	14.74	51.94	-	-	P	V
			24447	38.51	-35.49	74	36.14	38.65	15.55	51.83	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		39.7	27.83	-12.17	40	39.35	19.85	1.06	32.43	-	-	P	H	
		135.73	29.74	-13.76	43.5	42.63	17.6	1.91	32.4	-	-	P	H	
		177.44	37.24	-6.26	43.5	52.36	15.1	2.19	32.41	-	-	P	H	
		285.11	34.79	-11.21	46	45.67	18.8	2.75	32.43	-	-	P	H	
		780.78	30.15	-15.85	46	29.85	27.98	4.62	32.3	-	-	P	H	
		919.49	32.07	-13.93	46	29.09	29.48	4.97	31.47	-	-	P	H	
														H
														H
														H
														H
														H
			40.67	33.39	-6.61	40	45.39	19.37	1.06	32.43	100	27	Q	V
			95.96	31.78	-11.72	43.5	46.98	15.5	1.71	32.41	-	-	P	V
			182.29	33.4	-10.1	43.5	48.68	14.9	2.22	32.4	-	-	P	V
			284.14	27.84	-18.16	46	38.74	18.78	2.75	32.43	-	-	P	V
			467.47	31.05	-14.95	46	36.82	23.25	3.54	32.56	-	-	P	V
			935.98	33.42	-12.58	46	29.46	30.26	5.03	31.33	-	-	P	V
														V
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or noise floor only. 													



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2389.17	56.76	-17.24	74	43.16	27.68	17.42	31.5	100	242	P	H	
		2389.905	47.04	-6.96	54	33.44	27.68	17.42	31.5	100	242	A	H	
	*	2402	114.71	-	-	101.1	27.66	17.44	31.49	100	242	P	H	
	*	2402	112.58	-	-	98.97	27.66	17.44	31.49	100	242	A	H	
													H	
													H	
			2372.055	56.1	-17.9	74	42.39	27.84	17.39	31.52	291	175	P	V
			2389.695	45.49	-8.51	54	31.79	27.78	17.42	31.5	291	175	A	V
	*		2402	108.19	-	-	94.5	27.74	17.44	31.49	291	175	P	V
	*		2402	106.03	-	-	92.34	27.74	17.44	31.49	291	175	A	V
													V	
												V		
BLE CH 19 2440MHz		2320.56	55.59	-18.41	74	41.89	27.93	17.3	31.53	100	214	P	H	
		2385.68	45.5	-8.5	54	31.9	27.69	17.42	31.51	100	214	A	H	
	*	2440	114.81	-	-	101.12	27.66	17.5	31.47	100	214	P	H	
	*	2440	112.53	-	-	98.84	27.66	17.5	31.47	100	214	A	H	
			2486.88	55.74	-18.26	74	41.99	27.62	17.59	31.46	100	214	P	H
			2492.4	45.82	-8.18	54	32.07	27.61	17.6	31.46	100	214	A	H
			2368.72	55.29	-18.71	74	41.57	27.85	17.39	31.52	270	177	P	V
			2370.96	44.96	-9.04	54	31.25	27.84	17.39	31.52	270	177	A	V
	*		2440	107.9	-	-	94.28	27.59	17.5	31.47	270	177	P	V
	*		2440	104.96	-	-	91.34	27.59	17.5	31.47	270	177	A	V
			2487.92	54.93	-19.07	74	41.3	27.5	17.59	31.46	270	177	P	V
		2499.6	44.89	-9.11	54	31.24	27.49	17.61	31.45	270	177	A	V	



BLE CH 39 2480MHz	*	2480	114.02	-	-	100.27	27.63	17.58	31.46	118	215	P	H
	*	2480	111.74	-	-	97.99	27.63	17.58	31.46	118	215	A	H
		2483.52	62.06	-11.94	74	48.32	27.62	17.58	31.46	118	215	P	H
		2483.52	52.85	-1.15	54	39.11	27.62	17.58	31.46	118	215	A	H
													H
													H
	*	2480	106.2	-	-	92.57	27.51	17.58	31.46	302	149	P	V
	*	2480	104.42	-	-	90.79	27.51	17.58	31.46	302	149	A	V
		2483.72	57.02	-16.98	74	43.39	27.51	17.58	31.46	302	149	P	V
		2483.64	47.62	-6.38	54	33.99	27.51	17.58	31.46	302	149	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		4804	56.25	-17.75	74	81.05	31.51	11.57	67.88	356	337	P	H	
		4804	50.48	-3.52	54	75.28	31.51	11.57	67.88	356	337	A	H	
		7206	53.44	-31.27	84.71	69.25	36.17	13.97	65.95	297	346	P	H	
		9608	58.85	-25.86	84.71	73.63	38.32	15.94	69.04	190	360	P	H	
		11355	49.07	-24.93	74	59.65	39.91	17.71	68.2	-	-	P	H	
		11355	38.63	-15.37	54	49.21	39.91	17.71	68.2	-	-	A	H	
		14490	51.12	-22.88	74	56.97	41.94	20.19	67.98	-	-	P	H	
		14490	41.76	-12.24	54	47.61	41.94	20.19	67.98	-	-	A	H	
		17985	59.6	-14.4	74	59.16	48.43	21.91	69.9	-	-	P	H	
		17985	47.99	-6.01	54	47.55	48.43	21.91	69.9	-	-	A	H	
														H
														H
			4804	52.67	-21.33	74	77.44	31.54	11.57	67.88	332	35	P	V
			4804	46.98	-7.02	54	71.75	31.54	11.57	67.88	332	35	A	V
			7206	50.45	-34.26	84.71	66.26	36.17	13.97	65.95	219	26	P	V
			7500	55.88	-18.12	74	72.01	36.46	14.22	66.81	300	2	P	V
			7500	43.02	-10.98	54	59.15	36.46	14.22	66.81	300	2	A	V
			9608	55.71	-29	84.71	70.55	38.26	15.94	69.04	104	320	P	V
			11025	49.01	-24.99	74	59.78	40.04	17.38	68.19	-	-	P	V
			11025	38.43	-15.57	54	49.2	40.04	17.38	68.19	-	-	A	V
		14490	50.67	-23.33	74	56.52	41.94	20.19	67.98	-	-	P	V	
		14490	41.76	-12.24	54	47.61	41.94	20.19	67.98	-	-	A	V	
		18000	59.19	-14.81	74	57.95	49.04	21.92	69.72	-	-	P	V	
		18000	49.58	-4.42	54	48.34	49.04	21.92	69.72	-	-	A	V	



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	56.72	-17.28	74	81.62	31.45	11.57	67.92	306	311	P	H
		4880	51.13	-2.87	54	76.03	31.45	11.57	67.92	306	311	A	H
		7320	54.27	-19.73	74	70.91	36.33	14.1	67.07	270	3	P	H
		7320	47.18	-6.82	54	63.82	36.33	14.1	67.07	270	3	A	H
		9760	59.81	-25	84.81	74.09	38.79	16.14	69.21	212	360	P	H
		10965	49.84	-24.16	74	60.7	40.17	17.32	68.35	-	-	P	H
		10965	38.44	-15.56	54	49.3	40.17	17.32	68.35	-	-	A	H
		14490	51.8	-22.2	74	57.65	41.94	20.19	67.98	-	-	P	H
		14490	41.86	-12.14	54	47.71	41.94	20.19	67.98	-	-	A	H
		18000	58.34	-15.66	74	57.32	48.82	21.92	69.72	-	-	P	H
		18000	48.9	-5.1	54	47.88	48.82	21.92	69.72	-	-	A	H
		4880	53.02	-20.98	74	77.99	31.38	11.57	67.92	399	351	P	V
		4880	47.34	-6.66	54	72.31	31.38	11.57	67.92	399	351	A	V
		7320	49.67	-24.33	74	66.24	36.4	14.1	67.07	100	357	P	V
		7320	42.01	-11.99	54	58.58	36.4	14.1	67.07	100	357	A	V
		7470	55.76	-18.24	74	72.13	36.46	14.21	67.04	300	4	P	V
		7470	42.77	-11.23	54	59.14	36.46	14.21	67.04	300	4	A	V
		9760	57.41	-27.4	84.81	71.66	38.82	16.14	69.21	100	321	P	V
		10845	49.25	-24.75	74	60.82	39.94	17.2	68.71	-	-	P	V
		10845	37.62	-16.38	54	49.19	39.94	17.2	68.71	-	-	A	V
	14490	50.99	-23.01	74	56.84	41.94	20.19	67.98	-	-	P	V	
	14490	41.76	-12.24	54	47.61	41.94	20.19	67.98	-	-	A	V	
	18000	59.5	-14.5	74	58.26	49.04	21.92	69.72	-	-	P	V	
	18000	49.13	-4.87	54	47.89	49.04	21.92	69.72	-	-	A	V	



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	57.46	-16.54	74	82.43	31.51	11.58	68.06	304	304	P	H
		4960	51.78	-2.22	54	76.75	31.51	11.58	68.06	304	304	A	H
		7440	54.59	-19.41	74	71.13	36.49	14.2	67.23	285	335	P	H
		7440	46.8	-7.2	54	63.34	36.49	14.2	67.23	285	335	A	H
		9920	59.33	-24.69	84.02	73.36	38.88	16.29	69.2	198	319	P	H
		11430	49.28	-24.72	74	59.38	40.07	17.78	67.95	-	-	P	H
		11430	38.93	-15.07	54	49.03	40.07	17.78	67.95	-	-	A	H
		14490	51.03	-22.97	74	56.88	41.94	20.19	67.98	-	-	P	H
		14490	41.76	-12.24	54	47.61	41.94	20.19	67.98	-	-	A	H
		18000	58.44	-15.56	74	57.42	48.82	21.92	69.72	-	-	P	H
		18000	48.91	-5.09	54	47.89	48.82	21.92	69.72	-	-	A	H
		4960	53.97	-20.03	74	78.99	31.46	11.58	68.06	316	35	P	V
		4960	48.15	-5.85	54	73.17	31.46	11.58	68.06	316	35	A	V
		7440	49.95	-24.05	74	66.51	36.47	14.2	67.23	210	26	P	V
		7440	42.29	-11.71	54	58.85	36.47	14.2	67.23	210	26	A	V
		7470	55.95	-18.05	74	72.32	36.46	14.21	67.04	300	10	P	V
		7470	42.75	-11.25	54	59.12	36.46	14.21	67.04	300	10	A	V
		9920	56.6	-27.42	84.02	70.63	38.88	16.29	69.2	400	332	P	V
		11400	49.58	-24.42	74	59.97	39.92	17.75	68.06	-	-	P	V
		11400	38.95	-15.05	54	49.34	39.92	17.75	68.06	-	-	A	V
	14490	52.57	-21.43	74	58.42	41.94	20.19	67.98	-	-	P	V	
	14490	41.83	-12.17	54	47.68	41.94	20.19	67.98	-	-	A	V	
	18000	59.33	-14.67	74	58.09	49.04	21.92	69.72	-	-	P	V	
	18000	49.16	-4.84	54	47.92	49.04	21.92	69.72	-	-	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 												



Emission above 18GHz

2.4GHz BLE (SHF)

BT	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		23705	38.18	-35.82	74	36.18	38.8	15.1	51.9	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23705	38.18	-35.82	74	36.18	38.8	15.1	51.9	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.
- The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		41.64	29.23	-10.77	40	41.77	18.82	1.07	32.43	-	-	P	H	
		114.39	31.48	-12.02	43.5	44.89	17.24	1.75	32.4	-	-	P	H	
		177.44	35.33	-8.17	43.5	50.45	15.1	2.19	32.41	-	-	P	H	
		305.48	31.34	-14.66	46	41.62	19.3	2.86	32.44	-	-	P	H	
		375.32	25.63	-20.37	46	33.95	20.91	3.26	32.49	-	-	P	H	
		746.83	32.98	-13.02	46	32.73	28.04	4.62	32.41	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			43.58	31.79	-8.21	40	45.41	17.75	1.07	32.44	100	123	Q	V
			90.14	27.87	-15.63	43.5	43.91	14.73	1.65	32.42	-	-	P	V
			176.47	34.43	-9.07	43.5	49.51	15.15	2.18	32.41	100	223	Q	V
			261.83	27.87	-18.13	46	37.7	19.94	2.64	32.41	-	-	P	V
			636.25	29.66	-16.34	46	31.66	26.5	4.11	32.61	-	-	P	V
			750.71	32.28	-13.72	46	31.95	28.1	4.63	32.4	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or noise floor only.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Fu Chen and Daniel Lee	Temperature :	20~23°C
		Relative Humidity :	42~47%

Note symbol

-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Horizontal	Fundamental
Peak	<p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>
Avg.	<p>Site : 03CH02-CA Condition : AV6_BE_54 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : AV6_54 3m HORN_02113_220622 HORIZONTAL</p>

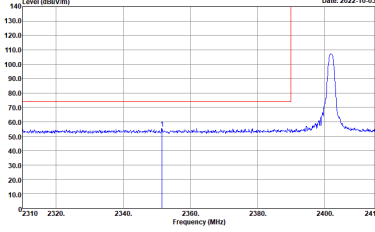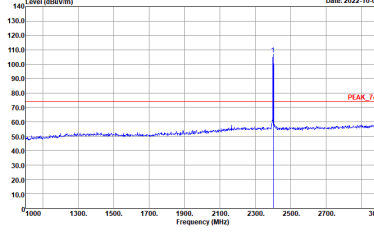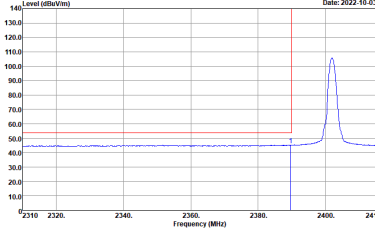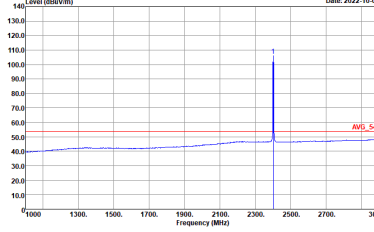

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A sharp peak is visible at approximately 2402 MHz, reaching a level of about 110 dBuV/m. A red horizontal line is drawn at approximately 75 dBuV/m. The plot is dated 2022-10-03.</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A sharp peak is visible at approximately 2402 MHz, reaching a level of about 110 dBuV/m. A red horizontal line is drawn at approximately 75 dBuV/m and labeled 'PEAK_74'. The plot is dated 2022-10-03.</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical Average. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2415 MHz. A peak is visible at approximately 2402 MHz, reaching a level of about 100 dBuV/m. A red horizontal line is drawn at approximately 75 dBuV/m. The plot is dated 2022-10-03.</p> <p>Site : 03CH02-CA Condition : AV6_BE_54 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Average. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A peak is visible at approximately 2402 MHz, reaching a level of about 100 dBuV/m. A red horizontal line is drawn at approximately 75 dBuV/m and labeled 'AVG_54'. The plot is dated 2022-10-03.</p> <p>Site : 03CH02-CA Condition : AV6_54 3m HORN_02113_220622 VERTICAL</p>

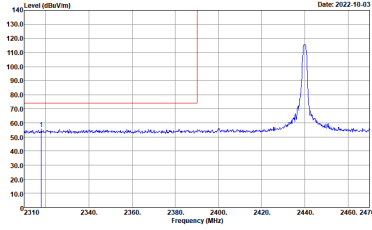
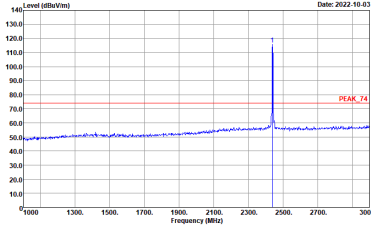
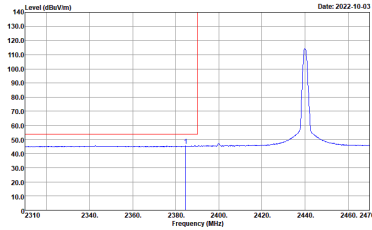
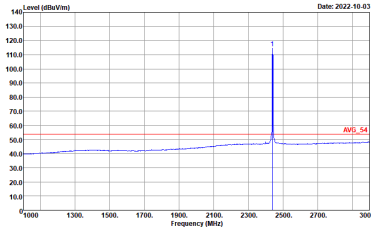


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz. The peak level is approximately 115 dBm/1m.</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz. The peak level is approximately 115 dBm/1m, labeled as PEAK_74.</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz. The peak level is approximately 115 dBm/1m.</p> <p>Site : 03CH02-CA Condition : AV6_BE_54 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz. The peak level is approximately 115 dBm/1m, labeled as AV6_54.</p> <p>Site : 03CH02-CA Condition : AV6_54 3m HORN_02113_220622 HORIZONTAL</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	<p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 HORIZONTAL</p>	Left blank
Avg.	<p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN_02113_220622 HORIZONTAL</p>	Left blank

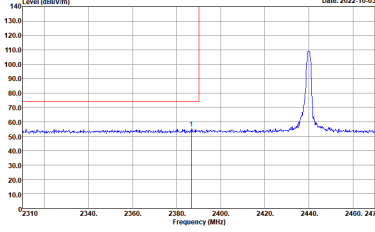
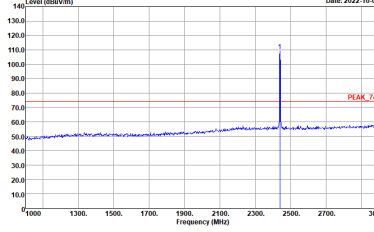
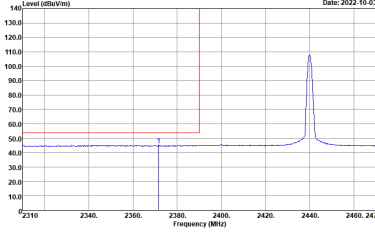
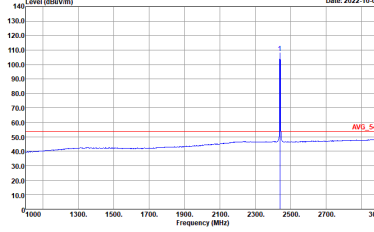


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz. The plot title is 'Date: 2022-10-03'.</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz. The plot title is 'Date: 2022-10-03'.</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz. The plot title is 'Date: 2022-10-03'.</p> <p>Site : 03CH02-CA Condition : AV6_BE_54 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2440 MHz. The plot title is 'Date: 2022-10-03'.</p> <p>Site : 03CH02-CA Condition : AV6_54 3m HORN_02113_220622 VERTICAL</p>



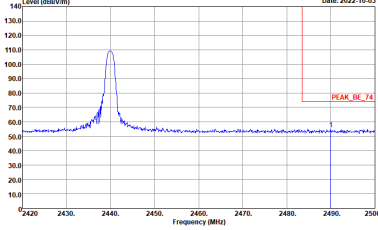
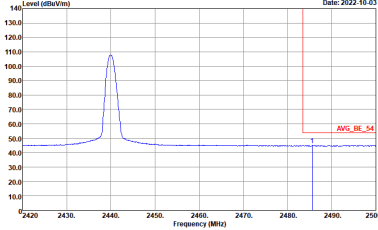


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 VERTICAL</p>	Left blank
Avg.	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN_02113_220622 VERTICAL</p>	Left blank

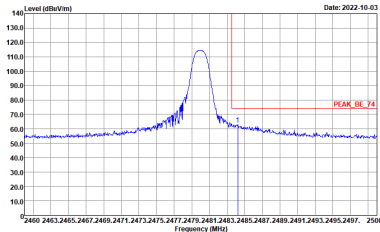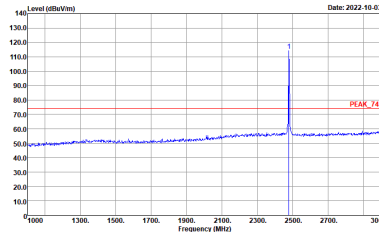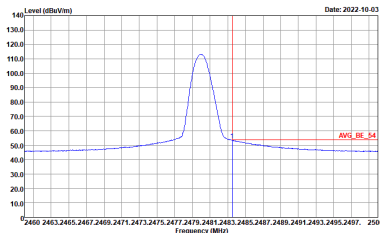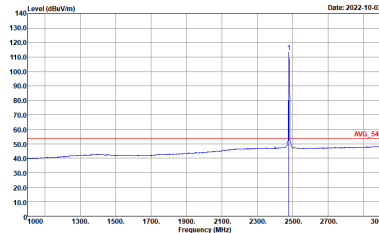

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Date: 2022-10-03</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Date: 2022-10-03</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>
Avg.	 <p>Date: 2022-10-03</p> <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Date: 2022-10-03</p> <p>Site : 03CH02-CA Condition : AVG_54 3m HORN_02113_220622 HORIZONTAL</p>

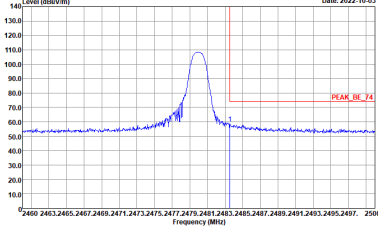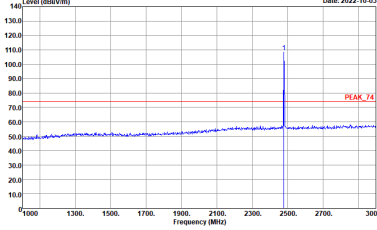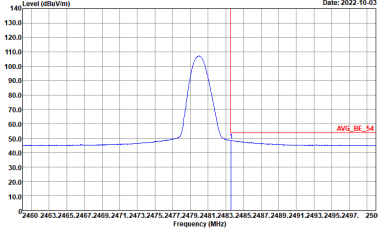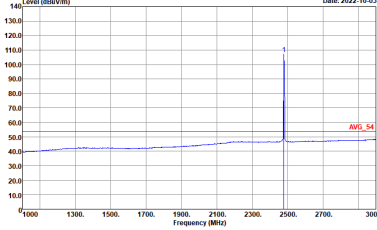

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 110 dBuV/m. A red vertical line marks the peak, and a red horizontal line indicates the level. The label 'PEAK_BE_74' is present.</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 110 dBuV/m. A red vertical line marks the peak, and a red horizontal line indicates the level. The label 'PEAK_74' is present.</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A peak is visible at 2480 MHz. A red vertical line marks the peak, and a red horizontal line indicates the average level. The label 'AVG_BE_54' is present.</p> <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN_02113_220622 VERTICAL</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A sharp peak is visible at 2480 MHz. A red vertical line marks the peak, and a red horizontal line indicates the average level. The label 'AVG_54' is present.</p> <p>Site : 03CH02-CA Condition : AVG_54 3m HORN_02113_220622 VERTICAL</p>



2.4GHz 2400~2483.5MHz





BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
Peak Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>

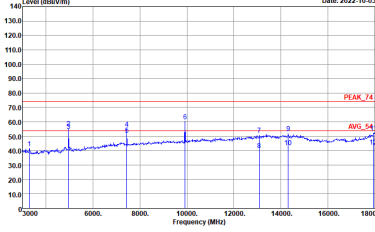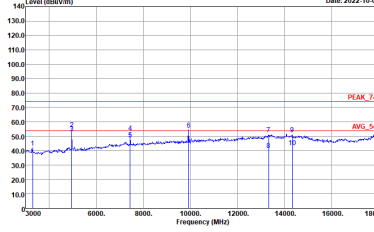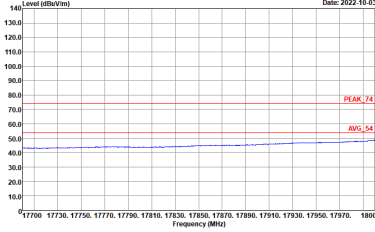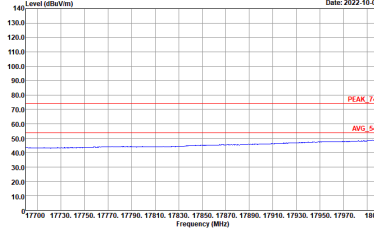

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>
Avg.	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN_02113_220622 VERTICAL</p>





Emission after 18GHz
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 1m SHF_HORN_842_220816 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 1m SHF_HORN_842_220816 VERTICAL</p>



Emission below 1GHz
2.4GHz BLE (LF)



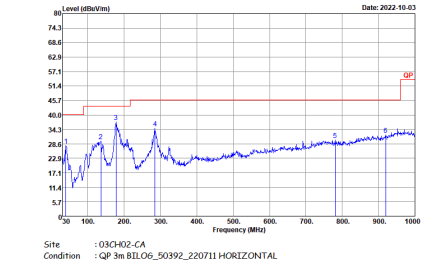
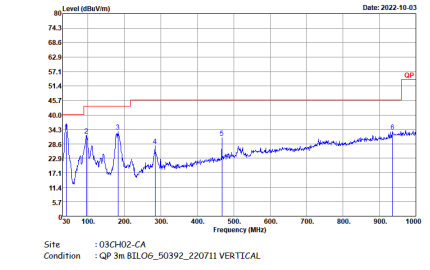
BLE	2.4GHz 2400~2483.5MHz	
BLE LF		
Horizontal		Vertical
QP / Peak	 <p>Site : 03CH02-CA Condition : QP 3m BIL06_50392_220711 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : QP 3m BIL06_50392_220711 VERTICAL</p>







<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

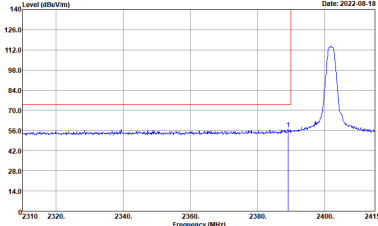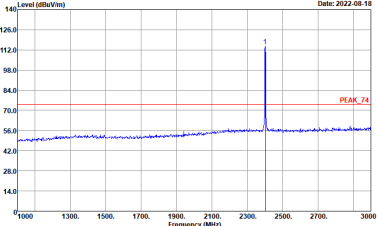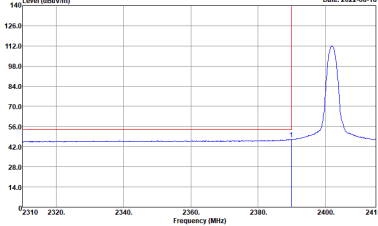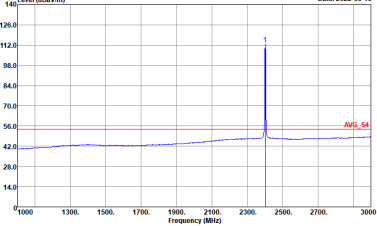BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>

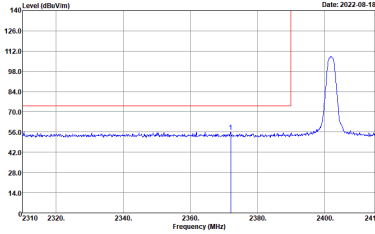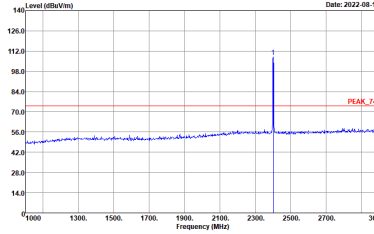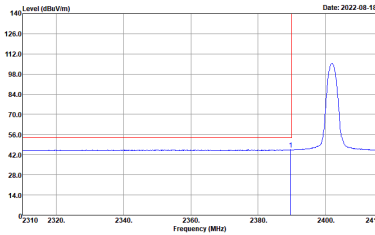
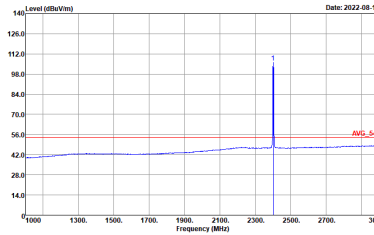


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	<p>Date: 2022-08-18</p> <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2022-08-18</p> <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2022-08-18</p> <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	<p>Date: 2022-08-18</p> <p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>

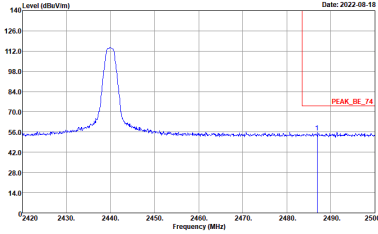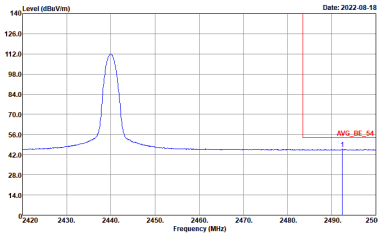

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Vertical	Fundamental
Peak	<p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	<p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	<p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	Left blank

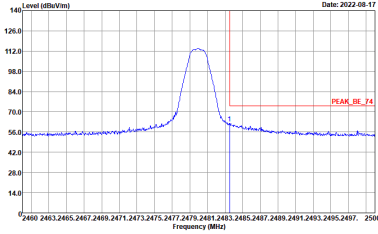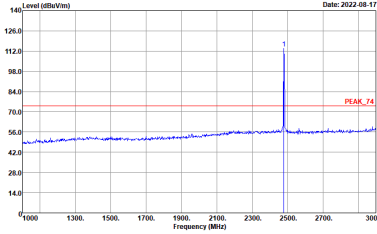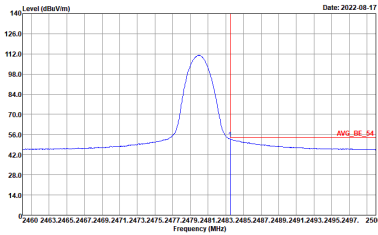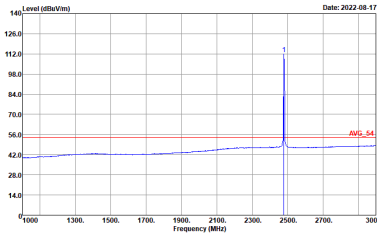

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>

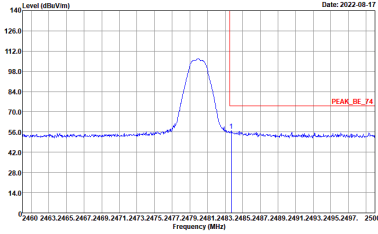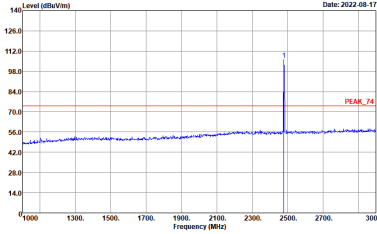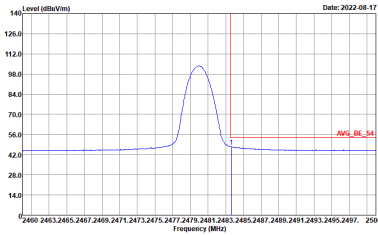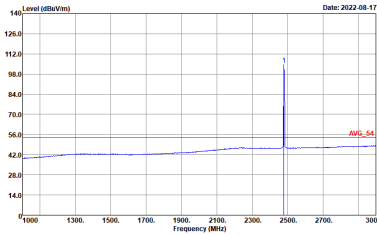

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
	Vertical	Fundamental
Peak	 <p>Site : 03CH02-CA Condition : PEAK_BE_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH02-CA Condition : AVG_BE_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>	 <p>Site : 03CH02-CA Condition : AVG_54 3m HORN-HF_01895_2021 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz





BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p>Peak</p> <p>Avg.</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>
<p>Avg.</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>

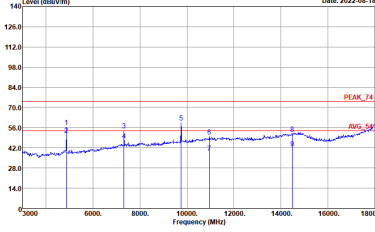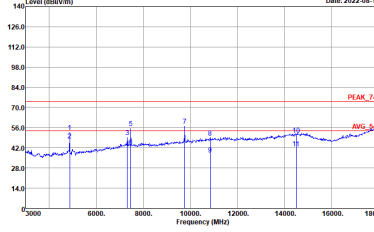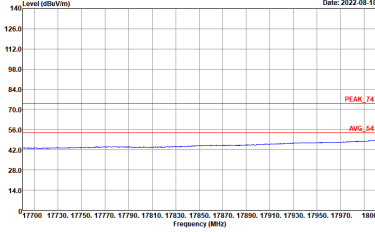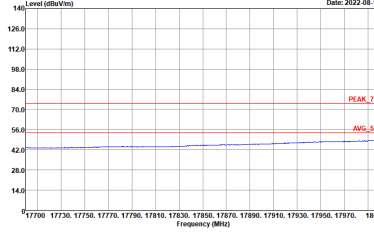

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>
<p>Avg.</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>

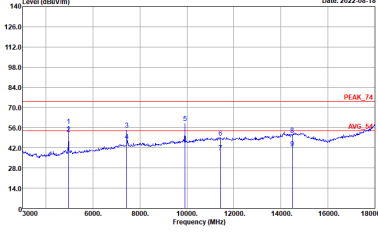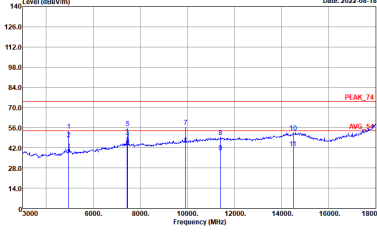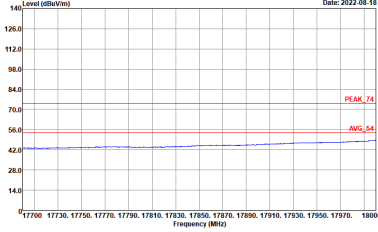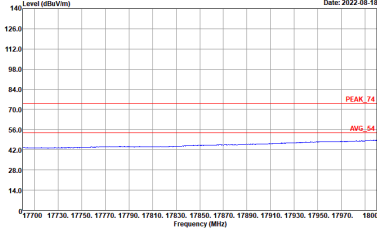

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>
<p>Avg.</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : PEAK_74 3m HORN-HF_01895_2021 VERTICAL</p>





Emission after 18GHz
2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH02-CA Condition : PEAK_74 1m SHF_HORN_841_210826 VERTICAL</p>	<p>Site : 03CH02-CA Condition : PEAK_74 1m SHF_HORN_841_210826 HORIZONTAL</p>



Emission below 1GHz
2.4GHz BLE (LF)

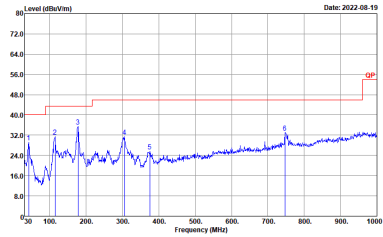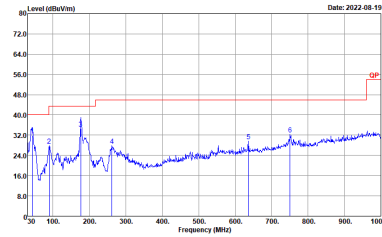
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH02-CA Condition : QP 3m BIL06_50392_220711 HORIZONTAL</p>	 <p>Site : 03CH02-CA Condition : QP 3m BIL06_50392_220711 VERTICAL</p>



Appendix E. Duty Cycle Plots

<1Mbps>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	83.71	2096	0.48	1kHz

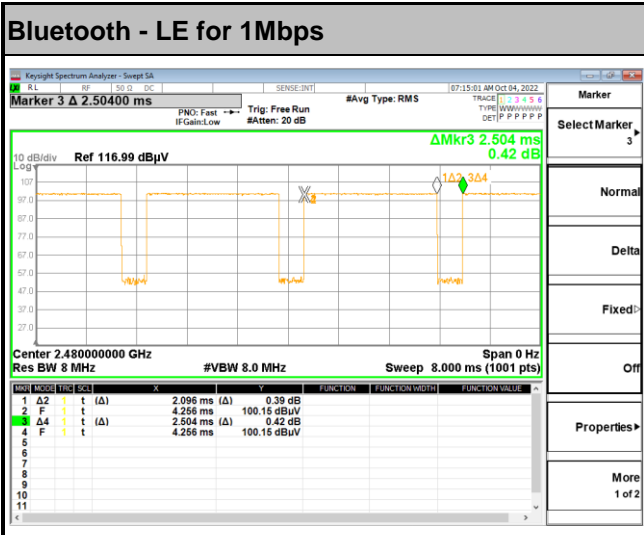

<2Mbps>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 2Mbps	56.53	1060	0.94	1kHz

