

RF MEASUREMENT REPORT

FCC ID: XMR2022RG520NNA
Application: Quectel Wireless Solutions Co., Ltd
Product: 5G Sub-6 GHz LGA Module
Model No.: RG520N-NA
Brand Name: Quectel
FCC Rule Part(s): Part 96
Test Procedure(s): ANSI C63.26: 2015
Result: Complies
Test Date: 2022-04-26 ~ 2022-06-15

Reviewed By:

Sunny Sun

Sunny Sun

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2204RSU037-U5	Rev. 01	Initial Report	2022-08-07	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification	6
1.6. Test Methodology	6
2. Test Configuration	7
2.1. Test System Connection Diagram.....	7
2.2. Test Environment Condition	7
3. Measuring Instrument	8
4. Decision Rules and Measurement Uncertainty	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty	10
5. Test Result	11
5.1. Summary.....	11
5.2. Occupied Bandwidth Measurement	12
5.2.1. Test Limit	12
5.2.2. Test Procedure	12
5.2.3. Test Setting	12
5.2.4. Test Setup	12
5.2.5. Test Result	12
5.3. Frequency Stability Measurement	13
5.3.1. Test Limit	13
5.3.2. Test Procedure	13
5.3.3. Test Setting	13
5.3.4. Test Setup	14
5.3.5. Test Result	14
5.4. Equivalent Isotropically Radiated Power Measurement	15
5.4.1. Test Limit	15
5.4.2. Test Procedure	15
5.4.3. Test Setting	15
5.4.4. Test Setup	16
5.4.5. Test Result	16

5.5.	Band Edge Measurement	17
5.5.1.	Test Limit	17
5.5.2.	Test Procedure	17
5.5.3.	Test Setting	17
5.5.4.	Test Setup	18
5.5.5.	Test Result	18
5.6.	Conducted Spurious Emissions Measurement.....	19
5.6.1.	Test Limit	19
5.6.2.	Test Procedure	19
5.6.3.	Test Setting	19
5.6.4.	Test Setup	20
5.6.5.	Test Result	20
5.7.	Radiated Spurious Emissions Measurement.....	21
5.7.1.	Test Limit	21
5.7.2.	Test Procedure	21
5.7.3.	Test Setting	21
5.7.4.	Test Setup	21
5.7.5.	Test Result	22
5.8.	End User Device Additional Requirement (CBSD Protocol) Measurement.....	23
5.8.1.	Test Limit	23
5.8.2.	Test Procedure	23
5.8.3.	Test Setting	23
5.8.4.	Test Result	23
Appendix A - Test Result	24	
A.1	Occupied Bandwidth Test Result.....	24
A.2	Frequency Stability Test Result	32
A.3	Equivalent Isotropically Radiated Power Test Result	33
A.4	Band Edge Test Result	45
A.5	Conducted Spurious Emissions Test Result	65
A.6	Radiated Spurious Emissions Test Result	73
A.7	End User Device Additional Requirement (CBSD Protocol) Test Result	74
Appendix B - Test Setup Photograph	76	
Appendix C - EUT Photograph	77	

1. General Information

1.1. Applicant

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.2. Manufacturer

Quectel Wireless Solutions Co., Ltd

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

1.3. Testing Facility

<input checked="" type="checkbox"/>	<p>Test Site - MRT Suzhou Laboratory</p> <p>Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China</p> <p>Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China</p> <p>Laboratory Accreditations</p> <p>A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001</p> <p>VCCI: <input type="checkbox"/>R-20025 <input type="checkbox"/>G-20034 <input type="checkbox"/>C-20020 <input type="checkbox"/>T-20020 <input type="checkbox"/>R-20141 <input type="checkbox"/>G-20134 <input type="checkbox"/>C-20103 <input type="checkbox"/>T-20104</p>
<input type="checkbox"/>	<p>Test Site - MRT Shenzhen Laboratory</p> <p>Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China</p> <p>Laboratory Accreditations</p> <p>A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105</p>
<input type="checkbox"/>	<p>Test Site - MRT Taiwan Laboratory</p> <p>Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)</p> <p>Laboratory Accreditations</p> <p>TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261</p>

1.4. Product Information

Product Name	5G Sub-6 GHz LGA Module
Model No.	RG520N-NA
Brand Name	Quectel
IMEI	Conducted Measurement 1: 863109050007421 Conducted Measurement 2: 863109050005151 Radiated Measurement: 863109050007306
E-UTRA Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
5G NR Band	n2, n5, n7, n12, n13, n14, n25, n26, n30, n38, n41, n66, n71, n77, n78
Operating Temperature	-30 ~ 75 °C
Power Type	3.3 ~ 4.4Vdc, typical 3.8Vdc
Remark: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.	

1.5. Radio Specification

TDD Tx & Rx Frequency Range	Band 48: 3550 ~ 3700 MHz
Modulation	UL up to 256QAM, DL up to 256QAM
Device Type	End User Device
Remark: For other features of this EUT, test report will be issued separately.	


1.6. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part Part 96
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- FCC KDB 940660 D01 v03 Part 96 CBRS Eqpt
- WINNF-TS-0122 V1.0.2: Test and Certification for Citizens Broadband Radio Service (CBRS);
Conformance and Performance Test Technical Specification; CBS/D/DP as Unit Under Test (UUT)

2. Test Configuration

2.1. Test System Connection Diagram

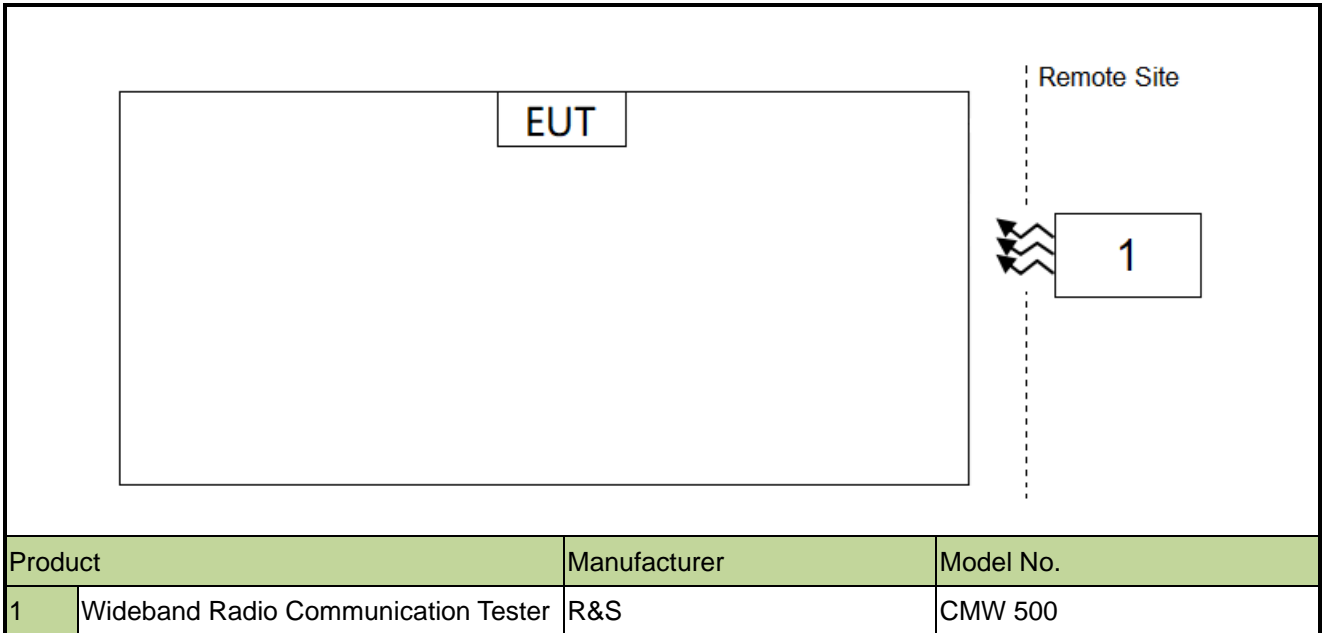

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2022-12-09	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2023-06-01	SIP-SR1
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2022-10-31	SIP-SR1
Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022-09-07	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022-10-10	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2023-06-01	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2023-01-06	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06903	1 year	2022-11-23	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022-11-23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	N/A	N/A	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	N/A	N/A	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	N/A	N/A	SIP-SR1
FR1 Switching Unit	Keysight	C8880A	MRTSUE06908	N/A	N/A	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022-12-29	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2023-02-27	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	N/A	N/A	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06954	3 years	2024-06-02	SIP-SR1
Millimeter-Wave Transceiver for 5G	Keysight	M1740A	MRTSUE06955	3 years	2024-06-02	SIP-SR1
5G Wireless Test Platform	Keysight	E7515B	MRTSUE06956	1 year	2023-06-01	SIP-SR1
Common Interface Unit	Keysight	E7770A	MRTSUE06957	N/A	N/A	SIP-SR1
USB Power Sensor	Keysight	U8488A	MRTSUE06958	1 year	2022-07-08	SIP-SR1
Directional Coupler	ar	DC7200A	MRTSUE06147	N/A	N/A	SIP
Directional Coupler	ar	DC6080A	MRTSUE06148	N/A	N/A	SIP-SR1
Directional Coupler	narda	4226-10	MRTSUE06564	1 year	2022-10-11	SIP-SR1
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06846	1 year	2023-06-02	SIP-SR1
Directional Coupler	PULSAR	CS10-23-436/20	MRTSUE06848	1 year	2023-06-02	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11055	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11056	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11057	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11058	1 year	2023-06-09	SIP-SR1
Attenuator	MVE	MVE2213	MRTSUE11059	1 year	2023-06-09	SIP-SR1

Attenuator	MVE	MVE2213	MRTSUE11060	1 year	2023-06-09	SIP-SR1
------------	-----	---------	-------------	--------	------------	---------

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	Conducted	Pass	Section 5.2
2.1055	Frequency Stability		Pass	Section 5.3
96.41(b)	Equivalent Isotropic Radiated Power		Pass	Section 5.4
2.1051 96.41(e)	Spurious Emissions; Band Edge Emissions		Pass	Section 5.5, 5.6
2.1053, 96.41(e)	Spurious Emissions	Radiated	Pass	Section 5.7
96.47	End User Device Additional Requirements (CBSD Protocol)		Pass	Section 5.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Occupied Bandwidth, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

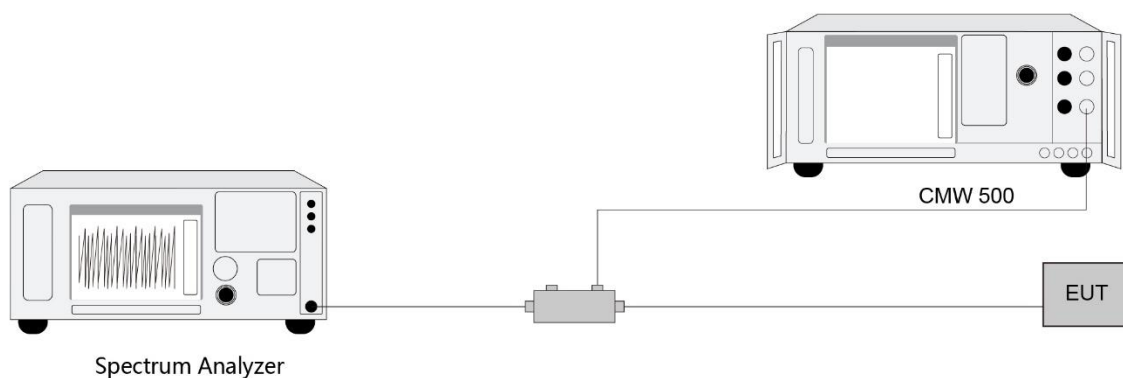

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

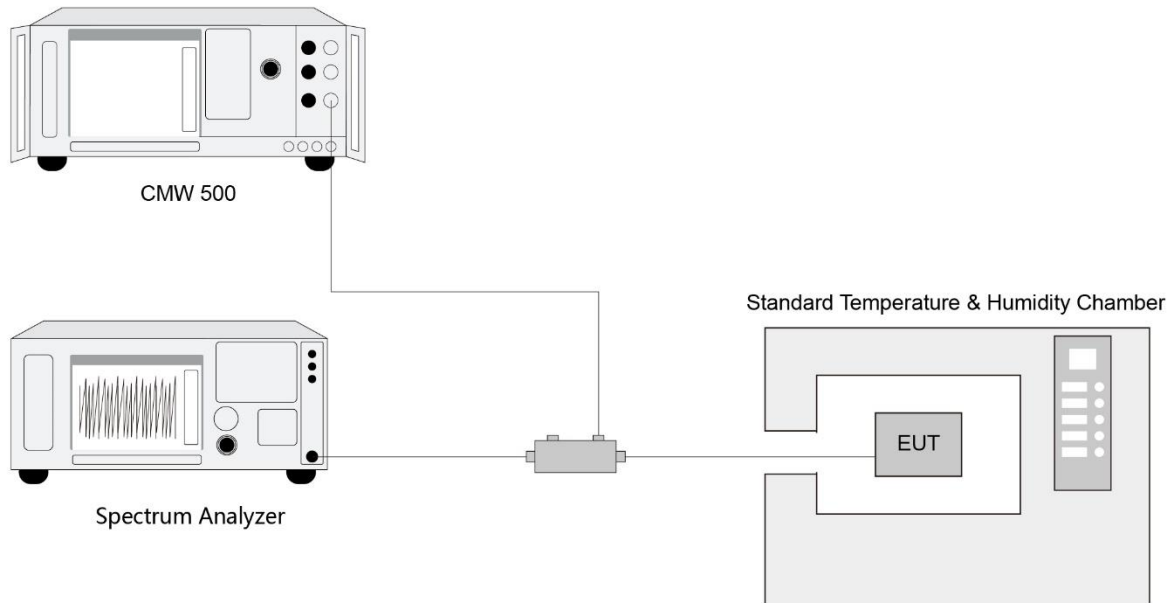

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Equivalent Isotropically Radiated Power Measurement

5.4.1. Test Limit

The maximum effective isotropic radiated power (EIRP) End User Device is 23dBm/10MHz

5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.4.2 & 5.2.5.5

5.4.3. Test Setting

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT can not be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to $\pm 2\%$).

- a) Set span to 2 × to 3 × the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- e) Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ for single sweep (automation-compatible) measurement.
- f) Detector = power averaging (rms).
- g) Set sweep trigger to “free run.”
- h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
- i) Using the marker function to identify the maximum PSD.
- j) Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T \tag{1}$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

5.4.4. Test Setup

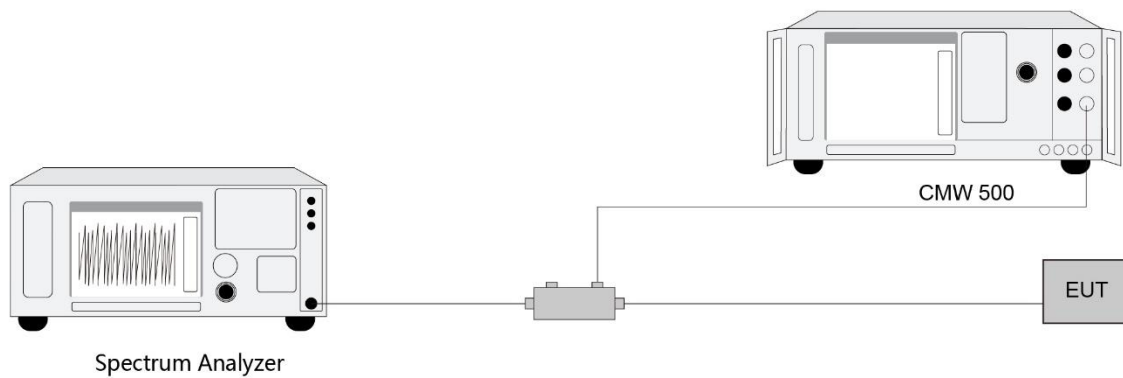

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Band Edge Measurement

5.5.1. Test Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz. The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7


5.5.3. Test Setting

1. Set the analyzer frequency to low, middle, high channel.
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3*RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time,

increase the sweep time.

- 9. Used power integration when using a measurement bandwidth smaller than the specified bandwidth.

5.5.4. Test Setup

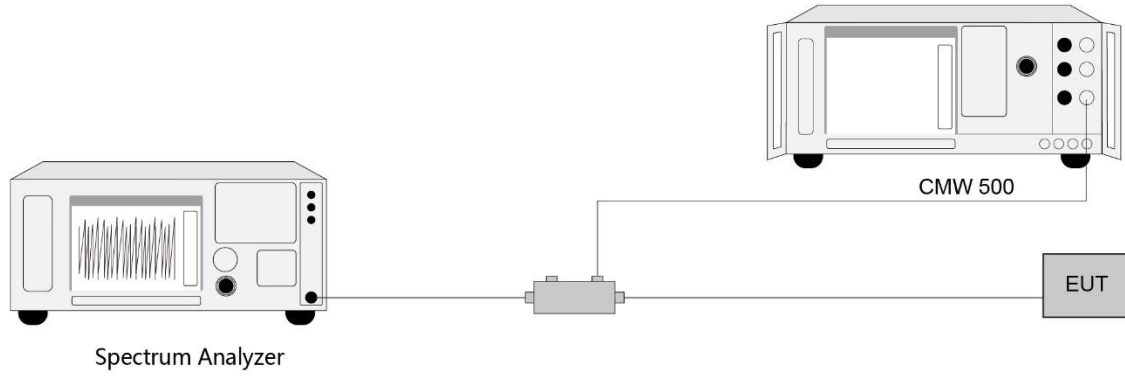

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Conducted Spurious Emissions Measurement

5.6.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

The conducted power of any emissions below 3530MHz or above 3720MHz shall not exceed -40dBm/MHz.


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW \geq 3*RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

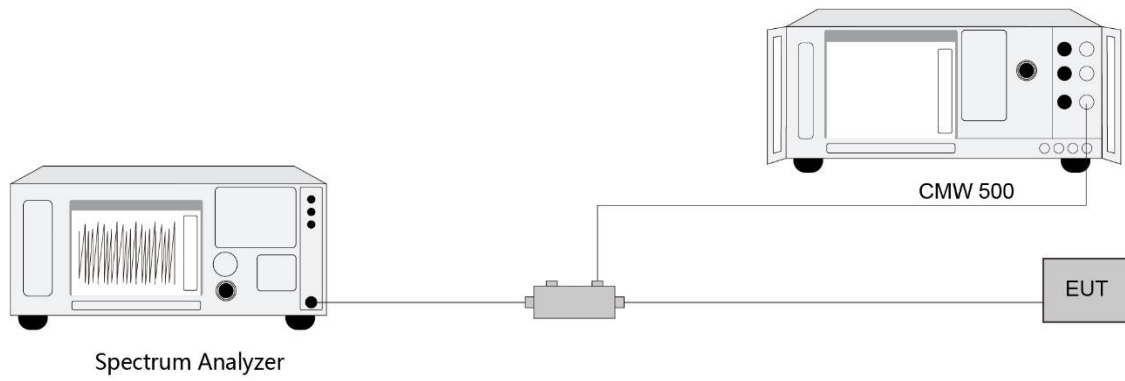

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Radiated Spurious Emissions Measurement

5.7.1. Test Limit

Out of band emissions: The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to 55.3dB μ V/m.

5.7.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.7.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.7.4. Test Setup

Below 1GHz Test Setup:

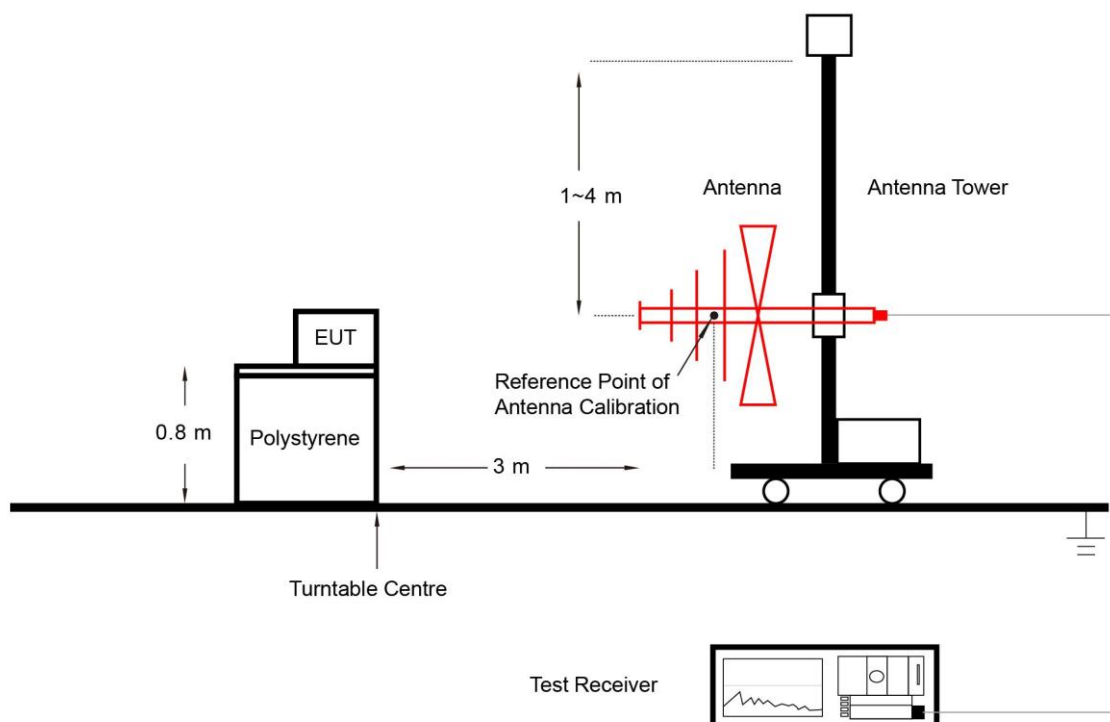

Above 1GHz Test Setup:

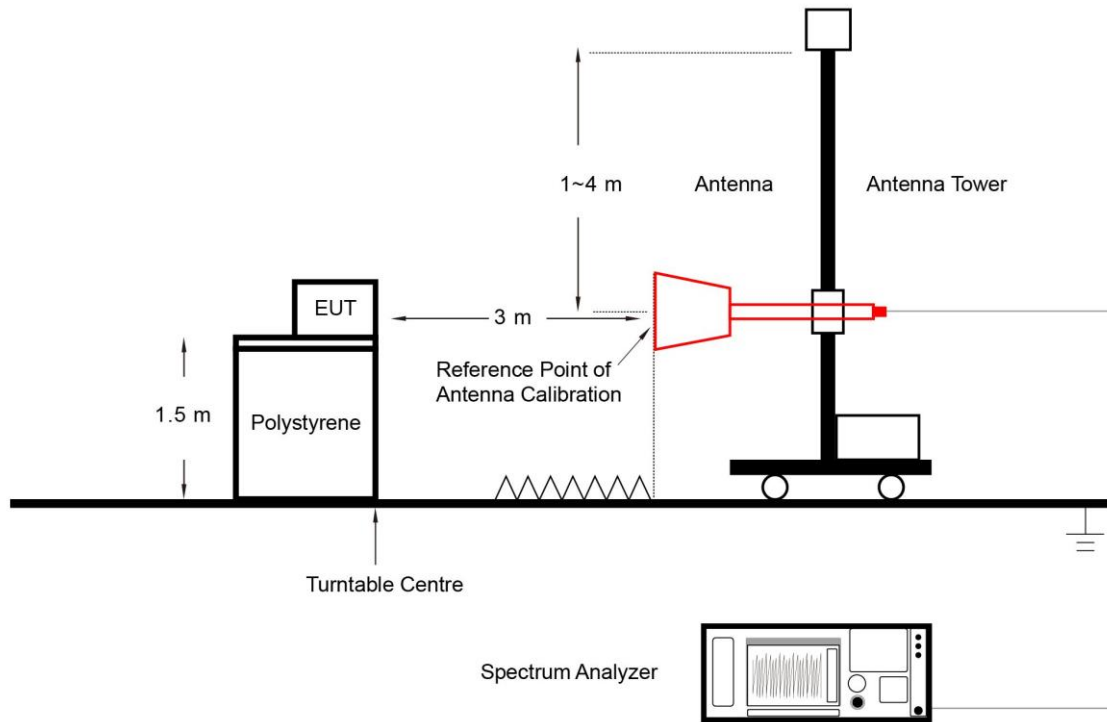

5.7.5. Test Result

Refer to Appendix A.6.

5.8. End User Device Additional Requirement (CBSD Protocol) Measurement

5.8.1. Test Limit

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by aCBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD

5.8.2. Test Procedure

KDB 940660 D01 v02, WINNF-TS-0122 V1.0.0

5.8.3. Test Setting

The EUT was connected via an RF cable to a certified CBSD (Ruckus Wireless, Inc. FCC ID: S9GQ910US00) and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.

Step 1:

- a. Setup WINNF.PT.C.HBT.1 with 3570 ~ 3590MHz and power level at 13 dBm/MHz.
- b. Enable AP service from Ruckus LTE Cloud management.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from Ruckus LTE Cloud management and check EUT stop transmission within 10s.

Step 2:

- a. Setup WINNF.PT.C.HBT.1 with 3670 ~ 3690MHz and power level at 8 dBm/MHz.
- b. Enable AP service from Ruckus LTE Cloud management.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from Ruckus LTE Cloud management and check EUT stop transmission within 10s.

5.8.4. Test Result

Refer to Appendix A.7.

Appendix A - Test Result


A.1 Occupied Bandwidth Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/12	Test Band	Band 48


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3625.0	5	4.47
		10	8.95
		15	13.42
		20	17.86
16QAM	3625.0	5	4.47
		10	8.94
		15	13.41
		20	17.86
64QAM	3625.0	5	4.47
		10	8.94
		15	13.41
		20	17.83
256QAM	3625.0	5	4.47
		10	8.95
		15	13.40
		20	17.82

99% Bandwidth - QPSK


5MHz Channel Bandwidth

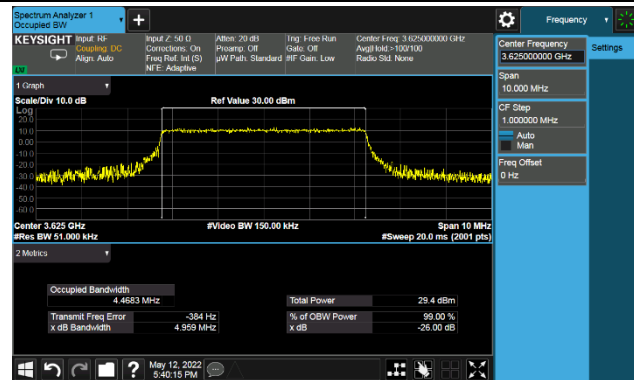


10MHz Channel Bandwidth

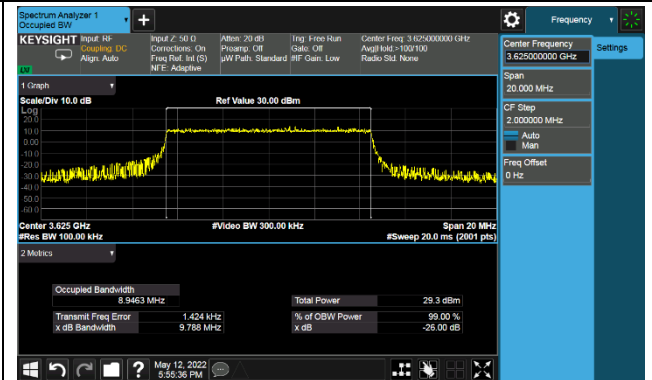

15MHz Channel Bandwidth

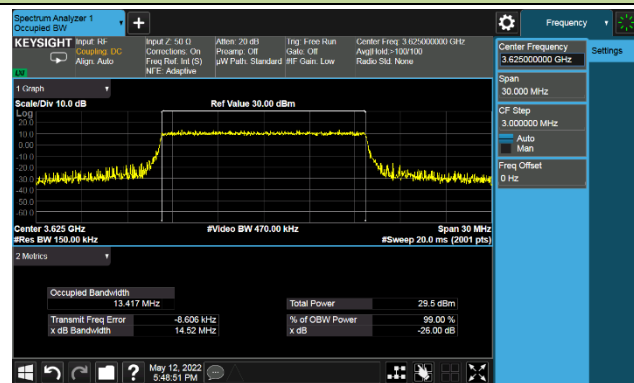


20MHz Channel Bandwidth

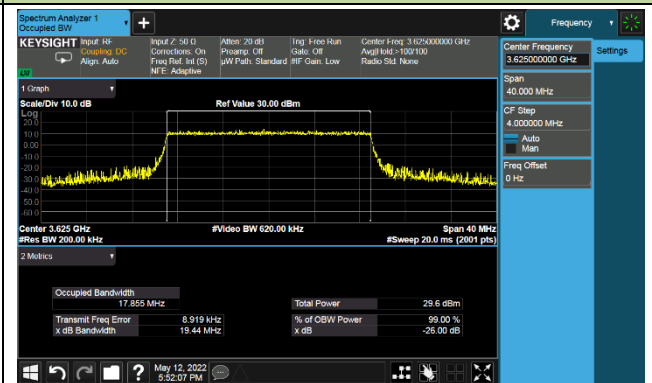


99% Bandwidth - 16QAM


5MHz Channel Bandwidth

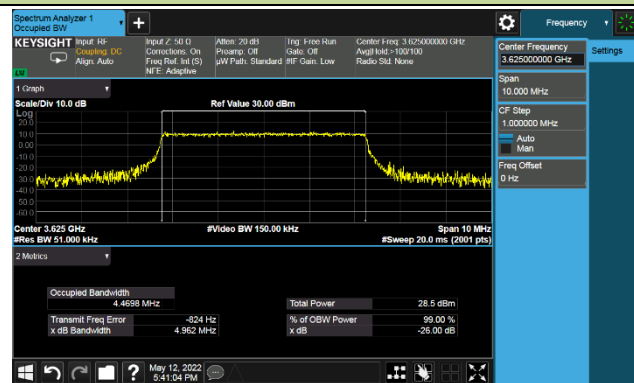


10MHz Channel Bandwidth

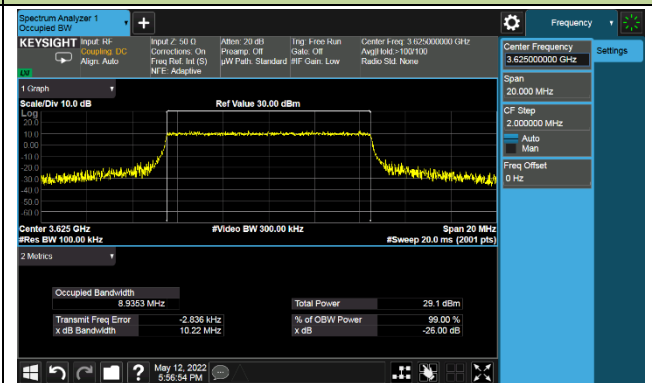

15MHz Channel Bandwidth

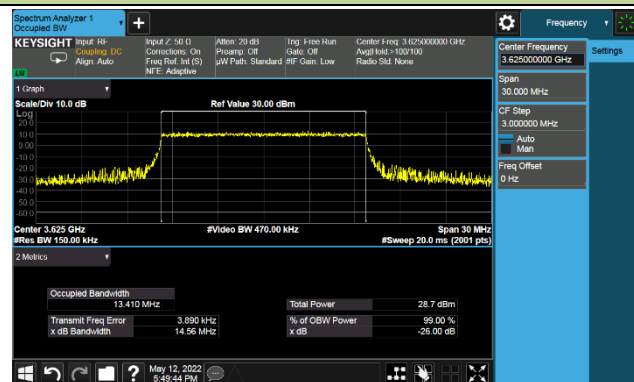


20MHz Channel Bandwidth

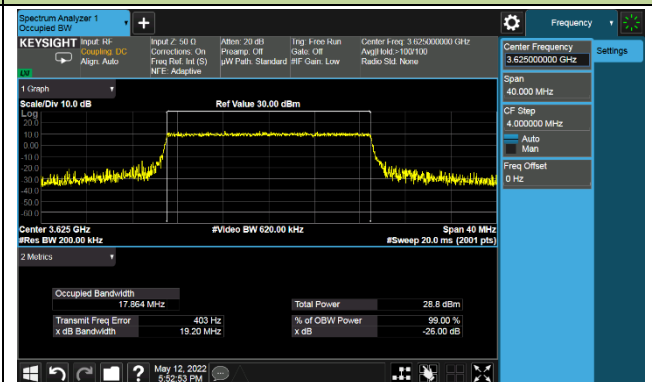


99% Bandwidth - 64QAM


5MHz Channel Bandwidth

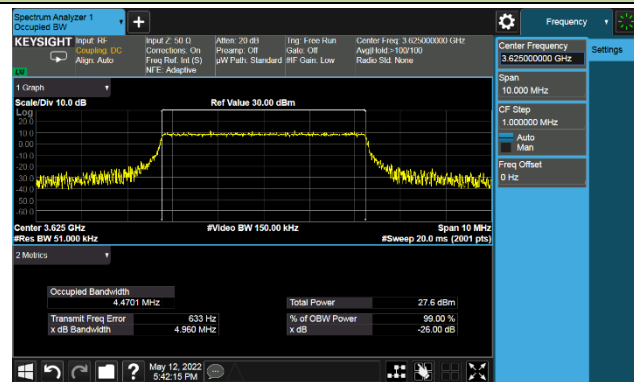


10MHz Channel Bandwidth

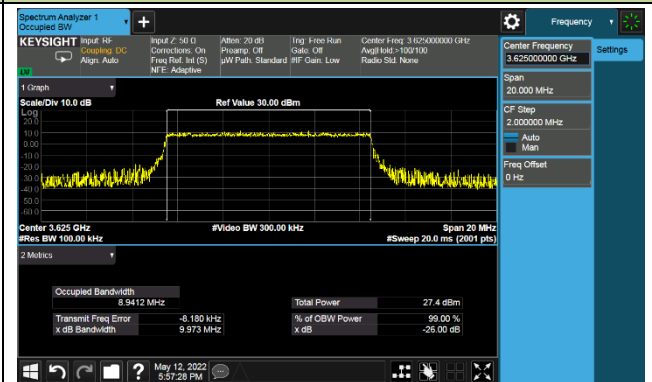

15MHz Channel Bandwidth

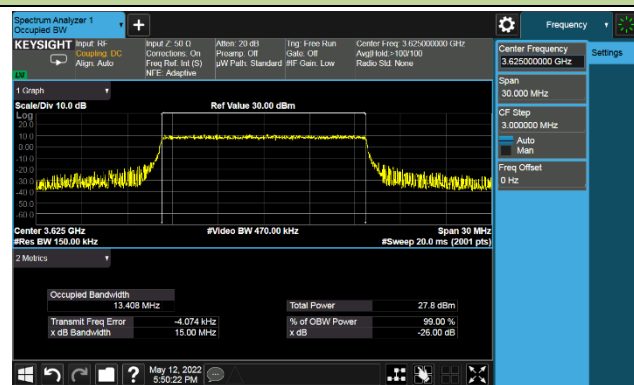


20MHz Channel Bandwidth

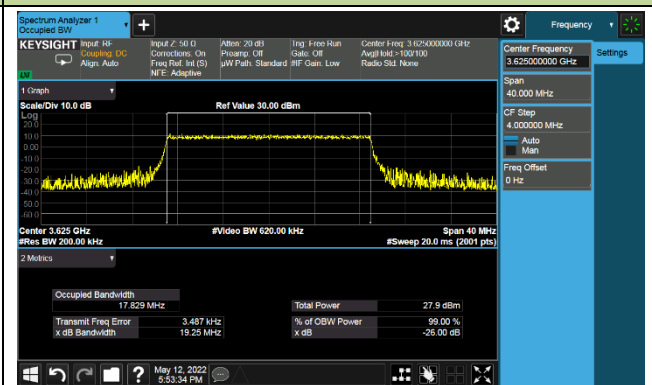


99% Bandwidth - 256QAM


5MHz Channel Bandwidth

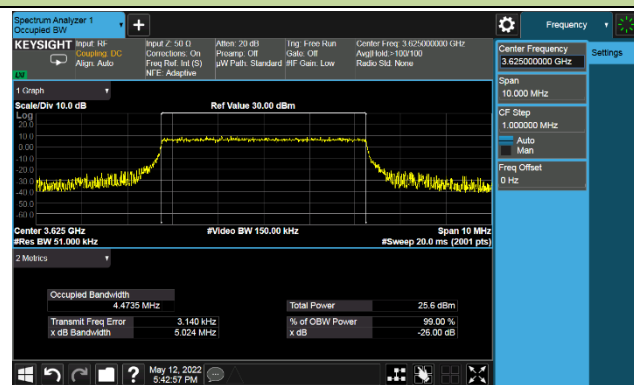


10MHz Channel Bandwidth

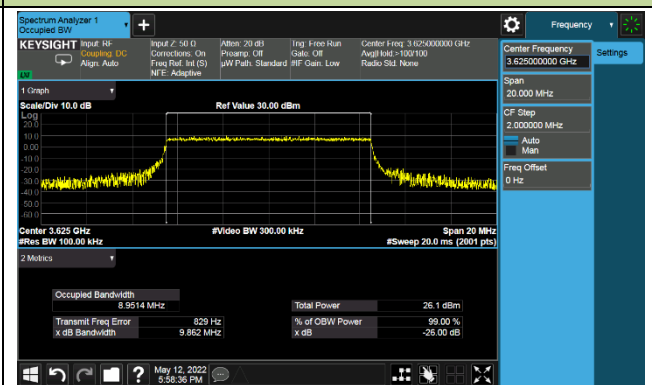

15MHz Channel Bandwidth

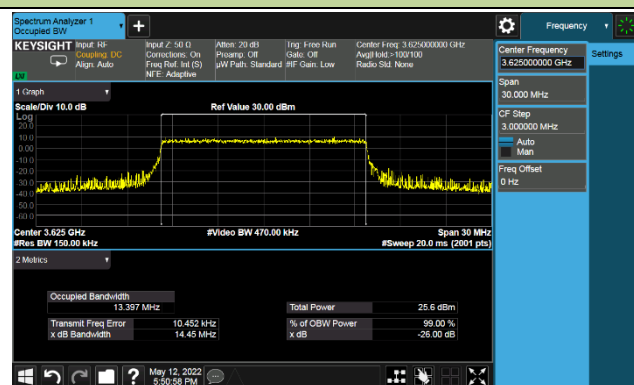

20MHz Channel Bandwidth

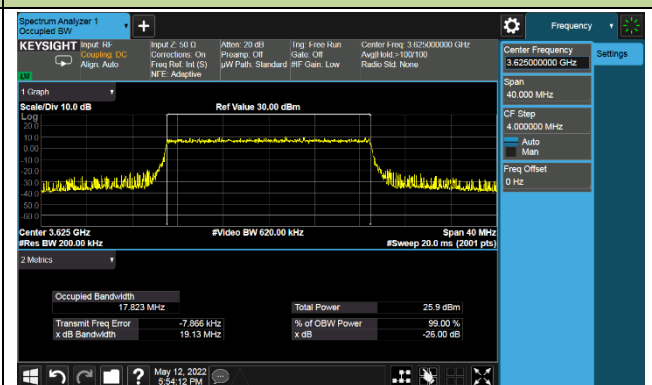


Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/10	Test Band	Intra-Band CA_48C


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3615.8+3627.5	5+20	22.51
	3622.5+3634.2	20+5	22.71
	3615.6+3630.0	10+20	27.38
	3620.1+3634.5	20+10	27.55
	3615.3+3632.4	15+20	32.27
	3617.6+3634.7	20+15	32.39
	3615.1+3634.9	20+20	37.16
16QAM	3615.8+3627.5	5+20	22.44
	3622.5+3634.2	20+5	22.73
	3615.6+3630.0	10+20	27.39
	3620.1+3634.5	20+10	27.57
	3615.3+3632.4	15+20	32.27
	3617.6+3634.7	20+15	32.37
	3615.1+3634.9	20+20	37.19
64QAM	3615.8+3627.5	5+20	22.46
	3622.5+3634.2	20+5	22.69
	3615.6+3630.0	10+20	27.39
	3620.1+3634.5	20+10	27.57
	3615.3+3632.4	15+20	32.25
	3617.6+3634.7	20+15	32.29
	3615.1+3634.9	20+20	37.24
256QAM	3615.8+3627.5	5+20	22.49
	3622.5+3634.2	20+5	22.69
	3615.6+3630.0	10+20	27.32
	3620.1+3634.5	20+10	27.52
	3615.3+3632.4	15+20	32.27
	3617.6+3634.7	20+15	32.33
	3615.1+3634.9	20+20	37.14

99% Bandwidth - QPSK


5+20MHz Channel Bandwidth

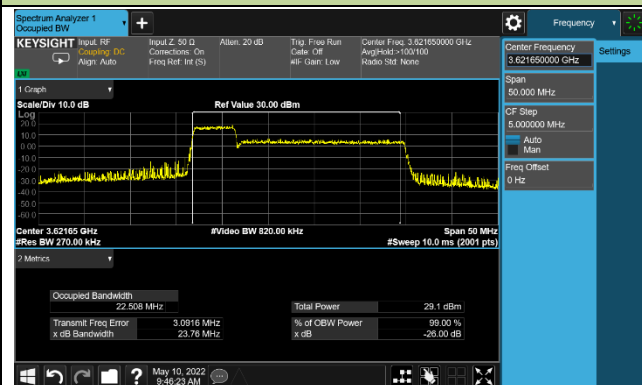


20+5MHz Channel Bandwidth

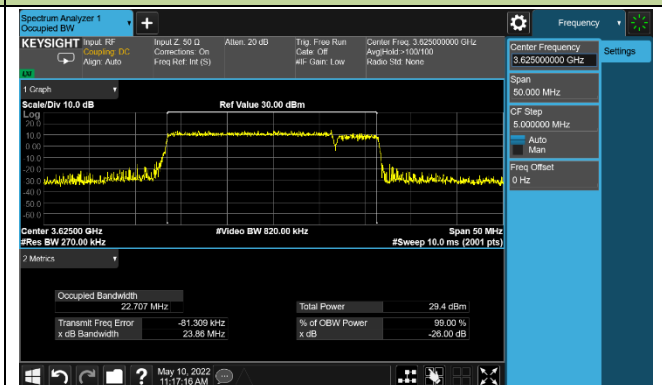


10+20MHz Channel Bandwidth

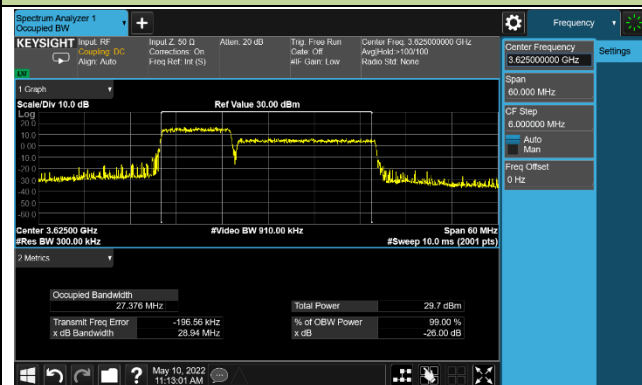


20+10MHz Channel Bandwidth

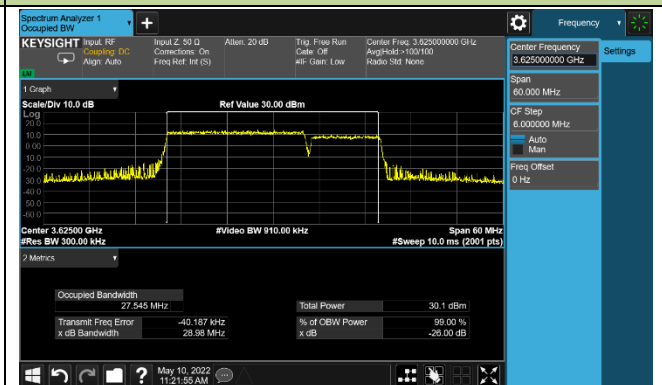


15+20MHz Channel Bandwidth

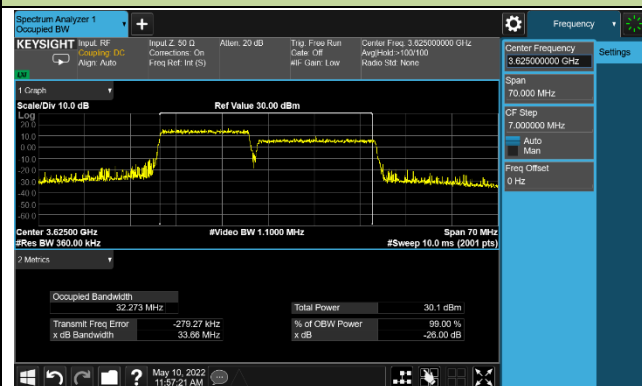

20+15MHz Channel Bandwidth

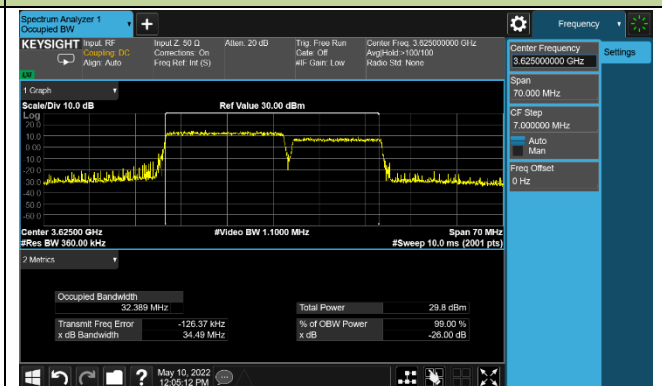


20+20MHz Channel Bandwidth

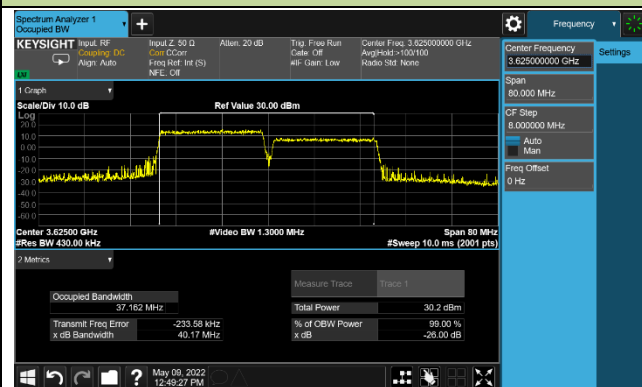


99% Bandwidth - 16QAM


5+20MHz Channel Bandwidth

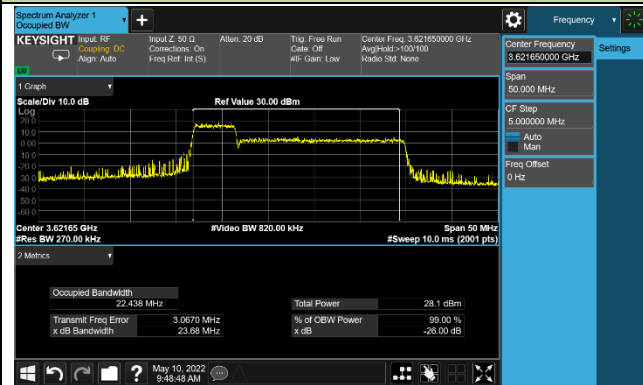


20+5MHz Channel Bandwidth

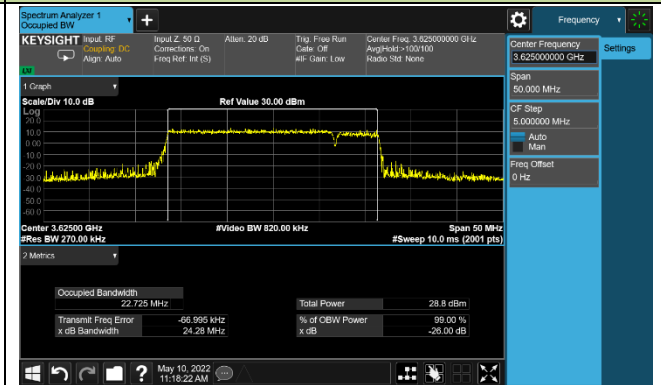


10+20MHz Channel Bandwidth

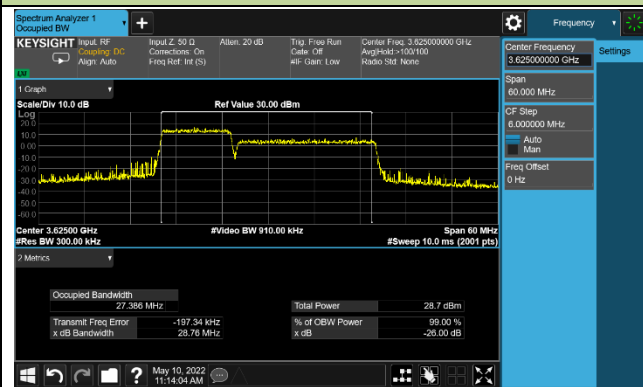


20+10MHz Channel Bandwidth

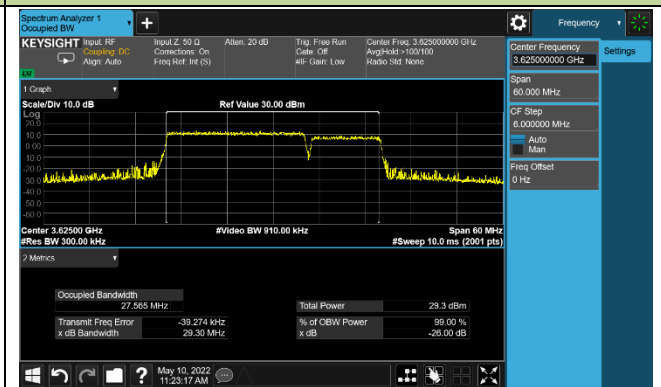


15+20MHz Channel Bandwidth

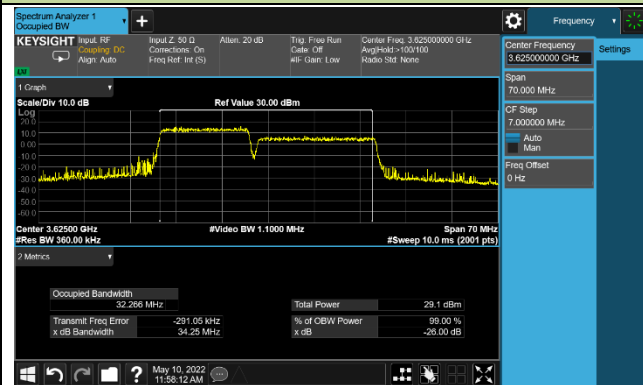

20+15MHz Channel Bandwidth

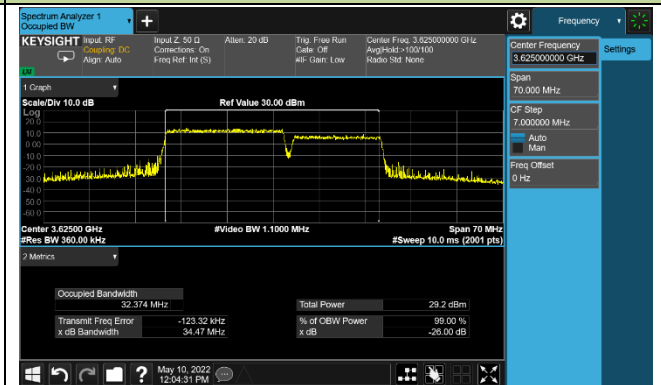


20+20MHz Channel Bandwidth

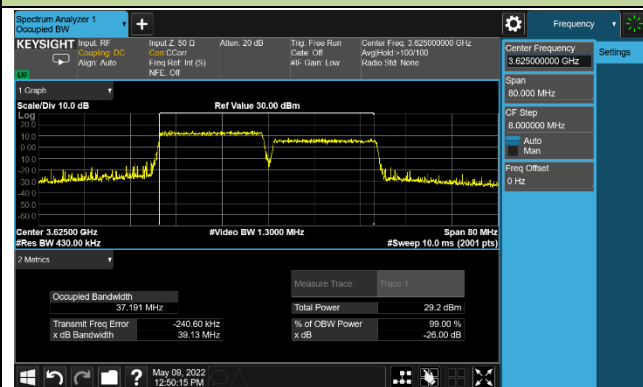


99% Bandwidth - 64QAM


5+20MHz Channel Bandwidth

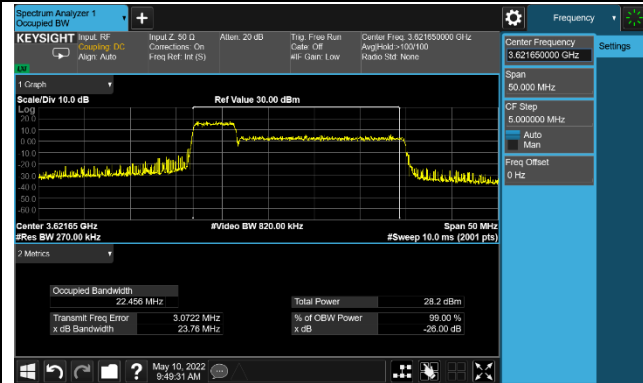


20+5MHz Channel Bandwidth

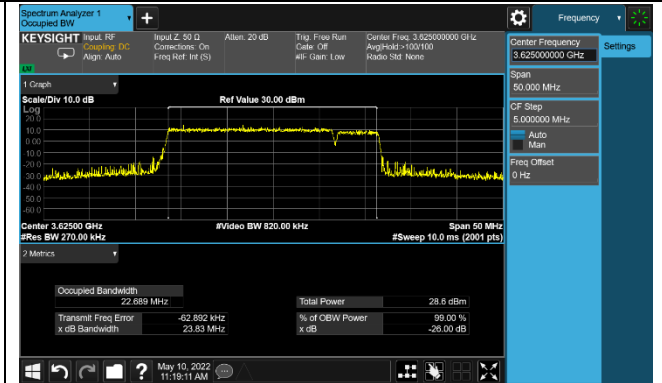


10+20MHz Channel Bandwidth

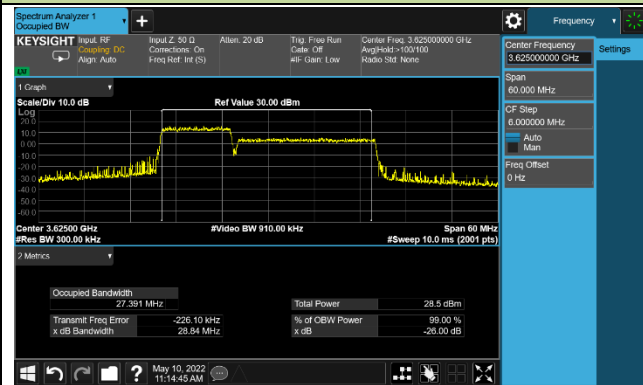


20+10MHz Channel Bandwidth

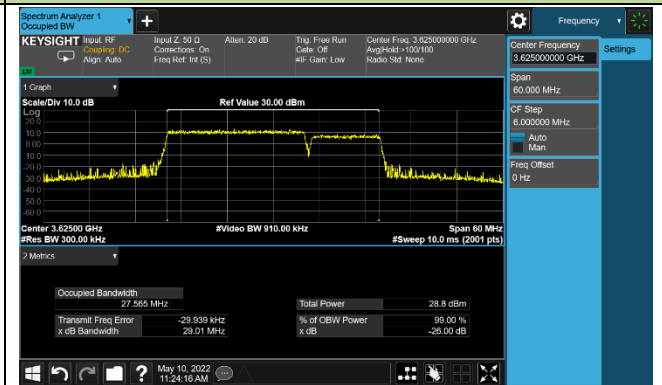


15+20MHz Channel Bandwidth

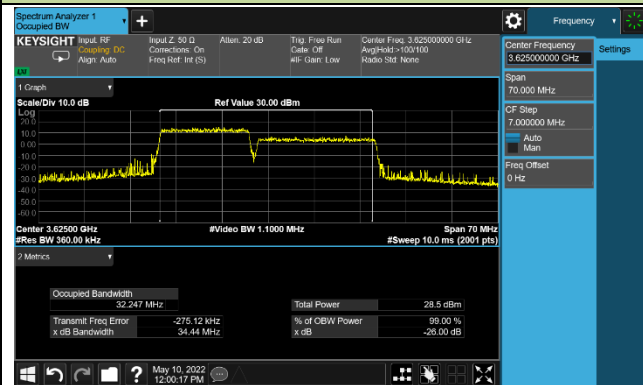

20+15MHz Channel Bandwidth

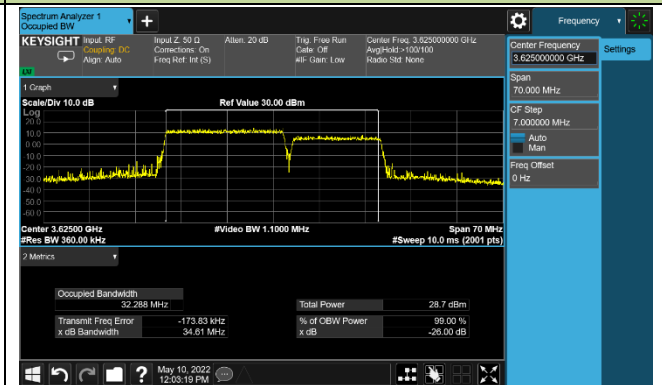


20+20MHz Channel Bandwidth

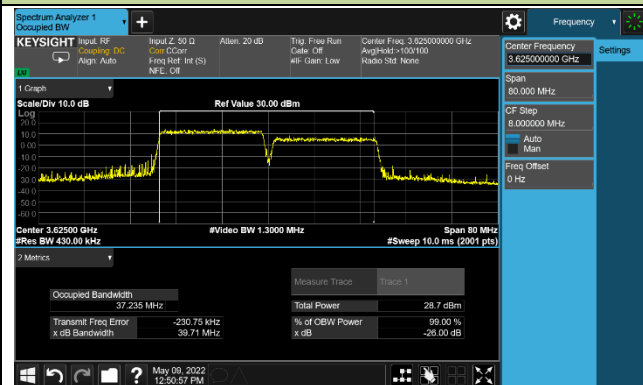


99% Bandwidth - 256QAM


5+20MHz Channel Bandwidth

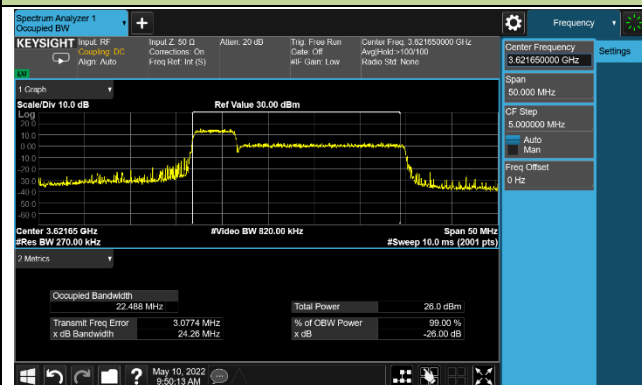


20+5MHz Channel Bandwidth

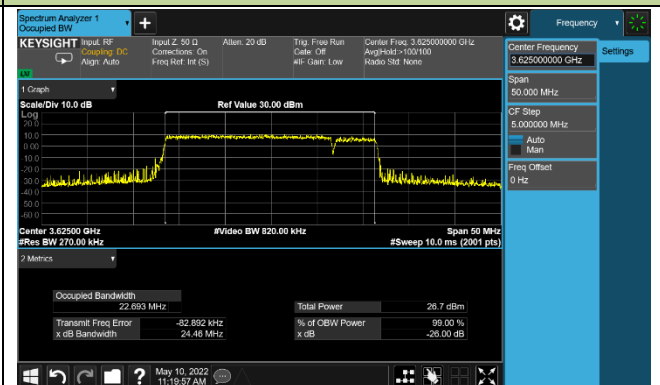


10+20MHz Channel Bandwidth

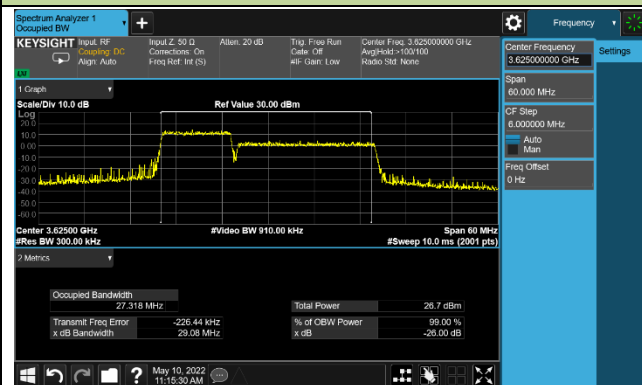


20+10MHz Channel Bandwidth

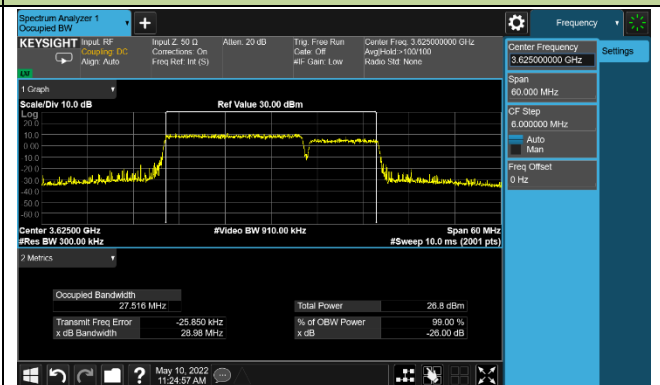


15+20MHz Channel Bandwidth

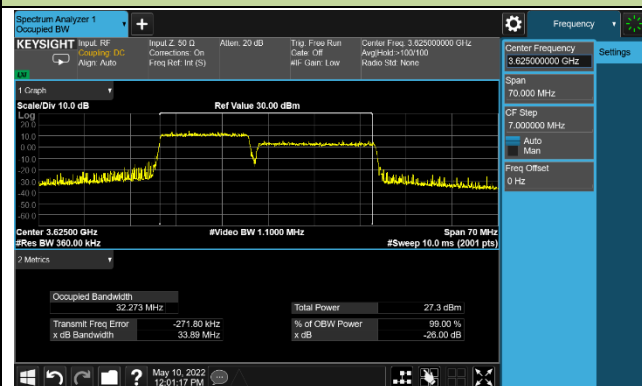

20+15MHz Channel Bandwidth

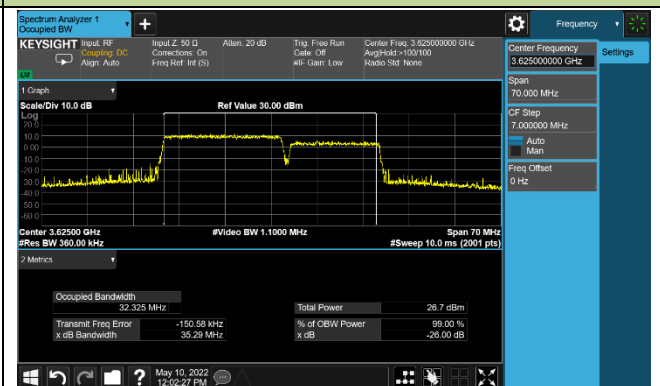

20+20MHz Channel Bandwidth

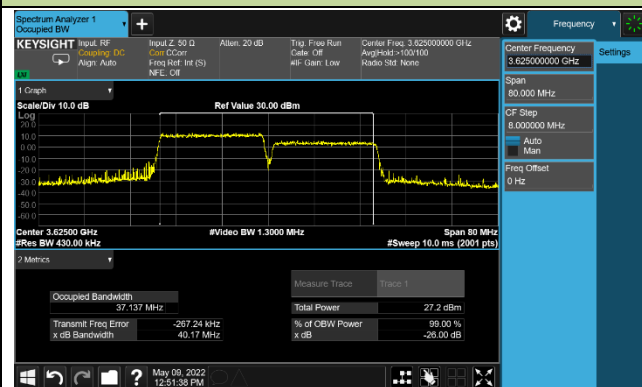

A.2 Frequency Stability Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/09	Test Band	Band 48

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0018
	- 20	0.0012
	- 10	-0.0016
	0	-0.0012
	+ 10	-0.0014
	+ 20	-0.0009
	+ 30	-0.0015
	+ 40	0.0007
	+ 50	-0.0005
4.4	+ 20	-0.0013
3.3	+ 20	-0.0004

A.3 Equivalent Isotropically Radiated Power Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/07/14	Test Band	Band 48

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
QPSK						
3552.50	5	25	0	21.53	22.11	<23.00
3625.00				21.16	21.74	<23.00
3697.50				21.14	21.72	<23.00
3555.00	10	50	0	21.52	22.10	<23.00
3625.00				21.11	21.69	<23.00
3695.00				21.06	21.64	<23.00
3557.50	15	75	0	21.70	22.28	<23.00
3625.00				21.30	21.88	<23.00
3692.50				21.36	21.94	<23.00
3560.00	20	100	0	20.31	20.89	<23.00
3625.00				20.29	20.87	<23.00
3690.00				20.13	20.71	<23.00
16QAM						
3552.50	5	25	0	20.55	21.13	<23.00
3625.00				20.00	20.58	<23.00
3697.50				20.14	20.72	<23.00
3555.00	10	50	0	20.67	21.25	<23.00
3625.00				20.13	20.71	<23.00
3695.00				20.13	20.71	<23.00
3557.50	15	75	0	20.71	21.29	<23.00
3625.00				20.39	20.97	<23.00
3692.50				20.34	20.92	<23.00
3560.00	20	100	0	19.24	19.82	<23.00
3625.00				19.27	19.85	<23.00
3690.00				19.15	19.73	<23.00

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
64QAM						
3552.50	5	25	0	19.57	20.15	<23.00
3625.00				19.06	19.64	<23.00
3697.50				19.10	19.68	<23.00
3555.00	10	50	0	19.67	20.25	<23.00
3625.00				19.15	19.73	<23.00
3695.00				19.19	19.77	<23.00
3557.50	15	75	0	19.71	20.29	<23.00
3625.00				19.37	19.95	<23.00
3692.50				19.48	20.06	<23.00
3560.00	20	100	0	18.32	18.90	<23.00
3625.00				18.23	18.81	<23.00
3690.00				18.17	18.75	<23.00
256QAM						
3552.50	5	25	0	17.62	18.20	<23.00
3625.00				17.03	17.61	<23.00
3697.50				17.12	17.70	<23.00
3555.00	10	50	0	17.61	18.19	<23.00
3625.00				17.14	17.72	<23.00
3695.00				17.18	17.76	<23.00
3557.50	15	75	0	17.76	18.34	<23.00
3625.00				17.37	17.95	<23.00
3692.50				17.42	18.00	<23.00
3560.00	20	100	0	16.26	16.84	<23.00
3625.00				16.19	16.77	<23.00
3690.00				16.34	16.92	<23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)						

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
QPSK						
3552.50	5	25	0	22.83	23.41	N/A
3625.00				22.79	23.37	N/A
3697.50				22.80	23.38	N/A
3555.00	10	50	0	22.78	23.36	N/A
3625.00				22.81	23.39	N/A
3695.00				22.75	23.33	N/A
3557.50	15	75	0	22.67	23.25	N/A
3625.00				22.66	23.24	N/A
3692.50				22.64	23.22	N/A
3560.00	20	100	0	22.67	23.25	N/A
3625.00				22.68	23.26	N/A
3690.00				22.55	23.13	N/A
16QAM						
3552.50	5	25	0	21.84	22.42	N/A
3625.00				21.76	22.34	N/A
3697.50				21.78	22.36	N/A
3555.00	10	50	0	21.81	22.39	N/A
3625.00				21.83	22.41	N/A
3695.00				21.72	22.30	N/A
3557.50	15	75	0	21.65	22.23	N/A
3625.00				21.68	22.26	N/A
3692.50				21.63	22.21	N/A
3560.00	20	100	0	21.63	22.21	N/A
3625.00				21.68	22.26	N/A
3690.00				21.53	22.11	N/A

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
64QAM						
3552.50	5	25	0	20.83	21.41	N/A
3625.00				20.76	21.34	N/A
3697.50				20.80	21.38	N/A
3555.00	10	50	0	20.78	21.36	N/A
3625.00				20.82	21.40	N/A
3695.00				20.73	21.31	N/A
3557.50	15	75	0	20.66	21.24	N/A
3625.00				20.64	21.22	N/A
3692.50				20.70	21.28	N/A
3560.00	20	100	0	20.65	21.23	N/A
3625.00				20.67	21.25	N/A
3690.00				20.50	21.08	N/A
256QAM						
3552.50	5	25	0	18.82	19.40	N/A
3625.00				18.74	19.32	N/A
3697.50				18.82	19.40	N/A
3555.00	10	50	0	18.77	19.35	N/A
3625.00				18.81	19.39	N/A
3695.00				18.70	19.28	N/A
3557.50	15	75	0	18.67	19.25	N/A
3625.00				18.69	19.27	N/A
3692.50				18.65	19.23	N/A
3560.00	20	100	0	18.63	19.21	N/A
3625.00				18.66	19.24	N/A
3690.00				18.51	19.09	N/A
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)						

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/06 ~ 2022/06/15	Test Band	Intra-Band CA_48C

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
QPSK							
3553.3	3565.0	5+20	P_25@0	S_100@0	19.93	20.51	<23.00
3615.8	3627.5				20.13	20.71	<23.00
3678.3	3690.0				20.44	21.02	<23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	17.13	17.71	<23.00
3622.5	3634.2				17.54	18.12	<23.00
3685.0	3696.7				17.73	18.31	<23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	19.78	20.36	<23.00
3615.6	3630.0				20.05	20.63	<23.00
3675.6	3690.0				20.21	20.79	<23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	17.38	17.96	<23.00
3620.1	3634.5				16.88	17.46	<23.00
3680.1	3694.5				17.22	17.80	<23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	18.66	19.24	<23.00
3615.3	3632.4				18.86	19.44	<23.00
3672.9	3690.0				19.20	19.78	<23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	17.39	17.97	<23.00
3617.6	3634.7				17.55	18.13	<23.00
3675.1	3692.2				18.01	18.59	<23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	17.40	17.98	<23.00
3615.1	3634.9				17.56	18.14	<23.00
3670.2	3690.0				17.95	18.53	<23.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
16QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	20.49	21.07	<23.00
3615.8	3627.5				20.71	21.29	<23.00
3678.3	3690.0				21.01	21.59	<23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	17.56	18.14	<23.00
3622.5	3634.2				18.07	18.65	<23.00
3685.0	3696.7				18.38	18.96	<23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	20.25	20.83	<23.00
3615.6	3630.0				20.45	21.03	<23.00
3675.6	3690.0				20.70	21.28	<23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	17.91	18.49	<23.00
3620.1	3634.5				17.32	17.90	<23.00
3680.1	3694.5				17.79	18.37	<23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	19.04	19.62	<23.00
3615.3	3632.4				19.25	19.83	<23.00
3672.9	3690.0				19.79	20.37	<23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	18.04	18.62	<23.00
3617.6	3634.7				18.07	18.65	<23.00
3675.1	3692.2				18.51	19.09	<23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	17.89	18.47	<23.00
3615.1	3634.9				18.10	18.68	<23.00
3670.2	3690.0				18.58	19.16	<23.00

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
64QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	20.48	21.06	<23.00
3615.8	3627.5				20.80	21.38	<23.00
3678.3	3690.0				20.37	20.95	<23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	17.61	18.19	<23.00
3622.5	3634.2				17.82	18.40	<23.00
3685.0	3696.7				17.57	18.15	<23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	20.23	20.81	<23.00
3615.6	3630.0				20.50	21.08	<23.00
3675.6	3690.0				20.16	20.74	<23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	17.82	18.40	<23.00
3620.1	3634.5				17.23	17.81	<23.00
3680.1	3694.5				17.72	18.30	<23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	19.13	19.71	<23.00
3615.3	3632.4				19.31	19.89	<23.00
3672.9	3690.0				19.22	19.80	<23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	17.83	18.41	<23.00
3617.6	3634.7				18.00	18.58	<23.00
3675.1	3692.2				17.96	18.54	<23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	17.91	18.49	<23.00
3615.1	3634.9				18.01	18.59	<23.00
3670.2	3690.0				17.88	18.46	<23.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
PCC	SCC						
256QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	18.49	19.07	<23.00
3615.8	3627.5				18.69	19.27	<23.00
3678.3	3690.0				18.85	19.43	<23.00
3560.0	3571.7	20+5	P_100@0	S_25@0	15.66	16.24	<23.00
3622.5	3634.2				16.13	16.71	<23.00
3685.0	3696.7				16.43	17.01	<23.00
3555.5	3569.9	10+20	P_50@99	S_100@0	18.27	18.85	<23.00
3615.6	3630.0				18.50	19.08	<23.00
3675.6	3690.0				18.71	19.29	<23.00
3560.0	3574.4	20+10	P_100@0	S_50@0	15.87	16.45	<23.00
3620.1	3634.5				15.39	15.97	<23.00
3680.1	3694.5				16.23	16.81	<23.00
3557.8	3574.9	15+20	P_75@0	S_75@0	17.13	17.71	<23.00
3615.3	3632.4				17.29	17.87	<23.00
3672.9	3690.0				17.77	18.35	<23.00
3560.0	3577.1	20+15	P_100@0	S_100@0	15.99	16.57	<23.00
3617.6	3634.7				16.10	16.68	<23.00
3675.1	3692.2				16.48	17.06	<23.00
3560.0	3579.8	20+20	P_100@0	S_100@0	15.82	16.40	<23.00
3615.1	3634.9				16.00	16.58	<23.00
3670.2	3690.0				16.45	17.03	<23.00
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
QPSK							
3553.3	3565.0	5+20	P_25@0	S_100@0	19.89	20.47	N/A
3615.8	3627.5				20.13	20.71	N/A
3678.3	3690.0				20.24	20.82	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	19.85	20.43	N/A
3622.5	3634.2				20.02	20.60	N/A
3685.0	3696.7				20.41	20.99	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	19.88	20.46	N/A
3615.6	3630.0				20.08	20.66	N/A
3675.6	3690.0				20.17	20.75	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	19.99	20.57	N/A
3620.1	3634.5				20.02	20.60	N/A
3680.1	3694.5				20.20	20.78	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	19.91	20.49	N/A
3615.3	3632.4				20.13	20.71	N/A
3672.9	3690.0				20.46	21.04	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	19.99	20.57	N/A
3617.6	3634.7				20.11	20.69	N/A
3675.1	3692.2				20.44	21.02	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	19.96	20.54	N/A
3615.1	3634.9				20.18	20.76	N/A
3670.2	3690.0				20.40	20.98	N/A
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
16QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	20.42	21.00	N/A
3615.8	3627.5				20.66	21.24	N/A
3678.3	3690.0				20.77	21.35	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	20.37	20.95	N/A
3622.5	3634.2				20.65	21.23	N/A
3685.0	3696.7				20.99	21.57	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	20.39	20.97	N/A
3615.6	3630.0				20.61	21.19	N/A
3675.6	3690.0				20.68	21.26	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	20.49	21.07	N/A
3620.1	3634.5				20.46	21.04	N/A
3680.1	3694.5				20.62	21.20	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	20.44	21.02	N/A
3615.3	3632.4				20.64	21.22	N/A
3672.9	3690.0				20.97	21.55	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	20.45	21.03	N/A
3617.6	3634.7				20.63	21.21	N/A
3675.1	3692.2				20.96	21.54	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	20.43	21.01	N/A
3615.1	3634.9				20.64	21.22	N/A
3670.2	3690.0				20.93	21.51	N/A
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							

Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
64QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	20.38	20.96	N/A
3615.8	3627.5				20.60	21.18	N/A
3678.3	3690.0				20.12	20.70	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	20.38	20.96	N/A
3622.5	3634.2				20.54	21.12	N/A
3685.0	3696.7				20.12	20.70	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	20.34	20.92	N/A
3615.6	3630.0				20.59	21.17	N/A
3675.6	3690.0				20.14	20.72	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	20.50	21.08	N/A
3620.1	3634.5				20.49	21.07	N/A
3680.1	3694.5				20.18	20.76	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	20.42	21.00	N/A
3615.3	3632.4				20.64	21.22	N/A
3672.9	3690.0				20.43	21.01	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	20.48	21.06	N/A
3617.6	3634.7				20.64	21.22	N/A
3675.1	3692.2				20.41	20.99	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	20.42	21.00	N/A
3615.1	3634.9				20.66	21.24	N/A
3670.2	3690.0				20.31	20.89	N/A
Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)							




Frequency (MHz)		Channel Bandwidth (MHz)	PCC RB	SCC RB	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
PCC	SCC						
256QAM							
3553.3	3565.0	5+20	P_25@0	S_100@0	18.42	19.00	N/A
3615.8	3627.5				18.51	19.09	N/A
3678.3	3690.0				18.75	19.33	N/A
3560.0	3571.7	20+5	P_100@0	S_25@0	18.37	18.95	N/A
3622.5	3634.2				18.69	19.27	N/A
3685.0	3696.7				18.96	19.54	N/A
3555.5	3569.9	10+20	P_50@99	S_100@0	18.35	18.93	N/A
3615.6	3630.0				18.57	19.15	N/A
3675.6	3690.0				18.71	19.29	N/A
3560.0	3574.4	20+10	P_100@0	S_50@0	18.51	19.09	N/A
3620.1	3634.5				18.52	19.10	N/A
3680.1	3694.5				18.71	19.29	N/A
3557.8	3574.9	15+20	P_75@0	S_75@0	18.46	19.04	N/A
3615.3	3632.4				18.67	19.25	N/A
3672.9	3690.0				18.97	19.55	N/A
3560.0	3577.1	20+15	P_100@0	S_100@0	18.43	19.01	N/A
3617.6	3634.7				18.62	19.20	N/A
3675.1	3692.2				18.93	19.51	N/A
3560.0	3579.8	20+20	P_100@0	S_100@0	18.45	19.03	N/A
3615.1	3634.9				18.62	19.20	N/A
3670.2	3690.0				18.94	19.52	N/A

Note: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi)

A.4 Band Edge Test Result

Test Site	SIP-SR1	Test Engineer	Allen Zou
Test Date	2022/05/23 ~ 2022/05/25	Test Band	Band 48


5MHz Channel Bandwidth - 1RB

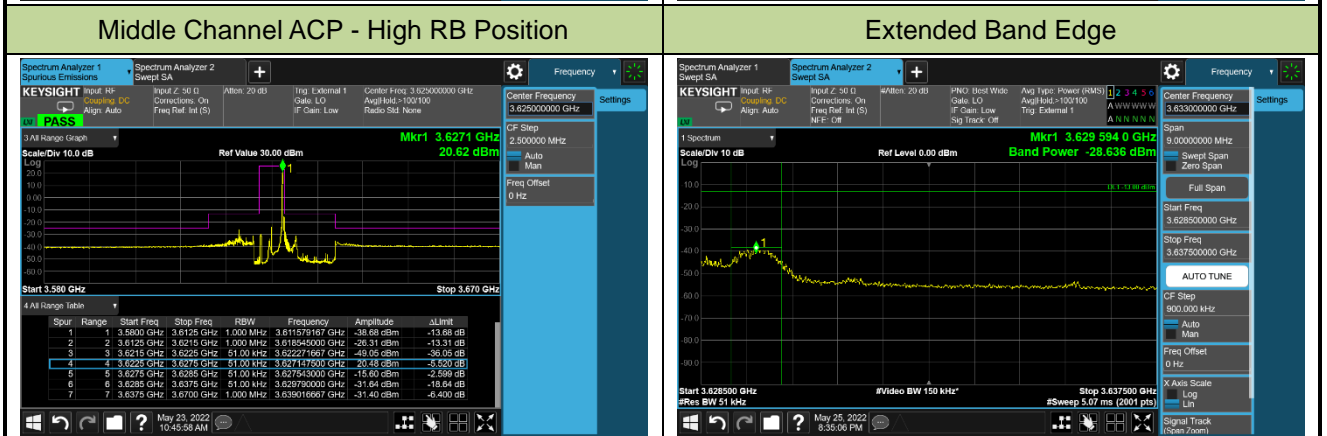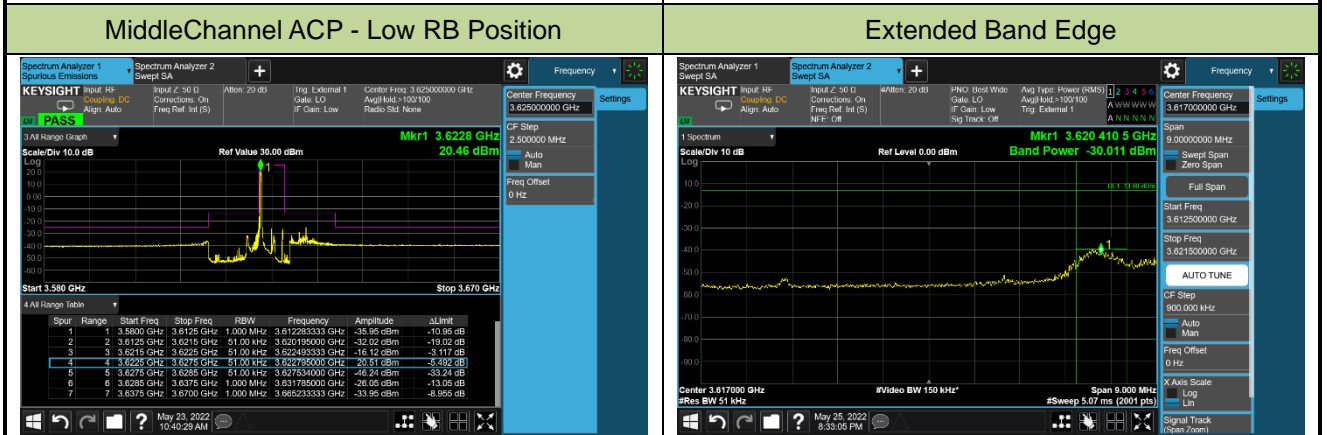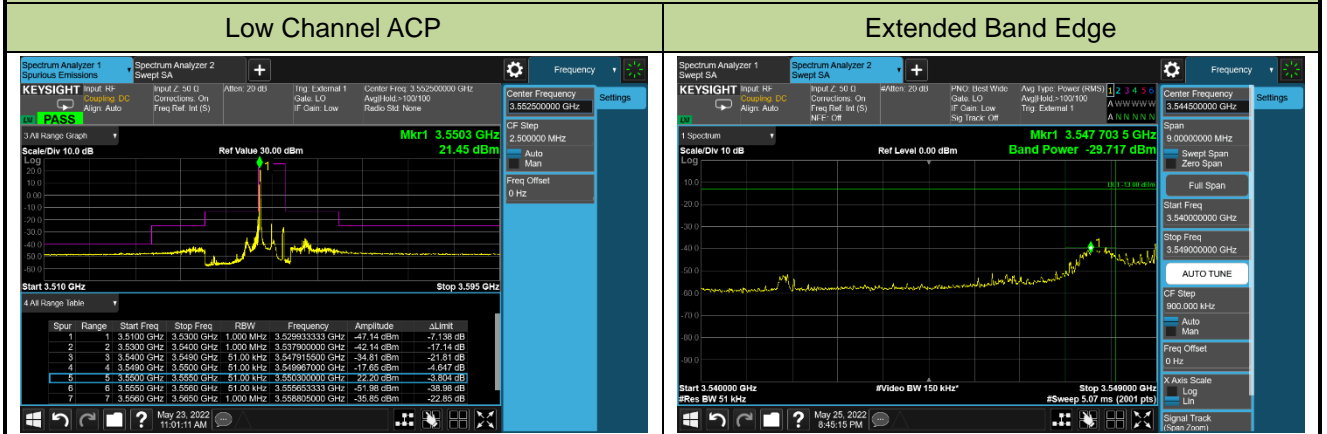




10MHz Channel Bandwidth - 1RB


Low Channel ACP

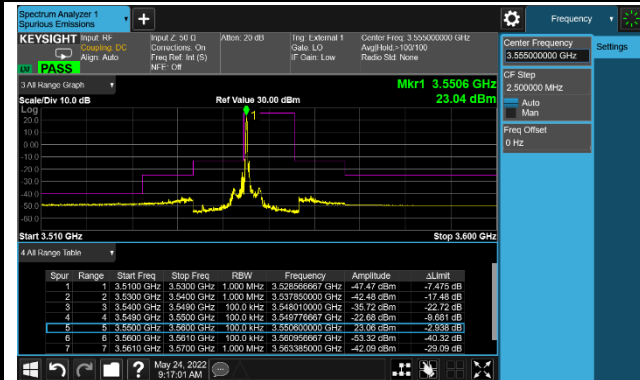


Extended Band Edge

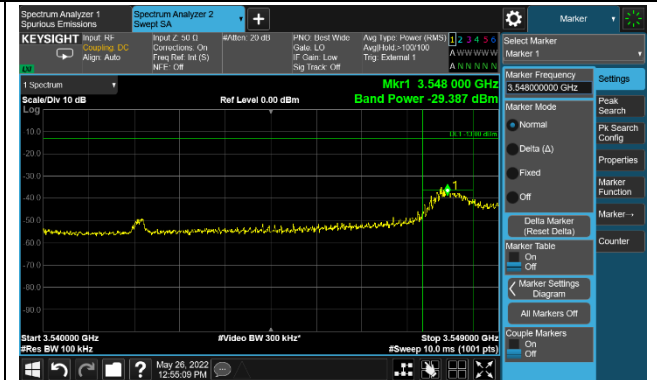


MiddleChannel ACP - Low RB Position

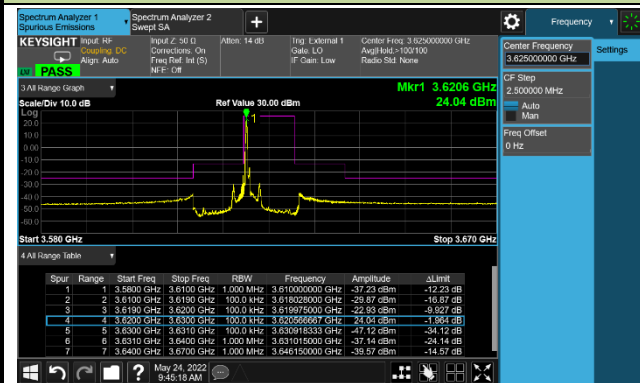


Extended Band Edge

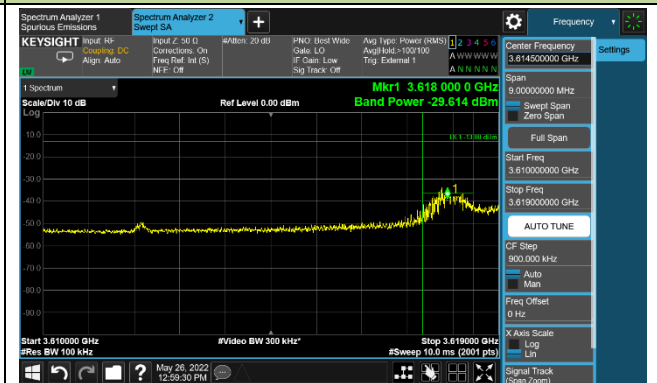


MiddleChannel ACP - High RB Position

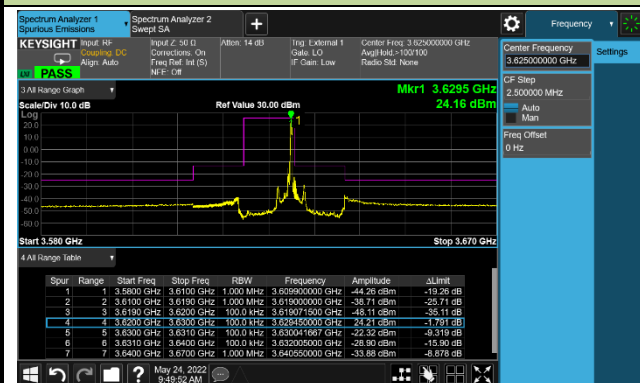


Extended Band Edge

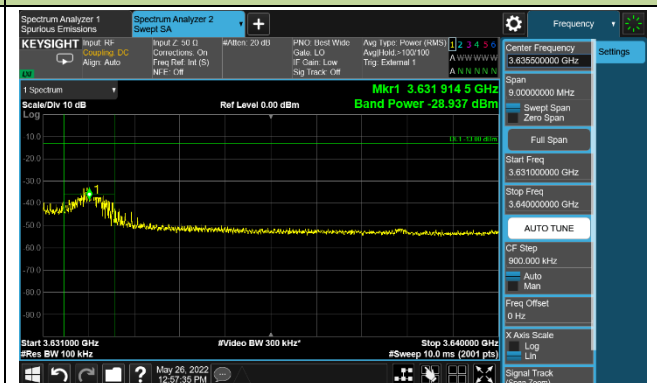

High Channel ACP

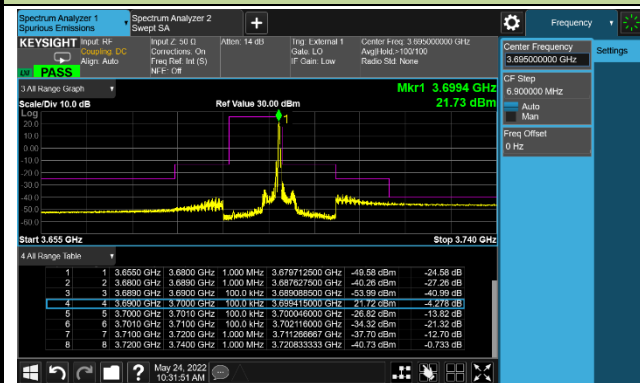


Extended Band Edge

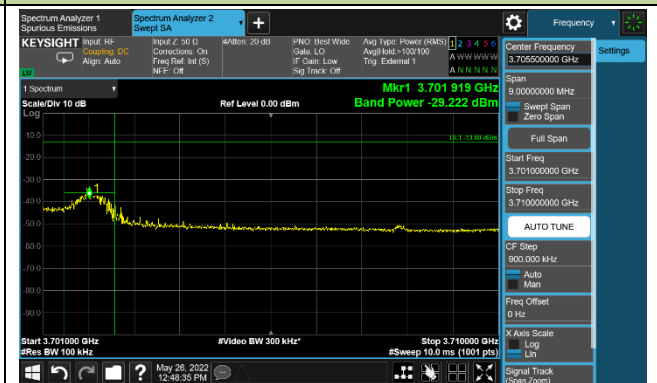


15MHz Channel Bandwidth - 1RB


Low Channel ACP

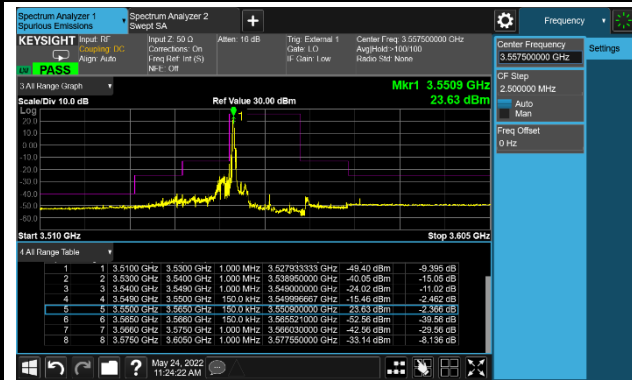


MiddleChannel ACP - Low RB Position

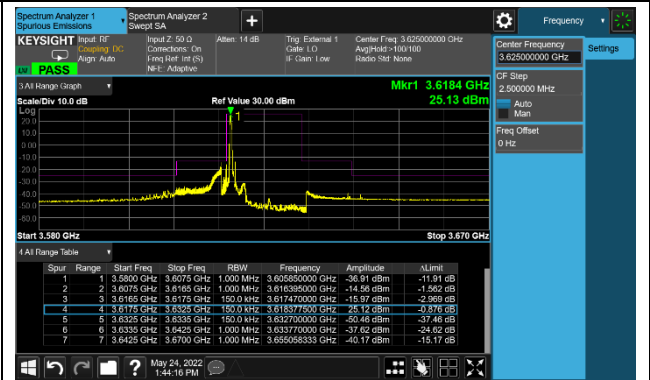

MiddleChannel ACP - High RB Position

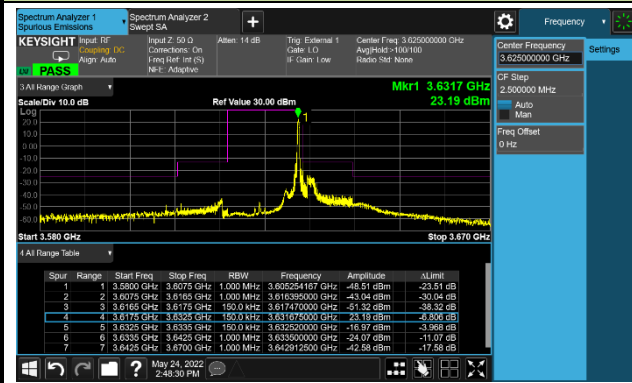


High Channel ACP

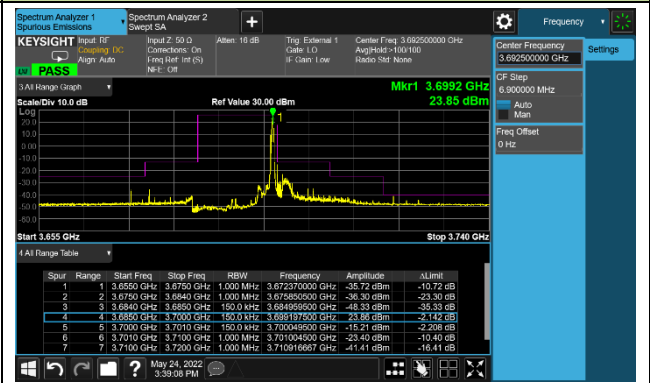


20MHz Channel Bandwidth - 1RB


Low Channel ACP

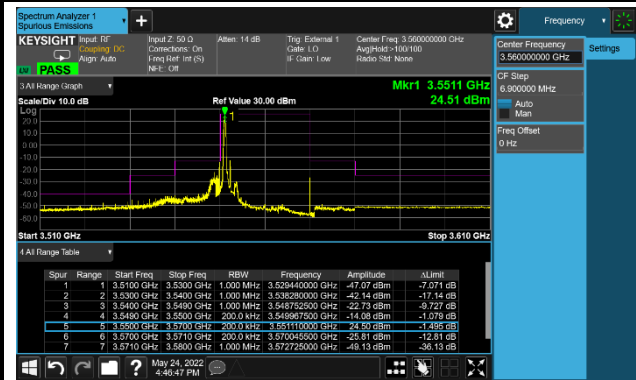


MiddleChannel ACP - Low RB Position

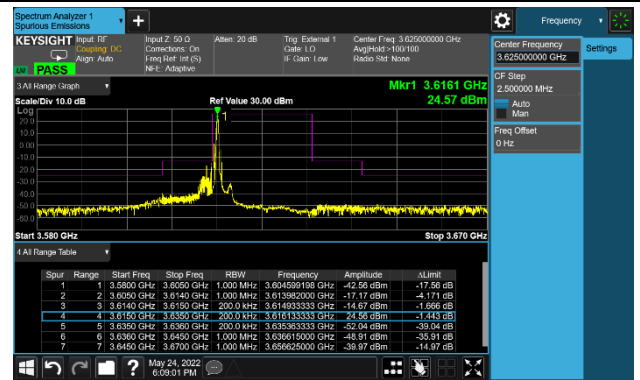

MiddleChannel ACP - High RB Position

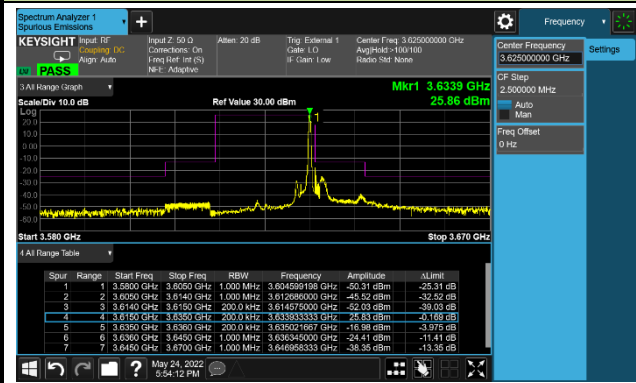


High Channel ACP

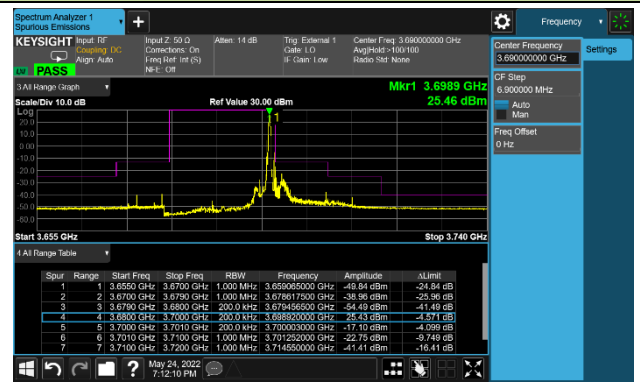


5MHz Channel Bandwidth - Full RB


Low Channel ACP

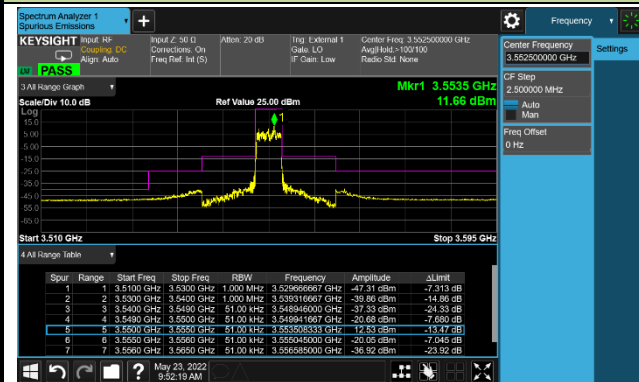


Extended Band Edge

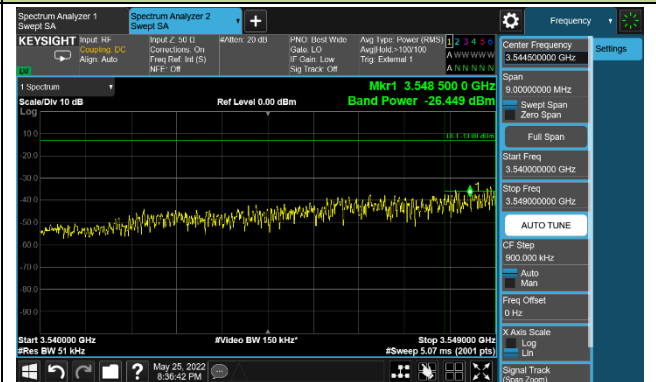


Extended Band Edge

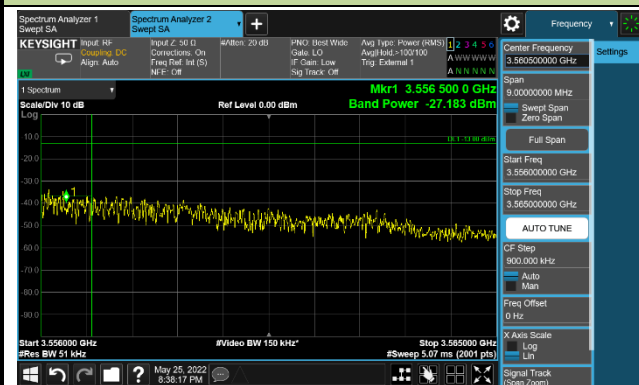

Middle Channel ACP

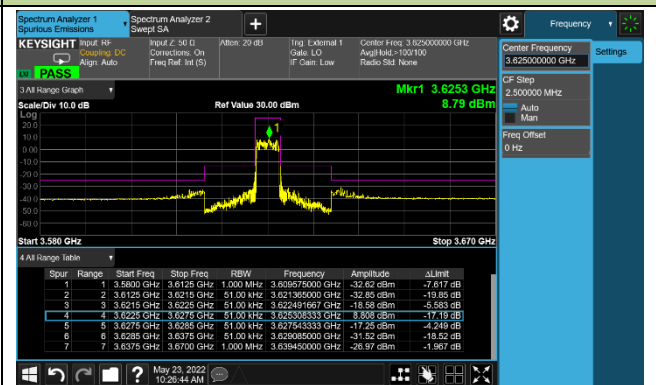

Extended Band Edge

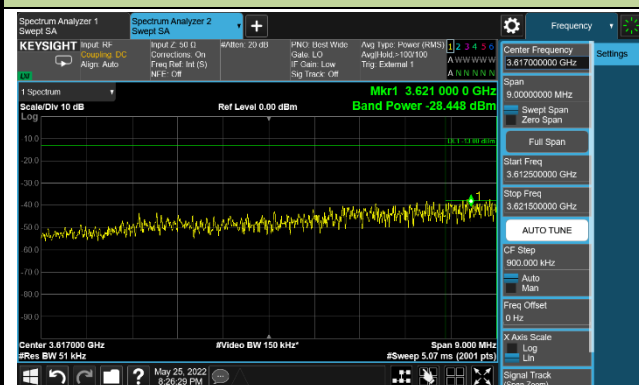

Extended Band Edge

