

# FCC PART 15.247 TEST REPORT

For

**SHANGHAI MERIT TECHNOLOGY CORP.**

1058 TAOGAN RD., SHESHAN TOWN, SONGJIANG DISTRICT, SHANGHAI, China

**FCC ID: XJ6-MT-202-2**

**Report Type:**

Original Report

**Product Type:**

2CH 2.4GHZ FHSS RADIO  
CONTROL SYSTEM

**Test Engineer:** Chao Gao

*Chao Gao*

**Report Number:** RSHF200929002-00B

**Report Date:** 2020-12-04

**Reviewed By:** Oscar Ye  
EMC Manager

*Oscar Ye*

**Prepared By:** Bay Area Compliance Laboratories Corp. (Kunshan)  
No.248 Chenghu Road,Kunshan,Jiangsu province,China  
Tel: +86-0512-86175000  
Fax: +86-0512-88934268  
[www.baclcorp.com.cn](http://www.baclcorp.com.cn)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>FCC§15.247 (i), §1.1310 &amp;§2.1093 – RF EXPOSURE .....</b>	<b>11</b>
MEASUREMENT RESULT .....	11
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA INFORMATION .....	12
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP .....	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY .....	14
TEST DATA .....	15
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>30</b>
APPLICABLE STANDARD .....	30

TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>33</b>
APPLICABLE STANDARD .....	33
TEST PROCEDURE .....	33
TEST DATA .....	33
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>36</b>
APPLICABLE STANDARD .....	36
TEST PROCEDURE .....	36
TEST DATA .....	36

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant:	SHANGHAI MERIT TECHNOLOGY CORP.
Tested Model:	MT-202
Product Type:	2CH 2.4GHZ FHSS RADIO CONTROL SYSTEM
Power Supply:	DC 6V from 1.5V*4cell "AA" alkaline battery
RF Function:	SRD
Operating Band/Frequency:	2405-2450 MHz
Total Channel Number:	46
Hopping Channel Number	29
Minimum Hopping Channel Separation:	1 MHz
Modulation Type:	GFSK
Antenna Type:	Dipole antenna
*Maximum Antenna Gain:	2 dBi

*Note\*: The maximum antenna gain was provided by the manufacturer.*

*\*All measurement and test data in this report was gathered from production sample serial number: 20200929002. (Assigned by BACL, Kunshan). The EUT was received on 2020-09-29.*

### Objective

This test report is prepared on behalf of *SHANGHAI MERIT TECHNOLOGY CORP.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliant Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISSED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for FHSS (GFSK) Modulation:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	24	2428
2	2406	25	2429
3	2407	26	2430
4	2408	27	2431
5	2409	28	2432
6	2410	29	2433
7	2411	30	2434
8	2412	31	2435
9	2413	32	2436
10	2414	33	2437
11	2415	34	2438
12	2416	35	2439
13	2417	36	2440
14	2418	37	2441
15	2419	38	2442
16	2420	39	2443
17	2421	40	2444
18	2422	41	2445
19	2423	42	2446
20	2424	43	2447
21	2425	44	2448
22	2426	45	2449
23	2427	46	2450

For fixed channel mode: EUT was tested with Channel 1, 24, 46.

For Hopping mode: 29 random frequency hopping channels was test.

### EUT Exercise Software

The EUT was tested in the engineering mode; EUT can be setup for fixed channel mode and hopping mode.

**Special Accessories**

No special accessory.

**Equipment Modifications**

No modification was made to the EUT tested.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	/	/	/

**External I/O Cable**


Cable Description	Length (m)	From Port	To
/	/	/	/

**Block Diagram of Test Setup**

For Radiated Emissions (Below 1GHz):

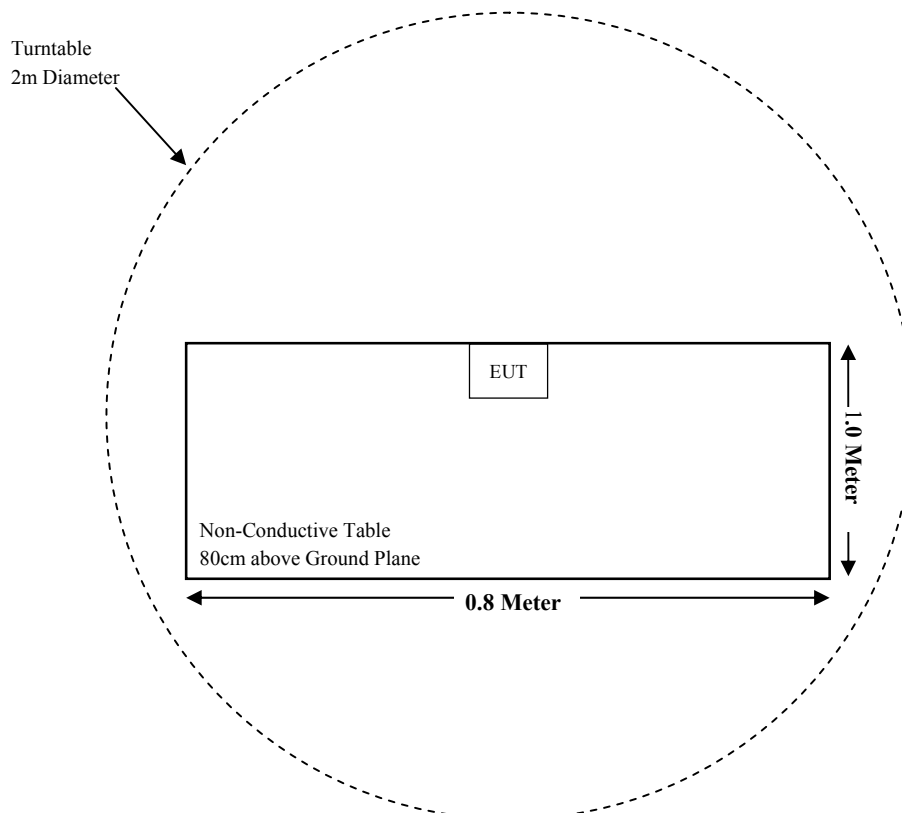

For Radiated Emissions (Above 1GHz):

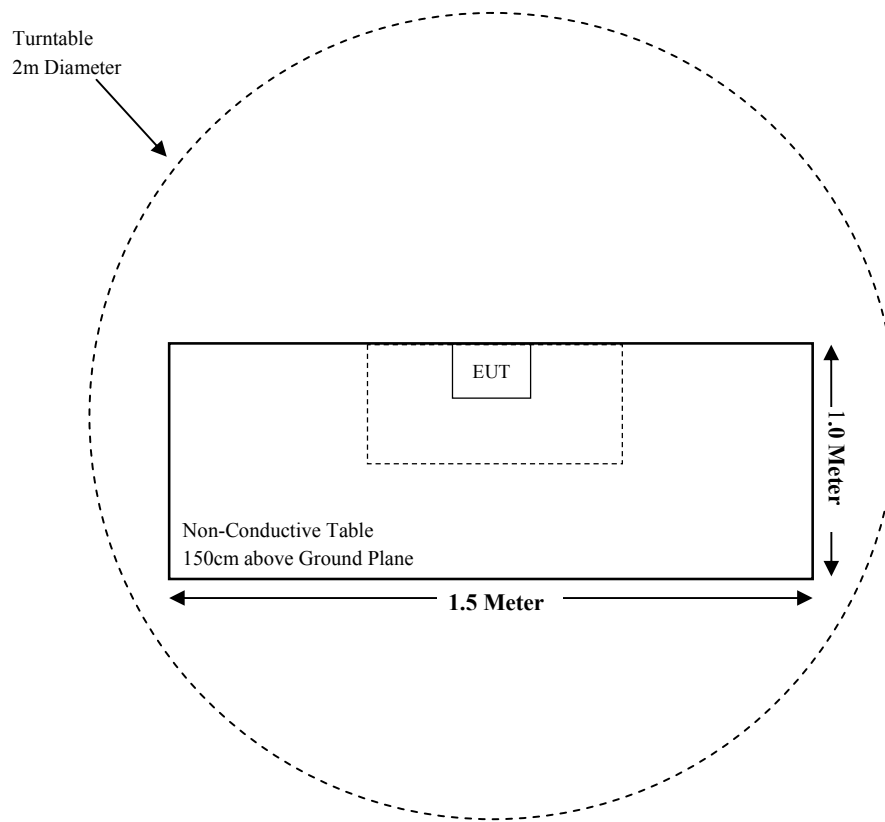



**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i)§1.1310 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Not Applicable (See Note)
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

Note: The EUT is powered by batteries.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	84159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Narda	Attenuator/10dB	10dB	/	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
SHANGHAI MERIT TECHNOLOGY CORP.	RF Cable	MERIT C01	C01	Each Time	/

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1310 & §2.1093 – RF EXPOSURE

### Applicable Standard

According to §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR, and  $\leq 7.5$  for 10-g extremity SAR

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion

### Measurement Result

Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (10-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2405-2450	17.00	50.12	14.00	5.60	7.50	Yes

#### Note:

#### 1. This is a handheld device



**Result: No SAR test is required.**

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Information**

The EUT has a dipole antenna, which the antenna gain is 2.0dBi; fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.


## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:

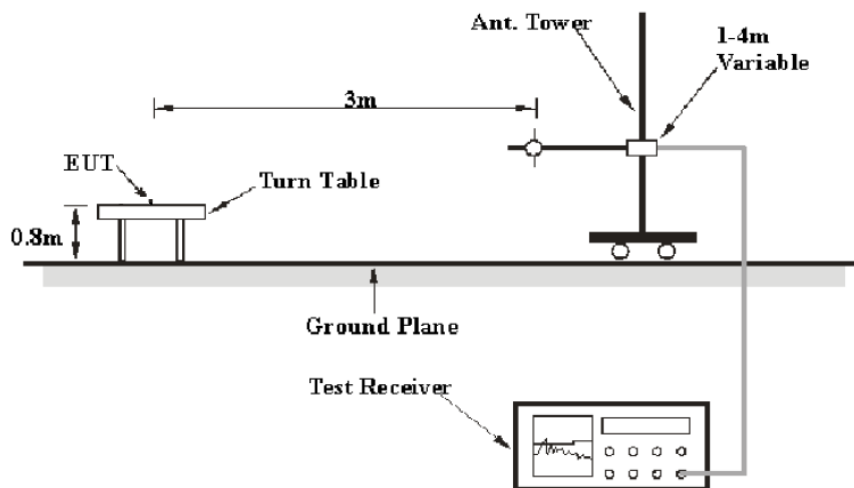

Above 1GHz:

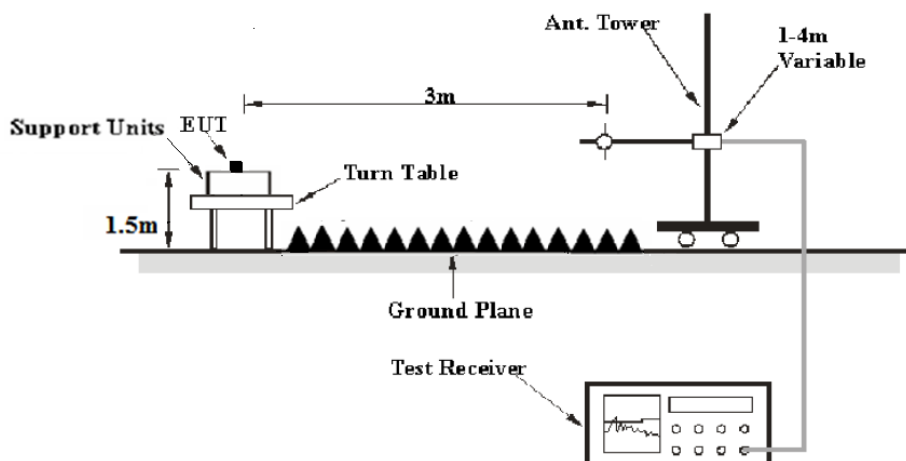

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz - 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data****Environmental Conditions**


<b>Temperature:</b>	22.9 °C~23.5 °C
<b>Relative Humidity:</b>	51%~55%
<b>ATM Pressure:</b>	101kPa~102kPa

The testing was performed by Chao Gao from 2020-11-26 to 2020-11-30.

EUT operation mode: Transmitting

**Spurious Emission Test:****30MHz-1GHz:**

Pre-Scan with low, middle and high channels in the X,Y and Z axes of orientation, the worst case **high channel in X-axis of orientation** was recorded

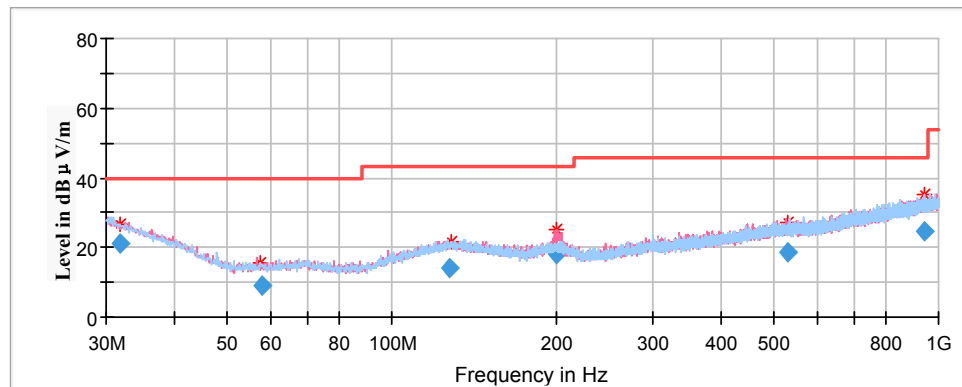

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
31.842059	21.16	200.0	H	311.0	-5.8	40.00	18.84
57.764600	9.11	100.0	V	120.0	-18.0	40.00	30.89
127.522150	14.23	100.0	H	339.0	-11.3	43.50	29.27
200.229550	17.96	100.0	V	241.0	-11.5	43.50	25.54
528.558950	18.81	200.0	V	190.0	-5.9	46.00	27.19
941.571850	24.48	200.0	H	90.0	1.0	46.00	21.52

**1GHz-18GHz**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)  
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)  
 Margin (dB) = Limit (dBμV/m) - Corrected Amplitude (dBμV/m)

**Low Channel: 2405MHz**

Full Spectrum

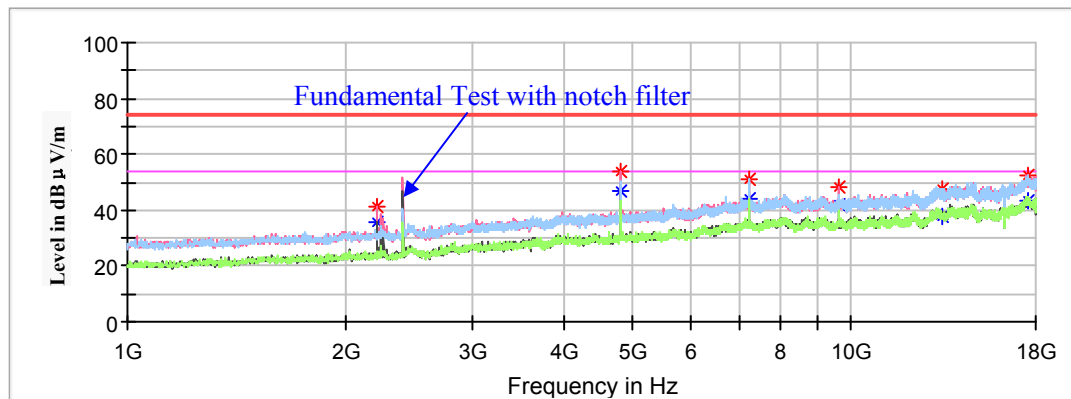


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2212.100000	---	35.80	150.0	V	74.0	-13.6	54.00	18.20
2212.100000	41.30	---	150.0	V	74.0	-13.6	74.00	32.70
4810.000000	---	47.18	200.0	V	297.0	-5.6	54.00	6.82
4810.000000	54.11	---	200.0	V	297.0	-5.6	74.00	19.89
7216.000000	---	43.94	150.0	H	104.0	0.4	54.00	10.06
7216.000000	51.07	---	150.0	H	104.0	0.4	74.00	22.93
9620.000000	---	41.77	200.0	V	283.0	2.1	54.00	12.23
9620.000000	48.19	---	200.0	V	283.0	2.1	74.00	25.81
13381.100000	---	37.97	150.0	V	257.0	5.6	54.00	16.03
13381.100000	47.74	---	150.0	V	257.0	5.6	74.00	26.26
17537.600000	---	43.34	200.0	H	191.0	8.9	54.00	10.66
17537.600000	52.33	---	200.0	H	191.0	8.9	74.00	21.67



**Middle Channel: 2428MHz**


Full Spectrum

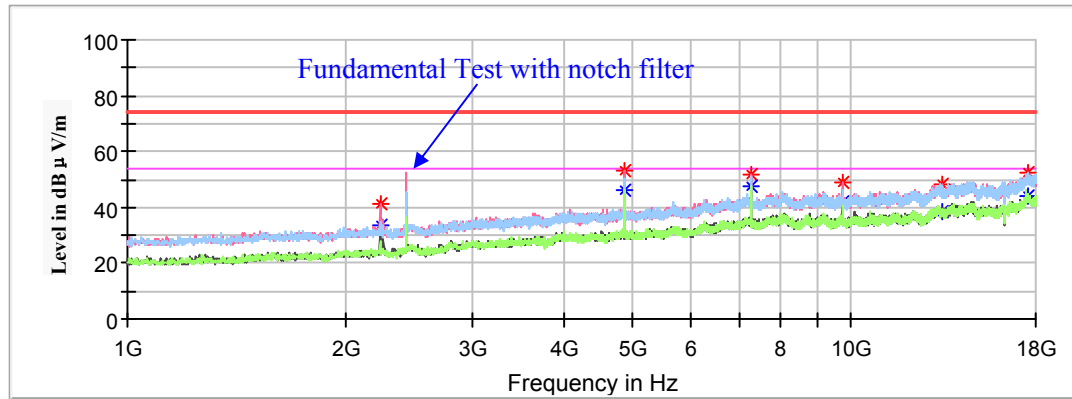

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
2234.200000	---	33.27	150.0	V	46.0	-13.5	54.00	20.73
2234.200000	40.97	---	150.0	V	46.0	-13.5	74.00	33.03
4856.000000	53.39	---	150.0	V	97.0	-5.5	74.00	20.61
4856.000000	---	46.46	150.0	V	97.0	-5.5	54.00	7.54
7284.000000	51.76	---	150.0	H	81.0	0.6	74.00	22.24
7284.000000	---	47.61	150.0	H	81.0	0.6	54.00	6.39
9712.000000	49.09	---	200.0	V	2.0	2.0	74.00	24.91
9712.000000	---	41.69	200.0	V	2.0	2.0	54.00	12.31
13379.400000	---	38.17	200.0	V	296.0	5.6	54.00	15.83
13379.400000	48.24	---	200.0	V	296.0	5.6	74.00	25.76
17547.800000	---	43.78	200.0	H	216.0	8.9	54.00	10.22
17547.800000	52.58	---	200.0	H	216.0	8.9	74.00	21.42

**High Channel: 2450MHz**


Full Spectrum

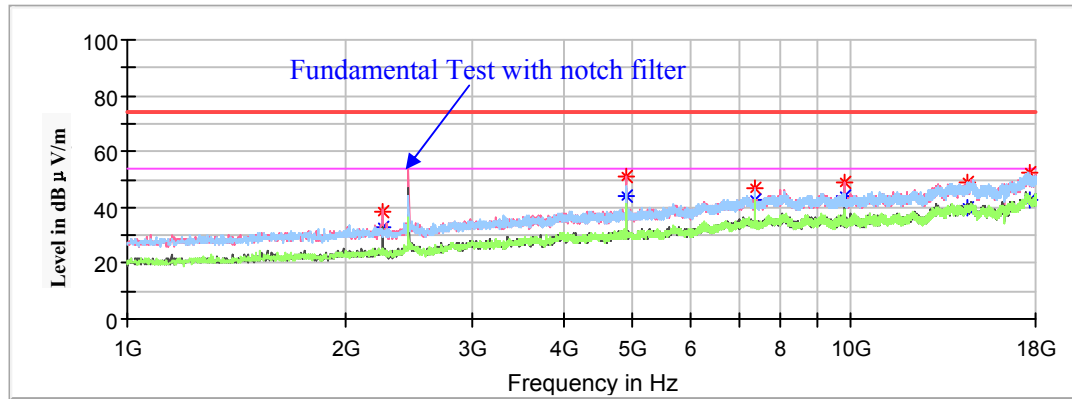


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
2256.300000	---	32.82	200.0	V	236.0	-13.4	54.00	21.18
2256.300000	38.65	---	200.0	V	236.0	-13.4	74.00	35.35
4900.000000	51.07	---	150.0	V	345.0	-5.4	74.00	22.93
4900.000000	---	44.40	150.0	V	345.0	-5.4	54.00	9.60
7350.000000	46.90	---	200.0	H	296.0	0.7	74.00	27.10
7350.000000	---	42.52	200.0	H	296.0	0.7	54.00	11.48
9800.000000	49.28	---	150.0	V	10.0	2.0	74.00	24.72
9800.000000	---	44.06	150.0	V	10.0	2.0	54.00	9.94
14470.800000	---	39.66	200.0	H	53.0	6.5	54.00	14.34
14470.800000	49.27	---	200.0	H	53.0	6.5	74.00	24.73
17631.100000	---	42.55	150.0	V	160.0	8.9	54.00	11.45
17631.100000	52.19	---	150.0	V	160.0	8.9	74.00	21.81

**18GHz-25GHz:**

Pre-Scan with low, middle and high channels in the X,Y and Z axes of orientation, the worst case **high channel in X-axis of orientation** was recorded

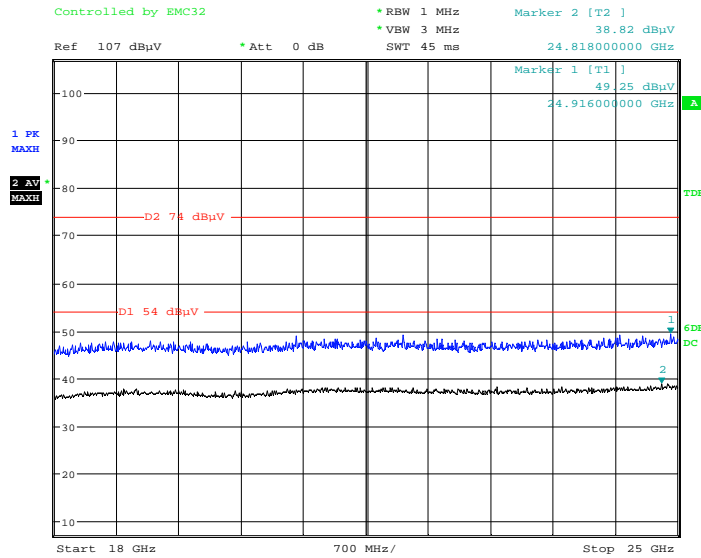**Horizontal**

Date: 26.NOV.2020 13:31:33

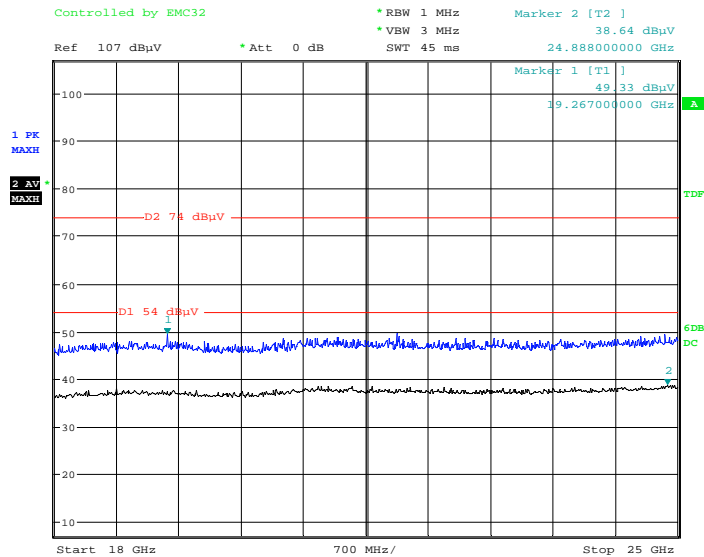**Vertical**

Date: 26.NOV.2020 13:33:44

**Fundamental Test & Restricted Bands Emissions:**

*Pre-Scan in the X,Y and Z axes of orientation, the worst case in X-axis of orientation was recorded*

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2405MHz								
2390.00	---	53.59	150.0	H	258.0	-2.9	54.00	0.41
2390.00	66.44	---	150.0	H	258.0	-2.9	74.00	7.56
2390.00	---	52.13	150.0	V	273.0	-2.9	54.00	1.87
2390.00	64.81	---	150.0	V	273.0	-2.9	74.00	9.19
High Channel: 2450MHz								
2483.50	---	47.62	200.0	H	256.0	-2.5	54.00	6.38
2483.50	58.95	---	200.0	H	256.0	-2.5	74.00	6.26
2483.50	---	45.86	200.0	V	95.0	-2.5	54.00	8.14
2483.50	61.08	---	200.0	V	95.0	-2.5	74.00	12.92

# Conducted Spurious Emissions at Antenna Port:


## Low Channel

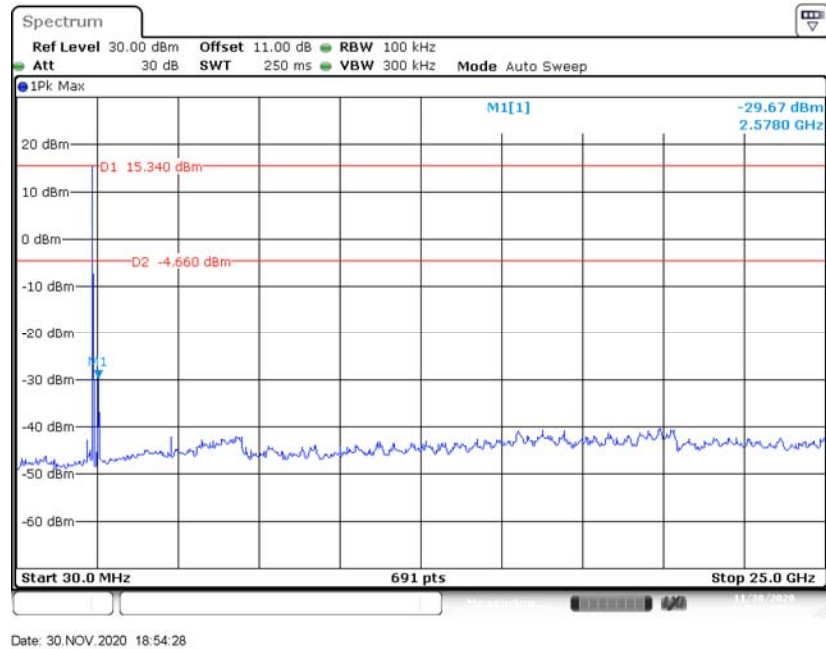

## Middle Channel

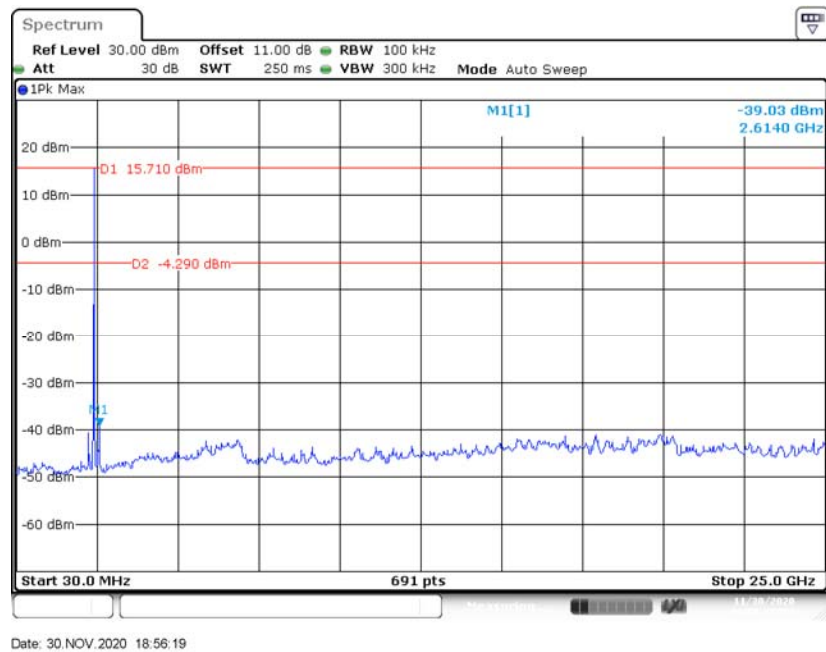

# High Channel

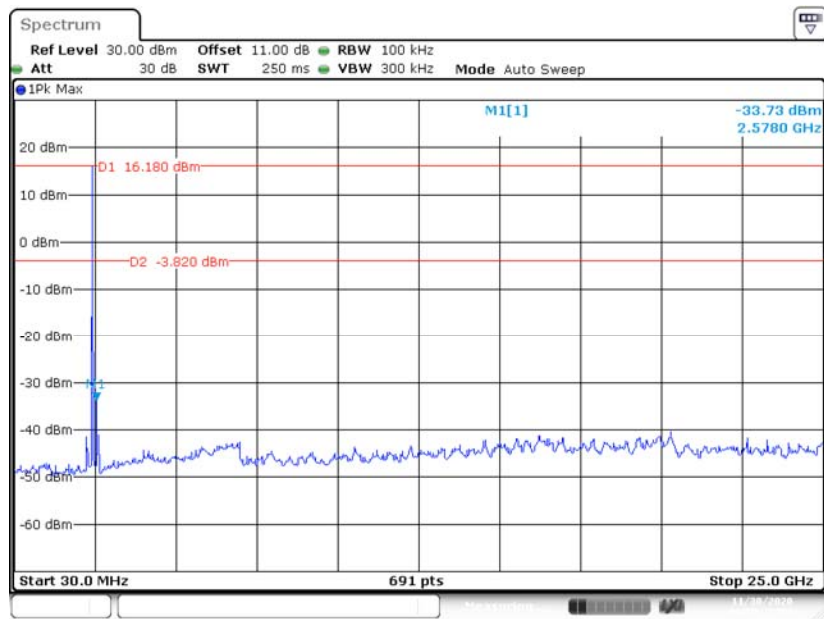

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa

*The testing was performed by Chao Gao on 2020-12-01.*


*EUT operation mode: Hopping*

*Test Result: Compliant.*

Modulation	Channel	Frequency (MHz)	Channel Separation (kHz)	Limit (kHz)	Result
GFSK	Middle	2428	1002.90	258.5	Pass
	Adjacent	2427			

Note: Limit=2/3\*20dB bandwidth

### Middle Channel

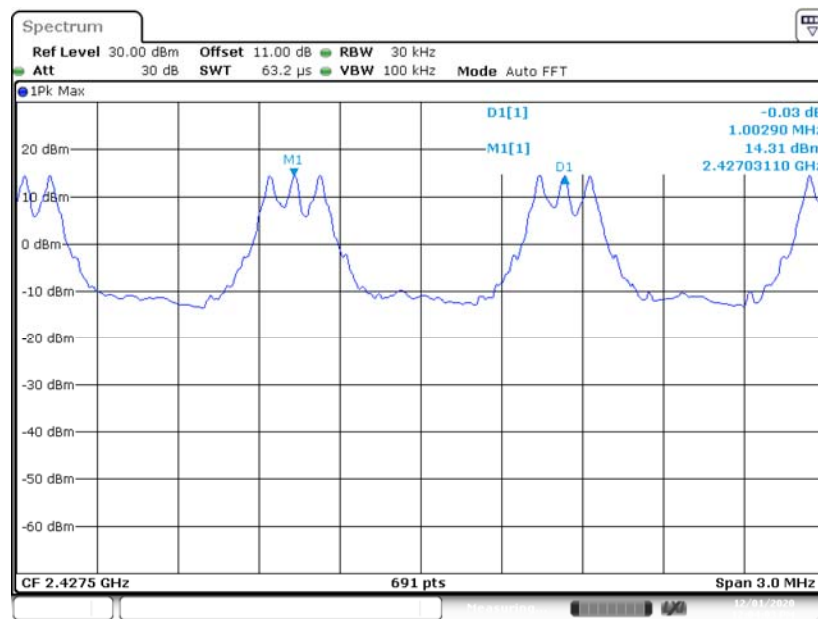

Date: 1 DEC 2020 12:04:04



**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-30.*

*EUT operation mode: Transmitting*

*Test Result: Compliant.*

Modulation	Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)
GFSK	Low	2405	387.8
	Middle	2428	387.8
	High	2450	387.8

### Low Channel

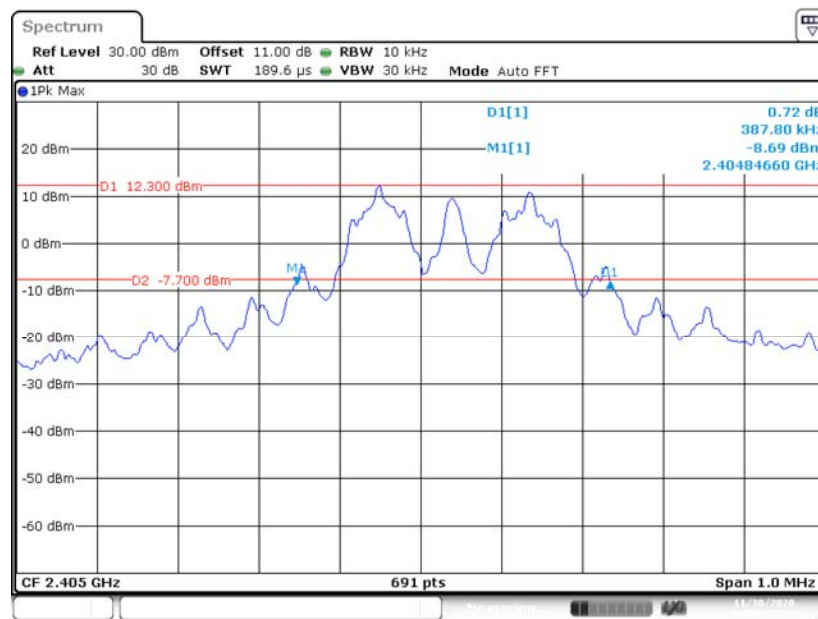


Date: 30.NOV.2020 18:39:19

### Middle Channel



Date: 30.NOV.2020 18:37:34

### High Channel

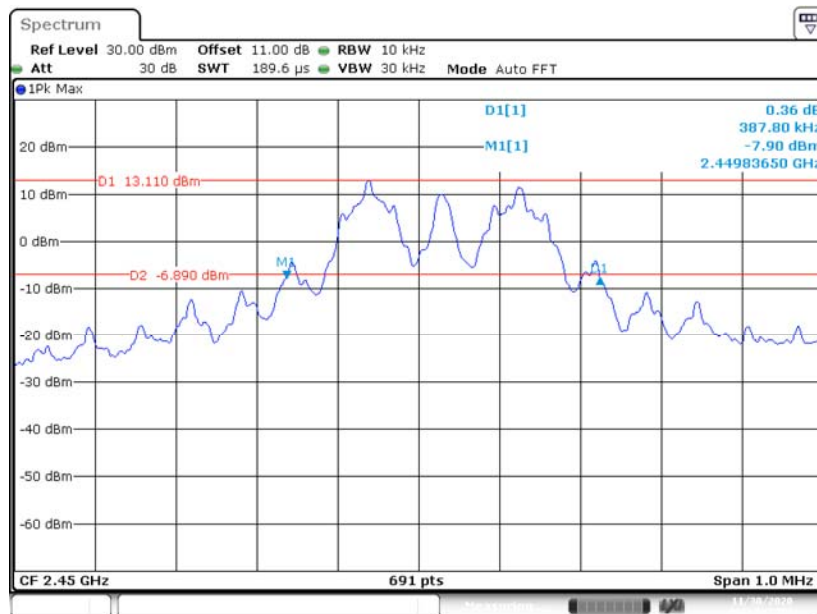

Date: 30.NOV.2020 18:34:52

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.3 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-30.*

*EUT operation mode: Hopping*

*Test Result: Compliant.*

Modulation	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
GFSK	2405-2450	29	$\geq 15$

### Number of Hopping Channels

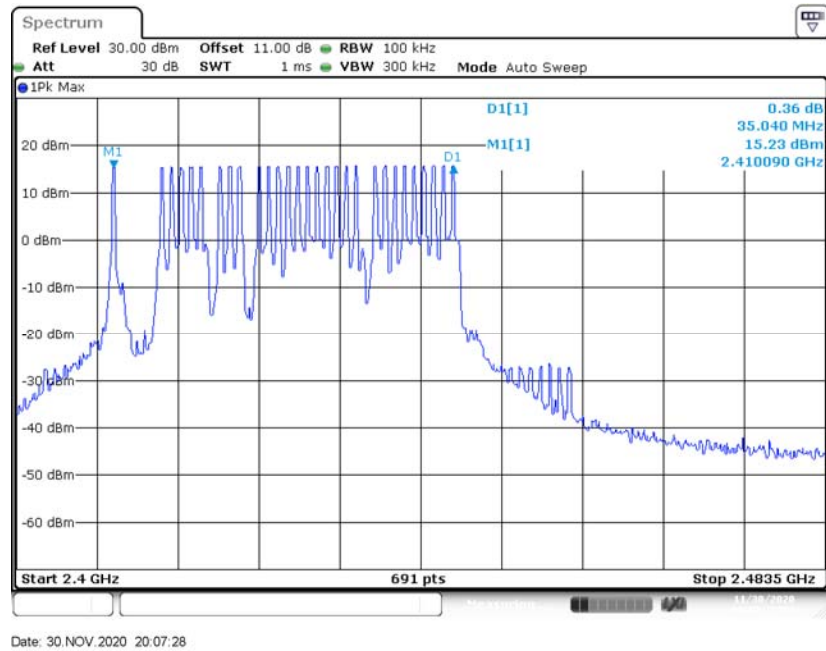

## FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

### Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0Hz. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	23.2 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa


The testing was performed by Chao Gao on 2020-11-30.

EUT operation mode: Hopping

Test Result: Compliant.


Modulation	Pulse Width	Pulse Number	Dwell Time	Limit	Result
	(ms)		(s)	(s)	
GFSK	1.594	9*3	0.043	≤0.4	Pass
	Note: Dwell time = Pulse time * N Observed time = 0.4s * hopping number = 0.4s * 29 = 11.6s				

# Number of Pulses

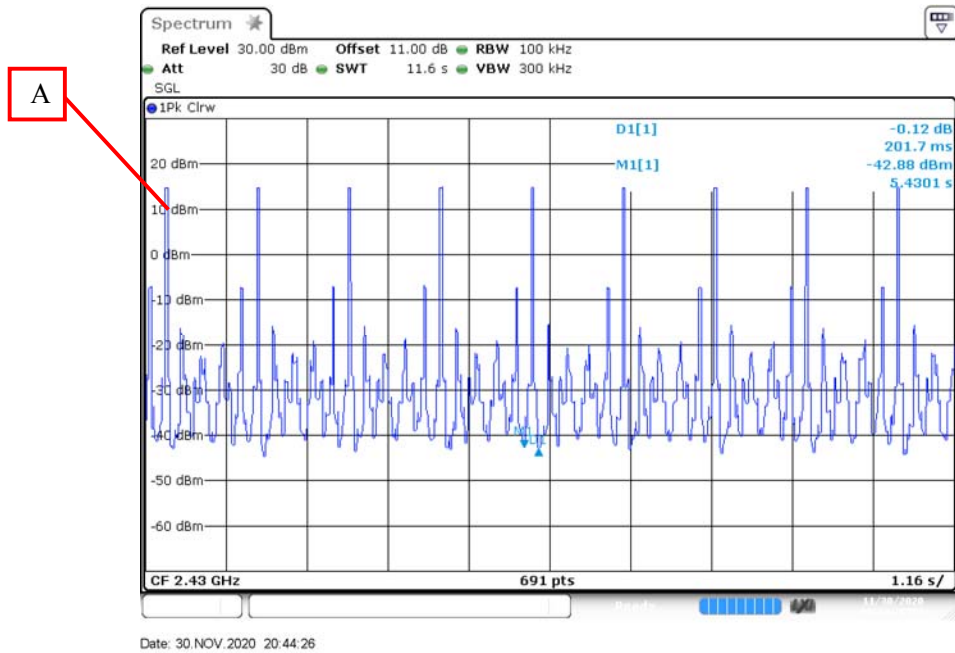


Note: A means one pulse train.

## Zoom in A

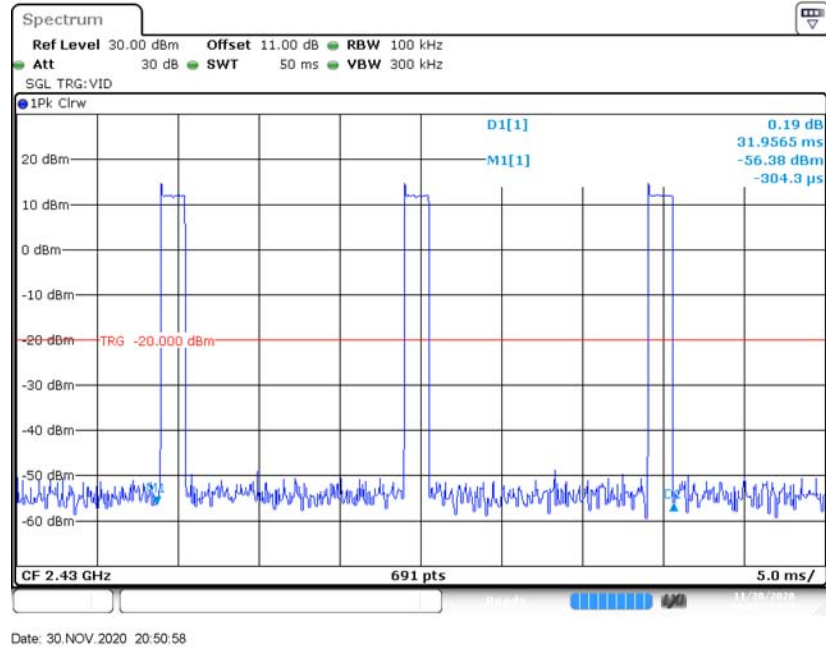

# Single Pulse

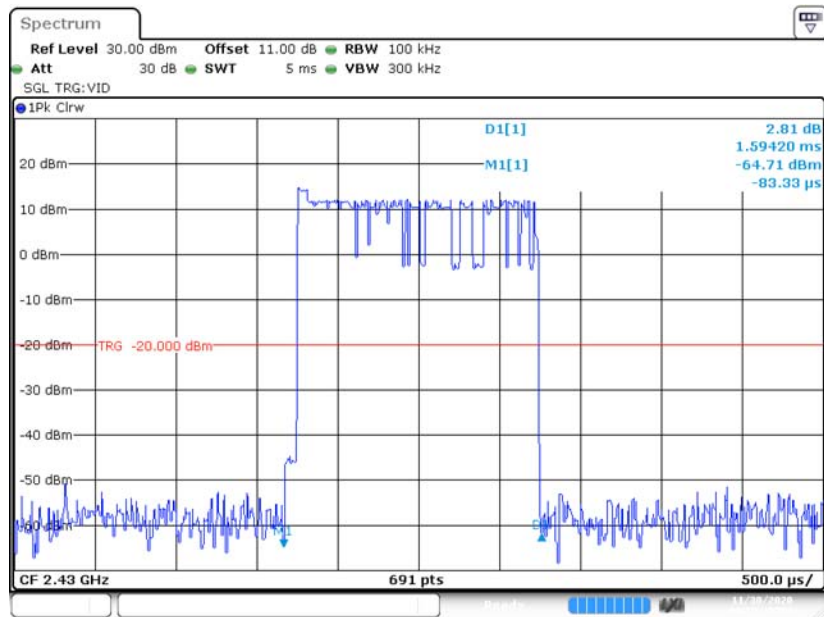

Date: 30 NOV. 2020 20:52:39



**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.1 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-30.*

*EUT operation mode: Transmitting*

*Test Result: Compliant.*


Modulation	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
GFSK	Low	2405	15.98	39.63	125
	Middle	2428	16.32	42.85	125
	High	2450	16.52	44.87	125

### Low Channel

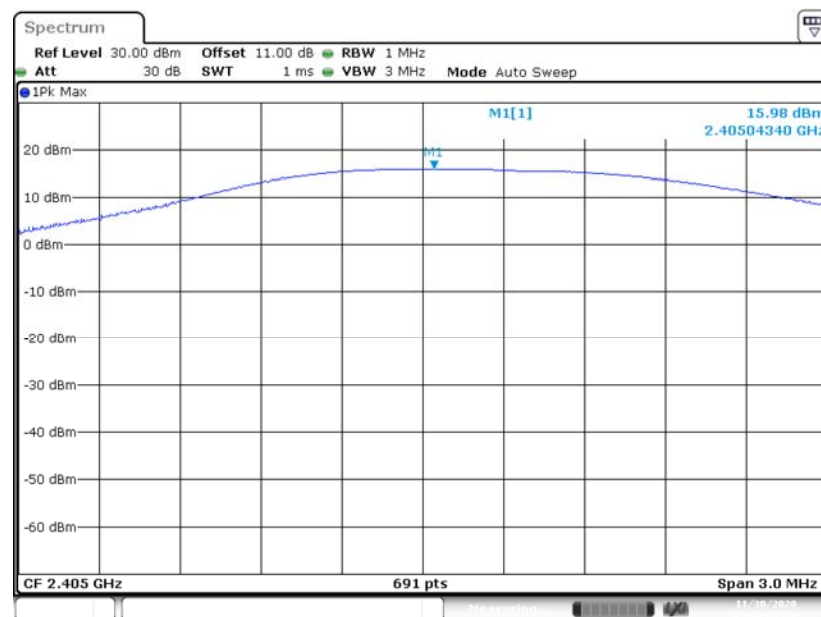


Date: 30. NOV. 2020 17:40:25

### Middle Channel

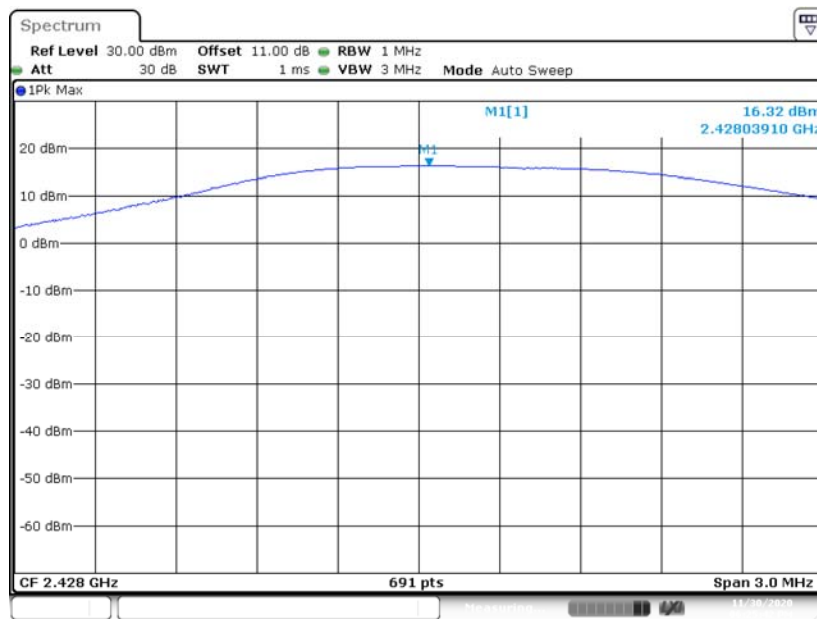

Date: 30 NOV. 2020 18:25:43

### High Channel

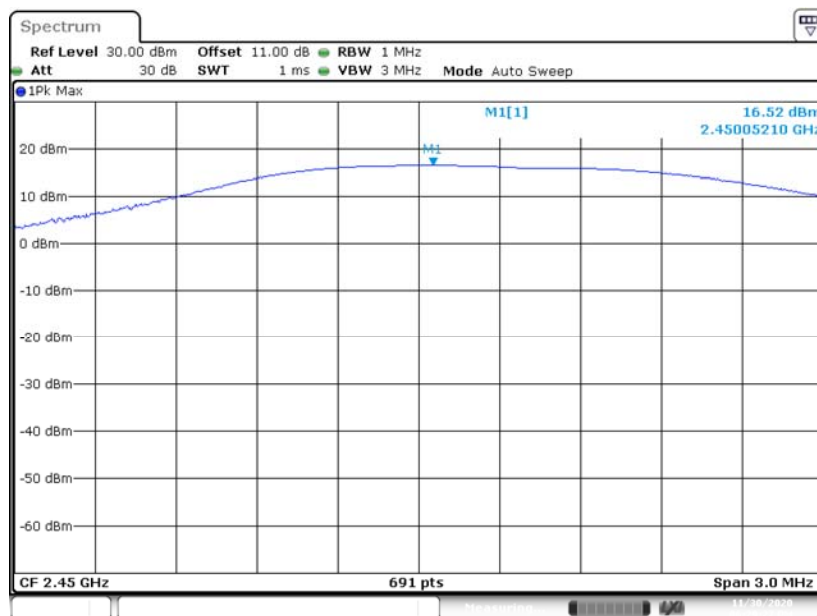

Date: 30 NOV. 2020 18:29:28

## **FCC §15.247(d) - BAND EDGES TESTING**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	23.1 °C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.5 kPa


*The testing was performed by Chao Gao on 2020-11-30.*

*EUT operation mode: Transmitting&Hopping*

*Test Result: Compliant.*


# Band Edge

## Left Side

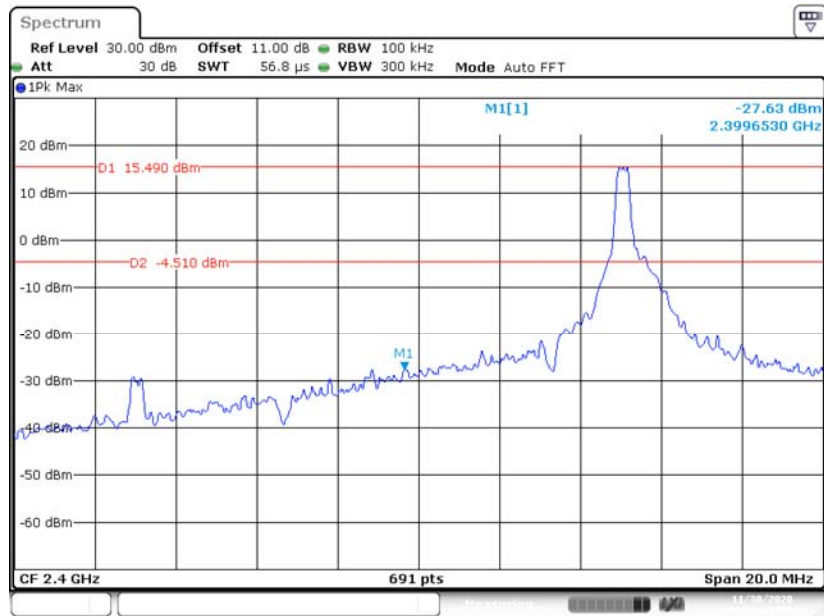


Date: 30.NOV.2020 18:44:28

## Right Side

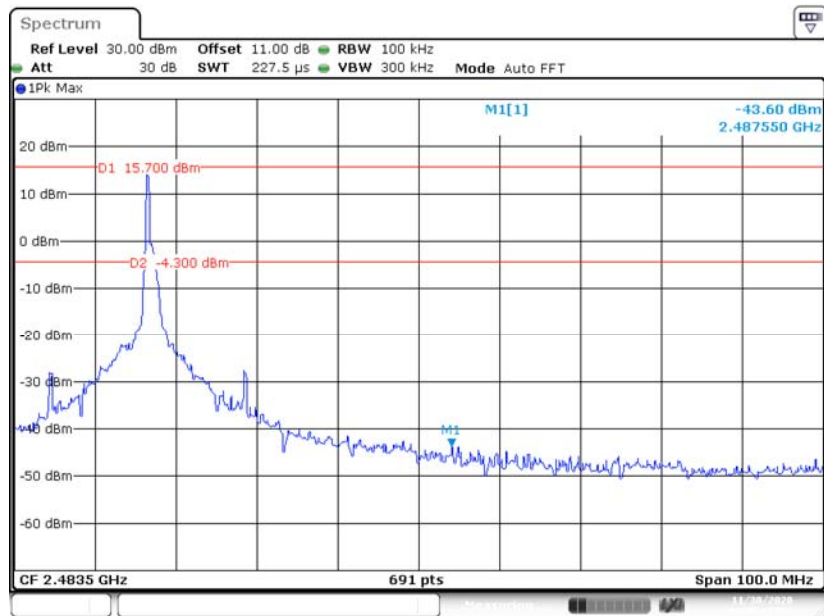


Date: 30.NOV.2020 18:48:10

### Left Side-Hopping

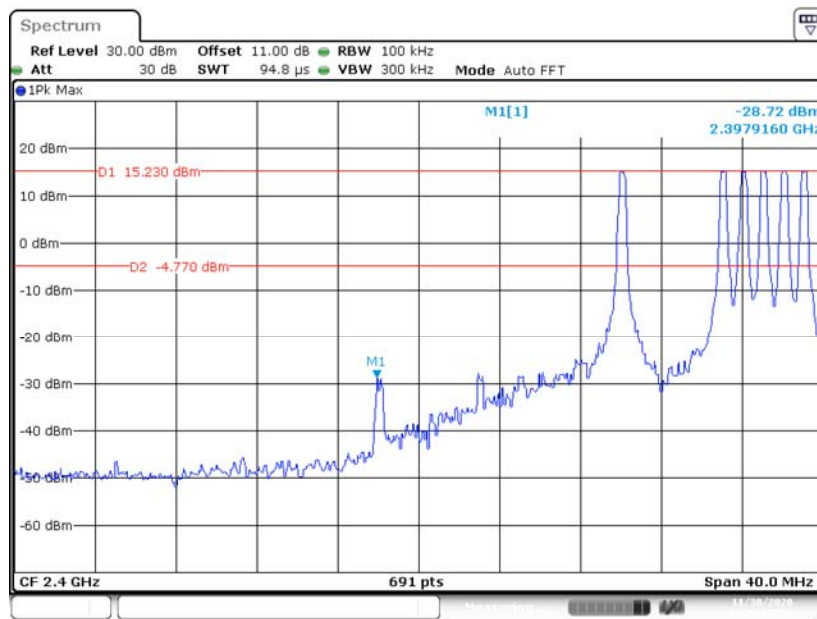

### Right Side-Hopping

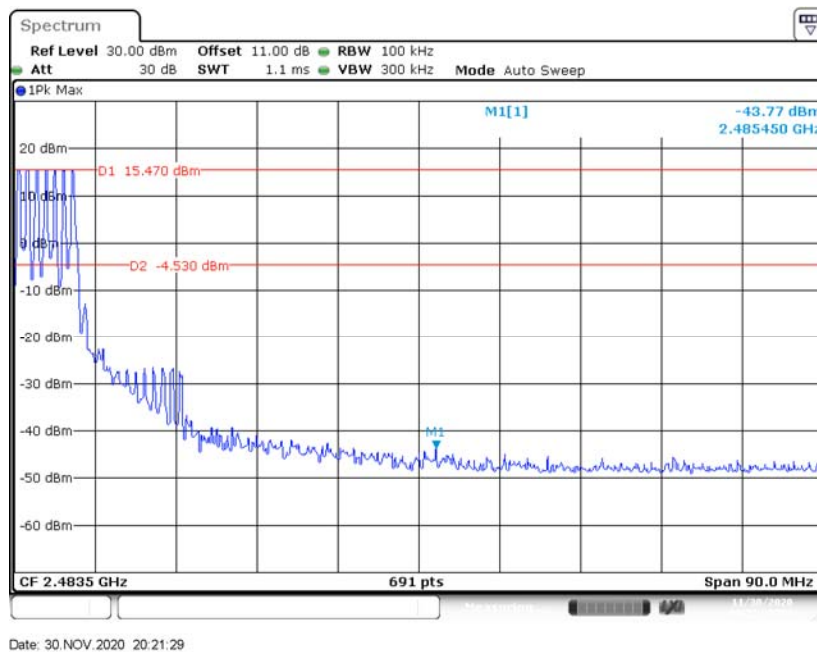

### **Declarations**

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***