



FCC Part 15, Subpart C, Section 15.247

Test Report

On

Wireless 12 Channel Analog Input Sensor Node  
FCC ID: XJQMSLINK0012

**Customer Name:** Lord Corporation

**Customer P.O.:** 769363

**Date of Report:** April 3, 2019

**Test Report No:** R-6373N-1

**Test Start Date:** November 20, 2018

**Test Finish Date:** January 25, 2019

**Test Technician:** M. Seamans

**Test Engineer:** T. Hannemann

**Report Approved By:** S. Wentworth

**Report Prepared By:** P. Harris

Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the general public. This test report shall not be reproduced, except in full, without the written approval of Retlif Testing Laboratories.



**40 YEARS OF TESTING EXCELLENCE**

## Technical Information

**Report Number:** R-6373N-1

**Customer:** Lord Corporation

**Address:** 459 Hurricane Lane, Suite 102  
Williston, VT 05495

**Manufacturer:** Lord Corporation

**Manufacturer Address:** 459 Hurricane Lane, Suite 102  
Williston, VT 05495

**Test Sample:** Wireless 12 Channel Analog Input Sensor Node

**Model Number:** TC-Link-200

**Serial Number:** 6310-5400-50000

**FCC ID:** XJQMSLINK0012  
Digital Transmission – Direct Sequence Spread Spectrum

**Type:** Transmitter

**Power Requirements:** 4.0 – 36.0 VDC

**Frequency of Operation:** 2.402 - 2.480 GHz

**Equipment Class:** DTS  
Internal Ceramic Chip Antenna, 1.5dBi Gain or External ¼

**Antenna Type:** Wave Antenna with RP SMA Connector, 2.5 dBi Gain

**Equipment Use:** Wireless Data Module

**Test Specification:**

FCC Rules and Regulations Part 15, Subpart C, Section 15.247

**Test Procedure:**

ANSI C63.4:2014

ANSI C63.10:2013

FCC 558074 D01 DTS Meas Guidance V04, April 5, 2017

Measurement Guide for Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices, V05R01, February 11, 2019

**Test Facility:**

Retlif Testing Laboratories  
101 New Boston Road  
Goffstown, NH 03045

FCC Designation Number: US5327



Retlif Testing Laboratories

Report No. R-6373N-1

Table 1 – Tests Performed

FCC Part 15, Subpart C	Test Method
15.247(b)(3)	Power Output
15.247(a)(2)	Occupied Bandwidth
15.247(d)	Antenna Terminal Out of Band/Band Edge Conducted Emissions
15.247(d)	Out of Band/Band Edge Radiated Emissions
15.247(e)	Power Density

**EUT Operation:**

During the performance of testing specified herein, the EUT was tested in the modes of operation as specified below (as applicable):

- Transmitting modulated signal at 2.405, 2.440 and 2.480 GHz with the following parameters:
  - Non synchronized
  - 2 channel
  - float data
  - 128 Hz sampling rate
  - filter set at 294 Hz
- Standby (Receiver tests)

**EUT Description:**

The TC-Link-200 is a thermocouple input node used in LORD Corporation wireless sensing networks. Sensor wire length used with this node is limited to 1 meter.

All equipment that was utilized to achieve the EUT operating state is specified in the table below:

Table 2 – Support Equipment

Description	Manufacturer	Model Number	Serial Number
Laptop PC	ASUS	K54C	C9N0ASKRR1SF39F
Basestation	Lord Corporation	WSDA-200-USB	6307-2040-00086



Retlif Testing Laboratories

Report No. R-6373N-1

## Certification and Signatures

We certify that this report is a true representation of the results obtained from the tests of the equipment stated. We further certify that the measurements shown in this report were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Scott Wentworth  
Branch Manager



Todd Hannemann  
EMC Test Engineer  
iNARTE Certified Technician ATL-0255-T

### Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

### Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This report must not be used by the client to claim product endorsement by ANSI National Accreditation Board (ANAB).



Retlif Testing Laboratories

Report No. R-6373N-1

## Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document:

<b>Revision</b>	<b>Date</b>	<b>Pages Affected</b>
-	April 3, 2019	Original Release



**Retlif Testing Laboratories**

Report No. R-6373N-1

## Requirements and Test Results

### **FCC Section 15.247 (a)(2) – Bandwidth**

For systems using digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands the minimum 6 dB bandwidth shall be at least 500 kHz.

- **Results:**

The minimum 6dB bandwidth measured while transmitting was 1.1666 MHz.

The device was found to meet the requirement of 15.247 (a)(2).

### **FCC Section 15.247 (b)(3) - Power Output**

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the 1 Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g.: alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

- **Results:**

The maximum measured peak conducted output power when transmitting was 45.29 mW. The maximum antenna gain of the antennas is 2.5 dBi. The device was found to meet the power output requirements of 15.247 (b)(3) including de facto EIRP.

### **FCC Section 15.247(d) – Unwanted Emissions**

#### **Antenna Terminal Out of Band/Band Edge Conducted Emissions**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under Paragraph (b)(3) of Section 15.247, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

- **Results:**

All measured out of band/band edge conducted emissions were below the specified limits and the device was found to meet the requirements of 15.247 (d).



**Retlif Testing Laboratories**

Report No. R-6373N-1

## Requirements and Test Results (con't)

### FCC Section 15.247(d) – Unwanted Emissions

#### Radiated Spurious Emissions/Restricted Bands/Band Edge

Emissions which fall into restricted bands, as defined in 15.205(a) must comply with the radiated emissions limits specified in 15.209(a) and shown below in Table 3. Emissions emanating from the EUT cabinet and cables must also comply with the radiated emissions limits. Radiated emissions measurements were also performed at the band edges to ensure band edge compliance.

Table 3 - Radiated Emission Limits

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 to 88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960	500	3

- **Results:**

All spurious emissions were measured and found to be in compliance with the limits specified in 15.209(a). Band edge emissions were also found to be in compliance with the limits specified in 15.209(a).

### FCC Section 15.247(e) – Power Spectral Density

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

- **Results:**

The power spectral density conducted from the intentional radiator to the antenna was not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density was determined in accordance with Section 15.247(b)(3), herein.



Retlif Testing Laboratories

Report No. R-6373N-1

## Requirements and Test Results (con't)

Field Strength Calculation/Conversion:

The maximized field strength of the emission was obtained as follows:

$$CR = MR + CF$$

Where:

CR = Corrected Reading in dB $\mu$ V/m

MR = Uncorrected Meter Reading in dB $\mu$ V

CF = Correction Factor in dB (Antenna Factor, Pre-amp + Cable Loss)

Example:

MR = 15.35 dB $\mu$ V

CF = 16.85 dB

CR = 15.35 dB $\mu$ V + 16.85 = 32.2 dB $\mu$ V/m

dB $\mu$ V/M is converted to uV/M for comparison to the specified limit using the formula:

$$\text{invLog dB}\mu\text{V/M}/20$$

$$32.2 \text{ dB}\mu\text{V/m} = 40.74 \text{ uV/m}$$

RF Power Conversion:

Power readings in dBm may be converted to mW using the formula:

$$\text{InvLog dBm}/10$$

$$\text{Example: } 20 \text{ dBm} = 100 \text{ mW}$$



Retlif Testing Laboratories

Report No. R-6373N-1

## FCC Section 15.247 (i)

### RF Exposure Limits

Spread Spectrum Transmitters operating under 15.247 must be operated in a manner that ensures the public is not exposed to RF energy levels in excess of the commission's guidelines. Based on the transmitter power and maximum antenna gain (see calculation below) the minimum separation distance was calculated to determine the distance for acceptable MPE power density levels to meet both the Occupational/Controlled Exposure and the General Population/Uncontrolled Exposure requirements of FCC Part 1.1310. The calculation below uses the more stringent General Population MPE Limits.

$$S = \frac{PG}{4\pi Dsq}$$

D = Minimum Separation Distance in cm

S = Max allowed Power Density in mW/cmsq

Per 1.1310 For the Frequency of 2405 MHz S = 1 mW/cmsq

Power = Max Power Input to Antenna = 45.29mW

Gain = Max Power Gain of Antenna = 2.5 dBi = 1.78 numeric

$$1 \text{ mW/cmsq} = \frac{45.29 \times 1.78}{4 \times (3.14) \times D^2} = \frac{80.62}{12.56 \times D^2}$$

$$D^2 = \frac{80.62}{12.56 \times 1}$$

$$D = \sqrt{6.42} = 2.53 \text{ cm}$$

**NOTE:** The maximum measured RF power output and maximum antenna gain was utilized in the RF Exposure calculation.



Retlif Testing Laboratories

Report No. R-6373N-1

## Equipment List

### FCC Section 15.247(a)(2) Occupied Bandwidth

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5133	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz, 2 W	757C-10	11/9/2018	11/30/2019
5231	AGILENT / HP	ANALYZER, SPECTRUM	3 Hz - 26.5 GHz	E4440A	4/12/2018	4/30/2019

### FCC Section 15.247 (d) Out of Band-Band Edge Conducted

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5133	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz, 2 W	757C-10	11/9/2018	11/30/2019
5231	AGILENT / HP	ANALYZER, SPECTRUM	3 Hz - 26.5 GHz	E4440A	4/12/2018	4/30/2019

### FCC Section 15.247(b)(3) Power Output

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5133	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz, 2 W	757C-10	11/9/2018	11/30/2019
5231	AGILENT / HP	ANALYZER, SPECTRUM	3 Hz - 26.5 GHz	E4440A	4/12/2018	4/30/2019

### FCC Section 15.247 (d) Restricted Band Emissions

EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
1232	AGILENT / HP	PRE-AMPLIFIER	1 - 26.5 GHz	8449B	5/25/2018	5/31/2019
3258	ETS / EMCO	ANTENNA, DOUBLE RIDGED GUIDE	1 - 18 GHz	3115	5/10/2018	11/30/2019
3427B	ETS / EMCO	ANTENNA, BICONICAL	20 - 200 MHz	3104	9/21/2017	3/31/2019
3430	MCS	ANTENNA, HORN	18 - 26.5 GHz	K-5039	No Calibration Required	
4029B	RETLIF	OPEN AREA TEST SITE, ATTENUATION	3 / 10 Meters	RNH	8/16/2017	8/31/2019
443	ELECTRO-METRICS	ANTENNA, LOG PERIODIC	200 MHz - 1000 MHz	LPA-25	5/21/2018	11/30/2019
5143	MINI-CIRCUITS	FILTER, HIGH PASS	1700 - 5000 MHz	VHF-1320	10/22/2018	10/31/2019
5144	MINI-CIRCUITS	FILTER, HIGH PASS	3400 - 9900 MHz	VHF-3100+	10/22/2018	10/31/2019
5231	AGILENT / HP	ANALYZER, SPECTRUM	3 Hz - 26.5 GHz	E4440A	4/12/2018	4/30/2019

### FCC Section 15.247(e) Power Spectral Density


EN	Manufacturer	Description	Range	Model No.	Cal Date	Due Date
5133	NARDA MICROWAVE	ATTENUATOR, COAXIAL	10 dB, DC - 12.4 GHz, 2 W	757C-10	11/9/2018	11/30/2019
5231	AGILENT / HP	ANALYZER, SPECTRUM	3 Hz - 26.5 GHz	E4440A	4/12/2018	4/30/2019



Retlif Testing Laboratories

Report No. R-6373N-1

## Test Photographs Occupied Bandwidth

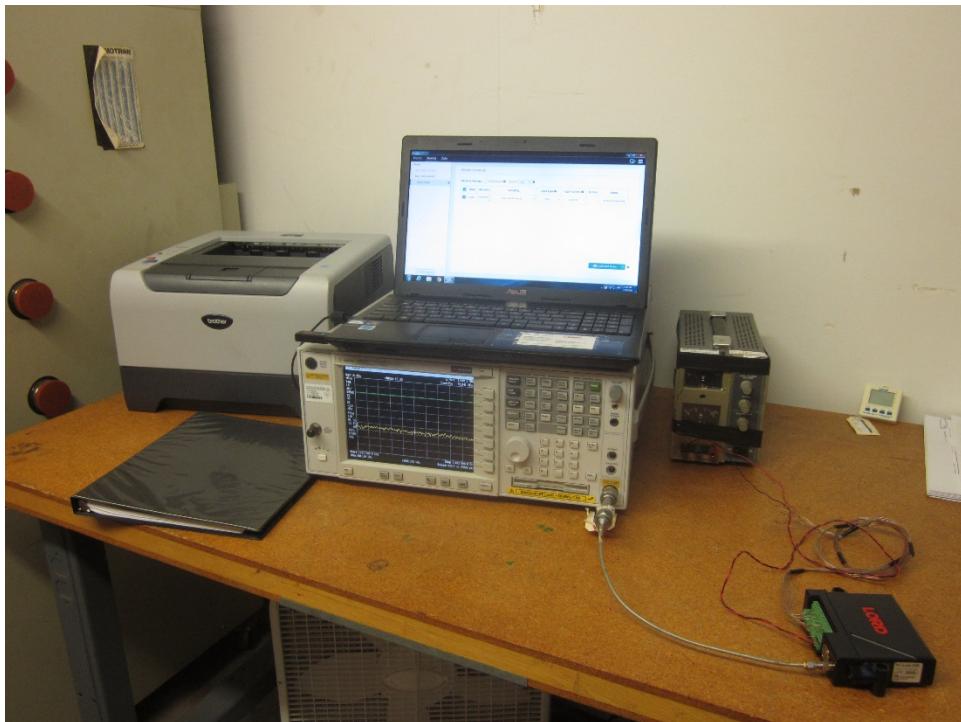

Test Setup



Retlif Testing Laboratories

Report No. R-6373N-1

**FCC Section 15.247(a)(2)**  
**Occupied Bandwidth**  
**Test Data**




**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS Power Setting: 20 dBm 6dB Bandwidth: 1.2296 MHz

Agilent 20:59:53 Sep 30, 2037

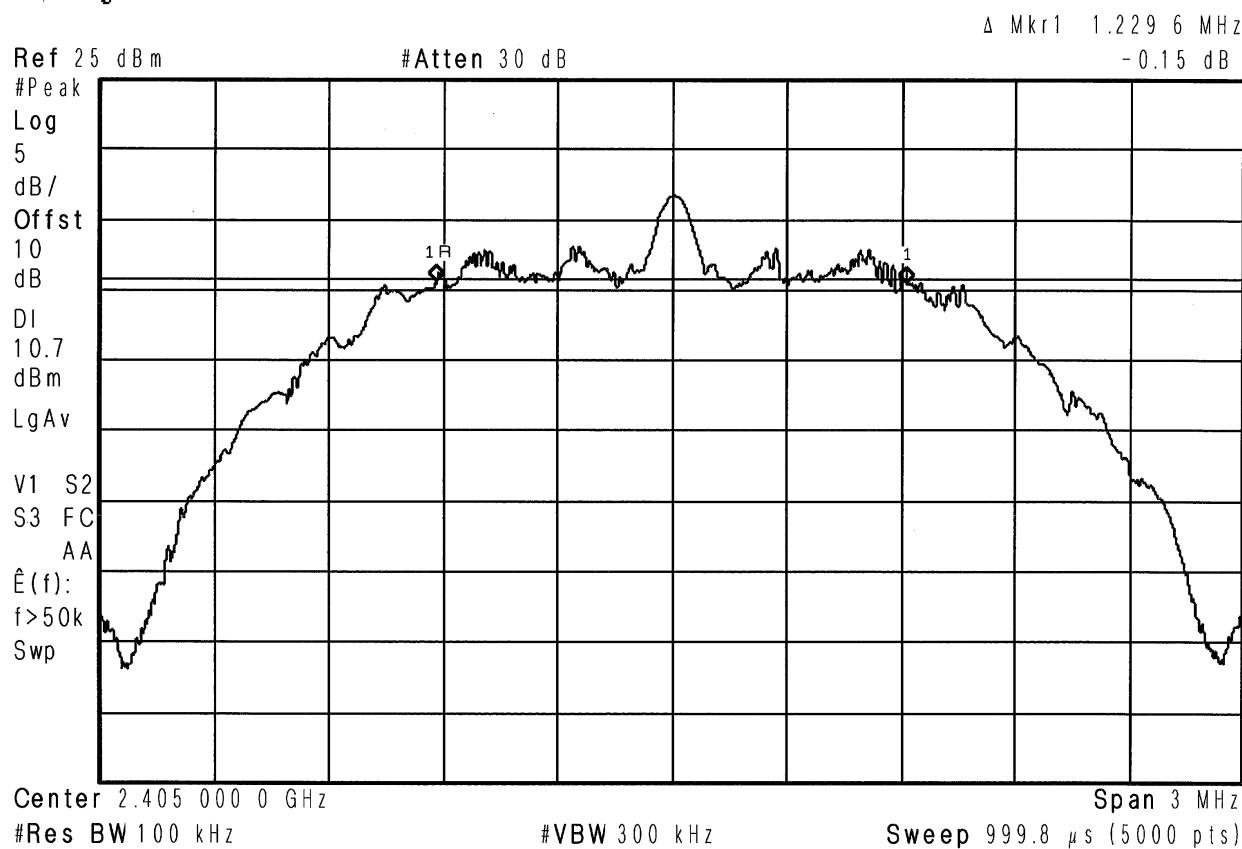


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS Power Setting: 20 dBm 6dB Bandwidth: 1.2549 MHz

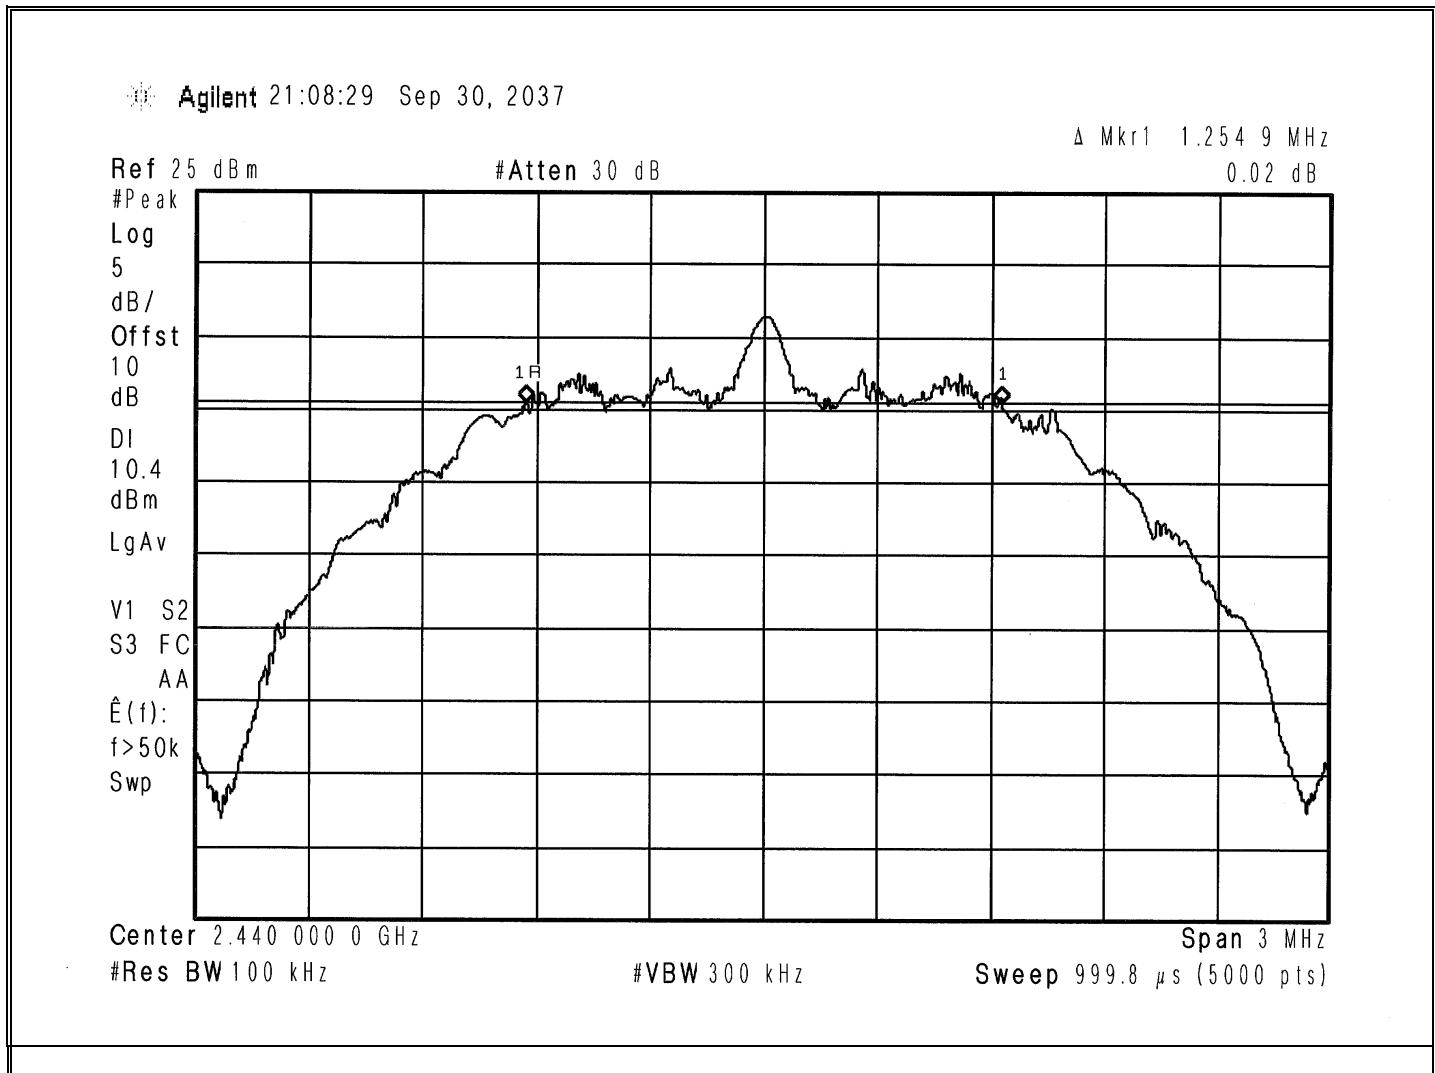


Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS Power Setting: 20 dBm 6dB Bandwidth: 1.2452 MHz

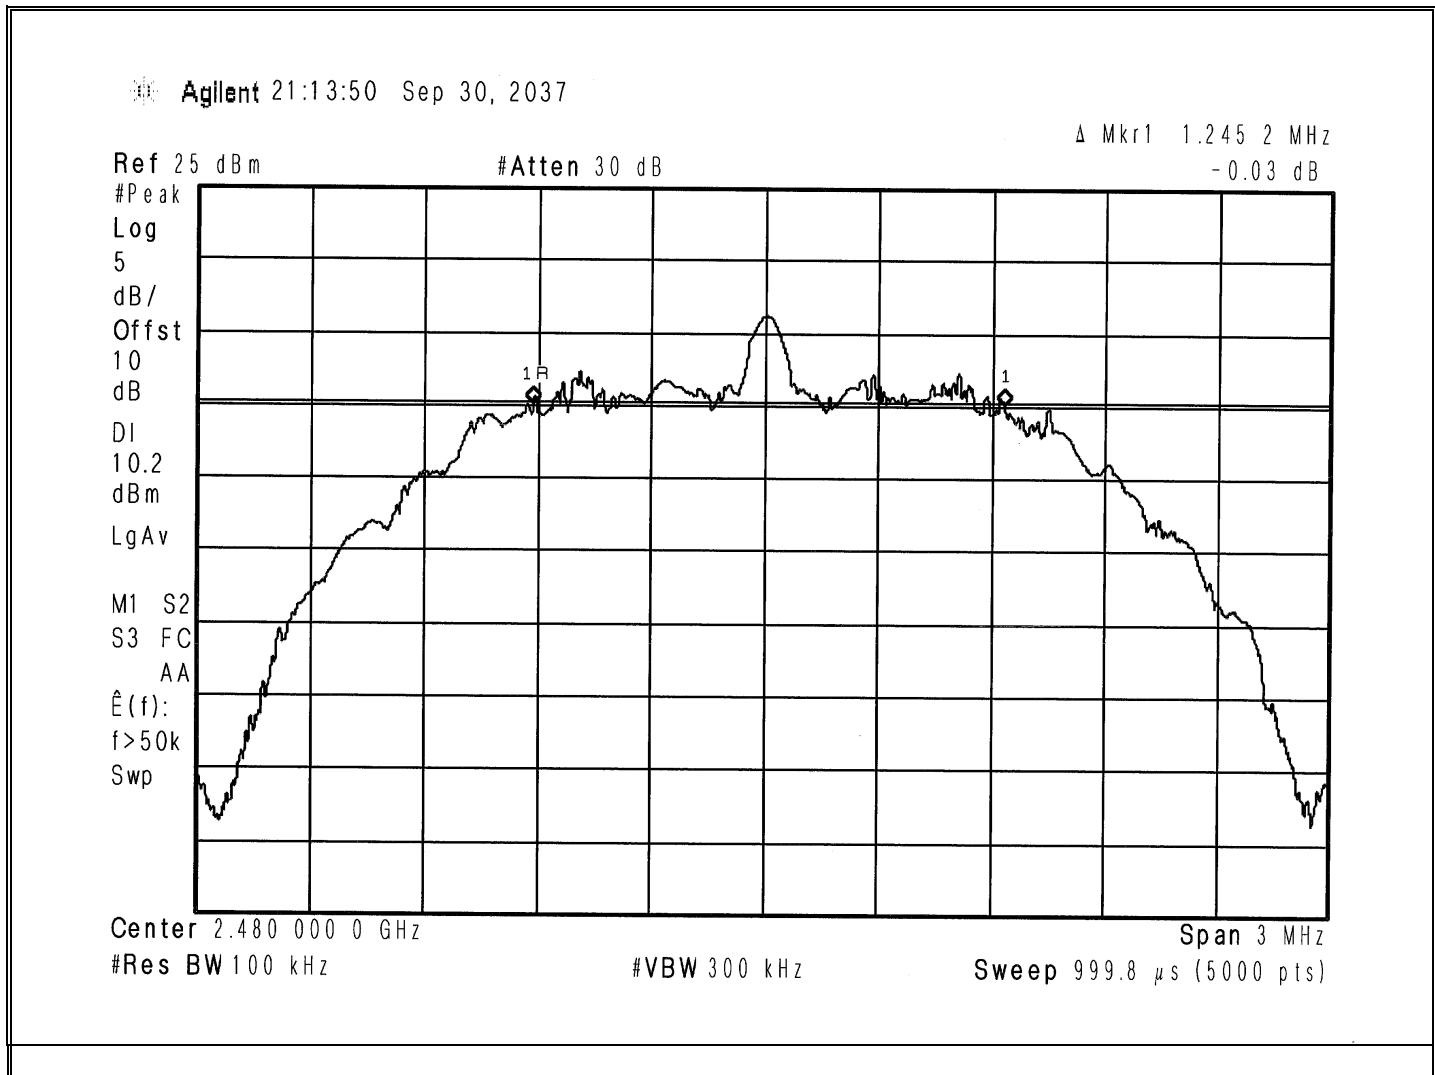


Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS+ Power Setting: 16 dBm 6dB Bandwidth: 1.1678 MHz

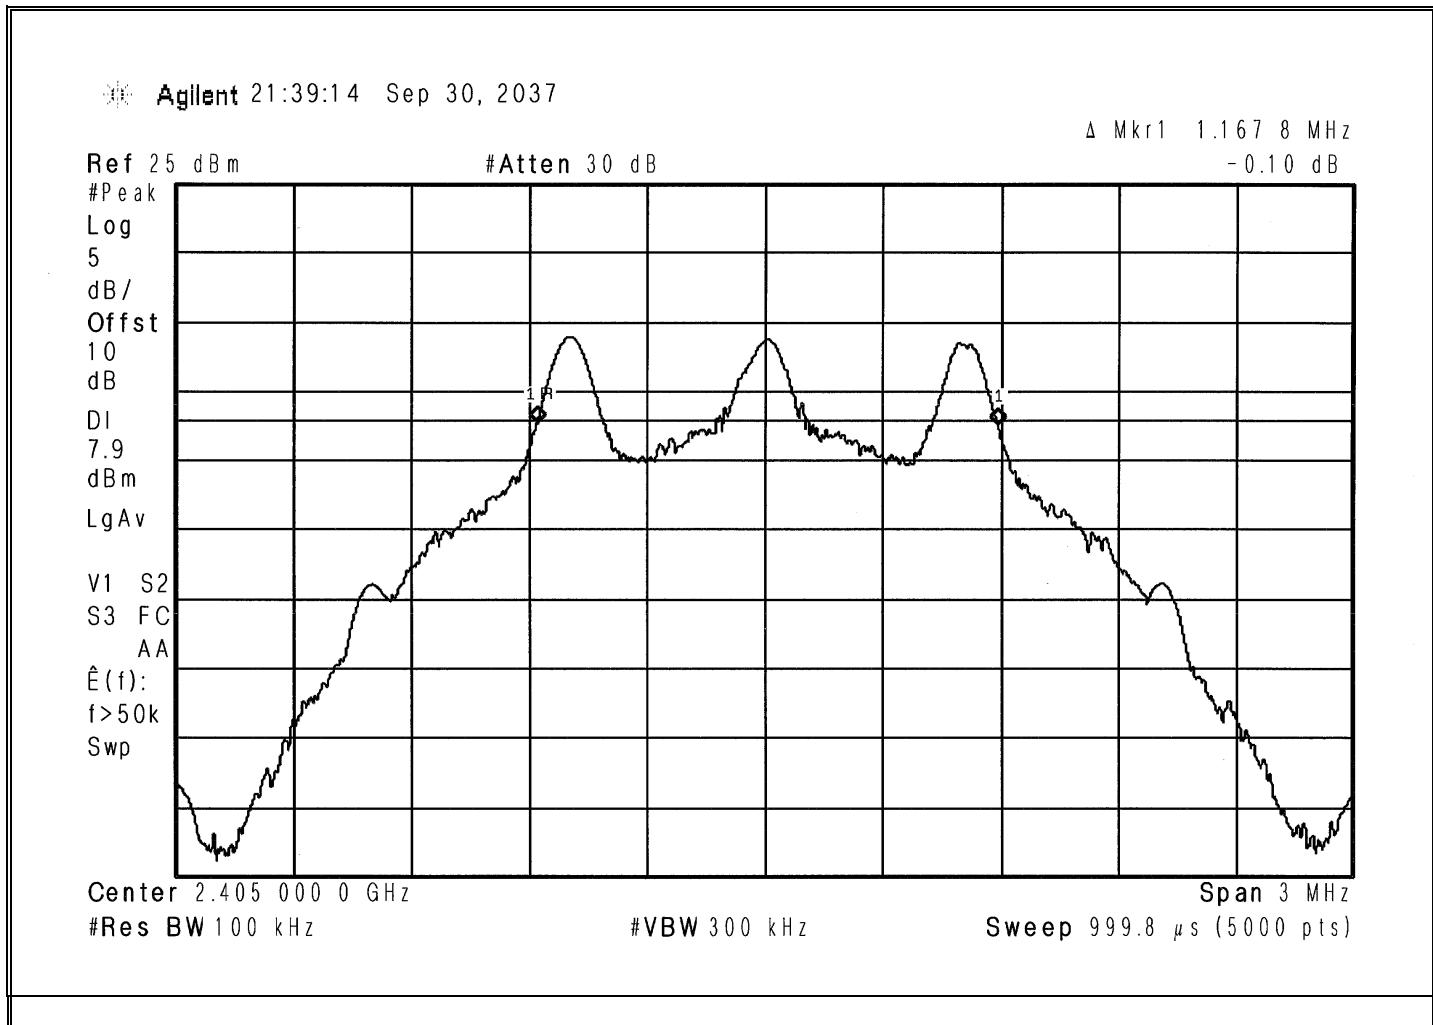


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS+ Power Setting: 16 dBm 6dB Bandwidth: 1.1666 MHz

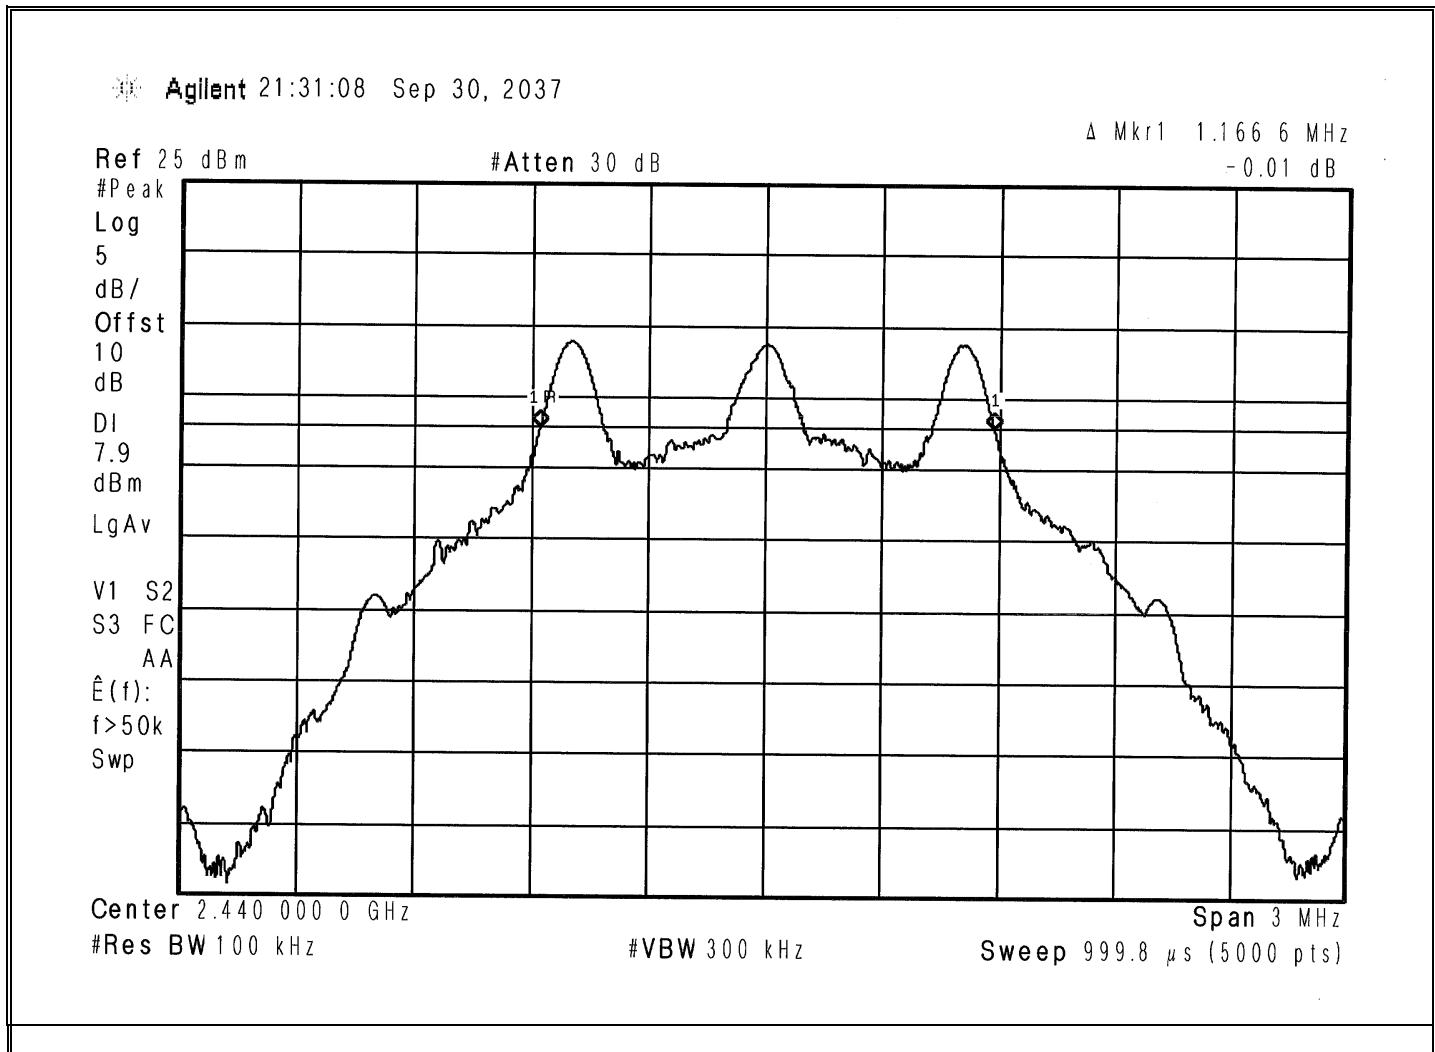


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET


<b>Method:</b>	<b>Occupied Bandwidth</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (a)(2)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	LXRS+ Power Setting: 16 dBm 6dB Bandwidth: 1.1702 MHz

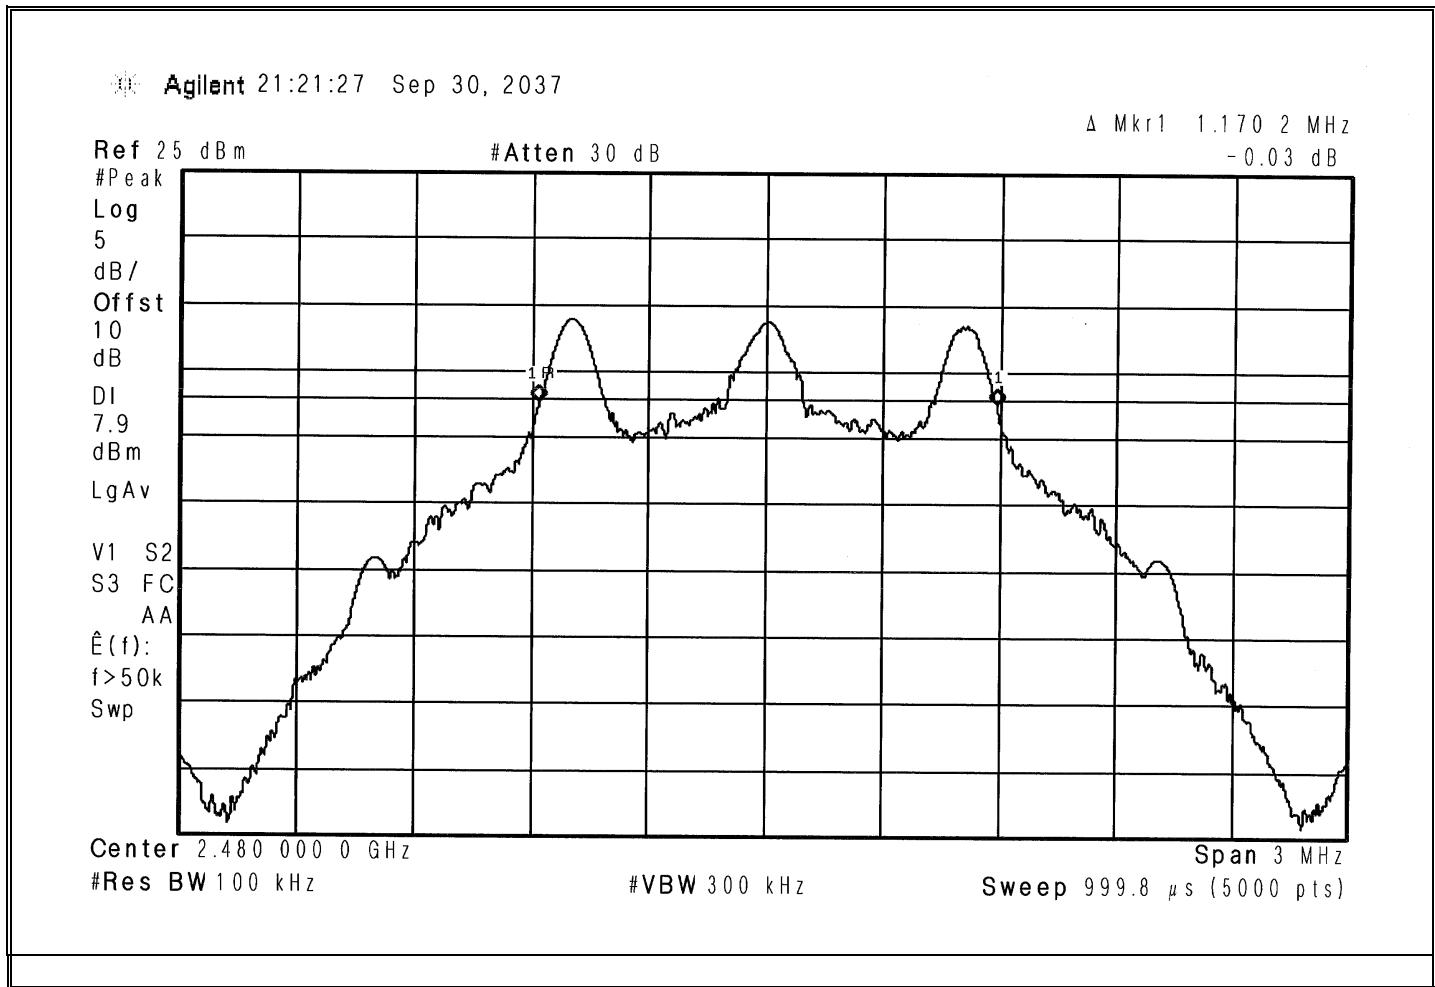

Retlif Testing Laboratories

Report No. R-6373N-1

**Test Photographs  
Power Output**

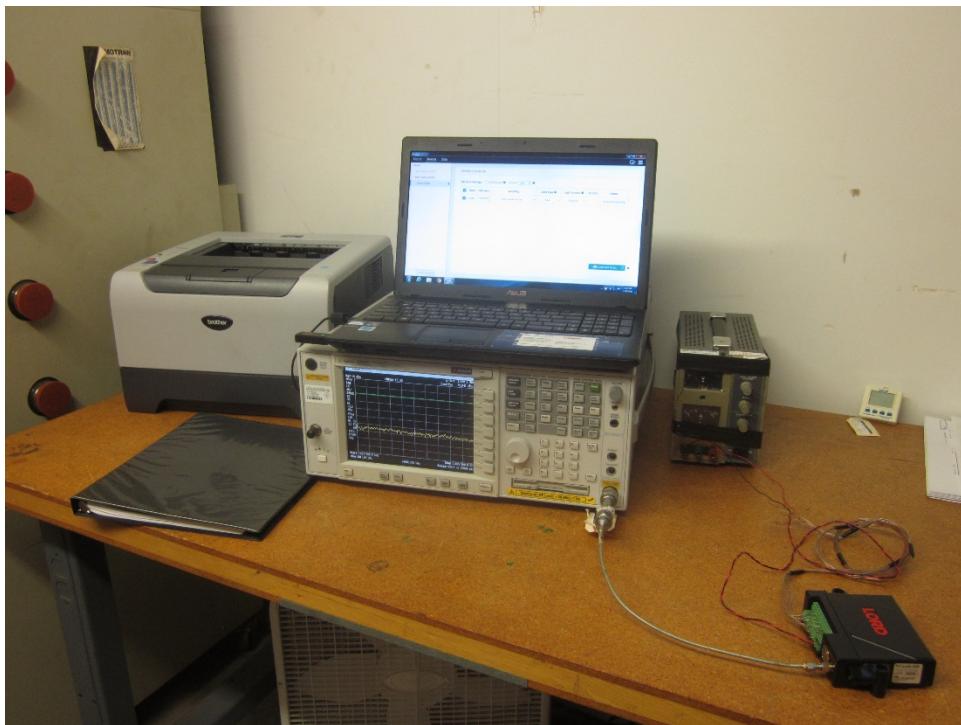

Test Setup



**Retlif Testing Laboratories**

Report No. R-6373N-1

**FCC Section 15.247 (b)(3)**  
**Power Output**  
**Test Data**




**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

EMISSIONS TEST DATA SHEET	
<b>Method:</b>	<b>Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.1.1 RBW $\geq$ DTS Bandwidth Power Setting: 20 dBm Power Output: 16.56 dBm

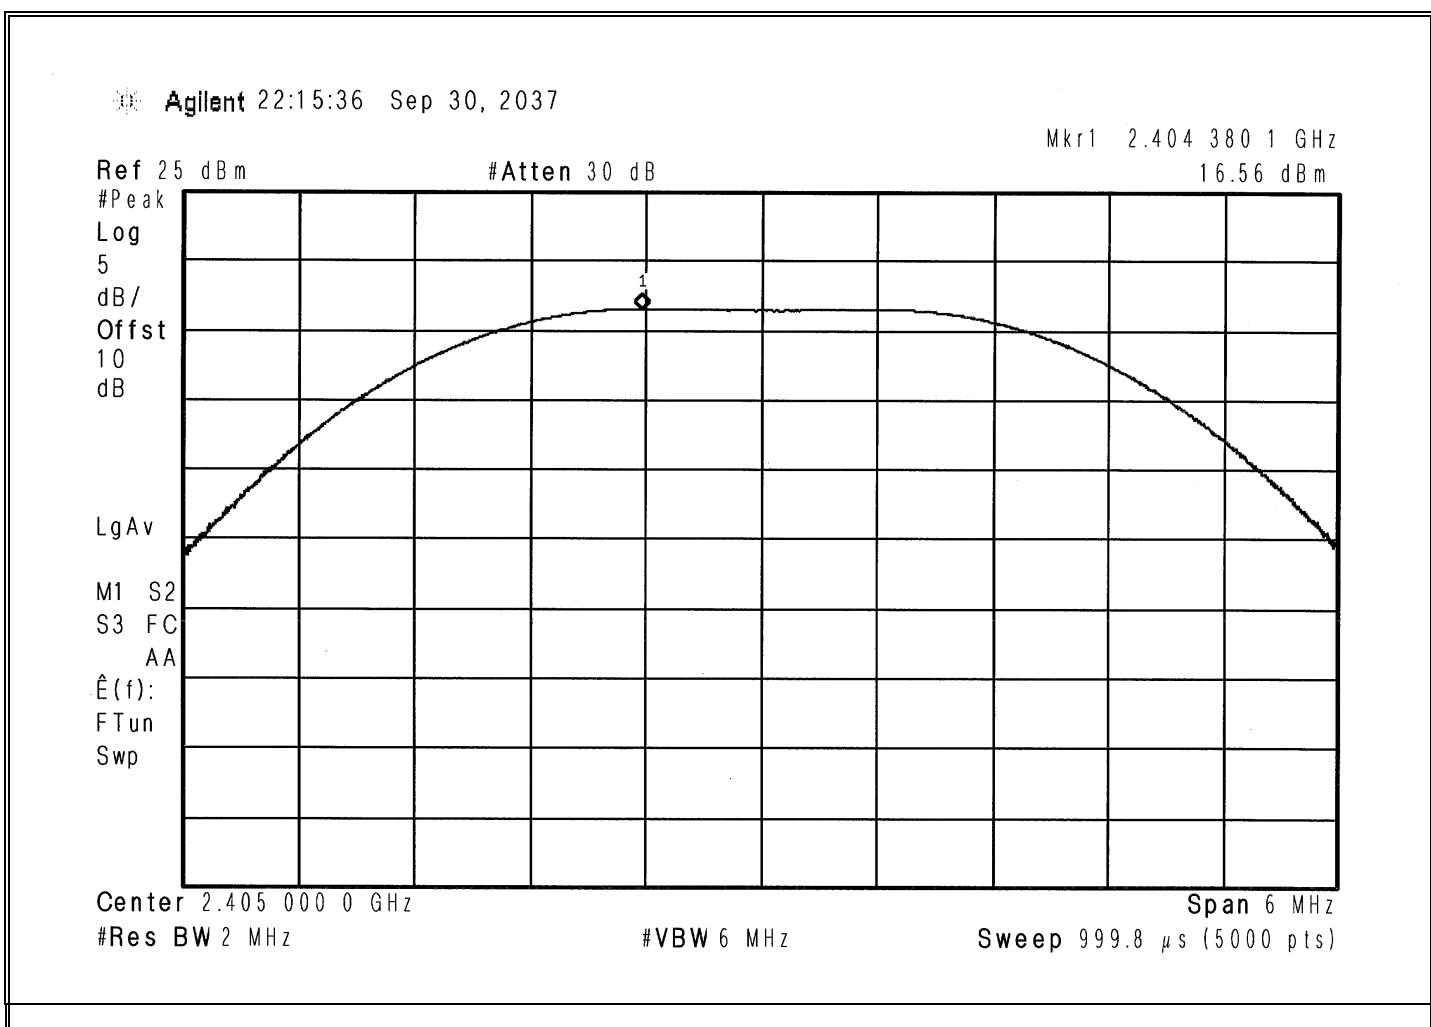


## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

EMISSIONS TEST DATA SHEET	
<b>Method:</b>	<b>Peak Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.1.1 RBW $\geq$ DTS Bandwidth Power Setting: 20 dBm Power Output: 16.26 dBm

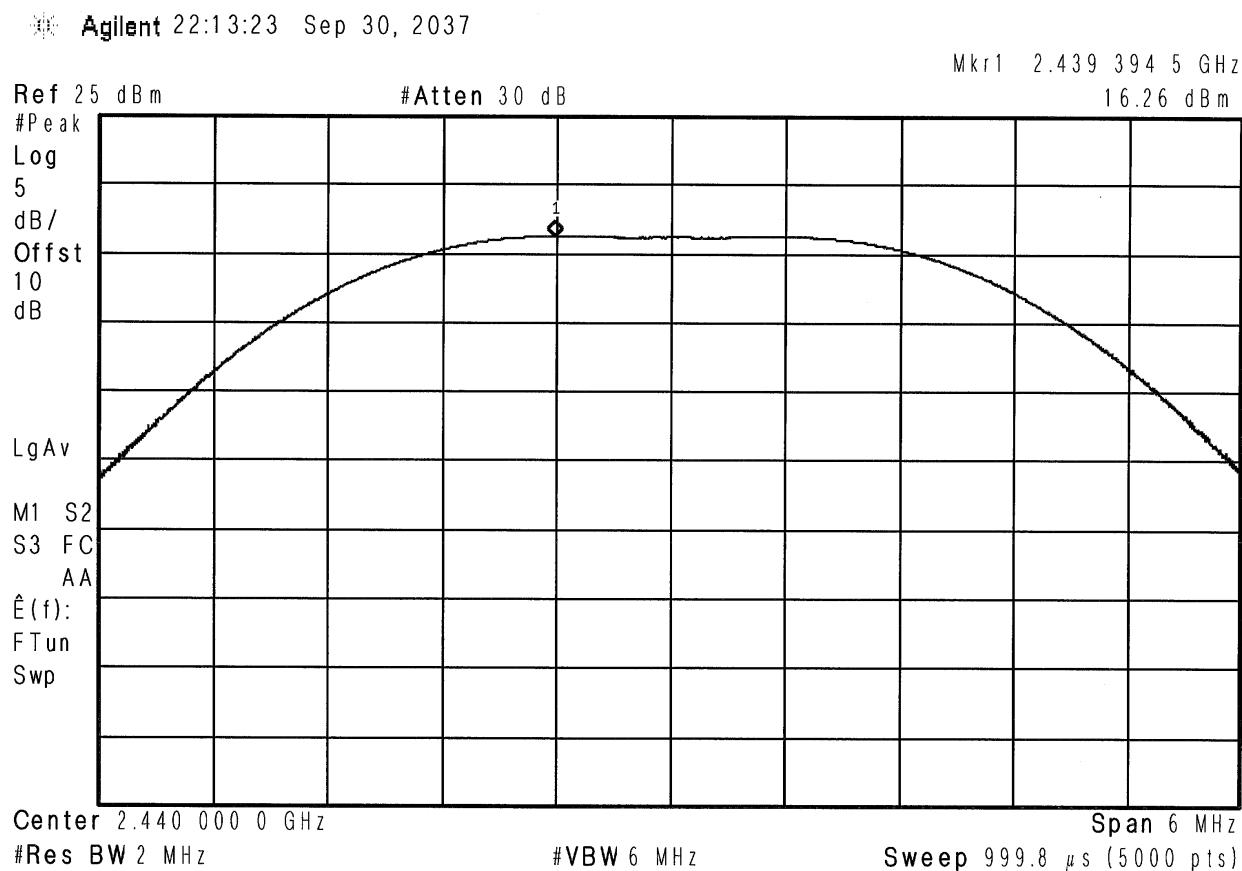


## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Peak Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.1.1 RBW≥DTS Bandwidth Power Setting: 20 dBm Power Output: 16.03 dBm

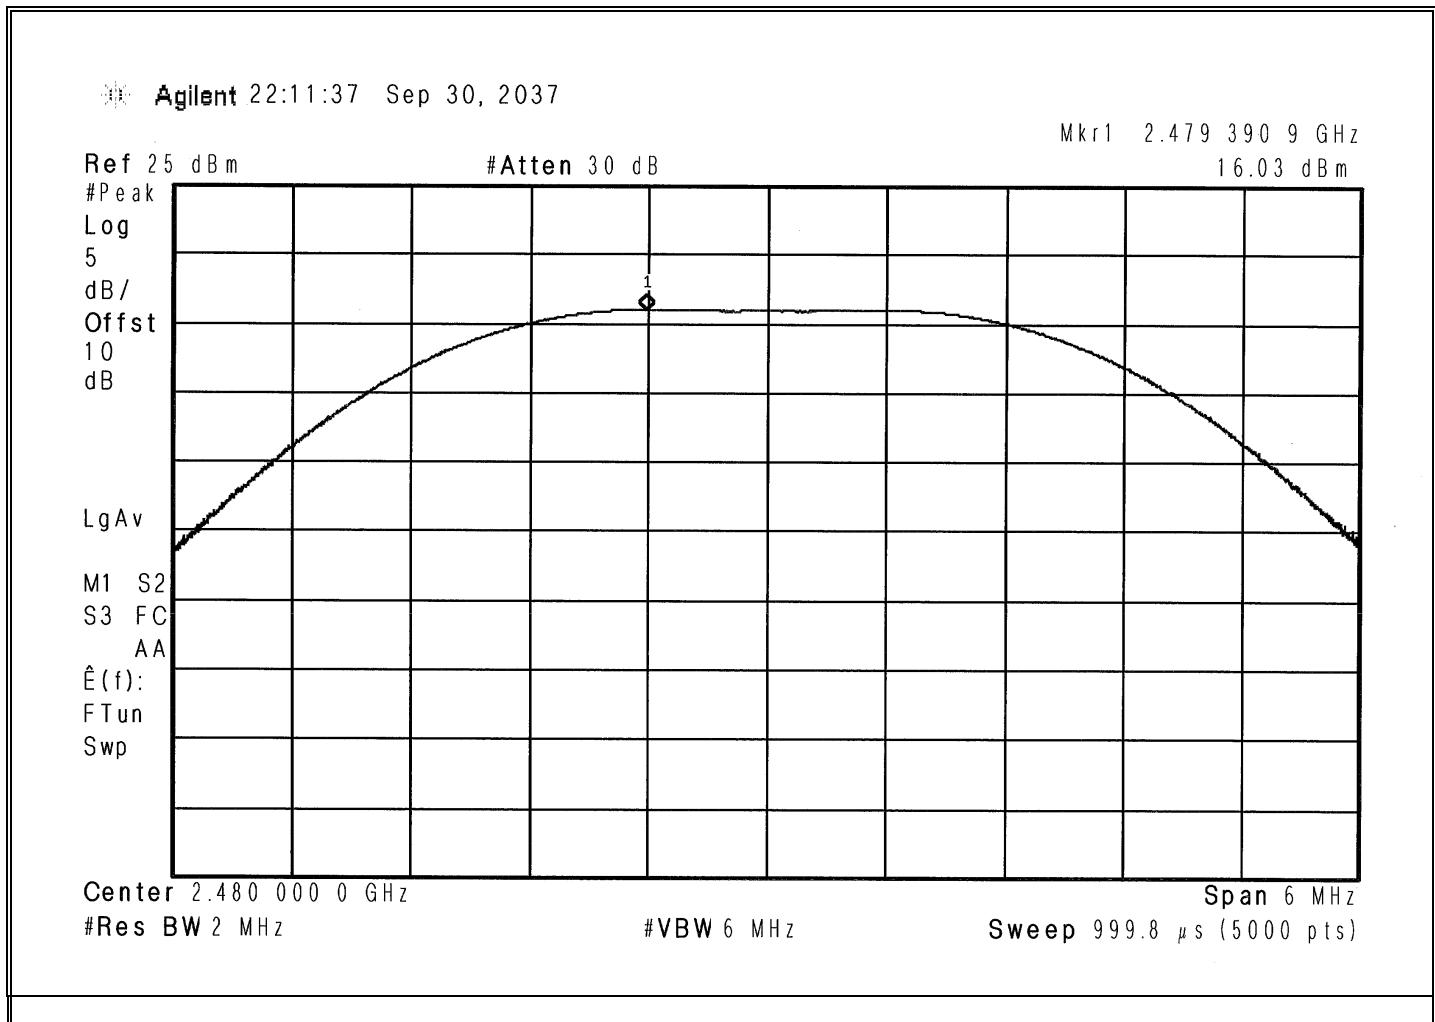


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.2.2.4 AVGSA-2 Power Setting: 16 dB Duty Cycle Factor: 11.952dB Power Output: 13.528 dBm (1.576 dBm + 11.952 dB)

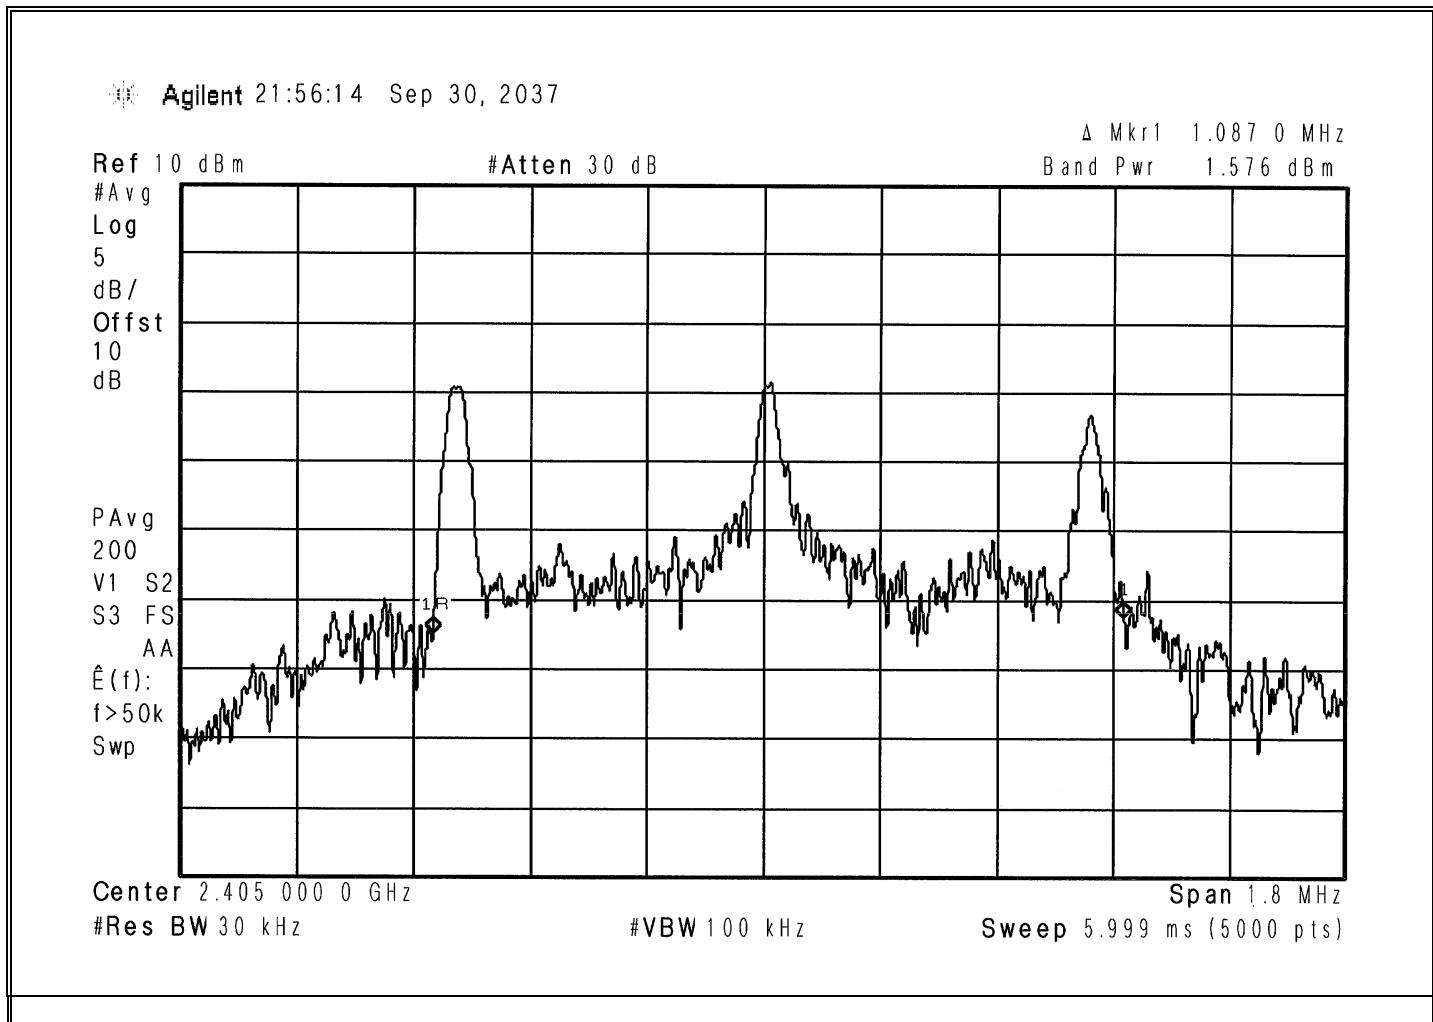


Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Peak Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.2.2.4 AVGSA-2 Power Setting: 16 dB Duty Cycle Factor: 11.952dB Power Output: 14.302 dBm (2.350 dBm + 11.952 dB)

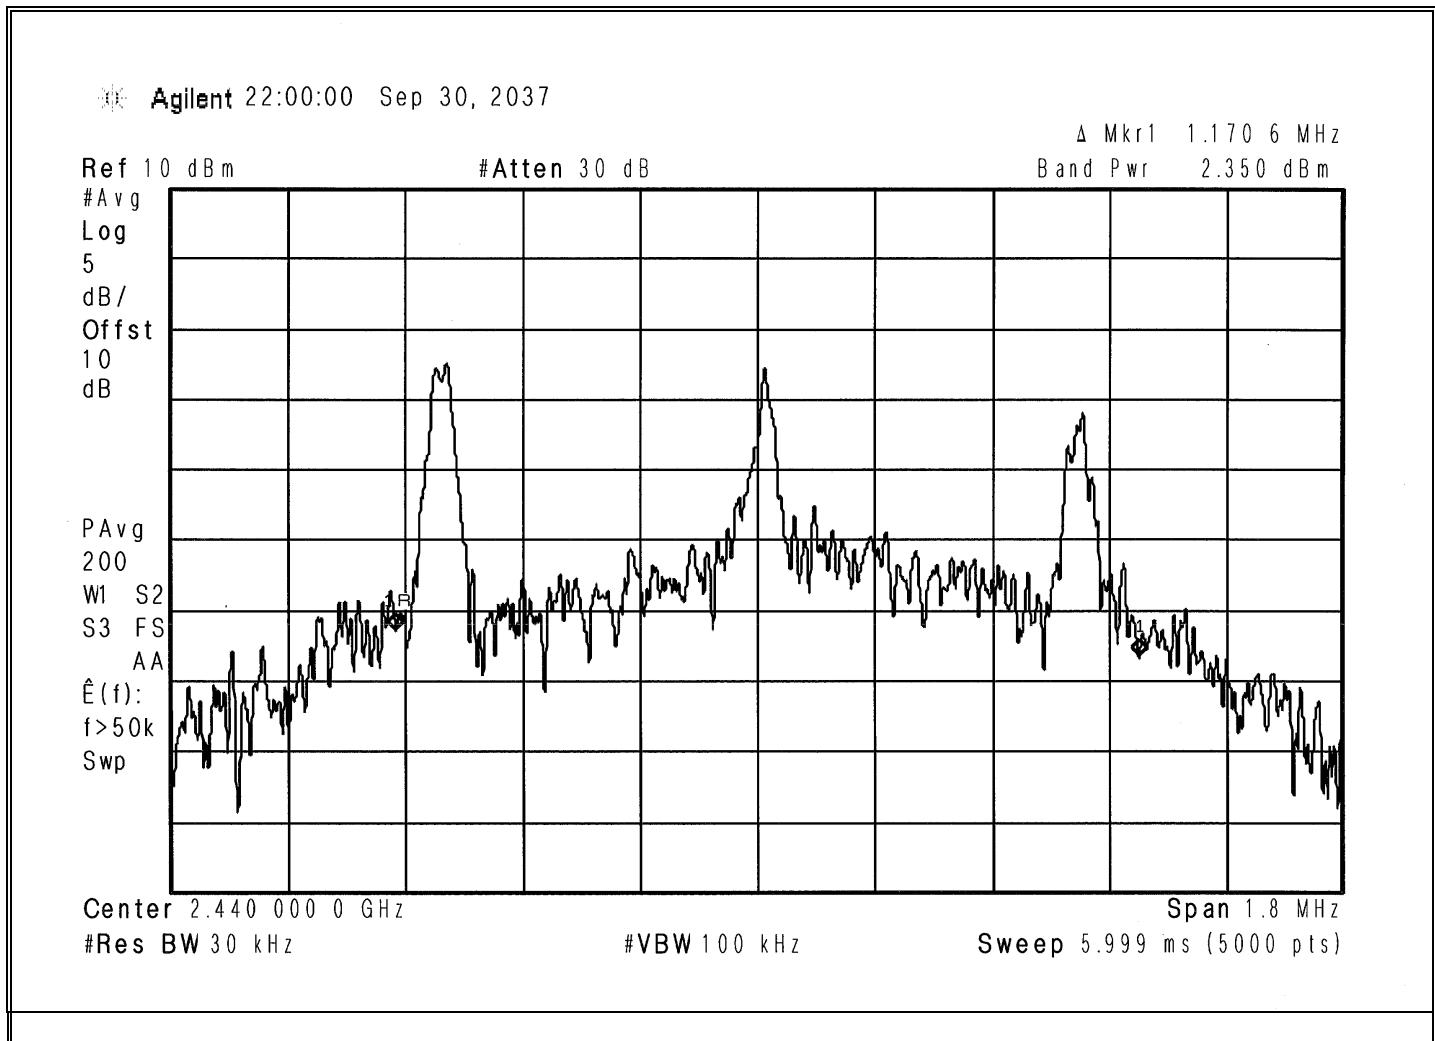


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET


<b>Method:</b>	<b>Peak Power Output</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (b)(3)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 21.9 %
<b>Notes:</b>	Method: 11.9.2.2.4 AVGSA-2 Power Setting: 16 dB Duty Cycle Factor: 11.952dB Power Output: 14.287 dBm (2.335 dBm + 11.952 dB)

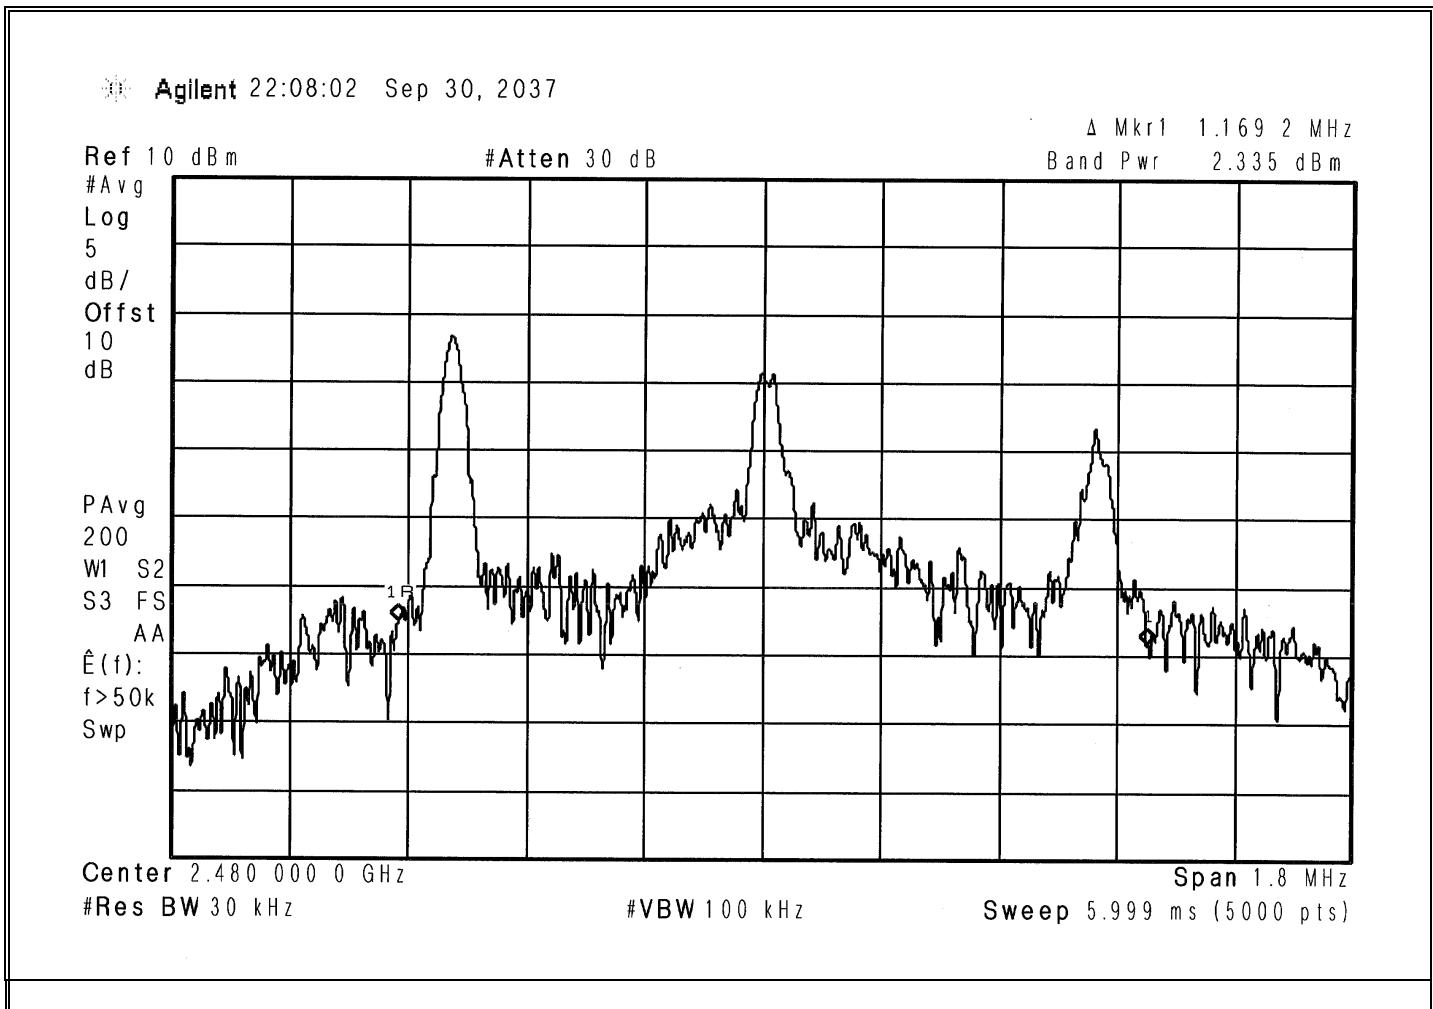

Retlif Testing Laboratories

Report No. R-6373N-1

**Test Photographs**  
**Antenna Terminal Out of Band/Band Edge Conducted Emissions**

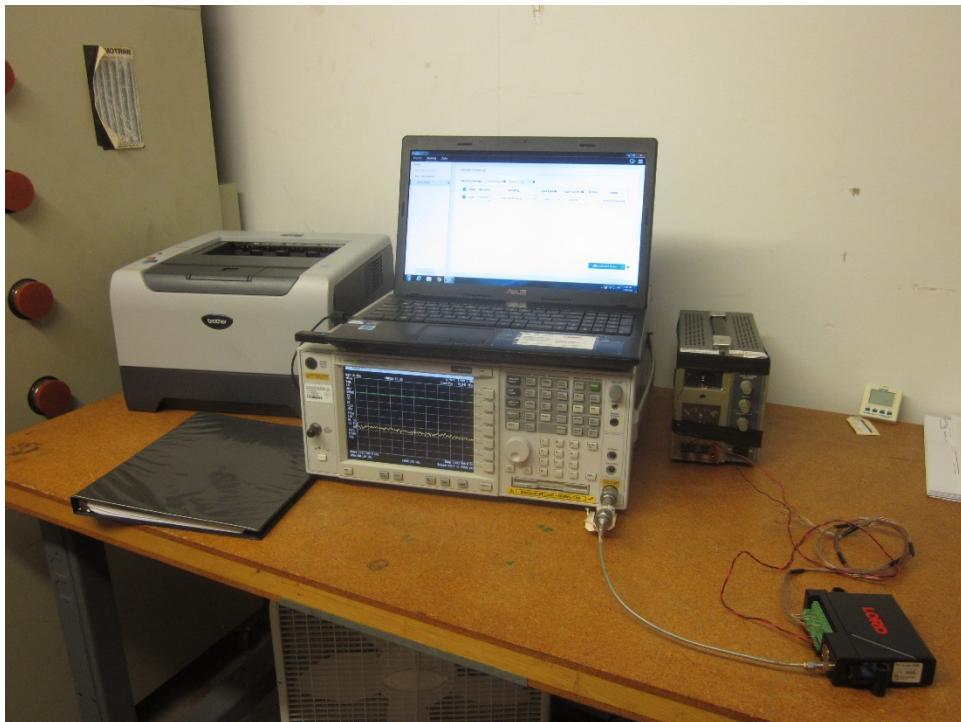

Test Setup



**Retlif Testing Laboratories**

Report No. R-6373N-1

**FCC Section 15.247 (d)**  
**Antenna Terminal Out of Band/Band Edge Conducted Emissions**  
**Test Data**



**Retlif Testing Laboratories**

Report No. R-6373N-1

**Conducted Out of Band  
Test Data**




**Retlif Testing Laboratories**

**Report No. R-6373N-1**

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

Agilent 23:19:44 Sep 30, 2037

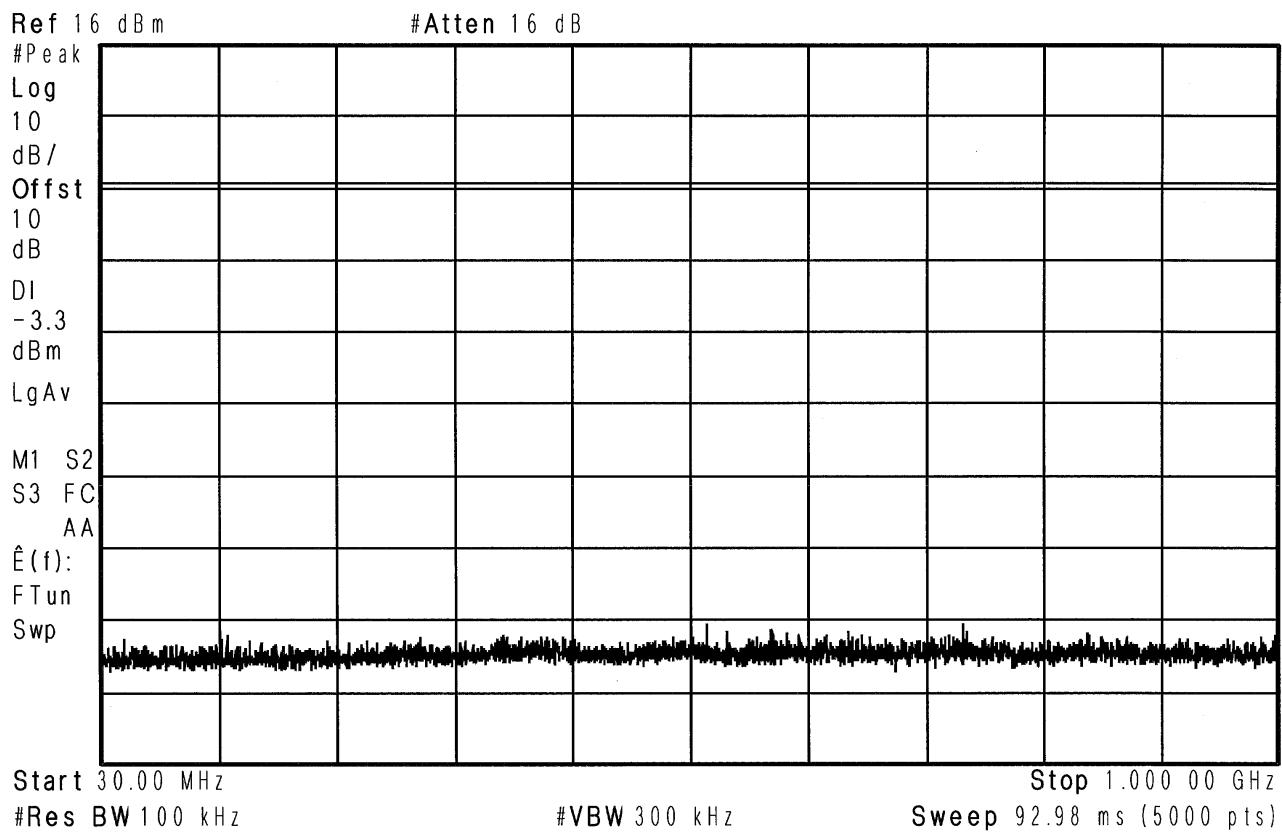

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

Agilent 23:21:40 Sep 30, 2037

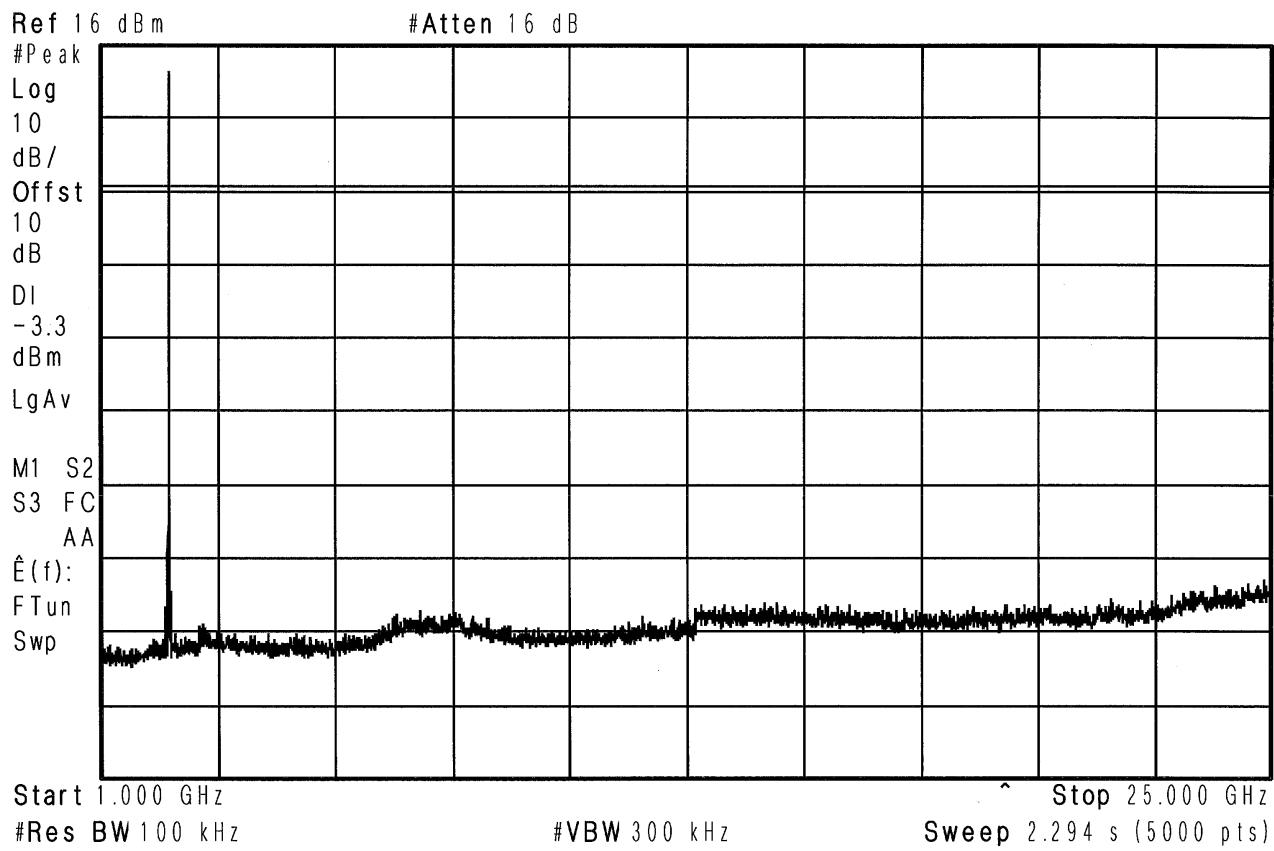

1GHz to 25GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

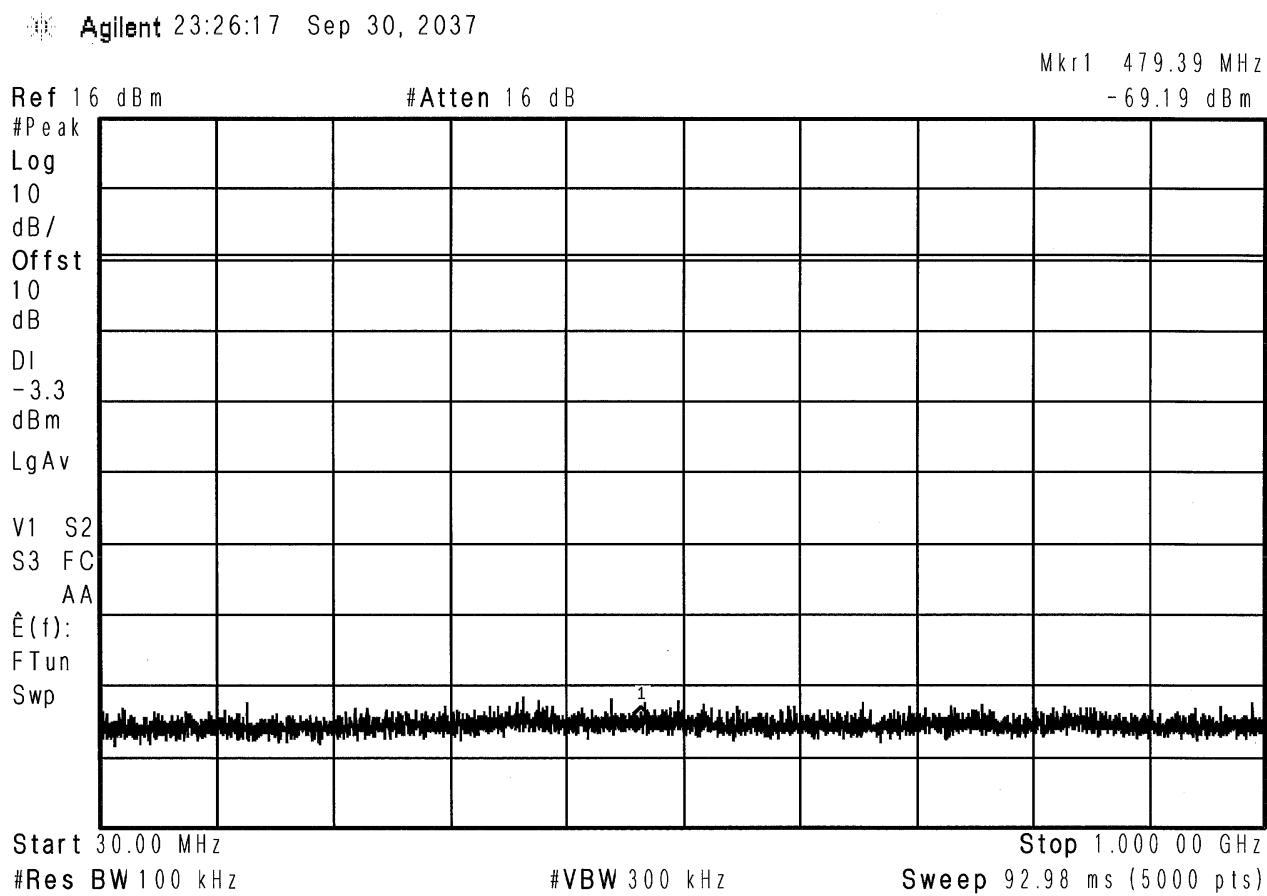

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Conducted Out of Band
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

Agilent 23:24:36 Sep 30, 2037

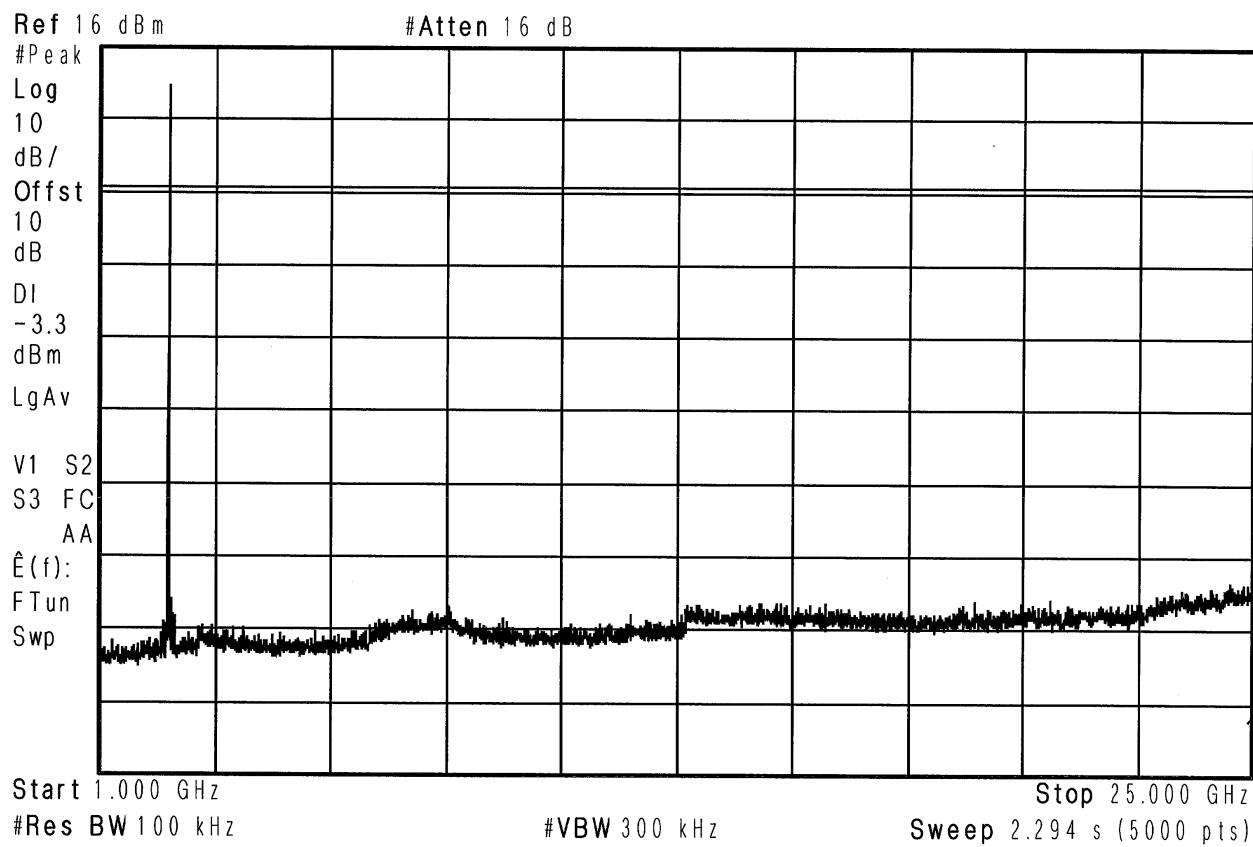

1GHz to 25GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

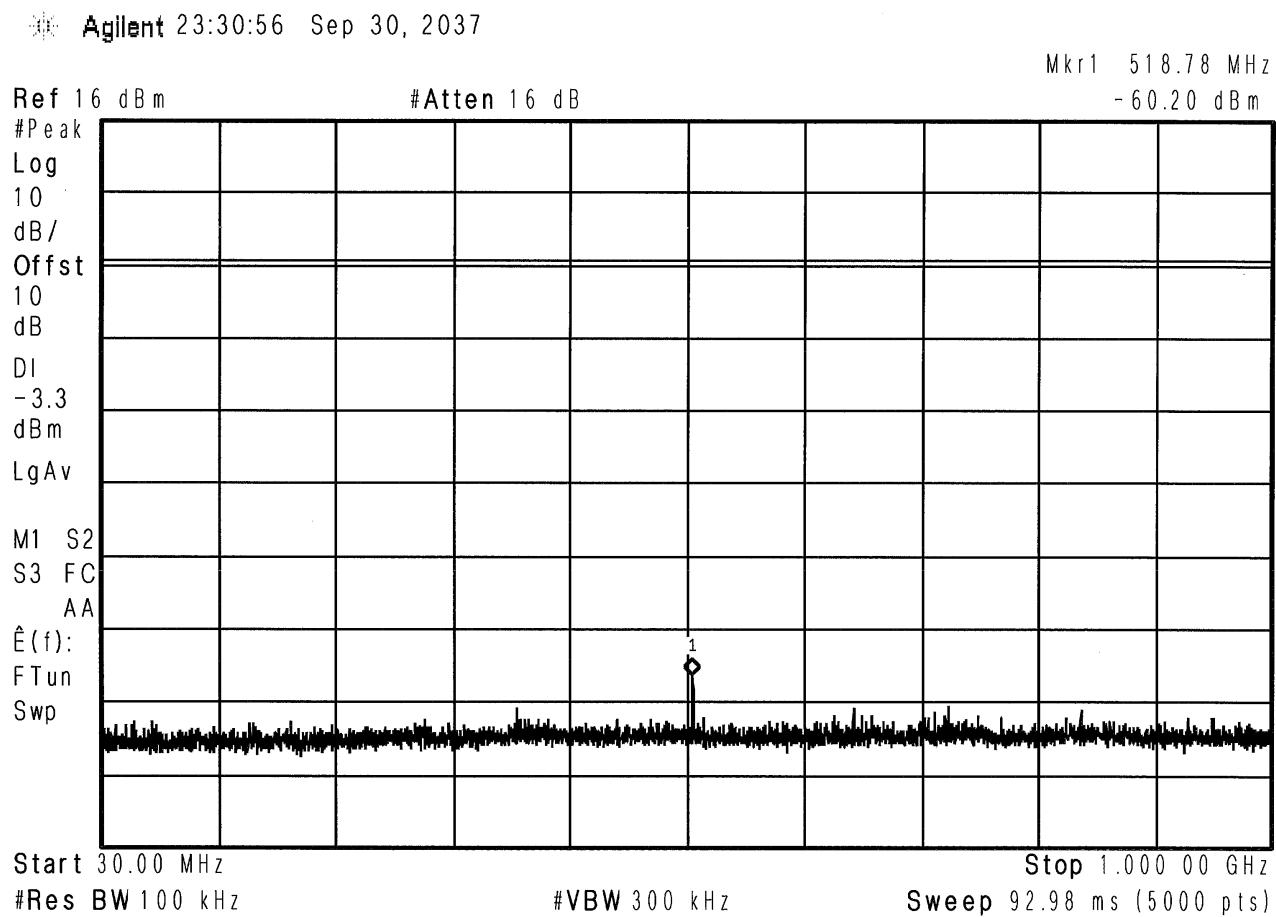

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -3.3 dBm

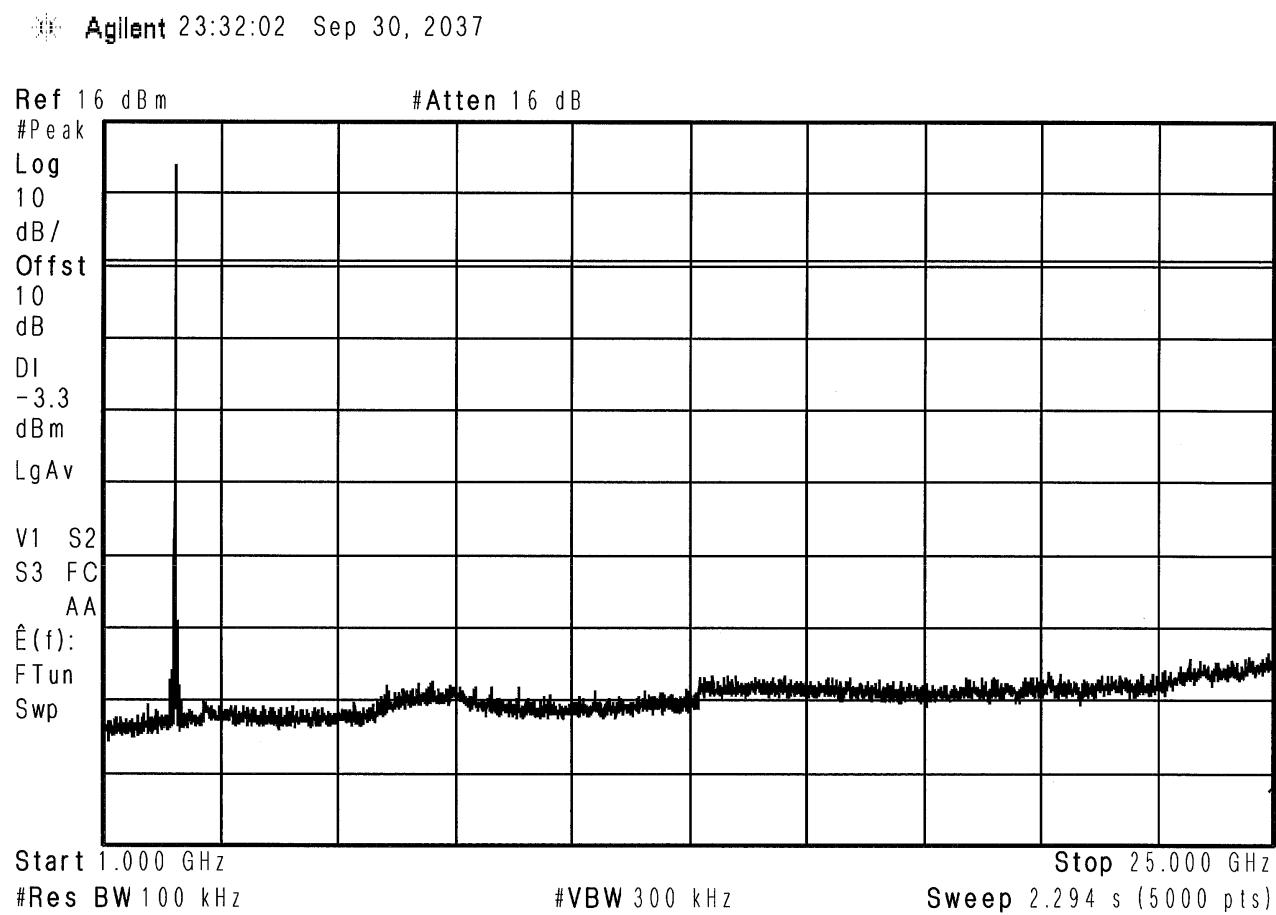


## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:44:57 Sep 30, 2037

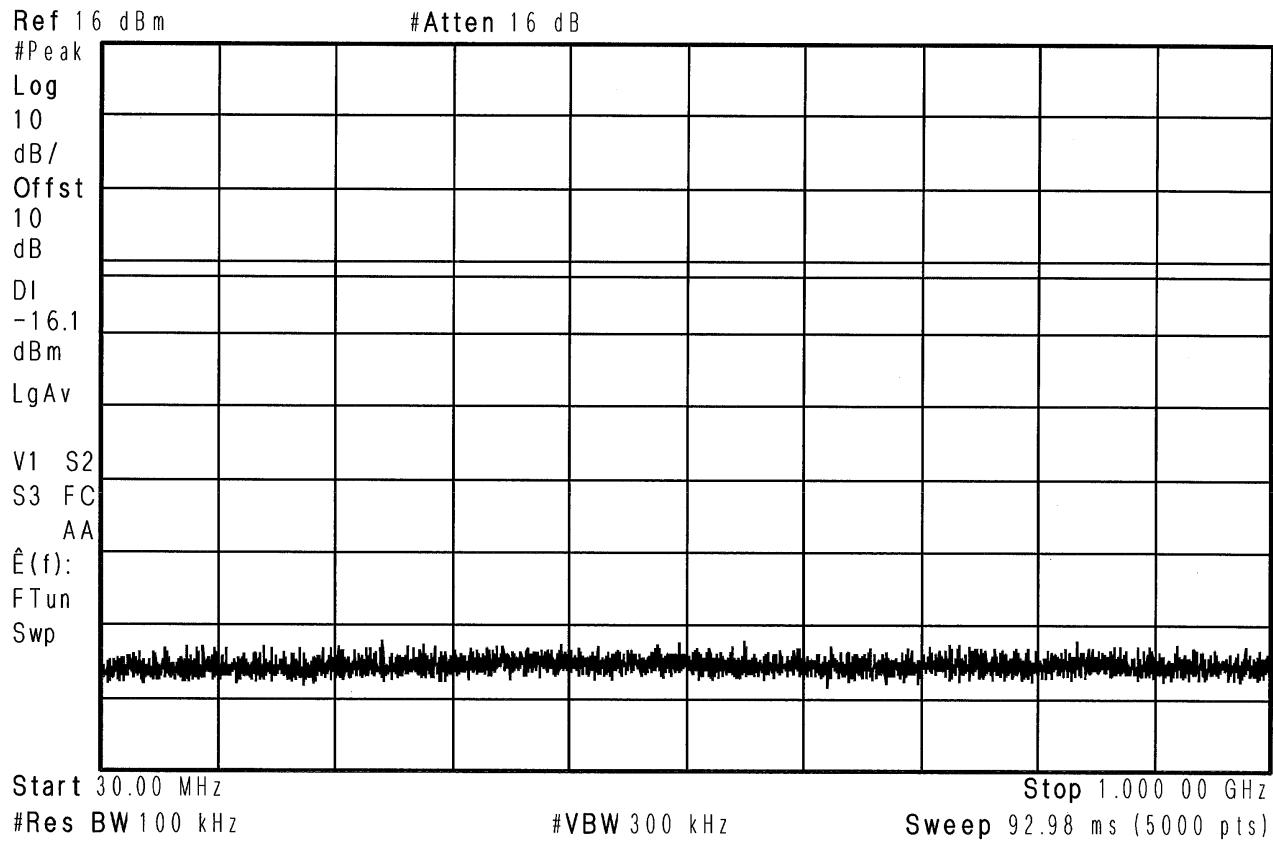

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Conducted Out of Band
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:42:12 Sep 30, 2037

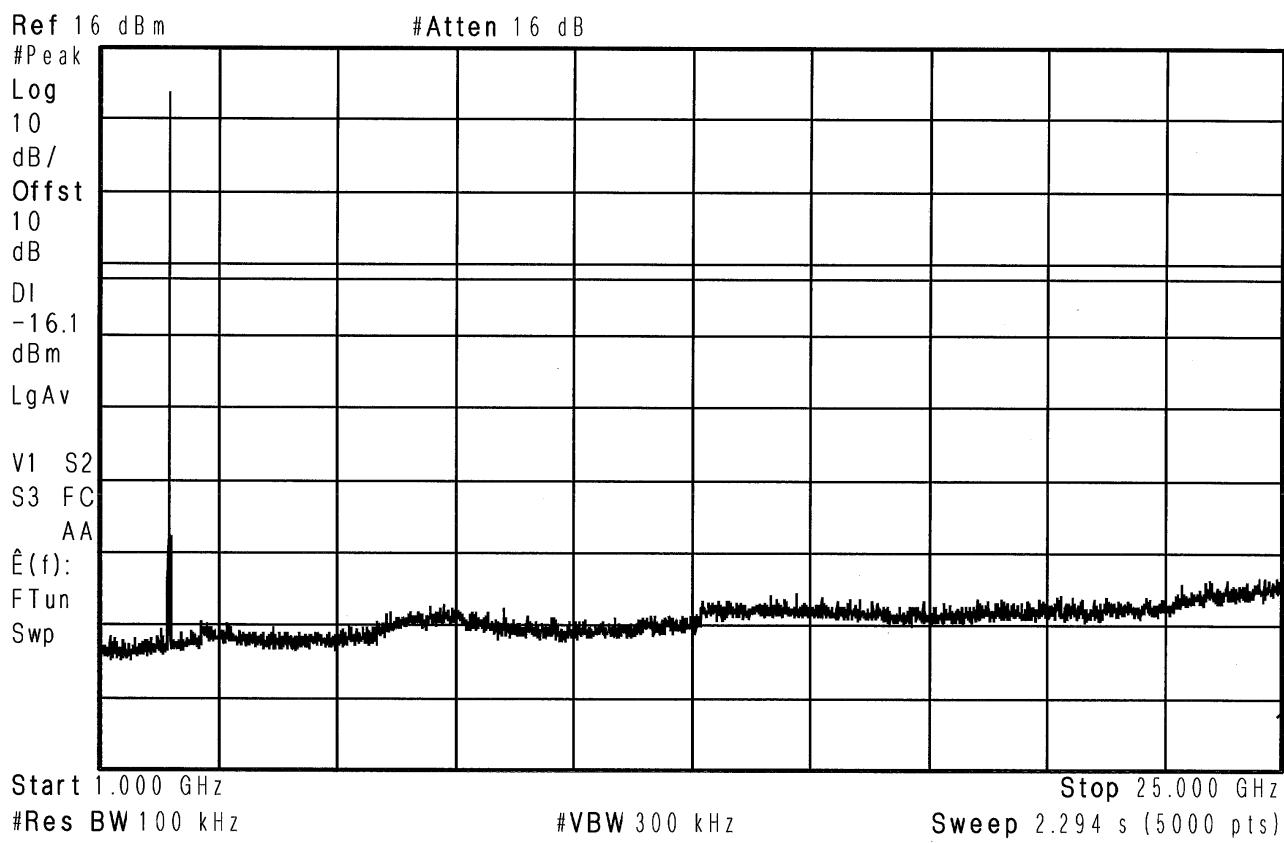

1GHz to 25GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Conducted Out of Band
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:37:41 Sep 30, 2037

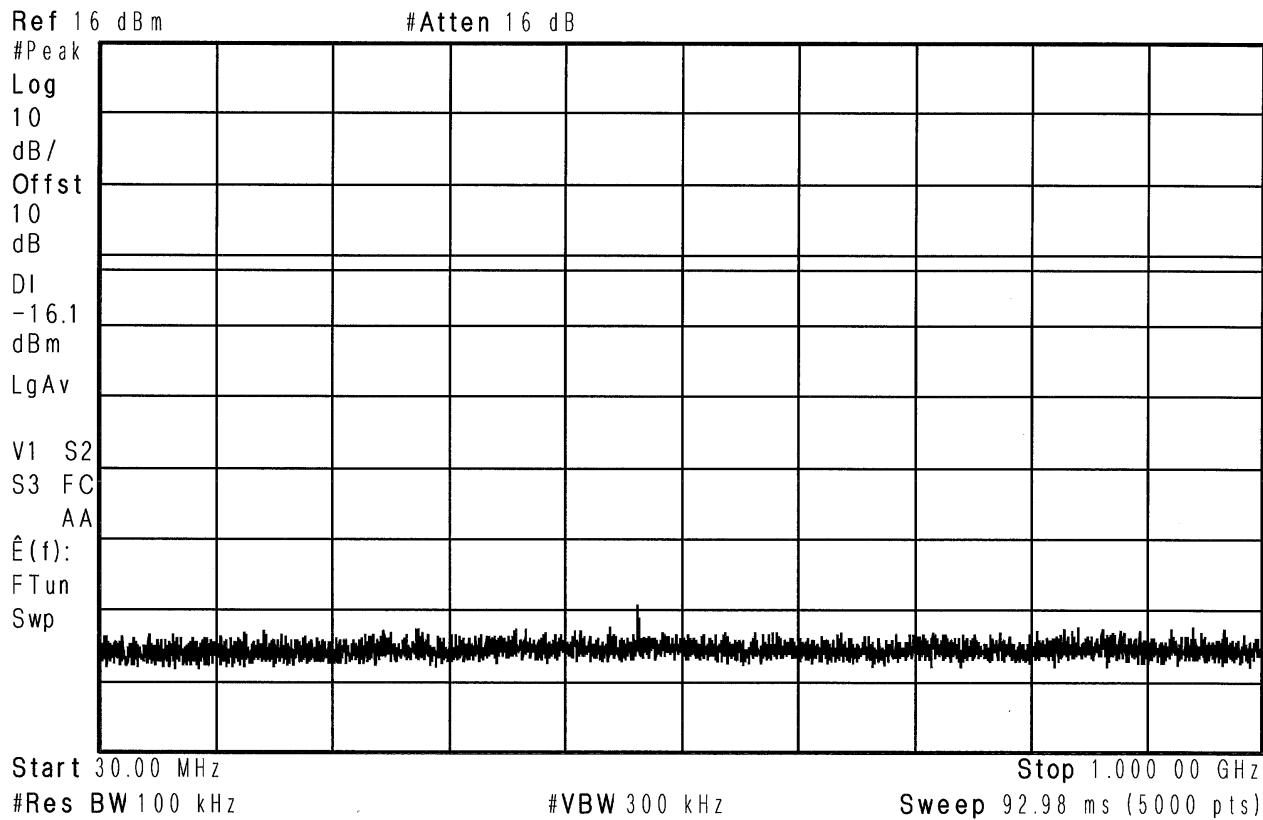

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:39:15 Sep 30, 2037

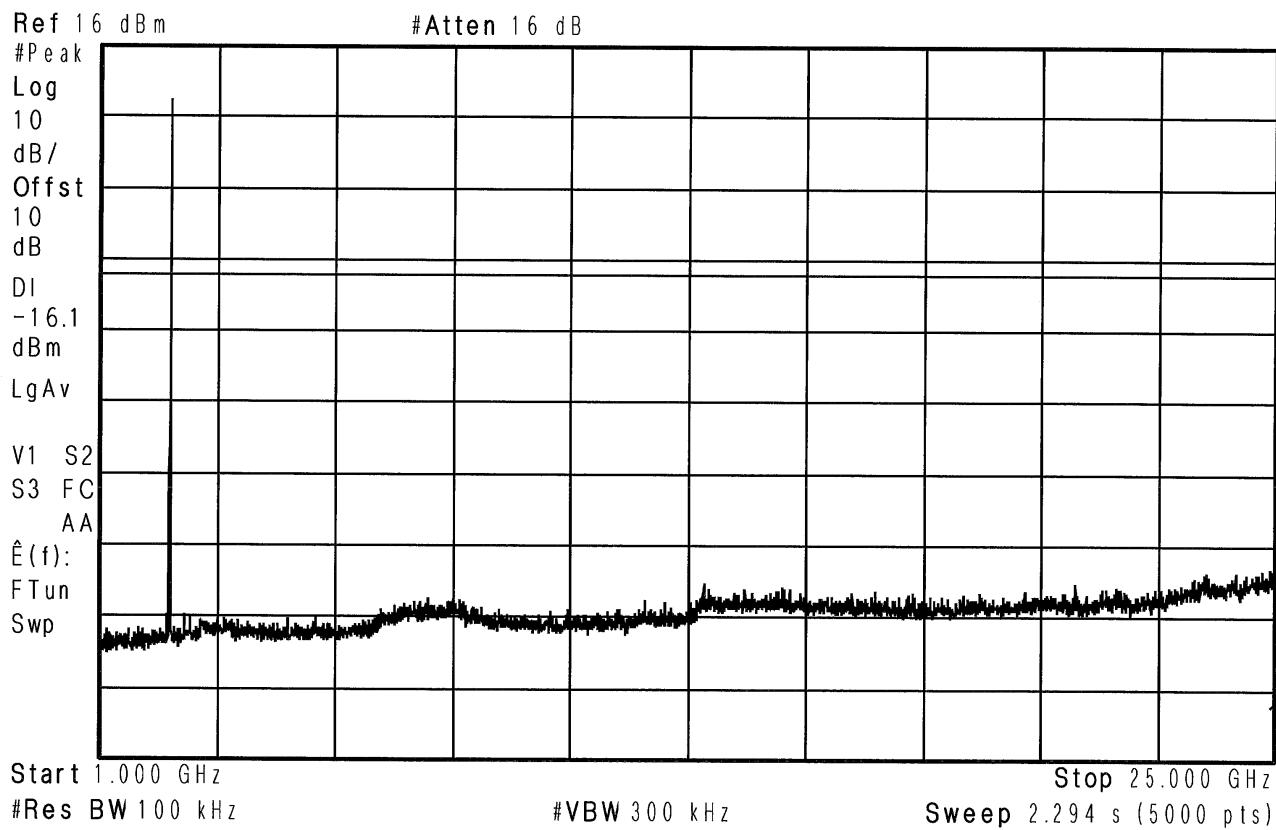

1GHz to 25GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:36:33 Sep 30, 2037

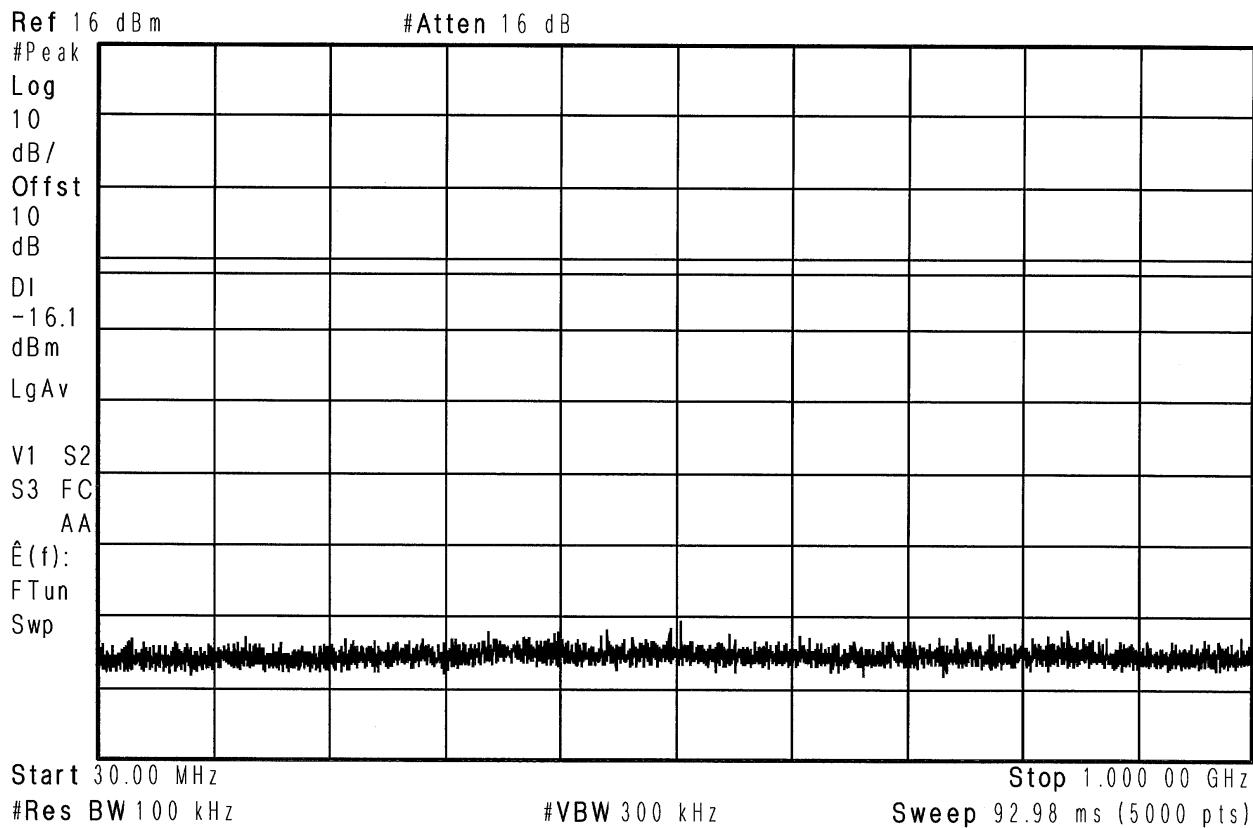

25MHz to 1GHz




## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Conducted Out of Band</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Limit: -16.1 dBm

Agilent 23:36:14 Sep 30, 2037

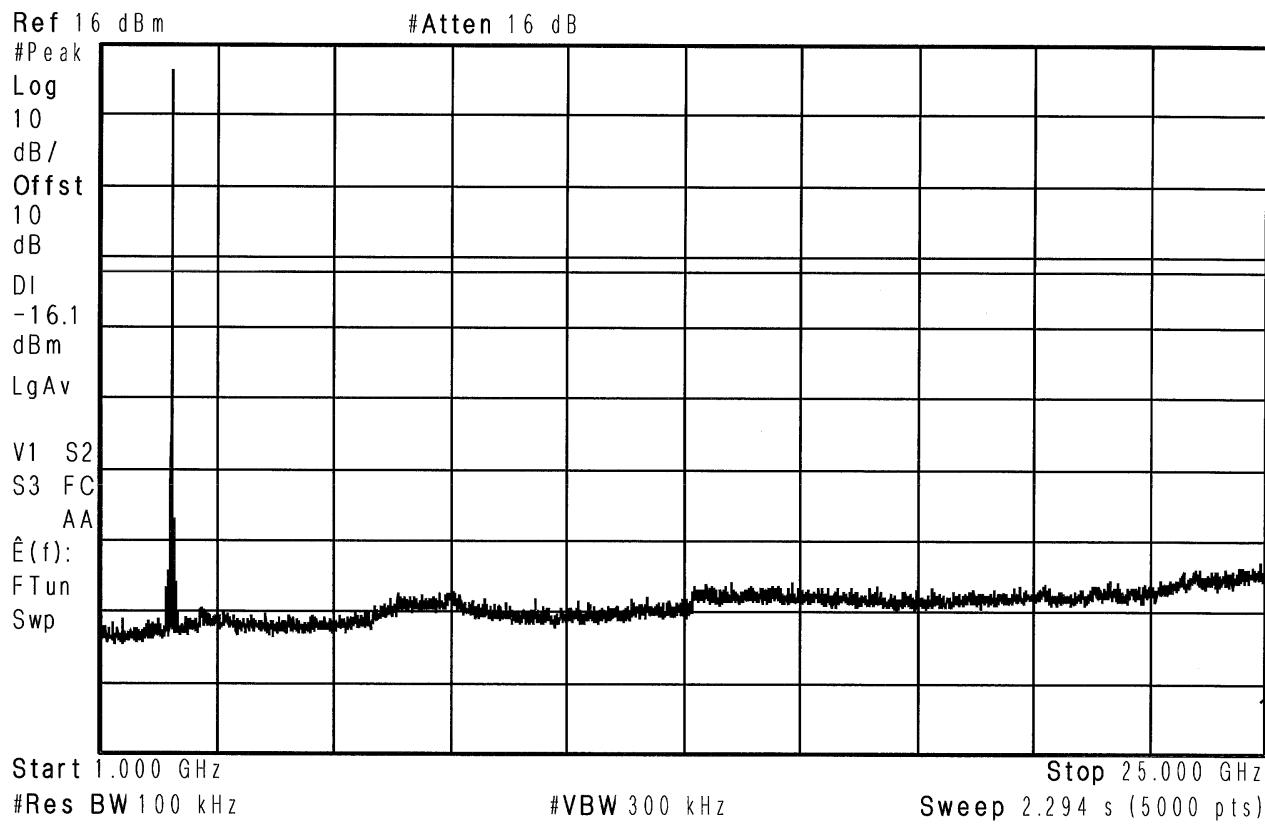

## Retlif Testing Laboratories

Report No. R-6373N-1

**Band Edge  
Test Data**




**Retlif Testing Laboratories**

**Report No. R-6373N-1**

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Band Edge
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Method: 11.13.3.4 Limit: -3.3 dBm Band Edge Reading: -36.18 dBm Duty Cycle Factor: 8.06 dB

Agilent 23:54:57 Sep 30, 2037

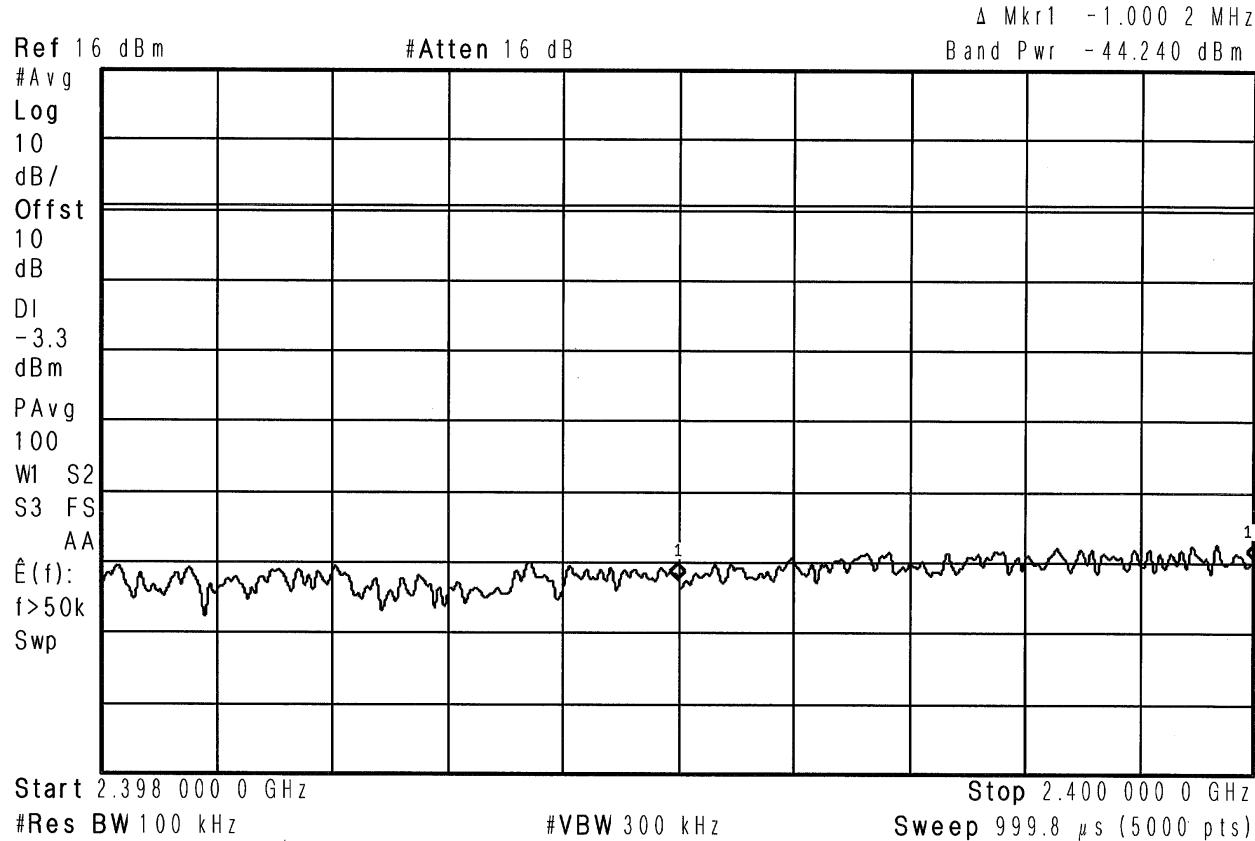

Band Edge Low




Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Band Edge
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	22.6 °C / 34.2 %
<b>Notes:</b>	Method: 11.13.3.4 Limit: -3.3 dBm Band Edge Reading: 31.781 dBm Duty Cycle Factor: 8.06 dB

Agilent 00:05:46 Oct 1, 2037

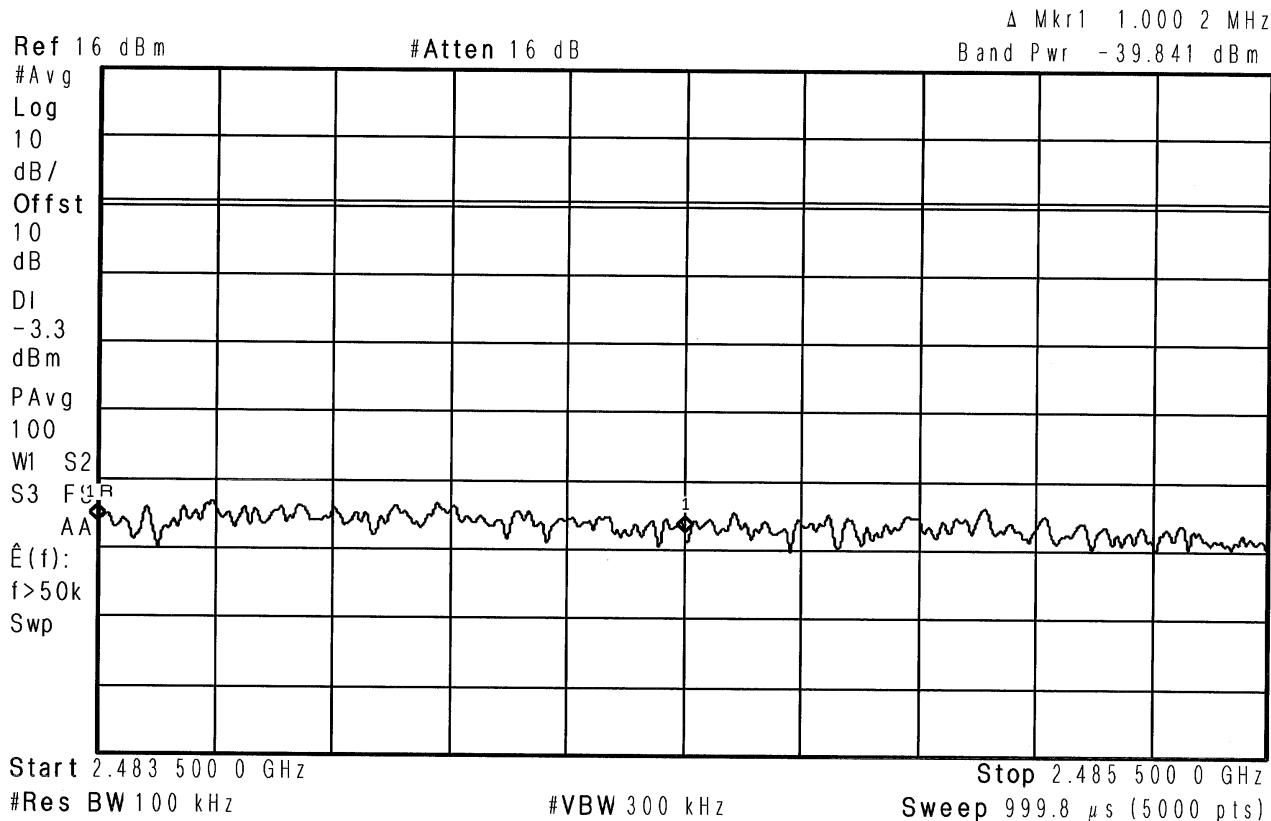

Band Edge High




Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Band Edge
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	22.6 °C / 34.2 %
<b>Notes:</b>	Method: 11.13.3.4 Limit: -16.1 dBm Band Edge Reading: 39.334 dBm Duty Cycle Factor: 11.952 dB

Agilent 23:56:31 Sep 30, 2037

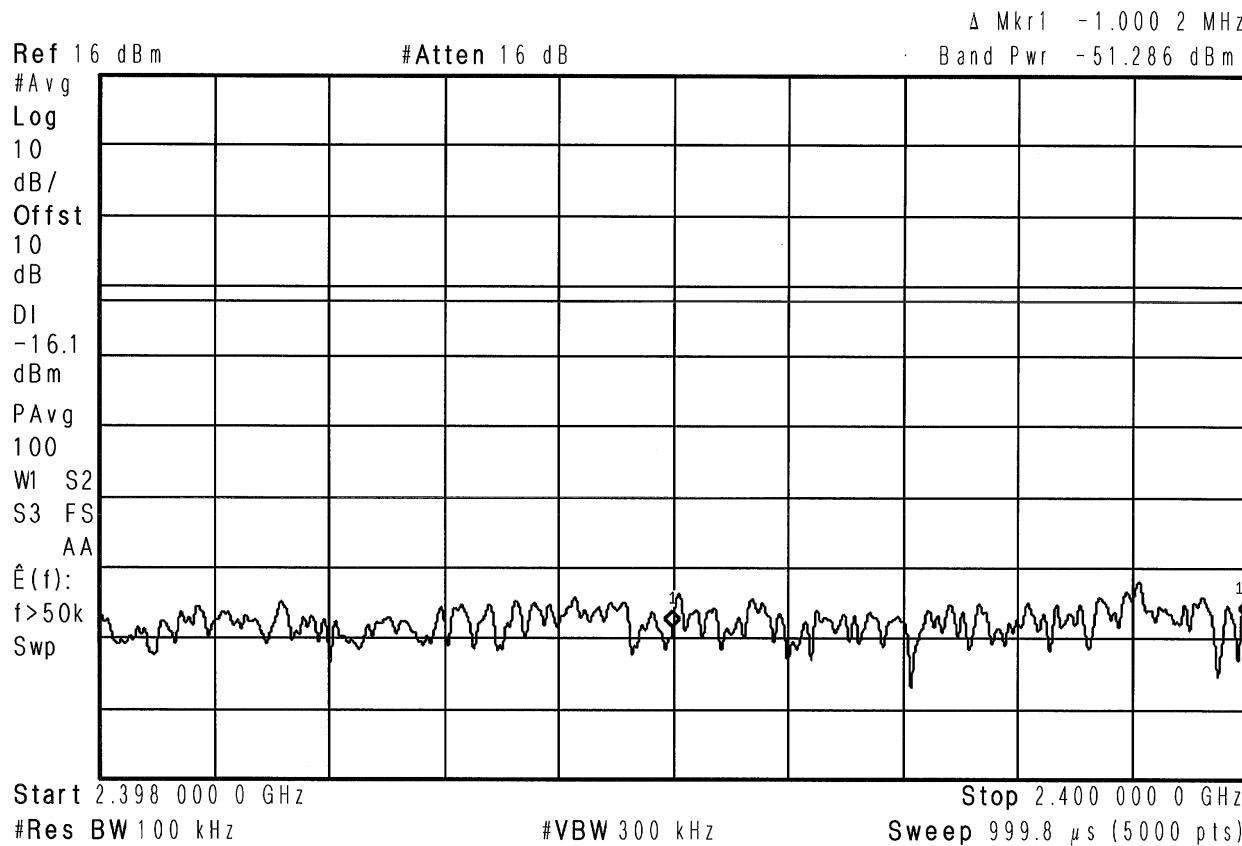

Band Edge Low




Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

ENVIRONMENT TEST DATA SHEET	
<b>Method:</b>	<b>Band Edge</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (d)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M. Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	22.6 °C / 34.2 %
<b>Notes:</b>	Method: 11.13.3.4 Limit: -16.1 dBm Band Edge Reading: -32.958 dBm Duty Cycle Factor: 11.952 dB

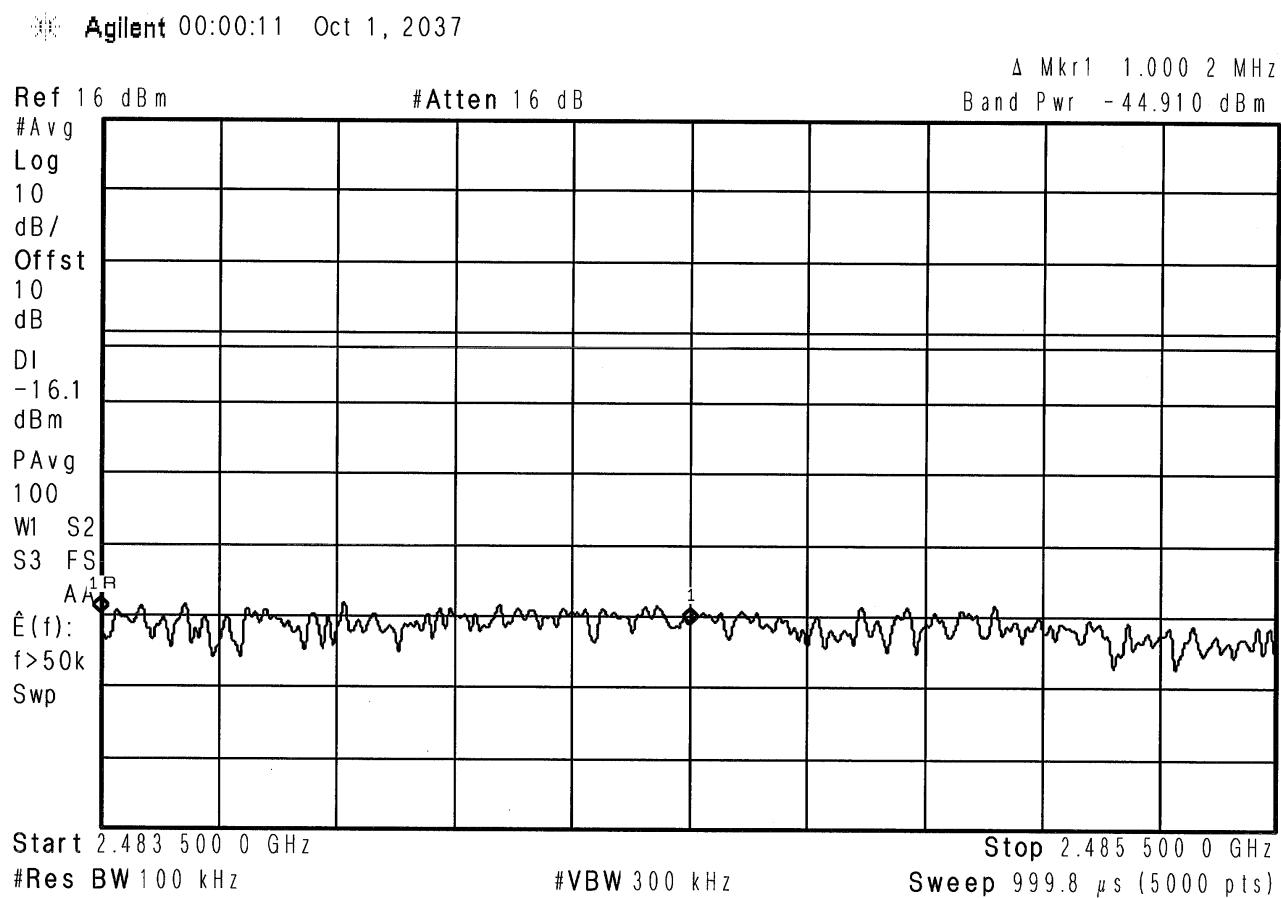

### Band Edge High



## Retlif Testing Laboratories

Report No. R-6373N-1

## Test Photographs Spurious Radiated Emissions



Horizontal Antenna Polarization, 30 MHz to 200 MHz, Biconical Antenna, Internal Antenna



Vertical Antenna Polarization, 30 MHz to 200 MHz, Biconical Antenna, Internal Antenna



**Retlif Testing Laboratories**

Report No. R-6373N-1

## Test Photographs Spurious Radiated Emissions



Horizontal Antenna Polarization, 200 MHz to 1 GHz, Log Periodic, Internal Antenna



Vertical Antenna Polarization, 200 MHz to 1 GHz, Log Periodic Internal Antenna



Retlif Testing Laboratories

Report No. R-6373N-1

**Test Photographs  
Spurious Radiated Emissions**



Horizontal Antenna Polarization, 1 MHz to 18 GHz, Log Periodic, Internal Antenna



Vertical Antenna Polarization, 1 GHz to 18 GHz, Log Periodic, Internal Antenna



**Retlif Testing Laboratories**

Report No. R-6373N-1

**Test Photographs  
Spurious Radiated Emissions**



Horizontal Antenna Polarization, 18 GHz to 25 GHz, Log Periodic, Internal Antenna



Vertical Antenna Polarization, 18 GHz to 25 GHz, Log Periodic, Internal Antenna



**Retlif Testing Laboratories**

Report No. R-6373N-1

## Test Photographs Spurious Radiated Emissions



Horizontal Antenna Polarization, 30 MHz to 200 MHz, Biconical Antenna, External Antenna



Vertical Antenna Polarization, 30 MHz to 200 MHz, Biconical Antenna, External Antenna



Retlif Testing Laboratories

Report No. R-6373N-1

## Test Photographs Spurious Radiated Emissions



Horizontal Antenna Polarization, 200 MHz to 1 GHz, Log Periodic, External Antenna



Vertical Antenna Polarization, 200 MHz to 1 GHz, Log Periodic, External Antenna



Retlif Testing Laboratories

Report No. R-6373N-1

**Test Photographs  
Spurious Radiated Emissions**



Horizontal Antenna Polarization, 1 GHz to 18 GHz, Log Periodic, External Antenna



Vertical Antenna Polarization, 1 GHz to 18 GHz, Log Periodic, External Antenna



**Retlif Testing Laboratories**

Report No. R-6373N-1

**Test Photographs  
Spurious Radiated Emissions**



Horizontal Antenna Polarization, 18 GHz to 25 GHz, Log Periodic, External Antenna



Vertical Antenna Polarization, 18 GHz to 25 GHz, Log Periodic, External Antenna



**Retlif Testing Laboratories**

Report No. R-6373N-1

**FCC Section 15.247 (d)  
Out of Band/Band Edge Radiated Emissions  
Test Data**



**Retlif Testing Laboratories**

**Report No. R-6373N-1**

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
37.50	-	-	-	-			-	100.00
	38.00	8.19	12.61	20.80	*		10.96	I
38.25	-	-	-	-			-	100.00
73.00	-	-	-	-			-	100.00
	74.00	14.72	8.94	23.66	*		15.24	I
74.60	-	-	-	-			-	100.00
74.80	-	-	-	-			-	100.00
	75.00	13.04	8.94	21.98	*		12.56	
75.20	-	-	-	-			-	100.00
108.00	-	-	-	-			-	150.00
	115.00	4.31	15.11	19.42	*		9.35	
	-	-	-	-			-	
121.94	-	-	-	-			-	150.00
123.00	-	-	-	-			-	150.00
	130.00	3.95	14.57	18.52	*		8.43	
	-	-	-	-			-	
138.00	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
149.90	-	-	-	-			-	150.00
	150.00	1.96	17.65	19.61	*		9.56	
150.05	-	-	-	-			-	150.00
156.52	-	-	-	-			-	150.00
	156.52	2.73	17.65	20.38	*		10.45	
156.52	-	-	-	-			-	150.00
156.70	-	-	-	-			-	150.00
	156.80	2.74	17.65	20.39	*		10.46	
156.90	-	-	-	-			-	150.00
162.01	-	-	-	-			-	150.00
	165.00	2.04	19.66	21.70	*		12.16	
167.17	-	-	-	-			-	150.00
		-						
167.72	-	-	-	-			-	150.00
	170.00	1.91	20.12	22.03	*		12.63	
173.20	-	-	-	-			-	150.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
240.00	-	-	-	-			-	200.00
	260.00	3.36	15.92	19.28	*		9.20	
285.00	-	-	-				-	200.00
322.80	-	-	-				-	200.00
	330.00	2.92	18.72	21.64	*		12.08	
335.40	-	-	-				-	200.00
399.90	-	-	-				-	200.00
	405.00	2.23	20.86	23.09	*		14.27	
410.00	-	-	-				-	200.00
608.00	-	-	-				-	200.00
	611.00	1.63	25.89	27.52	*		23.77	
614.00	-	-	-				-	200.00
		-						
960.00	-		-				-	500.00
	975.00	1.38	32.84	34.22	*		51.40	
1240.00	-	-	-				-	500.00
1300.00	-	-	-	-			-	500.00
	1350.00	30.85	-9.40	21.45	*		11.82	
1427.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters	Detector: Quasi-Peak <1GHz, Average >1GHz	

### TEST PARAMETERS

<b>Restricted Band</b>	<b>Measured Frequency</b>	<b>Meter Reading</b>	<b>Correction Factor</b>	<b>Corrected Reading</b>			<b>Converted Reading</b>	<b>Limit at 3M</b>
<b>MHz</b>	<b>MHz</b>	<b>dBuV</b>	<b>dB</b>	<b>dBuV/m</b>			<b>uV/m</b>	<b>uV/m</b>
1435.00	-	-	-	-			-	500.00
	1500.00	31.10	-8.64	22.46	*		13.27	
1646.50	-	-	-	-			-	500.00
1660.00	-	-	-	-			-	500.00
	1680.00	30.60	-7.82	22.78	*		13.77	
1710.00	-	-	-	-			-	500.00
1718.80	-	-	-	-			-	500.00
	1720.00	30.63	-7.65	22.98	*		14.09	
1722.20	-	-	-	-			-	500.00
2200.00	-	-	-	-			-	500.00
	2250.00	30.07	-5.78	24.29	*		16.39	
2300.00	-	-	-	-			-	500.00
2310.00	-	-	-	-			-	500.00
	2390.00	41.90	-5.38	36.52			66.39	
2390.00	-	-	-	-			-	500.00
2483.50	-	-	-	-			-	500.00
	2483.50	47.85	-5.12	42.73			136.93	
2500.00	-	-	-	-			-	500.00

EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

\* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
2690.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	2750.00	29.56	-4.45	25.11	*		18.01	
	-	-	-	-			-	
2900.00	-	-	-	-			-	500.00
3260.00	-	-	-	-			-	500.00
	3263.00	28.97	-2.88	26.09	*		20.16	
3267.00	-	-	-	-			-	500.00
3332.00	-	-	-	-			-	500.00
	3336.00	29.90	-2.62	27.28	*		23.12	
3339.00	-	-	-	-			-	500.00
3345.00	-	-	-	-			-	500.00
	3350.00	29.09	-2.57	26.52	*		21.18	
3358.00	-	-	-	-			-	500.00
3600.00	-	-	-	-			-	500.00
	-	-	-	-			-	
	3700.00	29.81	-1.40	28.41	*		26.33	
	-	-	-	-			-	

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



Retlif Testing Laboratories

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
	-	-	-	-			-	
4400.00	-	-	-	-			-	500.00
4500.00	-	-	-	-			-	500.00
	4800.00	29.42	0.28	29.70	*		30.55	
	-	-	-	-			-	
5150.00	-	-	-	-			-	500.00
5350.00	-	-	-	-			-	500.00
	5400.00	28.95	0.92	29.87	*		27.77	
5460.00	-	-	-	-			-	500.00
7250.00	-	-	-	-			-	500.00
	7440.00	30.18	3.65	33.83	*		49.15	
7750.00	-	-	-	-			-	500.00
8025.00	-	-	-	-			-	500.00
	8300.00	30.64	4.43	35.07	*		56.69	
8500.00	-	-	-	-			-	500.00
9000.00	-	-	-	-			-	500.00
	9100.00	30.81	5.10	35.91	*		62.45	
9200.00	-	-	-	-			-	500.00

No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

# RETLIF TESTING LABORATORIES

## EMISSIONS TEST DATA SHEET

<b>Test Method</b>	Unwanted Emissions into Restricted Frequency Bands	
<b>Customer</b>	Lord Corporation	
<b>Job Number</b>	R-6373N-1	
<b>Test Sample</b>	Wireless 12 Channel Analog Input Sensor Node	
<b>Model Number</b>	TC-Link-200	
<b>Serial Number</b>	6310-5400-50000	
<b>Test Specification</b>	FCC Part 15 Subpart C	Paragraph: 15.247(d)
<b>Operating Mode</b>	Transmitting modulated (LXRS, LXRS+) signal at 2.405 GHz, 2.440 GHz, 2.480 GHz	
<b>Technician</b>	M. Seamans	
<b>Date</b>	November 28 <sup>th</sup> , 2018	
<b>Notes:</b> Antenna Test Distance: 3 meters      Detector: Quasi-Peak <1GHz, Average >1GHz		

### TEST PARAMETERS

Restricted Band	Measured Frequency	Meter Reading	Correction Factor	Corrected Reading			Converted Reading	Limit at 3M
MHz	MHz	dBuV	dB	dBuV/m			uV/m	uV/m
9300.00	-	-	-	-			-	500.00
	9400.00	30.72	5.38	36.10	*		63.83	
9500.00	-	-	-	-			-	500.00
10600.00	-	-	-	-			-	500.00
	12200.00	30.54	8.37	38.91	*		88.21	
12700.00	-	-	-	-			-	500.00
13250.00	-	-	-	-			-	500.00
	15800.00	32.08	8.84	40.92	*		111.17	
16200.00	-	-	-	-			-	500.00
17700.00	-	-	-	-			-	500.00
	19240.00	32.79	-6.52	26.27	*		20.58	
21400.00	-	-	-	-			-	500.00
22010.00	-	-	-	-			-	500.00
	22320.00	32.65	-5.26	27.39	*		23.42	
23120.00	-	-	-	-			-	500.00
23600.00	-	-	-	-			-	500.00
	23800.00	32.70	-4.17	28.53	*		26.70	
24000.00	-	-	-	-			-	500.00


No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum. \* This emission is not from the EUT. It is a measurement of minimum measurement system sensitivity (Noise Floor).



**Retlif Testing Laboratories**

Report No. R-6373N-1

## Test Photographs Power Density

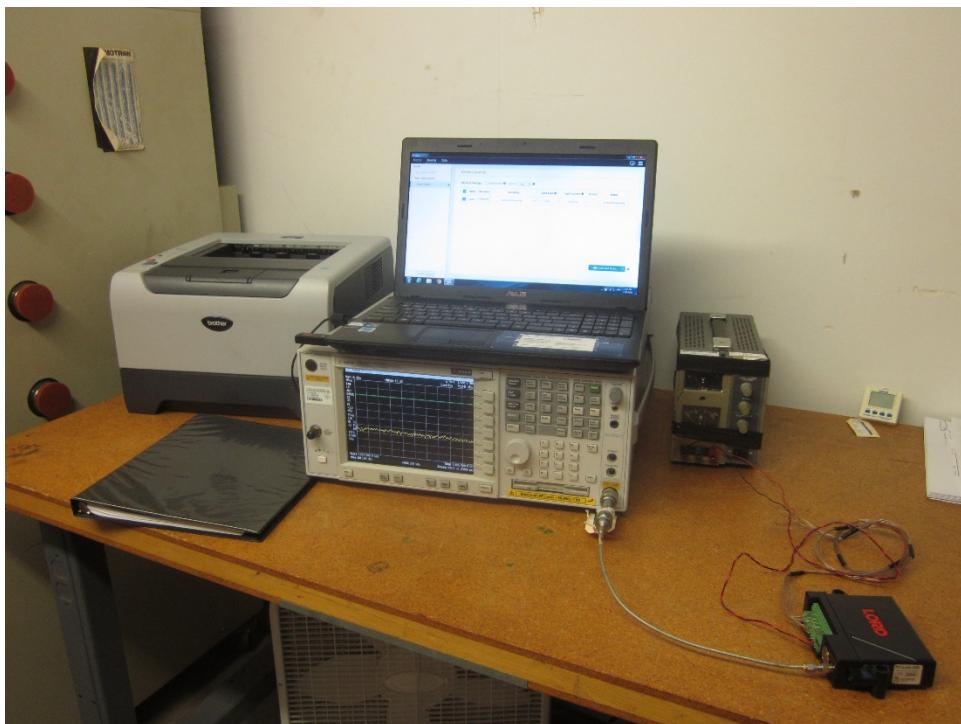

Test Configuration



Retlif Testing Laboratories

Report No. R-6373N-1

**FCC Section 15.247(e)  
Power Density  
Test Data**




**Retlif Testing Laboratories**

**Report No. R-6373N-1**

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Power Spectral Density
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Method: 11.10.2 PKPSD Power Setting: 20 dBm Power Spectral Density: 4.01 dBm

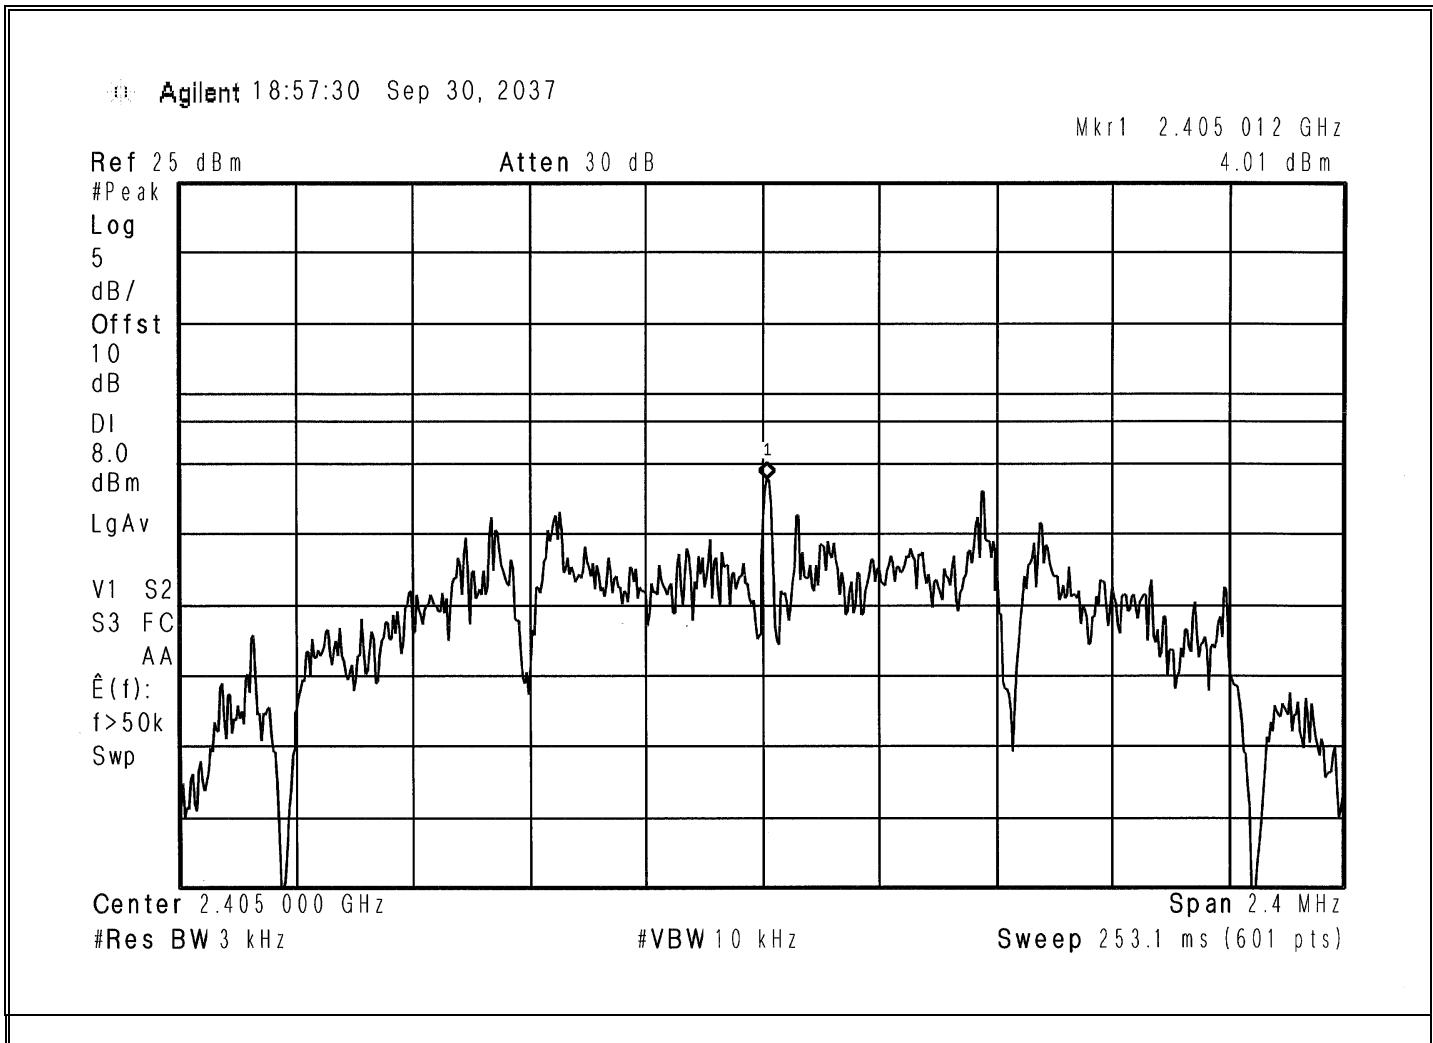


Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Power Spectral Density</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Method: 11.10.2 PKPSD Power Setting: 20 dBm Power Spectral Density: 3.84 dBm

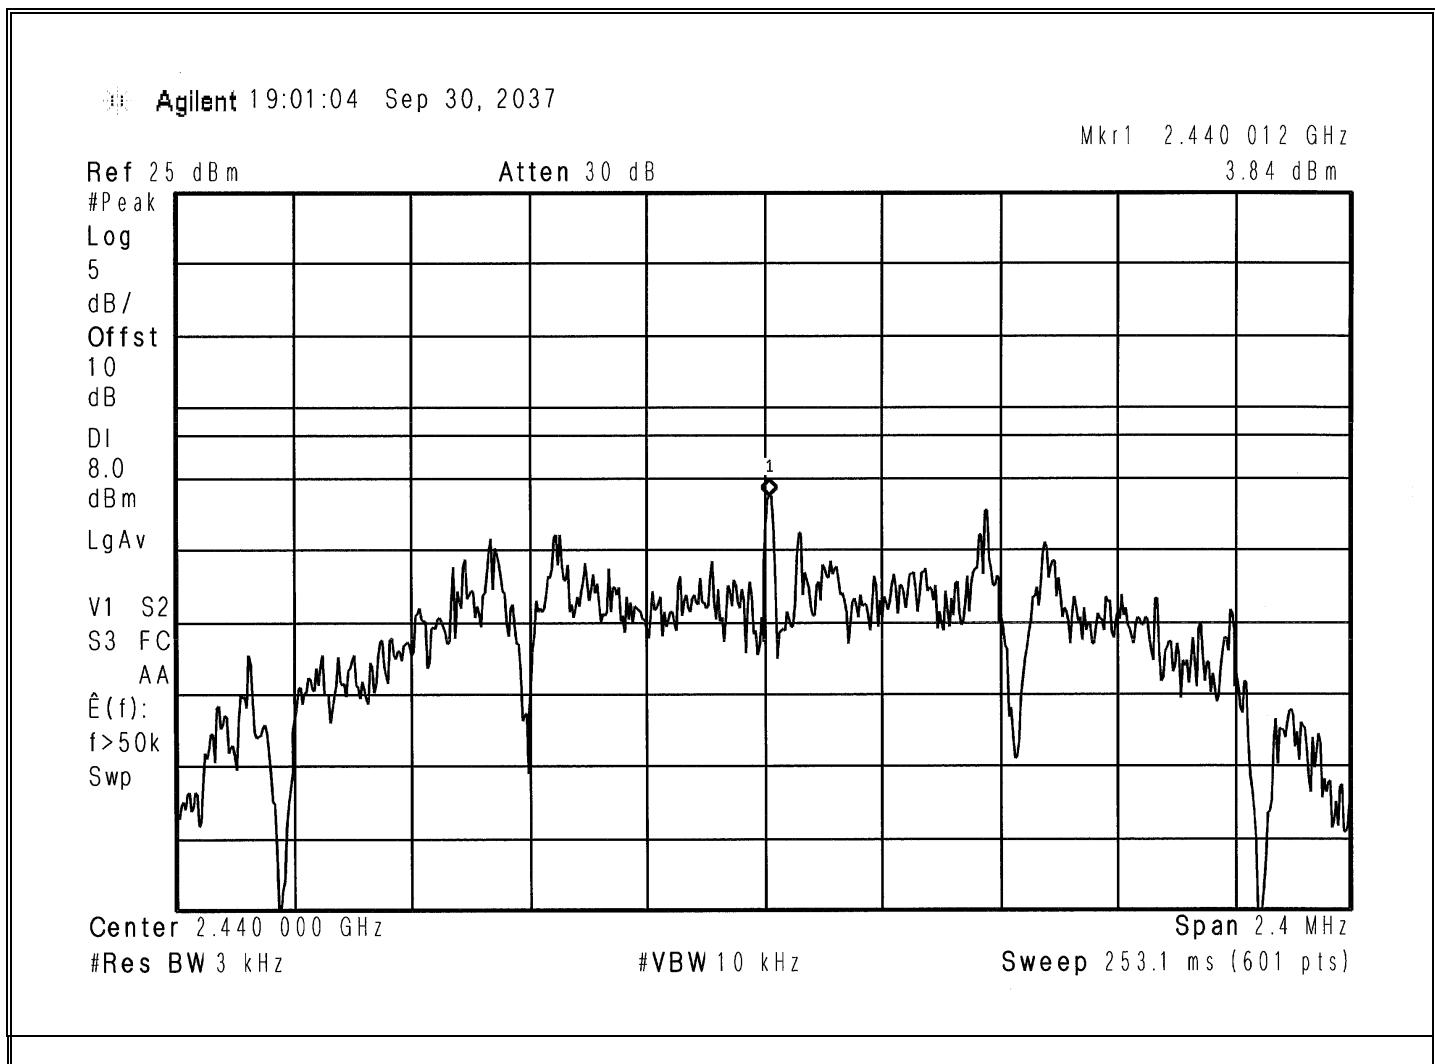


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Power Spectral Density</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	January 25 <sup>th</sup> , 2019
<b>Temp/ Relative Humidity:</b>	21.9 °C / 32.9 %
<b>Notes:</b>	Method: 11.10.2 PKPSD Power Setting: 20 dBm Power Spectral Density: 3.84 dBm

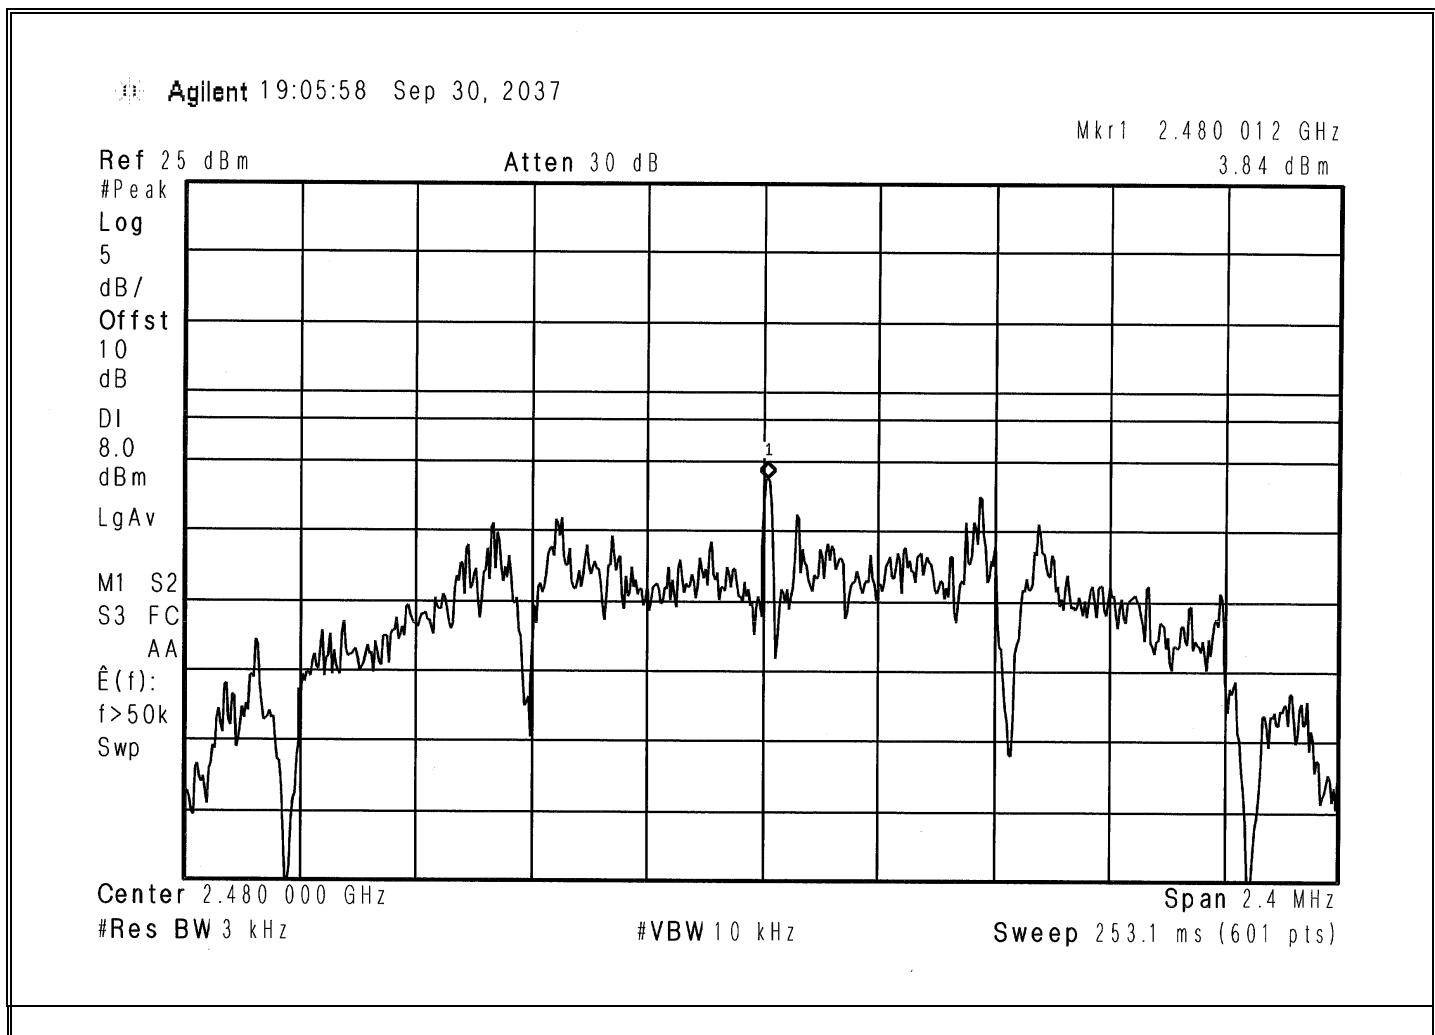


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	Power Spectral Density
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.405 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	21.9 °C / 35.6 %
<b>Notes:</b>	Method: 11.10.5 AVGPSD-2 Power Setting: 16 dBm Duty Cycle Factor: 11.952 dB Power Spectral Density: 7.314 dBm

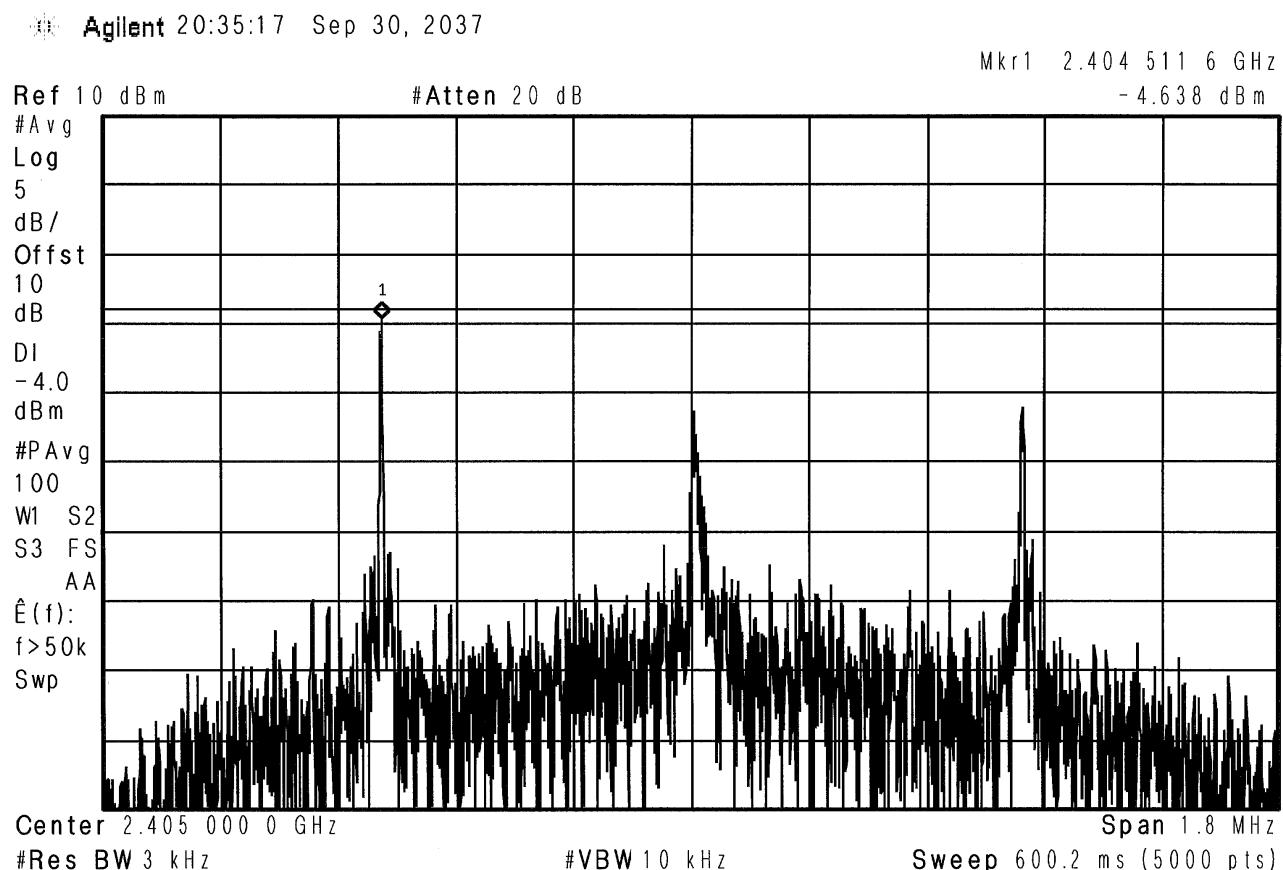


## Retlif Testing Laboratories

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Power Spectral Density</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.440 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	21.9 °C / 35.6 %
<b>Notes:</b>	Method: 11.10.5 AVGPSD-2 Power Setting: 16 dBm Duty Cycle Factor: 11.952 dB Power Spectral Density: 7.655 dBm

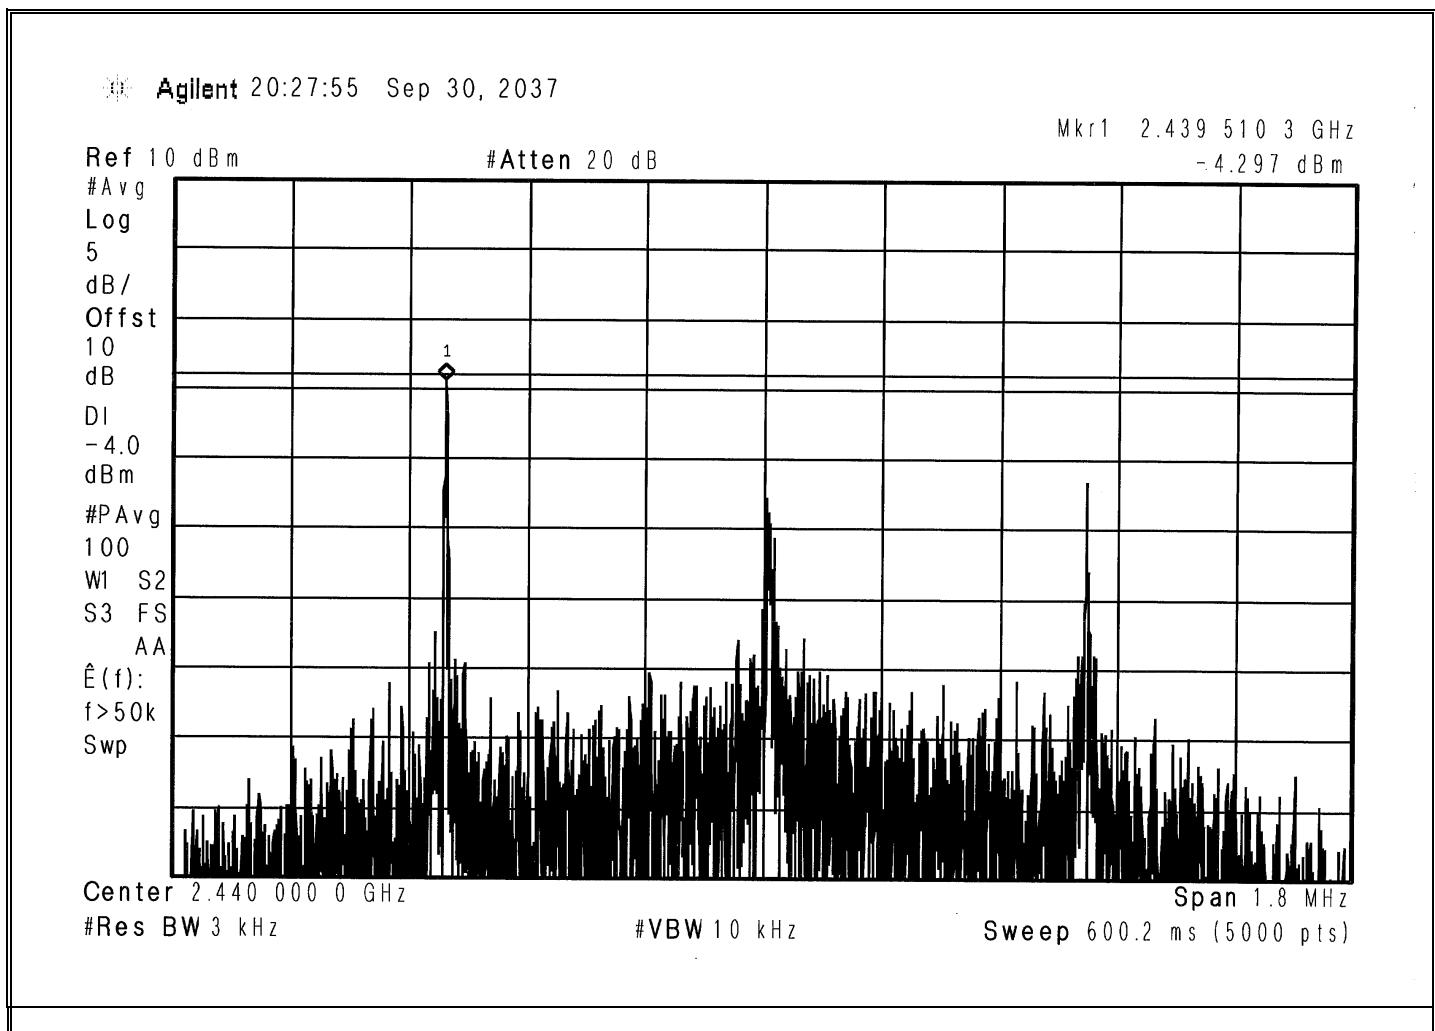


**Retlif Testing Laboratories**

Report No. R-6373N-1

## EMISSIONS TEST DATA SHEET

<b>Method:</b>	<b>Power Spectral Density</b>
<b>Test Specification:</b>	FCC Part 15, Subpart C Paragraph: 15.247 (e)
<b>Job Number:</b>	R-6373N-1
<b>Customer:</b>	Lord Corporation
<b>Test Sample:</b>	Wireless 12 Channel Analog Input Sensor Node
<b>Model Number:</b>	TC-Link-200
<b>Serial Number:</b>	6310-5400-50000
<b>Operating Mode:</b>	Transmitting modulated (LXRS+) signal at 2.480 GHz
<b>Technician:</b>	M.Seamans
<b>Date(s):</b>	November 20 <sup>th</sup> , 2018
<b>Temp/ Relative Humidity:</b>	21.9 °C / 35.6 %
<b>Notes:</b>	Method: 11.10.5 AVGPSD-2 Power Setting: 16 dBm Duty Cycle Factor: 11.952 dB Power Spectral Density: 7.293 dBm

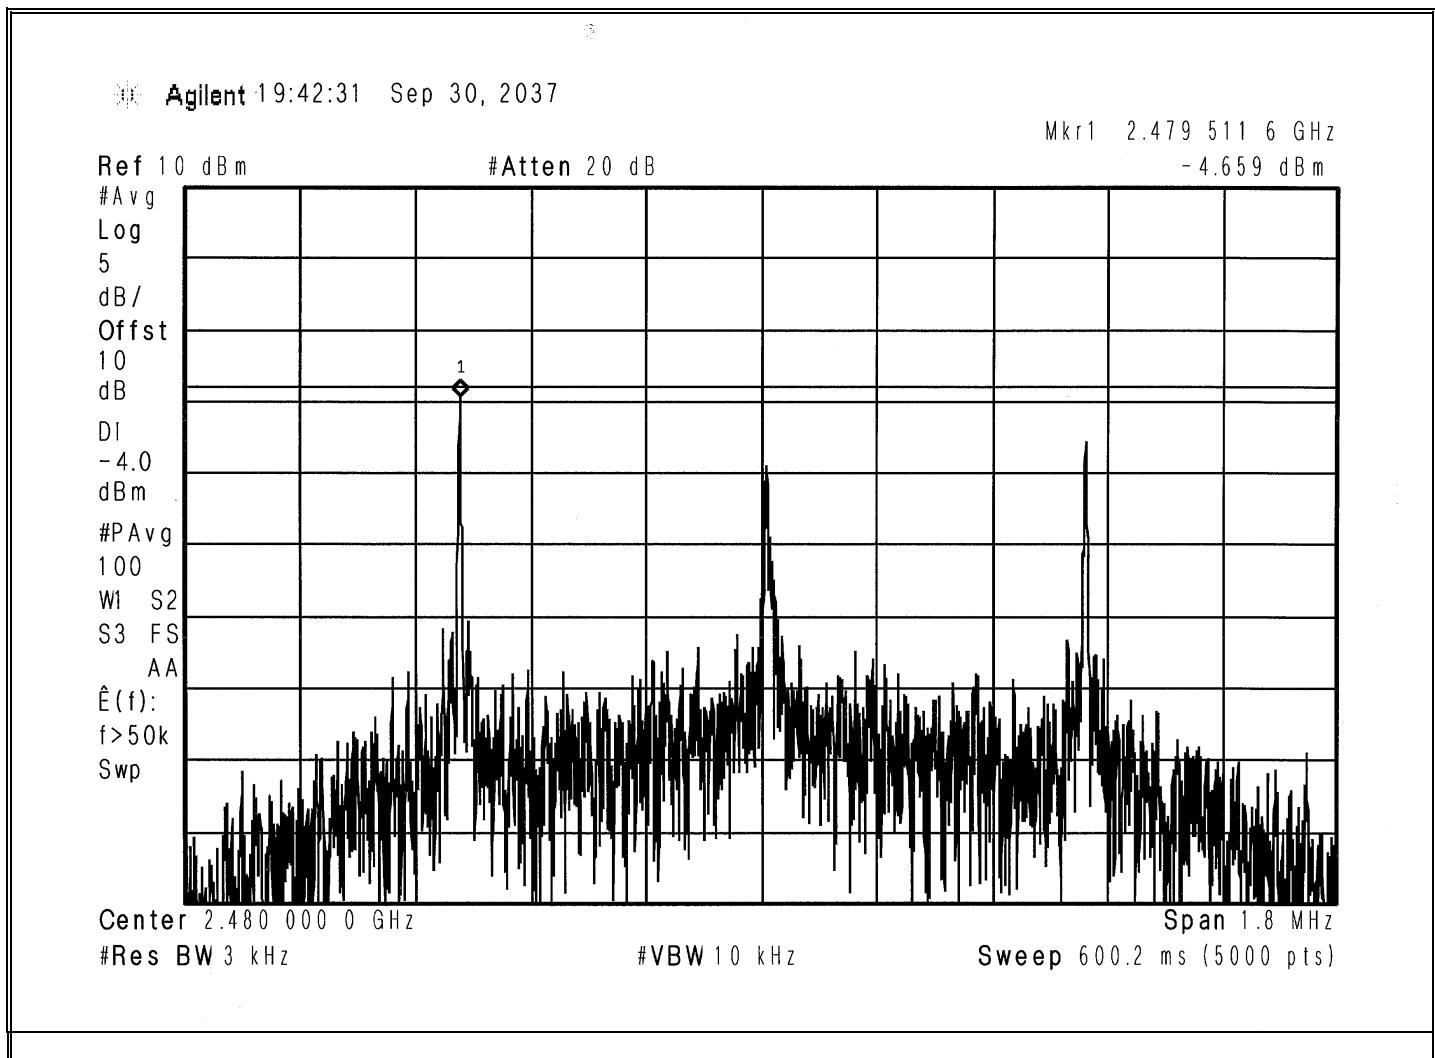

Retlif Testing Laboratories

Report No. R-6373N-1