

TEST REPORT

Test report no.: 1-4862/17-01-02



Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkKS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

Ingenico Group

9 Avenue de la Gare Rovaltain
26958 Valence Cedex 9 / FRANCE
Phone: -/-
Fax: -/-
Contact: Jean-Baptiste Palisse
e-mail: jean-baptiste.palisse@ingenico.com
Phone: +33 4 75 84 21 74

Manufacturer

Ingenico Group

9 Avenue de la Gare Rovaltain
26958 Valence Cedex 9 / FRANCE

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

RSS - 247 Issue 2 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

RSS - Gen Issue 4 Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Payment terminal
Model name: DESK3500 CL/ETH/MOD/WiFi
FCC ID: XKB-D3500CLWI
IC: 2586D-D3500CLWI
Frequency: DTS band 2400 MHz to 2483.5 MHz
Technology tested: WLAN (DSSS/b-mode; OFDM/g-;n HT20 & 40-mode)
Antenna: Integrated antenna
Power supply: 110 V AC / 8 V DC by AC/DC mains adapter PSM24W-080L6
Temperature range: 0°C to +40°C



This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Andreas Luckenbill
Lab Manager
Radio Communications & EMC

Test performed:

Marco Bertolino
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents.....	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s and references.....	4
4	Test environment	5
5	Test item	5
5.1	General description.....	5
5.2	Additional information	5
6	Description of the test setup	6
6.1	Shielded semi anechoic chamber	7
6.2	Shielded fully anechoic chamber	8
6.3	Radiated measurements > 18 GHz	9
6.4	AC conducted	10
6.5	Conducted measurements with peak power meter & spectrum analyzer.....	11
7	Sequence of testing	12
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	12
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	13
7.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	14
7.4	Sequence of testing radiated spurious above 18 GHz	15
8	Measurement uncertainty.....	16
9	Summary of measurement results	17
10	Additional comments.....	18
11	Additional EUT parameter.....	19
12	Measurement results	20
12.1	Antenna gain.....	20
12.2	Identify worst case data rate.....	23
12.3	Maximum output power	24
12.4	Duty cycle	25
12.5	Peak power spectral density	26
12.6	6 dB DTS bandwidth	41
12.7	Occupied bandwidth – 99% emission bandwidth	56
12.8	Occupied bandwidth – 20 dB bandwidth	71
12.9	Band edge compliance conducted.....	86
12.10	Spurious emissions conducted	95
12.11	Spurious emissions radiated below 30 MHz	124
12.12	Spurious emissions radiated 30 MHz to 1 GHz	131
12.13	Spurious emissions radiated above 1 GHz	142
12.14	Spurious emissions conducted below 30 MHz (AC conducted).....	155
13	Observations	157
Annex A	Glossary	158
Annex B	Document history	159
Annex C	Accreditation Certificate	159

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2017-09-25
Date of receipt of test item:	2017-10-04
Start of test:	2017-10-04
End of test:	2017-11-07
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	V04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature	:	T _{nom} T _{max} T _{min}	+20 °C during room temperature tests No tests under extreme temperature conditions required. No tests under extreme temperature conditions required.
Relative humidity content	:		42 %
Barometric pressure	:		1018 hpa
Power supply	:	V _{nom} V _{max} V _{min}	110 V AC / 8 V DC by AC/DC mains adapter PSM24W-080L6 No tests under extreme voltage conditions required. No tests under extreme voltage conditions required.

5 Test item

5.1 General description

Kind of test item	:	Payment terminal
Type identification	:	DESK3500 CL/ETH/MOD/WiFi
HMN	:	-/-
PMN	:	Desk/3500
HVIN	:	Desk/3500 CL/Eth/Mod/WiFi
FVIN	:	-/-
S/N serial number	:	Radiated unit: 161937313251060601110728 Conducted unit: 161937313301064301110726 Photo unit: 161937313251060601110728
HW hardware status	:	01
SW software status	:	OS_038002 HTB_0084
Frequency band	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 2412 MHz; highest channel 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	(D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	20 MHz bandwidth: 11 40 MHz bandwidth: 7
Antenna	:	Integrated antenna
Power supply	:	110 V AC / 8 V DC by AC/DC mains adapter PSM24W-080L6
Temperature range	:	0°C to +40°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

- 1-4862/17-01-01_AnnexA
- 1-4862/17-01-01_AnnexB
- 1-4862/17-01-01_AnnexD

6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vkl!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

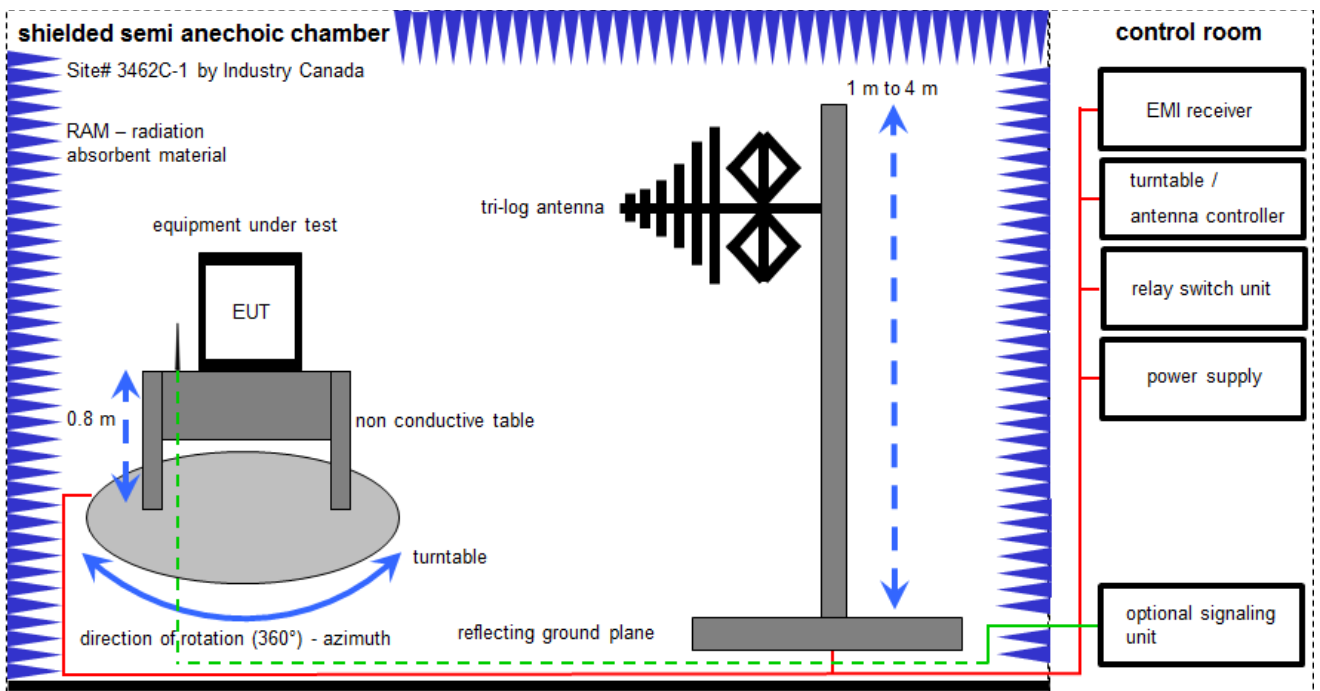

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023		300000551	ne	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	01.02.2017	31.01.2018
4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	-/-	-/-
5	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
6	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
7	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
8	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	25.04.2016	25.04.2018
9	A	Customer Notebook	-/-	Dell	P1250643	Ingenico #2	-/-	-/-	-/-

6.2 Shielded fully anechoic chamber

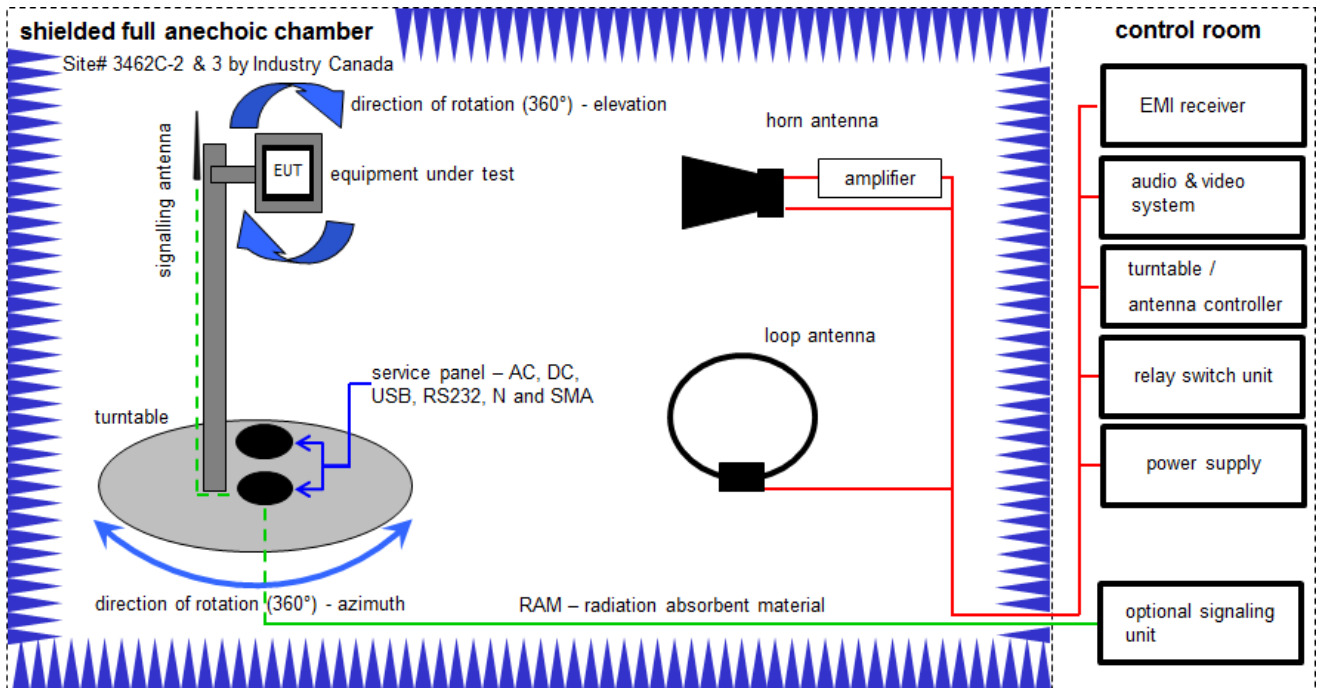

Measurement distance: horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (} 71.61 \text{ }\mu\text{V/m)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / IDK	87400/02	300000996	ev	-/-	-/-
3	B, C	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIKI!	14.02.2017	13.02.2019
4	A, B, C	Switch / Control Unit	3488A	HP	-/-	300000199	ne	-/-	-/-
5	A, B, C	Variable isolating transformer	MPL IEC625 Bus Variable isolating transformer	Erfi	91350	300001155	ne	-/-	-/-
6	B	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
7	A, B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	31.01.2017	30.01.2018
8	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
9	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
10	B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
11	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
12	A, B, C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
13	A, B, C	PC	ExOne	F+W	-/-	300004703	ne	-/-	-/-
14	A, B, C	Customer Notebook	-/-	Dell	P1250643	Ingenico #2	-/-	-/-	-/-

6.3 Radiated measurements > 18 GHz

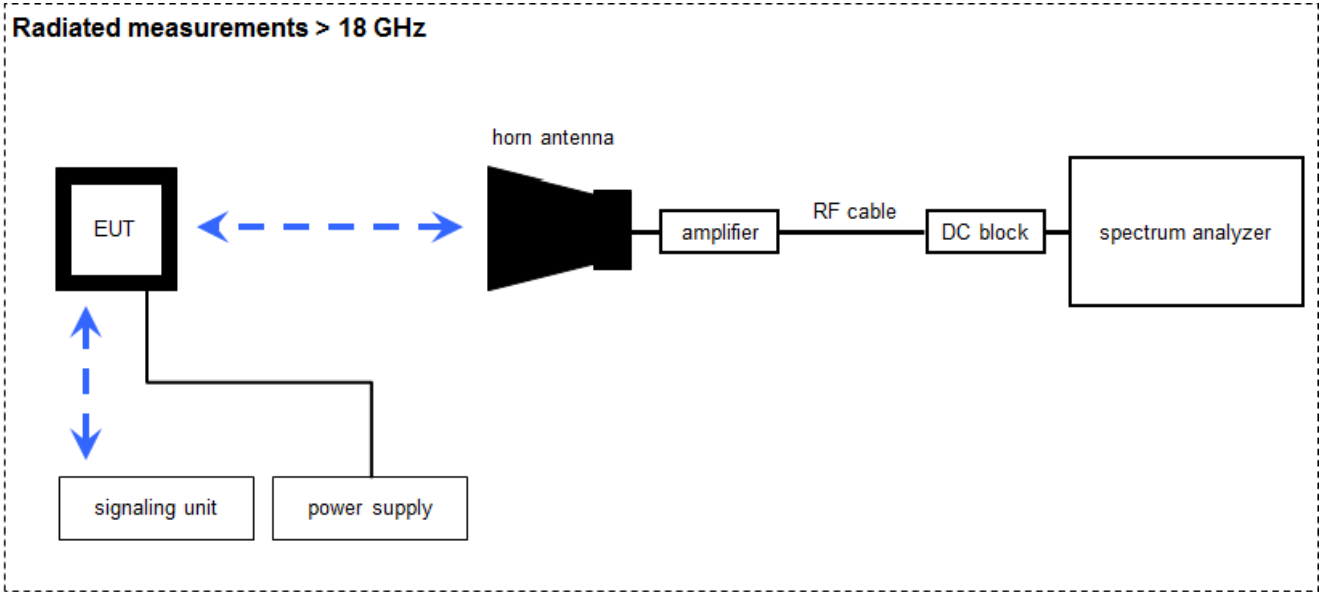

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Horn Antenna 18,0-40,0 GHz	LHAF180	Microw.Devel	39180-103-022	300001748	k	22.05.2015	22.05.2018
3	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	25.01.2017	24.01.2018
4	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
6	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
7	A	Customer Notebook	-/-	Dell	P1250643	Ingenico #2	-/-	-/-	-/-

6.4 AC conducted

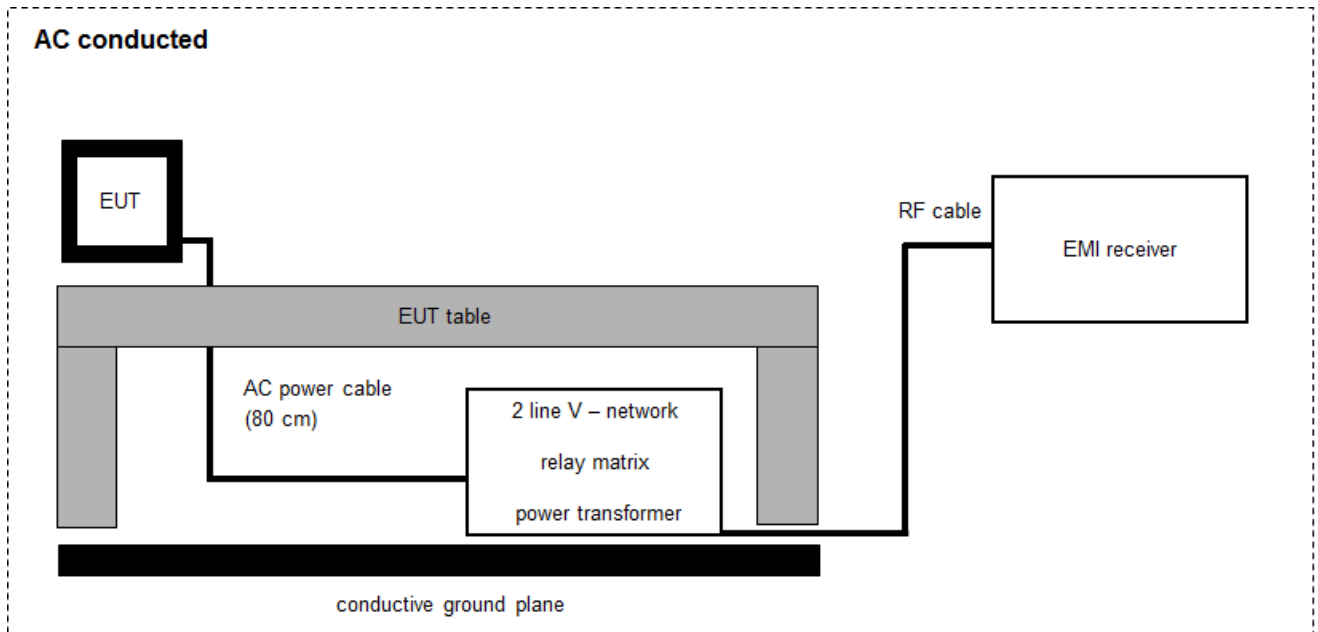

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)


Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	893045/004	300000584	k	31.01.2017	30.01.2018
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	k	27.11.2006	-/-
3	A	AC-Spannungsquelle variabel	MV2616-V	EM-Test	0397-12	300003259	k	11.12.2015	11.12.2017
4	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
5	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	01.02.2017	31.01.2018
6	A	Customer Notebook	-/-	Dell	P1250643	Ingenico #2	-/-	-/-	-/-

6.5 Conducted measurements with peak power meter & spectrum analyzer

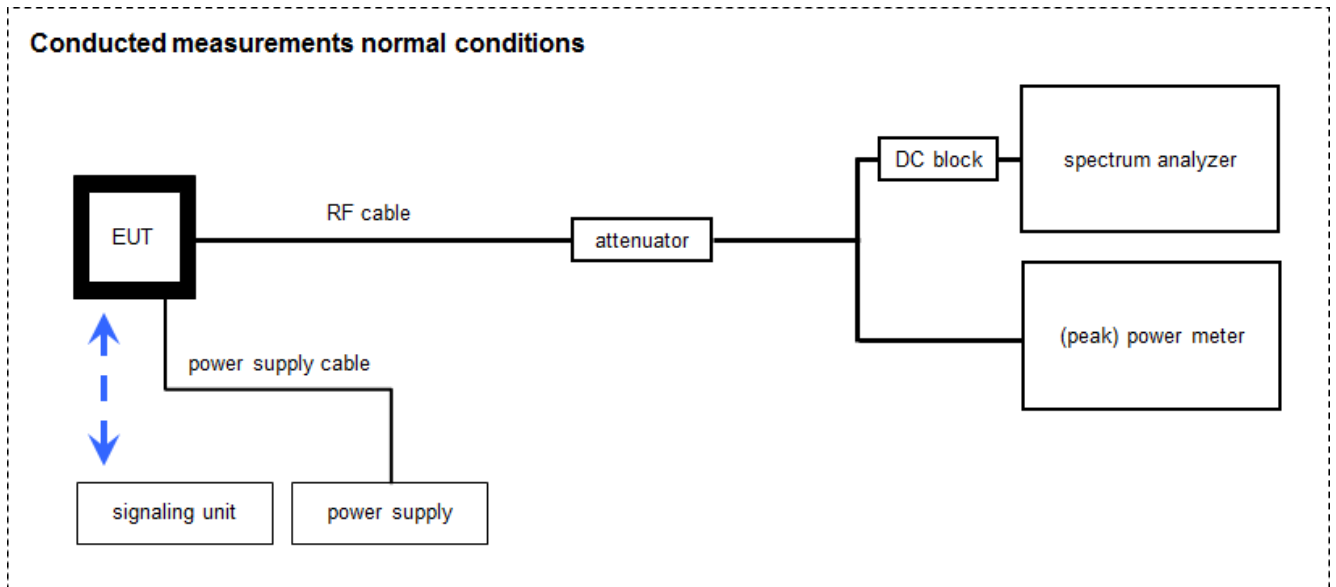

OP = AV + CA
(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	25.01.2017	24.01.2018
2	A, B	Isolating Transformer	RT5A	Grundig	12780	300001166	ev	-/-	-/-
3	A, B	PC-WLAN Tester	Intel Core i3 3220/3,3 GHz, Prozessor	-/-	2V2403033A45 23	300004589	ne	-/-	-/-
4	A, B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	-/-	300004590	ne	-/-	-/-
5	B	Power Sensor	NRP-Z81	R&S	-/-	300003780	k	26.01.2017	25.01.2019
6	A, B	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
7	A, B	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-
8	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	-/-	400001186	ev	-/-	-/-
9	A, B	Synchron Power Meter	SPM-4	CTC	1	400001294	ev	-/-	-/-
10	A, B	Hygro-Thermometer	5-45C, 20-100rF	-/-	-/-	400000108	ev	-/-	-/-
11	A, B	Customer Notebook	-/-	Dell	PT250643	Ingenico #2	-/-	-/-	-/-

7 Sequence of testing

7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

7.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Power spectral density	± 1.5 dB
DTS bandwidth	± 100 kHz (depends on the used RBW)
Occupied bandwidth	± 100 kHz (depends on the used RBW)
Maximum output power	± 1.5 dB
Detailed spurious emissions @ the band edge - conducted	± 1.5 dB
Band edge compliance radiated	± 3 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2017-11-29	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Nominal	DSSS		-/-			-/-
§15.35	Duty cycle	-/-	Nominal	Nominal	DSSS OFDM		-/-			-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. & rad.	KDB 558074 DTS clause: 13.3.2 and clause 12.2.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

10 Additional comments

Reference documents: None

Special test descriptions:

Channel	1	2	3	4	5	6	7	8	9	10	11
11b	13	13	13	13	13	13	13	13	13	13	13
11g	14	15	16	16	16	16	16	16	15	14	12
11n-20	13	15	15	15	15	15	15	15	14	14	12
11n-40	-/-	-/-	10	11	12	13	13	12	10	-/-	-/-

In addition to the power table above, Ingenico calibration files were used. These files have a relevant impact on the performance and spectral appearance of each channel

Configuration descriptions: None

Provided channels:

Channels with 20 MHz channel bandwidth: b - mode

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 20 MHz channel bandwidth: g - mode

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 20 MHz channel bandwidth: n HT20 - mode

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & centre frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	-/-	-/-	2422	2427	2432	2437	2442	2447	2452	-/-	-/-	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

11 Additional EUT parameter

- Test mode:
- No test mode available
lperf was used to ping another device with the largest support packet size
 - Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself
- Modulation types:
- Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
 - Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- Operating mode 1 (single antenna)
 - *Equipment with 1 antenna,*
 - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
 - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
 - Operating mode 2 (multiple antennas, no beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
 - Operating mode 3 (multiple antennas, with beamforming)
 - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

12 Measurement results

12.1 Antenna gain

Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz / 10 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 – A (conducted) See chapter 6.2 – C (radiated)
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
6 dBi / > 6 dBi output power and power density reduction required	

Results:


	Ch. 1	Ch. 6	Ch. 11
Conducted power / dBm Measured with DSSS modulation	11.7	11.2	11.3
Radiated power / dBm Measured with DSSS modulation	9.8	9.5	10.6
Gain / dBi Calculated	-1.9	-1.7	-0.7

Plots: DSSS / b – mode


Plot 1: Lowest channel

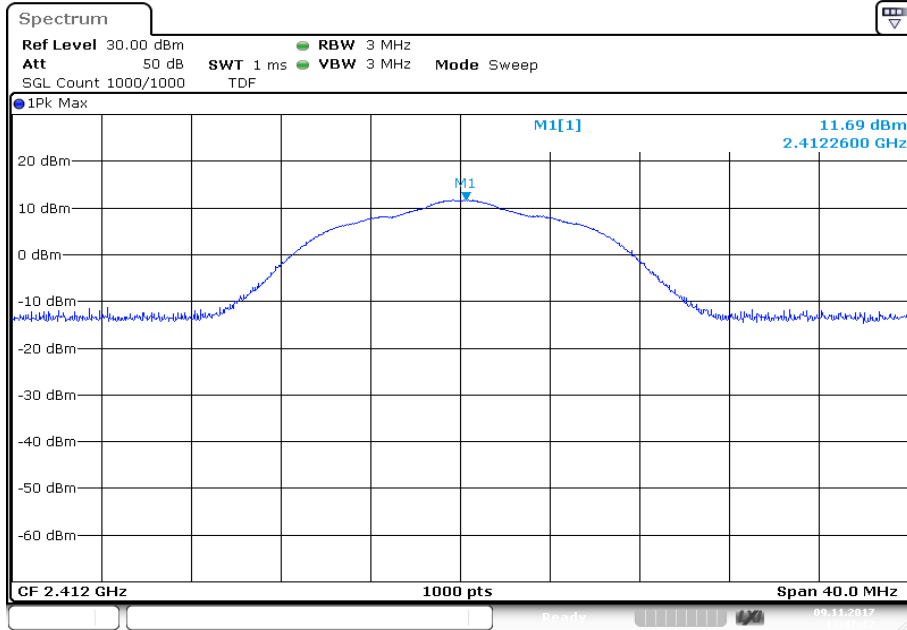

Plot 2: Middle channel

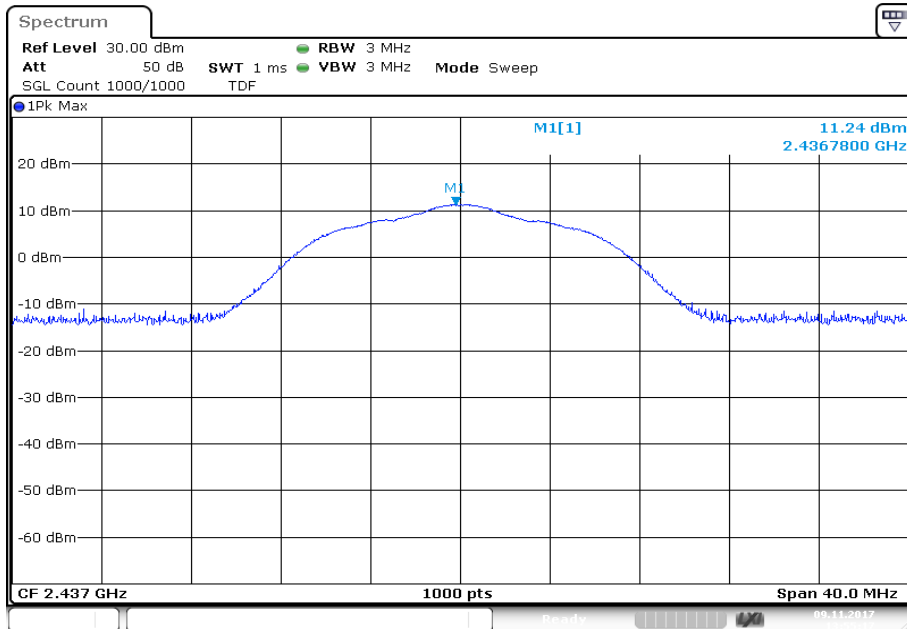

Plot 3: Highest channel

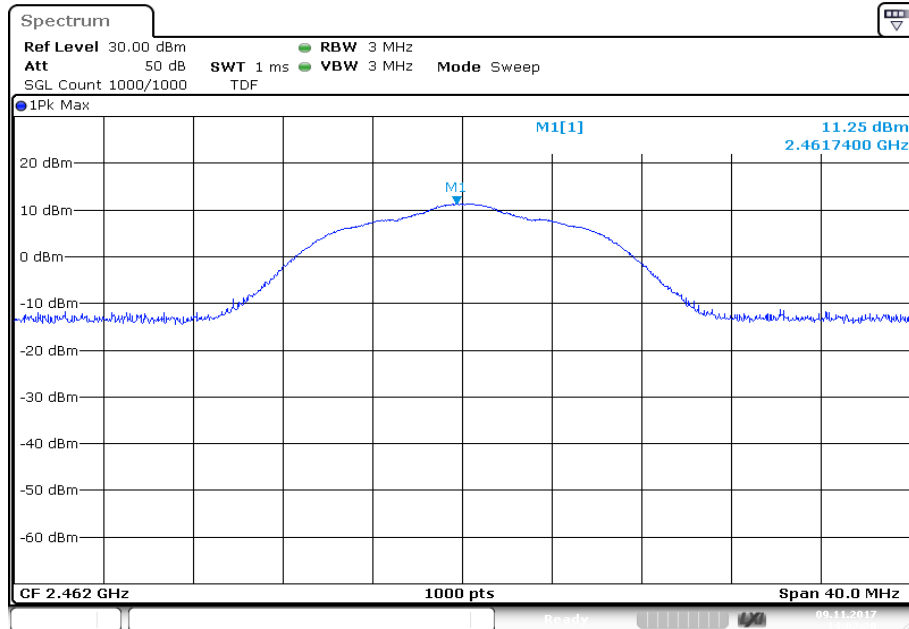

Date: 9.NOV.2017 14:02:20

12.2 Identify worst case data rate

Description:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 – A
Measurement uncertainty	-/-

Results:

Modulation scheme / bandwidth	
DSSS / b – mode	1 Mbit/s
OFDM / g – mode	6 Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

12.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
According to DTS clause 9.1.2	
Peak power meter	
Test setup	See chapter 6.5 – B
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

Results:

T _{nom}	V _{nom}	maximum output power / dBm							
		Ch. 1			Ch. 6			Ch. 11	
Output power conducted DSSS / b – mode		14.7			14.0			14.6	
		Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11	
Output power conducted OFDM / g – mode		20.9	21.5	21.6	21.7	21.0	20.6	19.9	
		Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11	
Output power conducted OFDM / n HT20 – mode		20.4	21.4	21.5	21.6	20.8	20.6	19.7	
		Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9	
Output power conducted OFDM / n HT40 – mode		19.1	17.6	20.6	21.1	20.9	20.5	18.9	

12.4 Duty cycle

Description:

Measurement of the timing behavior.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Limits:

FCC	IC
No limitation!	

Results:

T _{nom}	V _{nom}	Ch. 1			Ch. 6			Ch. 11	
DSSS / b – mode		100 % / 0.00 dB			100 % / 0.00 dB			100 % / 0.00 dB	
		Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11	
OFDM / g – mode		100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	
		Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11	
OFDM / n HT20 – mode		100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	
		Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9	
OFDM / n HT40 – mode		100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	100 % / 0.00 dB	

12.5 Peak power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause 10.2	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
8 dBm / 3 kHz (conducted)	
8 dBm / 100 kHz (conducted)	

Results:

	peak power spectral density / dBm @ 100 kHz						
	Ch. 1		Ch. 6			Ch. 11	
DSSS / b – mode	0.87		0.20			0.75	
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / g – mode	-3.02	-1.72	-0.55	-0.50	-1.34	-3.14	-4.69
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / n HT20 – mode	-4.13	-1.06	-1.23	-0.75	-2.19	-2.55	-4.65
	Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9
OFDM / n HT40 – mode	-9.57	-10.74	-7.34	-7.02	-7.00	-8.00	-9.34


Plots: DSSS / b – mode

Plot 1: channel 1

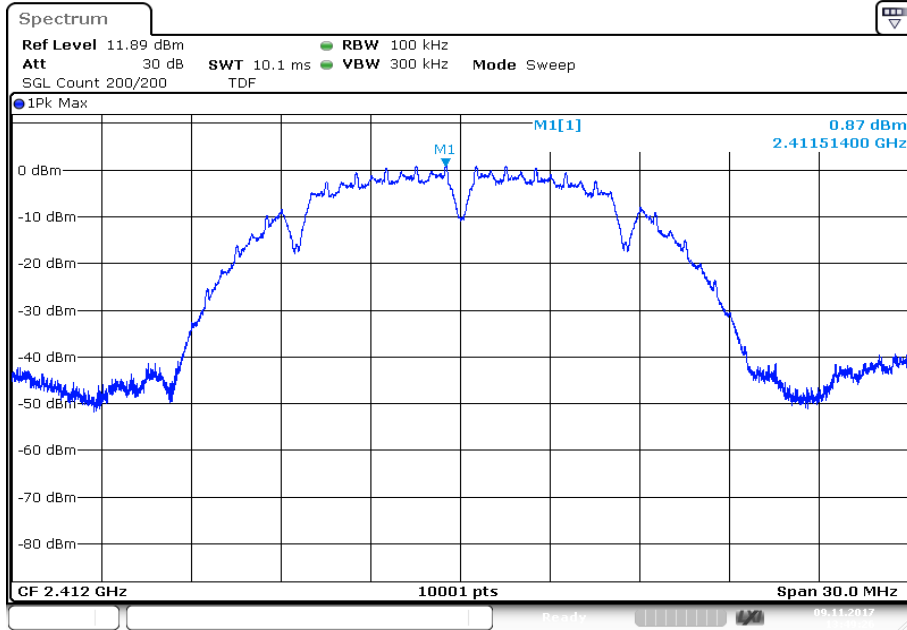


Date: 9.NOV.2017 13:49:27

Plot 2: channel 6

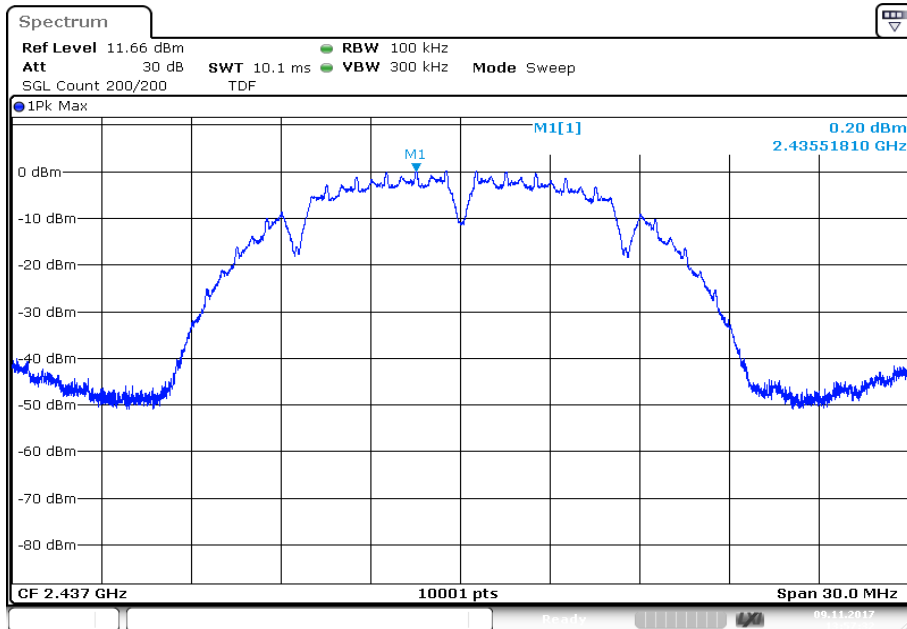

Date: 9.NOV.2017 13:57:32


Plot 3: channel 11

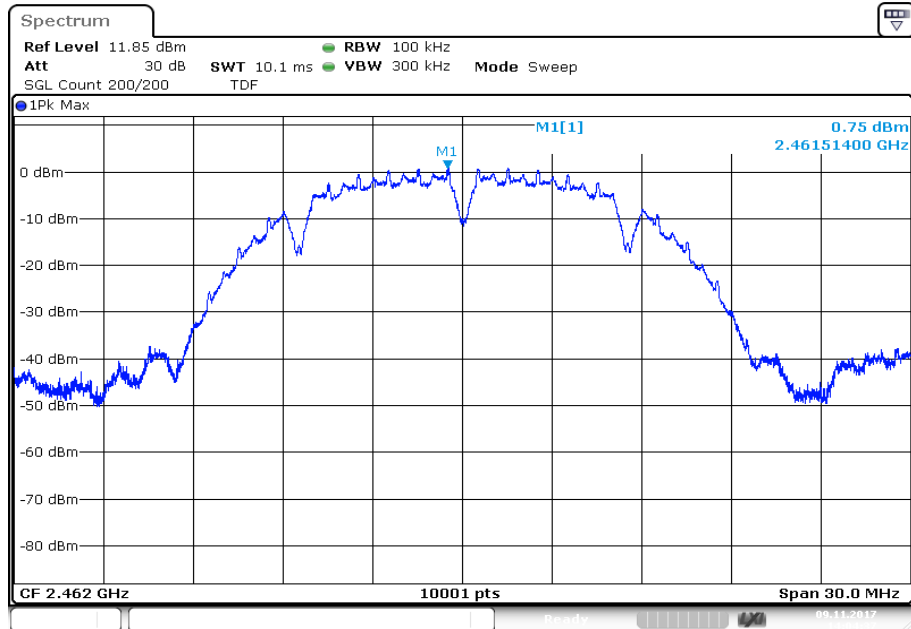


Date: 9.NOV.2017 14:04:38

Plots: OFDM / g – mode


Plot 1: channel 1

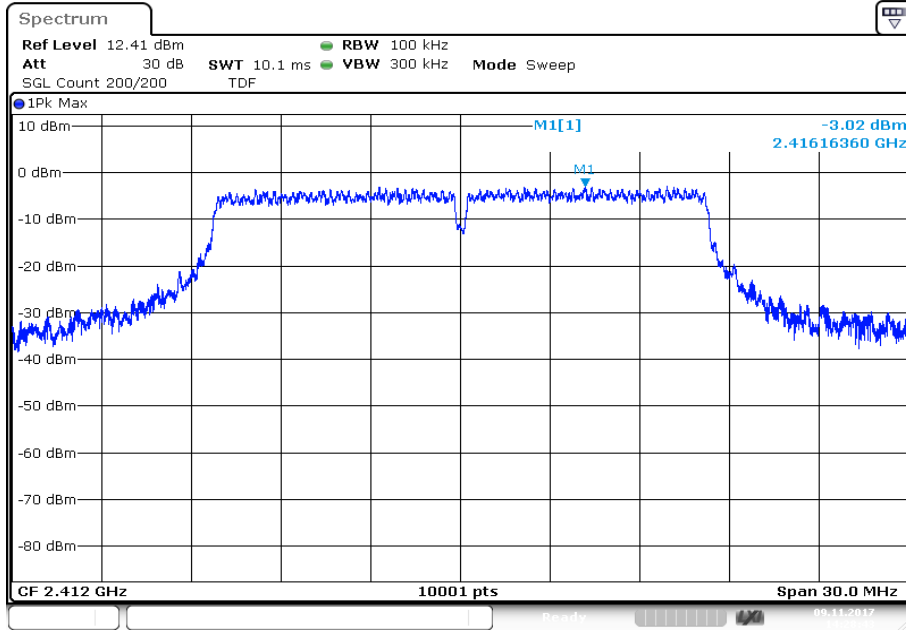

Plot 2: channel 2

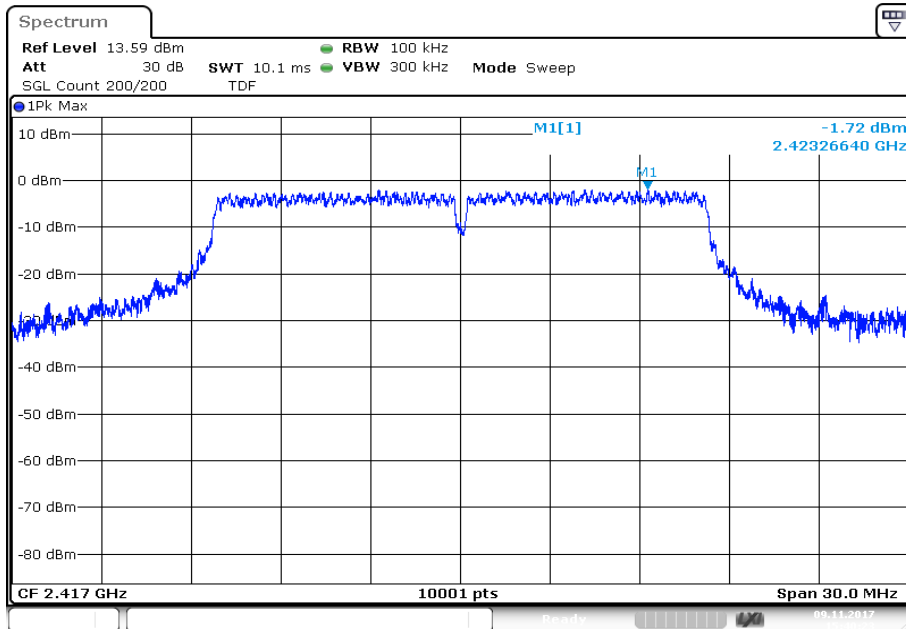


Plot 3: channel 3

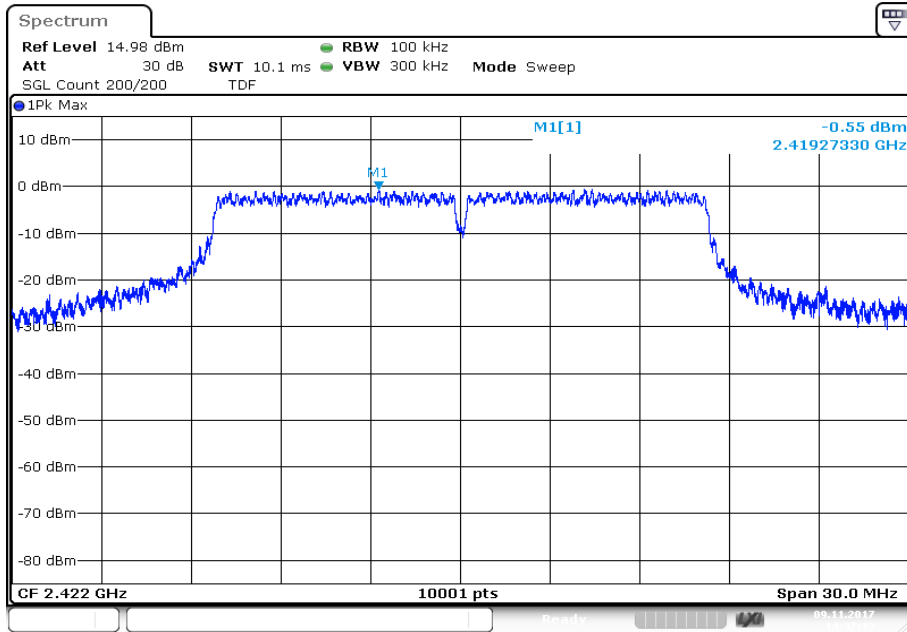


Date: 9.NOV.2017 14:47:13

Plot 4: channel 6

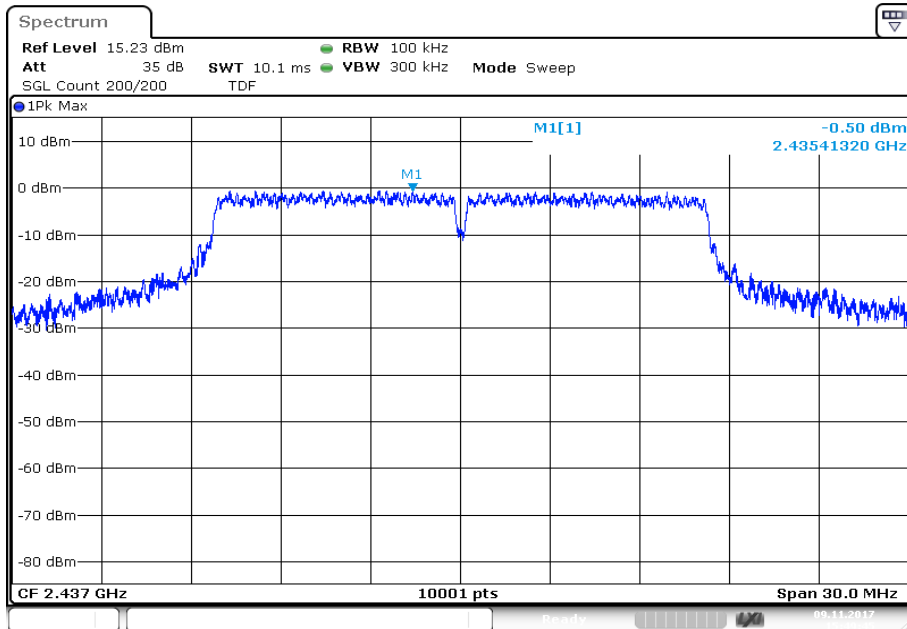


Date: 9.NOV.2017 15:49:45

Plot 5: channel 9

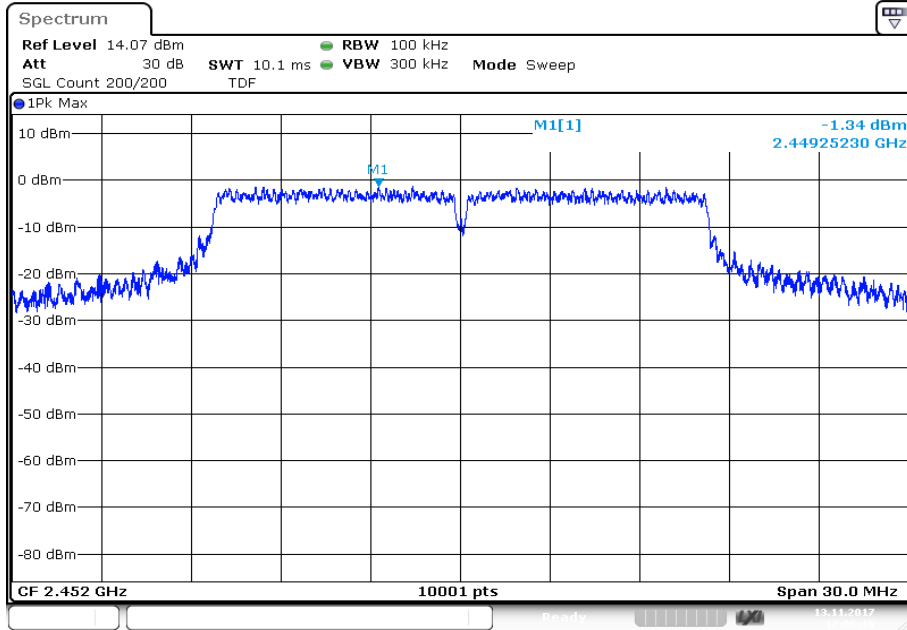


Date: 13.NOV.2017 12:06:17

Plot 6: channel 10

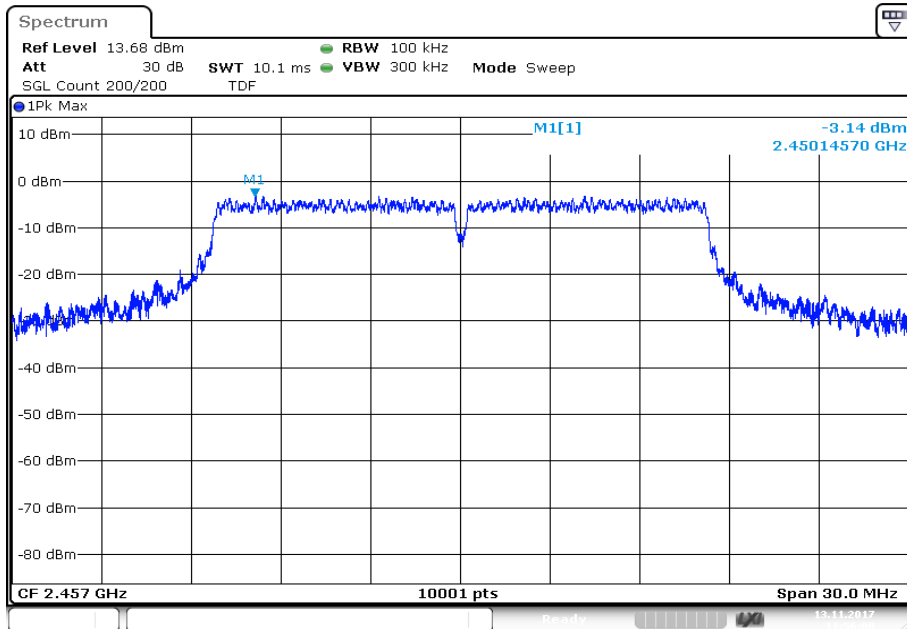

Date: 13.NOV.2017 11:56:09


Plot 7: channel 11

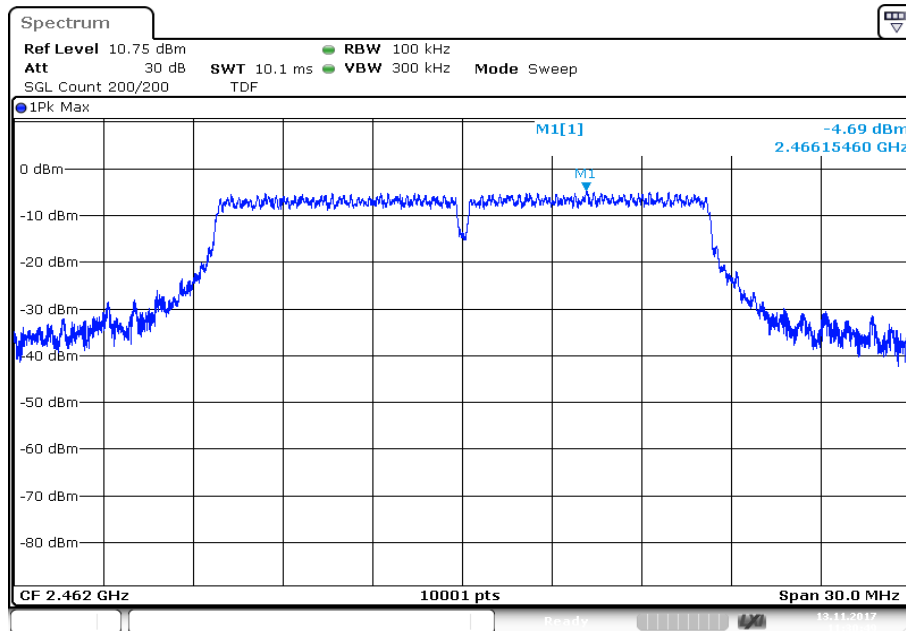

Date: 13.NOV.2017 11:30:50


Plots: OFDM / n HT20 – mode

Plot 1: channel 1

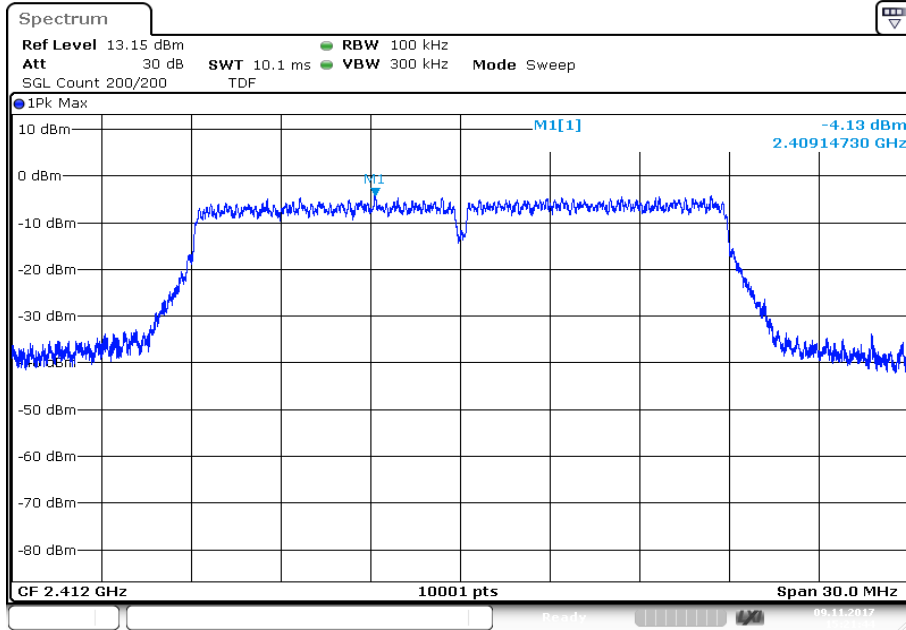


Date: 9.NOV.2017 15:21:44

Plot 2: channel 2

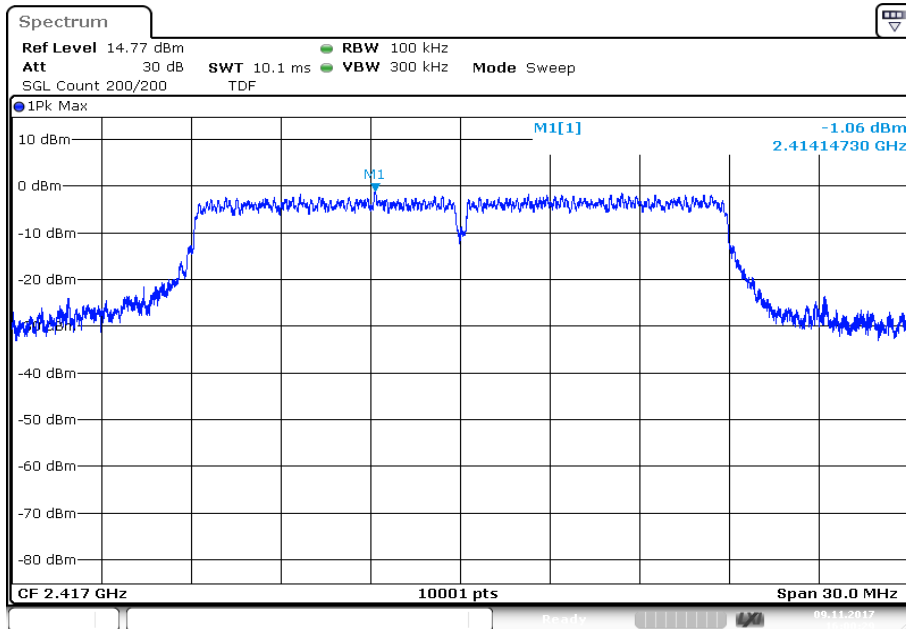


Date: 9.NOV.2017 16:00:29

Plot 3: channel 3

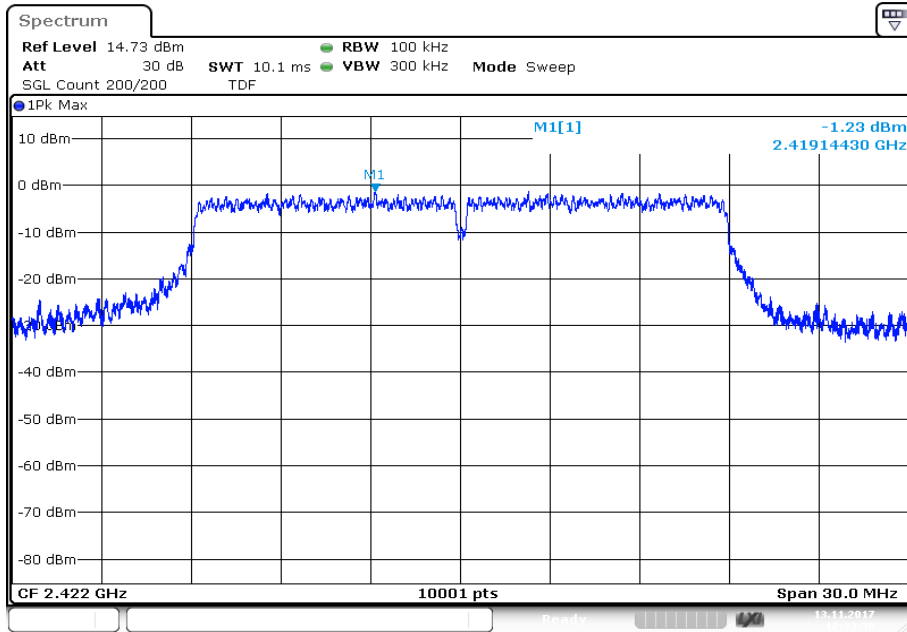


Date: 13.NOV.2017 12:33:39

Plot 4: channel 6

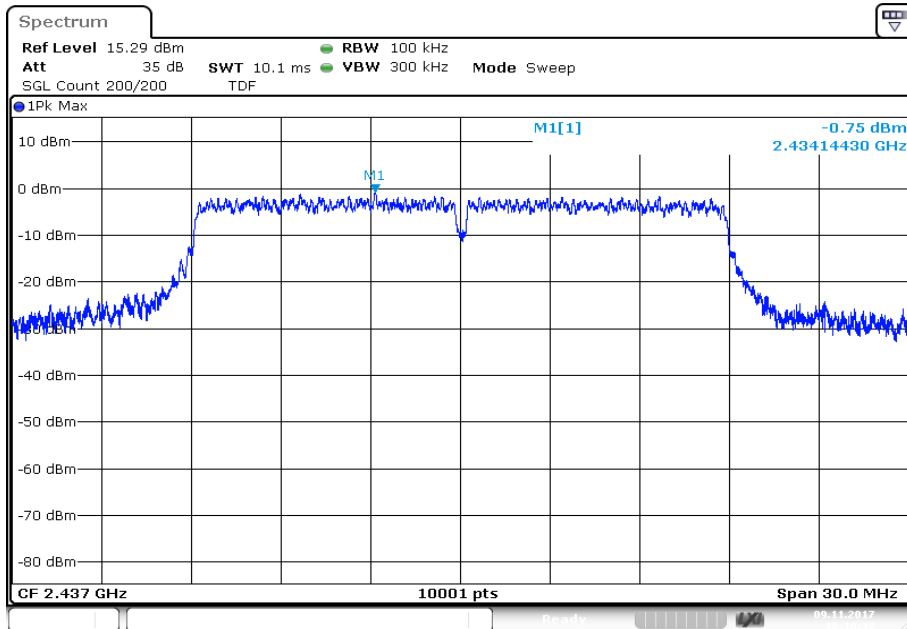


Date: 9.NOV.2017 16:10:37

Plot 5: channel 9

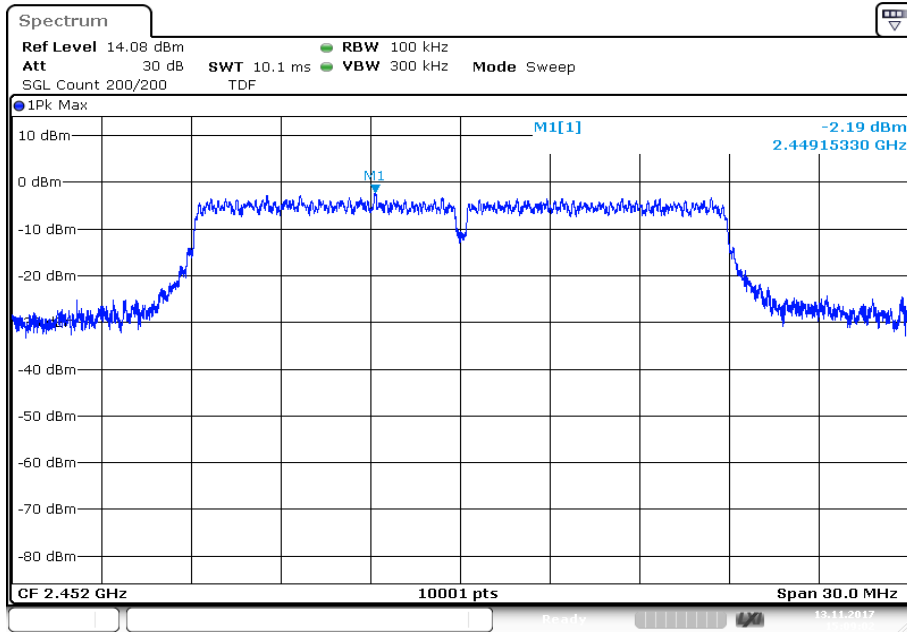


Date: 13.NOV.2017 15:09:03

Plot 6: channel 10

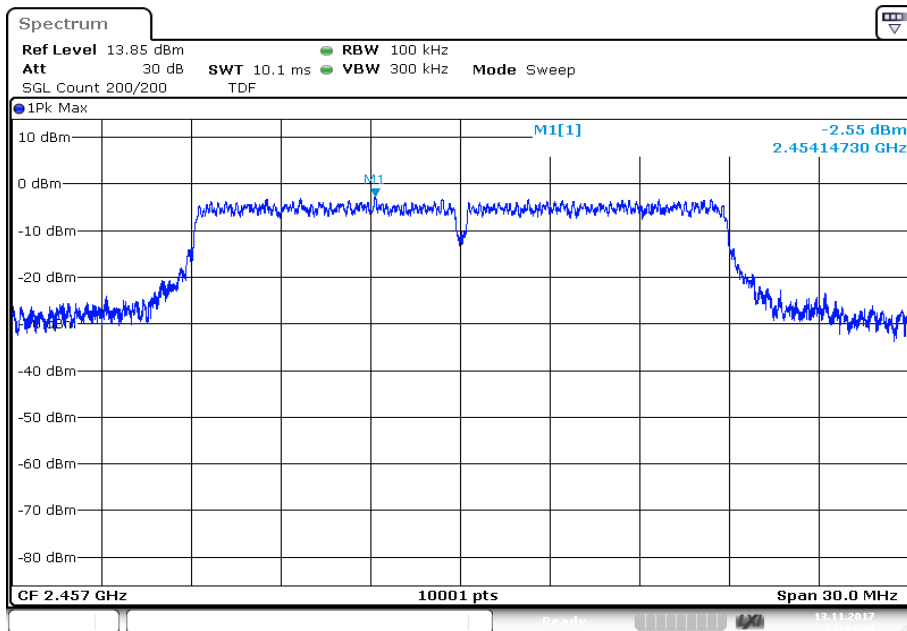

Date: 13.NOV.2017 13:44:35


Plot 7: channel 11

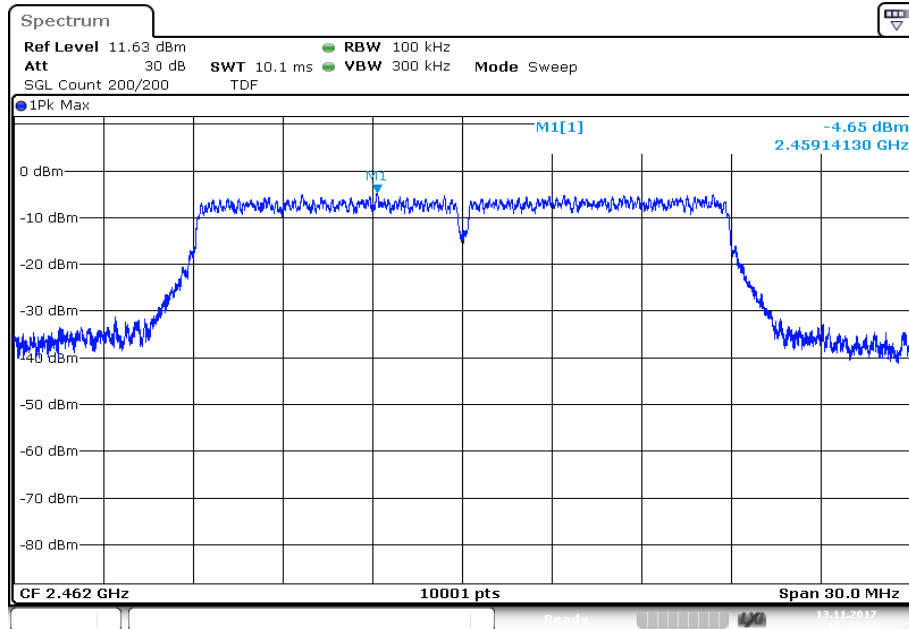

Date: 13.NOV.2017 13:25:09


Plots: OFDM / n HT40 – mode

Plot 1: channel 3

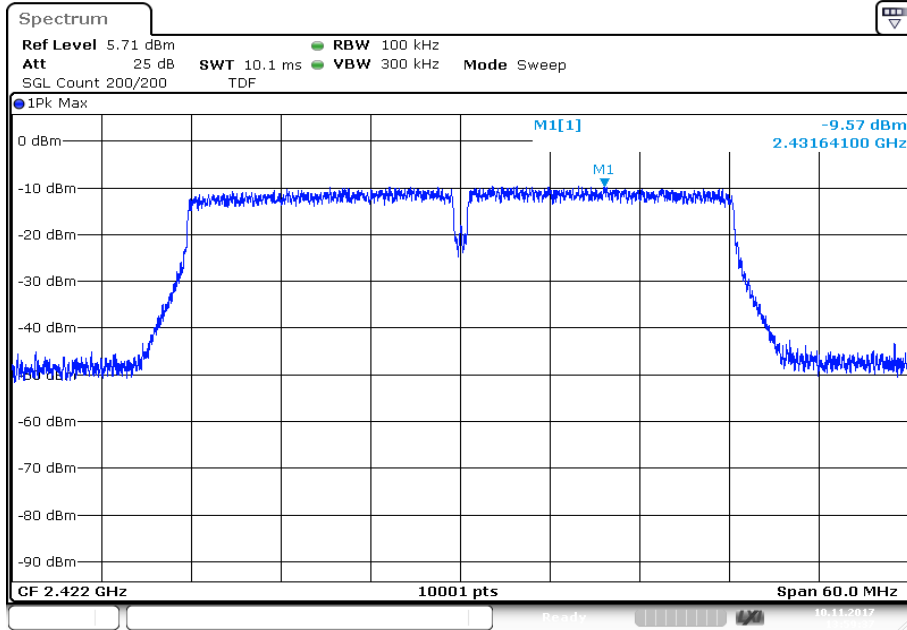


Date: 10.NOV.2017 13:59:37

Plot 2: channel 4

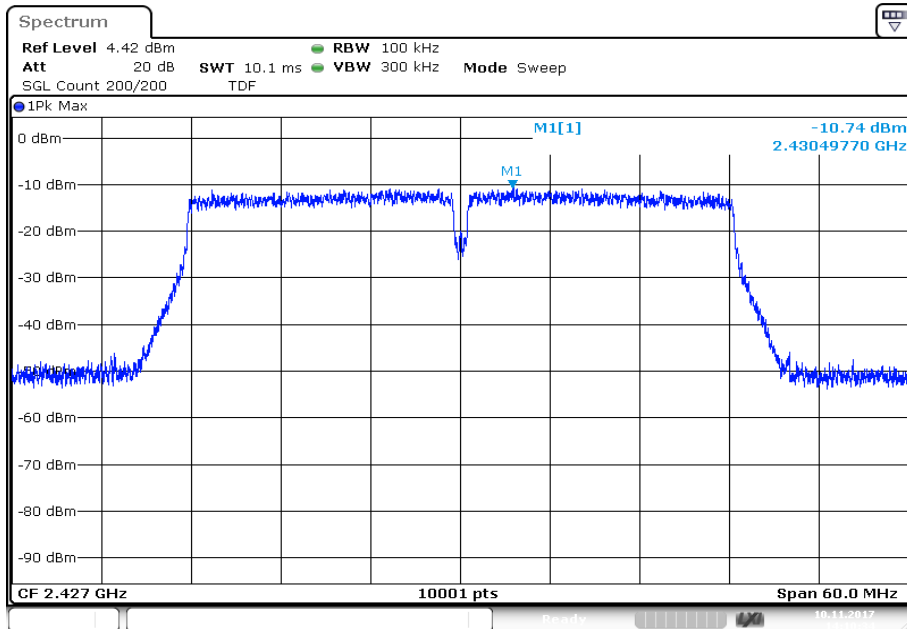


Date: 10.NOV.2017 14:10:34


Plot 3: channel 5

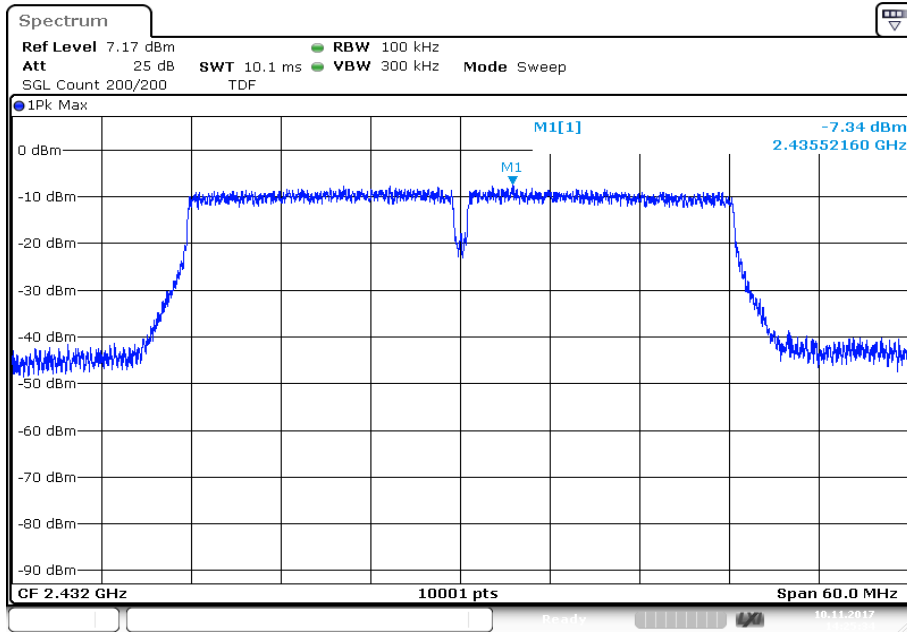

Plot 4: channel 6

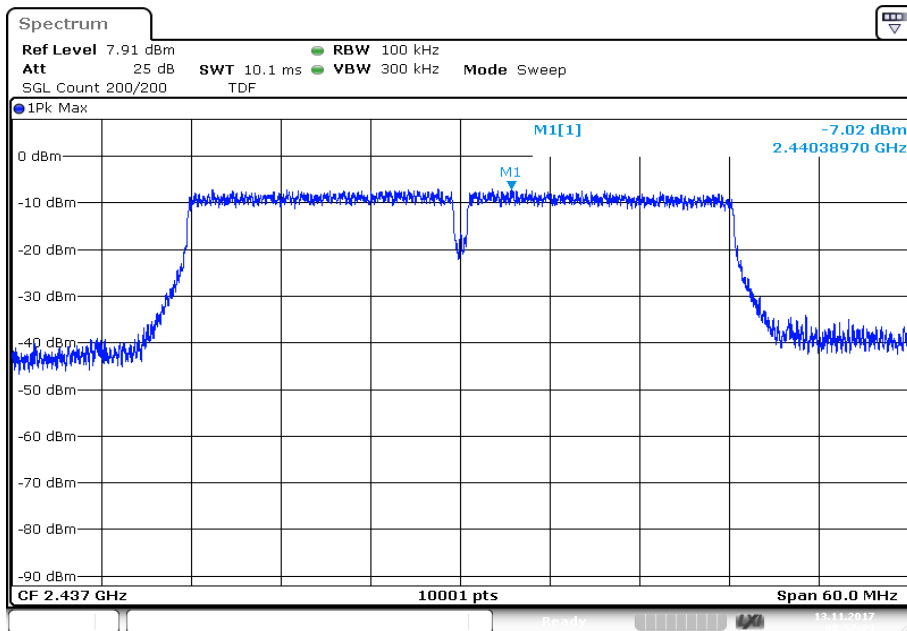


Plot 5: channel 7

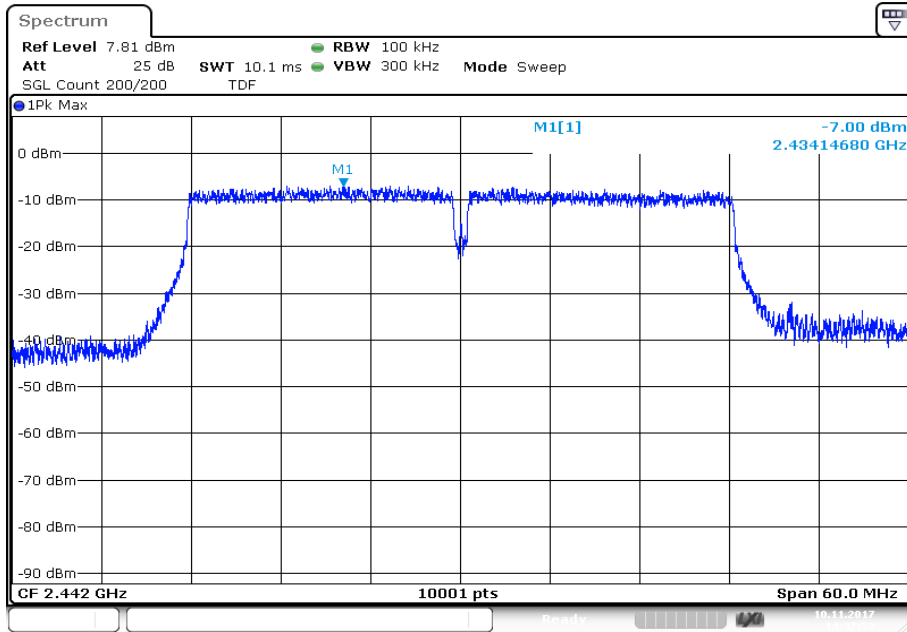


Date: 10.NOV.2017 14:47:53

Plot 6: channel 8

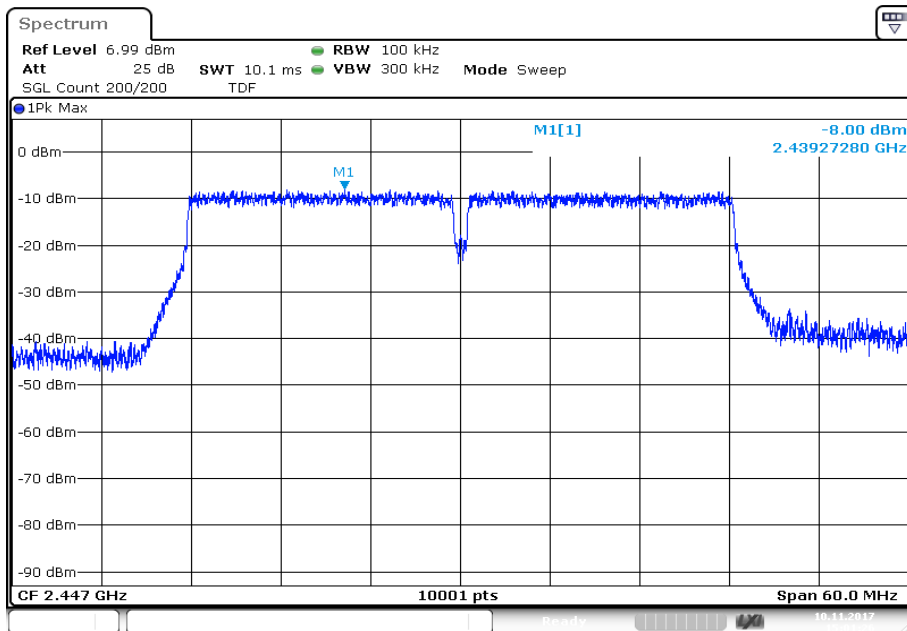

Date: 10.NOV.2017 15:01:26

Plot 7: channel 9

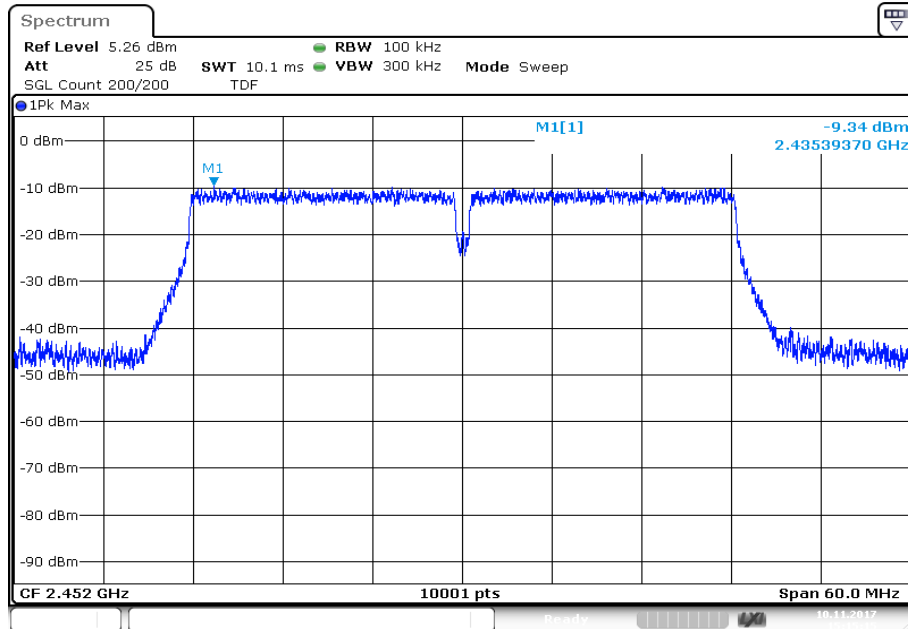

Date: 10.NOV.2017 15:15:15

12.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause 8.1	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:


	6 dB DTS bandwidth / kHz						
	Ch. 1		Ch. 6			Ch. 11	
DSSS / b – mode	10040		10037			10052	
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / g – mode	16543	16561	16552	16540	16568	16568	16543
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / n HT20 – mode	17797	17806	17593	17596	17803	17599	17812
	Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9
OFDM / n HT40 – mode	36530	36530	36374	36410	36542	36560	36566

Plots: DSSS / b – mode


Plot 1: channel 1

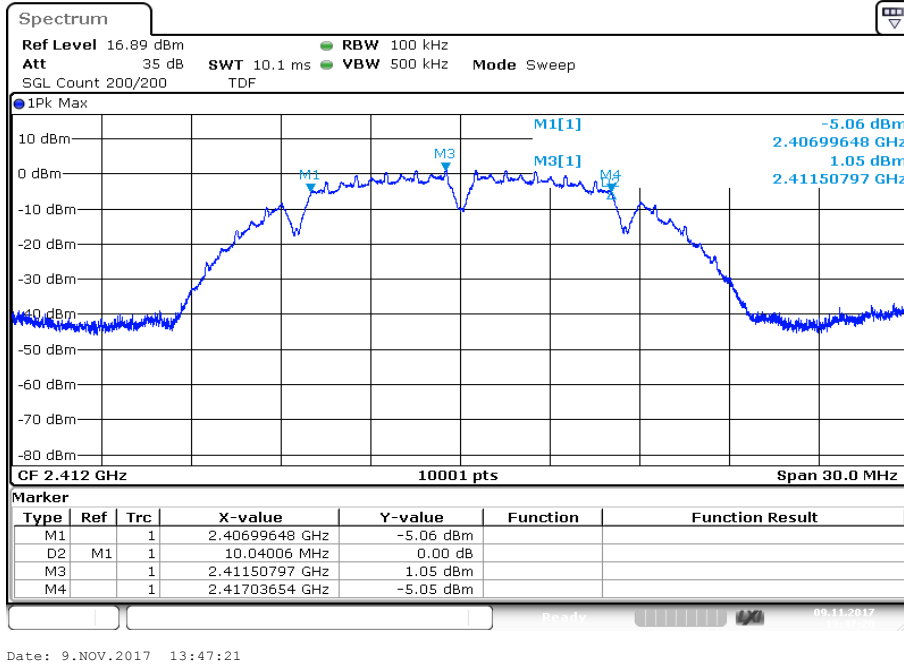

Plot 2: channel 6

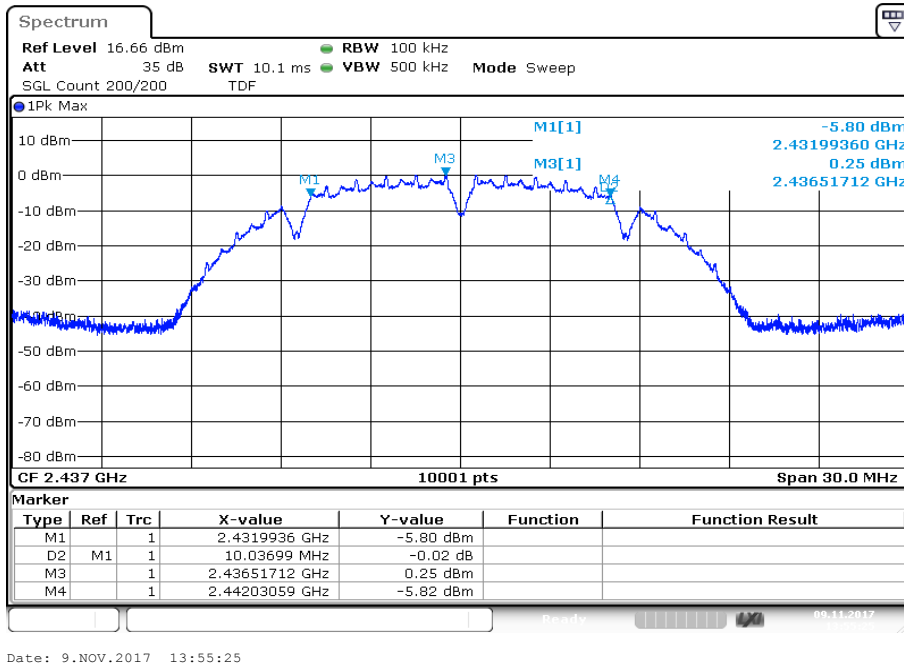


Plot 3: channel 11

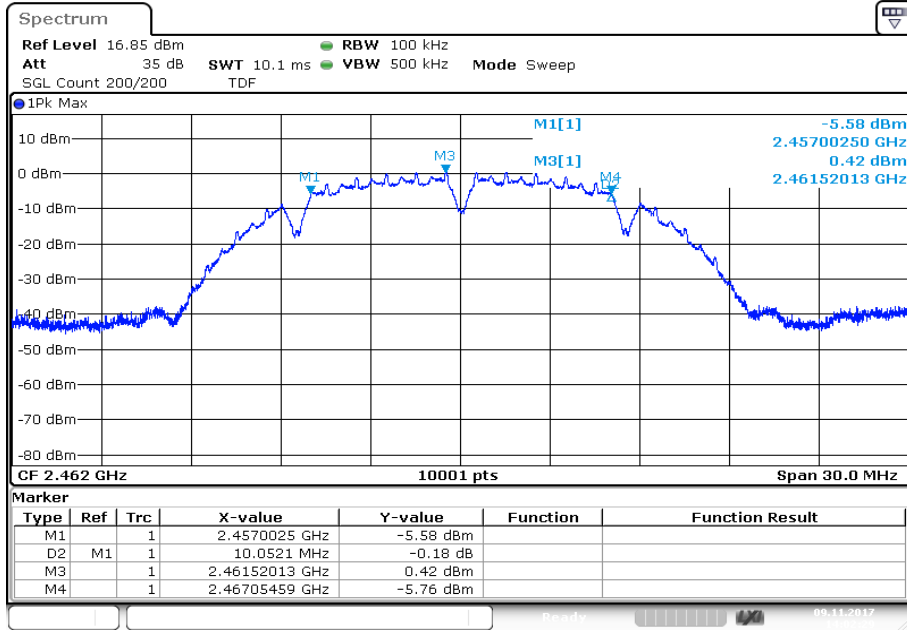


Date: 9.NOV.2017 14:02:29

Plots: OFDM / g – mode


Plot 1: channel 1

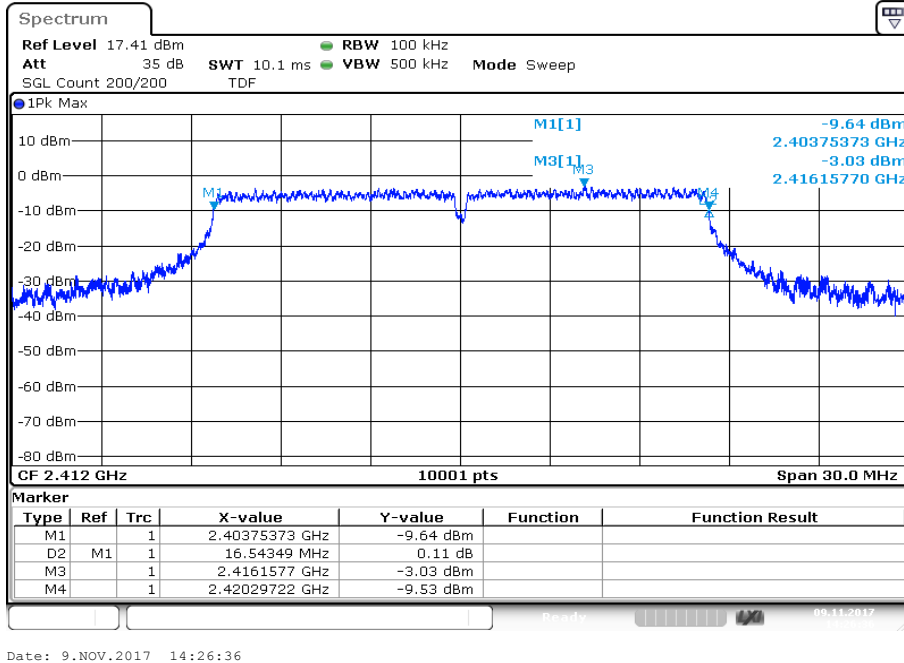


Plot 2: channel 2

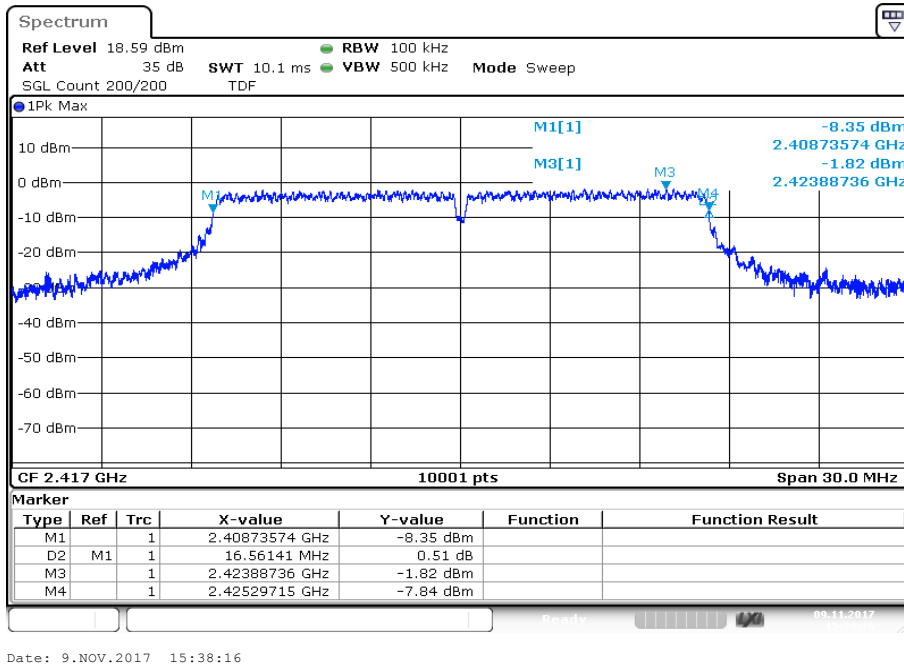


Plot 3: channel 3

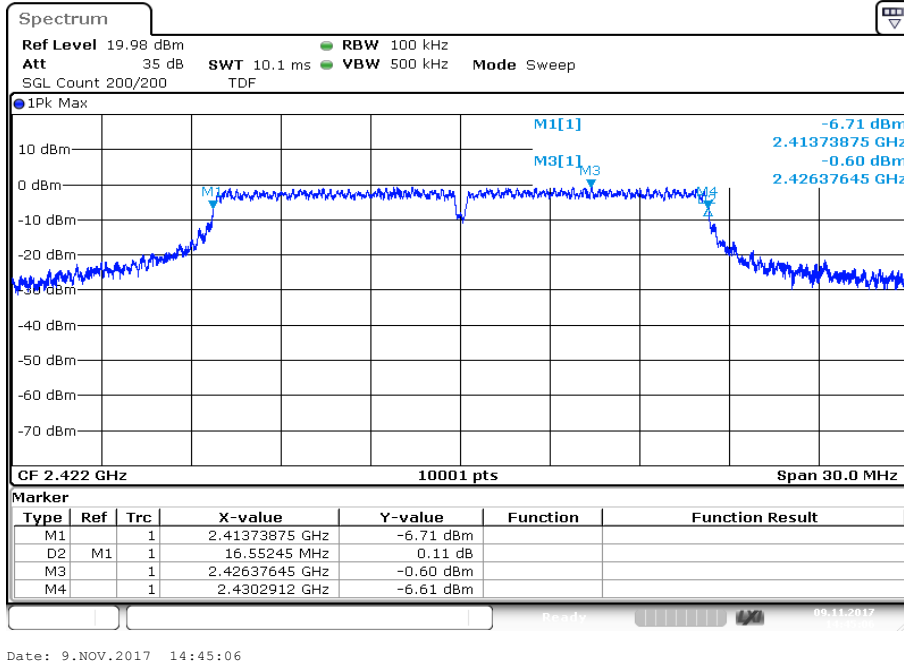


Plot 4: channel 6

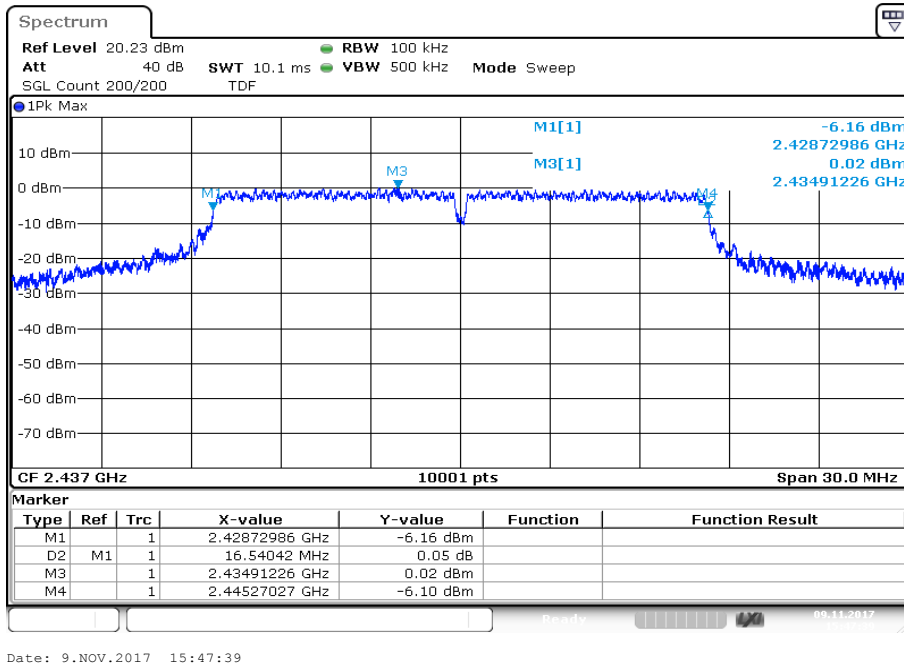


Plot 5: channel 9

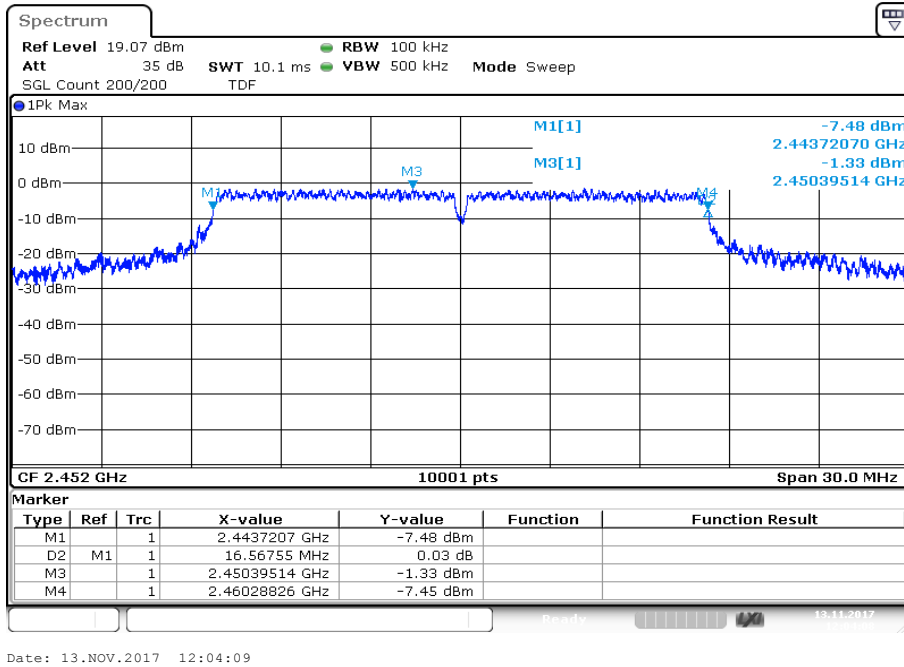

Plot 6: channel 10

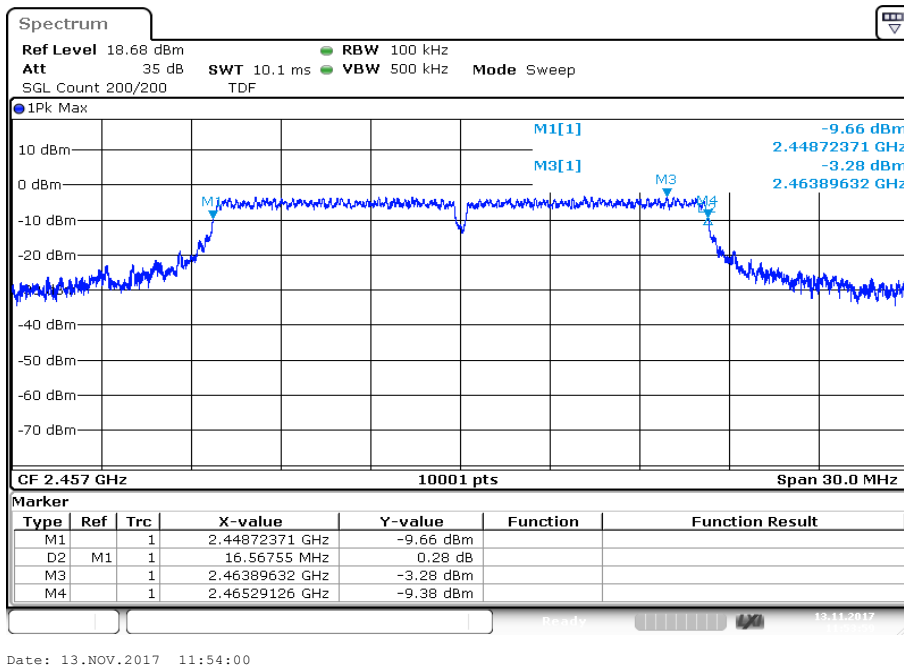


Plot 7: channel 11

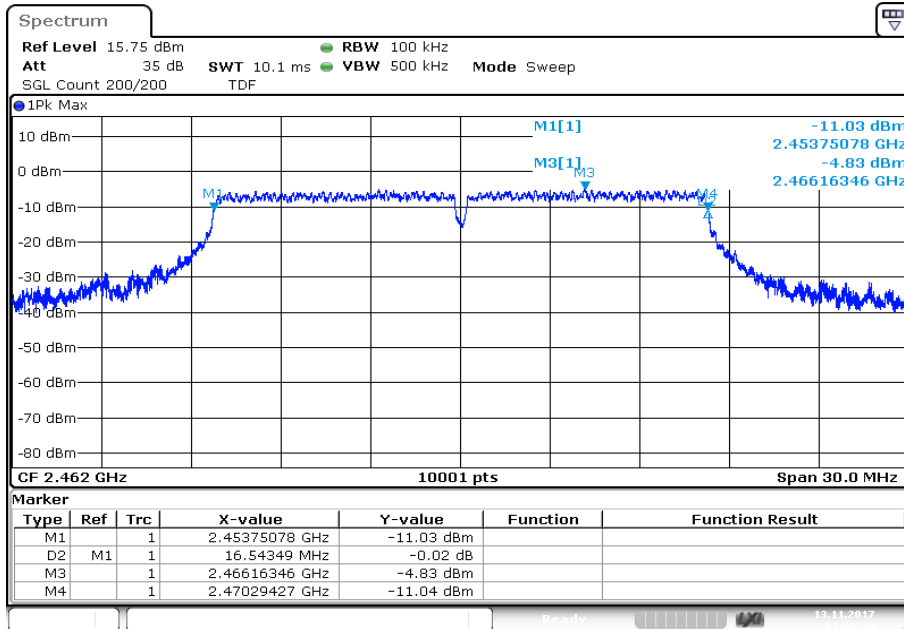

Date: 13.NOV.2017 11:28:40


Plots: OFDM / n HT20 – mode

Plot 1: channel 1

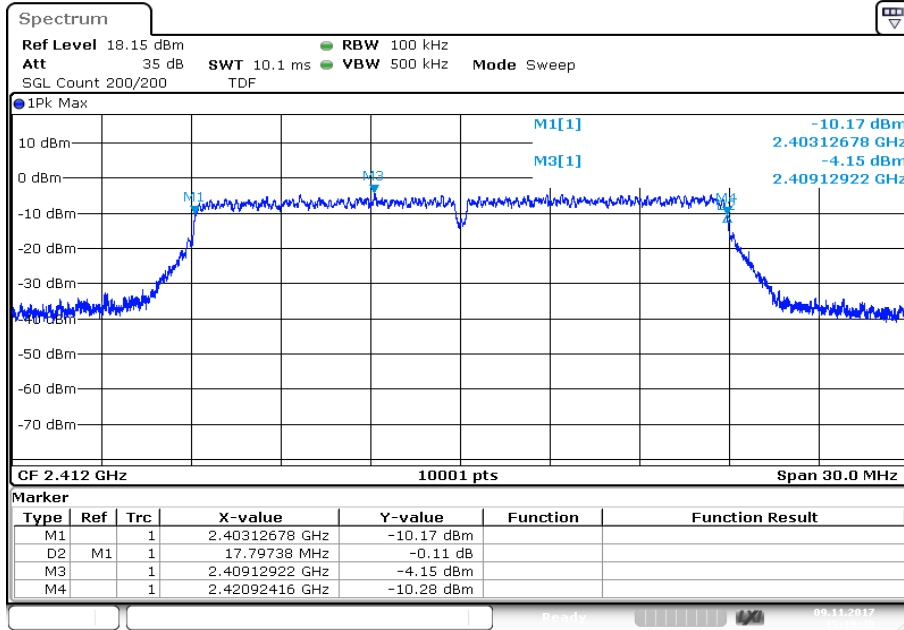


Date: 9.NOV.2017 15:19:39

Plot 2: channel 2

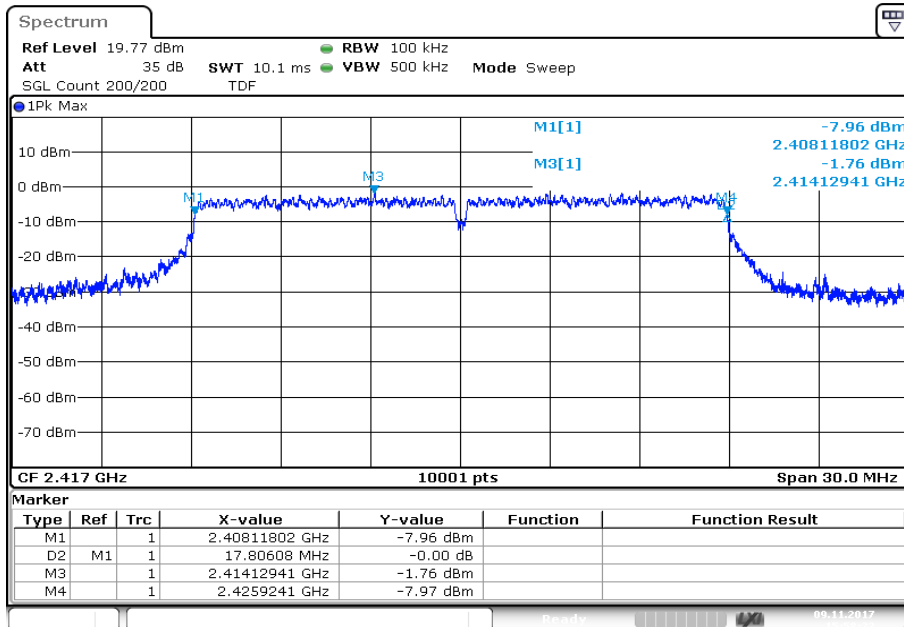


Date: 9.NOV.2017 15:58:22


Plot 3: channel 3

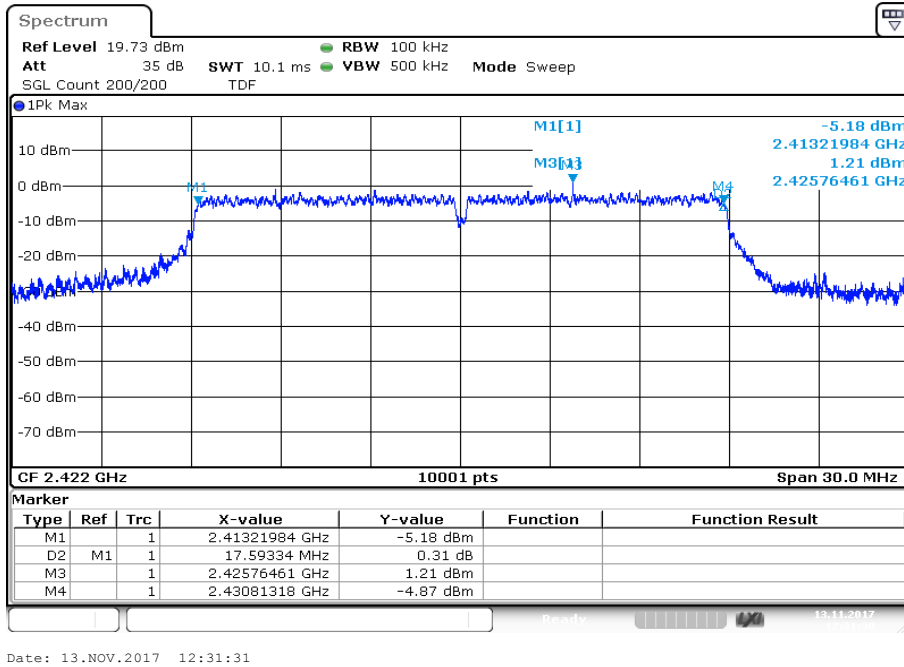


Plot 4: channel 6

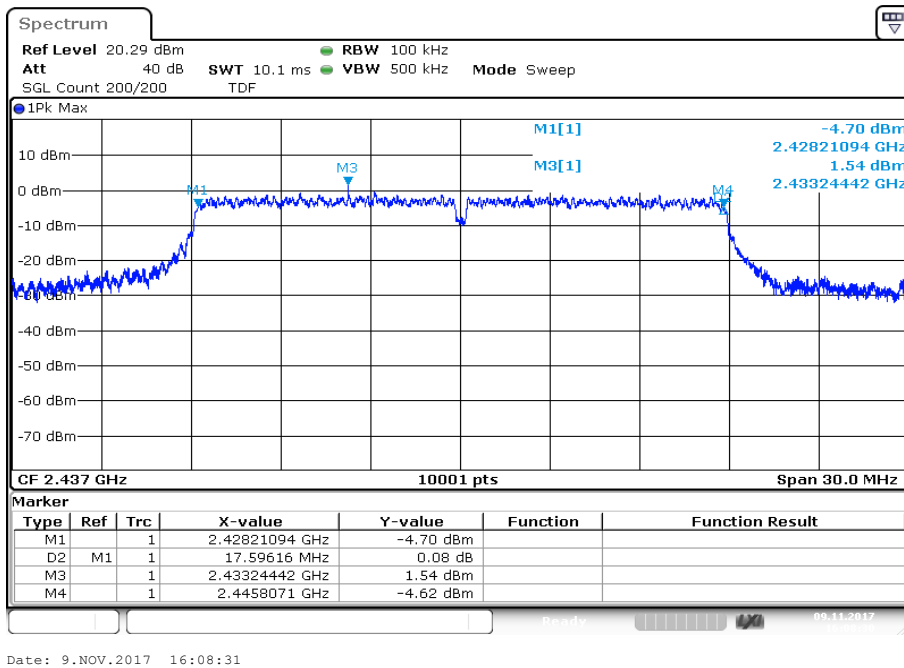


Plot 5: channel 9

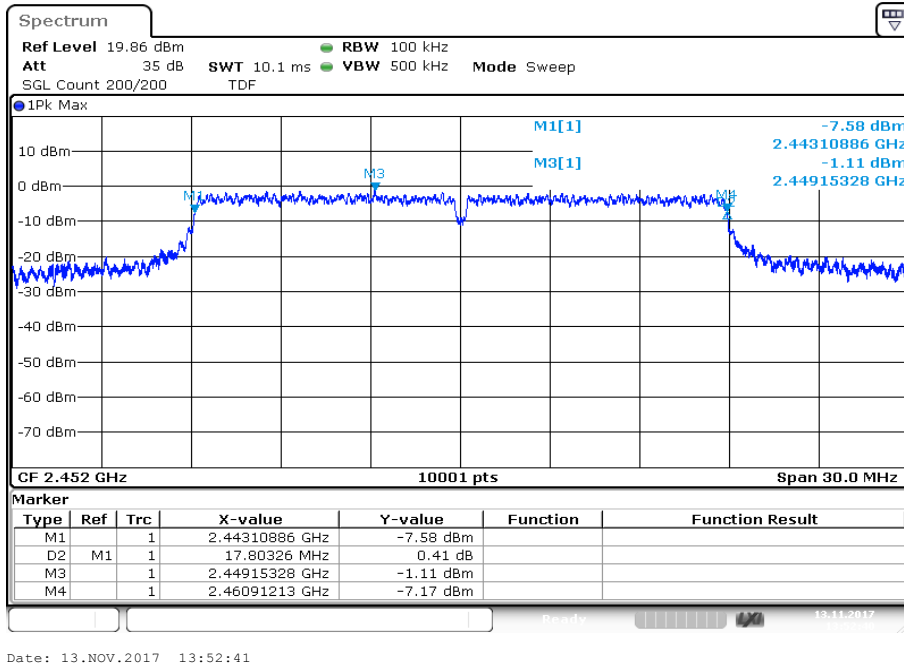

Plot 6: channel 10

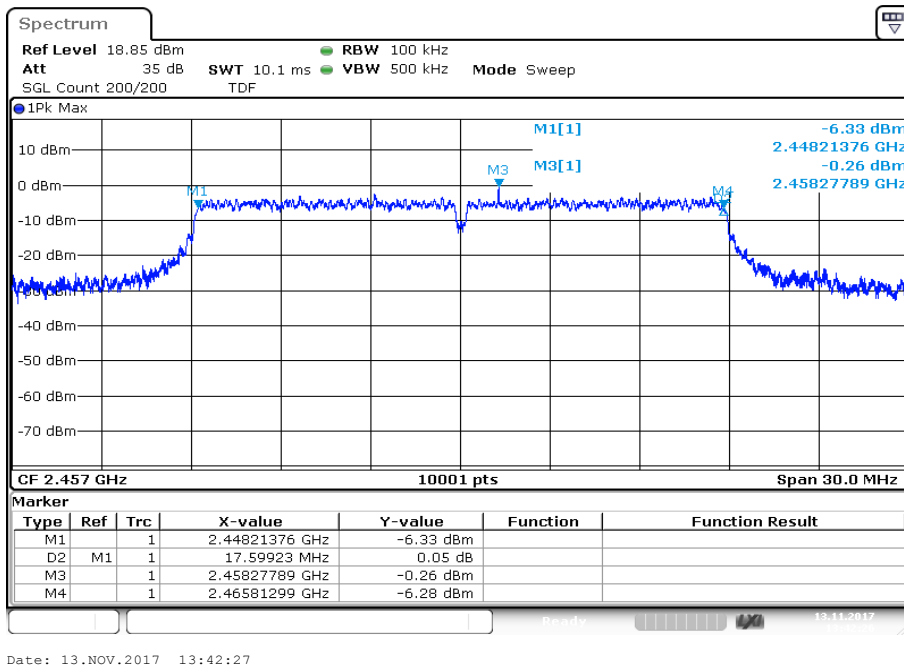


Plot 5: channel 11

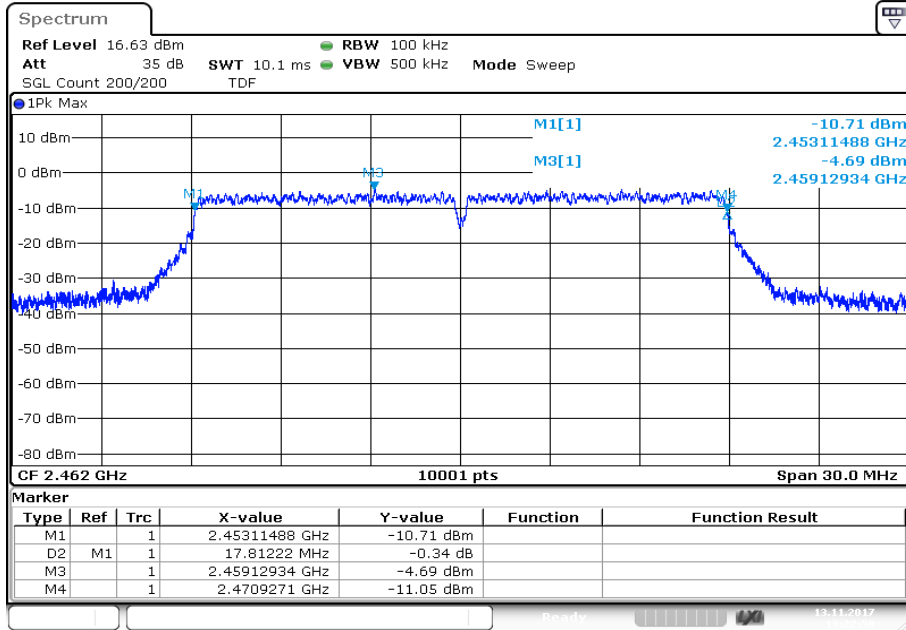


Date: 13.NOV.2017 13:22:59

Plots: OFDM / n HT40 – mode


Plot 1: channel 3

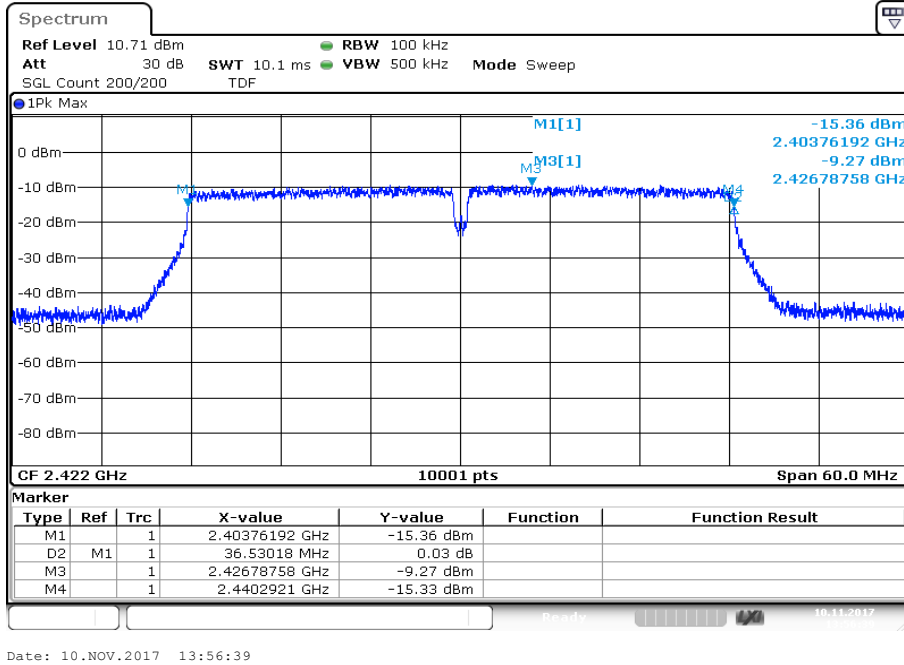


Plot 2: channel 4

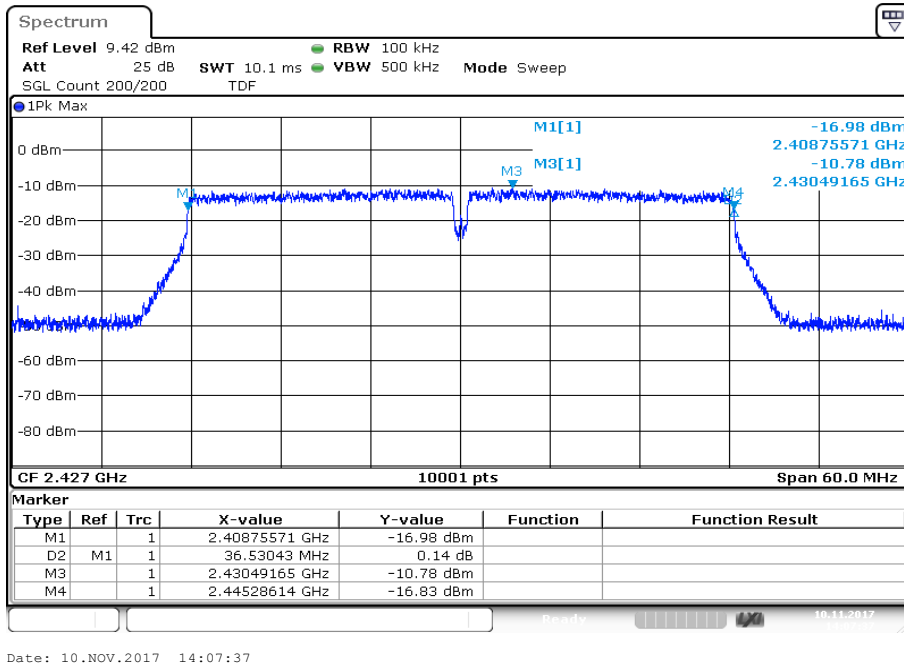


Plot 3: channel 5

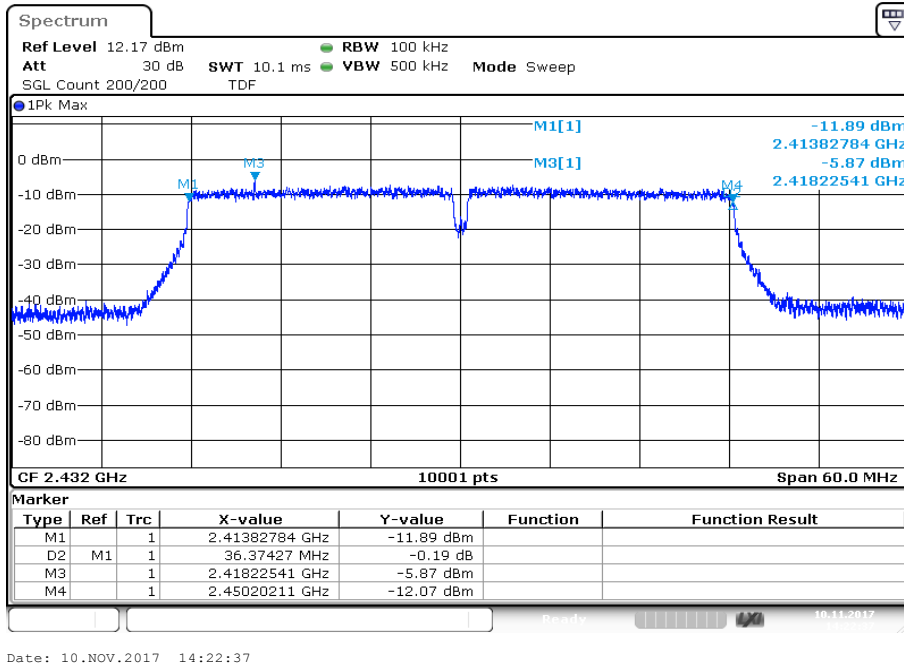


Plot 4: channel 6

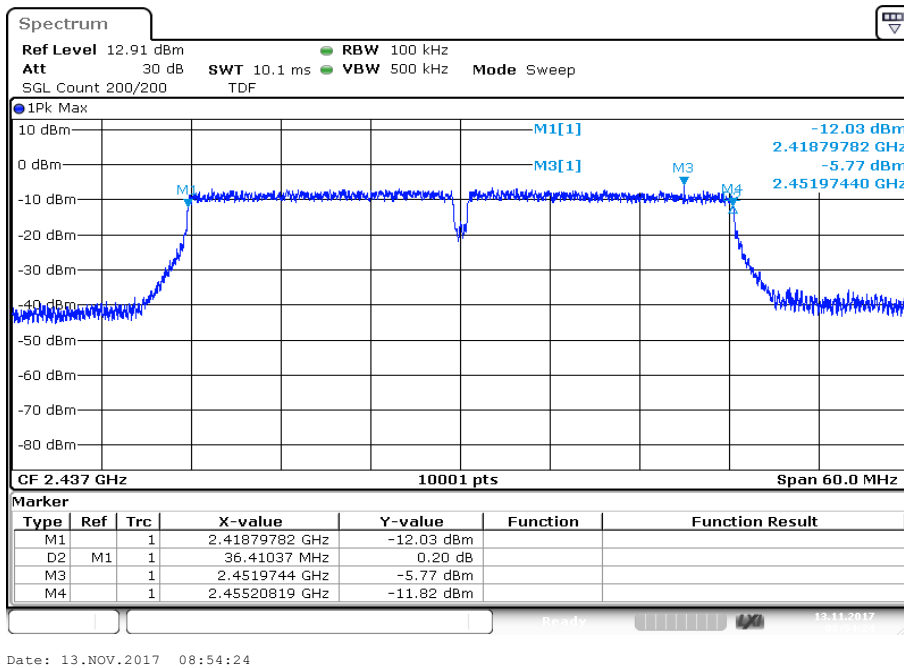


Plot 5: channel 7

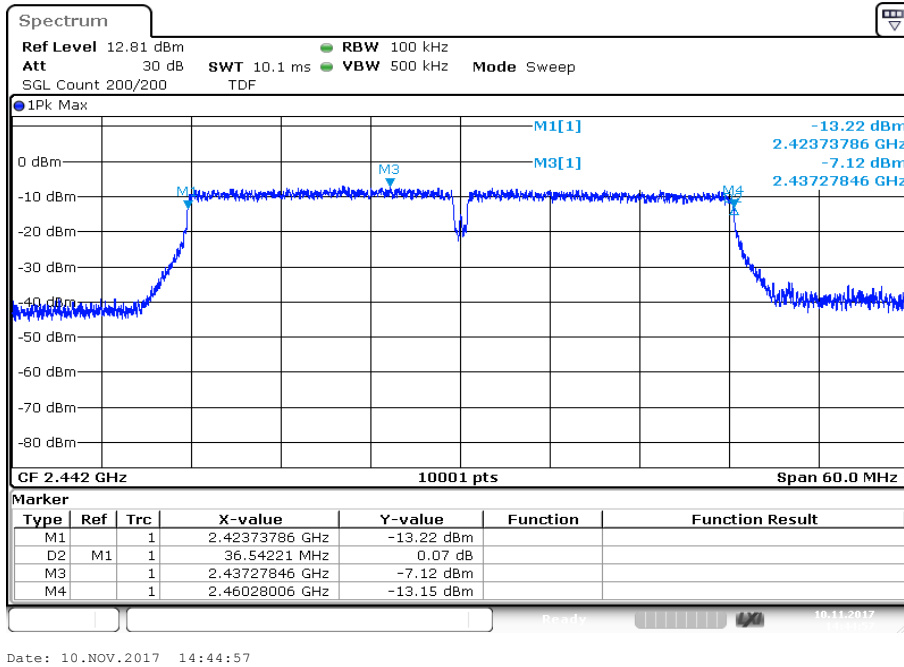

Plot 6: channel 8

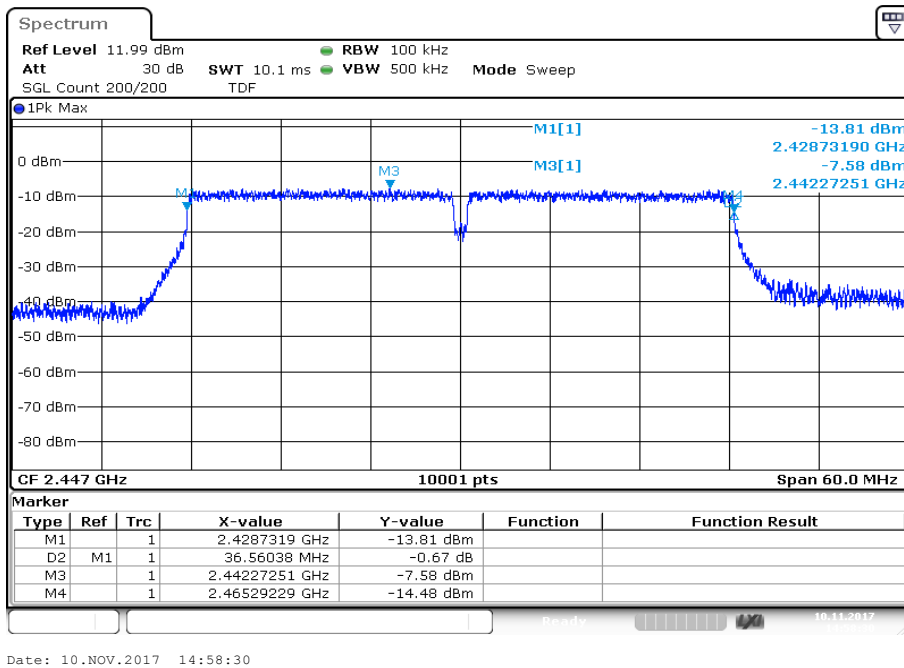

Plot 7: channel 9

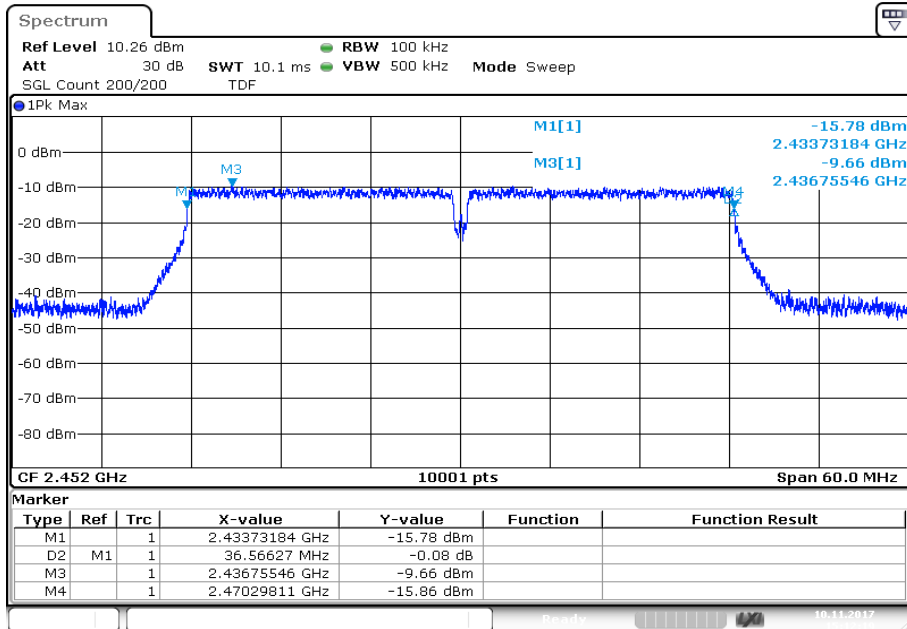

Date: 10.NOV.2017 15:12:19

12.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Usage:


-/-	IC
OBW is necessary for Emission Designator	

Results:


	99% emission bandwidth / kHz						
	Ch. 1		Ch. 6			Ch. 11	
DSSS / b – mode	13637		13679			13688	
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / g – mode	16918	17158	17338	17401	18967	17575	16981
	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
OFDM / n HT20 – mode	17941	18112	18085	18097	18871	18250	17956
	Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9
OFDM / n HT40 – mode	36692	36710	36770	36824	36896	36980	36980

Plots: DSSS / b – mode


Plot 1: channel 1

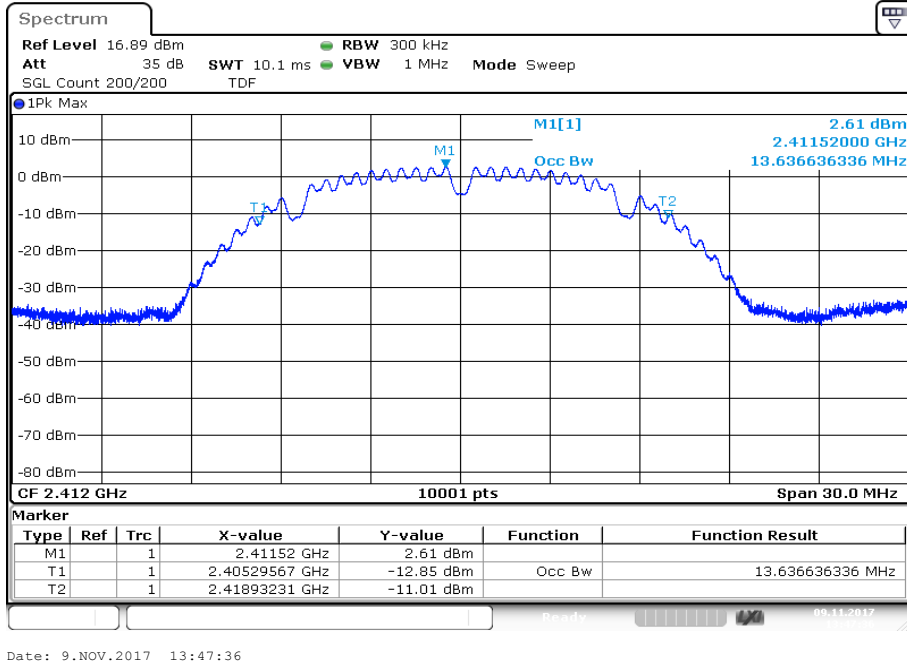

Plot 2: channel 6

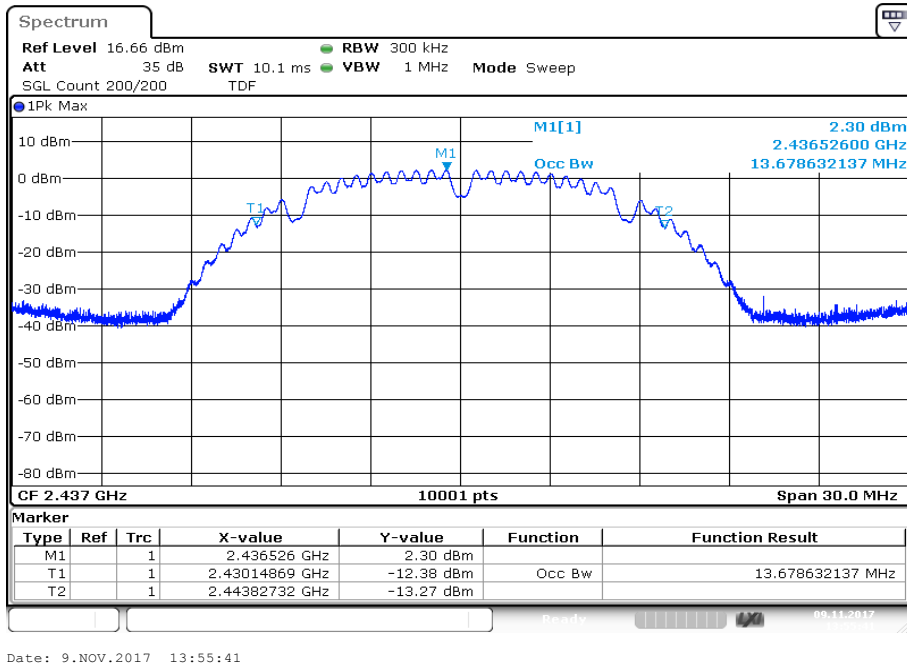


Plot 3: channel 11

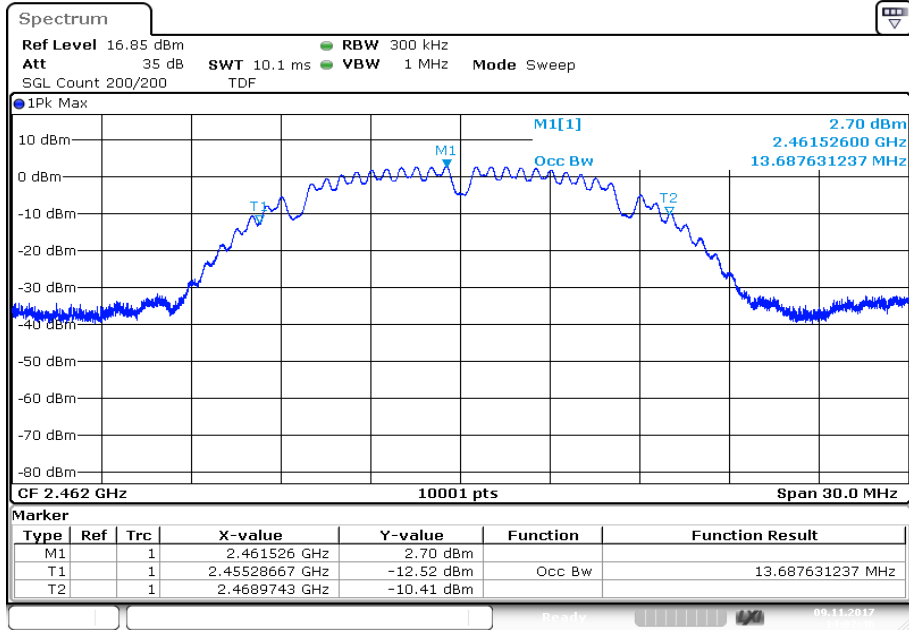


Date: 9.NOV.2017 14:02:46

Plots: OFDM / g – mode


Plot 1: channel 1

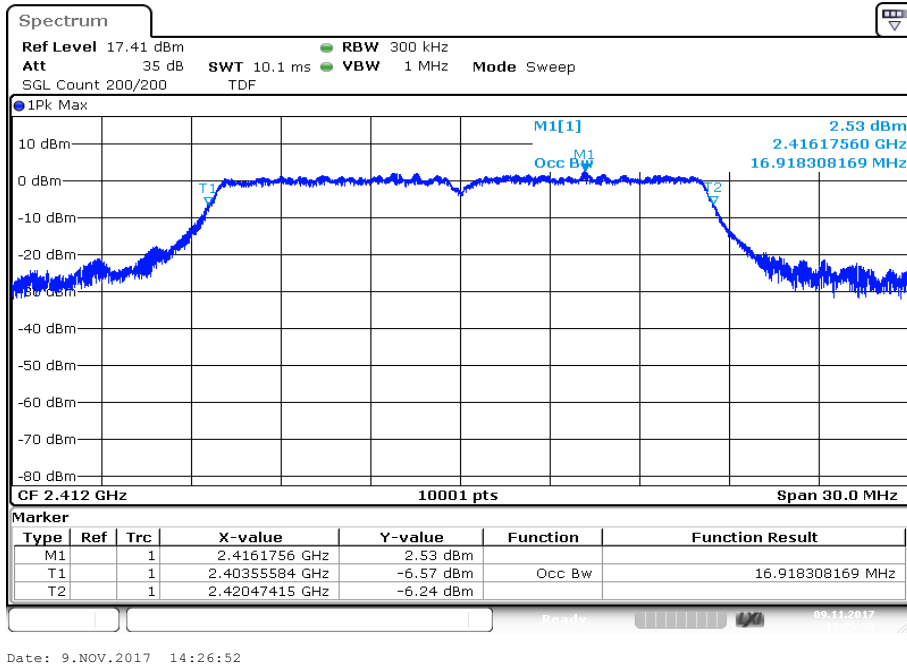


Plot 2: channel 2

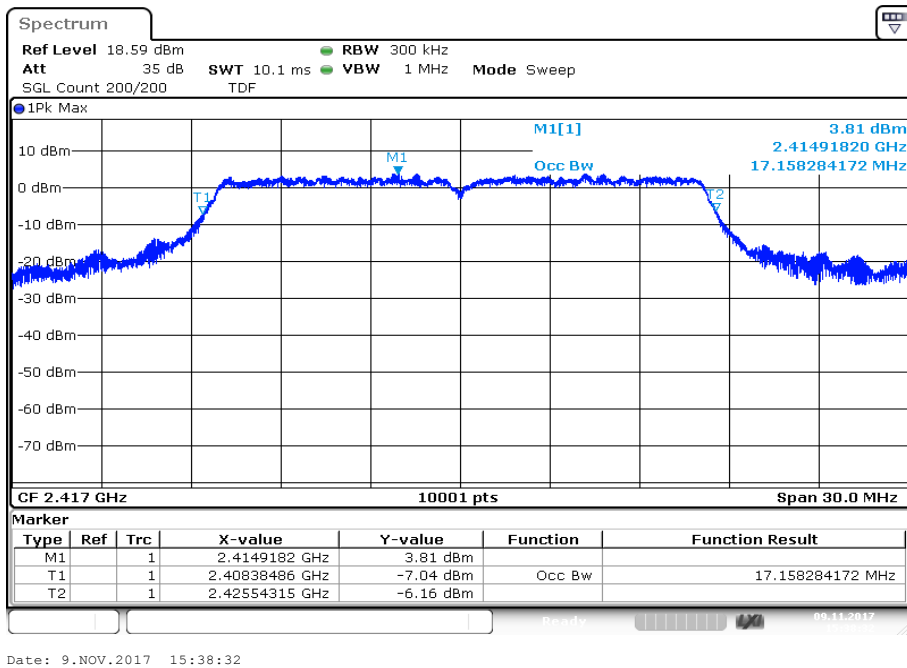


Plot 3: channel 3

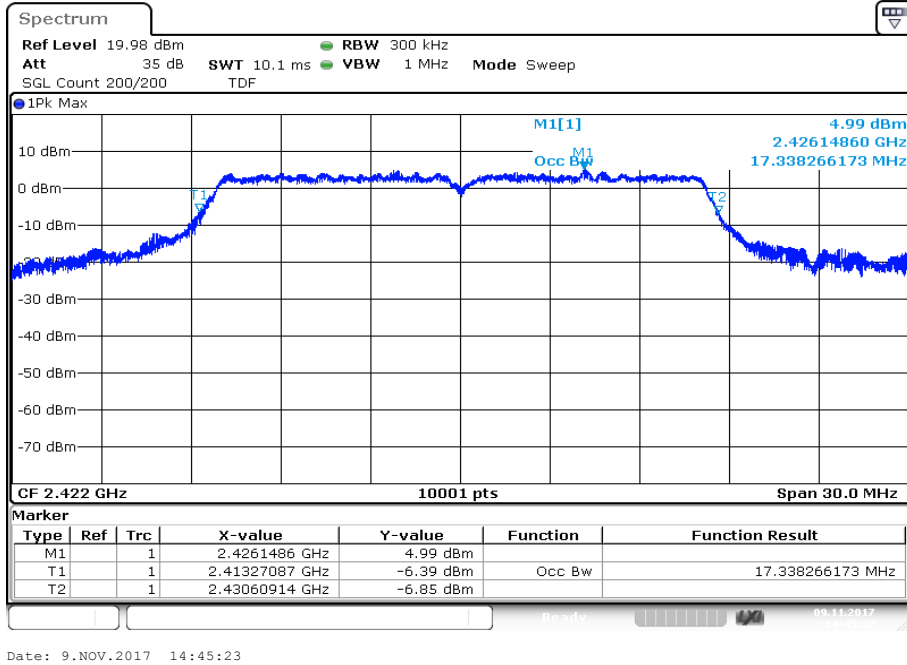


Plot 4: channel 6

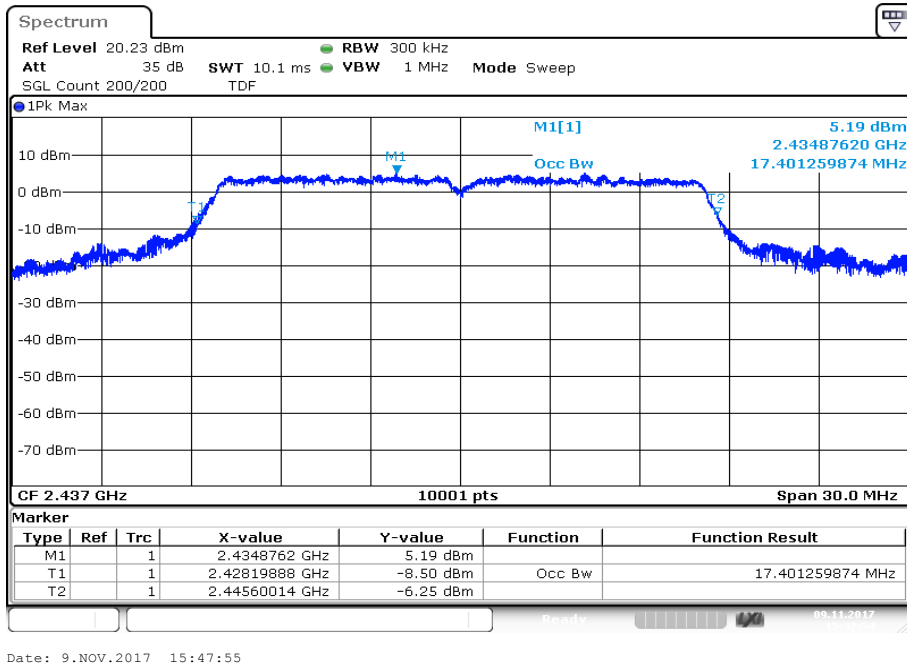


Plot 5: channel 9

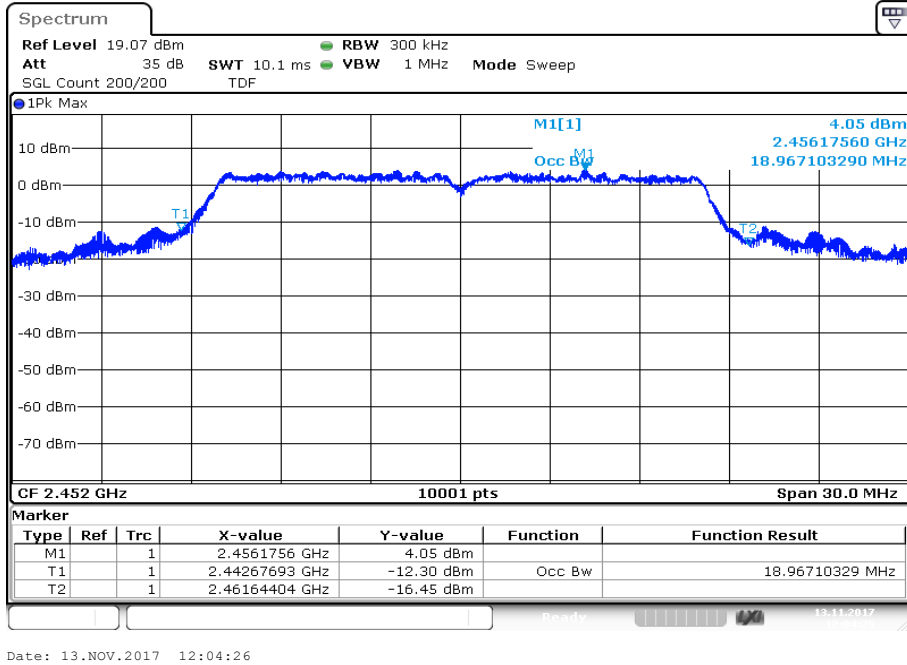

Plot 6: channel 10

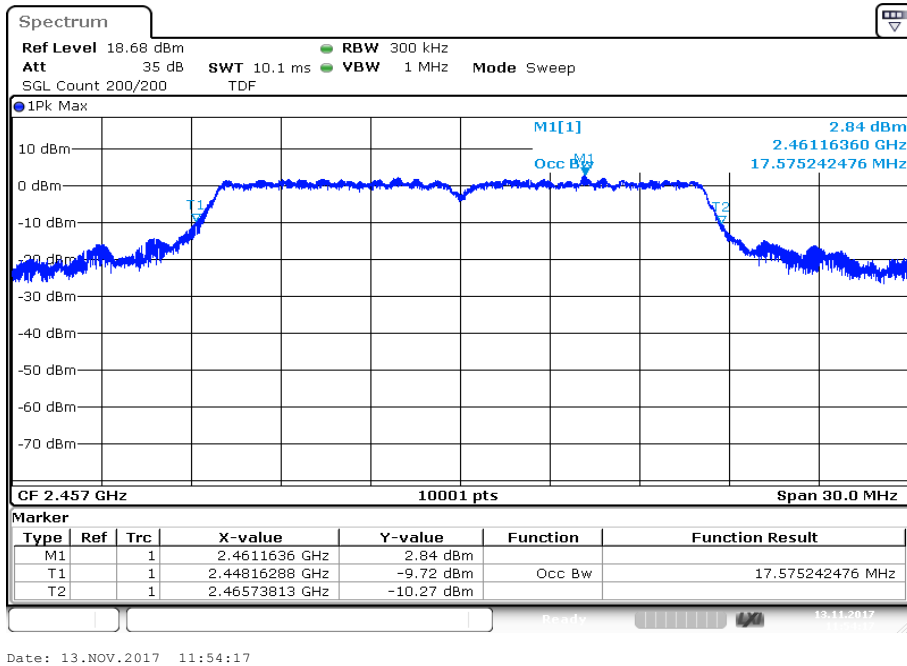


Plot 7: channel 11

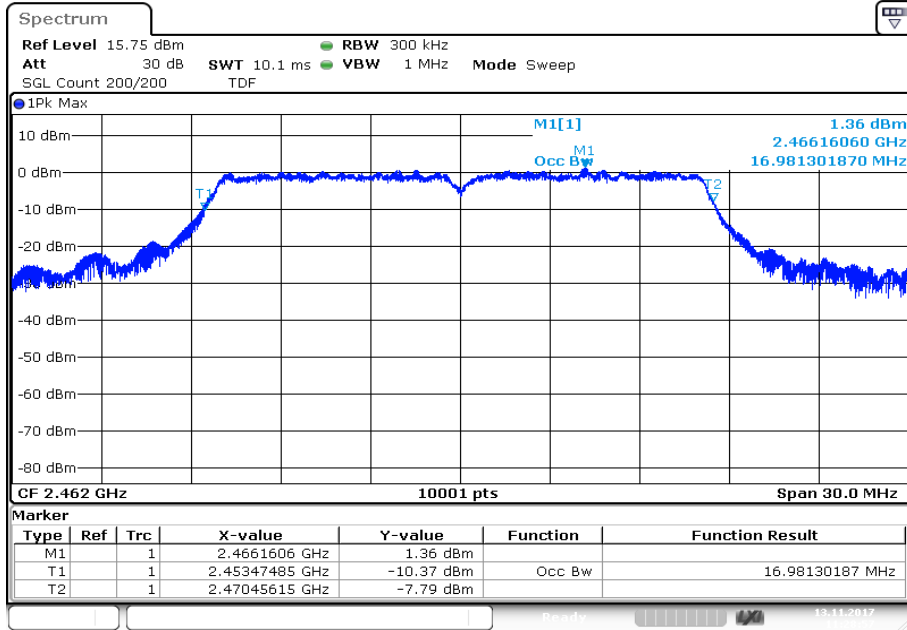


Date: 13.NOV.2017 11:28:57

Plots: OFDM / n HT20 – mode


Plot 1: channel 1

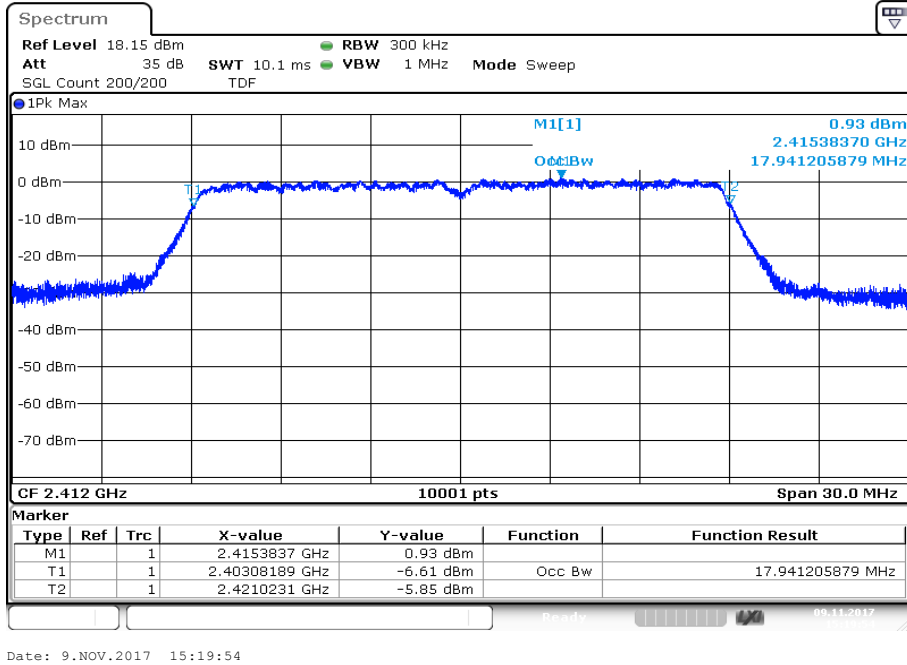


Plot 2: channel 2

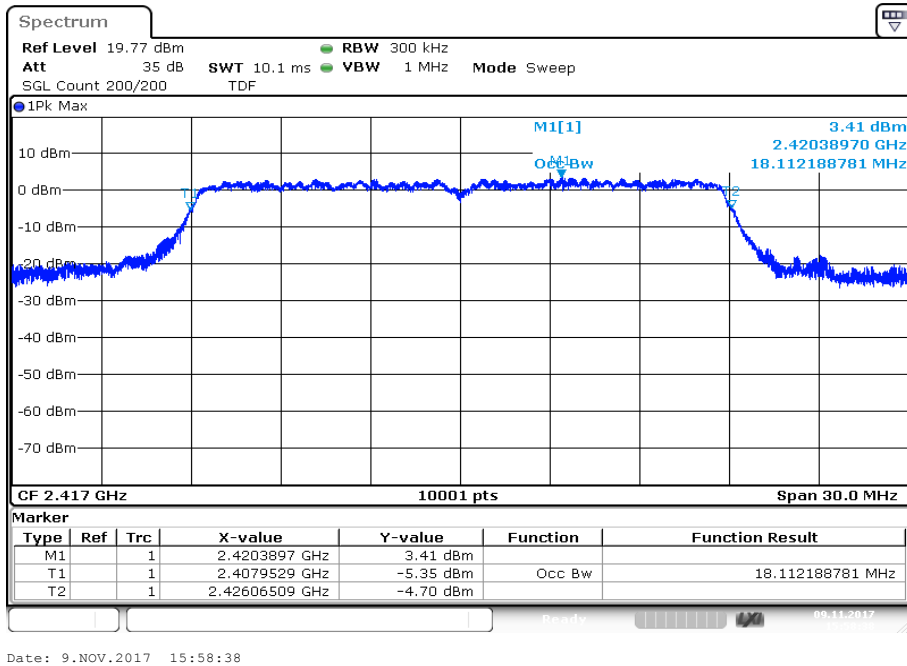


Plot 3: channel 3

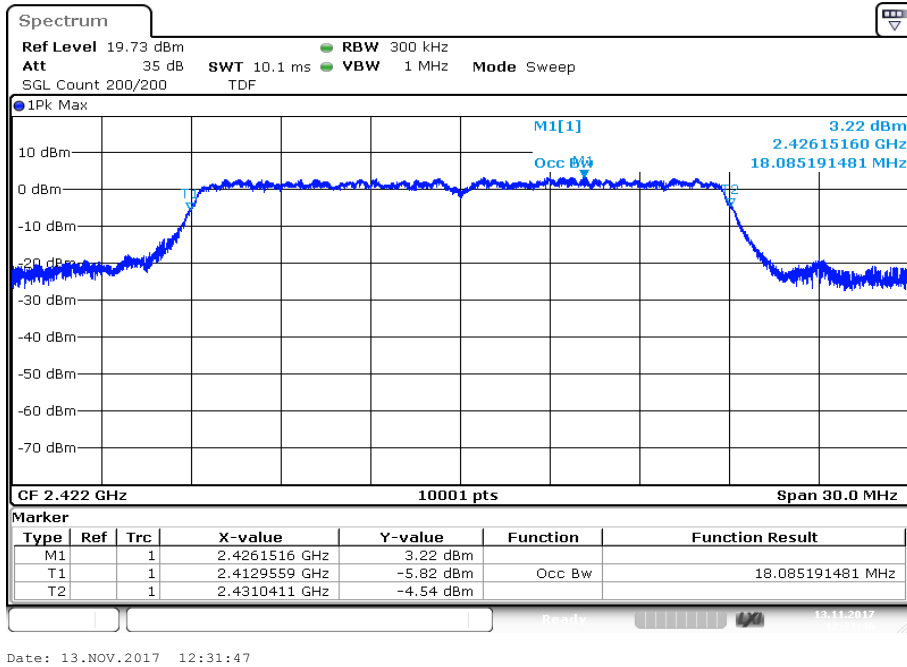


Plot 4: channel 6

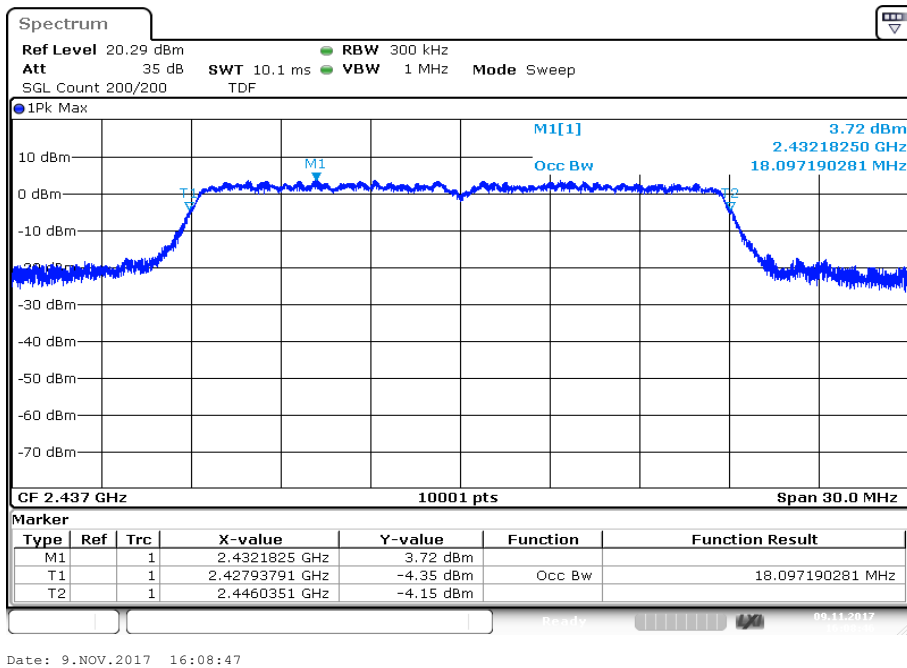


Plot 5: channel 9

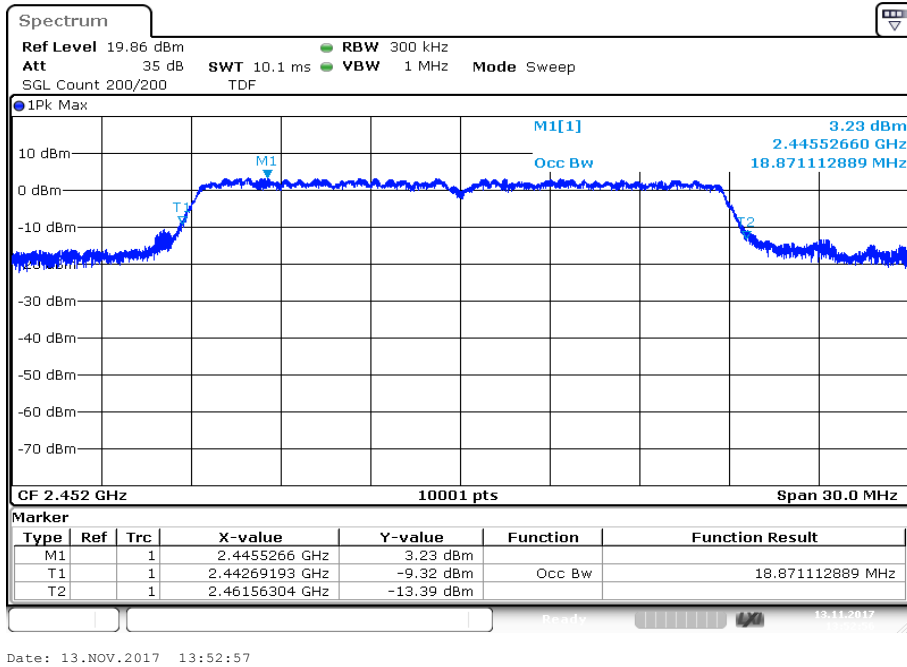

Plot 6: channel 10

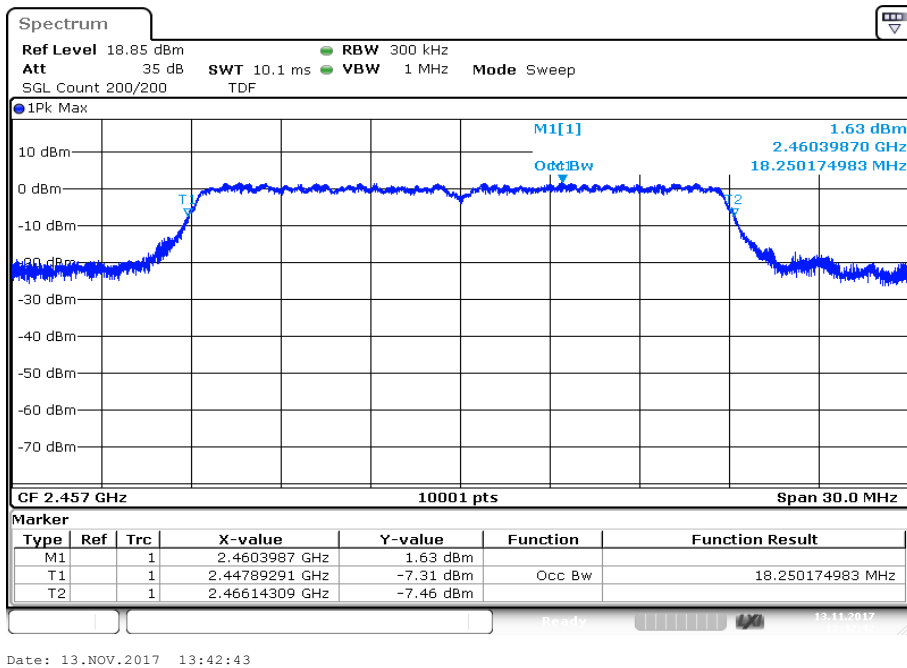


Plot 5: channel 11

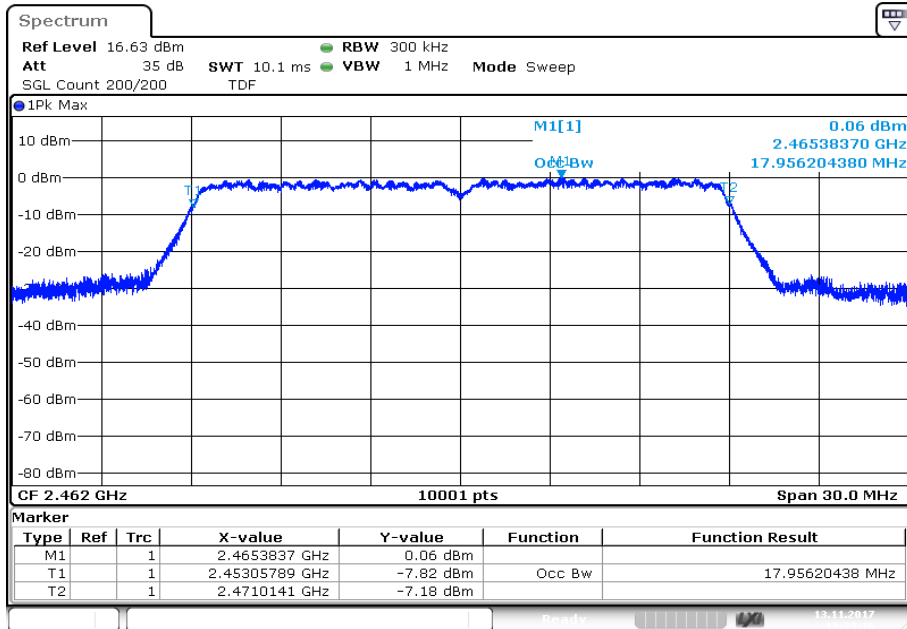


Date: 13.NOV.2017 13:23:17

Plots: OFDM / n HT40 – mode


Plot 1: channel 3

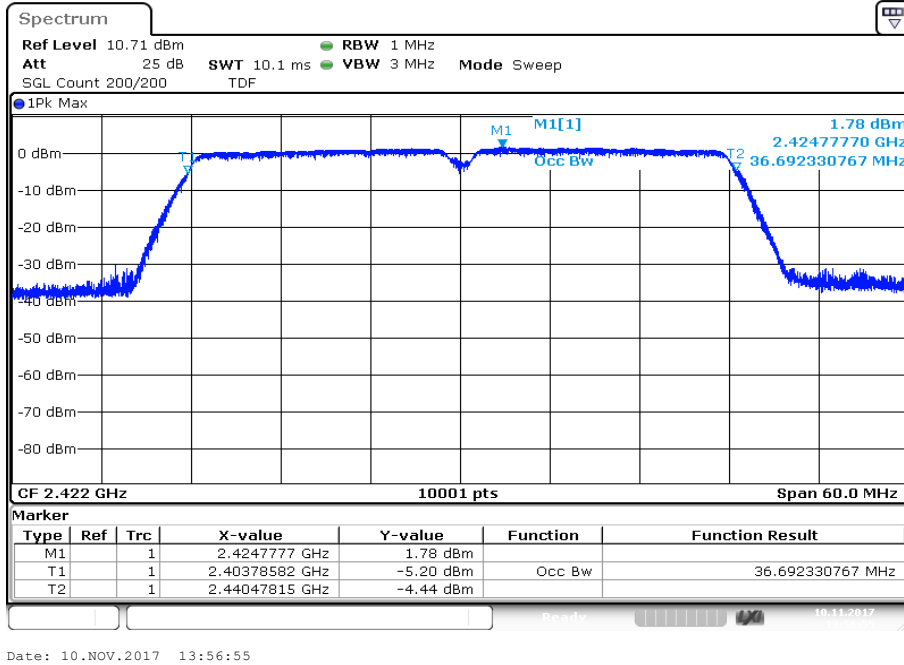


Plot 2: channel 4

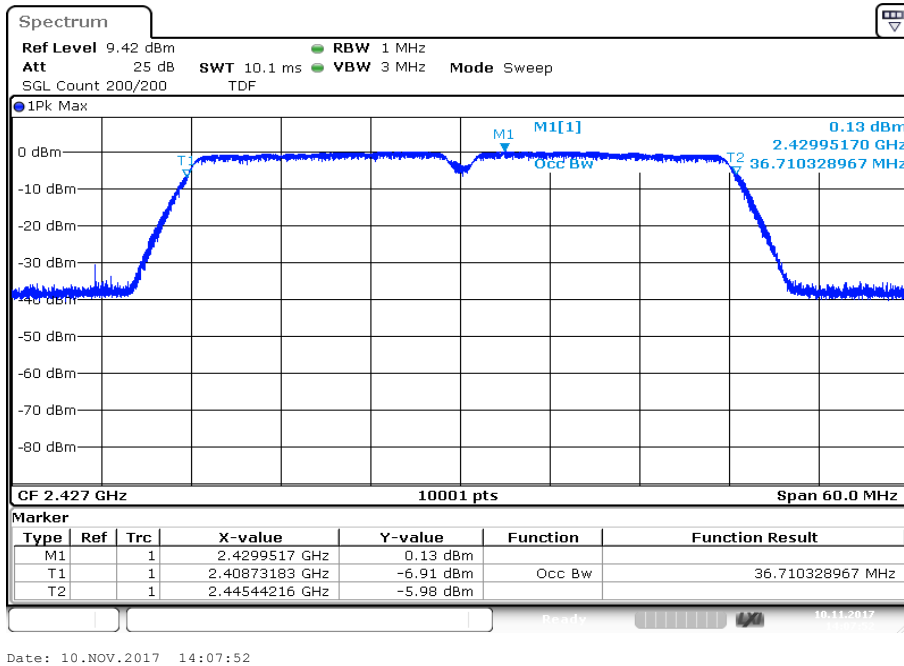


Plot 3: channel 5

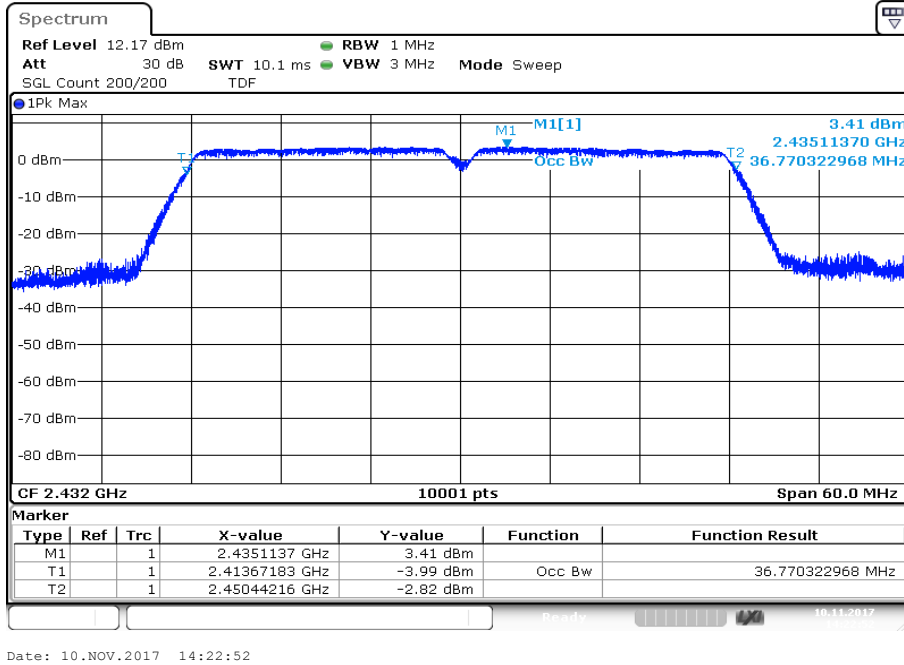


Plot 4: channel 6

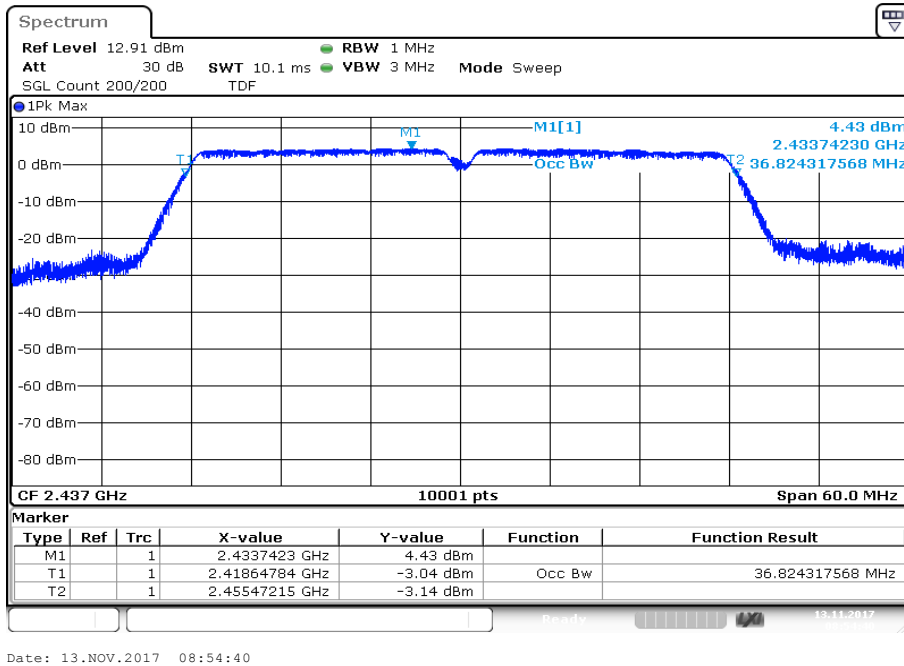


Plot 5: channel 7

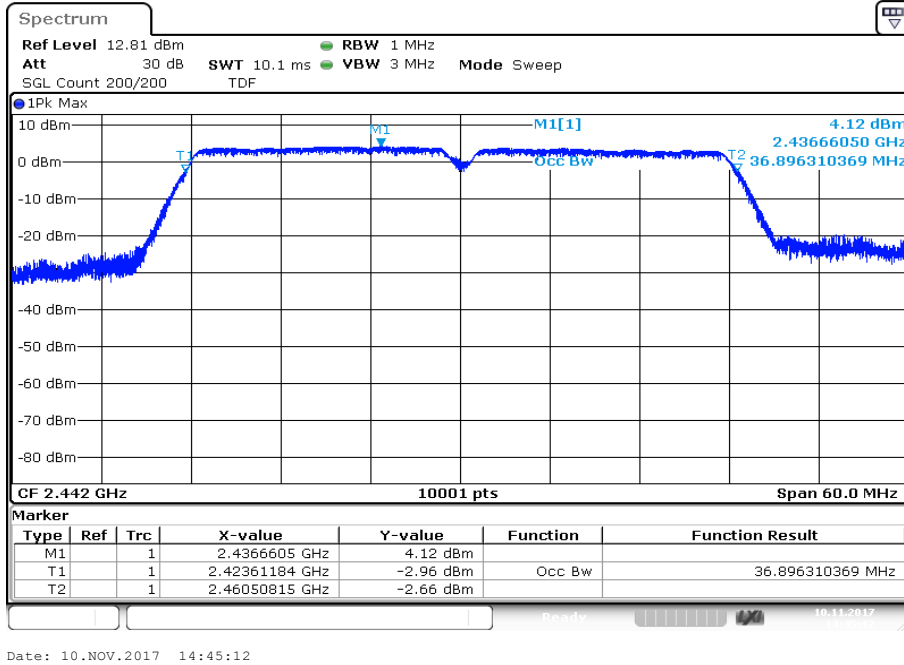

Plot 6: channel 8

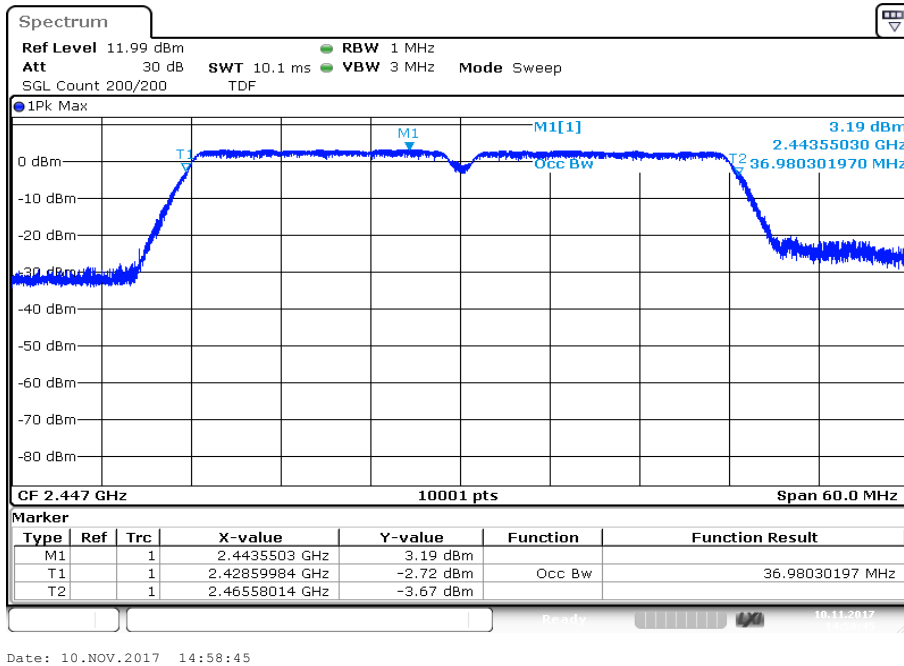

Plot 7: channel 9

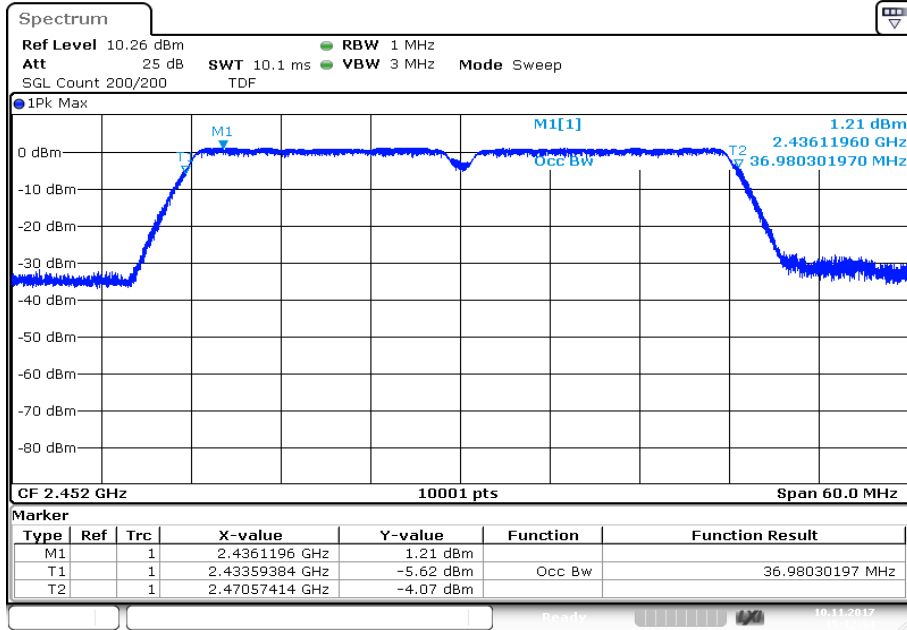

Date: 10.NOV.2017 15:12:34

12.8 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Usage:


-/-	IC
Within the used band!	

Results:


	20 dB bandwidth / MHz						
	Ch. 1		Ch. 6			Ch. 11	
DSSS / b – mode	15.19		15.18			15.20	
OFDM / g – mode	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
	18.69	19.97	20.66	20.72	24.71	21.39	18.69
OFDM / n HT20 – mode	Ch. 1	Ch. 2	Ch. 3	Ch. 6	Ch. 9	Ch. 10	Ch. 11
	19.29	19.88	19.85	19.52	25.70	20.06	19.23
OFDM / n HT40 – mode	Ch. 3	Ch. 4	Ch. 5	Ch. 6	Ch. 7	Ch. 8	Ch. 9
	38.04	38.06	38.32	38.17	38.06	38.46	38.41

Plots: DSSS / b – mode


Plot 1: channel 1

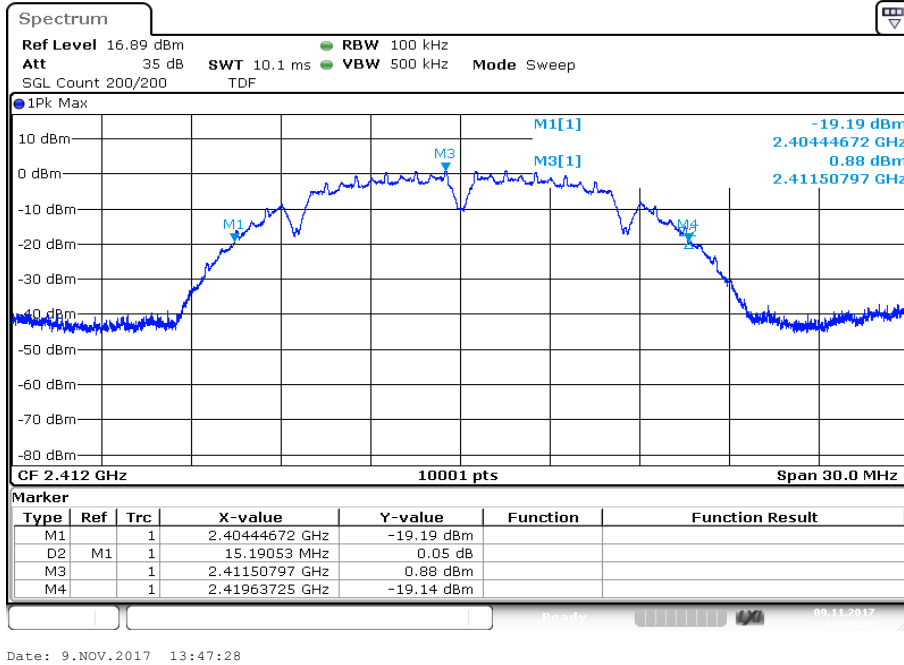

Plot 2: channel 6

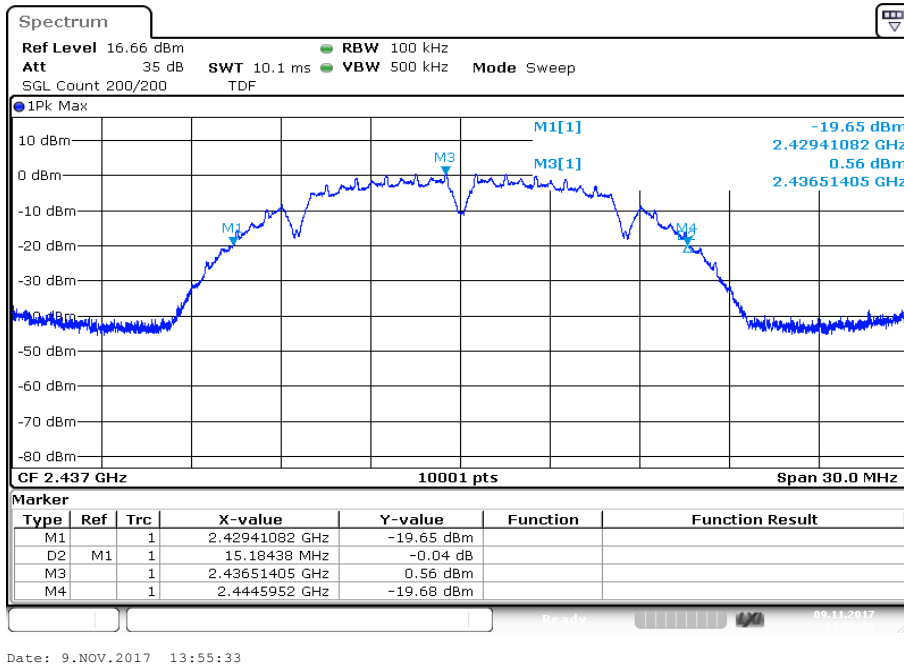


Plot 3: channel 11

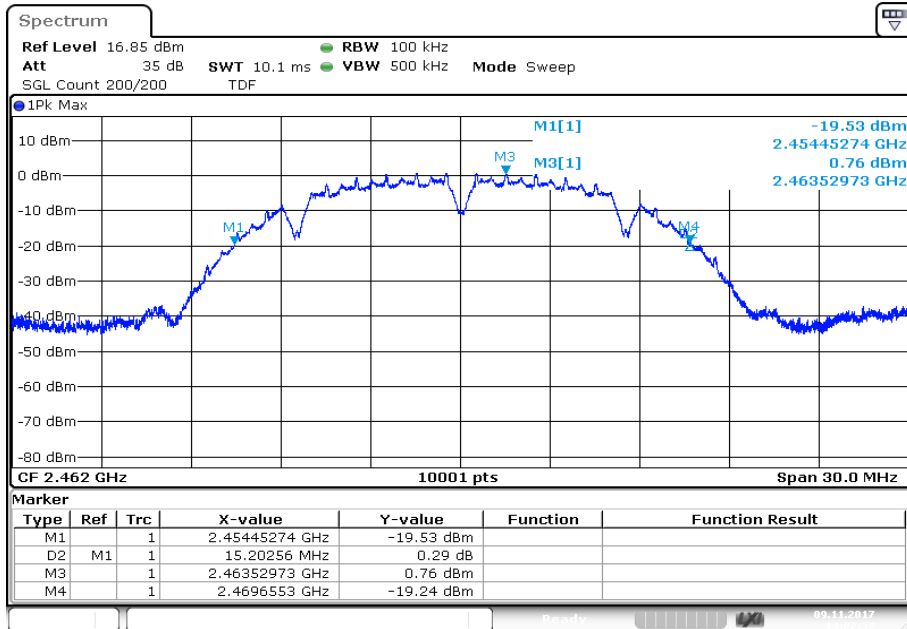


Date: 9.NOV.2017 14:02:38

Plots: OFDM / g – mode


Plot 1: channel 1

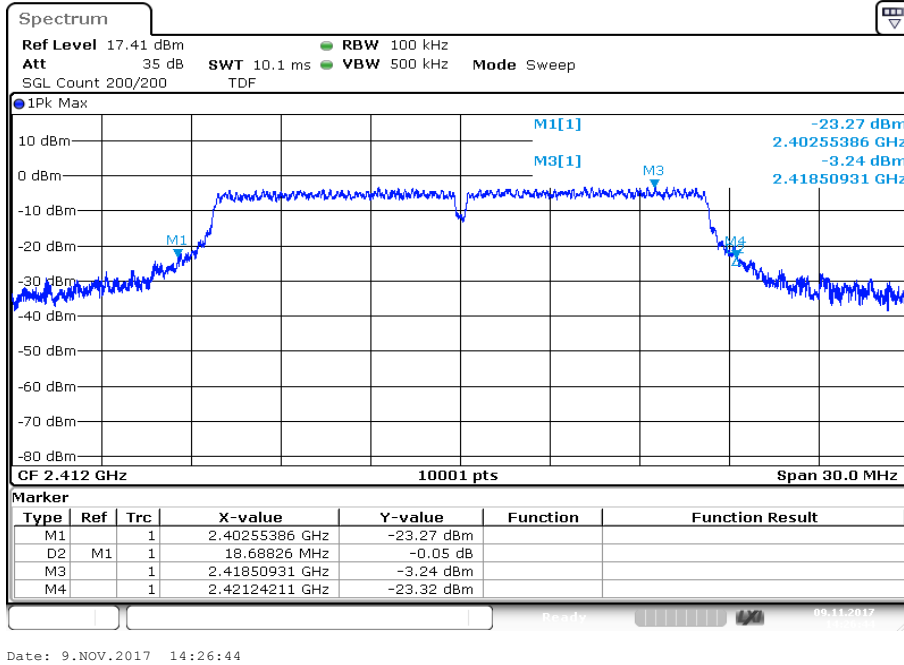


Plot 2: channel 2

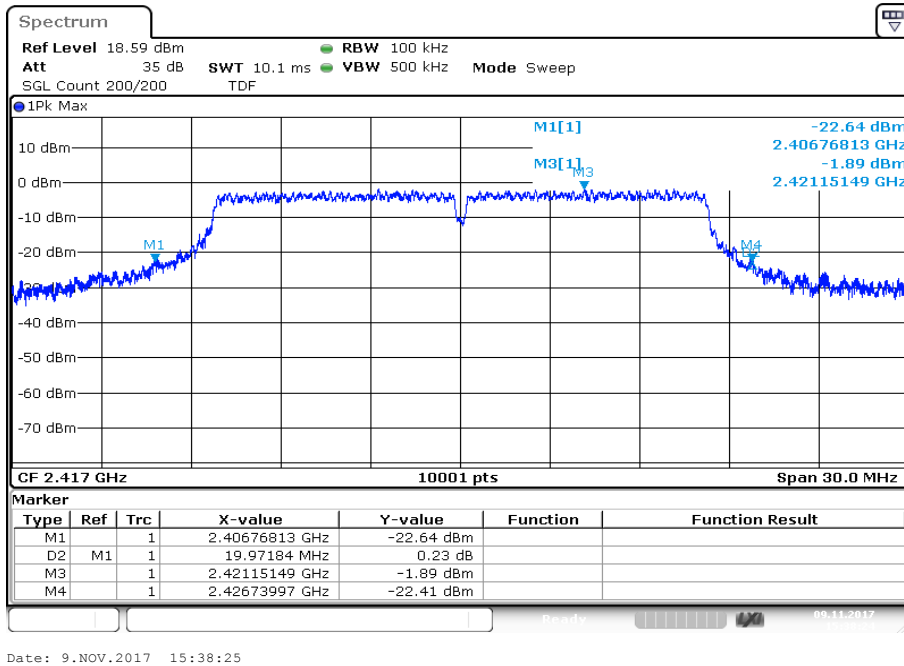


Plot 3: channel 3

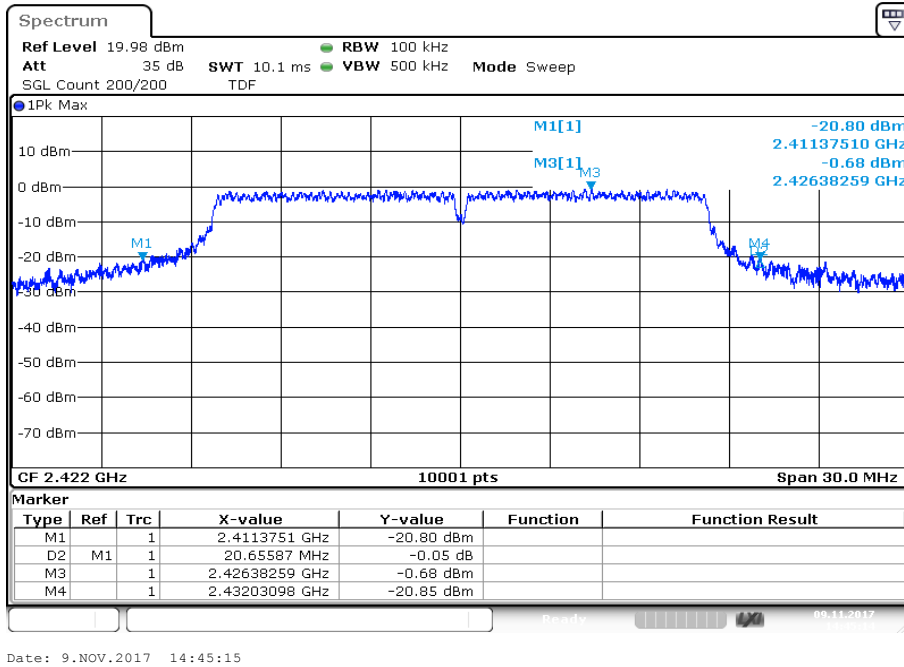


Plot 4: channel 6

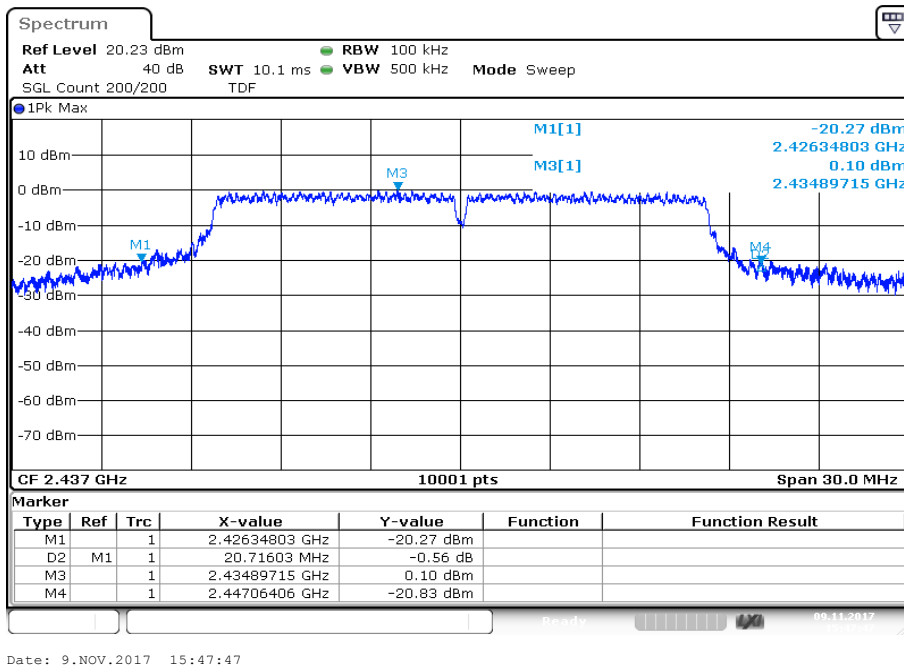


Plot 5: channel 9

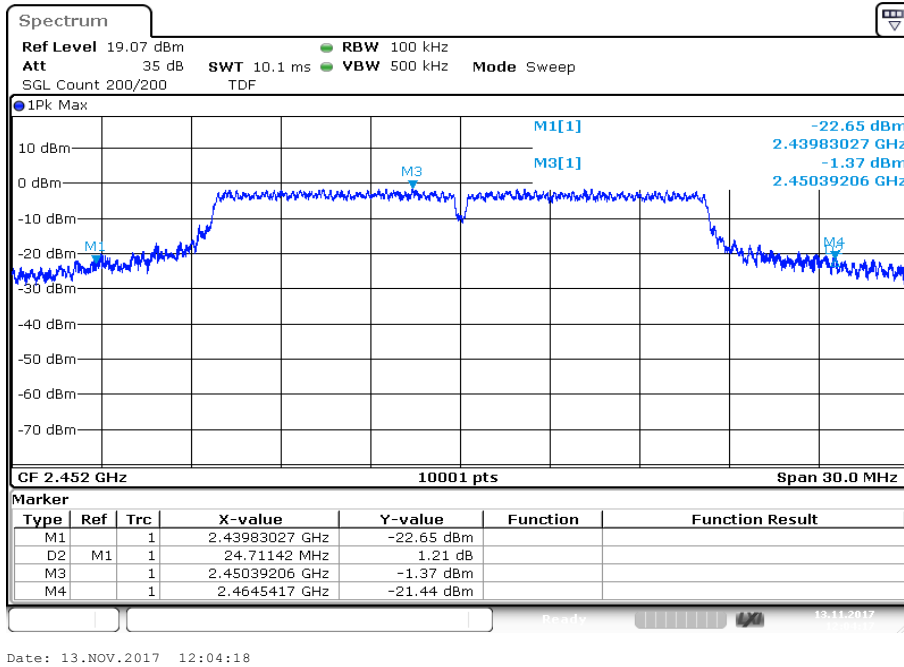

Plot 6: channel 10

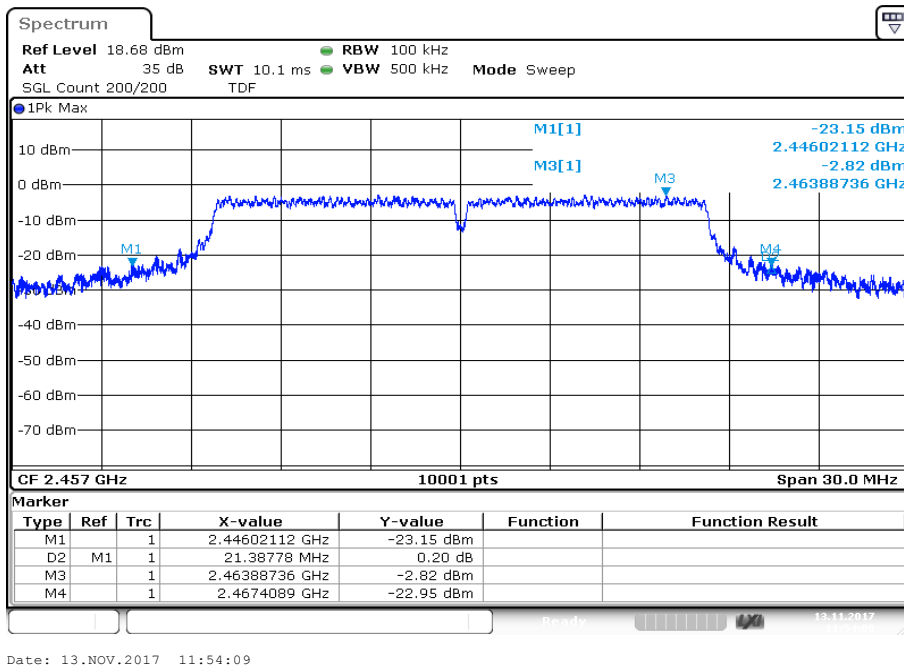


Plot 7: channel 11

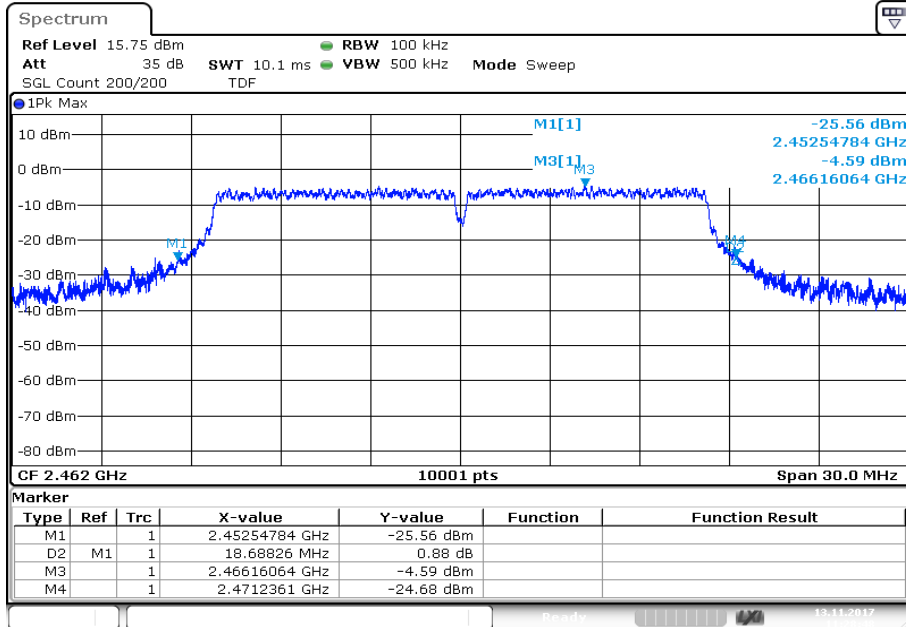


Date: 13.NOV.2017 11:28:49

Plots: OFDM / n HT20 – mode


Plot 1: channel 1

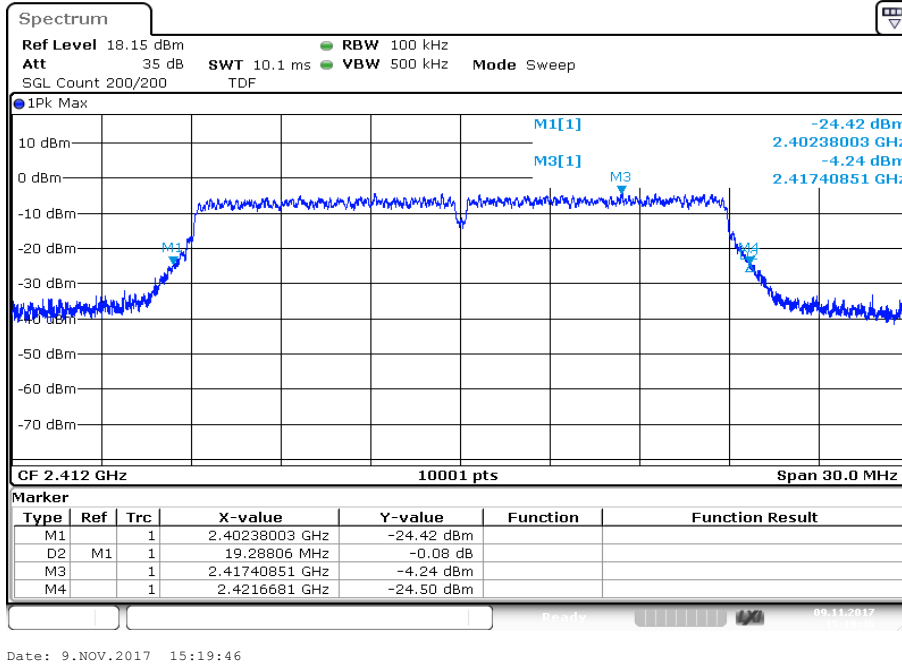


Plot 2: channel 2

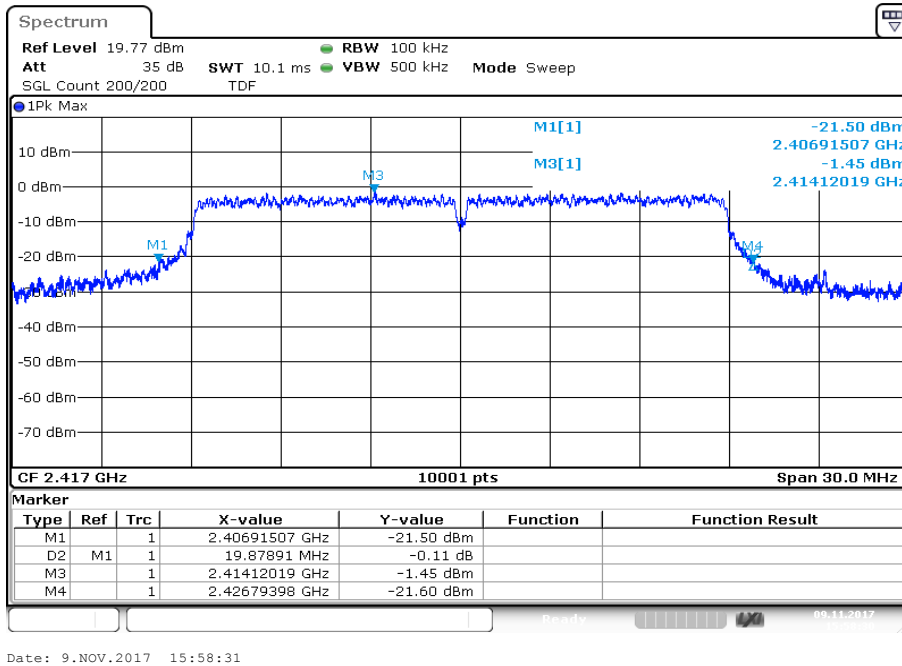


Plot 3: channel 3

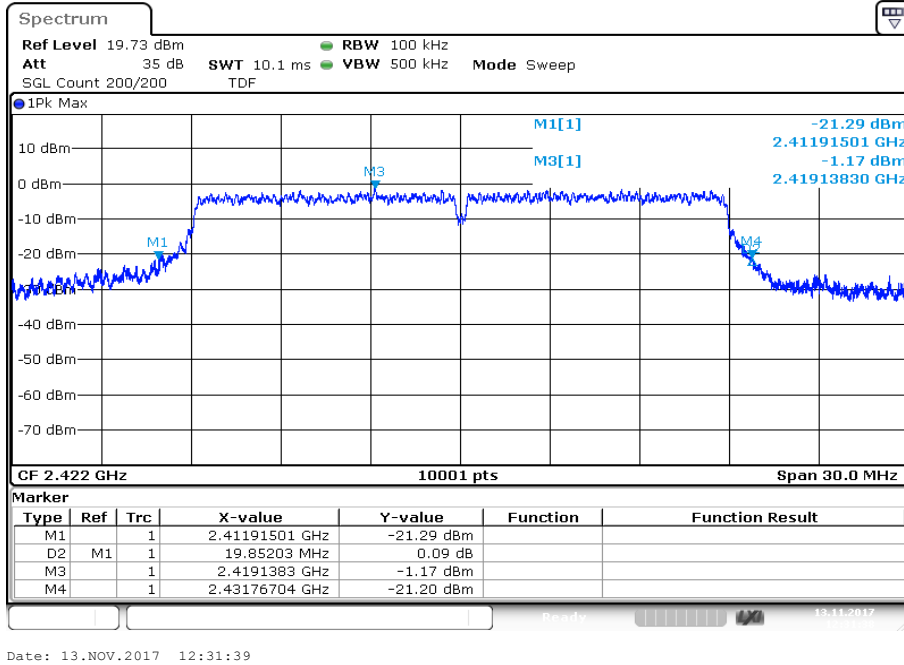


Plot 4: channel 6

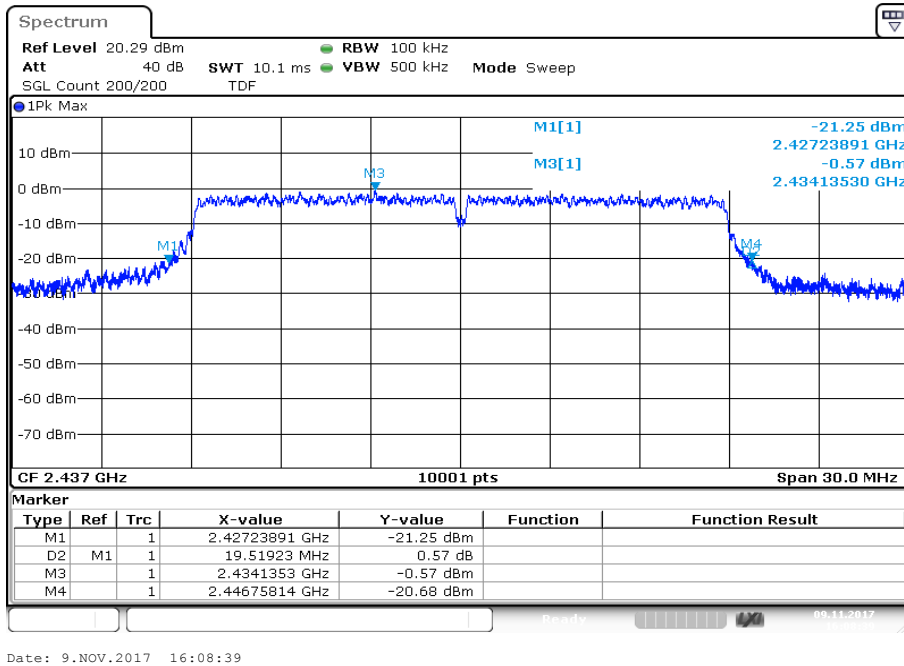


Plot 5: channel 9

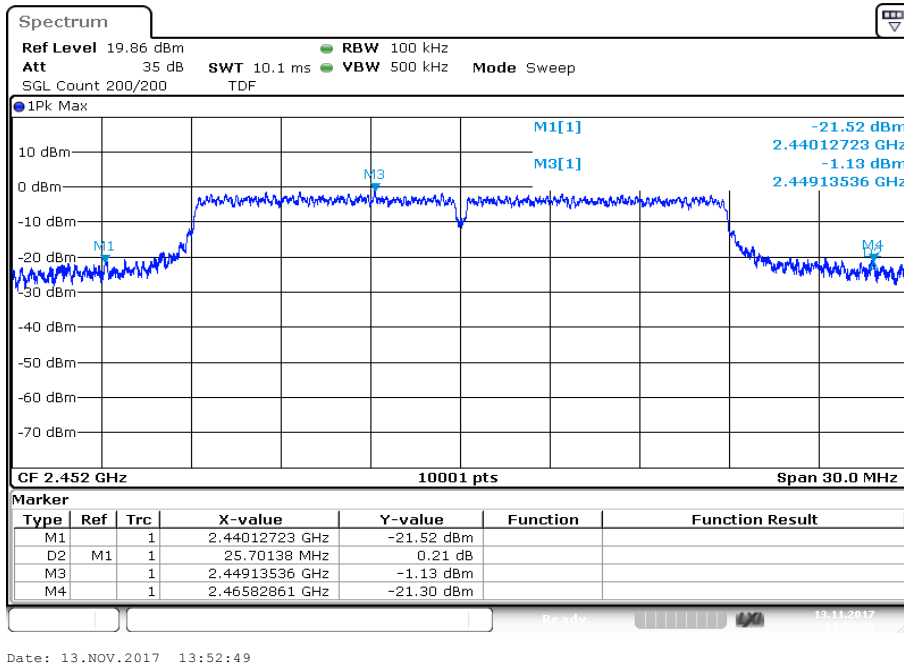

Plot 6: channel 10

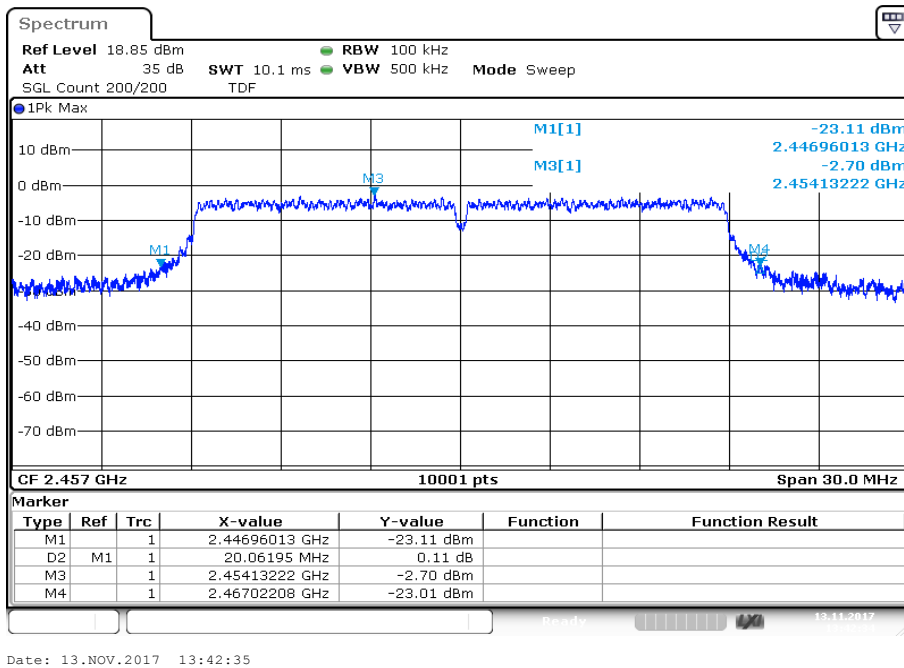


Plot 7: channel 11

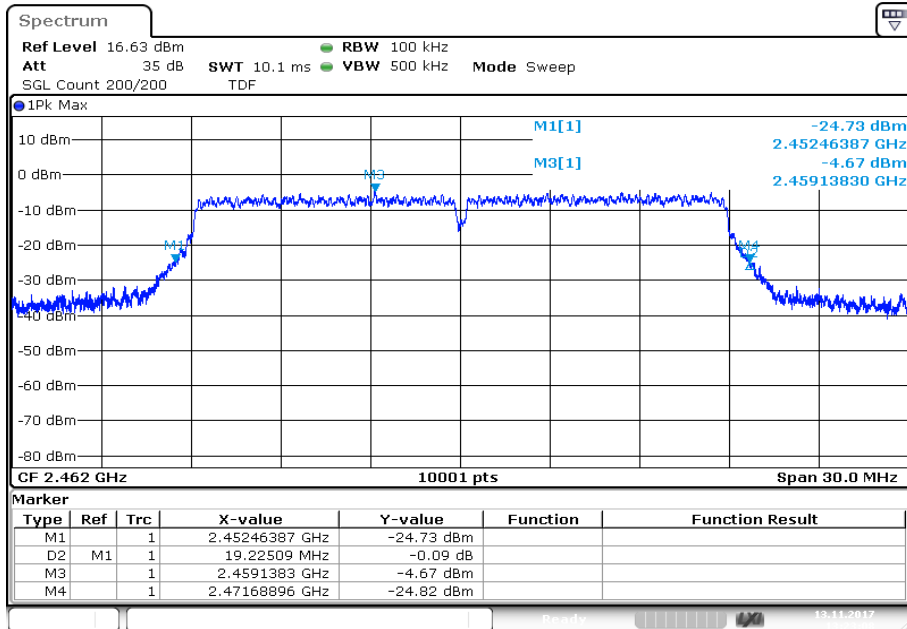


Date: 13.NOV.2017 13:23:08

Plots: OFDM / n HT40 – mode


Plot 1: channel 3

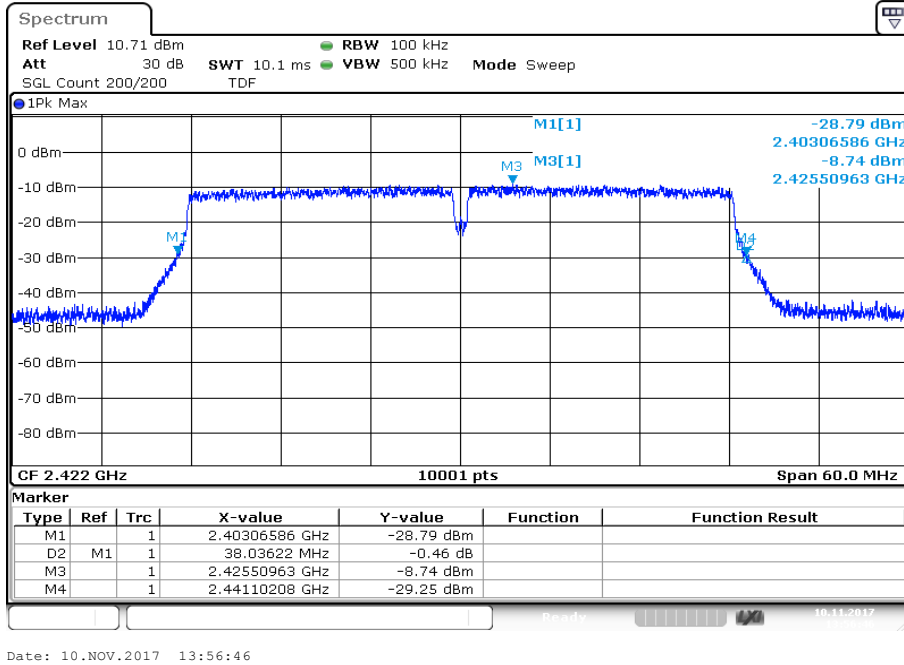


Plot 2: channel 4

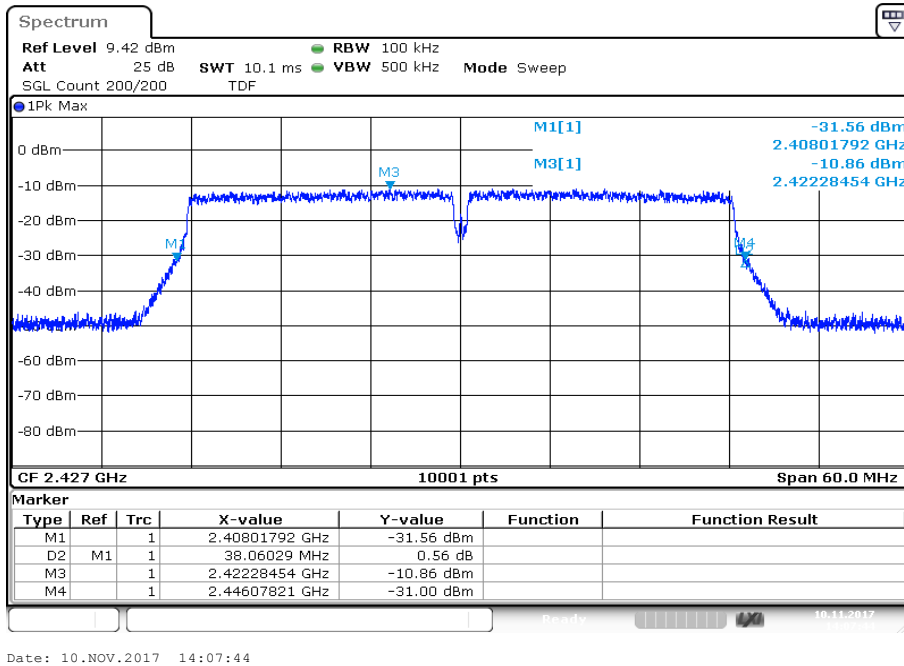


Plot 3: channel 5

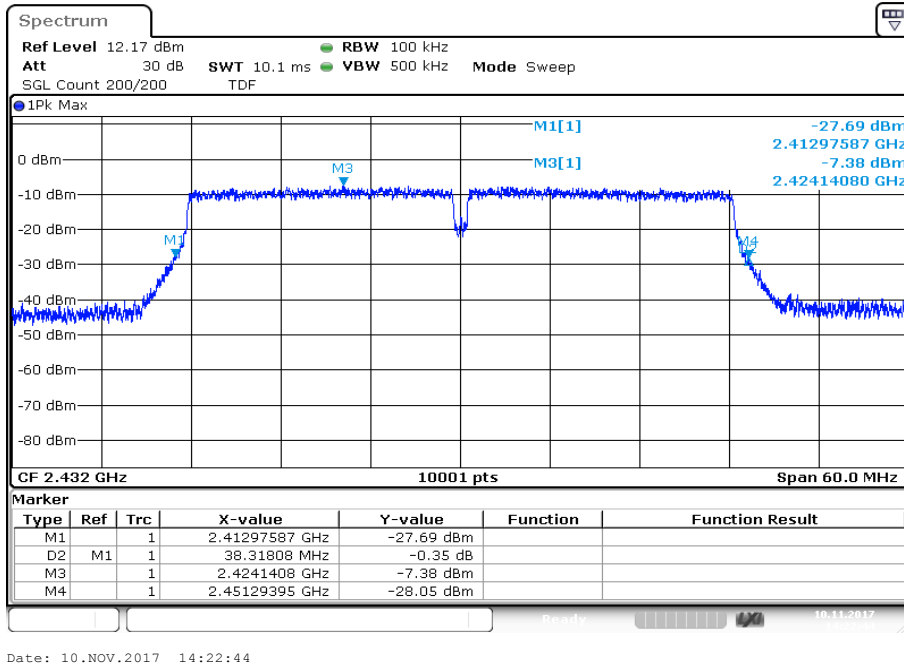


Plot 4: channel 6

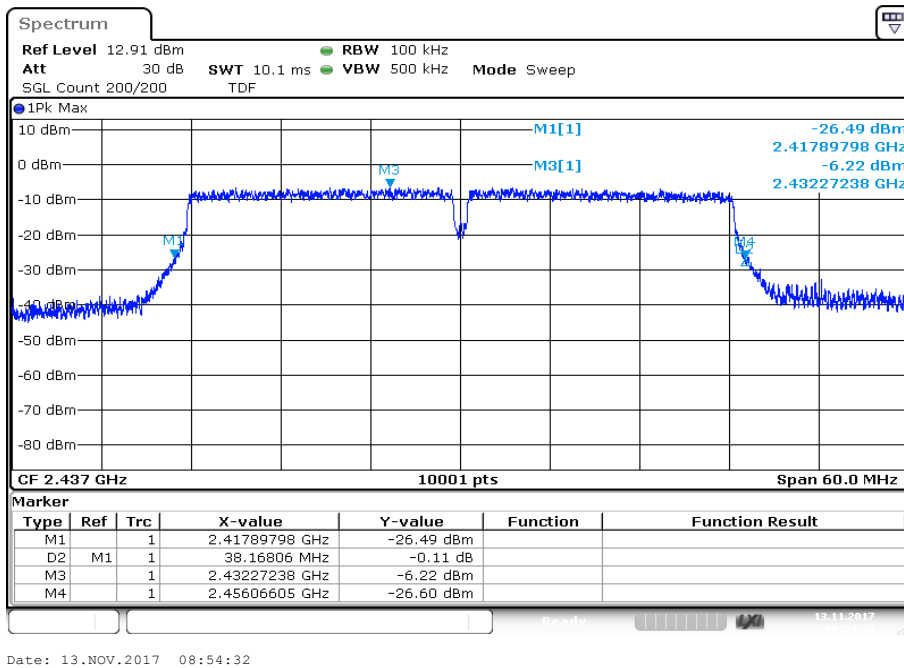


Plot 5: channel 7

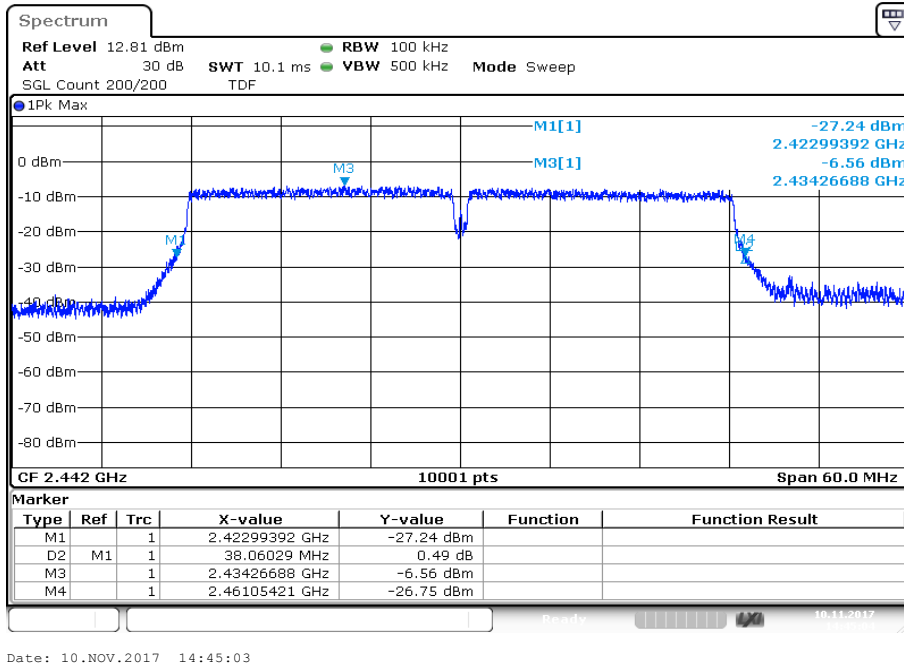

Plot 6: channel 8

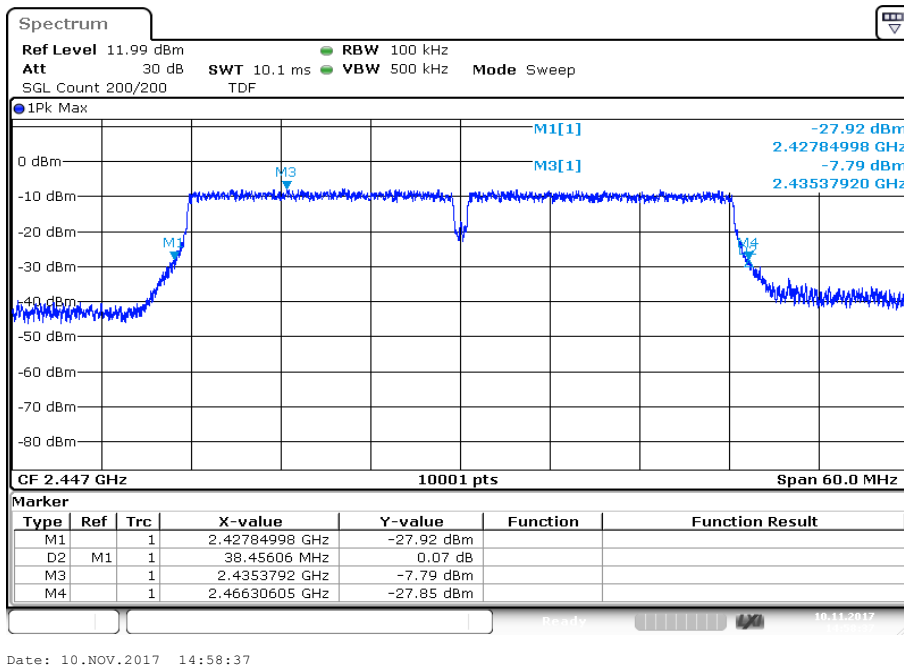

Plot 7: channel 9

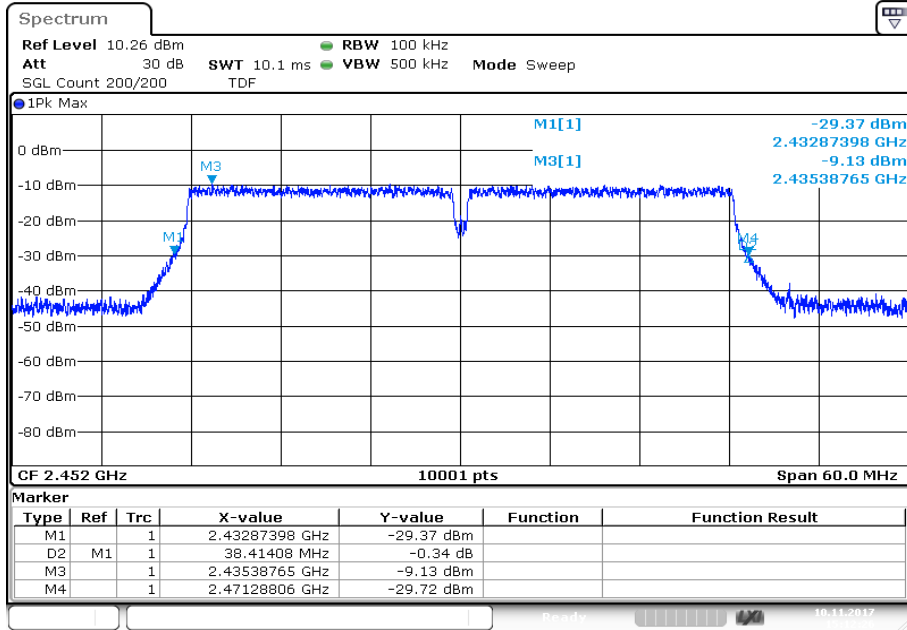

Date: 10.NOV.2017 15:12:26

12.9 Band edge compliance conducted

Description:

Measurement of the radiated band edge compliance with a conducted test setup.

Measurement:

Measurement parameter for measurements	
According to DTS clause 13.3.2 and clause 12.2.2	
Detector	RMS
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	2 MHz lower band edge 2388 MHz to 2390 MHz upper band edge 2483.5 MHz to 2485.5 MHz
Trace mode	Trace average with 200 counts
Test setup	See chapter 6.5 – A
Measurement uncertainty	See chapter 8

Limits:


FCC	IC
-41.26 dBm	

Results:


	band edge compliance / dBm (gain calculation)						
Modulation:	DSSS / b – mode	OFDM / g – mode		OFDM / n HT20 – mode		OFDM / n HT40 – mode	
	Ch. 1	Ch. 1	Ch. 2	Ch. 1	Ch. 2	Ch. 3	Ch. 4
Max. lower band edge power conducted	-60.16	-43.62	-43.21	-47.55	-41.18	-49.90	-52.68
Antenna gain / dBi	-1.9						
Max. lower band edge power radiated	-62.06	-45.52	-45.11	-49.45	-43.08	-51.80	-54.58
	DSSS / b – mode	OFDM / g – mode		OFDM / n HT20 – mode		OFDM / n HT40 – mode	
	Ch. 11	Ch. 10	Ch. 11	Ch. 10	Ch. 11	Ch. 8	Ch. 9
Max. upper band edge power conducted	-58.47	-41.59	-45.65	-40.67	-44.26	-42.04	-45.85
Antenna gain / dBi	-0.7						
Max. upper band edge power radiated	-59.17	-42.29	-46.35	-41.37	-44.96	-42.74	-46.55

Plots: DSSS / b – mode

Plot 1: Lower band edge

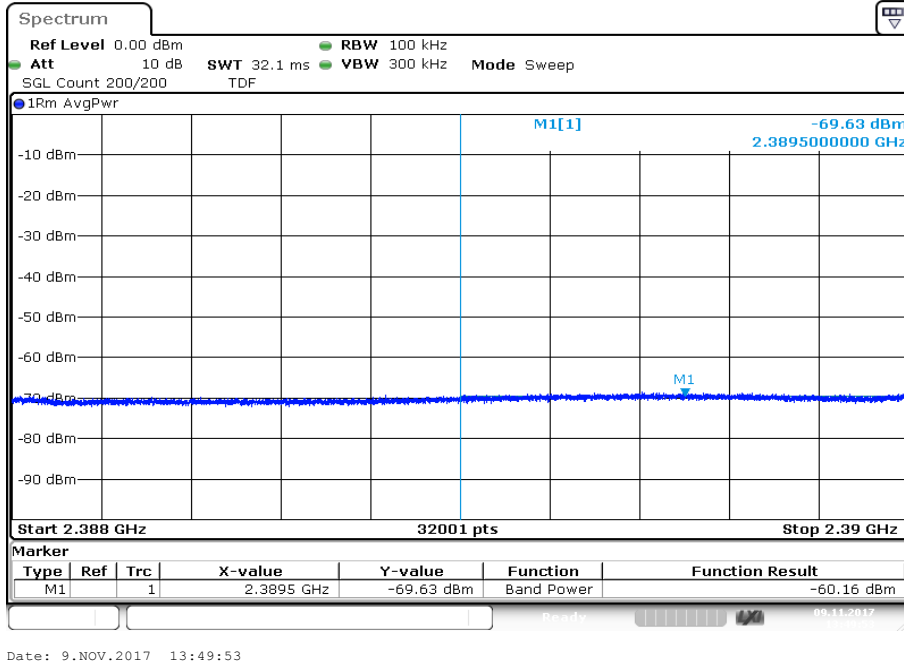


Plot 2: Upper band edge

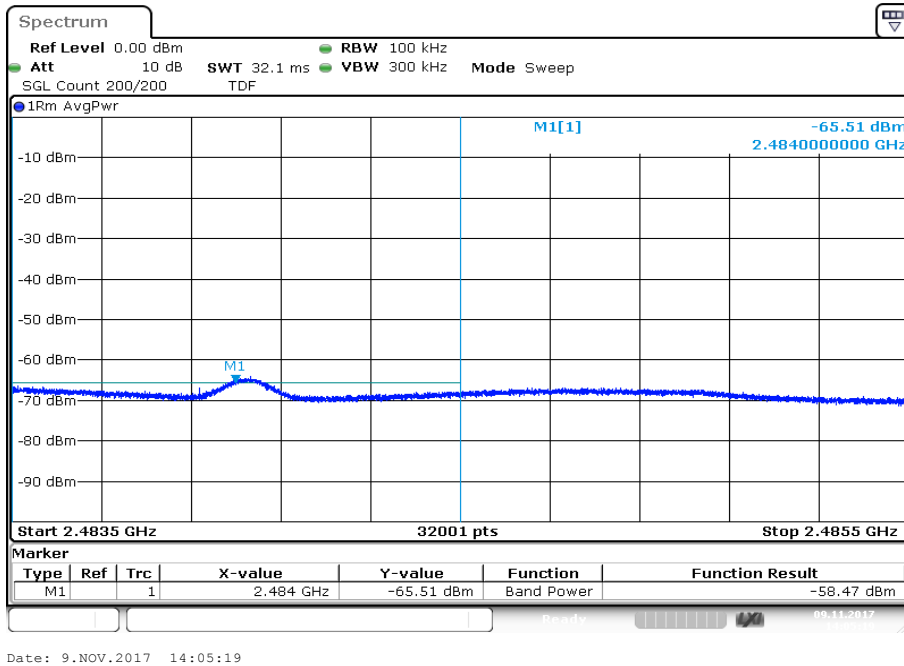


Plots: OFDM / g – mode


Plot 1: Lower band edge, channel 1

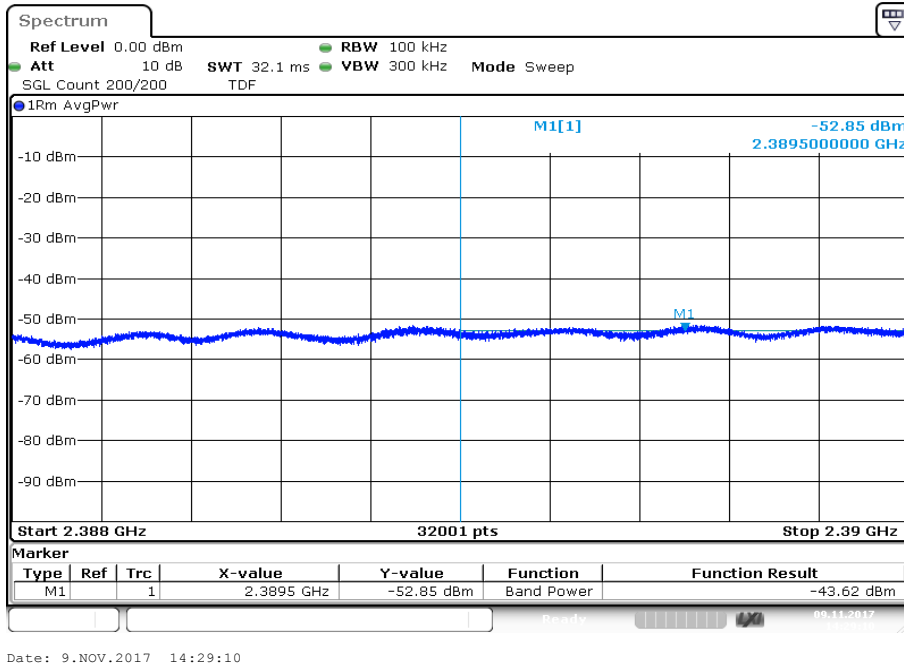


Plot 2: Upper band edge, channel 11

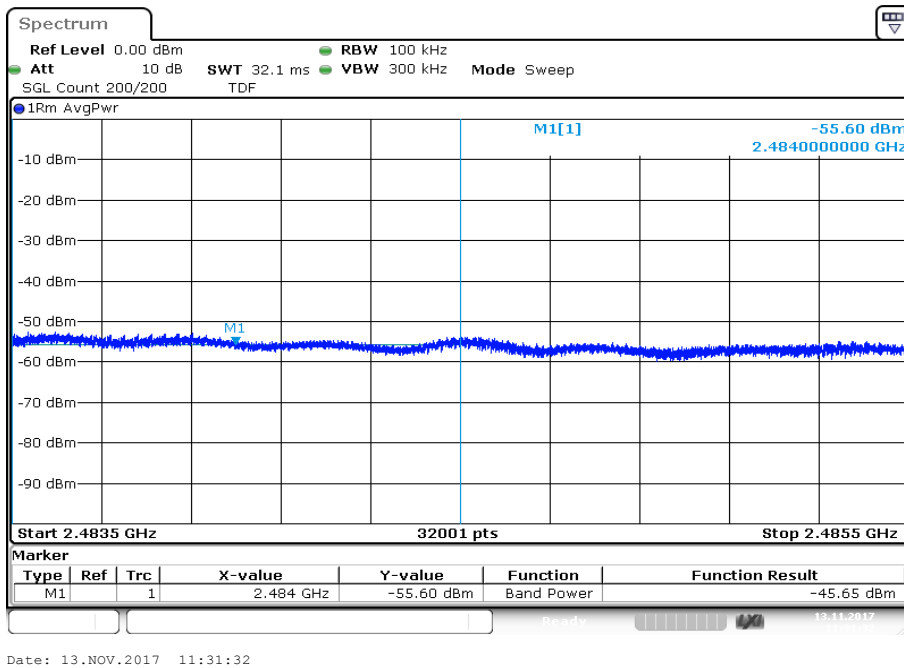

Plot 3: Lower band edge, channel 2

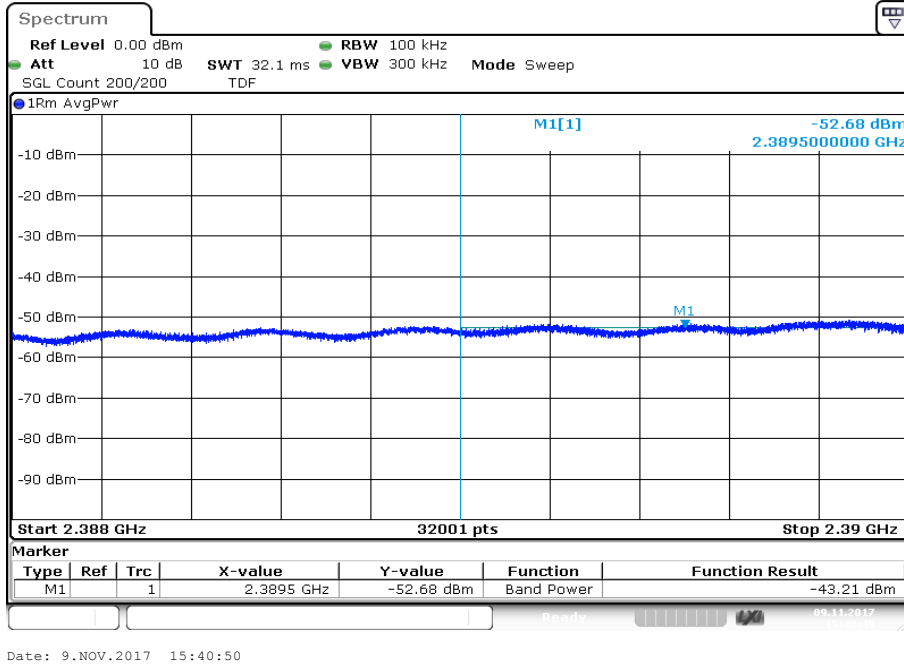


Plot 4: Upper band edge, channel 10

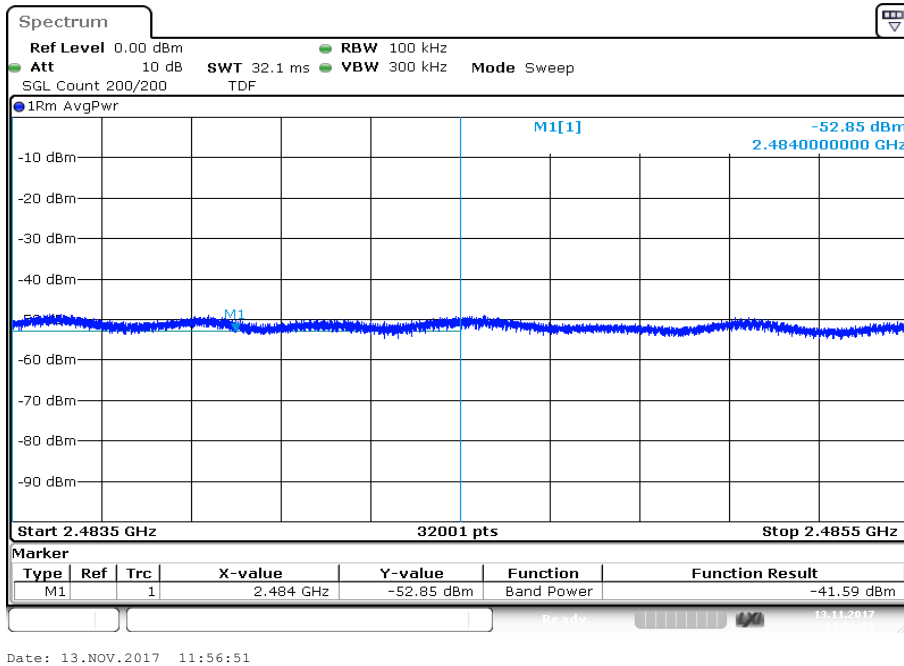


Plots: OFDM / n HT20 – mode


Plot 1: Lower band edge, channel 1

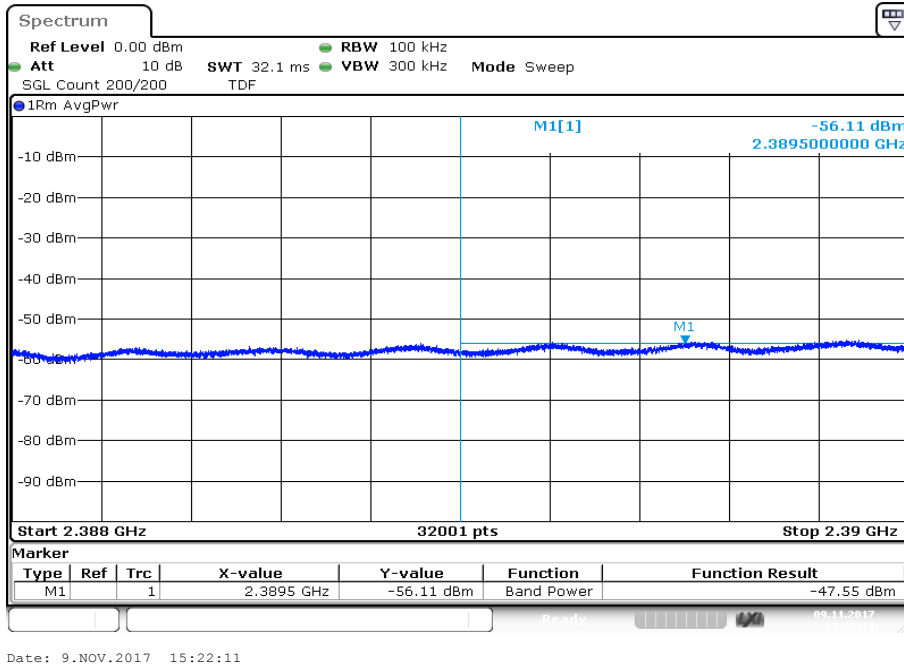


Plot 2: Upper band edge, channel 11

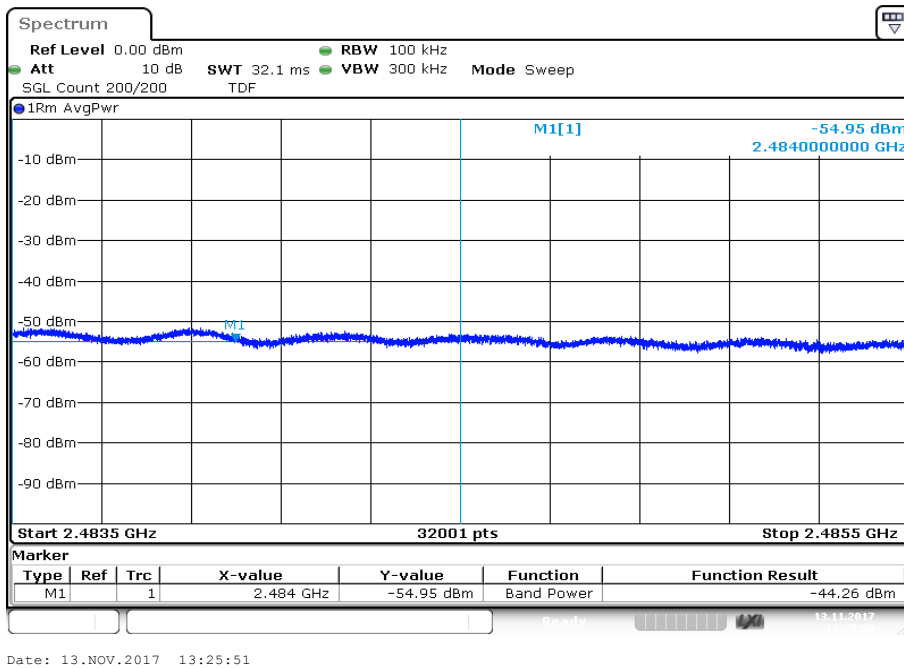

Plot 3: Lower band edge, channel 2

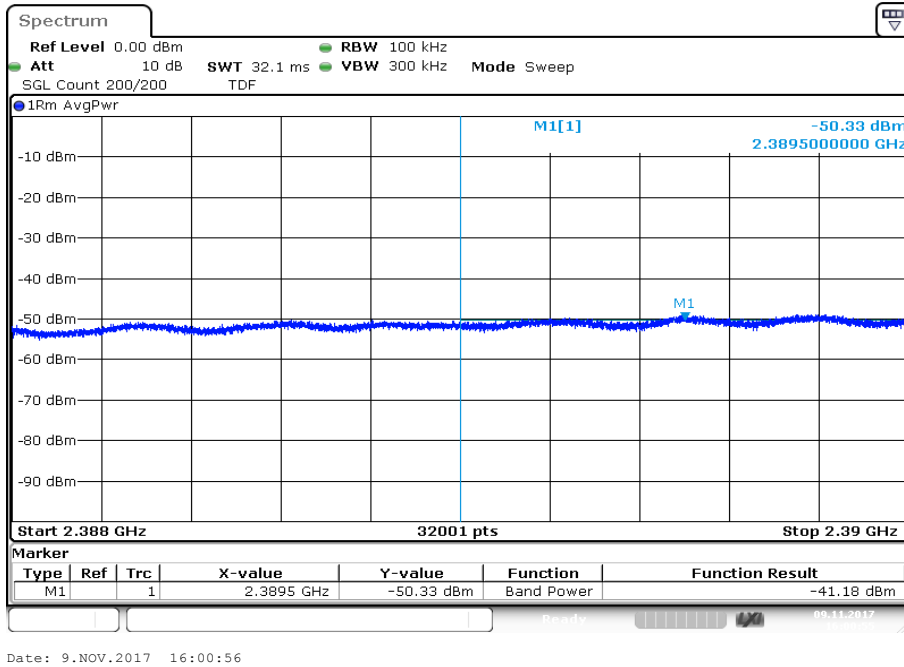


Plot 4: Upper band edge, channel 10

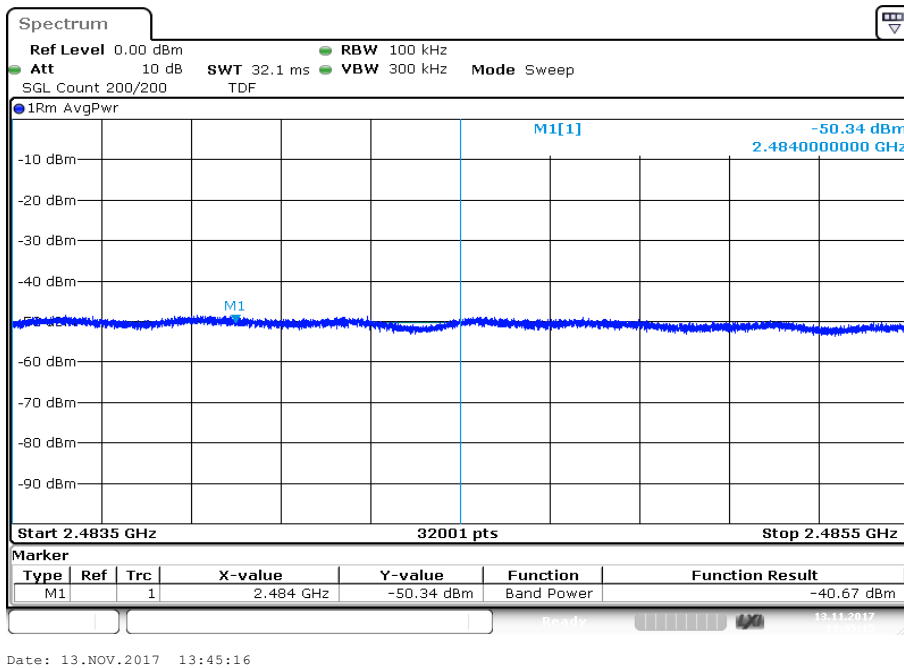


Plots: OFDM / n HT40 – mode


Plot 1: Lower band edge, channel 3

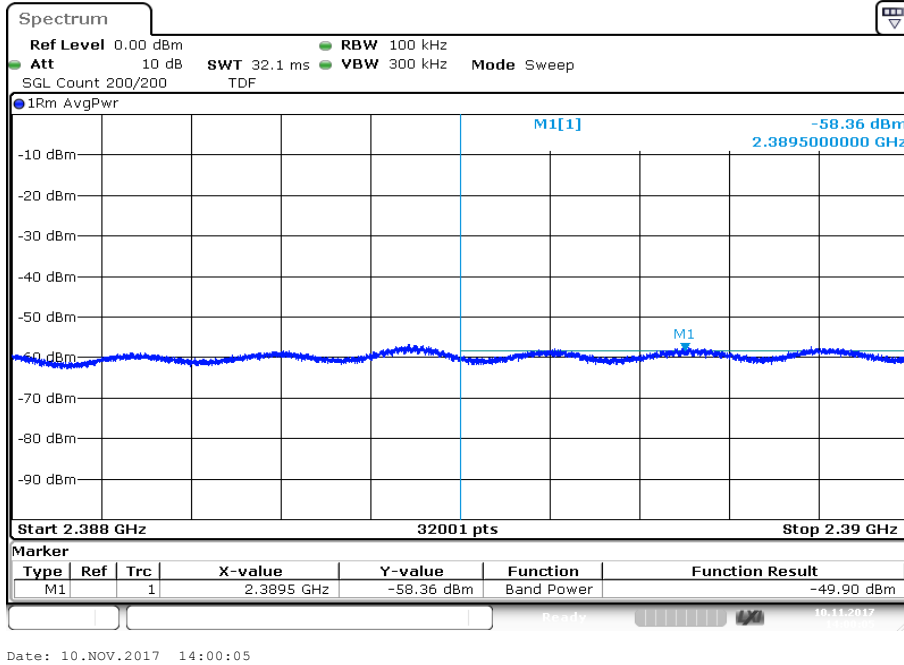

Plot 2: Upper band edge, channel 9

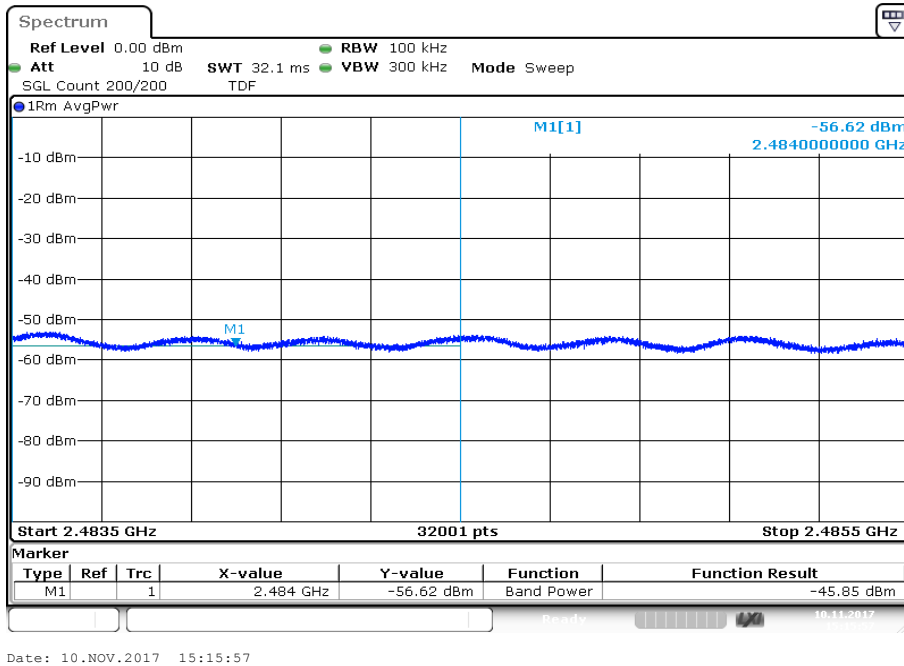


Plot 3: Lower band edge, channel 4

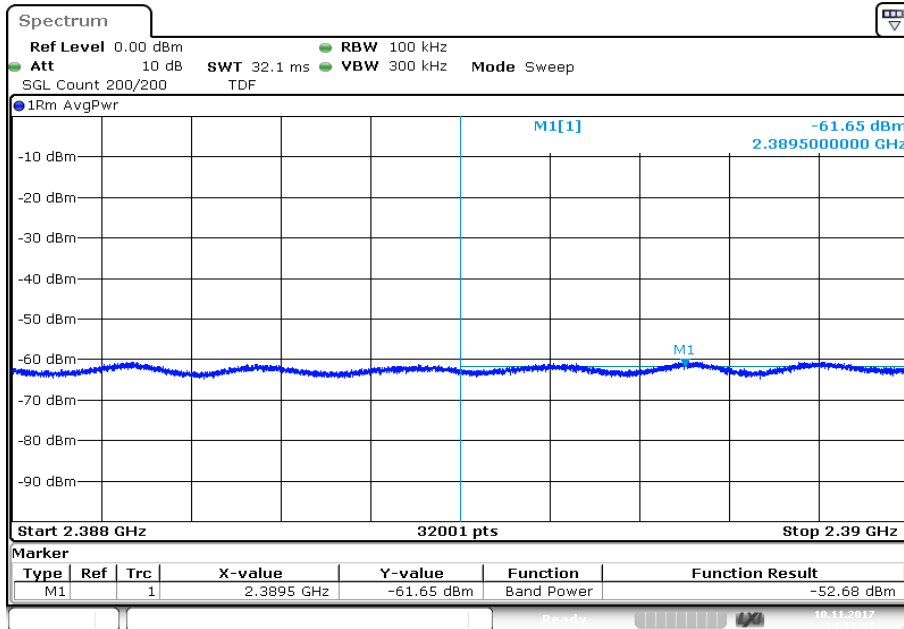

Date: 10.NOV.2017 14:11:01

Plot 4: Upper band edge , channel 8

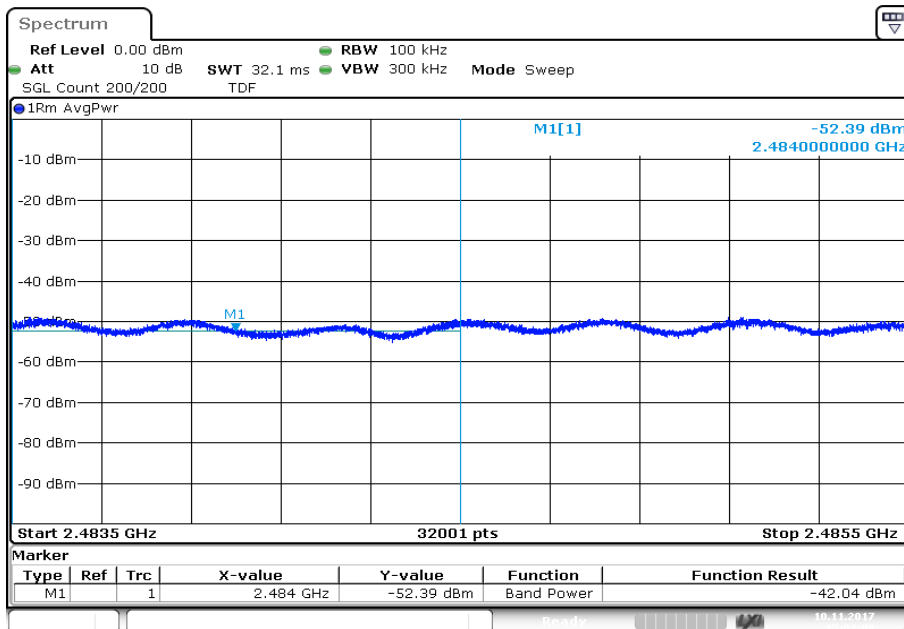

Date: 10.NOV.2017 15:02:08