



FCC PART 15C

TEST REPORT

For

INGENICO

9 Avenue de la gare - Rovaltain TGV BP25156 26958 Valence Cedex 9, France

FCC ID:XKB-DX8CL4GWBT


Report Type: Original Report	Product Type: Smart POS Terminal
Report Number:	RXM200918051-00C
Report Date:	2020-11-06
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 MEASUREMENT UNCERTAINTY4

 TEST FACILITY4

 DECLARATIONS.....4

SYSTEM TEST CONFIGURATION5

 JUSTIFICATION5

 EUT EXERCISE SOFTWARE5

 EQUIPMENT MODIFICATIONS5

 SUPPORT CABLE LIST AND DETAILS5

 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

FCC §15.203- ANTENNA REQUIREMENT.....7

 APPLICABLE STANDARD7

 ANTENNA CONNECTED CONSTRUCTION7

FCC §15.207 (A)– AC LINE CONDUCTED EMISSIONS8

 APPLICABLE STANDARD8

 EUT SETUP8

 EMI TEST RECEIVER SETUP.....8

 TEST EQUIPMENT LIST AND DETAILS.....9

 TEST PROCEDURE9

 CORRECTED AMPLITUDE & MARGIN CALCULATION9

 TEST DATA10

FCC§15.225, §15.205 & §15.209- RADIATED EMISSIONS13

 APPLICABLE STANDARD13

 EUT SETUP.....13

 EMI TEST RECEIVER SETUP.....13

 CORRECTED AMPLITUDE & MARGIN CALCULATION14

 TEST EQUIPMENT LIST AND DETAILS.....14

 TEST DATA14

FCC§15.225(E) - FREQUENCY STABILITY.....20

 APPLICABLE STANDARD20

 TEST PROCEDURE20

 TEST EQUIPMENT LIST AND DETAILS.....20

 TEST DATA21

FCC §15.215(C)– 20 DB BANDWIDTH.....22

 APPLICABLE STANDARD22

 TEST PROCEDURE22

 TEST EQUIPMENT LIST AND DETAILS.....22

 TEST DATA23

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

EUT Name:	Smart POS Terminal
EUT Model:	AXIUM DX8000
Operation Frequency:	13.56 MHz
Modulation Type:	ASK
Rated Input Voltage:	DC 7.2V from battery or DC 5V from adapter
Adapter#1 Information:	Model: SW-0983
	Input: 100-240Vac 50/60Hz 0.5A
	Output: 5.0Vdc 2.0A
Adapter#2 Information:	Model: A8-050200U-US3
	Input: 100-240Vac 50/60Hz 0.35A
	Output: 5.0Vdc 2.0A
Serial Number:	RXM200918051-RF-S1
EUT Received Date:	2020.09.18
EUT Received Status:	Good

Note: Per pre-test of FCC Part 15B test, the adapter#1 and battery#1 was the worst, and was performed the test items in this report.

Battery Information:

No.	Manufacturer	Specification
Battery 1#	Xinyu Ganfeng Electronics Co.,Ltd.	DC 7.2V 3400mAh/24.48Wh
Battery 2#	SCUD(Fujian) Electronics Co., Ltd.	DC 7.2V 3400mAh/24.48Wh

Objective

This type approval report is prepared on behalf of **INGENICO** in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15B JAB submissions with FCC ID: XKB-DX8CL4GWBT.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
radiated Emissions	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ Δ ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode.

EUT Exercise Software

No software used in test.


Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	No	0.8	Adapter	EUT

Block Diagram of Test Setup

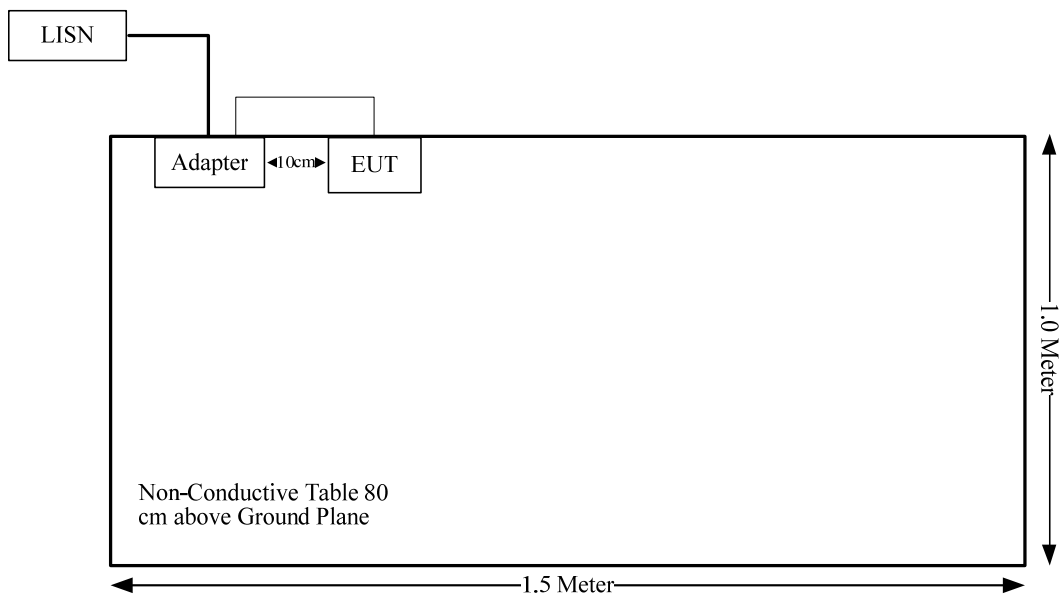

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207 (a)	Conducted Emissions	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Bandwidth	Compliance

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connected Construction

The EUT has one Loop antenna arrangement for NFC, fulfill the requirement of this section.


Result: Compliance.

FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a).

EUT Setup

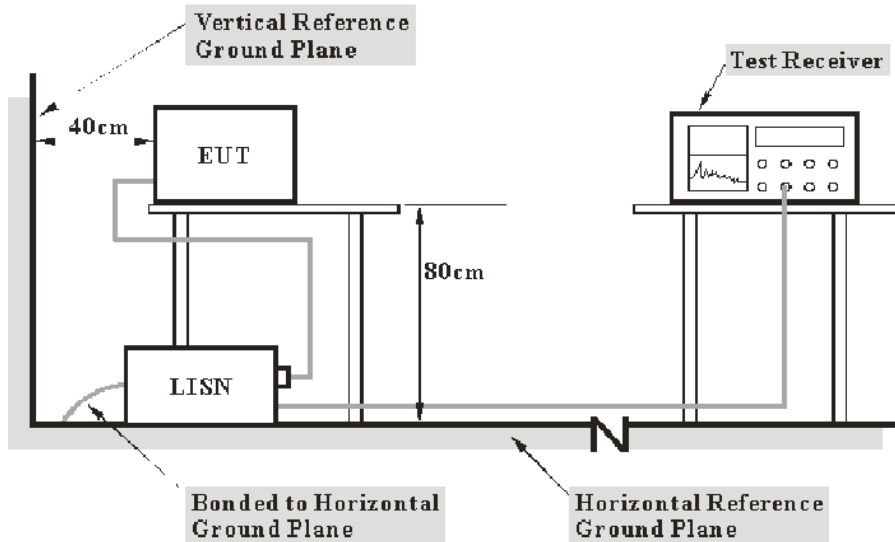

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions

Temperature:	24.7 °C
Relative Humidity:	63 %
ATM Pressure:	100.7 kPa
Tester:	Barry Yang
Test Date:	2020-10-14

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

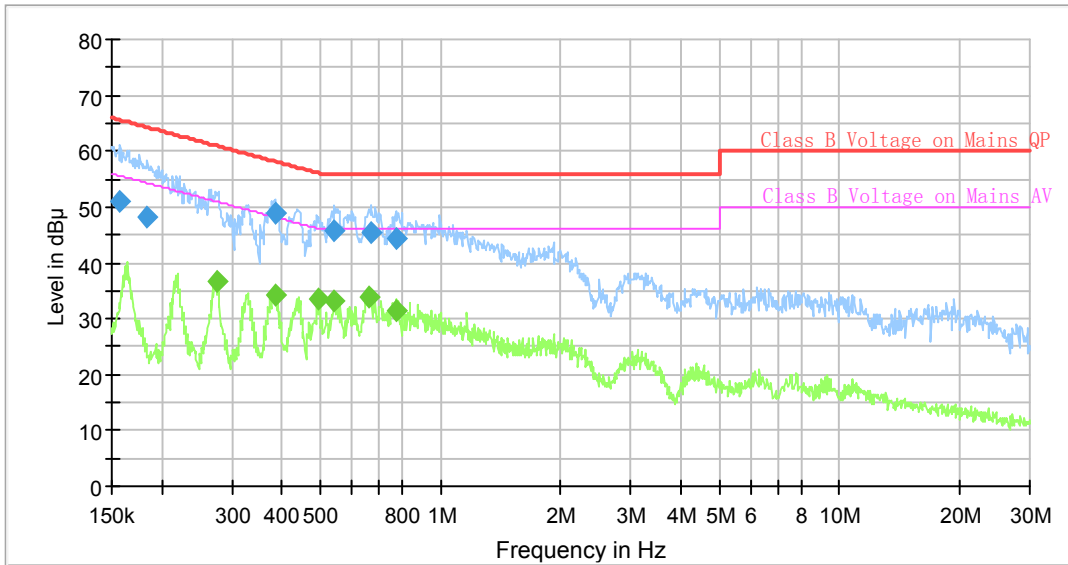

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.157671	50.88	---	65.59	14.71	9.000	L1	9.6
0.184035	48.04	---	64.30	16.26	9.000	L1	9.6
0.274274	---	36.70	50.99	14.29	9.000	L1	9.6
0.385014	48.88	---	58.17	9.29	9.000	L1	9.6
0.386939	---	34.21	48.13	13.92	9.000	L1	9.6
0.494060	---	33.70	46.10	12.40	9.000	L1	9.6
0.540467	---	33.20	46.00	12.80	9.000	L1	9.6
0.543169	45.89	---	56.00	10.11	9.000	L1	9.6
0.663098	---	33.88	46.00	12.12	9.000	L1	9.6
0.669745	45.51	---	56.00	10.49	9.000	L1	9.6
0.773973	---	31.34	46.00	14.66	9.000	L1	9.7
0.773973	44.33	---	56.00	11.67	9.000	L1	9.7

AC120 V, 60 Hz, Neutral:

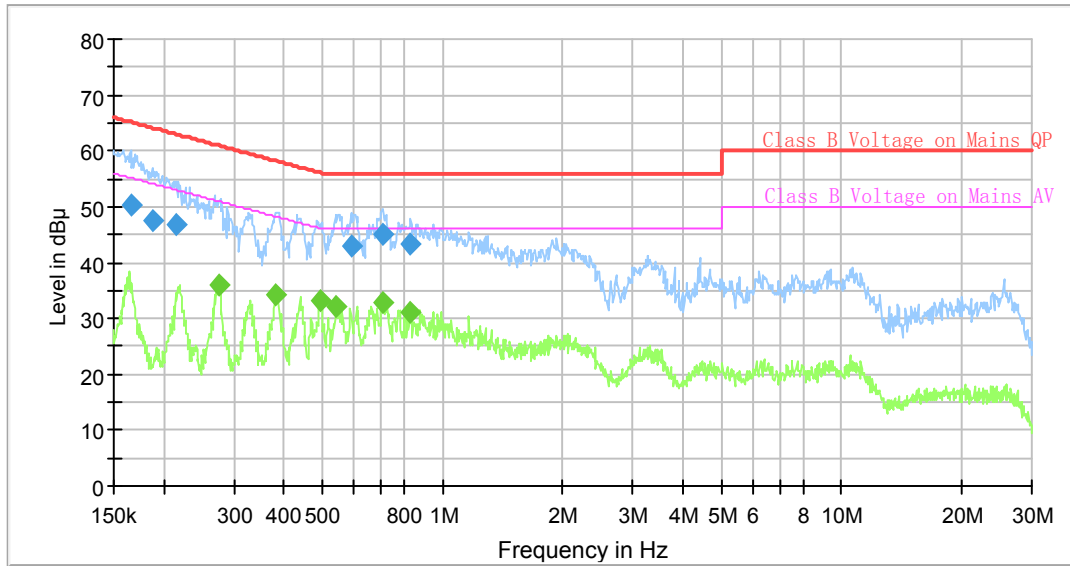

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.165734	50.43	---	65.17	14.74	9.000	N	9.6
0.186809	47.34	---	64.18	16.84	9.000	N	9.6
0.214807	46.75	---	63.02	16.27	9.000	N	9.6
0.274274	---	35.81	50.99	15.18	9.000	N	9.6
0.383099	---	34.16	48.21	14.05	9.000	N	9.6
0.494060	---	33.09	46.10	13.01	9.000	N	9.6
0.540467	---	32.01	46.00	13.99	9.000	N	9.6
0.591232	43.13	---	56.00	12.87	9.000	N	9.6
0.711054	44.96	---	56.00	11.04	9.000	N	9.6
0.711054	---	32.88	46.00	13.12	9.000	N	9.6
0.829947	---	31.00	46.00	15.00	9.000	N	9.6
0.829947	43.41	---	56.00	12.59	9.000	N	9.6


FCC§15.225, §15.205 & §15.209- RADIATED EMISSIONS

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

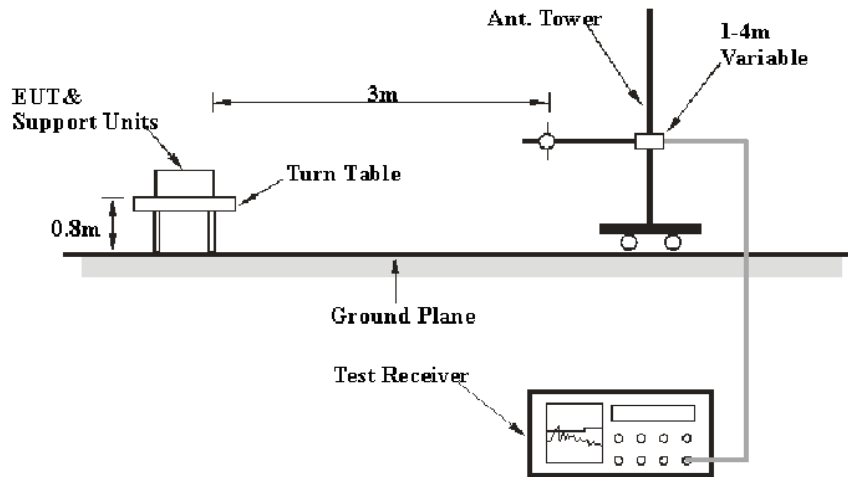

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP measurement

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
EMCO	Passive Loop	6512	9706-1206	2020-03-05	2023-03-04
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz
Temperature:	27.4°C
Relative Humidity:	41 %
ATM Pressure:	101.2 kPa
Tester:	Asa Chen
Test Date:	2020-10-20


Test mode: Transmitting

1) 9 kHz~30 MHz:

130.0 dBuV/m

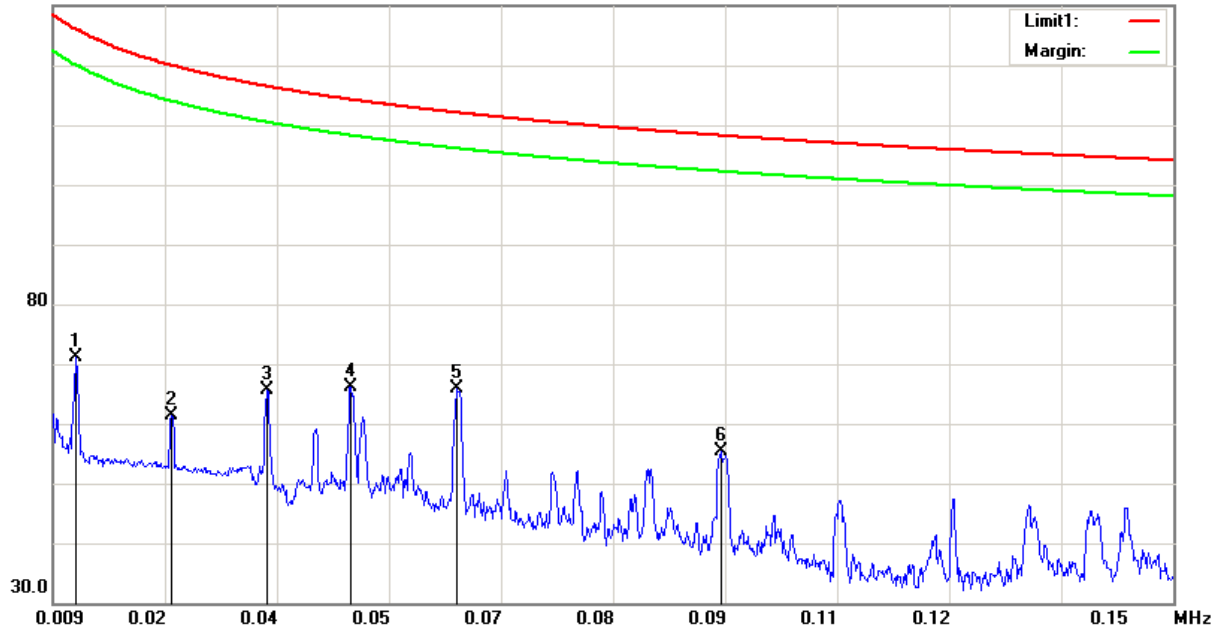


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.0120	14.49	peak	56.63	71.12	126.02	54.90
0.0240	7.42	peak	53.92	61.34	120.00	58.66
0.0360	14.46	peak	51.21	65.67	116.48	50.81
0.0464	17.19	peak	48.85	66.04	114.27	48.23
0.0600	20.03	peak	45.78	65.81	112.04	46.23
0.0930	17.03	peak	38.32	55.35	108.23	52.88

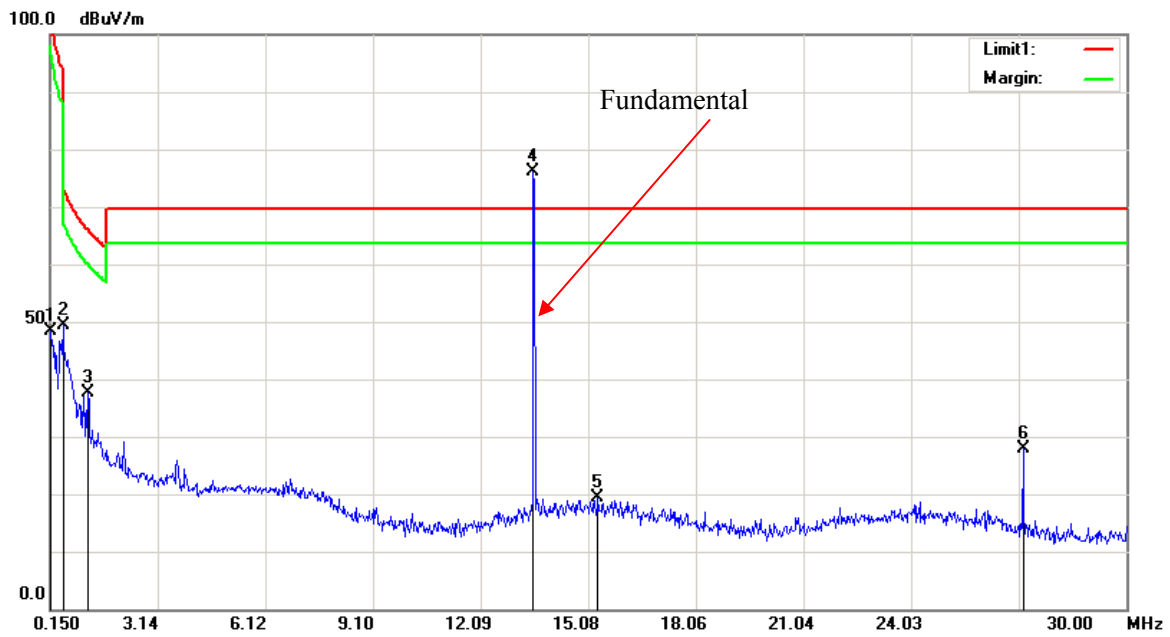

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.1797	17.04	peak	31.45	48.49	102.51	54.02
0.5081	28.26	peak	21.13	49.39	73.48	24.09
1.1948	23.19	peak	14.42	37.61	66.02	28.41
13.5527*	74.58	peak	1.62	76.20	/	/
15.3437	17.80	peak	1.58	19.38	69.54	50.16
27.1343	27.67	peak	0.10	27.77	69.54	41.77

*Fundamental.

Fundamental:

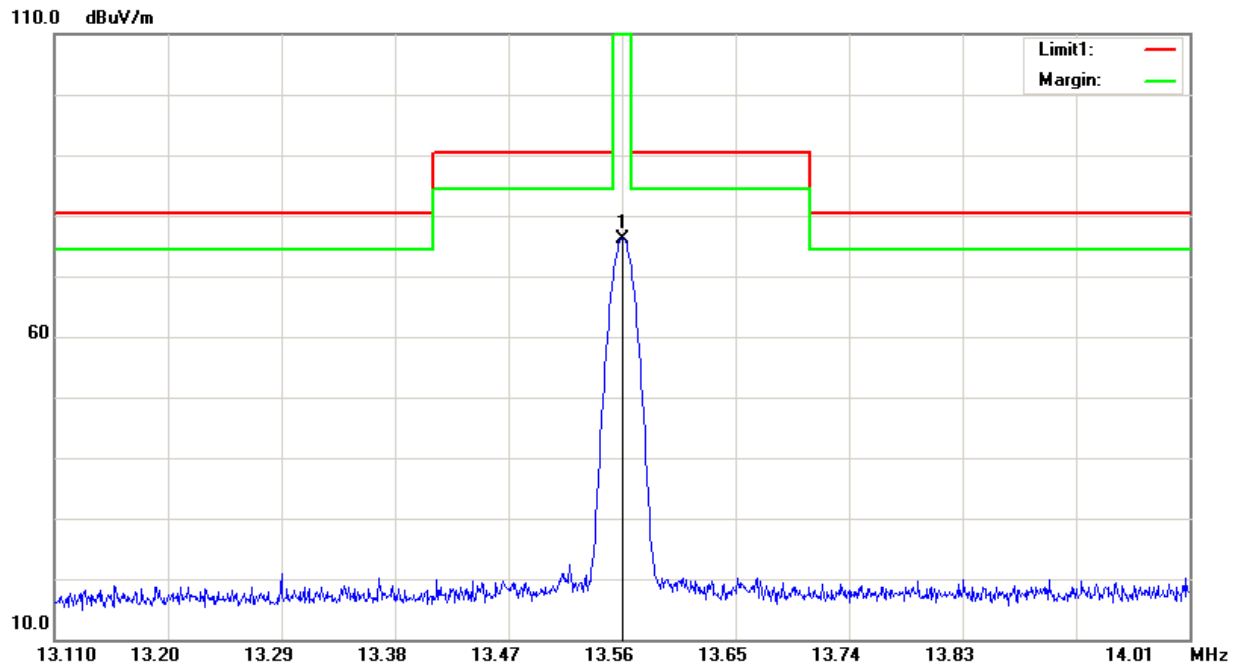


Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
13.5600	74.52	peak	1.62	76.14	124.00	47.86

30MHz-1GHz

Horizontal:


80.0 dBuV/m

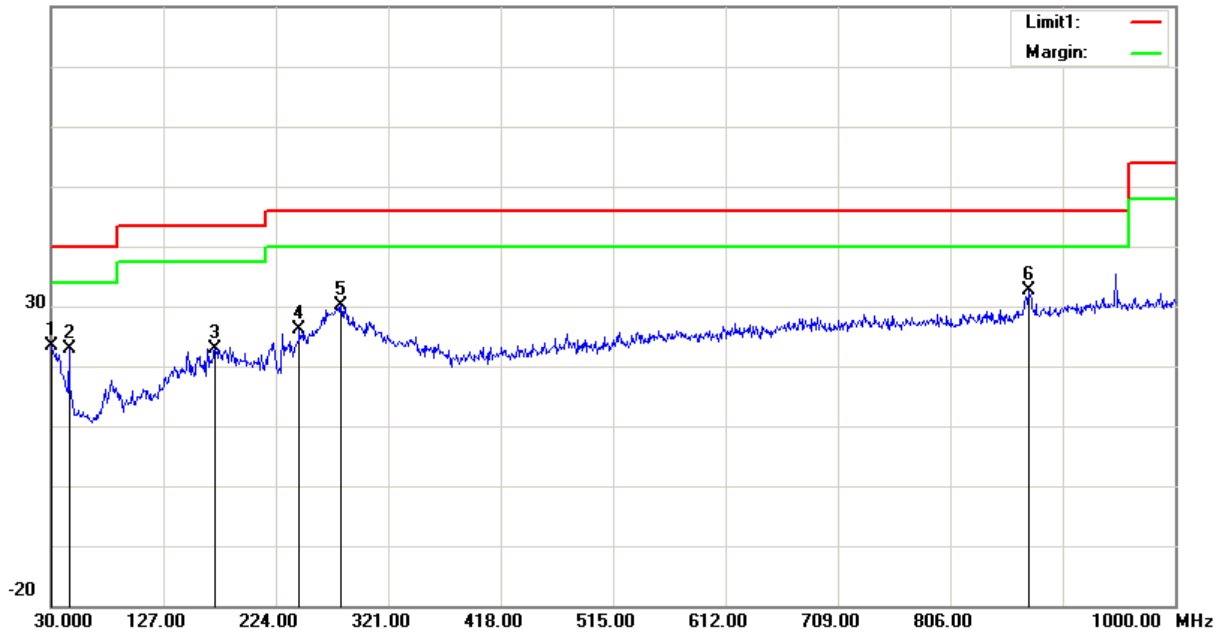

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	28.04	peak	-4.66	23.38	40.00	16.62
45.5200	35.96	peak	-13.12	22.84	40.00	17.16
171.6200	32.42	peak	-9.47	22.95	43.50	20.55
244.3700	35.91	peak	-9.83	26.08	46.00	19.92
280.2600	38.79	peak	-8.56	30.23	46.00	15.77
873.9000	30.04	peak	2.61	32.65	46.00	13.35

Vertical:

80.0 dB μ V/m

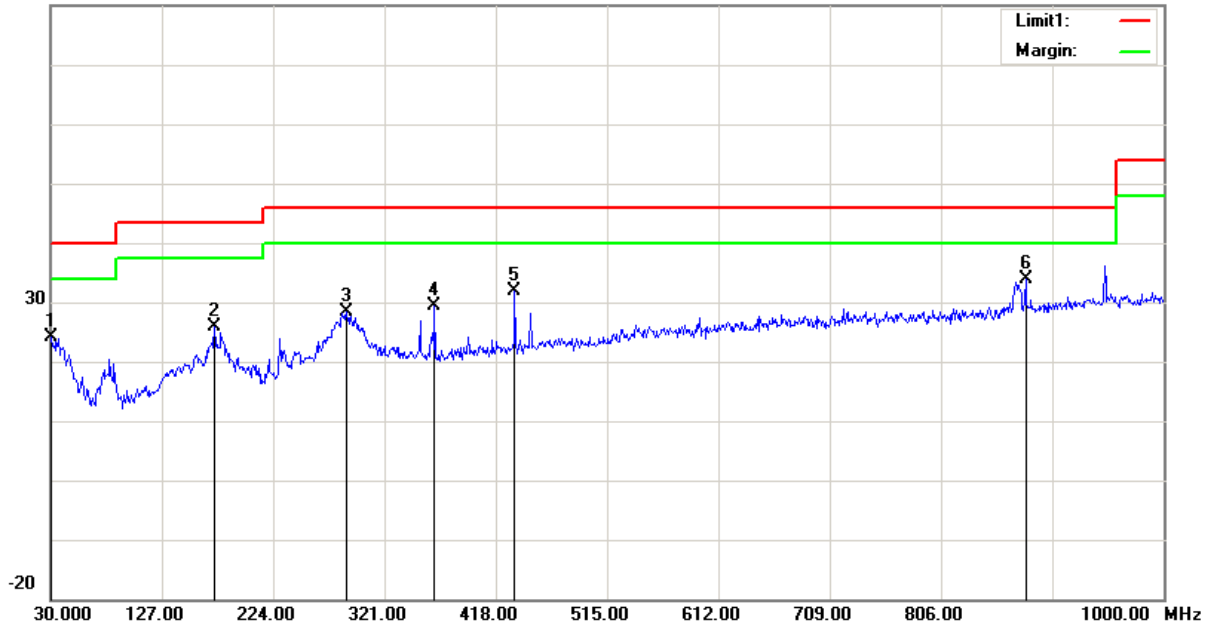

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	28.26	peak	-4.10	24.16	40.00	15.84
172.5900	35.36	peak	-9.53	25.83	43.50	17.67
288.0200	36.51	peak	-8.23	28.28	46.00	17.72
364.6500	35.44	peak	-6.13	29.31	46.00	16.69
434.4900	36.39	peak	-4.49	31.90	46.00	14.10
879.7200	31.12	peak	2.88	34.00	46.00	12.00

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

As per FCC Part 15.225:

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop	6512	9706-1206	2020-03-05	2023-03-04
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
UNI-T	Multimeter	UT39A	M130199938	2020-07-24	2021-07-24
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2020-03-10	2021-03-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4°C
Relative Humidity:	41 %
ATM Pressure:	101.2 kPa
Tester:	Asa Chen
Test Date:	2020-10-20

Test Mode: Transmitting

Test Result: Pass

f₀ = 13.56 MHz					
Temperature	Voltage	Measured frequency	Frequency Error	Limit	
°C	V_{DC}	MHz	Hz	Hz	
-30	7.2	13.5589	-1100	±1356	
-20		13.5597	-300	±1356	
-10		13.5595	-500	±1356	
0		13.5593	-700	±1356	
10		13.5589	-1100	±1356	
20		13.5595	-500	±1356	
25		13.5602	200	±1356	
30		13.5607	700	±1356	
40		13.561	1000	±1356	
50		13.5602	200	±1356	
25		6.4	13.5606	600	±1356
25		8.4	13.5604	400	±1356

FCC §15.215(c)– 20 dB BANDWIDTH

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop	6512	9706-1206	2020-03-05	2023-03-04
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.4°C
Relative Humidity:	41 %
ATM Pressure:	101.2 kPa
Tester:	Asa Chen
Test Date:	2020-10-20

Test Mode: Transmitting

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.800

20 dB Bandwidth

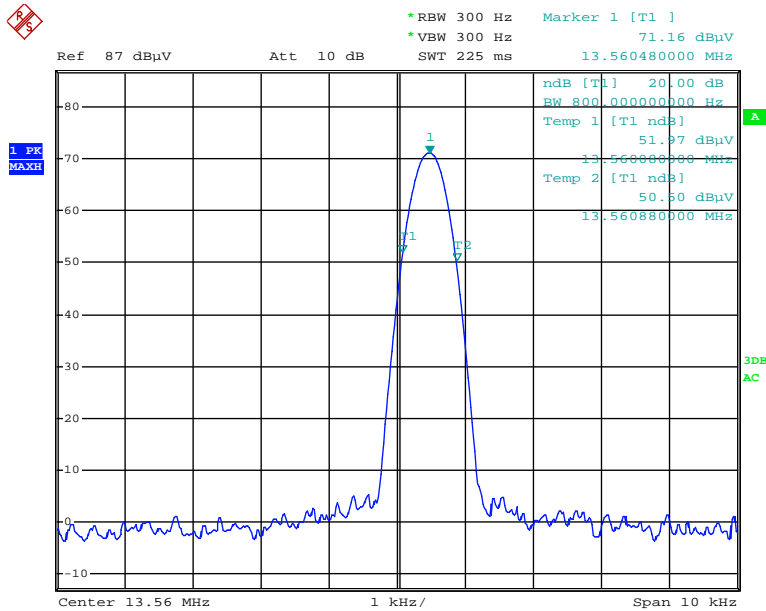

Date: 20.OCT.2020 17:30:44

******* END OF REPORT *******