

LCIE
Etablissement de Moirans
ZI Centr'alp
170, rue de Chatagnon
38430 Moirans



L C I E

RCS Grenoble 408 363 174

Tél. : +33 4 76 07 36 36
Fax : +33 4 76 55 90 88

Rapport d'essai / Test report

N° 600435-A3-R4-E

JDE : 121072

DELIVRE A / ISSUED TO

: INGENICO
Rovaltain TGV – Gare
26300 ALIXAN – FRANCE

Objet / Subject

: Essais de compatibilité électromagnétique conformément aux normes
FCC CFR 47 Part 15, Subpart B et C
RSS-210 Issue 8
Electromagnetic compatibility tests according to the standards
FCC CFR 47 Part 15, Subpart B and C
RSS-210 Issue 8

Matériel testé / Apparatus under test :

- Produit / Product : **Terminal de paiement / Payment terminal**
- Marque / Trade mark : **INGENICO**
- Constructeur / Manufacturer : **INGENICO**
- Type / Model : **ICM122-01T2263A**
- N° de série / serial number : **13079PP00004795**
- FCC ID : **XKB-ICM122BT**
- IC : **2586D-ICM122BT**

Date des essais / Test date

: Du 13 au 30 Mai 2013 / *From May 13th to 30th, 2013*

Lieu d'essai / Test location

: **LCIE SUD-EST**
ZI Centr'Alp – 170 rue de Chatagnon
38430 MOIRANS - FRANCE

Test réalisé par / Test performed by

: Anthony MERLIN

Ce document comporte / Composition of document : 49 pages.

Ecrit par / *Written by*,
Anthony MERLIN

MOIRANS. LE 26 JUN 2013 / *JUNE 26TH. 2013*

Approuvé par / *Approved by*
Jacques DROUIN
LABORATOIRE CENTRAL DES
INSTRUMENTS ELECTRIQUES
SUD-EST
ZI Centr'Alp
170 rue de Chatagnon
38430 MOIRANS
Tél. 04 76 07 36 36
Fax 04 76 55 90 88

La reproduction de ce document n'est autorisée que sous sa forme intégrale. Toute reproduction partielle ou toute insertion de résultats dans un texte d'accompagnement en vue de leur diffusion doit recevoir un accord préalable et formel de LCIE. Ce document résulte d'essais effectués sur un spécimen, un échantillon ou une éprouvette. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé. Sauf indication contraire, la décision de conformité prend en compte l'incertitude de mesures. Il ne préjuge en aucun cas d'une décision de certification.

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document does not anticipate any certification decision.

LCIE

33, av du Général Leclerc

BP 8

92266 Fontenay-aux-Roses cedex

France

Tél : +33 1 40 95 60 60

Fax : +33 1 40 95 86 56

contact@lcie.fr

www.lcie.fr

Société par Actions Simplifiée

au capital de 15 745 984 €

RCS Nanterre B 408 363 174

www.lcie.com



SUMMARY

1.	TEST PROGRAM	3
2.	SYSTEM TEST CONFIGURATION.....	4
3.	CONDUCTED EMISSION DATA.....	6
4.	RADIATED EMISSION DATA	9
5.	MAXIMUM PEAK OUTPUT POWER (15.247)	17
6.	HOPPING CHANNEL SEPARATION (15.247).....	20
7.	NUMBER OF HOPPING FREQUENCIES (15.247).....	24
8.	TIME OF OCCUPANCY (DWELL TIME) (15.247).....	26
9.	BAND EDGE MEASUREMENT (15.247)	28
10.	OCCUPIED BANDWIDTH.....	31
11.	ANNEX 1 (GRAPHS)	32
12.	UNCERTAINTIES CHART	49



1. TEST PROGRAM

- Standard:**
- FCC Part 15, Subpart C 15.247
 - ANSI C63.4 (2003)
 - RSS-210 Issue 8 – Dec 2010
 - RSS-Gen Issue 3 – Dec 2010

EMISSION Test	LIMITS			RESULTS (Comments)
	Frequency	Quasi-peak value (dBµV)	Average value (dBµV)	
Limits for conducted disturbance at mains ports 150kHz-30MHz	150-500kHz	66 to 56	56 to 46	PASS
	0.5-5MHz	56	46	
	5-30MHz	60	50	
Radiated emissions 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Measure at 300m 9kHz-490kHz : 67.6dBµV/m /F(kHz)			PASS
	Measure at 30m 490kHz-1.705MHz : 87.6dBµV/m /F(kHz)			
	1.705MHz-30MHz : 29.5 dBµV/m			
Radiated emissions 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Measure at 3m 30MHz-88MHz : 40 dBµV/m			PASS
	88MHz-216MHz : 43.5 dBµV/m			
	216MHz-960MHz : 46.0 dBµV/m			
	Above 960MHz : 54.0 dBµV/m			
Maximum Peak Output Power CFR 47 §15.247 (b) RSS-210 §A8.4(1)	Limit: 21dBm Conducted or Radiated measurement			PASS
Hopping Channel Separation CFR 47 §15.247 (a) (1) RSS-210 §A8.1(b)	Minimum between: Two-third 20dB Bandwidth or 25kHz Whichever is greater			PASS
Number of Hopping Frequencies CFR 47 §15.247 (a) (1) (iii) RSS-210 §A8.1(d)	At least 15 channels used			PASS
Time of Occupancy (Dwell Time) CFR 47 §15.247 (a) (1) (iii) RSS-210 §A8.1(d)	Maximum 0.4 sec within 31.6sec			PASS
Band Edge Measurement CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	Limit: -20dBc			PASS
Occupied bandwidth RSS-Gen §4.6.1	No limit			See results
Receiver Spurious Emission** RSS-Gen §4.10	See RSS-Gen §4.10			NA

*§15.33: The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.
 - If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.

- If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.

If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.

**Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.



2. SYSTEM TEST CONFIGURATION

2.1. JUSTIFICATION

The system was configured for testing in a typical fashion (as a customer would normally use it).

2.2. HARDWARE IDENTIFICATION

- **Equipment under test (EUT):**

ICM122-01T2263A

Serial number: 13079PP00004795

- Internal max frequencies: 387MHz

- **Power supply:**

- Battery lithium-ion 3.7VDC
- Loaded by MicroUSB

During all the tests, EUT is supplied by battery with or without load, worst case presented.

- **Input/output:**

- Micro USB, load only, not used with PC

- **Auxiliaries used for testing:**

- USB power adapter A1205 Apple
- Contact card
- CMU200 for Bluetooth communication
- Laptop IBM

- **I/O cables used for testing:**

- 1 x MicroUSB cable, shielded, length: 1.5m

- **Equipment information:**

- Frequency band: [2400.0-2483.5] MHz
- Standard: Wifi Bluetooth v3.0 Zigbee
- Spectrum Modulation: FHSS DSSS
- Modulation type: GFSK Pi/4 DQPSK 8DPSK
- Packet type: DH1, DH3, DH5
- Transfert data rate: 1Mbps, 2Mbps, 3Mbps
- Number of channel: 78
- Channel separation: 5MHz 2MHz 1MHz
- Channel bandwidth: 10MHz 20MHz 1MHz
- Channel tested: Full test on 2402MHz, 2480MHz and 2441MHz with DH5 packet type
- RF mode: TX/RX RX Standby
- Antenna type: Internal
- Antenna connector: Permanent external Permanent internal
- None Temporary (only for tests)



2.3. EUT CONFIGURATION

Configuration n°1:

- CAM0, reading in loop of contact card
- Bluetooth, hopping mode or permanent channel 0, 39 or 78

Configuration n°2:

- CAM0, reading in loop of contact card
- Bluetooth, hopping mode or permanent channel 0, 39 or 78
- Load by MicroUSB with adapter

Terminal firmware: SDK 9.10

CSR8811A08 (Bluetooth chipset):

- Pre-qualified chipset : B017701
- Pre-qualified stack : B013295

2.4. EQUIPMENT MODIFICATIONS

None

2.5. SPECIAL ACCESSORIES

None



3. CONDUCTED EMISSION DATA

3.1. TEST CONDITIONS

Date of test : May 15th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 981hPa
Relative humidity : 43%
Ambient temperature : 20°C

3.2. SETUP FOR CONDUCTED EMISSIONS MEASUREMENT

The product has been tested according to ANSI C63.4-(2003) and FCC Part 15 subpart B and C.

The product has been tested with 120V/60Hz power line voltage and compared to the FCC Part 15 subpart B §15.107 and C §15.207 limits. Measurement bandwidth was 9kHz from 150 kHz to 30 MHz.

Measurement is made with a Rohde & Schwarz ESU8 receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is 50Ω / 50μH.

The Peak data are shown on plots in annex 1. Quasi-Peak and Average measurements are detailed in a table with frequencies and levels measured.


Interconnecting cables and equipment's were moved to position that maximized emission. A summary of the worst case emissions found in all test configurations and modes is shown on the following page.

3.3. TEST SETUP

The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm.

Auxiliaries are powered by another LISN.

The cable has been shorted to 1meter length. The EUT is powered trough the LISN (measure).

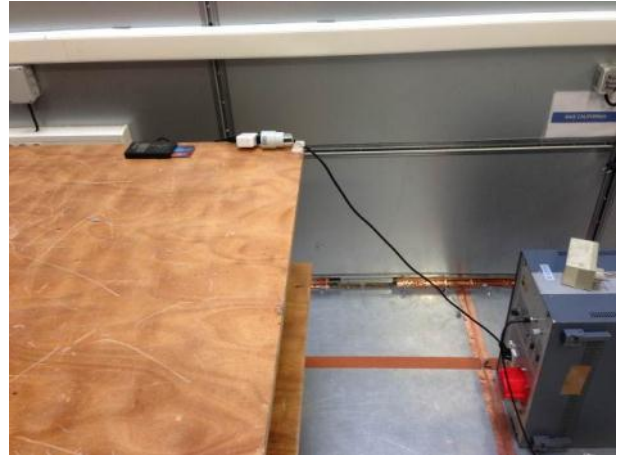

Conducted emission test setup

**3.4. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Cable	-	-	A5329578
Conducted emission comb generator	BARDET	-	A3169049
LISN tri-phase ESH2-Z5	RHODE & SCHWARZ	33852.19.53	C2320062
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011
Transient limiter	RHODE & SCHWARZ	ESH3-Z2	A7122204

3.1. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

3.2. TEST SEQUENCE AND RESULTS

Measurements are performed on the phase (L1) and neutral (N) of power line voltage.
Graphs are obtained in PEAK detection.
Measures are also performed in Quasi-Peak and Average for any strong signal.

Measure on L1: graph Emc#1 (Worst case) (see annex 1)
Measure on N: graph Emc#2 (Worst case) (see annex 1)

RESULT: PASS


4. RADIATED EMISSION DATA

4.1. TEST CONDITIONS


Date of test : May 14th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 990hPa
Relative humidity : 31%
Ambient temperature : 24°C

4.2. TEST SETUP

The installation of EUT is identical for pre-characterization measurement in a 3 meters semi anechoic chamber and for measures on a 10 meters Open site.

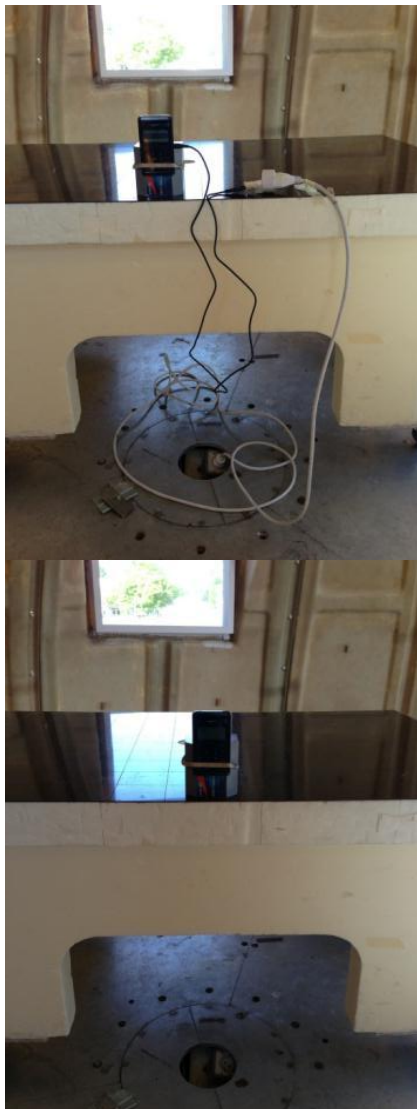



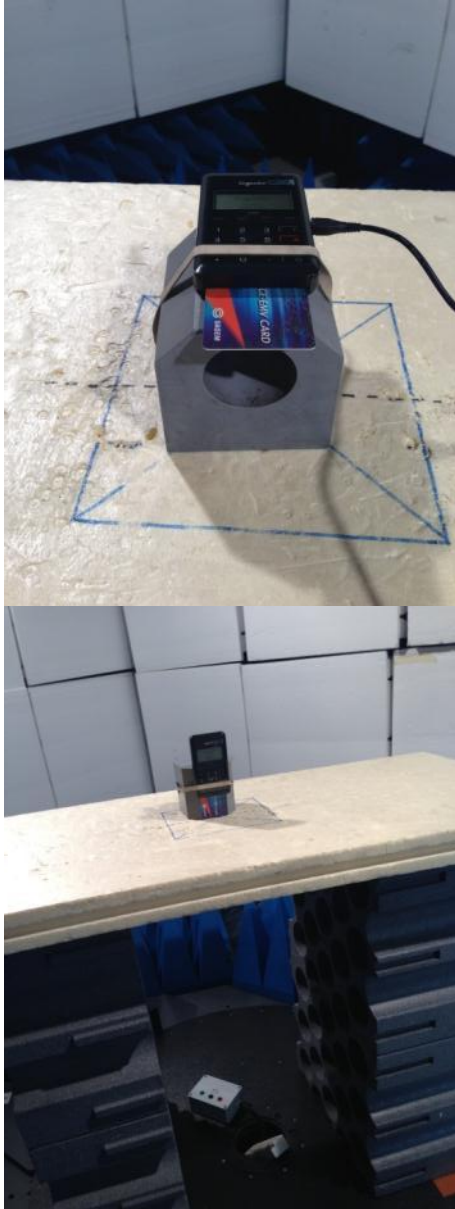

Radiated emission test setup



4.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Amplifier 1-13GHz	LCIE SUD EST	-	A7102067
Antenna Bi-log	CHASE	CBL6111A	C2040051
Antenna Loop	ELECTRO-METRICS	EM-6879	C2040052
Antenna Bi-log	CHASE	CBL6111A	C2040172
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	SUCOFLEX	106G	A5329061
Cable	-	-	A5329183
Cable OATS (Mast at 10m)	UTIFLEX	-	A5329188
Cable	-	-	A5329191
Cable	UTIFLEX	-	A5329192
Cable OATS (Mast at 10m)	UTIFLEX	-	A5329199
Cable N/N	-	-	A5329206
Cable	-	-	A5329590
Semi-Anechoic chamber #1	SIEPEL	-	D3044016
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Radiated emission comb generator	BARDET	-	A3169050
OATS	-	-	F2000409
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019
Receiver 20Hz-26.5GHz	ROHDE & SCHWARZ	ESIB26	A2642021
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371
Turntable / Mast controller (OATS)	ETS Lindgren	Model 2066	F2000372
Antenna mast (OATS)	ETS Lindgren	2071-2	F2000392
Turntable (OATS)	ETS Lindgren	Model 2187	F2000403
Turntable chamber (Cage#1)	MATURO Gmbh	TT 2.0 SI	F2000406
Antenna mast (Cage#1)	MATURO Gmbh	AM 4.0	F2000407
Turntable controller (Cage#1)	MATURO Gmbh	Control Unit	F2000408
Table	MATURO Gmbh	-	F2000437
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444

4.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



4.5. TEST SEQUENCE AND RESULTS

4.5.1. Pre-characterization at 3 meters [9kHz-30MHz]

A pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber. The distance between EUT and antenna is 3 meters. For Pre-characterization, the loop antenna was rotated during the test for maximized the emission measurement. Measurement performed on 3 axis of EUT. Frequency band investigated is 9kHz to 30MHz.

The pre-characterization graphs are obtained in PEAK detection.

See graph for 9kHz-30MHz band:

0° Polarization	Emr#1	<i>Alone</i>	(See annex 1)
0° Polarization	Emr#6	<i>Load</i>	(See annex 1)
0° Polarization	Emr#11	<i>Laptop</i>	(See annex 1)

4.5.1. Pre-characterization [30MHz-25GHz]

For frequency band 30MHz to 1GHz, a pre-scan of all the setup has been performed in a 3 meters semi anechoic chamber.

The distance between EUT and antenna is 3 meters. Test is performed in horizontal (H) and vertical (V) polarization with a log-periodic antenna. The EUT is being rotated on 360° and on 3 axis during the measurement. The pre-characterization graphs are obtained in PEAK detection.

For frequency band 1GHz to 25GHz, a search is performed in the semi-anechoic chamber in order to determine frequencies radiated by the EUT (Measuring distance reduced to 1m and 20cm for frequencies from 12GHz to 25GHz).

See graphs for 30MHz-1GHz:

H polarization	Emr#2	<i>Alone-Axis XY</i>	(See annex 1)
V polarization	Emr#3	<i>Alone-Axis XY</i>	(See annex 1)
H polarization	Emr#4	<i>Alone-Axis Z</i>	(See annex 1)
V polarization	Emr#5	<i>Alone-Axis Z</i>	(See annex 1)
H polarization	Emr#7	<i>Load-Axis XY</i>	(See annex 1)
V polarization	Emr#8	<i>Load-Axis XY</i>	(See annex 1)
H polarization	Emr#9	<i>Load-Axis Z</i>	(See annex 1)
V polarization	Emr#10	<i>Load-Axis Z</i>	(See annex 1)
H polarization	Emr#12	<i>Laptop-Axis XY</i>	(See annex 1)
V polarization	Emr#13	<i>Laptop-Axis XY</i>	(See annex 1)
H polarization	Emr#14	<i>Laptop-Axis Z</i>	(See annex 1)
V polarization	Emr#15	<i>Laptop-Axis Z</i>	(See annex 1)



4.5.2. Characterization on 10 meters open site from 30MHz to 1GHz

The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 120kHz from 30 MHz to 1GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following tables.

Worst case final data result (Alone/Load configuration):

No	Frequency (MHz)	QPeak Limit (dBµV/m)	Qpeak * (dBµV/m)	Qpeak-Limit (Margin, dB)	Angle (deg)	Pol	Hgt (cm)	Tot Corr (dB)	Comments
1	37.038	40.0	38.2	-1.8	30	V	100	16.6	Load configuration
2	40.680	40.0	37.0	-3.0	270	V	100	14.5	Load configuration
3	54.240	40.0	35.9	-4.1	55	V	100	8.8	Load configuration
4	81.360	40.0	33.3	-6.7	90	V	100	9.8	Load configuration
5	162.720	43.5	29.7	-13.8	45	V	150	12.9	Load configuration
6	194.251	43.5	27.8	-15.7	35	H	200	11.4	Load configuration
7	209.160	43.5	23.4	-20.1	185	H	330	11.7	Load configuration
8	212.680	43.5	23.3	-20.2	235	H	400	11.8	Load configuration

*: Measure have been done at 10m distance and corrected according to requirements of 15.209.e)
(M@3m = M@10m+10.5dB)



4.5.3. Characterization on 3 meters anechoic chamber from 1GHz to 25GHz

The product has been tested at a distance of **3 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 1MHz from 1GHz to 25GHz. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following tables.

Frequency band 1GHz to 25GHz

Measurements are performed using a PEAK and Average detection. (RBW = 1MHz)

No	Frequency (GHz)	Limit Average (dBµV/m)	Measure Average (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. factor (dB)	Comments
1	4804	54.0	31.3	-22.7	10	H	110	36.4	
2	7206	54.0	29.6	-24.4	55	H	110	39.6	
3	9608	54.0	28.6	-25.4	0	H	110	41.9	
4	4882	54.0	39.8	-14.2	10	H	110	36.5	
5	7323	54.0	35.6	-18.4	285	H	110	39.9	
6	9764	54.0	34.1	-19.9	310	H	110	42.0	
7	4960	54.0	37.4	-16.6	10	H	110	36.6	
8	7440	54.0	32.9	-21.1	300	H	110	40.1	
9	9920	54.0	31.3	-22.7	45	H	110	42.1	
10	2390	54.0	24.6	-29.4	15	H	110	31.3	
11	2483.5	54.0	24.8	-29.2	20	H	110	31.4	

Note: Measures have been done at 3m distance.

No	Frequency (GHz)	Limit Peak (dBµV/m)	Measure Peak (dBµV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. factor (dB)	Comments
1	4804	74.0	40.8	-33.2	10	H	110	36.4	
2	7206	74.0	36.5	-37.5	55	H	110	39.6	
3	9608	74.0	30.4	-43.6	0	H	110	41.9	
4	4882	74.0	48.9	-25.1	10	H	110	36.5	
5	7323	74.0	43.7	-30.3	285	H	110	39.9	
6	9764	74.0	37.8	-36.2	310	H	110	42.0	
7	4960	74.0	46.6	-27.4	10	H	110	36.6	
8	7440	74.0	41.0	-33.0	300	H	110	40.1	
9	9920	74.0	34.8	-39.2	45	H	110	42.1	
10	2390	74.0	38.7	-35.3	15	H	110	31.3	
11	2483.5	74.0	39.9	-34.1	20	H	110	31.4	

RESULTS: PASS

**4.6. FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength
- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Factor
- AG = Amplifier Gain

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

**5. MAXIMUM PEAK OUTPUT POWER (15.247)****5.1. TEST CONDITIONS**

Date of test : May 14th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 981hPa
Relative humidity : 35%
Ambient temperature : 24°C

5.1. EQUIPMENT CONFIGURATION

Modulation: GFSK, worst case
Packet Type: 1-DH5, worst case
Hopping sequence: OFF, worst case

5.2. SETUP*Conducted measurement:*

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10MHz VBW.
The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Radiated measurement:

The product has been tested at a distance of 3 meters from the antenna and using 3MHz RBW and 10MHz VBW. Antenna height search was performed from 1m to 4m for both horizontal and vertical polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.
To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m, utilizing a RBW \geq the 20 dB bandwidth of the emission, VBW > RBW, peak detector function. Follow the procedures in C63.4-1992 with respect to maximizing the emission.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

**5.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Cable N/N	-	-	A5329206
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011




5.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



5.5. TEST SEQUENCE AND RESULTS

Channel	Channel Frequency (MHz)	Maximum Field (dBµV/m)	E.I.R.P (dBm)	FC (dB)	Antenna Gain (dBi)	Peak Conducted Output Power (dBm)	Power Limit (dBm)	PASS / FAIL
0	2402	90.7	-4.5	30.4	-0.5	-4.0	30.0	PASS
39	2441	95.5	0.3	30.6	-0.5	0.8	30.0	PASS
78	2480	94.2	-1.0	30.8	-0.5	-0.5	30.0	PASS

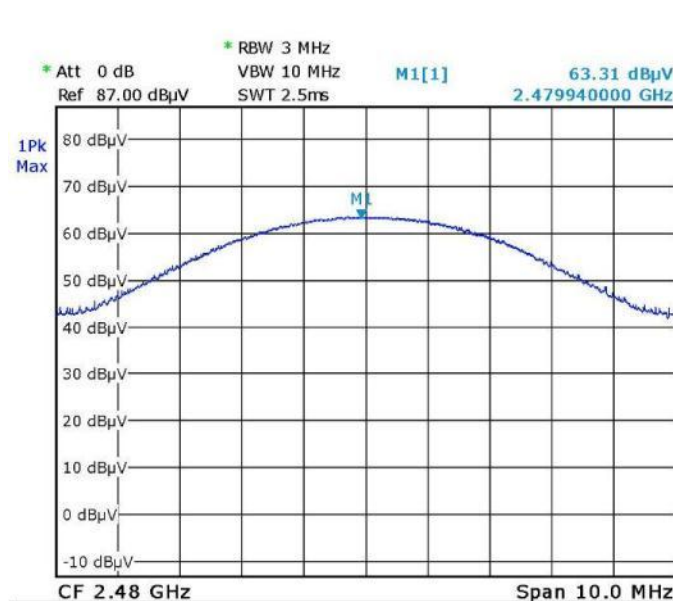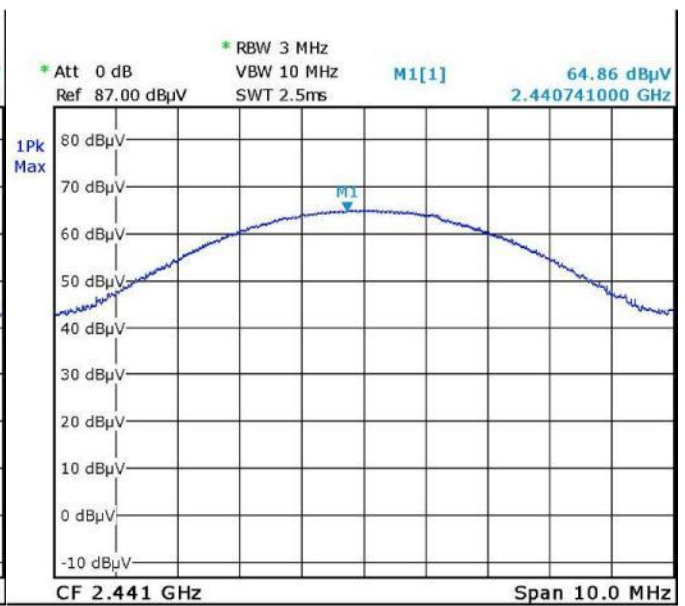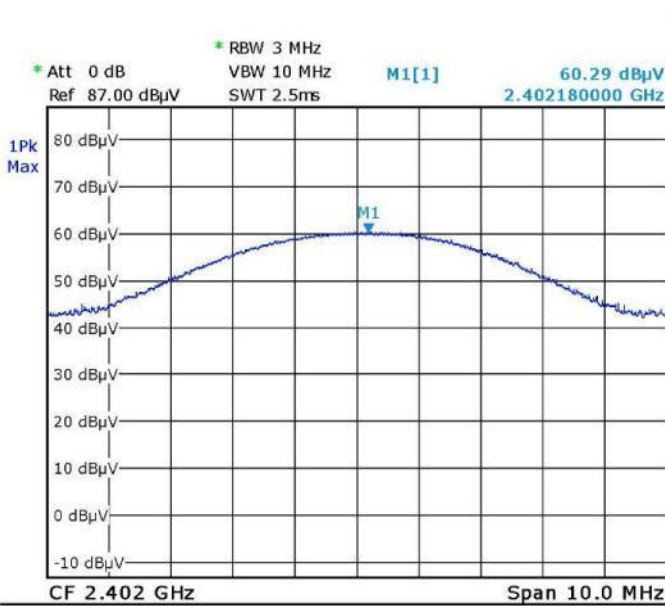



6. HOPPING CHANNEL SEPARATION (15.247)

6.1. TEST CONDITIONS

Date of test : May 28th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 990hPa
Relative humidity : 40%
Ambient temperature : 22°C

6.1. LIMIT

For frequency hopping system, hopping channel carrier frequencies must be separated by a minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.

6.2. EQUIPMENT CONFIGURATION

Modulation type:	<input checked="" type="checkbox"/> GFSK	<input checked="" type="checkbox"/> PI/4 DQPSK	<input checked="" type="checkbox"/> 8DPSK
Packet type:	1-DH5	2-DH5	3-DH5
Hopping sequence:	ON	ON	ON

6.3. SETUP – 20DB BANDWIDTH

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with the Peak Output Power measured. The EUT is turn ON and using the MaxHold function, the frequency separation of two frequencies that were attenuated 20dB from the Peak Output Power level. A delta marker is used to measure the frequency difference as the emission bandwidth.

6.4. SETUP – ADJACENT CHANNEL SEPARATION

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with the Peak Output Power measured. The EUT is turn ON and using the MaxHold function, the separation of two adjacent channels is recorded. A delta marker is used to measure the frequency difference.

6.5. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019

6.1. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None




6.2. TEST SEQUENCE AND RESULTS

GFSK – 1-DH5 – 1Mbps

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)	PASS / FAIL
0	2402	1.000	1.043	0.696	PASS
39	2441	1.000	1.048	0.698	PASS
78	2480	1.000	1.048	0.698	PASS

Limit used: Two-third 20dB Bandwidth

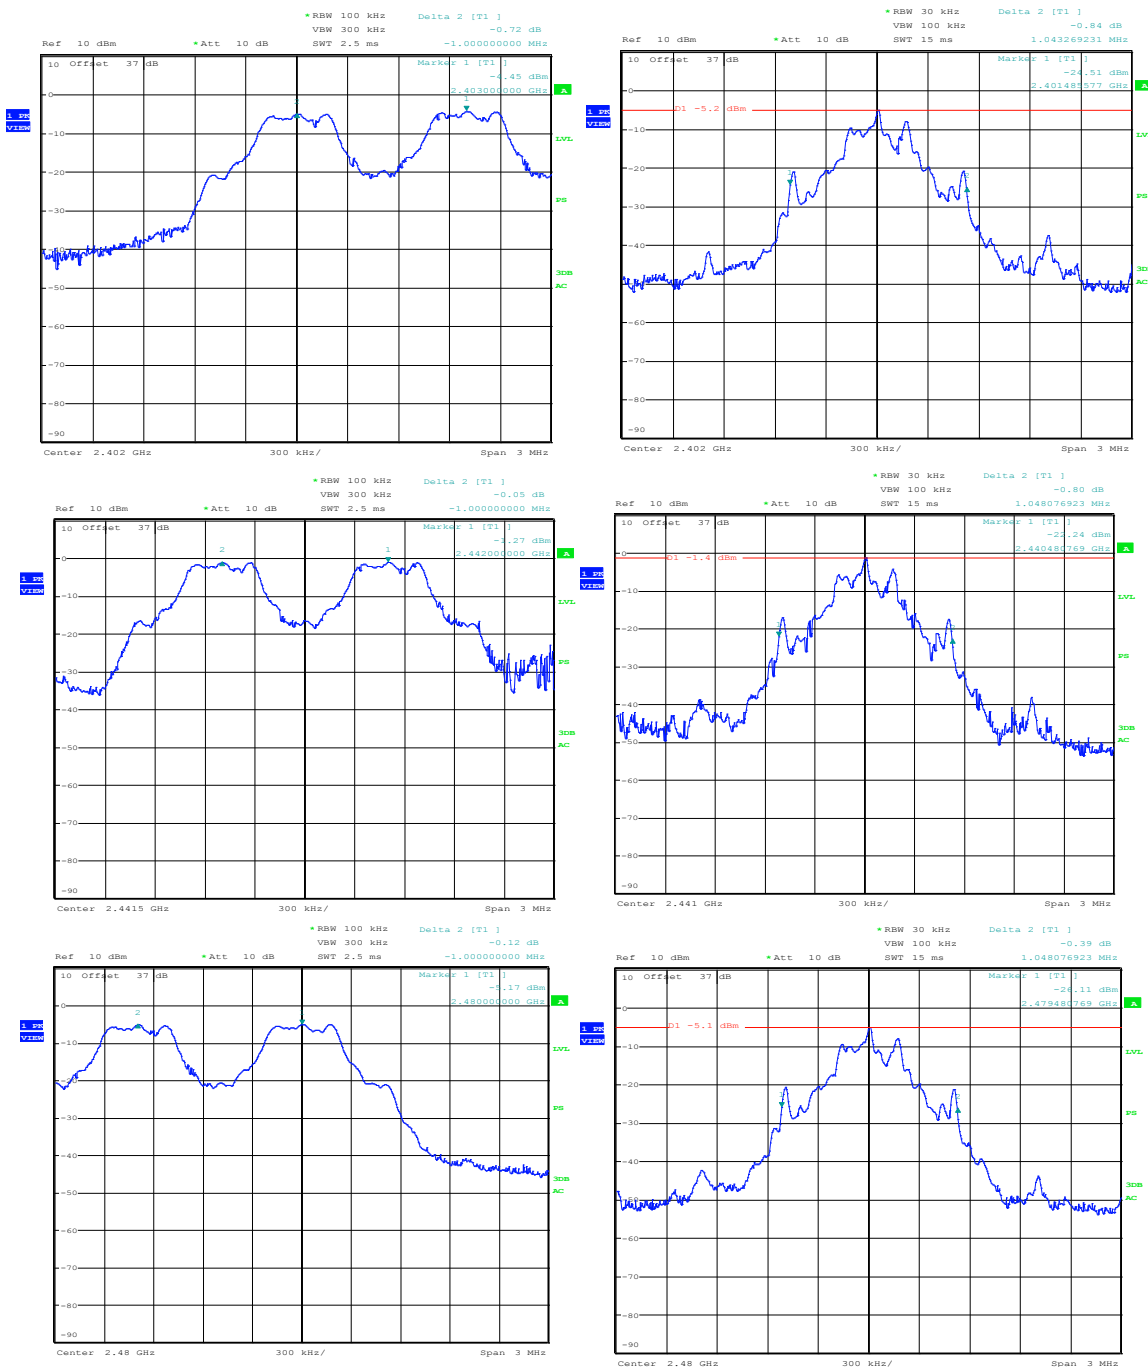




Pi/4 DQPSK – 2-DH5 – 2Mbps

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)	PASS / FAIL
0	2402	0.999	1.168	0.778	PASS
39	2441	1.004	1.139	0.759	PASS
78	2480	0.995	1.149	0.766	PASS

Limit used: Two-third 20dB Bandwidth

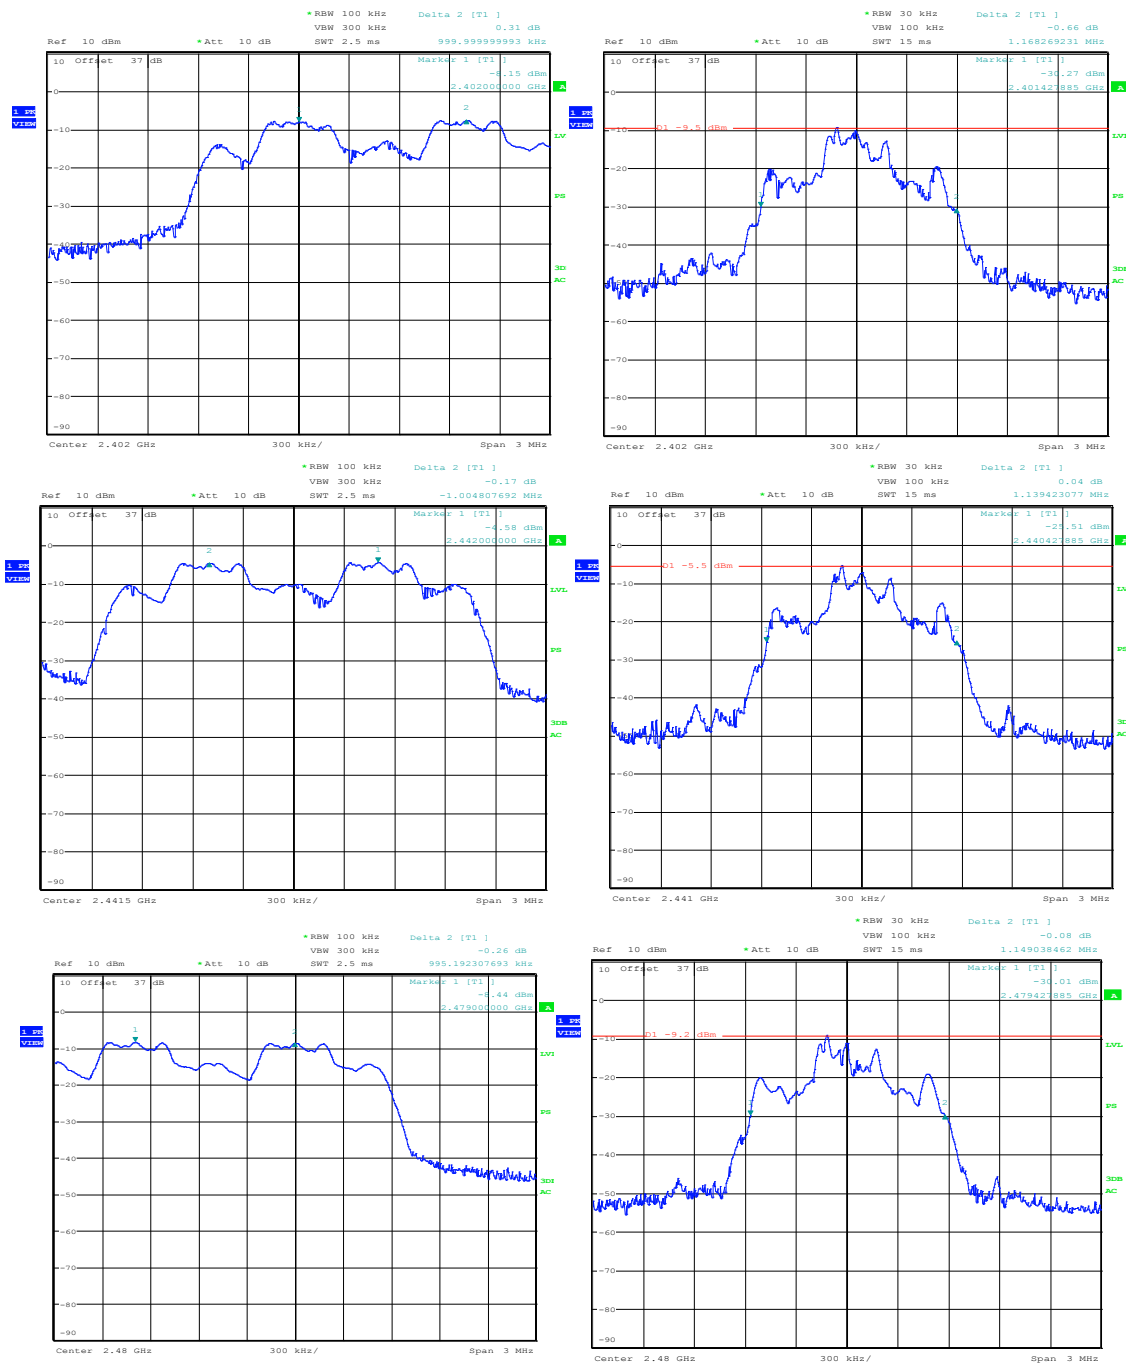




L C I E

8DPSK – 3-DH5 – 3Mbps

Channel	Channel Frequency (MHz)	Adjacent Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)	PASS / FAIL
0	2402	1.004	1.192	0.795	PASS
39	2441	1.000	1.206	0.804	PASS
78	2480	1.009	1.197	0.798	PASS

Limit used: Two-third 20dB Bandwidth

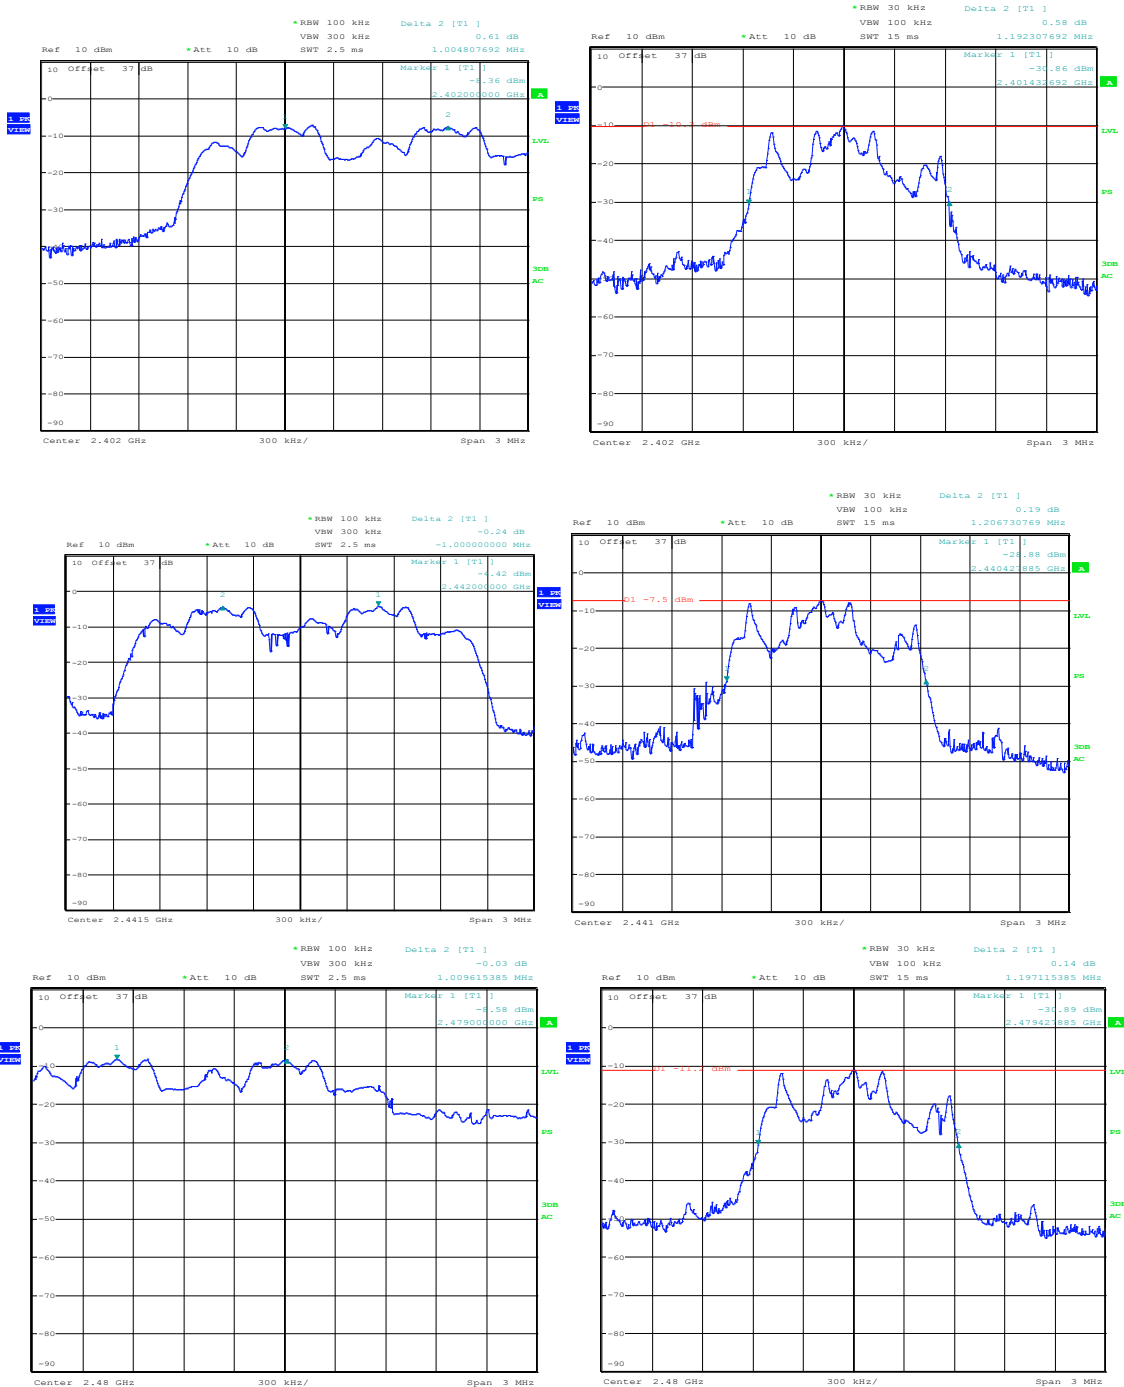

**7. NUMBER OF HOPPING FREQUENCIES (15.247)****7.1. TEST CONDITIONS**

Test performed by : A.MERLIN
Date of test : May 14th, 2013
Atmospheric pressure : 991hPa
Ambient temperature : 21°C
Relative humidity : 37%

7.2. LIMIT

For frequency hopping system operating in the 2400-2483.5MHz, at least 15 channels frequencies must be used and should be equally spaced.

7.3. EQUIPMENT CONFIGURATION

Modulation: GFSK, same results
Packet Type: 1-DH5, same results
Hopping sequence: ON

7.4. SETUP

The EUT is placed in an anechoic chamber. The EUT is turn ON and using the MaxHold function and a delta marker the number of frequencies used for this FHSS system is recorded, see following graphs.

RBW: 100kHz
VBW: 300kHz



7.5. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Cable N/N	-	-	A5329206
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011

7.6. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

7.7. TEST SEQUENCE AND RESULTS

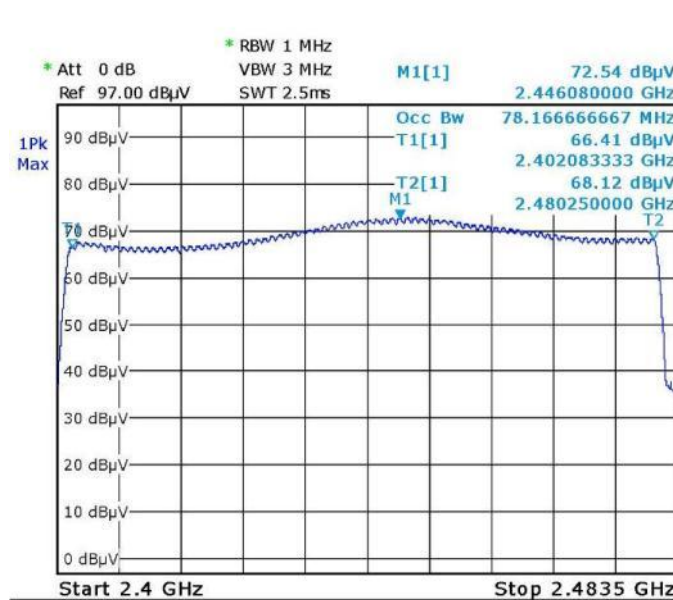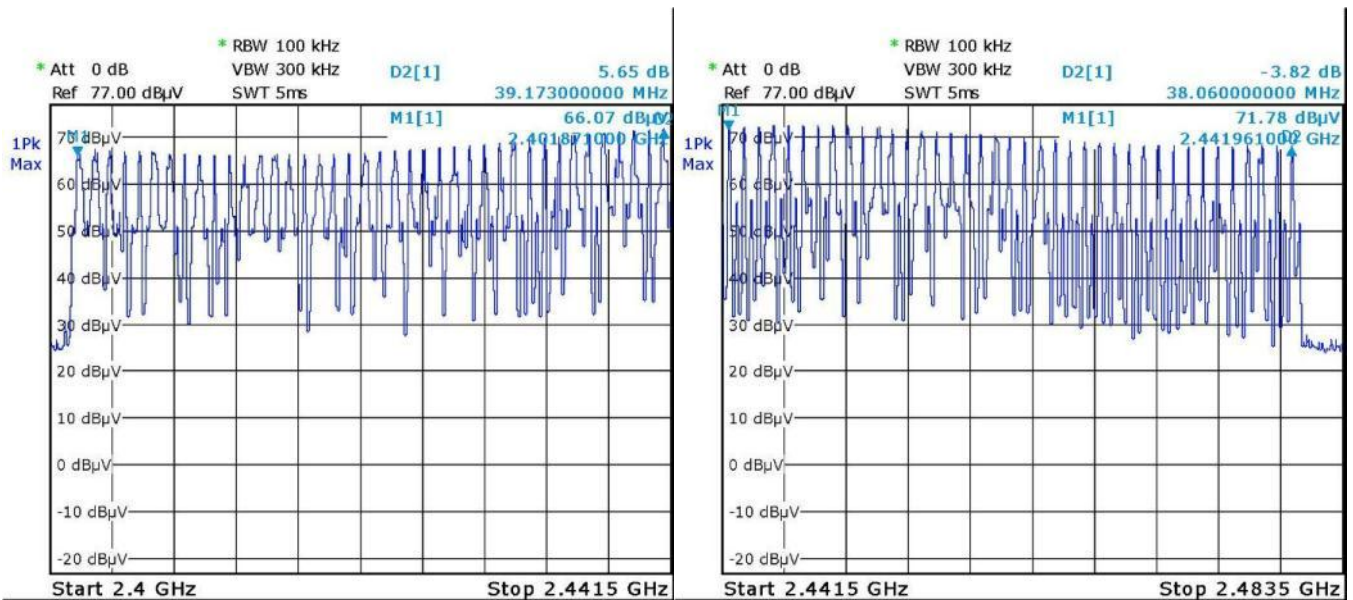

Number of frequency used in the hopping sequence: 79 channels / 78.2MHz (99% OBW)

**8. TIME OF OCCUPANCY (DWELL TIME) (15.247)****8.1. TEST CONDITIONS**

Date of test : May 28th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 990hPa
Relative humidity : 39%
Ambient temperature : 22°C

8.2. LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. EQUIPMENT CONFIGURATION

Modulation: 8DPSK, worst case
Packet Type: 3-DH5, worst case
Hopping sequence: ON

8.4. SETUP

The EUT is placed in an anechoic chamber. The EUT is turn ON; the Dwell Time is measured and calculated using the zero SPAN mode on a channel frequency and a SWEEP with an adapter value to measure the number of transmission within a period and the time of transmission

RBW: 100kHz
VBW: 300kHz

8.5. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Cable N/N	-	-	A5329206
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011

8.6. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None





8.7. TEST SEQUENCE AND RESULTS

8DPSK – 3-DH5 – 3Mbps

Packet Mode	Number of transmission in the period	Length of transmission time (ms)	Result (ms)	Limit (ms)	PASS / FAIL
3-DH5	26 times / 10s	2.909	239.0	400	PASS

Note: Period of 31.6 seconds (79 channels x 0.4)

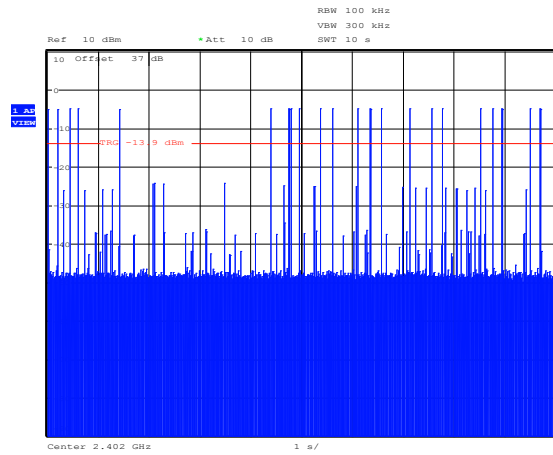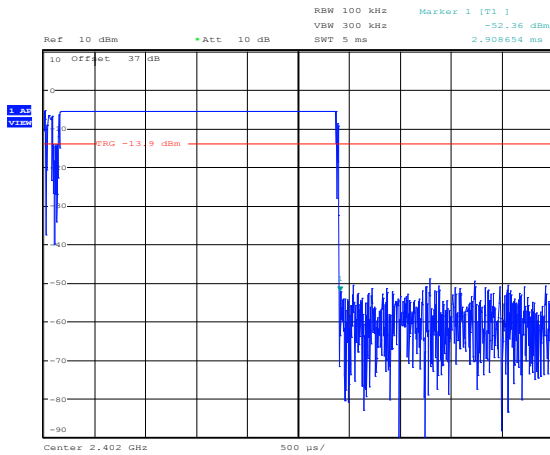

**9. BAND EDGE MEASUREMENT (15.247)****9.1. TEST CONDITIONS**

Date of test : May 29th, 2013
Test performed by : A.MERLIN
Atmospheric pressure : 990hPa
Relative humidity : 42%
Ambient temperature : 22°C°C

9.2. LIMIT

In Bandedge, the limit of spurious emissions are below -20dB of the highest emission level of operating band (in 100kHz RBW).

In the restrict band (2310-2390MHz) and (2483.5-2500MHz) including bandedge, the limit of spurious emissions are 15.209. (RBW:1MHz / VBW:1MHz)

9.3. EQUIPMENT CONFIGURATION

Modulation: 1-DH5 (Worst case)
Hopping sequence: ON

9.4. SETUP

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with Peak Output Power measurement. The EUT is turn ON; the graphs of the restrict frequency band are recorded with a display line indicating the highest level and other the 20dB offset below to show compliance with 15.247 (d) and 15.205. The emissions in restricted bands are compared to 15.209 limits.

RBW: 100kHz
VBW: 300kHz

**9.5. TEST EQUIPMENT LIST**


DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Amplifier 8-26GHz	ALDETEC	ALS01452	A7102026
Amplifier 1-13GHz	LCIE SUD EST	-	A7102067
Attenuator 10dB	JFW	-	A7122166
Cable SMA	-	-	A5329580
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
High Pass (4.8-18GHz)	BL Microwave	SH4800-1800	A7484034
Receiver 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020
Spectrum Analyzer 9KHz – 26.5GHz	HEWLETT PACKARD	8593E	A4060018

9.6. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

9.7. TEST SEQUENCE AND RESULTS

For spurious in restricted frequency band, see Radiated emission data paragraph.

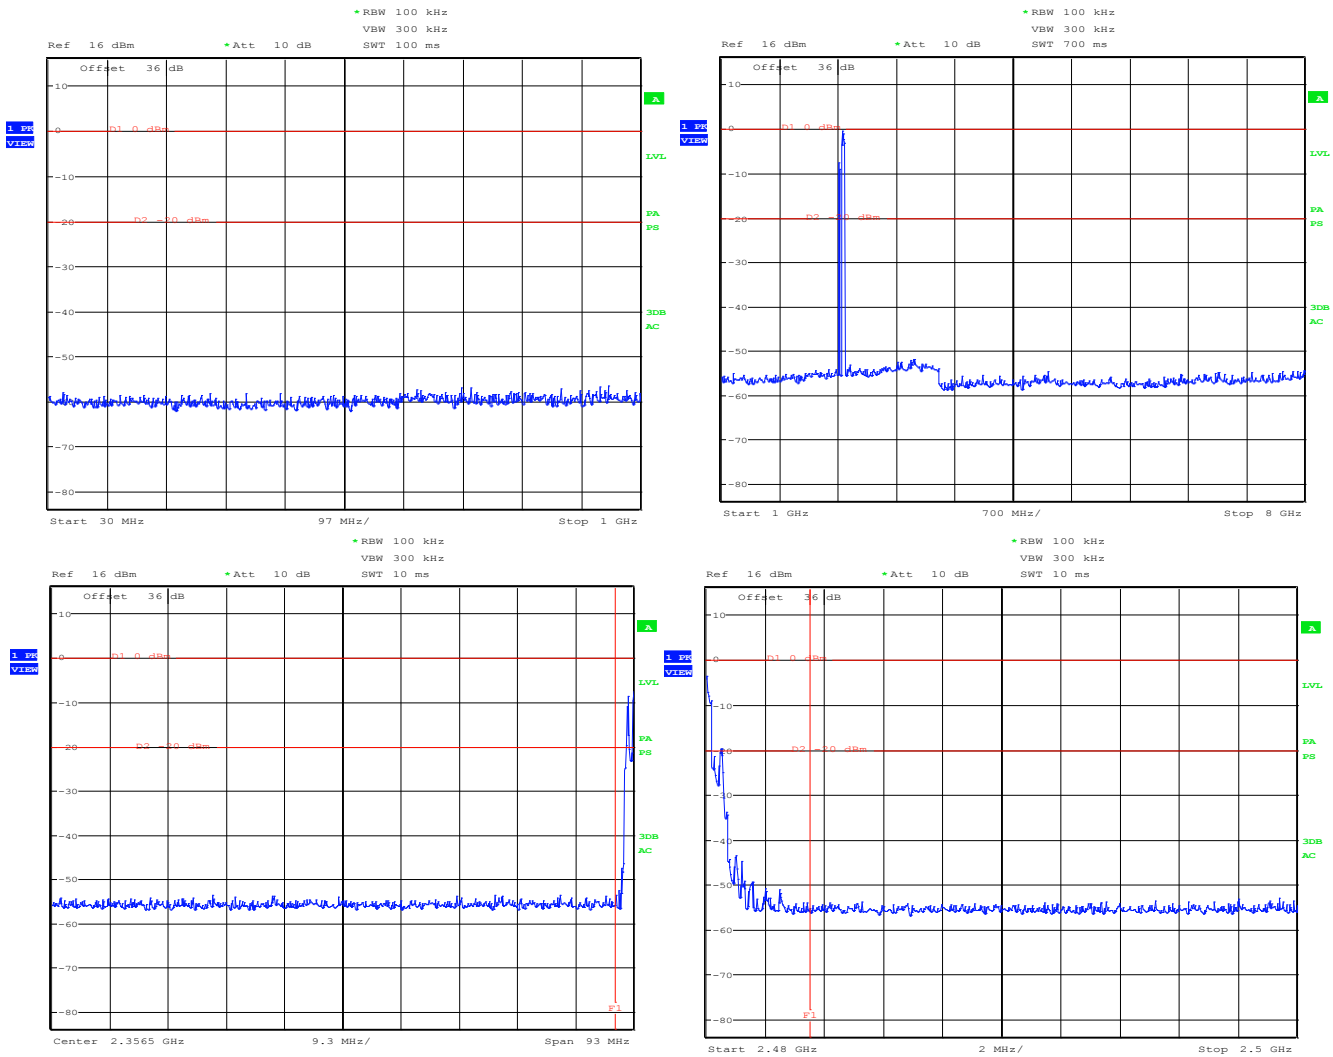

Measurement from 8GHz to 26GHz: No frequency observed



10. OCCUPIED BANDWIDTH

10.1. CLIMATIC CONDITIONS

Date of test : May 15th, 2013
 Test performed by : A.MERLIN
 Atmospheric pressure : 981hPa
 Relative humidity : 43%
 Ambient temperature : 21°C


10.1. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE
Antenna horn	EMCO	3115	C2042027
Cable N/N	-	-	A5329038
Cable	UTIFLEX	-	A5329192
Semi-Anechoic chamber #3	SIEPEL	-	D3044017
Receiver 20Hz – 8GHz	ROHDE & SCHWARZ	ESU8	A2642019

10.2. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

10.3. TEST RESULTS

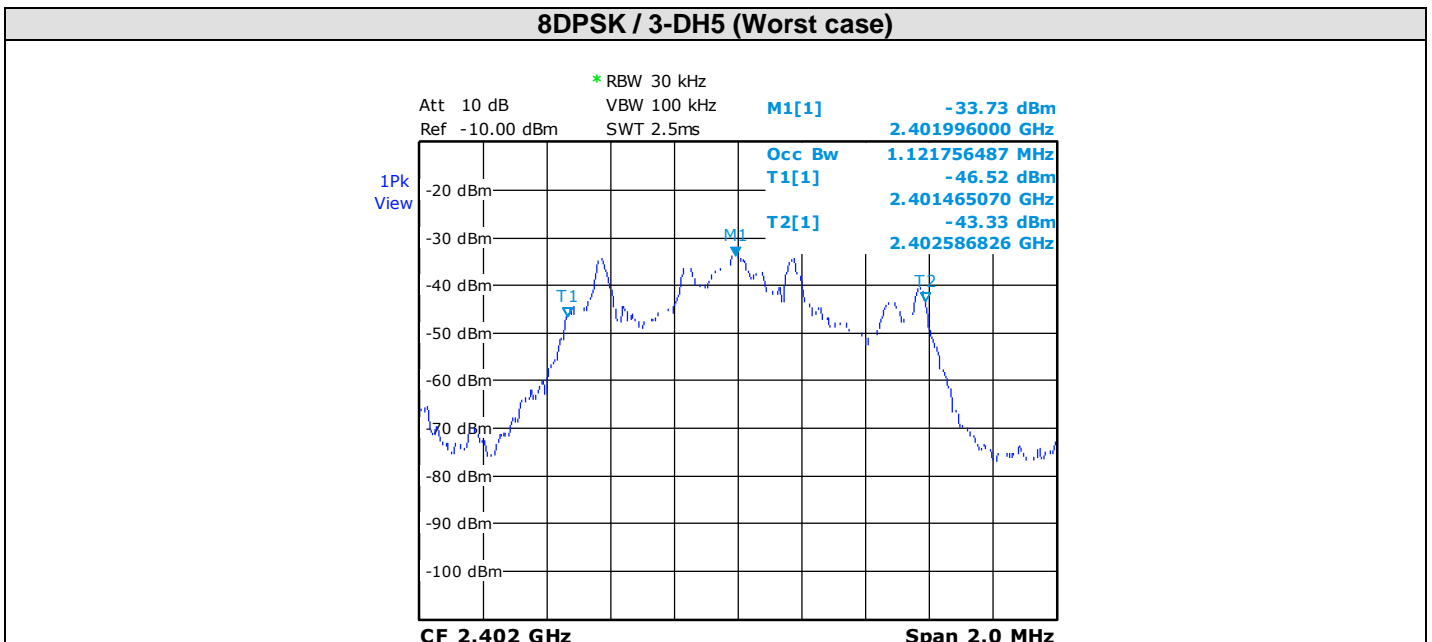

Measured occupied bandwidth is **1.122MHz**, same results following channel.

Measurement settings:

RBW = 30kHz / Video BW = 100kHz / SPAN = 2MHz


The occupied bandwidth is measured with OBW 99% function of spectrum analyzer.



11. ANNEX 1 (GRAPHS)

CONDUCTED EMISSIONS		
Graph name :	Emc#1	Test configuration:
Limit :	EN 55022	CAM0+Hopping mode
Class :	B	


PARAMETERS			
Voltage / Frequency :	110VAC/60Hz	Legend:	
Line :	Phase 1	Peak Measure	Average Measure
RBW :	9kHz		
VBW :	30kHz	QPeak Limit	Average Limit
Frequency :	150kHz- 30MHz		

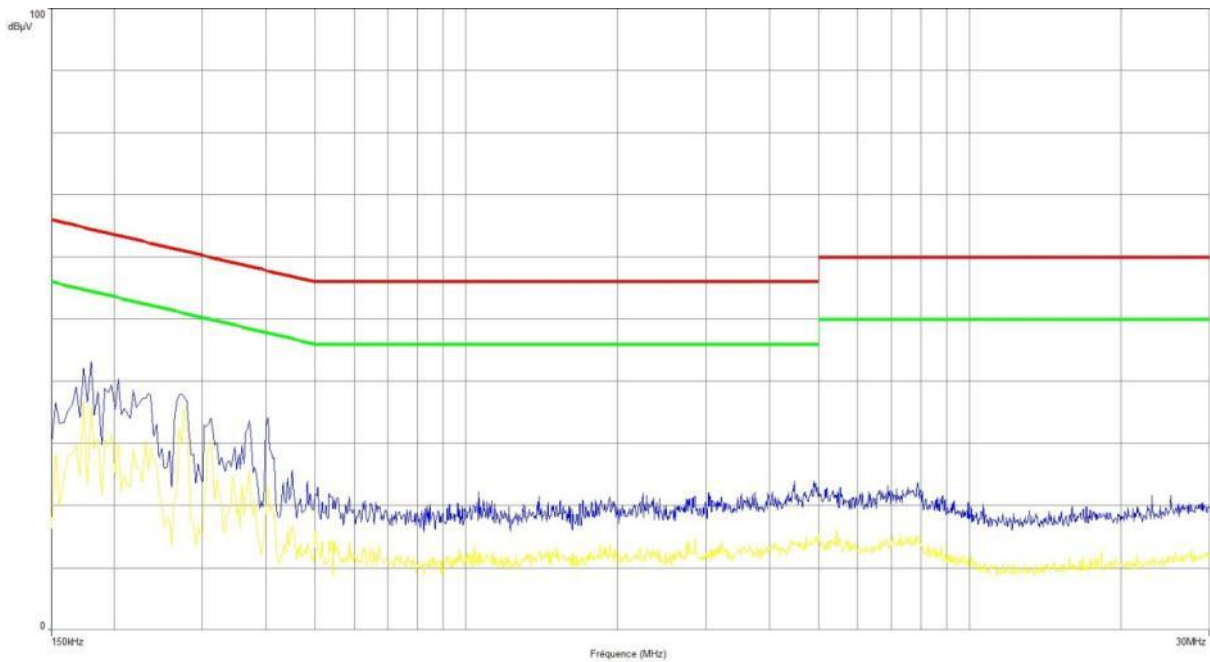




CONDUCTED EMISSIONS		
Graph name :	Emc#2	Test configuration:
Limit :	EN 55022	CAM0+Hopping mode
Class :	B	

PARAMETERS			
Voltage / Frequency :	110VAC/60Hz	Legend:	
Line :	Neutral	 Peak Measure	 Average Measure
RBW :	9kHz	 QPeak Limit	 Average Limit
VBW :	30kHz		
Frequency :	150kHz- 30MHz		

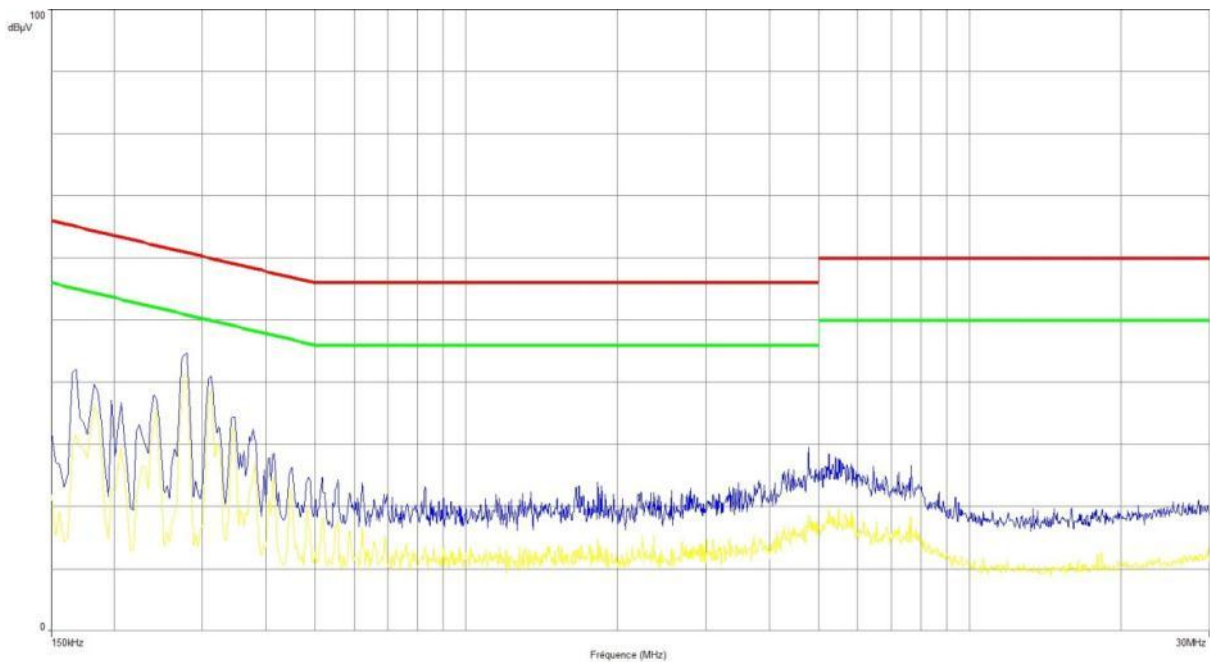




RADIATED EMISSIONS		
Graph name :	Emr#1	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Alone
Class :	-	Axis Z - (0°) Worst case
PARAMETERS		
Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	9kHz - 30MHz	

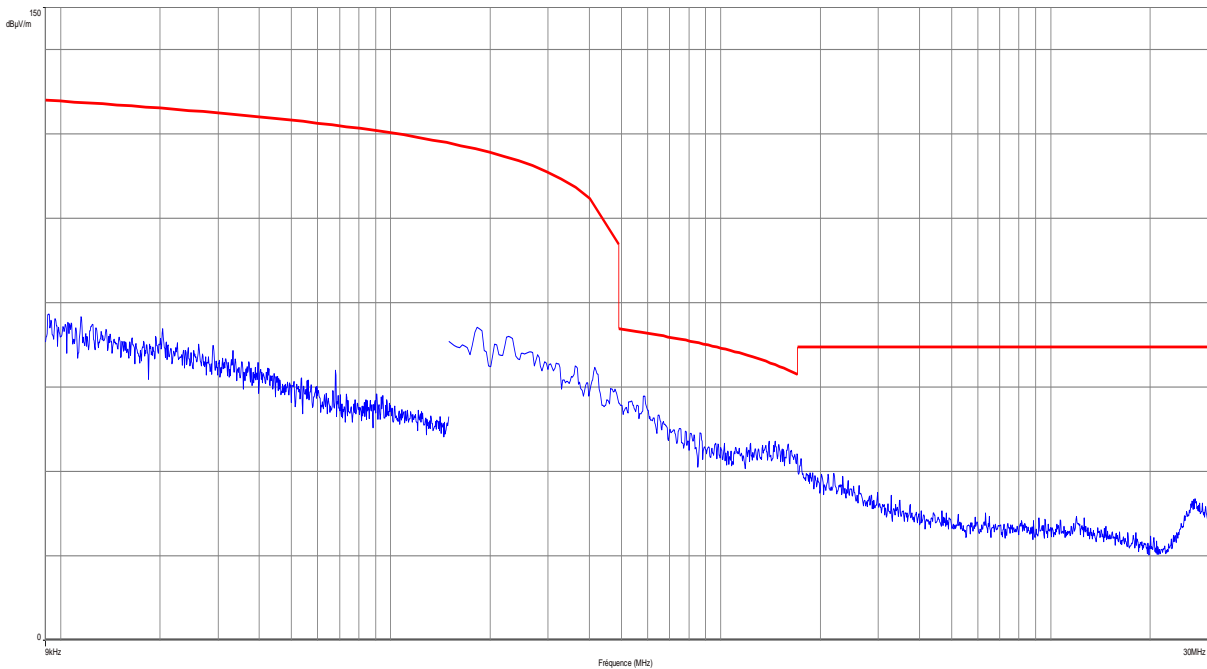




RADIATED EMISSIONS		
Graph name :	Emr#2	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis XY - Alone
Class :	-	
PARAMETERS		
Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

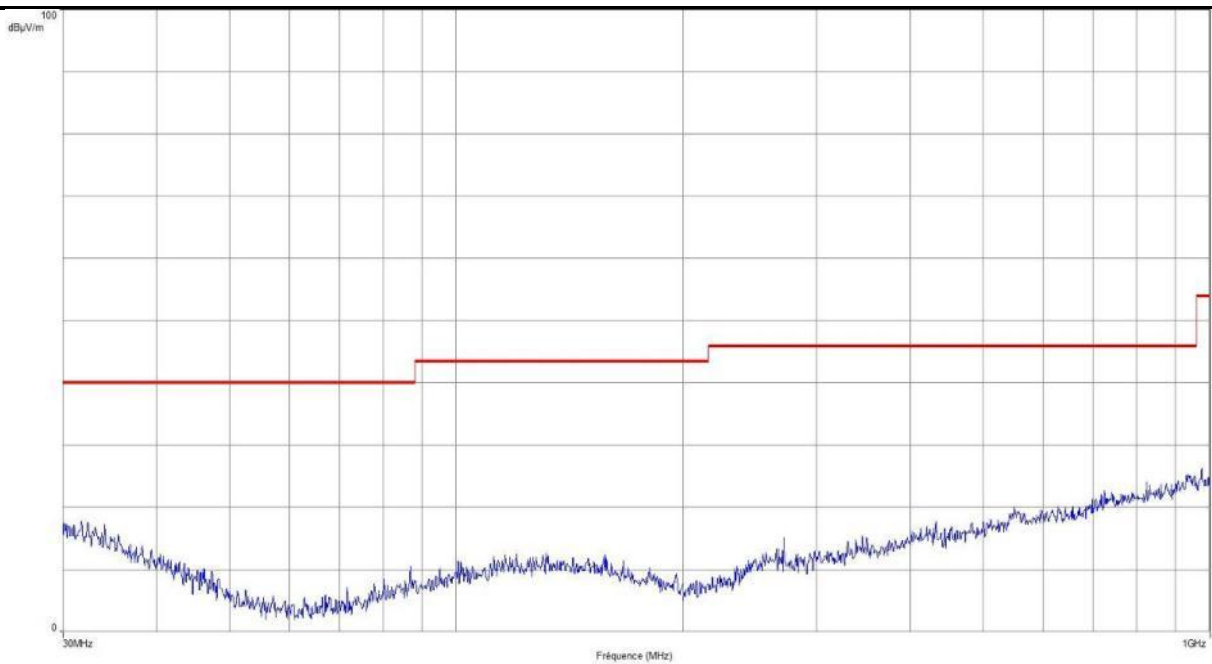

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#3	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis XY - Alone
Class :	-	
PARAMETERS		
Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

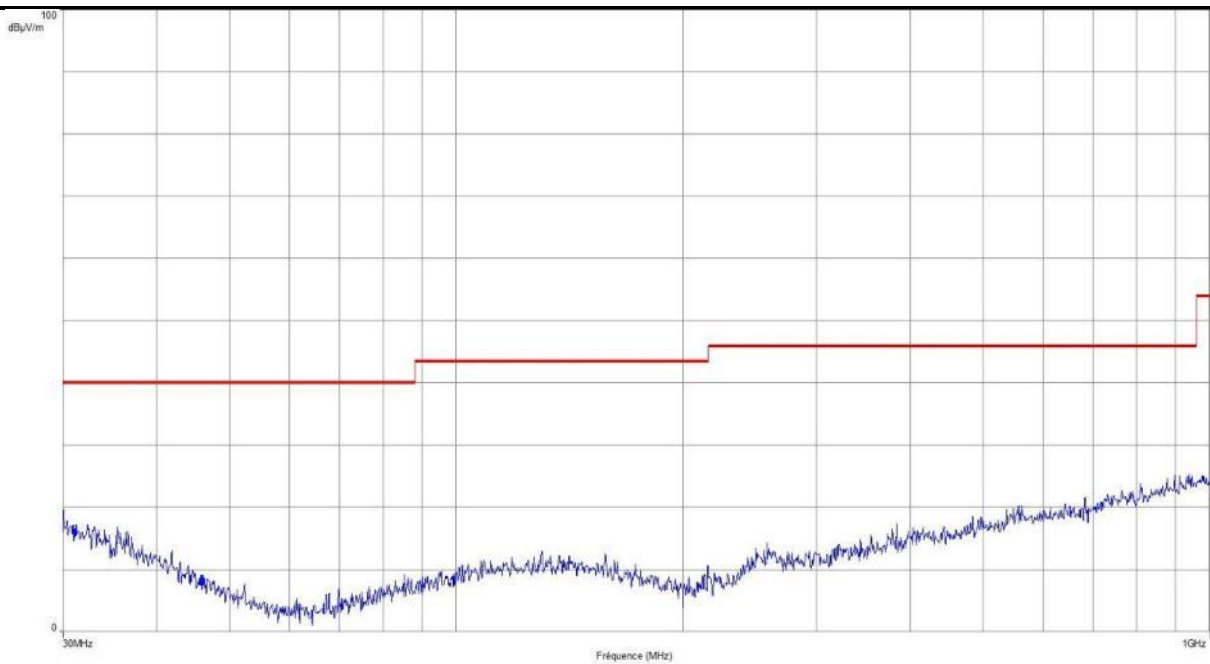

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#4	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis Z - Alone
Class :	-	
PARAMETERS		
Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

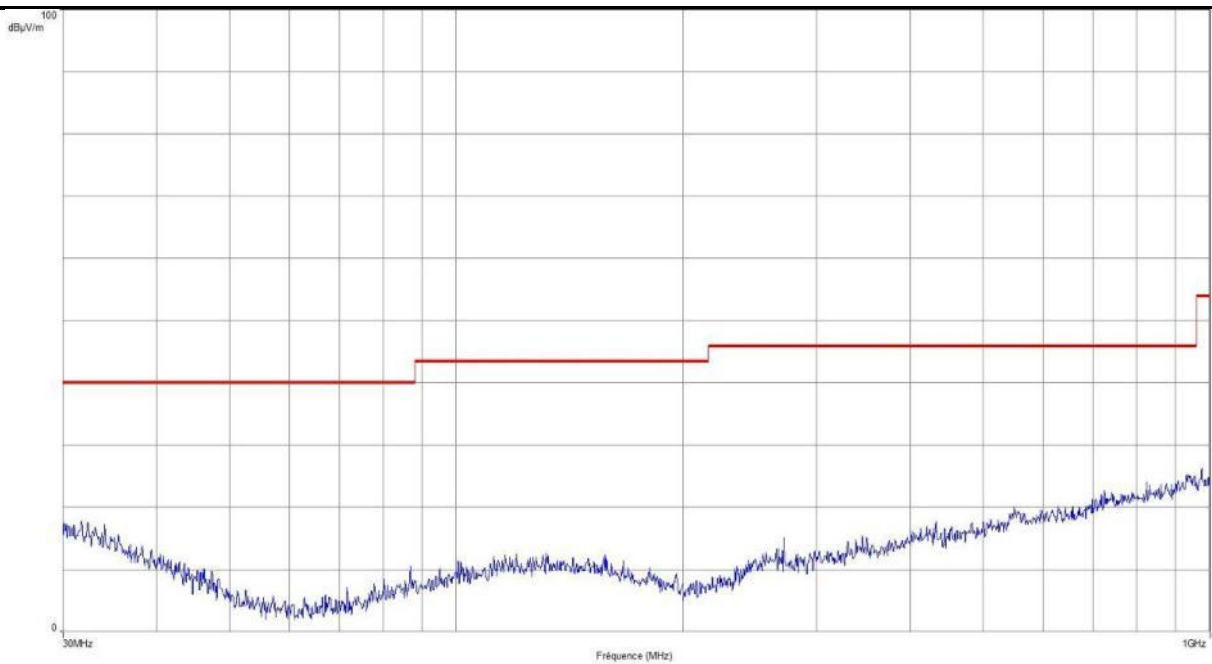

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#5	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis Z - Alone
Class :	-	
PARAMETERS		
Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

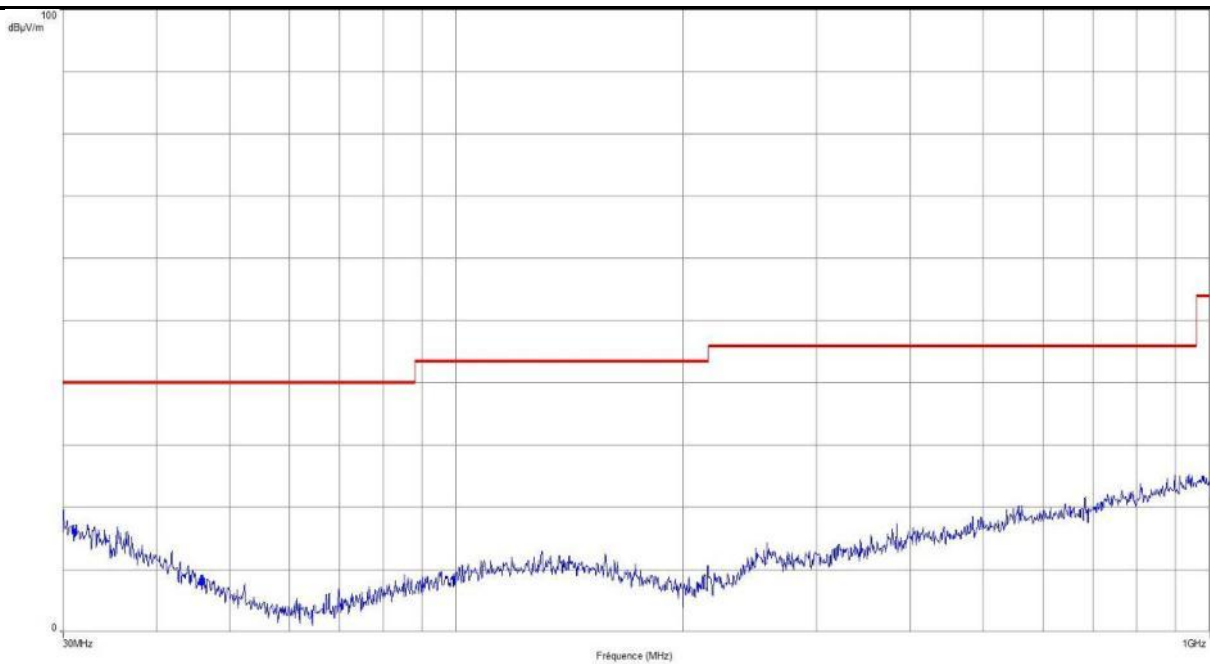

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#6	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 – USB (Load)
Class :	-	Axis Z - (0°) Worst case
PARAMETERS		
Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	9kHz - 30MHz	

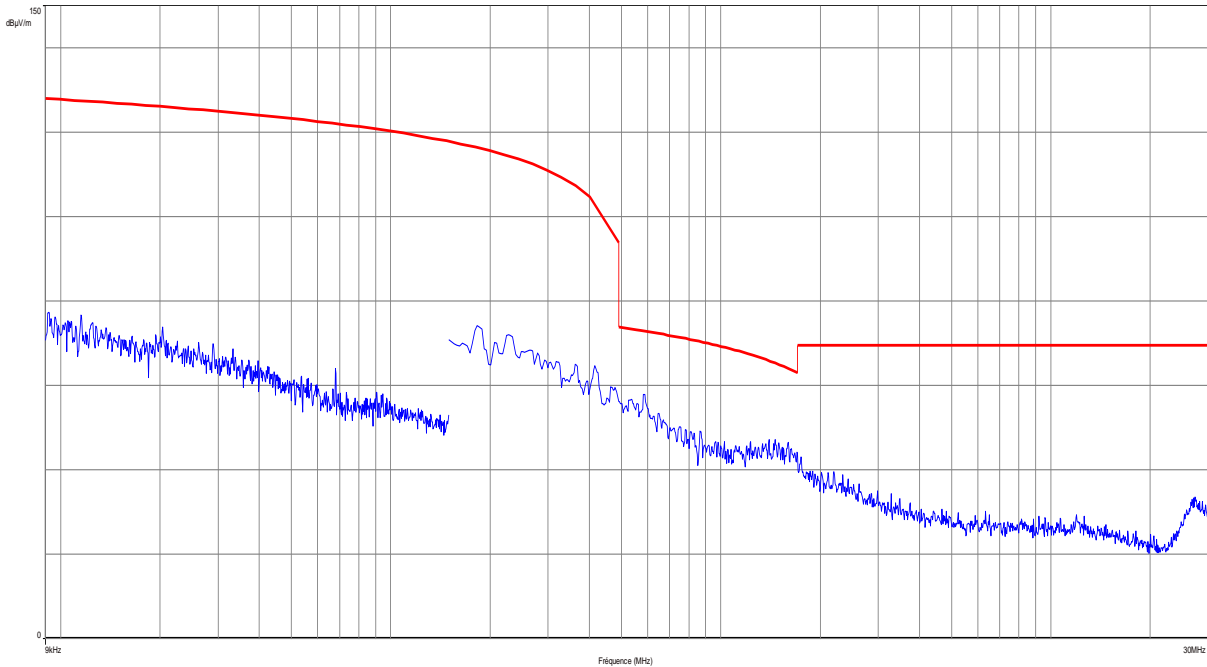




RADIATED EMISSIONS		
Graph name :	Emr#7	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis XY - USB (Load)
Class :	-	
PARAMETERS		
Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

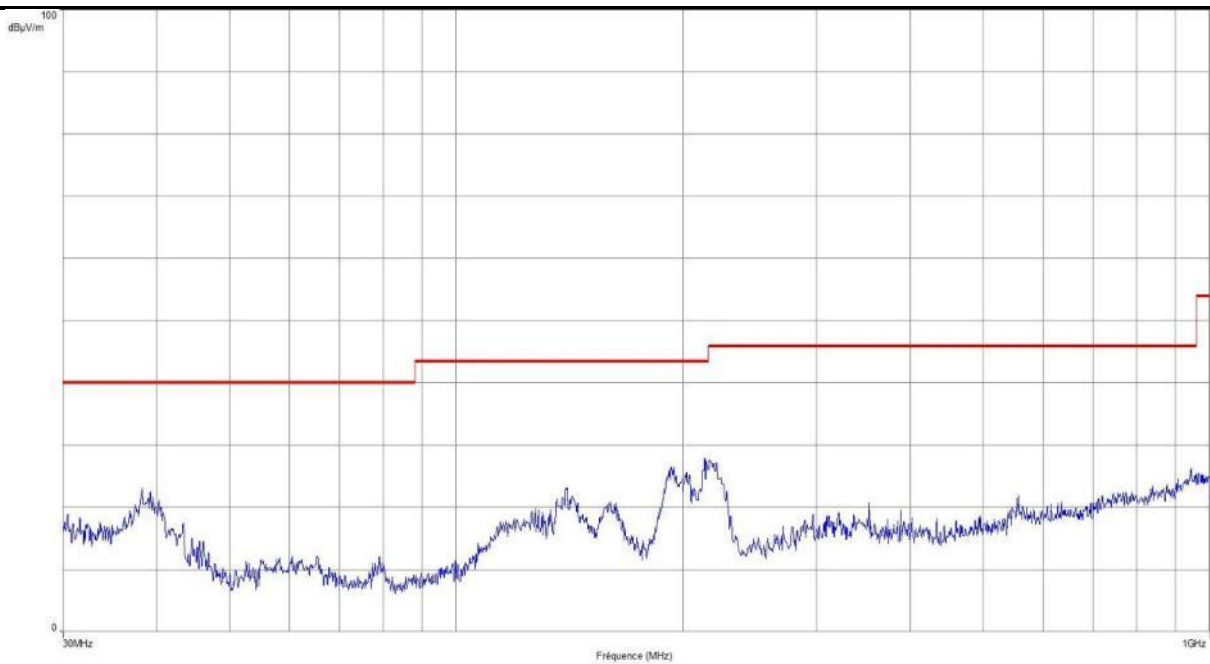

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#8	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis XY - USB (Load)
Class :	-	
PARAMETERS		
Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

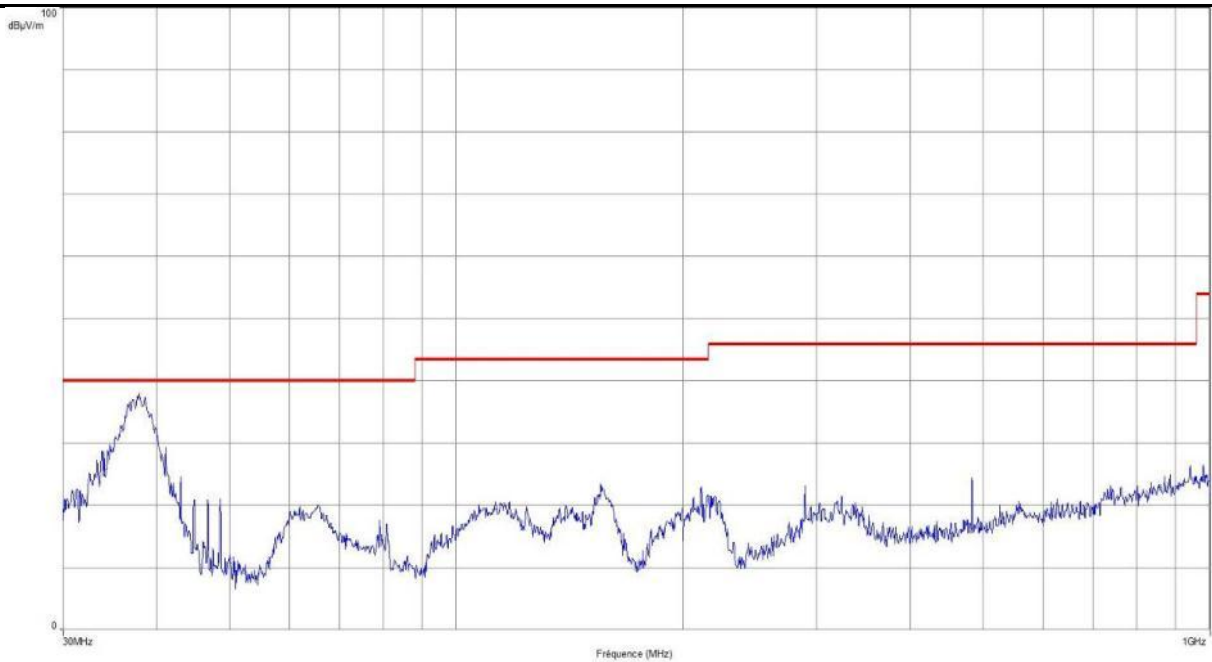

Frequency (MHz)	Peak Level (dBµV/m)
37.905	37.95




RADIATED EMISSIONS		
Graph name :	Emr#9	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis Z - USB (Load)
Class :	-	
PARAMETERS		
Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

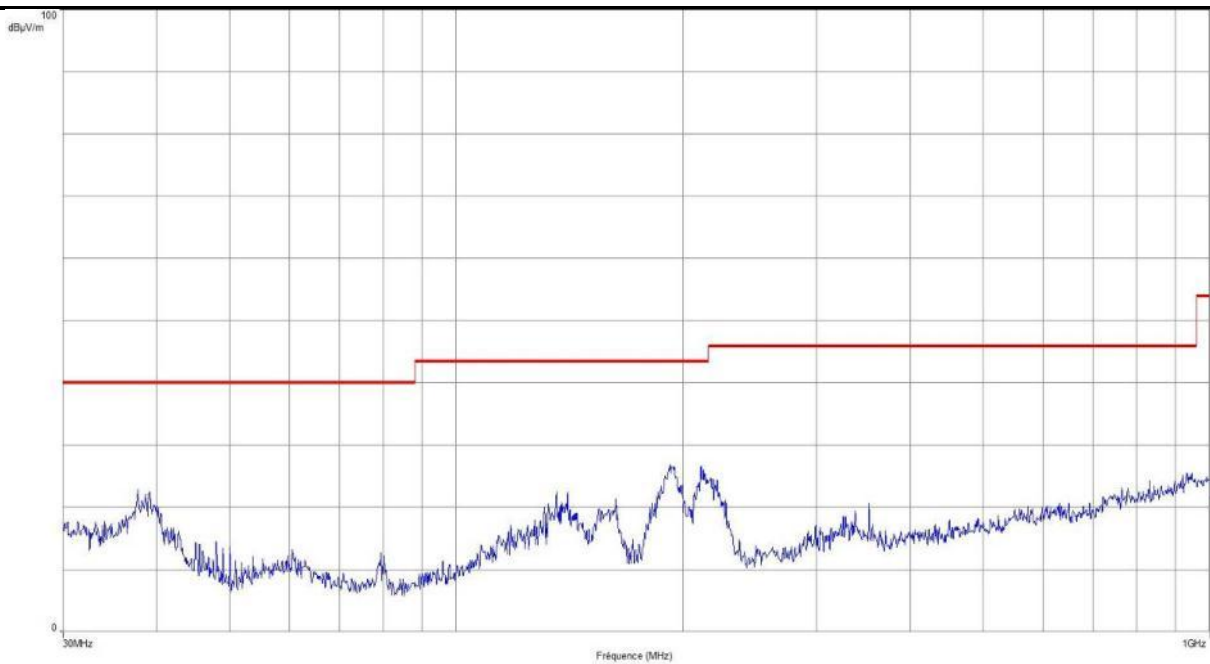

Frequency (MHz)	Peak Level (dBµV/m)
No significant frequency observed	




RADIATED EMISSIONS		
Graph name :	Emr#10	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Axis Z - USB (Load)
Class :	-	
PARAMETERS		
Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

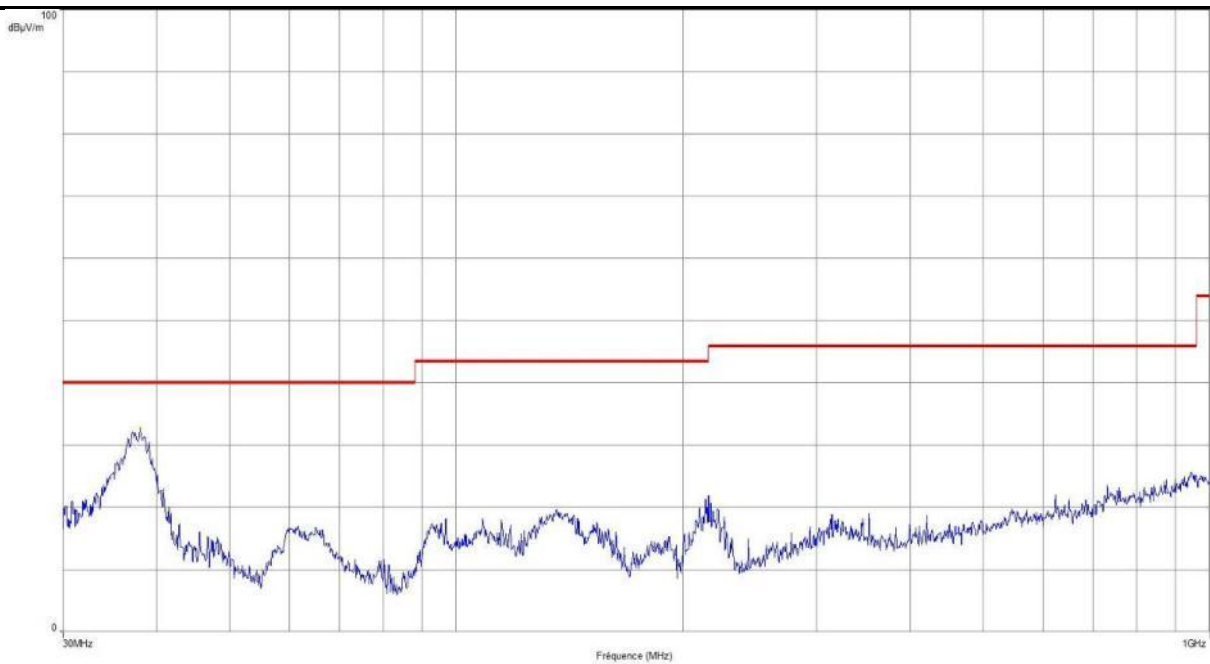

Frequency (MHz)	Peak Level (dBµV/m)
38.041	32.75



RADIATED EMISSIONS		
Graph name :	Emr#11	Test configuration:
Limit :	FCC Part15C	Bluetooth - CAM0 - Laptop
Class :	-	Axis Z - (0°) Worst case
PARAMETERS		
Antenna polarization:	0°	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	9kHz - 30MHz	

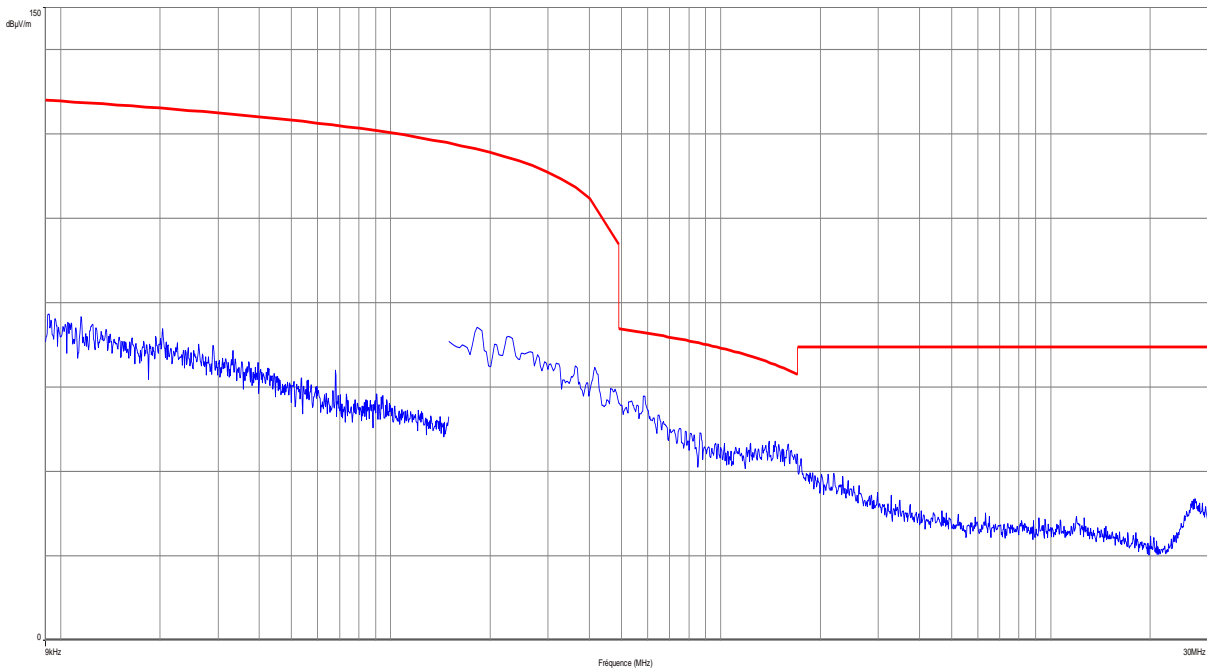




RADIATED EMISSIONS

Graph name :	Emr#12	Test configuration:
Limit :	FCC Part15C	Bluetooth – CAM0 - Axis XY - Laptop
Class :	-	

PARAMETERS

Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

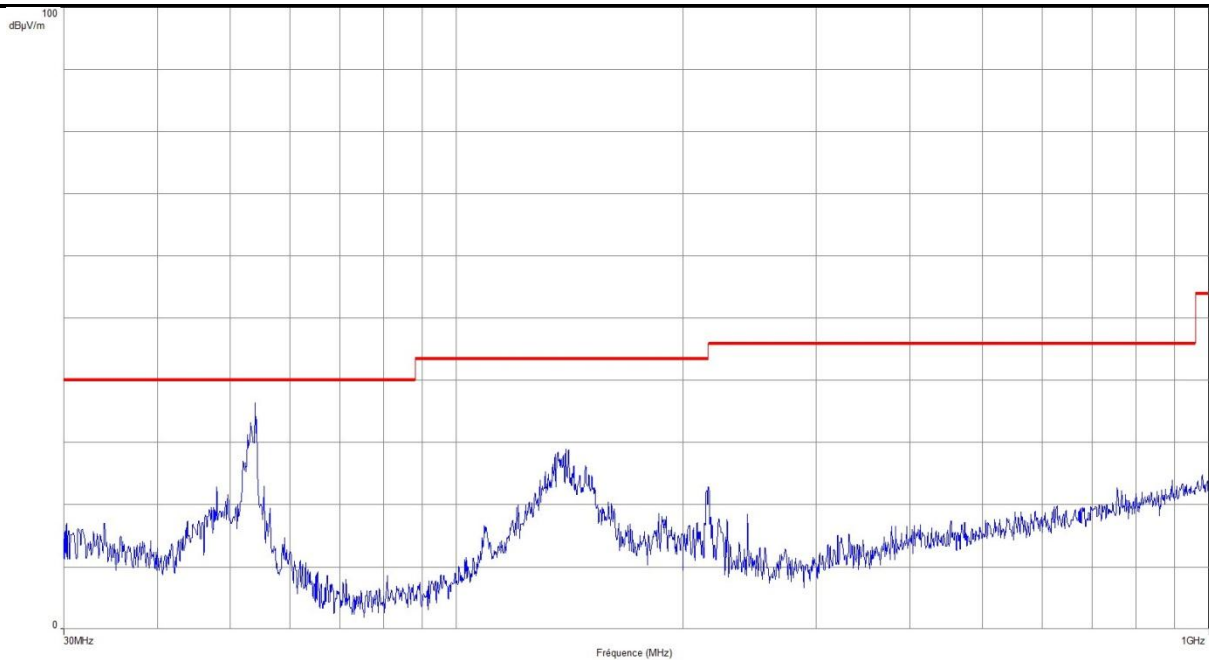

Frequency (MHz)	Peak Level (dBµV/m)
53.987	36.4




RADIATED EMISSIONS

Graph name :	Emr#13	Test configuration:
Limit :	FCC Part15C	Bluetooth – CAM0 - Axis XY - Laptop
Class :	-	

PARAMETERS

Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

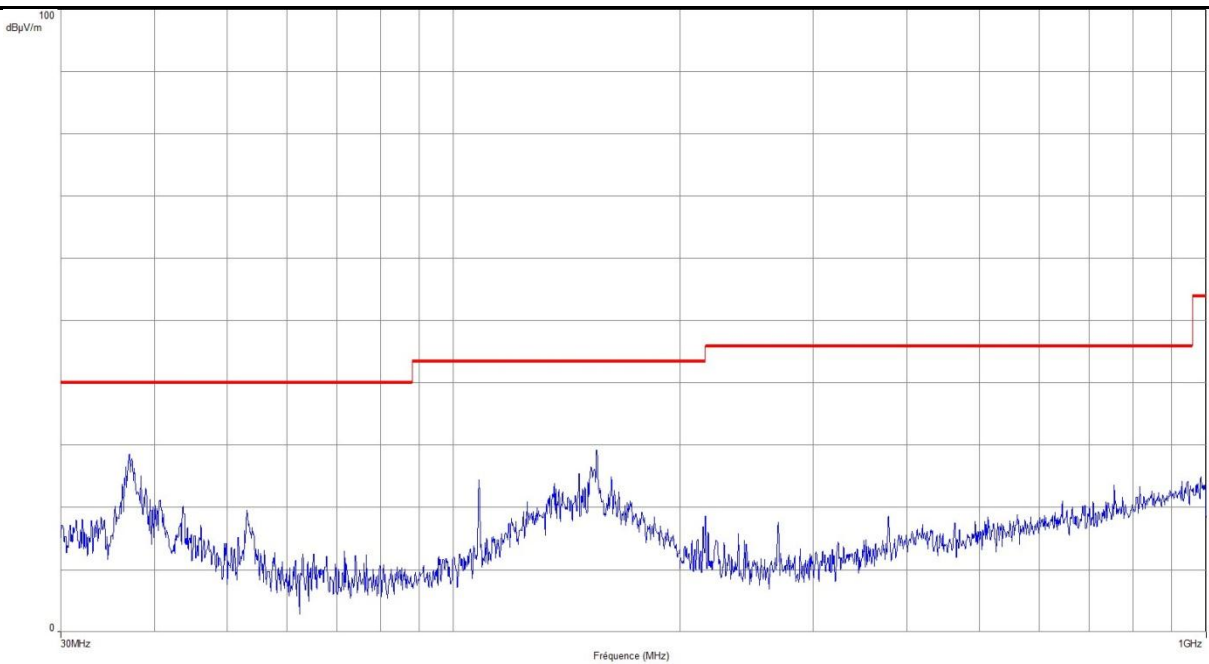




RADIATED EMISSIONS

Graph name :	Emr#14	Test configuration:
Limit :	FCC Part15C	Bluetooth – CAM0 - Axis Z - Laptop
Class :	-	

PARAMETERS


Antenna polarization:	Horizontal	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

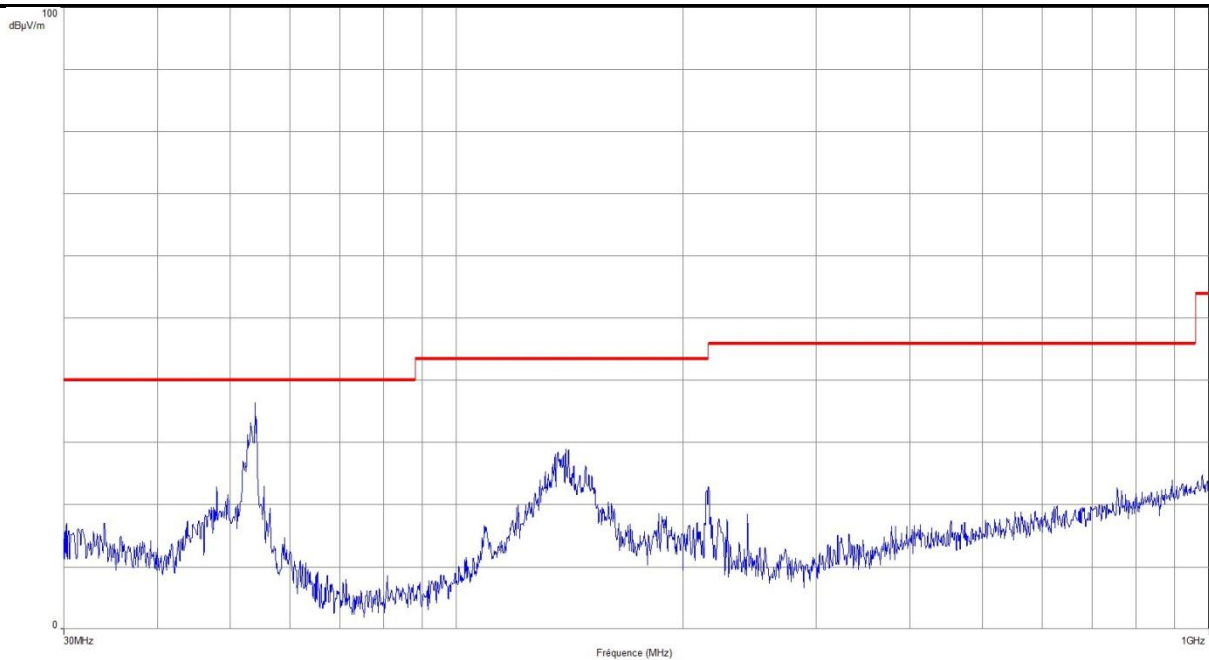

Frequency (MHz)	Peak Level (dBµV/m)
53.974	33.4



RADIATED EMISSIONS		
Graph name :	Emr#15	Test configuration:
Limit :	FCC Part15C	Bluetooth – CAM0 - Axis Z - Laptop
Class :	-	
PARAMETERS		
Antenna polarization:	Vertical	Legend:
Azimuth :	0° - 360°	█ Peak Measure
RBW :	100kHz	█ QPeak Limit@3m
VBW :	300kHz	
Frequency :	30MHz - 1GHz	

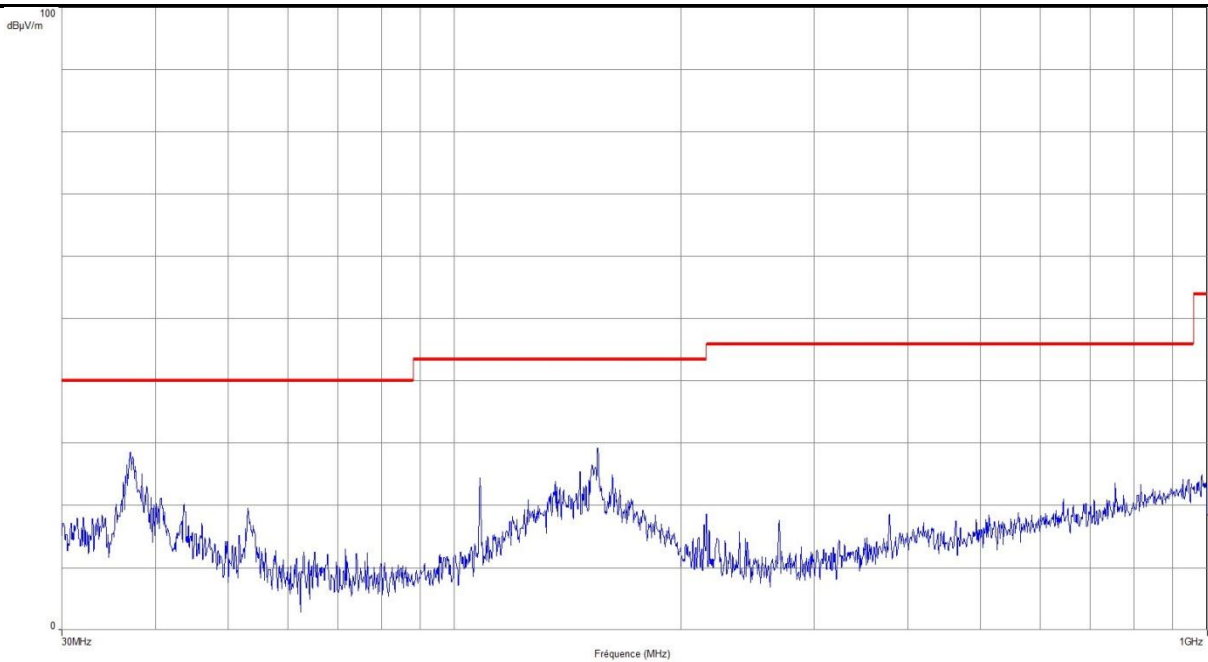



12. UNCERTAINTIES CHART

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) ± x	Incertitude limite du CISPR / CISPR uncertainty limit ± y
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.