



SAR Test Report

FOR:

Manufacturer: Ingenico
Model Name: IMP350-01T1496A
FCC ID: XKB-IMP3YYW
IC ID: 2586D-IMP3YY

Test Report #: SAR_CETE4_014_11001_1496A_rev5

Date of Report: 2012-03-28



FCC Listed #:
A2LA Accredited

IC Recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686



TABLE OF CONTENTS

1. Assessment.....	4
2. Administrative Data	5
2.1. Identification of the Testing Laboratory Issuing the SAR Test Report.....	5
2.2. Identification of the Client	5
2.3. Identification of the Manufacturer	5
3. Equipment under Test (EUT)	6
3.1. Specification of the Equipment under Test	6
3.2. Identification of the Equipment Under Test (EUT).....	6
3.3. Identification of Accessory equipment.....	6
4. Subject of Investigation	7
4.1. The IEEE Standard C95.1 and the FCC Exposure Criteria.....	7
4.2. Distinction Between Exposed Population, Duration of Exposure and Frequencies	7
4.3. Distinction between Maximum Permissible Exposure and SAR Limits.....	8
4.4. SAR Limit.....	8
5. The FCC Measurement Procedure and IC Measurement Procedure	9
5.1. General Requirements.....	9
5.2. Body-worn and Other Configurations.....	9
5.3. Procedure for assessing the peak spatial-average SAR.....	10
5.4. Determination of the largest peak spatial-average SAR	12
6. The Measurement System	13
6.1. Robot system specification	13
6.2. Isotropic E-Field Probe for Dosimetric Measurements	14
6.3. Data Acquisition Electronics.....	14
6.4. Phantoms	14



6.5. Interpolation and Extrapolation schemes.....	14
7. <i>Uncertainty Assessment</i>	15
7.1. Measurement Uncertainty Budget	15
8. <i>Test results summary</i>	16
8.1. Conducted Average Output Power	16
8.2. Test Positions and Configurations.....	16
8.3. Stand-Alone SAR Evaluation Exclusions	17
8.4. Simultaneous Transmission SAR Evaluation Exclusion	17
8.5. SAR Results for Body	18
8.5.1. EUT with Barcode Reader	18
8.5.2. EUT without Barcode Reader	18
8.6. Dipole verification.....	19
9. <i>References</i>	20
10. <i>Report History</i>	21



1. Assessment

The following device was tested against the limits for general population uncontrolled exposure specified in FCC 2.1093 and RSS 102, Issue 4. The device was tested according to measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and IEEE 1528:2003, and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Ingenico	EMV mobile payment terminal for iPod. It supports universal payments like EMV chip and pin, magnetic strip and contactless card support.	IMP350-01T1496A

Responsible for Testing Laboratory:

2012-03-28	Compliance	Sajay Jose (Test Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2012-03-28	Compliance	Josie Sabado (Project Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2. Administrative Data

2.1. Identification of the Testing Laboratory Issuing the SAR Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Director:	Heiko Strehlow
Responsible Project Leader:	Josie Sabado

2.2. Identification of the Client

Applicant's Name:	Ingenico
Street Address:	1 rue Claude Chappe BP346
City/Zip Code	GUILHERAND-GRANGES, 07503
Country	France
Contact Person:	Marc Delorme
Phone No.	+33 475602285
Fax:	+33 475814157
e-mail:	marc.delorme@ingenico.com

2.3. Identification of the Manufacturer

Manufacturer's Name:	JABIL VIETNAM CO, LTD
Manufacturers Address:	F02, LOT I4, LE VAN VIET STREET, SAIGON HITECH PARK, DISTRICT 9
City/Zip Code	HO CHI MINH CITY
Country	VIETNAM

3. Equipment under Test (EUT)

3.1. Specification of the Equipment under Test

Product Type:	Portable
RF Exposure Environment:	General / Uncontrolled
Exposure Conditions:	Body worn
Marketing Name:	ISMP
Model No:	IMP350-01T1496A
Supported Radios¹:	Bluetooth Near Field Communications
FCC-ID:	XKB-IMP3YYW
IC-ID :	2586D-IMP3YY
Antenna Type:	Internal
Maximum Conducted Output Power:	802.11b: 16.9 dBm 802.11g: 16.78 dBm 802.11n: 16.58 dBm

Notes:

1. EUT can be used with a 4th generation iPod Touch from Apple, Inc. See section 4.

3.2. Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Comments
1	11264PP60002817	V4	0964	With barcode reader
2	11298PP60006741	V4	0964	Without barcode reader

3.3. Identification of Accessory equipment

AE #	Type	Manufacturer	Model	FCC ID
1	Portable Music Player	Apple, Inc.	4 th Generation iPod Touch	BCG-E2407

4. Subject of Investigation

The objective of the measurements done by Cetecom Inc. was the dosimetric assessment of one device. The tests were performed in configurations for devices operated next to a person's body. The examinations were carried out with the dosimetric assessment system DASY52 described in Section 6.

The EUT works exclusively with the 4th generation iPod Touch. No other iPod version can be used. The 4th generation iPod Touch from Apple Inc. has a WLAN radio and Bluetooth radio that can transmit while being used with the EUT. Guidance from the FCC can be found under the pre-TCB KDB inquiry.

4.1. The IEEE Standard C95.1 and the FCC Exposure Criteria

In the USA the recent FCC exposure criteria [FCC 2001] are based upon the IEEE Standard C95.1 [IEEE 1999]. The IEEE standard C95.1 sets limits for human exposure to radio frequency electromagnetic fields in the frequency range 3 kHz to 300 GHz.

4.2. Distinction Between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE 1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered. Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

4.3. Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{\partial T}{\partial t} \Big|_{t \rightarrow 0+}$$

The specific absorption rate describes the initial rate of temperature rise $\partial T / \partial t$ as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S , derived from the SAR limits. The limits for E , H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

4.4. SAR Limit

In this report the comparison between the American exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded.

Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR_{1g}) with the shape of a cube.

Standard	Status	SAR limit (W/kg)
IEEE C95.1	In force	1.6

Table 1: Relevant spatial peak SAR limit averaged over a mass of 1 g

5. The FCC Measurement Procedure and IC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and order on the 1st of August 1996 [FCC 1996], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and portable devices with FCC limits for human exposure to radiofrequency emissions [FCC 2001]. The following KDB Publications have also been used:

- 447498 – Mobile and portable device RF Exposure Procedures
- 648474 – SAR Evaluation Considerations for Handsets with Multiple Transmitters
- 248227 – SAR Measurement Procedures for 802.11 a/b/g Transmitters

The Industry Canada (IC) measurement procedure follows many of the same procedures as the FCC.

5.1. General Requirements

The test shall be performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity.

5.2. Body-worn and Other Configurations

Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

Test Position

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration. Devices with a headset output shall be tested with a connected headset.

Test to be Performed

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body. For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that

provides the closest spacing to the body must be tested. If the manufacturer provides none body-worn accessories a separation distance of 1.5 cm between the back of the device and the flat phantom is recommended. Other separation distances may be used, but they shall not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

5.3. Procedure for assessing the peak spatial-average SAR

Step 1: Power reference measurement:

Prior to the SAR test, a local SAR measurement should be taken at a user-selected spatial reference point to monitor power variations during testing. For example, this power reference point can be spaced 10 mm or less in the normal direction from the liquid-shell interface and within ± 10 mm transverse to the normal line at the ear reference point.

Step 2: Area scan

The measurement procedures for evaluating SAR associated with wireless handsets typically start with a coarse measurement grid in order to determine the approximate location of the local peak SAR values. This is referred to as the "area scan" procedure. The SAR distribution is scanned along the inside surface of typically half of the head of the phantom but at least larger than the areas projected (normal to the phantom's surface) by the handset and antenna. An example grid is given in Figure 4. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient precision. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. The resolution can also be tested using the functions in Annex E (see E.5.2). The approximate locations of the peak SARs should be determined from area scan. Since a given amplitude local peak with steep gradients may produce lower spatial-average SAR than slightly lower amplitude peaks with less steep gradients, it is necessary to evaluate the other peaks as well. However, since the spatial gradients of local SAR peaks are a function of wavelength inside the tissue simulating liquid and incident magnetic field strength, it is not necessary to evaluate peaks that are less than -2 dB of the local maximum. Two-dimensional spline algorithms [Press, et al, 1996], [Brishoual, 2001] are typically used to determine the peaks and gradients within the scanned area. If the peak is closer than one-half of the linear dimension of the 1 g or 10 g tissue cube

to the scan border, the measurement area should be enlarged if possible, e.g., by tilting the probe or the phantom (see Figure 5).

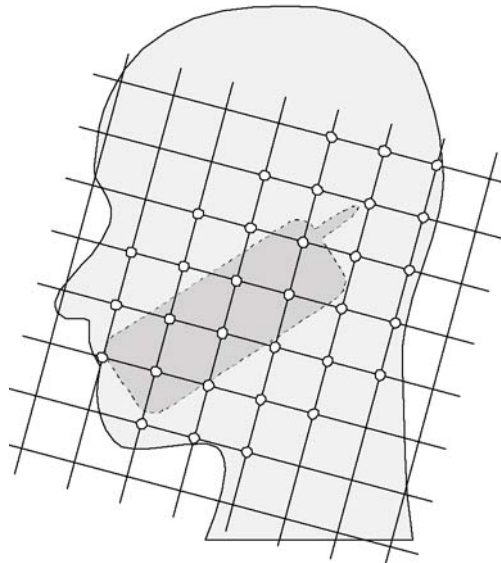


Figure 4 – Example of an area scan including the position of the handset. The scanned area (white dots) should be larger than the area projected by the handset and antenna.

Step 3: Zoom scan

In order to assess the peak spatial SAR values averaged over a 1 g and 10 g cube, fine resolution volume scans, called "zoom scans", are performed at the peak SAR locations determined during the "area scan." The zoom scan volume should have at least 1.5 times the linear dimension of either a 1 g or a 10 g tissue cube for whichever peak spatial-average SAR is being evaluated. The peak local SAR locations that were determined in the area scan (interpolated value) should be on the centerline of the zoom scans. The centerline is the line that is normal to the surface and in the center of the volume scan. If this is not possible, the zoom scan can be shifted but not by more than half the dimension of the 1 g or a 10 g tissue cube.

The maximum spatial-average SAR is determined by a numerical analysis of the SAR values obtained in the volume of the zoom scan, whereby interpolation (between measured points) and extrapolation (between surface and closest measured points) routines should be applied. A 3-D-spline algorithm [Press, et al, 1996], [Kreyszig, 1983], [Brishoual, 2001] can be used for interpolation and a trapezoidal algorithm for the integration (averaging). Scan resolutions of larger than 2 mm can be used provided the uncertainty is evaluated according to E (see E.5).

In some areas of the phantom, such as the jaw and upper head region, the angle of the probe with respect to the line normal to the surface might become large, e.g., at angles larger than $\pm 30^\circ$ (see Figure 5), which may increase the boundary effect to an unacceptable level. In these cases, a change in the orientation of the probe and/or the phantom is recommended during the zoom scan so that the angle between the probe housing tube and the line normal to the surface is significantly reduced ($<30^\circ$).

Step 4: Power reference measurement

The local SAR should be measured at exactly the same location as in Step 1. The absolute value of the measurement drift (the difference between the SAR measured in Step 4 and Step 1) should be recorded in the uncertainty budget. It is recommended that the drift be kept within $\pm 5\%$. If this is not possible, even with repeat testing, additional information may be used to demonstrate the power stability during the test. Power reference measurements can be taken after each zoom scan, if more than one zoom scan is needed. However, the drift should always be referred to the initial state with fully charged battery.

5.4. Determination of the largest peak spatial-average SAR

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes should be tested for each frequency band according to steps 1 to 3 below.

Step 1: The tests should be conducted at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom,
- b) all configurations for each device position in (a), e.g. antenna extended and retracted, and
- c) all operational modes for each device position in (a) and configuration in (b) in each frequency band, e.g. analog and digital.

If more than three frequencies need to be tested, (i.e., $N_c > 3$), then all frequencies, configurations and modes must be tested for all of the above positions.

Step 2: For the condition providing highest spatial peak SAR determined in Step 1 conduct all tests at all other test frequencies, e.g. lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the spatial peak SAR value determined in Step 1 is within 3dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well¹.

Step 3: Examine all data to determine the largest value of the peak spatial-average SAR found in Steps 1 to 2.

6. The Measurement System

6.1. Robot system specification

The SAR measurement system being used is the SPEAG DASY52 system, which consists of a Stäubli TX90XL 6-axis robot arm and CS8c controller, SPEAG SAR Probe, Data Acquisition Electronics, and SAM Twin Phantom. The robot is used to articulate the probe to programmed positions inside the phantom to obtain the SAR readings from the EUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

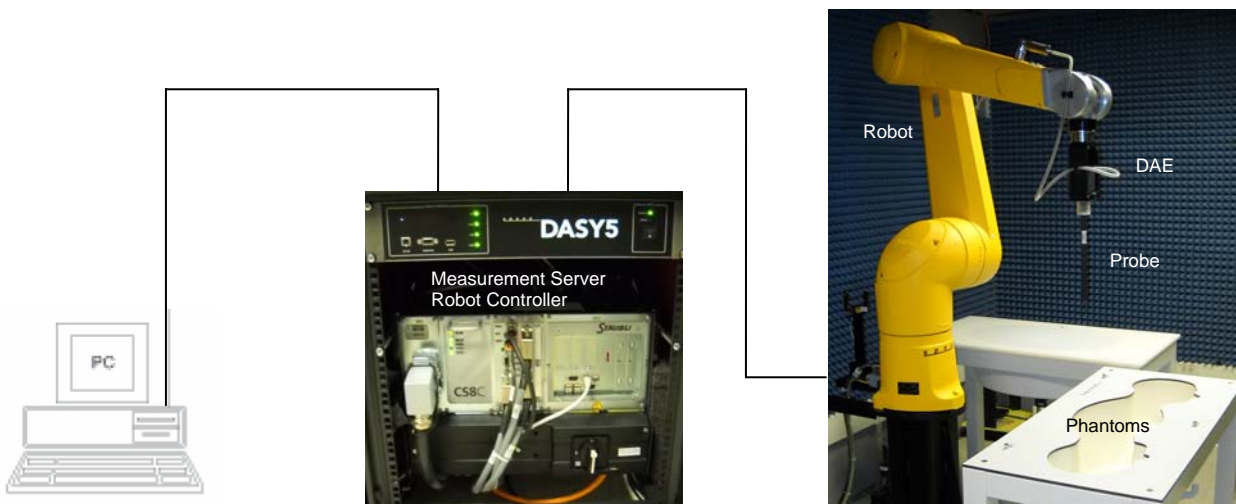


Figure 5: Schematic diagram of the SAR measurement system

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centered at that point to determine volume averaged SAR level.

6.2. Isotropic E-Field Probe for Dosimetric Measurements

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the probe's calibration certificate (see appendix C).

6.3. Data Acquisition Electronics

The DAE contains a signal amplifier, multiplexer, 16bit A/D converter and control logic. It uses an optical link for communication with the DASY5 system. The DAE has a dynamic range of -100 to 300 mV. It also contains a two step probe touch detector for mechanical surface detection and emergency robot stop.

6.4. Phantoms

The Twin SAM V4.0 Phantom is designed to specifications defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

Additionally, the Oval Flat ELI V4.0 Phantom is designed to specification defined in IEEE 1528 and IEC 62209-2. It enables the dosimetric evaluation of body mounted usage.

6.5. Interpolation and Extrapolation schemes

The interpolation, extrapolation and maximum search routines are all based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. The routines construct a once-continuously differentiable function that interpolates the measurement values.

7. Uncertainty Assessment

Measurement uncertainty values were evaluated for SAR measurements performed by Cetecom Inc. The uncertainty values for components specified in *FCC Supplement C (01-01) to OET Bulletin 65 (97-01)* were evaluated according to the procedures of *IEEE 1528-200X December 29, 2002, NIST 1297 1994 edition and ISO Guide to the Expression of Uncertainty in Measurements (GUM)*.

7.1. Measurement Uncertainty Budget

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g = c x f / e</i>	<i>k</i>
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1-g)	1-g u_i (±%)	<i>v_i</i>
Measurement System							
Probe Calibration	E2.1	5.5	N	1	1	5.5	∞
Axial Isotropy	E2.2	4.7	R	√3	0.7	1.9	∞
Hemispherical Isotropy	E2.2	9.6	R	√3	0.7	3.9	∞
Boundary Effect	E2.3	1.0	R	√3	1	0.6	∞
Linearity	E2.4	4.7	R	√3	1	2.7	∞
System Detection Limits	E2.5	1.0	R	√3	1	0.6	∞
Readout Electronics	E2.6	0.3	N	1	1	0.3	∞
Response Time	E2.7	0.8	R	√3	1	0.5	∞
Integration Time	E2.8	2.6	R	√3	1	1.5	∞
RF Ambient Noise	E6.1	3.0	R	√3	1	1.7	∞
RF Ambient Reflections	E6.1	3.0	R	√3	1	1.7	∞
Probe Positioner Mechanical Tolerance	E6.2	0.4	R	√3	1	0.2	∞
Probe Positioning with respect to Phantom Shell	E6.3	2.9	R	√3	1	1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	1.0	R	√3	1	0.6	∞
Test sample Related							
Test Sample Positioning	E4.2	2.9	N	1	1	2.9	145
Device Holder Uncertainty	E4.1	3.6	N	1	1	3.6	5
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	√3	1	2.9	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	4.0	R	√3	1	2.3	∞
Liquid Conductivity Target - tolerance	E3.2	5.0	R	√3	0.7	1.8	∞
Liquid Conductivity - measurement uncertainty	E3.3	2.5	N	1	0.7	1.6	∞
Liquid Permittivity Target tolerance	E3.2	5.0	R	√3	0.6	1.7	∞
Liquid Permittivity - measurement uncertainty	E3.3	2.5	N	1	0.6	1.5	∞
Combined Standard Uncertainty			RSS			± 10.7%	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)			<i>k</i> = 2.00705			± 21.4%	

8. Test results summary

8.1. Conducted Average Output Power

Measurement uncertainty for conducted measurements is ± 0.5 dB

WLAN

Channel	Frequency [MHz]	Average Power [dBm]		
		802.11b	802.11g	802.11n
1	2412	16.87	14.6	13.9
6	2437	16.9	16.78	16.58
11	2462	16.87	14.48	13.62

8.2. Test Positions and Configurations

SAR evaluation guidance from the FCC is from the pre-TCB KDB inquiry.

The EUT uses the WLAN radio of the iPod. There are two variants of the EUT. One variant includes a barcode reader and the second variant does not include a barcode reader. Full SAR evaluation for WLAN is conducted on the unit with barcode reader. A spotcheck measurement is conducted for on the unit without barcode reader for the position that had the highest SAR value for tests with barcode reader.

Body positions are front and back of EUT with 0mm air gap between the EUT and SAR phantom. See Appendix B for test setup photos.

WLAN is tested on the channel with the highest measured conducted average power.

WLAN is tested with 100% duty cycle. Test software is used to enable the WLAN radio on the iPod to force a continuous transmission at a single channel. According to SPEAG user manual section 27.2, CW can be assumed which results in crest factor 1.

If the SAR value on the middle channel was more than 3dB below the limit, high and low channels were not evaluated.

8.3. Stand-Alone SAR Evaluation Exclusions

SAR evaluation for 802.11g and 802.11n channels is not required when the maximum average output power is less than $\frac{1}{4}$ dB higher than that measured on the corresponding 802.11b channels.

SAR evaluation for the 4th generation iPod Touch Bluetooth radio is not required because the conducted average output power is less than $60/f_{(GHz)}$. Refer to SAR test report number 10U13294-16C issued by Compliance Certification Services on August 27, 2010 for FCC ID BCG-E2407.

SAR evaluation for the ISMP Bluetooth radio is not required because the conducted output power is less than $60/f_{(GHz)}$. Refer to the FCC part 15.247 test report.

SAR evaluation for the ISMP RFID is not required because SAR requirements have not been established at 13.56MHz.

8.4. Simultaneous Transmission SAR Evaluation Exclusion

Simultaneous Transmission Modes

- RFID + iPod Touch Wifi
- RFID + iPod Touch Bluetooth
- ISMP Bluetooth + RFID

According to KDB 648474, SAR evaluation for simultaneous transmissions can be excluded when specific requirements are satisfied. When stand-alone SAR evaluation is not required, the SAR value for that antenna is assumed to be 0.0 W/kg. The only antenna required for stand-alone SAR evaluation is the iPod Touch WLAN antenna. SAR evaluation for simultaneous transmission is not required because the sum of 1g SAR values for antenna pairs which transmit simultaneously is less than 1.6 W/kg.

8.5. SAR Results for Body

8.5.1. EUT with Barcode Reader

Band	Operation Mode	Channel	Frequency (MHz)	Position	SAR 1g (W/kg)	Area Scan (Appendix A)	Positioning Photo (Appendix B)
WLAN 802.11b	100% Duty Cycle	6	2437	Back 0mm	1.27	Plot 1	Photo 1
				Front 0mm	0.00382	Plot 2	Photo 2
		1	2412	Back 0mm	1.26	Plot 3	Photo 1
		11	2462	Back 0mm	1.2	Plot 4	Photo 1

8.5.2. EUT without Barcode Reader

Spot check measurement on position with highest SAR value in section 8.3.1 above

Band	Operation Mode	Channel	Frequency (MHz)	Position	SAR 1g (W/kg)	Area Scan (Appendix A)	Positioning Photo (Appendix B)
WLAN 802.11b	100% Duty Cycle	6	2437	Back 0mm	1.12	Plot 5	Photo 1

8.6. Dipole verification

Prior to formal testing at each frequency a system verification was performed in accordance with IEEE 1528. The 1 Watt reference SAR value is taken from the SPEAG dipole calibration report as required by FCC KDB 450824 D01. All of the testing described in this report was performed within 24 hours of the system verification. The following results were obtained:

Date	Frequency (MHz)	CW input at dipole feed (Watts)	1g SAR (W/kg)	1 Watt reference SAR value (W/kg)	Difference reference SAR value to normalized SAR	Area scan (Appendix A)
2012-01-23	2450	1	50	50.8	-1.57%	Plot 6

9. References

1. [FCC 2001] Federal Communications Commission: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), FCC, 2001.
2. [IEEE 1999] IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 1999.
3. [IEEE 2003] IEEE Std 1528-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head From Wireless Communications Devices: Measurement Techniques. Inst. of Electrical and Electronics Engineers, Inc., 2003.
4. [NIST 1994] NIST: Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results, Technical Note 1297 (TN1297), United States Department of Commerce Technology Administration, National Institute of Standards and Technology, 1994.
5. [IC 2010] RSS-102: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), Industry Canada, 2010.

Test Report #: SAR_CETE4_014_11001_1496A_rev5

FCC ID: XKB-IMP3YYW

IC ID: 2586D-IMP3YY

Date of Report : 2012-03-28

Page 21 of 21



10. Report History

2011-10-05: Original Report.

2011-10-07: Replaces test report number SAR_CETE4_014_11001_1496A. Updated model number in section 3.

2012-01-27: Replaces test report number SAR_CETE4_014_11001_1496A_rev 1. Updated SAR values for 0mm distance.

2012-02-27: Replaces test report number SAR_CETE4_014_11001_1496A_rev 2. Changes according to TCB comments.

2012-03-21: Replaces test report number SAR_CETE4_014_11001_1496A_rev3. Changes according to FCC comments. Updated sections 3, 4, and 8.

2012-03-28: Replaces test report number SAR_CETE4_014_11001_1496A_rev4. Removed KDB inquiry tracking number.