


**PRODUCT LABELING**


**FCC ID / IC number label**

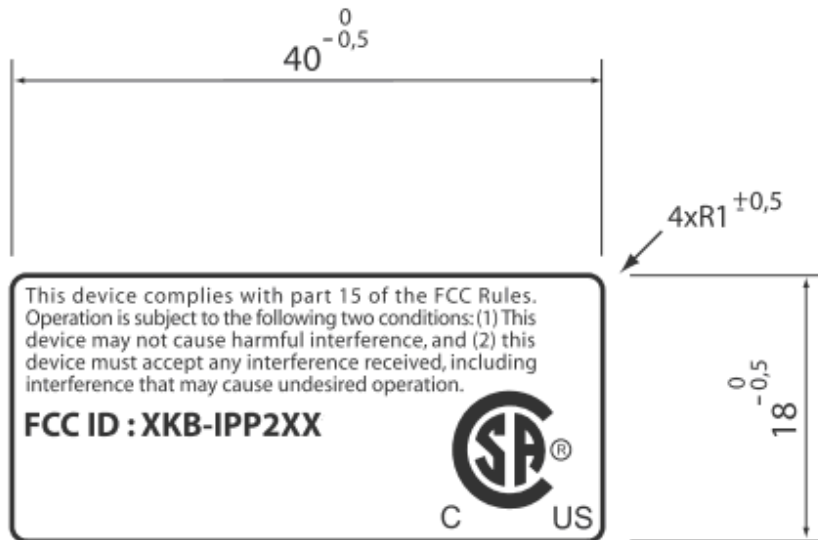


Color:White RAL9010

Adhésive one side: permanent UL969 certified

Material:Vynil or Polyester,thickness 50 to 100 m UL969 certified

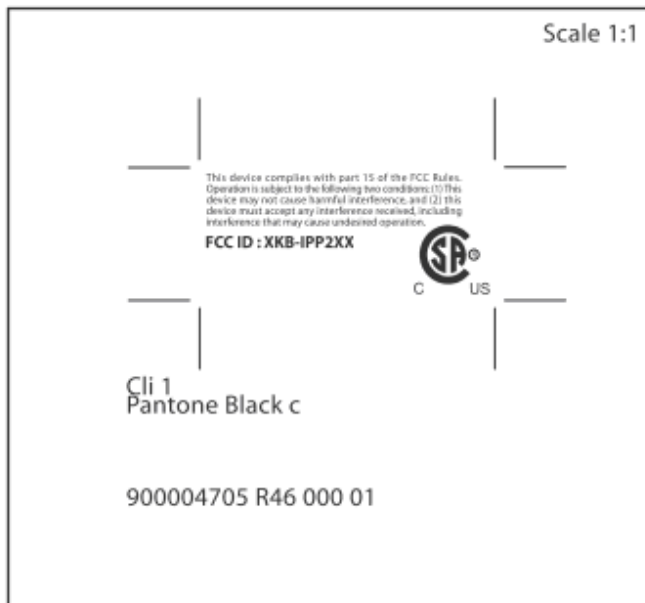

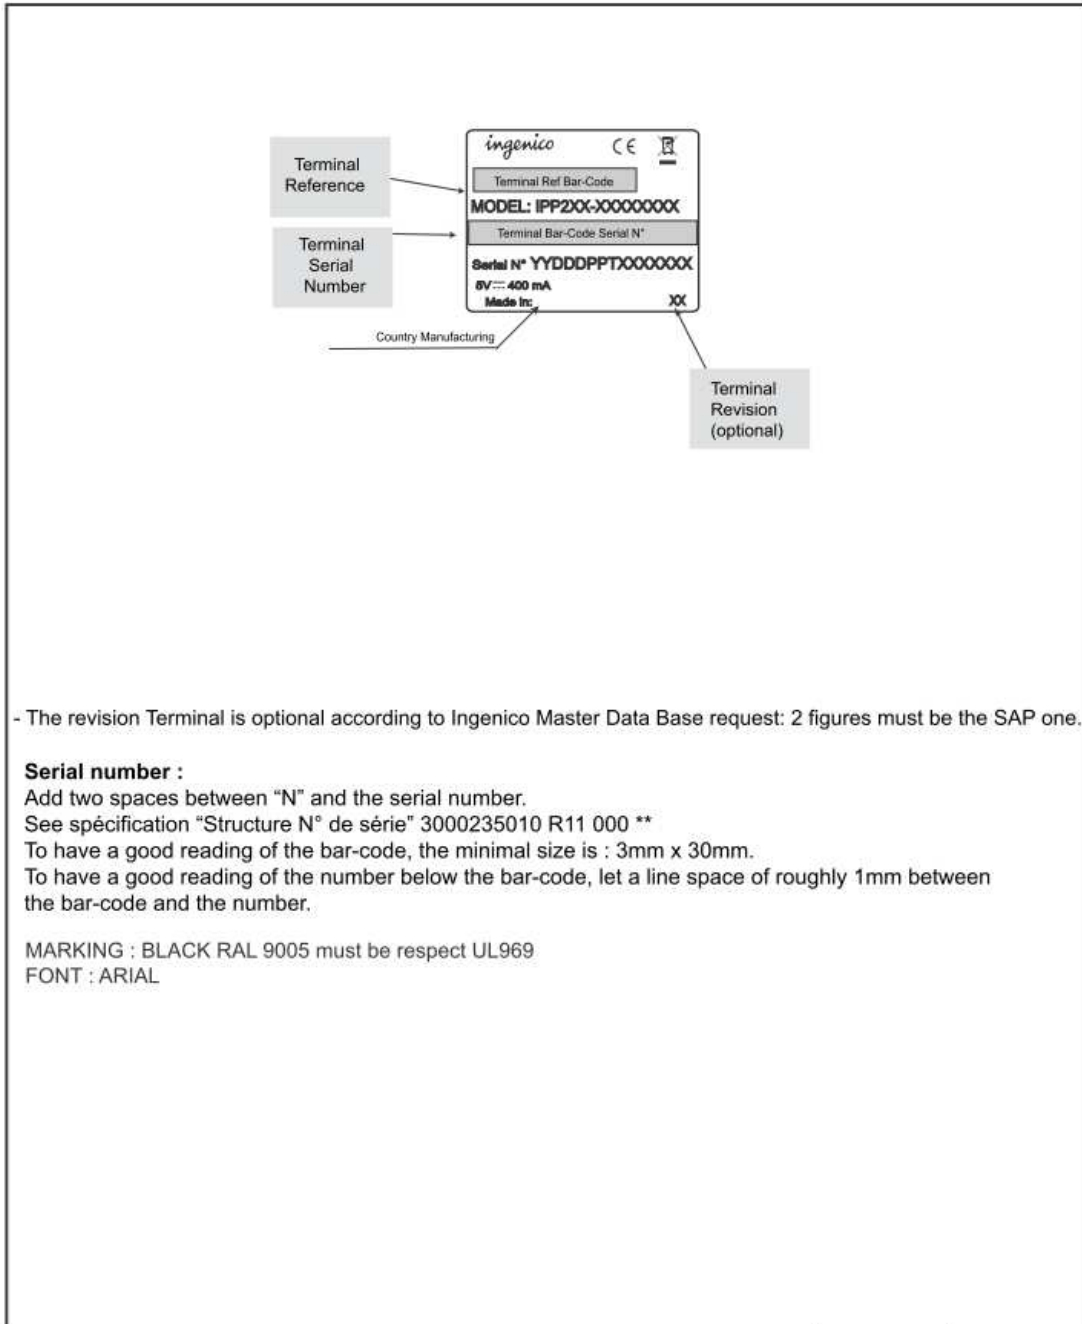

- The revision Terminal is optional according to Ingenico Master Data Base request: 2 figures must be the SAP one.

**Serial number :**

Add two spaces between "N" and the serial number.

See spécification "Structure N° de série" 3000235010 R11 000 \*\*

To have a good reading of the bar-code, the minimal size is : 3mm x 30mm.

To have a good reading of the number below the bar-code, let a line space of roughly 1mm between the bar-code and the number.

MARKING : BLACK RAL 9005 must be respect UL969

FONT : ARIAL

Adobe / ILLUSTRATOR						EHELLE SCALE	
ETABLI DRAWN	NOM / NAME Bernard MAURICE	DATE 23/12/2010	VERIFIE CHECKED	NOM / NAME Olivier FABREGOULE	DATE 23/10/2010		
LIBELLE DENOMINATION ETIQUETTE TERMINAL USB IPP2XX Terminal Label USB IPP2XX							
R.FAB / P.N. 296123401				FEUILLE / SHEET 1/1			
FORMAT SIZE A4		NUMERO DU DOCUMENT DRAWING NUMBER 900004702		R40	000	02	VERS.

Etiquette produit										Designation comercial									
IPP	Family	Range	Security	Item	ID LEVEL 3	Version	IPP	Family	Range	Memory RAM+Flash	Item	COMs	Family	Software	Colour	Country	Customised	Concatenated commercial	
IPP220-01T1167B	220 = B&W display 250 = Color display	-	01	T	xxxx	A: Version identifier The final letter is the index, starting at 'A' that evolves when an important change occurs. This final letter is useful to ensure traceability of the evolution(s) of the device	IPP	220	512+96k		T	U	1st digit : U = USB 2nd digit : R = RS232	SD	STD	GC	S	IPP220 512+96k T U NP SD STD GC S	
IPP250-01T1168B	220 = B&W display 250 = Color display	-	01	T	1168		IPP	250	512+96k		T	U	1st digit : C = Contactless 2nd digit : N = Non contactless 3rd digit : N = No PIN Shroud 4th digit : P = PCI PIN Shroud factory mounted 5th digit : Z = ZKA PIN Shroud factory mounted	SD	STD	GC	S	IPP250 512+96k T U NN SD STD GC S	