



LCIE

TEST REPORT

N°: 678803CR2016-01-28

JDE : 137591

Subject Electromagnetic compatibility (EMC) :
Publication CFR 47 PART 15.225; RSS-210 issue 8 & RSS-GEN issue 4 (Limited program)

FCC Registration number 166175
Industry Canada number 6230B

Issued to INGENICO
28-32 Boulevard de Grenelle
75015 Paris
FRANCE


Apparatus under test
↳ **Product** Payment terminal
↳ **Trade mark** Ingenico
↳ **Manufacturer** Ingenico
↳ **Model under test** ISC480 INT
↳ **Serial number** 14197SC80301170
↳ **FCC ID** XKB-ISC480CLINT
↳ **IC** 2586D-ISC480CLINT

Test date November 26th, 2015 to November 27th, 2015
Test location Fontenay Aux Roses
Test performed by Laurent Deneux
Composition of document 16 pages

Initial issued on January 12th, 2016
Modified on January 28th, 2016

Written by :
Laurent DENEUX
Tests operator

Approved by :

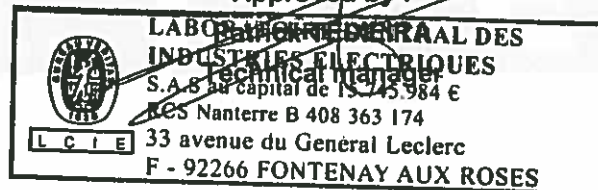

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document doesn't anticipate any certification decision.



SUMMARY

1.	TEST PROGRAM	3
2.	EQUIPMENT DESCRIPTION (DECLARED BY PROVIDER)	4
3.	MEASUREMENT OF RADIATED EMISSIONS.....	7
4.	MEASUREMENT OF CONDUCTED DISTURBANCE	10
5.	UNCERTAINTIES CHART	16



1. Test Program

References

- 47 CFR Part 15C
- RSS-210 issue 8
- RSS-Gen issue 4
- CISPR 16-4-2
- ANSI C63.10 (2013)

Emission tests:

Test Description	Test Description	Test result - Comments
RSS-Gen § 6.6	Occupied Bandwidth	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input checked="" type="checkbox"/> NP (Limited Program)
CFR 47 § 15.225 (e) RSS-210 § A2.6	Frequency tolerance	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input checked="" type="checkbox"/> NP (Limited Program)
CFR 47 § 15.207 RSS-Gen § 8.8	AC Power Line Conducted Emissions	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP (Limited Program)
CFR 47 § 15.225 (a) (b) (c) RSS-210 § A2.6 (a) (b) (c)	Field strength within the band 13.110-14.010 MHz	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input checked="" type="checkbox"/> NP (Limited Program)
CFR 47 § 15.209 (a) CFR 47 § 15.225 (d) RSS-210 § A2.6 (d)	Field strength outside of the bands 13.110-14.010 MHz	<input checked="" type="checkbox"/> PASS (30MHz-1GHz only) <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP (Limited Program)
RSS-Gen § 7.1	Receiver Radiated emissions	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA (Transceiver equipment. Include in Field strength test) <input type="checkbox"/> NP (Limited Program)

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. Equipment Description (declared by provider)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT): ISC480 INT

Serial Number: 14797SC80301170



EUT: ISC480 INT



EUT Power supply: PSM32W-080L6IN-R



RFID Card

Equipment Under Test




Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Power supply AC	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Nothing to report


Auxiliary equipment used during test:

Type	Reference	Sn	Comments
-	-	-	-

Equipment information: (Declared by provider)

Apparatus Description	The ISC480 contactless interne is a payment terminal.		
Type of power source:	<input checked="" type="checkbox"/> AC power supply	<input type="checkbox"/> DC power supply	<input type="checkbox"/> Battery (Select Type)
Test source voltage:	Vmin-Vmax:	<input checked="" type="checkbox"/> 120V -60Hz	<input type="checkbox"/> Vdc
Operating Modes	Mode 1	Loop increment:  <p>Operation frequency : 13.56MHz</p>	

2.2. EQUIPMENT LABELLING

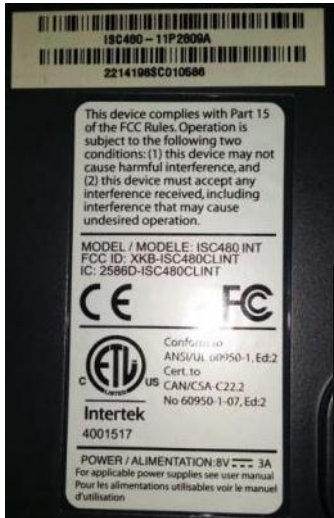

ISCA480 - 11P2808A
2214198SC010586


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

MODEL / MODELE: ISCA480 INT
FCC ID: XKB-ISC480CLINT
IC: 2586D-ISC480CLINT

Conforms to
ANSI/UL 60950-1, Ed.2
Cert. No. CAN/CSA C22.3
No 60950-1-07, Ed.2

Intertek
4001517

POWER / ALIMENTATION: 8V 3A
For applicable power supplies see user manual
Pour les alimentations utilisables voir le manuel d'utilisation



ingenico[®]

電源供應器/电源适配器
SWITCHING POWER SUPPLY
MODEL No. 型號 (型号): PSM32W-080L6
PIN (料号): 236196016
INPUT 輸入 (输入): 100-240V ~ 50-60Hz 0.9A
OUTPUT 輸出 (输出): 8.0V = 4.0A

UL LISTED
CCC
A001670
LPS
Energy Verified

EFFICIENCY LEVEL VI
仅适用于海拔2000m以下地区安全使用
生產廠: 飛安(東莞)電子有限公司
生產廠: 飛安(東莞)電子有限公司
製造商: 飛安科技股份有限公司
製造商: 飛安科技股份有限公司

CAUTION:
For use with Information Technology Equipment.
Risk of electric shock.
Dry location use only.
Indoor use only.

注意:
使用於資訊技術設備
觸電危險
使用於乾燥處
僅限室內使用

注意:
使用於信息技术设备
触电危险
使用于干燥处
仅限室内使用

MADE IN CHINA IN-R
中國製造/中国制造

2.3. EQUIPMENT MODIFICATIONS

None Modification:

3. Measurement of radiated emissions

3.1. ENVIRONMENTAL CONDITIONS

Test performed by : Laurent Deneux
Date of test : 2015/11/26
Ambient temperature : 21°C
Relative humidity : 46%

3.2. TEST SETUP

Specifications:

Frequency 30 – 1000 MHz RBW 120 kHz

Detector Peak and Quasi-Peak

Pre characterization in semi anechoic room is performed to define the critical frequencies

Operating conditions:

- The Equipment under Test is installed:

- Measure in semi anechoic room
- Measure in open area site

- Measuring distance:

- 3m
- 10m

- Deviation method:


- Yes
- No

-Product installation:

- The EUT was tested as a tabletop equipment and was placed on a non-conducting platform the top of which is 0.8m above the metal ground plane.
- The EUT is at 10cm height from reference plane

Operating mode:

- Mode 1 Mode 2 Mode 3 ...

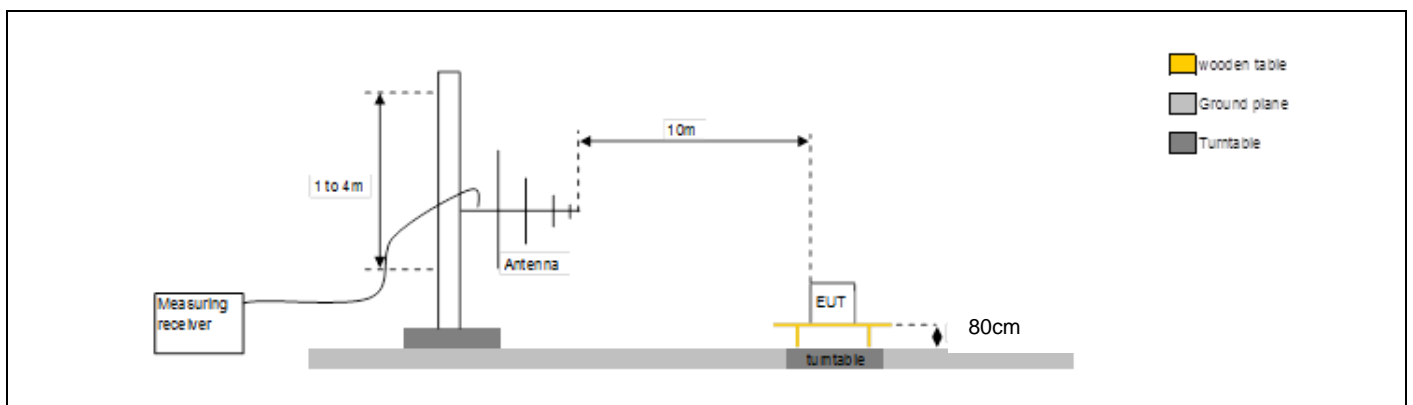

Test Set up for radiated measurement in open area site(30MHz to 1000MHz)



3.3. TEST EQUIPMENT LIST

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Open test site	LCIE	-	F2000400	2015-06	2016-06
EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018	2015-01	2016-01
Cable	-	-	A5329442	2015-10	2016-10
cable	-	-	A5329362	2015-03	2016-03
Bilog antenna	CHASE	CBL 6112A	C2040040	2015-04	2016-04
Cable	-	-	A5329449	2015-10	2016-10
Cable	-	-	A5329368	2015-03	2016-03
cable	-	-	A5329444	2015-10	2016-10

3.4. RESULTS


Table N°1

10 m radiated measurement graph from 30 to 1000 MHz

Frequency (MHz)	Quasi-peak measurements @ 10m (dB μ V/m)	Limits @ 10m (dB μ V/m)
40.7	26.3	29.5
166.7	28.5	33
244.1	33.6	35.5
400	34.7	35.5
600	34.2	35.5
800	33.9	35.5



Diagram N°1 Horizontal & vertical Polarization (30MHz-1GHz)

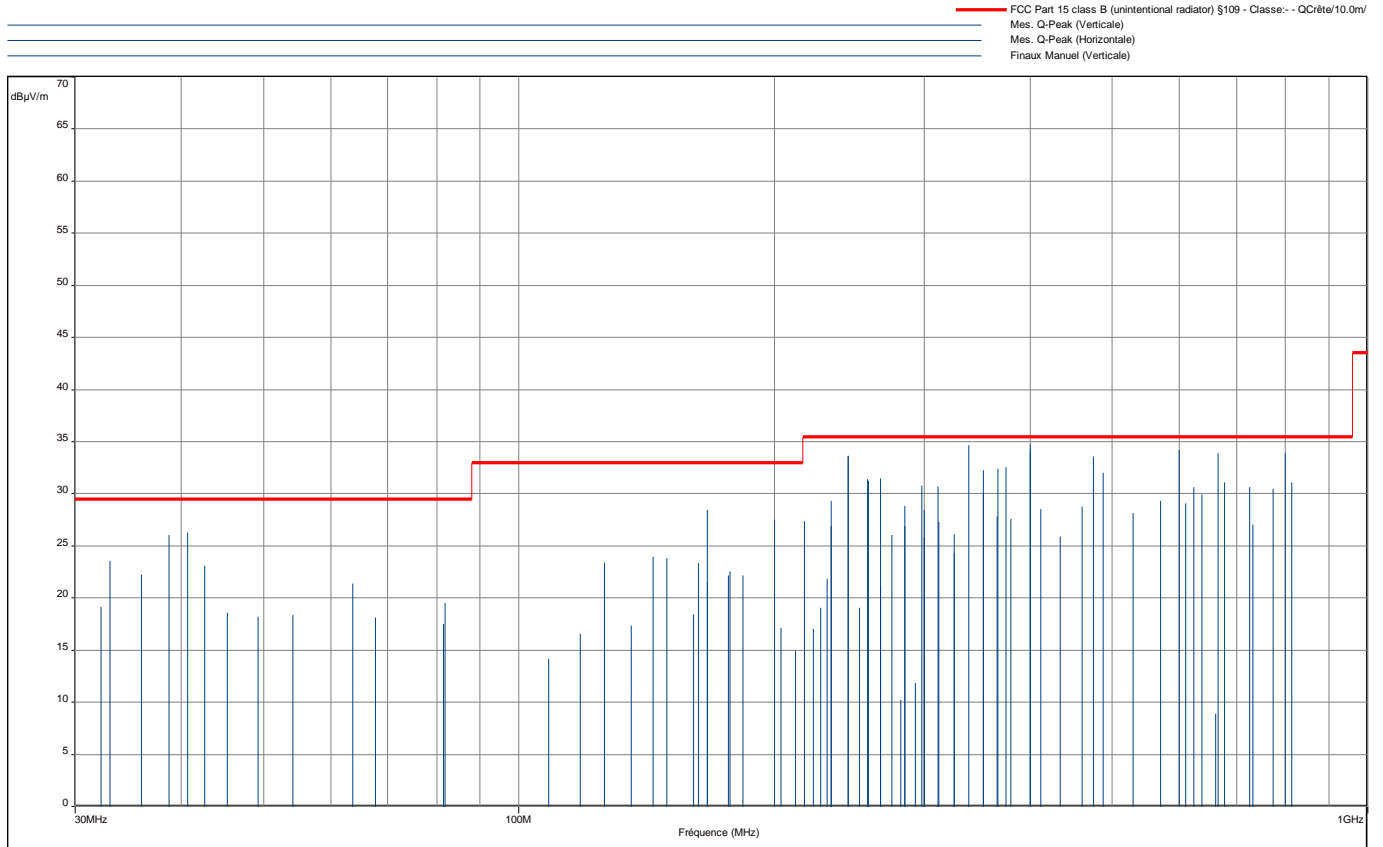

3.5. CONCLUSION

Measures of Radiated Emission, performed on the sample of the product **ISC480 INT**, SN: **14197SC80301170**, in configuration and description presented in this test report, show levels **conform to** the FCC part 15 & RSS-GEN §7.2.4 limits.



4. Measurement of conducted disturbance

4.1. ENVIRONMENTAL CONDITIONS

Test performed by : Laurent Deneux
Date of test : 2015/11/27
Ambient temperature : 21°C
Relative humidity : 46%

4.2. TEST SETUP

Specifications:

Frequency 0.15 – 30 MHz RBW 9 kHz
Detector Peak , Quasi Peak and average

The measurement is performed on power supply with a LISN and telecommunication lines with RSI or current clamp for shielded cables.

Operating conditions:

- Deviation method:


- Yes
 No

-Product installation:


- The EUT is installed on a wooden table 80 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN and at 40cm of the vertical conductive wall
 The EUT is installed on a wooden table 40 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN.
 The EUT is installed 10 cm above the reference plane, at 80cm of the 50Ohm/50microhenry LISN.

Operating mode:

- Mode 1 Mode 2 Mode 3 ...

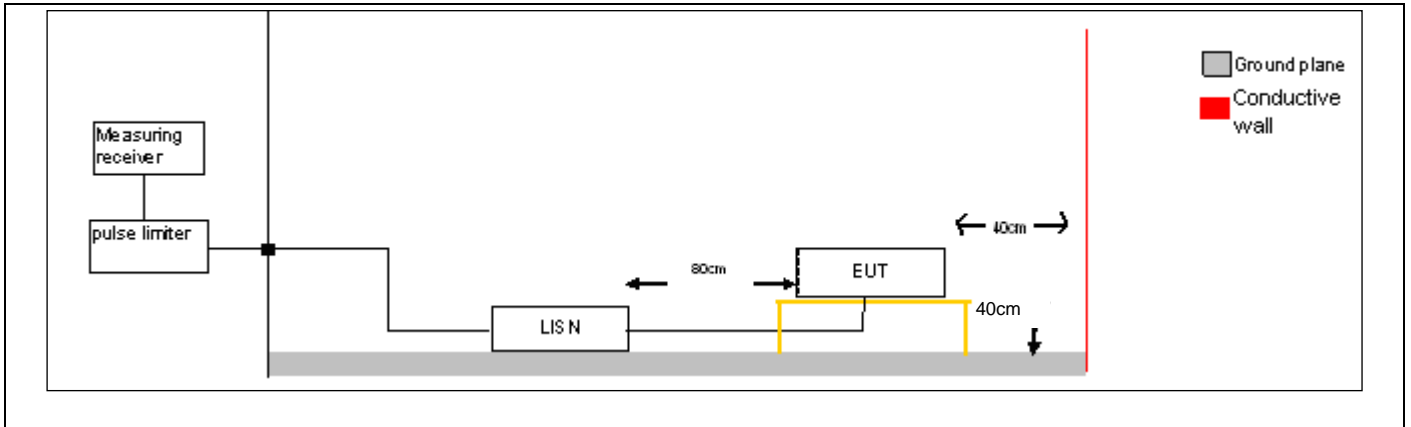

Test set up of conducted emission on power supply

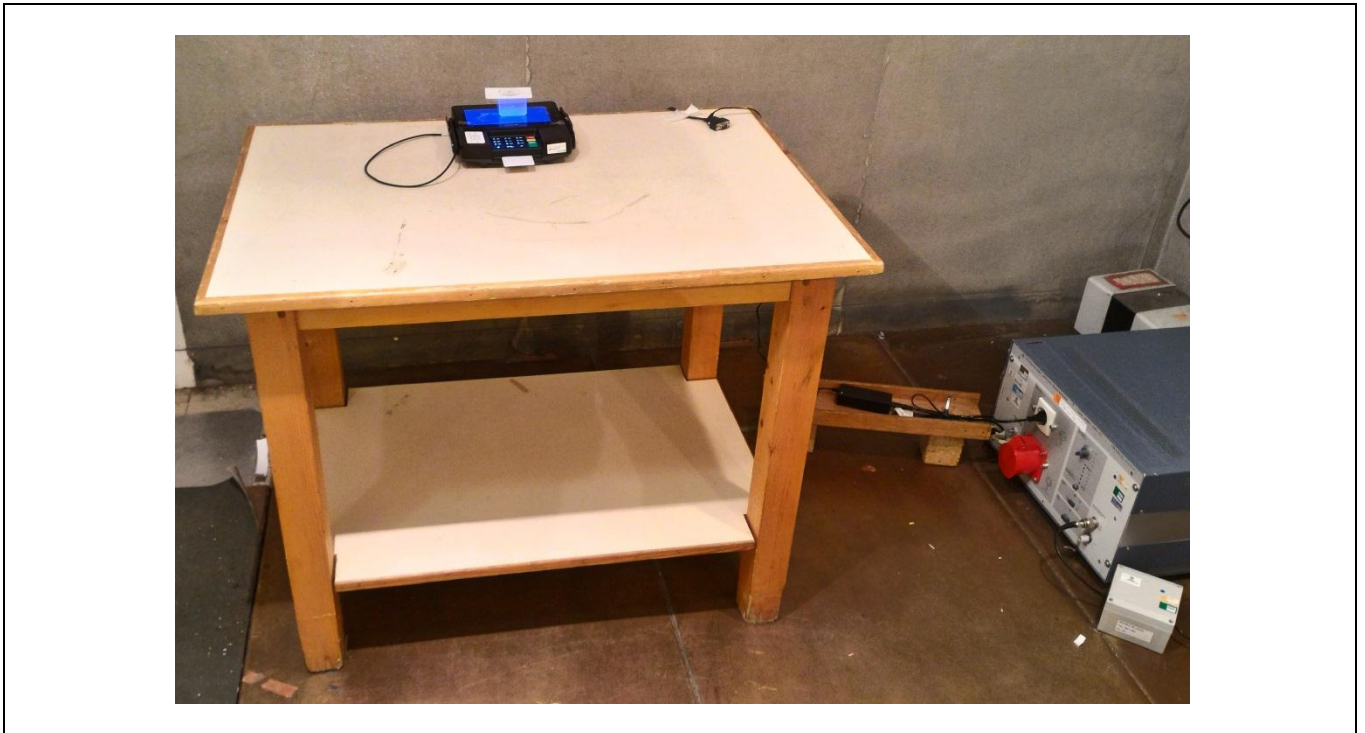

Test set up of conducted emission on power supply



Test set up of conducted emission on power supply

4.3. LIMIT

Power supply Class A

Frequency Bands/frequencies	dB μ V quasi-peak	dB μ V average
0.15-0.5MHz	79	66
0.5-30 MHz	73	60

Power supply Class B

Frequency Bands/frequencies	dB μ V quasi-peak	dB μ V average
0.15-0.5MHz	66-56	56-46
0.5-5 MHz	56	46
5-30 MHz	60	50




4.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal. Date	Cal. Due
Reference ground plan 2 x 3m	L.C.I.E.	-	-	-	-
Recepteur/ Receiver	RHODE & SCHWARZ	ESU	A2642018	2015-01	2016-01
Cable	-	-	A5329417	2015-10	2016-10
Réseau V / V ISLN	ROHDE & SCHWARZ	ESH2-Z5	C2322002	2015-06	2016-06
Limiteur d'impulsion / Pulse limiter	ROHDE & SCHWARZ	ESH3-Z2	A2649008	2015-02	2016-02

4.5. RESULTS

**Diagram N°1
Phase**

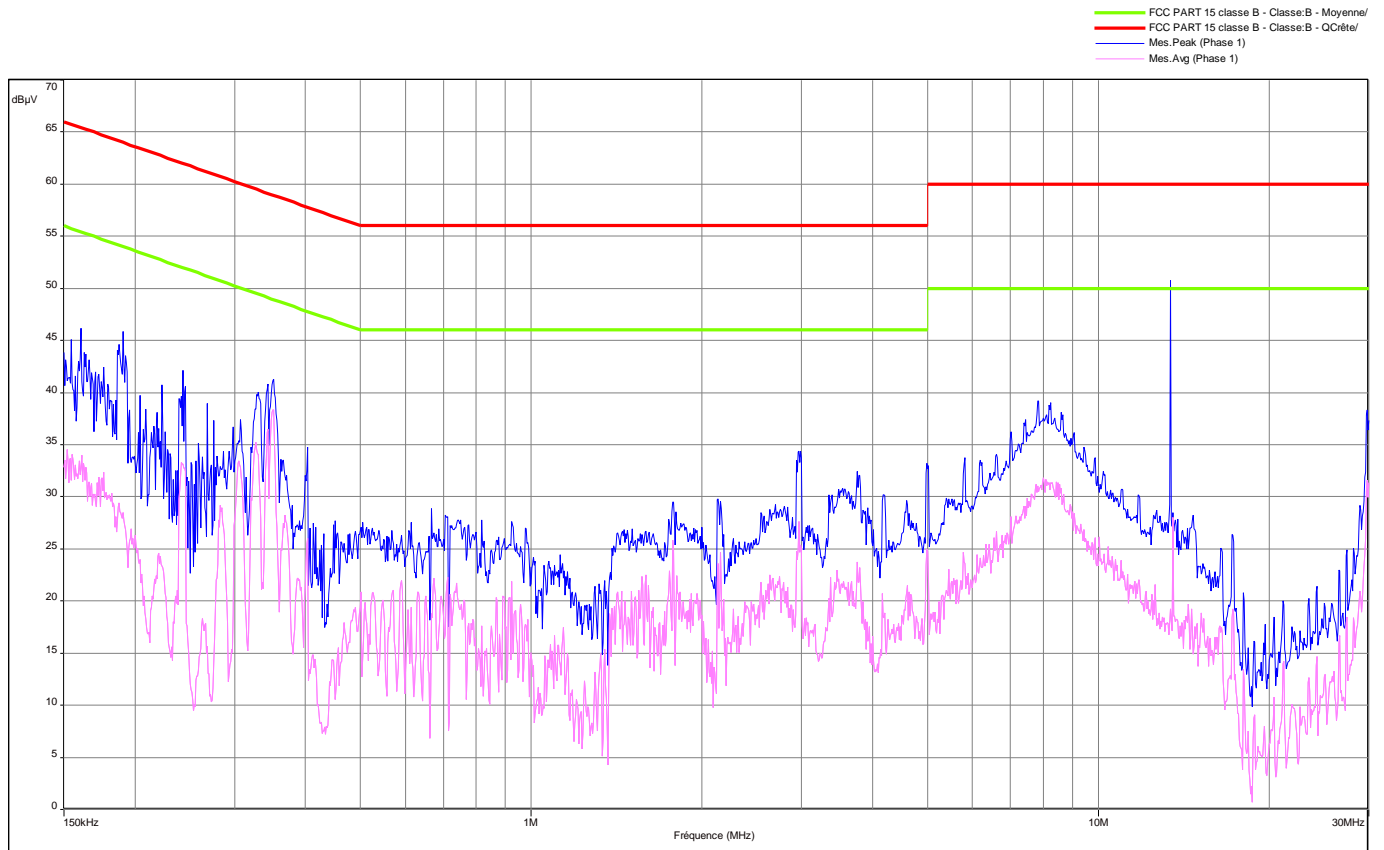


Frequency (MHz)	Peak measurements (dBµV)	Quasi-Peak measurements (dBµV)	Quasi-Peak limits (dBµV)	Average measurement (dBµV)	Average limits (dBµV)
0.160	46	-	65.5	34.5	55.5
0.350	41.2	-	59	38.3	49
2.966	34.4	-	56	27.6	46
13.56	50.5	-	60	28	50
30	38	-	60	31.6	50



Diagram N°2
Neutral

— FCC PART 15 classe B - Classe: B - Moyenne/
— FCC PART 15 classe B - Classe: B - QCRéte/
— Mes. Peak (Neutre)
— Mes. Avg (Neutre)

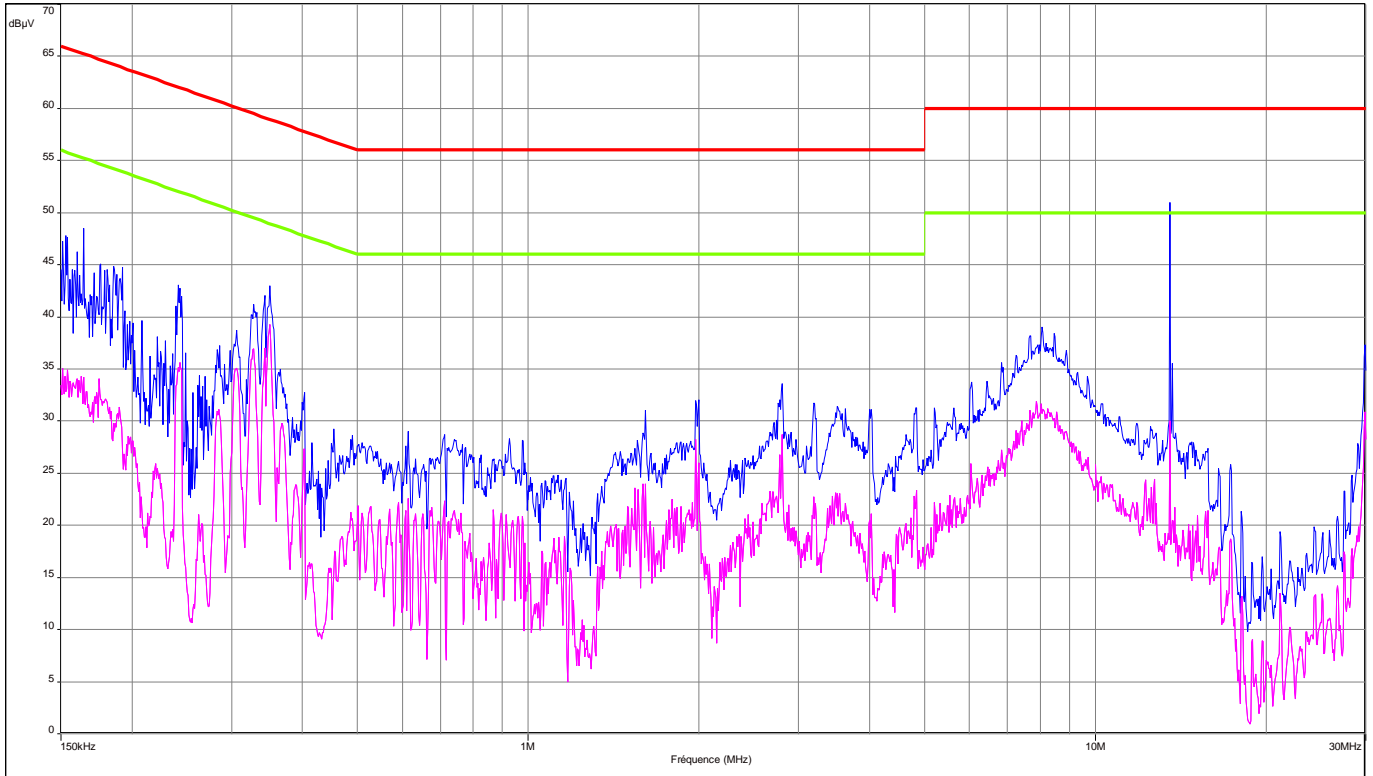

Frequency (MHz)	Peak measurements (dBµV)	Quasi-Peak measurements (dBµV)	Quasi-Peak limits (dBµV)	Average measurement (dBµV)	Average limits (dBµV)
0.164	48.5	-	65.2	35	55.2
0.350	43	-	58.9	39.3	48.9
2.808	33.6	-	56	28.8	46
13.56	51	-	60	30	50
30	35	-	60	32	50

4.6. CONCLUSION

Measures of Conducted Emission, performed on the sample of the product **ISC480 INT**, SN: **14197SC80301170**, in configuration and description presented in this test report, show levels **conform to** the FCC part 15 RSS-GEN §7.2.5 limits.

5. Uncertainties Chart

Kind of measurement	Wide uncertainty laboratory (k=2) ±x(dB)	CISPR uncertainty limit ±y(dB)
Measurement of conducted disturbances in voltage on the AC power port on the Fontenay-aux-Roses site.	3.51	3.6
Measurement of discontinuous conducted disturbances in voltage on the AC power port on the Fontenay-aux-Roses site. (S48 room)	3.45	3.6
Measurement of conducted disturbances in voltage on the AC power port on the Ecuelles site.	3.86	3.6
In Situ measurement of conducted disturbances in voltage on the AC power port with ESH2 receiver	3.51	3.6
Measurement of conducted disturbances in voltage on the DC power port on the Fontenay-aux-Roses site.	3.49	3.6
Measurement of conducted disturbances in voltage on the DC power port on the Ecuelles site.	3.72	3.6
Measurement of conducted disturbances in voltage on the telecommunication port.	3.26	Under consideration
Measurement of conducted disturbances in voltage on the telecommunication port at Ecuelles Site.	3.45	Under consideration
Measurement of conducted disturbances in current	3.09	Under consideration
Measurement of radiated electric field from 30 to 200MHz on the Fontenay-aux-Roses site (with EATON 96002 antenna)	5.2	5.2
Measurement of radiated electric field from 200 to 1000MHz on the Fontenay-aux-Roses site	5.3	5.2
Measurement of radiated electric field from 1 to 18GHz on the Fontenay-aux-Roses site	4.8	Under consideration
Measurement of radiated electric field from 30 to 80MHz in horizontal position on the Ecuelles site (dipole antenna)	3.77	5.2
Measurement of radiated electric field from 30 to 80MHz in vertical position on the Ecuelles site (dipole antenna)	4.12	5.2
Measurement of radiated electric field from 80 to 1000MHz in horizontal position on the Ecuelles site (R&S HL023 A2 logper antenna)	4.19	5.2
Measurement of radiated electric field from 80 to 1000MHz in vertical position on the Ecuelles site (R&S HL023 A2 logper antenna)	4.50	5.2
Measurement of radiated electric field from 30 to 1000MHz in horizontal position on the Ecuelles site (CBL6112 bilog antenna)	4.24	5.2
Measurement of radiated electric field from 30 to 1000MHz in vertical position on the Ecuelles site (CBL6112 bilog antenna)	4.55	5.2
Measurement of radiated electric field from 1 to 18GHz on the Ecuelles site	5.16	Under consideration
Measurement of current harmonics	11.11%	/
Flicker measurement	9.26%	/
Measurement of disturbance power	3.32	4.5
Immunity to conducted disturbances, induced by radio-frequency fields	2.36	/
Immunity to conducted disturbances, induced by radio-frequency fields with injection clamp	2.76	/
Immunity to radiated electromagnetic field	2.64	/
EMF measurement according to EN62233 from 10KHz to 400KHz	23,51%	/

Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures.

End of test report