

## Test at TX 5230 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.12	dBm	INFO
Ref. Frequency	---	---	5224.610	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.12   3.41   25
Start [MHz]   Stop [MHz]	5180.000   5280.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.3	dBm	INFO
Peak Power	---	---	6.76083	mW	INFO
Frequency at Peak	---	---	5226.4	MHz	INFO

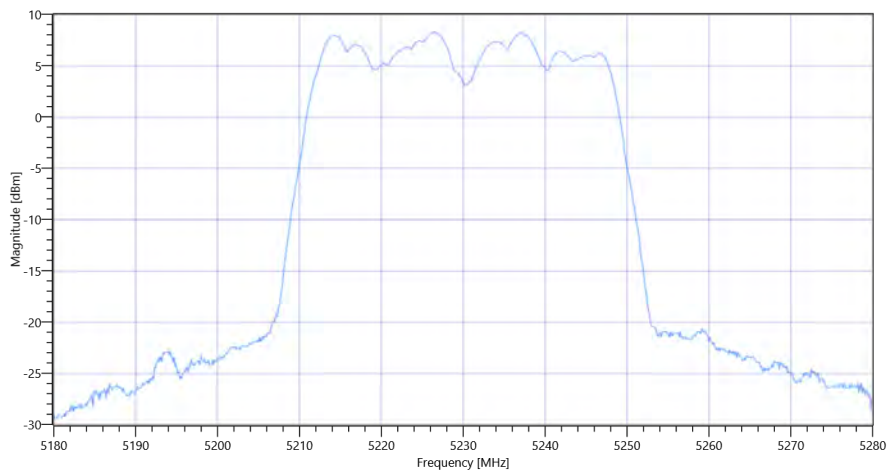

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-1

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References	
TC Start	15.11.2022 13:29:06
Ambit Temp [°C]   Humidity [rel%]	23.6   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5190
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5230
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5230 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.20	dBm	INFO
Ref. Frequency	---	---	5244.190	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

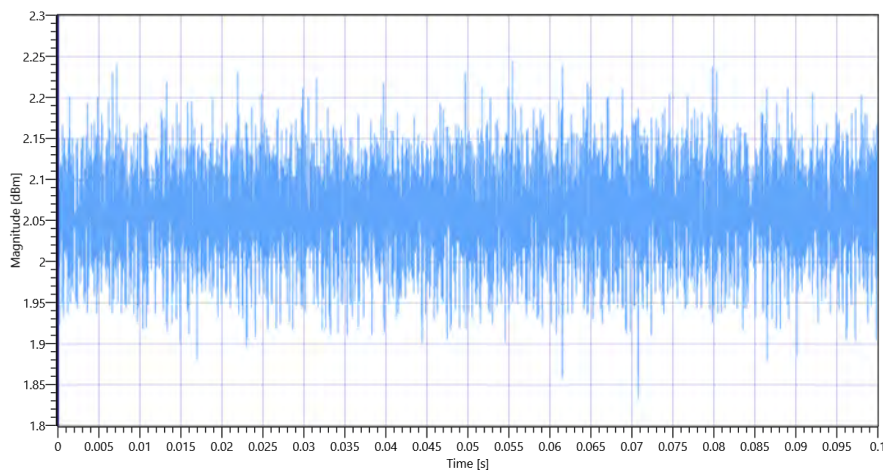


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5230 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.68	MHz	INFO
T1 26dB	---	---	5209.2800	MHz	INFO
T2 26dB	---	---	5250.9600	MHz	INFO

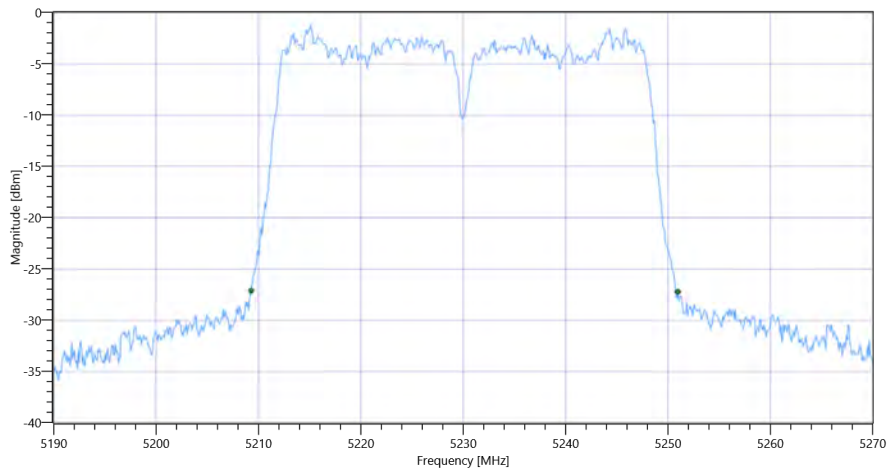

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.20   3.41   25
Start [MHz]   Stop [MHz]	5190.000   5270.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.94	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.94	dBm	PASS
Limit: 11 dBm + 10 log 41.68					
Max Output Power DC corrected	---	27.2	7.94	dBm	na

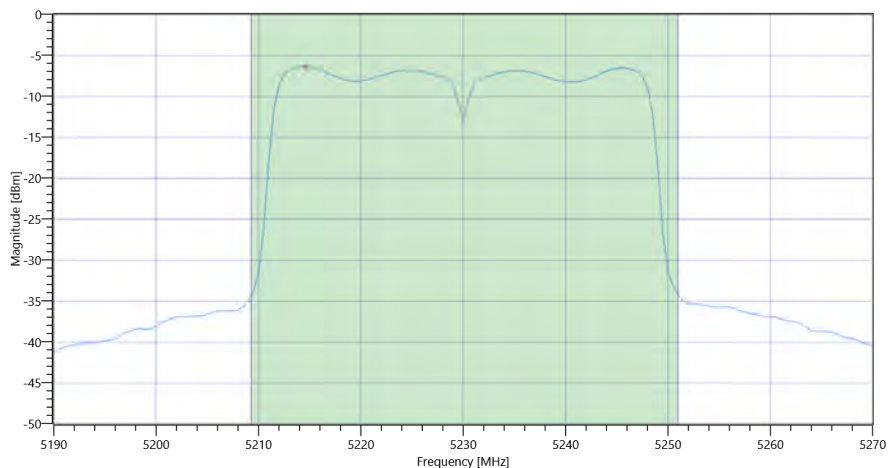

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.34	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.34	dBm/1MHz	PASS
General verdict			PASS		

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

Test References	
TC Start	15.11.2022 13:30:48
Ambit Temp [°C]   Humidity [rel%]	23.6   42
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5190
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5230
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5230 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.01	dBm	INFO
Ref. Frequency	---	---	5214.820	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

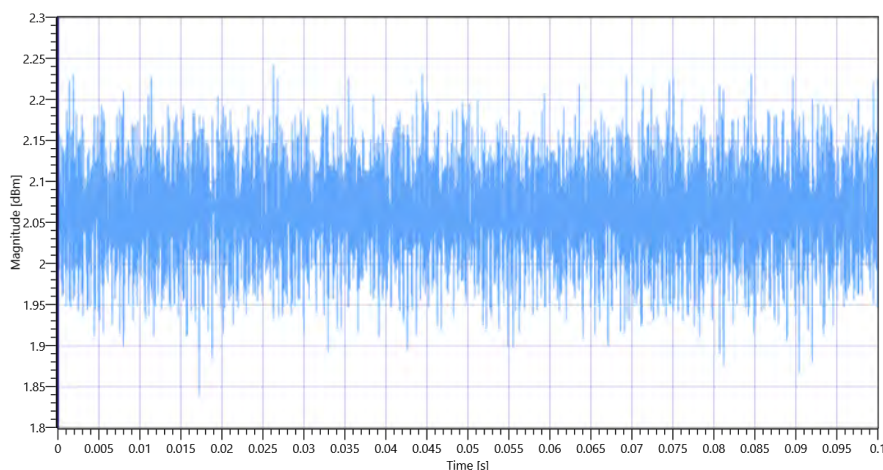


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 5230 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.523	MHz	INFO
T1 99%	---	---	5211.7782	MHz	INFO
T2 99%	---	---	5248.3017	MHz	INFO

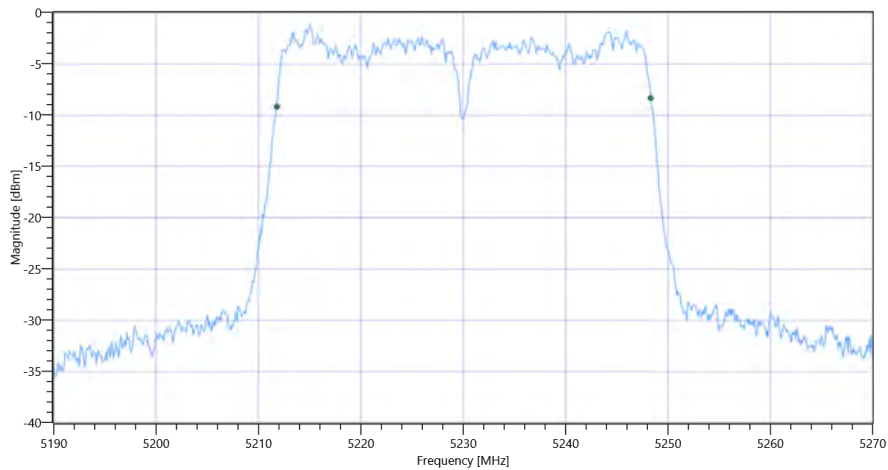

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.01   3.41   25
Start [MHz]   Stop [MHz]	5190.000   5270.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.89	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.89	dBm	na
Limit: 11 dBm + 10 log 36.523					
Max Output Power DC corrected	---	26.63	7.89	dBm	na

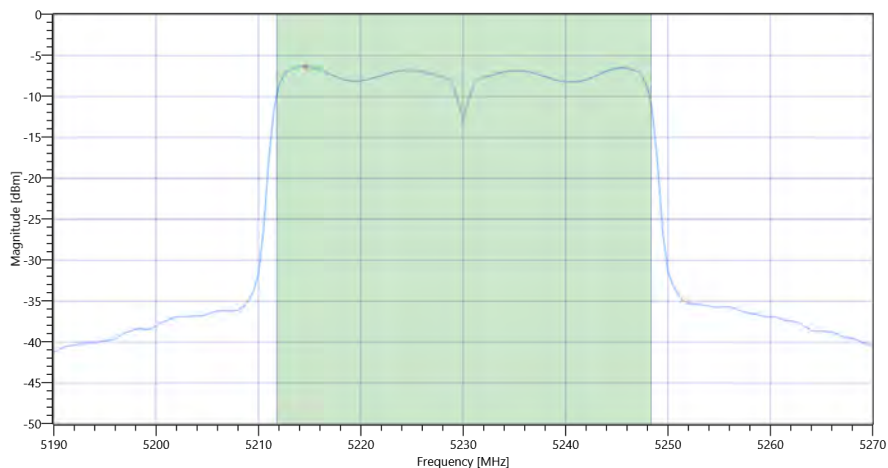

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1 Max OP and PSD



## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.34	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.34	dBm/1MHz	PASS
General verdict			PASS		

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-1

Test References	
TC Start	15.11.2022 13:32:30
Ambit Temp [°C]   Humidity [rel%]	23.6   42
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5190
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5230
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5230 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.11	dBm	INFO
Ref. Frequency	---	---	5214.420	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	9.11   3.41   25
Start [MHz]   Stop [MHz]	5180.000   5280.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.563	MHz	INFO
T1 99%	5150.000000	---	5211.8182	MHz	PASS
T2 99%	---	5250.000000	5248.3816	MHz	PASS

### Plot: Bandwidth only

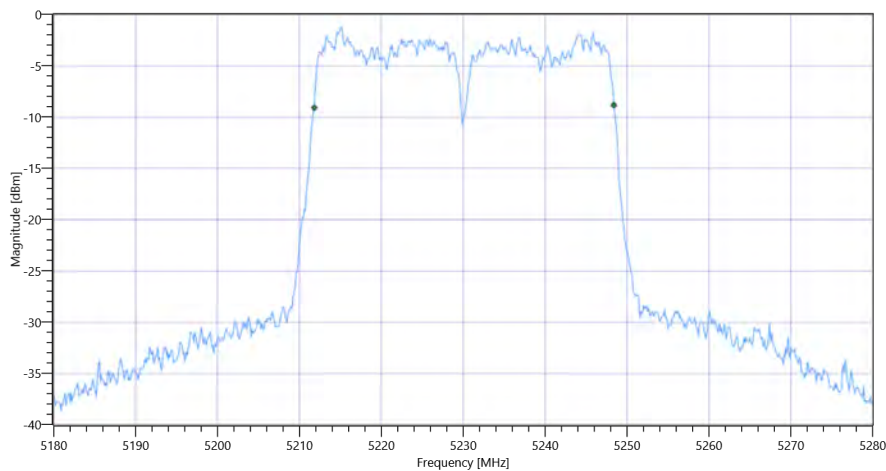

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-1 99PCT


### Plot: Bandwidth within Band

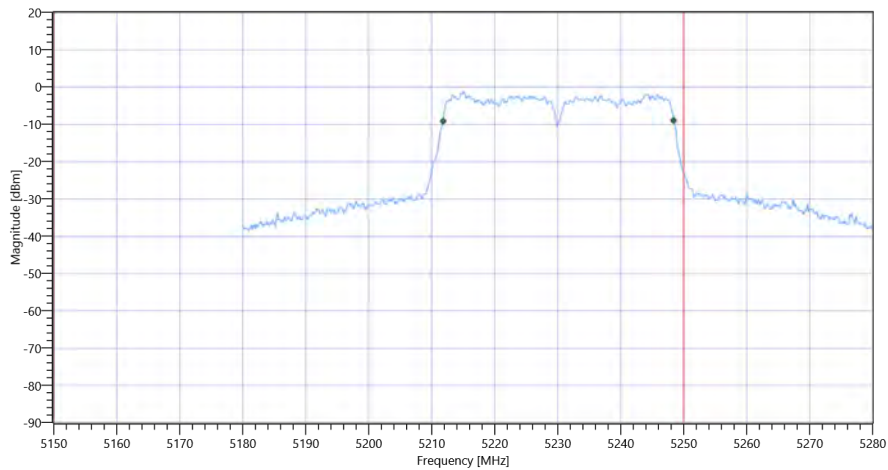

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-1


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.3	MHz	INFO
T1 26dB	5150.000000	---	5209.4000	MHz	PASS
T2 26dB	---	5250.000000	5250.7000	MHz	DFS required

Plot: Bandwidth only

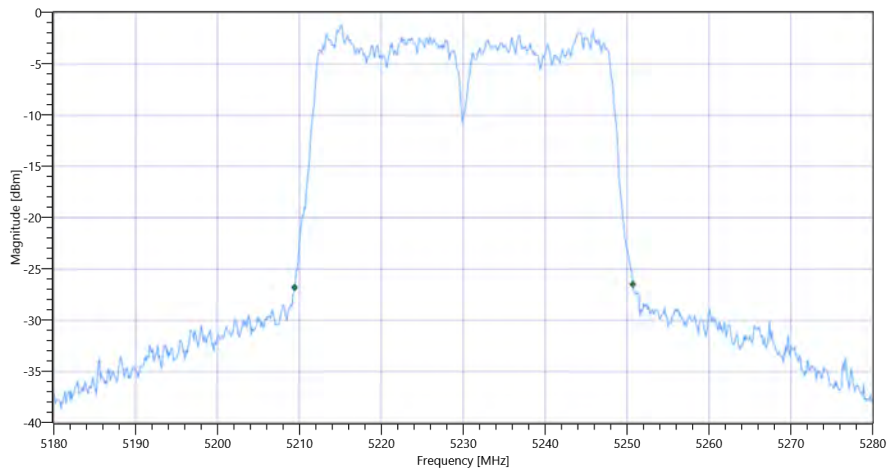

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-1 26dB

Plot: Bandwidth within Band

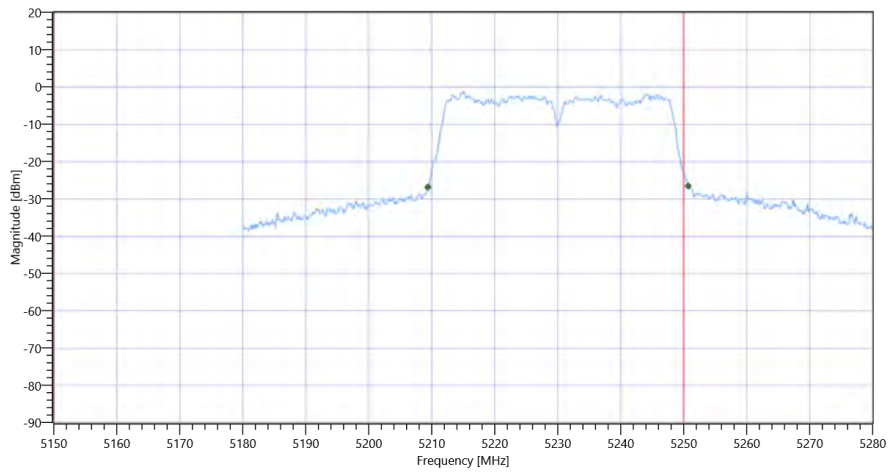

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-1

General verdict

PASS

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 13:33:21
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_2A
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 13:33:22
Message	set WLAN5Gx to n_HT40_U_NII_2A, Frequency [MHz] 5270 ,

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:34:25
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5270 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.17	dBm	INFO
Ref. Frequency	---	---	5286.180	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.17   3.42   25
Start [MHz]   Stop [MHz]	5220.000   5320.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.56	dBm	INFO
Peak Power	---	---	7.177943	mW	INFO
Frequency at Peak	---	---	5266.3	MHz	INFO

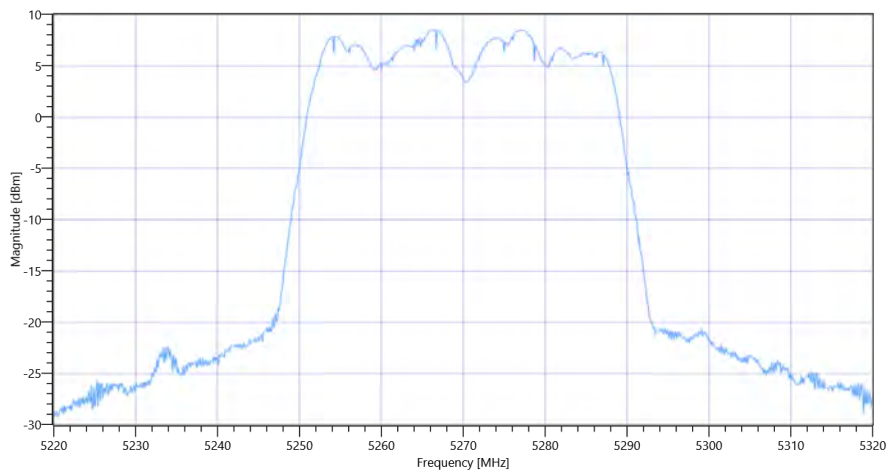

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-2A

General verdict

**PASS**



## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:34:55
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5270 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.40	dBm	INFO
Ref. Frequency	---	---	5273.800	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

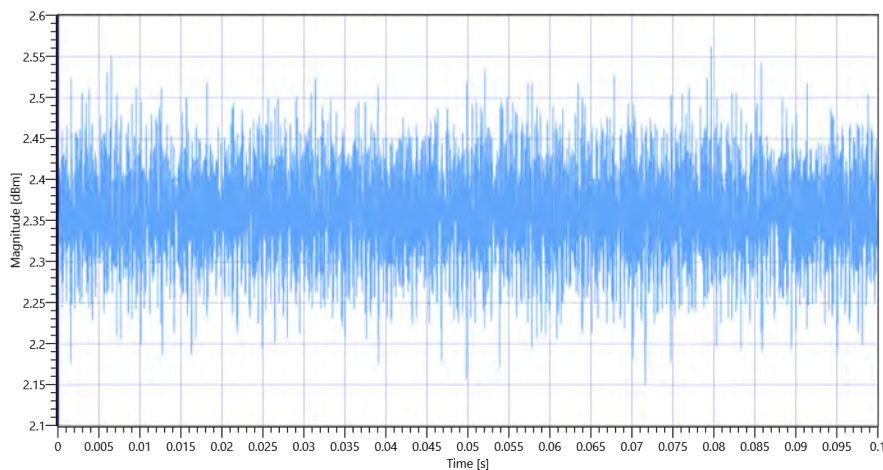


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5270 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	42.16	MHz	INFO
T1 26dB	---	---	5249.1200	MHz	INFO
T2 26dB	---	---	5291.2800	MHz	INFO

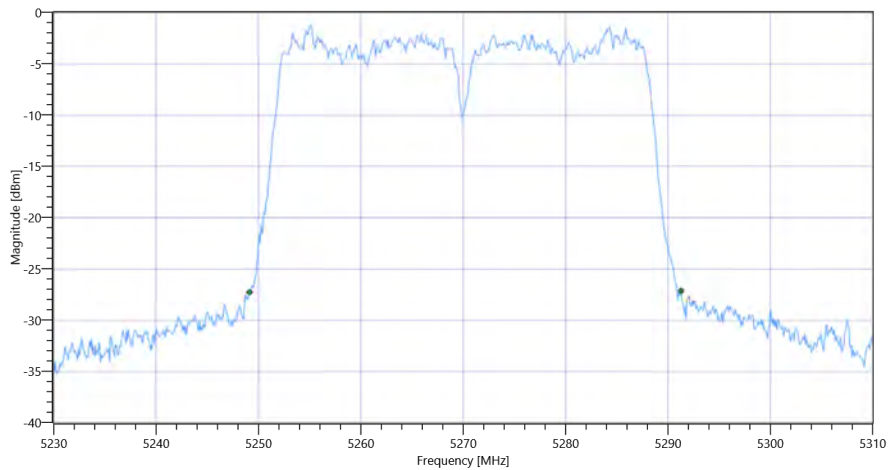

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.40   3.42   25
Start [MHz]   Stop [MHz]	5230.000   5310.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.13	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	8.13	dBm	PASS
Limit: 11 dBm + 10 log 42.16					
Max Output Power DC corrected	---	27.25	8.13	dBm	PASS

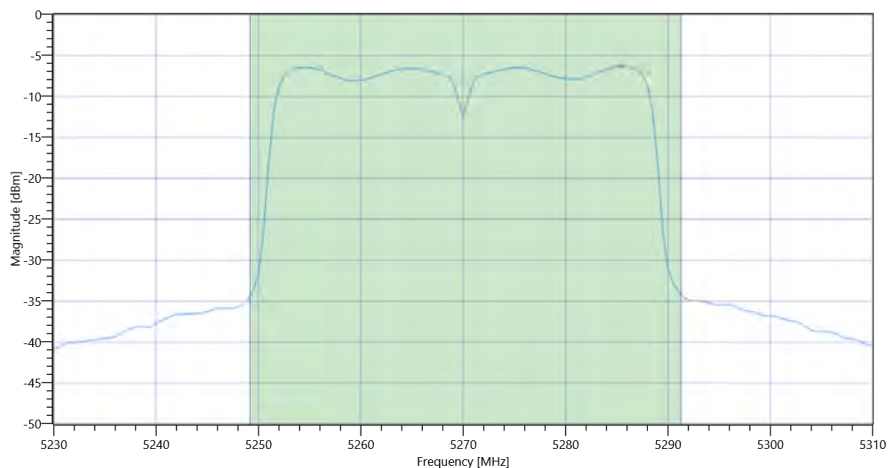

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.29	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.29	dBm/1MHz	PASS
General verdict			PASS		

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:36:37
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5270 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.45	dBm	INFO
Ref. Frequency	---	---	5284.190	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

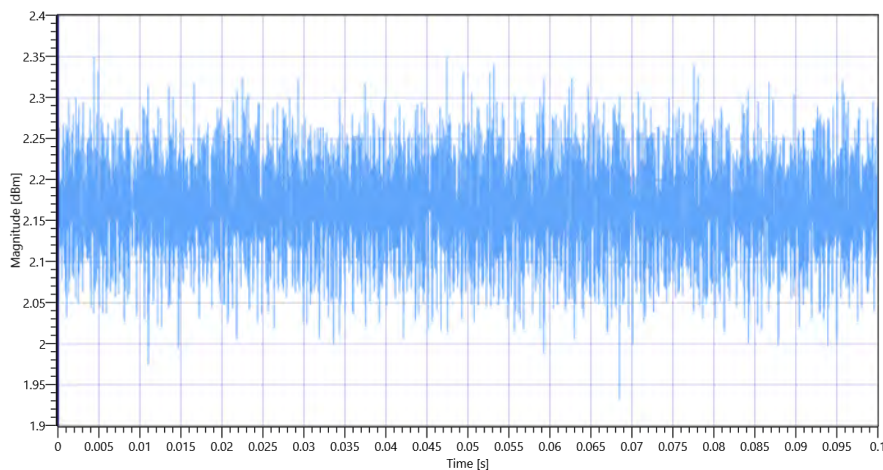


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5270 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.523	MHz	INFO
T1 99%	---	---	5251.8581	MHz	INFO
T2 99%	---	---	5288.3816	MHz	INFO

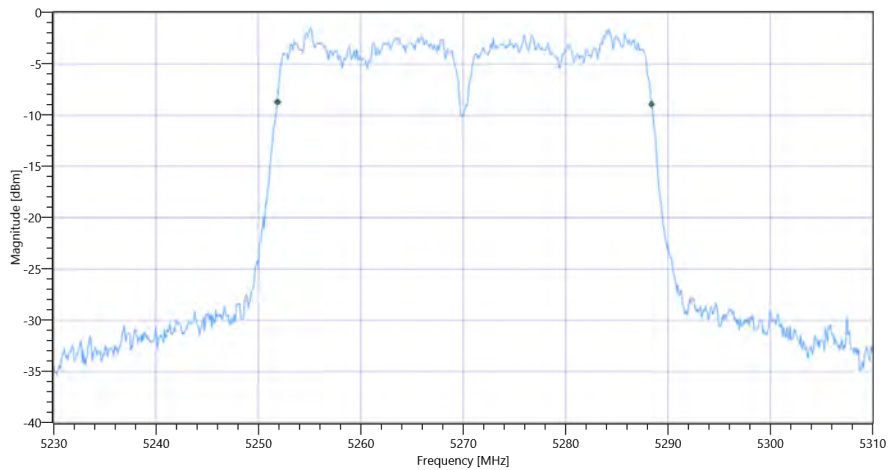

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.45   3.42   25
Start [MHz]   Stop [MHz]	5230.000   5310.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.09	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	8.09	dBm	PASS
Limit: 11 dBm + 10 log 36.523					
Max Output Power DC corrected	---	26.63	8.09	dBm	PASS

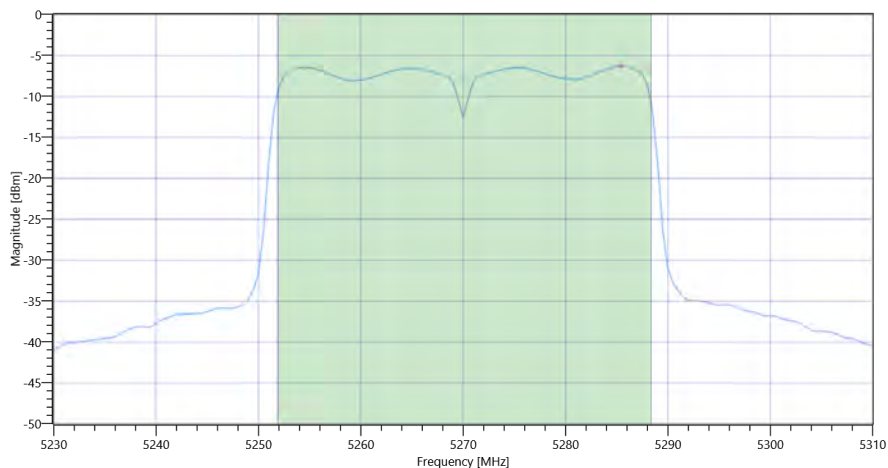

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.28	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.28	dBm/1MHz	PASS
General verdict			PASS		



## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:38:20
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5270 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.08	dBm	INFO
Ref. Frequency	---	---	5275.590	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	9.08   3.42   25
Start [MHz]   Stop [MHz]	5220.000   5320.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.563	MHz	INFO
T1 99%	5250.000000	---	5251.8182	MHz	PASS
T2 99%	---	5350.000000	5288.3816	MHz	PASS

### Plot: Bandwidth only

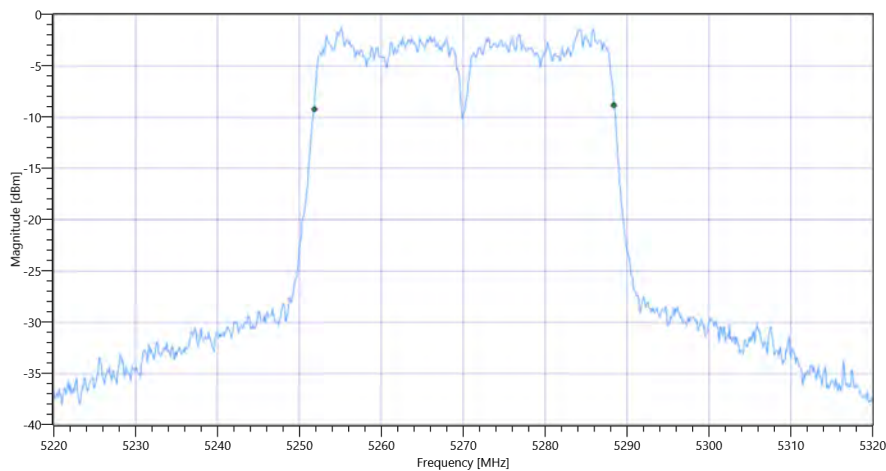

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

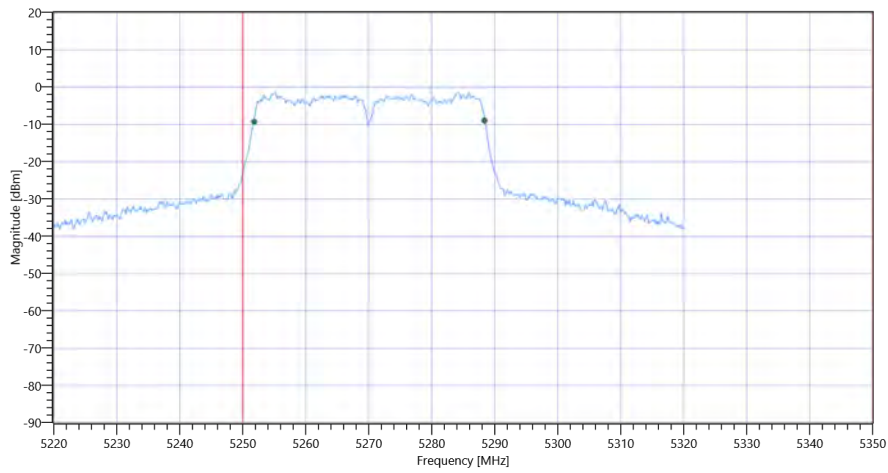

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.8	MHz	INFO
T1 26dB	5250.000000	---	5249.3000	MHz	FAIL
T2 26dB	---	5350.000000	5291.1000	MHz	PASS

Plot: Bandwidth only

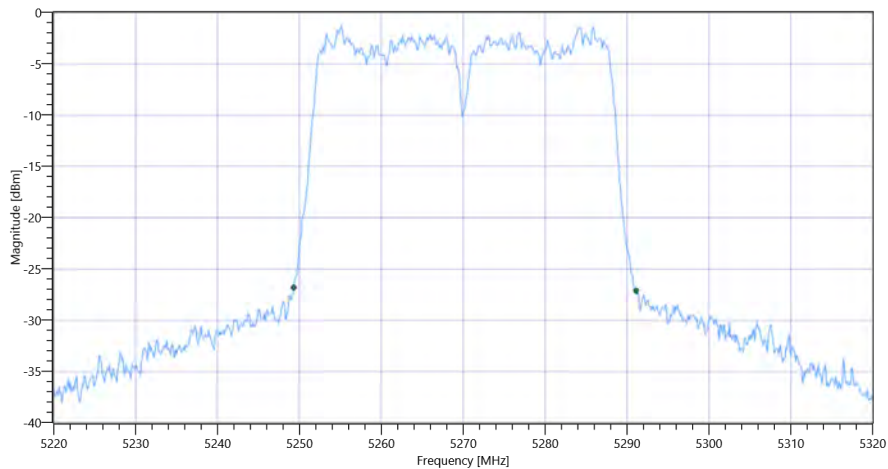

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A 26dB

Plot: Bandwidth within Band

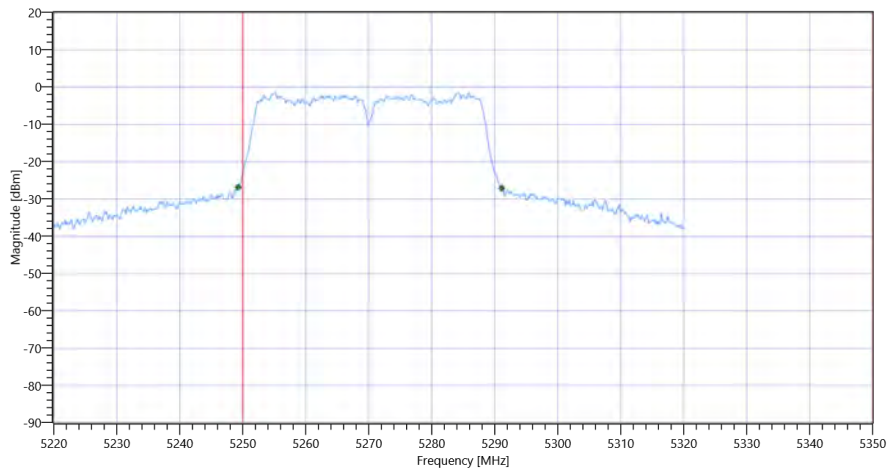

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A

General verdict

FAIL

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 13:39:11
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_2A
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 13:39:12
Message	set WLAN5Gx to n_HT40_U_NII_2A, Frequency [MHz] 5310

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:40:40
Ambit Temp [°C]   Humidity [rel%]	23.4   42
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5310 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.04	dBm	INFO
Ref. Frequency	---	---	5326.580	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.04   3.42   25
Start [MHz]   Stop [MHz]	5260.000   5360.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.08	dBm	INFO
Peak Power	---	---	6.426877	mW	INFO
Frequency at Peak	---	---	5317.09	MHz	INFO

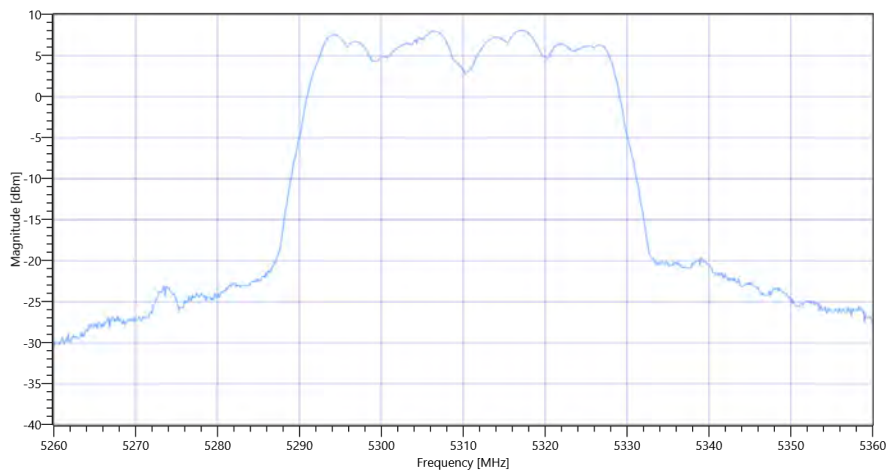

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-2A

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:41:11
Ambit Temp [°C]   Humidity [rel%]	23.5   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	



## Test at TX 5310 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.35	dBm	INFO
Ref. Frequency	---	---	5324.190	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

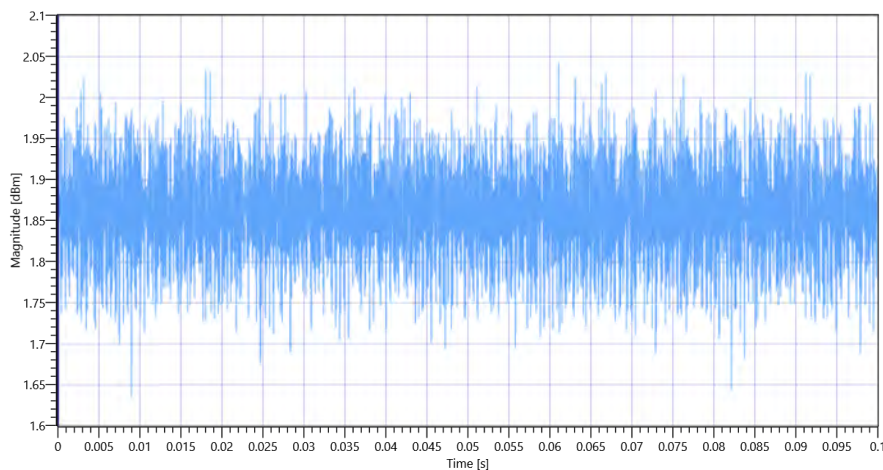


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5310 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	43.2	MHz	INFO
T1 26dB	---	---	5289.3600	MHz	INFO
T2 26dB	---	---	5332.5600	MHz	INFO

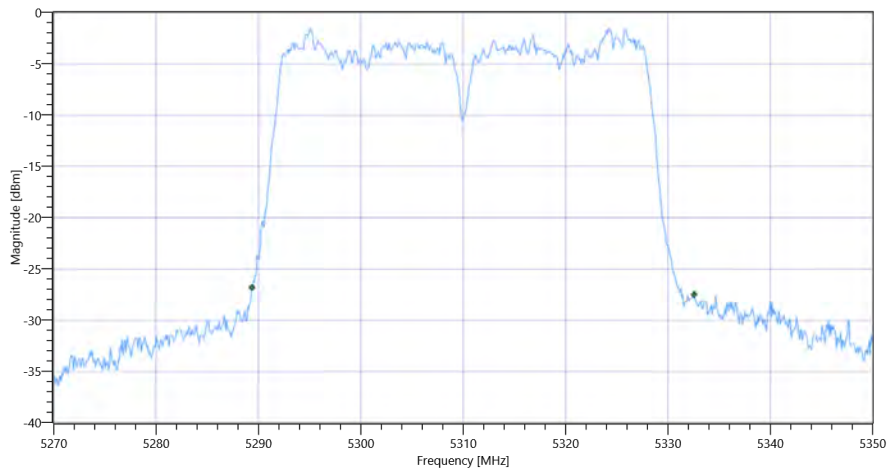

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.35   3.42   25
Start [MHz]   Stop [MHz]	5270.000   5350.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.77	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.77	dBm	PASS
Limit: 11 dBm + 10 log 43.2					
Max Output Power DC corrected	---	27.35	7.77	dBm	PASS

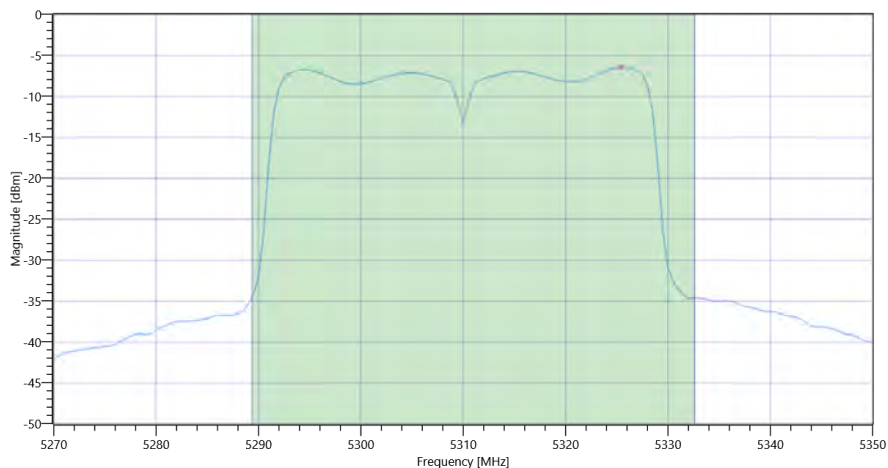

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.38	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.38	dBm/1MHz	PASS
General verdict			PASS		

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:42:53
Ambit Temp [°C]   Humidity [rel%]	23.4   42
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5310 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.75	dBm	INFO
Ref. Frequency	---	---	5295.610	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

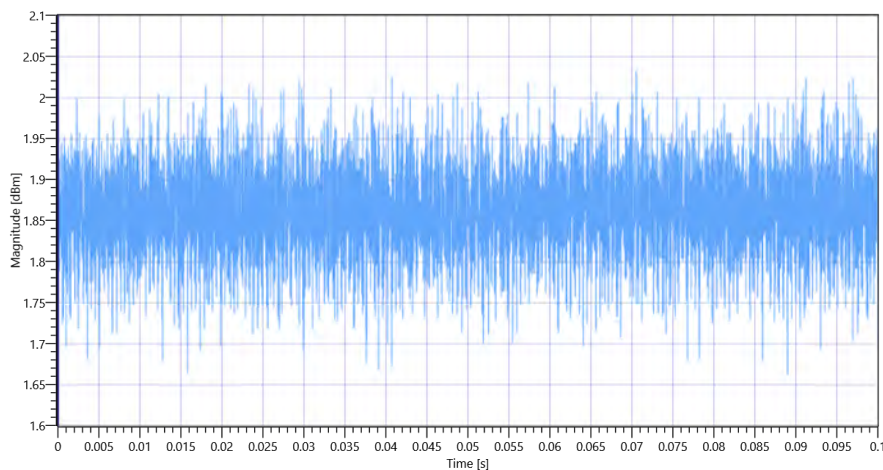


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A 5310 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.523	MHz	INFO
T1 99%	---	---	5291.8581	MHz	INFO
T2 99%	---	---	5328.3816	MHz	INFO

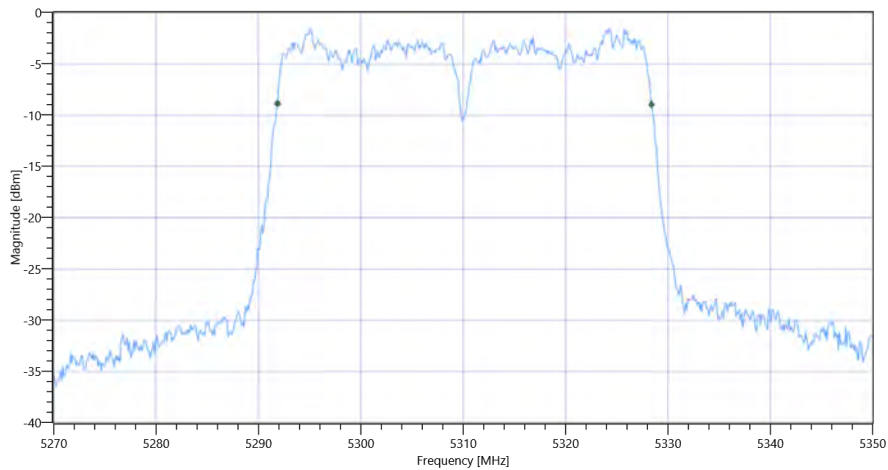

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.75   3.42   25
Start [MHz]   Stop [MHz]	5270.000   5350.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.73	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.73	dBm	PASS
Limit: 11 dBm + 10 log 36.523					
Max Output Power DC corrected	---	26.63	7.73	dBm	PASS

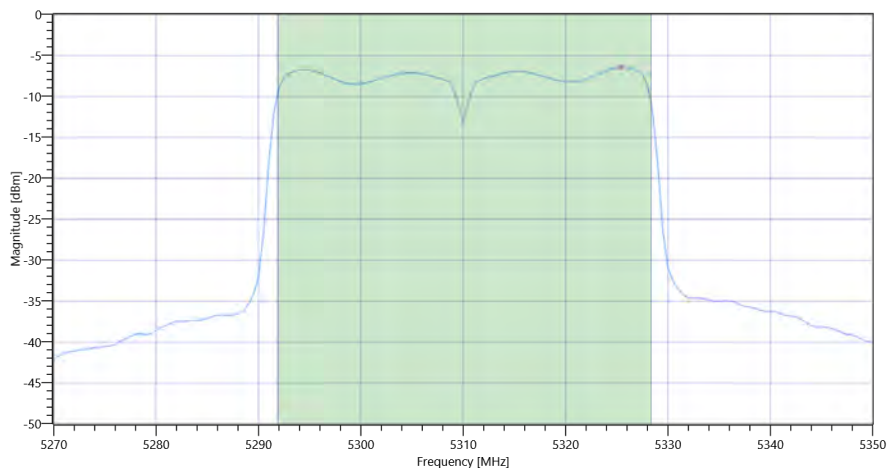

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.38	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.38	dBm/1MHz	PASS
General verdict			PASS		

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A

Test References	
TC Start	15.11.2022 13:44:36
Ambit Temp [°C]   Humidity [rel%]	23.4   42
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5270
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5310
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	



## Test at TX 5310 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.32	dBm	INFO
Ref. Frequency	---	---	5324.990	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	9.32   3.42   25
Start [MHz]   Stop [MHz]	5260.000   5360.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.663	MHz	INFO
T1 99%	5250.000000	---	5291.8182	MHz	PASS
T2 99%	---	5350.000000	5328.4815	MHz	PASS

### Plot: Bandwidth only

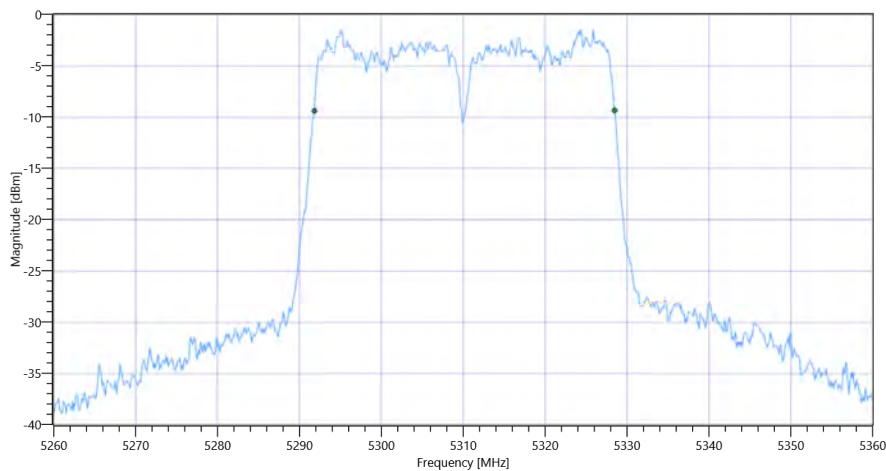

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A 99PCT


### Plot: Bandwidth within Band

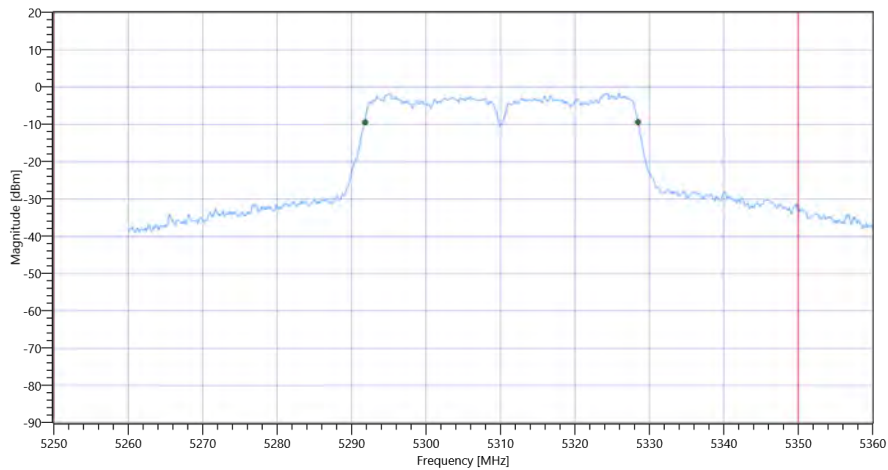

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	42	MHz	INFO
T1 26dB	5250.000000	---	5289.4000	MHz	PASS
T2 26dB	---	5350.000000	5331.4000	MHz	PASS

Plot: Bandwidth only

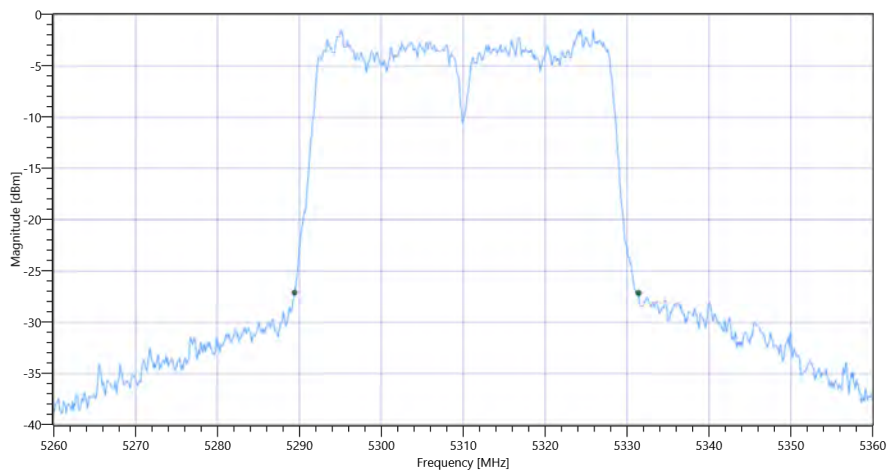

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A 26dB

Plot: Bandwidth within Band

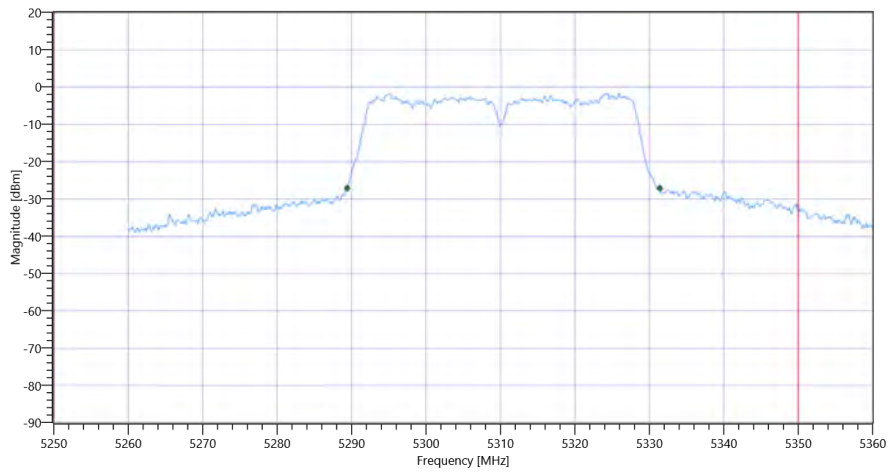

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2A

General verdict

PASS

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 13:45:27
Ambit Temp [°C]   Humidity [rel%]	23.4   42
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_2C
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 13:45:29
Message	set WLAN5Gx to n_HT40_U_NII_2C, Frequency [MHz] 5510 ,

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:49:50
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5510 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.29	dBm	INFO
Ref. Frequency	---	---	5494.820	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.29   3.39   25
Start [MHz]   Stop [MHz]	5460.000   5560.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	7.6	dBm	INFO
Peak Power	---	---	5.754399	mW	INFO
Frequency at Peak	---	---	5506.3	MHz	INFO

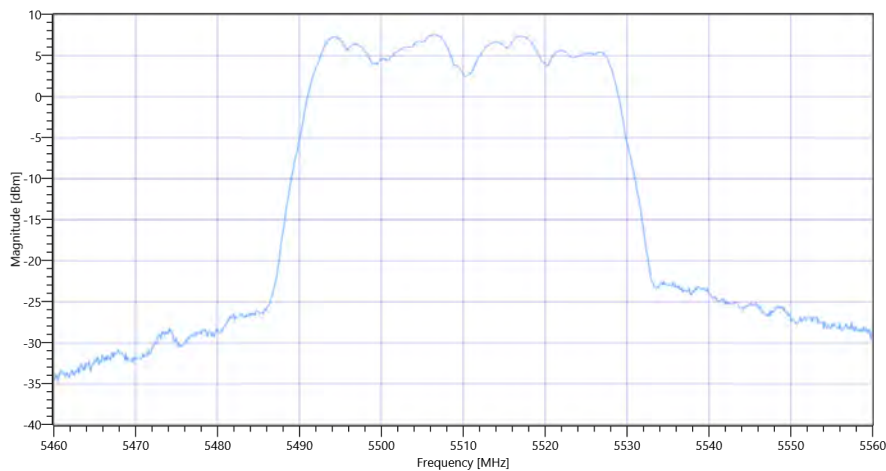

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:50:21
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5510 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.46	dBm	INFO
Ref. Frequency	---	---	5495.610	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

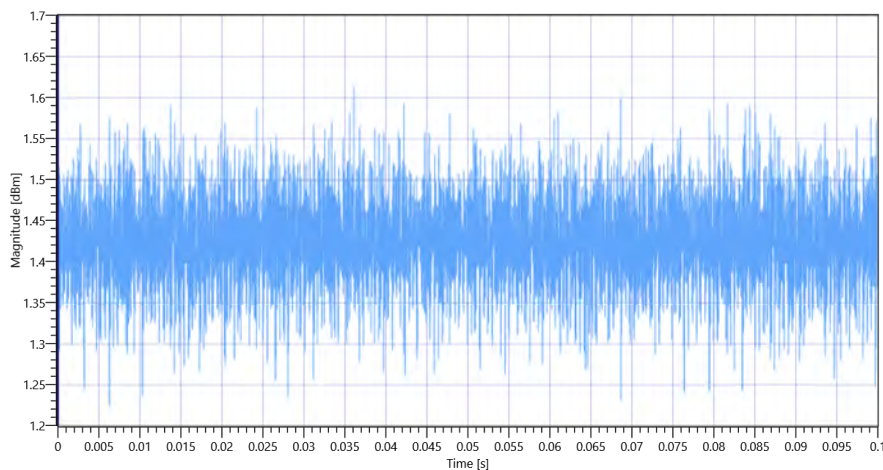


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5510 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.28	MHz	INFO
T1 26dB	---	---	5489.5200	MHz	INFO
T2 26dB	---	---	5530.8000	MHz	INFO



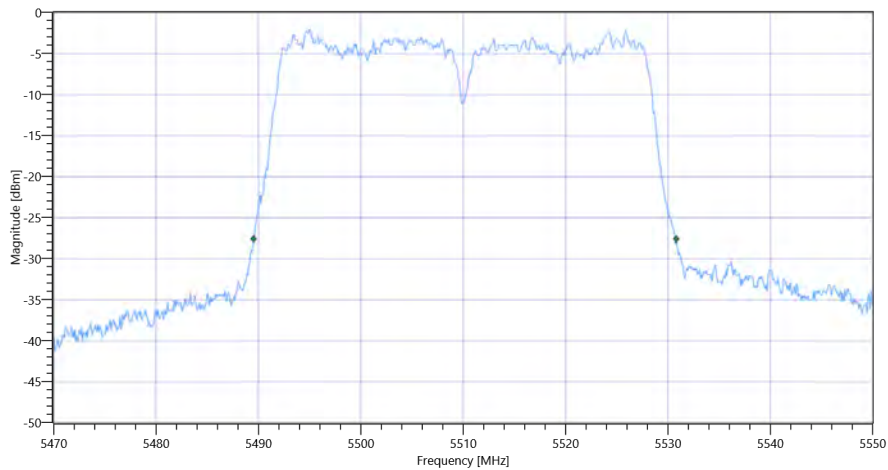

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.46   3.39   25
Start [MHz]   Stop [MHz]	5470.000   5550.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.27	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.27	dBm	PASS
Limit: 11 dBm + 10 log 41.28					
Max Output Power DC corrected	---	27.16	7.27	dBm	PASS

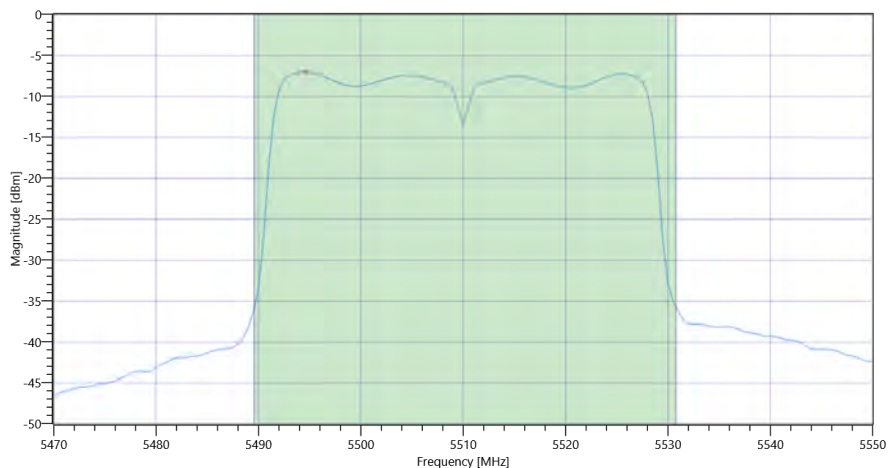

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.99	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.99	dBm/1MHz	PASS
General verdict			PASS		

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:52:08
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5510 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.34	dBm	INFO
Ref. Frequency	---	---	5495.610	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

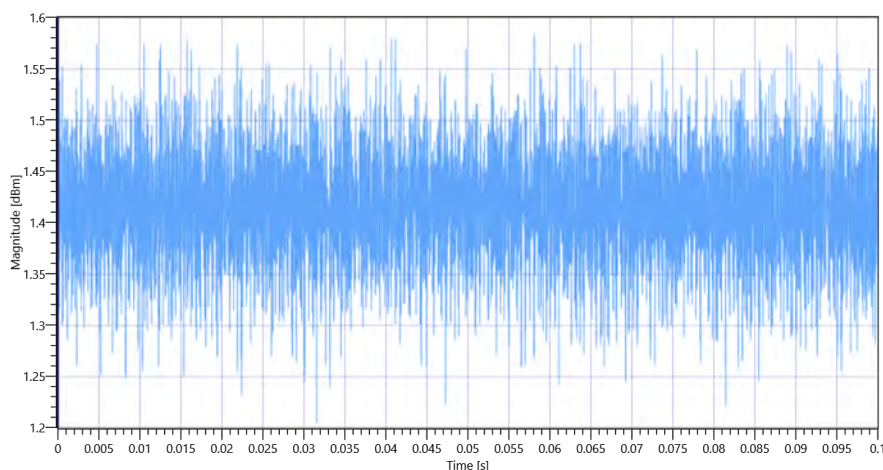


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5510 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.444	MHz	INFO
T1 99%	---	---	5491.8581	MHz	INFO
T2 99%	---	---	5528.3017	MHz	INFO

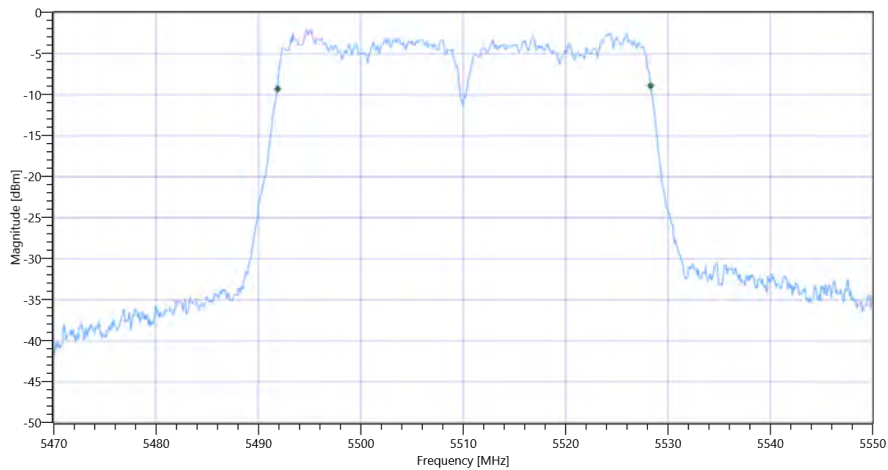

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.34   3.39   25
Start [MHz]   Stop [MHz]	5470.000   5550.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.22	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.22	dBm	PASS
Limit: 11 dBm + 10 log 36.444					
Max Output Power DC corrected	---	26.62	7.22	dBm	PASS

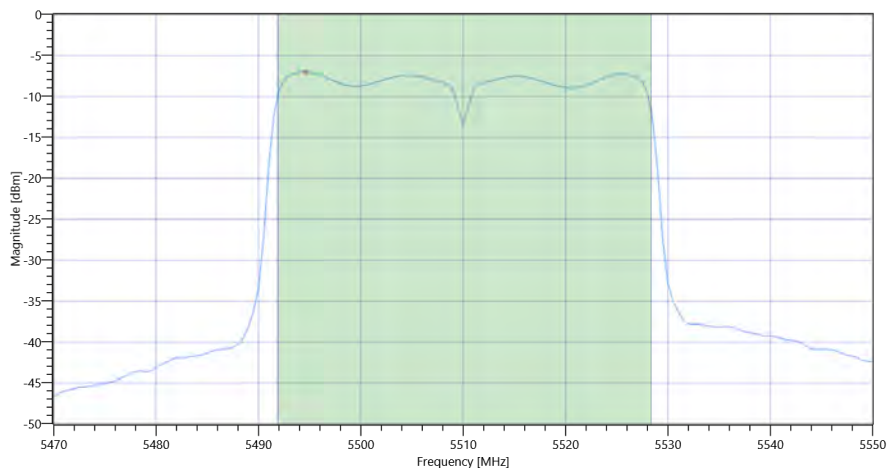

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.98	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.98	dBm/1MHz	PASS
General verdict			PASS		

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:53:55
Ambit Temp [°C]   Humidity [rel%]	23.4   42
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5510 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.52	dBm	INFO
Ref. Frequency	---	---	5504.610	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	8.52   3.39   25
Start [MHz]   Stop [MHz]	5460.000   5560.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5491.9181	MHz	PASS
T2 99%	---	5725.000000	5528.2817	MHz	PASS


### Plot: Bandwidth only

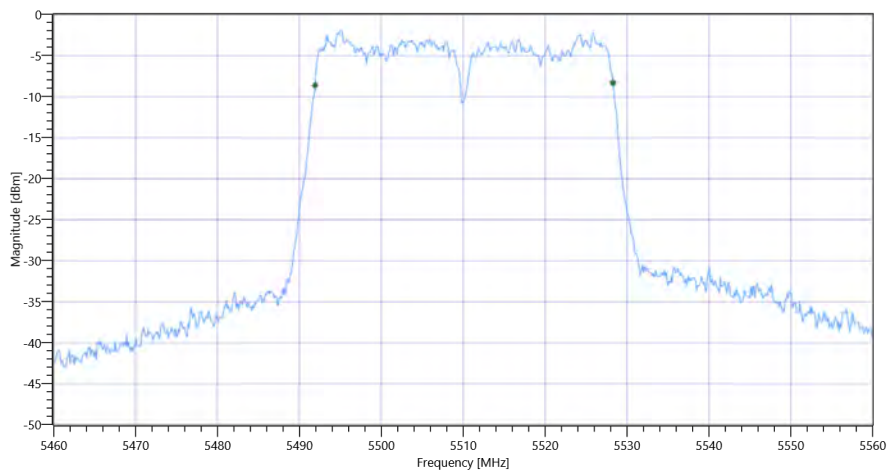

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT

### Plot: Bandwidth within Band




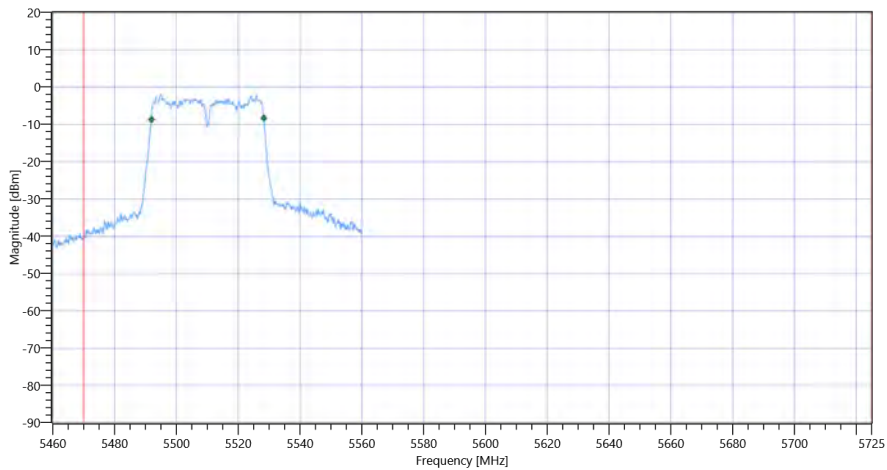

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.3	MHz	INFO
T1 26dB	5470.000000	---	5489.5000	MHz	PASS
T2 26dB	---	5725.000000	5530.8000	MHz	PASS

Plot: Bandwidth only

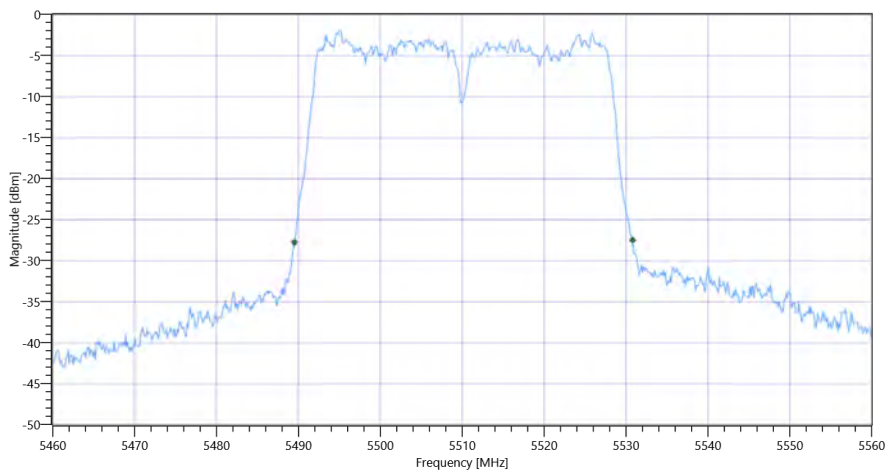

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band

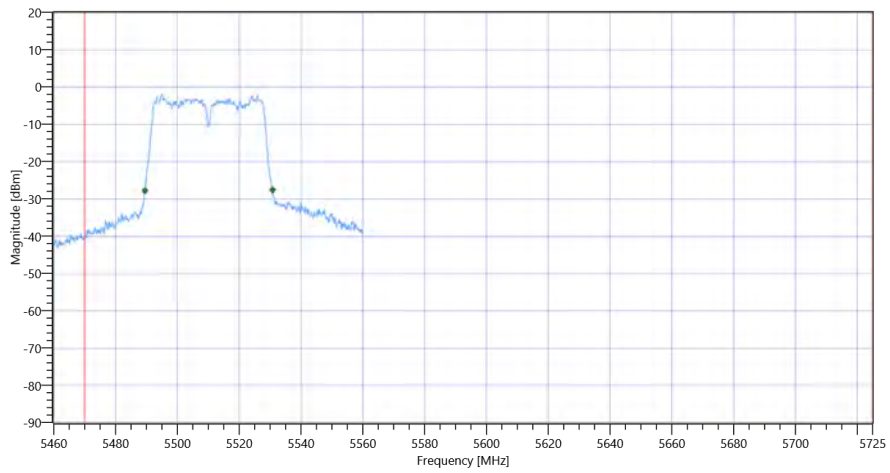

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 13:54:53
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_2C
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 13:54:54
Message	set WLAN5Gx to n_HT40_U_NII_2C, Frequency [MHz] 5590 ,

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:55:22
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	True   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5590 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.14	dBm	INFO
Ref. Frequency	---	---	5605.180	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.14   3.44   25
Start [MHz]   Stop [MHz]	5540.000   5640.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.02	dBm	INFO
Peak Power	---	---	6.338697	mW	INFO
Frequency at Peak	---	---	5586.3	MHz	INFO

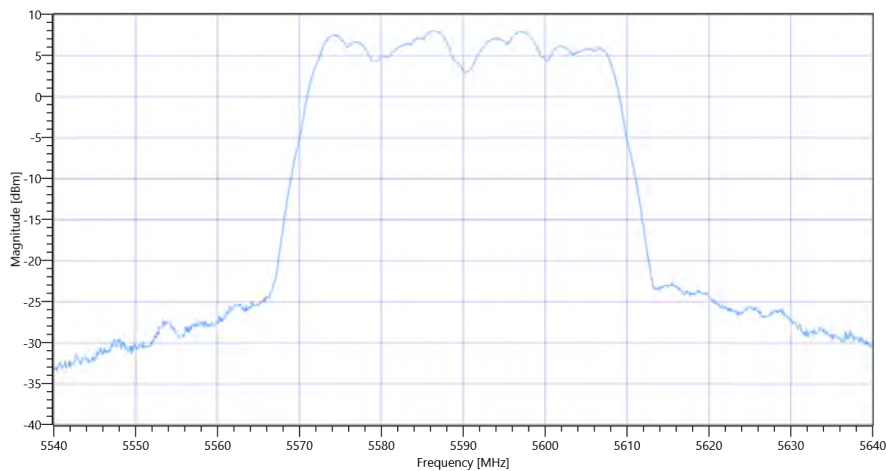

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:55:53
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	True   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5590 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.16	dBm	INFO
Ref. Frequency	---	---	5605.180	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

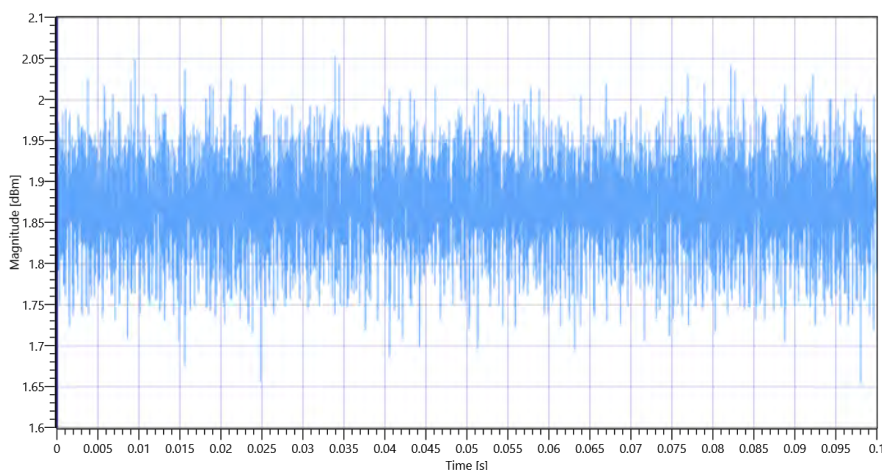


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5590 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.2	MHz	INFO
T1 26dB	---	---	5569.5200	MHz	INFO
T2 26dB	---	---	5610.7200	MHz	INFO

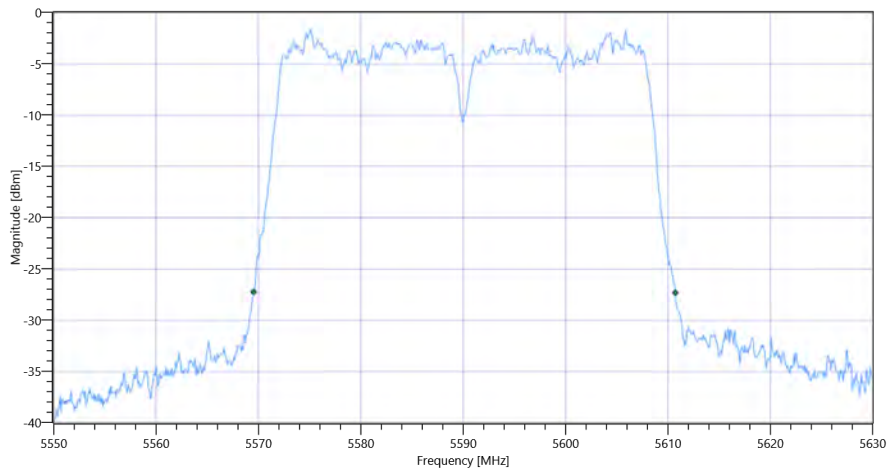

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.16   3.44   25
Start [MHz]   Stop [MHz]	5550.000   5630.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.68	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.68	dBm	PASS
Limit: 11 dBm + 10 log 41.2					
Max Output Power DC corrected	---	27.15	7.68	dBm	PASS

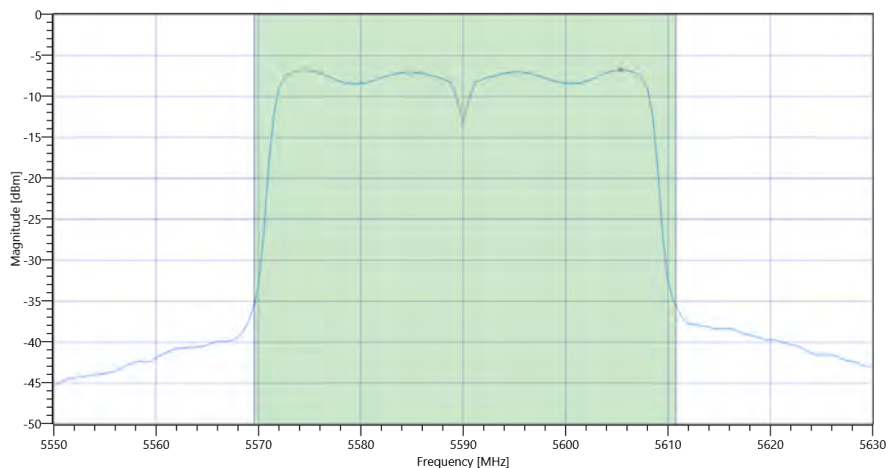

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD



## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.75	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.75	dBm/1MHz	PASS
General verdict			PASS		

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:57:37
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	True   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5590 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.99	dBm	INFO
Ref. Frequency	---	---	5582.810	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

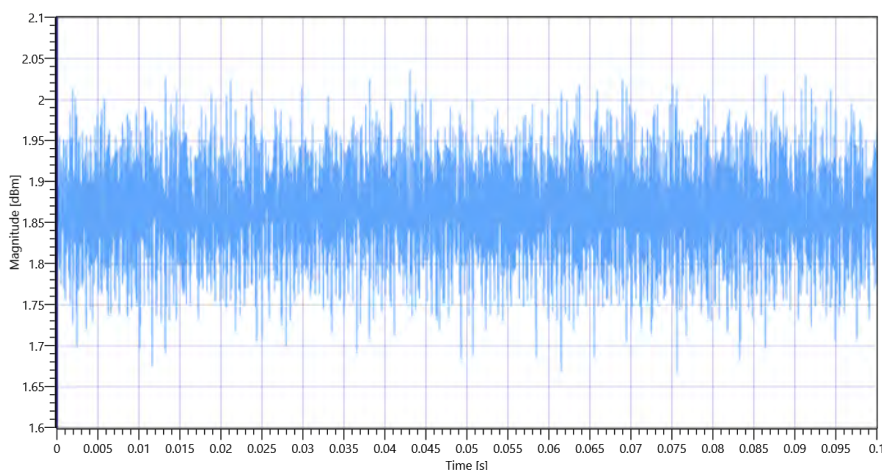


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5590 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	---	---	5571.9381	MHz	INFO
T2 99%	---	---	5608.3017	MHz	INFO

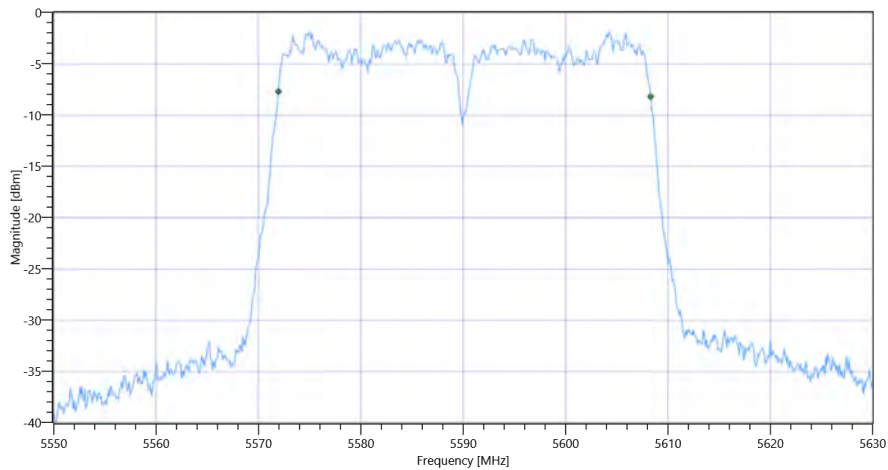

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.99   3.44   25
Start [MHz]   Stop [MHz]	5550.000   5630.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.62	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.62	dBm	PASS
Limit: 11 dBm + 10 log 36.364					
Max Output Power DC corrected	---	26.61	7.62	dBm	PASS

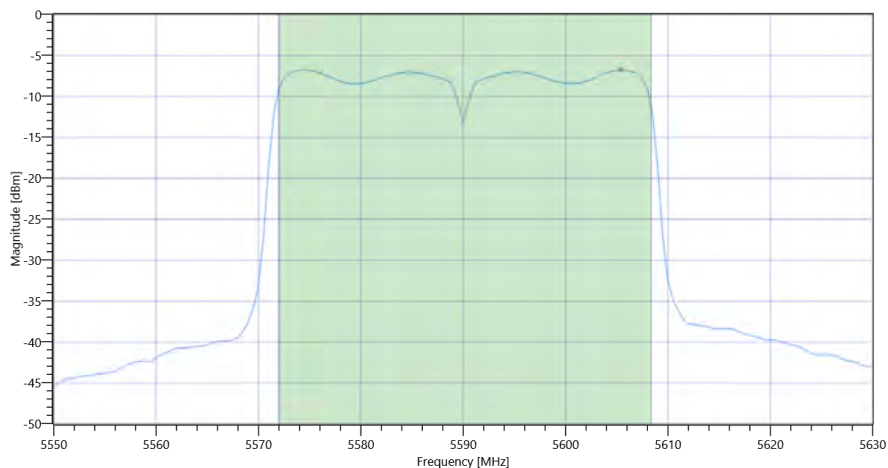

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.75	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.75	dBm/1MHz	PASS
General verdict			PASS		

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 13:59:21
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	True   Freq [MHz] 5590
Frequency high to test	False   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5590 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.74	dBm	INFO
Ref. Frequency	---	---	5594.400	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	8.74   3.44   25
Start [MHz]   Stop [MHz]	5540.000   5640.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5571.9181	MHz	PASS
T2 99%	---	5725.000000	5608.2817	MHz	PASS

### Plot: Bandwidth only

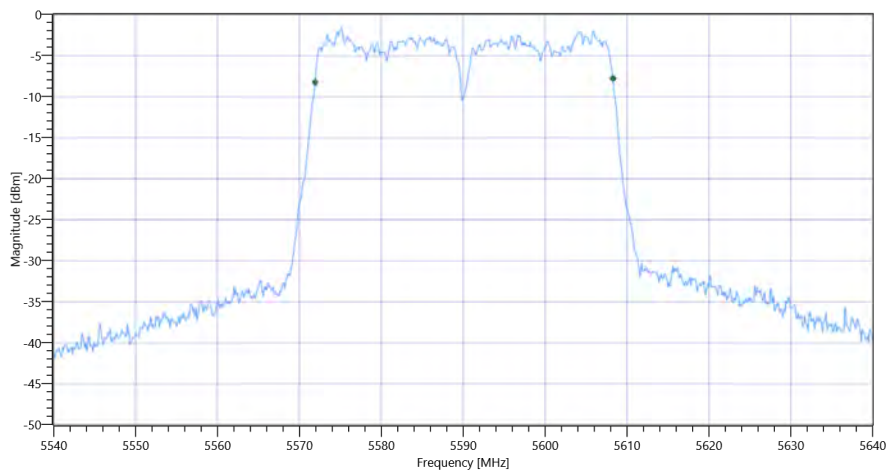

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

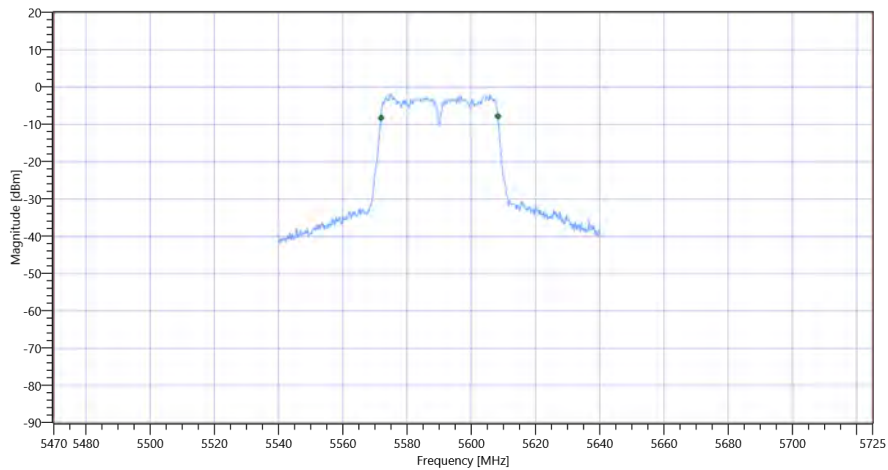

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.2	MHz	INFO
T1 26dB	5470.000000	---	5569.5000	MHz	PASS
T2 26dB	---	5725.000000	5610.7000	MHz	PASS


Plot: Bandwidth only

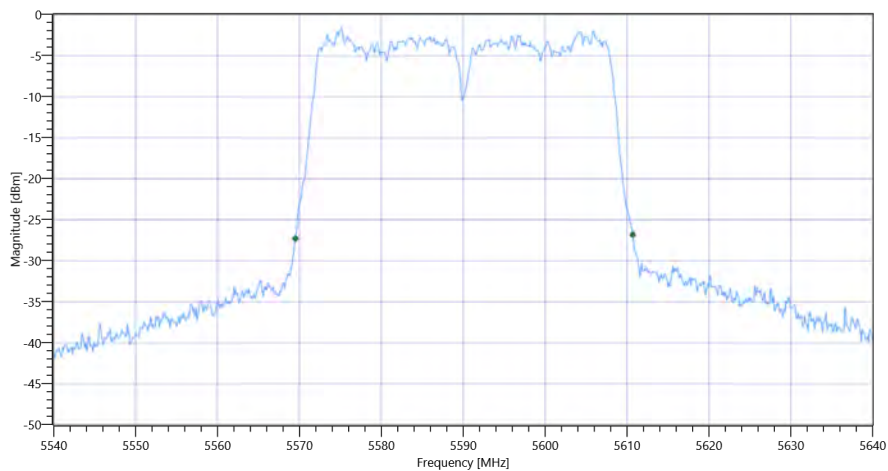

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band



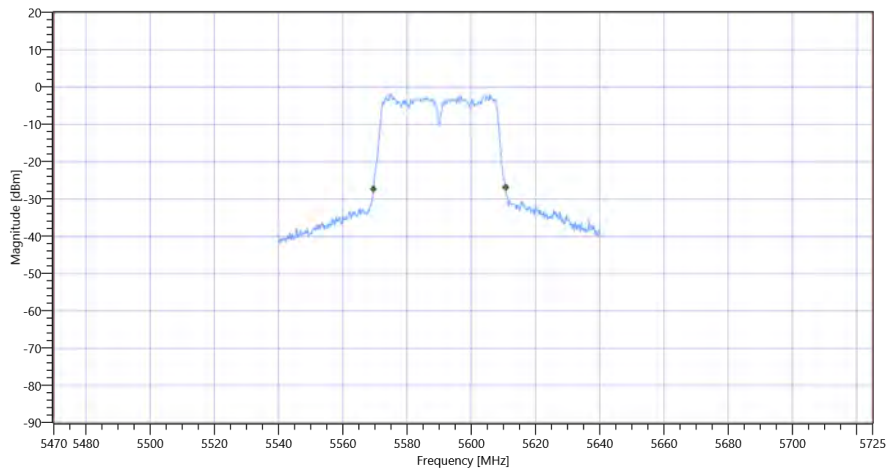

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 14:00:19
Ambit Temp [°C]   Humidity [rel%]	23.3   42
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_2C
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 14:00:21
Message	set WLAN5Gx to n_HT40_U_NII_2C, Frequency [MHz] 5670

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 14:03:33
Ambit Temp [°C]   Humidity [rel%]	23.2   42
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	True   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5670 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.04	dBm	INFO
Ref. Frequency	---	---	5662.810	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	13.04   3.52   25
Start [MHz]   Stop [MHz]	5620.000   5720.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	8.15	dBm	INFO
Peak Power	---	---	6.531306	mW	INFO
Frequency at Peak	---	---	5666.5	MHz	INFO

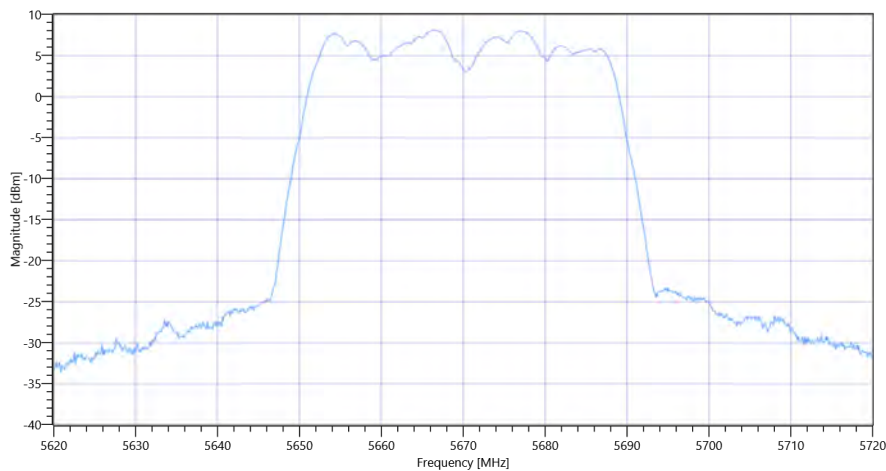

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 14:04:03
Ambit Temp [°C]   Humidity [rel%]	23.2   42
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	True   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5670 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.76	dBm	INFO
Ref. Frequency	---	---	5684.990	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

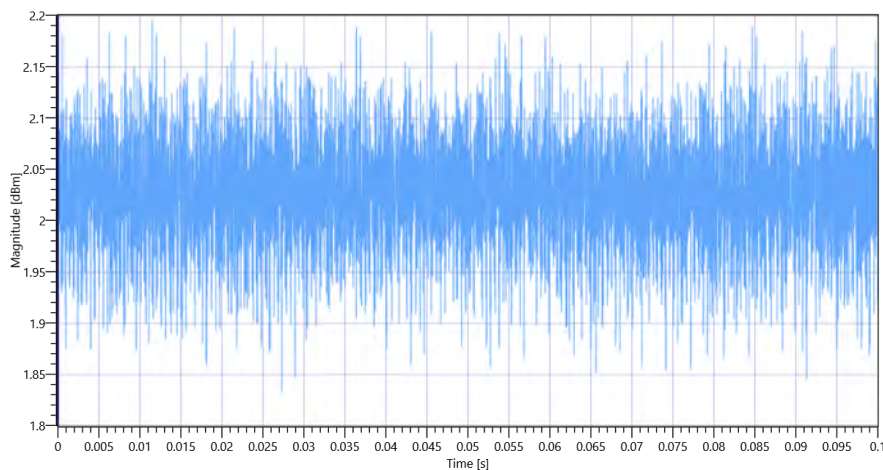


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5670 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.12	MHz	INFO
T1 26dB	---	---	5649.5200	MHz	INFO
T2 26dB	---	---	5690.6400	MHz	INFO

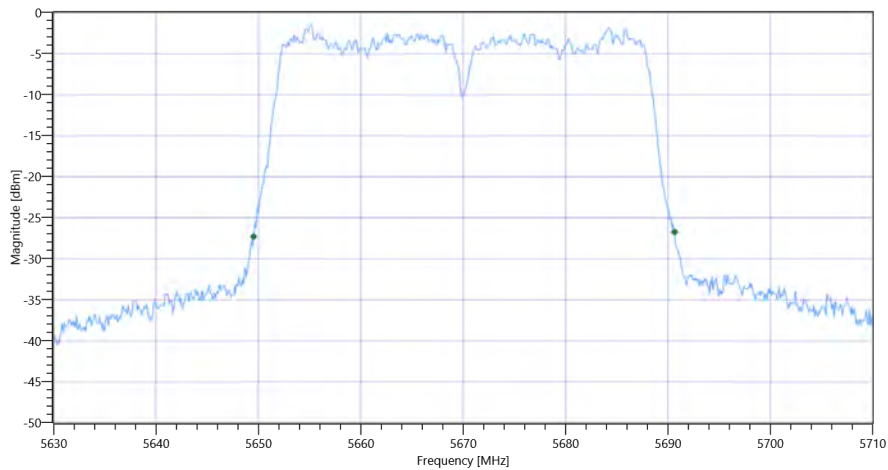

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.76   3.52   25
Start [MHz]   Stop [MHz]	5630.000   5710.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.79	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.79	dBm	PASS
Limit: 11 dBm + 10 log 41.12					
Max Output Power DC corrected	---	27.14	7.79	dBm	PASS

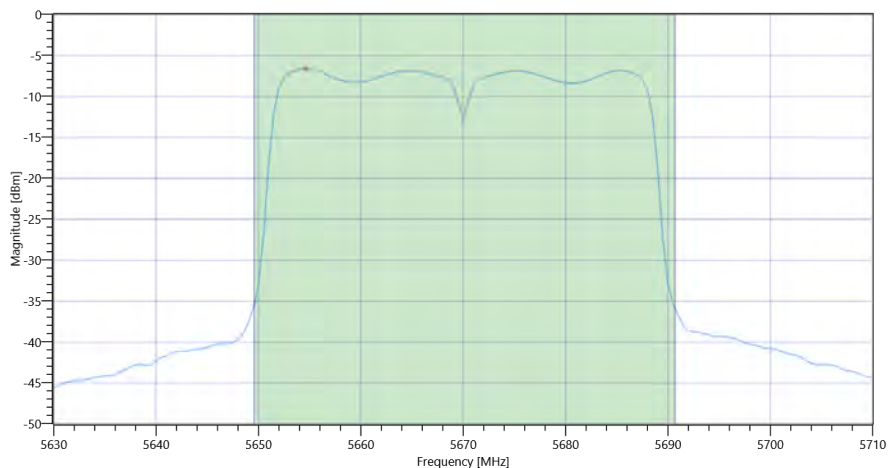

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.6	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.6	dBm/1MHz	PASS
General verdict			PASS		



## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 14:05:47
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	True   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5670 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.85	dBm	INFO
Ref. Frequency	---	---	5655.010	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

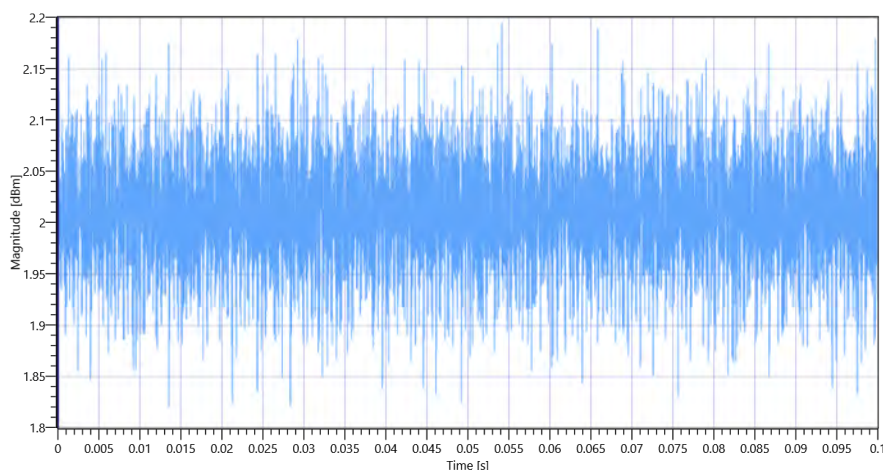


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C 5670 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.284	MHz	INFO
T1 99%	---	---	5651.9381	MHz	INFO
T2 99%	---	---	5688.2218	MHz	INFO

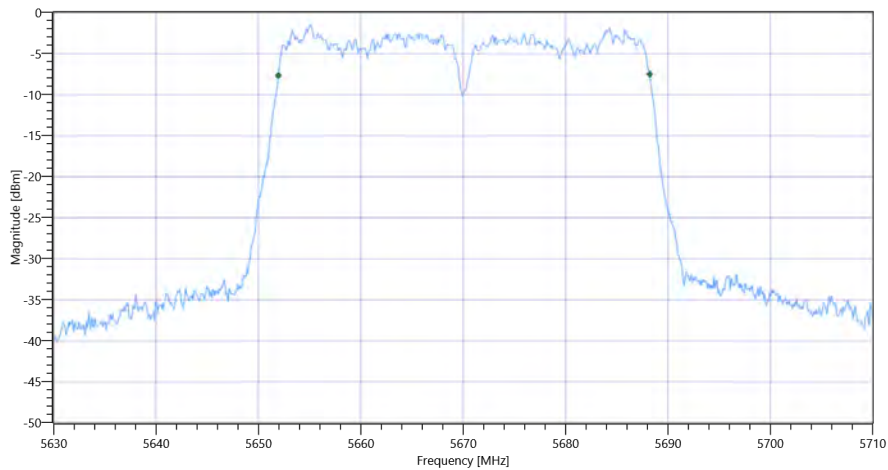

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	12.85   3.52   25
Start [MHz]   Stop [MHz]	5630.000   5710.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	7.72	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	24	7.72	dBm	PASS
Limit: 11 dBm + 10 log 36.284					
Max Output Power DC corrected	---	26.6	7.72	dBm	PASS

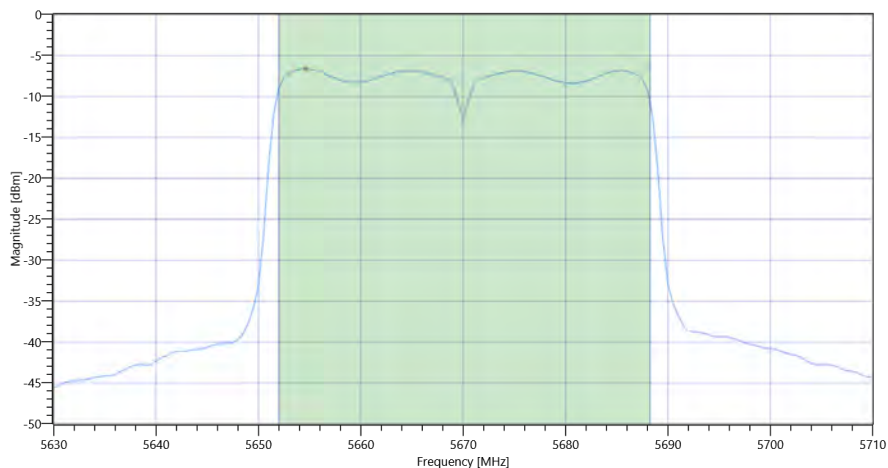

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-2C Max OP and PSD

## Power Spectral Density

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.61	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-6.61	dBm/1MHz	PASS
General verdict			PASS		

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	15.11.2022 14:07:31
Ambit Temp [°C]   Humidity [rel%]	23.1   43
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5510
Frequency mid to test	False   Freq [MHz] 5590
Frequency high to test	True   Freq [MHz] 5670
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5670 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	0.91	dBm	INFO
Ref. Frequency	---	---	5664.610	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	8.91   3.52   25
Start [MHz]   Stop [MHz]	5620.000   5720.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5470.000000	---	5651.9181	MHz	PASS
T2 99%	---	5725.000000	5688.2817	MHz	PASS

### Plot: Bandwidth only

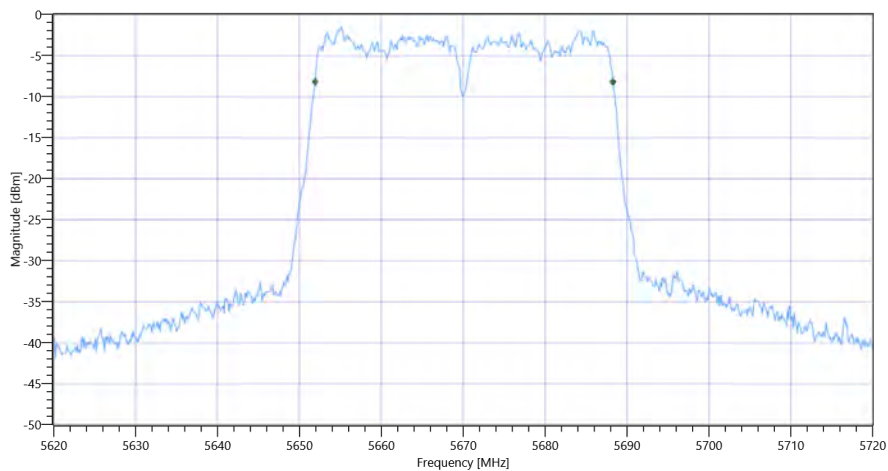

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT


### Plot: Bandwidth within Band

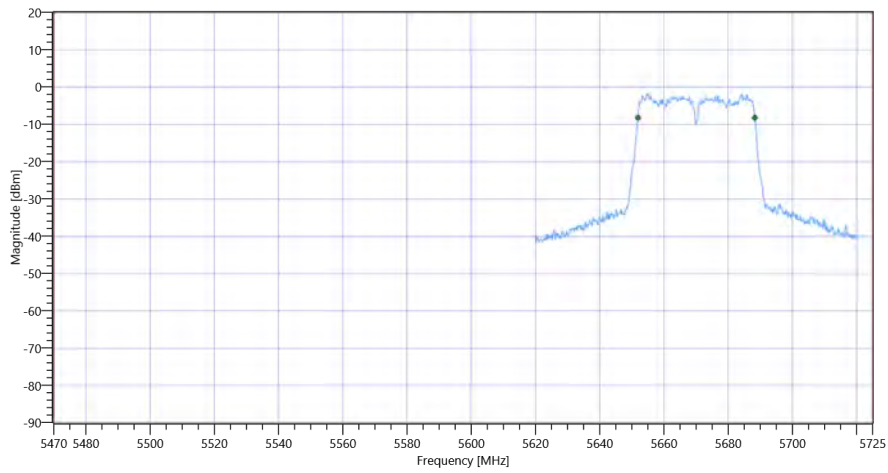

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.3	MHz	INFO
T1 26dB	5470.000000	---	5649.5000	MHz	PASS
T2 26dB	---	5725.000000	5690.8000	MHz	PASS

Plot: Bandwidth only

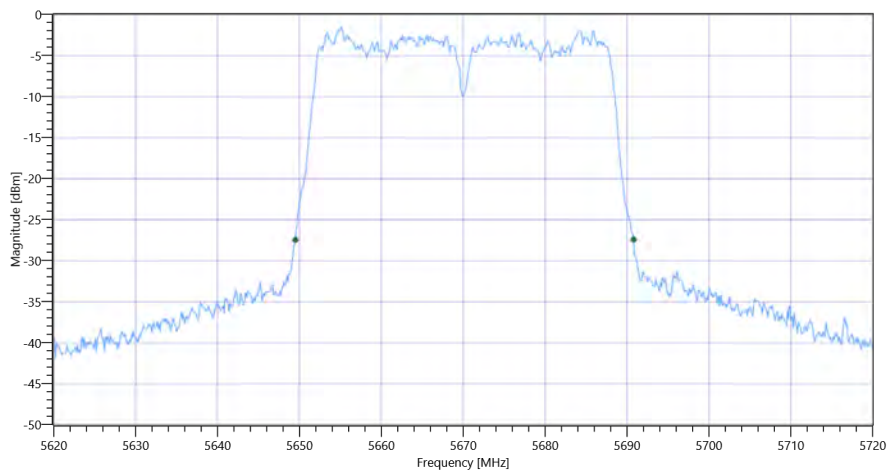

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band

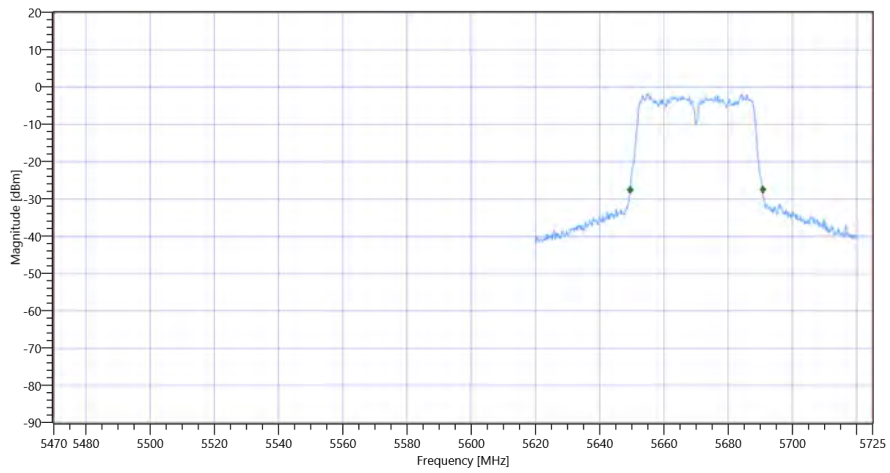

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS



## # Message with SA scan ~

Test References	
TC Start	15.11.2022 14:08:23
Ambit Temp [°C]   Humidity [rel%]	23.1   43
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_3
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 14:08:25
Message	set WLAN5Gx to n_HT40_U_NII_3, Frequency [MHz] 5755 ,

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:09:39
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5755 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.55	dBm	INFO
Ref. Frequency	---	---	5739.220	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.55   3.73   30
Start [MHz]   Stop [MHz]	5705.000   5805.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	10.32	dBm	INFO
Peak Power	---	---	10.764652	mW	INFO
Frequency at Peak	---	---	5751.4	MHz	INFO

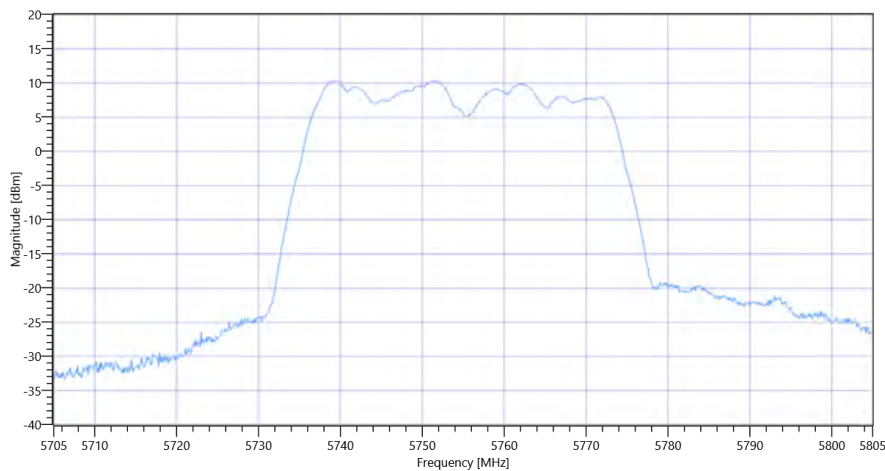

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:10:10
Ambit Temp [°C]   Humidity [rel%]	23.1   43
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5755 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.76	dBm	INFO
Ref. Frequency	---	---	5739.620	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

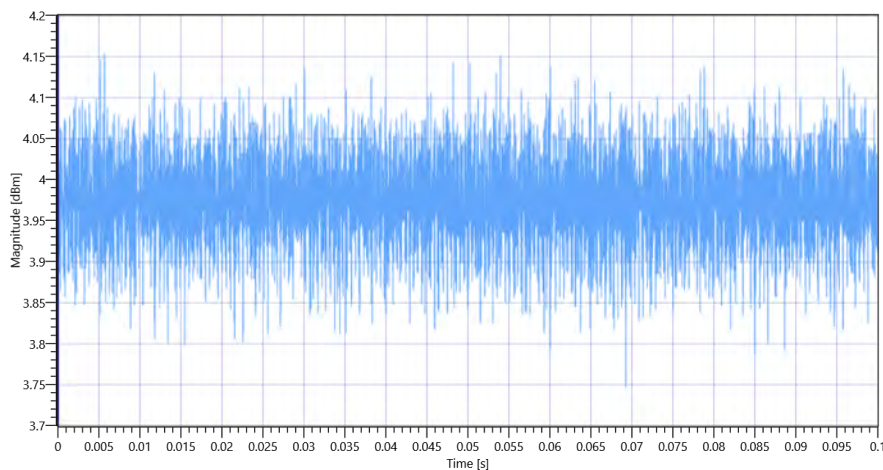


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5755 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.12	MHz	INFO
T1 26dB	---	---	5734.5200	MHz	INFO
T2 26dB	---	---	5775.6400	MHz	INFO

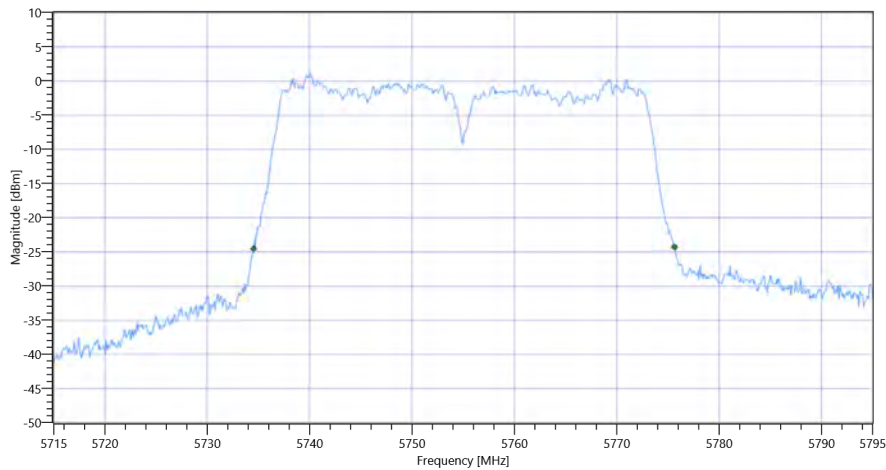

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.76   3.73   30
Start [MHz]   Stop [MHz]	5715.000   5795.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.93	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	9.93	dBm	PASS
Limit: 11 dBm + 10 log 41.12					
Max Output Power DC corrected	---	27.14	9.93	dBm	na

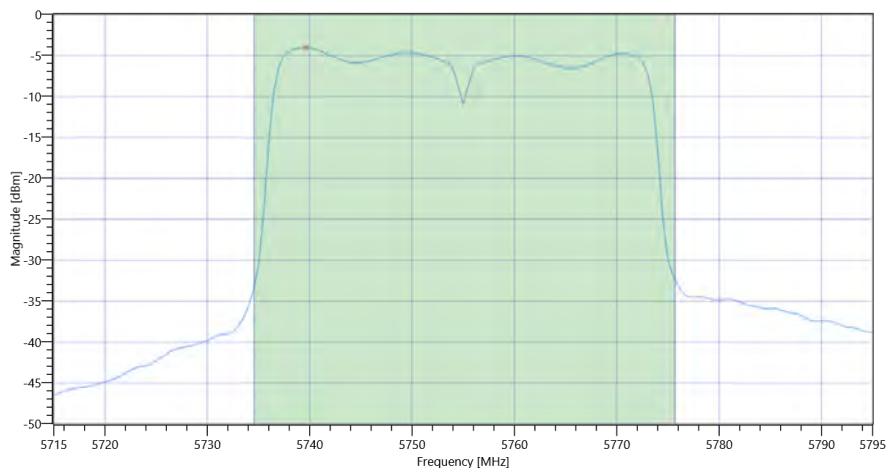

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


### Power Spectral Density U-NII-3

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.76   3.73   30
Start [MHz]   Stop [MHz]	5715.000   5795.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-7	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-7	dBm/0.5MHz	PASS

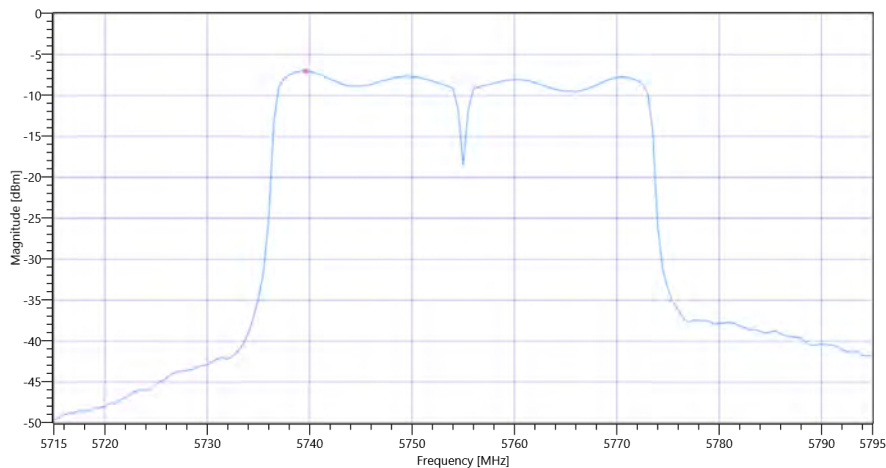

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:12:56
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	



## Test at TX 5755 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.48	dBm	INFO
Ref. Frequency	---	---	5739.420	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

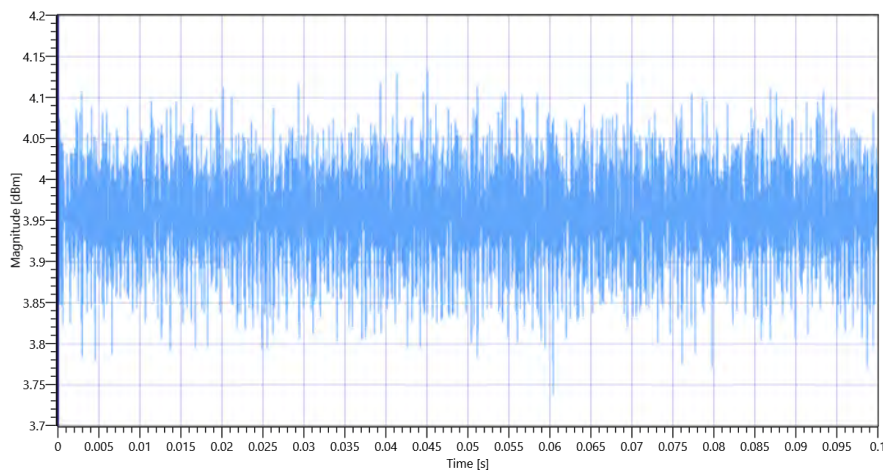


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5755 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.444	MHz	INFO
T1 99%	---	---	5736.8581	MHz	INFO
T2 99%	---	---	5773.3017	MHz	INFO

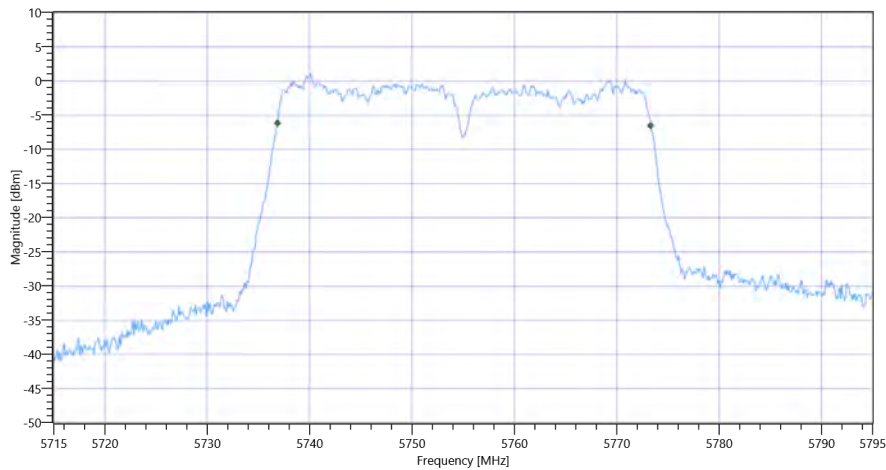

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3\_BW


## Maximum Output Power

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.48   3.73   30
Start [MHz]   Stop [MHz]	5715.000   5795.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.86	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	9.86	dBm	PASS
Limit: 11 dBm + 10 log 36.444					
Max Output Power DC corrected	---	26.62	9.86	dBm	na

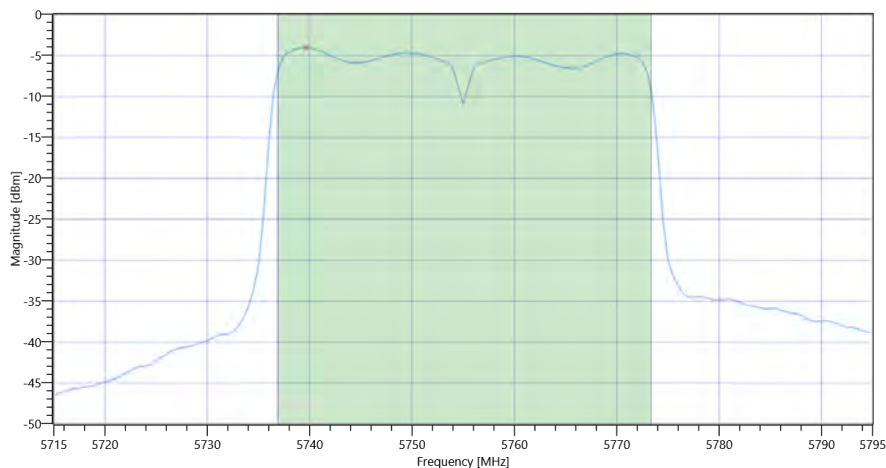

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.48   3.73   30
Start [MHz]   Stop [MHz]	5715.000   5795.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-7.02	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-7.02	dBm/0.5MHz	PASS

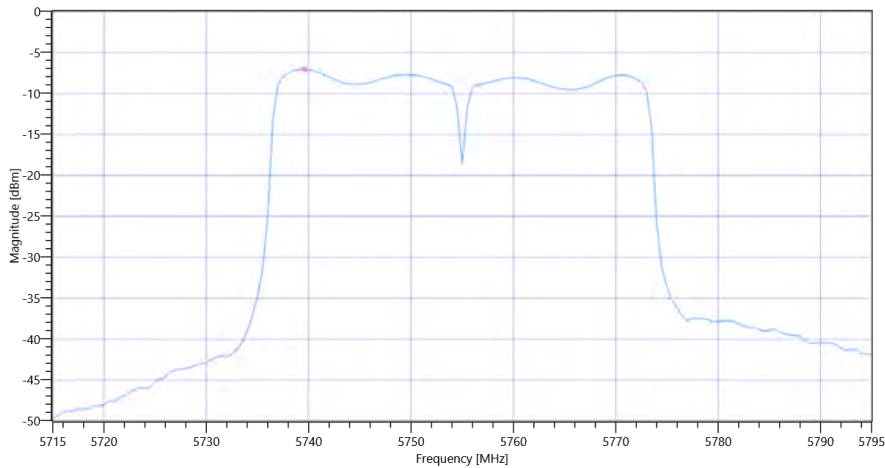

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:15:43
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5755 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.38	dBm	INFO
Ref. Frequency	---	---	5747.610	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	11.38   3.73   25
Start [MHz]   Stop [MHz]	5705.000   5805.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.563	MHz	INFO
T1 99%	5725.000000	---	5736.8182	MHz	PASS
T2 99%	---	5850.000000	5773.3816	MHz	PASS

### Plot: Bandwidth only

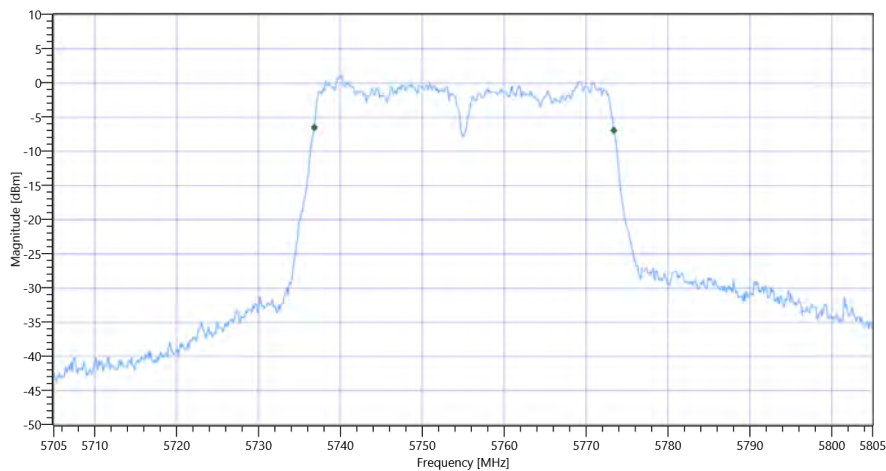

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 99PCT


### Plot: Bandwidth within Band

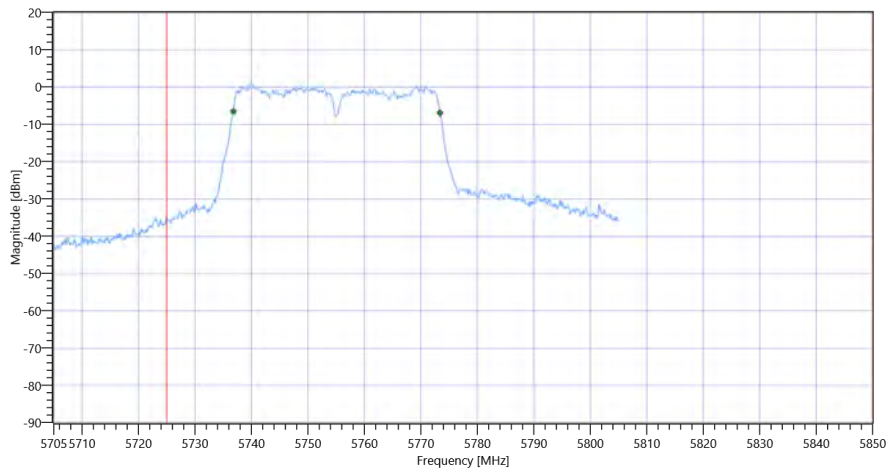

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.1	MHz	INFO
T1 26dB	5725.000000	---	5734.6000	MHz	PASS
T2 26dB	---	5850.000000	5775.7000	MHz	PASS

Plot: Bandwidth only

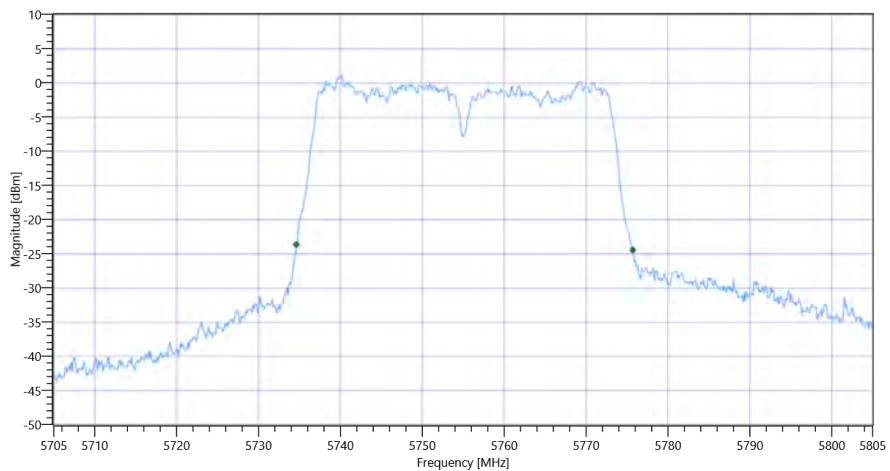

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 26dB

Plot: Bandwidth within Band

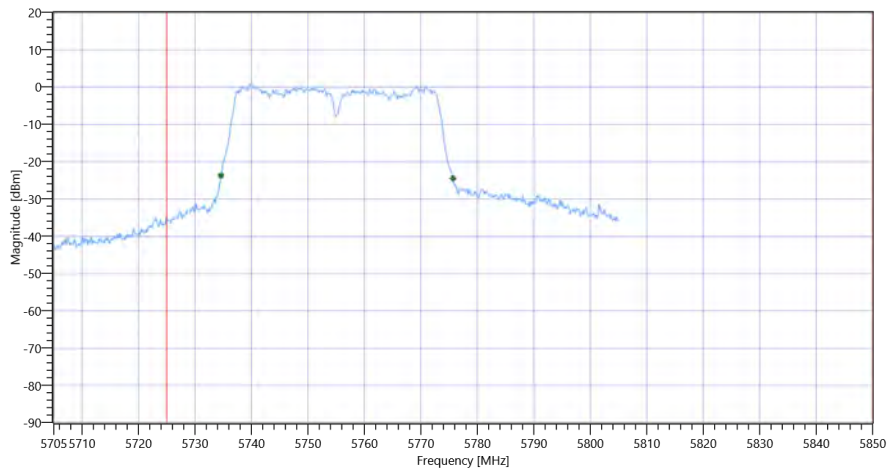

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:16:36
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	False   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	



## Test at TX 5755 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. Frequency	---	---	5739.620	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.40   3.73   30
Start [MHz]   Stop [MHz]	5705.000   5805.000
RBW [MHz]   VBW [MHz]	0.100000   0.300000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	2   1500   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.4	MHz	PASS

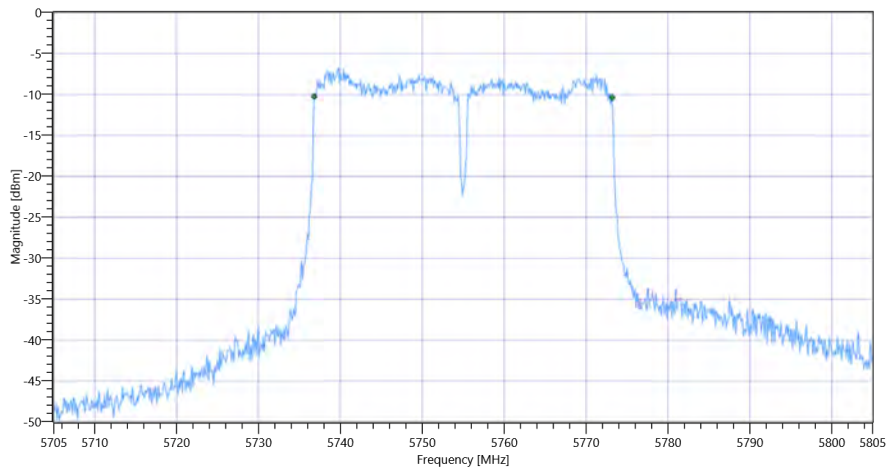

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

PASS

## # Message with SA scan ~

Test References	
TC Start	15.11.2022 14:17:05
Ambit Temp [°C]   Humidity [rel%]	23.2   43
System Version	3.3.1.8
Test Specification	-
Test Method	
TC Version	0.0.1
My Description	Message with SA Scan n_HT40_U_NII_3
Add. Information	

Test Parameter	
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer
Message start	15.11.2022 14:17:07
Message	set WLAN5Gx to n_HT40_U_NII_3, Frequency [MHz] 5795

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

General verdict

INFO

## Common 5Gx 6Gx # Peak output power 3MHz/3MHz ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:19:00
Ambit Temp [°C]   Humidity [rel%]	23.3   44
System Version	3.3.1.8
Test Specification	Common 5Gx 6Gx - none
Test Method	
TC Version	0.0.1
My Description	Peak OP 3MHz/3MHz - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5795 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.95	dBm	INFO
Ref. Frequency	---	---	5799.600	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	14.95   3.69   30
Start [MHz]   Stop [MHz]	5745.000   5845.000
RBW [MHz]   VBW [MHz]	3.000000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	300   20   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	10.38	dBm	INFO
Peak Power	---	---	10.914403	mW	INFO
Frequency at Peak	---	---	5791.5	MHz	INFO

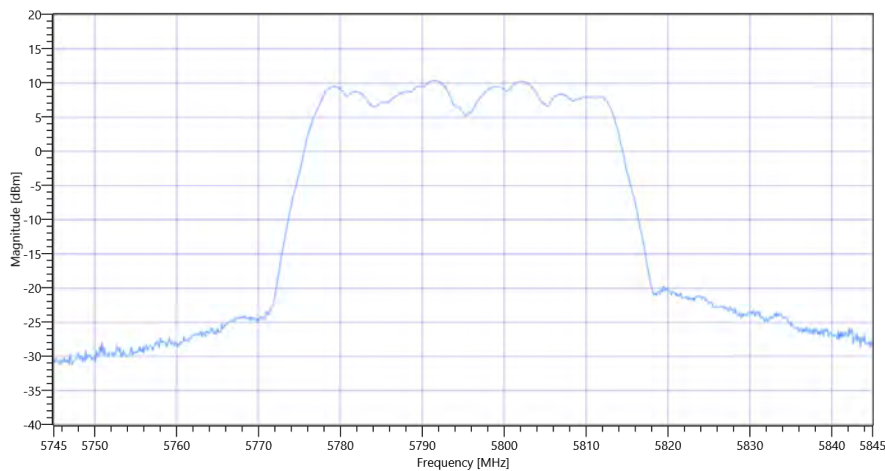

Common 5Gx 6Gx # Peak output power 3MHz-3MHz ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

**PASS**

## FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:19:31
Ambit Temp [°C]   Humidity [rel%]	23.3   44
System Version	3.3.1.8
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5795 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.08	dBm	INFO
Ref. Frequency	---	---	5798.800	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

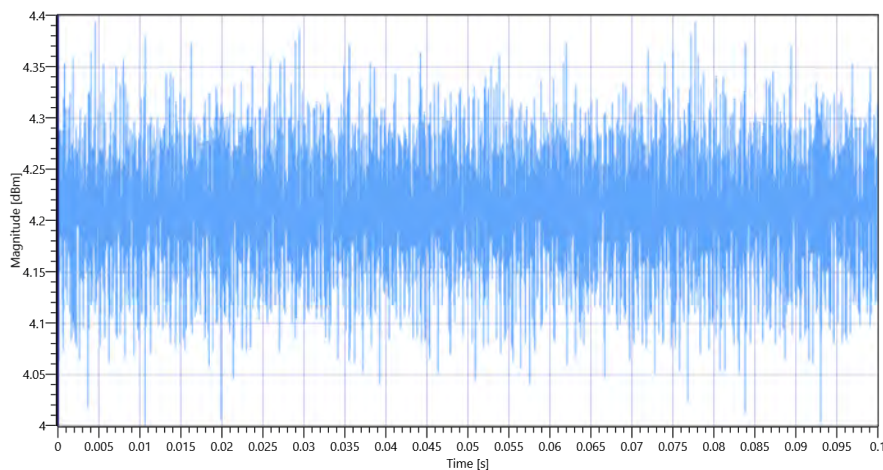


FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5795 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.12	MHz	INFO
T1 26dB	---	---	5774.6000	MHz	INFO
T2 26dB	---	---	5815.7200	MHz	INFO

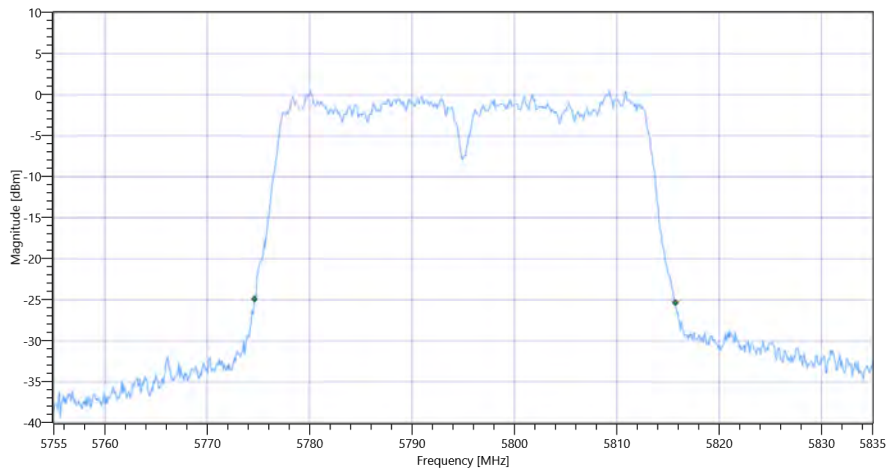

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.08   3.69   30
Start [MHz]   Stop [MHz]	5755.000   5835.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.91	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	9.91	dBm	PASS
Limit: 11 dBm + 10 log 41.12					
Max Output Power DC corrected	---	27.14	9.91	dBm	na

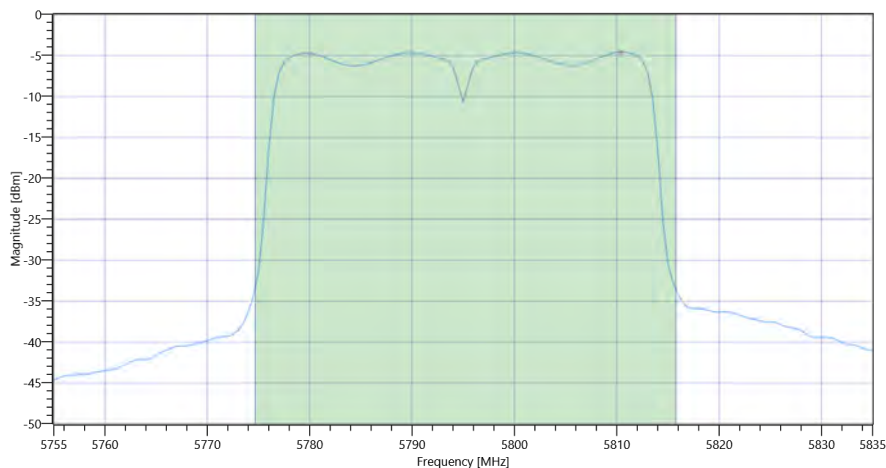

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


### Power Spectral Density U-NII-3

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.08   3.69   30
Start [MHz]   Stop [MHz]	5755.000   5835.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-7.56	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-7.56	dBm/0.5MHz	PASS

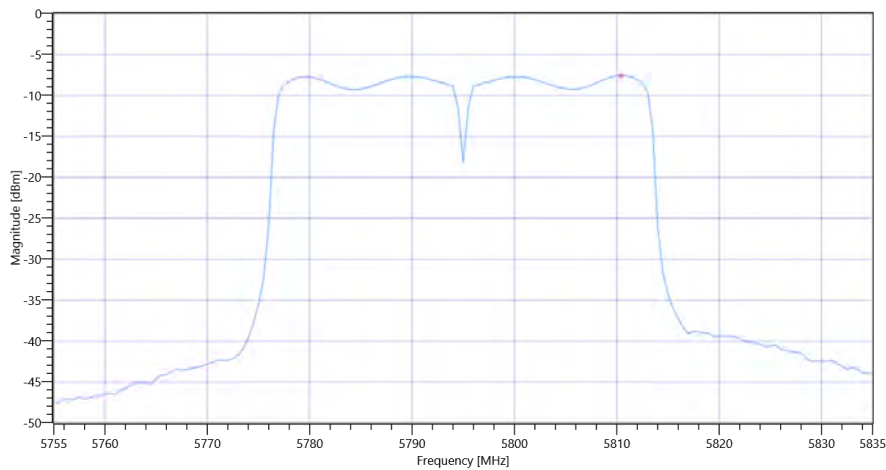

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS



## ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:22:18
Ambit Temp [°C]   Humidity [rel%]	23.3   44
System Version	3.3.1.8
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5795 MHz


### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. Frequency	---	---	5787.810	MHz	INFO

## Evaluation max. Duty Cycle

### Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
No enough Bursts detected, Duty Cycle Burst Ratio set to 1					
Duty Cycle (Burst Ratio) max	---	---	1	---	INFO
Duty Cycle max	---	---	0	dB	INFO
Duty Cycle (Burst Ratio) min	---	---	1	---	INFO
Duty Cycle min	---	---	0	dB	INFO

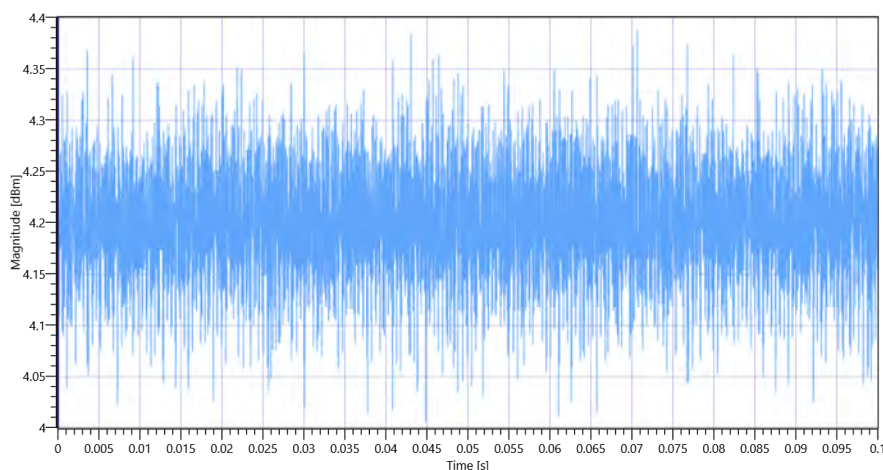


ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 5795 MHz - DutyCycle

## Evaluation Bandwidth

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	---	---	5776.9381	MHz	INFO
T2 99%	---	---	5813.3017	MHz	INFO

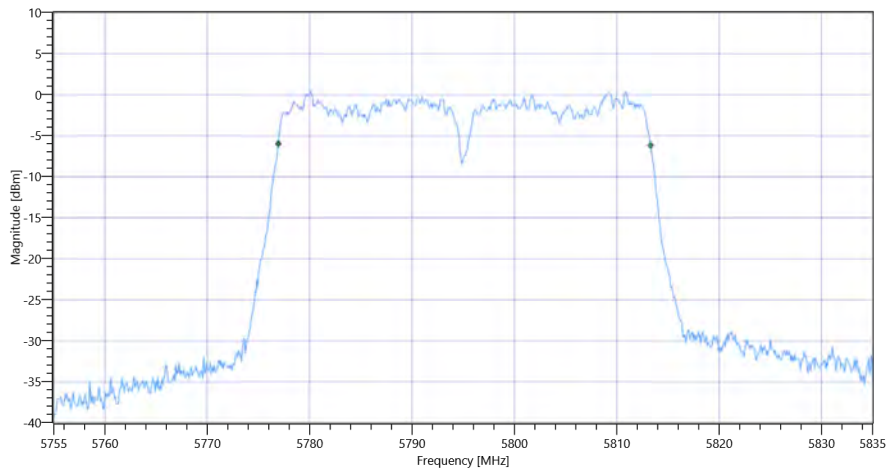

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3\_BW


### Maximum Output Power

#### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.40   3.69   30
Start [MHz]   Stop [MHz]	5755.000   5835.000
RBW [MHz]   VBW [MHz]	1.000000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

#### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.85	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					
Max Output Power DC corrected	---	30	9.85	dBm	PASS
Limit: 11 dBm + 10 log 36.364					
Max Output Power DC corrected	---	26.61	9.85	dBm	na

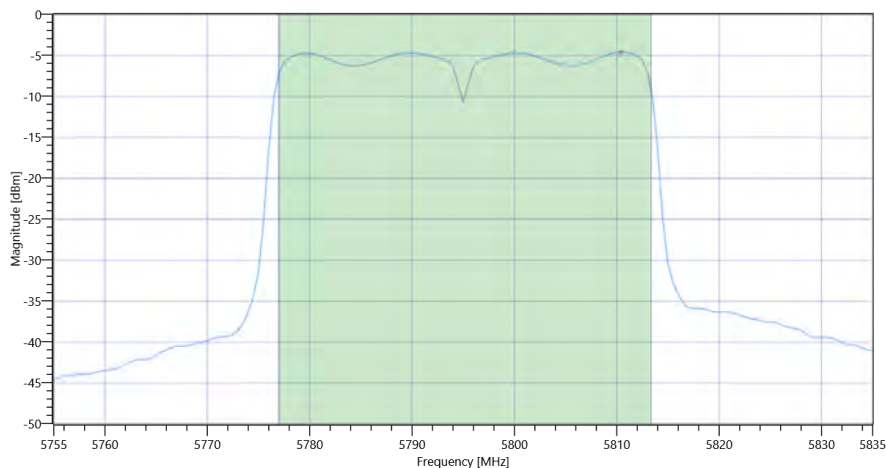

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 Max OP and PSD


### Power Spectral Density U-NII-3

**READ SA SETTINGS:**

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.40   3.69   30
Start [MHz]   Stop [MHz]	5755.000   5835.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	RMS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	53700   1   161   SWE

**RESULT**

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-7.57	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-7.57	dBm/0.5MHz	PASS

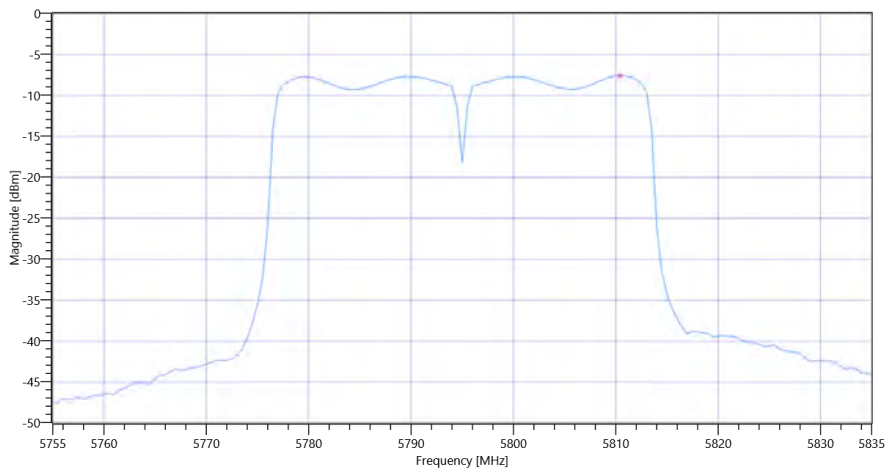

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3 PSD UNII-3

General verdict

PASS

## FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:25:05
Ambit Temp [°C]   Humidity [rel%]	23.4   44
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5795 MHz

### RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.42	dBm	INFO
Ref. Frequency	---	---	5789.610	MHz	INFO


### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	11.42   3.69   25
Start [MHz]   Stop [MHz]	5745.000   5845.000
RBW [MHz]   VBW [MHz]	0.500000   3.000000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	1   2500   1001   SWE

### RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.364	MHz	INFO
T1 99%	5725.000000	---	5776.9181	MHz	PASS
T2 99%	---	5850.000000	5813.2817	MHz	PASS

### Plot: Bandwidth only

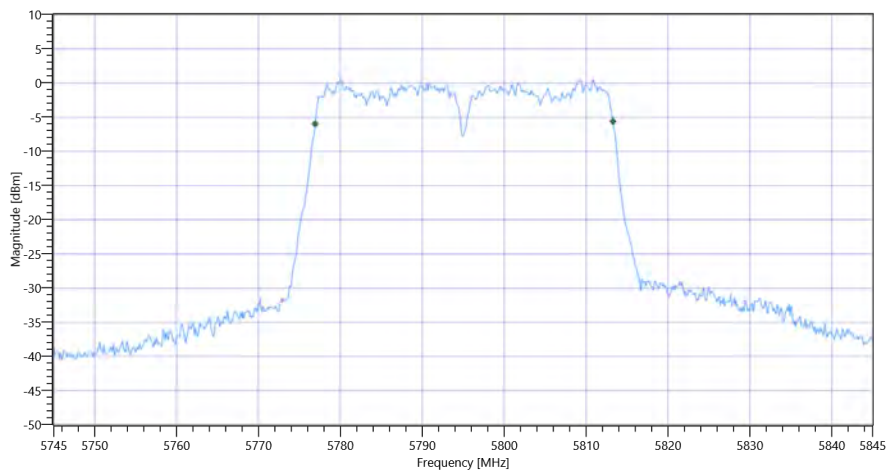

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 99PCT


### Plot: Bandwidth within Band

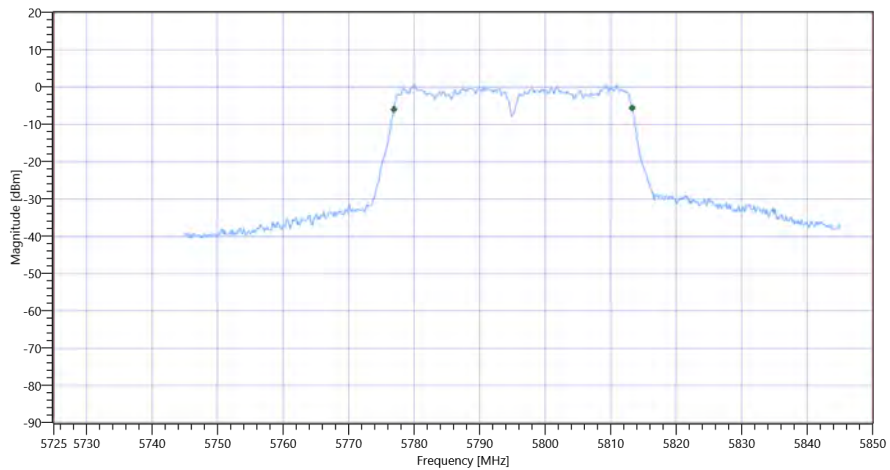

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	41.1	MHz	INFO
T1 26dB	5725.000000	---	5774.6000	MHz	PASS
T2 26dB	---	5850.000000	5815.7000	MHz	PASS

Plot: Bandwidth only

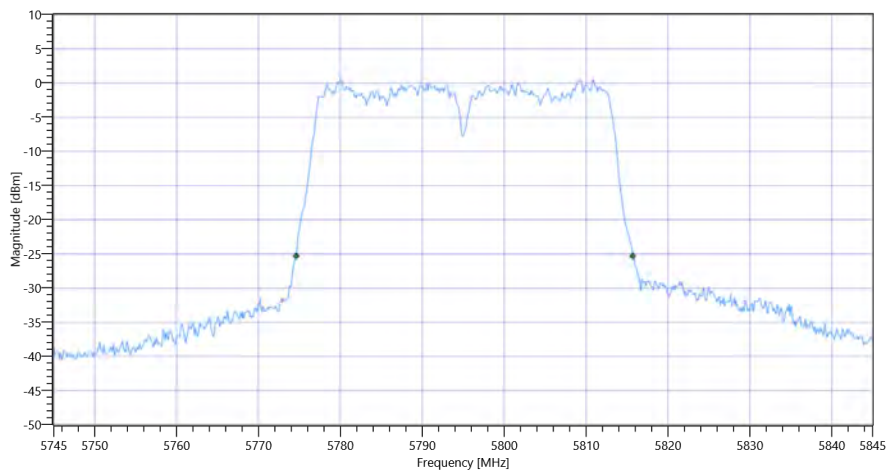

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3 26dB

Plot: Bandwidth within Band

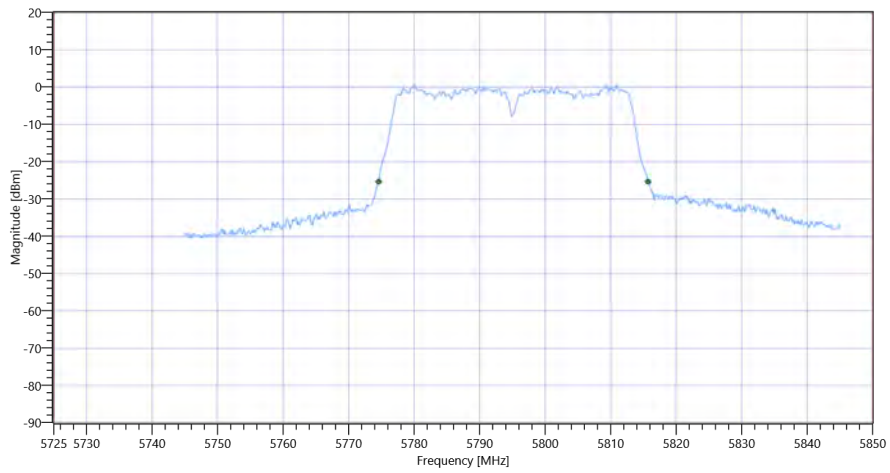

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

PASS



## FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

Test References	
TC Start	15.11.2022 14:25:58
Ambit Temp [°C]   Humidity [rel%]	23.4   44
System Version	3.3.1.8
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	KDB789033 D02, C.2.
TC Version	0.0.1
My Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False   Freq [MHz] 5755
Frequency mid to test	False   Freq [MHz] 0
Frequency high to test	True   Freq [MHz] 5795
Auto Control enabled Power Supply   Climatic Box	No   No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-40,1321.3008K40/101353,3.70	
Switch matrix,Rohde&Schwarz,OSP-B157W8PLUS,1527.1144.05 / 100837,2.10.0.23	

## Test at TX 5795 MHz

### RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.33	dBm	INFO
Ref. Frequency	---	---	5787.810	MHz	INFO

### READ SA SETTINGS:

RefLevel [dBm]   RefLevelOffset [dB]   InpAtt [dB]	15.33   3.69   30
Start [MHz]   Stop [MHz]	5745.000   5845.000
RBW [MHz]   VBW [MHz]	0.100000   0.300000
Detector   TraceMode	POS   MAXH
Sweep: Time [ms]   Count   Points per Section   Type	2   1500   1001   SWE

### RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth (6dB)	0.500	---	36.5	MHz	PASS

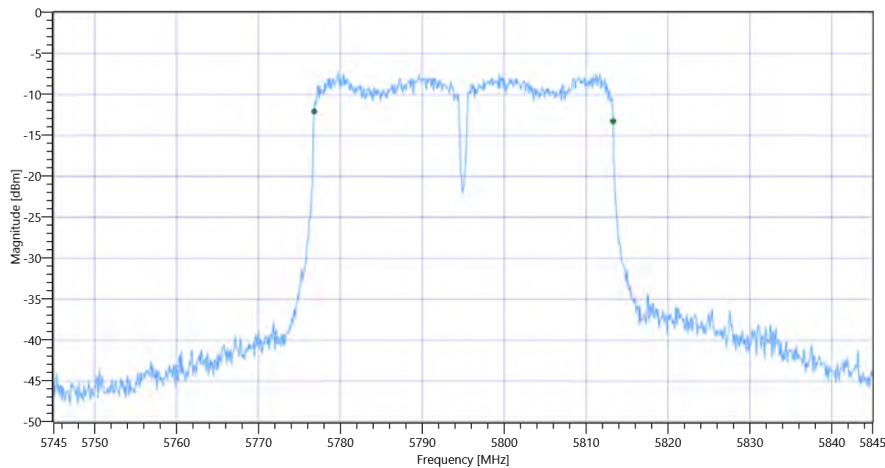

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

General verdict

**PASS**

- END OF DOCUMENT -