

Conducted test results

No.1-6608/23-01-14_TR1-A201

November 17, 2023

Test Standard(s) FCC 15.247 - NI
 FCC 15.247, ISED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski

Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	4
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	6
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	8
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	10
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	12
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	14
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	16
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	18
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	20
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	22
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	24
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	26
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	28
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	32
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	36
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	40
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	44
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	48
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	52
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	56
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	60
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	64
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	68
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	72
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	76
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	78
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode	80
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	82
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	84
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	86
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	88
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode	90
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	92
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	94
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode	96
FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode	98
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	100
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	102
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode	104
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	106
FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	108

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode	110
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	112
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	114
FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode	116
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	118
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	120
FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode	122
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	124
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	127
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	130
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	133
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	136
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	139
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	142
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	145
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	148
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	151
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	154
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	157

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 14:17:00
Ambit temp [°C] humidity [rel%]	22.5 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2452 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	3.40	dBm	INFO
Ref. Frequency	--	--	2454.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.40 13.41 10
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

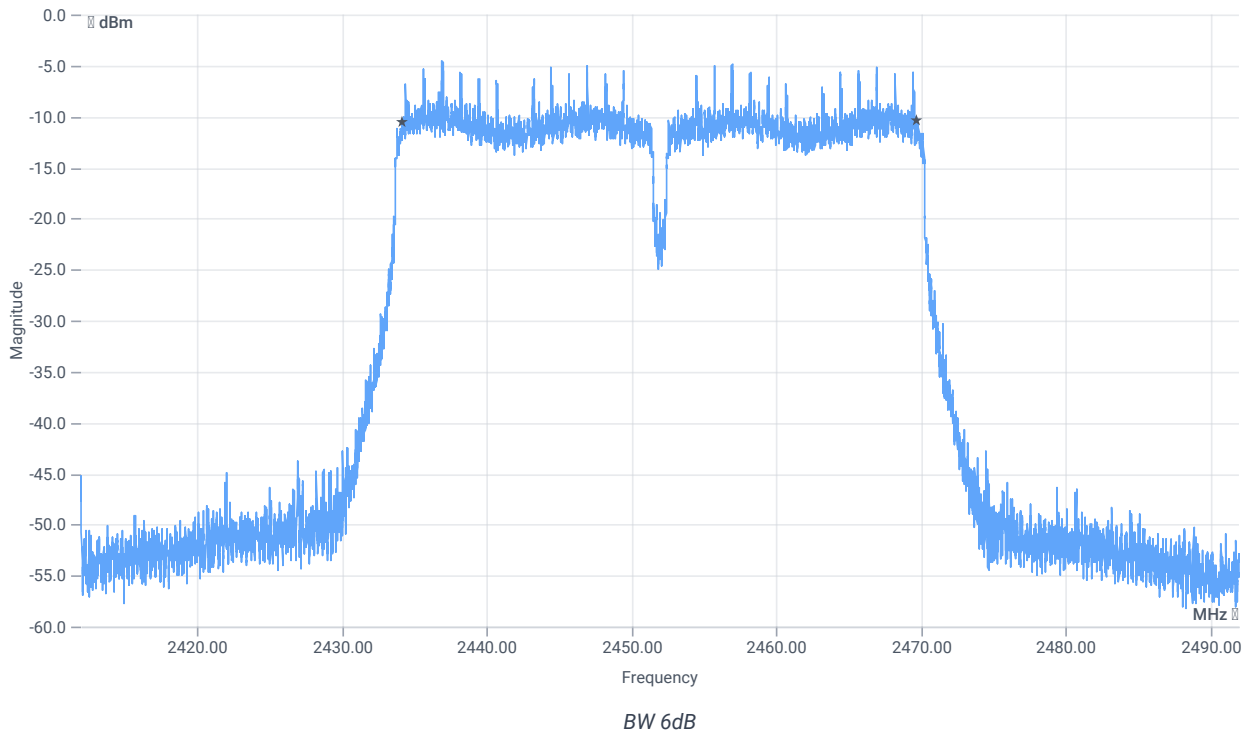

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	35544	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:49:39
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.16	dBm	INFO
Ref. Frequency	--	--	2420.320	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.16 13.31 10
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

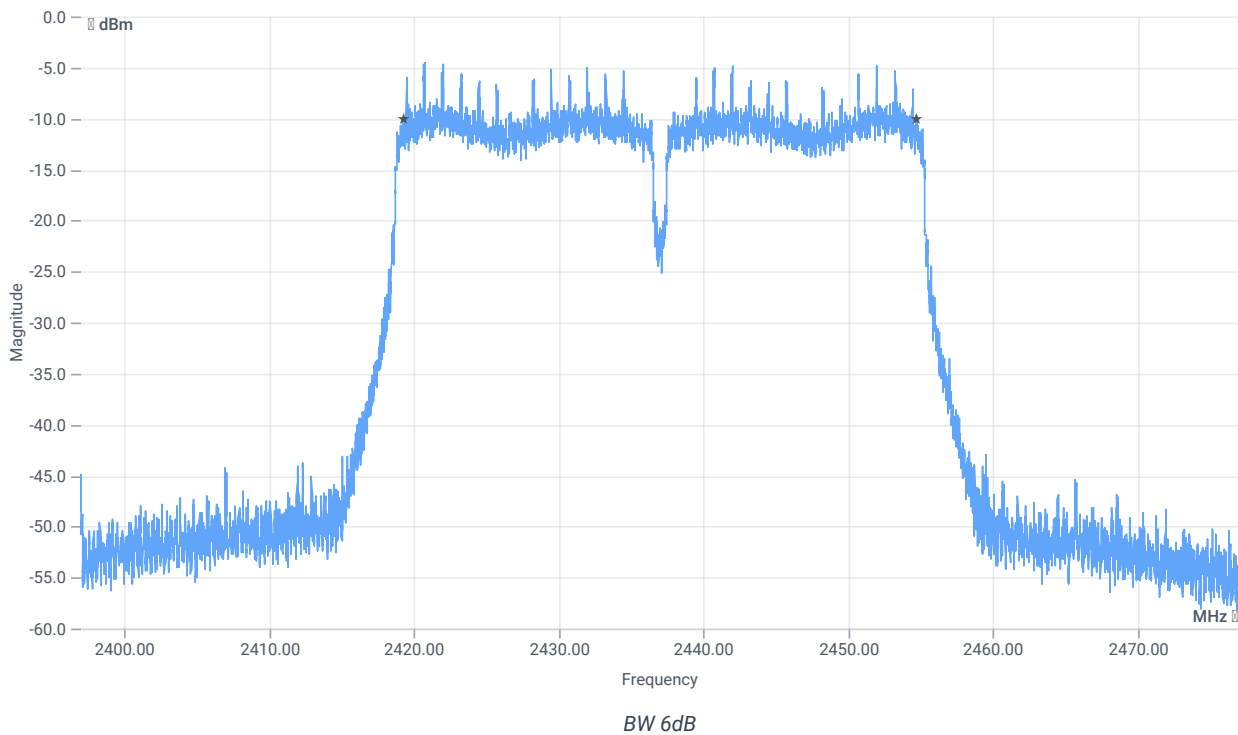

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	35536	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:36:46
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2422 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.35	dBm	INFO
Ref. Frequency	--	--	2415.810	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.35 13.21 10
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

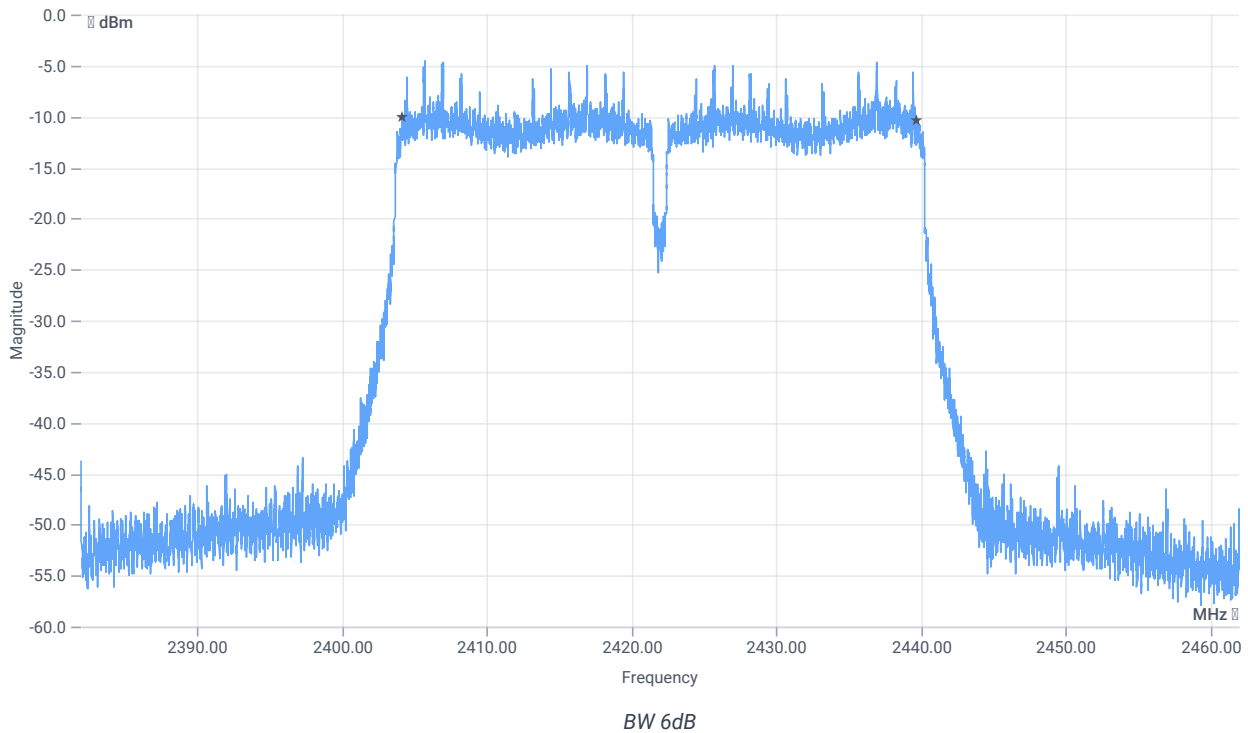

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	35552	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:23:08
Ambit temp [°C] humidity [rel%]	22.2 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.31	dBm	INFO
Ref. Frequency	--	--	2465.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.31 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

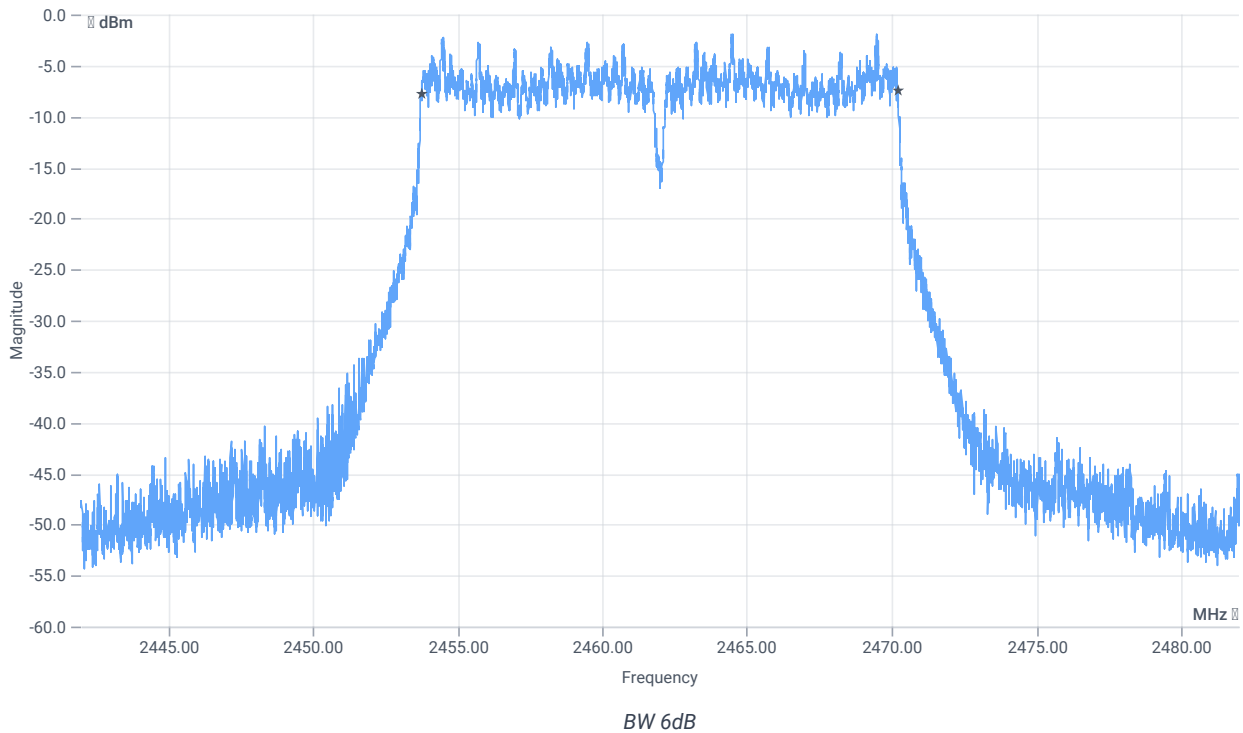

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16488	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:10:26
Ambit temp [°C] humidity [rel%]	22.1 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.14	dBm	INFO
Ref. Frequency	--	--	2429.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.14 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

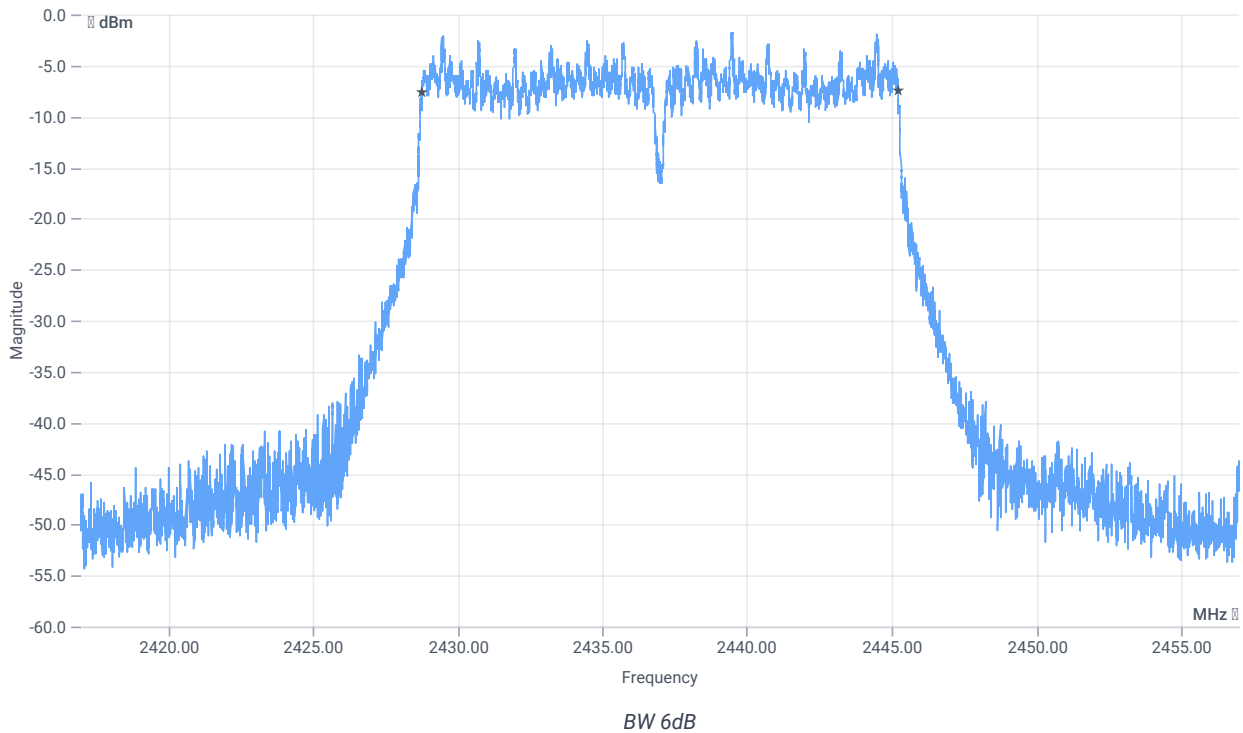

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16472	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 11:10:20
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.45	dBm	INFO
Ref. Frequency	--	--	2414.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.45 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

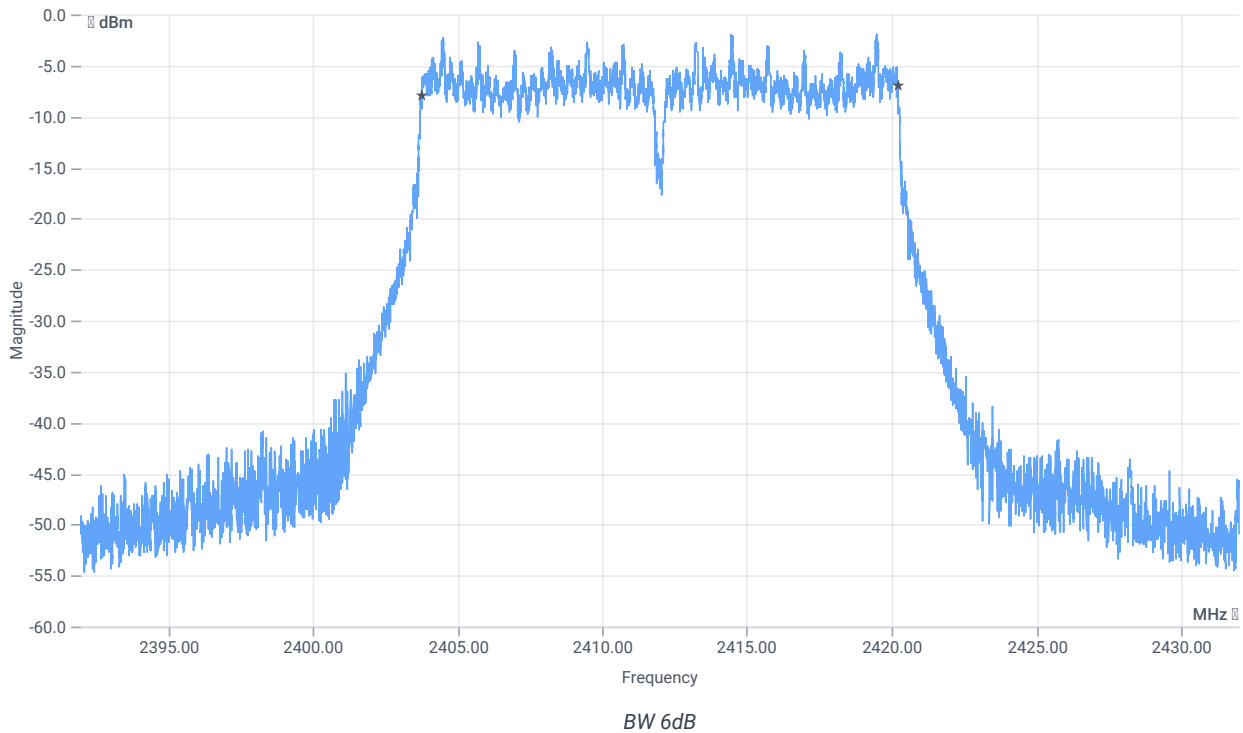

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16472	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:53:48
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.53	dBm	INFO
Ref. Frequency	--	--	2458.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.53 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

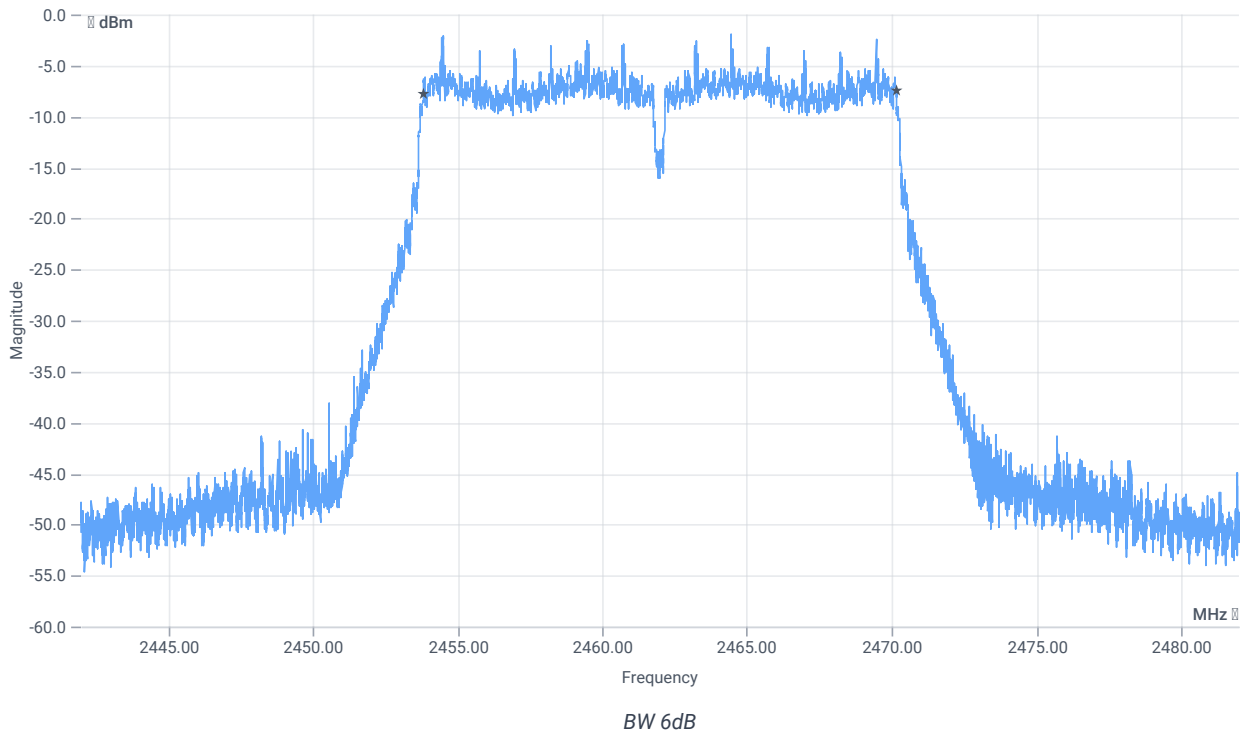

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16340	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:41:41
Ambit temp [°C] humidity [rel%]	21.8 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.18	dBm	INFO
Ref. Frequency	--	--	2429.810	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.18 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

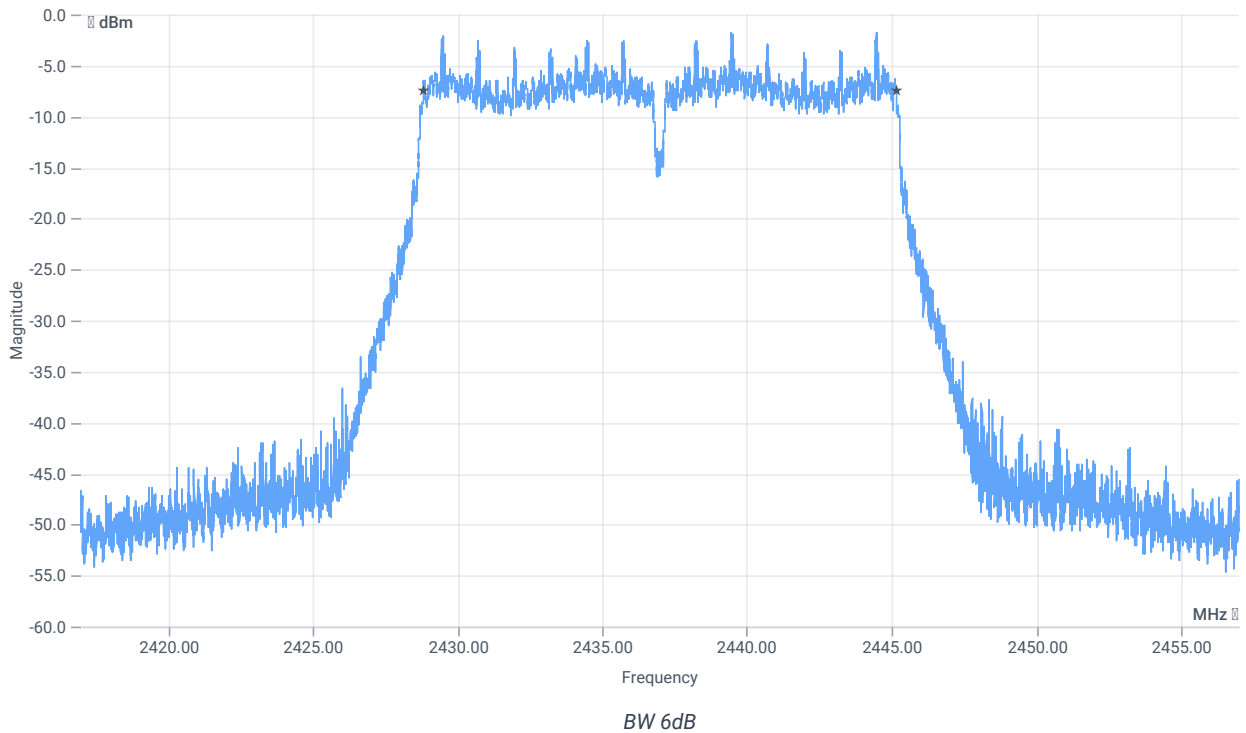

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16324	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:23:24
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.41	dBm	INFO
Ref. Frequency	--	--	2414.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.41 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

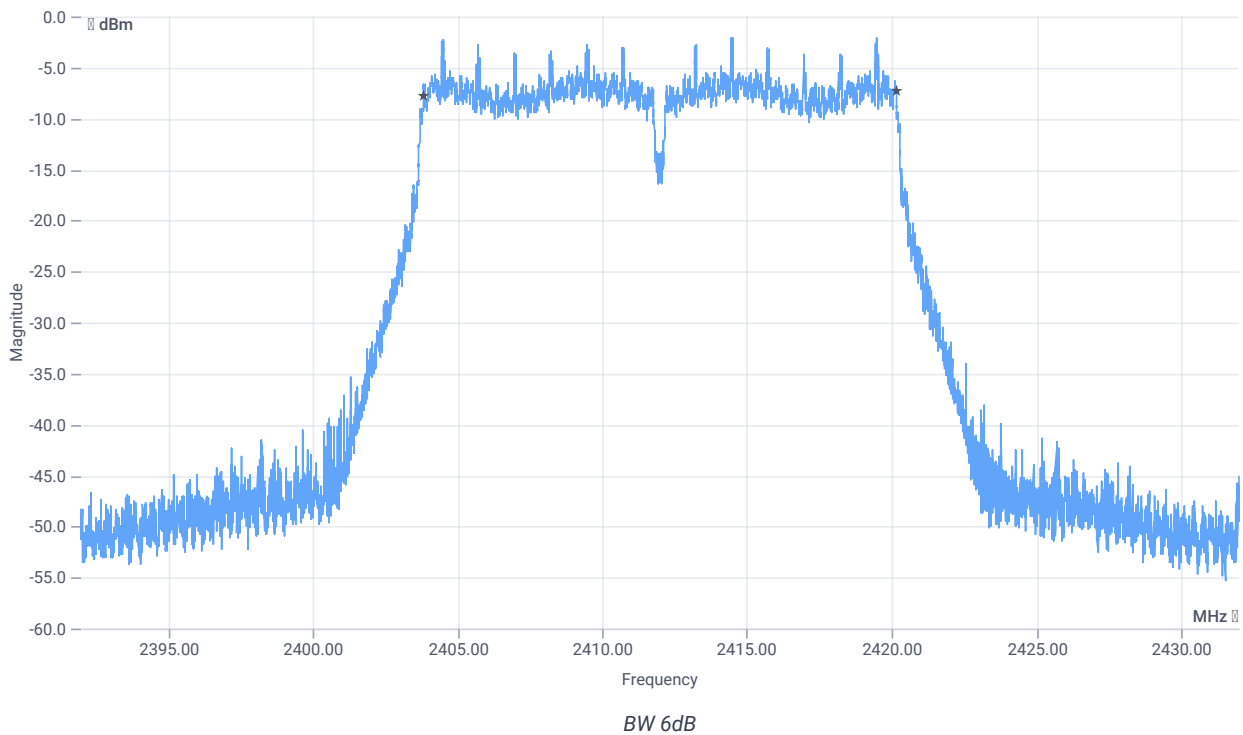

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	16332	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 09:28:38
Ambit temp [°C] humidity [rel%]	21.5 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.72	dBm	INFO
Ref. Frequency	--	--	2463.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.72 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

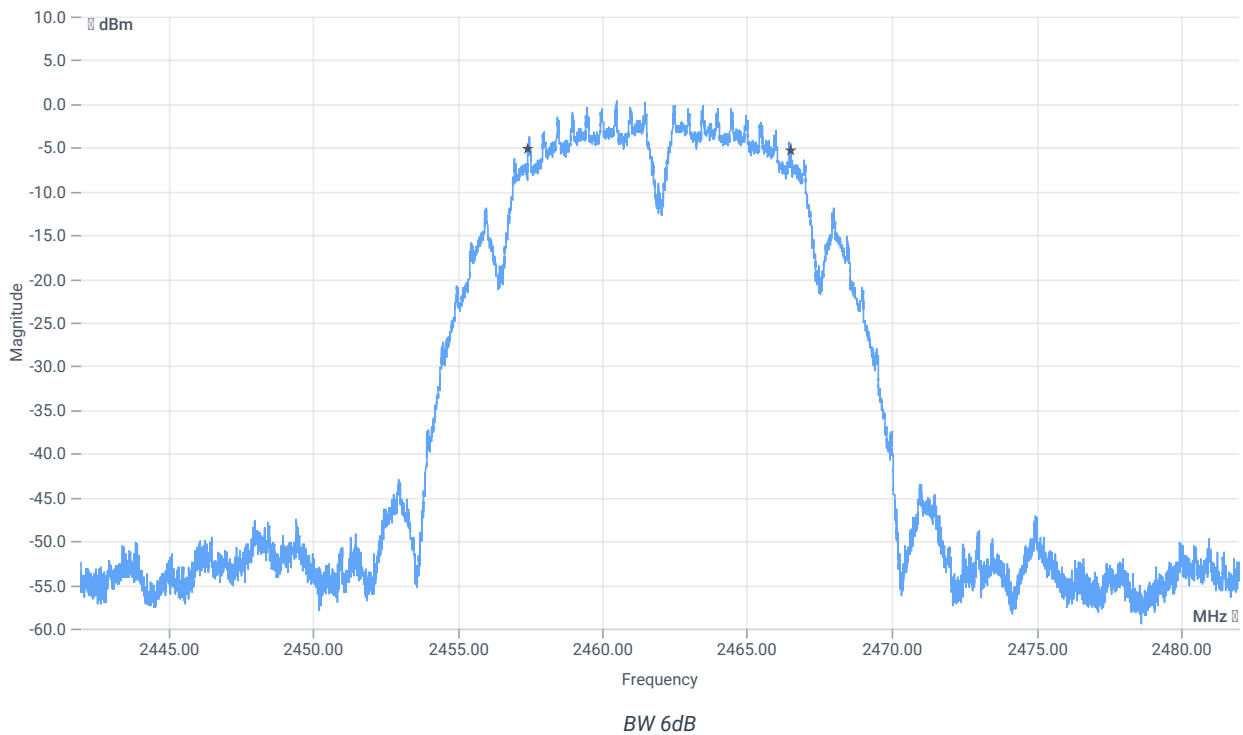

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	9068	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:45:35
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.68	dBm	INFO
Ref. Frequency	--	--	2438.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.68 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

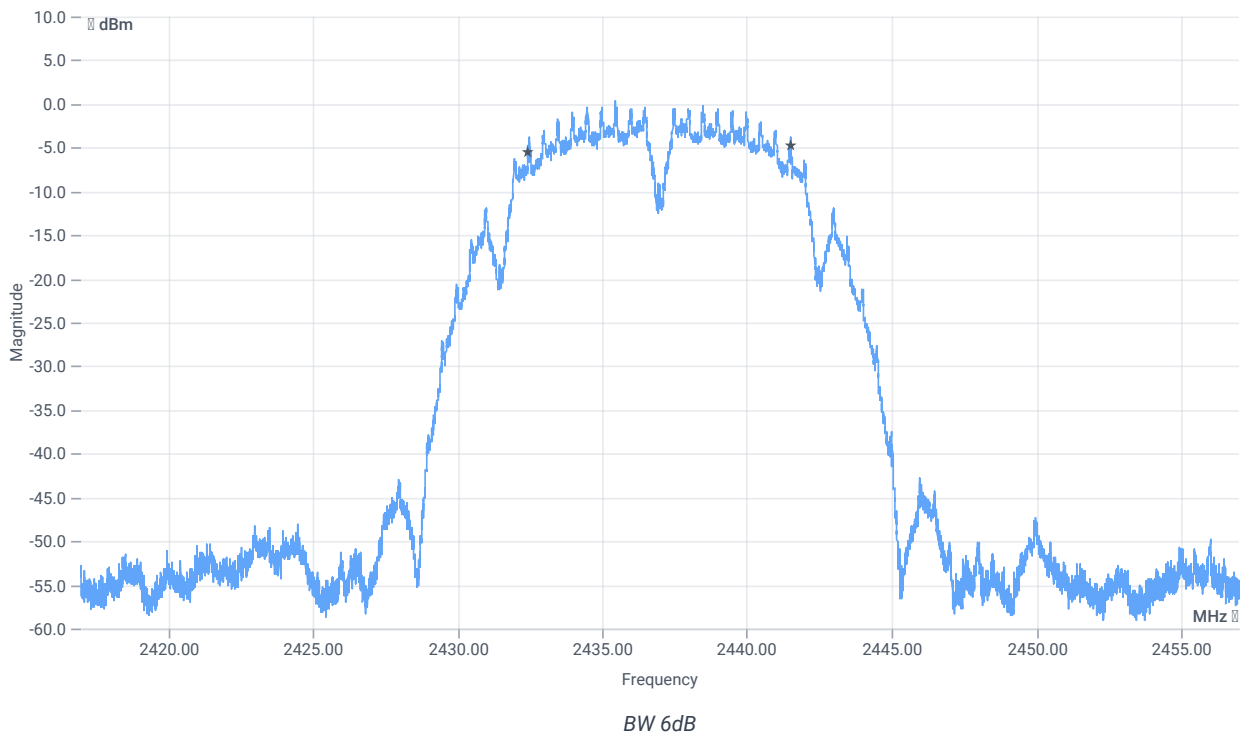

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	9076	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:23:48
Ambit temp [°C] humidity [rel%]	21.6 43
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.40	dBm	INFO
Ref. Frequency	--	--	2410.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.40 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

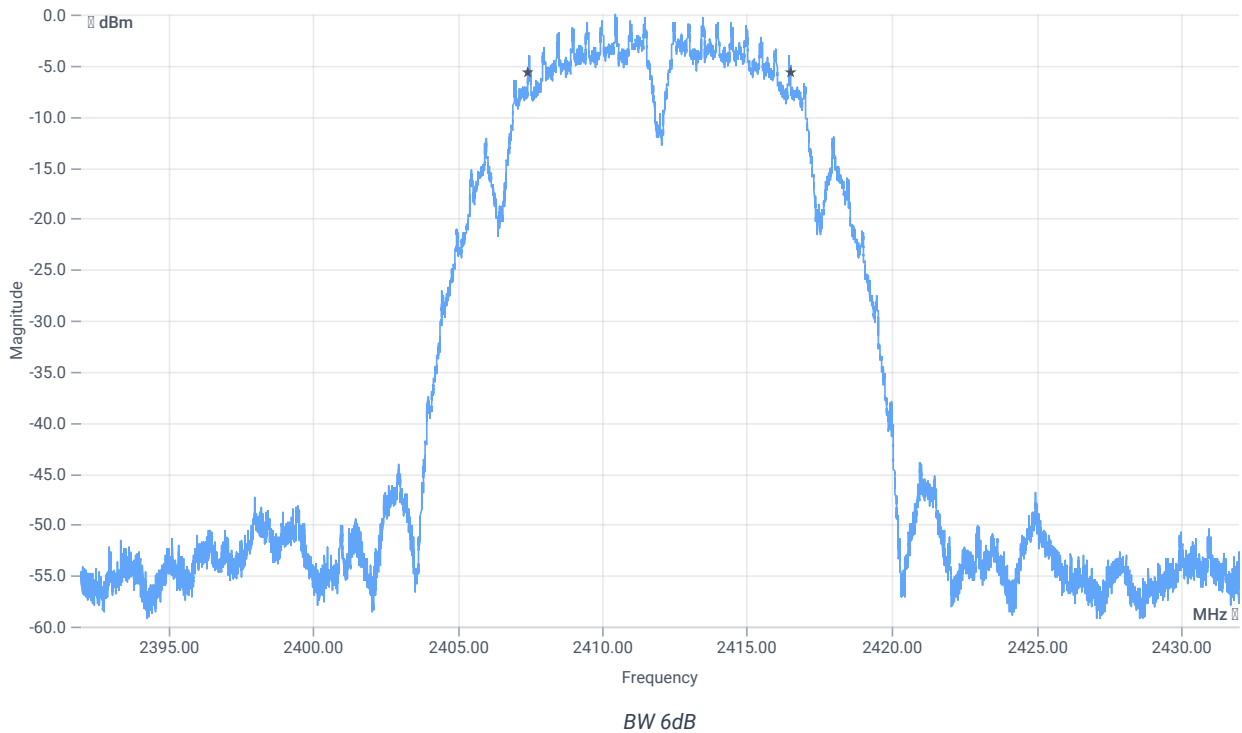

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	--	9080	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 14:18:13
Ambit temp [°C] humidity [rel%]	22.5 39
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2452 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.68	dBm	INFO
Ref. Frequency	--	--	2437.310	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.68 13.41 10
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

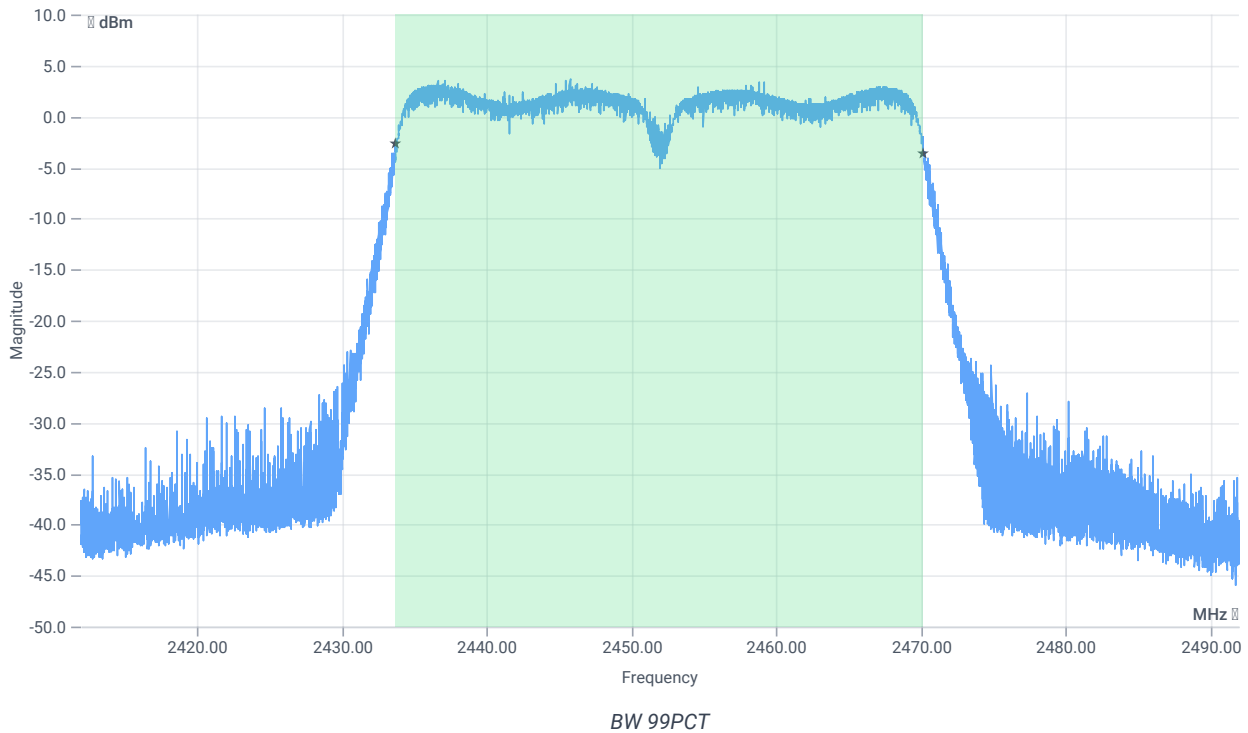


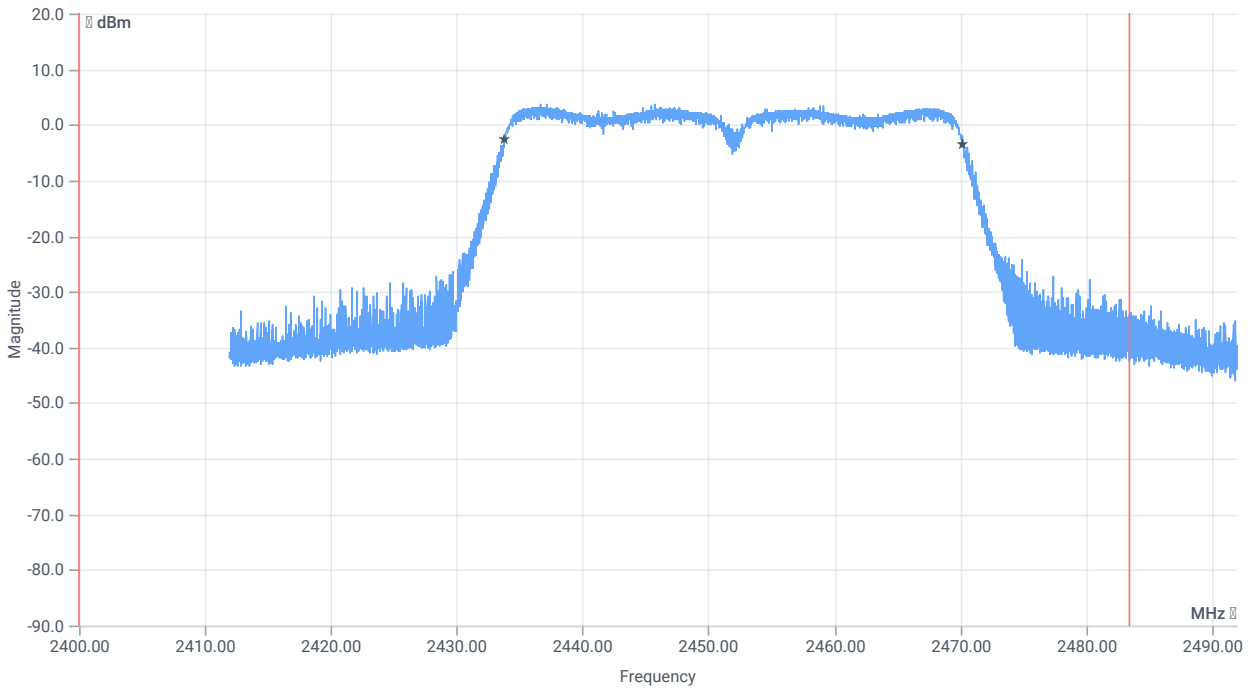


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36436.000	kHz	INFO
T1 99%	2400.000000	--	2433.7618	MHz	PASS
T2 99%	--	2483.500000	2470.1982	MHz	PASS

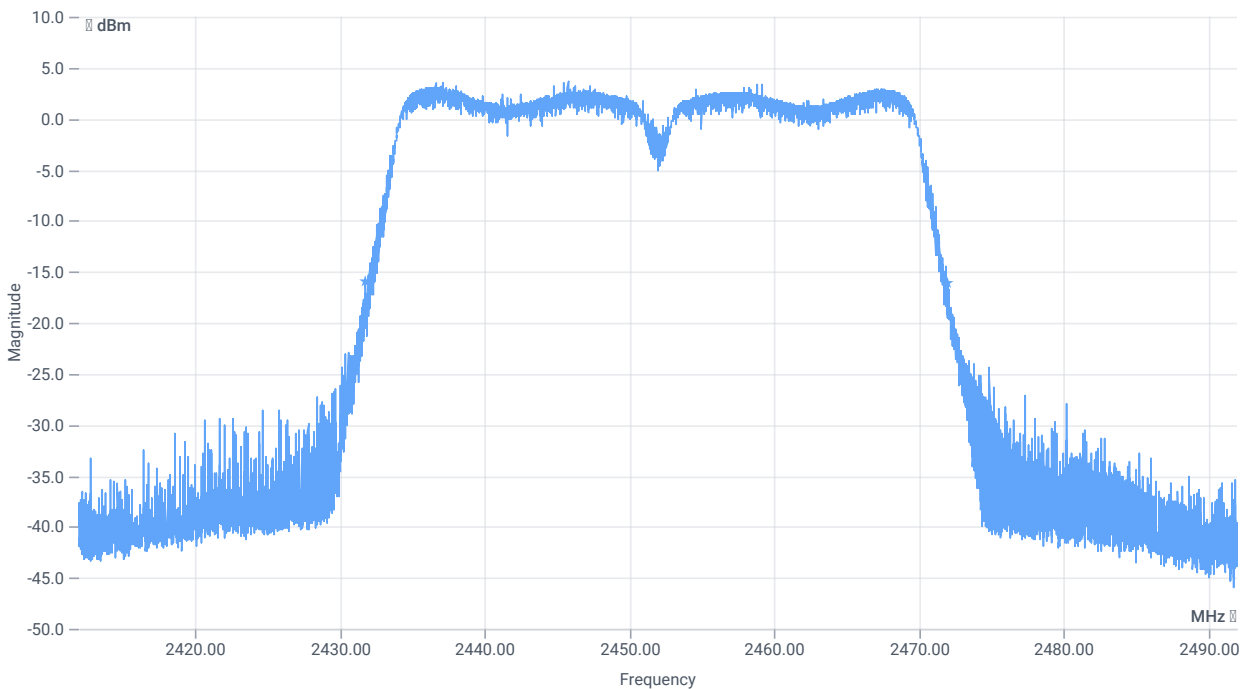

BW 20dB

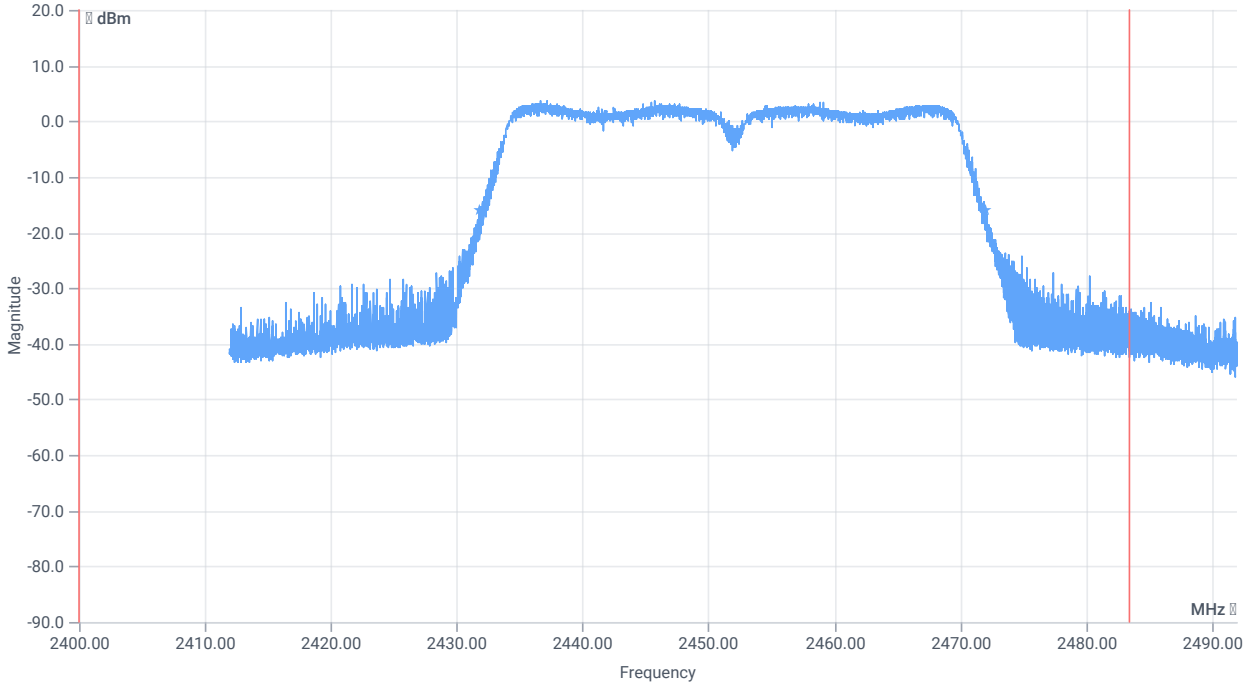

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	40200	kHz	INFO
T1 20dB	2400.000000	--	2431.8240	MHz	PASS
T2 20dB	--	2483.500000	2472.0240	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:50:52
Ambit temp [°C] humidity [rel%]	22.5 41
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.55	dBm	INFO
Ref. Frequency	--	--	2451.690	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.55 13.31 10
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

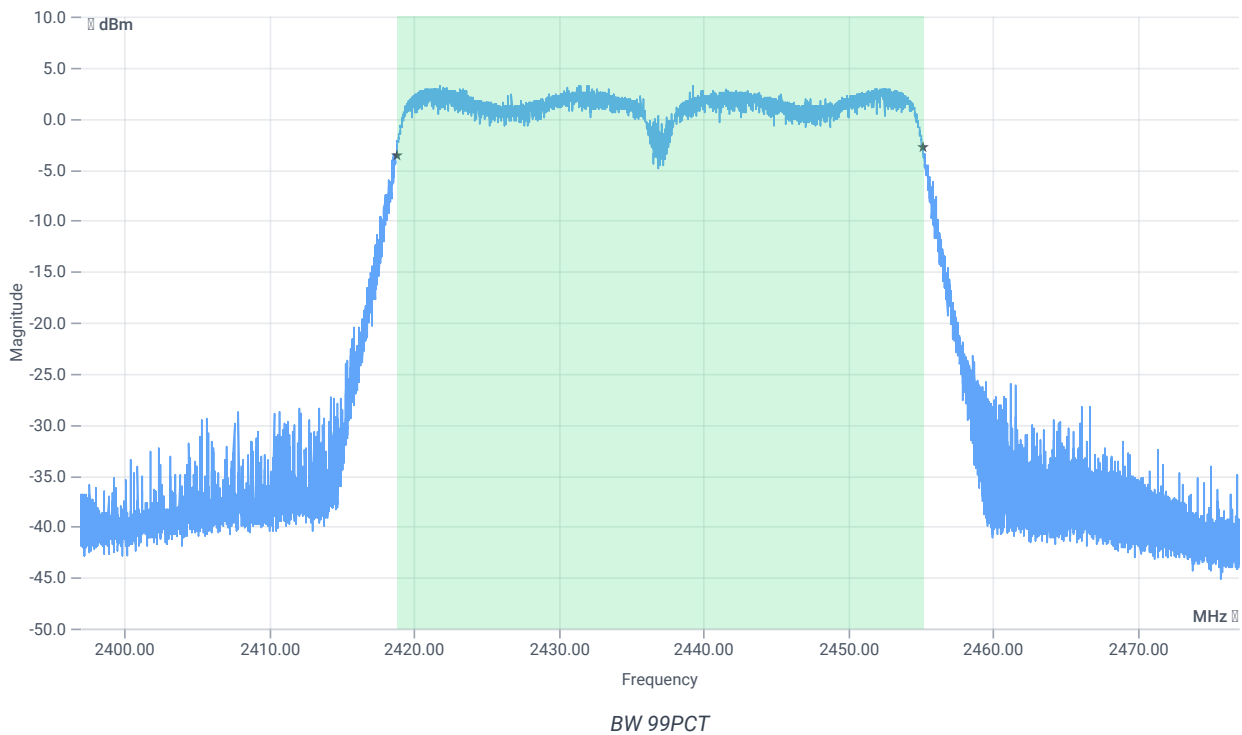


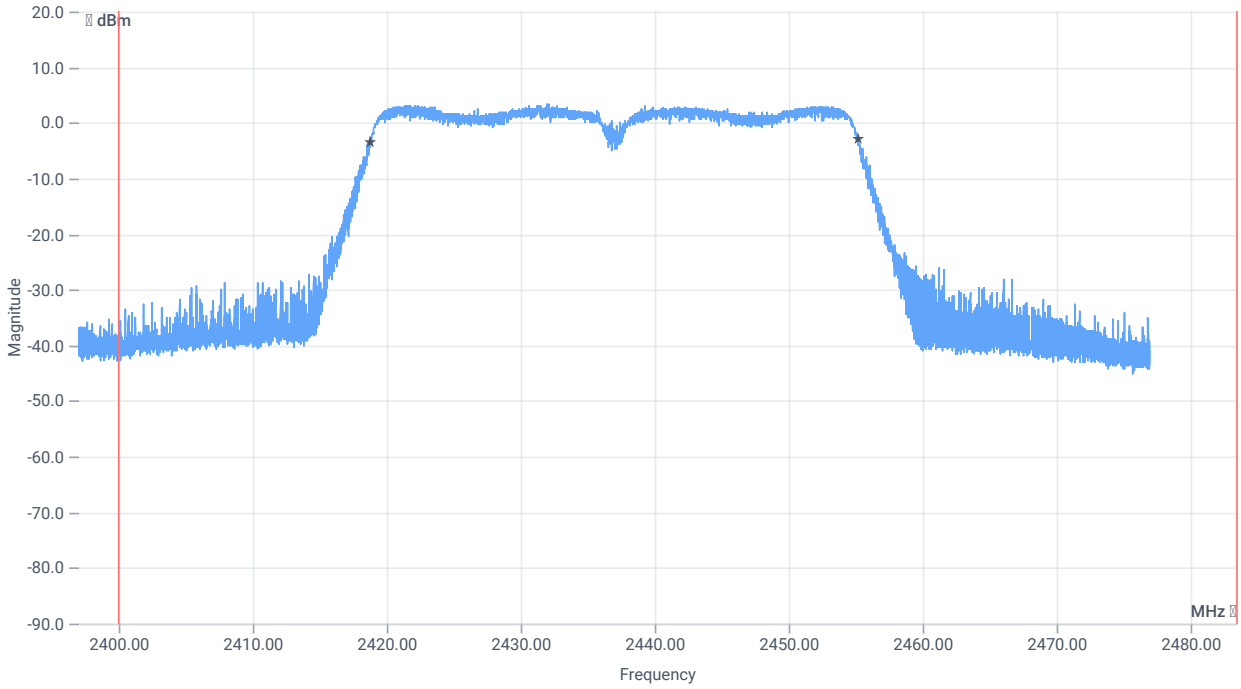


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36412.000	kHz	INFO
T1 99%	2400.000000	--	2418.7778	MHz	PASS
T2 99%	--	2483.500000	2455.1902	MHz	PASS

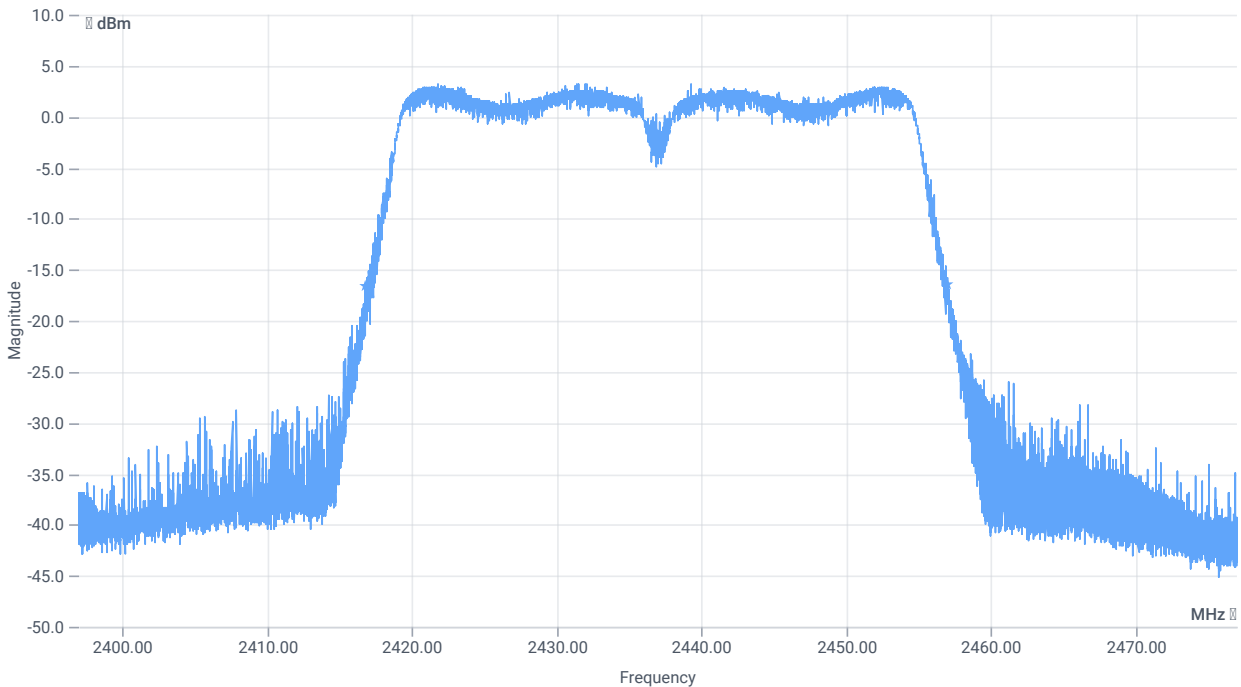

BW 20dB

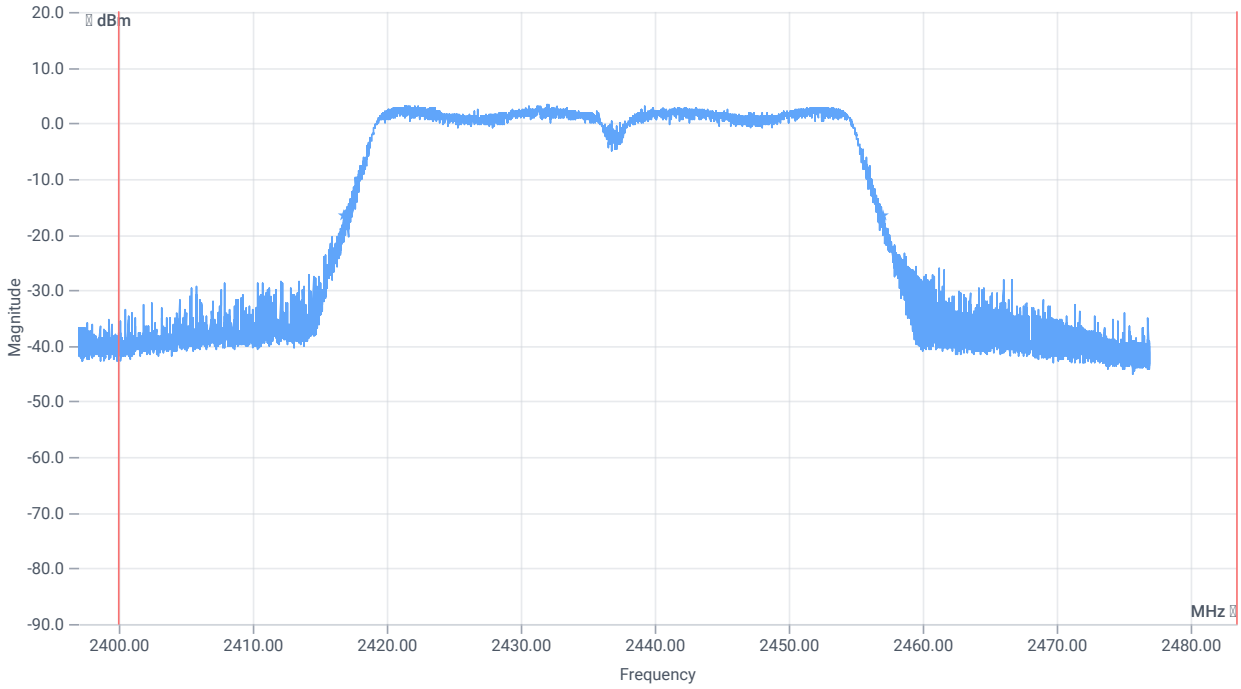

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	40208	kHz	INFO
T1 20DB	2400.000000	--	2416.8080	MHz	PASS
T2 20dB	--	2483.500000	2457.0160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:37:58
Ambit temp [°C] humidity [rel%]	22.5 41
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2422 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.39	dBm	INFO
Ref. Frequency	--	--	2426.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.39 13.21 10
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

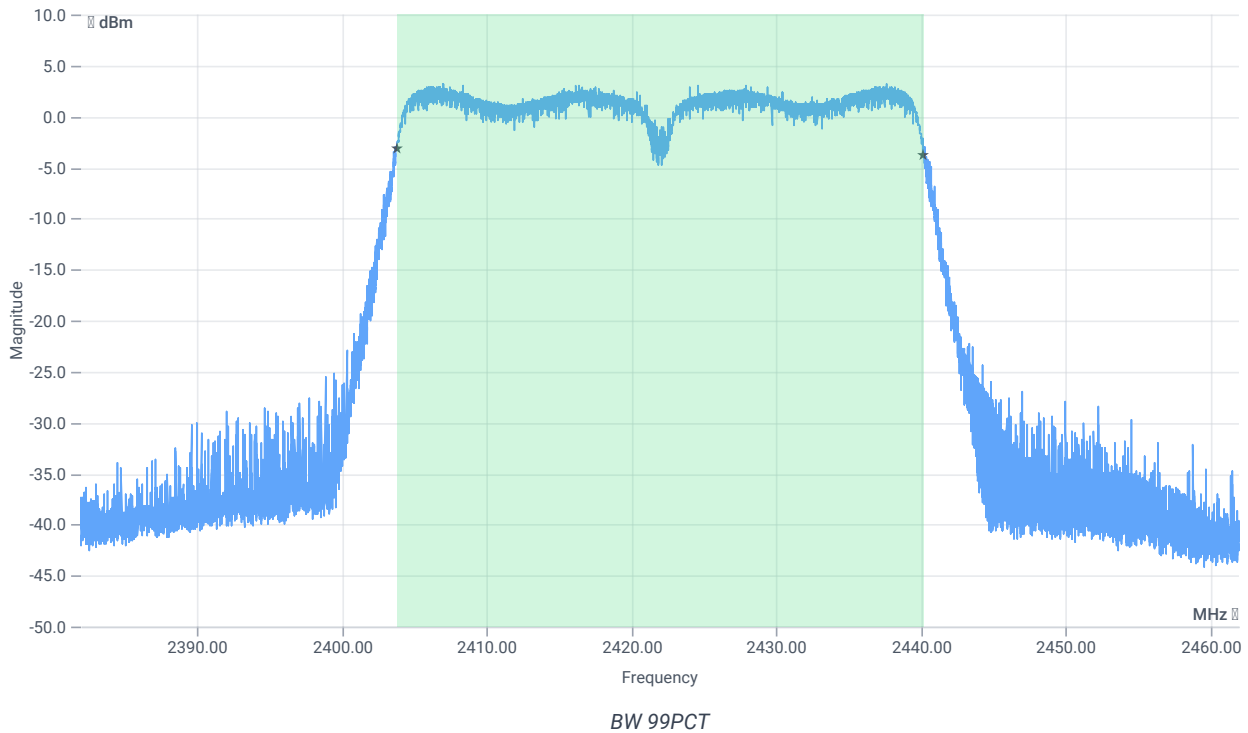


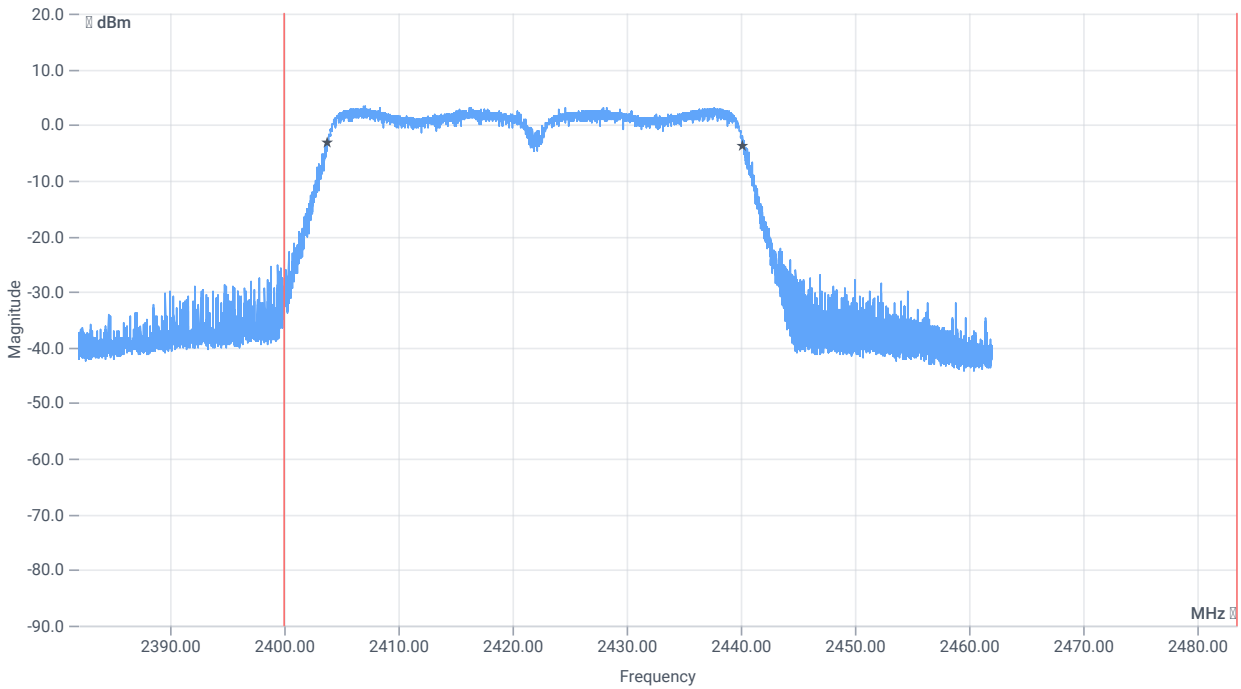


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36436.000	kHz	INFO
T1 99%	2400.000000	--	2403.7778	MHz	PASS
T2 99%	--	2483.500000	2440.2142	MHz	PASS

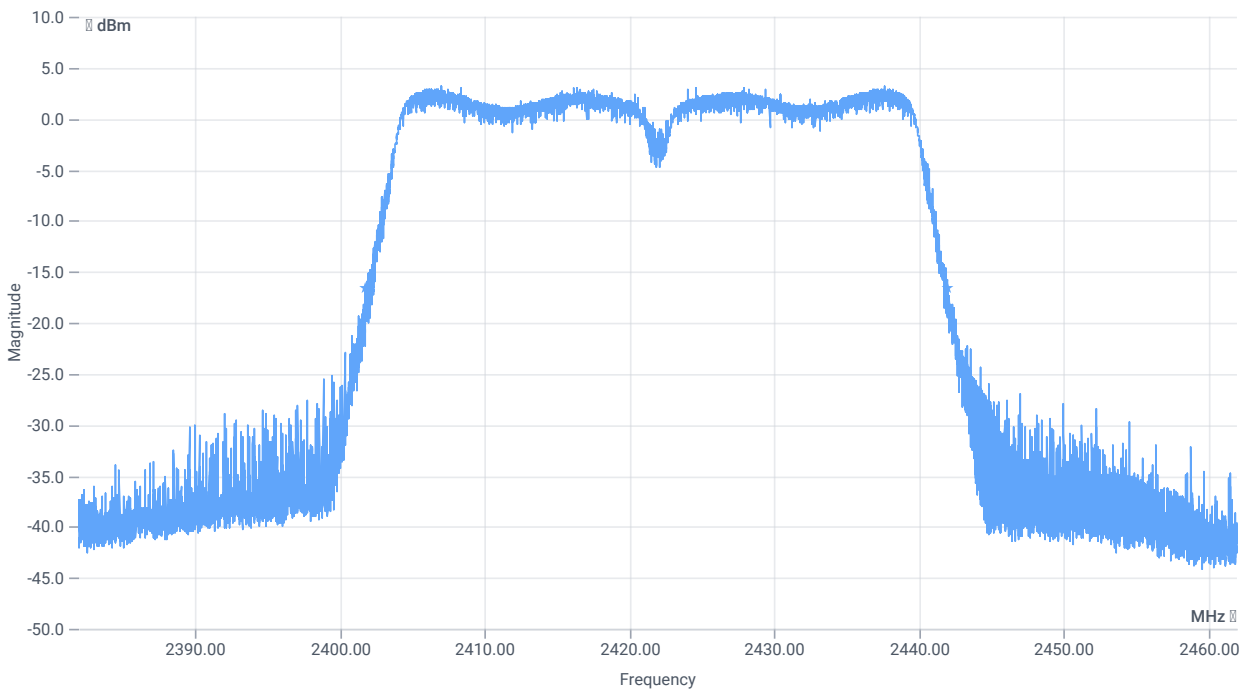

BW 20dB

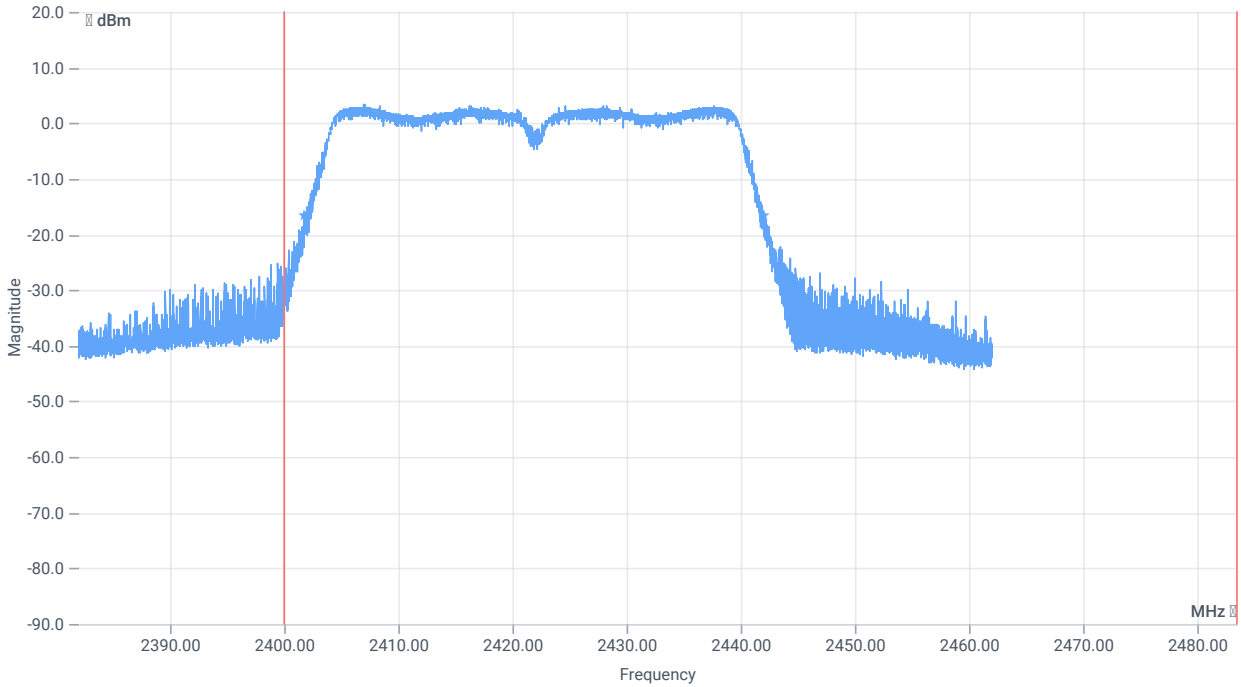

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	40200	kHz	INFO
T1 20DB	2400.000000	--	2401.7920	MHz	PASS
T2 20dB	--	2483.500000	2441.9920	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:24:22
Ambit temp [°C] humidity [rel%]	22.2 42
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.61	dBm	INFO
Ref. Frequency	--	--	2459.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.61 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

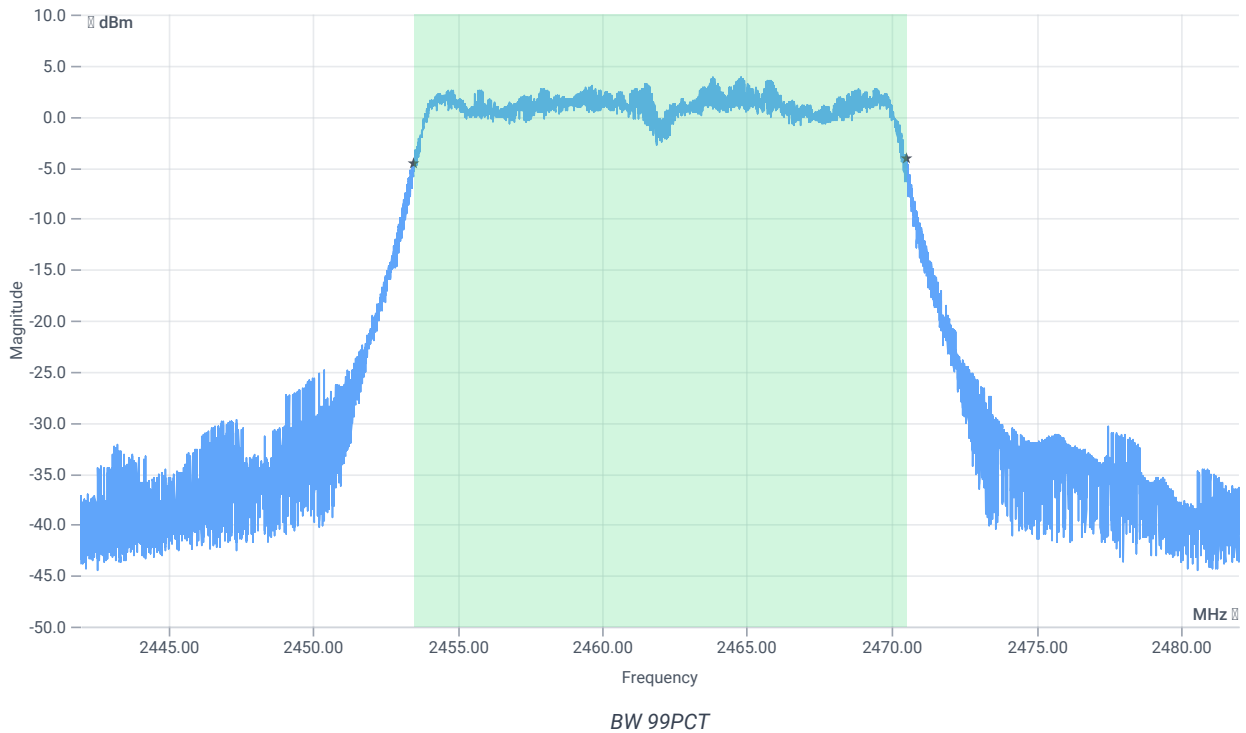


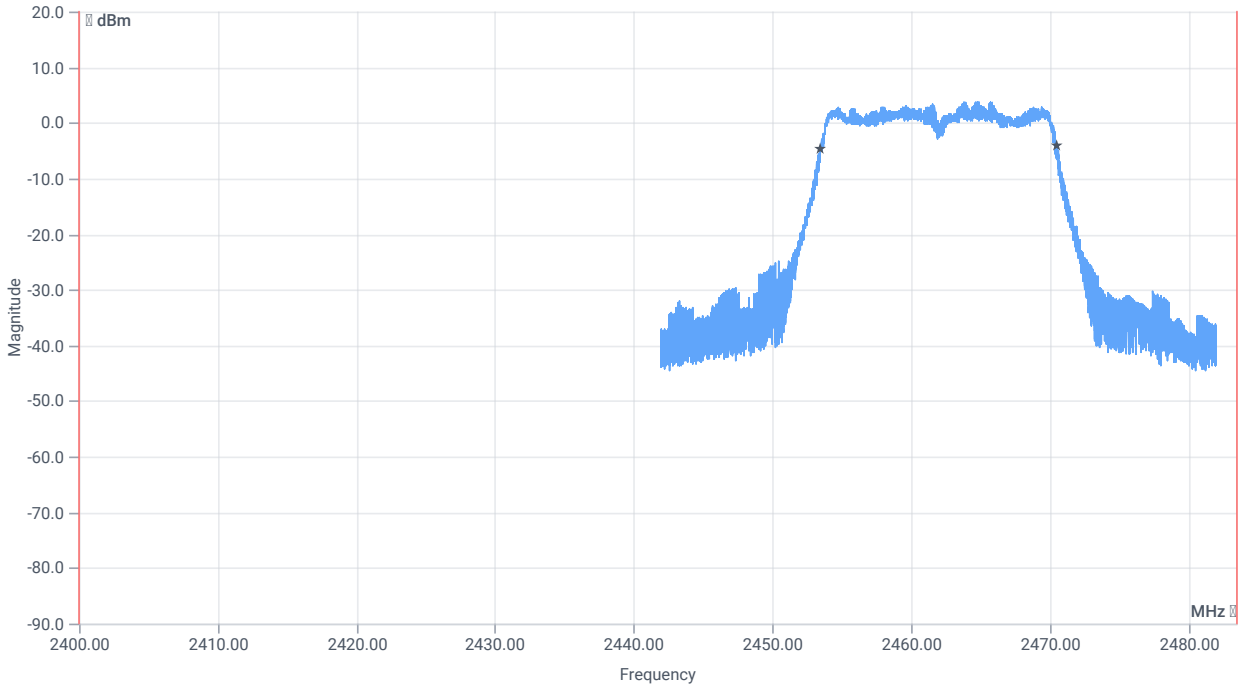


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	17014.000	kHz	INFO
T1 99%	2400.000000	--	2453.4769	MHz	PASS
T2 99%	--	2483.500000	2470.4912	MHz	PASS

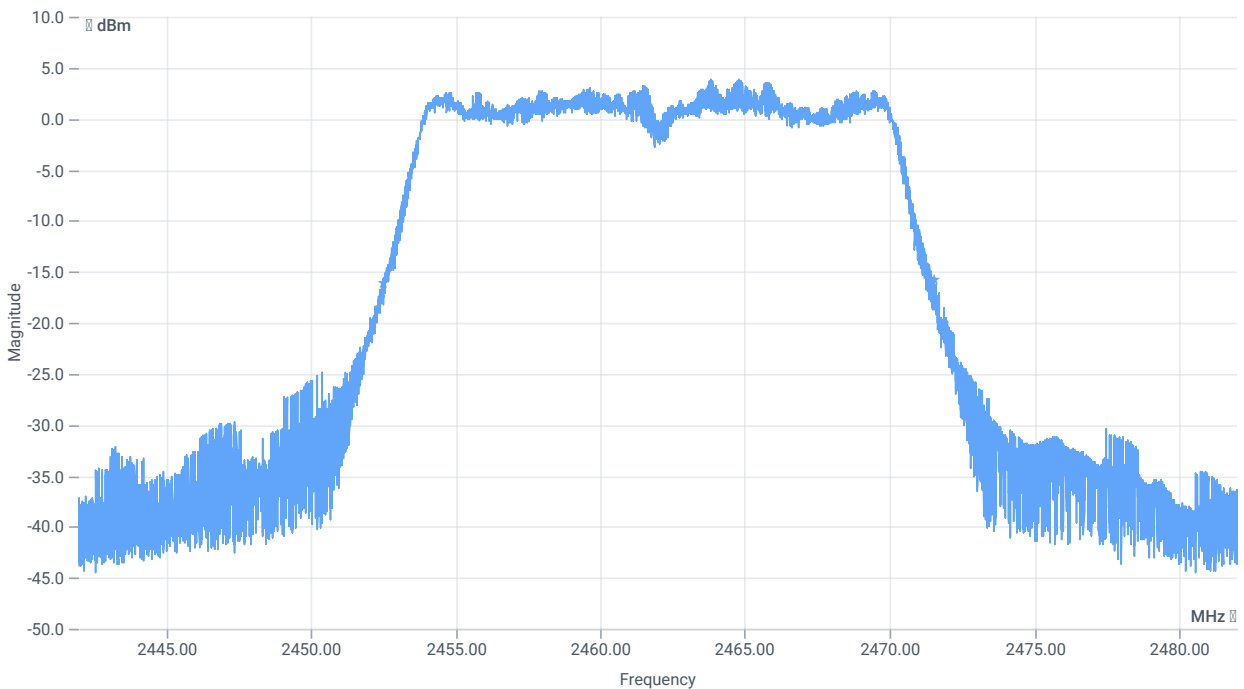

BW 20dB

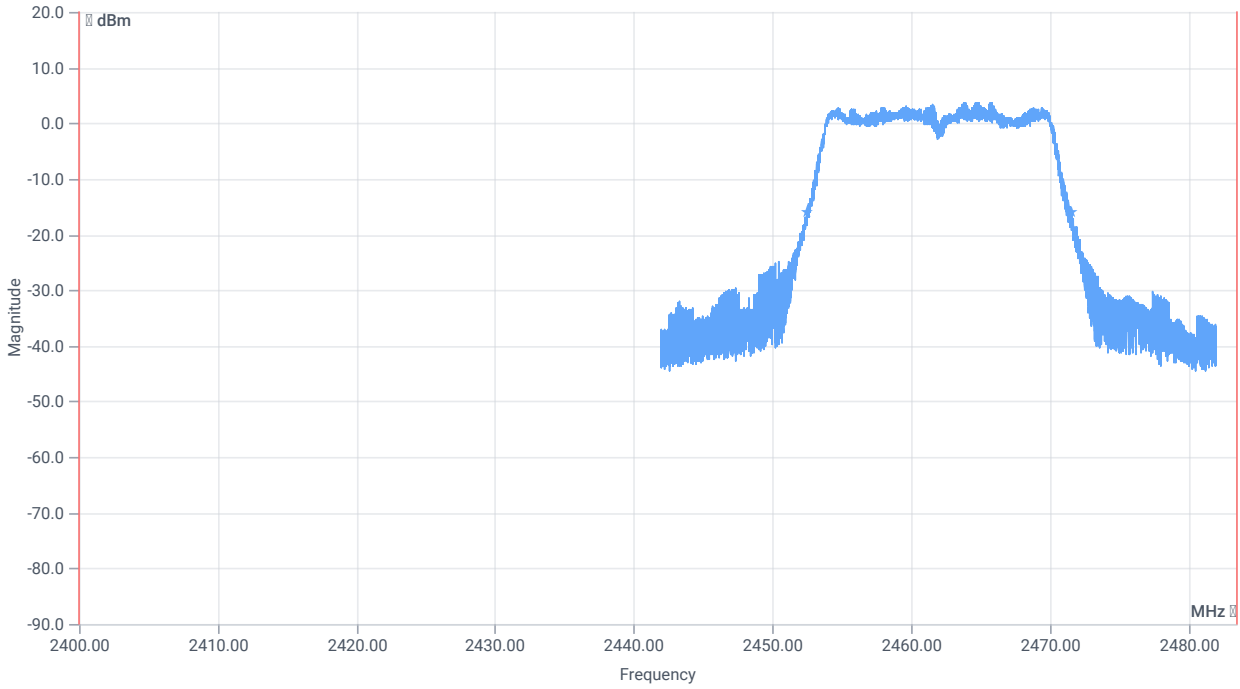

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19016	kHz	INFO
T1 20dB	2400.000000	--	2452.5200	MHz	PASS
T2 20dB	--	2483.500000	2471.5360	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:11:40
Ambit temp [°C] humidity [rel%]	22.1 42
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.42	dBm	INFO
Ref. Frequency	--	--	2440.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.42 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

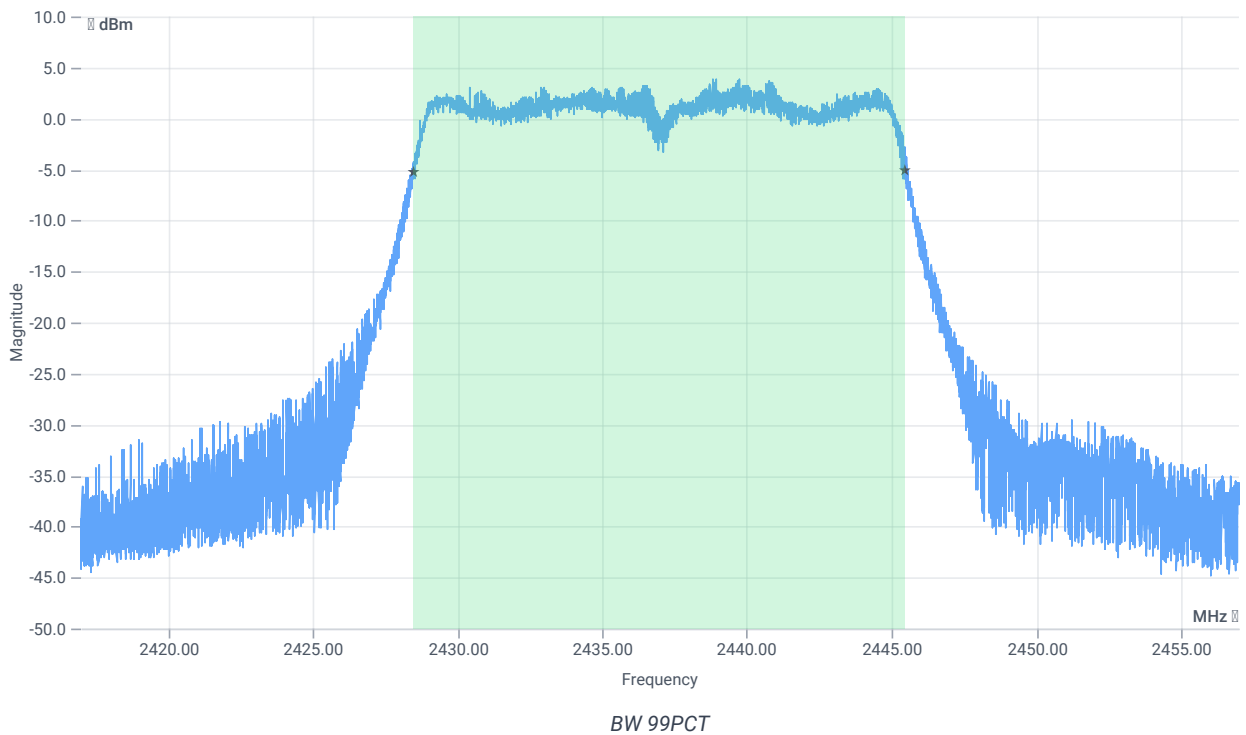


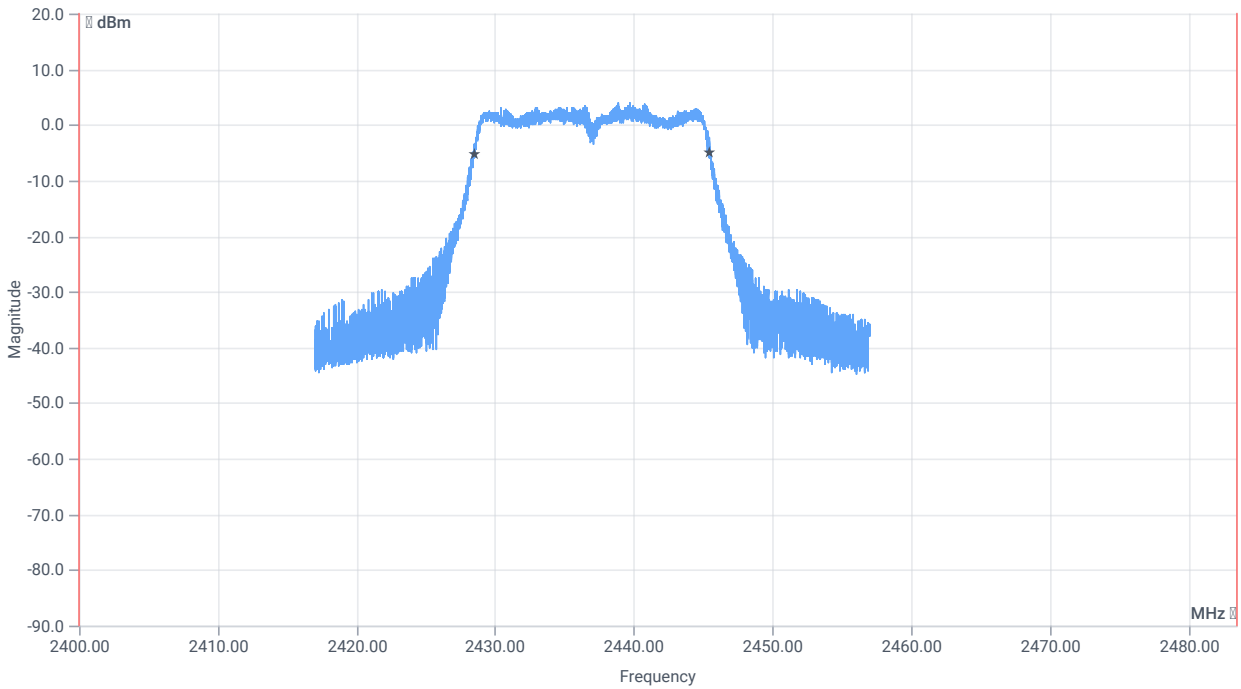


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16994.000	kHz	INFO
T1 99%	2400.000000	--	2428.4849	MHz	PASS
T2 99%	--	2483.500000	2445.4792	MHz	PASS

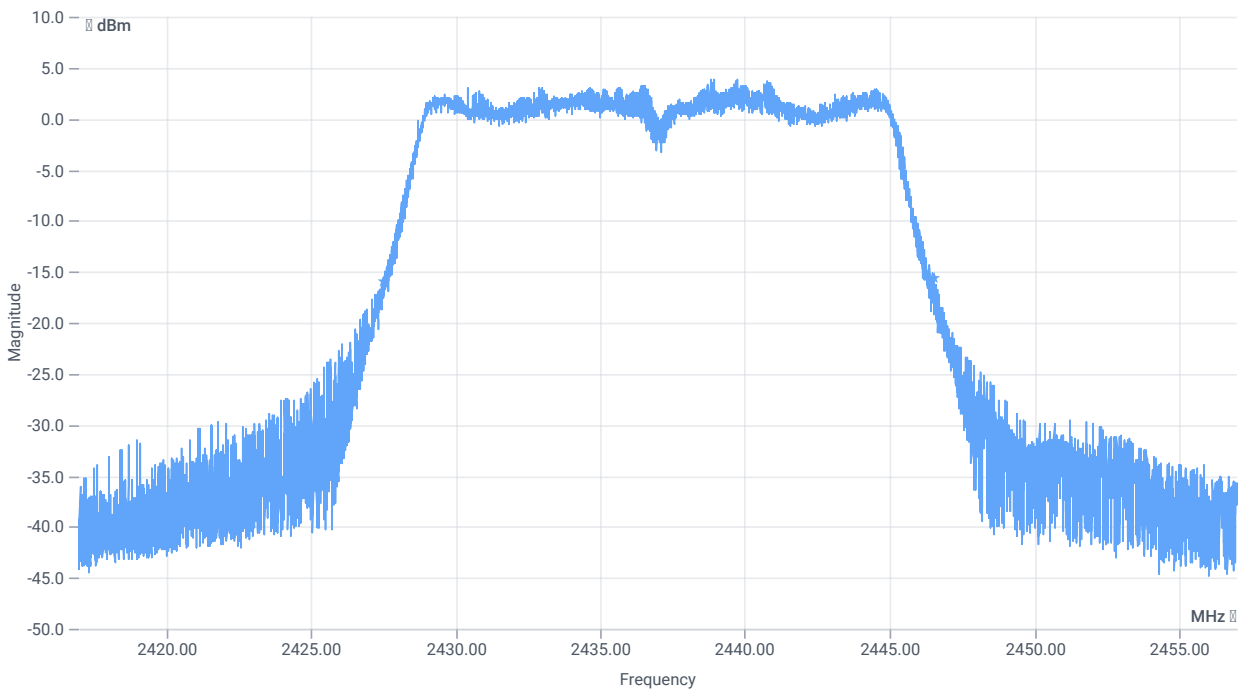

BW 20dB

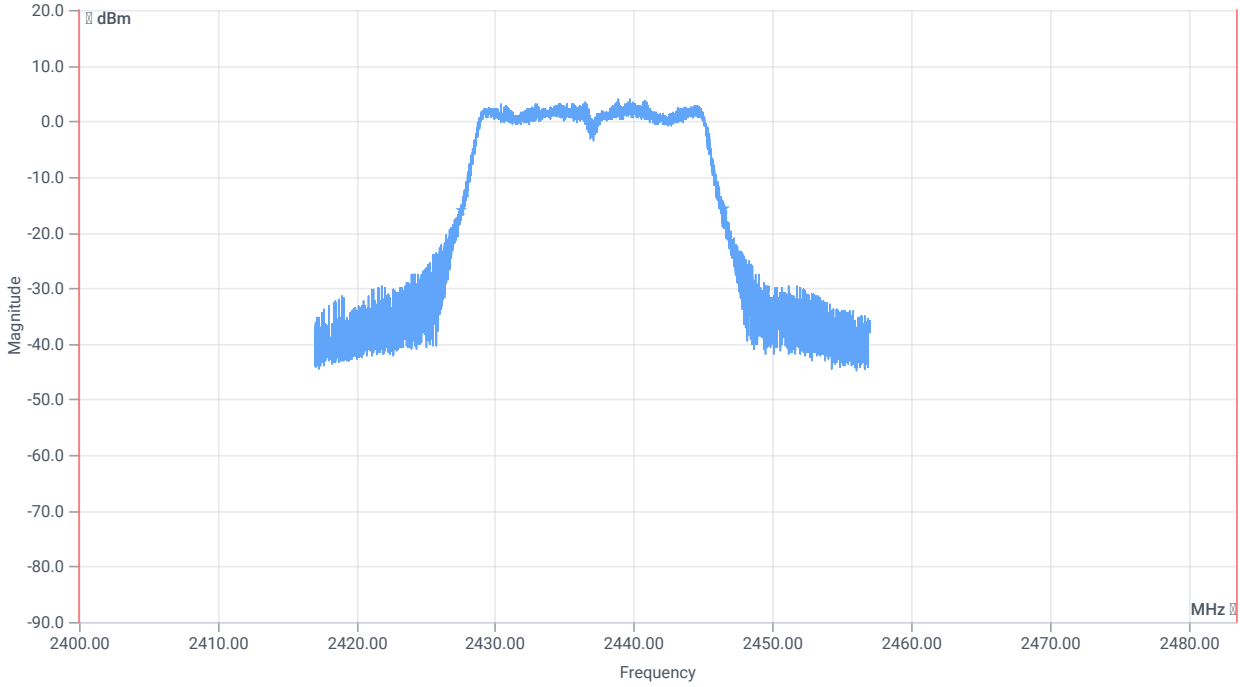

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19004	kHz	INFO
T1 20dB	2400.000000	--	2427.5120	MHz	PASS
T2 20dB	--	2483.500000	2446.5160	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 11:11:36
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.71	dBm	INFO
Ref. Frequency	--	--	2415.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.71 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

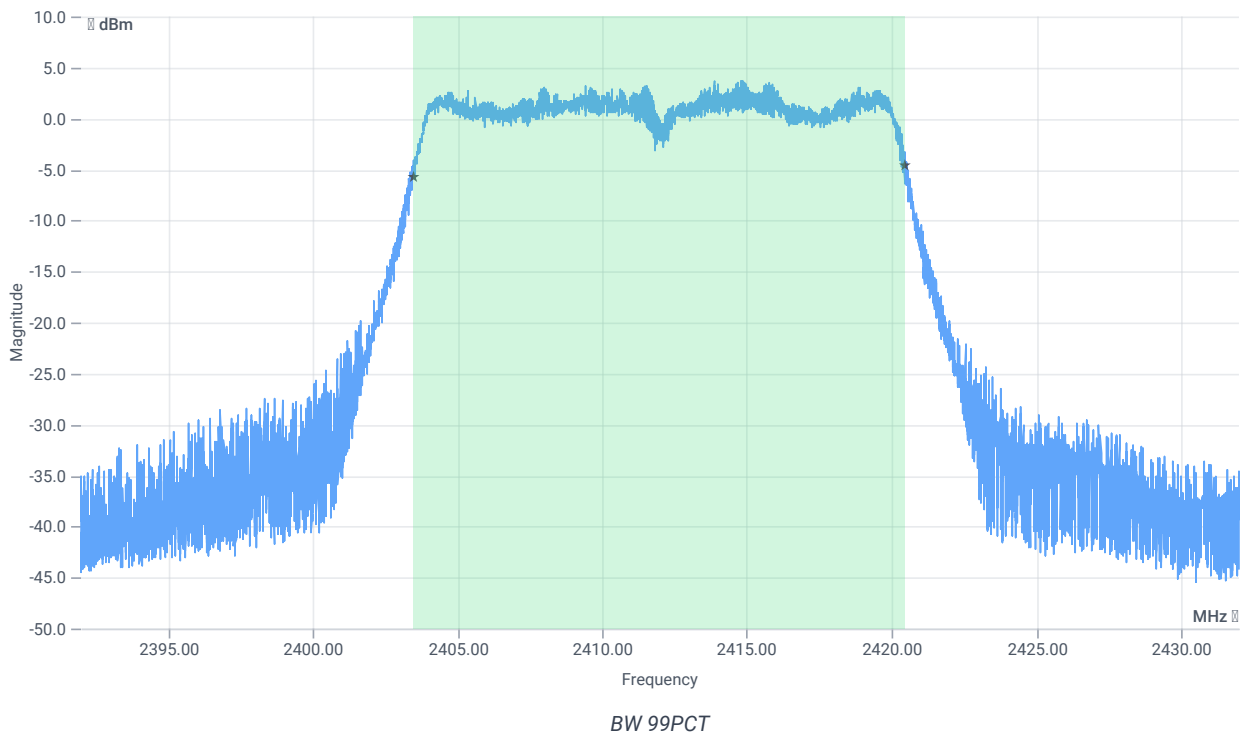


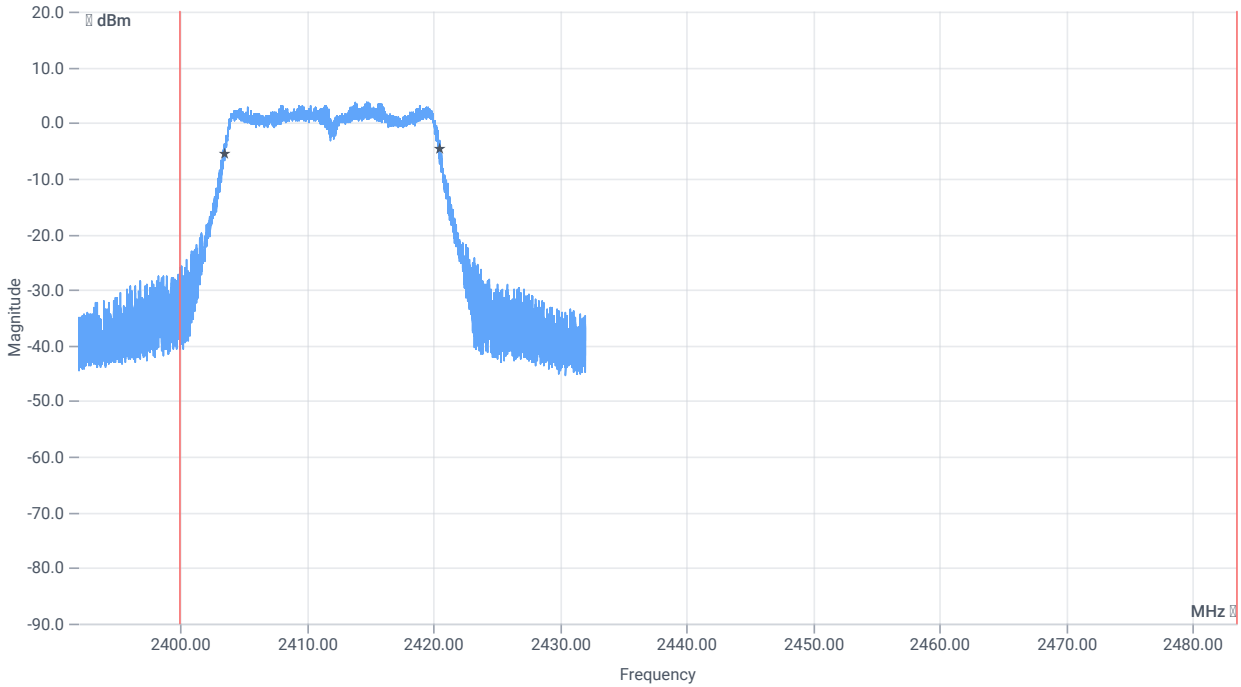


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16998.000	kHz	INFO
T1 99%	2400.000000	--	2403.4769	MHz	PASS
T2 99%	--	2483.500000	2420.4752	MHz	PASS

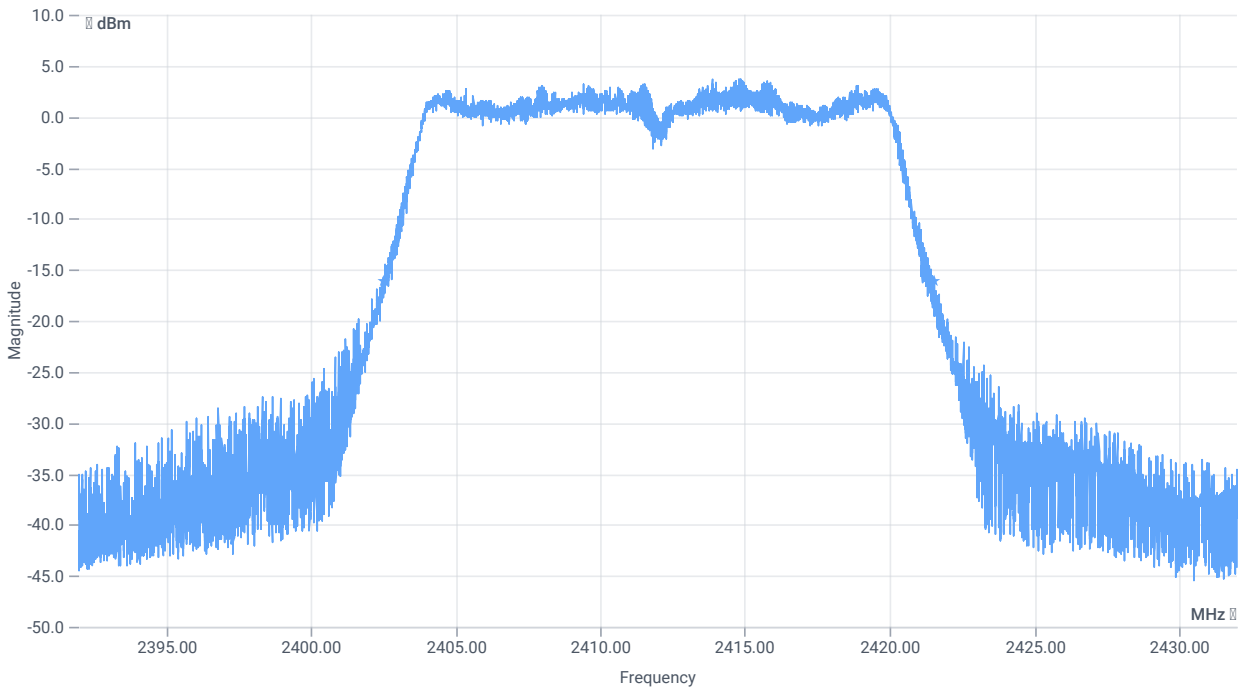

BW 20dB

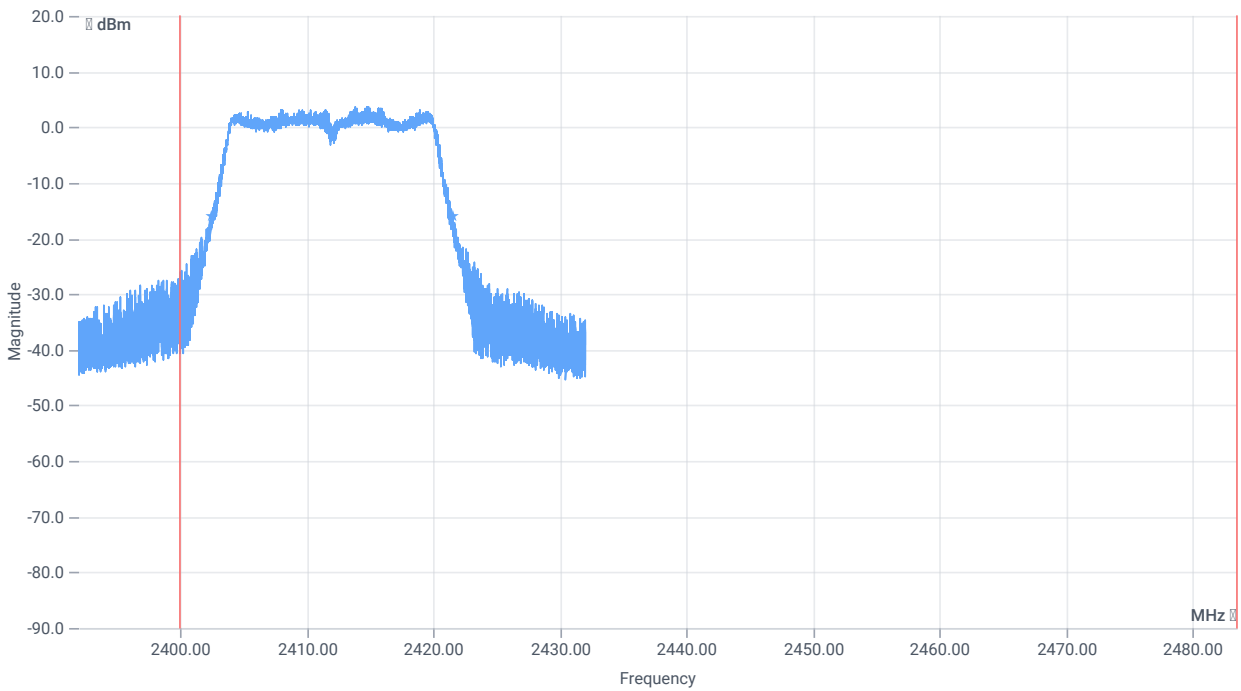

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19056	kHz	INFO
T1 20dB	2400.000000	--	2402.4960	MHz	PASS
T2 20dB	--	2483.500000	2421.5520	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:55:02
Ambit temp [°C] humidity [rel%]	21.8 42
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.26	dBm	INFO
Ref. Frequency	--	--	2463.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.26 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

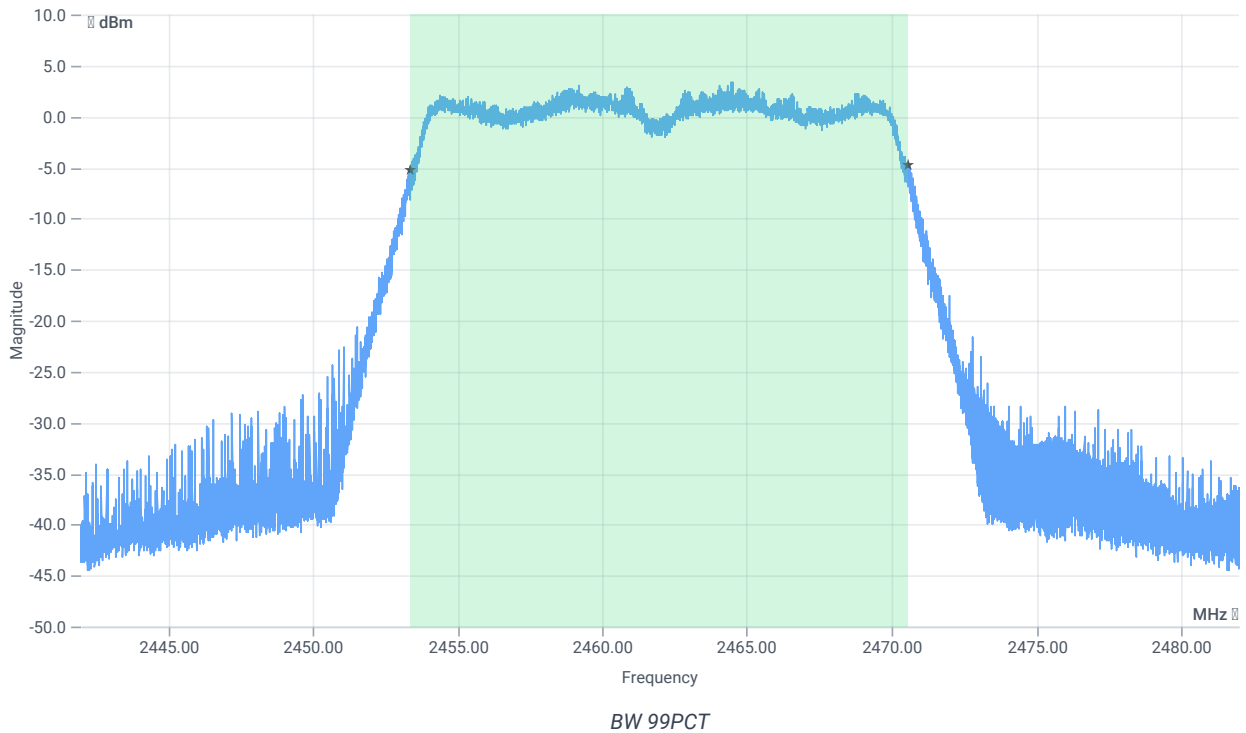


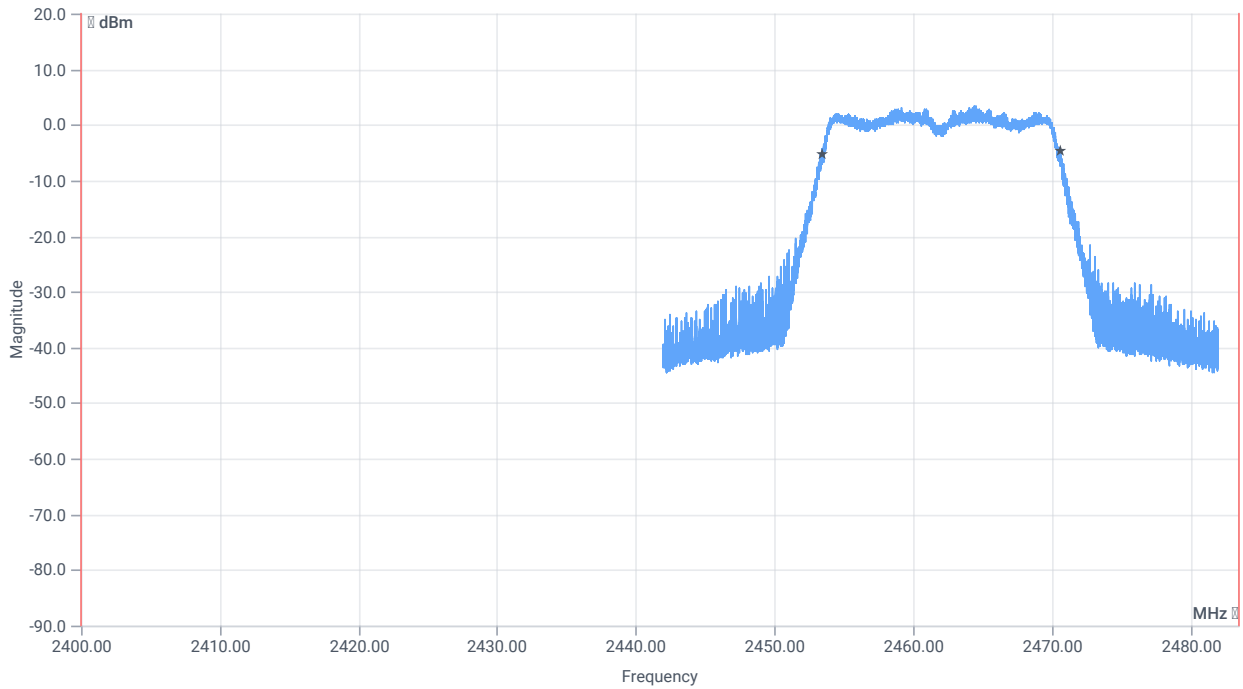


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	17186.000	kHz	INFO
T1 99%	2400.000000	--	2453.3809	MHz	PASS
T2 99%	--	2483.500000	2470.5671	MHz	PASS

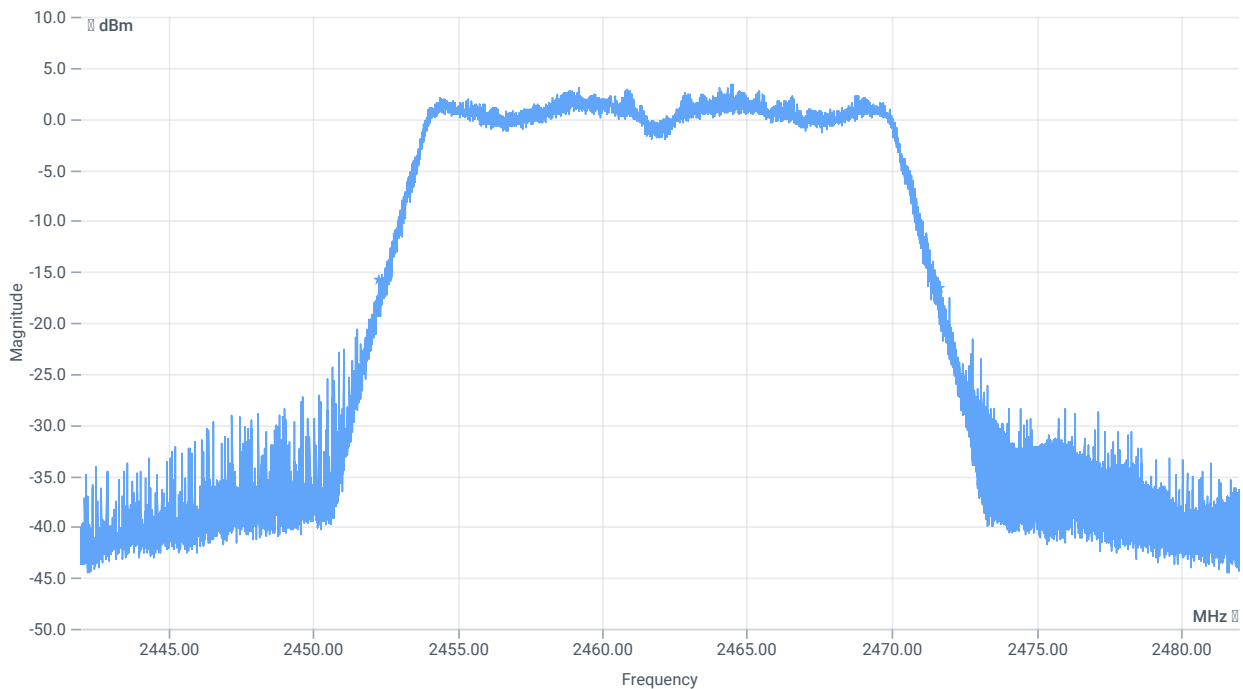

BW 20dB

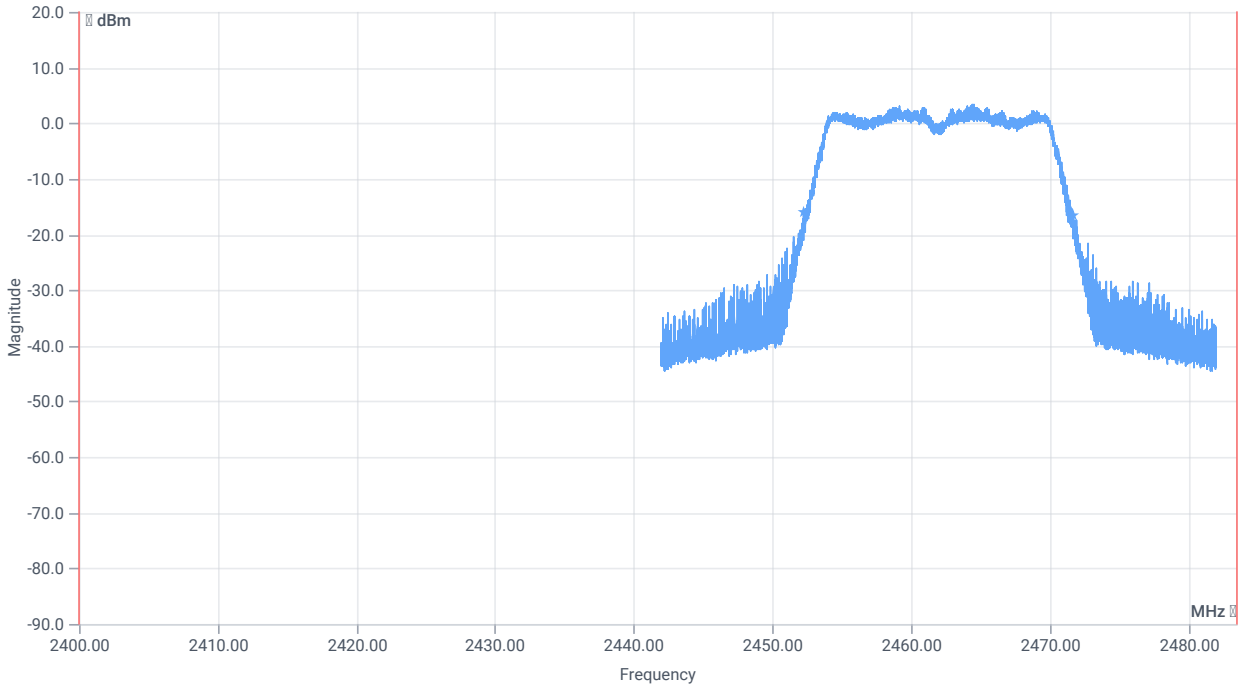

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19376	kHz	INFO
T1 20dB	2400.000000	--	2452.2920	MHz	PASS
T2 20dB	--	2483.500000	2471.6680	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:42:56
Ambit temp [°C] humidity [rel%]	21.8 40
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.49	dBm	INFO
Ref. Frequency	--	--	2434.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.49 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

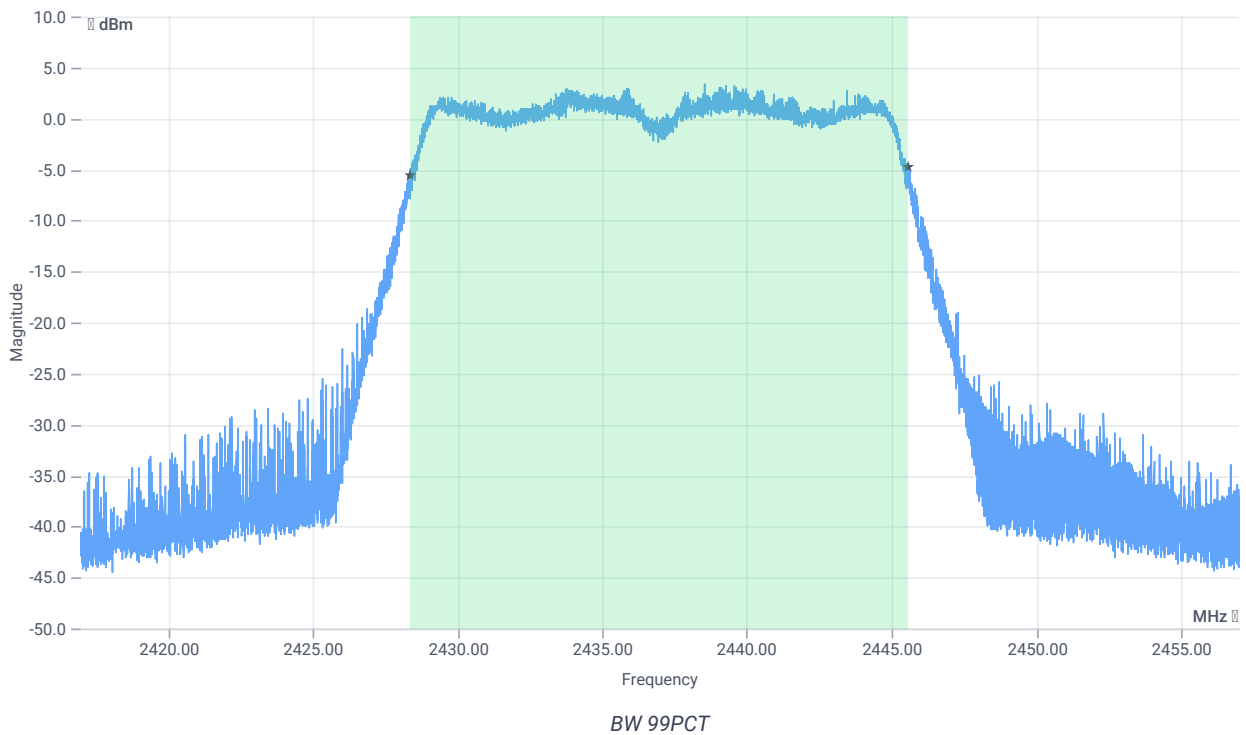


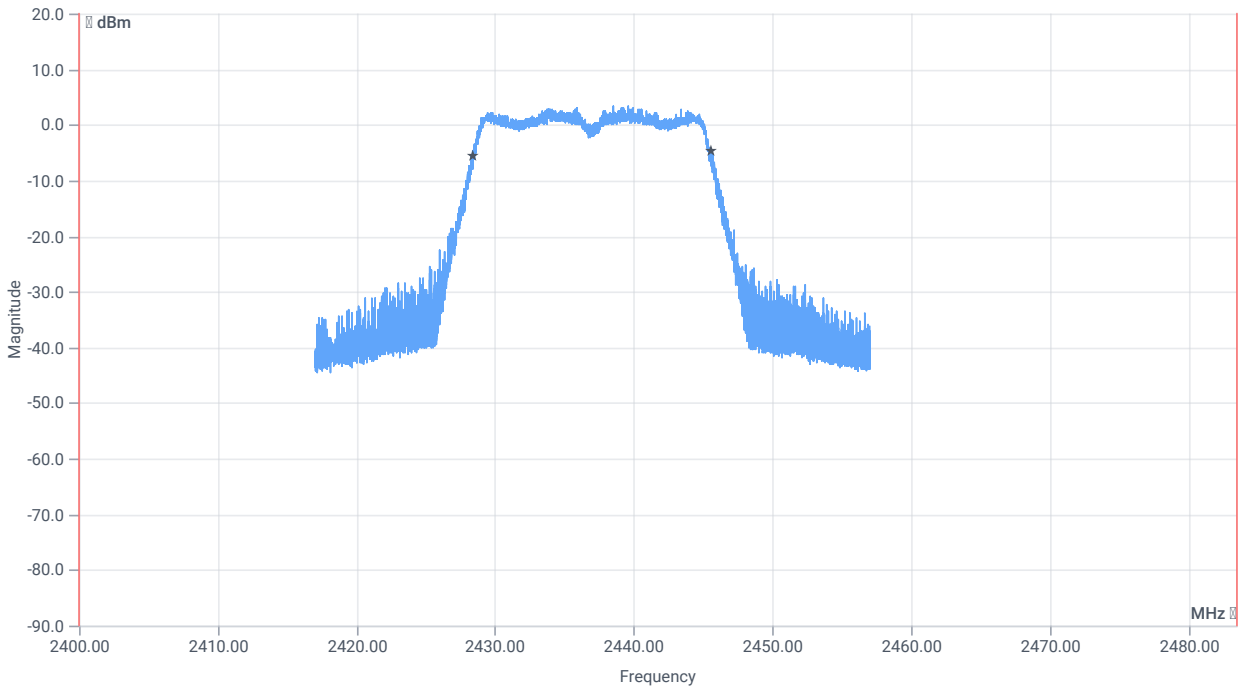


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	17182.000	kHz	INFO
T1 99%	2400.000000	--	2428.3849	MHz	PASS
T2 99%	--	2483.500000	2445.5671	MHz	PASS

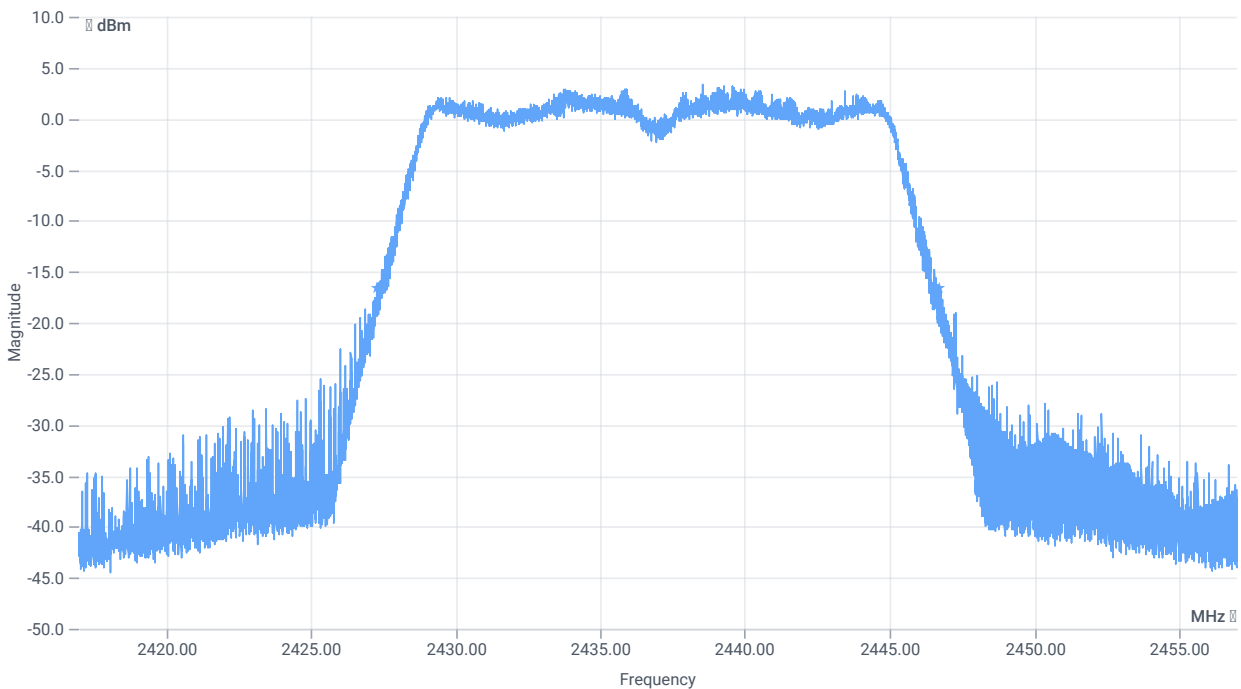

BW 20dB

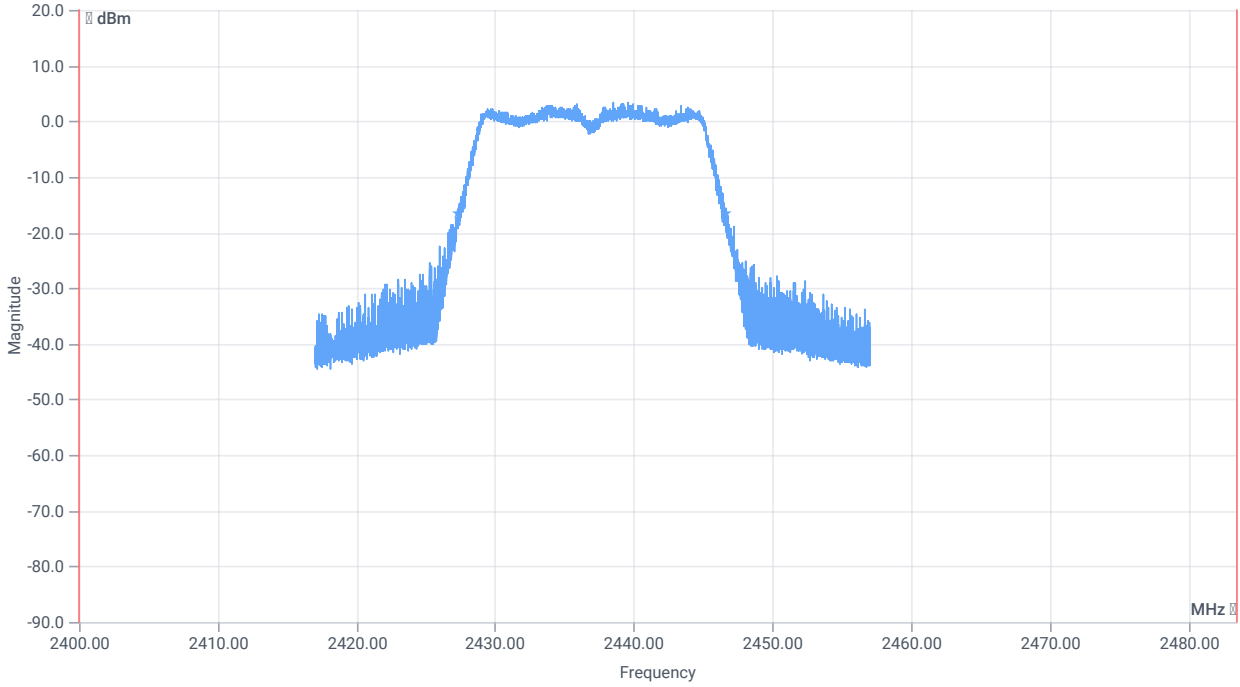

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19388	kHz	INFO
T1 20dB	2400.000000	--	2427.3000	MHz	PASS
T2 20dB	--	2483.500000	2446.6880	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:24:40
Ambit temp [°C] humidity [rel%]	21.9 41
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.47	dBm	INFO
Ref. Frequency	--	--	2415.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.47 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

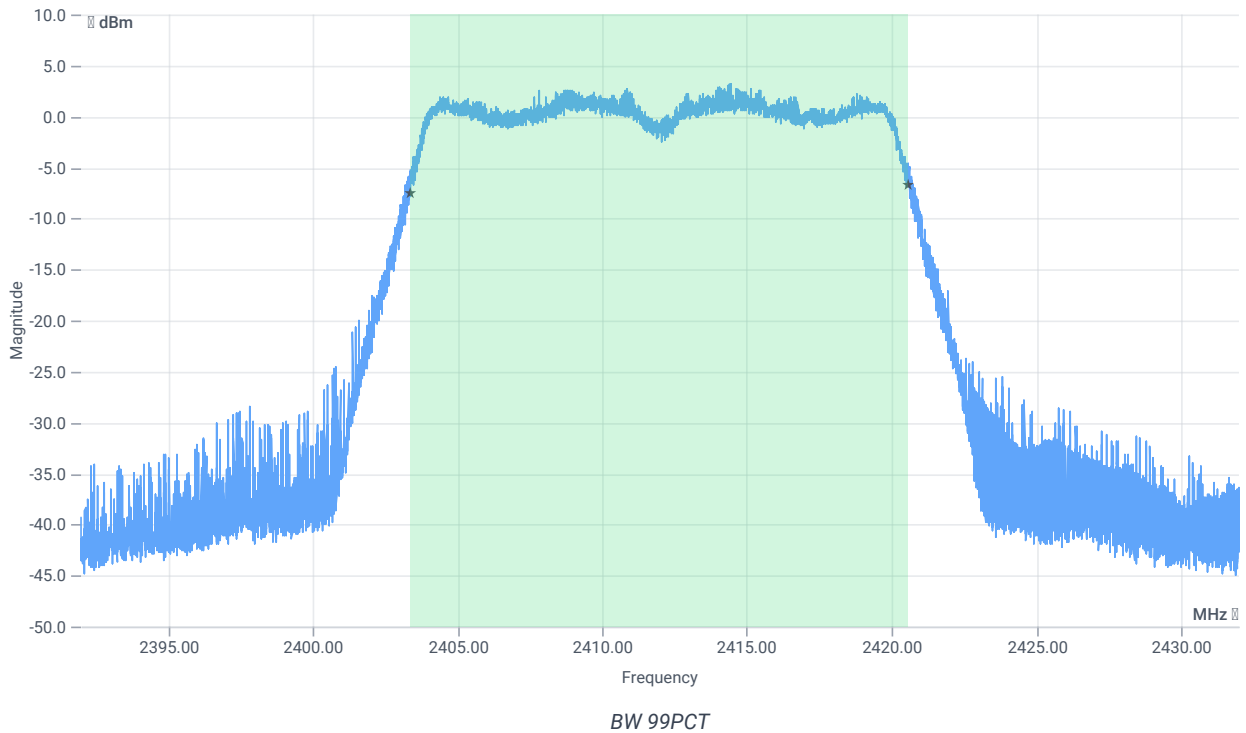


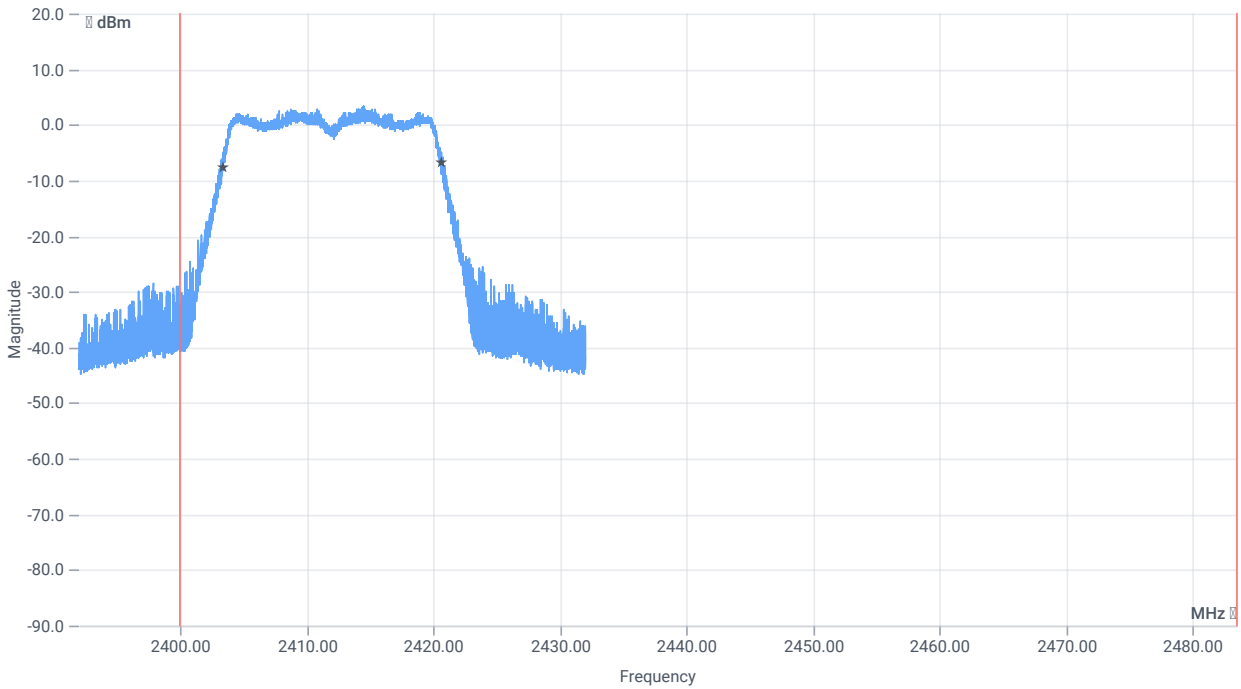


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	17178.000	kHz	INFO
T1 99%	2400.000000	--	2403.3929	MHz	PASS
T2 99%	--	2483.500000	2420.5711	MHz	PASS

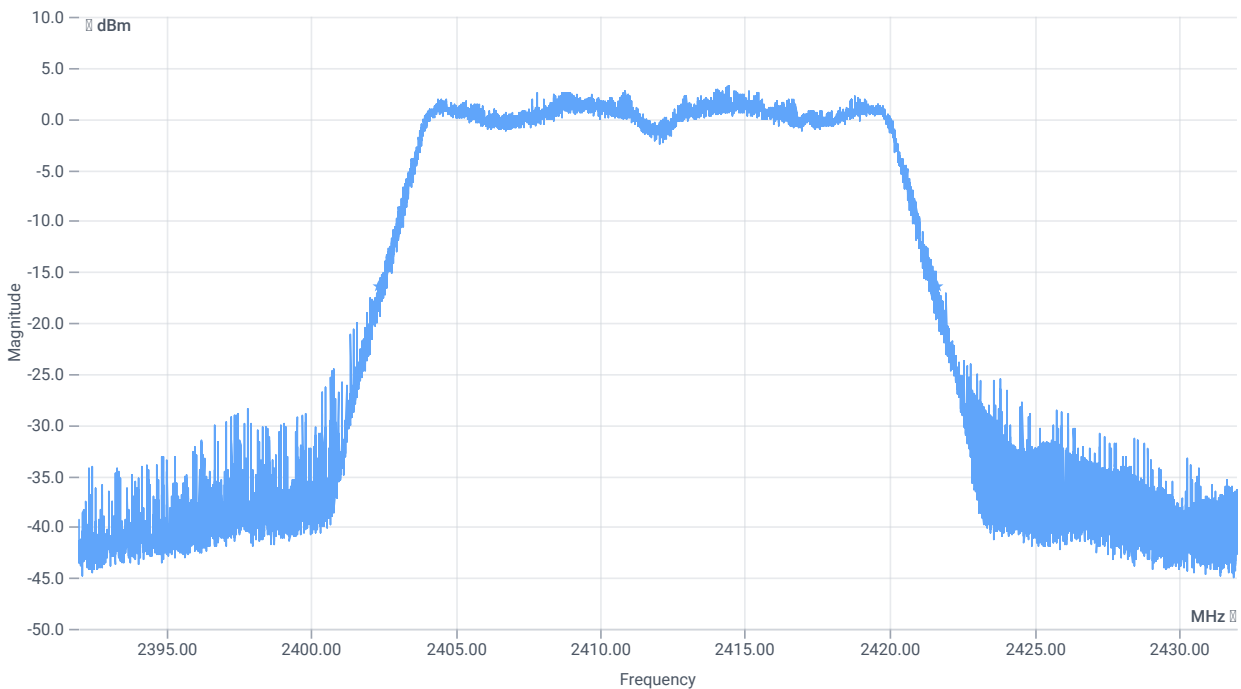

BW 20dB

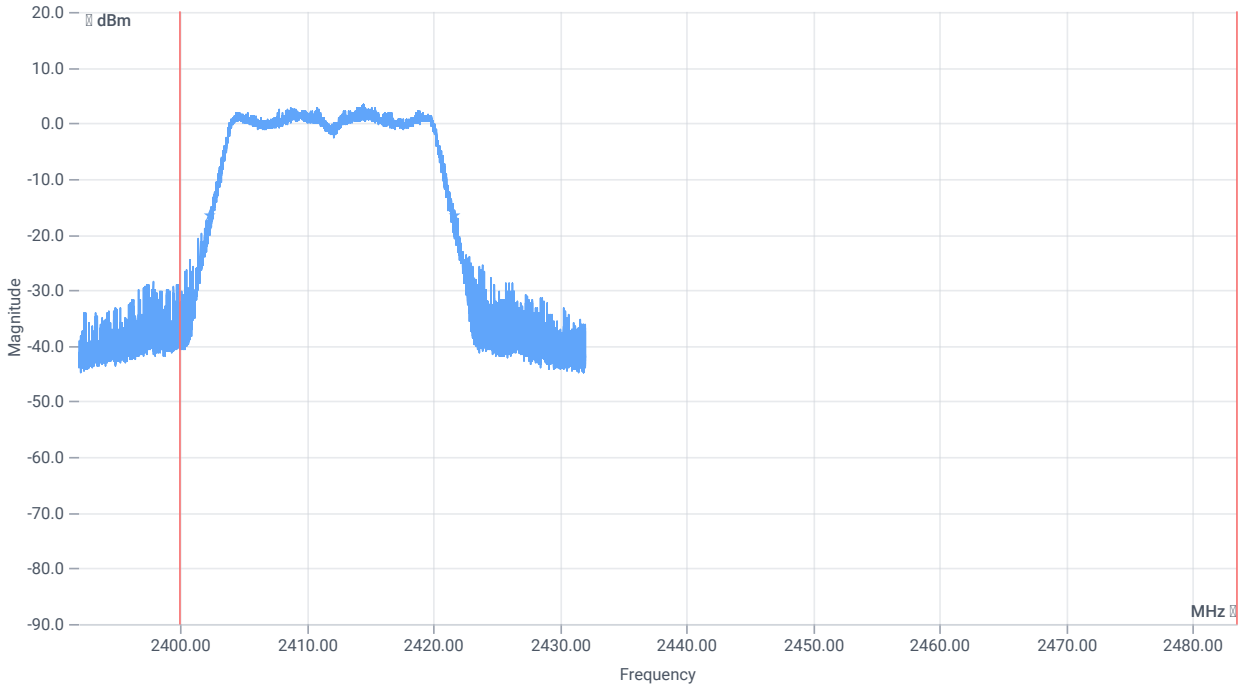

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19348	kHz	INFO
T1 20DB	2400.000000	--	2402.3280	MHz	PASS
T2 20dB	--	2483.500000	2421.6760	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	08.11.2023 09:29:54
Ambit temp [°C] humidity [rel%]	21.6 42
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.65	dBm	INFO
Ref. Frequency	--	--	2463.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.65 13.44 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

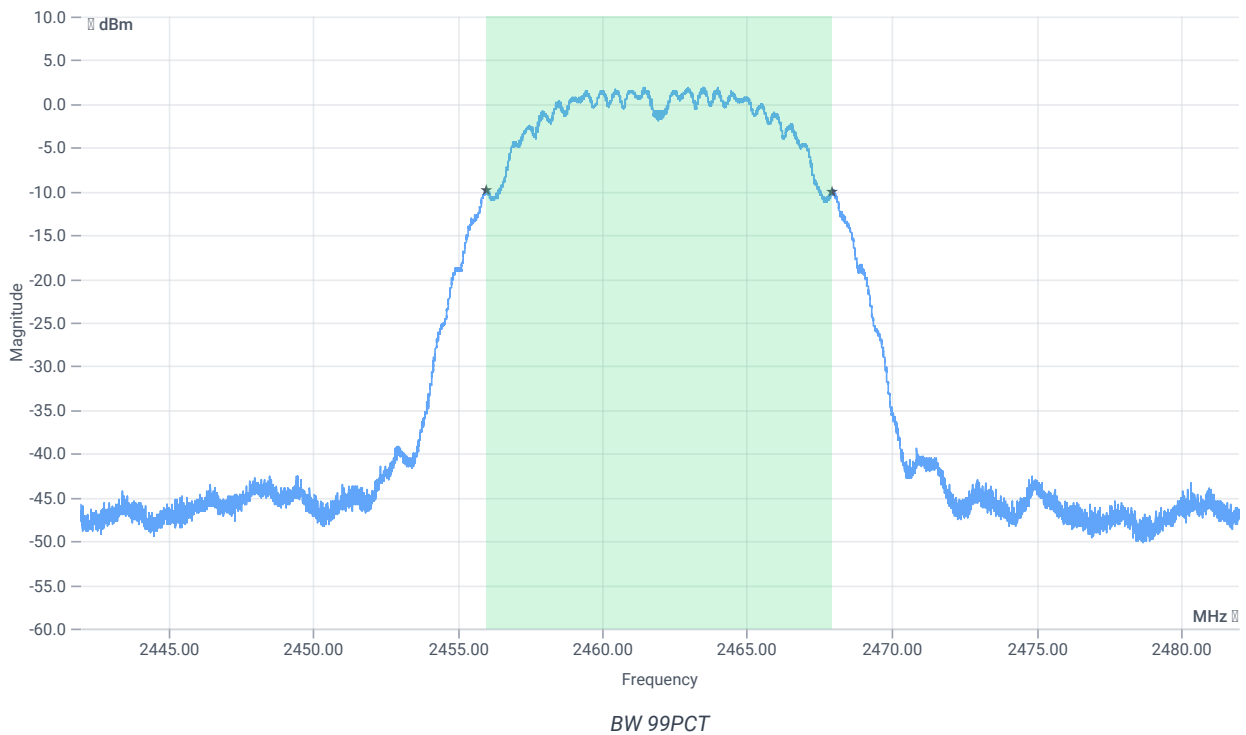


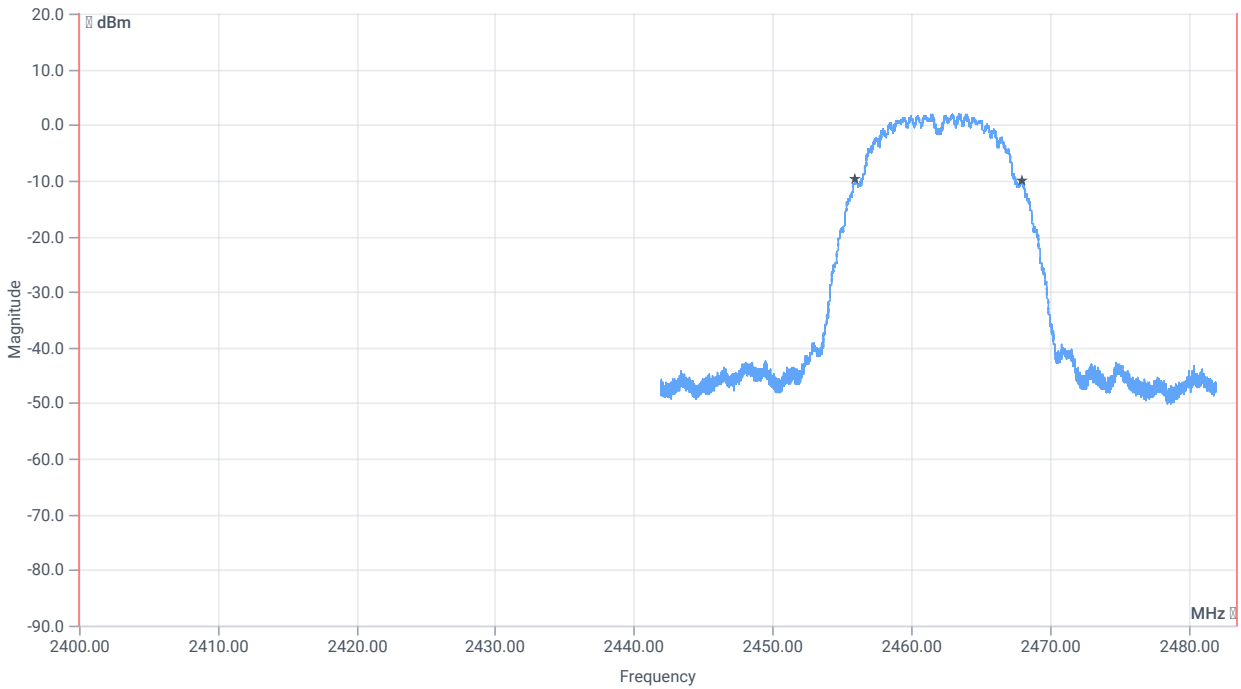


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	11967.000	kHz	INFO
T1 99%	2400.000000	--	2455.9966	MHz	PASS
T2 99%	--	2483.500000	2467.9634	MHz	PASS

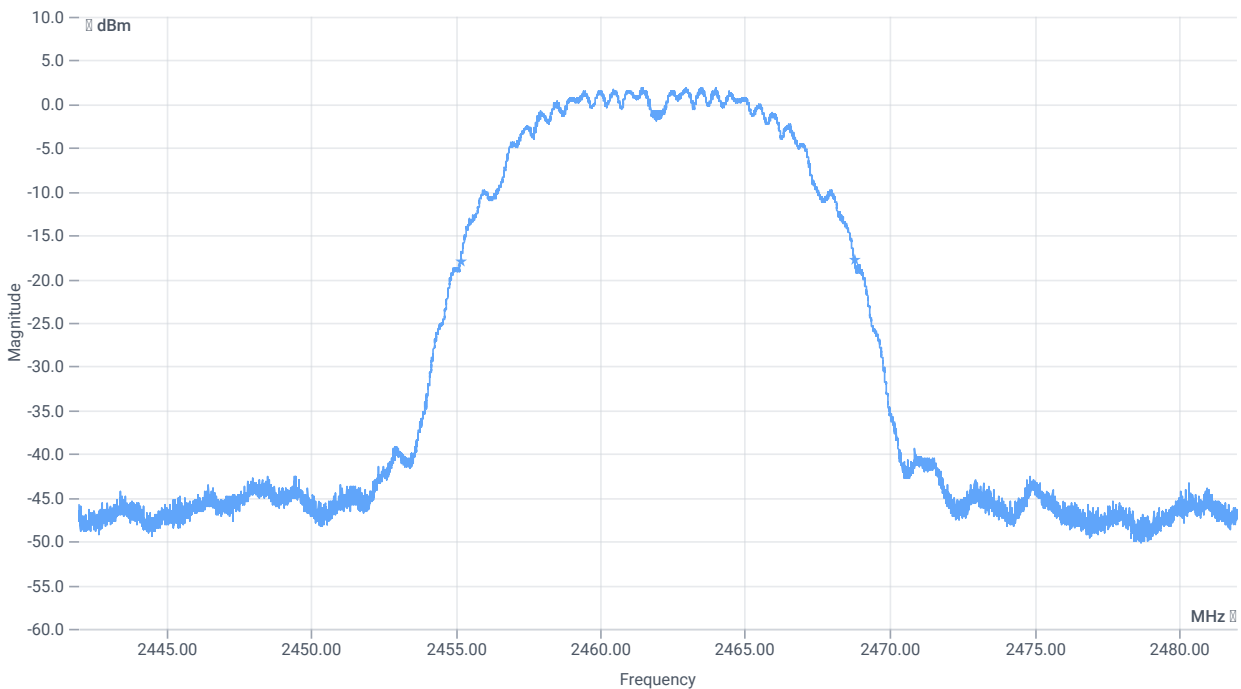

BW 20dB

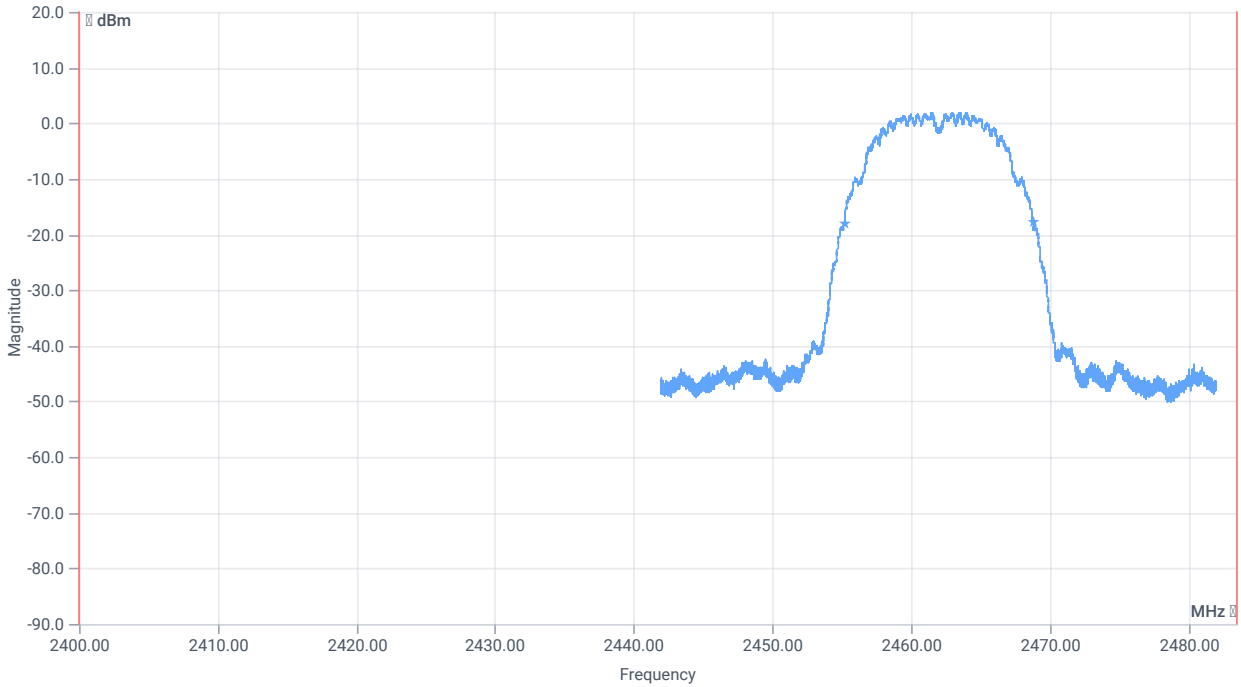

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	13608	kHz	INFO
T1 20DB	2400.000000	--	2455.1720	MHz	PASS
T2 20dB	--	2483.500000	2468.7800	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:46:53
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.69	dBm	INFO
Ref. Frequency	--	--	2438.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 13.31 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

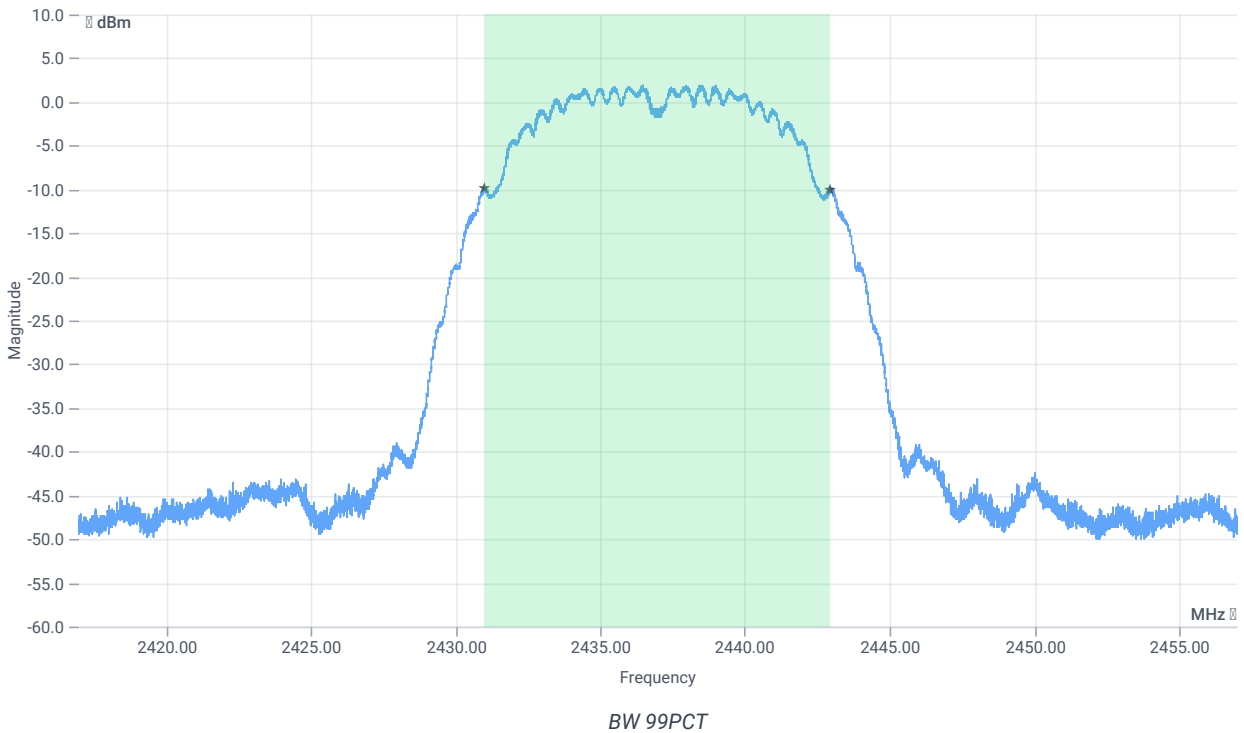


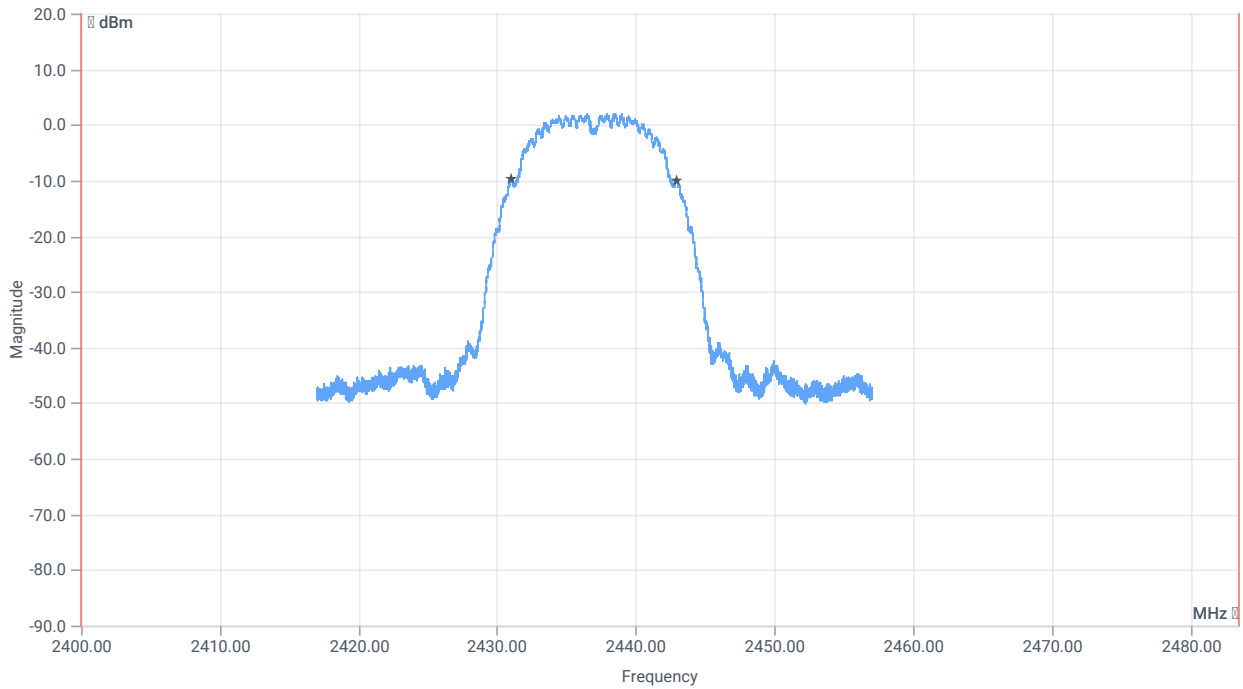


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	11967.000	kHz	INFO
T1 99%	2400.000000	--	2431.0006	MHz	PASS
T2 99%	--	2483.500000	2442.9674	MHz	PASS

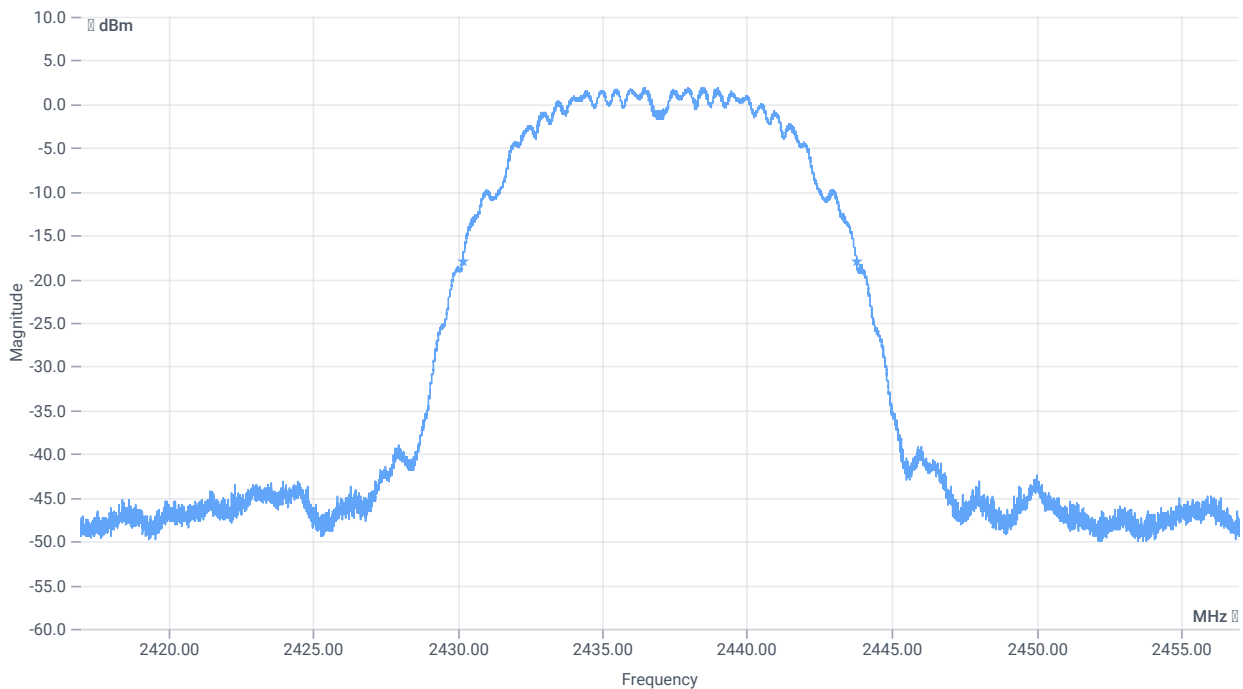

BW 20dB

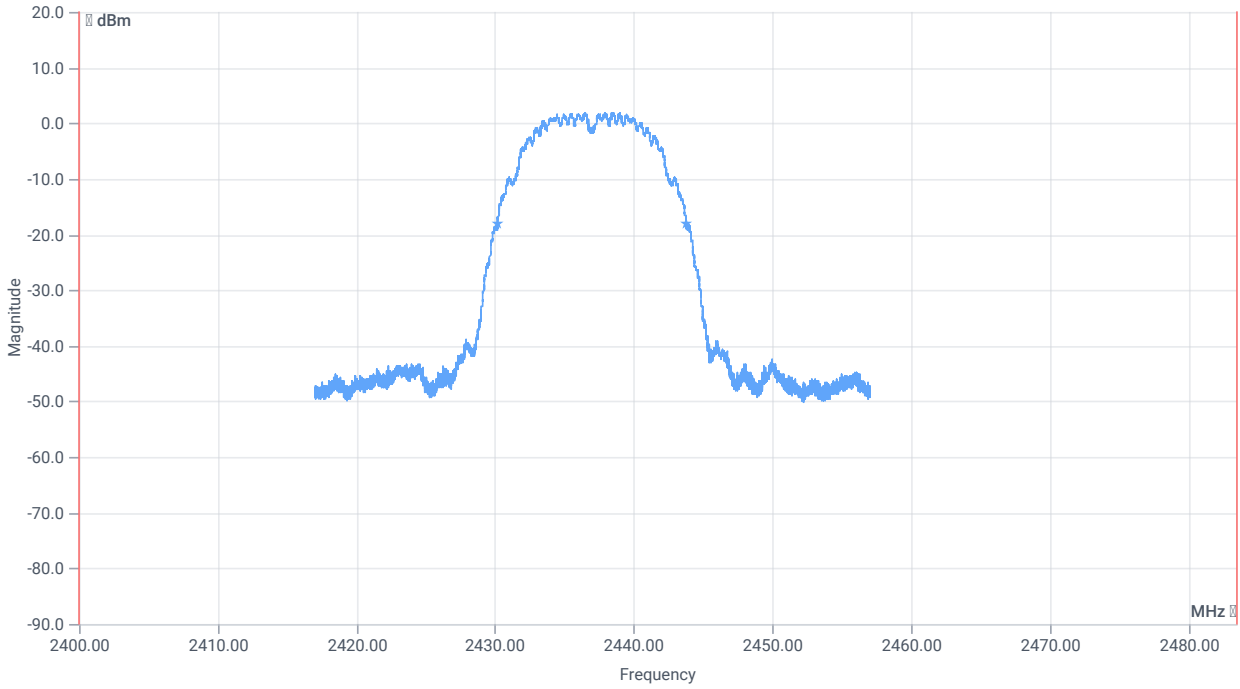

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	13616	kHz	INFO
T1 20DB	2400.000000	--	2430.1760	MHz	PASS
T2 20dB	--	2483.500000	2443.7920	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:25:10
Ambit temp [°C] humidity [rel%]	21.6 43
System version	4.7.1.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.23	dBm	INFO
Ref. Frequency	--	--	2413.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.23 13.15 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

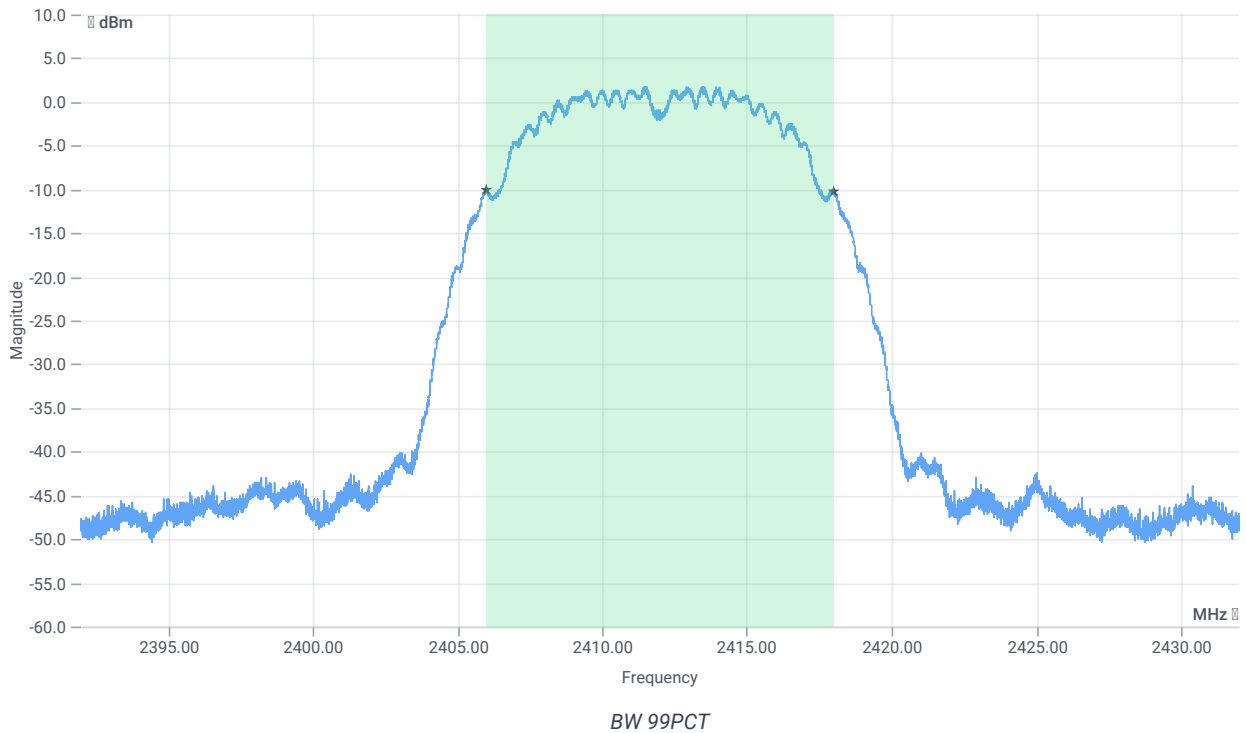


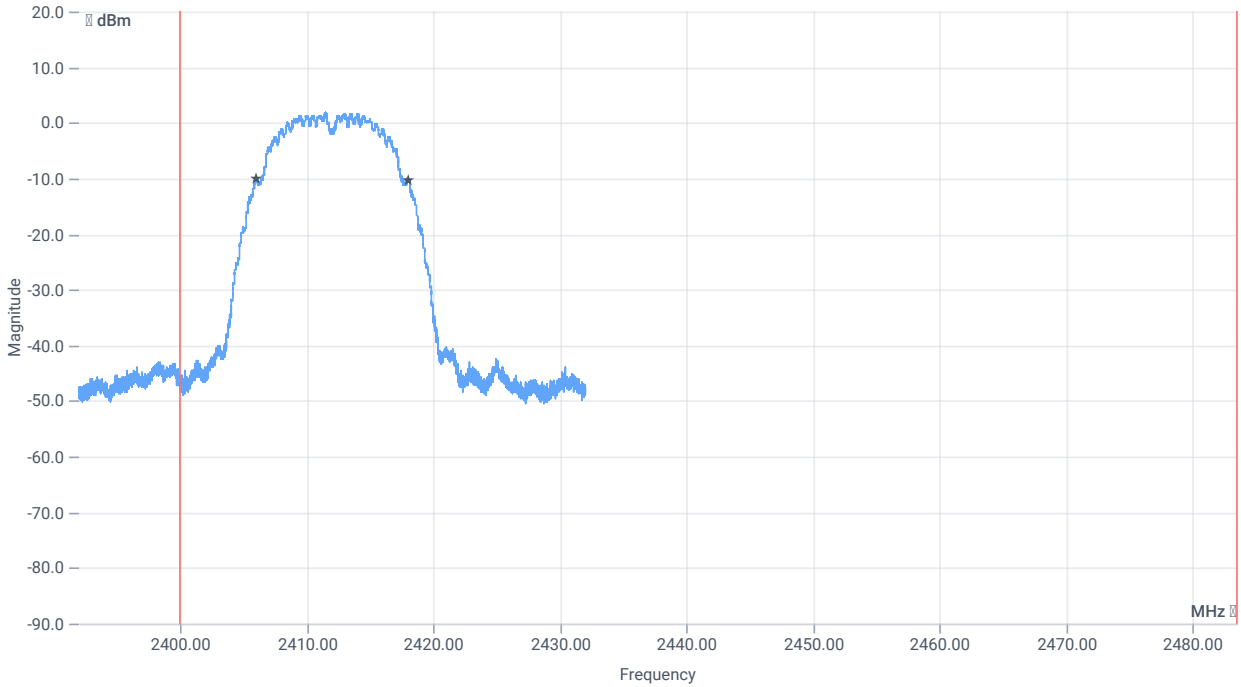


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	11983.000	kHz	INFO
T1 99%	2400.000000	--	2405.9926	MHz	PASS
T2 99%	--	2483.500000	2417.9754	MHz	PASS

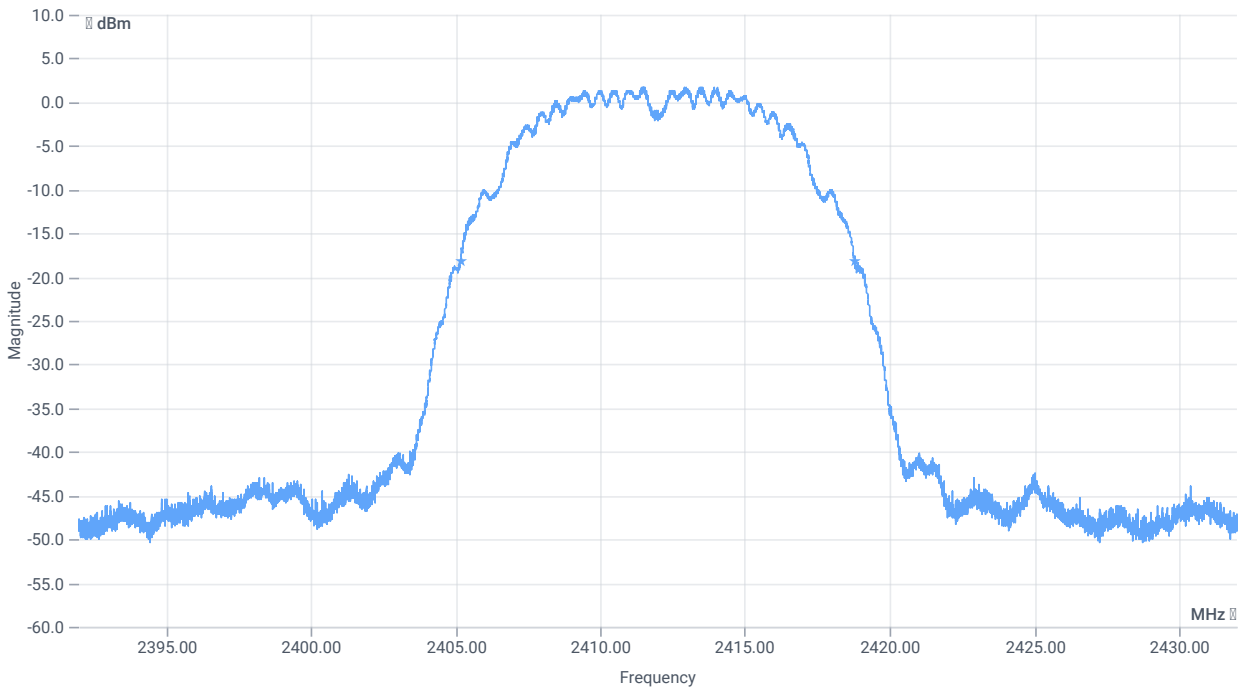

BW 20dB

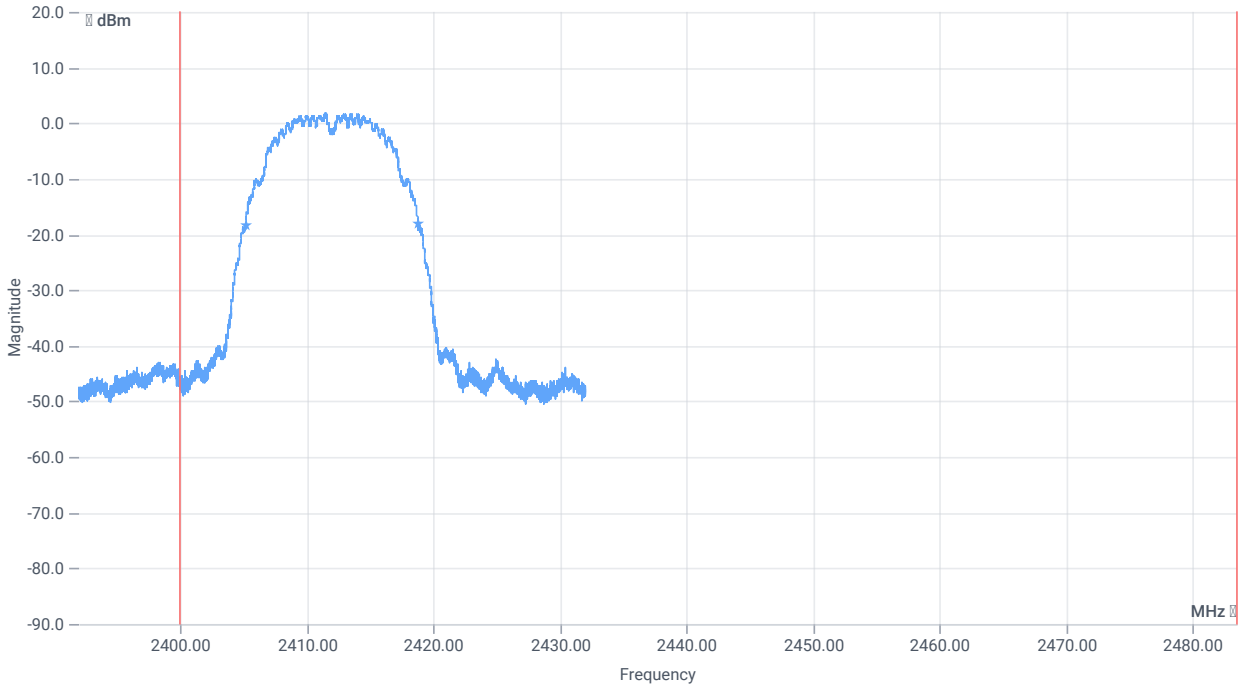

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	13628	kHz	INFO
T1 20dB	2400.000000	--	2405.1760	MHz	PASS
T2 20dB	--	2483.500000	2418.8040	MHz	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 14:26:16
Ambit temp [°C] humidity [rel%]	22.2 38
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2452 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.54	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:58:54
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.92	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:46:00
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2422 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.7	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:32:24
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.29	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:19:42
Ambit temp [°C] humidity [rel%]	22.2 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.08	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 11:03:05
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.61	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:50:58
Ambit temp [°C] humidity [rel%]	21.7 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.91	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:32:43
Ambit temp [°C] humidity [rel%]	21.9 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	19.91	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 09:37:59
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2462 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	14	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:54:57
Ambit temp [°C] humidity [rel%]	21.7 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2437 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	14.25	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:33:17
Ambit temp [°C] humidity [rel%]	21.6 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI
Power sensor,Keysight Technologies,U2021XA,MY59190010,A.04.06

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	14.29	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak output power PM DTS ~ WLAN2G4 n-HT20 mode

References

TC start	21.11.2023 15:41:17
Ambit temp [°C] humidity [rel%]	26.7 36
System version	4.7.1.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
Description	FCC 15.247 Peak output power PM DTS - WLAN2G4 n-HT20 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path name type	EUT - SignalingUnit - PowerMeter

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,29655273,NI
Power sensor,Keysight Technologies,L2061XA,MY58000020,A.02.06

Test at TX 2412 MHz

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	--	30	17.76	dBm	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 14:17:31
Ambit temp [°C] humidity [rel%]	22.5 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2452 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.38	dBm	INFO
Ref. Frequency	--	--	2446.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.38 13.41 10
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

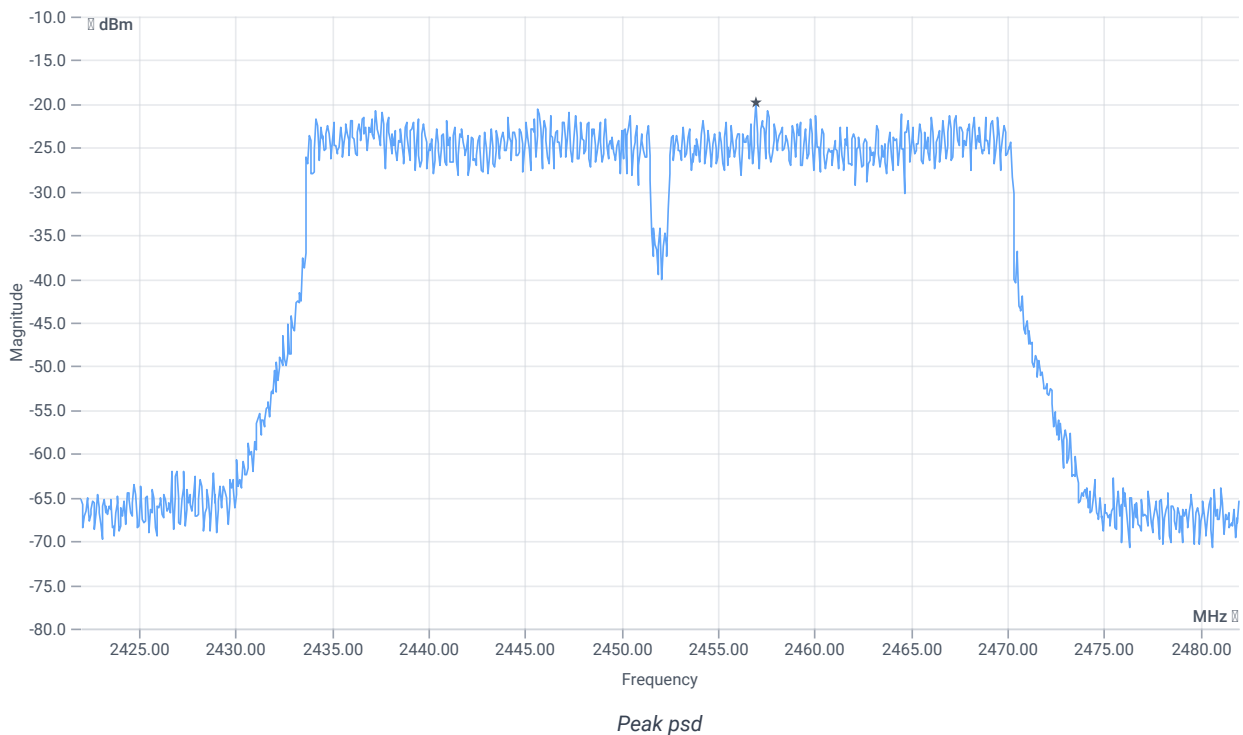

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-19.84	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:50:09
Ambit temp [°C] humidity [rel%]	22.5 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.68	dBm	INFO
Ref. Frequency	--	--	2422.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.68 13.31 10
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

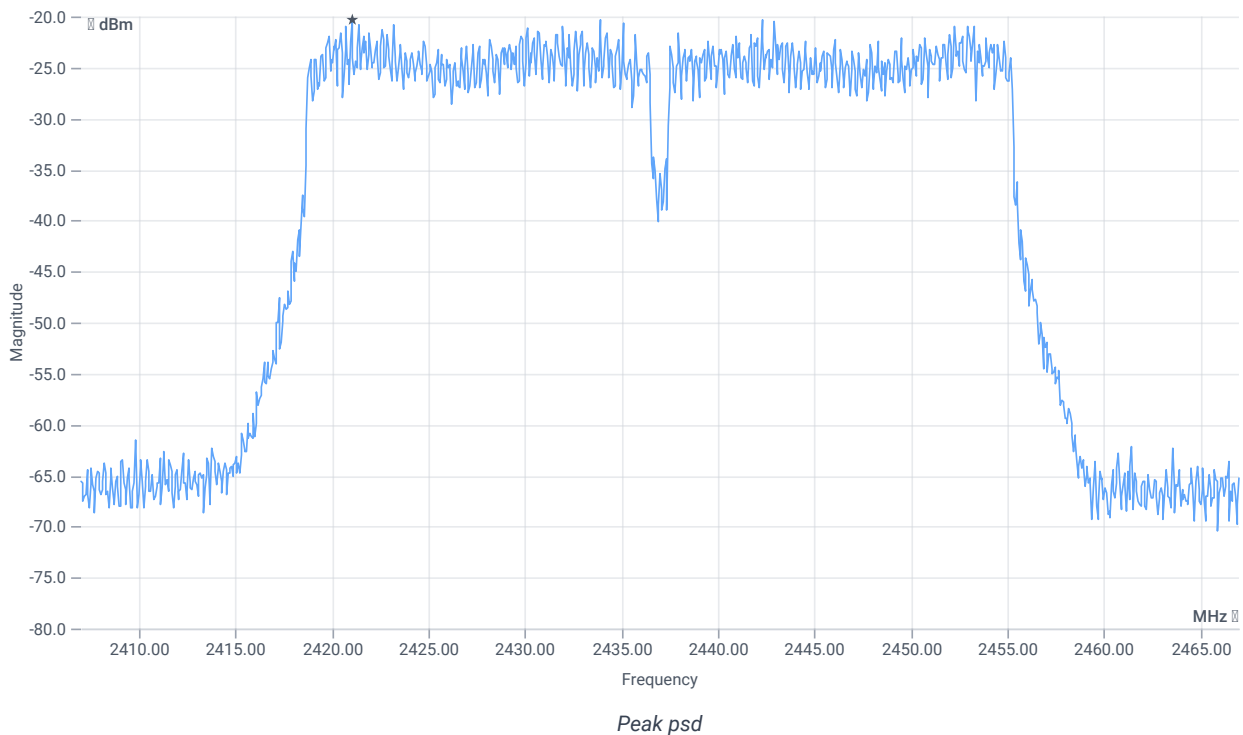

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-20.25	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:37:16
Ambit temp [°C] humidity [rel%]	22.5 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2422 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.70	dBm	INFO
Ref. Frequency	--	--	2437.580	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.70 13.21 10
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

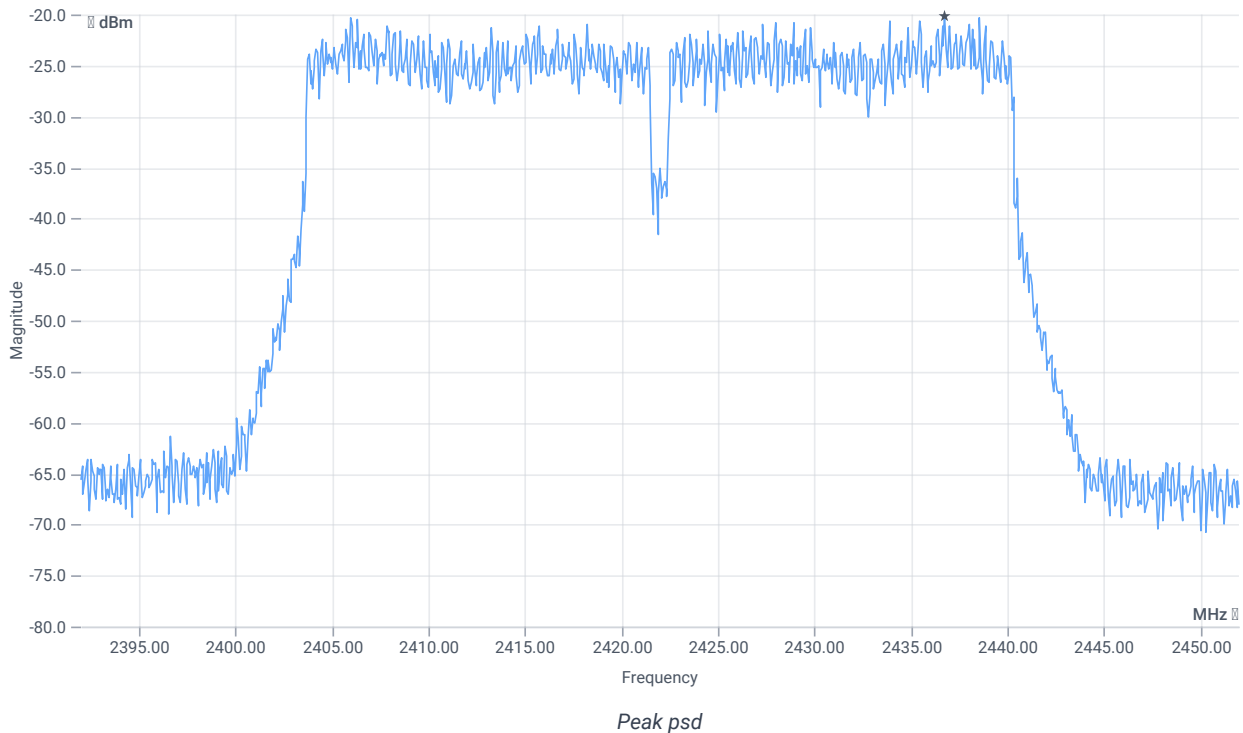

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-20.17	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:23:41
Ambit temp [°C] humidity [rel%]	22.2 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.10	dBm	INFO
Ref. Frequency	--	--	2464.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.10 13.44 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

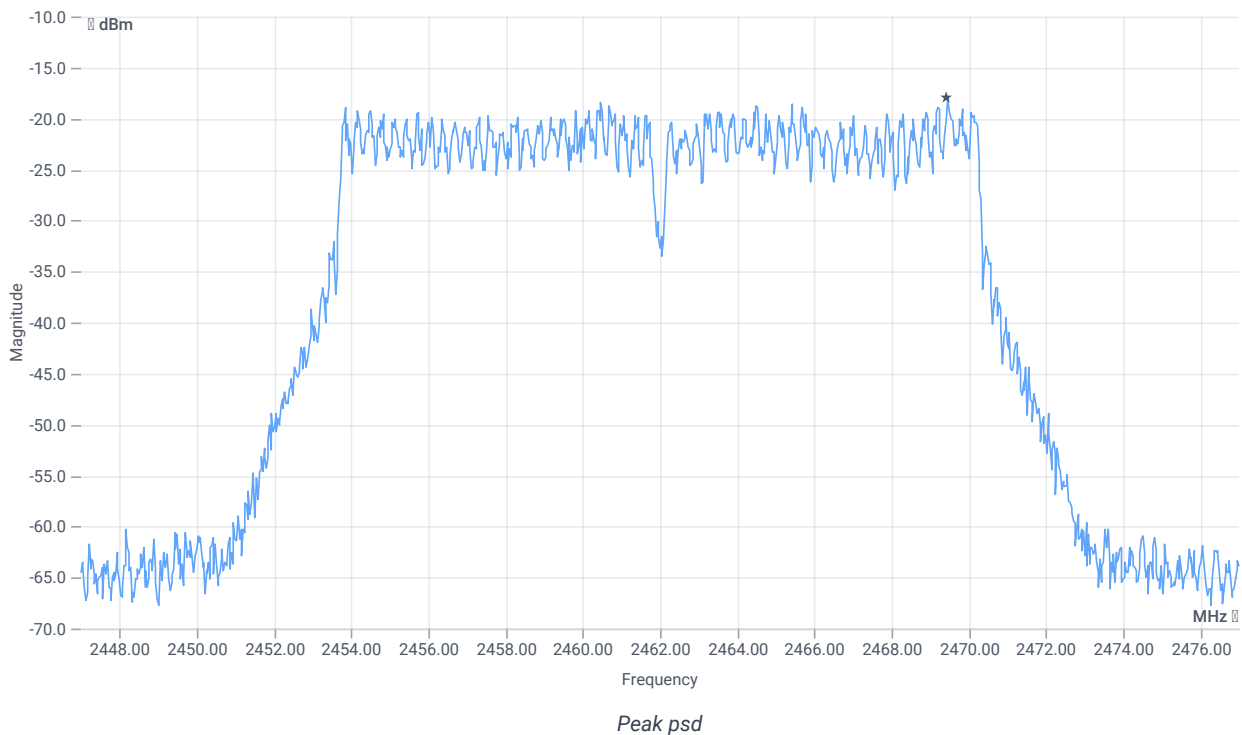

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.99	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:10:59
Ambit temp [°C] humidity [rel%]	22.1 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.54	dBm	INFO
Ref. Frequency	--	--	2429.810	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.54 13.31 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

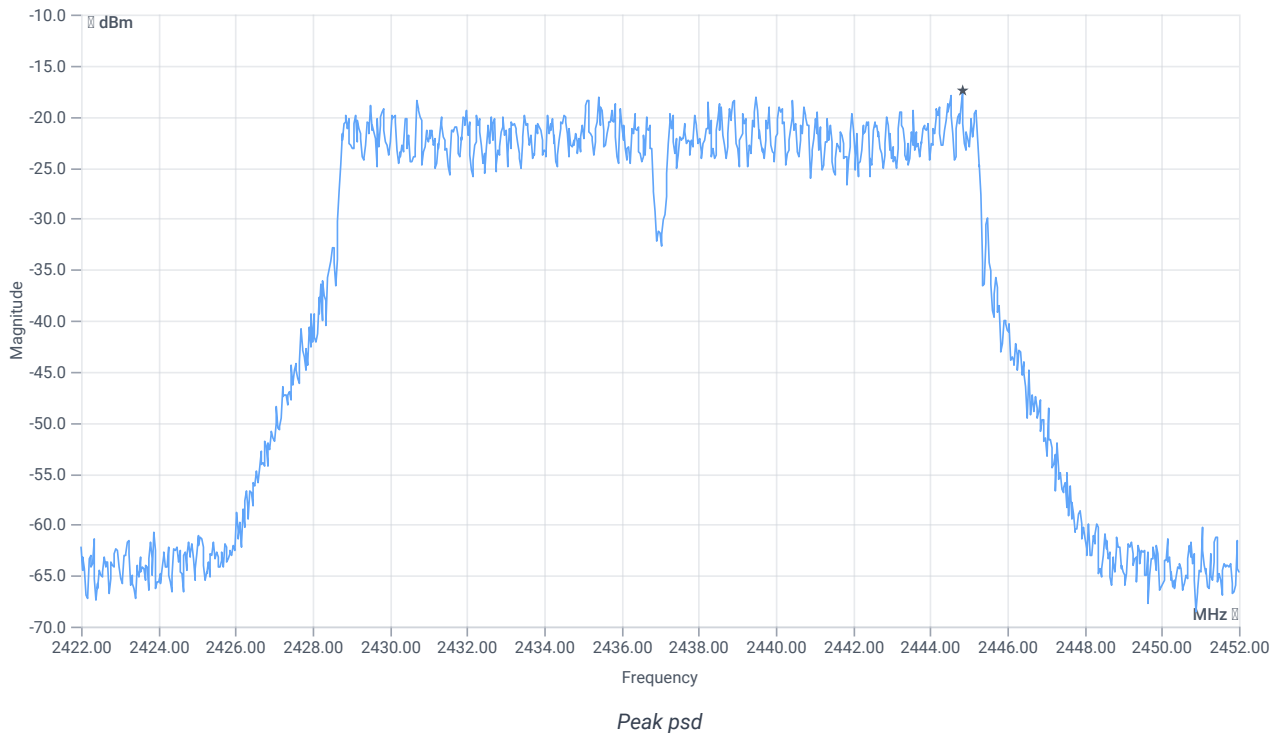

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.42	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 11:10:54
Ambit temp [°C] humidity [rel%]	21.8 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.62	dBm	INFO
Ref. Frequency	--	--	2414.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.62 13.15 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

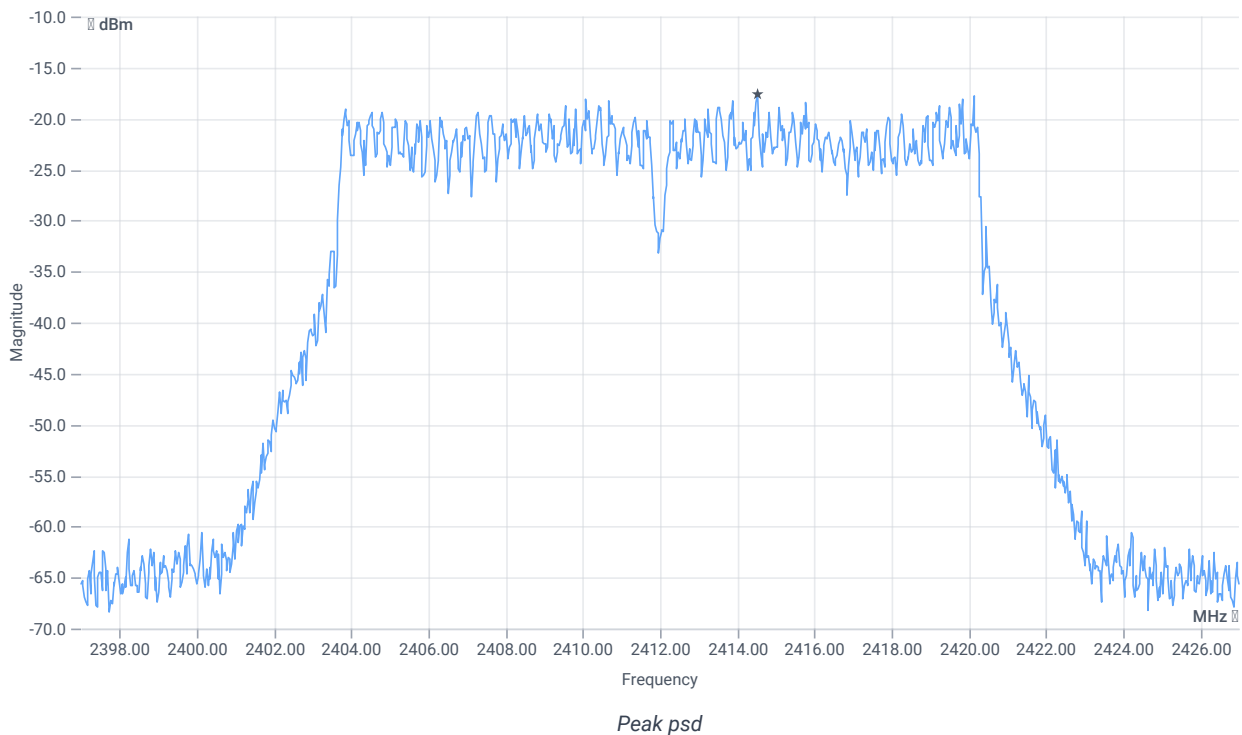

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.55	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:54:21
Ambit temp [°C] humidity [rel%]	21.8 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.61	dBm	INFO
Ref. Frequency	--	--	2460.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.61 13.44 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

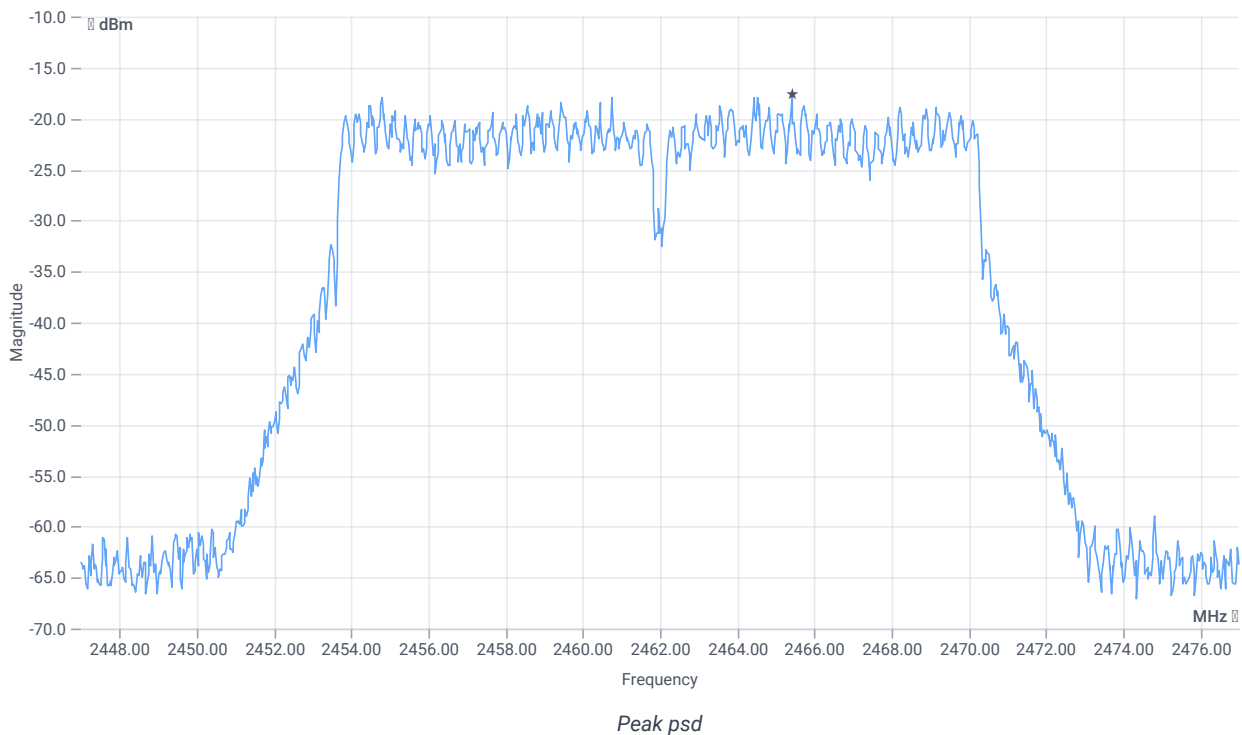

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.6	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:42:14
Ambit temp [°C] humidity [rel%]	21.8 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.90	dBm	INFO
Ref. Frequency	--	--	2439.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.90 13.31 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

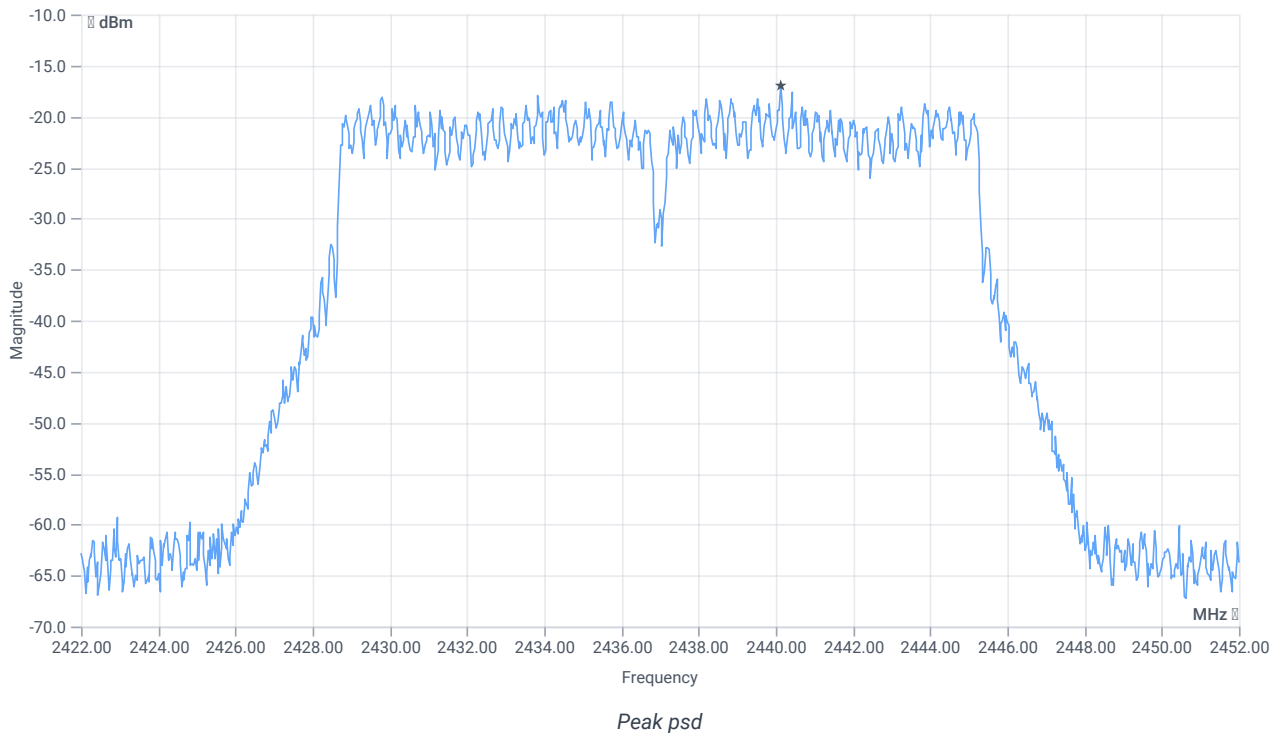

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.03	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:23:59
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.44	dBm	INFO
Ref. Frequency	--	--	2408.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.44 13.15 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

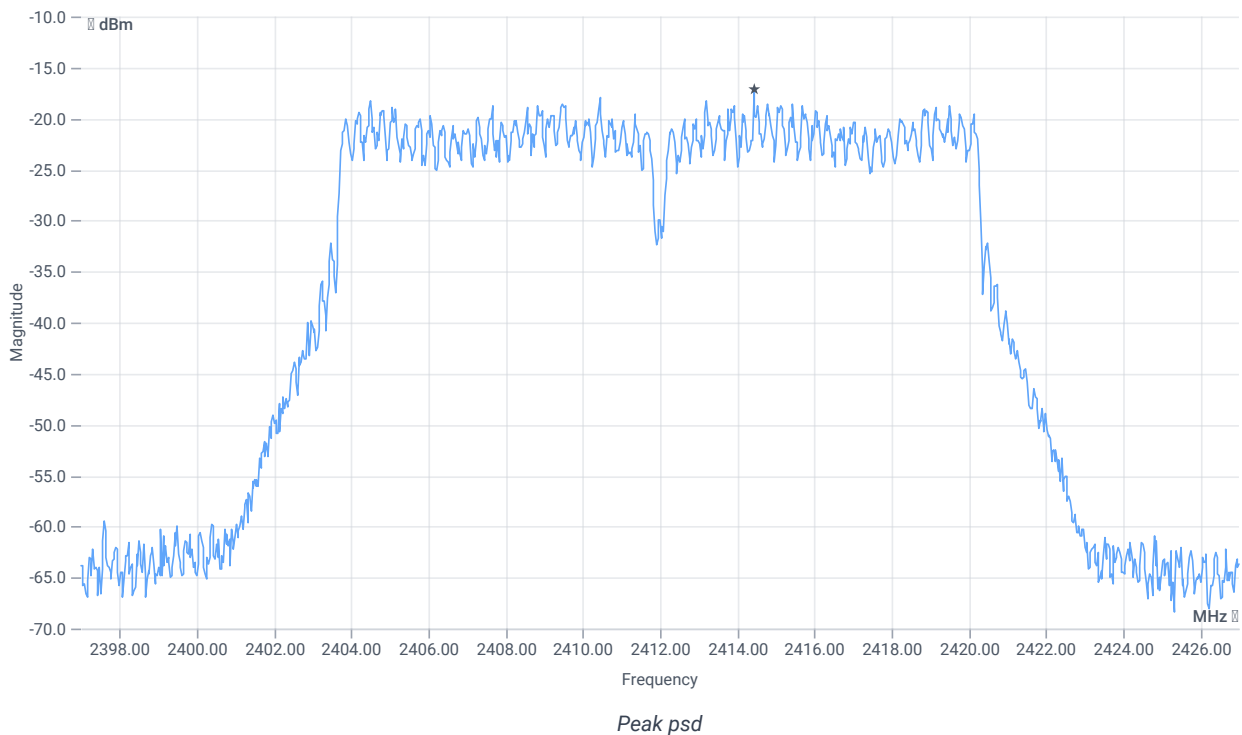

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-17.19	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 09:29:13
Ambit temp [°C] humidity [rel%]	21.6 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2462 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.51	dBm	INFO
Ref. Frequency	--	--	2463.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.51 13.44 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

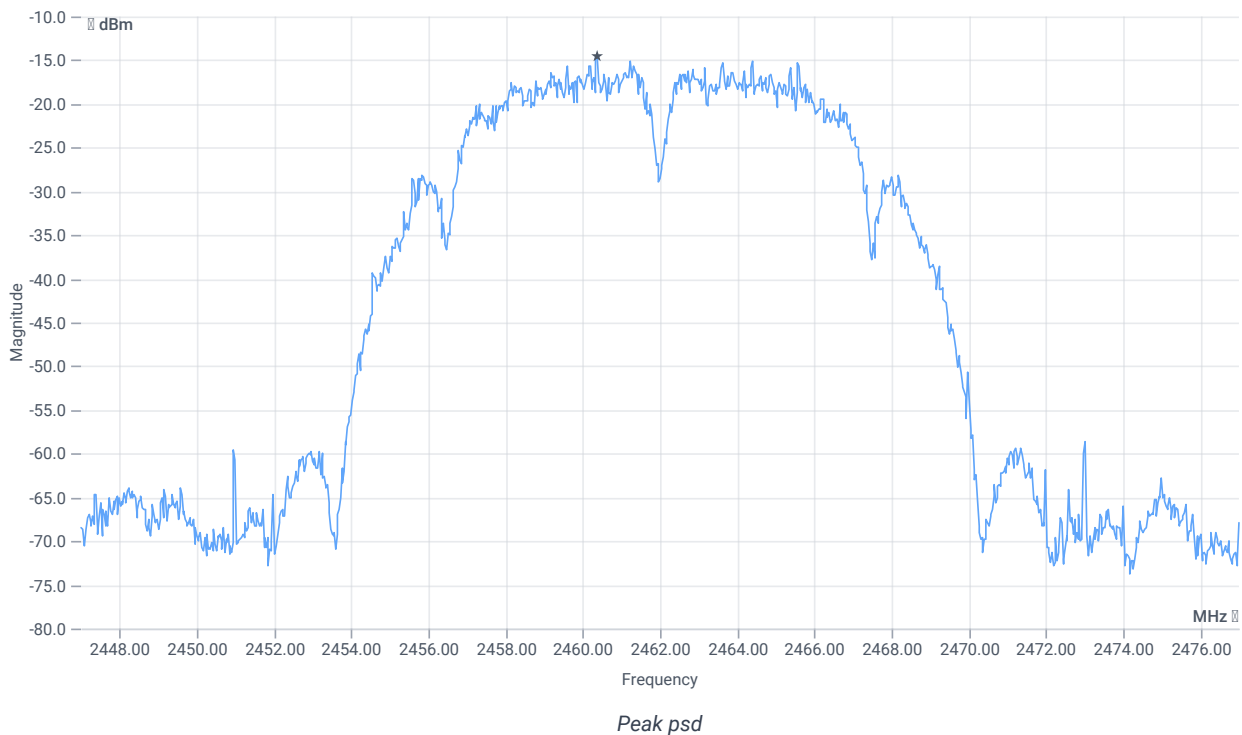

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-14.61	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:46:10
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.35	dBm	INFO
Ref. Frequency	--	--	2438.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.35 13.31 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

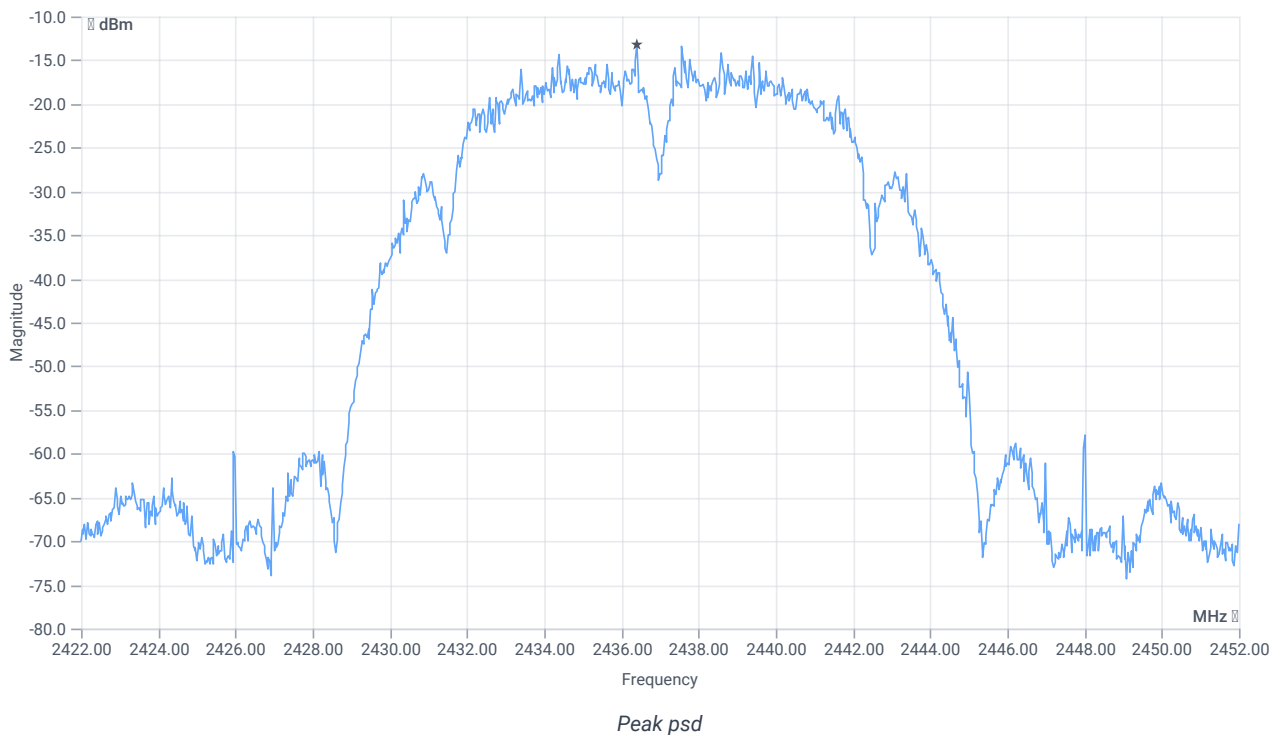

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-13.24	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:24:24
Ambit temp [°C] humidity [rel%]	21.6 43
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI


Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.39	dBm	INFO
Ref. Frequency	--	--	2410.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.39 13.15 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

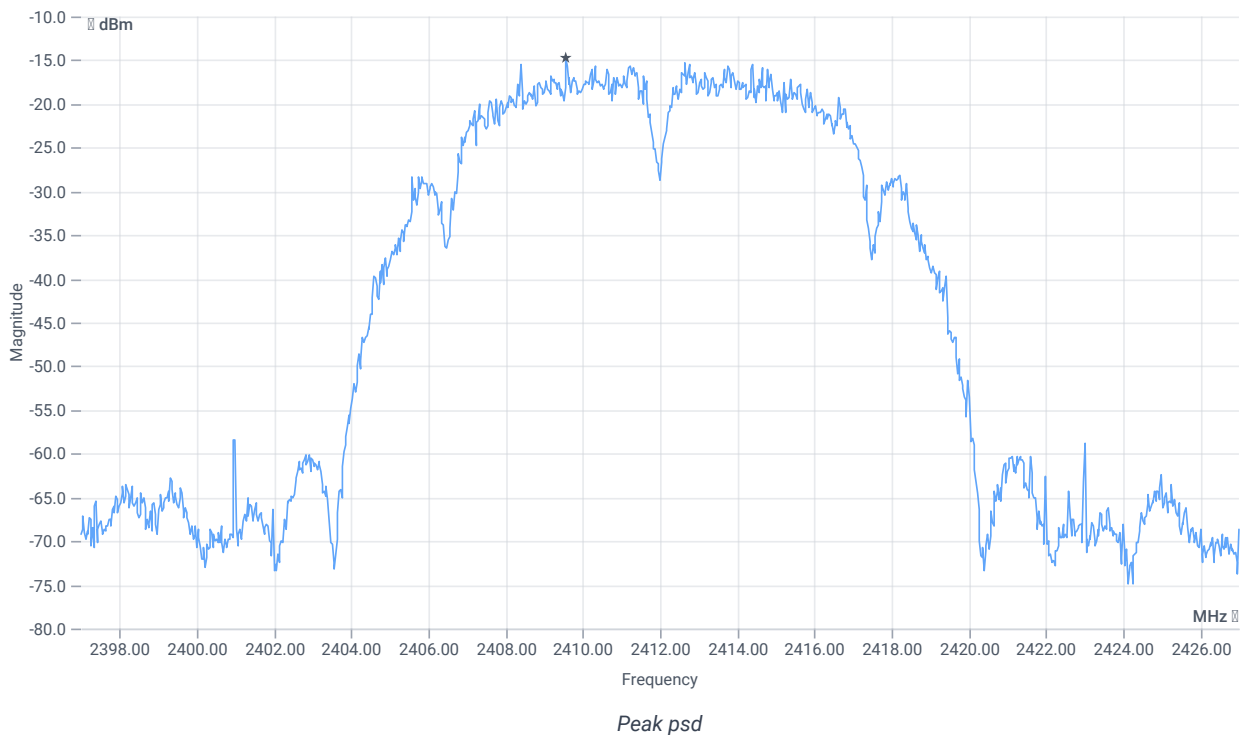

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	--	8	-14.76	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 14:18:51
Ambit temp [°C] humidity [rel%]	22.5 39
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2452 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	2.26	dBm	INFO
Ref. Frequency	--	--	2456.500	MHz	INFO

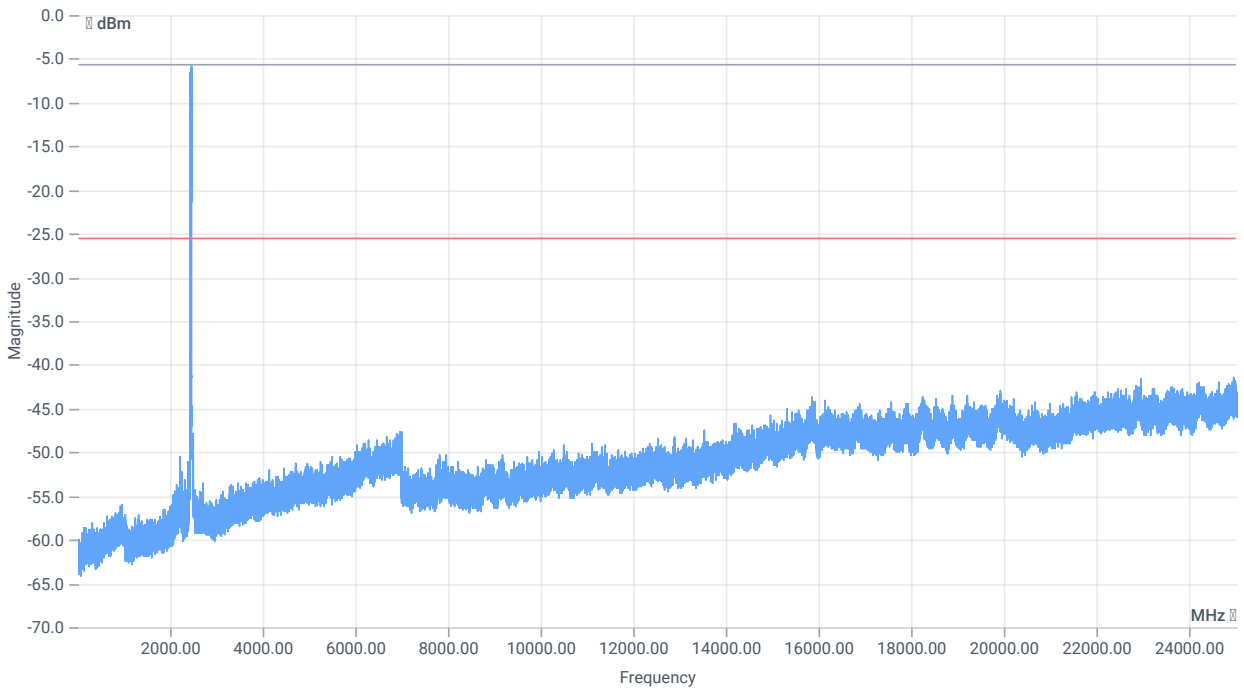

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.26 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

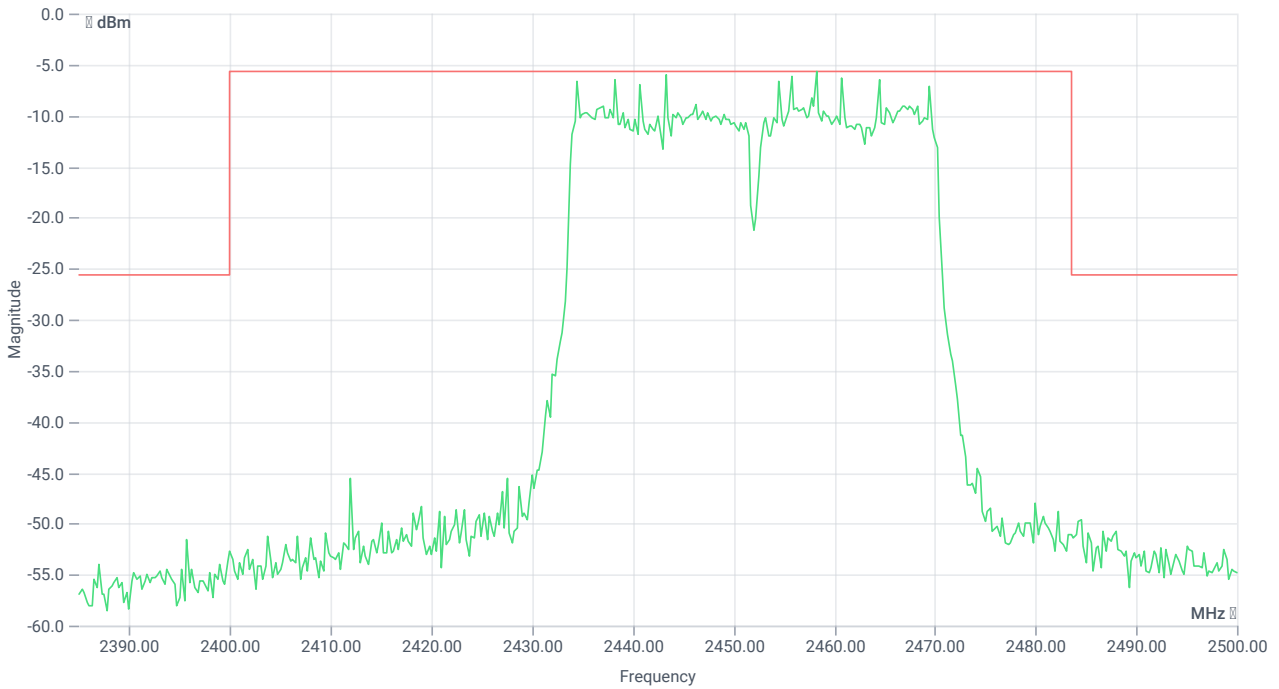

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2458.25 MHz	--	--	-5.62	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24957.5 MHz	0	--	15.89	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:51:30
Ambit temp [°C] humidity [rel%]	22.4 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	1.94	dBm	INFO
Ref. Frequency	--	--	2453.980	MHz	INFO

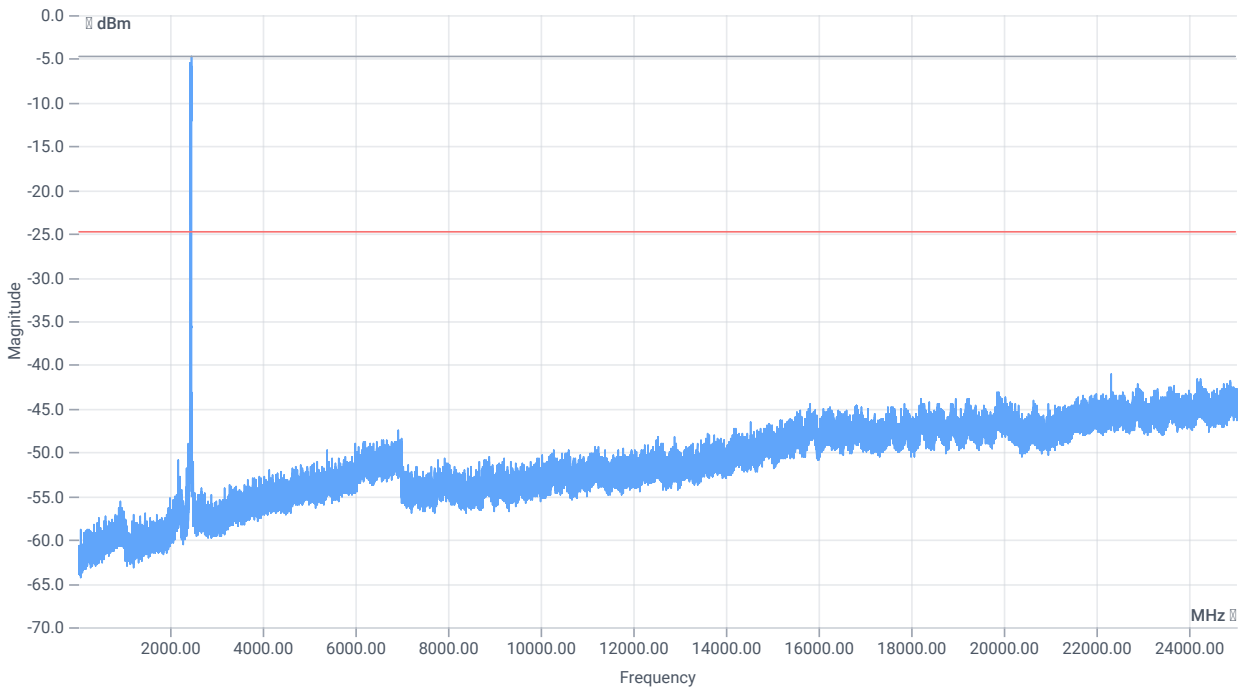

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.94 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

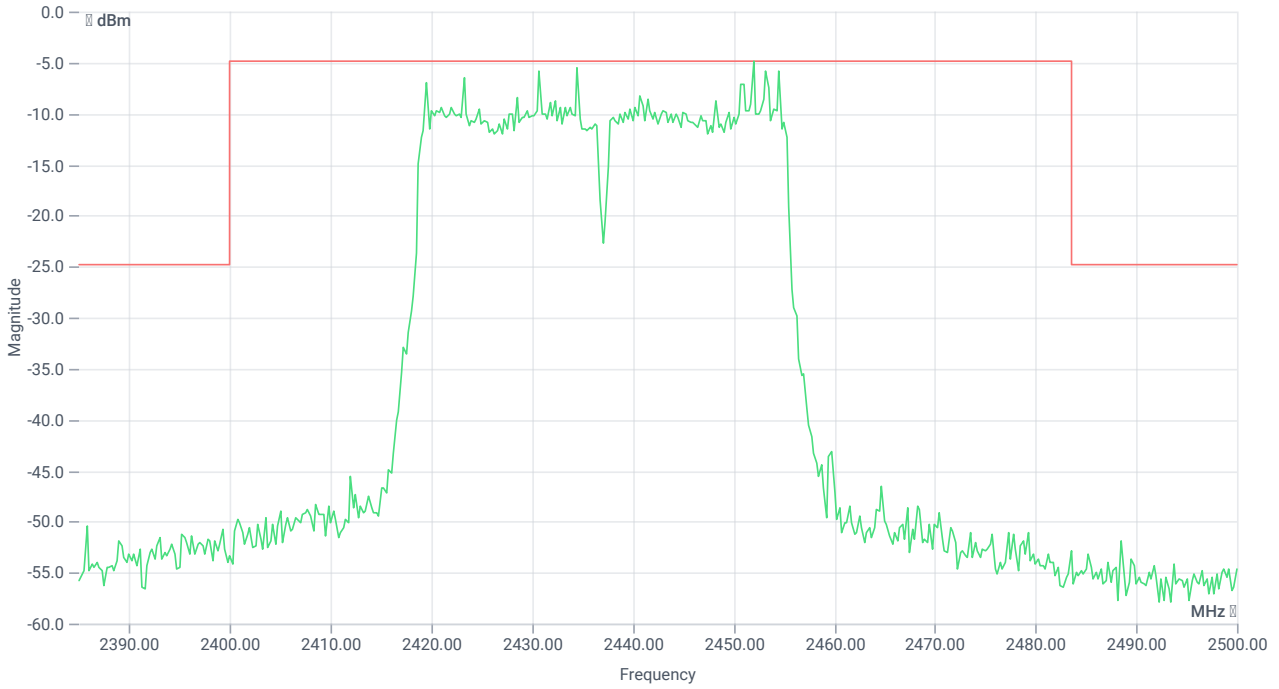

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2452.00 MHz	--	--	-4.80	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 22299.75 MHz	0	--	16.29	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode

References

TC start	08.11.2023 13:38:35
Ambit temp [°C] humidity [rel%]	22.5 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 n-HT40 mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2422 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	1.89	dBm	INFO
Ref. Frequency	--	--	2437.180	MHz	INFO

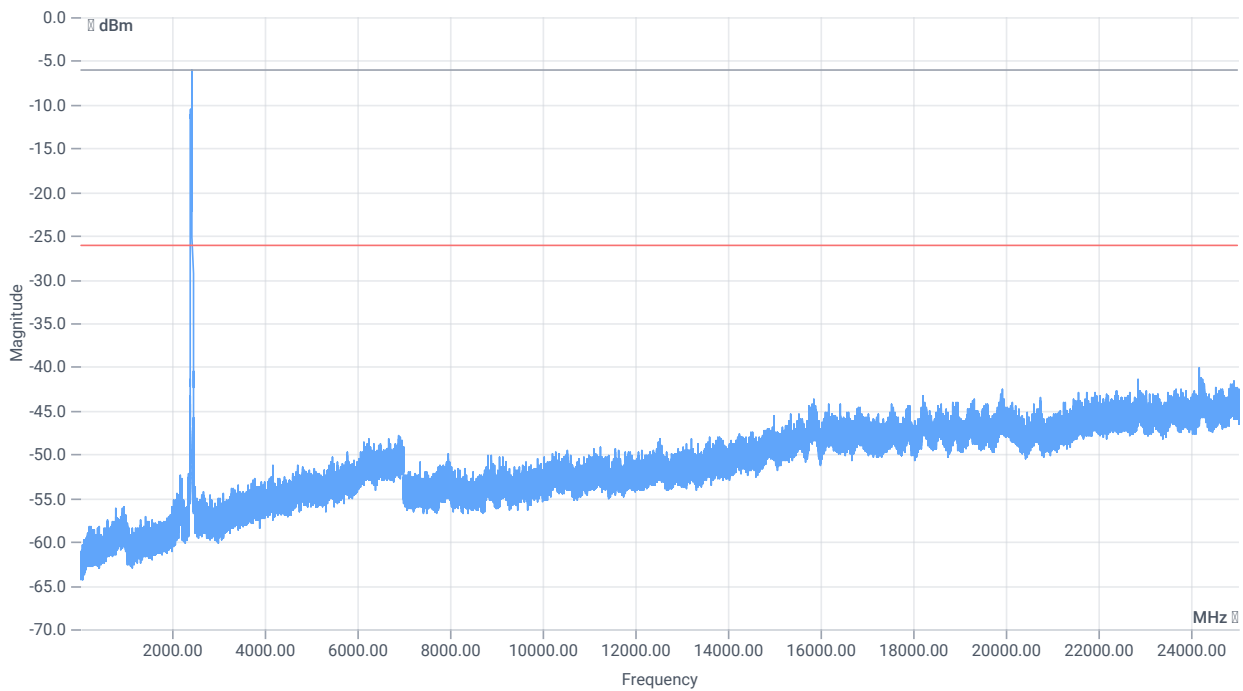

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.89 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

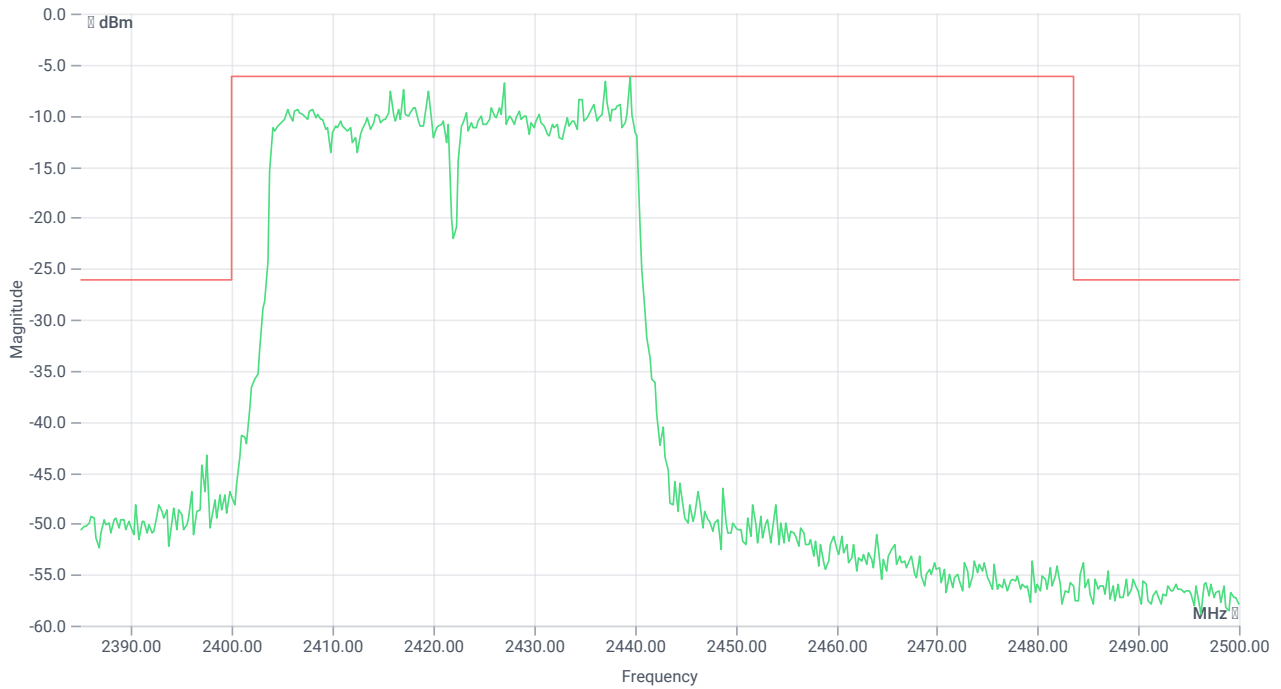

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2439.50 MHz	--	--	-6.11	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24187.5 MHz	0	--	13.96	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:25:01
Ambit temp [°C] humidity [rel%]	22.2 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.47	dBm	INFO
Ref. Frequency	--	--	2454.410	MHz	INFO

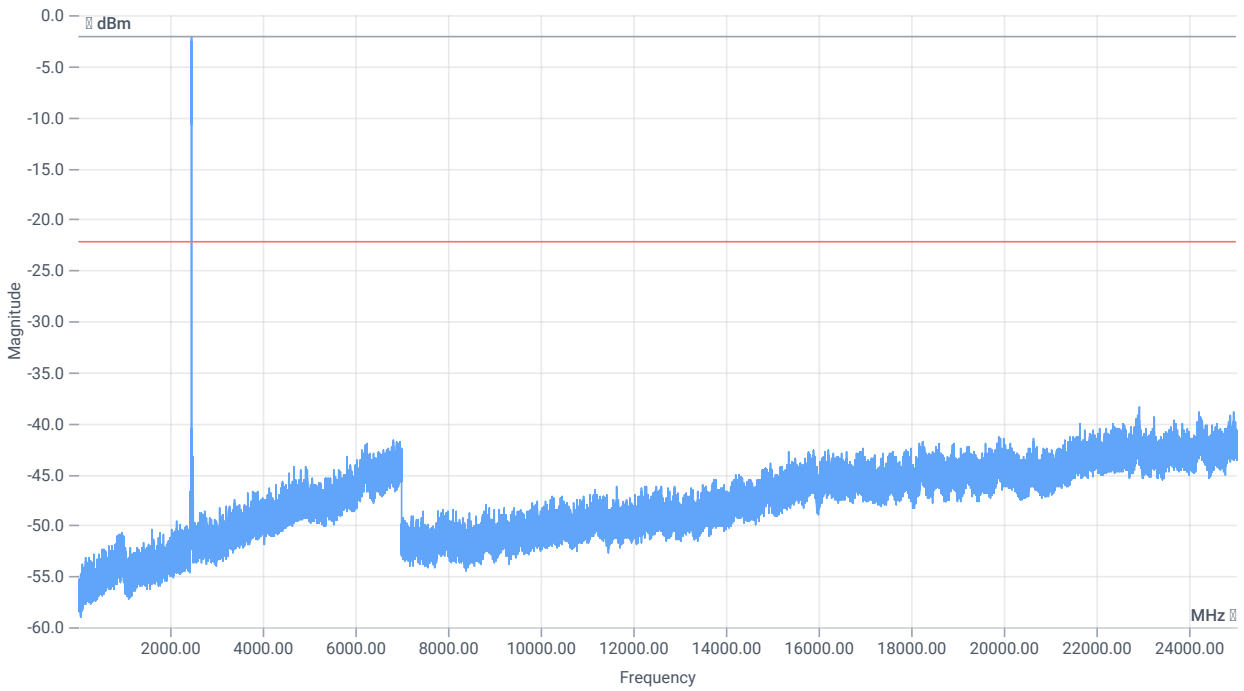

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.47 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

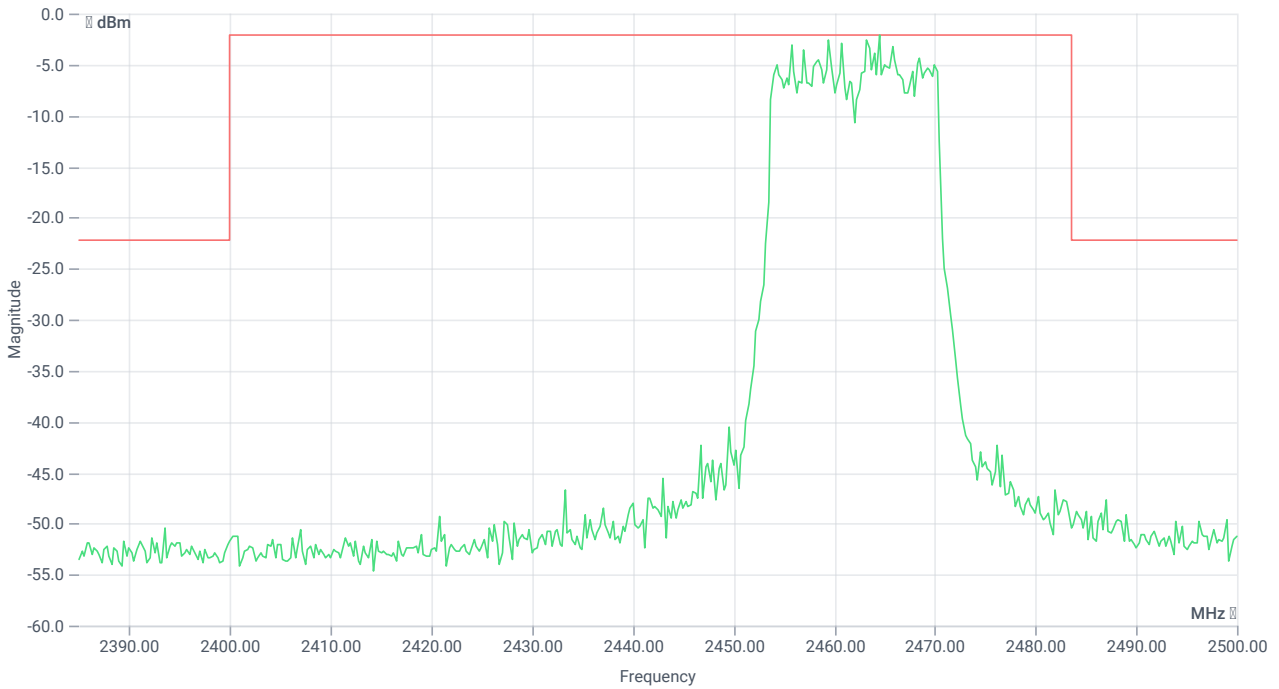

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2464.50 MHz	--	--	-2.14	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 30 MHz	0	--	-144.16	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 13:12:18
Ambit temp [°C] humidity [rel%]	22.1 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	6.03	dBm	INFO
Ref. Frequency	--	--	2433.800	MHz	INFO

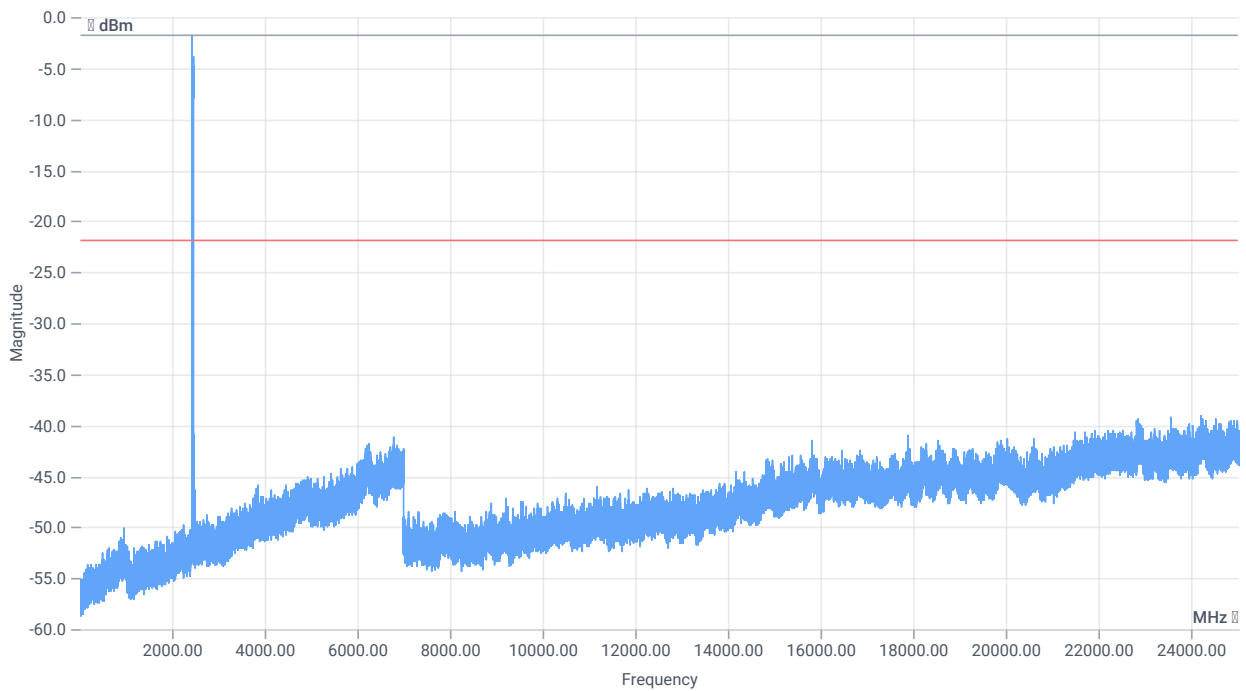

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.03 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

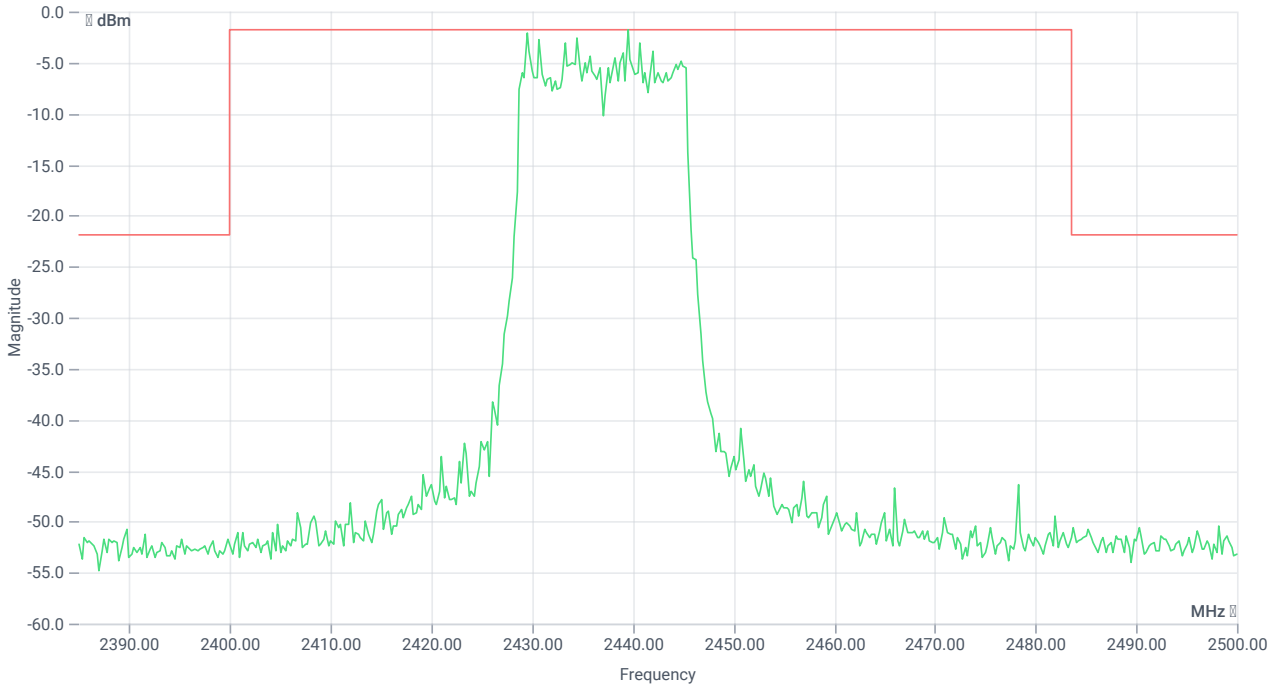

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2439.50 MHz	--	--	-1.83	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24196.25 MHz	0	--	17.25	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode

References

TC start	08.11.2023 11:12:13
Ambit temp [°C] humidity [rel%]	21.8 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS DTS - WLAN2G4 nHT20_mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.28	dBm	INFO
Ref. Frequency	--	--	2404.410	MHz	INFO

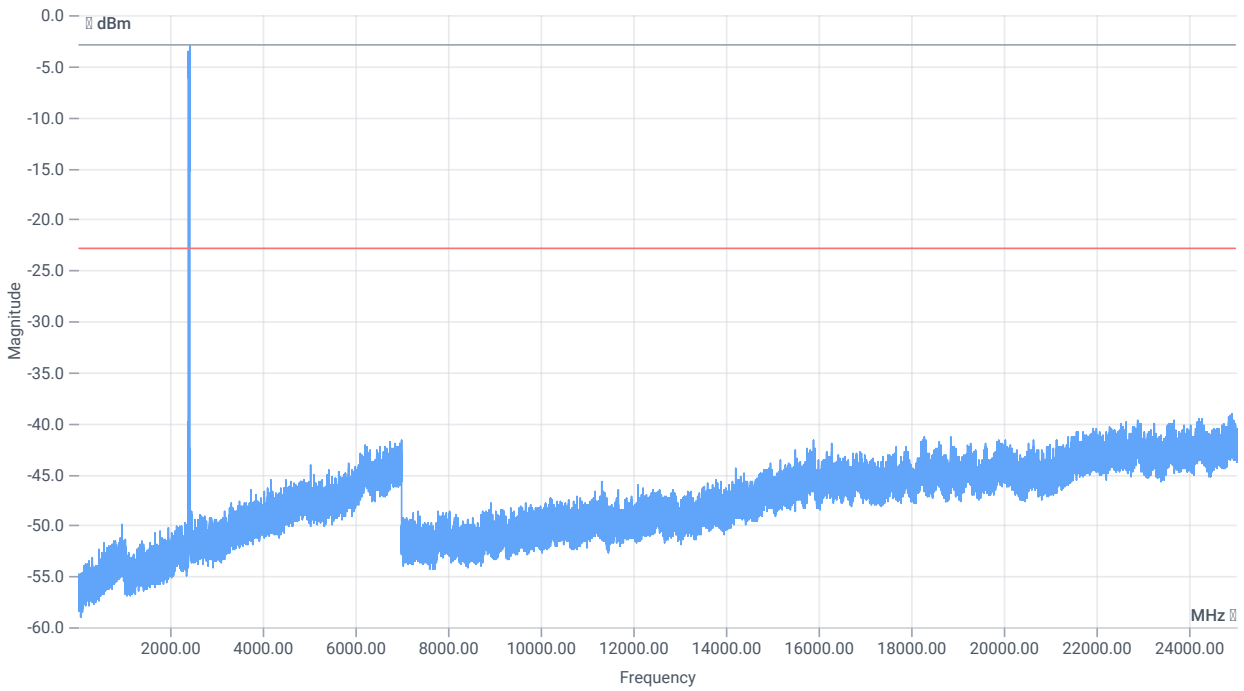

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.28 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2409.50 MHz	--	--	-2.85	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24931.25 MHz	0	--	16.22	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:55:41
Ambit temp [°C] humidity [rel%]	21.8 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.77	dBm	INFO
Ref. Frequency	--	--	2459.700	MHz	INFO

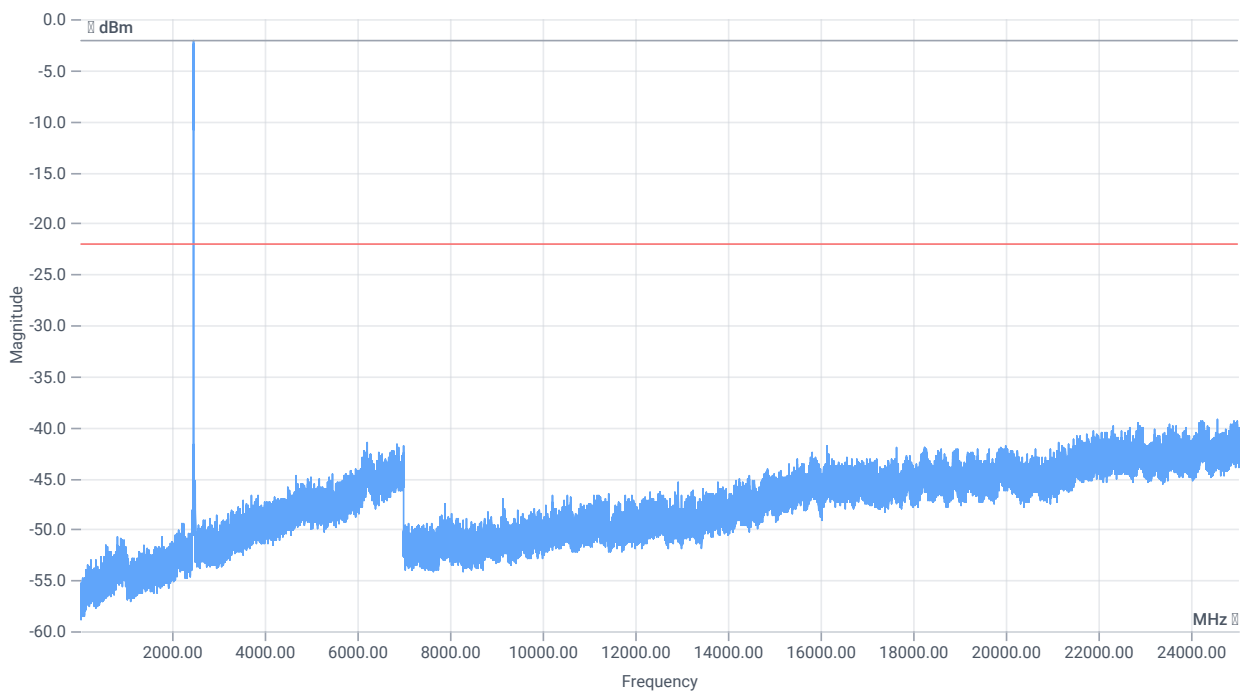

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.77 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

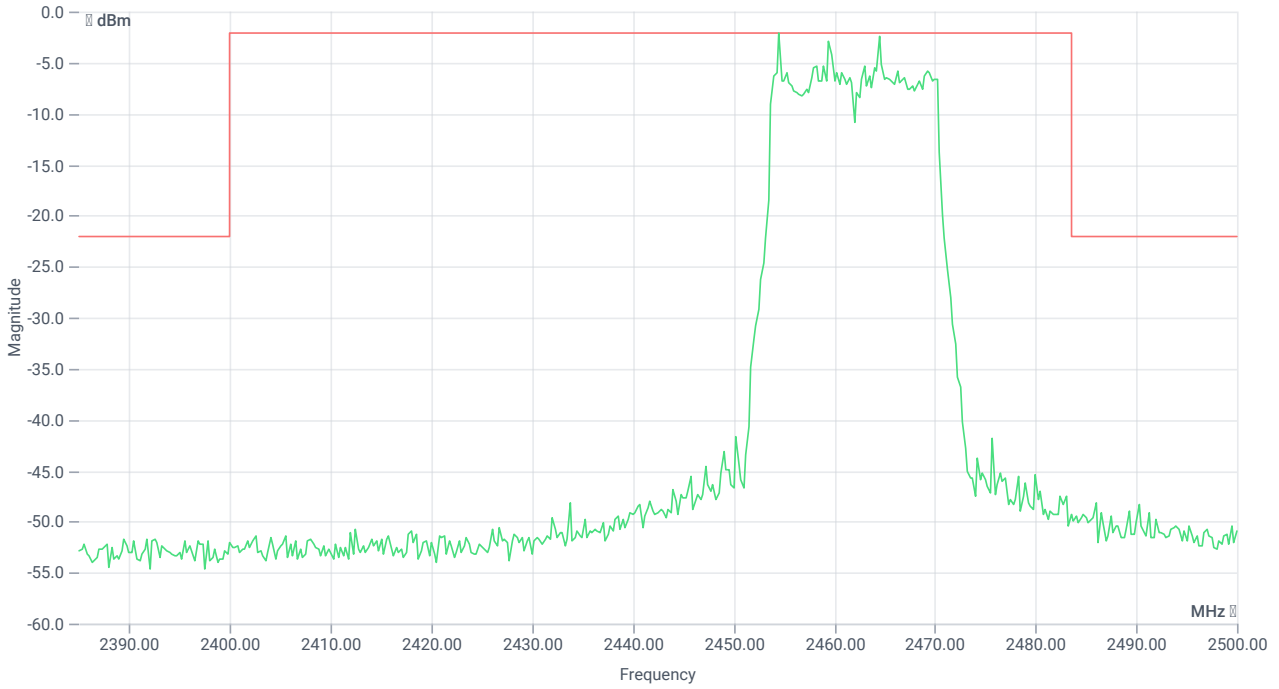

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2454.50 MHz	--	--	-2.10	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 30 MHz	0	--	-143.04	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:43:34
Ambit temp [°C] humidity [rel%]	21.8 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.28	dBm	INFO
Ref. Frequency	--	--	2439.200	MHz	INFO

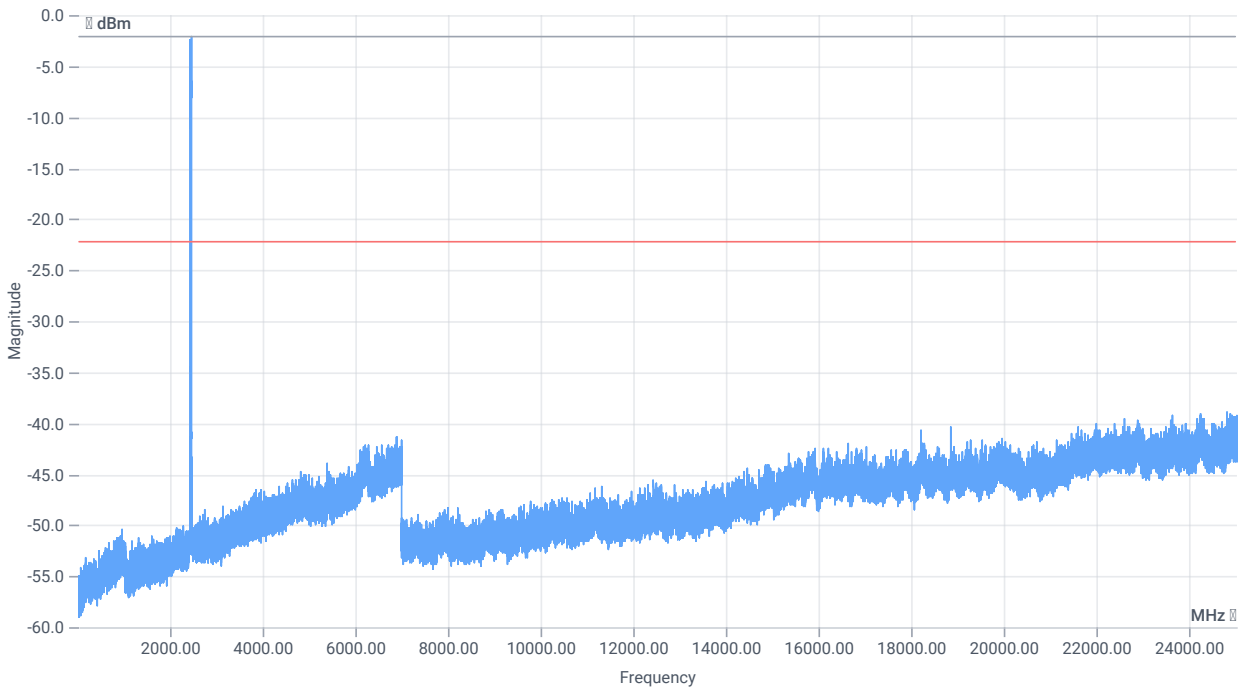

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.28 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2444.50 MHz	--	--	-2.15	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 30 MHz	0	--	-144.08	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode

References

TC start	08.11.2023 10:25:19
Ambit temp [°C] humidity [rel%]	21.9 40
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 g mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	5.65	dBm	INFO
Ref. Frequency	--	--	2409.400	MHz	INFO

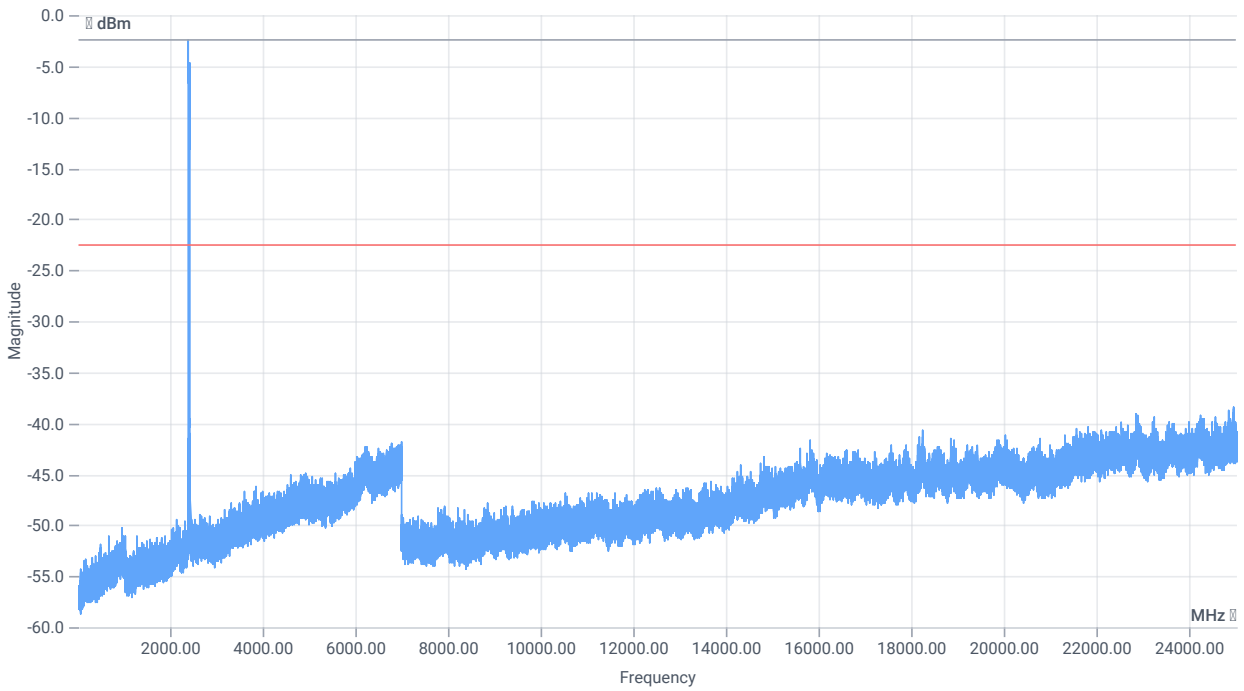

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.65 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2404.50 MHz	--	--	-2.49	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24973.25 MHz	0	--	15.89	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	08.11.2023 09:30:34
Ambit temp [°C] humidity [rel%]	21.6 42
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.69	dBm	INFO
Ref. Frequency	--	--	2460.500	MHz	INFO

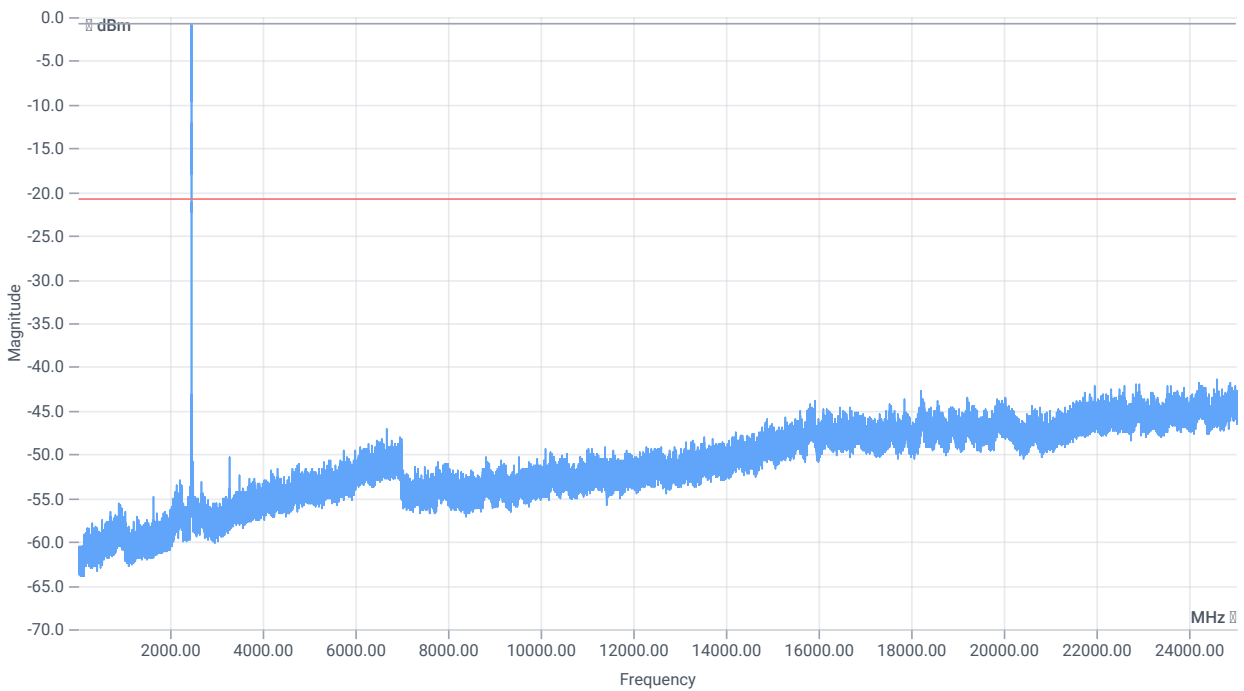

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.69 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

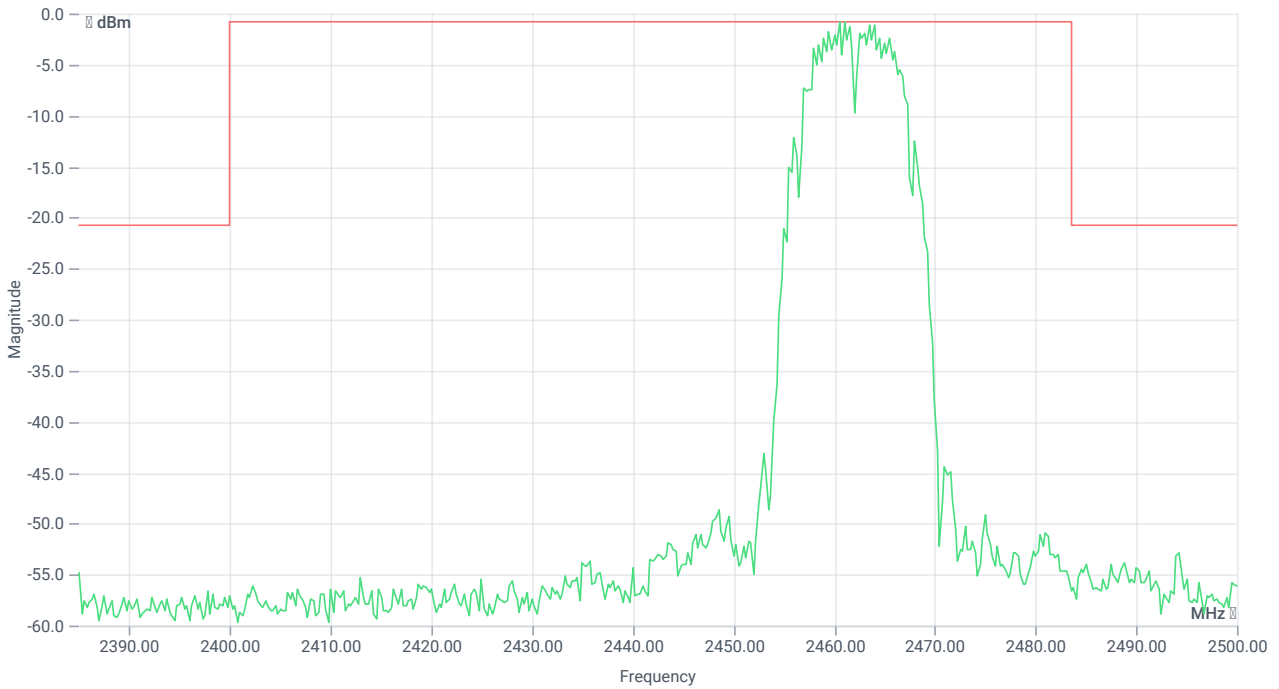

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2461.00 MHz	--	--	-0.77	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24594 MHz	0	--	20.68	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:47:32
Ambit temp [°C] humidity [rel%]	21.8 41
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.60	dBm	INFO
Ref. Frequency	--	--	2435.800	MHz	INFO

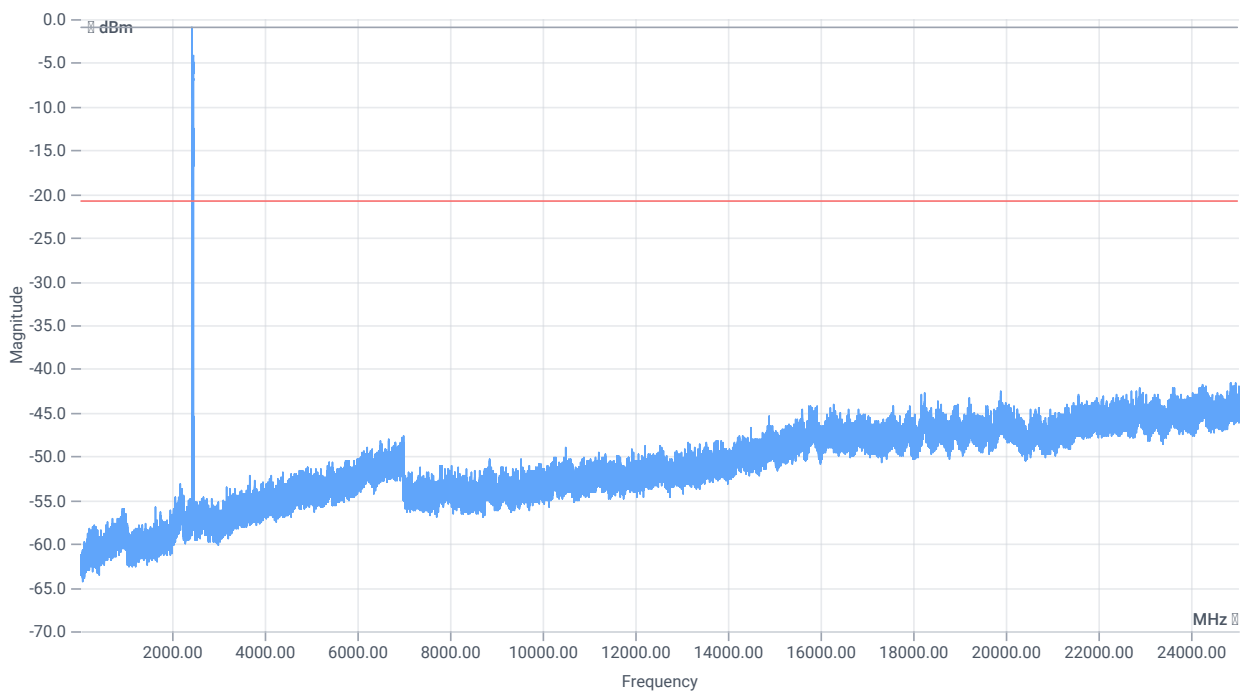

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.60 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE



TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2434.50 MHz	--	--	-0.89	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24964.25 MHz	0	--	20.65	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode

References

TC start	08.11.2023 08:25:49
Ambit temp [°C] humidity [rel%]	21.6 43
System version	4.7.1.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - WLAN2G4 b mode
Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer


Equipment

Signal analyzer,Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.70
Switch matrix,CTCadvanced,SPM-4 NI DAQ,28016133,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	--	--	4.28	dBm	INFO
Ref. Frequency	--	--	2413.500	MHz	INFO

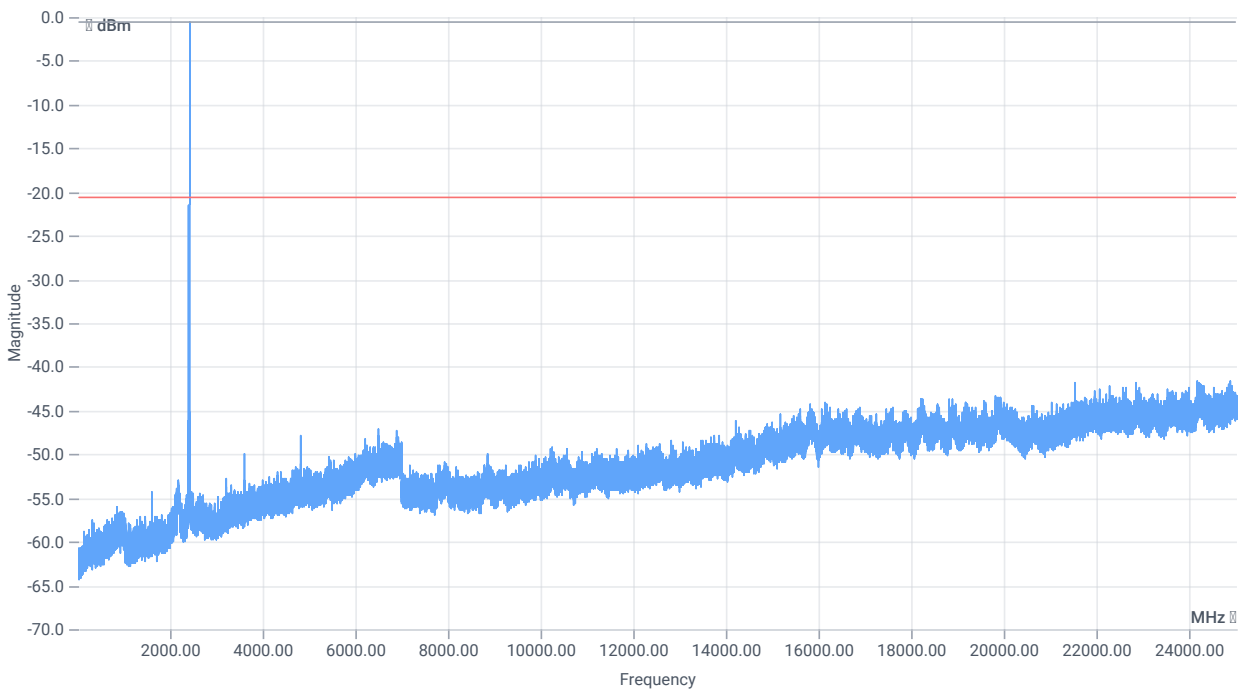

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.28 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

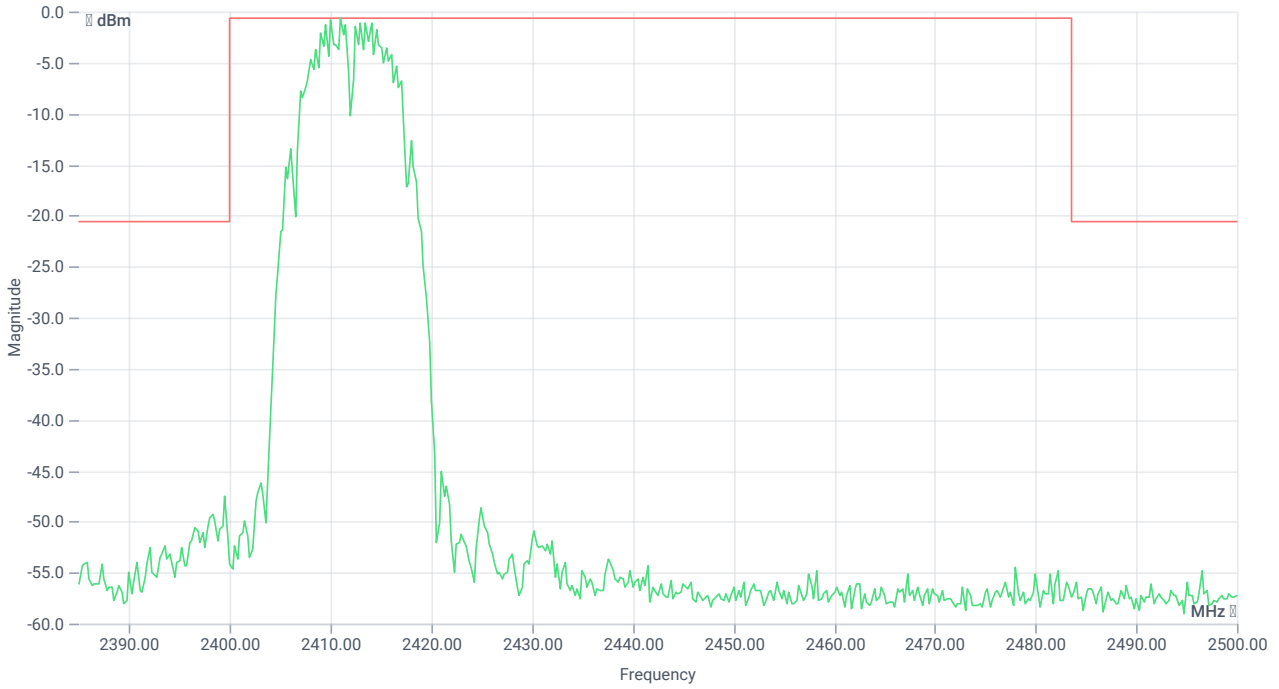

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2411.00 MHz	--	--	-0.66	dBm	INFO
No peaks detected	--	--			PASS
Lowest margin to limit 24180.5 MHz	0	--	20.93	dB	INFO

Verdict

PASS

- END OF DOCUMENT -