



TEST REPORT

Number
Composition of document

RADIO

138293-679005
36 pages

FCC Registration Number
Industry Canada Number

166175 (FAR)
6230B

Standards

47 CFR Part 15.225
RSS-210, Issue 8
RSS-Gen, Issue 4

Issued to

INGENICO
28/32 Boulevard de Grenelle
75015 PARIS
FRANCE

Apparatus under test

Trade mark
Manufacturer
Type
Serial number
IC
FCC ID

Payment terminal
INGENICO
INGENICO
Lane/5000 CL/Eth (with capacitive screen)
151407313031009301003609
2586D-LANE5000CL
XKB-LANE5000CL

Test date

2015/12/17 to 2015/12/21

Tests performed by

Arnaud FAYETTE

Test site


Fontenay aux Roses

Date of issue

March 29th 2016

Written by :
Arnaud FAYETTE
Tests operator

Approved by :
Stéphane PHOUDIAH

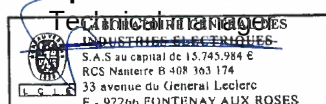

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document doesn't anticipate any certification decision.



SUMMARY

- 1. TEST PROGRAM 3
- 2. EQUIPMENT DESCRIPTION..... 4
- 3. OCCUPIED BANDWIDTH..... 8
- 4. FREQUENCY TOLERANCE 10
- 5. AC POWER LINE CONDUCTED EMISSIONS..... 12
- 6. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ..... 14
- 7. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHZ 17
- 8. TEST EQUIPMENT LIST 20
- 9. UNCERTAINTIES CHART 21
- 10. ANNEX (GRAPHS) 22



1. TEST PROGRAM

- **References**

Standards:

- 47 CFR Part 15C
- RSS-210 Issue 8
- RSS-Gen Issue 4
- CISPR 16-4-2
- ANSI C63.10 (2013)

Standard Section	Test Description	TEST RESULT - Comments
RSS-Gen § 6.6	Occupied Bandwidth	PASS (No Limit applicable)
CFR 47 § 15.225 (e) RSS-210 § A2.6	Frequency tolerance	PASS
CFR 47 § 15.207 RSS-Gen § 8.8	AC Power Line Conducted Emissions	PASS
CFR 47 § 15.225 (a) (b) (c) RSS-210 § A2.6 (a) (b) (c)	Field strength within the band 13.110-14.010 MHz	PASS
CFR 47 § 15.209 (a) CFR 47 § 15.225 (d) RSS-210 § A2.6 (d)	Field strength outside of the bands 13.110-14.010 MHz	PASS (Note)
RSS-Gen § 7	Receiver Radiated emissions	NA (Transceiver equipment. Include in Field strength test)

Note: Test performed only below 1GHz because the product has been tested in test report: 138293-679000Cr2016-03-03. with another power supply

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed



2. EQUIPMENT DESCRIPTION

2.1. HARDWARE & SOFTWARE IDENTIFICATION

- Equipment under test (EUT):



Front face



Back face

Equipment Under Test

The equipment was equipped with capacitive screen.

The equipment has been tested with the following AC/DC power supply:

- PHIHONG, reference: PSM24W-080L6IN-R



RFID card



Bank card



Equipment Under Test



- **Auxiliary equipment (AE) used for testing:**

No auxiliary equipment

Photograph of AE

- **Input/output:**

- Input Power

- **Software identification:**

-Software version: Unknown

- **Equipment information:**

- External antenna connector: No
- Frequency band allocated: 13.553MHz to 13.567MHz
- Frequency band used: 13.56MHz
- Modulation: ASK 100%
- Number of channel: 1
- Antenna type: Integral
- Stand By mode: No
- Type of power source: External power supply
- Power supply: Vmin : 108 V
Vnom: 120 V
Vmax :132 V
- Temperature range: Tmin: -30°C (IC) -20°C (FCC)
Tnom: 20°C
Tmax: +50°C

2.2. RUNNING MODE

The EUT is set in the following modes during tests:

- Permanent emission-reception with modulation



2.3. EQUIPEMENT LABELLING



2.4. EQUIPMENT MODIFICATIONS

No equipment modification has been necessary during testing.



3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Arnaud FAYETTE
Date of test : 2015/12/21
Ambient temperature : 22°C
Relative humidity : 43%

3.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT with a test fixture. The product has been tested according to the RSS-GEN § 4.6.1 reference method.

Spectrum Analyzer Setting:

Center frequency= 13.56MHz
Span= At least twice the emission spectrum
Amplitude= Sufficient to observe the signal amplitude
RBW= 1% of span
VBW= 3*RBW
Sweep= Auto
Trace= Max Hold
Detector= Peak
Occupied Bandwidth 99% activated



Photograph for Occupied Bandwidth



3.3. RESULTS

Temperature	Tnom
Voltage	Vnom
Frequency	Fnom
Occupied Bandwidth (kHz)	1715kHz

Result: PASS

Limit: → None



4. FREQUENCY TOLERANCE

4.1. TEST CONDITIONS

Test performed by : Arnaud FAYETTE
Date of test : 2015/12/21
Ambient temperature : 23°C
Relative humidity : 43%

4.2. TEST SETUP

The Equipment Under Test is installed on a table and set in permanent emission with modulation. Measurement is performed with a spectrum analyzer on the EUT with a test fixture.

Spectrum Analyzer Setting:

Center frequency= 13.56MHz
Span= At least twice the emission spectrum
Amplitude= Sufficient to observe the signal amplitude
RBW= 1% of span
VBW= 3*RBW
Sweep= Auto
Trace= Max Hold
Detector= Peak



Photograph for Frequency tolerance



4.3. RESULTS

Temperature	Tmin (IC)	Tmin (FCC)	Tnom	Tmax
Voltage:	Vmin			
Frequency (MHz)	13,56	13,56	13,56	13,56
Frequency Drift (%)	0%	0%	0%	0%
Voltage:	Vnom			
Frequency (MHz)	13,56	13,56	13,56	13,56
Frequency Drift (%)	0%	0%	0%	0%
Voltage:	Vmax			
Frequency (MHz)	13,56	13,56	13,56	13,56
Frequency Drift (%)	0%	0%	0%	0%

Result: PASS

Limit: → +/- 0.01%




5. AC POWER LINE CONDUCTED EMISSIONS

5.1. TEST CONDITIONS

Test performed by : Arnaud Fayette
Date of test : 2015/12/18
Ambient temperature : 23°C
Relative humidity : 41%

5.2. TEST SETUP

The product has been tested according to ANSI C63.10-(2013) method. The EUT is placed on the ground reference plane, at 80cm from the LISN. The distance between the EUT and the vertical ground plane is 40cm. Auxiliaries are powered by another LISN. The cable has been shorted to 1meter length. The EUT is powered through the LISN. Measurement is made with a receiver in peak mode. This was followed by a Quasi-Peak, i.e. CISPR measurement for any strong signal. If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary. The LISN (measure) is $50\Omega / 50\mu\text{H}$. Interconnecting cables and equipment's were moved to position that maximized emission.

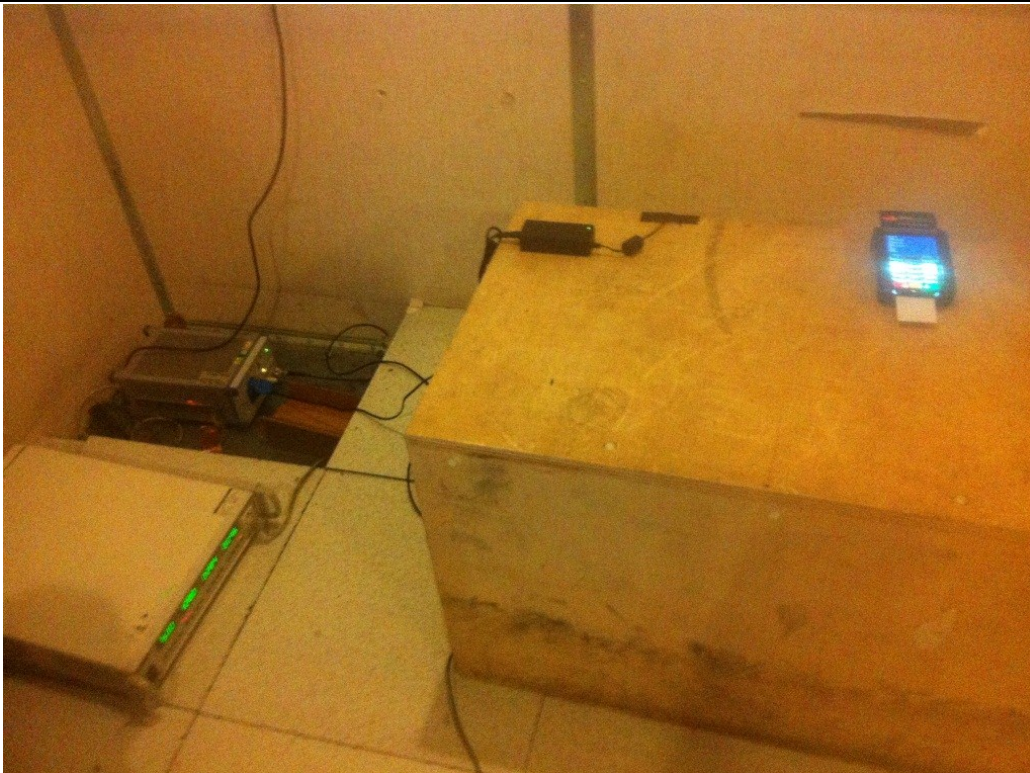

Photograph for AC Power Line Conducted Emissions (Global view)



5.3. RESULTS

Phase Line

Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
0.38	46.755	-	58.131	41.035	48.101
0.630	35.401	-	56	21.521	46
1.585	29.923	-	56	21.151	46
3.045	27.98	-	56	20.105	46
20.795	28.627	-	60	16.285	50

Neutral Line

Frequency (MHz)	Peak Level (dB μ V)	Quasi-Peak Level (dB μ V)	Quasi-Peak Limit (dB μ V)	Average Level (dB μ V)	Average Limit (dB μ V)
0.38	47.087	-	58.25	42.425	48.28
2.865	30.319	-	56	22.196	46
3.835	30.098	-	56	20.596	46
4.82	29.411	-	56	19.306	46

See annex for graphics

Result: PASS

Limit: →

Quasi-Peak

0,15kHz to 0,5MHz: 66dB μ V to 56dB μ V*

0,5MHz to 5MHz: 56dB μ V

5MHz to 30MHz: 60dB μ V

Average

0,15kHz to 0,5MHz: 56dB μ V to 46dB μ V*

0,5MHz to 5MHz: 46dB μ V

5MHz to 30MHz: 50dB μ V

*Decreases with the logarithm of the frequency



6. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ

6.1. TEST CONDITIONS

Test performed by : Arnaud Fayette
Date of test : 2015/12/17
Ambient temperature : 21°C
Relative humidity : 44%


6.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013). The EUT is placed in a semi-anechoic chamber. Distance between measuring antenna and the EUT is 3m. Test is performed in parallel and perpendicular axis with a loop antenna. Measurement bandwidth was 9kHz.

The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m.



Photograph for Field strength within the band 13.110-14.010MHz

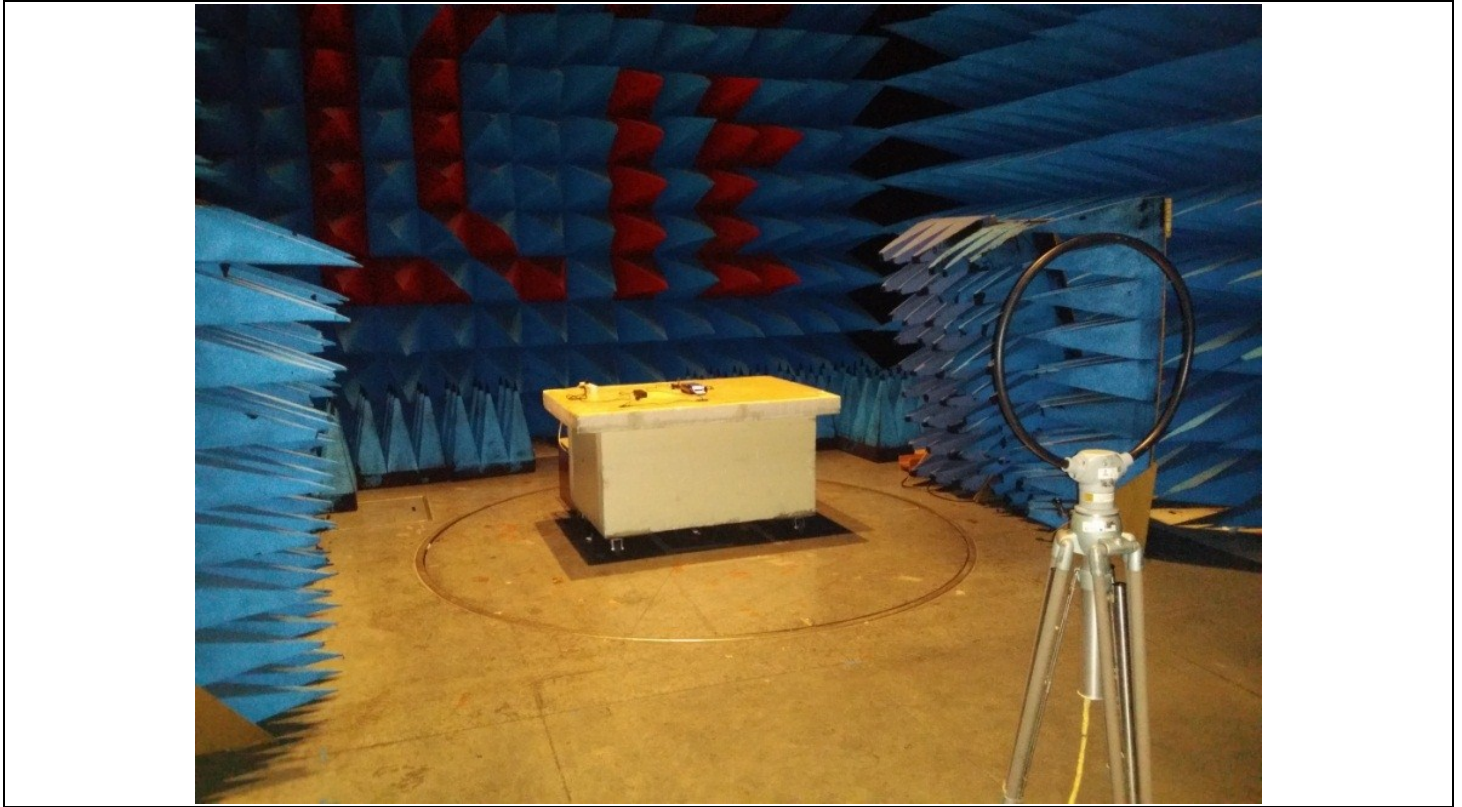

Photograph for Field strength within the band 13.110-14.010MHz



6.3. RESULTS

- Characterization in a semi anechoic chamber:**

Parallel Axis

Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	25.65	-	69.5
13.110 to 13.410	25.91	-	80.5
13.410 to 13.553	27.22	-	90.5
13.553 to 13.567	42.86	-	124
13.567 to 13.710	33.48	-	90.5
13.710 to 14.010	30.54	-	80.5
Above 14.010	25.99	-	69.5

Perpendicular Axis

Frequency (MHz)	Peak Level (dB μ V/m) (3m)	QPeak Level (dB μ V/m) (3m)	Limit (dB μ V/m) (3m)
Below 13.110	26.91	-	69.5
13.110 to 13.410	28.39	-	80.5
13.410 to 13.553	38.05	-	90.5
13.553 to 13.567	51.54	-	124
13.567 to 13.710	27.06	-	90.5
13.710 to 14.010	27.20	-	80.5
Above 14.010	29.09	-	69.5

See annex for graphics

Result: PASS

Limit: → Below 13.110MHz: 69.5dB μ V/m (3m) or 29.5dB μ V/m (30m)
 13.110MHz to 13.410MHz: 106 μ V/m (30m) or 80.5dB μ V/m (3m)
 13.410MHz to 13.553MHz: 334 μ V/m (30m) or 90.5dB μ V/m (3m)
 13.553MHz to 13.567MHz: 15848 μ V/m (30m) or 124dB μ V/m (3m)
 13.567MHz to 13.710MHz: 334 μ V/m (30m) or 90.5dB μ V/m (3m)
 13.710MHz to 14.010MHz: 106 μ V/m (30m) or 80.5dB μ V/m (3m)
 Above 14.010MHz: 69.5dB μ V/m (3m) or 29.5dB μ V/m (30m)



7. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHZ

7.1. TEST CONDITIONS


Test performed by : Arnaud Fayette
Date of test : 2015/12/17
Ambient temperature : 22°C
Relative humidity : 44%

7.2. TEST SETUP


The product has been tested according to ANSI C63.10 (2013). The EUT is placed in a semi-anechoic chamber. Distance between measuring antenna and the EUT is 3m.

Test is performed in parallel and perpendicular axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximized by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m.

Test is performed in horizontal (H) and vertical (V) polarization with bilog antenna between 30MHz & 1GHz. Measurement bandwidth was 120kHz below 1GHz. The level has been maximized by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m.

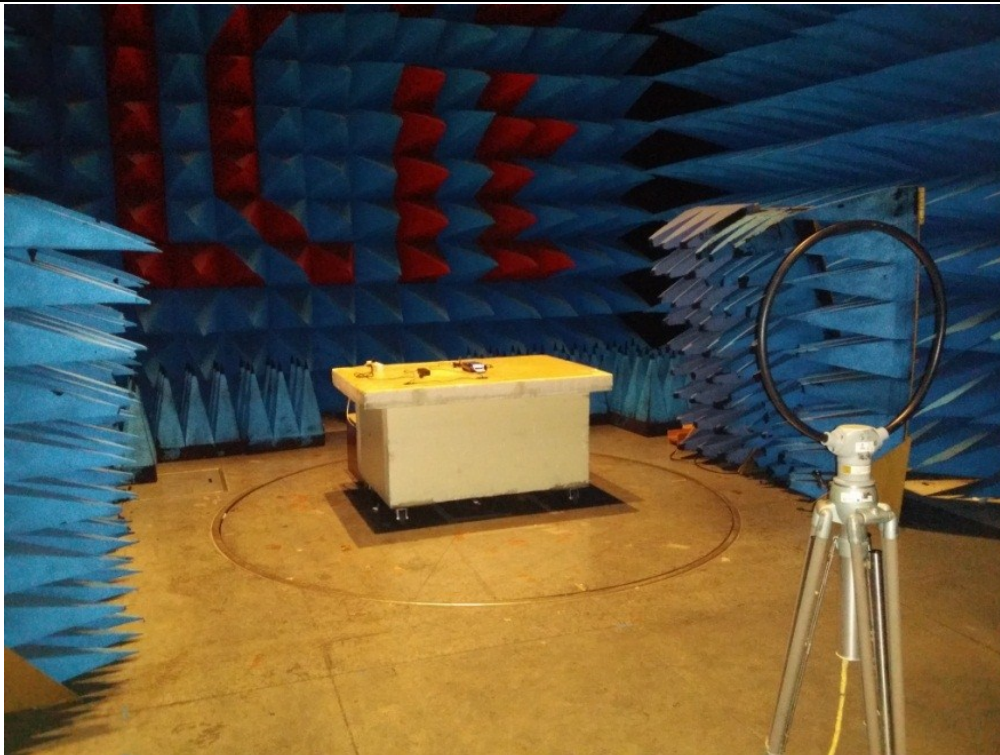

Photograph for Field strength outside of the bands 13.110-14.010 MHz

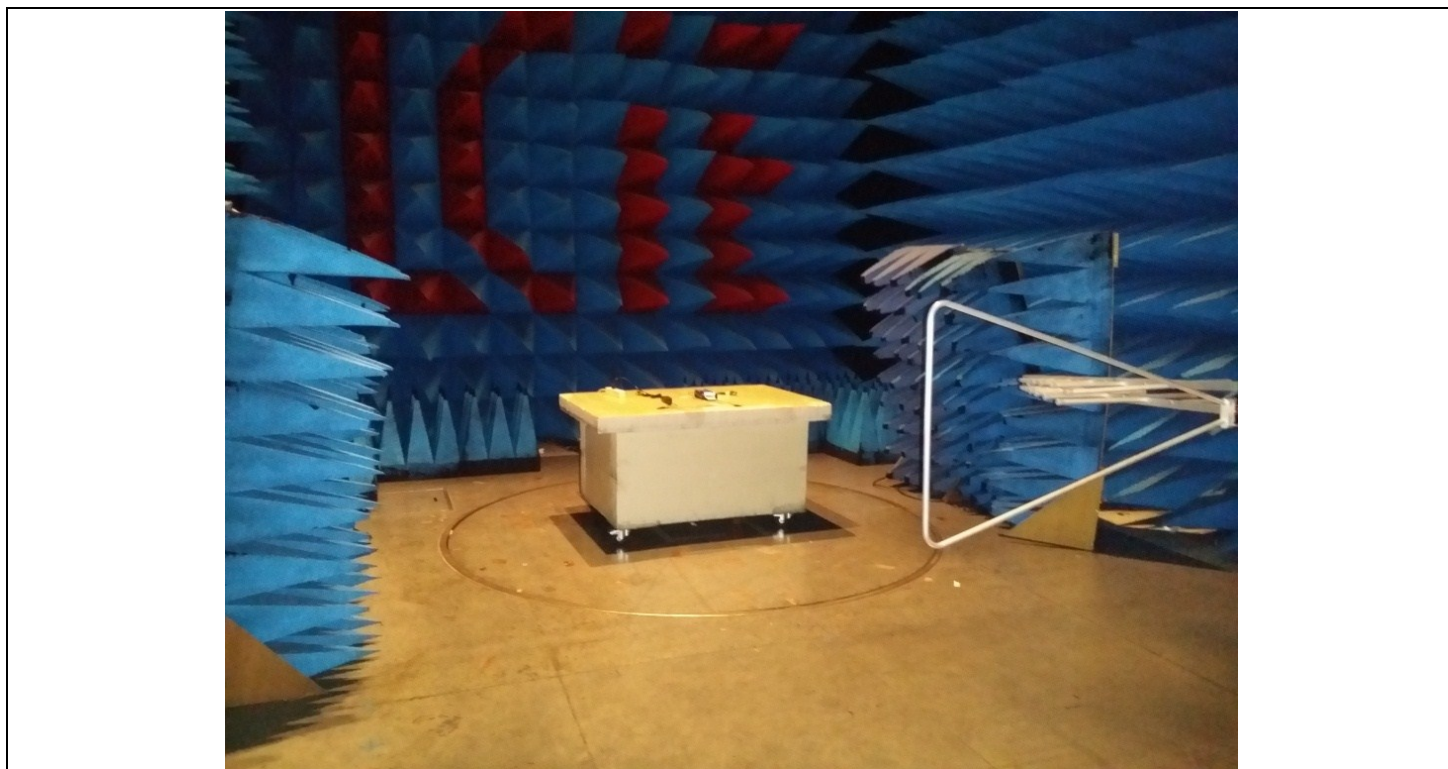

Photograph for Field strength outside of the bands 13.110-14.010 MHz

7.3. RESULTS

- Characterization in a semi anechoic chamber (9kHz to 1GHz):**

Vertical Polarization

Below 30MHz

Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	Limit (dB μ V/m)
0.486	41.95	-	113.85
0.671	40.42	-	111.07
13.54	50.54	-	69.5
22.15	28.49	-	69.5
29.53	32.04	-	69.5

Above 30MHz

Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	QPeak Limit (dB μ V/m)
39.8	32.768	29.224	40
91.05	26.43	-	43.5
108.3	26.747	-	43.5



Horizontal Polarization

Below 30MHz

Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	Limit (dB μ V/m)
0.449	44.22	-	114.60
0.674	41.58	-	111.03

Above 30MHz

Frequency (MHz)	Peak Level (dB μ V/m)	QPeak Level (dB μ V/m)	QPeak Limit (dB μ V/m)
94.9	24.727	-	43.5
148.3	28.741	-	43.5
894.26	39.852	-	46

See annex for graphics

Result: PASS

Limit: →

- 9kHz to 0,490MHz: 2400/F(kHz) μ V/m (300m) or 20log(2400/F(kHz))dB μ V/m (3m) QPeak
- 0,490MHz to 1.705MHz: 240000/F(kHz) μ V/m (30m) or 20log(240000/F(kHz))dB μ V/m (3m) QPeak
- 1.705MHz to 30MHz: 30 μ V/m (30m) or dB μ V/m (3m) QPeak
- 30MHz to 88MHz: 100 μ V/m (3m) or 40dB μ V/m (3m) QPeak
- 88MHz to 216MHz: 150 μ V/m (3m) or 43,5dB μ V/m (3m) QPeak
- 216MHz to 960MHz: 200 μ V/m (3m) or 46dB μ V/m (3m) QPeak
- 960MHz to 1000MHz: 500 μ V/m (3m) or 54dB μ V/m (3m) QPeak



8. TEST EQUIPMENT LIST

Frequency Tolerance & Occupied Bandwidth					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
Climatic Chamber	SECASI Technologies	SLT-34	D1024029	-	-
Thermometer	AOIP	TM 6630	B4041042	2014/12	2016/06
Cable	CABLES & CONNECTIQUES	-	A5329422	-	-
Spectrum analyzer	ROHDE & SCHWARZ	FSL6	A4060032	2015/04	2017/04
Multimeter	KEITLEY	2000 Multimeter	A1241084	2014/02	2016/02
AC/DC power supply	KIKUSUI	PCR500M	A7040079	2014/05	2016/05
Field strength outside of the bands 13.110-14.010 MHz					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
Semi anechoic chamber	SIEPEL	-	D3044008	2015/09	2016/09
EMI receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015/01	2016/01
Bilog antenna	CHASE	CBL6112A	C2040040	2015/03	2016/03
Cable	CABLES & CONNECTIQUES	3.5MD/CSU528AA/3.5MD/4000	A5329374	2015/06	2016/06
Cable	CABLES & CONNECTIQUES	2.9MD/CSU440AA-TDINOX/2.9MD/12000	A5329426	2015/07	2016/07
Cable	CABLES & CONNECTIQUES	2.9MD/CSU440AA/2.9MD/2000	A5329358	2014/12	2015/12
Loop antenna	ROHDE & SCHWARZ	HFH2-Z2	C2040007	2015/11	2016/11
Field strength within the band 13.110-14.010MHz					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
Semi anechoic chamber	SIEPEL	-	D3044008	2015/09	2016/09
EMI receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015/01	2016/01
Loop antenna	ROHDE & SCHWARZ	HFH2-Z2	C2040007	2015/11	2016/11
Cable	CABLES & CONNECTIQUES	3.5MD/CSU528AA/3.5MD/4000	A5329374	2015/06	2016/06
Cable	CABLES & CONNECTIQUES	2.9MD/CSU440AA-TDINOX/2.9MD/12000	A5329426	2015/07	2016/07
AC Power Line Conducted Emissions					
Apparatus	Trade Mark	Type	Registration number	Calibration date	Calibration due
Semi anechoic chamber	SIEPEL	-	D3044008	2015/09	2016/09
EMI receiver	ROHDE & SCHWARZ	ESIB26	A2642021	2015/01	2016/01
Cable	CABLES & CONNECTIQUES	-	A5329411	2015/06	2016/06
Cable	CABLES & CONNECTIQUES	-	A5329413	2015/06	2016/06
V LISN	ROHDE & SCHWARZ	ENV216	C2320163	2015/02	2016/02




9. UNCERTAINTIES CHART

Kind of test	Measurement uncertainties (k=2) $\pm x(\text{dB}) / (\text{Hz})$	Limit for uncertainties $\pm y(\text{dB})$
TRANSMITTER REQUIREMENTS		
Radio frequency	$\pm 2 \cdot 10^{-8}$ Hz	$\pm 1 \cdot 10^{-7}$ Hz
RF Conducted power	± 0.6 dB	± 1.5 dB
Spurious emissions <ul style="list-style-type: none"> • Frequency < 1000 MHz • Frequency > 1000 MHz 	± 3.9 dB ± 3.1 dB	± 6 dB
Spurious in conduction	± 1.6 dB	± 3 dB
Temperature	$\pm 0.5^\circ\text{C}$	$\pm 1^\circ\text{C}$
Humidity	± 2.5 %	± 10 %




10. ANNEX (GRAPHS)

Occupied Bandwidth
Temperature: Tnom
Voltage: Vnom

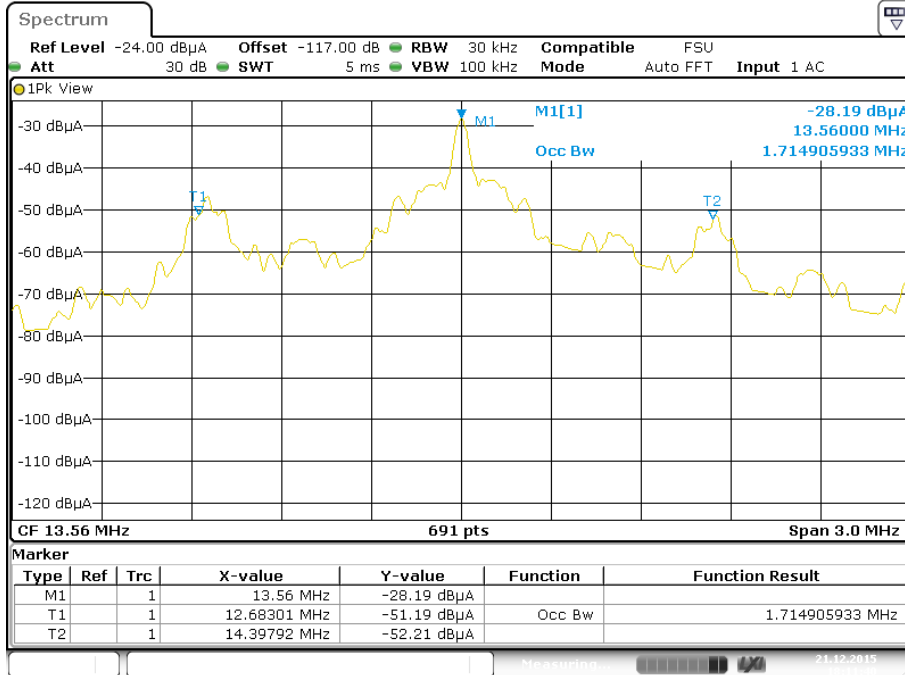




Frequency tolerance
Temperature: Tnom
Voltage: Vmin

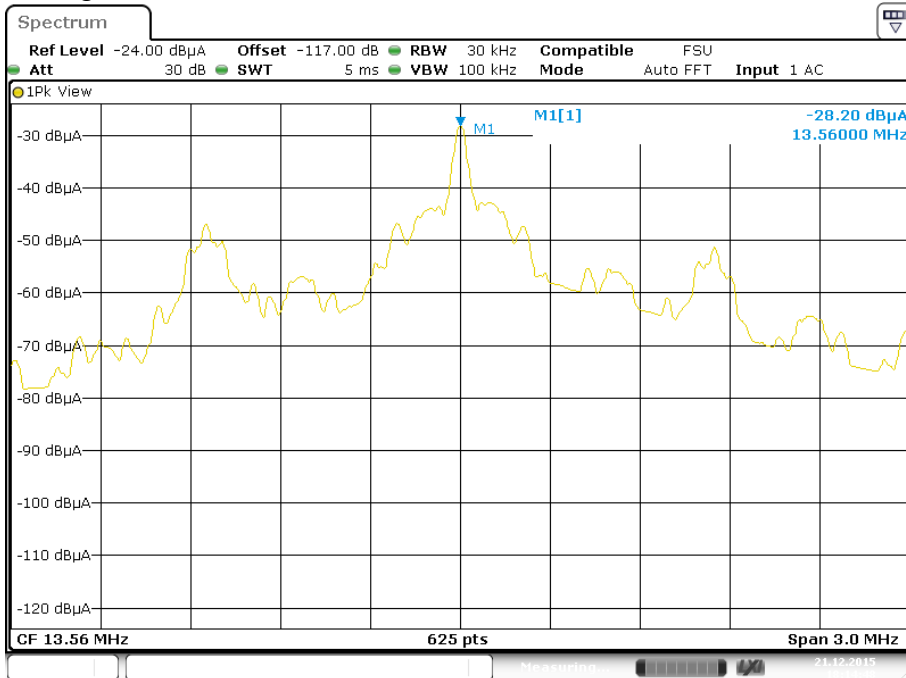

Date: 21.DEC.2015 18:14:48




Frequency tolerance
Temperature: Tnom
Voltage: Vnom

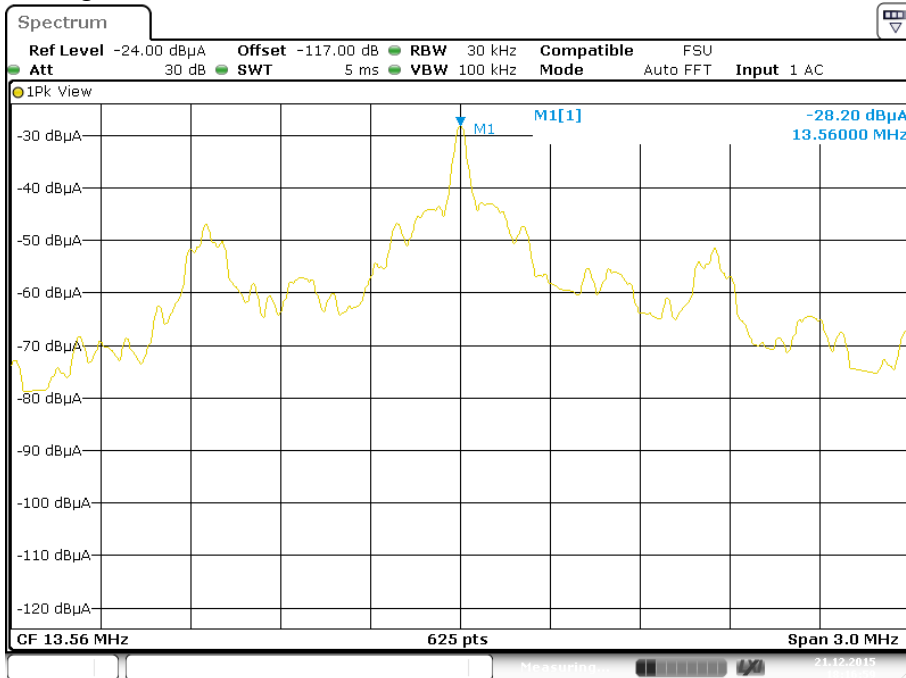

Date: 21.DEC.2015 18:17:00




Frequency tolerance
Temperature: Tnom
Voltage: Vmax

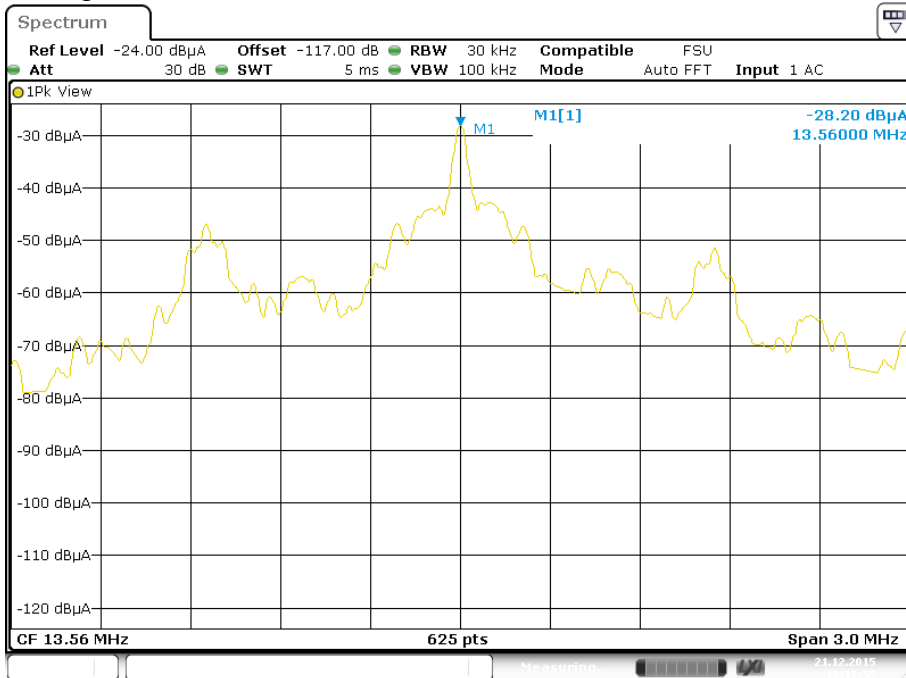

Date: 21.DEC.2015 18:17:56




Frequency tolerance
Temperature: Tmin (IC)
Voltage: Vnom

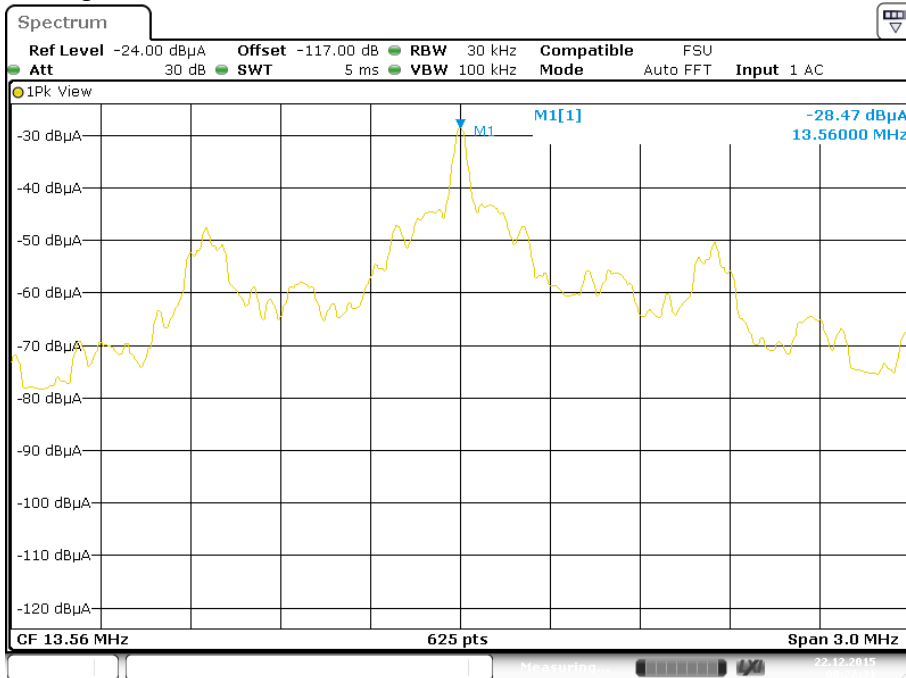

Date: 22.DEC.2015 08:22:32




Frequency tolerance
Temperature: Tmin (FCC)
Voltage: Vnom

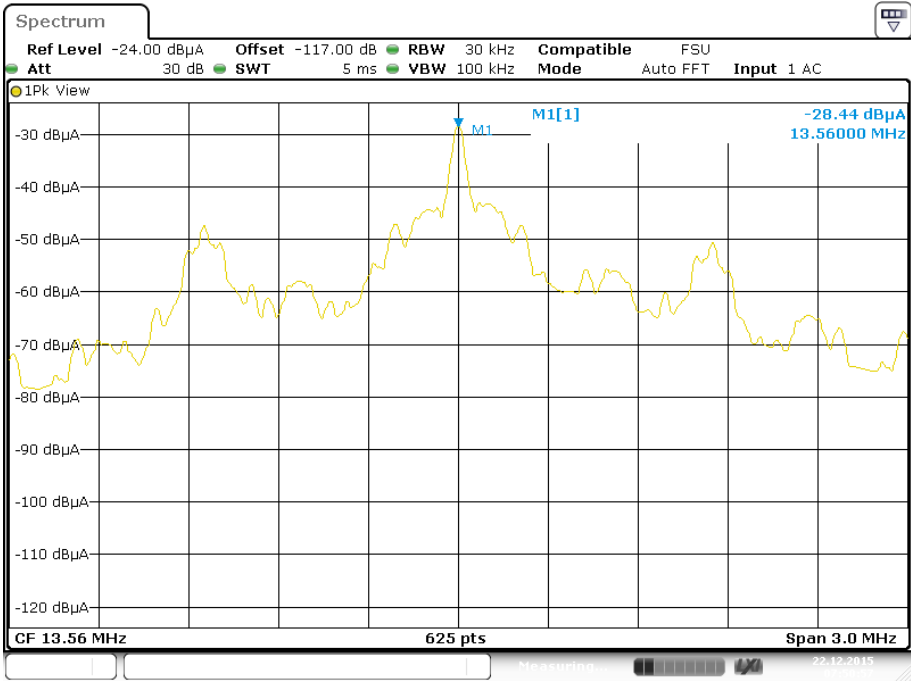

Date: 22.DEC.2015 07:50:57



Frequency tolerance
Temperature: Tmax
Voltage: Vnom

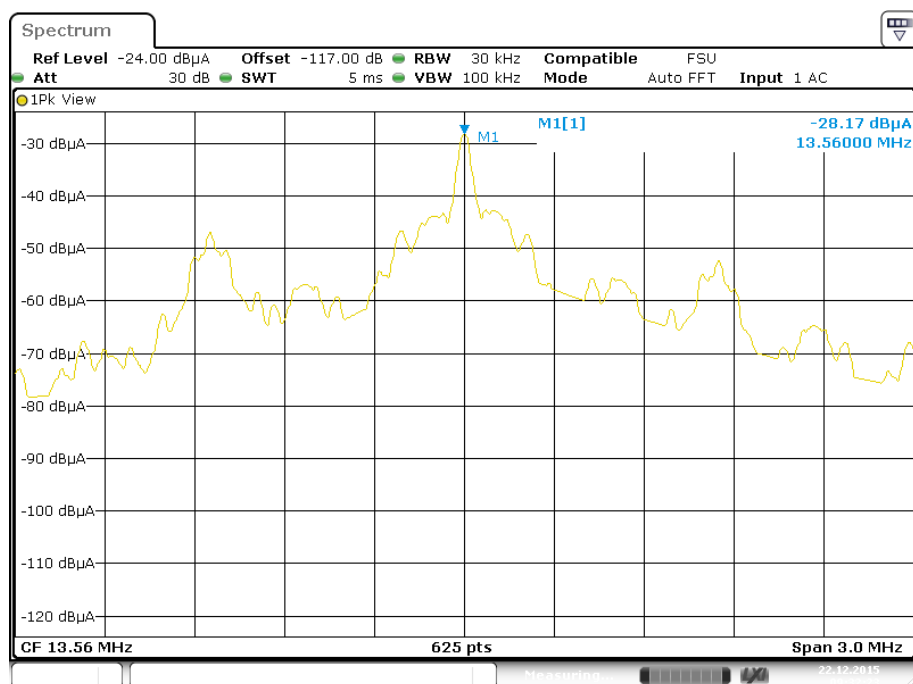


Date: 22.DEC.2015 09:32:23



AC power line conducted emissions
Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Phase Line

Description Sous-bande 1
Fréquences: 150 kHz - 30 MHz (Mode: Lin, Pas: 5 kHz)
Réglages: RBW: 10 kHz, VBW: Auto, Temps de mesure : 50 ms/Pts, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: On
Ligne:Phase 1

— Civil 55022/EN 55022 Conduit Alim - Classe:B - Moyenne/
— Civil 55022/EN 55022 Conduit Alim - Classe:B - QCrête/
— Mes Peak (Phase 1)
— Mes.Avg (Phase 1)

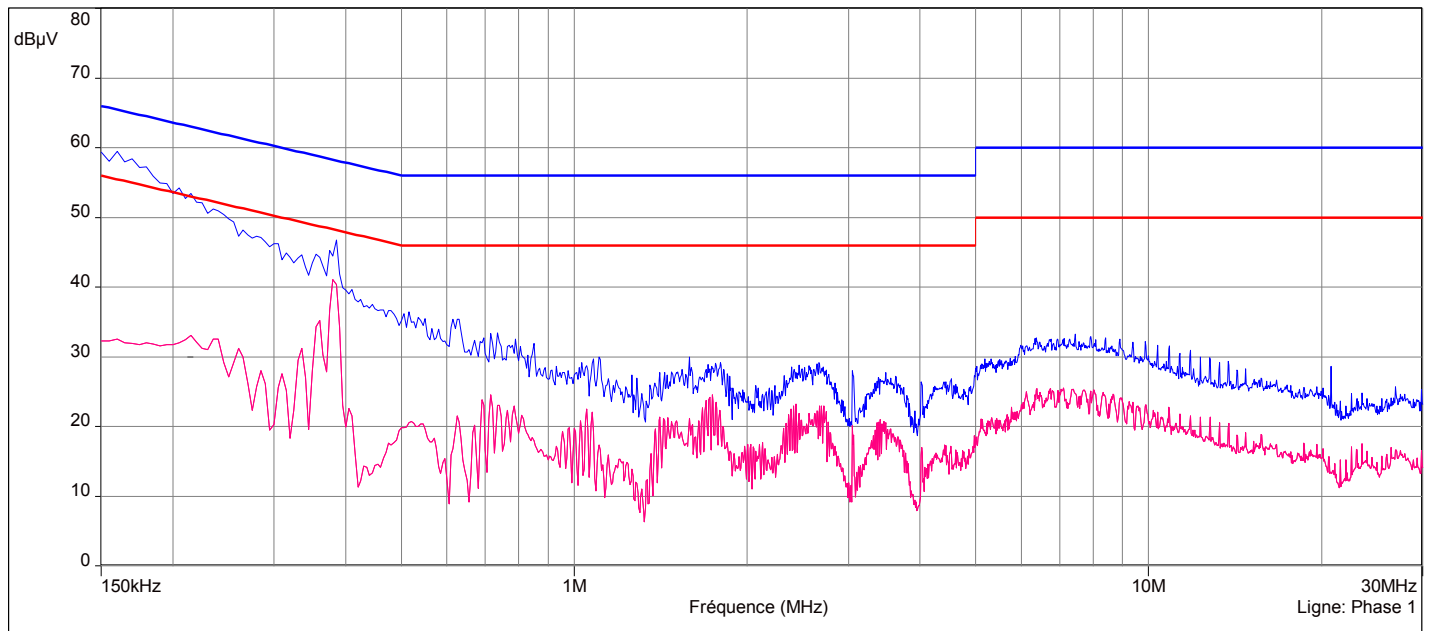



AC power line conducted emissions

Frequency: F_{nom}

Temperature: T_{nom}

Voltage: V_{nom}

Neutral Line


Description Sous-bande 2

Fréquences: 150 kHz - 30 MHz (Mode: Lin, Pas: 5 kHz)

Réglages: RBW: 10 kHz, VBW: Auto, Temps de mesure : 50 ms/Pts, Nombre de Balayages : 1, Preamp : Off, LN Preamp : Off, Preselecteur: On

Ligne: Neutre


— Civil 55022/EN 55022 Conduit Alim - Classe: B - Moyenne/
— Civil 55022/EN 55022 Conduit Alim - Classe: B - QCrête/
— Mes. Peak (Neutre)
— Mes. Avg (Neutre)

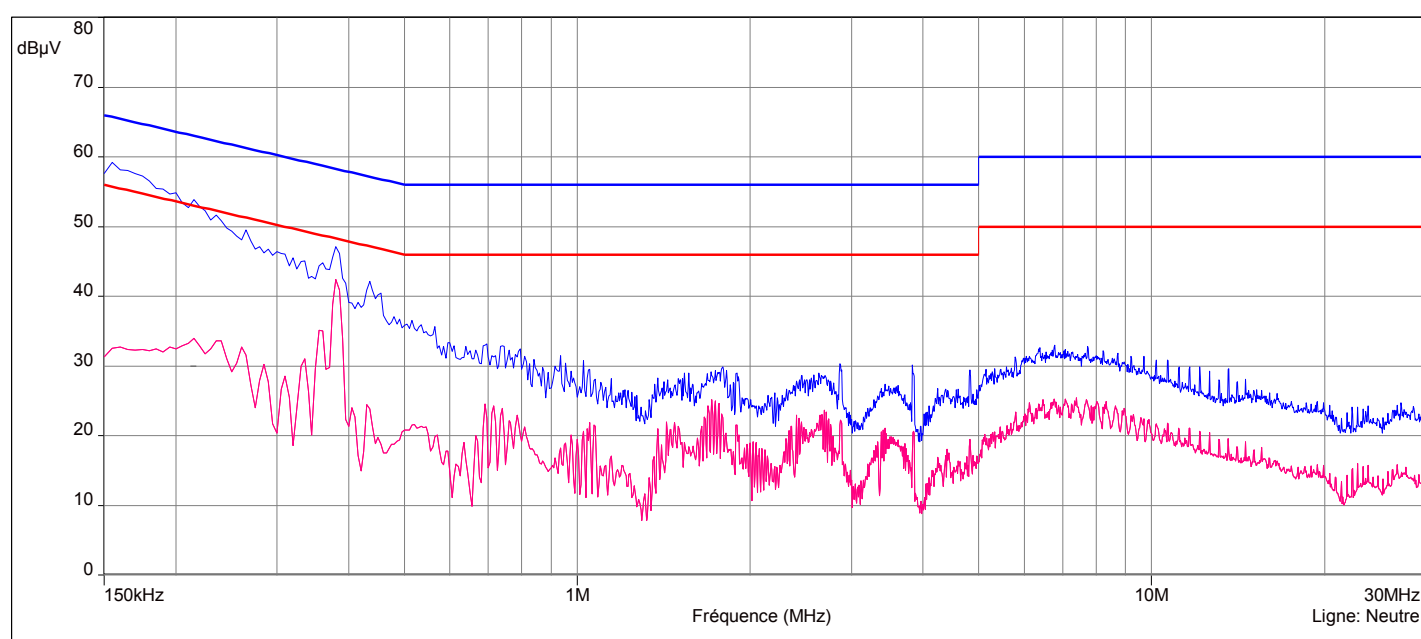



Transmitter Radiated Emissions
Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Horizontal polarisation

— FCC/FCC 15.209 >30M - Classe:1 - QCrête/3.0m/
— FCC/FCC 15.209 >30M - Classe:1 - Crête/3.0m/
— Mes.Peak (Horizontale)

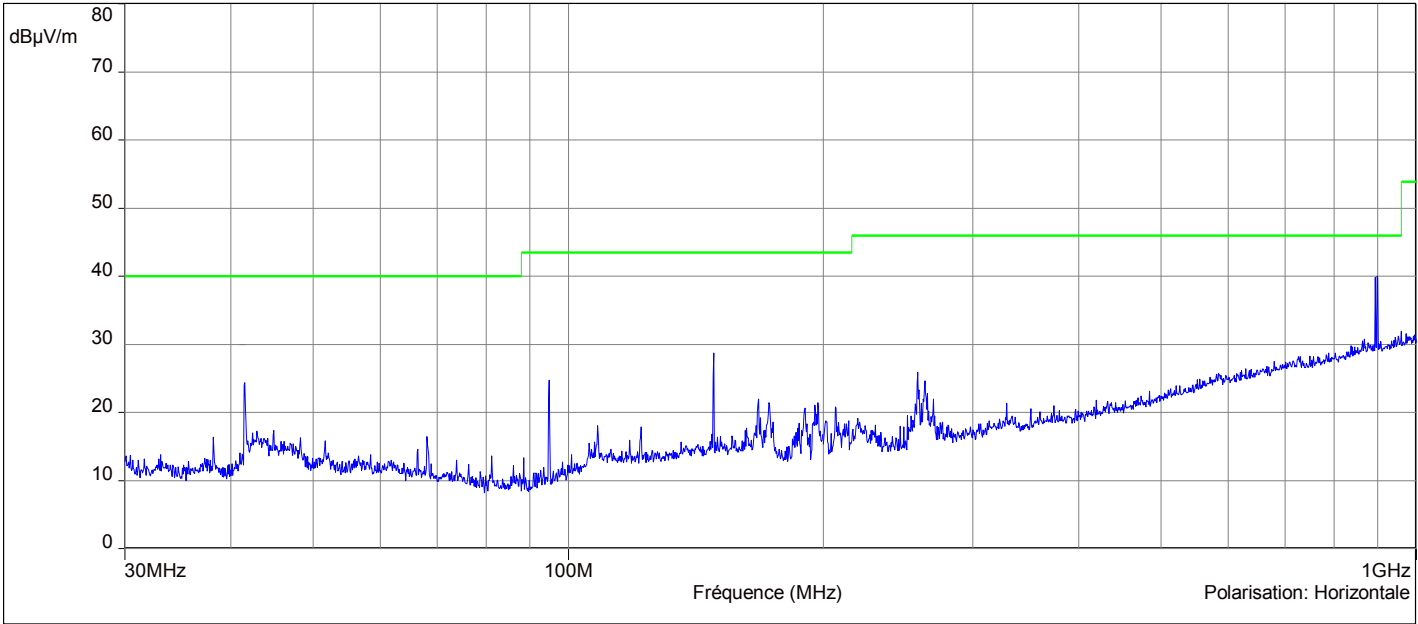


Horizontal Polarization (30-1000MHz)



Transmitter Radiated Emissions
Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Vertical polarisation

— FCC/FCC 15.209 >30M - Classe:1 - QCrête/3.0m/
— FCC/FCC 15.209 >30M - Classe:1 - Crête/3.0m/
— Mes.Peak (Verticale)
— Mes.QPeak (Verticale)

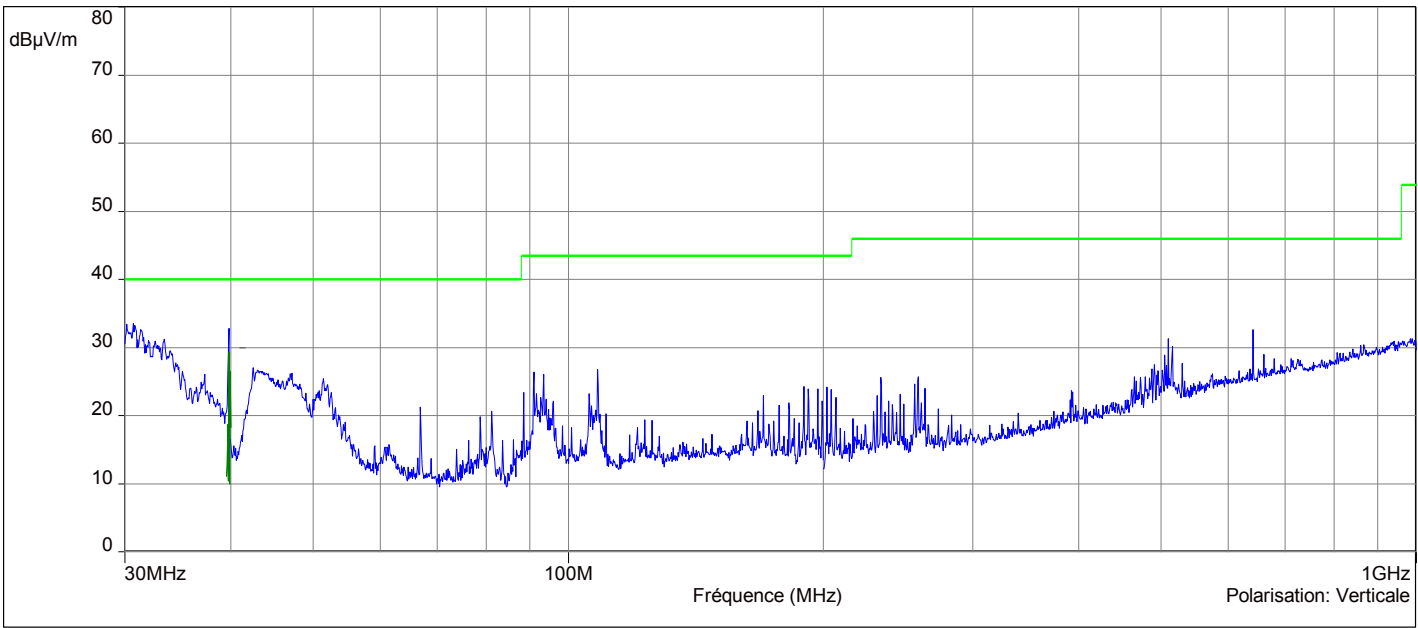


Vertical Polarization (30-1000MHz)



Transmitter Radiated Emissions

Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Parallel polarisation

- FCC/FCC 15.225 - Classe:1 - QCrête/3.0m/
- FCC/FCC 15.209 Antenne boucle - Classe:1 - QCrête/3.0m/
- Mes.Peak (Horizontale)

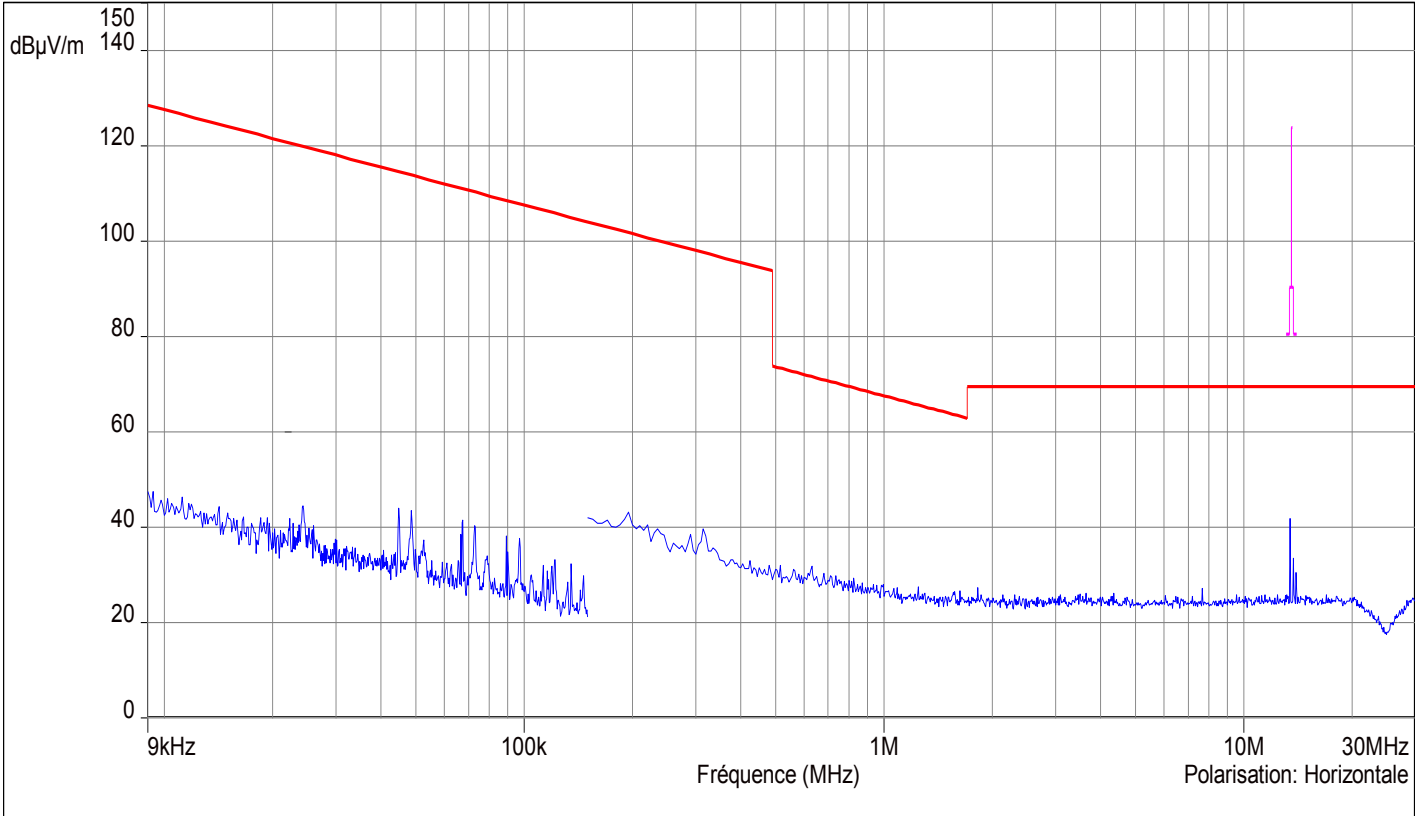



Transmitter Radiated Emissions


Frequency: F_{nom}

Temperature: T_{nom}

Voltage: V_{nom}

Perpendicular polarisation


- FCC/FCC 15.225 - Classe:1 - QCrête/3.0m/
- FCC/FCC 15.209 Antenne boucle - Classe:1 - QCrête/3.0m/
- Mes.Peak (Verticale)

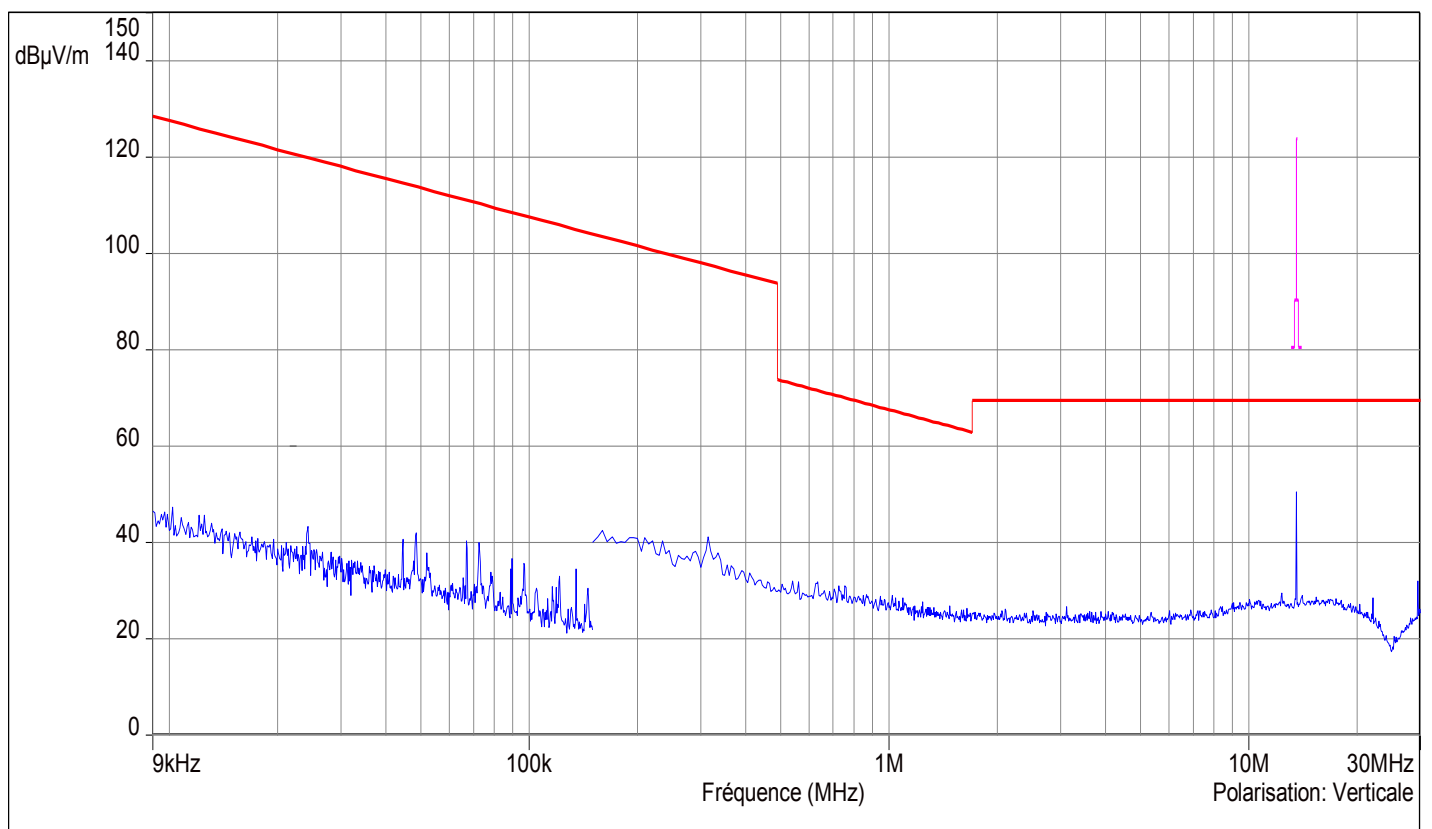



Transmitter Radiated Emissions
Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Parallel polarisation

- FCC/FCC 15.225 - Classe:1 - QCrête/3.0m/
- FCC/FCC 15.209 Antenne boucle - Classe:1 - QCrête/3.0m/
- Mes.Peak (Horizontale)

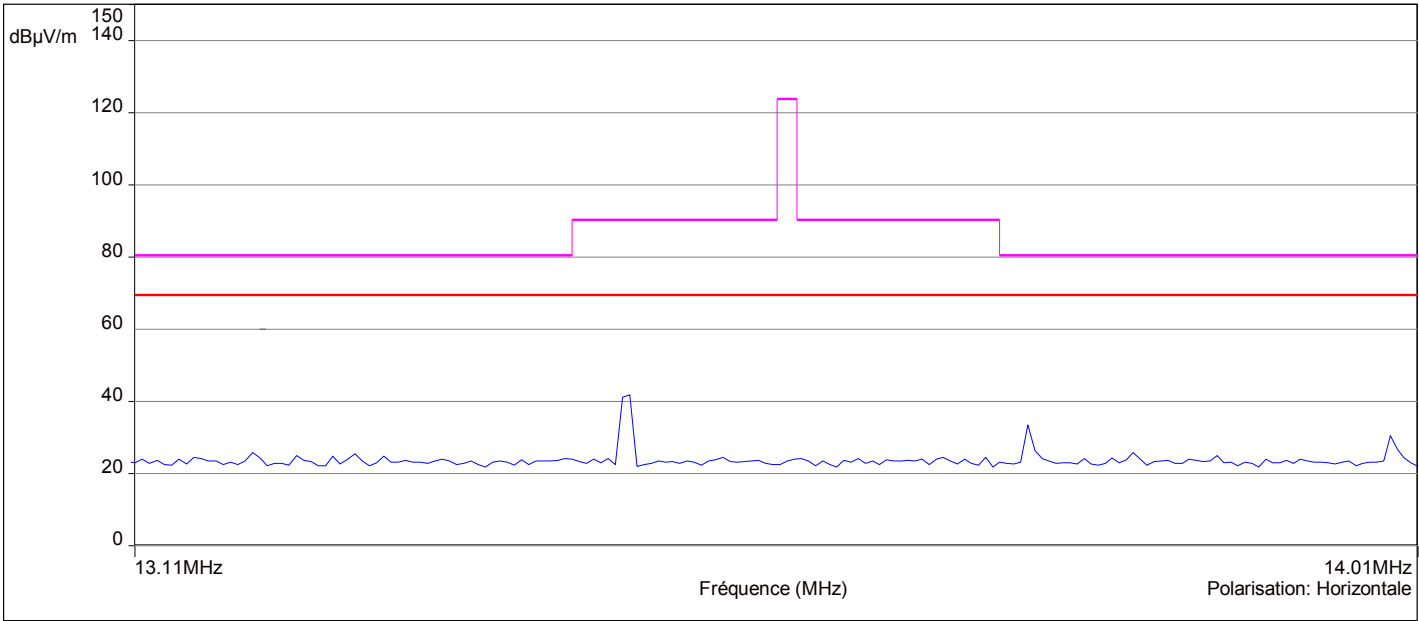



Transmitter Radiated Emissions
Frequency: F_{nom}
Temperature: T_{nom}
Voltage: V_{nom}
Perpendicular polarisation

- FCC/FCC 15.225 - Classe:1 - QCrête/3.0m/
- FCC/FCC 15.209 Antenne boucle - Classe:1 - QCrête/3.0m/
- Mes.Peak (Verticale)

