



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : March 5th, 2024

TEST REPORT

N°: 21490906-798425-B(FILE#7873522)

Version: 02

Subject

Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.225 & ANSI C63.10
RSS 210 & RSS-Gen

Issued to

INGENICO
9 Avenue de la gare - Rovaltain TGV BP25156
26958 – VALENCE Cedex 9
FRANCE

Apparatus under test

↪ Product
↪ Trade mark
↪ Manufacturer
↪ Family range
↪ Model under test
↪ Serial number
↪ FCCID
↪ IC

Payment terminal
INGENICO
INGENICO
AXIUM
AXIUM RX9000
2419MR900137
XKB-RX9CLWBT
2586D-RX9CLWBT

Conclusion

See Test Program chapter

Test date March 06, 2024 to March 12, 2024
Test location LCIE Grenoble
FCC Test site FR0008 - 918017 (MOI)
ISED Test site 6500A (MOI)
Sample receipt date March 04, 2024
Composition of document 39 pages
Document issued on August 12, 2024

Written by :

Akram HAKKARI
Tests operator

Approved by :

Majid MOURZAGH
Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudice the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE
Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'alp
170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	April 30, 2024	Akram HAKKARI	Creation of the document
02	August 12, 2024	Akram HAKKARI	Correction applicant address

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER).....	5
3.	OCCUPIED BANDWIDTH.....	10
4.	20DB EMISSION BANDWIDTH	13
5.	FREQUENCY TOLERANCE.....	16
6.	FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ	19
7.	FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHZ.....	26
8.	UNCERTAINTIES CHART	39



1. TEST PROGRAM

References

- 47 CFR Part 15.225 (2023)
- RSS 210 Issue 10.1
- RSS Gen Issue 5.2
- ANSI C63.10 (2013)

Radio requirement:

Clause - Test Description		Test result - Comments
Occupied Bandwidth	<i>ISED</i>	PASS
20dB Bandwidth	<i>FCC & ISED</i>	PASS
Frequency Tolerance	<i>FCC & ISED</i>	PASS
Field strength within the band [13.110-14.010] MHz	<i>FCC & ISED</i>	PASS
Field strength outside of the bands [13.110-14.010] MHz	<i>FCC & ISED</i>	PASS
Receiver Radiated Emissions	<i>ISED</i>	PASS(2)

This table is a summary of test report, see conclusion of each clause of this test report for detail.

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable


NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES)

Equipment under test (EUT):

Model under test:	AXIUM RX9000
Serial Number:	2419MR900137

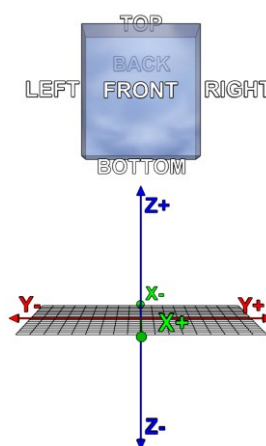

Dimensions:	16cm x 20cm x 2.5cm (Length x Width x Height)
Type:	Table-Top

Power supply:

Name	Type	Rating	Reference / Sn	Comments
Supply1	DC	8-14 VDC	NC	-
Supply2	PoE	12.95W max	NC	-

NC: Not communicated by provider



L C I E

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Comments
Supply1	8-14 VDC	NC	NC	No	-
Supply2	PoE	NC	NC	Yes	-
Access1	COMBOX	NC	No	NC	-

NC: Not communicated by provider



Equipment information (declaration of provider):

Type:	RFID		
Chipset / RF Module	PN5190		
Frequency band:	[13.553 to 13.567] MHz		
Number of Channel:	1		
Antenna Type:	Internal		
Transmit chains:	1		
Receiver chains	1		
Operating temperature range:	T _{min} :	-10 °C	
	T _{nom} :	20°C	
	T _{max} :	45 °C	
Operating voltage:	V _{min} (85% V _{nom}):	8VDC	
	V _{nom} :	12VDC	
	V _{max} (115% V _{nom}):	14VDC	

Antenna Characteristic			
Antenna reference	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
Internal/near field antenna	0	13.56	-

Modulation Type
ASK

Hardware information			
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):	F_{Highest}:	1800	MHz
Firmware (if applicable):	V:	-	
Software (if applicable):	V:	2.2.8_build20230517	

NC: Not communicated by provider

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power. Tests are performed with "TAG".
Test mode 2	Permanent reception

Test	Running mode
Occupied Bandwidth	Test mode 1
20dB Emission Bandwidth	Test mode 1
Frequency Tolerance	Test mode 1
Field strength within the band 13.110-14.010MHz	Test mode 1
Field strength outside of the bands 13.110-14.010 MHz	Test mode 1
Receiver Radiated Emissions	Test mode 2 (1)

(1) The test can't be performed because the transmitter and receiver are operating at the same frequency and the transmitter cannot be switched off as the carrier is used as receiver injection signal

2.3. EQUIPMENT LABELLING

Label


2.4. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dB μ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB μ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dB μ V/m

FS_{max} is the measured field strength, expressed in dB μ V/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.7. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period.

2.8. METHOD TO DETERMINATE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Date of test : March 11, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 20

3.2. TEST SETUP

The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in radiated method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

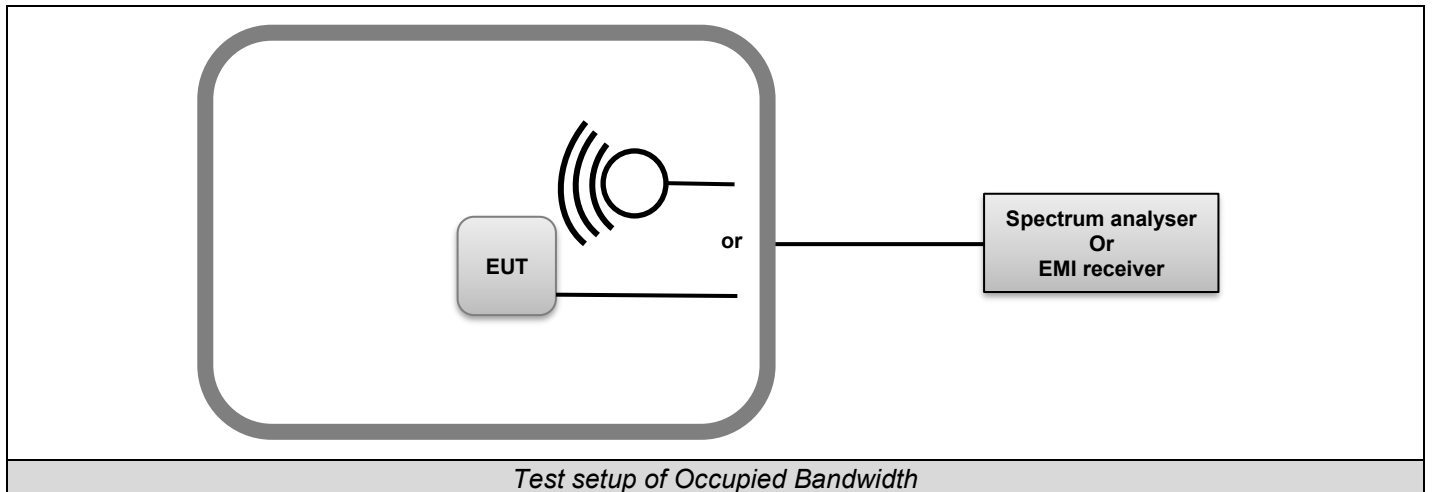




Photo of Occupied bandwidth

3.3. LIMIT

None


3.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
AC source 1kW	KEYSIGHT	AC6802A	A7042305		
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	09/22	09/25
Attenuator 10dB	AEROFLEX	_	A7122267	10/23	10/25
Cable SMA 2m	_	6GHz	A5329635	03/22	03/24
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	01/23	01/25
Data Logger (CEM1)	AGILENT	34970A	A6440083	05/23	05/25
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	03/24
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

3.6. RESULTS

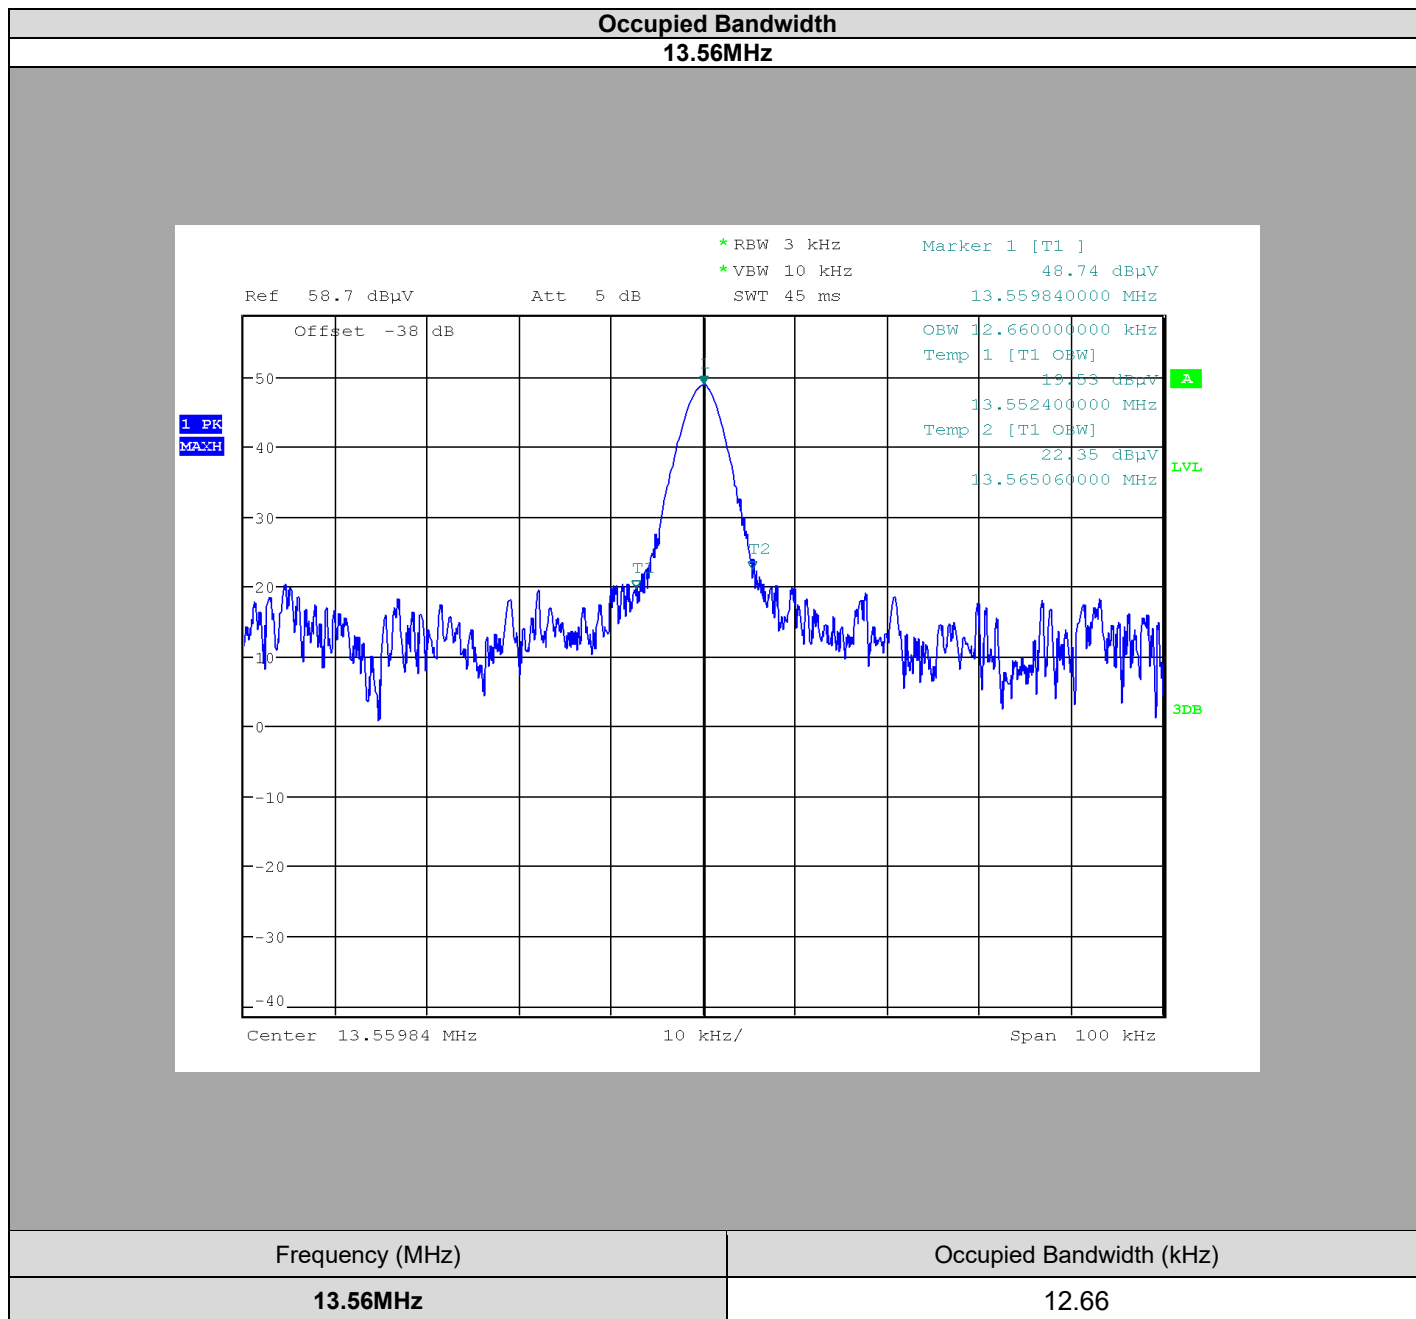

3.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900137**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

4. 20dB EMISSION BANDWIDTH

4.1. TEST CONDITIONS

Date of test : March 11, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 32
 Ambient temperature (°C) : 20

4.2. TEST SETUP

The Equipment Under Test is installed in a climatic chamber.
 Measurement is performed with a spectrum analyzer in radiated method.

Test Procedure:
 ANSI C63.10 § 6.9.2:

The EUT is turn ON; levels have been corrected to be in compliant with the Peak Output Power measured; and using the MaxHold function, the frequency separation of two frequencies that were attenuated 20dB from the Peak Output Power level. A delta marker is used to measure the frequency difference as the emission bandwidth.

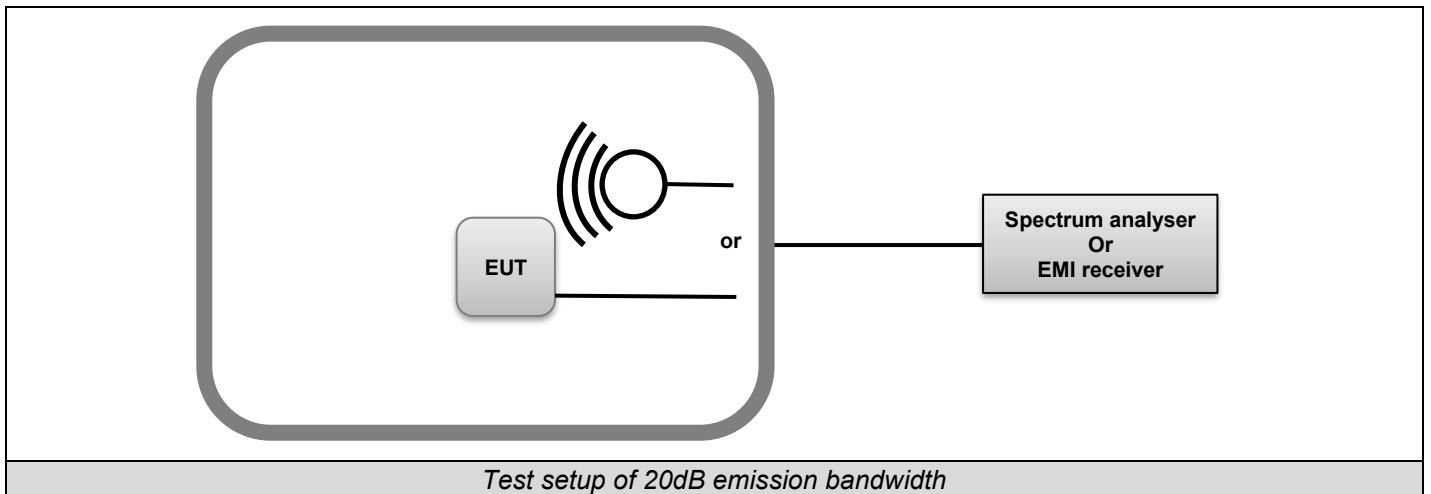




Photo of 20dB emission bandwidth

4.3. LIMIT

No Limit

4.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
AC source 1kW	KEYSIGHT	AC6802A	A7042305		
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	09/22	09/25
Attenuator 10dB	AEROFLEX	_	A7122267	10/23	10/25
Cable SMA 2m	_	6GHz	A5329635	03/22	03/24
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	01/23	01/25
Data Logger (CEM1)	AGILENT	34970A	A6440083	05/23	05/25
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	03/24
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION


None



4.6. RESULTS

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	2.78

Graph

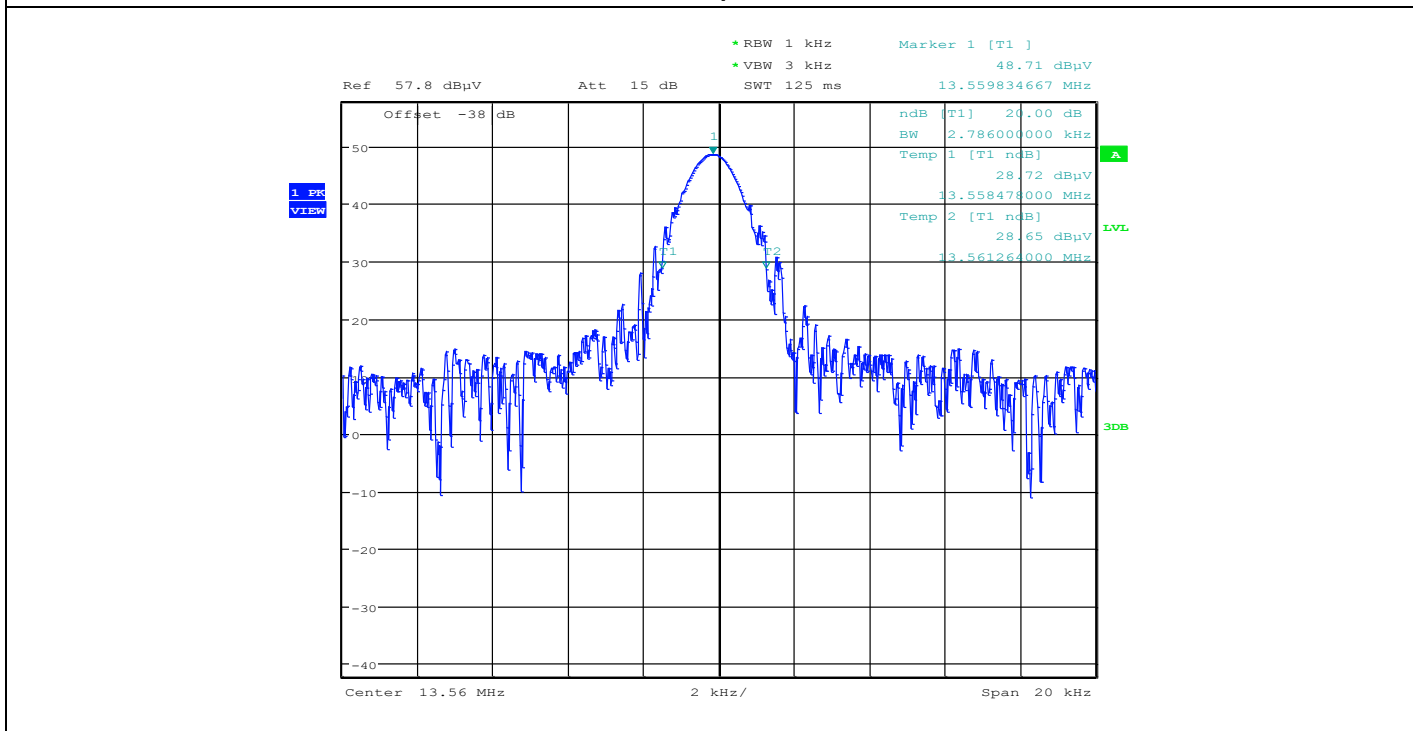

4.7. CONCLUSION

20dB Emission Bandwidth measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900137**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.225 & RSS 210** limits.

5. FREQUENCY TOLERANCE

5.1. TEST CONDITIONS

Date of test : March 11, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 20

5.2. TEST SETUP

The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in radiated method.

Test Procedure:
ANSI C63.10 § 6.8

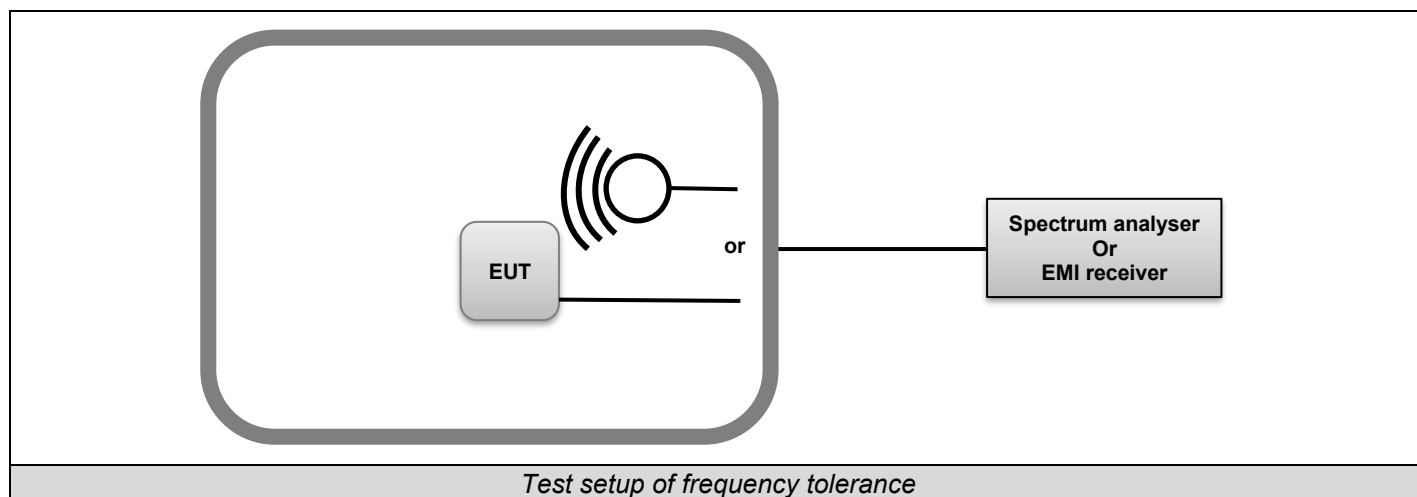




Photo of frequency tolerance

5.3. LIMIT

±0.01% (± 100ppm)

5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
AC source 1kW	KEYSIGHT	AC6802A	A7042305		
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	09/22	09/25
Attenuator 10dB	AEROFLEX	_	A7122267	10/23	10/25
Cable SMA 2m	_	6GHz	A5329635	03/22	03/24
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	01/23	01/25
Data Logger (CEM1)	AGILENT	34970A	A6440083	05/23	05/25
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	03/24
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



5.6. RESULTS

EUT activation:	Startup						
Voltage:	V_{nom}						
Temperature:	-10	0	10	20	30	40	45
Frequency (MHz)	13.5598882	13.559854	13.5598333	13.5598286	13.5598262	13.5598127	13.5598082
Frequency Drift (%)	-0.0008%	-0.0011%	-0.0012%	-0.0013%	-0.0013%	-0.0014%	-0.0014%
EUT activation:	2min						
Voltage:	V_{nom}						
Temperature:	-10	0	10	20	30	40	45
Frequency (MHz)	13.5599044	13.5598562	13.5598631	13.5598562	13.5598329	13.5597001	13.5597857
Frequency Drift (%)	-0.0007%	-0.0011%	-0.0010%	-0.0011%	-0.0012%	-0.0022%	-0.0016%
EUT activation:	5min						
Voltage:	V_{nom}						
Temperature:	-10	0	10	20	30	40	45
Frequency (MHz)	13.5599124	13.5598769	13.559854	13.559837	13.5598239	13.5598172	13.5598712
Frequency Drift (%)	-0.0006%	-0.0009%	-0.0011%	-0.0012%	-0.0013%	-0.0013%	-0.0009%
EUT activation:	10min						
Voltage:	V_{nom}						
Temperature:	-10	0	10	20	30	40	45
Frequency (MHz)	13.5599132	13.5598862	13.5598565	13.5598378	13.5598285	13.5598127	13.5598037
Frequency Drift (%)	-0.0006%	-0.0008%	-0.0011%	-0.0012%	-0.0013%	-0.0014%	-0.0014%

Temperature	T_{nom}		
Voltage:	13.559108	13.559335	13.559742
Frequency (MHz)	-0.0012%	-0.0012%	-0.0012%
Frequency Drift (%)	13.559108	13.559335	13.559742

5.7. CONCLUSION

Frequency tolerance measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900137**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.225 & RSS 210** limits.



6. FIELD STRENGTH WITHIN THE BAND 13.110-14.010MHZ

6.1. TEST CONDITIONS

Date of test : March 08, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 32
Ambient temperature (°C) : 21

6.2. TEST SETUP

The Equipment Under Test is installed **on an Open Area Test Site..**
Measurement is performed with a spectrum analyzer in **radiated method.**

Test Procedure:
ANSI C63.10

The EUT is placed **on an open area test site.** Distance between measuring antenna and the EUT is **10m.** Test is performed in parallel, perpendicular, and ground parallel axis with a loop antenna below 30MHz. Measurement bandwidth was 9kHz between 150kHz & 30MHz. The level has been maximized by the turntable rotation of 360 degrees range on all axis of EUT used in normal configuration. Antenna height search was performed from 1 to 4m. The EUT is place at **0.8m.**

Ambient temperature: 15 °C
Relative humidity: 31 %

Note: It is impracticable to carry out tests under normal condition as specified in standard.

When measurement with test fixture is used, the power level calibration of the spectrum analyzer shall then be related to the power level or field strength measured with temperature during OATS measure taking in consideration in climatic chamber. The calculation will be used to calculate the absolute level of the sideband power.

Frequency band 13.110-14.010MHz

Following plots show radiated emission level in the frequency band 13.110-14.010MHz with a RBW of 9kHz and a quasi-peak detector. The graphs are obtained with a measuring receiver.



L C I E


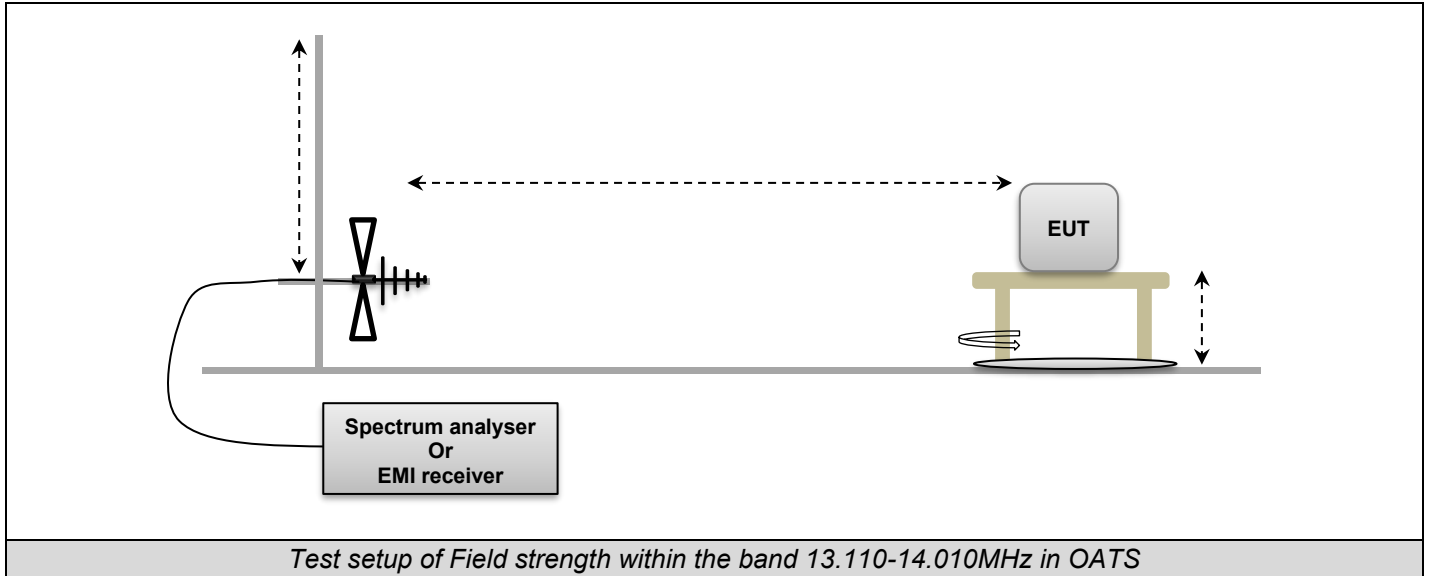




Photo of Field strength within the band 13.110-14.010MHz in OATS

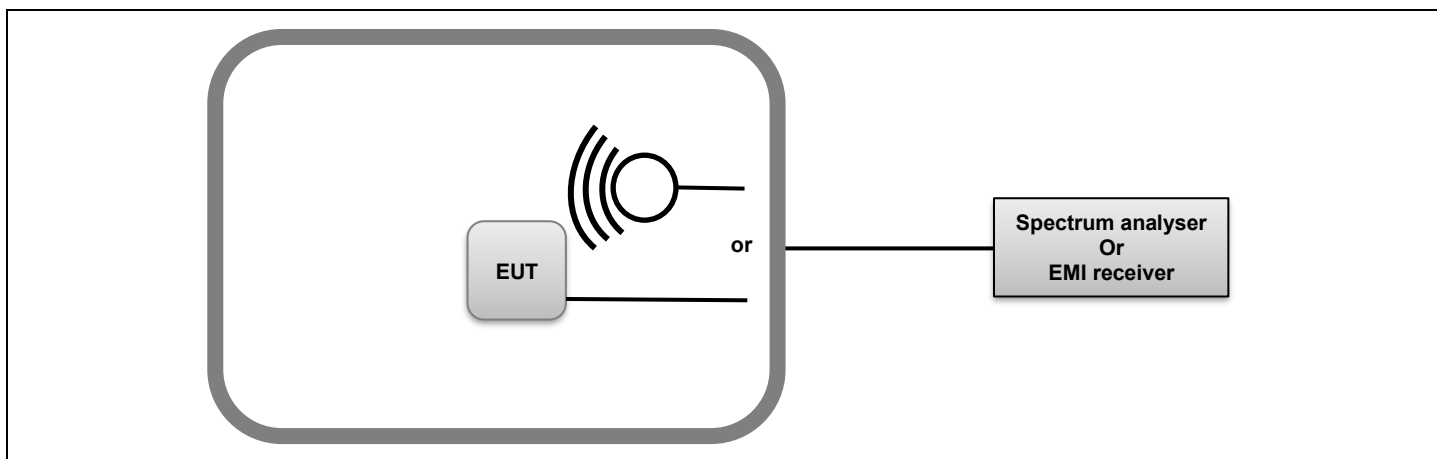

Test setup of Field strength within the band 13.110-14.010MHz in Climatic Chamber



Photo of Field strength within the band 13.110-14.010MHz in Climatic Chamber



6.3. LIMIT

Frequency (MHz)	Field strength ($\mu\text{V/m}$) @30m	Field strength ($\text{dB}\mu\text{V/m}$) @30m
13.553-13.567	15 848	84.0
13.410-13.553 13.567-13.710	334.0	50.5
13.110-13.410 13.710-14.010	106.0	40.5
Below 13.110MHz Above 14.010MHz	30.0	29.5

6.4. TEST EQUIPMENT LIST




TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Antenna Mat (OATS)	ETS Lingren	2071-2	F2000392		
Cable (OATS)	—	1GHz	A5329623	09/23	09/24
Emission Cable	RADIALEX		A5329061	07/23	07/24
OATS	—	—	F2000409	08/23	08/24
RADIMATION	RADIMATION	2023.2.4	L1000139		
RADIO ERP_EIRP	LCIE SUD EST	RADIO ERP_EIRP v4	L2000034		
Rehausse Table C1/OATS	LCIE	—	F2000512		
Table C1/OATS	LCIE	—	F2000445		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
Turntable (OATS)	ETS Lingren	Model 2187	F2000403		
Turntable / Mast controller (OATS)	ETS Lingren	Model 2066	F2000372		
AC source 1kW	KEYSIGHT	AC6802A	A7042305		
Antenna Loop (near field)	ELECTRO-METRICS	EM-6993	C2040215	09/22	09/25
Attenuator 10dB	AEROFLEX	—	A7122267	10/23	10/25
Cable SMA 2m	—	6GHz	A5329637	05/22	05/24
Climatic chamber	BIA CLIMATIC	CL 6-25	D1022117	01/23	01/25
Data Logger (CEM1)	AGILENT	34970A	A6440083	05/23	05/25
Spectrum Analyzer 9kHz - 6GHz	ROHDE & SCHWARZ	FSL6	A2642020	10/22	10/24
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25
Antenna loop	ELECTRO-METRICS	EM-6879	C2040294	08/22	08/24

6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

6.6. RESULTS


6.6.1. Results on OATS test conditions:

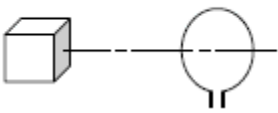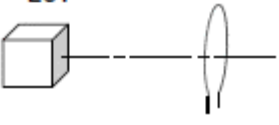Frequency (MHz)	QPeak Limit (dBµV/m) @ 30m	QPeak (dBµV/m) @ 30m	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. Factor (dB)	Comments
13.56	84.0	48	36	90	V	80	36.3	-
<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;"> <p>EUT</p>  <p>Parallel Axis (0°)</p> </div> <div style="text-align: center;"> <p>EUT</p>  <p>Perpendicular Axis (90°)</p> </div> <div style="text-align: center;"> <p>EUT</p>  <p>Ground Parallel Axis (180°)</p> </div> </div>								

Note: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) ($M@30m = M@10m - 19.1dB$)



6.6.2. Results under Normal condition

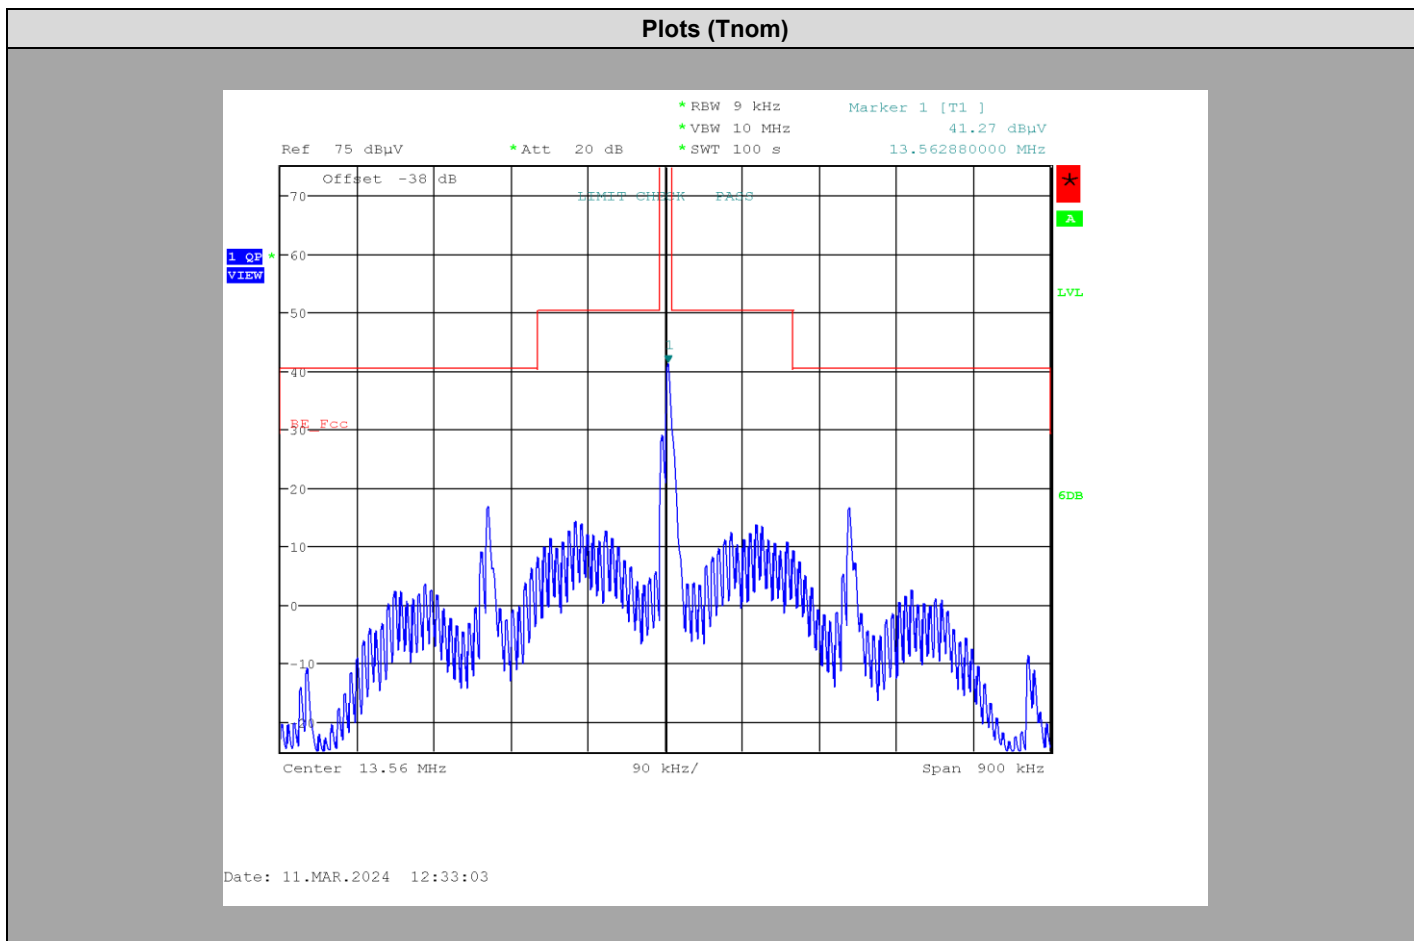

6.7. CONCLUSION

Field strength within the band 13.110-14.010MHz measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900137**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.225 & RSS 210** limits.



7. FIELD STRENGTH OUTSIDE OF THE BANDS 13.110-14.010 MHz

7.1. TEST CONDITIONS

Date of test : March 08, 2024
 Test performed by : Akram HAKKARI
 Relative humidity (%) : 32
 Ambient temperature (°C) : 21

7.2. TEST SETUP

Test procedure:
 ANSI C63.10 & FCC Part 15 subpart C


Following frequency ranges, test setup parameters are different and specified in this table:

Frequency range:	9kHz to 30MHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Parallel, Perpendicular and Ground parallel	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Loop	
RBW Filter:	200Hz below 150kHz / 9kHz above 150kHz	
Maximization:	Turntable rotation of 360 degrees range	
EUT height:	0.8m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak

Frequency range:	30MHz to 1GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Bi-Log	
RBW Filter:	120kHz	
Maximization:	Turntable rotation of 360 degrees range	
EUT height:	0.8m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak



L C I E

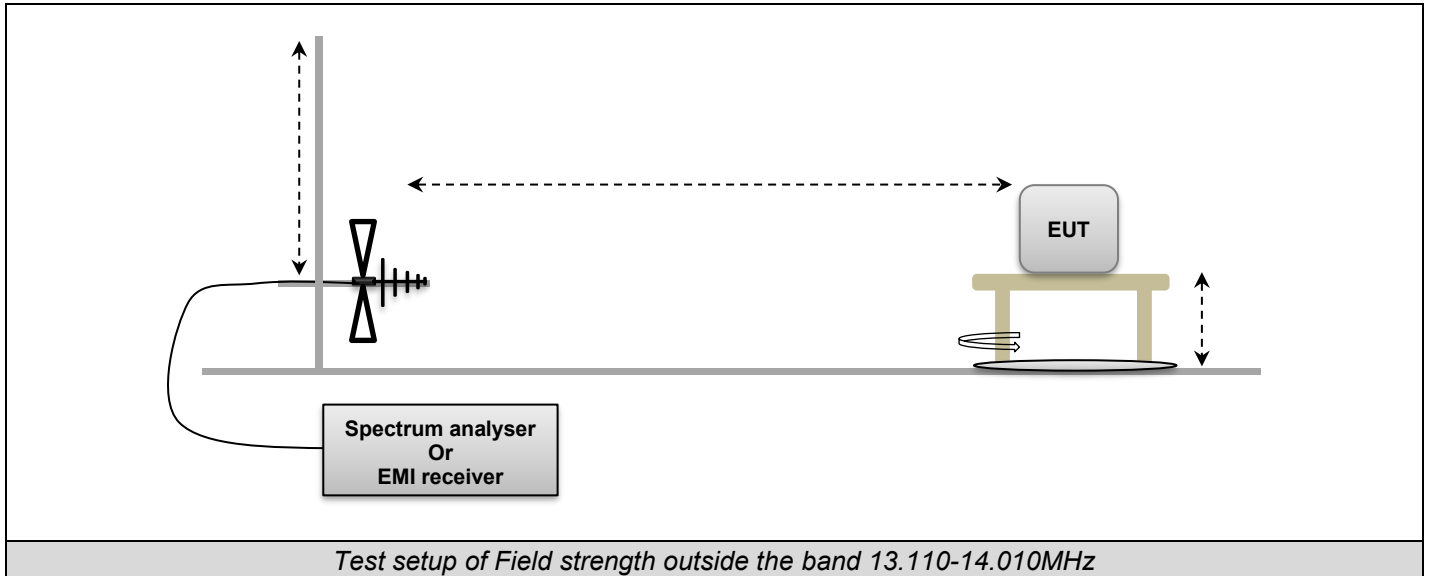

Same setup is used in semi anechoic chamber during pre-characterization, with a distance of 3m between EUT and antenna.





7.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

7.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 10MHz - 18GHz	LCIE SUD EST	_	A7102082	05/22	05/24
Antenna Bi-log	AH System	SAS-521-7	C2040180	05/23	05/25
Antenna loop	ELECTRO-METRICS	EM-6879	C2040294	08/22	08/24
BAT EMC	NEXIO	v3.21.0.32	L1000115		
Cable 0.75m	-	18GHz	A5329900	08/22	08/24
CONTROLLER	INNCO	CO3000	D3044034		
Filter Matrice	LCIE SUD EST	Combined filters	A7484078	03/23	03/25
Rehausse Table C3	LCIE	_	F2000511		
Semi-Anechoic chamber #3 (BF)	SIEPEL	_	D3044017_BF	04/22	04/25
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	_	D3044017_VSWR	04/22	04/25
SMA Cable 18GHz 0.5m	TELEDYNE	18GHz	A5330060	02/23	02/24
SMA Cable 18GHz 0.5m	TELEDYNE	18GHz	A5330059	02/23	02/24
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/23	09/25
Table C3	LCIE	_	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
TILT	INNCO	TILT	D3044033		
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		
Antenna Mat (OATS)	ETS Lingren	2071-2	F2000392		



LCIE

Biconic Antenna	EATON	94455-1	C2040234	05/23	05/25
Cable (OATS)	–	1GHz	A5329623	09/23	09/24
Emission Cable	CABELTEL	6GHz	A5329069	02/24	02/25
Emission Cable	RADIALEX		A5329061	07/23	07/24
OATS	–	–	F2000409	08/23	08/24
Rehausse Table C1/OATS	LCIE	–	F2000512		
Table C1/OATS	LCIE	–	F2000445		
Turntable (OATS)	ETS Lingren	Model 2187	F2000403		
Turntable / Mast controller (OATS)	ETS Lingren	Model 2066	F2000372		

7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None



7.6. RESULTS


7.6.1. 9kHz to 1GHz

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 1	0°/90°	TX	Single	Axis XY/Z	AC adapter 9KHz-30MHz
Emr# 2	180°	TX	Single	Axis XY/Z	AC adapter 9KHz-30MHz
Emr# 3	H/V	TX	Single	Axis XY/Z	AC adapter 30MHz-1GHZ
Emr# 4	0°/90°	TX	Single	Axis XY/Z	PoE 9KHz-30MHz
Emr# 5	180°	TX	Single	Axis XY/Z	PoE 9KHz-30MHz
Emr# 6	H/V	TX	Single	Axis XY/Z	PoE 30MHz-1GHZ



L C I E

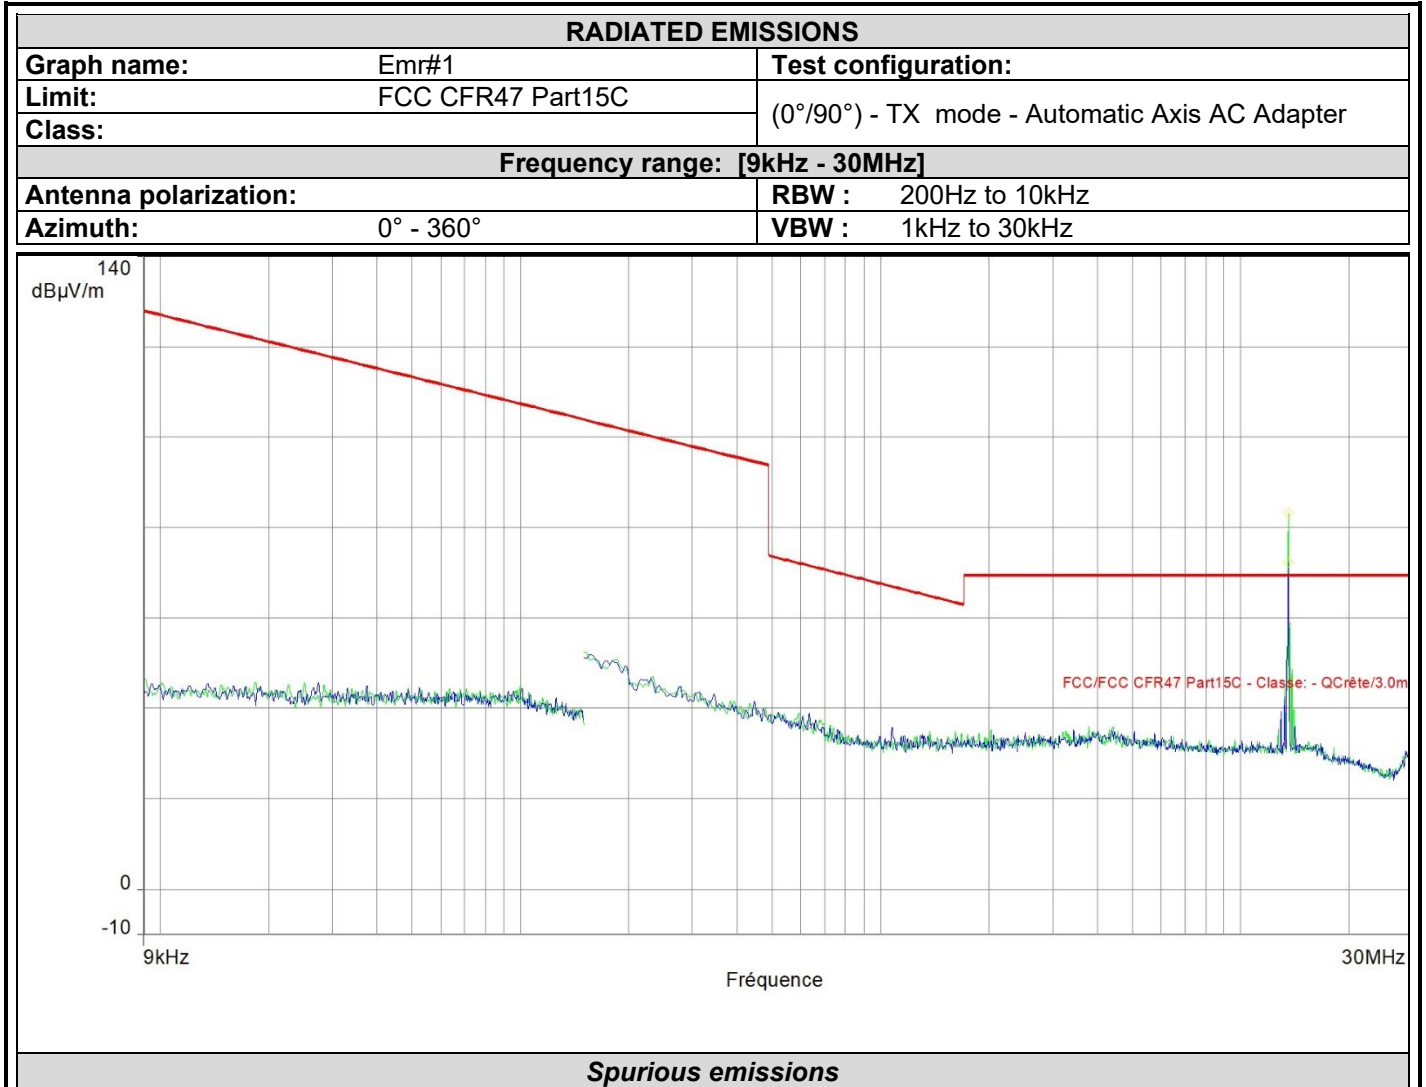


Frequency (MHz)	Peak (dBµV/m)	Lim.Q-Peak (dBµV/m)	Polarization	Correction (dB)
13.562*	72.3	69.5	Horizontal	39.0
13.562*	83.1	69.5	Vertical	39.0

*Carrier frequency
No significant frequency observed




L C I E

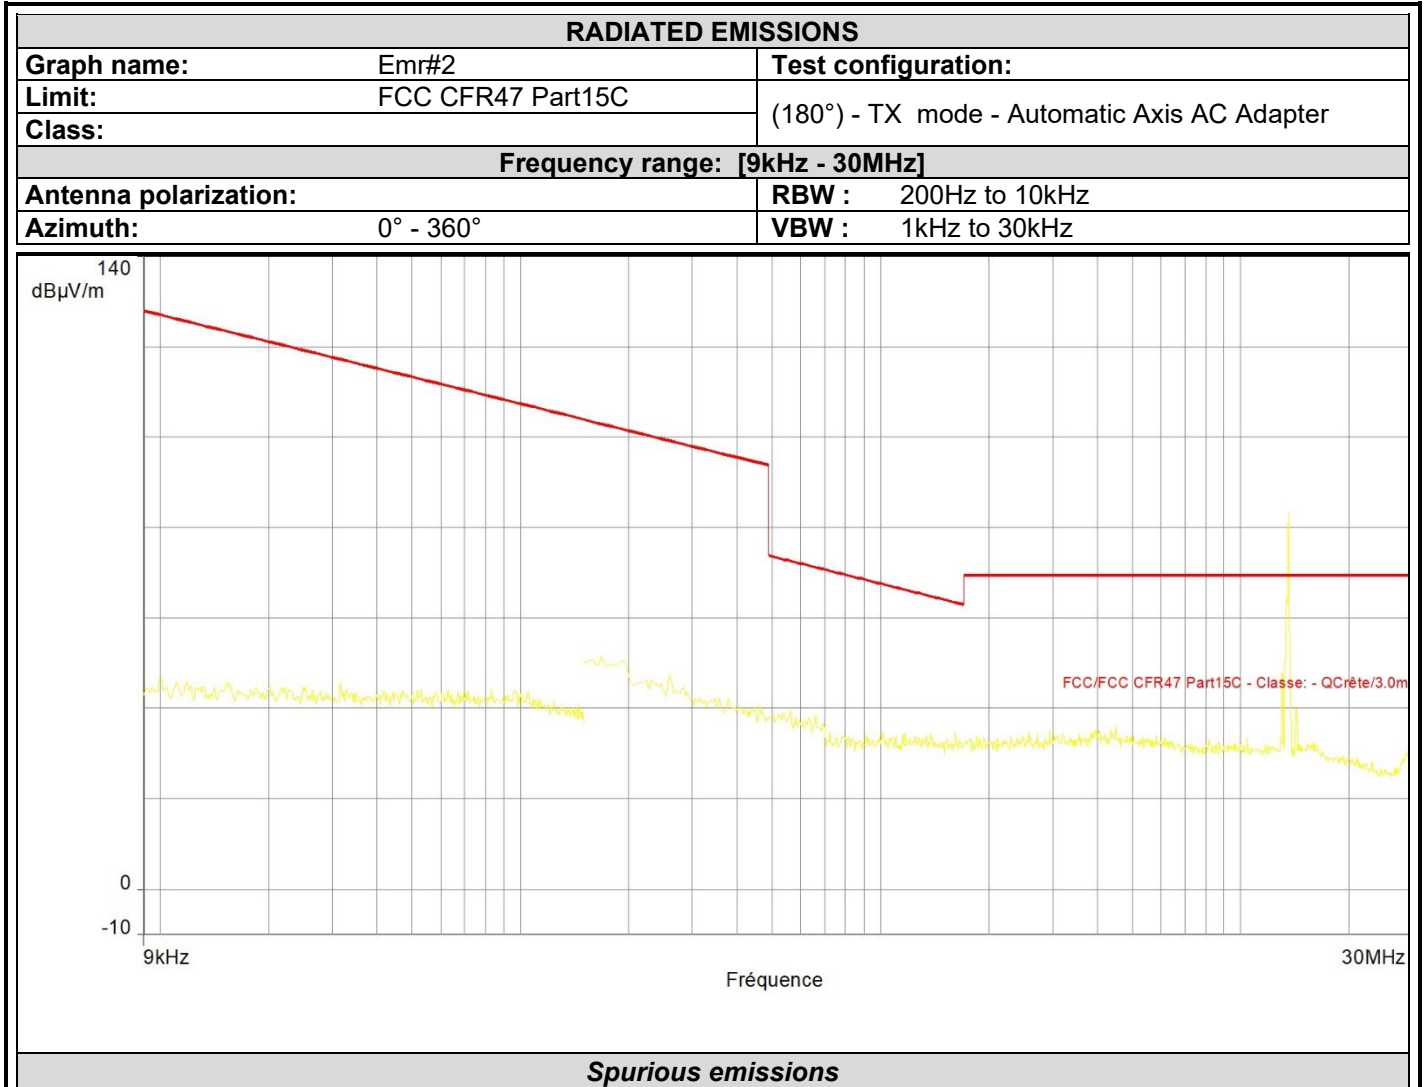

No significant frequency observed



L C I E

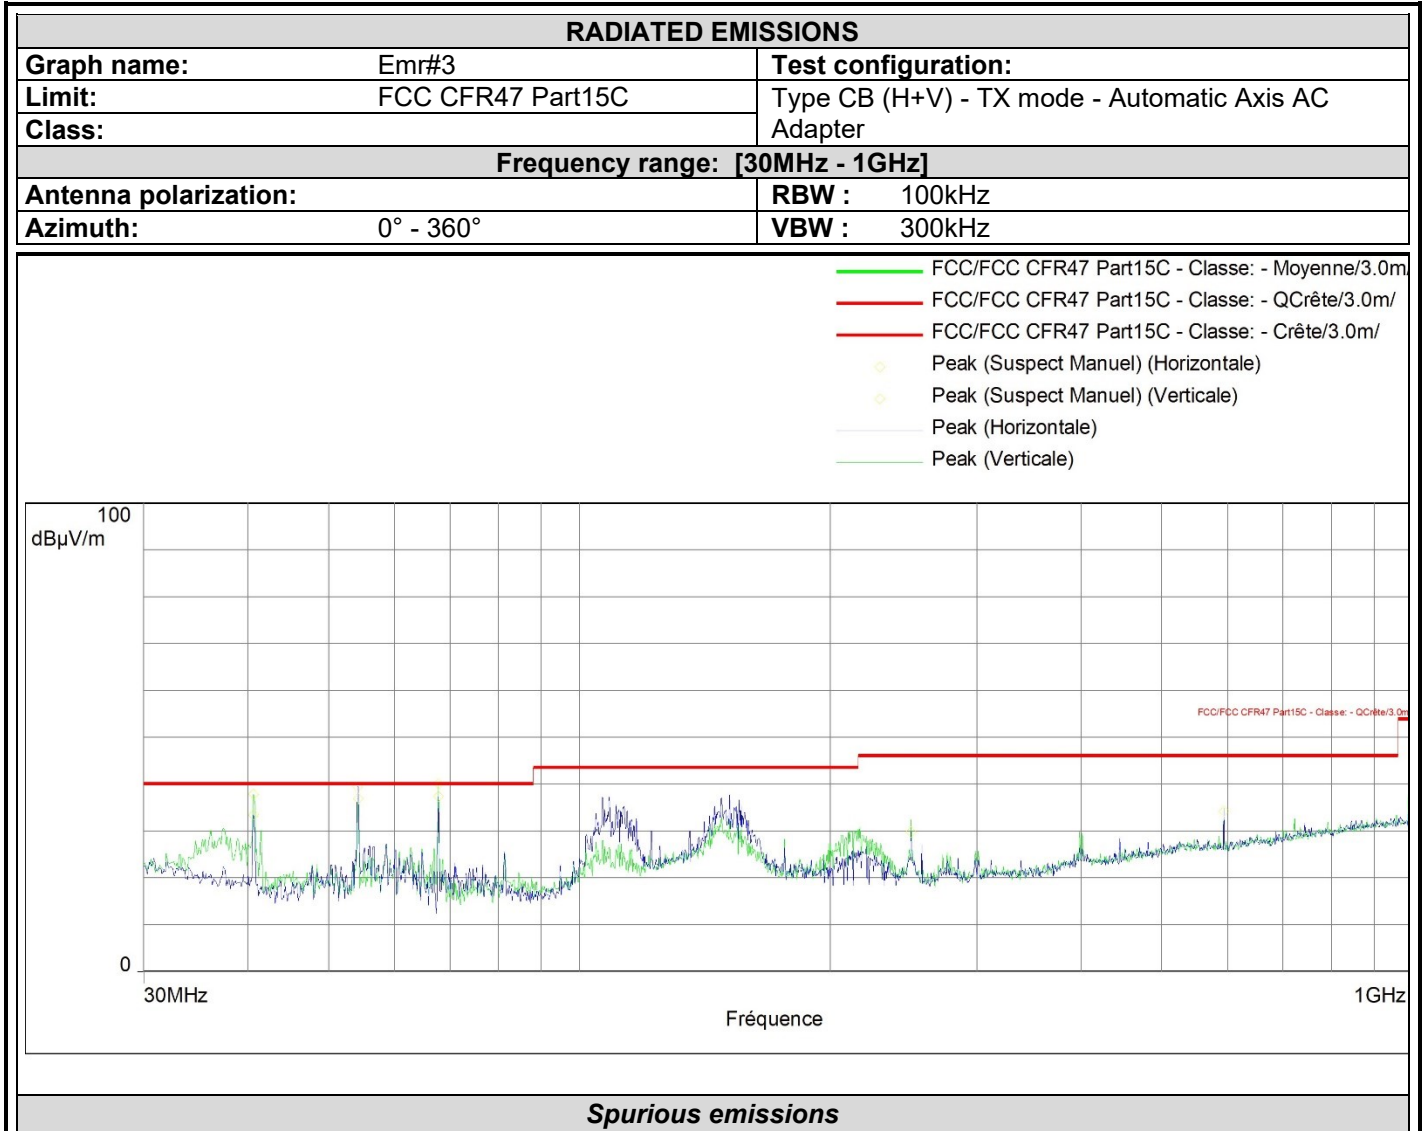


Frequency (MHz)	Peak (dBµV/m)	Lim.Q-Peak (dBµV/m)	Polarization	Correction (dB)
40.670	33.5	40.0	Horizontal	16.2
54.153	39.5	40.0	Horizontal	10.8
67.733	37.4	40.0	Horizontal	10.4
249.996	29.8	46.0	Horizontal	21.0
593.958	34.3	46.0	Horizontal	23.3
40.670	37.8	40.0	Vertical	16.2
54.250	36.9	40.0	Vertical	10.7
67.733	40.0	40.0	Vertical	10.4

Significant frequency observed



L C I E

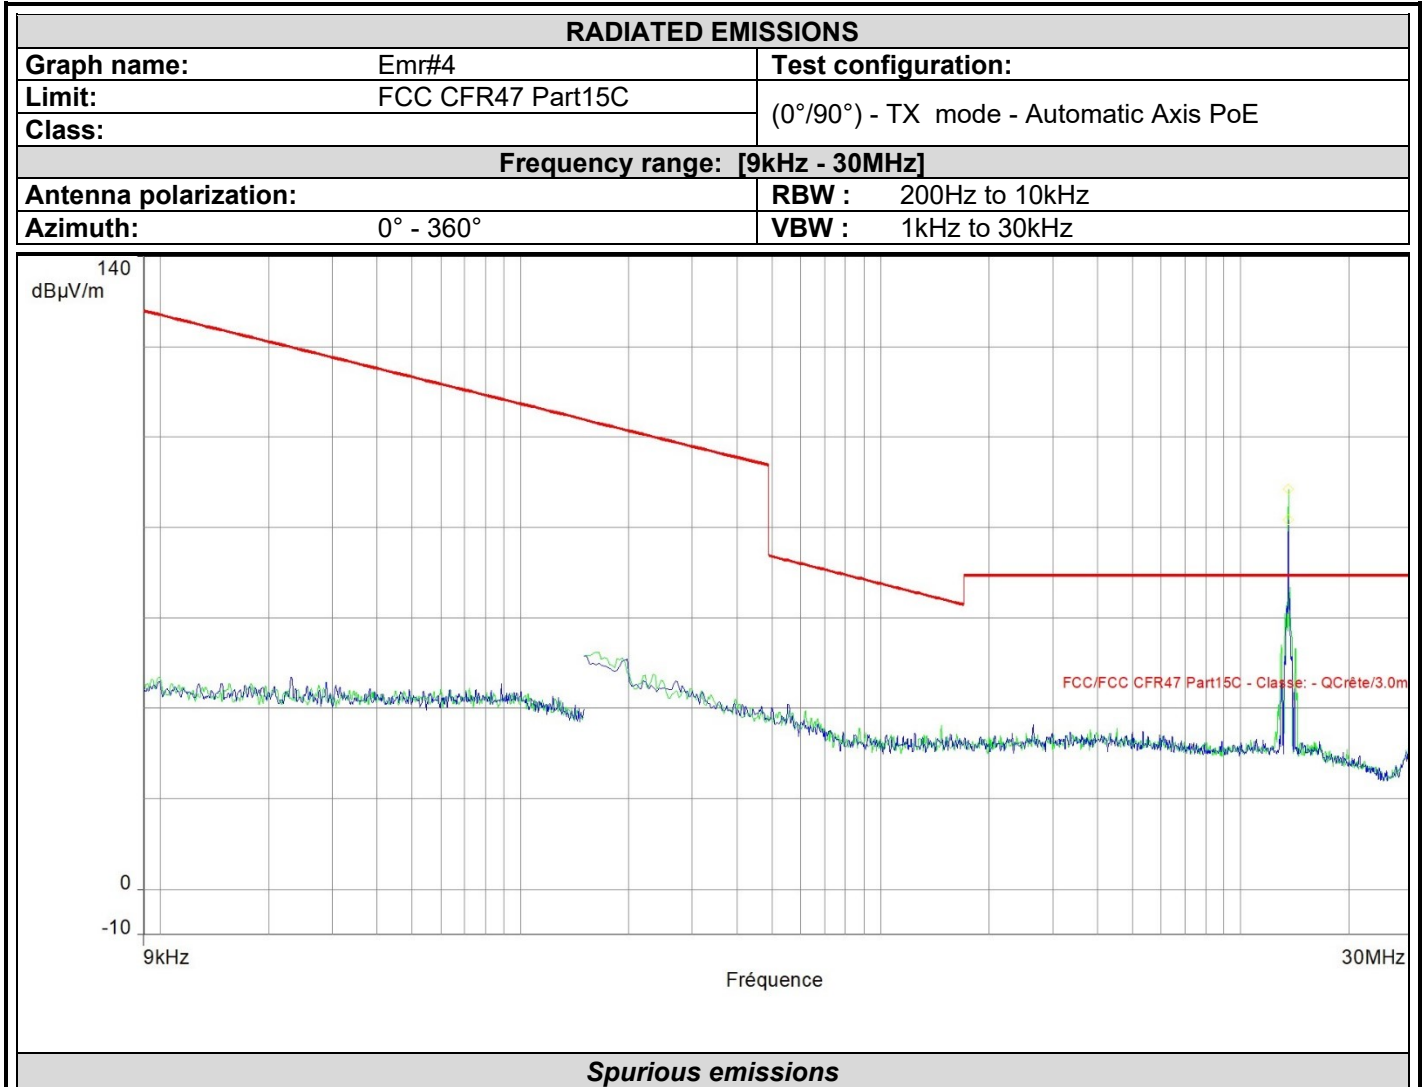


Frequency (MHz)	Peak (dBµV/m)	Lim.Q-Peak (dBµV/m)	Polarization	Correction (dB)
13.562*	81.7	69.5	Horizontal	39.0
13.559*	88.6	69.5	Vertical	39.0

*Carrier frequency
No significant frequency observed



L C I E

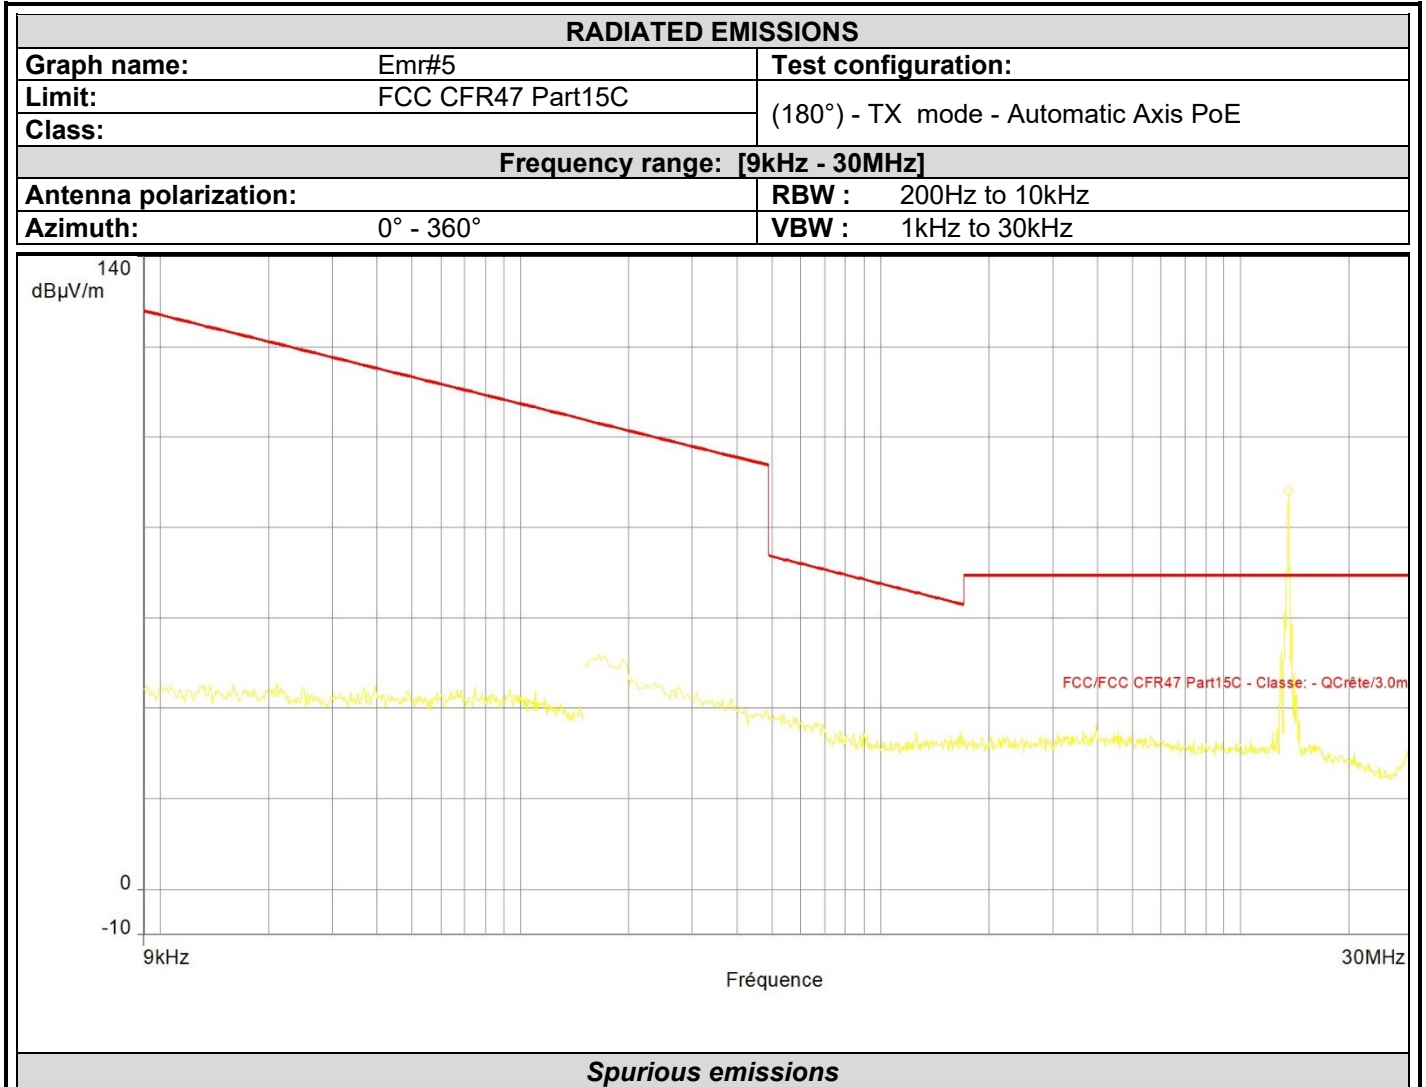


Frequency (MHz)	Peak (dBµV/m)	Lim.Peak (dBµV/m)	Lim.Avg (dBµV/m)	Lim.Q-Peak (dBµV/m)	Polarization	Correction (dB)
13.562*	88.1			69.5	Horizontal	39.0

*Carrier frequency
No significant frequency observed



L C I E

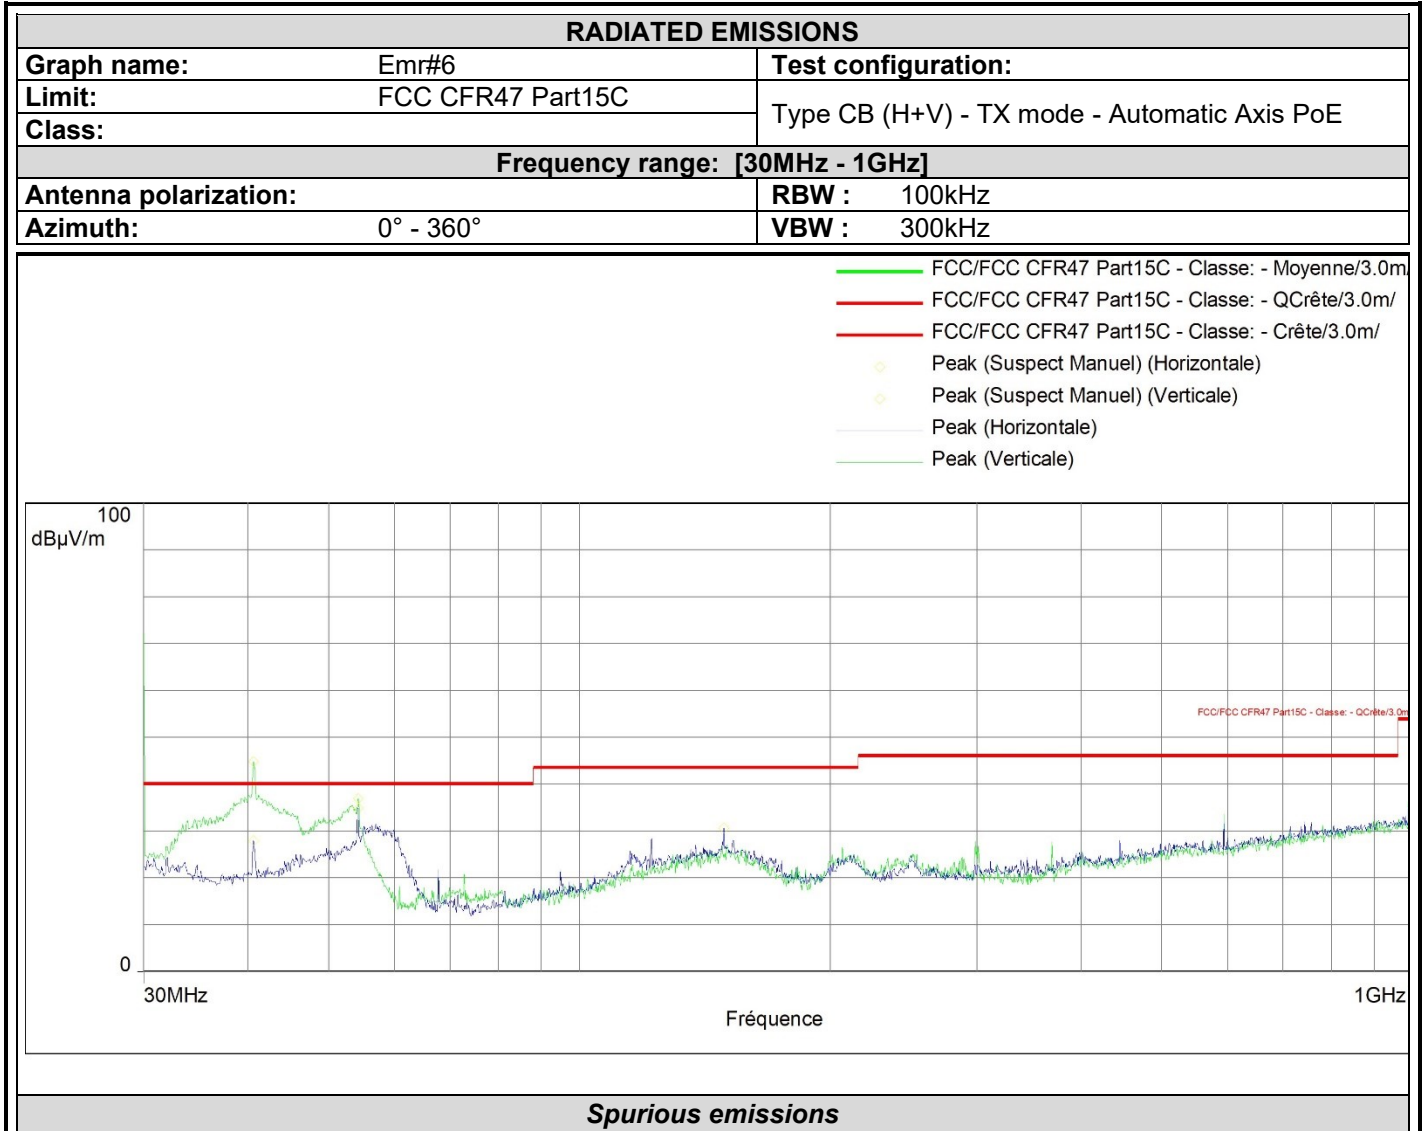

Frequency (MHz)	Peak (dBµV/m)	Lim.Q-Peak (dBµV/m)	Polarization	Correction (dB)
40.670	27.9	40.0	Horizontal	16.2
54.250	34.8	40.0	Horizontal	10.7
149.116	30.6	43.5	Horizontal	23.9
40.670	44.8	40.0	Vertical	16.2
54.250	36.9	40.0	Vertical	10.7

Significant frequency observed



Final measurement:

Test Frequency (MHz)	Meter Reading dB(μ V)	Detector (Pk/QP/Av)	Polarity (V/H)	Azimuth (Degrees)	Transducer Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6800	25.6	QP	V	345	13.9	39.5	40.0	-0.5
54.2400	25.4	QP	V	0	10.9	36.3	40.0	-3.7
67.8000	31.6	QP	V	180	7.4	39.0	40.0	-1.0

7.7. CONCLUSION

Field strength outside of the bands 13.110-14.010 MHz measurement performed on the sample of the product **AXIUM RX9000**, Sn: **2419MR900137**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.225 & RSS-Gen** limits.



8. UNCERTAINTIES CHART

<i>Kind of measurement</i>	<i>Wide uncertainty laboratory</i>
Occupied Channel Bandwidth	±2.8 %
Humidity	±3.2 %
Power Spectral Density, Conducted	±1.7 dB
Radio frequency	±0.3 ppm
RF power, conducted	±1.2 dB
RF power, radiated (Full anechoic chamber above 1GHz)	±3.7 dB
RF power, radiated (Semi anechoic chamber & open test site)	±5.6 dB
Spurious emission, conducted	±2.3 dB
Spurious emission, radiated (Full anechoic chamber above 1GHz)	±3.8 dB
Spurious emission, radiated (Semi anechoic chamber & open test site)	±5.7 dB
Temperature	±0.75 °C
Time	±2.3 %
Voltage	±1.7 %

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.