

Measurement Results

1-8503/19-01-02_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Mihail Dorongovskij
Lab Manager
Radio Communications & EMC

Table of Content

IUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate	4
2. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate	6
3. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate	8
4. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK	10
5. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK	12
6. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK	14
7. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR 8DPSK	16
8. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate	20
9. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate	22
10. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate	24

IUT Summary

IUT DEFINITION & Common settings	
Manufacturer	Ingenico Group
Type	Xtra Module
Serial No. Setup No.	190682203011067808006807 1.0
SW Version HW Version	NI NI
Comment 1 2	
Tlow Tmid Thigh [°C]	0 20 40
Vlow Vmid Vhigh [V] @Imax [A]	5 5 5 @1
Auto Control enabled Power Supply Climatic Box	No No
Antenna Gain [dBi]	0
Additional Path Loss [dB]	0

IUT Common Settings BT Classic	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
Power Control	Enhanced
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	LOOPback
Perform Inquiry	Yes
IUT BT Address	0123456789AB
Signaling BT Address	BABEBEDADBAD
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate

Test References	
TC Start	04.11.2019 13:13:40
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.38 9.79 15				
Start [MHz] Stop [MHz]	2399.500 2404.500				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-2.62	dBm	PASS
Peak Power	---	1000	0.547016	mW	PASS
Frequency at Peak	---	---	2402.155	MHz	Information

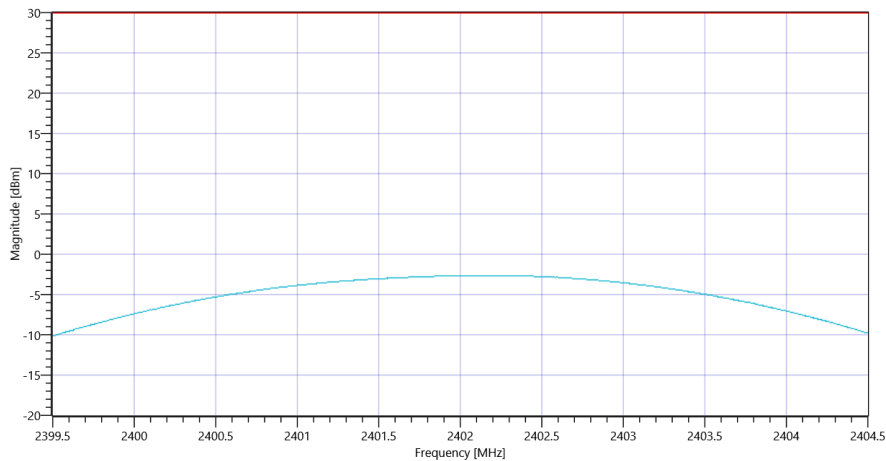

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate_04112019_131413.png

TEST FINISHED

General Verdict

04.11.2019 13:14:13 / RT: 32 s

PASS

2. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate

Test References	
TC Start	04.11.2019 13:14:43
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2441 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.56 9.91 20				
Start [MHz] Stop [MHz]	2438.500 2443.500				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	1.66	dBm	PASS
Peak Power	---	1000	1.465548	mW	PASS
Frequency at Peak	---	---	2440.845	MHz	Information

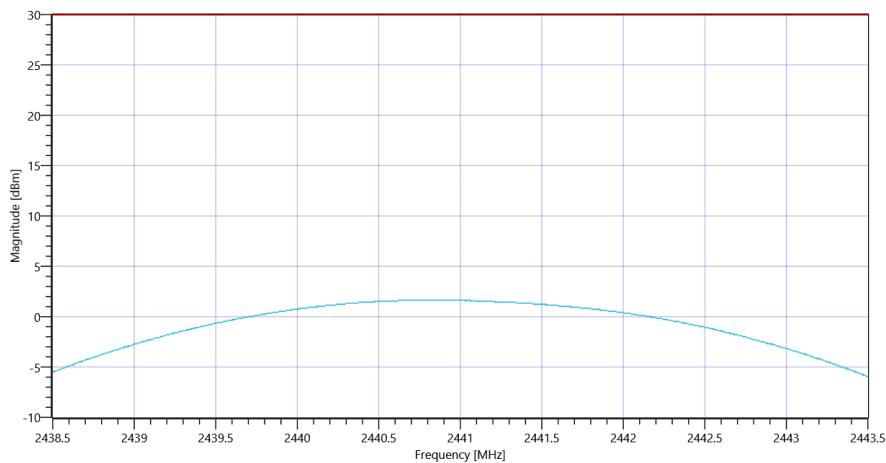

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate_04112019_131515.png

TEST FINISHED

General Verdict

04.11.2019 13:15:15 / RT: 31 s

PASS

3. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate

Test References	
TC Start	04.11.2019 13:16:29
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2480 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.75 9.96 20				
Start [MHz] Stop [MHz]	2477.500 2482.500				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	0.92	dBm	PASS
Peak Power	---	1000	1.235947	mW	PASS
Frequency at Peak	---	---	2479.885	MHz	Information

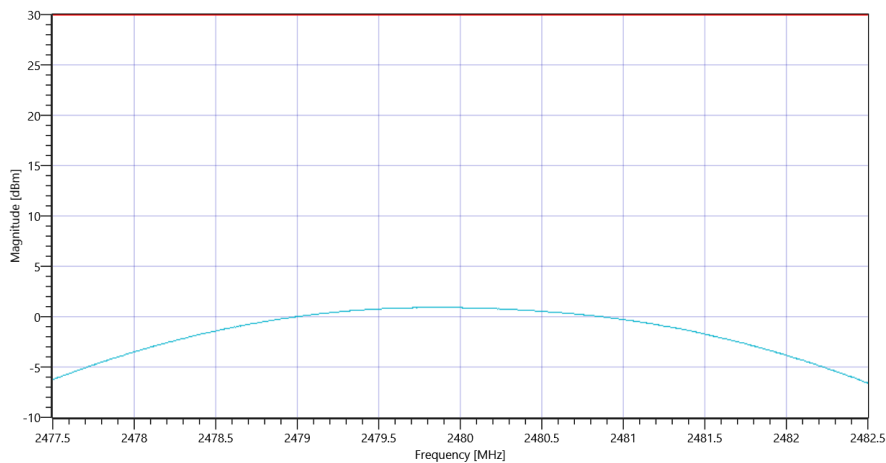

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic Basic rate_04112019_131704.png

TEST FINISHED

General Verdict

04.11.2019 13:17:04 / RT: 34 s

PASS

4. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK

Test References	
TC Start	04.11.2019 13:17:45
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

Test Parameter	
Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.97 9.79 15				
Start [MHz] Stop [MHz]	2398.750 2405.250				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.62	dBm	PASS
Peak Power	---	1000	0.866962	mW	PASS
Frequency at Peak	---	---	2401.857	MHz	Information

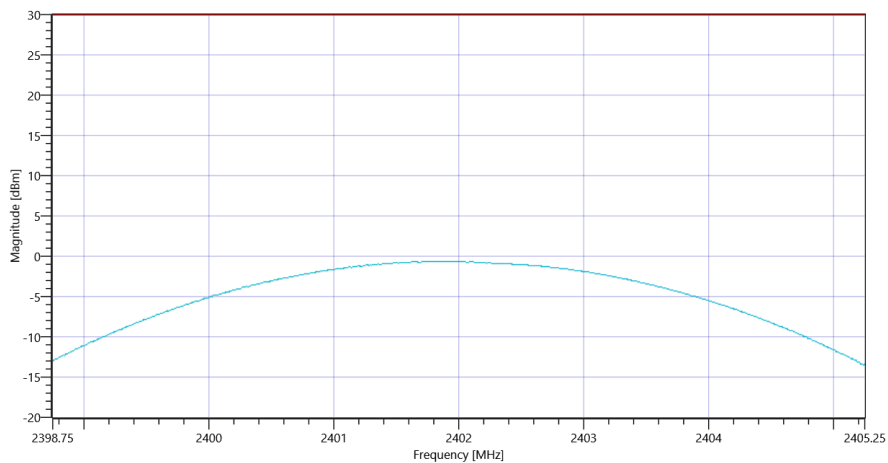

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi-4DQPSK_04112019_131816.png

TEST FINISHED

General Verdict

04.11.2019 13:18:16 / RT: 31 s

PASS

5. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK

Test References	
TC Start	04.11.2019 13:18:42
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

Test Parameter	
Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2441 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.11 9.91 20				
Start [MHz] Stop [MHz]	2437.750 2444.250				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.91	dBm	PASS
Peak Power	---	1000	1.954339	mW	PASS
Frequency at Peak	---	---	2440.877	MHz	Information

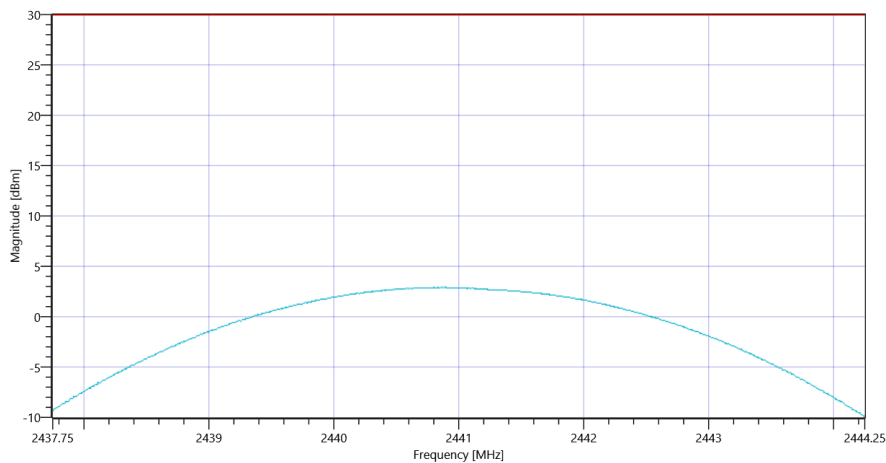

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi-4DQPSK_04112019_131913.png

TEST FINISHED

General Verdict

04.11.2019 13:19:13 / RT: 31 s

PASS

6. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi/4DQPSK

Test References	
TC Start	04.11.2019 13:19:34
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR Pi/4DQPSK
Add. Information	

Test Parameter	
Technology to test	BT Classic EDR Pi/4DQPSK
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2480 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.00 9.96 20				
Start [MHz] Stop [MHz]	2476.750 2483.250				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.03	dBm	PASS
Peak Power	---	1000	1.595879	mW	PASS
Frequency at Peak	---	---	2479.896	MHz	Information

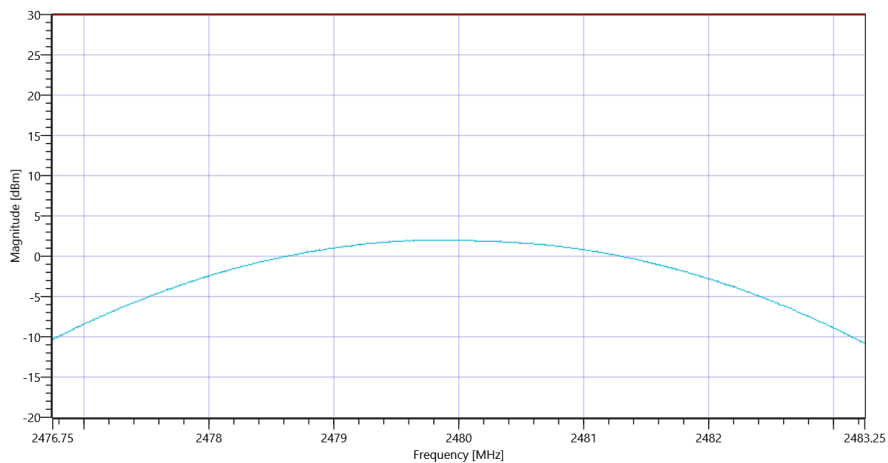

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR Pi-4DQPSK_04112019_132004.png

TEST FINISHED

General Verdict

04.11.2019 13:20:04 / RT: 29 s

PASS

7. FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR 8DPSK

Test References	
TC Start	04.11.2019 13:07:23
System Version	1.0.0.21
Test Specification	FCC Part 15.247
Test Method	
Class / TC Version / TC ID	TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01 Version: 0.0.1 TCID_FCC15247_4
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR 8DPSK
Add. Information	

Test Parameter	
Technology to test	BT Classic EDR 8DPSK
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.10 9.79 15				
Start [MHz] Stop [MHz]	2398.750 2405.250				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.36	dBm	PASS
Peak Power	---	1000	0.92045	mW	PASS
Frequency at Peak	---	---	2402.013	MHz	Information

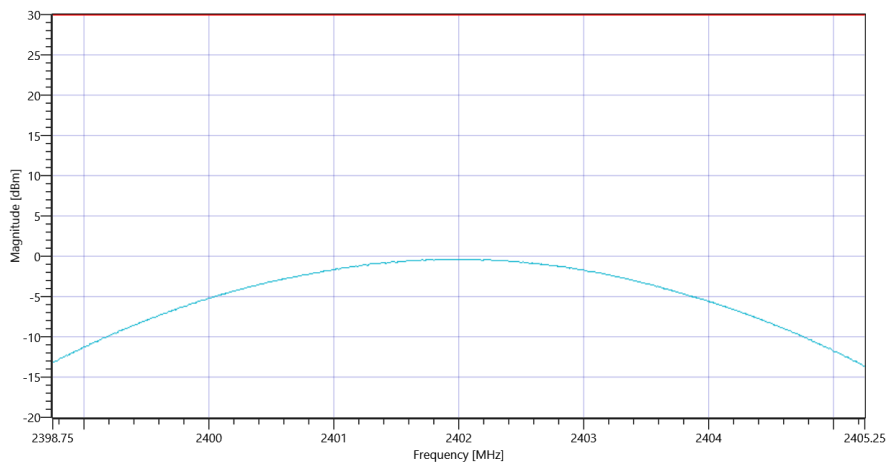


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR 8DPSK_04112019_130804.png

Test at TX 2441 MHz

RESULT: BT Classic Connection check					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.58 9.91 20
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	3.1	dBm	PASS
Peak Power	---	1000	2.041738	mW	PASS
Frequency at Peak	---	---	2440.922	MHz	Information

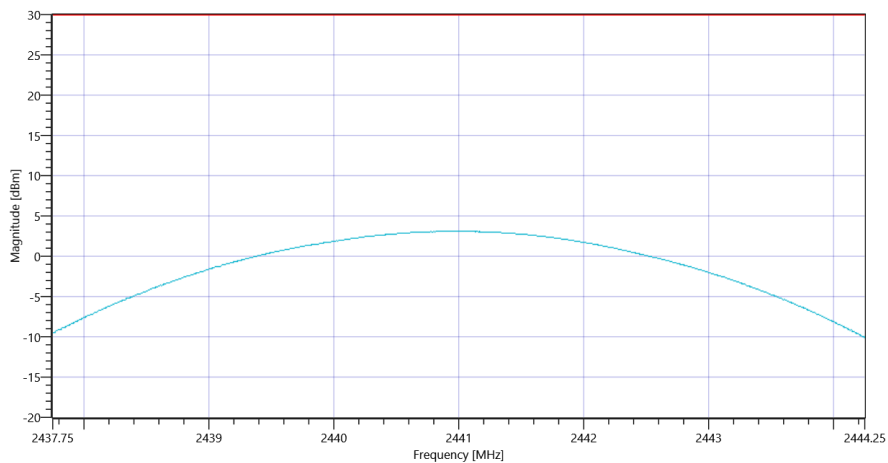

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR 8DPSK_04112019_130828.png

Test at TX 2480 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.79 9.96 20				
Start [MHz] Stop [MHz]	2476.750 2483.250				
RBW [MHz] VBW [MHz]	3.000000 10.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_FCC15247_Maximum_Peak_Conducted_Output_Power_FHSS_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	2.32	dBm	PASS
Peak Power	---	1000	1.706082	mW	PASS
Frequency at Peak	---	---	2479.922	MHz	Information

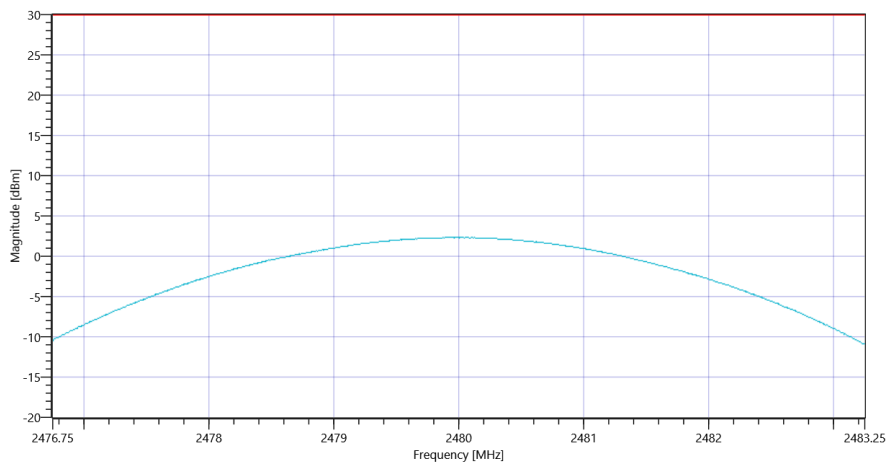

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power FHSS ~ BT Classic EDR 8DPSK_04112019_130852.png

TEST FINISHED

General Verdict

04.11.2019 13:08:52 / RT: 89 s

PASS

8. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate

Test References	
TC Start	28.10.2019 14:23:52
System Version	1.0.0.21
Test Specification	None
Test Method	
Class / TC Version / TC ID	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1 TCID_Common2G4_1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2402 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.96 9.79 15				
Start [MHz] Stop [MHz]	2399.500 2404.500				
RBW [MHz] VBW [MHz]	3.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	-1.99	dBm	Information
Peak Power	---	---	0.632412	mW	Information
Frequency at Peak	---	---	2402.075	MHz	Information

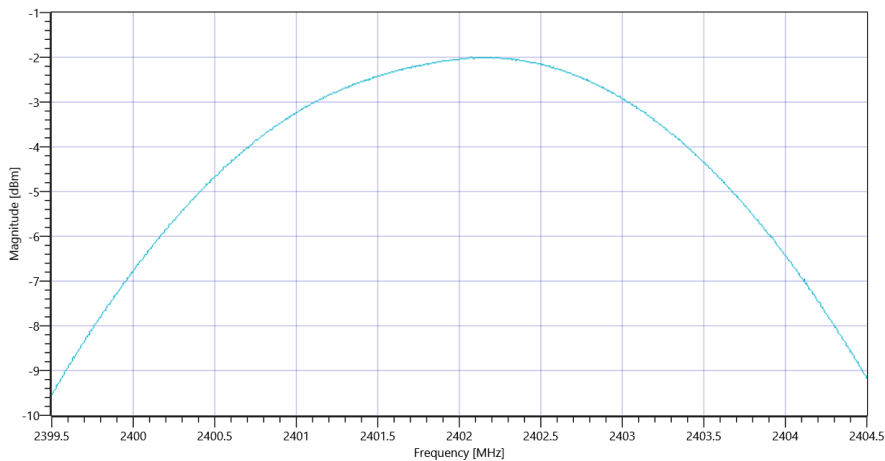

Plot_Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate_28102019_142423.png

TEST FINISHED

General Verdict

28.10.2019 14:24:23 / RT: 30 s

PASS

9. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate

Test References	
TC Start	28.10.2019 14:25:27
System Version	1.0.0.21
Test Specification	None
Test Method	
Class / TC Version / TC ID	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1 TCID_Common2G4_1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	False Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2441 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	--	--	--	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.16 9.91 20				
Start [MHz] Stop [MHz]	2438.500 2443.500				
RBW [MHz] VBW [MHz]	3.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	--	--	2.29	dBm	Information
Peak Power	--	--	1.694338	mW	Information
Frequency at Peak	--	--	2440.81	MHz	Information

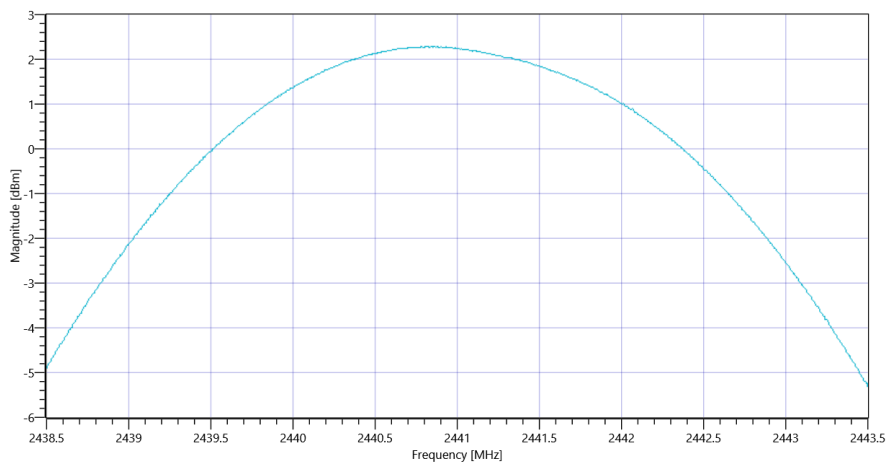

Plot_Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate_28102019_142601.png

TEST FINISHED

General Verdict

28.10.2019 14:26:01 / RT: 34 s

PASS

10. Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate

Test References	
TC Start	28.10.2019 14:26:55
System Version	1.0.0.21
Test Specification	None
Test Method	
Class / TC Version / TC ID	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1 TCID_Common2G4_1
My Description	Peak Output Power conducted 3MHz/3MHz - BT Classic Basic Rate
Add. Information	

Test Parameter	
Technology to test	BT Classic Basic rate
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SigBT: Rohde&Schwarz,CMW,1201.0002k75/100683,3.7.70 SA: Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.60

Test at TX 2480 MHz

RESULT: BT Classic Connection check


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Connection result	---	---	---	--	TCON

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.33 9.96 20				
Start [MHz] Stop [MHz]	2477.500 2482.500				
RBW [MHz] VBW [MHz]	3.000000 3.000000				
Detector TraceMode	POS MAXH				
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE				

RESULT: TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	1.5	dBm	Information
Peak Power	---	---	1.412538	mW	Information
Frequency at Peak	---	---	2479.83	MHz	Information

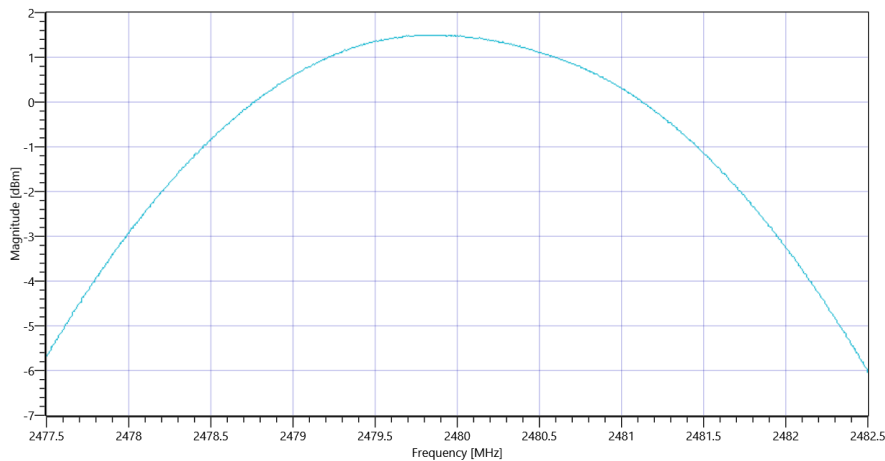

Plot_Common2G4 Peak Output Power conducted 3MHz_3MHz ~ BT Classic Basic rate_28102019_142726.png

TEST FINISHED

General Verdict

28.10.2019 14:27:27 / RT: 31 s

PASS

- END OF DOCUMENT -