

Test at TX 5745 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.50	dBm	INFO
Ref. Frequency	---	---	5752.390	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.942	MHz	INFO
T1 99%	---	---	5736.0889	MHz	INFO
T2 99%	---	---	5754.0310	MHz	INFO

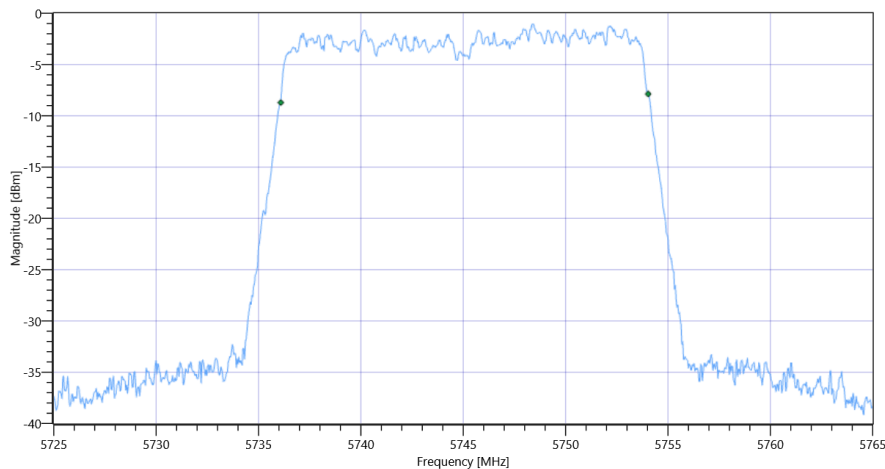

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.50 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.18	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	8.18	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.54	8.18	dBm	not applicable

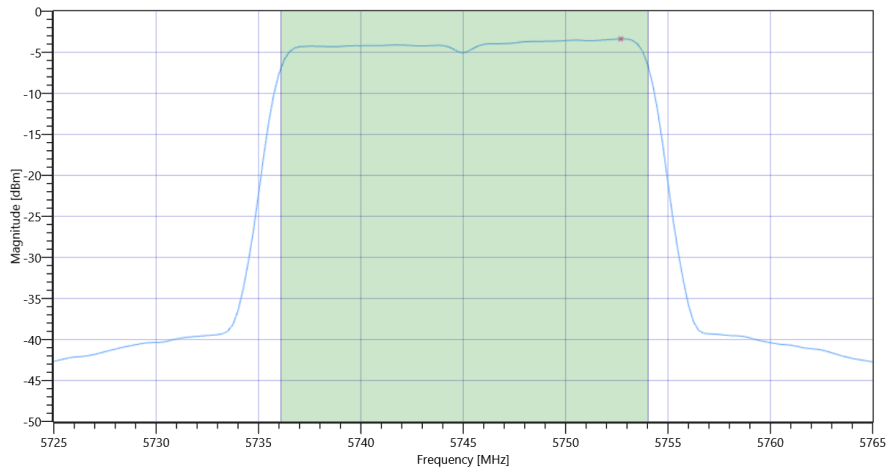

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.50 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.31	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-6.31	dBm/0.5MHz	PASS

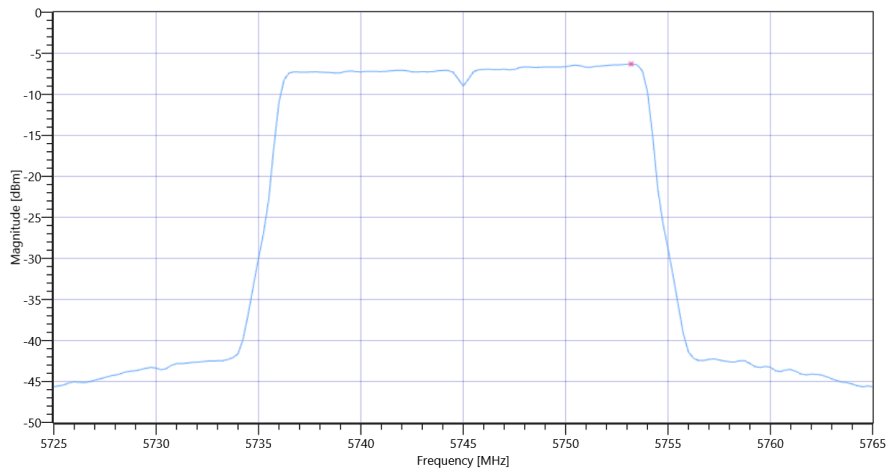

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

Test References	
TC Start	06.07.2022 10:46:53
Ambit Temp [°C] Humidity [rel%]	27.4 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5745 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.44	dBm	INFO
Ref. Frequency	---	---	5752.790	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.6	MHz	INFO
T1 26dB	---	---	5734.7600	MHz	INFO
T2 26dB	---	---	5755.3600	MHz	INFO

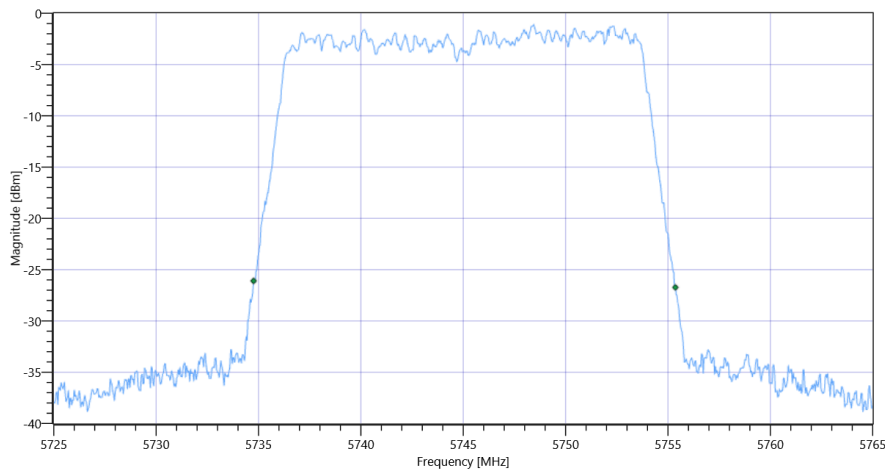

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.44 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.3	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	8.3	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.14	8.3	dBm	not applicable

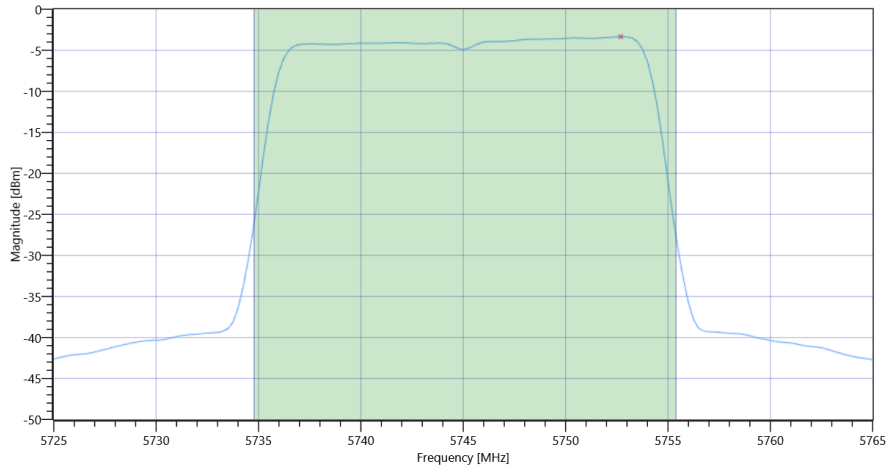

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.44 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-6.3	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-6.3	dBm/0.5MHz	PASS

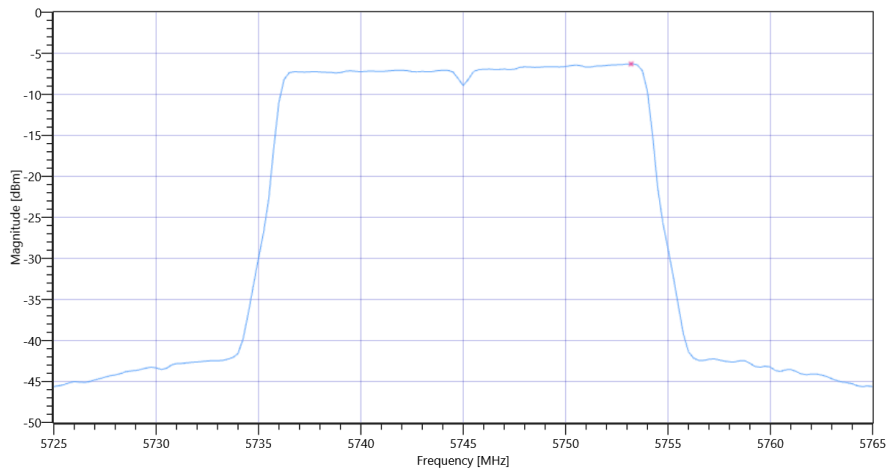

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3 PSD UNII-3

General verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:43:18
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5320 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.48	dBm	INFO
Ref. Frequency	---	---	5323.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.902	MHz	INFO
T1 99%	---	---	5311.0889	MHz	INFO
T2 99%	---	---	5328.9910	MHz	INFO

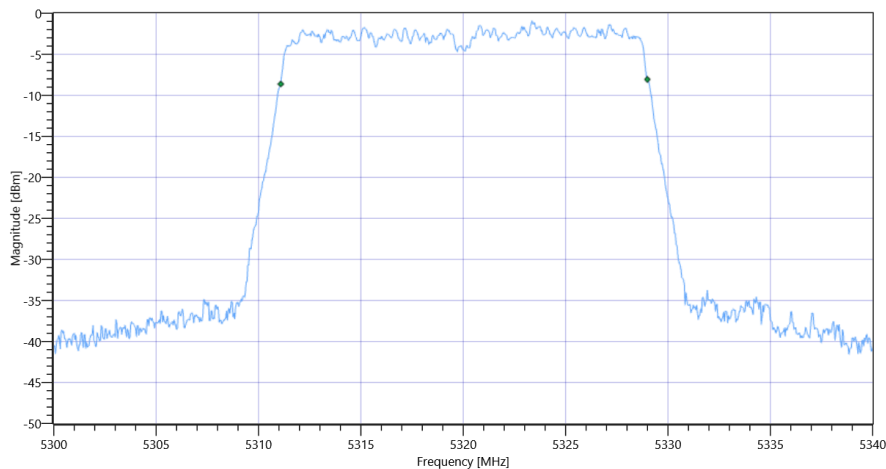

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.48 12.73 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.17	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	8.17	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.53	8.17	dBm	PASS

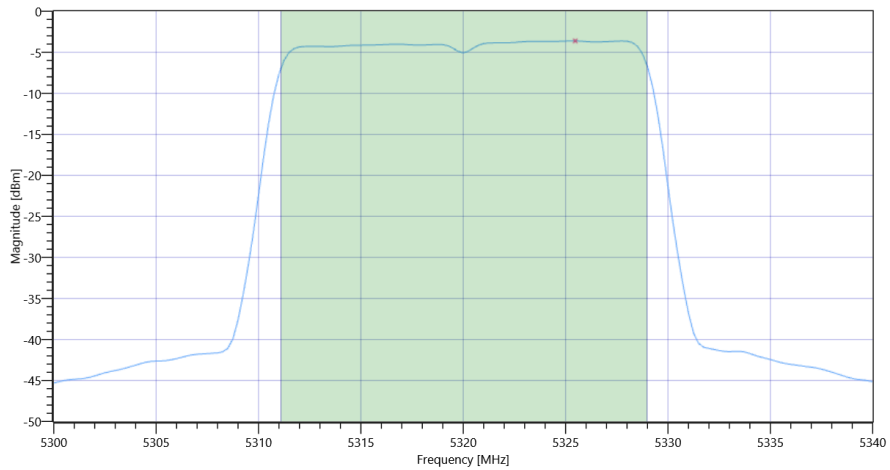

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.61	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-3.61	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:41:44
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5320 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.72	dBm	INFO
Ref. Frequency	---	---	5322.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.56	MHz	INFO
T1 26dB	---	---	5309.8000	MHz	INFO
T2 26dB	---	---	5330.3600	MHz	INFO

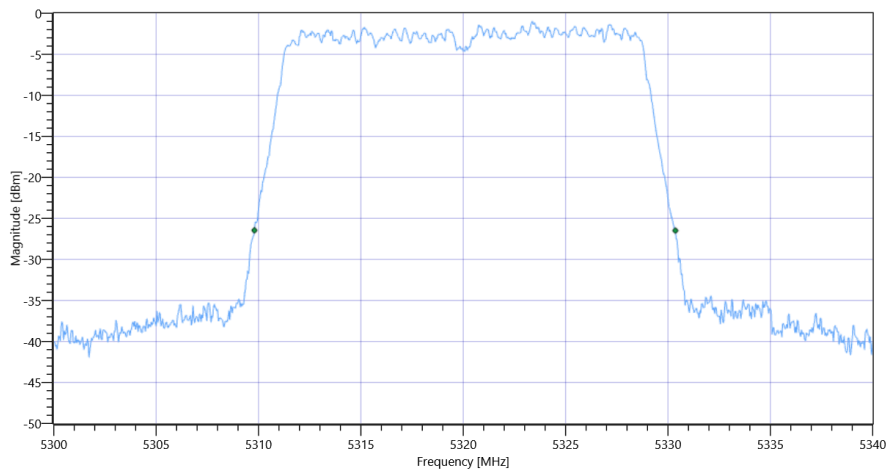

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.72 12.73 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.27	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	8.27	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.13	8.27	dBm	PASS

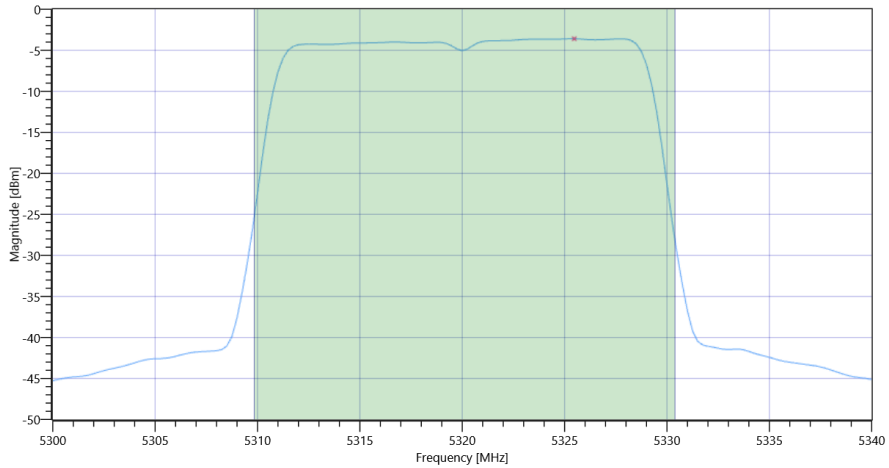

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.59	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-3.59	dBm/1MHz	PASS

General verdict	PASS
-----------------	-------------

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:34:44
Ambit Temp [°C] Humidity [rel%]	27.2 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5280 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.63	dBm	INFO
Ref. Frequency	---	---	5283.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.902	MHz	INFO
T1 99%	---	---	5271.1289	MHz	INFO
T2 99%	---	---	5289.0310	MHz	INFO

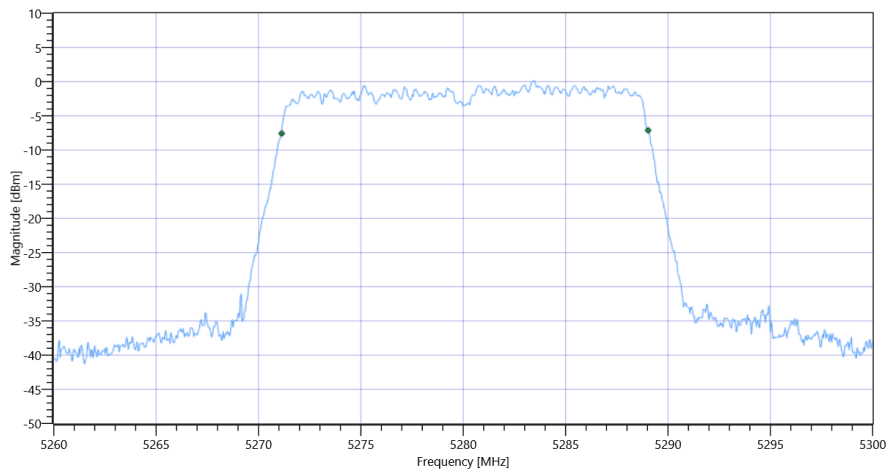

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.63 12.79 20
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.11	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.11	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.53	9.11	dBm	PASS

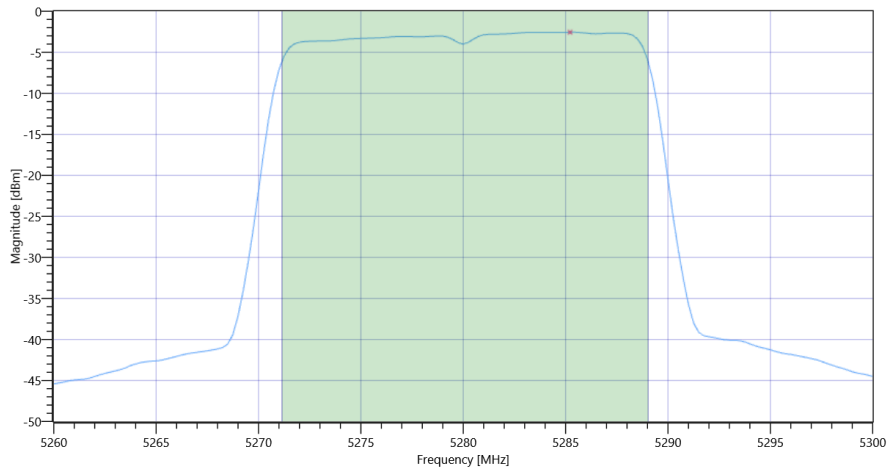

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.56	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.56	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:33:10
Ambit Temp [°C] Humidity [rel%]	27.2 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5280 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.58	dBm	INFO
Ref. Frequency	---	---	5283.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.48	MHz	INFO
T1 26dB	---	---	5269.8400	MHz	INFO
T2 26dB	---	---	5290.3200	MHz	INFO

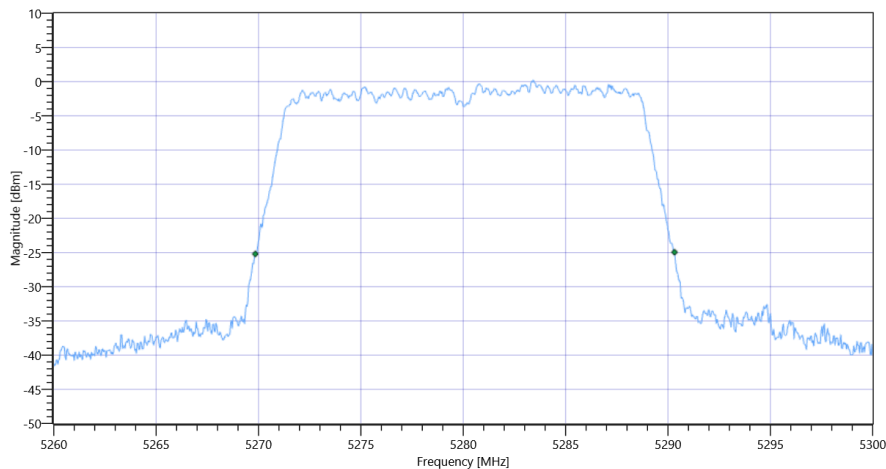

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.58 12.79 20
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.23	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.23	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.11	9.23	dBm	PASS

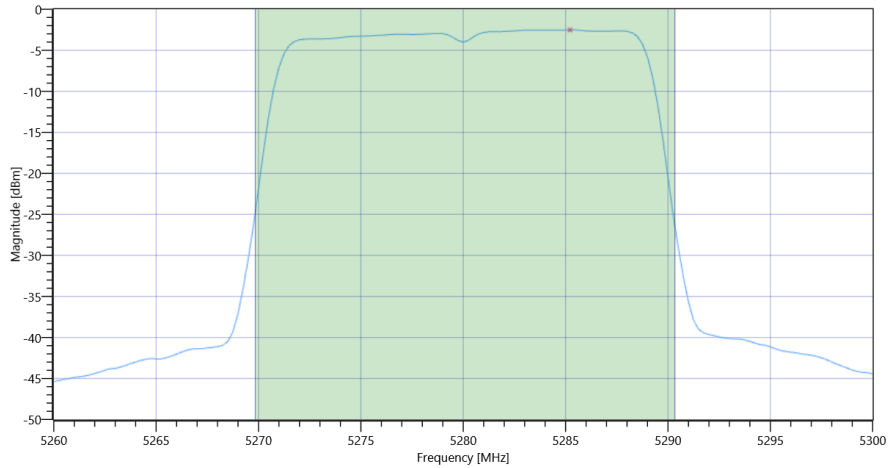

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.52	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.52	dBm/1MHz	PASS

General verdict **PASS**

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:29:37
Ambit Temp [°C] Humidity [rel%]	27.1 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5260 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.15	dBm	INFO
Ref. Frequency	---	---	5256.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.942	MHz	INFO
T1 99%	---	---	5251.0490	MHz	INFO
T2 99%	---	---	5268.9910	MHz	INFO

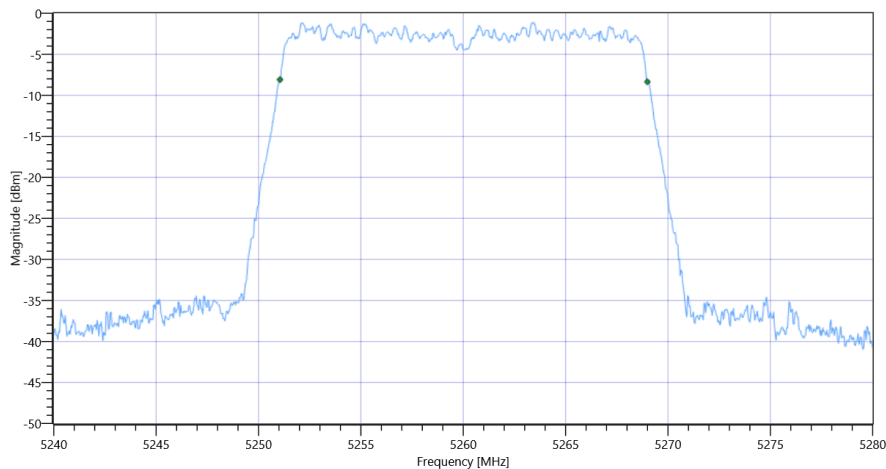

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.15 12.85 20
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.25	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	8.25	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.54	8.25	dBm	PASS

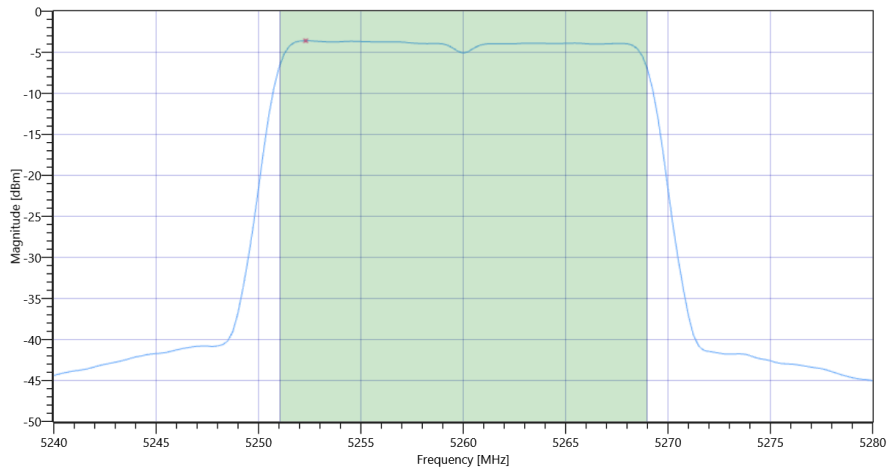

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.59	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-3.59	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A

Test References	
TC Start	06.07.2022 10:28:03
Ambit Temp [°C] Humidity [rel%]	27.2 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5260 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.60	dBm	INFO
Ref. Frequency	---	---	5252.410	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.68	MHz	INFO
T1 26dB	---	---	5249.7200	MHz	INFO
T2 26dB	---	---	5270.4000	MHz	INFO

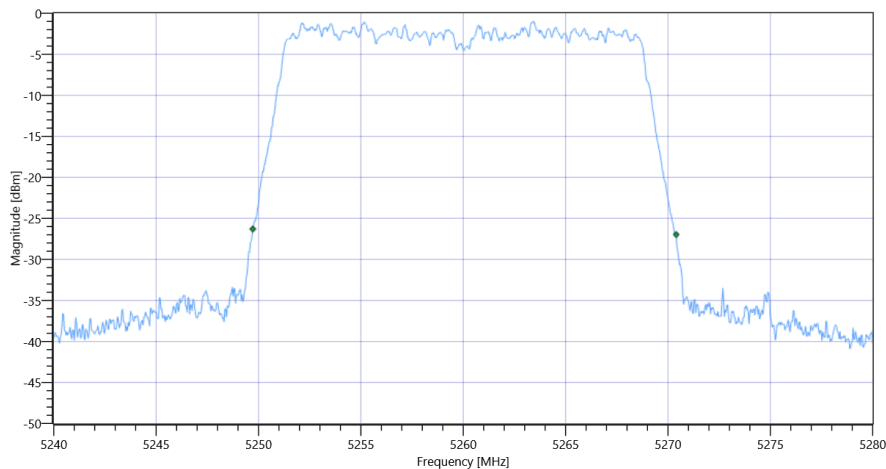

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.60 12.85 20
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	8.38	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	8.38	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.16	8.38	dBm	PASS

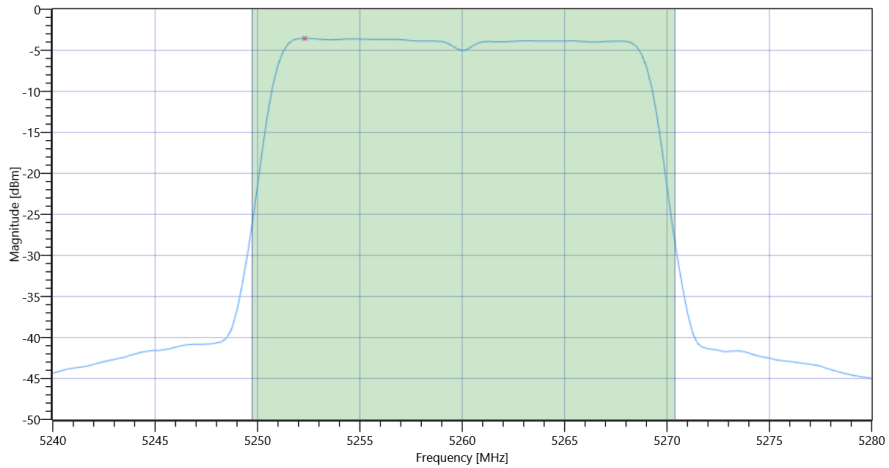

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-3.55	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-3.55	dBm/1MHz	PASS

General verdict **PASS**

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:21:22
Ambit Temp [°C] Humidity [rel%]	27.5 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5240 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.36	dBm	INFO
Ref. Frequency	---	---	5236.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.862	MHz	INFO
T1 99%	---	---	5231.0889	MHz	INFO
T2 99%	---	---	5248.9510	MHz	INFO

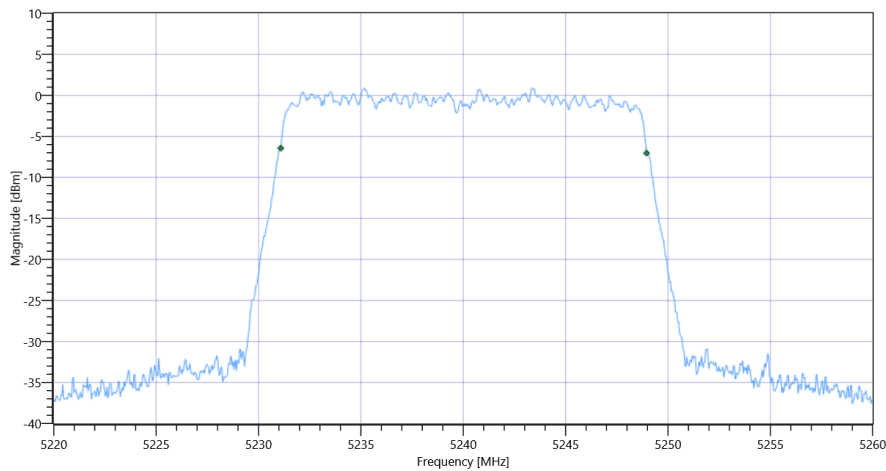

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.36 12.78 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.08	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	10.08	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.52	10.08	dBm	not applicable

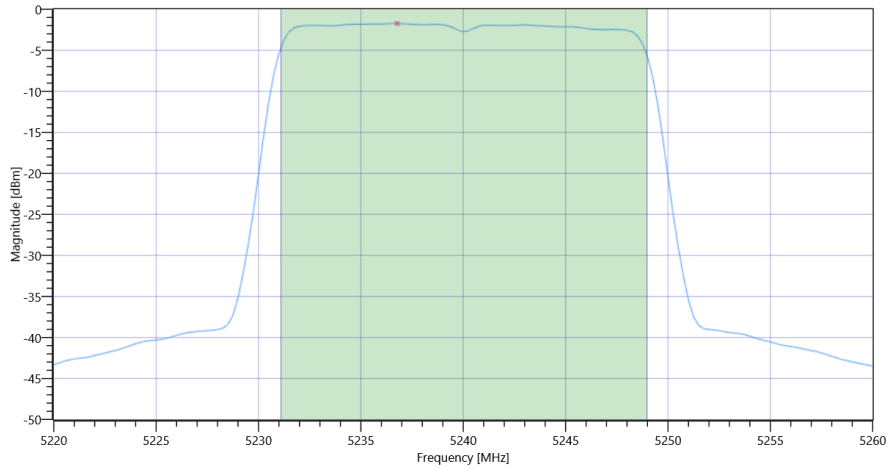

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.74	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-1.74	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:19:48
Ambit Temp [°C] Humidity [rel%]	27.4 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5240 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.48	dBm	INFO
Ref. Frequency	---	---	5237.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.52	MHz	INFO
T1 26dB	---	---	5229.7200	MHz	INFO
T2 26dB	---	---	5250.2400	MHz	INFO

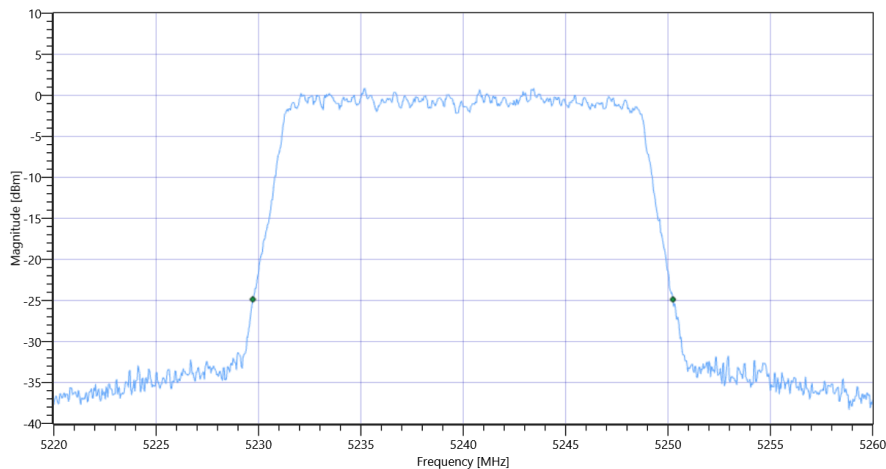

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.48 12.78 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.88	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.88	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.12	9.88	dBm	not applicable

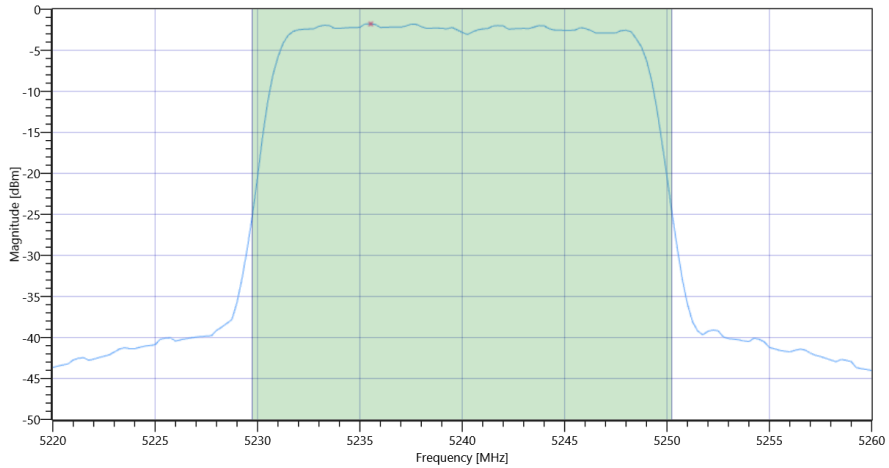

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.78	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-1.78	dBm/1MHz	PASS

General verdict	PASS
-----------------	-------------

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:16:02
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5200 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.98	dBm	INFO
Ref. Frequency	---	---	5202.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.902	MHz	INFO
T1 99%	---	---	5191.0889	MHz	INFO
T2 99%	---	---	5208.9910	MHz	INFO

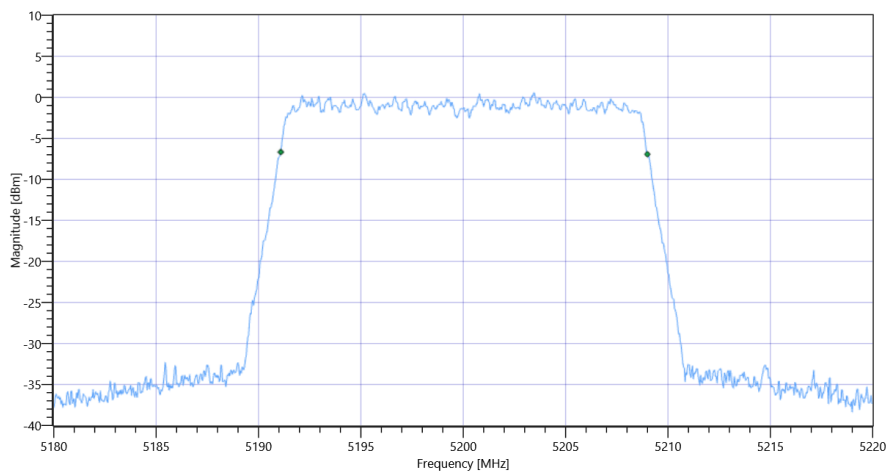

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.98 12.59 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.58	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.58	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.53	9.58	dBm	not applicable

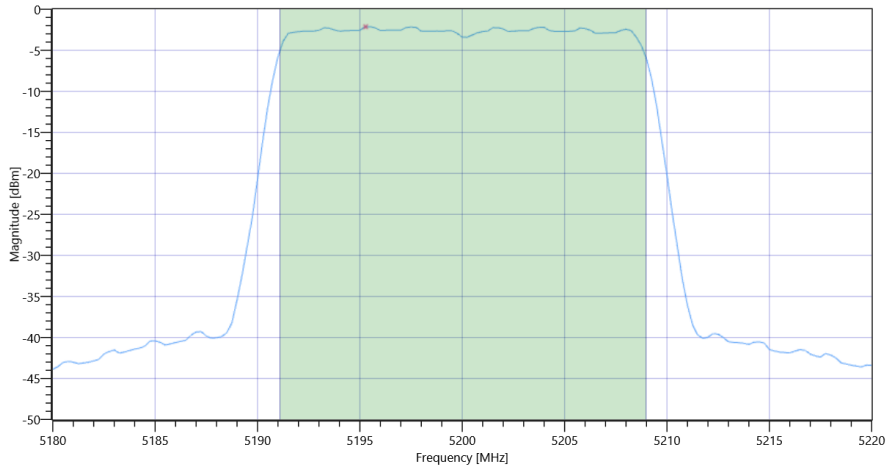

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.13	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.13	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:14:27
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5200 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.54	dBm	INFO
Ref. Frequency	---	---	5195.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.52	MHz	INFO
T1 26dB	---	---	5189.7600	MHz	INFO
T2 26dB	---	---	5210.2800	MHz	INFO

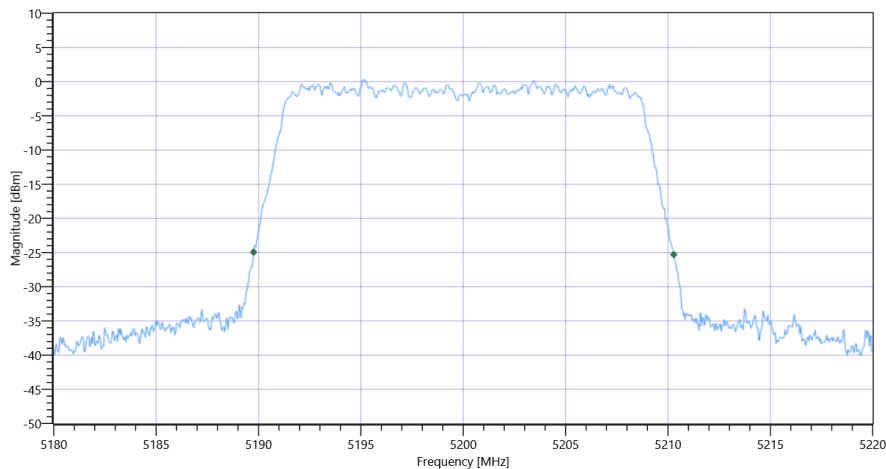

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.54 12.59 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.56	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.56	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.12	9.56	dBm	not applicable

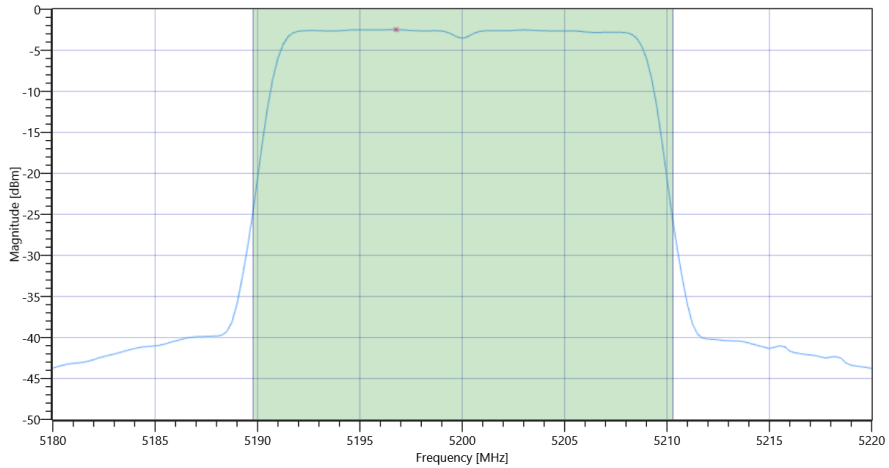

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.49	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.49	dBm/1MHz	PASS

General verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:07:16
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5180 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.00	dBm	INFO
Ref. Frequency	---	---	5184.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.902	MHz	INFO
T1 99%	---	---	5171.1289	MHz	INFO
T2 99%	---	---	5189.0310	MHz	INFO

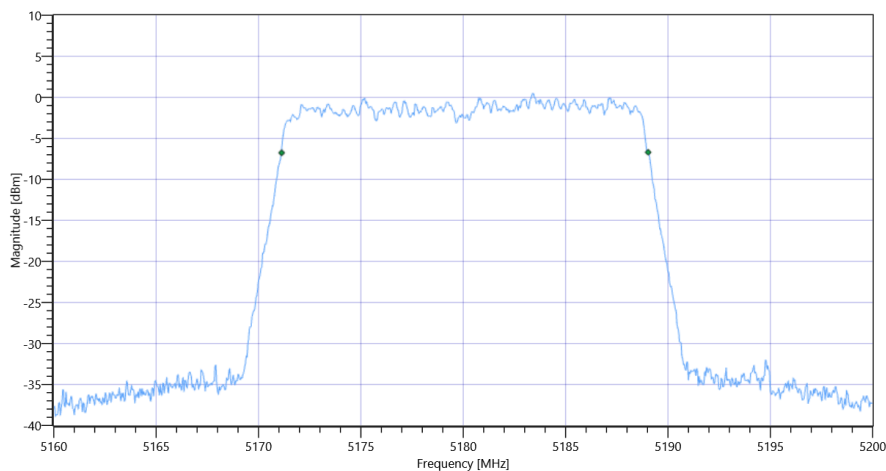

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.00 12.57 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.5	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.5	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.53	9.5	dBm	not applicable

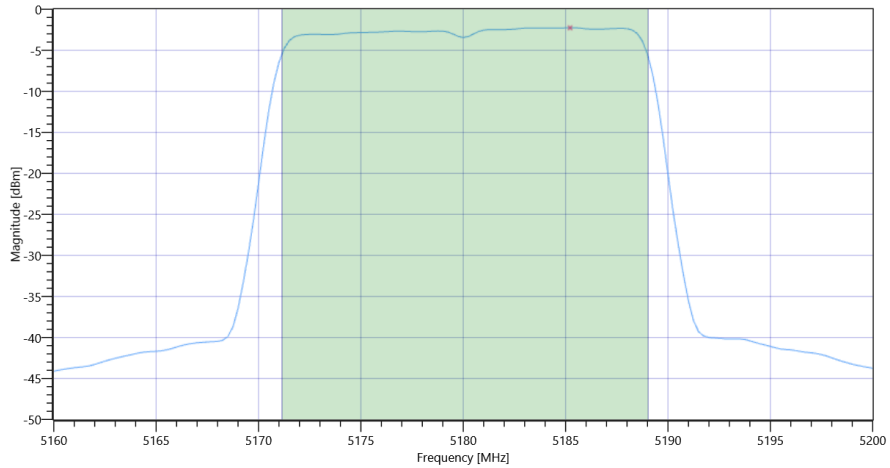

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.26	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.26	dBm/1MHz	PASS

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

Test References	
TC Start	06.07.2022 10:05:38
Ambit Temp [°C] Humidity [rel%]	27.3 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5180 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.74	dBm	INFO
Ref. Frequency	---	---	5183.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.48	MHz	INFO
T1 26dB	---	---	5169.8400	MHz	INFO
T2 26dB	---	---	5190.3200	MHz	INFO

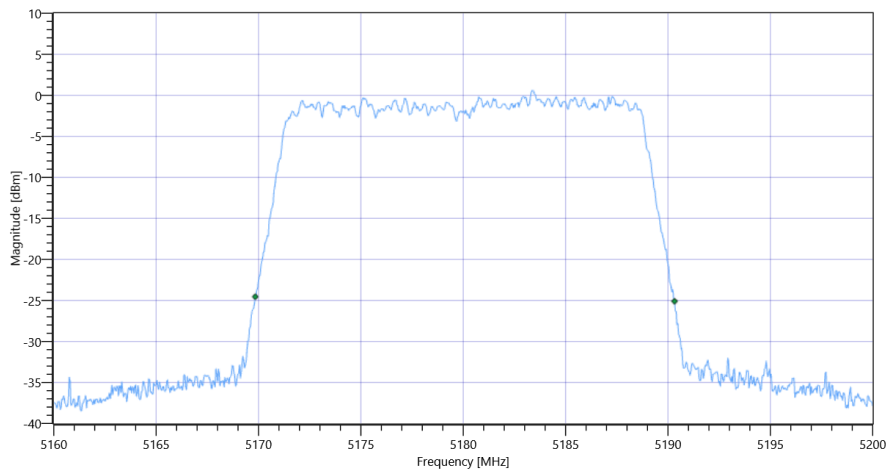

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.74 12.57 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.32	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.32	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.11	9.32	dBm	not applicable

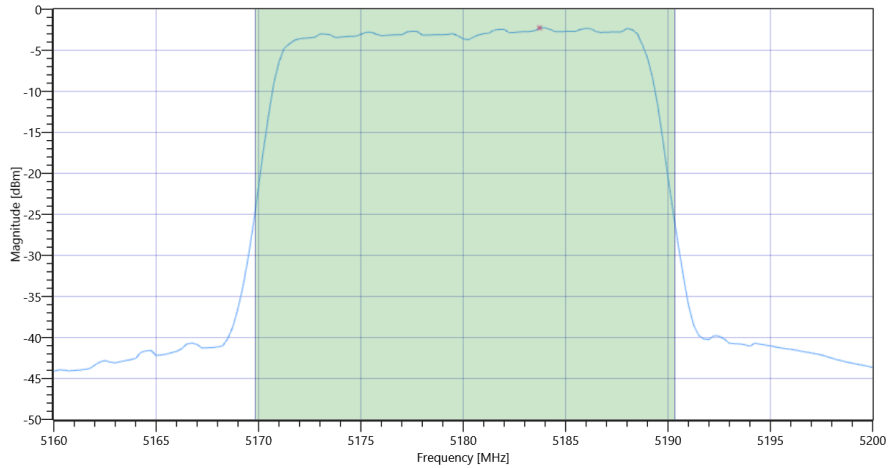

FCC 15.247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.27	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.27	dBm/1MHz	PASS

General verdict	PASS
-----------------	-------------

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:59:39
Ambit Temp [°C] Humidity [rel%]	27.2 30
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5825 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.08	dBm	INFO
Ref. Frequency	---	---	5821.800	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.823	MHz	INFO
T1 99%	---	---	5816.5684	MHz	INFO
T2 99%	---	---	5833.3916	MHz	INFO

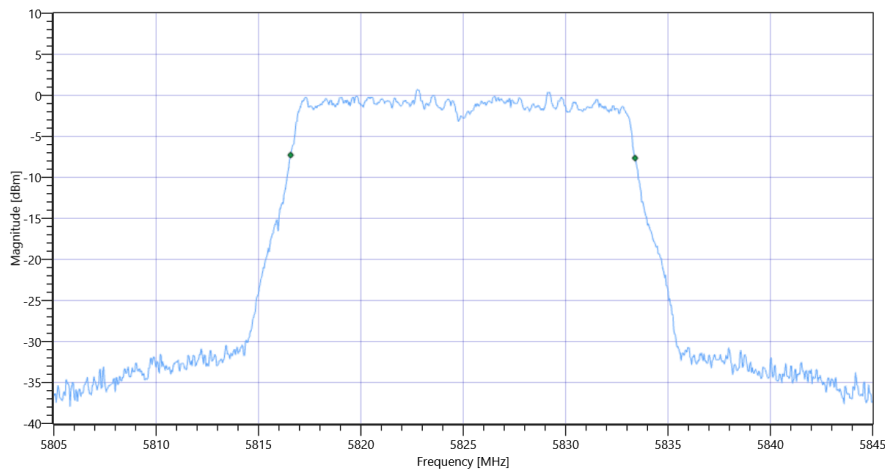

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.08 12.77 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.55	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	9.55	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.26	9.55	dBm	not applicable

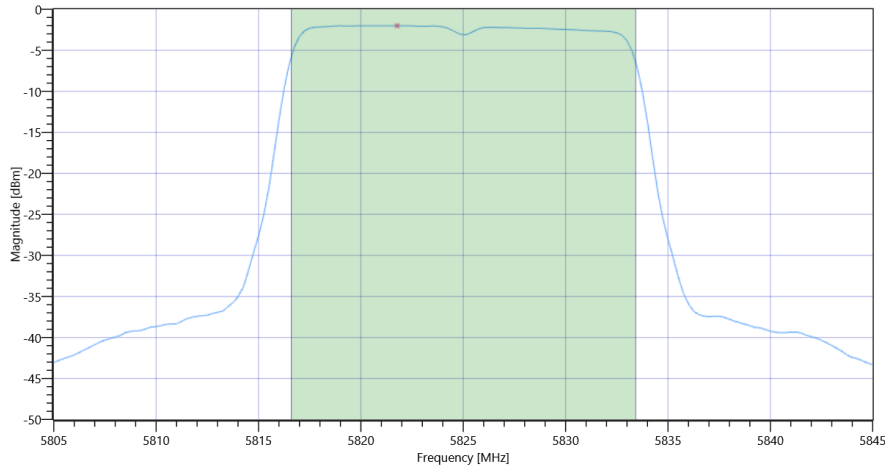

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.08 12.77 25
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-5.16	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-5.16	dBm/0.5MHz	PASS

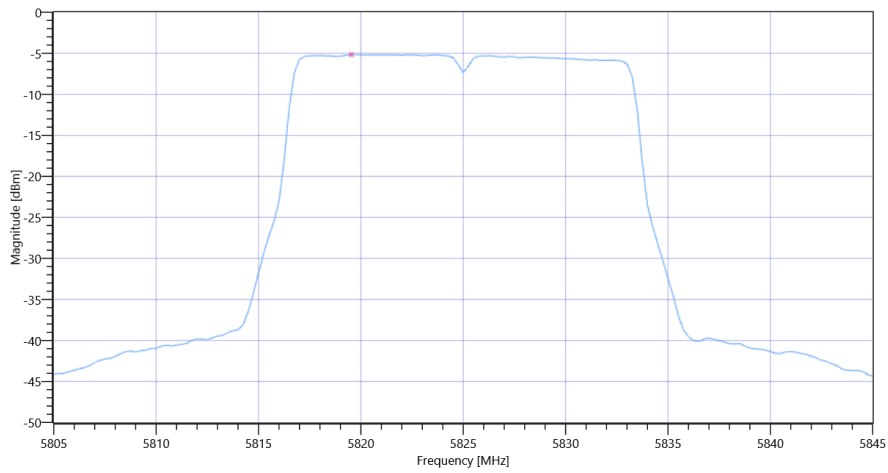

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:57:04
Ambit Temp [°C] Humidity [rel%]	27.2 30
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5825 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.85	dBm	INFO
Ref. Frequency	---	---	5819.010	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.08	MHz	INFO
T1 26dB	---	---	5815.0000	MHz	INFO
T2 26dB	---	---	5835.0800	MHz	INFO

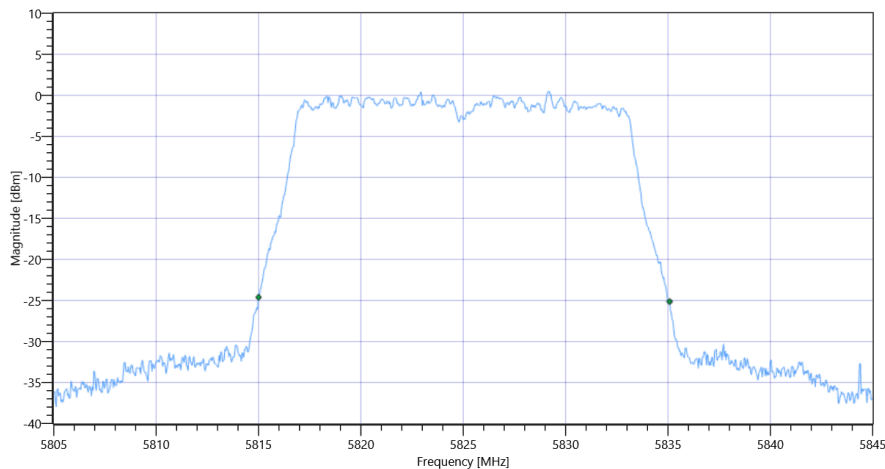

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.85 12.77 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.63	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	9.63	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.03	9.63	dBm	not applicable

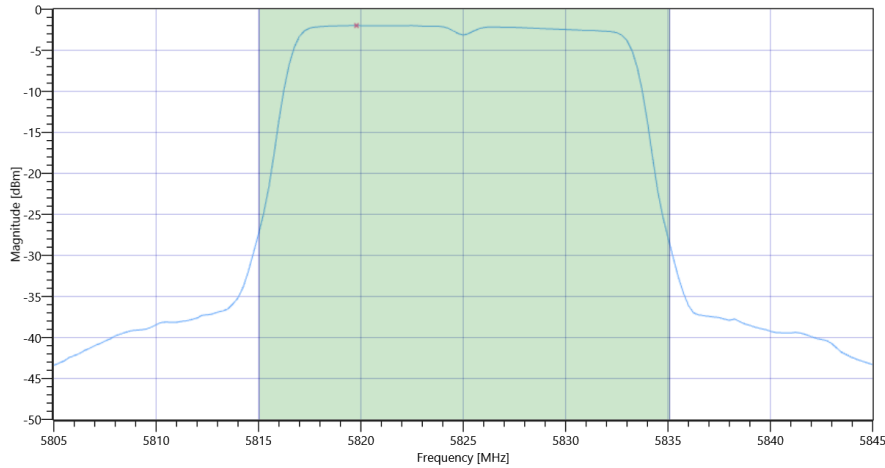

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.85 12.77 25
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-5.16	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-5.16	dBm/0.5MHz	PASS

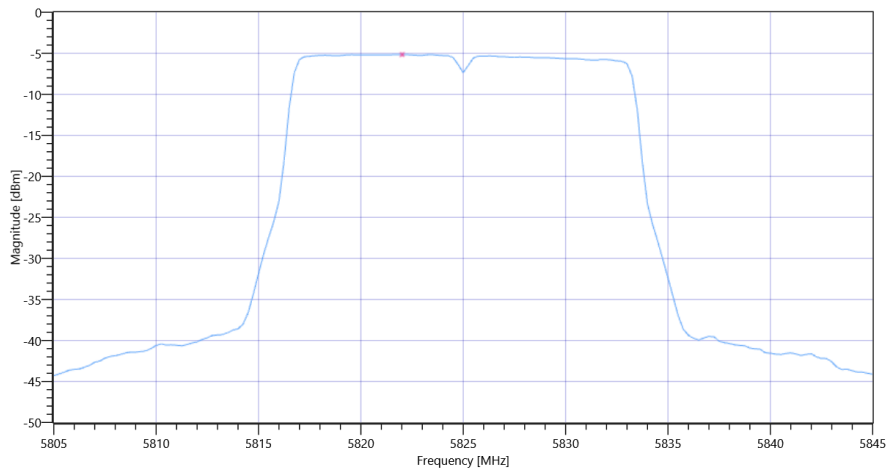

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:51:51
Ambit Temp [°C] Humidity [rel%]	27.1 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5785 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.25	dBm	INFO
Ref. Frequency	---	---	5783.400	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.903	MHz	INFO
T1 99%	---	---	5776.4885	MHz	INFO
T2 99%	---	---	5793.3916	MHz	INFO

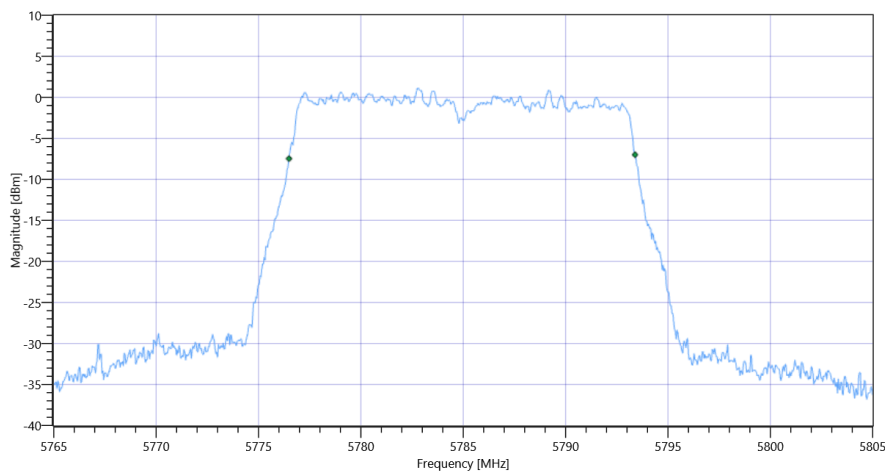

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.25 12.97 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.06	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	10.06	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.28	10.06	dBm	not applicable

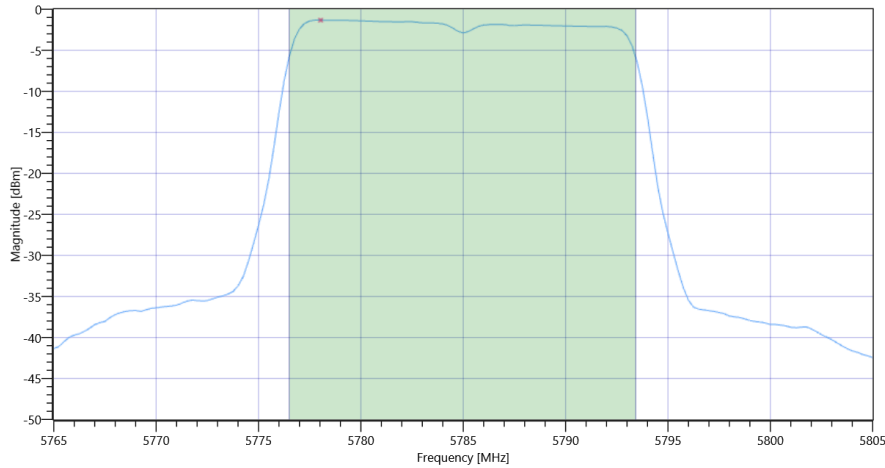

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.25 12.97 25
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-4.42	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-4.42	dBm/0.5MHz	PASS

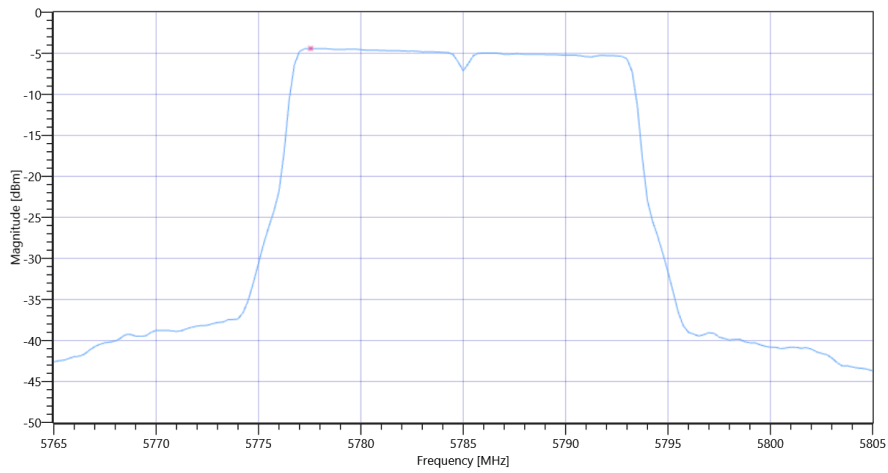

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:49:16
Ambit Temp [°C] Humidity [rel%]	27.1 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5785 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.78	dBm	INFO
Ref. Frequency	---	---	5779.410	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.24	MHz	INFO
T1 26dB	---	---	5774.8400	MHz	INFO
T2 26dB	---	---	5795.0800	MHz	INFO

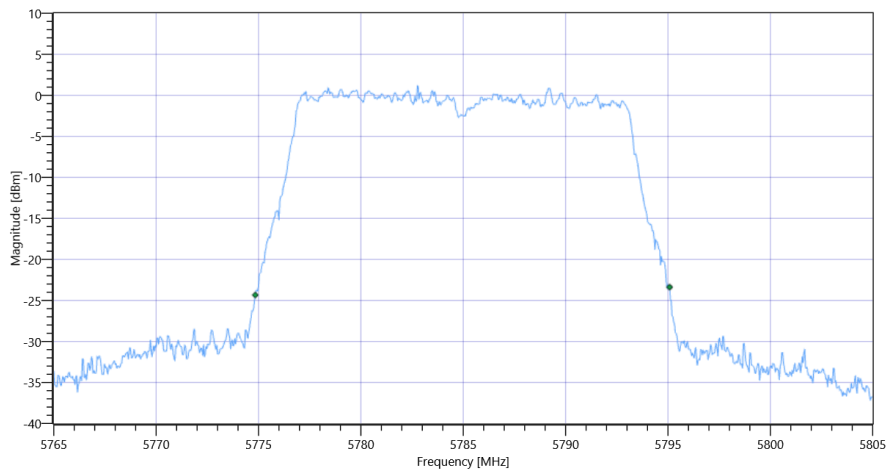

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.78 12.97 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.18	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	10.18	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.06	10.18	dBm	not applicable

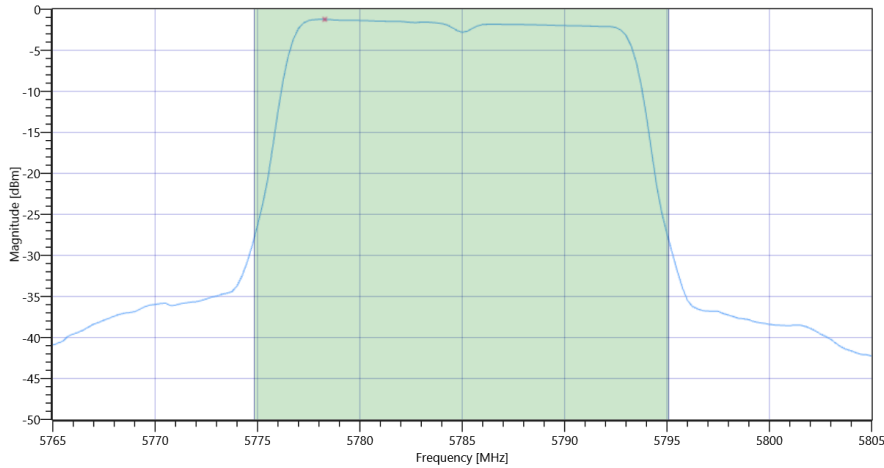

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.78 12.97 25
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-4.35	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-4.35	dBm/0.5MHz	PASS

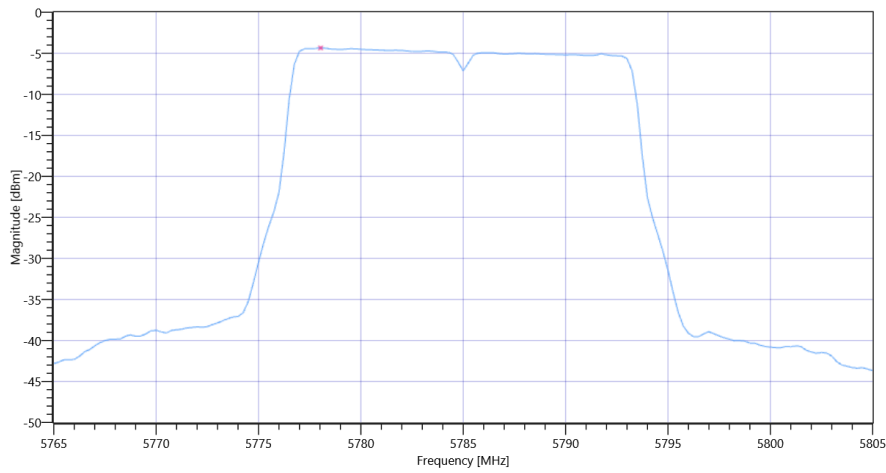

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:40:19
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5745 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.69	dBm	INFO
Ref. Frequency	---	---	5752.390	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17.463	MHz	INFO
T1 99%	---	---	5736.3287	MHz	INFO
T2 99%	---	---	5753.7912	MHz	INFO

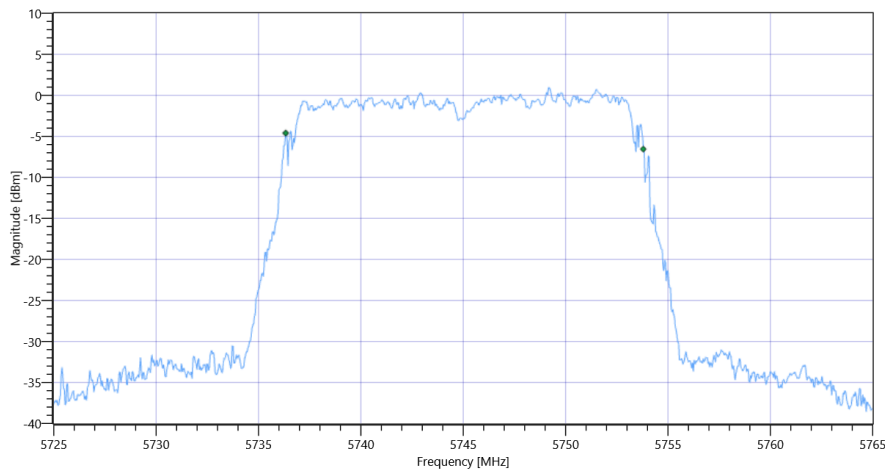

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.69 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.54	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	9.54	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.42	9.54	dBm	not applicable

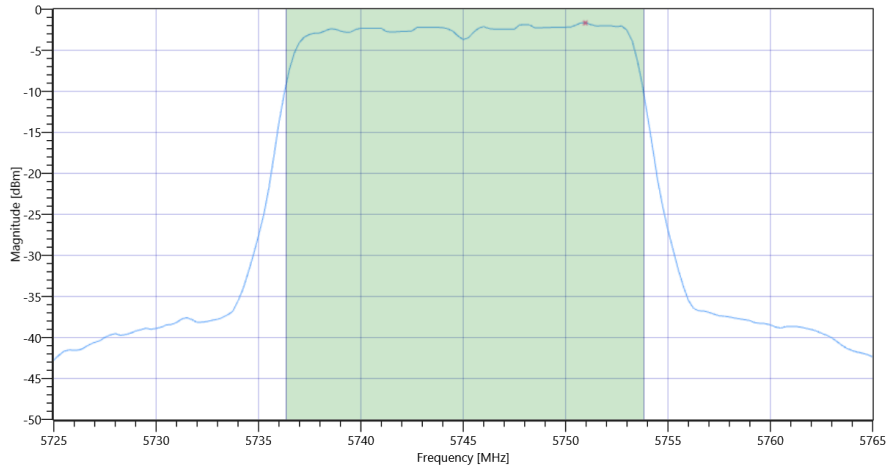

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.69 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-4.59	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-4.59	dBm/0.5MHz	PASS

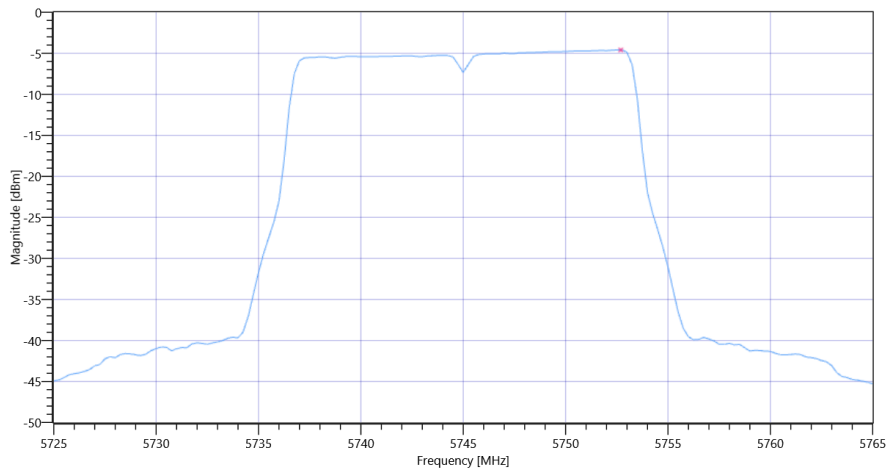

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

Test References	
TC Start	06.07.2022 09:37:44
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5745 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.00	dBm	INFO
Ref. Frequency	---	---	5752.390	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.24	MHz	INFO
T1 26dB	---	---	5734.9200	MHz	INFO
T2 26dB	---	---	5755.1600	MHz	INFO

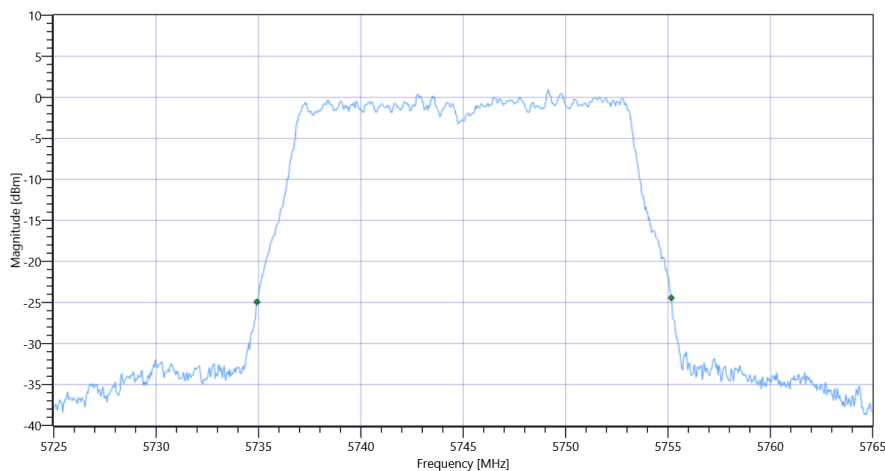

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.00 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.53	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	30	9.53	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.06	9.53	dBm	not applicable

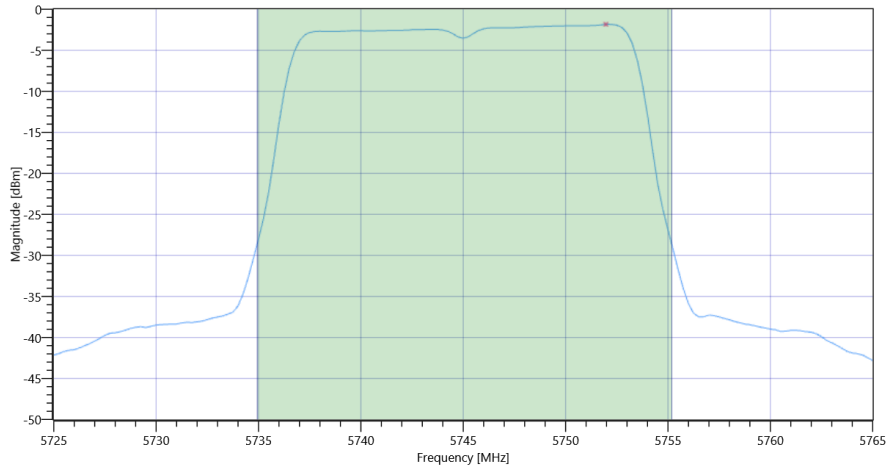

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 Max OP and PSD


Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.00 13.1 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-4.95	dBm/0.5MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	30	-4.95	dBm/0.5MHz	PASS

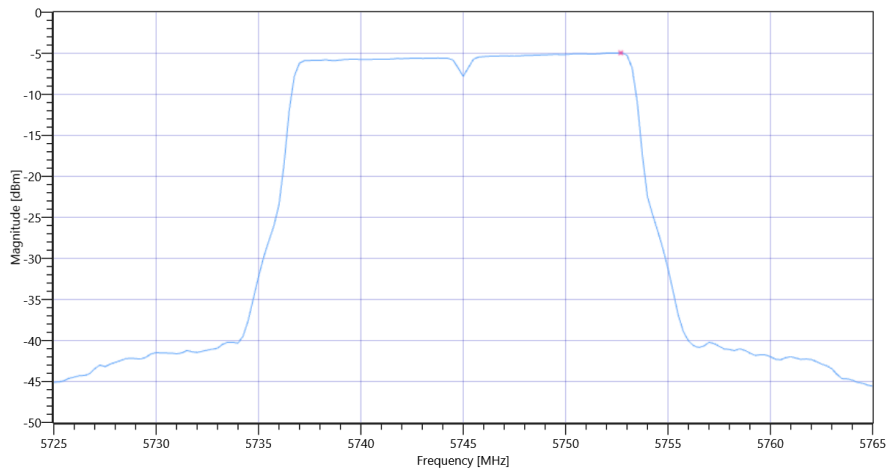

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3 PSD UNII-3

General verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:30:05
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5320 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.53	dBm	INFO
Ref. Frequency	---	---	5324.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.823	MHz	INFO
T1 99%	---	---	5311.6084	MHz	INFO
T2 99%	---	---	5328.4316	MHz	INFO

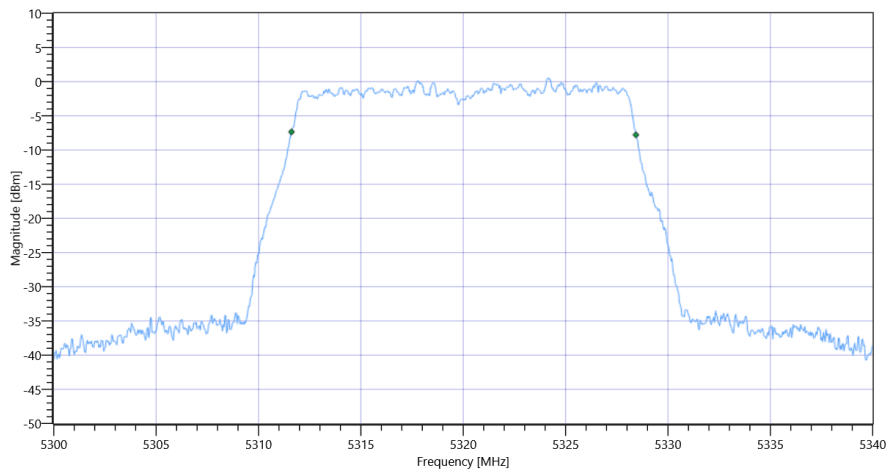

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.53 12.73 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.13	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.13	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.26	9.13	dBm	PASS

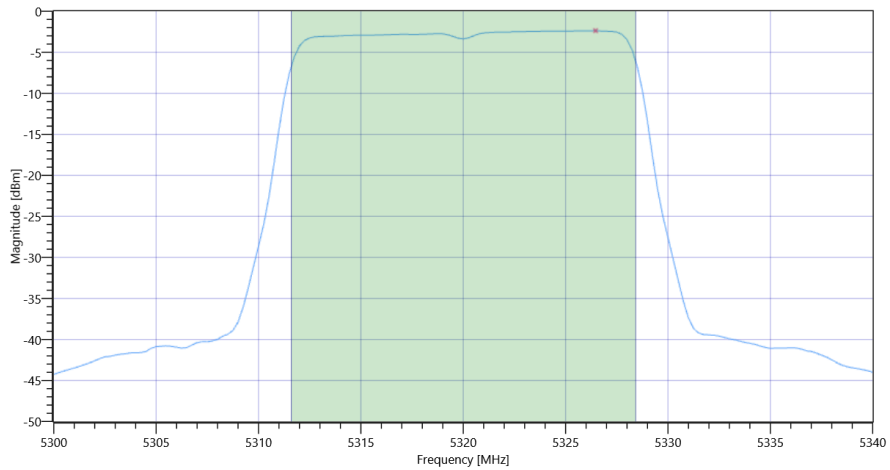

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.37	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.37	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:28:32
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	True Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5320 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.57	dBm	INFO
Ref. Frequency	---	---	5323.400	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.12	MHz	INFO
T1 26dB	---	---	5309.9200	MHz	INFO
T2 26dB	---	---	5330.0400	MHz	INFO

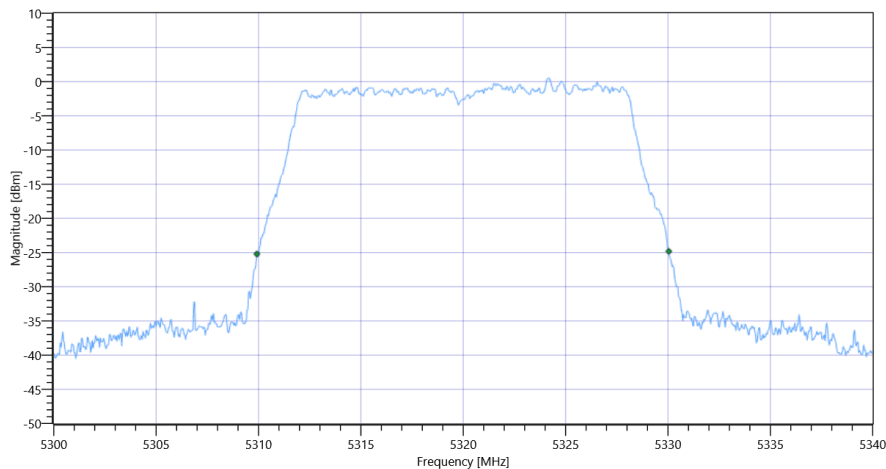

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.57 12.73 20
Start [MHz] Stop [MHz]	5300.000 5340.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.23	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.23	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.04	9.23	dBm	PASS

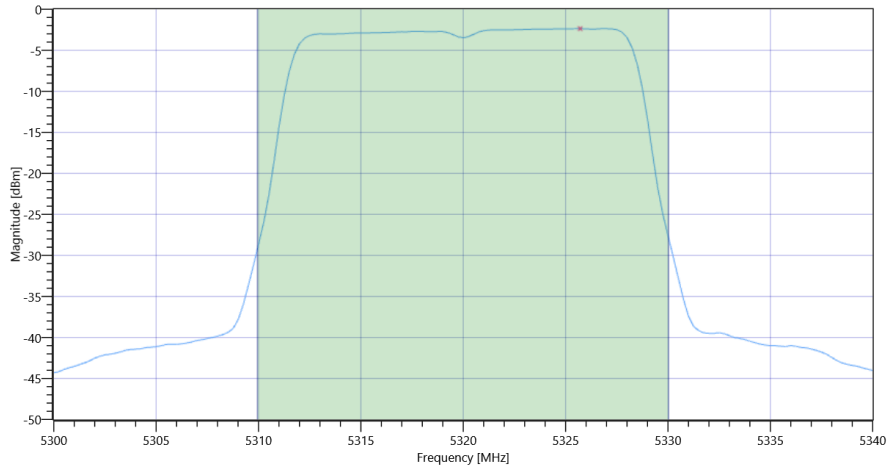

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-2.36	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-2.36	dBm/1MHz	PASS

General verdict	PASS
-----------------	-------------

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:24:56
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5280 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.09	dBm	INFO
Ref. Frequency	---	---	5282.600	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5271.6484	MHz	INFO
T2 99%	---	---	5288.4316	MHz	INFO

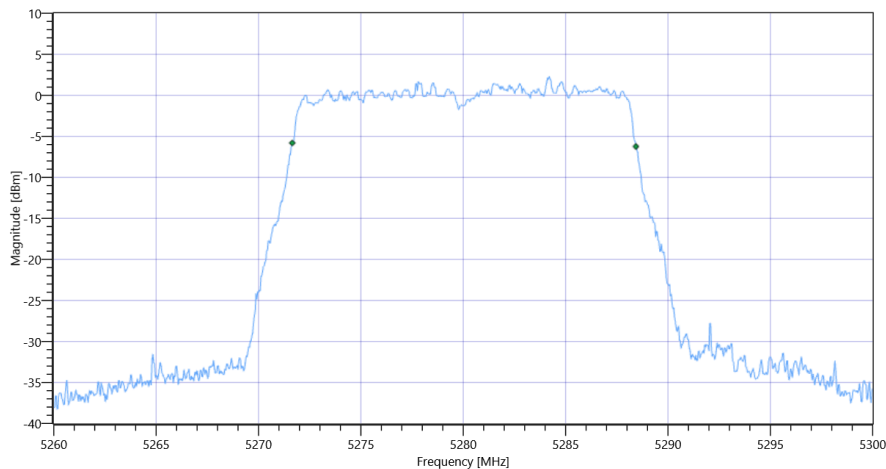

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.09 12.79 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.74	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	10.74	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.25	10.74	dBm	PASS

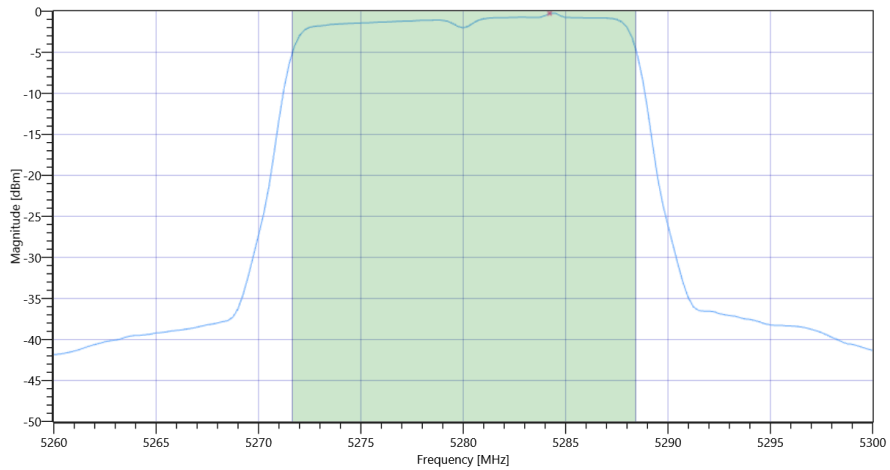

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.25	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.25	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:23:23
Ambit Temp [°C] Humidity [rel%]	27.0 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5260
Frequency mid to test	True Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5280 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.84	dBm	INFO
Ref. Frequency	---	---	5285.790	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.12	MHz	INFO
T1 26dB	---	---	5270.0000	MHz	INFO
T2 26dB	---	---	5290.1200	MHz	INFO

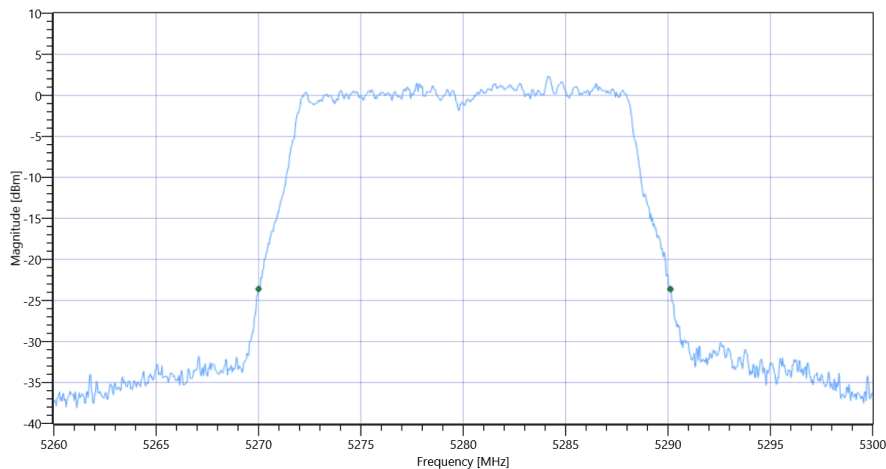

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.84 12.79 25
Start [MHz] Stop [MHz]	5260.000 5300.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.81	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	10.81	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.04	10.81	dBm	PASS

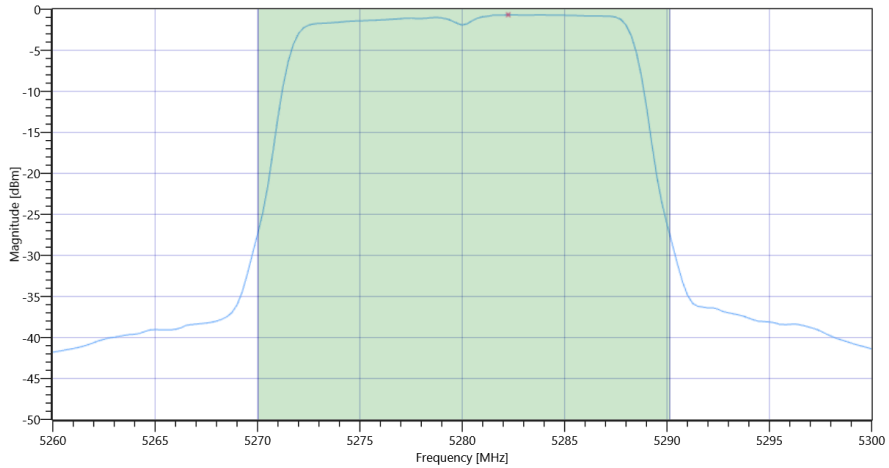

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.67	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.67	dBm/1MHz	PASS

General verdict	PASS
-----------------	-------------

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:15:15
Ambit Temp [°C] Humidity [rel%]	26.8 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5260 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	5.76	dBm	INFO
Ref. Frequency	---	---	5265.390	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.863	MHz	INFO
T1 99%	---	---	5251.5684	MHz	INFO
T2 99%	---	---	5268.4316	MHz	INFO

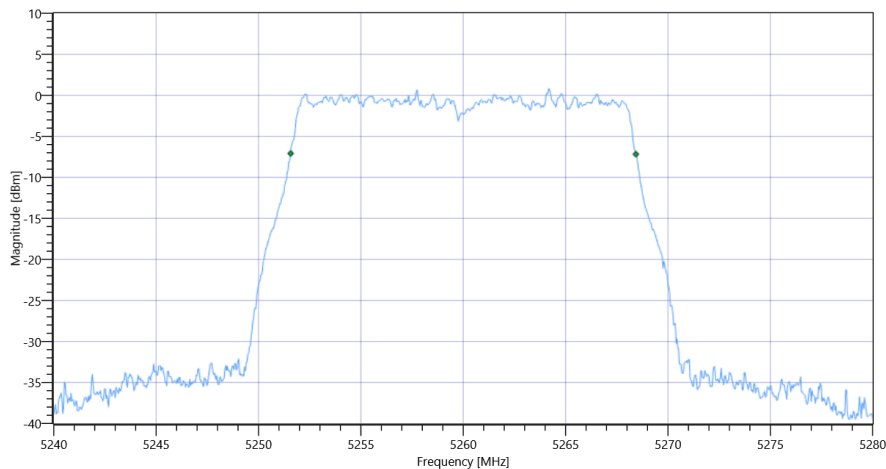

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	17.76 12.85 20
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.69	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.69	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.27	9.69	dBm	PASS

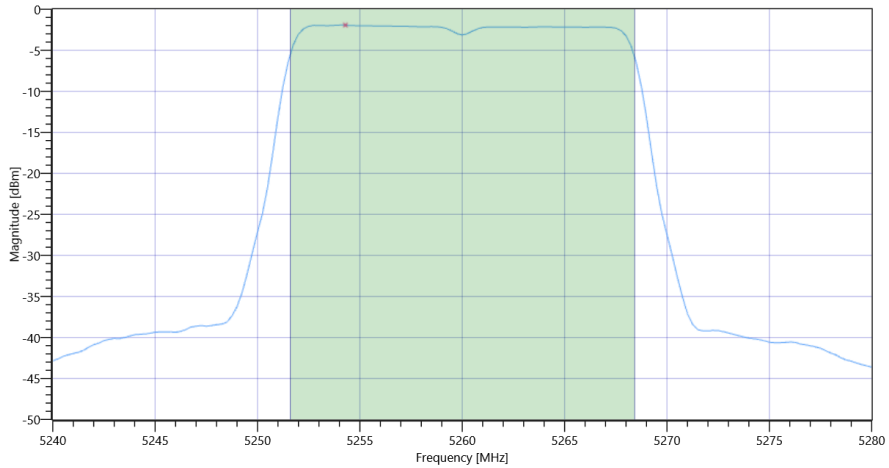

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.93	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-1.93	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A

Test References	
TC Start	06.07.2022 09:13:41
Ambit Temp [°C] Humidity [rel%]	26.8 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-2A
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5260
Frequency mid to test	False Freq [MHz] 5280
Frequency high to test	False Freq [MHz] 5320
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5260 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	6.00	dBm	INFO
Ref. Frequency	---	---	5254.010	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.24	MHz	INFO
T1 26dB	---	---	5249.9200	MHz	INFO
T2 26dB	---	---	5270.1600	MHz	INFO

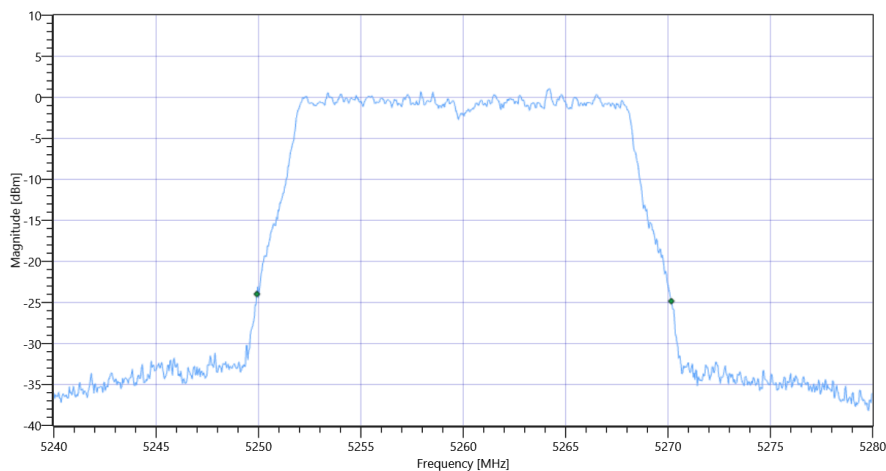

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.00 12.85 20
Start [MHz] Stop [MHz]	5240.000 5280.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	9.8	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	9.8	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.06	9.8	dBm	PASS

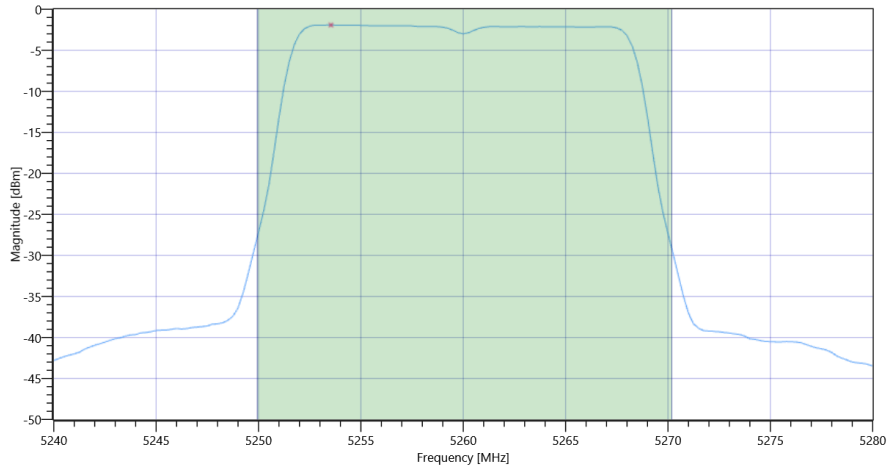

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-2A Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-1.92	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-1.92	dBm/1MHz	PASS

General verdict **PASS**

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 09:03:59
Ambit Temp [°C] Humidity [rel%]	26.7 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5240 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.03	dBm	INFO
Ref. Frequency	---	---	5236.000	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.823	MHz	INFO
T1 99%	---	---	5231.5684	MHz	INFO
T2 99%	---	---	5248.3916	MHz	INFO

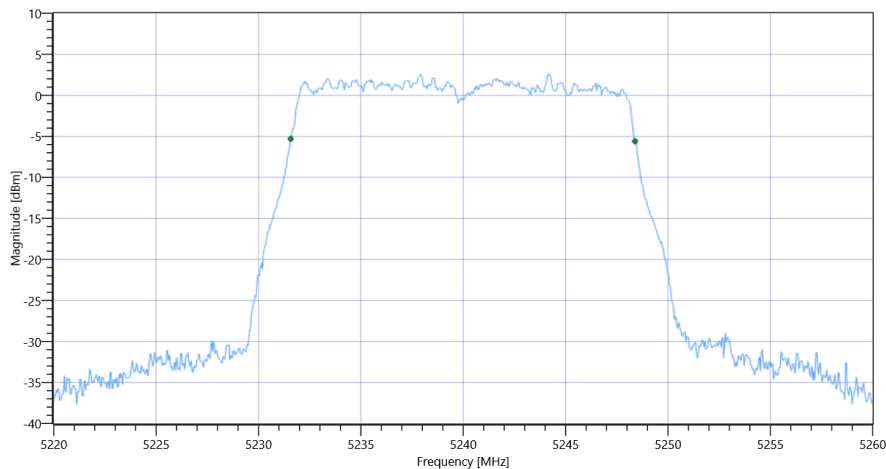

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.03 12.78 25
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	11.5	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	11.5	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.26	11.5	dBm	not applicable

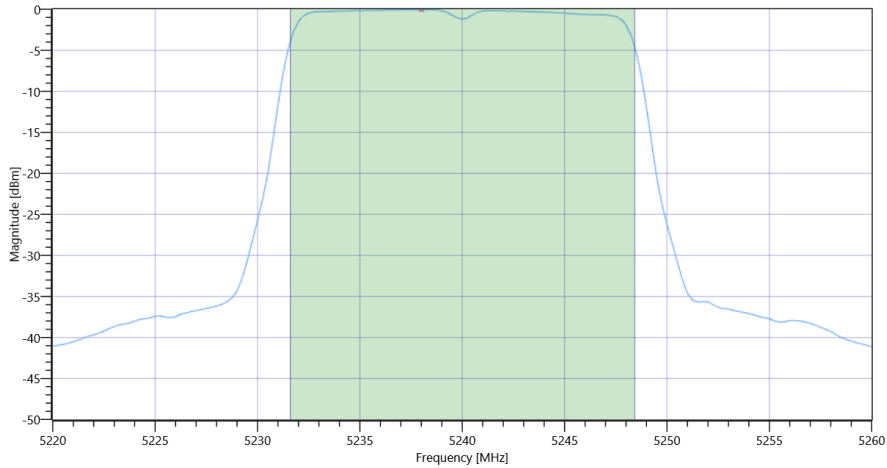

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.06	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.06	dBm/1MHz	PASS

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 09:02:26
Ambit Temp [°C] Humidity [rel%]	26.6 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5240 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	8.02	dBm	INFO
Ref. Frequency	---	---	5237.200	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.16	MHz	INFO
T1 26dB	---	---	5229.9200	MHz	INFO
T2 26dB	---	---	5250.0800	MHz	INFO

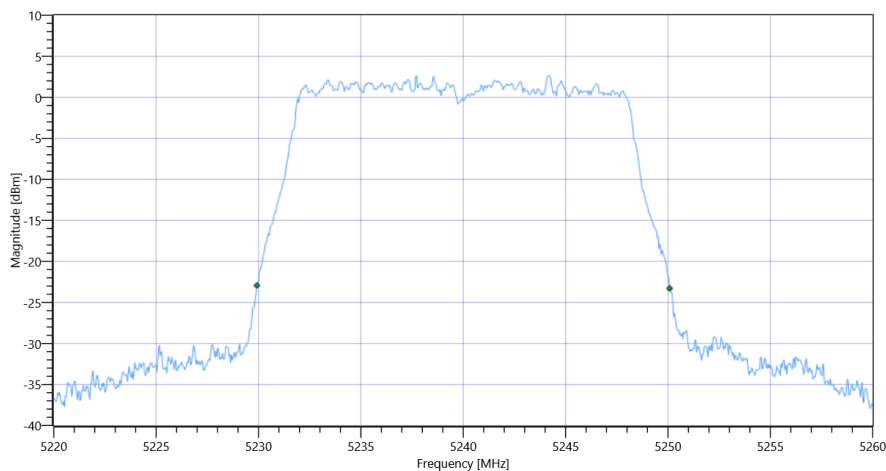

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.02 12.78 25
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	11.61	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	11.61	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.04	11.61	dBm	not applicable

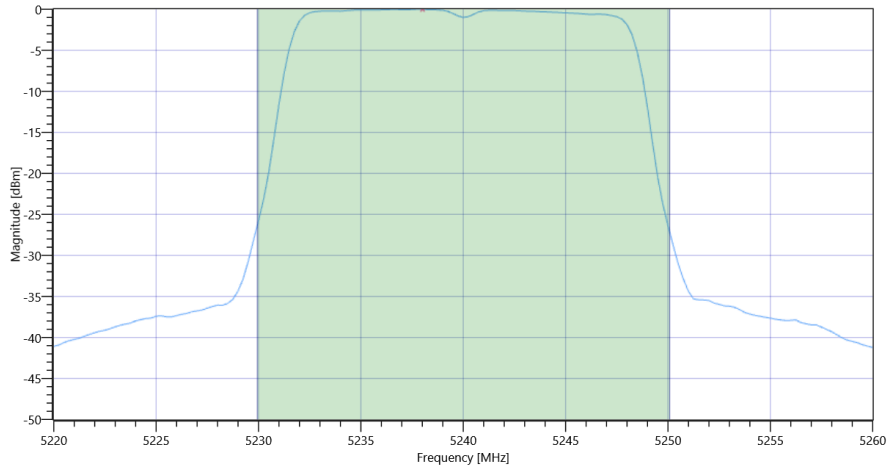

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	0	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	0	dBm/1MHz	PASS

General verdict **PASS**

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 08:59:02
Ambit Temp [°C] Humidity [rel%]	26.7 31
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5200 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.40	dBm	INFO
Ref. Frequency	---	---	5205.590	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5191.6084	MHz	INFO
T2 99%	---	---	5208.3916	MHz	INFO

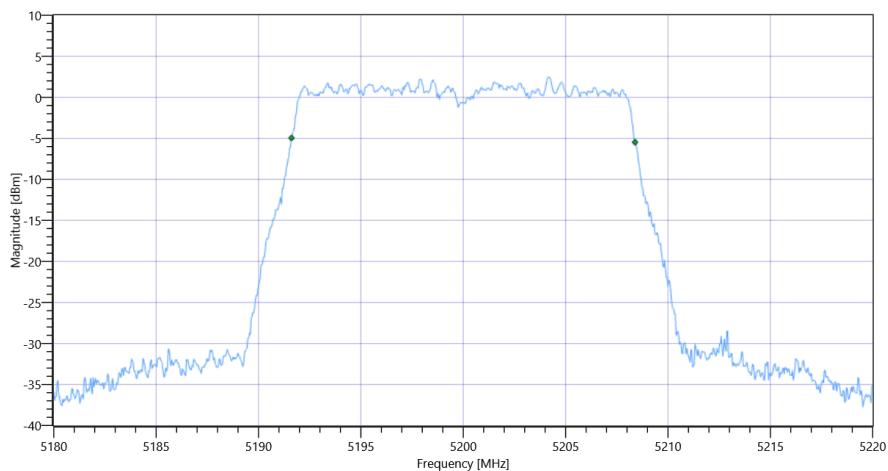

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.40 12.59 25
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	11.29	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	11.29	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.25	11.29	dBm	not applicable

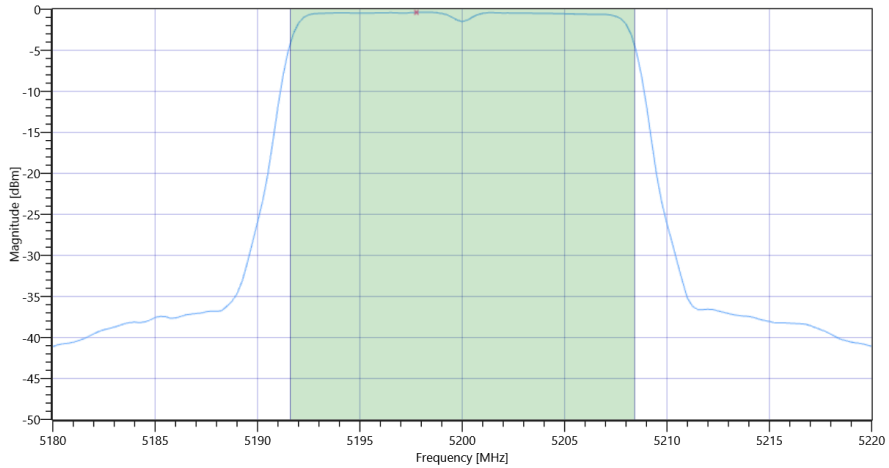

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.38	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.38	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 08:57:29
Ambit Temp [°C] Humidity [rel%]	26.6 31
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5200 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.54	dBm	INFO
Ref. Frequency	---	---	5195.400	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.16	MHz	INFO
T1 26dB	---	---	5189.9600	MHz	INFO
T2 26dB	---	---	5210.1200	MHz	INFO

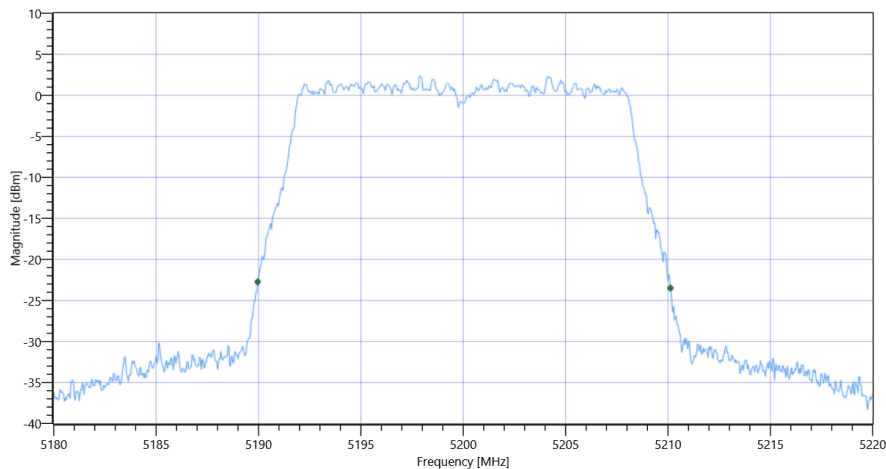

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.54 12.59 25
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	11.45	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	11.45	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.04	11.45	dBm	not applicable

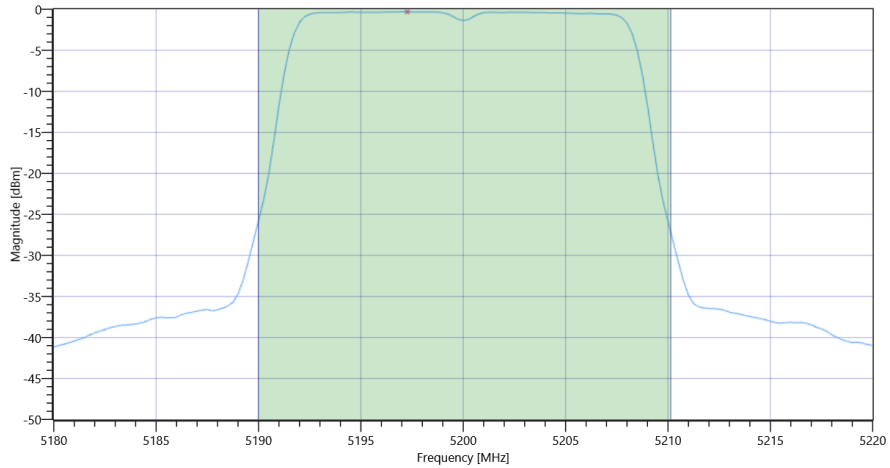

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.32	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.32	dBm/1MHz	PASS

General verdict **PASS**

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 08:47:42
Ambit Temp [°C] Humidity [rel%]	26.5 32
System Version	3.2.0.2
Test Specification	ISED RSS247 -
Test Method	
TC Version	0.0.1
My Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5180 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.29	dBm	INFO
Ref. Frequency	---	---	5177.400	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	16.823	MHz	INFO
T1 99%	---	---	5171.6084	MHz	INFO
T2 99%	---	---	5188.4316	MHz	INFO

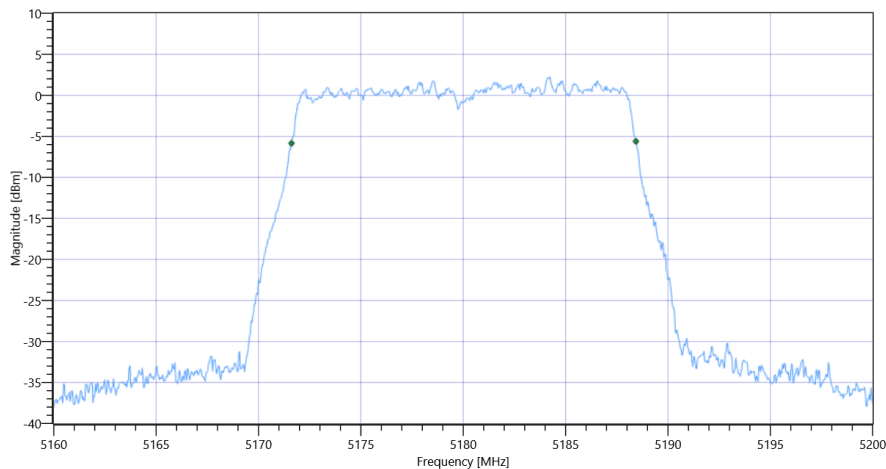

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.29 12.57 25
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	10.89	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	10.89	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	23.26	10.89	dBm	not applicable

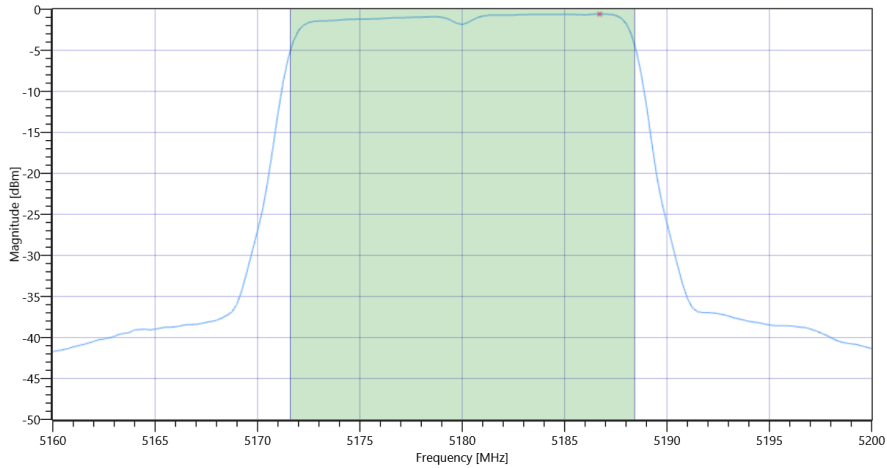

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.59	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.59	dBm/1MHz	PASS

General verdict

PASS

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

Test References	
TC Start	06.07.2022 08:46:06
Ambit Temp [°C] Humidity [rel%]	26.4 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	KDB789033 D02, F., E.2.e.
TC Version	0.0.1
My Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx a mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5180 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	7.51	dBm	INFO
Ref. Frequency	---	---	5183.400	MHz	INFO

Evaluation max. Duty Cycle


Duty Cycle evaluation

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Duty Cycle min	---	---	0	dB	DC > 98% defined

Evaluation Bandwidth

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 26dB	---	---	20.08	MHz	INFO
T1 26dB	---	---	5170.0000	MHz	INFO
T2 26dB	---	---	5190.0800	MHz	INFO

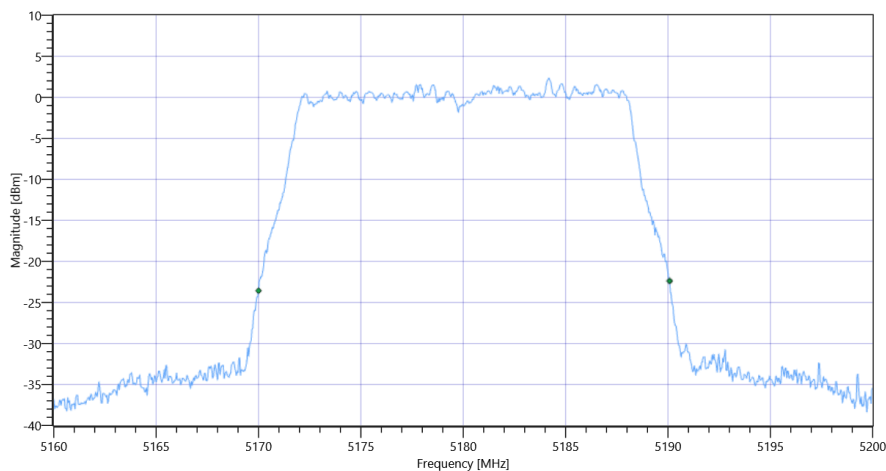

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1_BW

Maximum Output Power

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.51 12.57 25
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	53700 1 161 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power	---	---	11.06	dBm	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Limit absolute					

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Output Power DC corrected	---	24	11.06	dBm	PASS
Limit by: 11 dBm + 10 log Bandwidth					
Max Output Power DC corrected	---	24.03	11.06	dBm	not applicable

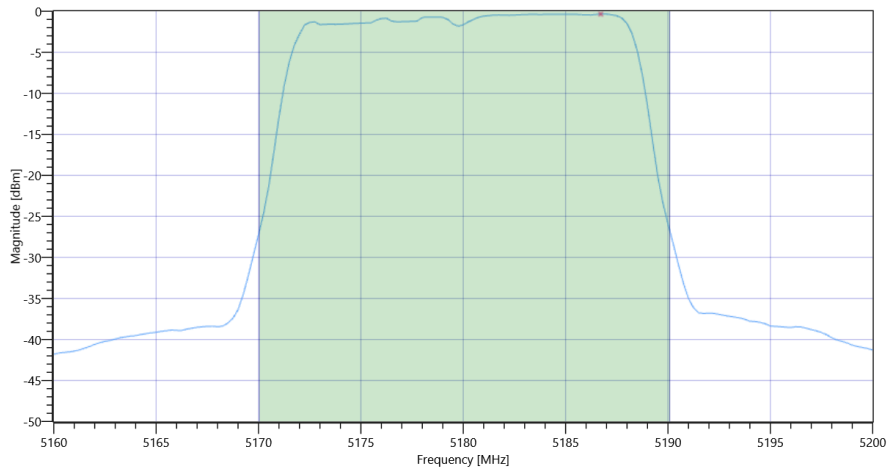

FCC 15.247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1 Max OP and PSD

Power Spectral Density

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Power Spectral Density	---	---	-0.34	dBm/1MHz	INFO
Duty Cycle Correction	---	---	0	dB	INFO
Power Spectral Density DC corrected	---	11	-0.34	dBm/1MHz	PASS

General verdict **PASS**

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	11.07.2022 12:41:03
Ambit Temp [°C] Humidity [rel%]	28.0 39
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	True Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5670 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-0.72	dBm	INFO
Ref. Frequency	---	---	5673.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.28 12.76 10
Start [MHz] Stop [MHz]	5620.000 5720.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.563	MHz	INFO
T1 99%	5470.000000	---	5651.8182	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5688.3816	MHz	

Plot: Bandwidth only

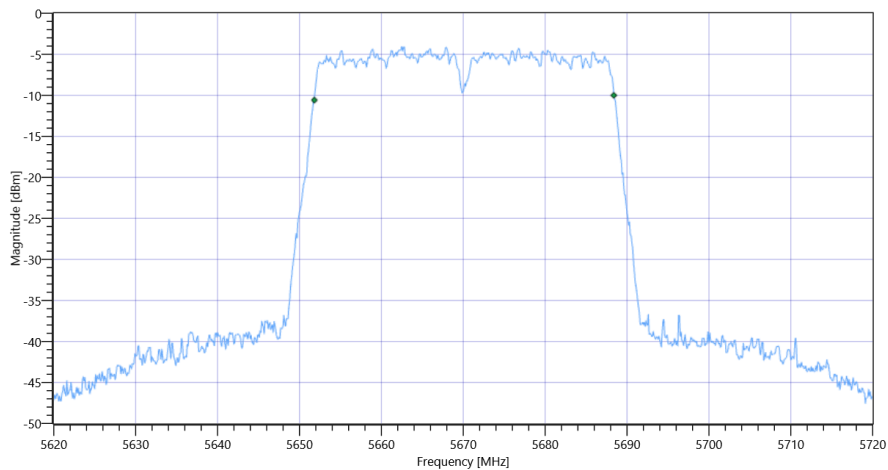

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT


Plot: Bandwidth within Band

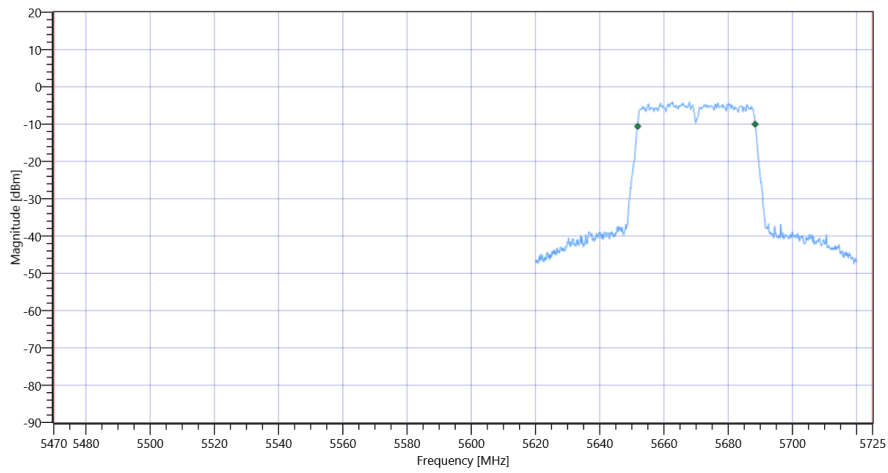

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	41.4	MHz	INFO
T1 26dB	5470.000000	---	5649.3000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5690.7000	MHz	

Plot: Bandwidth only

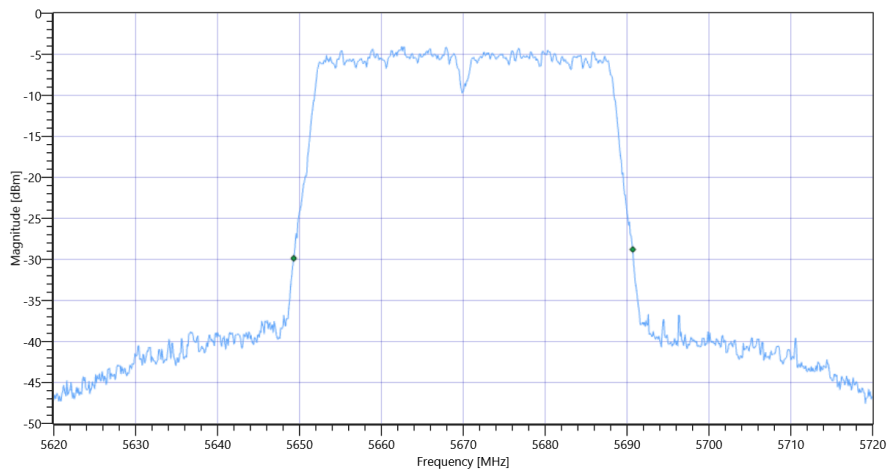

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band

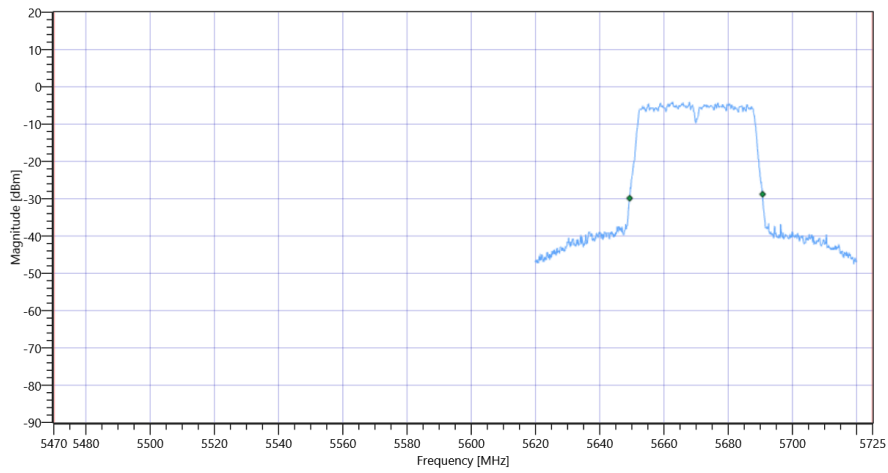

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	11.07.2022 12:34:27
Ambit Temp [°C] Humidity [rel%]	28.0 39
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5510
Frequency mid to test	True Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5590 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-1.83	dBm	INFO
Ref. Frequency	---	---	5605.980	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.17 12.83 10
Start [MHz] Stop [MHz]	5540.000 5640.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.763	MHz	INFO
T1 99%	5470.000000	---	5571.7183	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5608.4815	MHz	

Plot: Bandwidth only

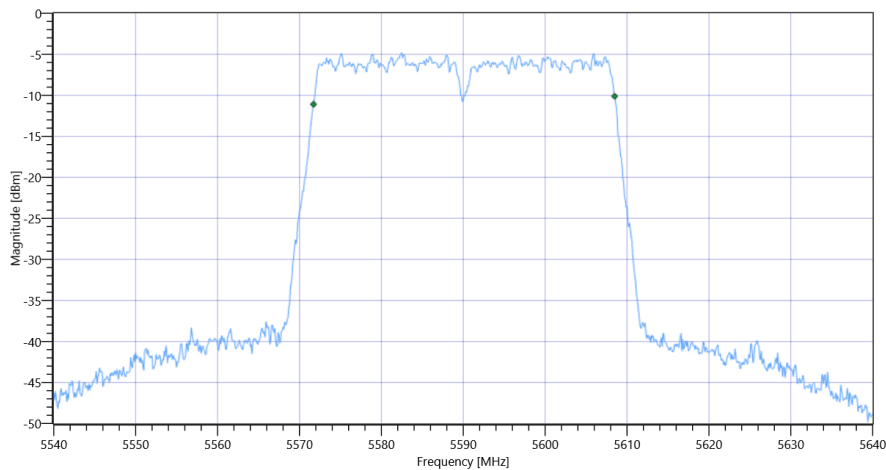

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT


Plot: Bandwidth within Band

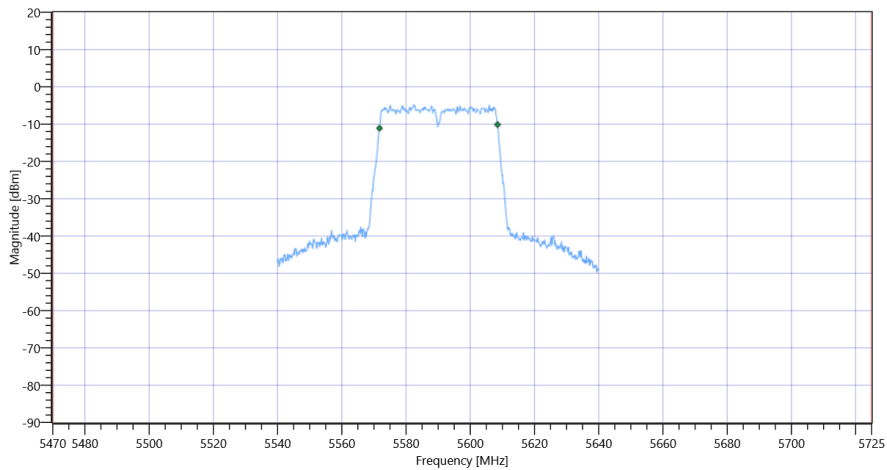

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	41.6	MHz	INFO
T1 26dB	5470.000000	---	5569.2000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5610.8000	MHz	

Plot: Bandwidth only

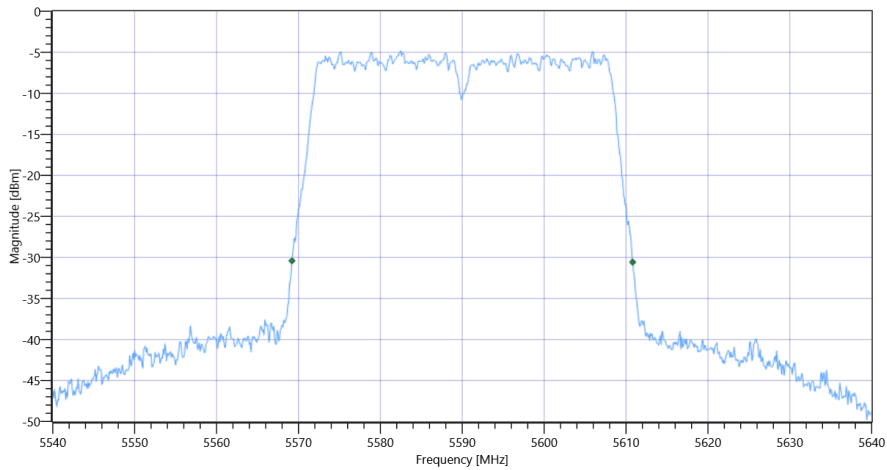

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band

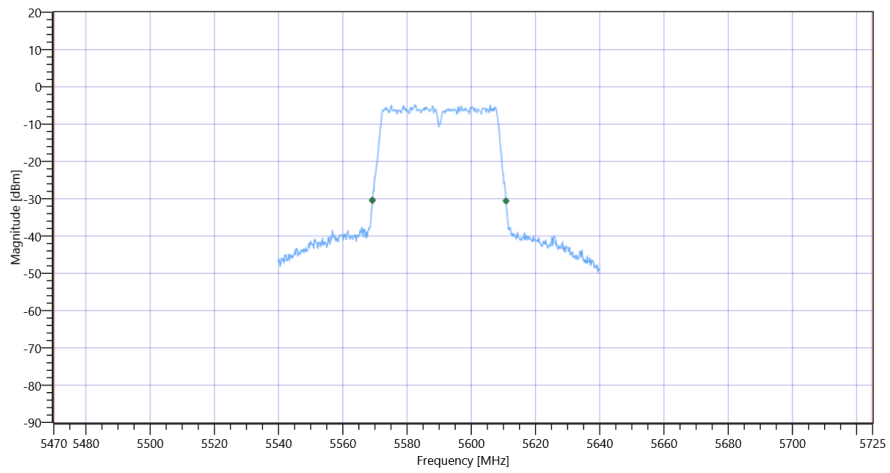

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

General verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

Test References	
TC Start	11.07.2022 12:24:08
Ambit Temp [°C] Humidity [rel%]	27.9 39
System Version	3.2.0.2
Test Specification	FCC 15.407, ISED RSS247 -
Test Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
TC Version	0.0.1
My Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-2C
Add. Information	

EUT Common Settings WLAN5Gx	
Number of Antenna Ports	1
User Interaction	No
Device Class UNII_1	Client

Test Parameter	
Technology to test	WLAN5Gx n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5510
Frequency mid to test	False Freq [MHz] 5590
Frequency high to test	False Freq [MHz] 5670
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 5510 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-1.66	dBm	INFO
Ref. Frequency	---	---	5502.410	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.34 12.64 10
Start [MHz] Stop [MHz]	5460.000 5560.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1 2500 1001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36.763	MHz	INFO
T1 99%	5470.000000	---	5491.7183	MHz	PASS since U-NII-3 is supported
T2 99%	---	5725.000000	5528.4815	MHz	

Plot: Bandwidth only

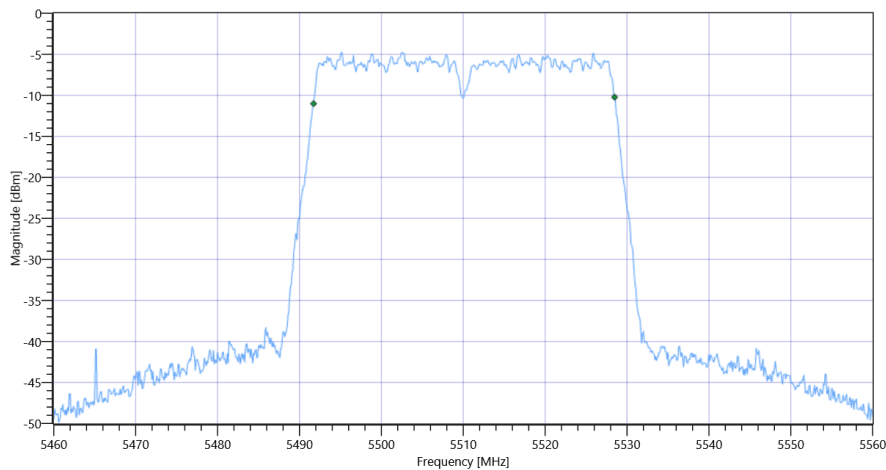

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 99PCT


Plot: Bandwidth within Band

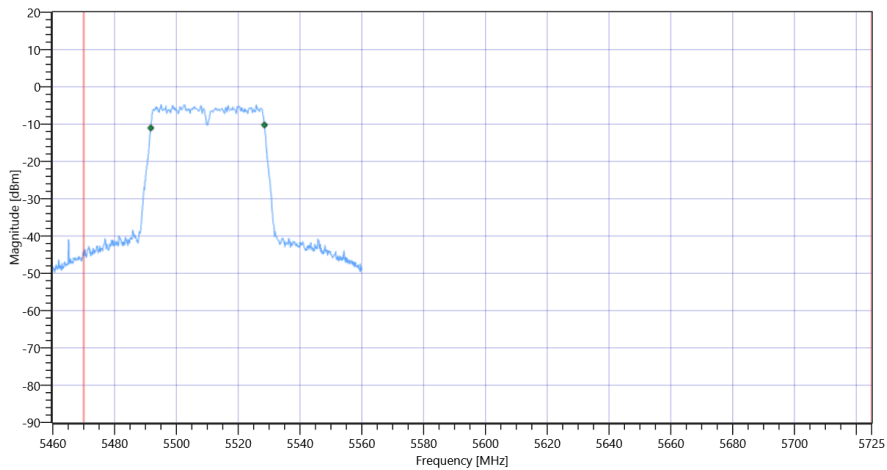

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	41.5	MHz	INFO
T1 26dB	5470.000000	---	5489.3000	MHz	PASS since U-NII-3 is supported
T2 26dB	---	5725.000000	5530.8000	MHz	

Plot: Bandwidth only

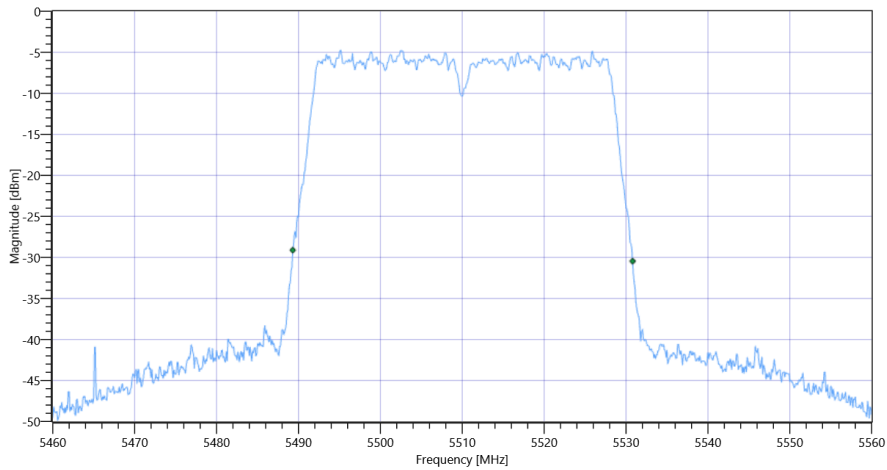

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 26dB ~ WLAN5Gx n-HT40 mode U-NII-2C 26dB

Plot: Bandwidth within Band