



Informe de ensayo nº:
Test report No:

NIE: 45355REM.009A2

Partial Test Report (Modification 2)

FCC Rules and Regulations 47 CFR Chapter I Part 15 Subpart B (10-01-13 Edition);
ICES-003 ISSUE 5 (2012)

Identification of item tested.....:	Wireless sensor node for the Internet of Things
Trademark	Libelium
Model and /or type reference	Wasmote Plug & Sense! WiFi
Other identification of the product	S/N: Prototype
Final HW version	1.0
Final SW version	1.0
FCC ID	XKM-WPS-WIFI-V1
IC	8472A-WPSWIFIV1
Features	Can communicate with 802.11b/g/n networks in the 2.4GHz ISM band. Contains a iW-SMG2SMT-EX radio.
Manufacturer	LIBELIUM COMUNICACIONES DISTRIBUIDAS, S.L. C/ Escatrón, 16. (Edificio Libelium), C.P.: 50014 Zaragoza. Spain.
Test method requested, standard.....:	FCC Rules and Regulations 47 CFR Chapter I Part 15 Subpart B (10-01-13 Edition); ICES-003 ISSUE 5 (2012)
Summary	IN COMPLIANCE
Approved by (name / position & signature).....:	Rafael López Martín LAB EMC Manager
	 Firmado digitalmente por RAFAEL LÓPEZ MARTÍN Fecha: 2016.08.29 11:56:46 +02'00'
Date of issue.....:	2016-08-29
Report template No.....:	FDT11_18

Index

Competences and guarantees	3
General conditions	3
Usage of samples	4
Test sample description	4
Identification of the client	4
Testing period	4
Environmental conditions	5
Modifications to the reference test report	6
Remarks and comments	6
Testing verdicts (Legend)	6
List of equipment used during the test	6
Appendix A – Test result	7
Appendix B - Photographs	17

Competences and guarantees

AT4 wireless is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless, S.A.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the AT4 wireless internal document PODT000.

Usage of samples

Samples under test have been selected by: the Client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial number	Reception date
45355/009	Sensor node with wireless communications	Plug&Sense	9	2015-12-03
45355/018	2.4GHz Plug&Sense RF Antenna	Plug&Sense	---	2015-12-03
45355/045	Connector for 3.3 – 4.2Vdc battery connector	Plug&Sense	---	2015-12-03
45355/073	Luminosity probe	Plug&Sense	---	2015-12-03
45355/135	Module	WiFi iW-SMG2SMT-EX	---	2015-12-03

Modifications realized on sample S/01:

Sample S/01 incorporates two ferrites with the code MURATA BLM21AG601SN1, one in the clock input and the other in the clock output. It was added a 50nF capacitor to the DC/DC input. It was added a 50nF capacitor to the DC/DC output. It was added a toroidal ferrite with the code WÜRTH 7427013 with two turns on the mains cable. It was diminished the charge current with R43 to 3,3K. It was added a ferrite with the code WÜRTH 742 712 22 with two turns in the power supply cable. It was added a ferrite with the code WÜRTH7427503 in the positive load cable and it was modified the C15 value to 22µF.

Test sample description

This device receives data from sensors and sends information with its wireless radio. It is battery powered and can be easily programmed.

Identification of the client

LIBELIUM COMUNICACIONES DISTRIBUIDAS, S.L.
C/ Escatrón, 16. (Edificio Libelium), C.P.: 50014
Zaragoza. Spain.

Testing period

The performed test started on 2015-11-04 and finished on 2015-11-05.

The tests have been performed at AT4 wireless.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 80 %
Shielding effectiveness	> 100 dB
Reference resistance to earth	< 1 Ω

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 30 °C
Relative humidity	Min. = 45 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Reference resistance to earth	< 1 Ω
Normal site attenuation (NSA)	< ± 4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
Site VSWR	< ± 6 dB at 3m distance between item under test and receiver antenna, (1 GHz to 18 GHz)
Field homogeneity	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 18 GHz).

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 30 °C
Relative humidity	Min. = 45 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar
Shielding effectiveness	> 100 dB
Reference resistance to earth	< 1 Ω

Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 45355REM.009A2 related with the same samples, in the next clauses and sub-clauses:

By client requirement it was added the code “IC: 8472A-WPSWIFIV1” to the page 1.

This modification test report cancels and replaces the test report 45355REM.009A2.

Remarks and comments

The tests have been performed by the technical personnel: Pedro Manuel Valenzuela & José Manuel Márquez.

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 1000 MHz is $I = \pm 4,37$ dB for quasi-peak measurements, $I = \pm 4,28$ dB for peak measurements ($k = 2$).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 1000 MHz to 26GHz is $I = \pm 2,62$ dB for peaks and average measurements ($k = 2$).

Testing verdicts (Legend)

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

List of equipment used during the test

CONTROL NUMBER	DESCRIPTION	MANUFACTURER	MODEL	LAST CALIBRATION	NEXT CALIBRATION
1999	EMI Receptor	ROHDE & SCHWARZ	ESIB 26	2015-06-16	2017-06-16
2932	Bilog Hybrid Antenna	SUNOL	JB6	2014-05-11	2017-05-11
4612	Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	2013-12-29	2016-12-29
4658	RF Amplifier	SCHWARZBECK	BBV9743	2015-03-19	2016-03-19
1975	RF Amplifier	MITEQ	JS4	2014-05-22	2016-05-22
3783	RF Amplifier	BONN ELEKTRONIK	BLMA 0118-3A	2015-05-15	2016-05-15

Appendix A – Test result

CONTENT

DESCRIPTION OF THE OPERATION MODES9

RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE 10

DESCRIPTION OF THE OPERATION MODES

The operation modes described in this paragraph constitute a functionality of the sample under test for itself. Every operation mode takes a failure criteria for the immunity test that they were applying to it and a monitoring to guarantee performance of the same ones.

The operation modes used by the samples to which the present report refers, are shown in the following table:

OPERATION MODE	DESCRIPTION
OM#01	EUT ON. Equipment in Idle mode. Charging battery: 6Vdc.



RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE

LIMITS:	Product standard:	FCC RULES AND REGULATIONS 47 CFR PART 15, SUBPART B (10-01-13 Edition); ICES-003 ISSUE 5 (2012)
	Test standard:	FCC RULES AND REGULATIONS 47 CFR PART 15, SUBPART B (10-01-13 Edition); ICES-003 ISSUE 5 (2012)

Limits of interference Class B

The applied limit for radiated emissions, 3 m distance, according with the requirements of FCC Rules and Regulations 47 CFR Part 15.109, Subpart B (10-01-13 Edition); ICES-003 ISSUE 5 (2012) & ANSI C63.4-2009 in the frequency range 30 MHz to 26 GHz, for Class B equipment, which is a transmitter in a band over 500 MHz, was:

Frequency range (MHz)	QP Limit for 3 m ($\mu\text{V/m}$)	QP Limit for 3 m ($\text{dB}\mu\text{V/m}$)
30 to 88	100	40
88 to 216	150	43.52
216 to 960	200	46.02
Above 960	500	53.98
Above 1000	Limit for 3m AVG	Limit for 3m PK
	53.98 $\text{dB}\mu\text{V/m}$	73.98 $\text{dB}\mu\text{V/m}$

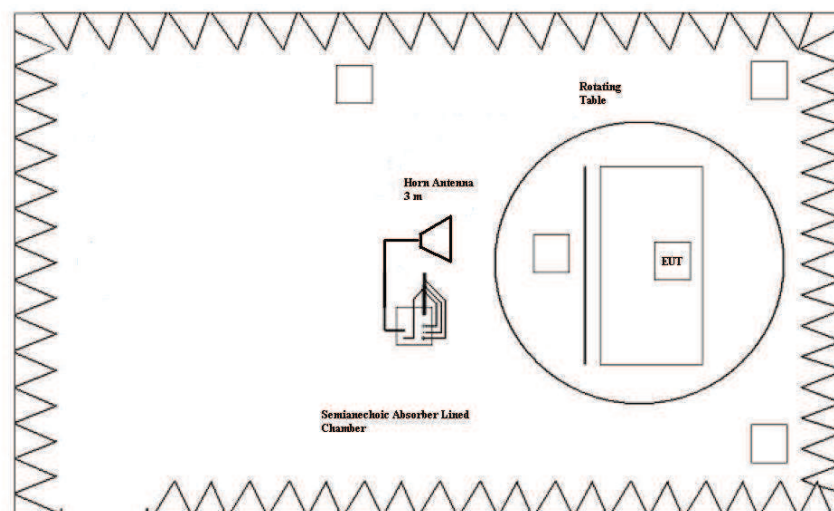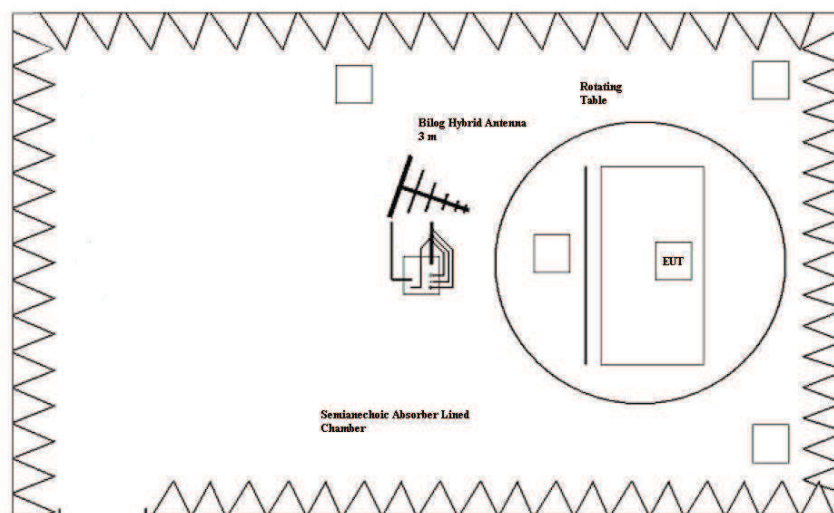


TESTED SAMPLES:	S/01
TESTED OPERATION MODES:	OM#01
TEST RESULTS:	CRmmnn: CR, Radiation Condition; mm: Sample number; nn: Operation mode

CRmmnn	Description	Result
CR0101RB	Range: 30 MHz - 1000 MHz.	P
CR0101RA_1_PH	Range: 1 GHz - 18 GHz. Horizontal polarization.	P
CR0101RA_1_PV	Range: 1 GHz - 18 GHz. Vertical polarization.	P
CR0101RA_2_PH	Range: 18 GHz - 26 GHz. Horizontal polarization.	P
CR0101RA_2_PV	Range: 18 GHz - 26 GHz. Vertical polarization.	P

Radiated Emission. CR0101RB

Project: 45355REM.009
Company: LIBELIUM COMUNICACIONES DISTRIBUIDAS S.L.
Sample: S/01
Operation mode: OM#01
Description: EUT ON. IDLE Mode. Charging battery. 6Vdc

FCC class B

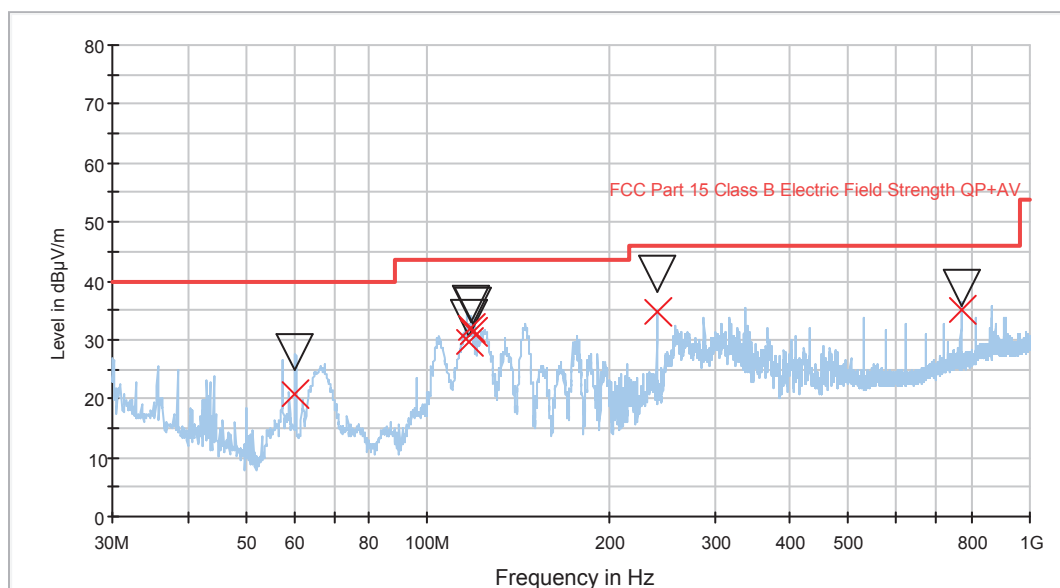

▽ FCC Part 15 Class B Electric Field Strength QP+AV MaxPeak
Preview Result 1-PK+ QuasiPeak


Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)
60.404000	27.9	20.7	105.0	V	186.0
116.773747	33.8	29.6	211.0	H	82.0
117.926854	36.0	32.0	265.0	H	61.0
119.286573	35.7	31.5	241.0	H	79.0
239.988978	41.1	34.6	137.0	H	115.0
767.984970	38.8	35.2	148.0	V	323.0

Radiated Emission. CR0101RA_1_PH

Project: 45355REM.009
Company: LIBELIUM COMUNICACIONES DISTRIBUIDAS S.L.
Sample: S/01
Operation mode: OM#01
Description: EUT ON. IDLE Mode. Charging battery. 6Vdc. Horizontal Polarization.

FCC 1-18GHz class B

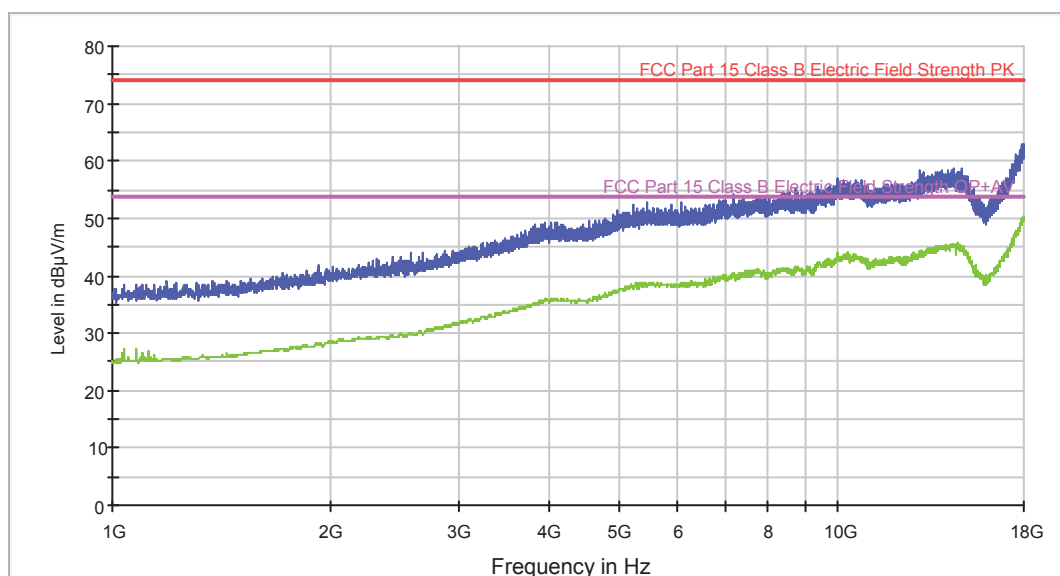

— MaxPeak-ClearWrite-PK+ — Average-ClearWrite-AVG
— FCC Part 15 Class B Electric Field Strength PK — FCC Part 15 Class B Electric Field Strength QP+AV


Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
1190.000000	39.2	25.5
1715.000000	40.4	27.3
2319.000000	42.9	29.2
3147.000000	45.2	32.1
4074.000000	49.4	35.8
5459.000000	52.7	38.3
7156.000000	54.2	40.2
9974.000000	57.1	43.6
12960.000000	58.3	44.1
17969.000000	63.0	50.1

Radiated Emission. CR0101RA_1_PV

Project: 45355REM.009
Company: LIBELIUM COMUNICACIONES DISTRIBUIDAS S.L.
Sample: S/01
Operation mode: OM#01
Description: EUT ON. IDLE Mode. Charging battery. 6Vdc. Vertical Polarization.

FCC 1-18GHz class B

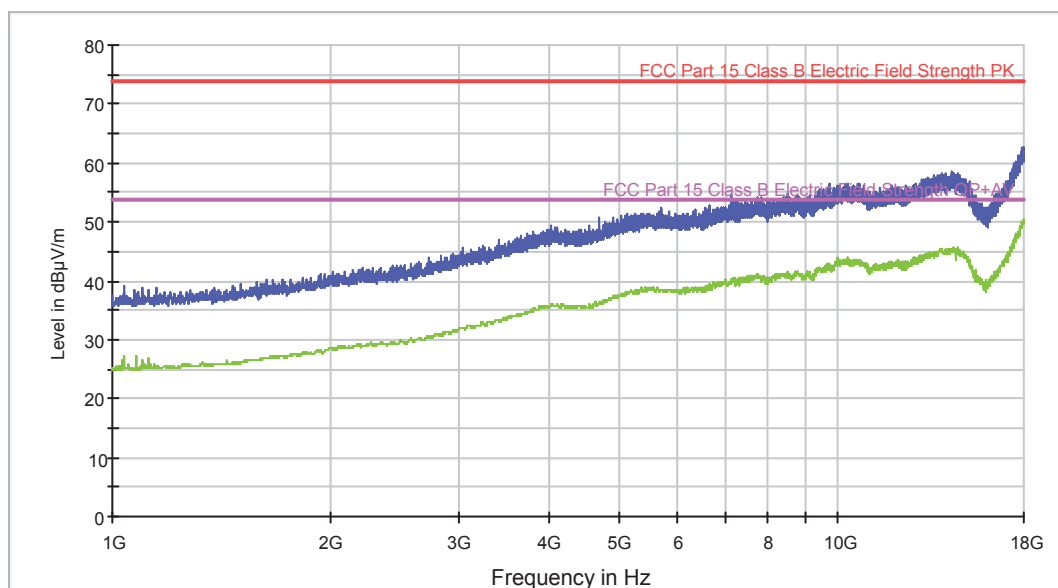

— MaxPeak-ClearWrite-PK+ — Average-ClearWrite-AVG
— FCC Part 15 Class B Electric Field Strength PK — FCC Part 15 Class B Electric Field Strength QP+AV


Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
1040.000000	39.1	27.4
1667.000000	40.3	27.0
2289.000000	42.4	29.1
3041.000000	45.7	32.0
4011.000000	49.5	35.8
5486.000000	51.5	38.8
7136.000000	54.5	40.0
9694.000000	56.4	42.8
13262.000000	57.4	44.6
17947.000000	62.7	49.7

Radiated Emission. CR0101RA_2_PH

Project: 45355REM.009
Company: LIBELIUM COMUNICACIONES DISTRIBUIDAS S.L.
Sample: S/02
Operation mode: OM#01
Description: EUT ON. IDLE Mode. Charging battery. 6Vdc. Horizontal Polarization.

FCC 18-26GHz class B

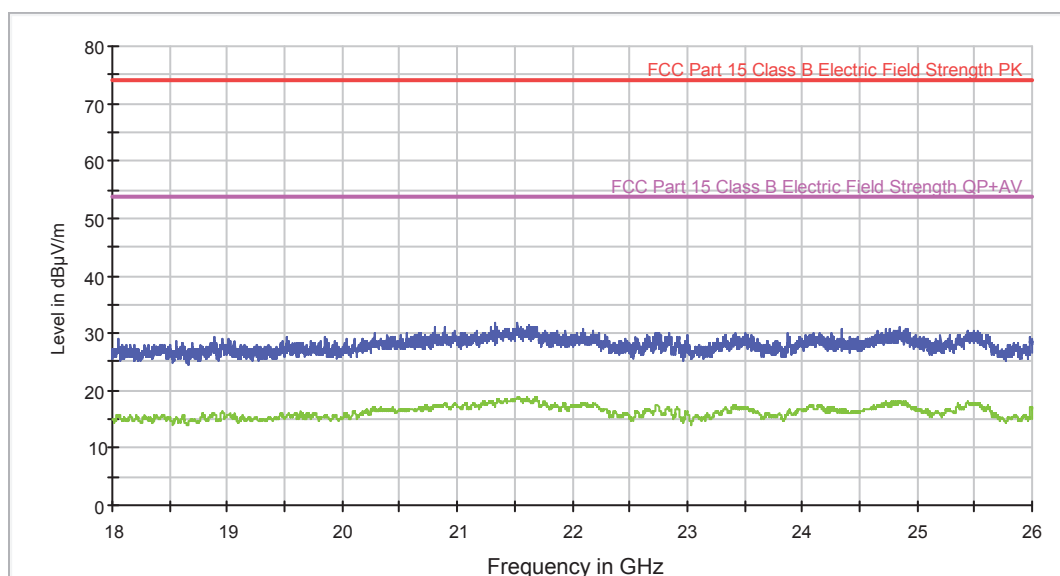

— MaxPeak-ClearWrite-PK+ — Average-ClearWrite-AVG
— FCC Part 15 Class B Electric Field Strength PK — FCC Part 15 Class B Electric Field Strength QP+AV


Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
18057.000000	29.0	15.9
18887.000000	29.4	15.9
19523.000000	29.3	15.8
20806.000000	31.1	17.3
21521.000000	31.8	18.8
21691.000000	31.1	18.6
22743.000000	30.2	17.5
23416.000000	30.0	17.3
24852.000000	31.0	18.0
25538.000000	30.3	17.7

Radiated Emission. CR0101RA_2_PV

Project: 45355REM.009
Company: LIBELIUM COMUNICACIONES DISTRIBUIDAS S.L.
Sample: S/02
Operation mode: OM#01
Description: EUT ON. IDLE Mode. Charging battery. 6Vdc. Vertical Polarization.

FCC 18-26GHz class B

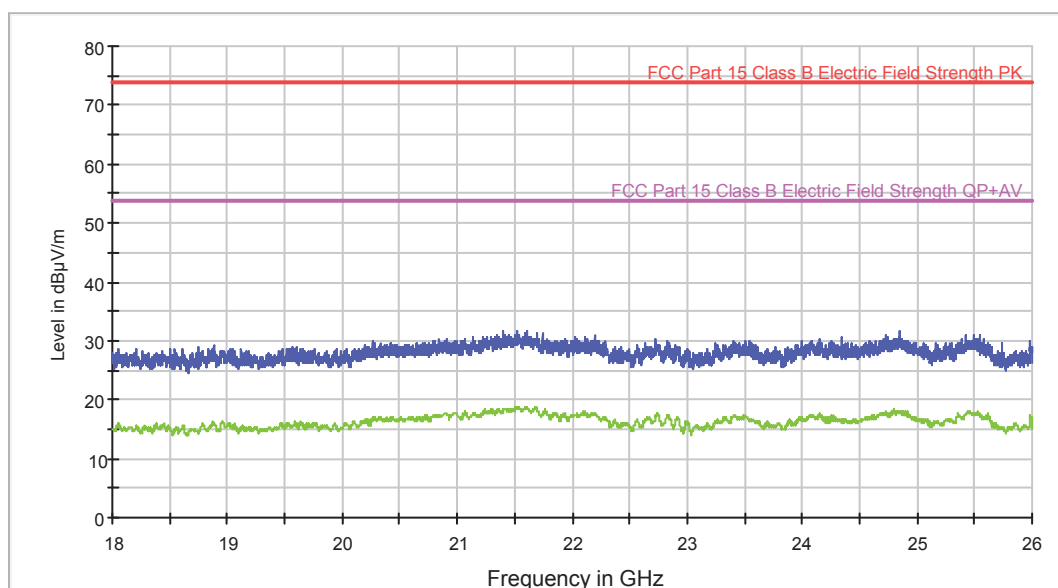

— MaxPeak-ClearWrite-PK+ — Average-ClearWrite-AVG
— FCC Part 15 Class B Electric Field Strength PK — FCC Part 15 Class B Electric Field Strength QP+AV

Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV/m)	Average-ClearWrite (dBµV/m)
18503.000000	28.6	15.4
18881.000000	29.1	16.1
19566.000000	28.8	15.8
20849.000000	30.2	17.3
21614.000000	31.7	18.5
21699.000000	31.4	18.2
22725.000000	30.1	17.1
24154.000000	30.3	17.5
24842.000000	31.6	18.1
25430.000000	31.0	17.8