



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 25, 2012

Digital Receiver Technology, Inc.  
20250 Century Blvd., Suite 500  
Germantown, MD 20874

Dear Steve Hudson,

Enclosed is the EMC Wireless test report for compliance testing of the Digital Receiver Technology, Inc., DRT9957A (Amplifier) as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 22 Subpart H for Cellular Devices and FCC Part 24 Subpart E for Broadband PCS Devices.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Digital Receiver Technology, Inc.\EMC31505A-FCC22\_24 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

## **Electromagnetic Compatibility Criteria Test Report**

for the

**Digital Receiver Technology, Inc.  
Model DRT9957A (Amplifier)**

**Tested under  
FCC Certification Rules  
Title 47 of the CFR,  
Part 22 Subpart H for Cellular Devices  
&  
Part 24 Subpart E for Broadband PCS Devices**

**MET Report: EMC31505A-FCC22\_24 Rev. 1**

January 25, 2012

**Prepared For:**

**Digital Receiver Technology, Inc.  
20250 Century Blvd., Suite 500  
Germantown, MD 20874**

**Prepared By:  
MET Laboratories, Inc.  
914 W. Patapsco Ave  
Baltimore, MD 21230**



## Electromagnetic Compatibility Criteria Test Report

for the

**Digital Receiver Technology, Inc.  
Model DRT9957A (Amplifier)**

**Tested Under  
FCC Certification Rules  
Title 47 of the CFR,  
Part 22 Subpart H for Cellular Devices  
&  
Part 24 Subpart E for Broadband PCS Devices**

Len Knight, Project Engineer  
Electromagnetic Compatibility Lab

Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H and Part 15 Subpart B of the FCC Rules under normal use and maintenance.

Shawn McMillen, Manager  
Wireless Manager, Electromagnetic Compatibility Lab



Digital Receiver Technology, Inc.  
DRT9957A (Amplifier)

Electromagnetic Compatibility  
Report Status  
CFR Title 47 Part 22 Subpart H & Part 24 Subpart E

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	September 21, 2011	Initial Issue
1	January 25, 2012	Revised to reflect customer corrections.



## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	6
	F. Support Equipment .....	6
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	7
	I. Method of Monitoring EUT Operation .....	7
	J. Modifications .....	7
	Modifications to EUT .....	7
	Modifications to Test Standard.....	7
	K. Disposition of EUT .....	7
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>8</b>
	§ 2.1046 RF Power Output .....	9
	§ 2.1049 Occupied Bandwidth .....	19
	§ 2.1053 Radiated Spurious Emissions .....	28
	§ 2.1051 Spurious Emissions at Antenna Terminals .....	34
	Intermodulation .....	44
	Out of Band Rejection .....	48
<b>IV.</b>	<b>Test Equipment .....</b>	<b>51</b>

## List of Tables

Table 1.	Executive Summary of EMC Compliance Testing .....	2
Table 2.	RF Power Output, Test Results .....	10
Table 3.	Occupied Bandwidth, Test Results.....	19



## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one <b>microamp</b>
dB $\mu$ V	Decibels above one <b>microvolt</b>
dB $\mu$ A/m	Decibels above one <b>microamp per meter</b>
dB $\mu$ V/m	Decibels above one <b>microvolt per meter</b>
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts <b>per meter</b>
VCP	Vertical Coupling Plane



# **I. Executive Summary**



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Digital Receiver Technology, Inc..DRT9957A (Amplifier), with the requirements of Part 22 Subpart H and Part 24 Subpart E. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the DRT9957A (Amplifier). Digital Receiver Technology, Inc.. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the DRT9957A (Amplifier), has been **permanently** discontinued

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H and Part 24 Subpart E, in accordance with Digital Receiver Technology, Inc., purchase order number 045620.

Reference	Description	Compliance
Part 22 Subpart H §2.1046; §22.913 Part 24 Subpart E §2.1046; §24.232	RF Power Output	Compliant
§2.1047	Modulation Characteristics	Not Applicable
§2.1049	Occupied Bandwidth	Compliant
§2.1051; §22.917, §24.238	Conducted Spurious Emissions at Antenna Terminals	Compliant
§2.1053; §22.917, §24.238	Radiated Spurious Emissions from the Cabinet	Compliant
§2.1055; §22.355, §24.135	Frequency Stability	Not Applicable
	Intermodulation	Compliant

**Table 1. Executive Summary of EMC ComplianceTesting**





## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Digital Receiver Technology, Inc.. to perform testing on the DRT9957A (Amplifier), under Digital Receiver Technology, Inc.'s purchase order number 045620.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Digital Receiver Technology, Inc., DRT9957A (Amplifier).

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	DRT9957A (Amplifier)		
<b>Model(s) Covered:</b>	DRT9957A (Amplifier)		
<b>EUT Specifications:</b>	Primary Power: 80 W		
	FCC ID: XLM9957A1		
	Type of Modulations:	GMSK and QPSK	
	Equipment Code:	AMP	
	RF Power Output	38.10 dBm	37.30 dBm
	EUT Frequency Ranges:	869 – 894	1930 – 1990
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.		
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C		
	Relative Humidity: 30-60%		
	Barometric Pressure: 860-1060 mbar		
<b>Evaluated by:</b>	Len Knight		
<b>Date(s):</b>	January 25, 2012		

## **B. References**

<b>CFR 47, Part 22, Subpart H</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 22: Rules and Regulations for Cellular Devices.
<b>CFR 47, Part 24, Subpart E</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>EIA/TIA-603-A-2001</b>	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards
<b>FCC Publication 935210</b>	Amplifier, Booster, and Repeater Guidance Document

## **C. Test Site**

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## **D. Description of Test Sample**

The DRT9957A is an RF power amplifier used with DRT base stations operating in the cellular, PCS, and TDMA 850MHz bands.

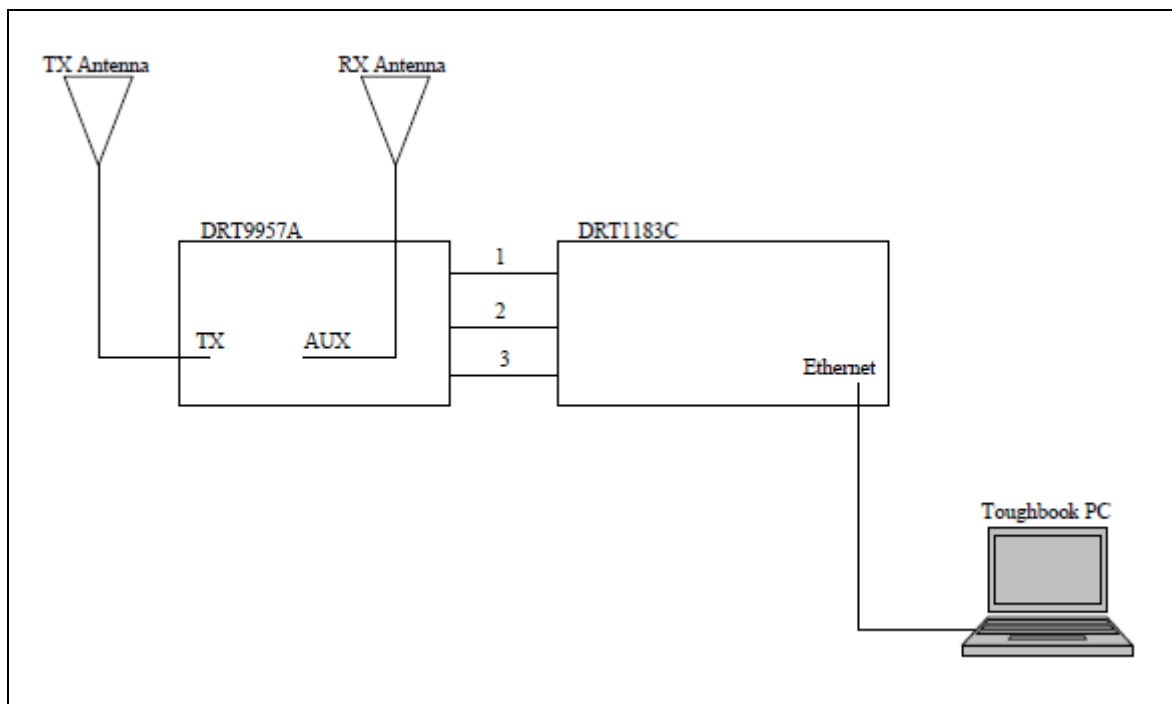


Figure 1. Block Diagram of Equipment Configuration

## E. Equipment Configuration

Name / Description	Model Number
TacTRAM	DRT9957A

Table 2. Equipment Configuration

## F. Support Equipment

Name / Description	Manufacturer	Model Number	Serial Number
Base Station	DRT	DRT1183C	--
Toughbook PC	Panasonic	CF-19	CF-19KDRAX6M

Table 3. Support Equipment

## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
N/A	AUX RF	Receive antenna	1	5	Y	N/A
N/A	TX	Transmit antenna	1	5	Y	N/A
1	RX E	RX signal to base station	1	2	Y	N/A
2	TX D	TX signal to amplifier	1	2	Y	N/A
3	RS-232 Control/GPIO	Control signals between base station and amplifier	1	2	Y	N/A

**Table 4. Ports and Cabling Information**

## H. Mode of Operation

Operates as a RF power amplifier for DRT mobile base stations in GSM and CDMA in the Cellular and PCS bands, and TDMA in the 850MHz band.

## I. Method of Monitoring EUT Operation

Ran control software on a connected PC.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Digital Receiver Technology, Inc.. upon completion of testing.



### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1046 RF Power Output

**Test Requirements:** § 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 2.1046 (b) For single sideband, independent sideband, and single channel, controlled carrier radiotelephone transmitters, the procedure specified in paragraph (a) of this section shall be employed and, in addition, the transmitter shall be modulated during the test as specified and as applicable in § 2.1046 (b) (1-5). In all tests, the input level of the modulating signal shall be such as to develop rated peak envelope power or carrier power, as appropriate, for the transmitter.

§ 2.1046 (c) For measurements conducted pursuant to paragraphs (a) and (b) of this section, all calculations and methods used by the applicant for determining carrier power or peak envelope power, as appropriate, on the basis of measured power in the radio frequency load attached to the transmitter output terminals shall be shown. Under the test conditions specified, no components of the emission spectrum shall exceed the limits specified in the applicable rule parts as necessary for meeting occupied bandwidth or emission limitations.

**§ 22.913 Power and antenna height limits.**

§ 22.913(a): The Effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

**§ 24.232 Power and antenna height limits.**

§ 24.232 (b): Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

**Test Procedures:** As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer or power meter. The spectrum analyzer was set to its default settings – RBW, VBW, Sweep Time, etc. – except that the detector was set to an average detector. The “Channel Power” measurement feature of the spectrum analyzer was used. The base station was used to drive the DRT9957A AMP. The signal was measured at both the input and the output of the amplifier EUT.

**Test Results:** The EUT complies with the requirements of this section. The EUT conducted power does not exceed limit at the carrier frequency.

**Test Engineer(s):** Len Knight


**Test Date(s):** 06/24/11




Part 22 - GSM			
Channel	Frequency (MHz)	Power In (dBm)	Power Out (dBm)
Low	869.2	9.30	37.15
Mid	881.6	10.11	38.10
High	893.8	9.50	37.61
Part 22 - CDMA			
Channel	Frequency (MHz)	Power In (dBm)	Power Out (dBm)
Low	869.7	1.74	30.72
Mid	881.52	1.54	31.52
High	893.31	1.52	30.06
Part 24 - GSM			
Channel	Frequency (MHz)	Power In (dBm)	Power Out (dBm)
Low	1930.2	9.65	36.31
Mid	1960	9.67	37.18
High	1989.8	9.60	37.30
Part 24 - CDMA			
Channel	Frequency (MHz)	Power In (dBm)	Power Out (dBm)
Low	1931.25	1.59	30.01
Mid	1960	1.86	32.18
High	1988.75	0.89	31.18

Table 5. RF Power Output, Test Results




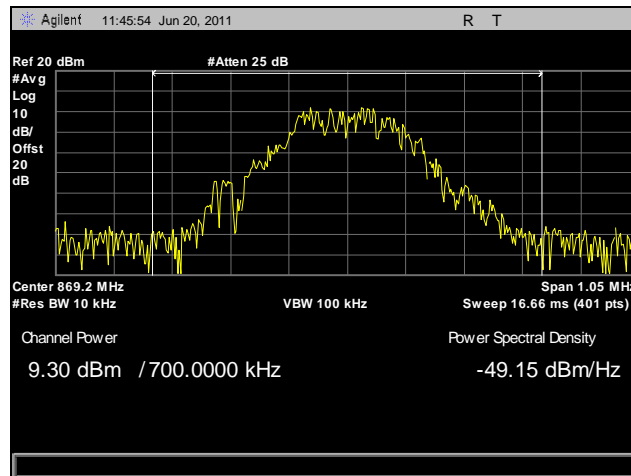


Plot 1. RF Power, Power-In, Low Channel, GSM, Part 22

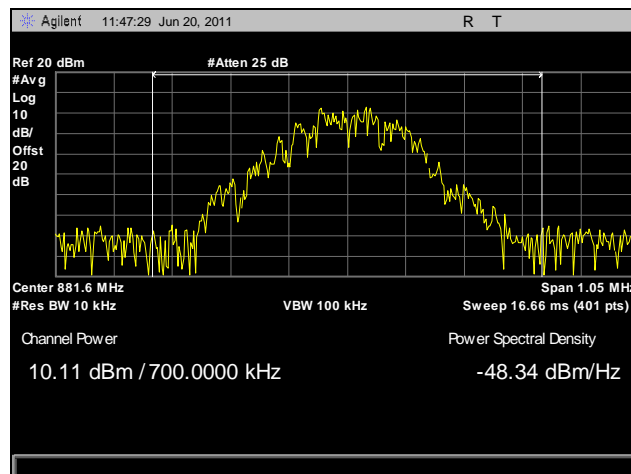


Plot 2. RF Power, Power-In, Mid Channel, GSM, Part 22

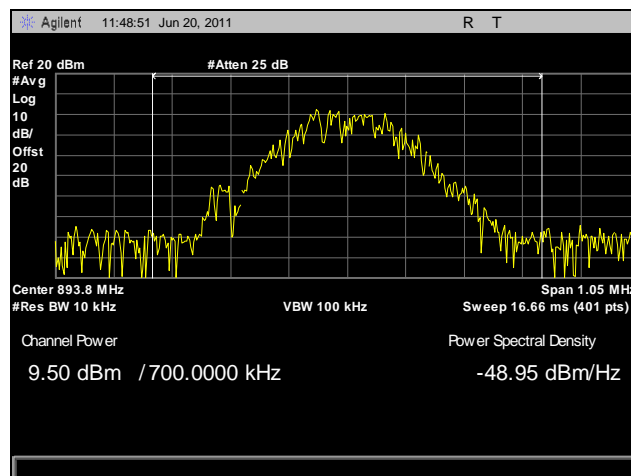


Plot 3. RF Power, Power-In, High Channel, GSM, Part 22

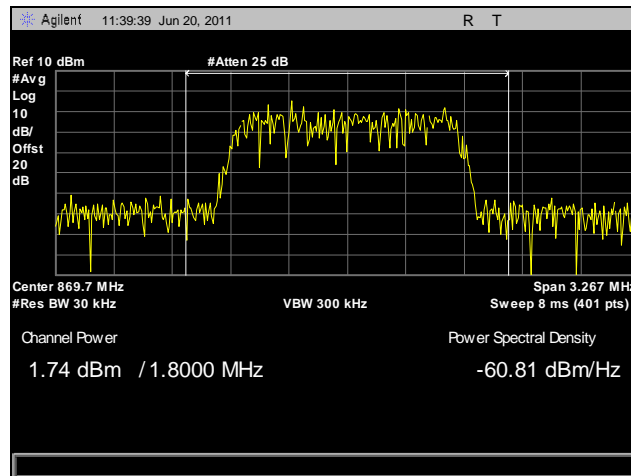


Plot 4. RF Power, Power-In, Low Channel, CDMA, Part 22

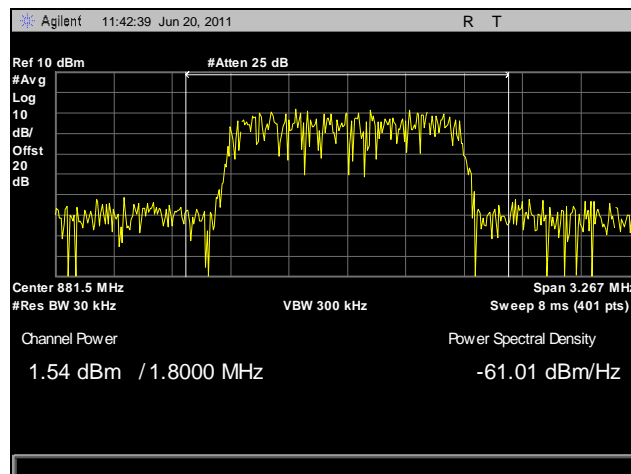


Plot 5. RF Power, Power-In, Mid Channel, CDMA, Part 22

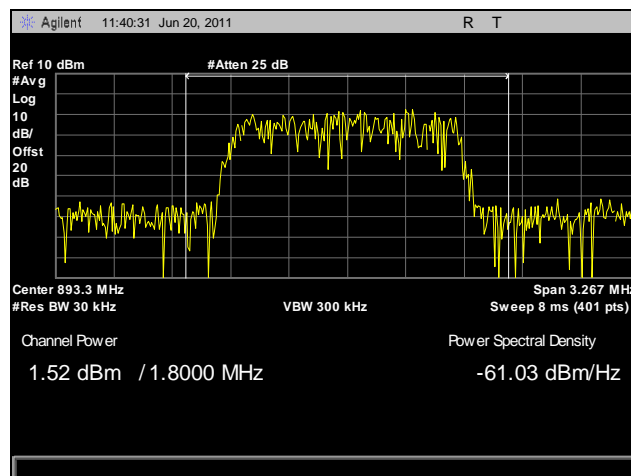


Plot 6. RF Power, Power-In, High Channel, CDMA, Part 22

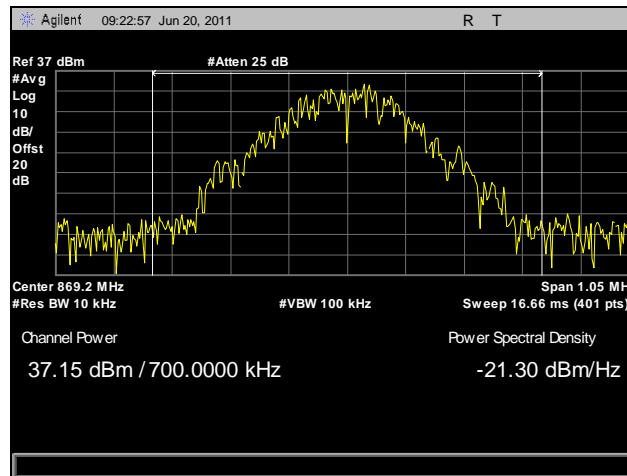


Plot 7. RF Power, Power-Out, Low Channel, GSM, Part 22

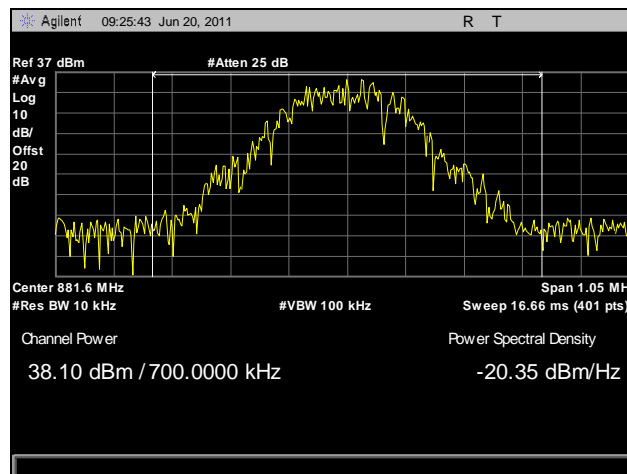


Plot 8. RF Power, Power-Out, Mid Channel, GSM, Part 22

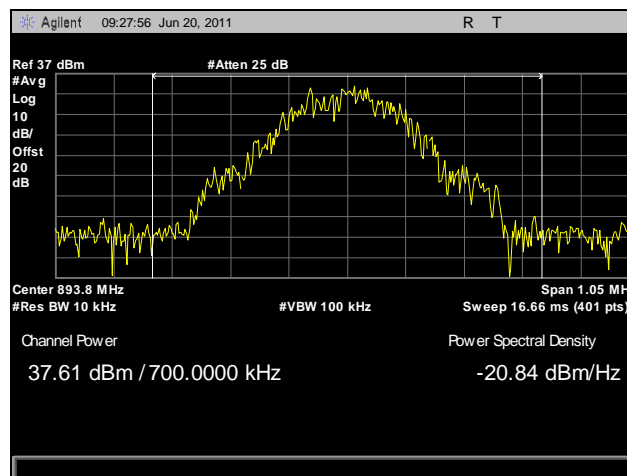


Plot 9. RF Power, Power-Out, High Channel, GSM, Part 22

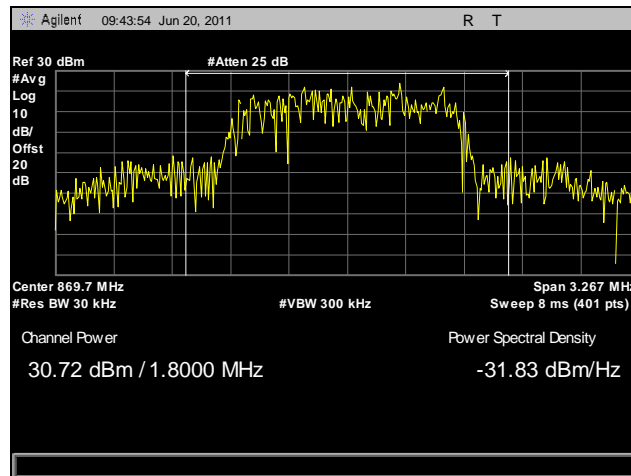


Plot 10. RF Power, Power-Out, Low Channel, CDMA, Part 22

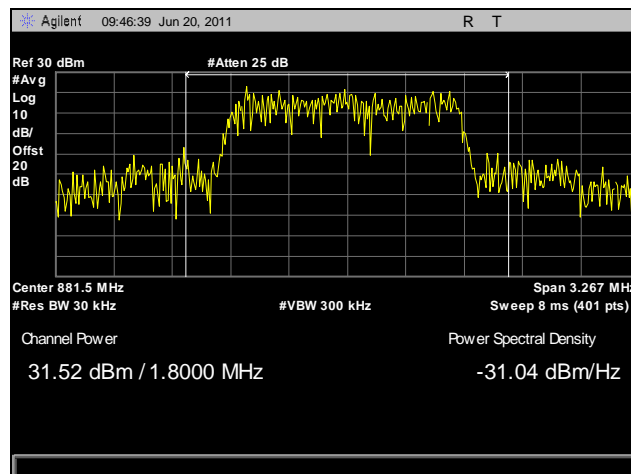


Plot 11. RF Power, Power-Out, Mid Channel, CDMA, Part 22

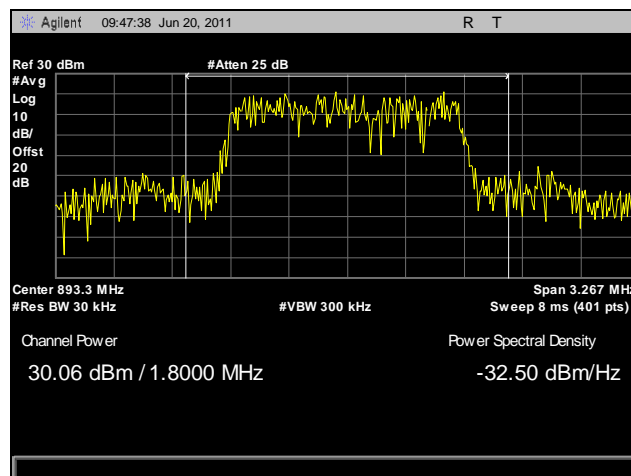


Plot 12. RF Power, Power-Out, High Channel, CDMA, Part 22

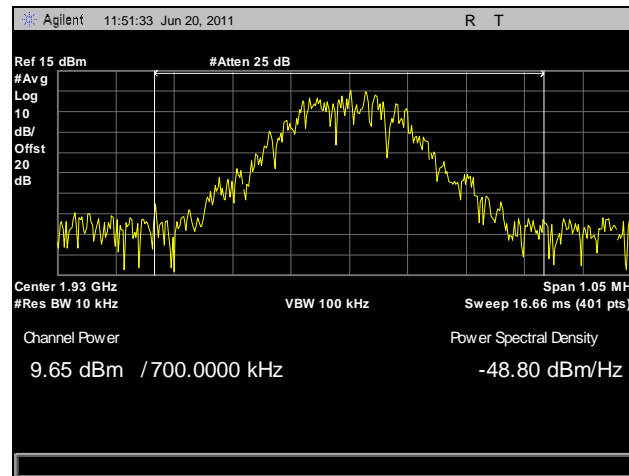


Plot 13. RF Power, Power-In, Low Channel, GSM, Part 24

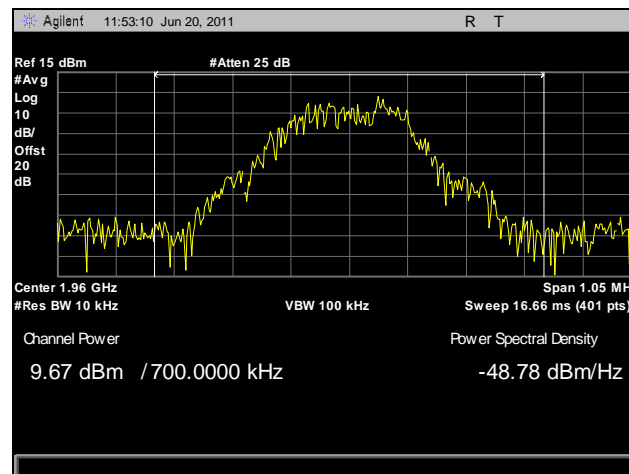


Plot 14. RF Power, Power-In, Mid Channel, GSM, Part 24

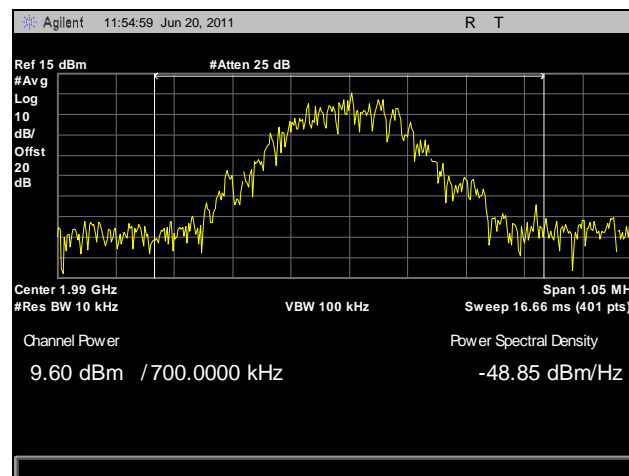


Plot 15. RF Power, Power-In, High Channel, GSM, Part 24

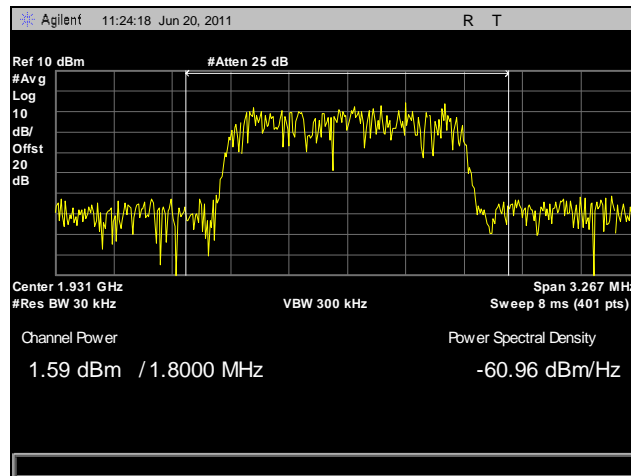


Plot 16. RF Power, Power-In, Low Channel, CDMA, Part 24

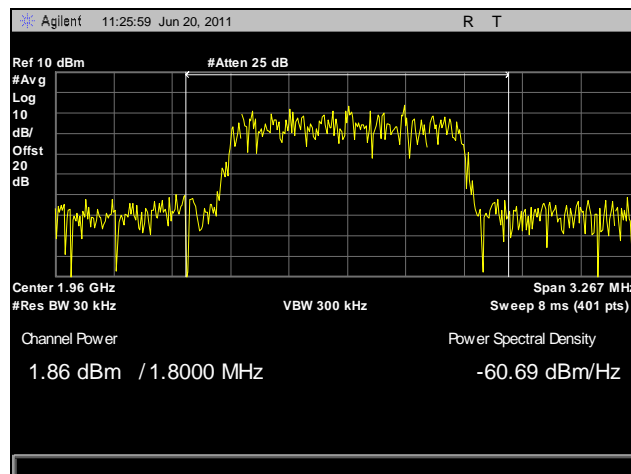


Plot 17. RF Power, Power-In, Mid Channel, CDMA, Part 24

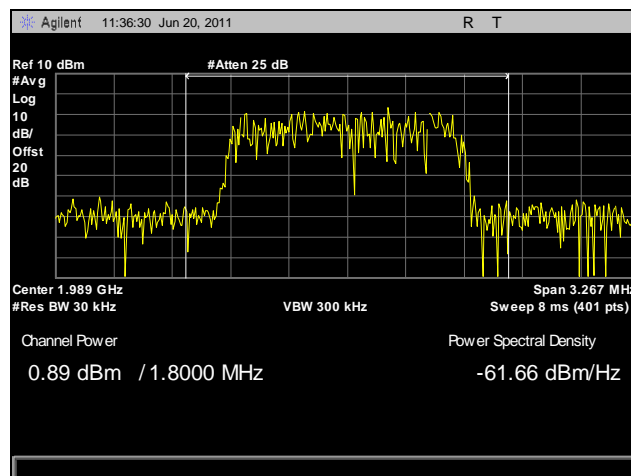


Plot 18. RF Power, Power-In, High Channel, CDMA, Part 24

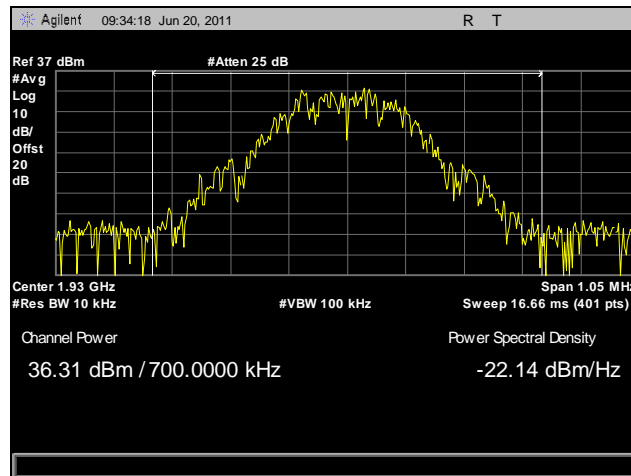


### Plot 19. RF Power, Power-Out, Low Channel, GSM, Part 24

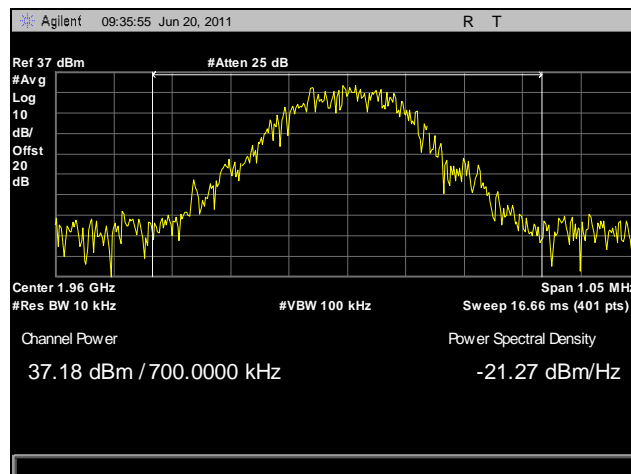


### Plot 20. RF Power, Power-Out, Mid Channel, GSM, Part 24

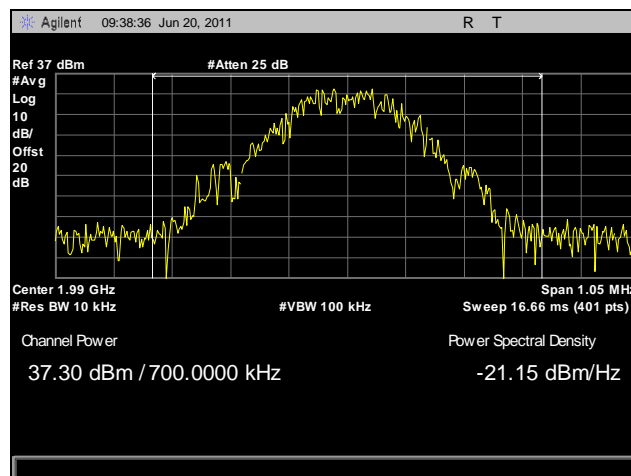


### Plot 21. RF Power, Power-Out, High Channel, GSM, Part 24

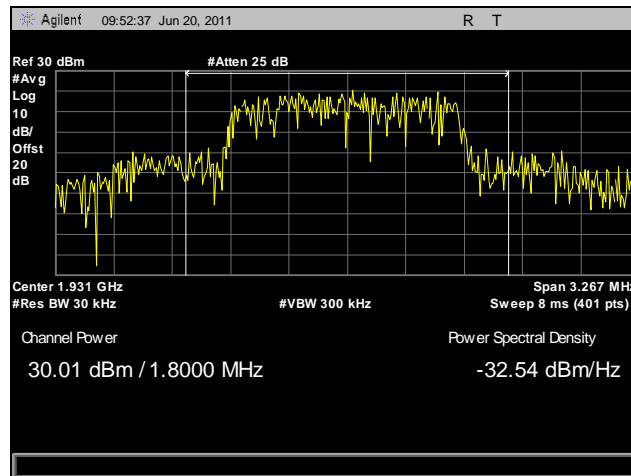

Plot 22. RF Power, Power-Out, Low Channel, CDMA, Part 24

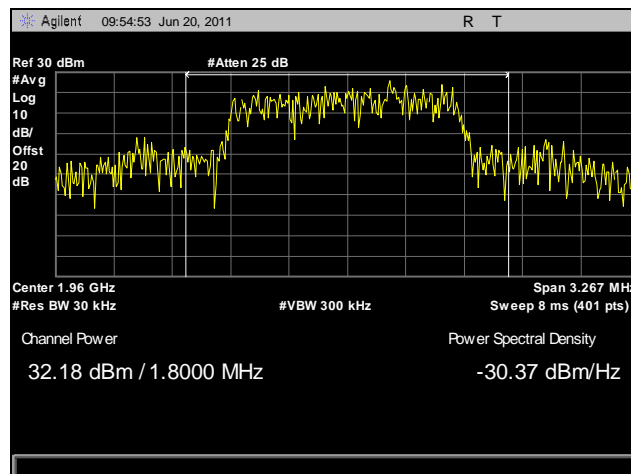

Plot 23. RF Power, Power-Out, Mid Channel, CDMA, Part 24

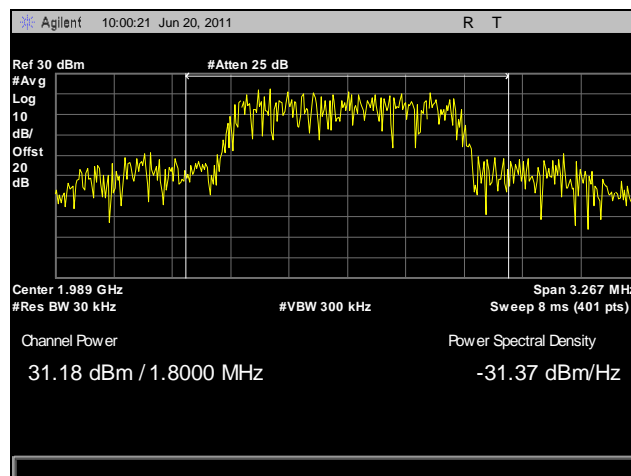

Plot 24. RF Power, Power-Out, High Channel, CDMA, Part 24





## § 2.1049 Occupied Bandwidth

**Test Requirement(s):** § 2.1049 Measurements required: **Occupied bandwidth:** The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

**Test Procedures:** As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made with a Spectrum Analyzer connected to the RF port. The base station was used to drive the DRT9957A AMP. The signal was measured at both the input and the output of the amplifier EUT.


**Test Results:** The EUT complies with the requirements of this section.

**Test Engineer(s):** Len Knight


**Test Date(s):** 06/28/11

GSM Modulation – Part 22			
Channel	Frequency (MHz)	Occupied Bandwidth In (kHz)	Occupied Bandwidth Out (kHz)
Low	869.2	307.961	305.189
Mid	881.6	307.85	305.019
High	893.8	307.532	311.918
CDMA Modulation – Part 22			
Channel	Frequency (MHz)	Occupied Bandwidth In (MHz)	Occupied Bandwidth Out (MHz)
Low	869.7	1.355	1.356
Mid	881.52	1.354	1.370
High	893.31	1.365	1.358
GSM Modulation – Part 24			
Channel	Frequency (MHz)	Occupied Bandwidth In (kHz)	Occupied Bandwidth Out (kHz)
Low	1930.2	315.443	308.509
Mid	1960	307.45	308.087
High	1989.8	315.873	307.983
CDMA Modulation – Part 24			
Channel	Frequency (MHz)	Occupied Bandwidth In (MHz)	Occupied Bandwidth Out (MHz)
Low	1931.25	1.350	1.369
Mid	1960	1.346	1.366
High	1988.75	1.365	1.348


Table 6. Occupied Bandwidth, Test Results

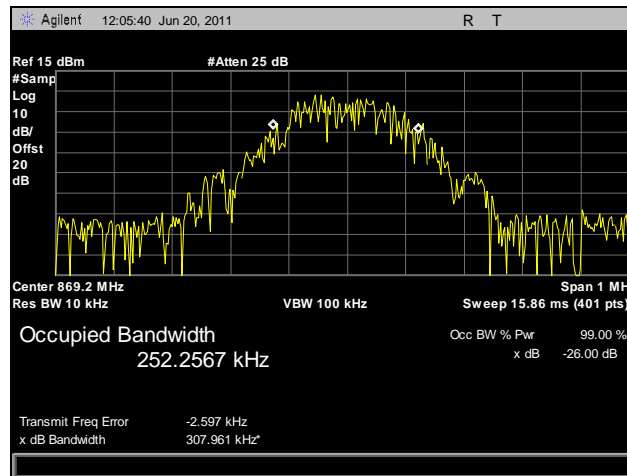


Plot 25. Occupied Bandwidth, Power-In, Low Channel, GSM, Part 22

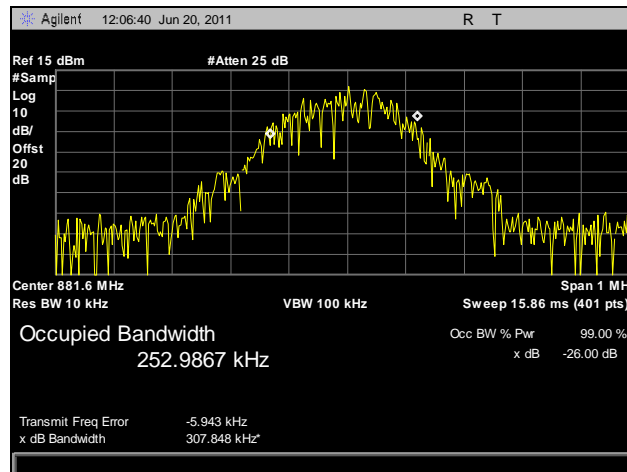


Plot 26. Occupied Bandwidth, Power-In, Mid Channel, GSM, Part 22

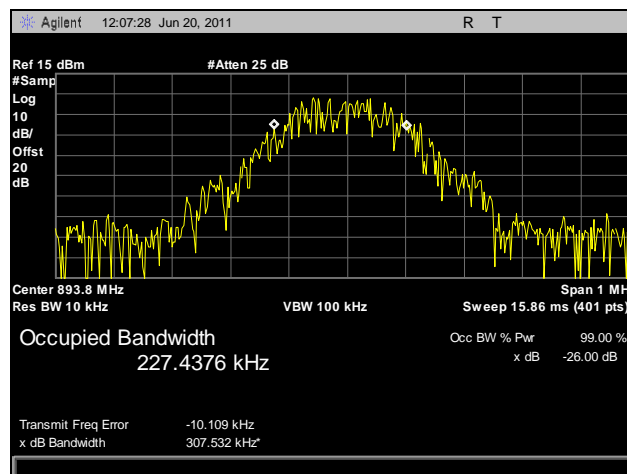


Plot 27. Occupied Bandwidth, Power-In, High Channel, GSM, Part 22

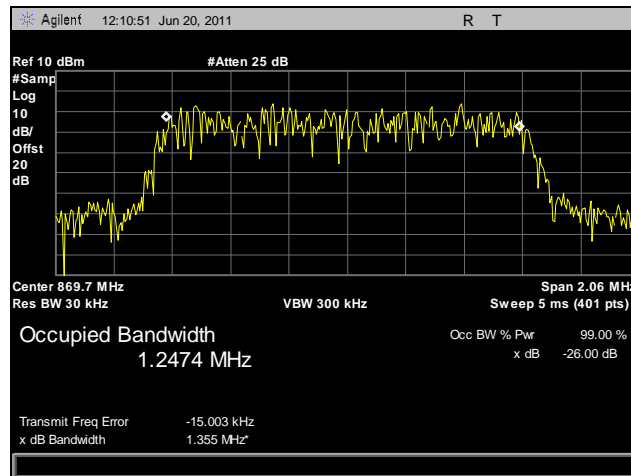


Plot 28. Occupied Bandwidth, Power-In, Low Channel, CDMA, Part 22

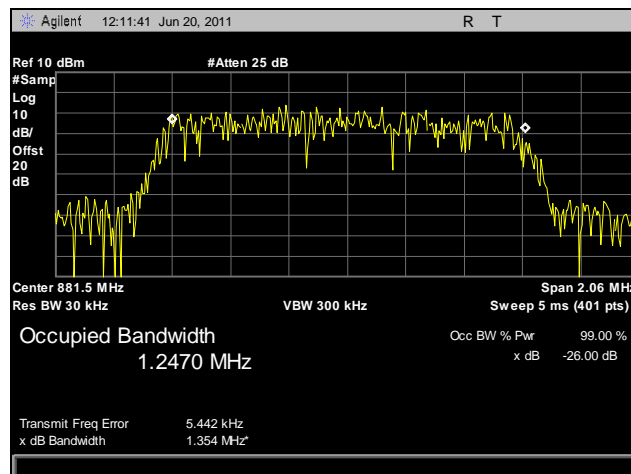


Plot 29. Occupied Bandwidth, Power-In, Mid Channel, CDMA, Part 22

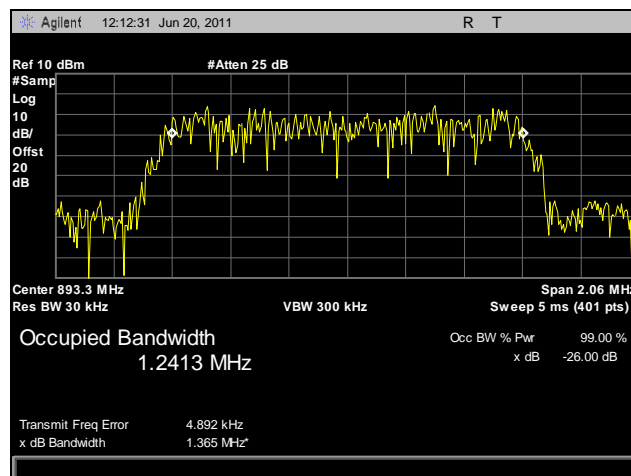


Plot 30. Occupied Bandwidth, Power-In, High Channel, CDMA, Part 22

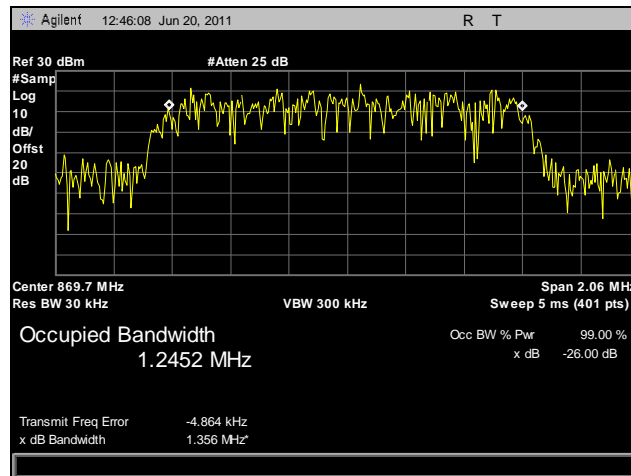


Plot 31. Occupied Bandwidth, Power-Out, Low Channel, GSM, Part 22

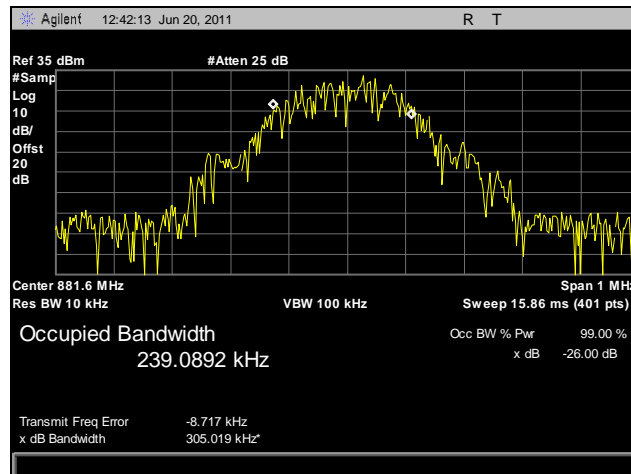


Plot 32. Occupied Bandwidth, Power-Out, Mid Channel, GSM, Part 22

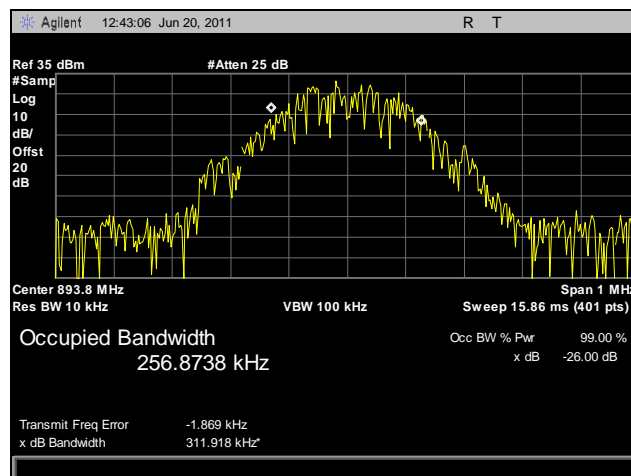


Plot 33. Occupied Bandwidth, Power-Out, High Channel, GSM, Part 22

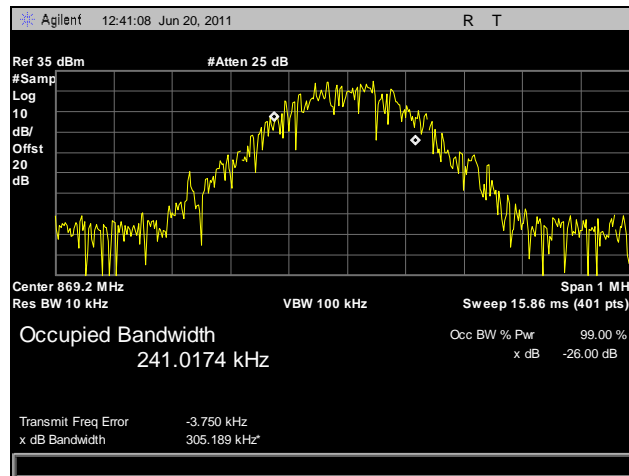


Plot 34. Occupied Bandwidth, Power-Out, Low Channel, CDMA, Part 22

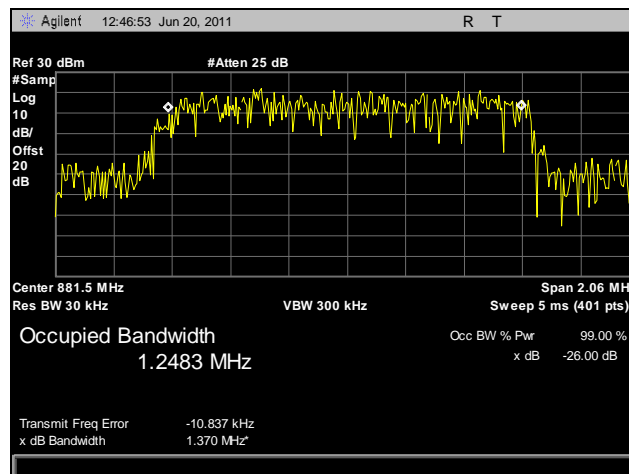


Plot 35. Occupied Bandwidth, Power-Out, Mid Channel, CDMA, Part 22

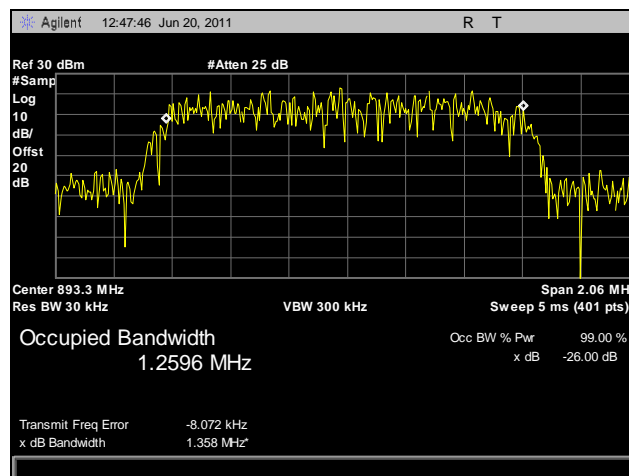


Plot 36. Occupied Bandwidth, Power-Out, High Channel, CDMA, Part 22

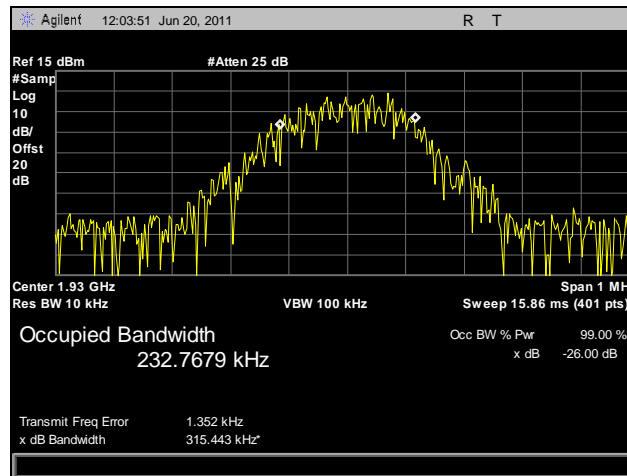


Plot 37. Occupied Bandwidth, Power-In, Low Channel, GSM, Part 24

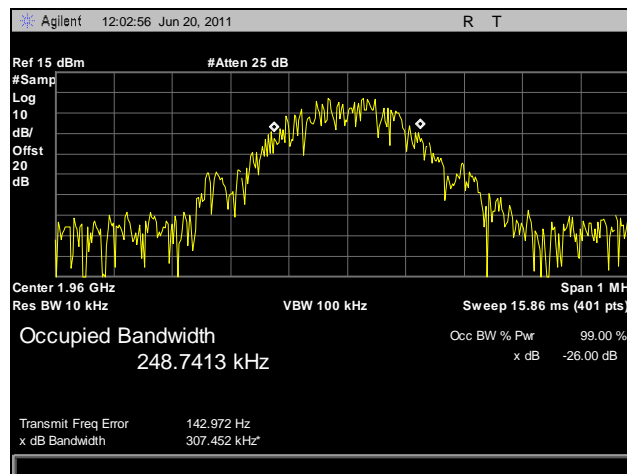


Plot 38. Occupied Bandwidth, Power-In, Mid Channel, GSM, Part 24

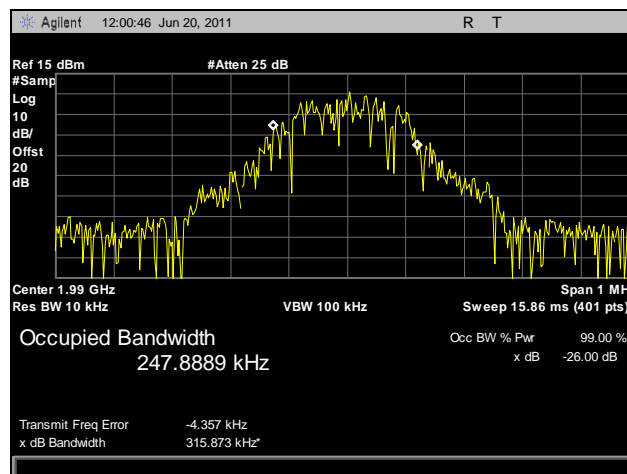


Plot 39. Occupied Bandwidth, Power-In, High Channel, GSM, Part 24

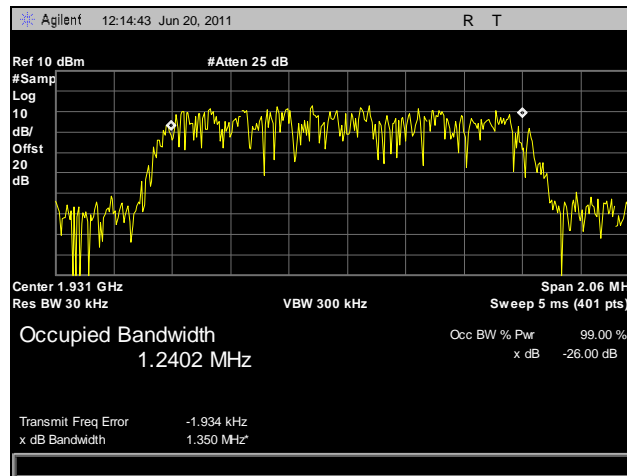


Plot 40. Occupied Bandwidth, Power-In, Low Channel, CDMA, Part 24

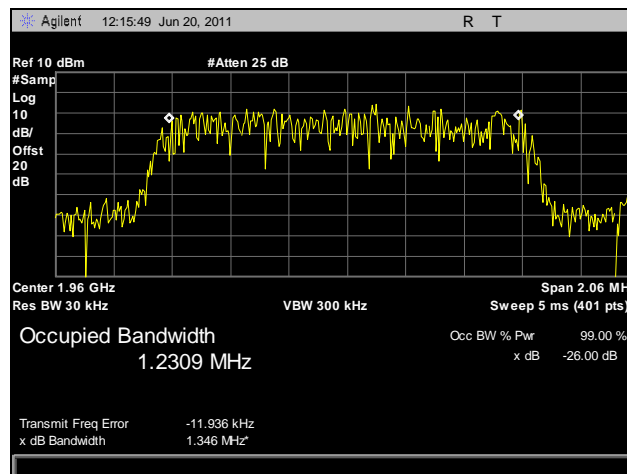


Plot 41. Occupied Bandwidth, Power-In, Mid Channel, CDMA, Part 24

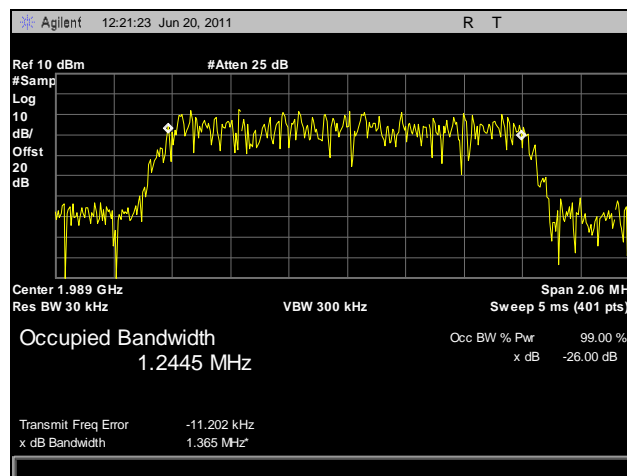


Plot 42. Occupied Bandwidth, Power-In, High Channel, CDMA, Part 24

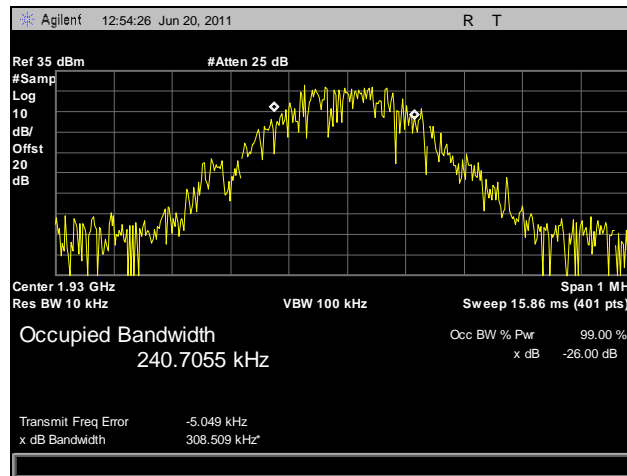

Plot 43. Occupied Bandwidth, Power-Out, Low Channel, GSM, Part 24

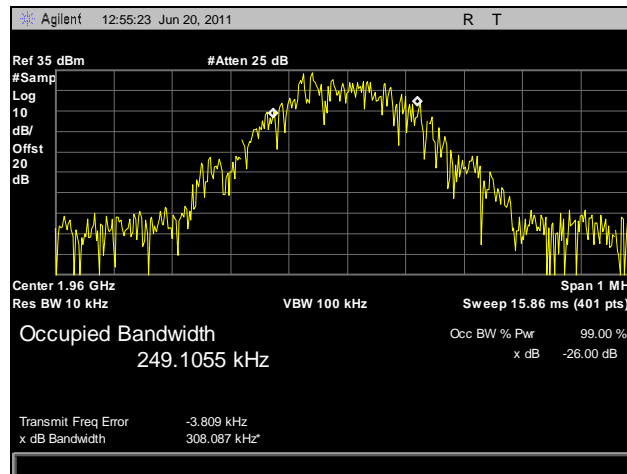


Plot 44. Occupied Bandwidth, Power-Out, Mid Channel, GSM, Part 24

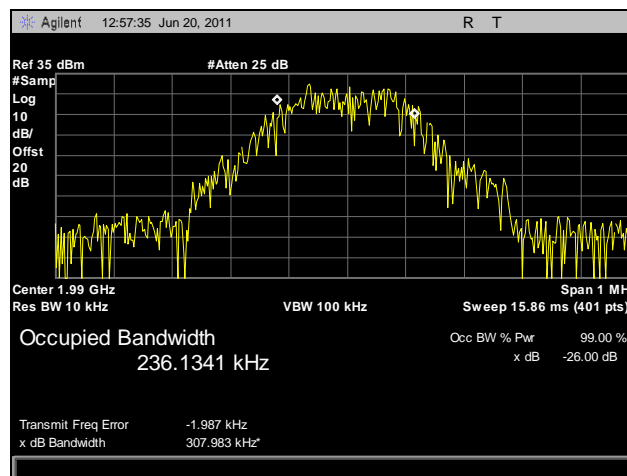


Plot 45. Occupied Bandwidth, Power-Out, High Channel, GSM, Part 24




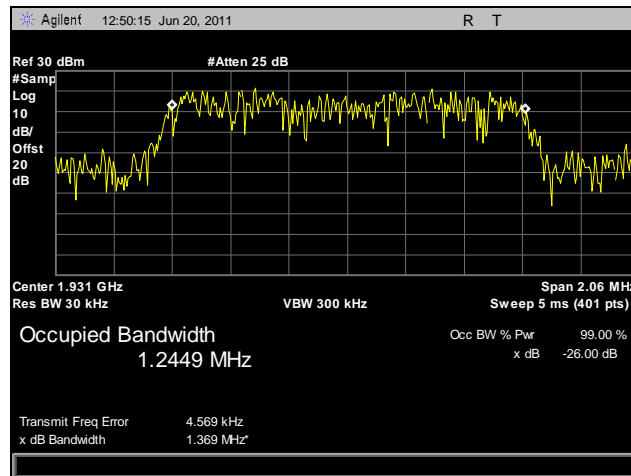

Plot 46. Occupied Bandwidth, Power-Out, Low Channel, CDMA, Part 24

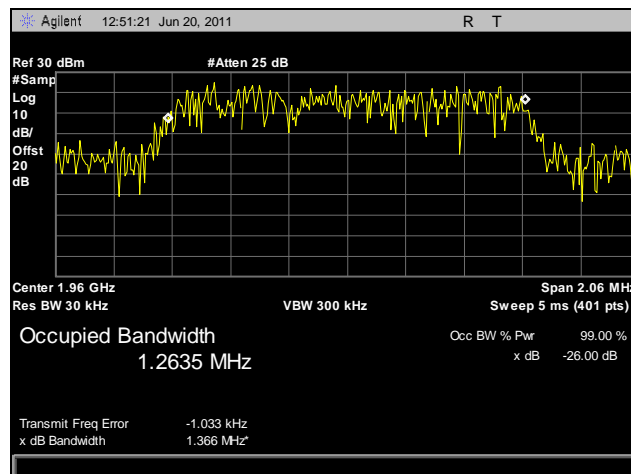

Plot 47. Occupied Bandwidth, Power-Out, Mid Channel, CDMA, Part 24

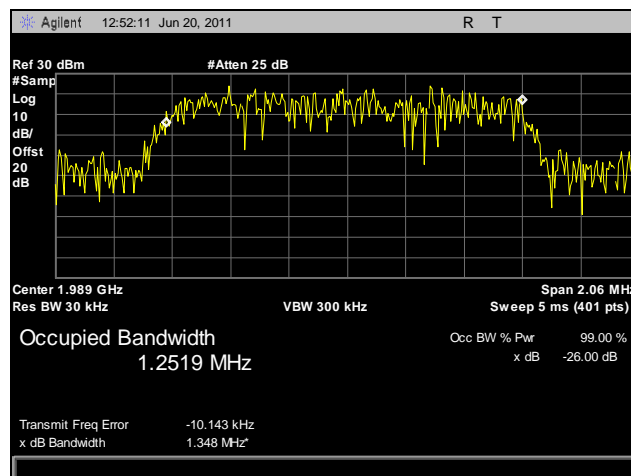

Plot 48. Occupied Bandwidth, Power-Out, High Channel, CDMA, Part 24



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1053 Radiated Spurious Emissions

**Test Requirement(s):** § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 Emission limitations Cellular equipment: The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$ .



**Test Procedures:** As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* was made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".


Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT's RF ports were terminated to 50ohm load. The base station was used to drive the DRT9957A AMP. The EUT was tested using both modulations and at the low, mid, and high channels. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. The plots are corrected for cable loss, antenna correction factor, and distance correction. The field strength was mathematically corrected to an E.I.R.P. Harmonic emissions up to the 10<sup>th</sup> or 40GHz, which ever was the lesser, were investigated.

The spectrum analyzer was set to 1MHz RBW and 3MHz VBW above 1 GHz and 100 kHz RBW and 300 kHz VBW below 1 GHz. The spectrum was investigated from 30MHz to the 10<sup>th</sup> harmonic of the carrier.


**Test Results:** The EUT complies with the requirements of this section.

**Test Engineer:** Len Knight


**Test Date(s):** 06/22/11 – 06/24/11

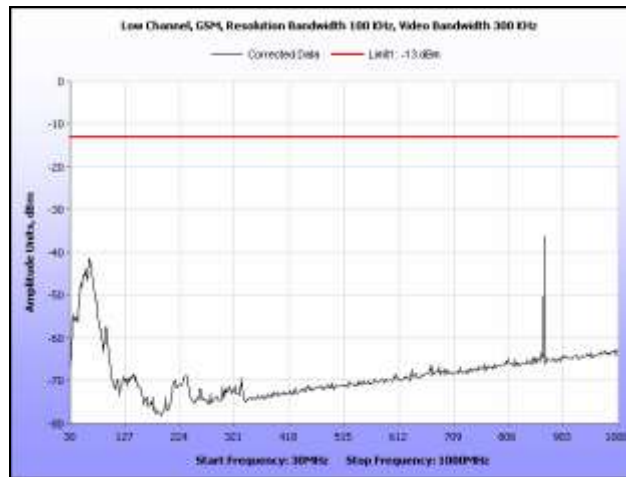


Plot 49. Radiated Spurious Emissions, Low Channel, GSM, Part 22, 30 MHz – 1 GHz

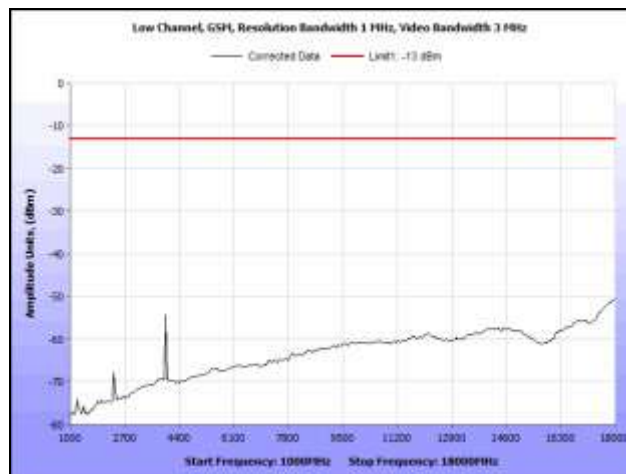


Plot 50. Radiated Spurious Emissions, Low Channel, GSM, Part 22, 1 GHz – 18 GHz

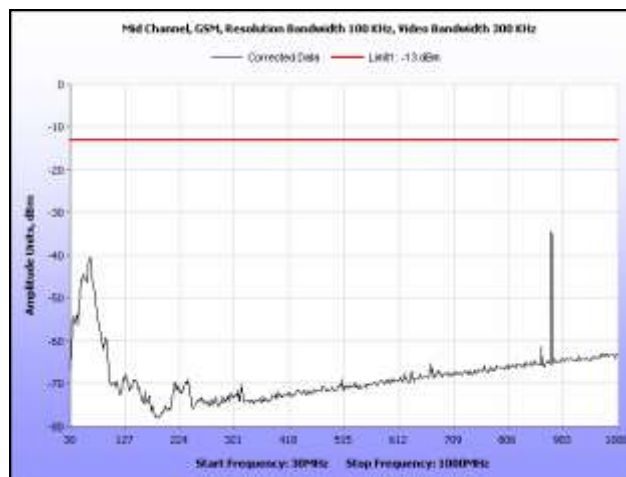


Plot 51. Radiated Spurious Emissions, Mid Channel, GSM, Part 22, 30 MHz – 1 GHz

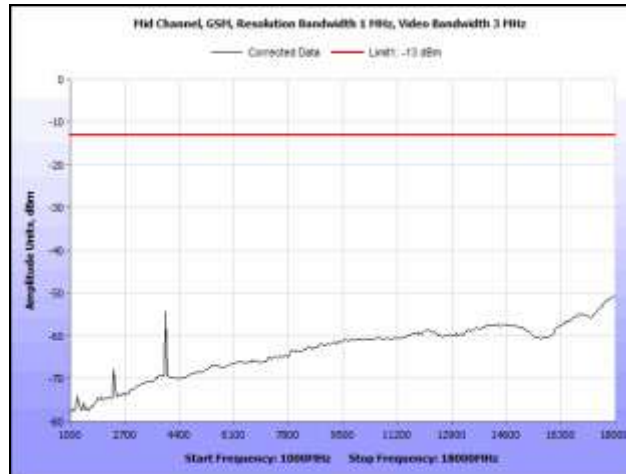


Plot 52. Radiated Spurious Emissions, Mid Channel, GSM, Part 22, 1 GHz – 18 GHz

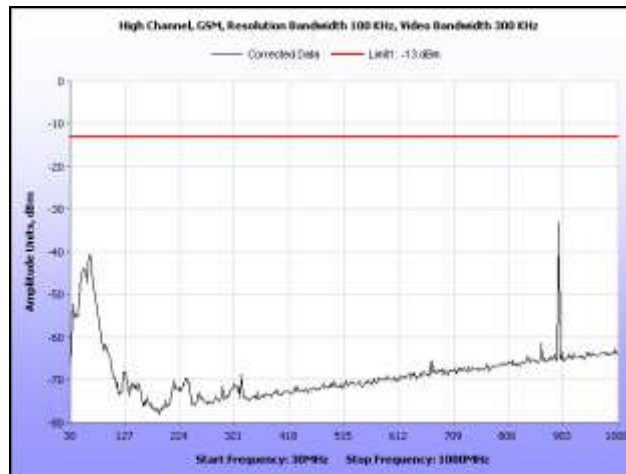


Plot 53. Radiated Spurious Emissions, High Channel, GSM, Part 22, 30 MHz – 1 GHz

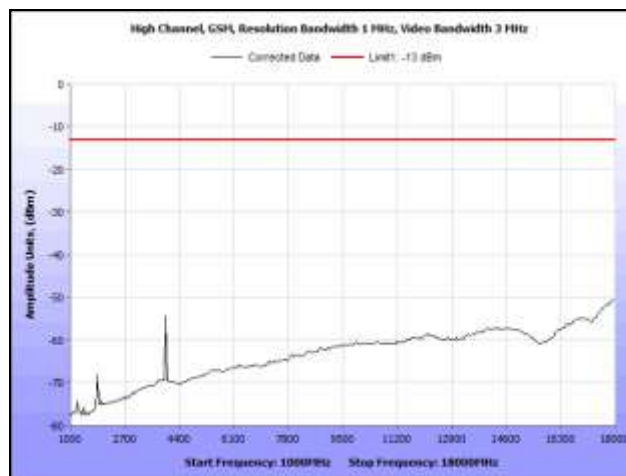


Plot 54. Radiated Spurious Emissions, High Channel, GSM, Part 22, 1 GHz – 18 GHz

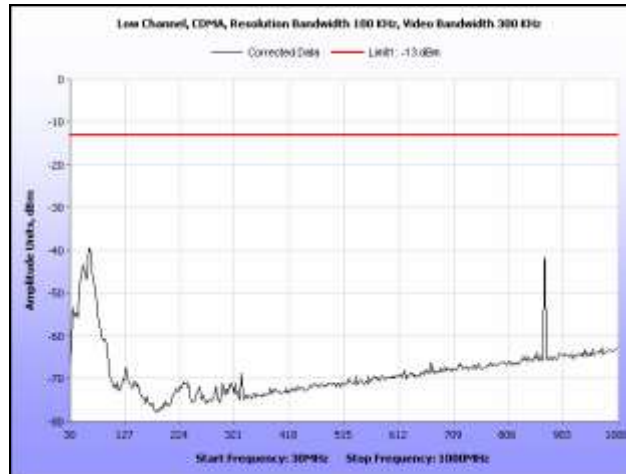


Plot 55. Radiated Spurious Emissions, Low Channel, CDMA, Part 22, 30 MHz – 1 GHz

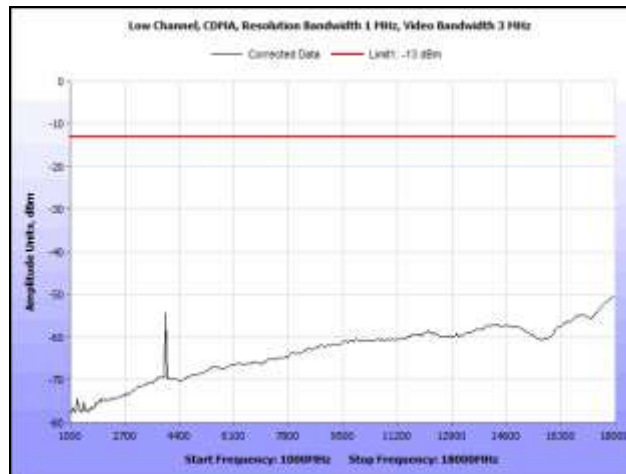


Plot 56. Radiated Spurious Emissions, Low Channel, CDMA, Part 22, 1 GHz – 18 GHz

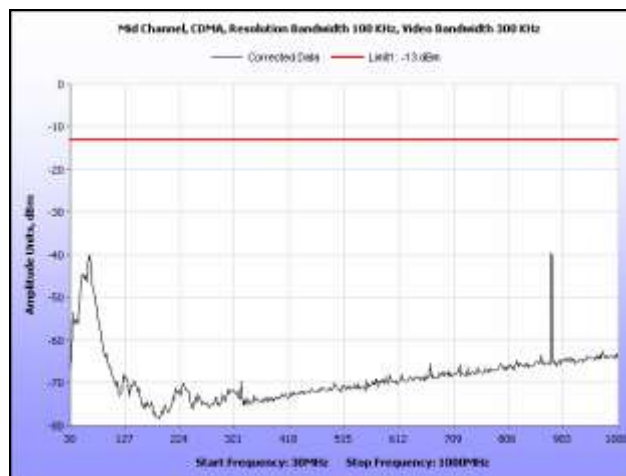


Plot 57. Radiated Spurious Emissions, Mid Channel, CDMA, Part 22, 30 MHz – 1 GHz

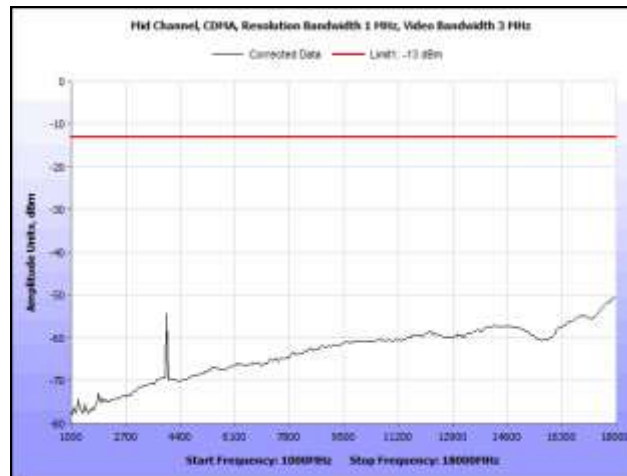

Plot 58. Radiated Spurious Emissions, Mid Channel, CDMA, Part 22, 1 GHz – 18 GHz

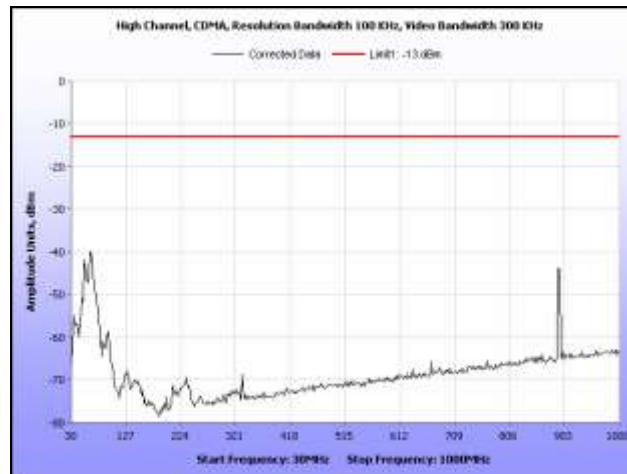

Plot 59. Radiated Spurious Emissions, High Channel, CDMA, Part 22, 30 MHz – 1 GHz

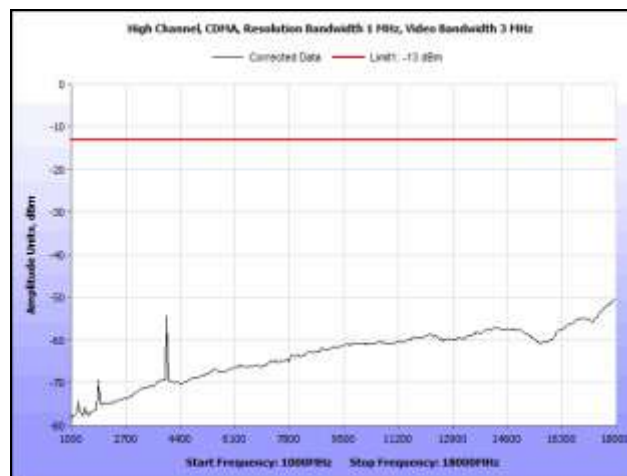

Plot 60. Radiated Spurious Emissions, High Channel, CDMA, Part 22, 1 GHz – 18 GHz



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1051 Spurious Emissions at Antenna Terminals

**Test Requirement(s):**    **§ 2.1051 Measurements required: Spurious emissions at antenna terminals:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

**§ 22.917** The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

**§ 22.917 (a)** Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**§ 22.917 (b) Measurement procedure.** Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy approved the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

**§24.238 Emission limitations for Broadband PCS equipment:** The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

**§ 24.238 (a)** Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**§ 24.238 (b) Measurement procedure.** Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.






**Test Procedures:** The EUT's RF Output Power port was connected to a spectrum analyzer through an attenuator. The base station was used to drive the DRT9957A AMP. The EUT was operated at both modulations and at the low, mid and high channels. Measurements were taken with an average detector up to the 10<sup>th</sup> harmonic of the carrier. The spectrum analyzer was set to 1 MHz RBW and 3 MHz RBW for testing.


**Test Results:** The EUT complies with the requirements of this section.

**Test Engineer(s):** Len Knight


**Test Date(s):** 06/28/11

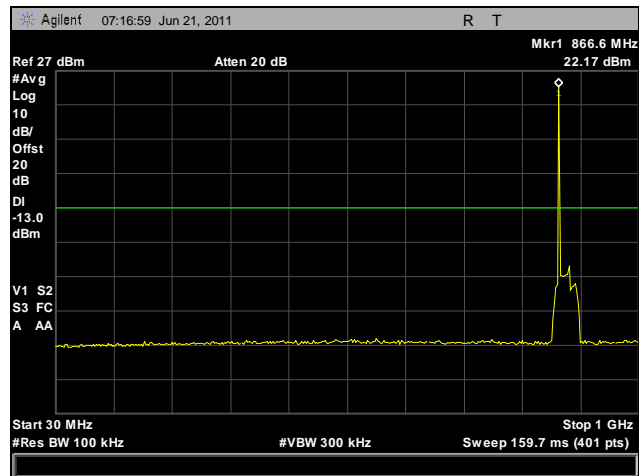


Plot 61. Conducted Spurious Emissions, Low Channel, GSM, Part 22, 30 MHz – 1 GHz

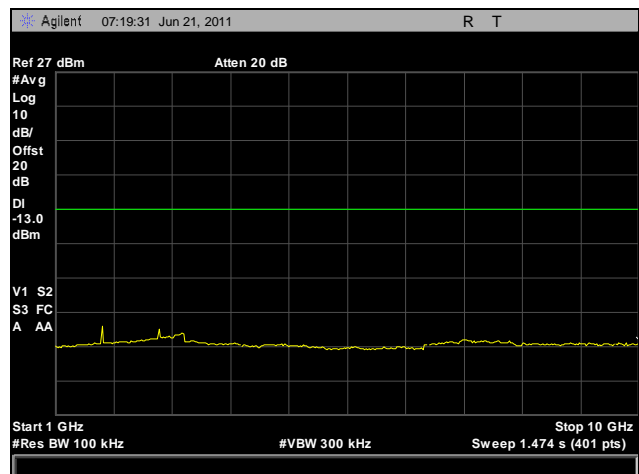


Plot 62. Conducted Spurious Emissions, Low Channel, GSM, Part 22, 1 GHz – 10 GHz

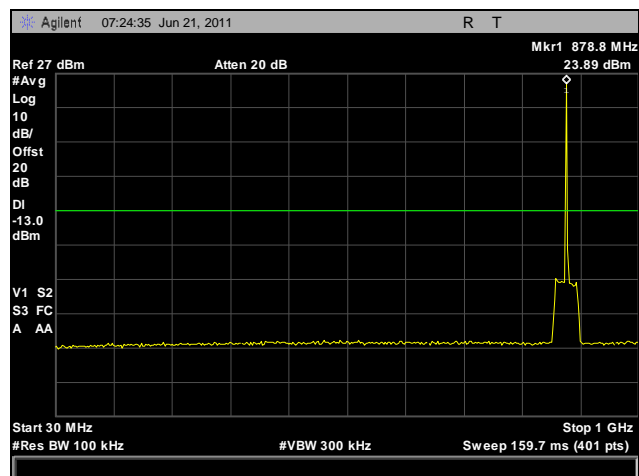


Plot 63. Conducted Spurious Emissions, Mid Channel, GSM, Part 22, 30 MHz – 1 GHz

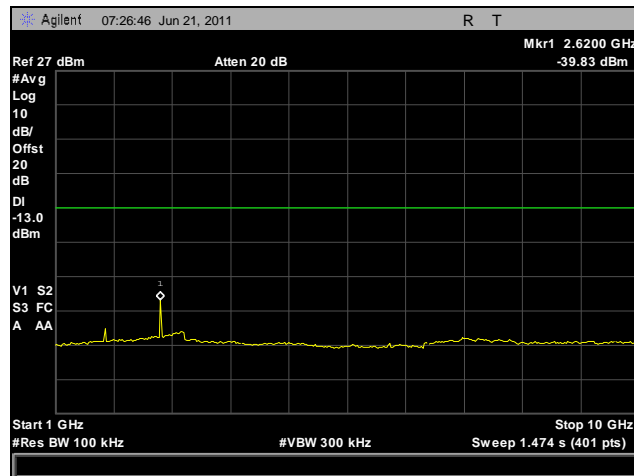


Plot 64. Conducted Spurious Emissions, Mid Channel, GSM, Part 22, 1 GHz – 10 GHz

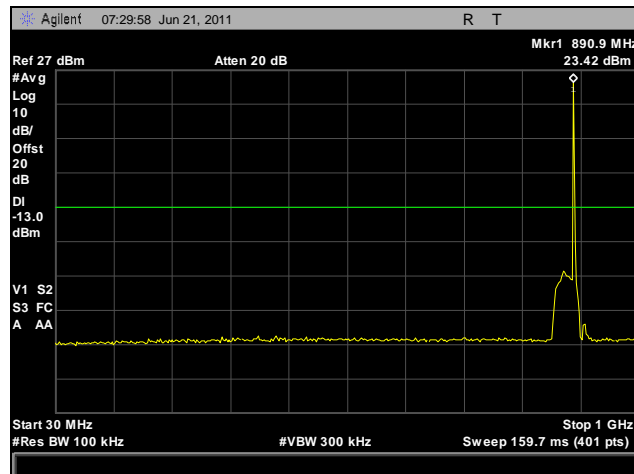


Plot 65. Conducted Spurious Emissions, High Channel, GSM, Part 22, 30 MHz – 1 GHz

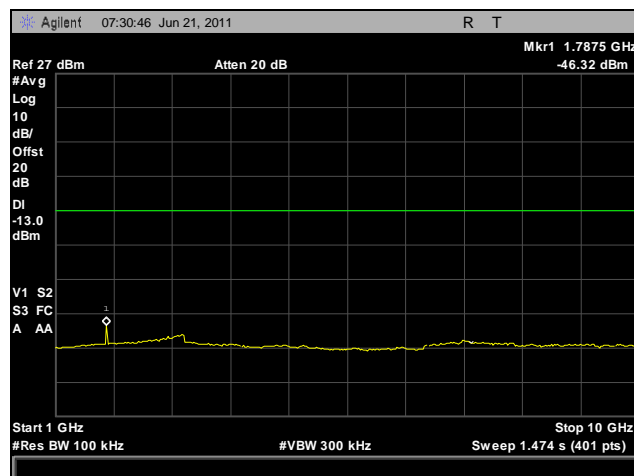


Plot 66. Conducted Spurious Emissions, High Channel, GSM, Part 22, 1 GHz – 10 GHz

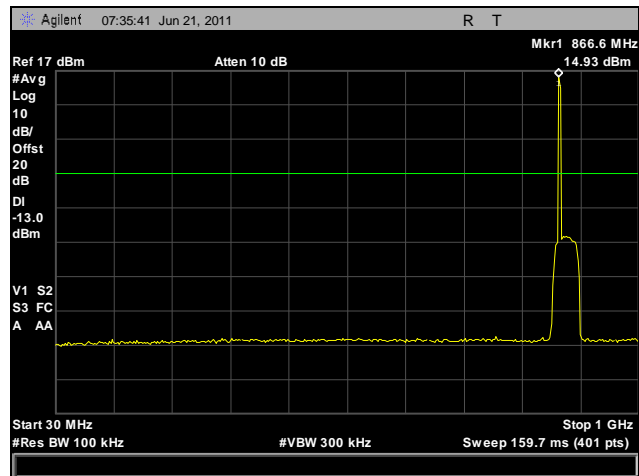


Plot 67. Conducted Spurious Emissions, Low Channel, CDMA, Part 22, 30 MHz – 1 GHz

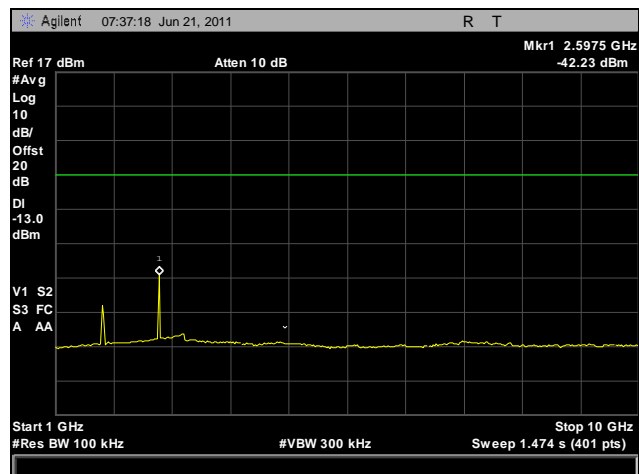


Plot 68. Conducted Spurious Emissions, Low Channel, CDMA, Part 22, 1 GHz – 10 GHz

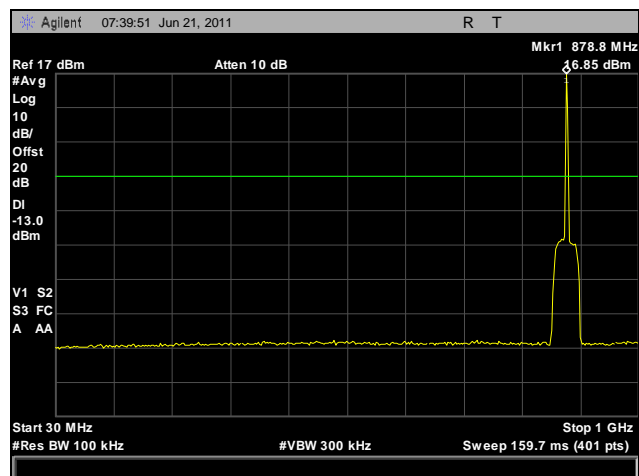


Plot 69. Conducted Spurious Emissions, Mid Channel, CDMA, Part 22, 30 MHz – 1 GHz

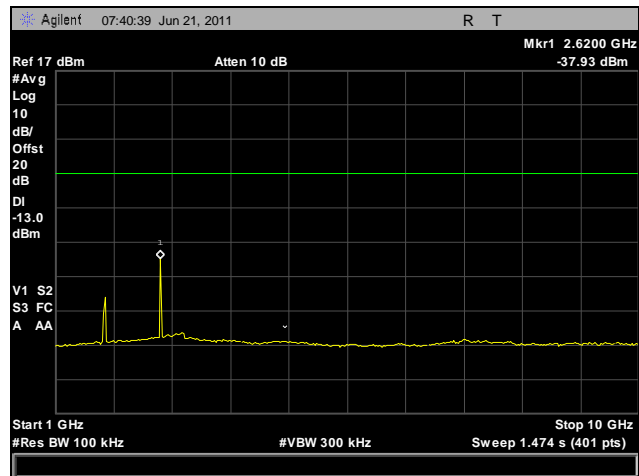


Plot 70. Conducted Spurious Emissions, Mid Channel, CDMA, Part 22, 1 GHz – 10 GHz

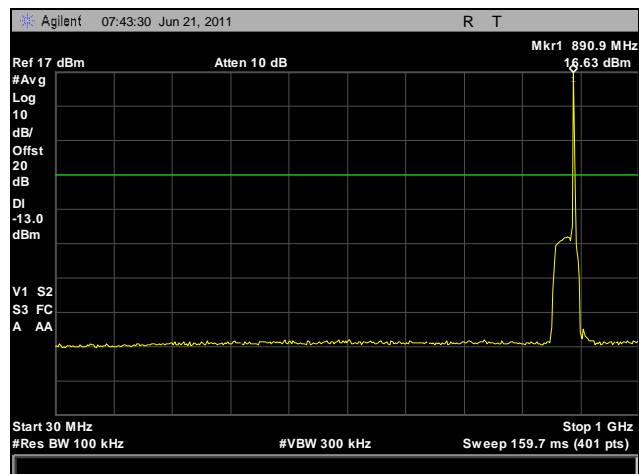


Plot 71. Conducted Spurious Emissions, High Channel, CDMA, Part 22, 30 MHz – 1 GHz

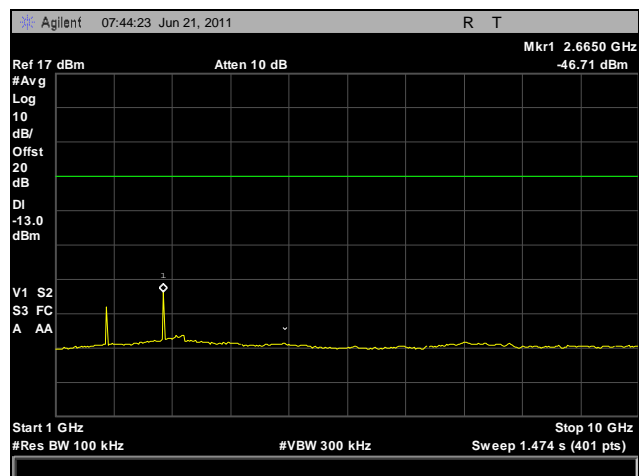


Plot 72. Conducted Spurious Emissions, High Channel, CDMA, Part 22, 1 GHz – 10 GHz

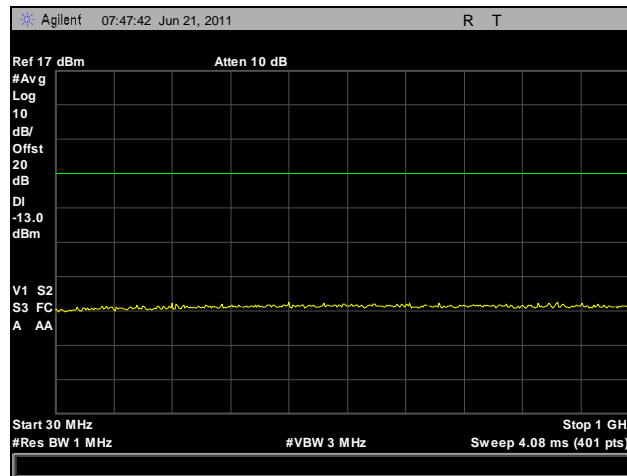


Plot 73. Conducted Spurious Emissions, Low Channel, GSM, Part 24, 30 MHz – 1 GHz

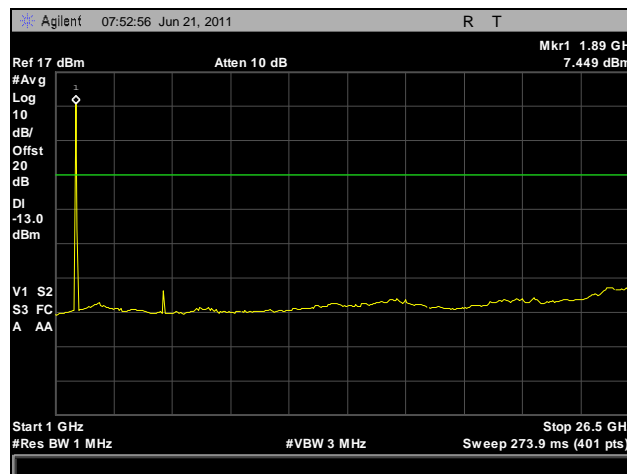


Plot 74. Conducted Spurious Emissions, Low Channel, GSM, Part 24, 1 GHz – 26.5 GHz

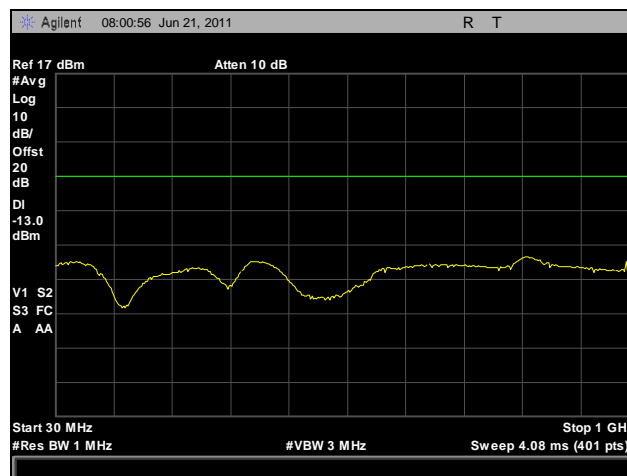


Plot 75. Conducted Spurious Emissions, Mid Channel, GSM, Part 24, 30 MHz – 1 GHz

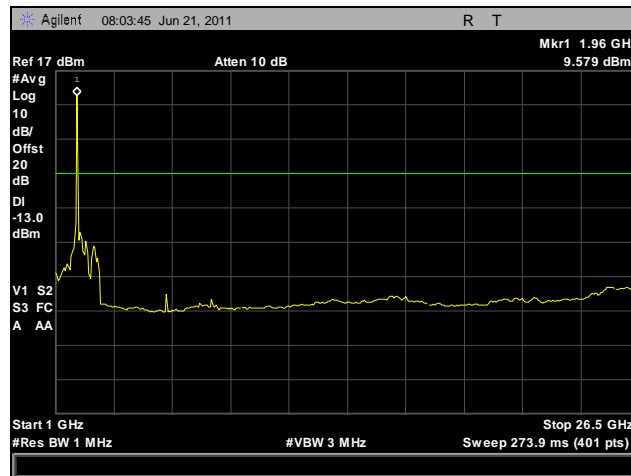


Plot 76. Conducted Spurious Emissions, Mid Channel, GSM, Part 24, 1 GHz – 26.5 GHz

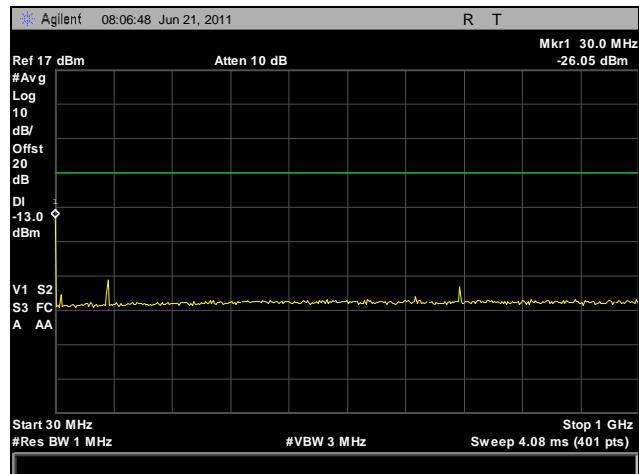


Plot 77. Conducted Spurious Emissions, High Channel, GSM, Part 24, 30 MHz – 1 GHz

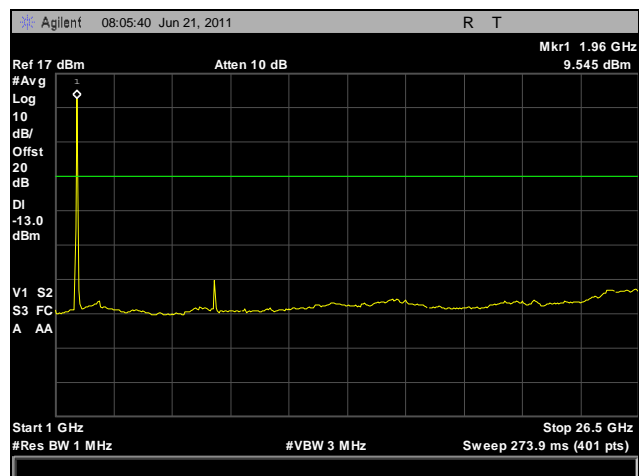


Plot 78. Conducted Spurious Emissions, High Channel, GSM, Part 24, 1 GHz – 26.5 GHz

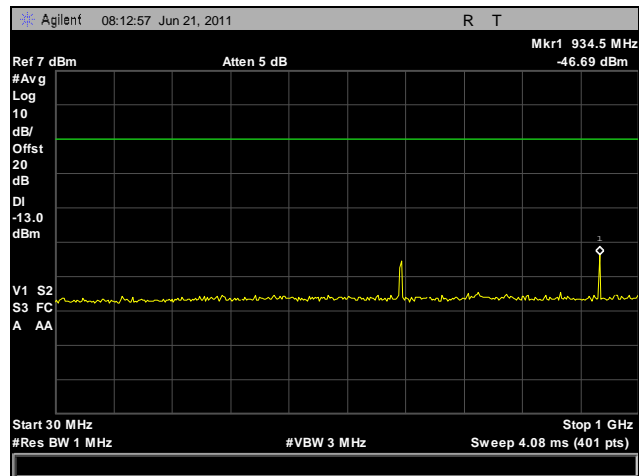

Plot 79. Conducted Spurious Emissions, Low Channel, CDMA, Part 24, 30 MHz – 1 GHz

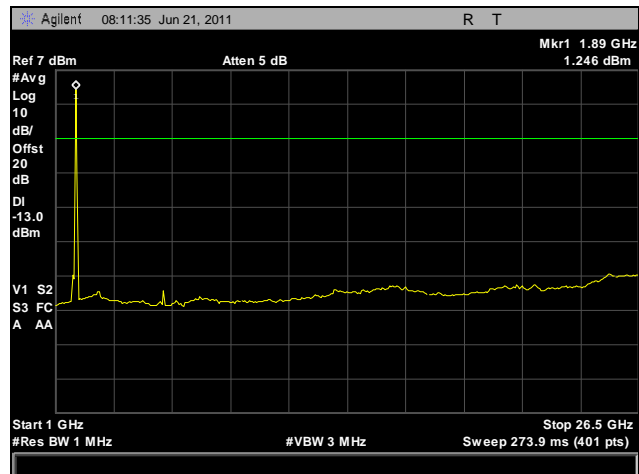


Plot 80. Conducted Spurious Emissions, Low Channel, CDMA, Part 24, 1 GHz – 26.5 GHz

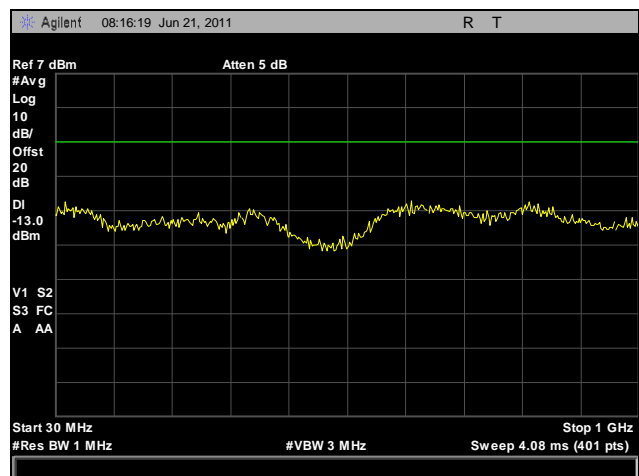


Plot 81. Conducted Spurious Emissions, Mid Channel, CDMA, Part 24, 30 MHz – 1 GHz




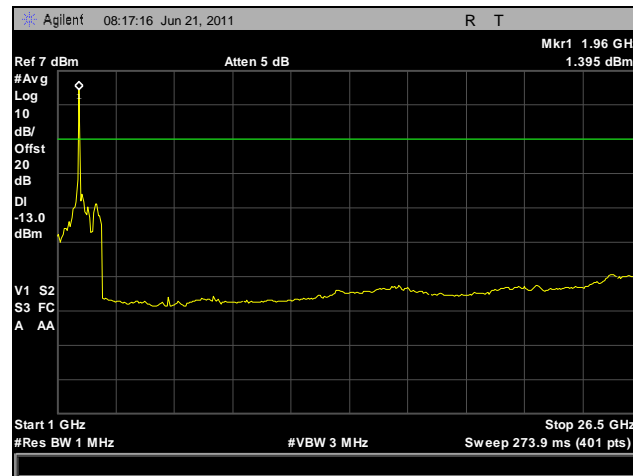

Plot 82. Conducted Spurious Emissions, Mid Channel, CDMA, Part 24, 1 GHz – 26.5 GHz

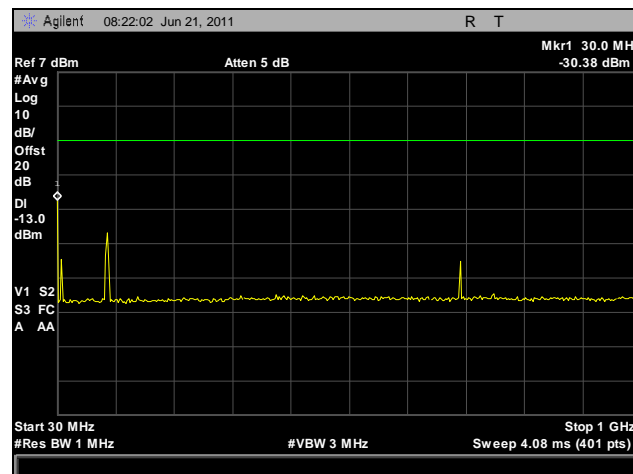

Plot 83. Conducted Spurious Emissions, High Channel, CDMA, Part 24, 30 MHz – 1 GHz

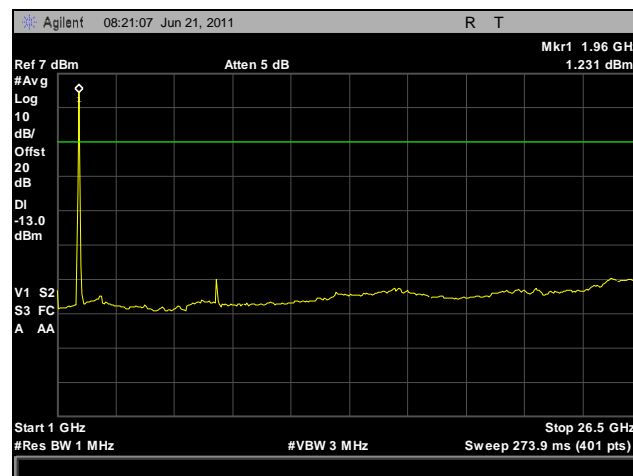

Plot 84. Conducted Spurious Emissions, High Channel, CDMA, Part 24, 1 GHz – 26.5 GHz



## Electromagnetic Compatibility Criteria for Intentional Radiators

### Intermodulation

**Test Requirement(s):** Intermodulation – Test all modulation types [TDMA, CDMA, and FM (covers GSM and F1D)]


- CW signal rather than typical signal is acceptable (for FM).
- At maximum drive level, for each modulation: one test with three tones, or two tests (high-, low-band edge) with two tones
- Limit usually is -13dBm conducted.
- Not needed for Single Channel systems
- Combination of modulation types not needed.

**Test Procedures:** A signal generator capable of CDMA and GSM modulation was used to drive the input of the EUT. The two tone test method was used. Each band was evaluated at the high and low band edge. Plots were taken for each modulation.


**Test Results:** Equipment is compliant with this requirement.

**Test Engineer(s):** Len Knight


**Test Date(s):** 06/27/11

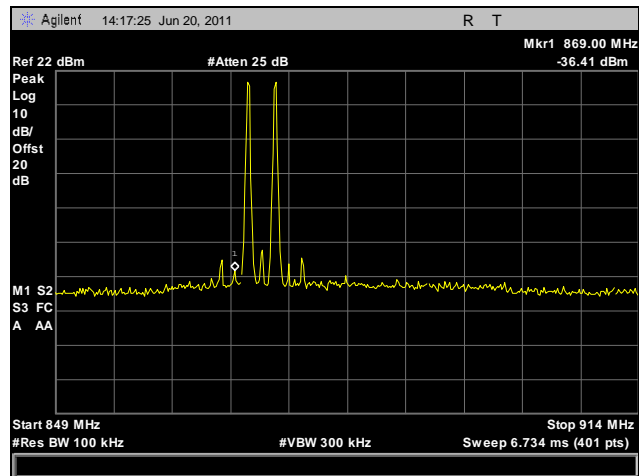


Plot 85. Intermodulation, Low Channel, GSM, Part 22

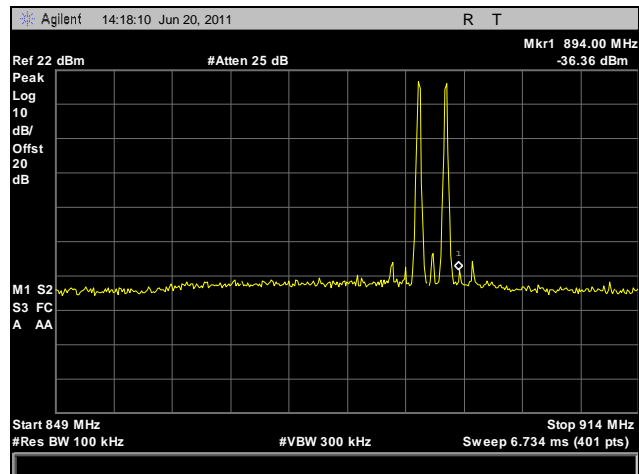


Plot 86. Intermodulation, High Channel, GSM, Part 22

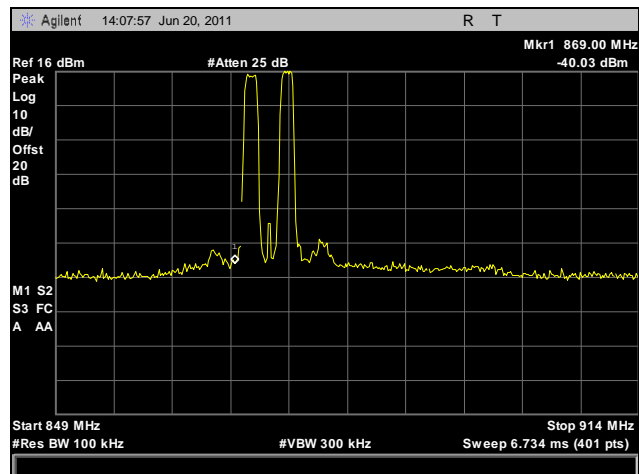


Plot 87. Intermodulation, Low Channel, CDMA, Part 22

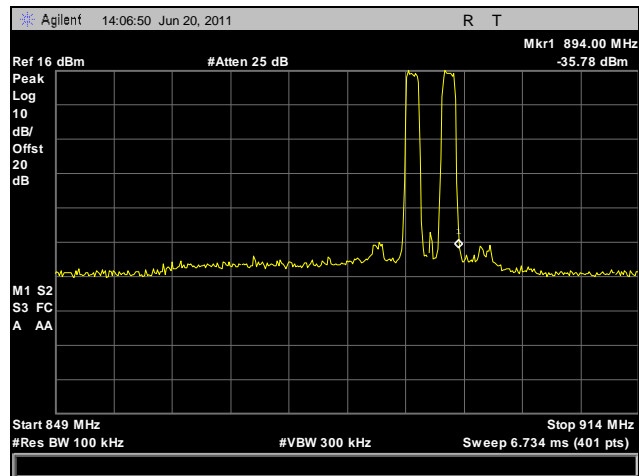


Plot 88. Intermodulation, High Channel, CDMA, Part 22

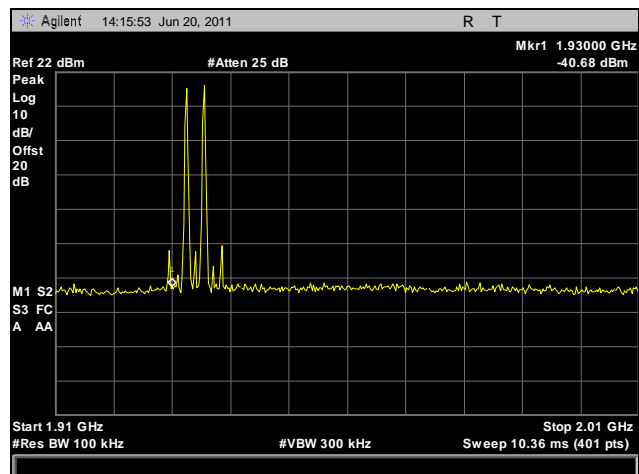


Plot 89. Intermodulation, Low Channel, GSM, Part 24

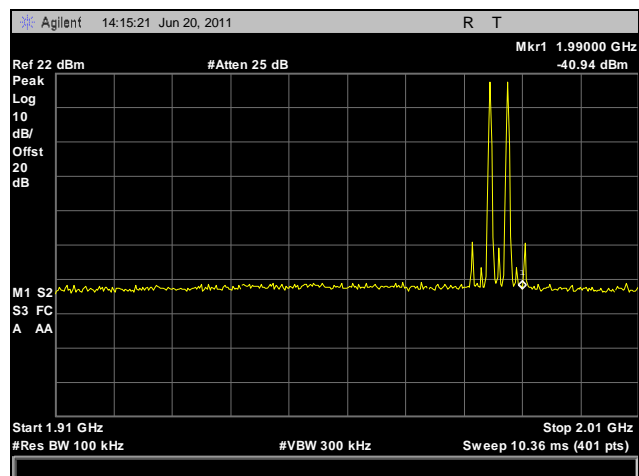

Plot 90. Intermodulation, High Channel, GSM, Part 24

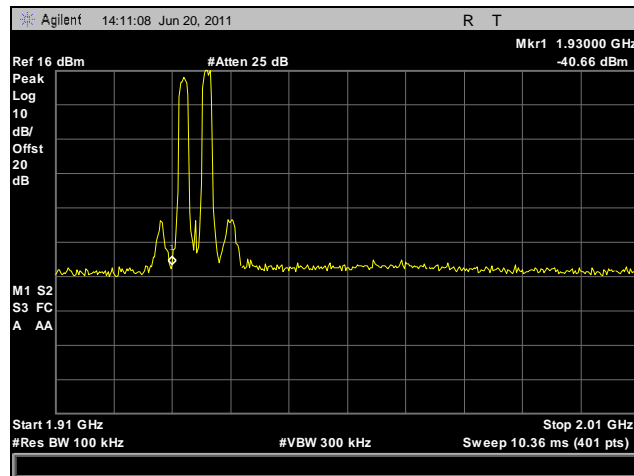

Plot 91. Intermodulation, Low Channel, CDMA, Part 24

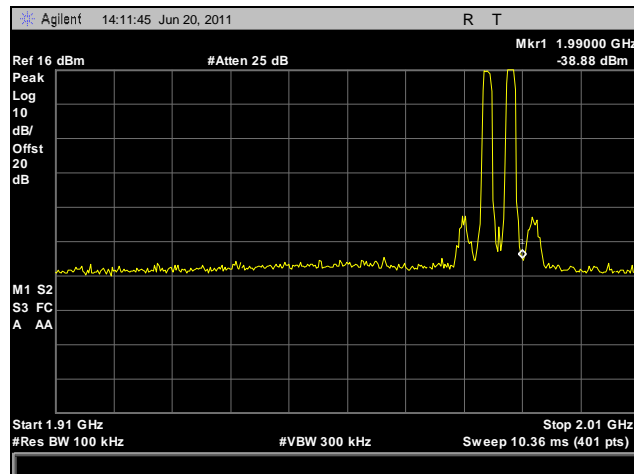

Plot 92. Intermodulation, High Channel, CDMA, Part 24



## Electromagnetic Compatibility Criteria for Intentional Radiators


### Out of Band Rejection

**Test Requirement(s):** Test for rejection of out-of-band signals


**Test Procedures:** A signal generator was used to drive the input of the EUT. The signal generator was swept across the band of interest. Filter frequency response plots were taken.

**Test Engineer(s):** Len Knight


**Test Date(s):** 06/27/11

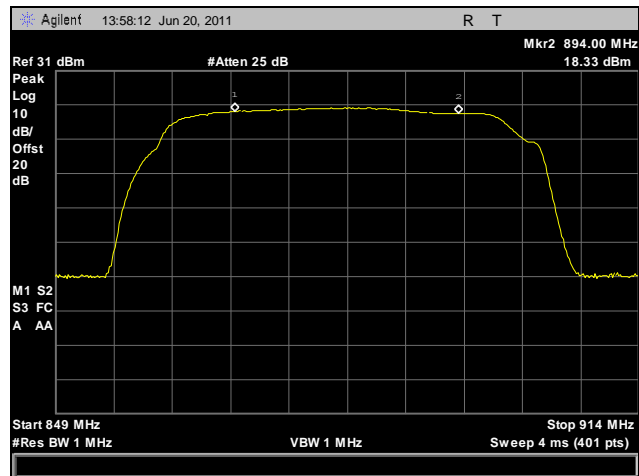


Plot 93. Out of Band Rejection, Part 22, Filter Response

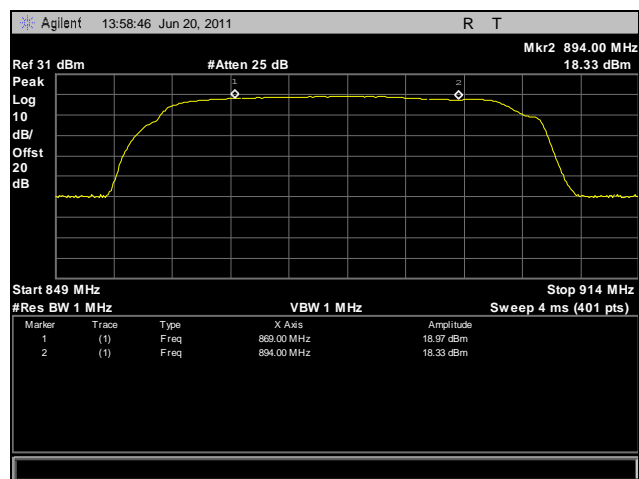

Plot 94. Out of Band Rejection, Part 22, Filter Response with Marker Table

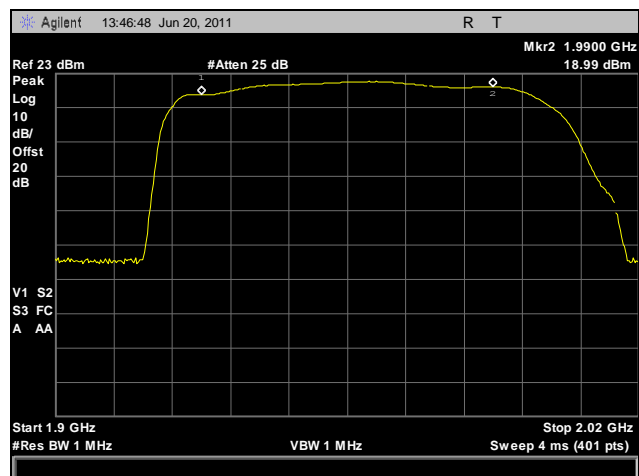

Plot 95. Out of Band Rejection, Part 24, Filter Response

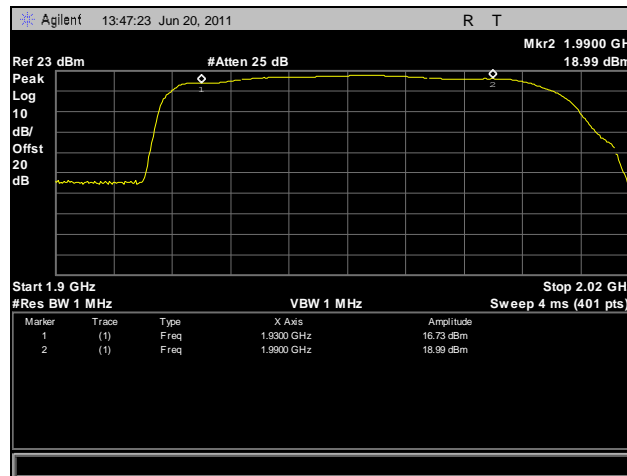

Plot 96. Out of Band Rejection, Part 24, Filter Response with Marker Table





## IV. Test Equipment



## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	09/27/2010	09/27/2011
1T2511	ANTENNA; HORN	EMCO	3115	08/31/2010	08/31/2011
1T4710	SIGNAL GENERATOR	HEWLETT PACKARD	8648D	03/30/2011	03/30/2012
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	08/23/2010	08/23/2013
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	06/14/2011	06/14/2012
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4297	TRANSFORMER; ISOLATION	SOLAR ELECTRONICS	6220-4	SEE NOTE	
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	11/03/2010	11/03/2011
1T4621	ESA-E SERIES SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4402B	05/31/2011	05/31/2012

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Digital Receiver Technology, Inc.  
DRT9957A (Amplifier)

Electromagnetic Compatibility  
End of Report  
CFR Title 47 Part 22 Subpart H & Part 24 Subpart E

---

# End of Report