

**TEST REPORT**

Applicant Name & : TELEBRANDS CORPORATION  
Address : One Telebrands Plaza, Fairfield, NJ 07004, USA

Sample Description  
Product : Star Shower Remote  
FCC ID : XLZ-SS-RM002  
Model No. : 9943  
Electrical Rating : 125V/60Hz 13A

Date Received : 18 September 2015  
Date Test Conducted : 18 September 2015 – 9 October 2015

Test standards : **FCC Part 15: 2014 Subpart B**

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.

Remark : None.

\*\*\*\*\*End of Page\*\*\*\*\*

*Prepared and Checked By:*

  
\_\_\_\_\_  
Sky Zhu  
Engineer  
Intertek Guangzhou

*Approved By:*

  
\_\_\_\_\_  
Helen Ma  
Team Leader  
Intertek Guangzhou  
10 October 2015  
\_\_\_\_\_  
Signature  
Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch  
Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China  
Tel / Fax: 86-20-8213 9688/86-20-3205 7538

**CONTENT**

<b>TEST REPORT .....</b>	<b>1</b>
<b>CONTENT .....</b>	<b>2</b>
<b>1 TEST RESULTS SUMMARY .....</b>	<b>3</b>
<b>2 TEST RESULTS CONCLUSION .....</b>	<b>4</b>
<b>3 LABORATORY MEASUREMENTS .....</b>	<b>5</b>
<b>4 TEST RESULTS .....</b>	<b>6</b>
4.1 CONDUCTED DISTURBANCE VOLTAGE AT MAINS PORTS.....	6
4.1.1 <i>Used Test Equipment</i> .....	6
4.1.2 <i>Block Diagram of Test Setup</i> .....	6
4.1.3 <i>Test Setup and Procedure</i> .....	6
4.1.4 <i>Limit</i> .....	7
4.1.5 <i>Test Data and curve</i> .....	8
4.1.6 <i>Measurement Uncertainty</i> .....	9
4.2 RADIATED EMISSION (30 MHZ -1000 MHZ).....	10
4.2.1 <i>Used Test Equipment</i> .....	10
4.2.2 <i>Block Diagram of Test Setup</i> .....	10
4.2.3 <i>Test Setup and Procedure</i> .....	11
4.2.4 <i>Limit</i> .....	11
4.2.5 <i>Test Data</i> .....	12
4.2.6 <i>Test Curve</i> .....	13
4.2.7 <i>Measurement uncertainty</i> .....	14
4.3 RADIATED EMISSION ABOVE 1 GHZ.....	14
4.3.1 <i>Used Test Equipment</i> .....	14
4.3.2 <i>Block Diagram of Test Setup</i> .....	15
4.3.3 <i>Test Setup and Procedure</i> .....	16
4.3.4 <i>Limit</i> .....	16
4.3.5 <i>Test Data</i> .....	17
4.3.6 <i>Test Curve</i> .....	18
4.3.7 <i>Measurement uncertainty</i> .....	18

**TEST RESULTS SUMMARY****Classification of EUT: Class B**

Test Item	Standard	Result
Conducted disturbance voltage at mains ports	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (30 MHz–1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Radiated emission (Above 1 GHz)	FCC Part 15: 2014, Subpart B	Pass
Remark: Reference publication is used for methods of measurement: ANSI C63.4:2014		

**Remark:** 1. The symbol “N/A” in above table means Not Applicable.  
2. When determining the test results, measurement uncertainty of tests has been considered.

**2**

## **Test Results Conclusion**

**(with Justification)**

**RE:** EMC Testing Pursuant to FCC Part 15, Subpart B Performed on the Star Shower Remote, Model: 9943.

We tested the Star Shower Remote, Model: 9943 to determine if it was in compliance with the relevant FCC rules as marked on the Test Results Summary. We found that the unit met the requirement of FCC Part 15, Subpart B when tested as received. The worst case's test data was presented in this test report.

An un-modulated CW signal at the operating frequency of the EUT is supplied to the EUT for all measurements.

The receiver type of the EUT is super heterodyne.

**Conclusion:**

The sample as received complied with the FCC Part 15 requirement.

The production units are required to conform to the initial sample as received when the units are placed on the market.

**3****LABORATORY MEASUREMENTS****Configuration Information****Equipment Under Test (EUT):** Star Shower Remote**Model:** 9943**Serial No.** Not Labeled**Support Equipment:** Incandescent Light Bulb**Rated Voltage:** 120V/60Hz**Condition of Environment:**  
Temperature : 22~28°C  
Relative Humidity: 35~60%  
Atmosphere Pressure 86~106kPa**Notes:**

1. The EMI measurements had been made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.  
An attempt had been made to maximize the emission by varying the configuration of the EUT.

**2. Test Sites:**

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City,  
GETDD Guangzhou, China

Except Radiated Disturbance was performed at:

Room 101, Block A, No.11 Jing Ye San Street, Yu Shu Industrial Park, Guangzhou Science City,  
GETDD Guangzhou

## 4 TEST RESULTS


### 4.1 Conducted Disturbance Voltage at mains ports

**Test Result: Pass**

#### 4.1.1 Used Test Equipment

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM004-04	EMC shield Room	8m×3m×3m	Zhongyu	2015-2-10	2016-2-10
EM080-05	EMI receiver	ESCI	R&S	2015-8-4	2016-8-4
EM006-05	LISN	ENV216	R&S	2014-12-12	2015-12-12
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

#### 4.1.2 Block Diagram of Test Setup

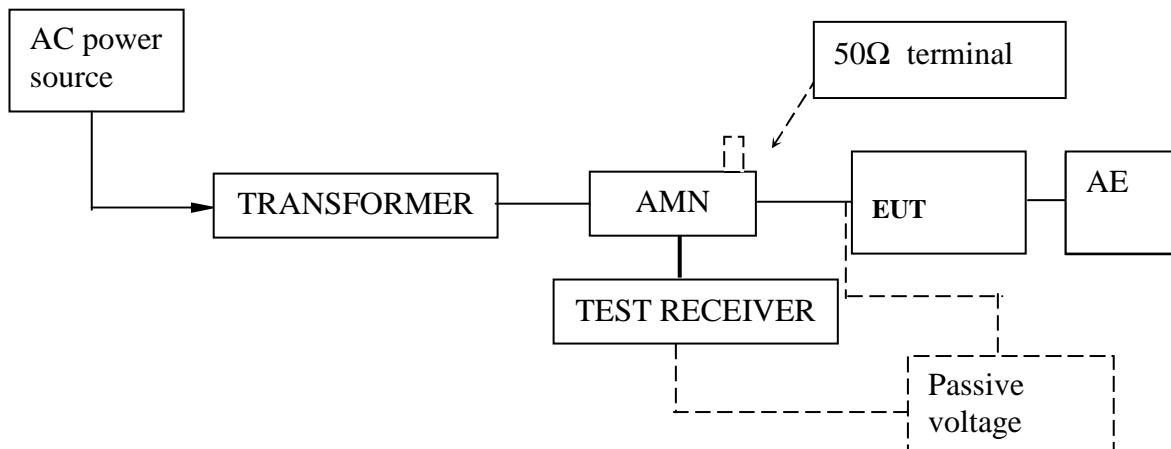

#### 4.1.3 Test Setup and Procedure

Test was performed according to ANSI C63.4: 2014. The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a  $50\Omega$  linear impedance. An Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT.

During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

#### 4.1.4 Limit

Class B

<b>Frequency range</b> MHz	<b>AC mains terminals</b> dB (uV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note 1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note 2: The lower limit is applicable at the transition frequency.


#### 4.1.5 Test Data and curve

At main terminal: Pass

Test Voltage: AC120 V, 60 Hz

Tested Wire: Live


Operation Mode: Receiving mode + Lighting

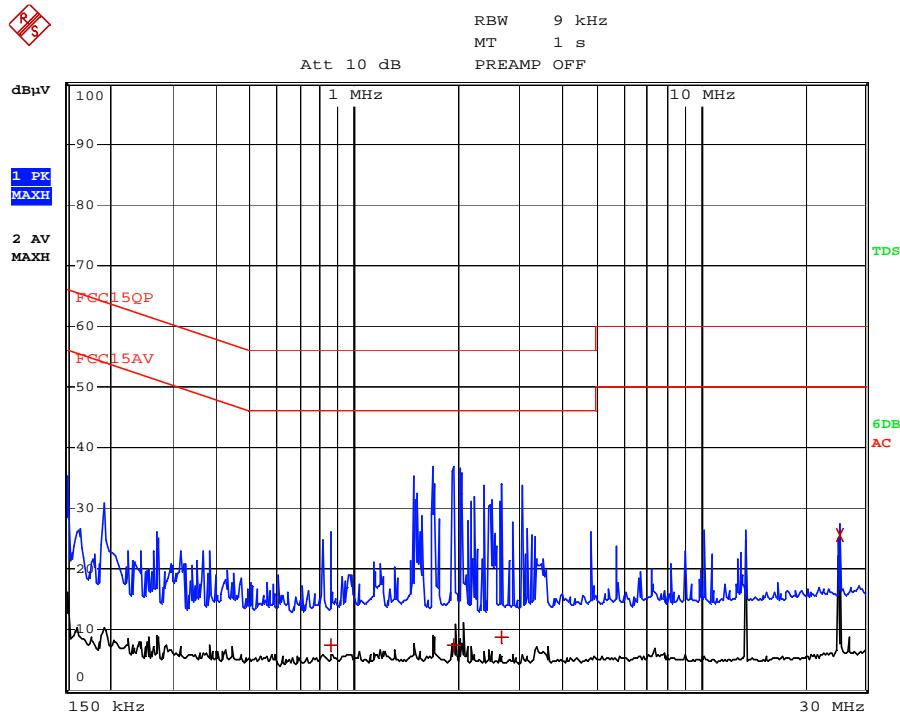

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
2 Average	25.202 MHz	25.50 L1	-24.49	
1 Quasi Peak	2.686 MHz	8.70 L1	-47.30	
1 Quasi Peak	1.946 MHz	7.58 L1	-48.41	
1 Quasi Peak	858 kHz	7.37 L1	-48.62	

## Tested Wire: Neutral

## Operation Mode: Receiving mode + Lighting

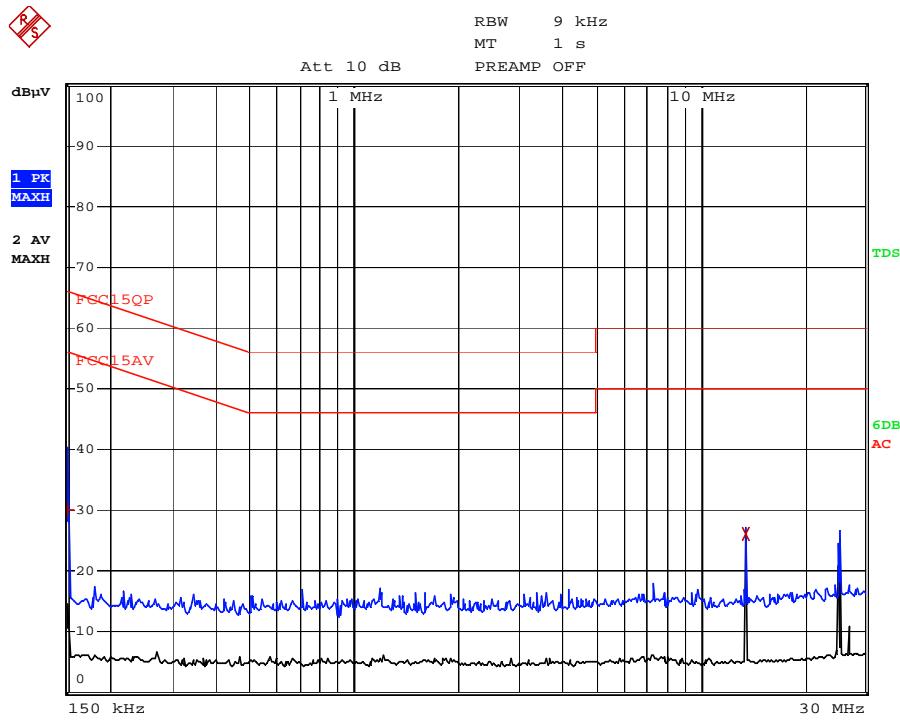

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	FCC15QP			
Trace2:	FCC15AV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV	DELTA	LIMIT dB
2 Average	13.522 MHz	26.07 L1	-23.92	
1 Quasi Peak	150 kHz	29.96 L1	-36.03	


## 4.1.6 Measurement Uncertainty

Uncertainty: 2.58 dB at a level of confidence of 95%

## 4.2 Radiated Emission (30 MHz -1000 MHz)

**Test Result: Pass****4.2.1 Used Test Equipment**

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2015-6-9	2016-6-9
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZB ECK	2015-8-30	2016-8-30
EM031-02-01	Coaxial cable	/	R&S	2015-6-9	2016-6-9
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

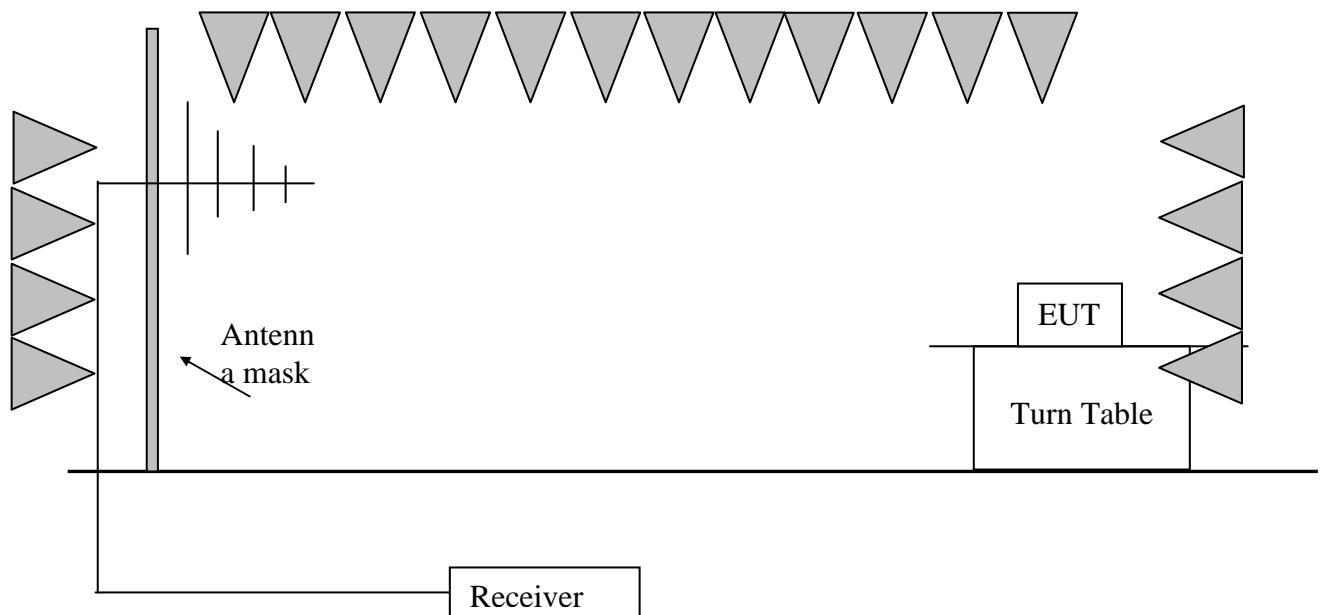**4.2.2 Block Diagram of Test Setup**

#### 4.2.3 Test Setup and Procedure

The measurement was applied in a 3 m semi-anechoic chamber. The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mask. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2014 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz. The frequency range from 30MHz to 1000MHz was checked

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

<b>Highest frequency generated or used in the device or on which the device operates or tunes (MHz)</b>	<b>Upper Frequency of Radiated Measurement</b>
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

At transitional frequencies the lower limit applies.

Remark: Radiated Emission was performed from 30 MHz to 1 GHz.

#### 4.2.4 Limit

Class B limit at 3m test distance:

<b>Frequency range</b> MHz	<b>Quasi-peak limits</b> dB ( $\mu$ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 1000	54



At transitional frequencies the lower limit applies.

**4.2.5 Test Data****Test Voltage: AC120 V, 60 Hz****Receiver mode + Lighting on  
Horizontal**

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector Function
47.90	7.90	13.60	21.50	40.00	-18.50	QP
319.08	9.80	16.00	25.80	46.00	-20.20	QP
711.92	11.60	23.10	34.70	46.00	-11.30	QP

**Vertical**

Frequency (MHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector Function
59.40	9.80	12.10	21.90	40.00	-18.10	QP
527.92	11.90	20.40	32.30	46.00	-13.70	QP
594.08	11.60	22.00	33.60	46.00	-12.40	QP

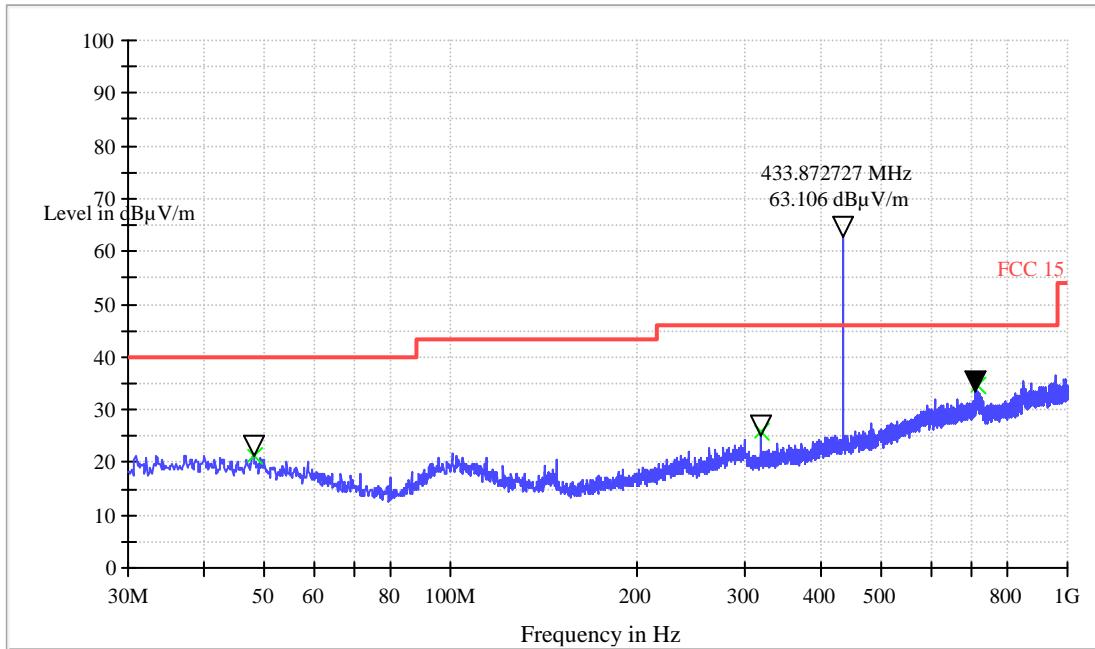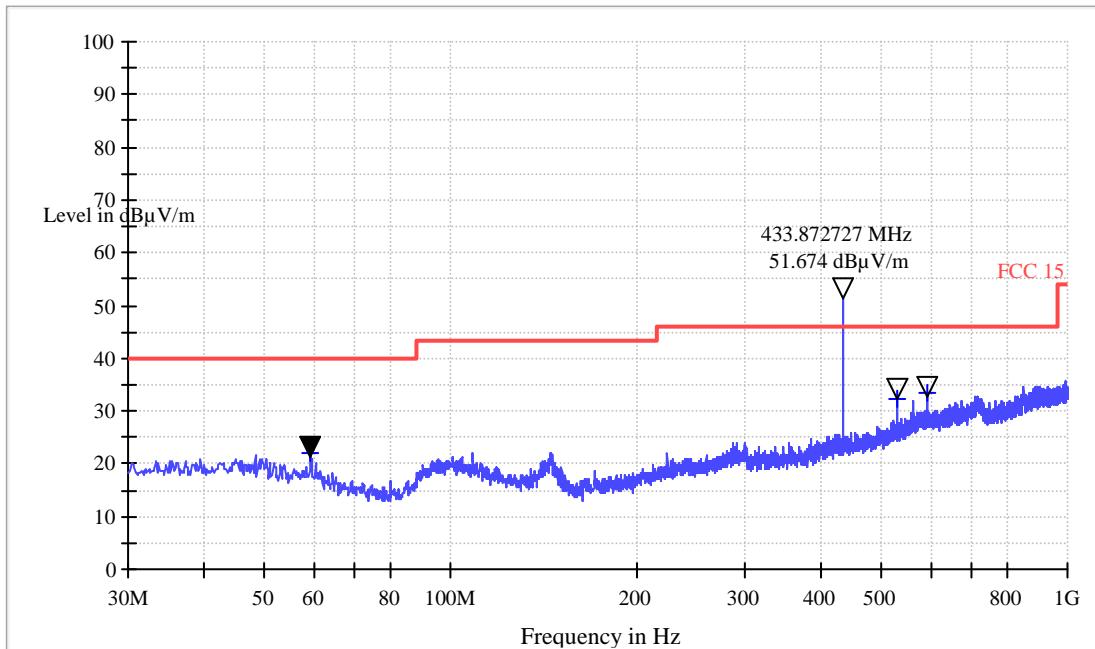**4.2.6 Test Curve****Receiver function + Lighting on  
Horizontal:****Vertical**

**Remark: The 433.872MHz is the un-modulated CW signal from the SIGNAL Generator**

**4.2.7 Measurement uncertainty**

Uncertainty: 4.87 dB in the frequency range of 30-1000 MHz at a level of confidence of 95%


**4.3 Radiated Emission above 1 GHz**

**Test Result: Pass**

**4.3.1 Used Test Equipment**

Equipment No.	Equipment	Model	Manufacturer	Cal.Date	Due Date
EM030-01	3m Semi-Anechoic Chamber	9×6×6 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM030-02	Control room for 3m Semi-Anechoic Chamber	4×4×3 m3	ETS•LINDGR EN	2015-5-3	2016-5-3
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	2015-6-9	2016-6-9
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZB ECK	2015-8-30	2016-8-30
EM031-03	Signal and Spectrum Analyzer (10 Hz~40 GHz)	R&S FSV40	R&S	2015-6-9	2016-6-9
EM033-02	Double-Ridged Waveguide Horn Antenna (800 MHz-18 GHz)	R&S HF907	EM033-02	2015-5-30	2016-5-30
EM031-02-01	Coaxial cable	/	R&S	2015-6-9	2016-6-9
EM084-02	SIGNAL Generator	SML02	R&S	2015-6-9	2016-6-9

#### 4.3.2 Block Diagram of Test Setup

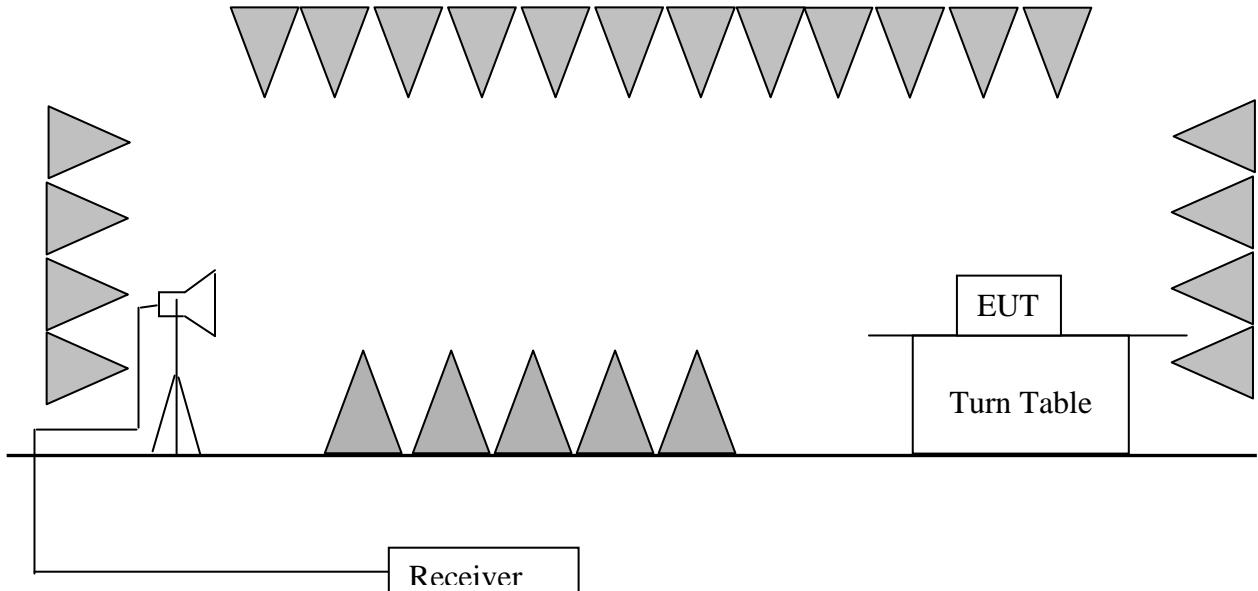

#### 4.3.3 Test Setup and Procedure

The measurement was applied in a semi-anechoic chamber with absorbing material placed on the ground. The EUT were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turntable varied every 30 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna pole. The antenna was set as same as the height of the radiation centre of the EUT.

Horn antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated during radiated test.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

<b>Highest Frequency Generated or Used in Device</b>	<b>Upper Frequency of Radiated Measurement</b>
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 1 GHz to 2 GHz since the highest frequency generated from the EUT was 433 MHz.

#### 4.3.4 Limit

Class B limit at 3m test distance:

<b>Frequency range</b> MHz	<b>Linear Average Detector</b> dB ( $\mu$ V/m)	<b>Peak Detector</b> dB ( $\mu$ V/m)
> 1000	54	74
At transitional frequencies the lower limit applies.		

**4.3.5 Test Data**Receiver mode + Lighting on  
Horizontal

Frequency (GHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector Function
1.05	46.80	-18.00	28.80	54.00	-25.20	Peak
1.32	49.70	-17.10	32.60	54.00	-21.40	Peak
1.50	45.70	-16.50	29.20	54.00	-24.80	Peak


Vertical

Frequency (GHz)	Read Level (dBuV)	Correction Factor (dB)	Level (dBuV/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Detector Function
1.06	49.90	-18.00	31.90	54.00	-22.10	Peak
1.32	56.60	-17.10	39.50	54.00	-14.50	Peak
1.52	45.20	-16.30	28.90	54.00	-25.10	Peak


Remark: The measured PK value is below AV limit so the result is pass.

**4.3.6 Test Curve**

Horizontal

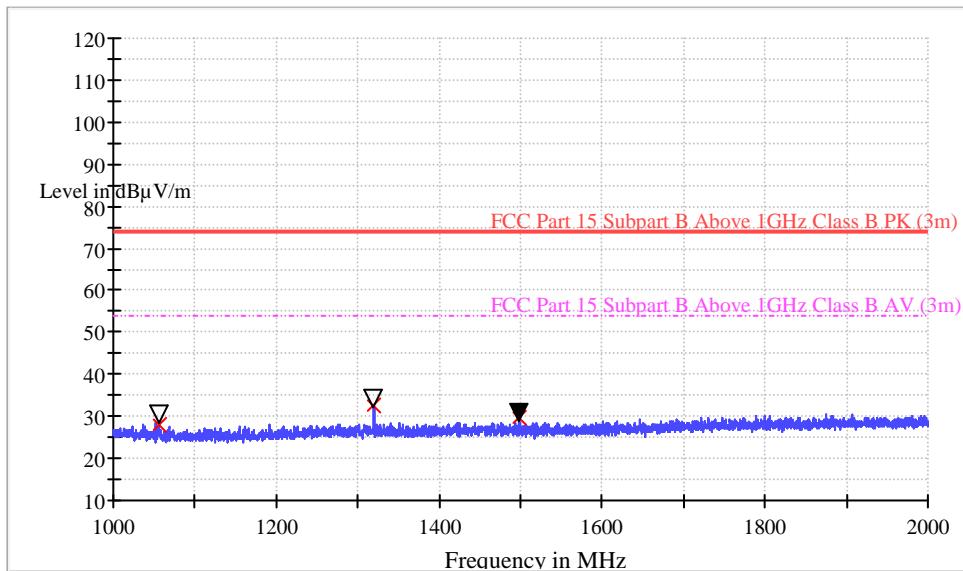

Vertical

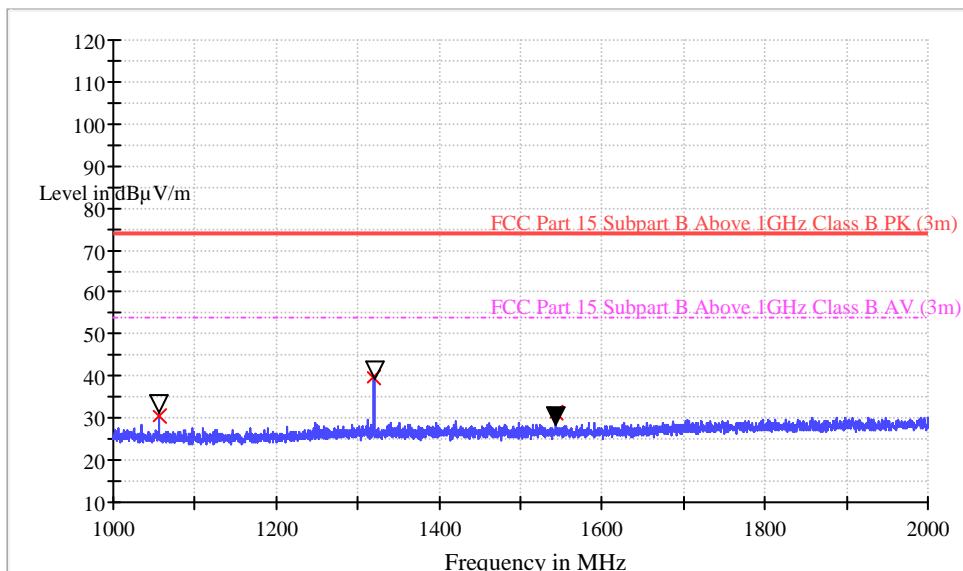**4.3.7 Measurement uncertainty**

Measurement uncertainty is under consideration according to CISPR 16-4-2:2003.