





Report Reference ID:	278616-2TRFWL
-----------------------------	---------------

Test specification:	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter A – General Part 24 – Personal Communication Services Subpart D – Narrowband PCS
----------------------------	---

Applicant:	TEKO Telecom Srl. Via Meucci, 24/a I-40024 Castel S. Pietro Terme (BO) (Italy)
Apparatus:	Remote Unit
Model:	TRE7S8SC8A9S19AWAS
FCC ID:	XM2-EP6B

Testing laboratory:	Nemko Italy Spa Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
----------------------------	---

	Name and title	Date
Tested by:	 G. Curioni, Wireless/EMC Specialist	2015-03-12
Reviewed by:	 P. Barbieri, Wireless/EMC Specialist	2015-03-12

Nemko Spa, 20853 Biassono (MB) - Italy. All rights reserved.

This publication may be reproduced in whole for non-commercial purposes as long as Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This test report may not be partially reproduced, except with the prior written permission of Nemko Spa. The test report merely corresponds to the test sample. The phase of sampling / collection of equipment under test is carried out by the customer.

This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

Table of contents

Section 1: Report summary	3
Section 2: Equipment under test	4
2.1 Identification of equipment under test (EUT).....	4
2.2 Accessories and support equipment.....	5
2.3 EUT description.....	6
2.4 Technical specifications of the EUT	6
2.5 EUT setup diagram.....	7
2.6 Operation of the EUT during testing.....	8
2.7 Modifications incorporated in the EUT	8
Section 3: Test conditions	9
3.1 Deviations from laboratory tests procedures.....	9
3.2 Test conditions, power source and ambient temperatures	9
3.3 Measurement uncertainty	10
3.4 Test equipment.....	10
Section 4: Result summary	11
4.1 Test results.....	11
Appendix A: Test results.....	12
Clause 24.132(c) Power and antenna height limits	12
Clause 24.131 Occupied bandwidth.....	13
Clause 24.133 Spurious emissions at antenna terminal.....	14
Clause 24.133 Field strength of spurious radiation	17
Clause 935210 D02v02r01 (D.3)(I) Out of band rejection.....	23
Appendix B: Block diagrams of test set-ups	24
Appendix C: EUT Photos.....	25

Section 1: Report summary

This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Spa.

Test specification:
FCC Part 24 Subpart D, Narrowband PCS

Compliance status:	Complies
Exclusions:	None
Non-compliances:	None
Report release history:	Original release
Test location:	Nemko Spa Via Del Carroccio, 4 – 20853 Biassono (MB) - Italy
Registration number:	481407 (10 m Semi anechoic chamber)

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Section 2: Equipment under test

2.1 Identification of equipment under test (EUT)

The following information identifies the EUT under test:

Type of equipment:	Remote Unit
Product marketing name:	Teko Telecom Srl
Model number:	TRE7S8SC8A9S19AWAS
Serial number:	132059001
Nemko sample number:	--
FCC ID:	XM2-EP6B
Date of receipt:	2015-03-09

2.2 Accessories and support equipment	
The following information identifies accessories used to exercise the EUT during testing:	
No other FCC-ID equipment are used to exercise the EUT during testing	
Item # 1	
Type of equipment:	Master Unit - Subrack
Brand name:	Teko Telecom srl
Model name or number:	SUB-TRX-PSU
Serial number:	101083001
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----
Item # 2	
Type of equipment:	Master Unit – Management Module
Brand name:	Teko Telecom srl
Model name or number:	TSPV-R
Serial number:	081900043
Nemko sample number:	-----
Connection port:	LAN port
Cable length and type:	-----
Item # 3	
Type of equipment:	Master Unit – Optical Module
Brand name:	Teko Telecom srl
Model name or number:	TTRU4W-S-M
Serial number:	110679007
Nemko sample number:	-----
Connection port:	DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit)
Cable length and type:	-----
Item # 4	
Type of equipment:	Master Unit – Power Supply
Brand name:	Teko Telecom srl
Model name or number:	TPSU/AC
Serial number:	100012286
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

Section 2: Equipment under test, continued

2.3 EUT description

See confidential block diagram and operational description

2.4 Technical specifications of the EUT

Operating band:	Down Link 940-941 MHz; Up Link 901-902 MHz
Operating frequencies:	Narrowband
Modulation type:	iDEN
Occupied bandwidth:	Standard
Channel spacing:	Standard
Emission designator:	iDEN: D7W
RF Output	Down Link: 31dBm (1,25W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
Gain	Down Link: 36dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
Antenna data:	No antenna provided
Antenna type:	No antenna provided External Antenna (Equipment that has an external 50 Ω RF connector)
Power source	100-240 Vac

Section 2: Equipment under test, continued

2.5 EUT setup diagram

In this system, Remote Unit is the EUT. Master Unit includes only management module and optical module (to convert RF signal in optical signal in down link direction and viceversa optical signal in RF signal in up link direction). As described in “Operational description”, master unit is connected directly to base station, so the system doesn’t use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of optical module in the Master Unit.


Test setup for output power, occupied bandwidth, spurious emissions:



Procedure

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.

Test setup for intermodulation:

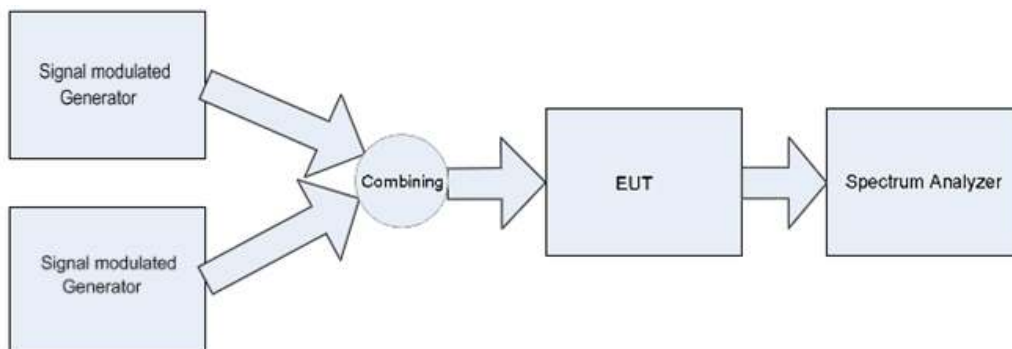

Procedure

Connect two signal modulated generators to the input of the EUT, so that the two input signals are same level. The EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT. At maximum drive level, for each modulation applies two tones for fulfill two tests (high-band edge and low-band-edge)

2.6 Operation of the EUT during testing

In down-link direction, normal working at max gain with max RF power output

2.7 Modifications incorporated in the EUT

None

There were no modifications performed to the EUT during this assessment

Section 3: Test conditions

3.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

3.2 Test conditions, power source and ambient temperatures

<p>Normal temperature, humidity and air pressure test conditions</p>	<p>Temperature: 15–30 °C Relative humidity: 20–75 % Air pressure: 86–106 kPa</p> <p>When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.</p>
<p>Power supply range:</p>	<p>The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.</p>

Section 3: Test conditions, continued

3.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements“. All calculations can be found in Nemko S.p.A. document WML1002.

3.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Agilent	N5172B EXG	MY53050534	Feb 2017
Vector Signal Generator	Agilent	E4438C ESG	MY45094485	Ago 2016
Spectrum Analyzer	Agilent	N9030A PXA	MY53120882	Apr 2015
Network Analyzer	Agilent	E5071B ENA	MY46418709	Jan 2016
--	--	--	--	--
EMI Receiver	R & S	ESCI	100888	08/2015
V-network	R & S	ESH2-Z5	872 460/041	09/2015
Trilog Broad Band Antenna 25-2000 MHz	Schwarzbeck	VULB 9168	VULB 9168-242	02/2015
Trilog Broad Band Antenna 25-8000 MHz	Schwarzbeck	VULB 9162	VULB 9162-25	05/2015
Antenna 1-18 GHz	Schwarzbeck	STLP 9148	STPL 9148-123	02/2015
Double ridge waveguide horn	RFspin	DRH40	061106A40	08/2016
Preamplifier 18-40 GHz	Miteq	JS44	1648665	11/2015
Broadband preamplifier 1-18 GHz	Schwarzbeck	BBV 9718	9718-137	10/2015
EMI receiver 20 Hz + 8 GHz	R&S	ESU8	100202	02/2015
EMI receiver 20 Hz + 3 GHz	R&S	ESCI	100888	08/2015
Hydraulic revolving platform	Nemko	RTPL 01	4.233	NCR
Turning-table	R&S	HCT	835 803/03	NCR
Antenna mast	R&S	HCM	836 529/05	NCR
Controller	R&S	HCC	836 620/7	NCR
Spectrum Analyzer 9kHz + 40GHz	R&S	FSEK	848255/005	08/2015
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	09/2016
Shielded room	Siemens	10m control room	1947	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	70	NCR
Shielded Room	Siemens	3m semi-anechoic chamber	3	NCR
Motor controller	Emco	1051-25	9012-1559	NCR
Motor controller	Emco	1061-1.521	9012-1508	NCR
Antenna Tower	Emco	2071-2	9601-1940	NCR
Controller pole/table	Emco	2090	9511-1099	NCR
V-Network	R & S	ESH2-Z5	872 460/041	09/2015

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use
 (*) Equipment supplied by manufacturer's

Section 4: Result summary

4.1 Test results

The apparatus was assessed against the following specifications:
 FCC Part 2 Subpart J, Equipment Authorization Procedures
 FCC Part 24 Subpart D, Narrowband PCS

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N	No : not applicable / not relevant.
Y	Yes : Mandatory i.e. the apparatus shall conform to these tests.
N/T	Not Tested, mandatory but not assessed. (See report summary)

Part	Test method	Test description	Required	Result
§24.132(c)	2.1046	Power and antenna height limits	Y	Pass
–	2.1047	Modulation characteristics	N	N/A a)
§24.131	2.1049	Occupied bandwidth	Y	Pass
§24.133	2.1051	Spurious emissions at the antenna terminal	Y	Pass
§24.133	2.1053	Field strength of spurious radiation	Y	Pass
§24.135	2.1055	Frequency stability	N	N/A a)
§ 935210 D02v02r01 (D.3)(I)	–	Out of band rejection	Y	Pass

Notes:
 a) **NOT APPLICABLE:** Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)

Appendix A: Test results

Clause 24.132(c) Power and antenna height limits

(c) Base stations transmitting in the 930-931 MHz and 940-941 MHz bands are limited to 3500 watts e.r.p. per authorized channel and are unlimited in antenna height except as provided in paragraph (d) of this section.

Test date: [2015-03-10](#)
 Test results: [Pass](#)


Special notes

Conducted measurement were performed:
 - The power was measured using spectrum analyzer with RMS detector / average power meter.
 In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

 Only conducted measurement at antenna connector was possible, no antenna provided by manufacturer.

Test data

Direction	Modulation	Frequency (MHz)	RF output channel Power (dBm)	RF output channel Power (W)	PAR (dB)
Down-link	iDEN (25 kHz)	940.5	31.12	1.29	3.15

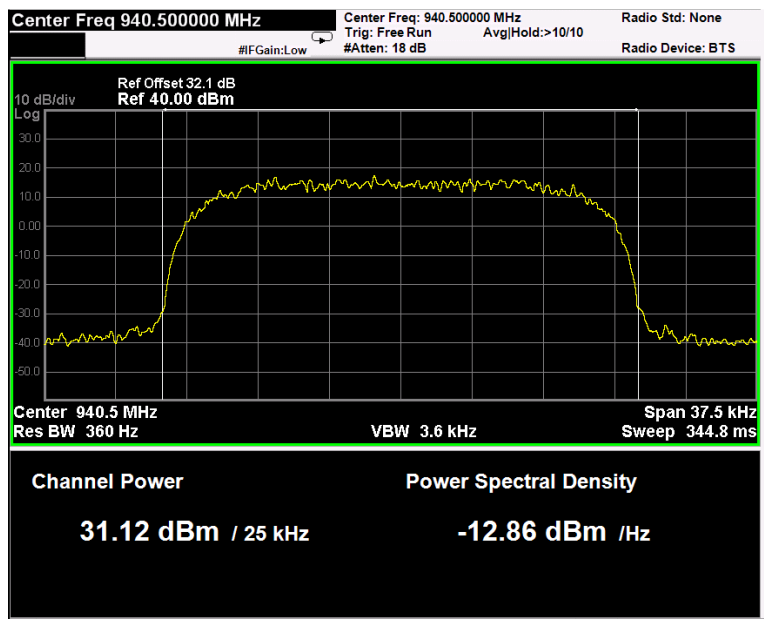


Clause 24.131 Occupied bandwidth

The authorized bandwidth of narrowband PCS channels will be 10 kHz for 12.5 kHz channels and 45 kHz for 50 kHz channels. For aggregated adjacent channels, a maximum authorized bandwidth of 5 kHz less than the total aggregated channel width is permitted.


Test date: 2015-03-10
 Test results: Pass

Special notes
 Resolution bandwidth was set wider or equal than occupied bandwidth.

Mod. iDEN (QAM)

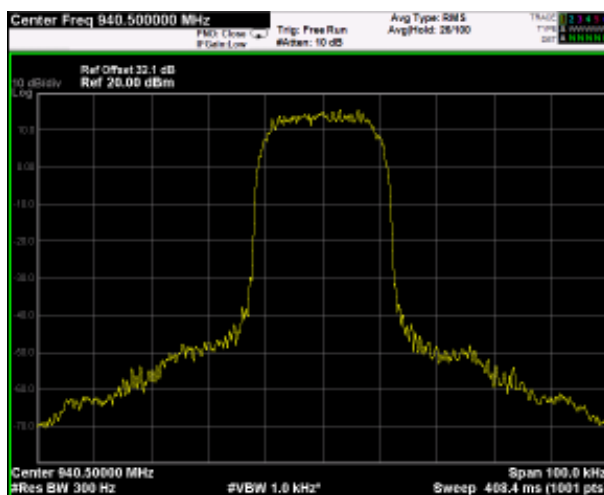

Output

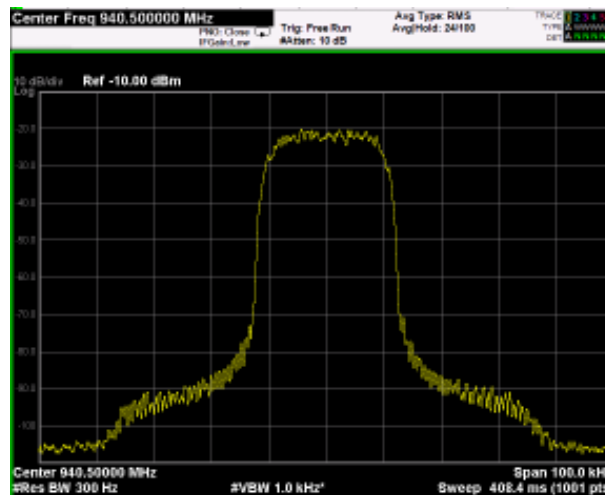

Input

Clause 24.133 Spurious emissions at antenna terminal

(a) The power of any emission shall be attenuated below the transmitter power (P), as measured in accordance with §24.132(f), in accordance with the following schedule:

(1) For transmitters authorized a bandwidth greater than 10 kHz:

- (i) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of up to and including 40 kHz: at least $116 \text{ Log}_{10} ((f_d+10)/6.1)$ decibels or 50 plus $10 \text{ Log}_{10} (P)$ decibels or 70 decibels, whichever is the lesser attenuation;
- (ii) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 40 kHz: at least $43+10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation.

(2) For transmitters authorized a bandwidth of 10 kHz:

- (i) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of up to and including 20 kHz: at least $116 \times \text{Log}_{10} ((f_d+5)/3.05)$ decibels or $50+10 \times \text{Log}_{10} (P)$ decibels or 70 decibels, whichever is the lesser attenuation;
- (ii) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 20 kHz: at least $43+10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation.

(b) The measurements of emission power can be expressed in peak or average values provided they are expressed in the same parameters as the transmitter power.

(c) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

(d) The following minimum spectrum analyzer resolution bandwidth settings will be used: 300 Hz when showing compliance with paragraphs (a)(1)(i) and (a)(2)(i) of this section; and 30 kHz when showing compliance with paragraphs (a)(1)(ii) and (a)(2)(ii) of this section.

Test date: [2015-03-10](#)

Test results: [Pass](#)


Special notes

- The spectrum was searched from 30 MHz up to 10th harmonic
- Only the worst data presented in the test report.


(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified).

Clause 24.133, continued: band edges inter modulation

Mod. iDEN (Down-link)

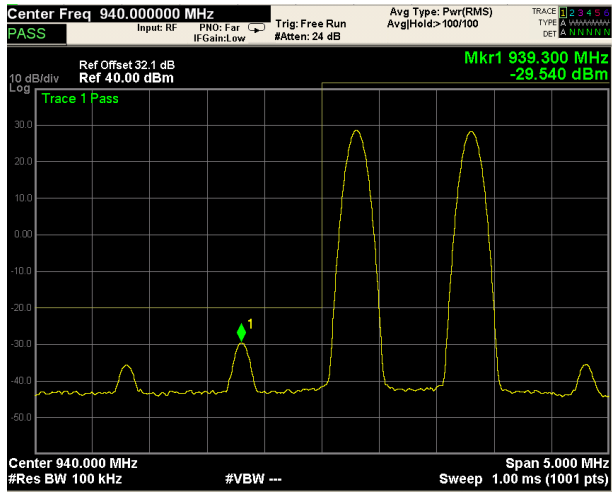

Low Band Edge

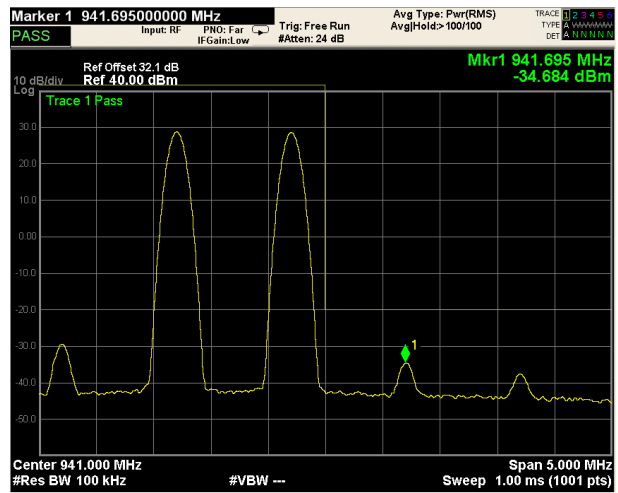


High Band Edge

Clause 24.133, continued: spurious emissions at antenna terminal


Mod. iDEN (Down-link)




9kHz-150kHz

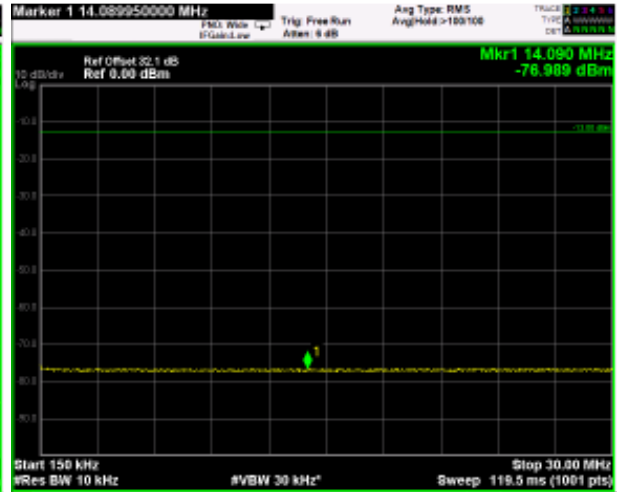

150kHz-30MHz

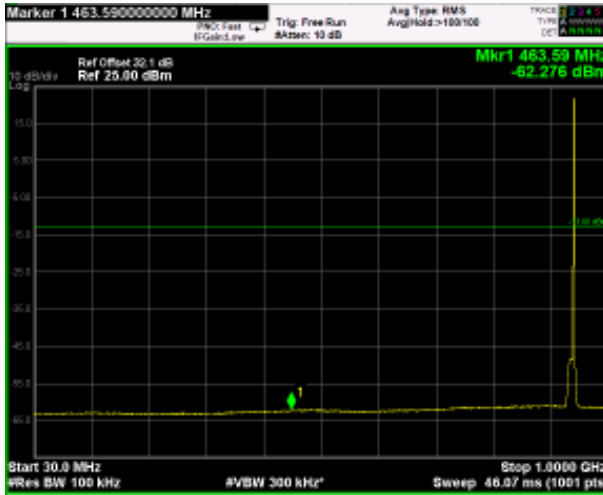

30MHz-1GHz

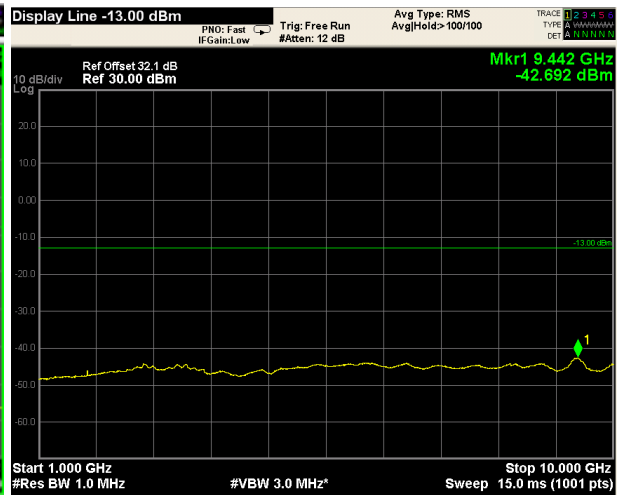

1GHz-10GHz

Clause 24.133 Field strength of spurious radiation

(a) The power of any emission shall be attenuated below the transmitter power (P), as measured in accordance with §24.132(f), in accordance with the following schedule:

- (1) For transmitters authorized a bandwidth greater than 10 kHz:
 - (i) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of up to and including 40 kHz: at least $116 \text{ Log}_{10} ((f_d+10)/6.1)$ decibels or 50 plus $10 \text{ Log}_{10} (P)$ decibels or 70 decibels, whichever is the lesser attenuation;
 - (ii) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 40 kHz: at least $43+10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation.
- (2) For transmitters authorized a bandwidth of 10 kHz:
 - (i) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of up to and including 20 kHz: at least $116 \times \text{Log}_{10} ((f_d+5)/3.05)$ decibels or $50+10 \times \text{Log}_{10} (P)$ decibels or 70 decibels, whichever is the lesser attenuation;
 - (ii) On any frequency outside the authorized bandwidth and removed from the edge of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 20 kHz: at least $43+10 \text{ Log}_{10} (P)$ decibels or 80 decibels, whichever is the lesser attenuation.

(b) The measurements of emission power can be expressed in peak or average values provided they are expressed in the same parameters as the transmitter power.

(c) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

(d) The following minimum spectrum analyzer resolution bandwidth settings will be used: 300 Hz when showing compliance with paragraphs (a)(1)(i) and (a)(2)(i) of this section; and 30 kHz when showing compliance with paragraphs (a)(1)(ii) and (a)(2)(ii) of this section.

Test date: 2015-03-10

Test results: Pass

Special notes

- The spectrum was searched from 30 MHz up to 10th harmonic
- The EUT was measured on three orthogonal axis.
- All measurements were performed at a distance of 3 m.
- The EUT's antenna port was terminated with 50 Ω termination

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 1 MHz or 1 percent of emission bandwidth, as specified).

Test data


The D.U.T. was positioned according to the radiated emissions set-up

The D.U.T. antenna connector was terminated by a 50 Ω shielded dummy load.

The spectrum was searched from 30 MHz to 1 GHz (RBW 100 kHz) & 1 GHz (RBW 1 MHz) to the tenth harmonic of the carrier.


There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

Clause 24.238(a) Field strength of spurious radiation, continued

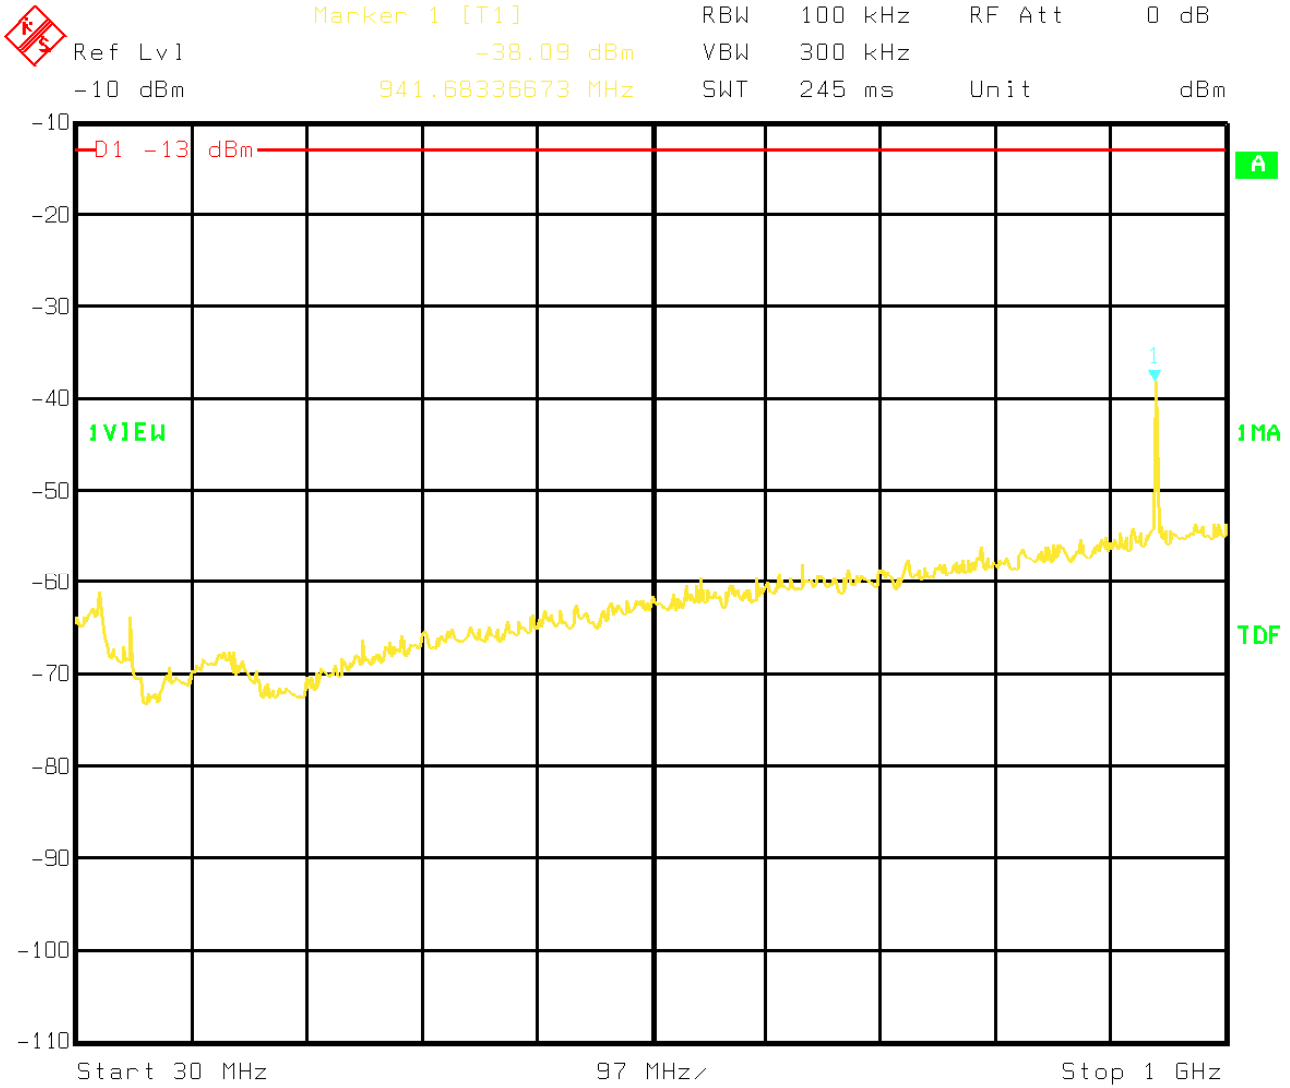


Date: 10.MAR.2015 08:57:55

30MHz-1GHz – H Pol

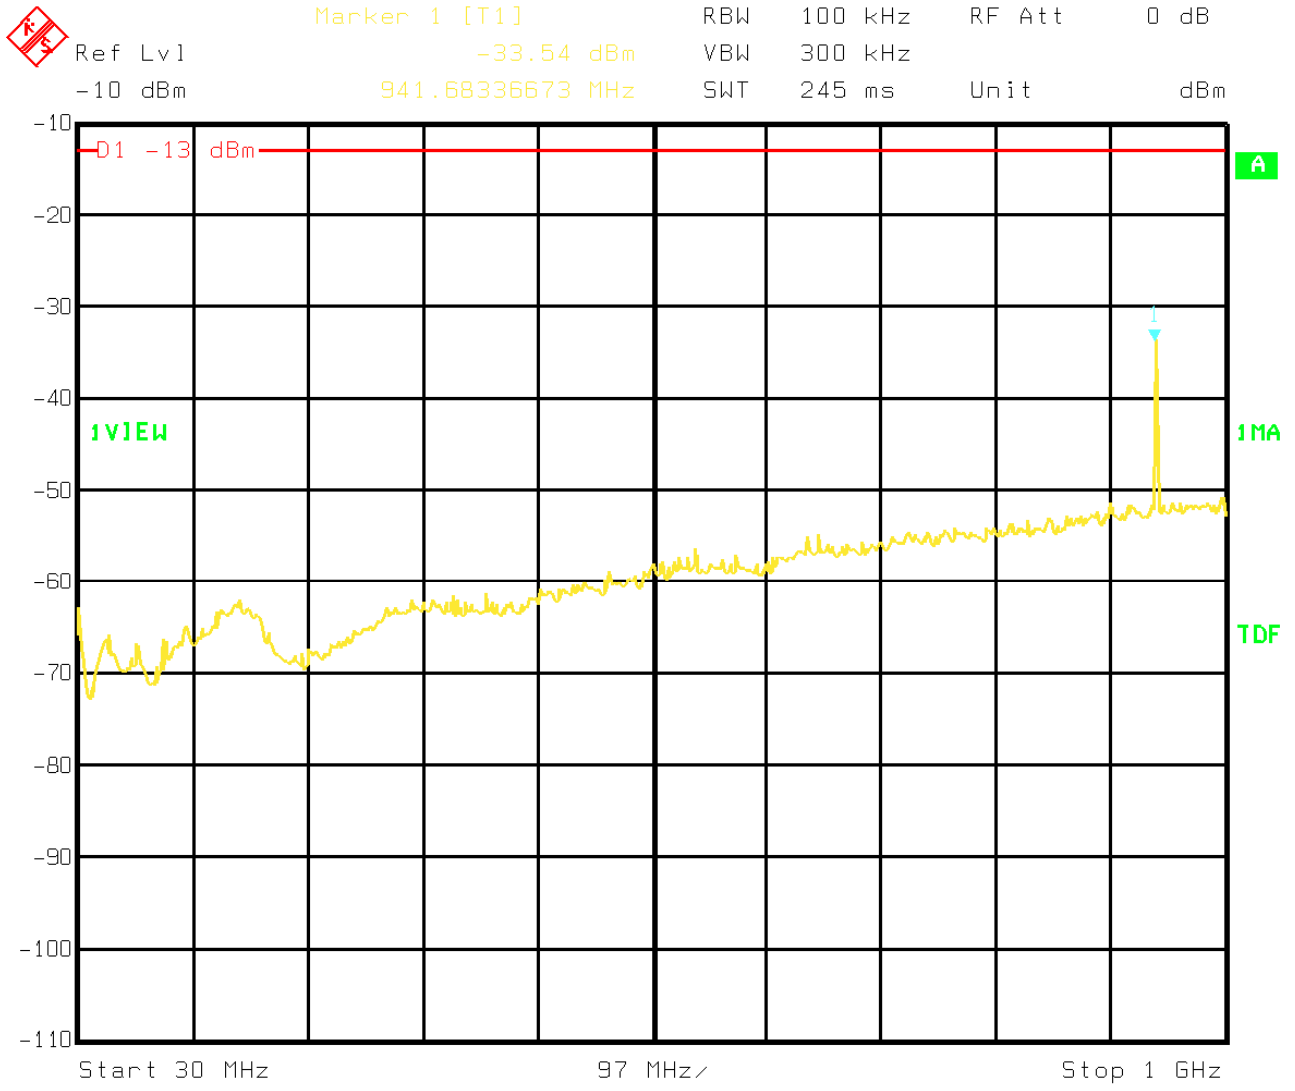


Date: 10.MAR.2015 09:00:32

30MHz-1GHz – V Pol

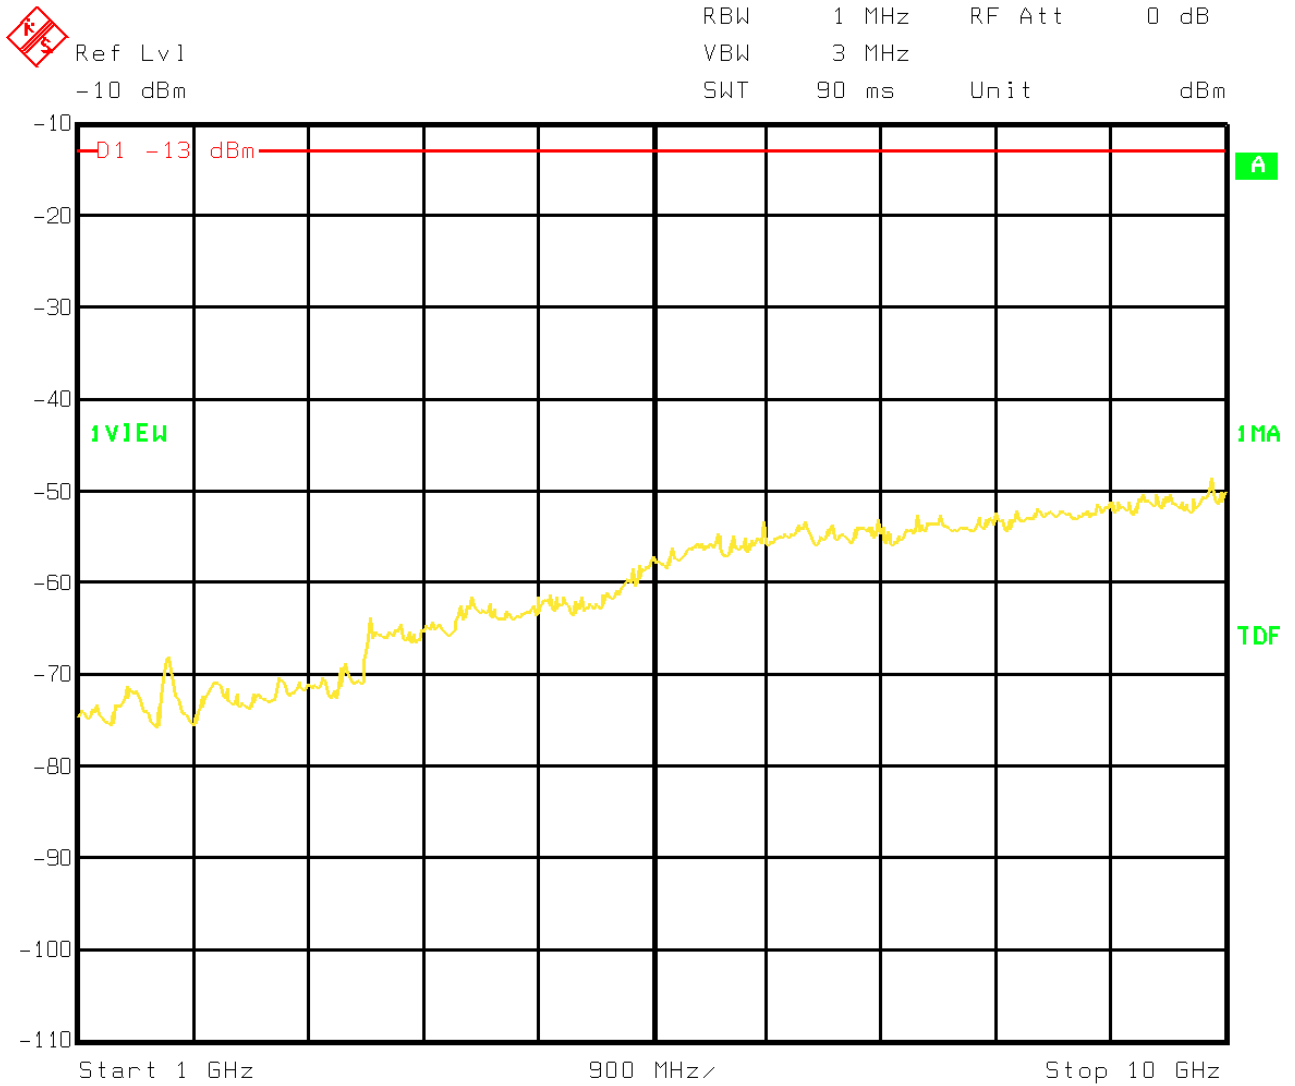

Date: 10.MAR.2015 10:37:37

1GHz-10GHz – H Pol

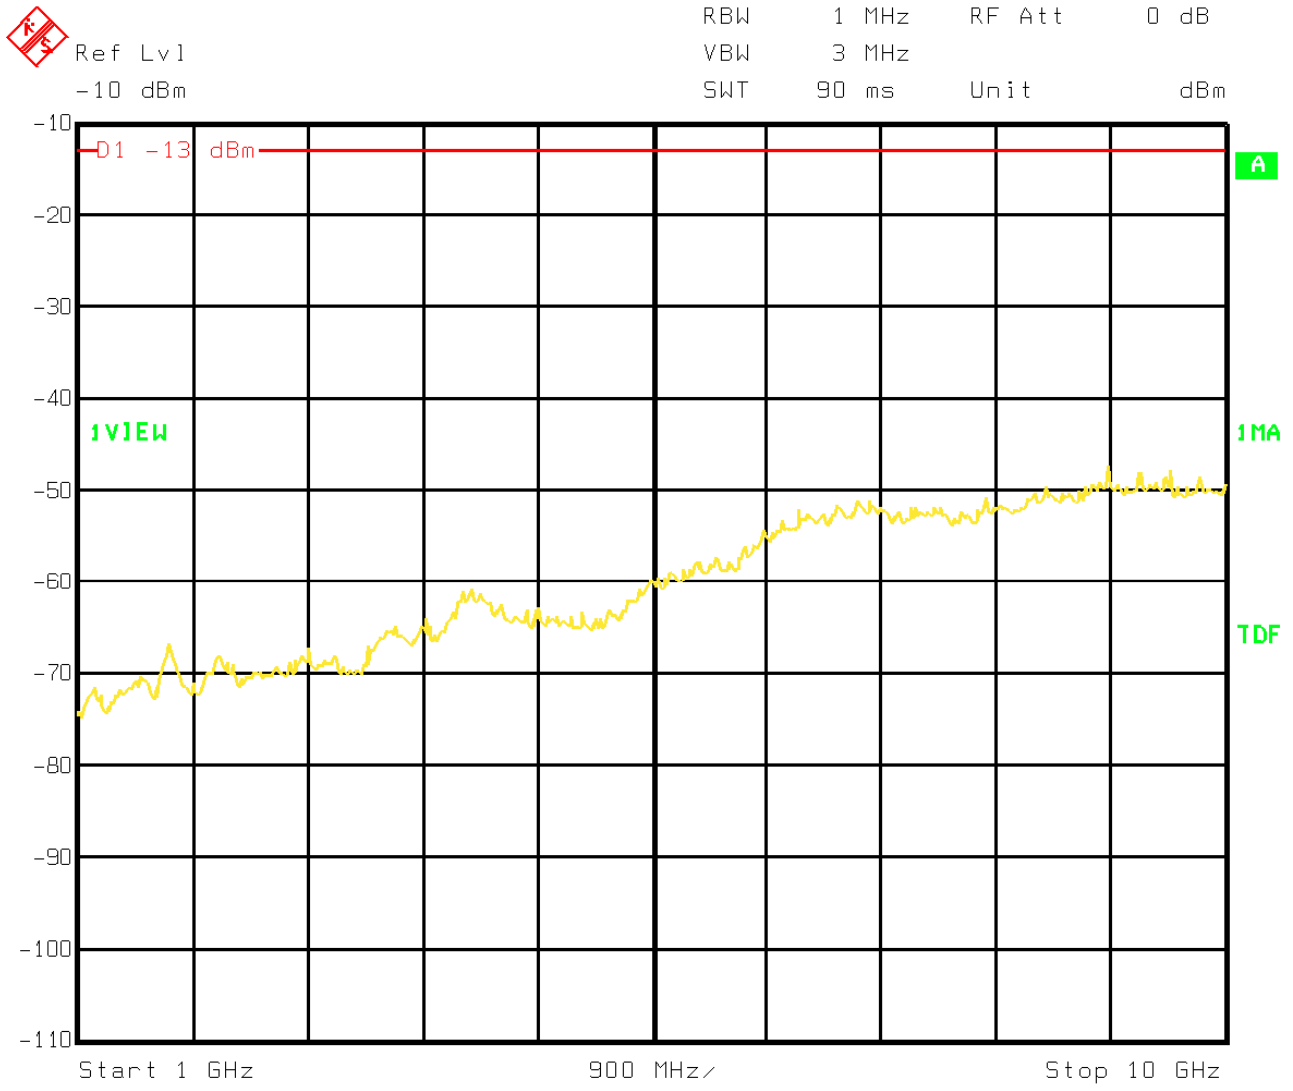

Date: 10.MAR.2015 10:34:57


1GHz-10GHz - V Pol

Clause 935210 D02v02r01 (D.3)(I) Out of band rejection

Out of Band Rejection – Test for rejection of out of band signals.
Filter frequency response plots are acceptable.


Test date: 2015-03-10

Test results: Pass

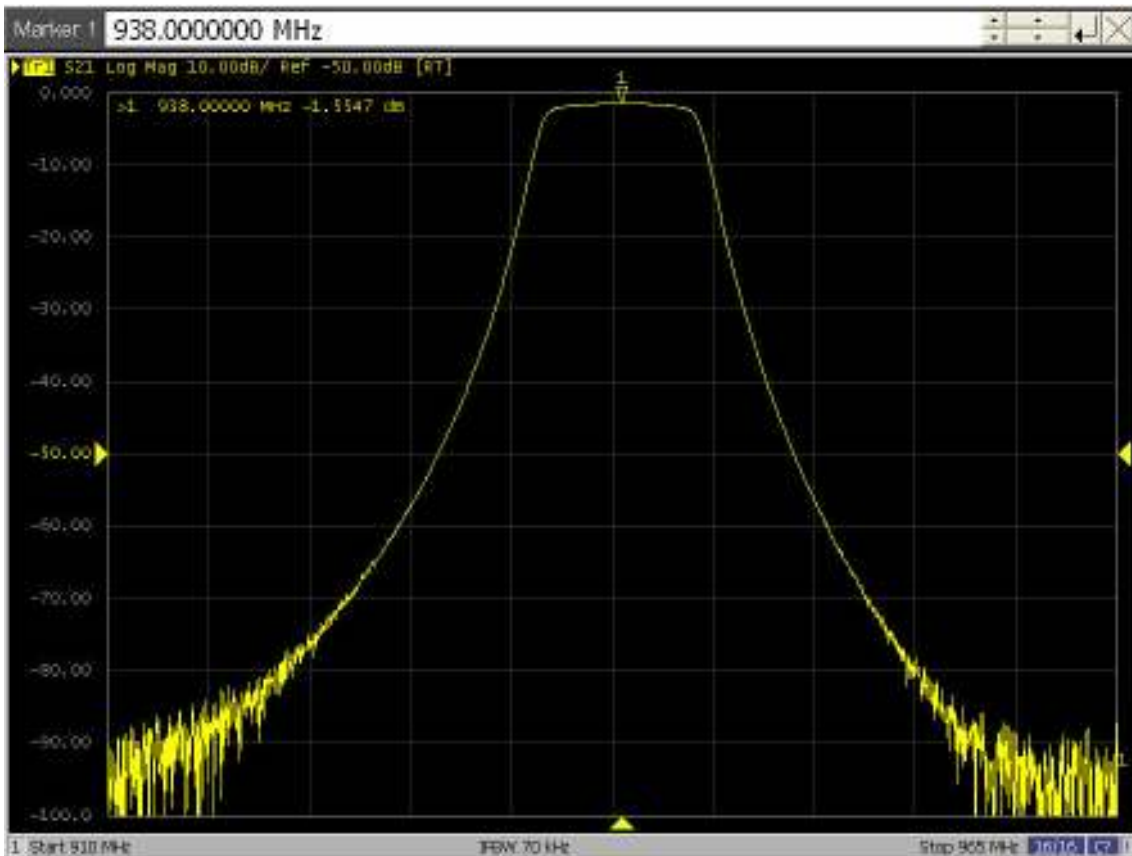


Appendix B: Block diagrams of test set-ups

Radiated emissions set-up

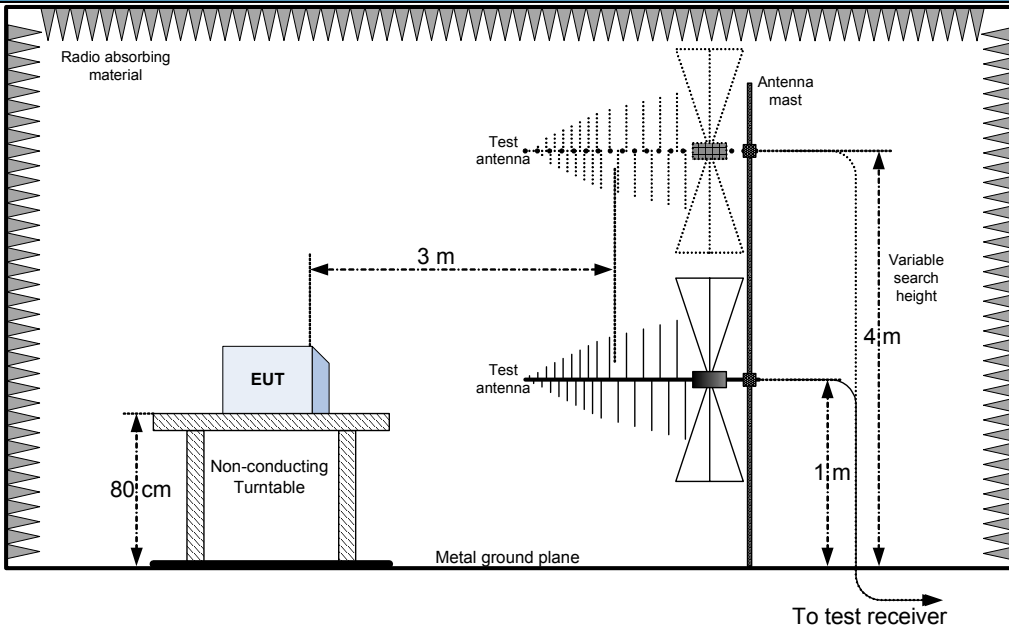

Substitution method set-up

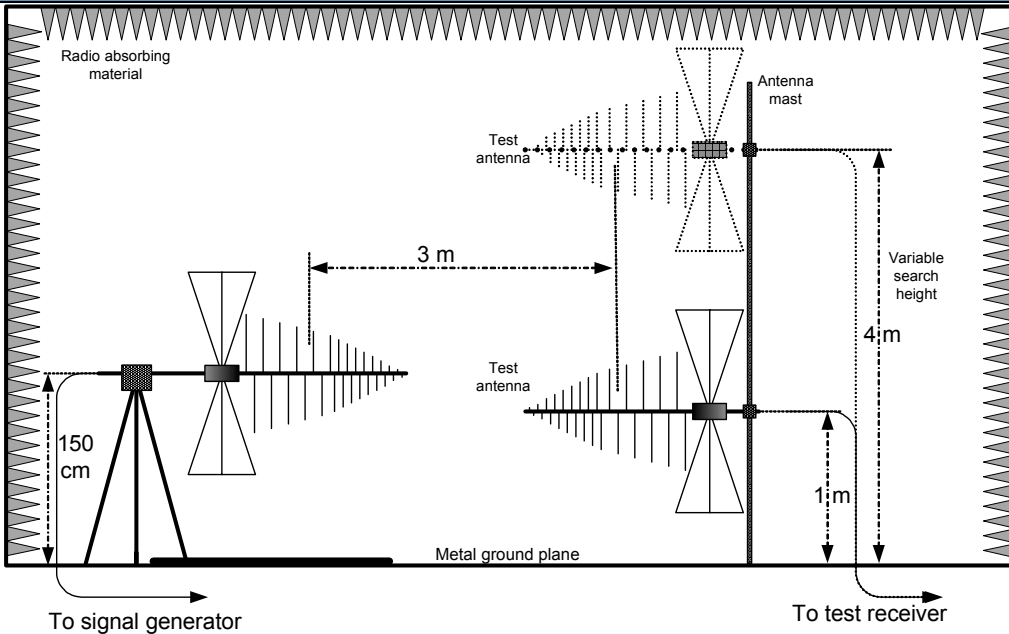

Appendix C: EUT Photos

Photo Set up



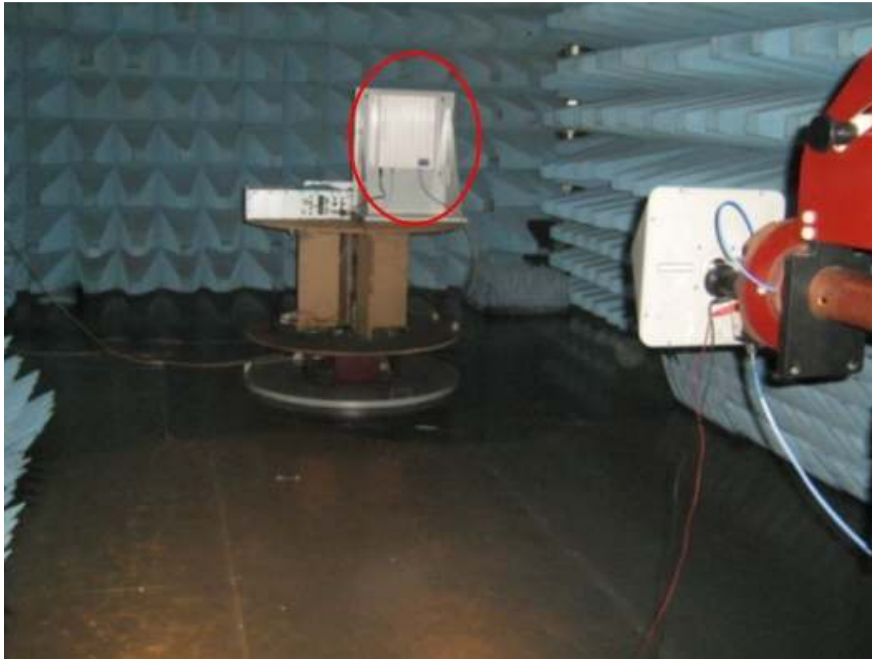


Photo EUT



