

FCC CERTIFICATION
On Behalf of
Lightcomm Technology Co., Ltd.

Roof Mount monitor with DVD
Model No.: AVXMTG10U, F101

FCC ID: XMF-AVXMTG10U

Prepared for : Lightcomm Technology Co., Ltd.
Address : Rooms M207-8, Haleson Building, 1 Jubilee Street
Central, Hong Kong

Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20102191
Date of Test : November 22-23, 2010
Date of Report : November 26, 2010

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty.....	5
2. MEASURING DEVICE AND TEST EQUIPMENT	6
3. SUMMARY OF TEST RESULTS.....	7
4. HARMONICS AND SPURIOUS RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)	8
4.1. Block Diagram of Test Setup.....	8
4.2. The Emission Limit for section 15.239(c).....	9
4.3. Configuration of EUT on Measurement	9
4.4. Operating Condition of EUT	10
4.5. Test Procedure	10
4.6. The Field Strength of Radiation Emission Measurement Results	11
5. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B)	17
5.1. Block Diagram of Test Setup.....	17
5.2. The Emission Limit For Section 15.239(b)	17
5.3. EUT Configuration on Measurement	18
5.4. Operating Condition of EUT	18
5.5. Test Procedure	18
5.6. The Emission Measurement Result	19
6. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A)	25
6.1. The Requirement For Section 15.239(a).....	25
6.2. EUT Configuration on Measurement	25
6.3. Operating Condition of EUT	25
6.4. Test Procedure	25
6.5. Test Result	26
7. TUNING RANGE	27
7.1. The Requirement For Section 15.239	27
7.2. EUT Configuration on Measurement	27
7.3. Operating Condition of EUT	27
7.4. Test Procedure	27
7.5. Test Result	28

APPENDIX I (TEST CURVES) (18 pages)

Test Report Certification

Applicant : Lightcomm Technology Co., Ltd.
Manufacturer : Huizhou Hengdu Electronics Co., Ltd.
EUT Description : Roof Mount monitor with DVD
(A) MODEL NO.: AVXMTG10U, F101
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 12V

Measurement Procedure Used:


**FCC Rules and Regulations Part 15 Subpart C Section 15.239: 2008
ANSI 63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.239 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : November 22-23, 2010

Prepared by : 
(Engineer)

Approved & Authorized Signer : 
(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Roof Mount monitor with DVD
Model Number	:	AVXMTG10U, F101 (Note: These samples are identical except the appearance is different. Therefore only model AVXMTG10U is tested.)
Power Supply	:	DC 12V
Operate Frequency	:	88.1-91.1MHz (step 0.2MHz)
Applicant Address	:	Lightcomm Technology Co., Ltd. Rooms M207-8, Haleson Building, 1 Jubilee Street, Central Hong Kong
Manufacturer Address	:	Huizhou Hengdu Electronics Co., Ltd. DIP South Area, Huiao Highway, Huizhou, Guangdong China
Date of sample received	:	November 18, 2010
Date of Test	:	November 22-23, 2010

1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen Listed by FCC The Registration Number is 752051 Listed by Industry Canada The Registration Number is 5077A-2 Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty
(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty
(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty
(Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2011
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2011
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2011
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2011
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 9, 2011
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 9, 2011
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2011
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2011

3. SUMMARY OF TEST RESULTS


FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.239(c) Section 15.209	Harmonics and Spurious Radiated Emission	Compliant
Section 15.239(b)	Fundamental Radiated Emission	Compliant
Section 15.239(a)	Occupied Bandwidth	Compliant
Section 15.239	Tuning Range	Compliant

Remark: "N/A" means "Not applicable".

4. HARMONICS AND SPURIOUS RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Roof Mount monitor with DVD)

4.1.2. Semi-Anechoic Chamber Test Setup Diagram

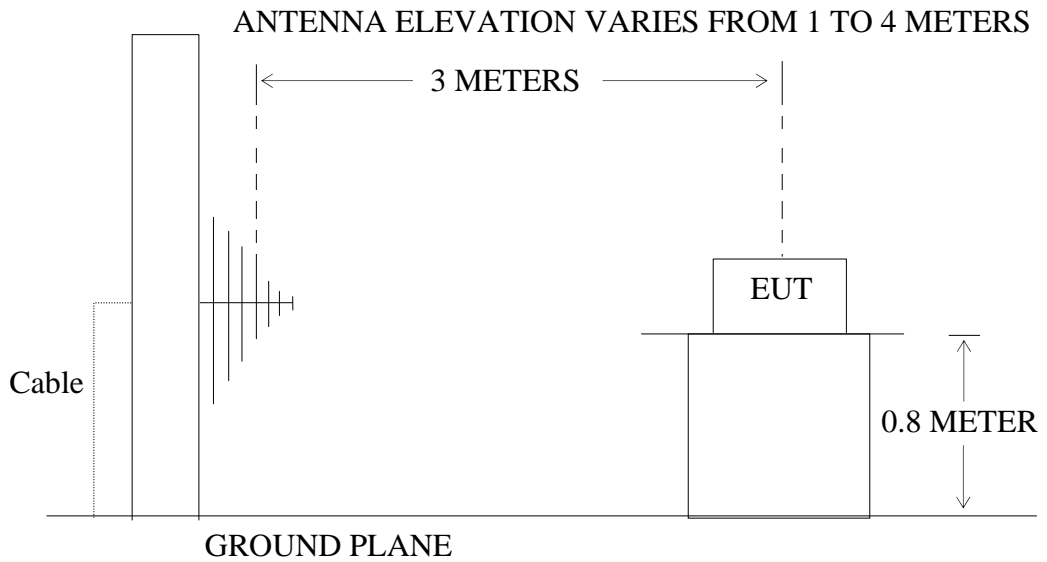

(EUT: Roof Mount monitor with DVD)

4.2.The Emission Limit for section 15.239(c)

4.2.1. The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in Section 15.209.

Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit,		The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB μ V/m)	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	

4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.Roof Mount monitor with DVD (EUT)

Model Number : AVXMTG10U
 Serial Number : N/A
 Manufacturer : Huizhou Hengdu Electronics Co., Ltd.

4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in TX modes [Connect EUT use DVD and SD card playing typical audio signal with maximum audio level] measure it. The transmit frequency are 88.1-91.1MHz. We are select 88.1M, 89.7M, 91.1MHz TX frequency to transmit.

4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz.

The frequency range from 30MHz to 1000MHz is checked.

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

4.6. The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 88.1MHz with DVD	Test Engineer:	Joe

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	176.2109	24.42	15.76	40.18	43.50	-3.32
Horizontal	256.5120	24.64	18.09	42.73	46.00	-3.27
Horizontal	461.7260	19.36	23.30	42.66	46.00	-3.34
Vertical	176.2109	24.41	15.76	40.17	43.50	-3.33
Vertical	256.5120	23.04	18.09	41.13	46.00	-4.87
Vertical	461.7260	19.12	23.30	42.42	46.00	-3.58

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 89.7MHz with DVD</u>	Test Engineer:	<u>Joe</u>

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	179.4120	24.24	15.78	40.02	43.50	-3.48
Horizontal	256.5120	24.47	18.09	42.56	46.00	-3.44
Horizontal	461.7260	19.61	23.30	42.91	46.00	-3.09
Vertical	179.4120	24.32	15.78	40.10	43.50	-3.40
Vertical	256.5120	23.11	18.09	41.20	46.00	-4.80
Vertical	461.7260	18.75	23.30	42.05	46.00	-3.95

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 91.1MHz with DVD</u>	Test Engineer:	<u>Joe</u>

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	182.2119	24.23	15.89	40.12	43.50	-3.38
Horizontal	256.5120	24.75	18.09	42.84	46.00	-3.16
Horizontal	461.7260	19.25	23.30	42.55	46.00	-3.45
Vertical	182.2119	24.29	15.84	40.13	43.50	-3.37
Vertical	256.5120	23.57	18.09	41.66	46.00	-4.34
Vertical	461.7260	18.54	23.30	41.84	46.00	-4.16

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 88.1MHz with SD card</u>	Test Engineer:	<u>Joe</u>

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	176.2109	24.41	15.76	40.17	43.50	-3.33
Horizontal	256.5120	24.81	18.09	42.90	46.00	-3.10
Horizontal	461.7260	19.54	23.30	42.84	46.00	-3.16
Vertical	176.2109	23.93	15.76	39.69	43.50	-3.81
Vertical	256.5120	24.13	18.09	42.22	46.00	-3.78
Vertical	461.7260	19.19	23.30	42.49	46.00	-3.51

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 89.7MHz with SD card</u>	Test Engineer:	<u>Joe</u>

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	179.4120	24.41	15.78	40.19	43.50	-3.31
Horizontal	256.5120	24.89	18.09	42.98	46.00	-3.02
Horizontal	461.7260	19.59	23.30	42.89	46.00	-3.11
Vertical	179.4120	24.36	15.78	40.14	43.50	-3.36
Vertical	256.5120	24.23	18.09	42.32	46.00	-3.68
Vertical	461.7260	18.95	23.30	42.25	46.00	-3.75

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 91.1MHz with SD card</u>	Test Engineer:	<u>Joe</u>

Polarization	Frequency (MHz)	Reading(dBμV/m) QP	Factor Corr.(dB)	Result(dBμV/m) QP	Limits(dBμV/m) QP	Margin(dB) QP
Horizontal	182.2119	24.17	15.89	40.06	43.50	-3.44
Horizontal	256.5120	24.84	18.09	42.93	46.00	-3.07
Horizontal	461.7260	19.55	23.30	42.85	46.00	-3.15
Vertical	182.2119	24.22	15.84	40.06	43.50	-3.44
Vertical	256.5120	23.94	18.09	42.03	46.00	-3.97
Vertical	461.7260	18.83	23.30	42.13	46.00	-3.87

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$


$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

5. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

SECTION 15.239(B)


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Roof Mount monitor with DVD)

5.1.2. Semi-Anechoic Chamber Test Setup Diagram

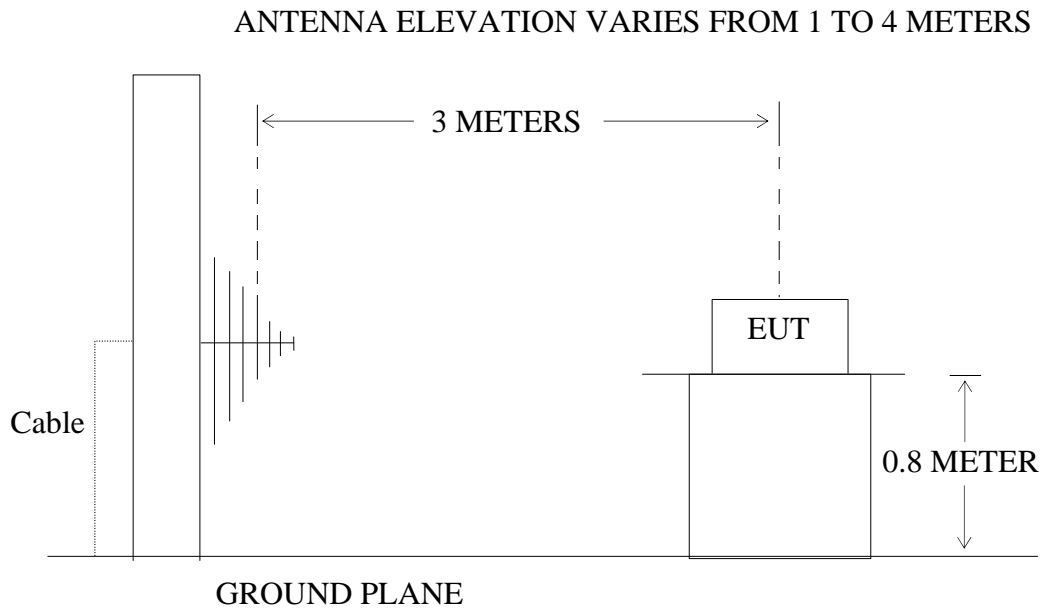

(EUT: Roof Mount monitor with DVD)

5.2. The Emission Limit For Section 15.239(b)

5.2.1. The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

5.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1.Roof Mount monitor with DVD (EUT)

Model Number : AVXMTG10U
Serial Number : N/A
Manufacturer : Huizhou Hengdu Electronics Co., Ltd.

5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes [Connect EUT use DVD and SD card playing typical audio signal with maximum audio level] measure it. The transmit frequency are 88.1-91.1MHz. We are select 88.1M, 89.7M, 91.1MHz TX frequency to transmit.

5.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 120kHz.

5.6.The Emission Measurement Result

PASS.

Date of Test:	<u>November 23, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Roof Mount monitor with DVD</u>	Humidity:	<u>50%</u>
Model No.:	<u>AVXMTG10U</u>	Power Supply:	<u>DC 12V</u>
Test Mode:	<u>TX 88.1MHz with DVD</u>	Test Engineer:	<u>Joe</u>

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
88.1070	30.44	32.55	13.75	44.19	46.30	48	68	-3.81	-21.70	Horizontal
88.1070	30.06	32.17	13.73	43.79	45.90	48	68	-4.21	-22.10	Vertical

Note:

1. Measurement was performed with modulated signal with average detector and peak detector.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$
3. The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 89.7MHz with DVD	Test Engineer:	Joe

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
89.7070	30.48	32.60	13.85	44.33	46.45	48	68	-3.67	-21.55	Horizontal
89.7070	30.23	32.29	13.65	43.88	45.94	48	68	-4.12	-22.06	Vertical

Note:

- Measurement was performed with modulated signal with average detector and peak detector.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 91.1MHz with DVD	Test Engineer:	Joe

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
91.1070	30.42	32.53	13.91	44.33	46.44	48	68	-3.67	-21.56	Horizontal
91.1070	30.20	32.28	13.68	43.88	45.96	48	68	-4.12	-22.04	Vertical

Note:

- Measurement was performed with modulated signal with average detector and peak detector.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 88.1MHz with SD card	Test Engineer:	Joe

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
88.1070	30.64	32.73	13.75	44.39	46.48	48	68	-3.61	-21.52	Horizontal
88.1070	30.36	32.43	13.73	44.09	46.16	48	68	-3.91	-21.84	Vertical

Note:

- Measurement was performed with modulated signal with average detector and peak detector.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 89.7MHz with SD card	Test Engineer:	Joe

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
89.7070	30.53	32.62	13.85	44.38	46.50	48	68	-3.62	-21.50	Horizontal
89.7070	30.32	32.39	13.65	43.97	46.04	48	68	-4.03	-21.96	Vertical

Note:

- Measurement was performed with modulated signal with average detector and peak detector.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

Date of Test:	November 23, 2010	Temperature:	25°C
EUT:	Roof Mount monitor with DVD	Humidity:	50%
Model No.:	AVXMTG10U	Power Supply:	DC 12V
Test Mode:	TX 99.1MHz with SD card	Test Engineer:	Joe

Fundamental Radiated Emissions

Frequency (MHz)	Reading(dBμV/m)		Factor (dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin (dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
91.7070	30.21	32.30	13.91	44.12	46.21	48	68	-3.88	-21.79	Horizontal
91.7070	30.38	32.47	13.68	44.06	46.15	48	68	-3.94	-21.85	Vertical

Note:

- Measurement was performed with modulated signal with average detector and peak detector.
- The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain
- The spectral diagrams in appendix I display the measurement of peak values.

6. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

15.239(A)

6.1.The Requirement For Section 15.239(a)

6.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

6.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1.Roof Mount monitor with DVD (EUT)

Model Number : AVXMTG10U
 Serial Number : N/A
 Manufacturer : Huizhou Hengdu Electronics Co., Ltd.

6.3.Operating Condition of EUT

6.3.1.Setup the EUT and simulator as shown as Section 5.1.

6.3.2.Turn on the power of all equipment.

6.3.3. Let the EUT work in TX modes [Connect EUT use DVD and SD card playing typical audio signal with maximum audio level] measure it. The transmit frequency are 88.1-91.1MHz. We are select 88.1M, 89.7M, 91.1MHz TX frequency to transmit.

6.4.Test Procedure

6.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.

6.4.2. Set EUT as normal operation. Playing typical audio signal (the volume control was set to maximum.)

6.4.3. Set EMI test receiver Center Frequency = fundamental frequency, RBW= 3kHz, VBW= 10kHz, Span=500kHz.

6.4.4. Set EMI test receiver Max hold. Mark peak, -26dB.

6.5. Test Result

The EUT does meet the FCC requirement.

FM Transmitter with DVD

FM 88.1MHz
-26dB bandwidth = 154.0kHz

FM 89.7MHz
-26dB bandwidth = 154.0kHz

FM 91.1MHz
-26dB bandwidth = 154.0kHz

FM Transmitter with SD card

FM 88.1MHz
-26dB bandwidth = 155.0kHz

FM 89.7MHz
-26dB bandwidth = 152.0kHz

FM 91.1MHz
-26dB bandwidth = 156.0kHz

The spectral diagrams are shown in appendix I.

7. TUNING RANGE

7.1.The Requirement For Section 15.239

88-108MHz

7.2.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.2.1. Roof Mount monitor with DVD (EUT)

Model Number : AVXMTG10U
Serial Number : N/A
Manufacturer : Huizhou Hengdu Electronics Co., Ltd.

7.3.Operating Condition of EUT

7.3.1.Setup the EUT and simulator as shown as Section 5.1.

7.3.2.Turn on the power of all equipment.

7.3.3. Let the EUT work in TX modes [Connect EUT use DVD and SD card playing typical audio signal with maximum audio level] measure it. The transmit frequency are 88.1-91.1MHz. We are select 88.1M, 89.7M, 91.1MHz TX frequency to transmit.

7.4.Test Procedure

7.4.1.The EUT was placed on a turn table which is 0.8m above ground plane.

7.4.2.Set the EUT working on the working frequency.

7.4.3. Set EMI test receiver center frequency = working frequency, RBW=3kHz, VBW= 10kHz, Span=500kHz.

7.4.4.Measuring the working frequency.

7.4.5.The working frequency should be inside 88-108MHz.

7.5. Test Result

The EUT does meet the FCC requirement.

FM Transmitter with DVD

Low Frequency = 88.1070MHz	EUT LED display 88.1MHz
Mid Frequency = 89.7070MHz	EUT LED display 89.7MHz
High Frequency = 91.1070MHz	EUT LED display 91.1MHz

FM Transmitter with SD card

Low Frequency = 88.1070MHz	EUT LED display 88.1MHz
Mid Frequency = 89.7070MHz	EUT LED display 89.7MHz
High Frequency = 91.1070MHz	EUT LED display 91.1MHz

The working frequency rang is from 88.1 to 91.1MHz.

APPENDIX I (Test Curves)




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1150	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/43/12
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 88.1MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

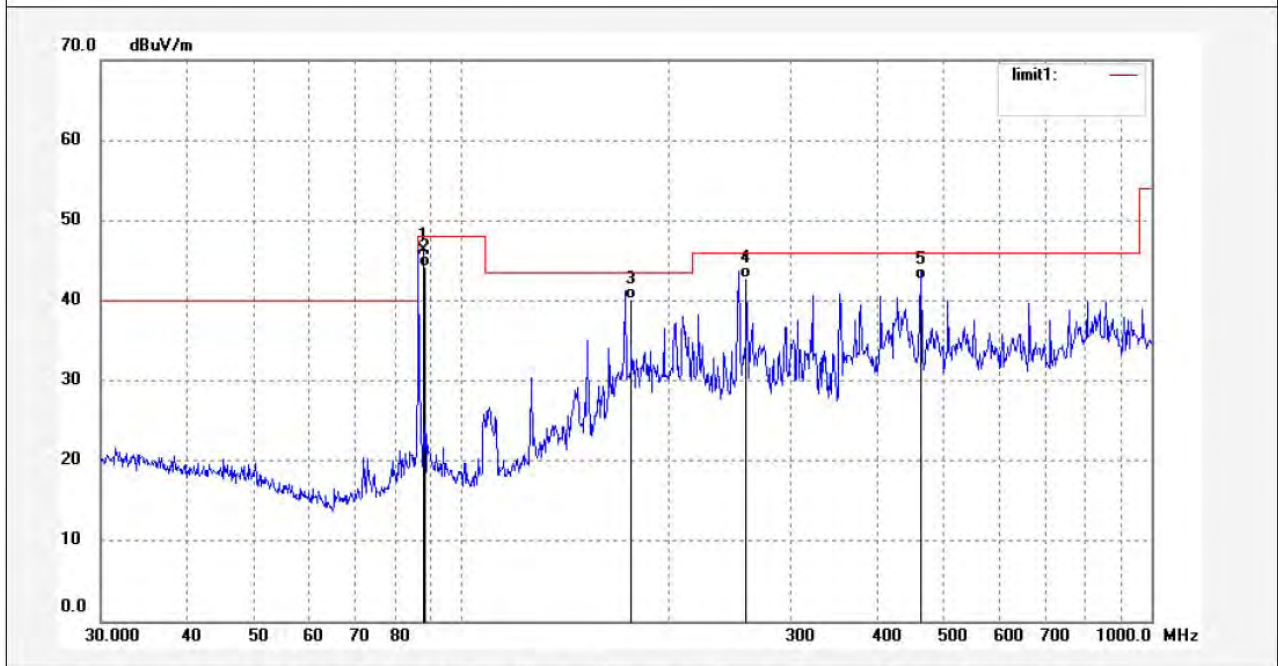

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	88.1070	32.55	13.75	46.30	68.00	-21.70	peak			
2	88.1070	30.44	13.75	44.19	48.00	-3.81	AVG			
3	176.2109	24.42	15.76	40.18	43.50	-3.32	QP			
4	256.5120	24.64	18.09	42.73	46.00	-3.27	QP			
5	461.7260	19.36	23.30	42.66	46.00	-3.34	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1151	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/47/30
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 88.1MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

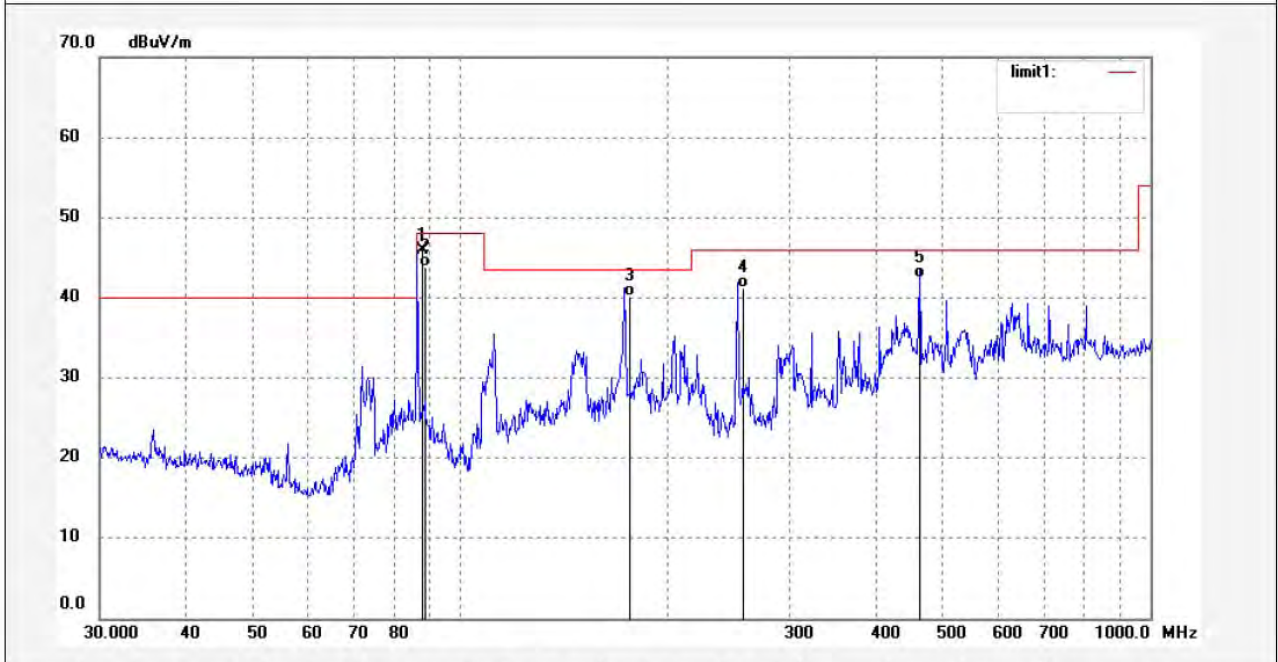

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	88.1070	32.17	13.73	45.90	68.00	-22.10	peak			
2	88.1070	30.06	13.73	43.79	48.00	-4.21	AVG			
3	176.2109	24.41	15.76	40.17	43.50	-3.33	QP			
4	256.5120	23.04	18.09	41.13	46.00	-4.87	QP			
5	461.7260	19.12	23.30	42.42	46.00	-3.58	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1153	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/56/58
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 89.7MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

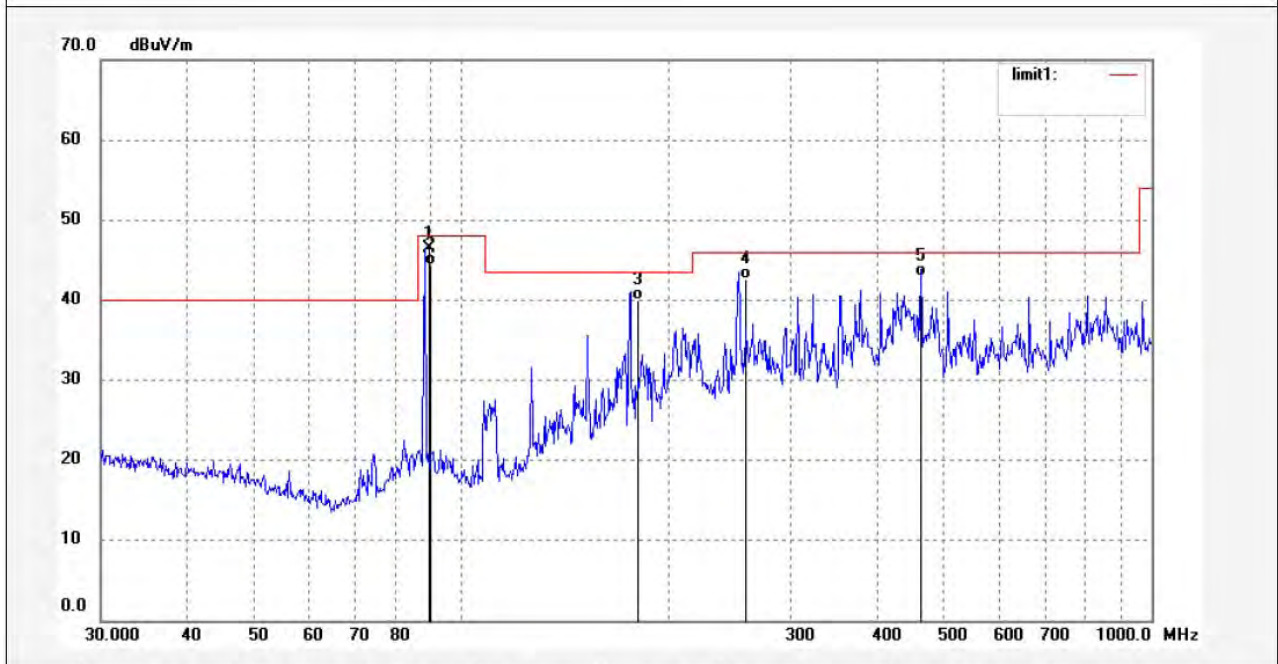

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	89.7070	32.60	13.85	46.45	68.00	-21.55	peak			
2	89.7070	30.48	13.85	44.33	48.00	-3.67	AVG			
3	179.4120	24.24	15.78	40.02	43.50	-3.48	QP			
4	256.5120	24.47	18.09	42.56	46.00	-3.44	QP			
5	461.7260	19.61	23.30	42.91	46.00	-3.09	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1152	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/52/41
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 89.7MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

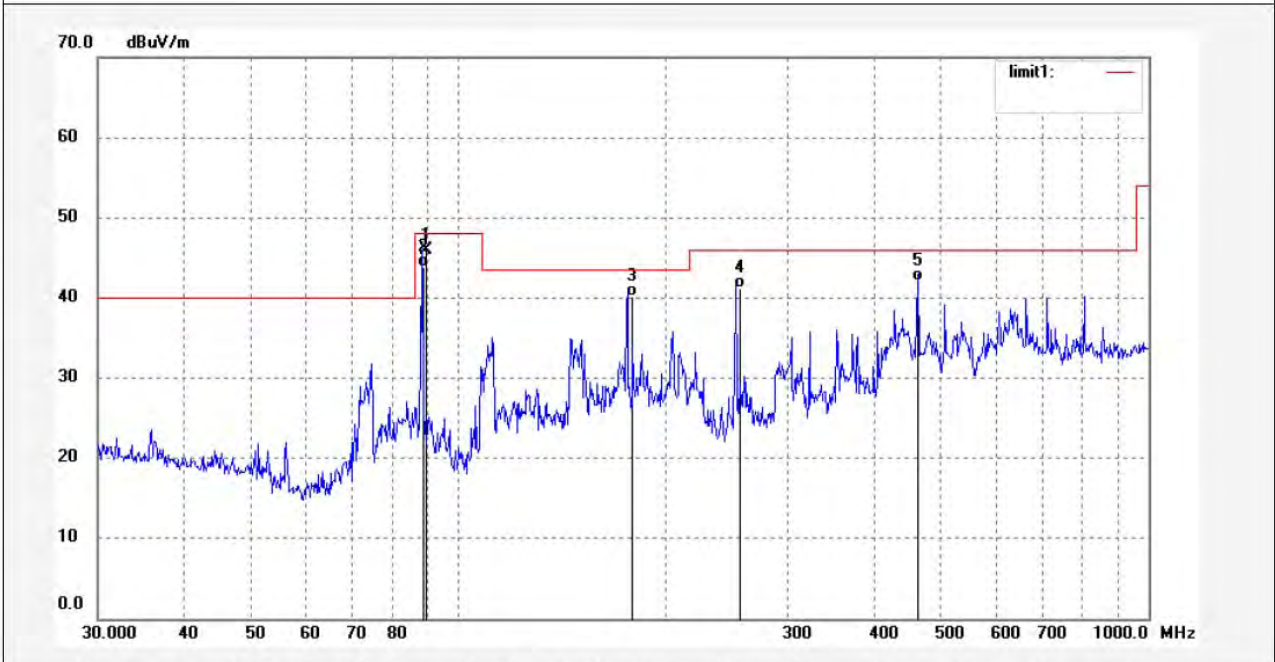

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	89.7070	32.29	13.65	45.94	68.00	-22.06	peak			
2	89.7070	30.23	13.65	43.88	48.00	-4.12	AVG			
3	179.4120	24.32	15.78	40.10	43.50	-3.40	QP			
4	256.5120	23.11	18.09	41.20	46.00	-4.80	QP			
5	461.7260	18.75	23.30	42.05	46.00	-3.95	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1154	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10/02/22
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 91.1MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

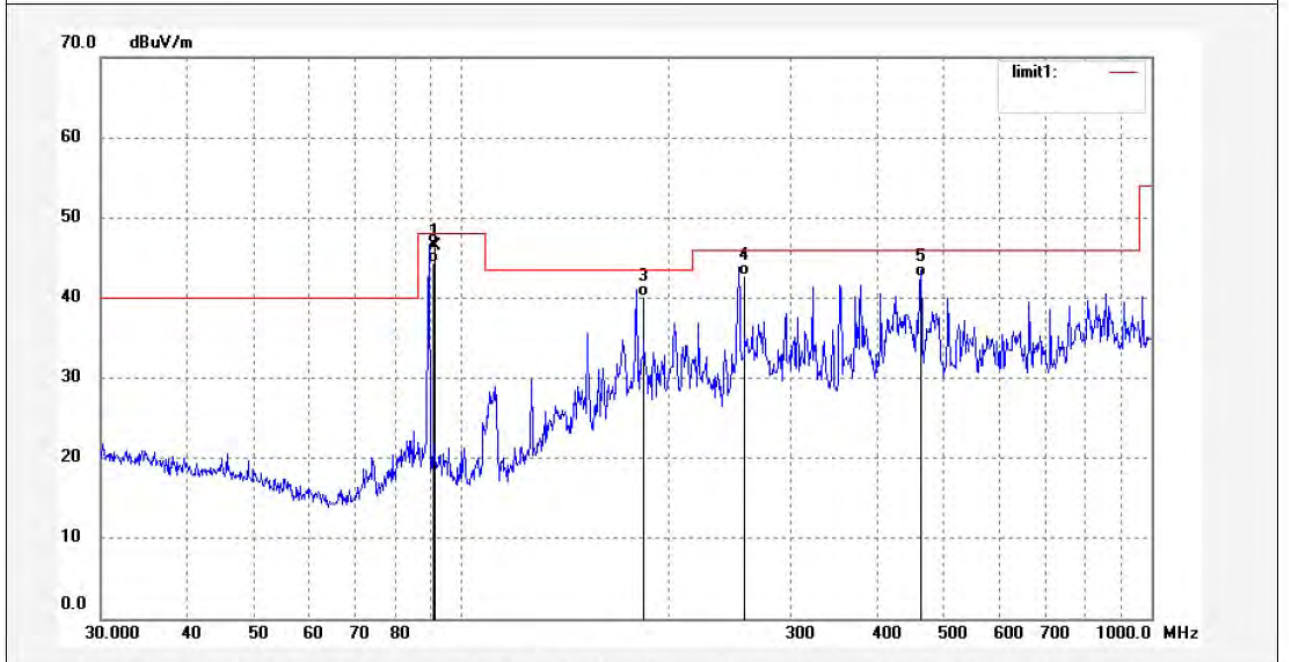

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	91.1070	32.53	13.91	46.44	68.00	-21.56	peak			
2	91.1070	30.42	13.91	44.33	48.00	-3.67	AVG			
3	182.2119	24.23	15.89	40.12	43.50	-3.38	QP			
4	256.5120	24.75	18.09	42.84	46.00	-3.16	QP			
5	461.7260	19.25	23.30	42.55	46.00	-3.45	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1155	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10/06/43
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 91.1MHz with DVD	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

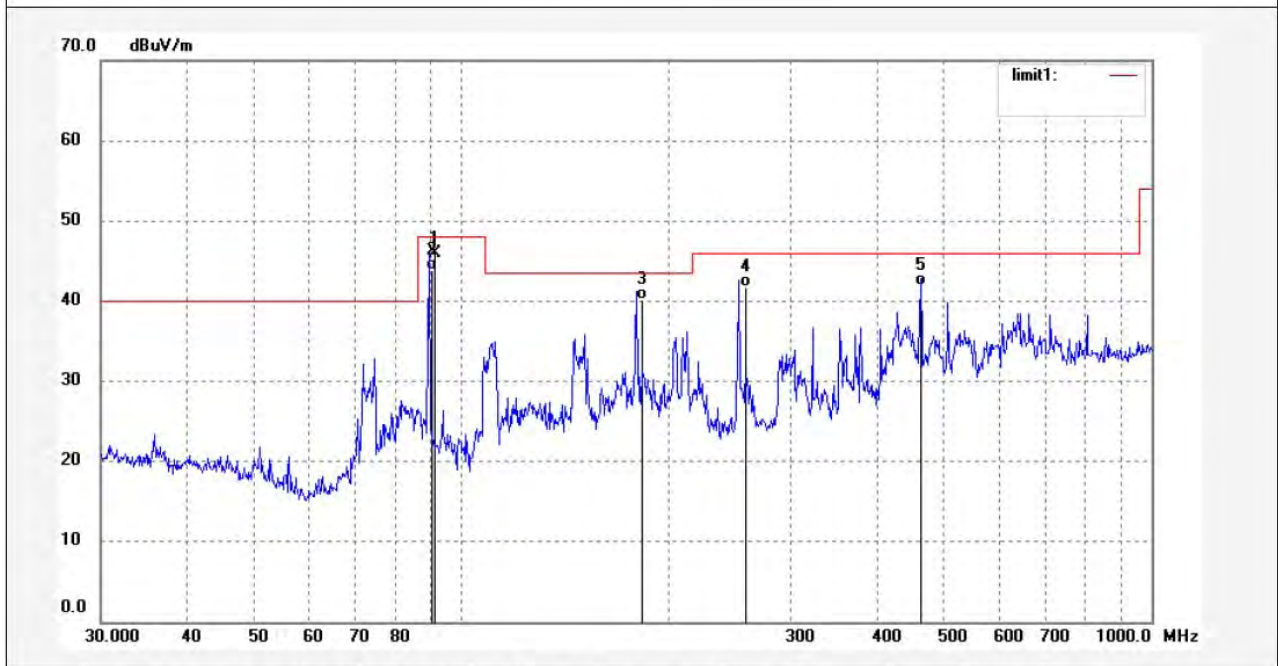

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	91.1070	32.28	13.68	45.96	68.00	-22.04	peak			
2	91.1070	30.20	13.68	43.88	48.00	-4.12	AVG			
3	182.2119	24.29	15.84	40.13	43.50	-3.37	QP			
4	256.5120	23.57	18.09	41.66	46.00	-4.34	QP			
5	461.7260	18.54	23.30	41.84	46.00	-4.16	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1145	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/11/38
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 88.1MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

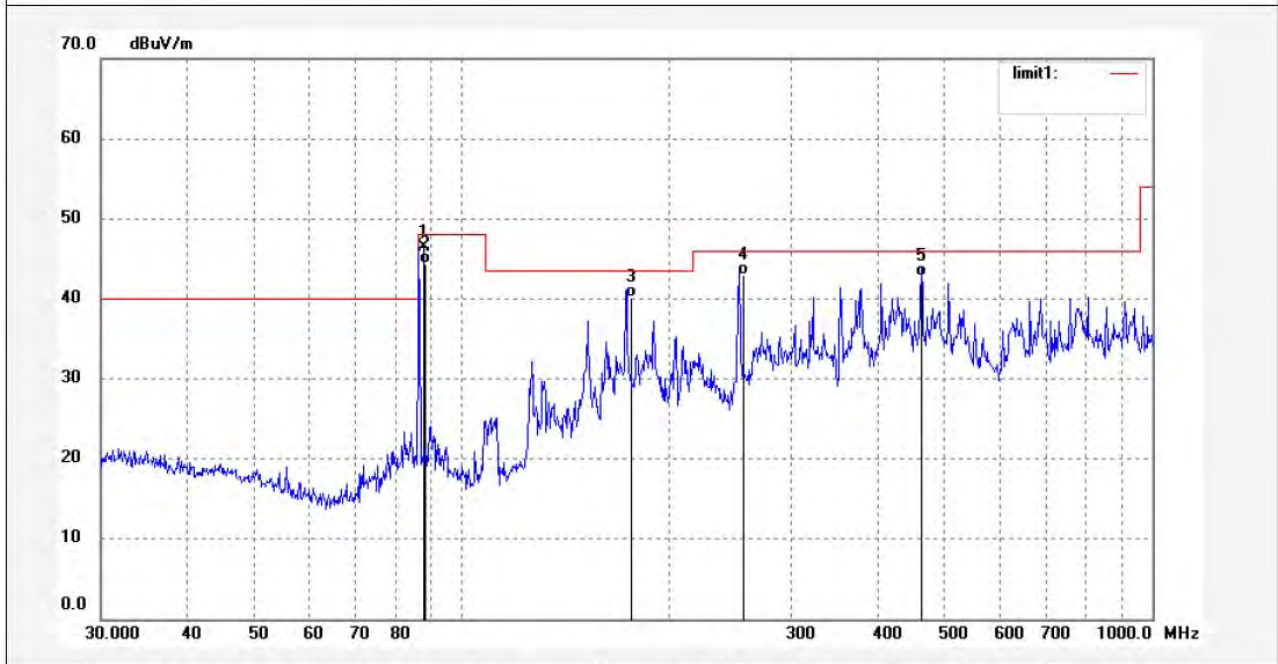

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	88.1070	32.73	13.75	46.48	68.00	-21.52	peak			
2	88.1070	30.64	13.75	44.39	48.00	-3.61	AVG			
3	176.2109	24.41	15.76	40.17	43.50	-3.33	QP			
4	256.5120	24.81	18.09	42.90	46.00	-3.10	QP			
5	461.7260	19.54	23.30	42.84	46.00	-3.16	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1144	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/07/21
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 88.1MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

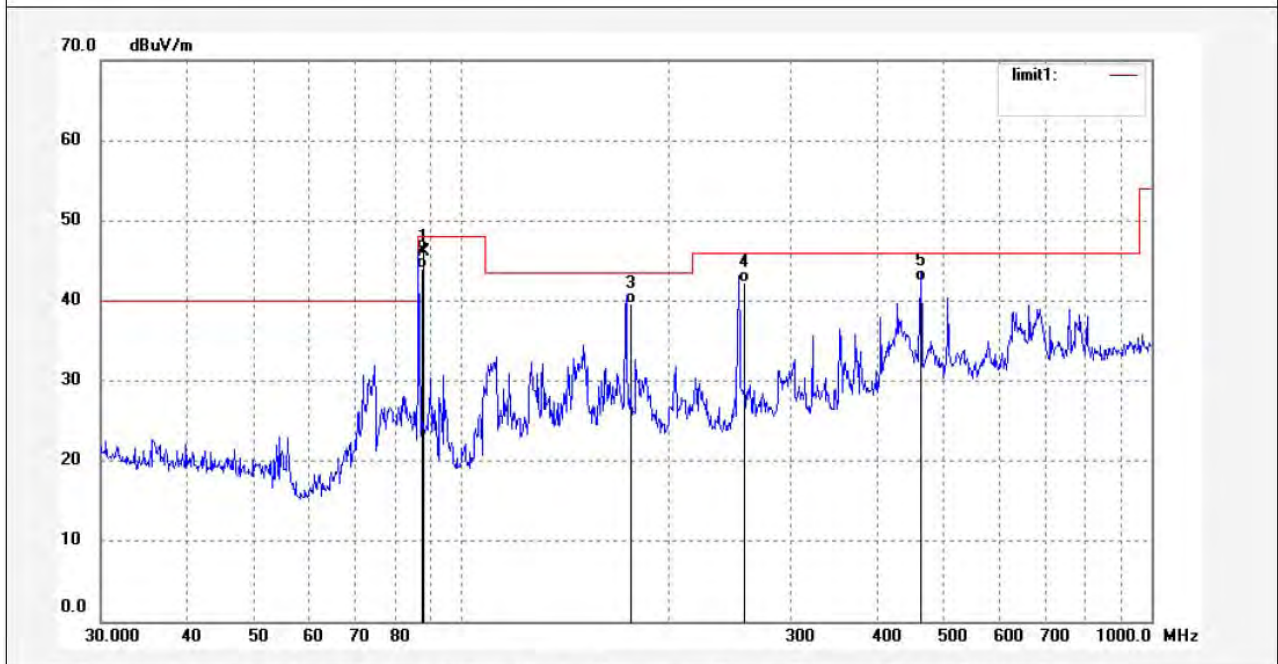

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	88.1070	32.43	13.73	46.16	68.00	-21.84	peak			
2	88.1070	30.36	13.73	44.09	48.00	-3.91	AVG			
3	176.2109	23.93	15.76	39.69	43.50	-3.81	QP			
4	256.5120	24.13	18.09	42.22	46.00	-3.78	QP			
5	461.7260	19.19	23.30	42.49	46.00	-3.51	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1146	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/16/47
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 89.7MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

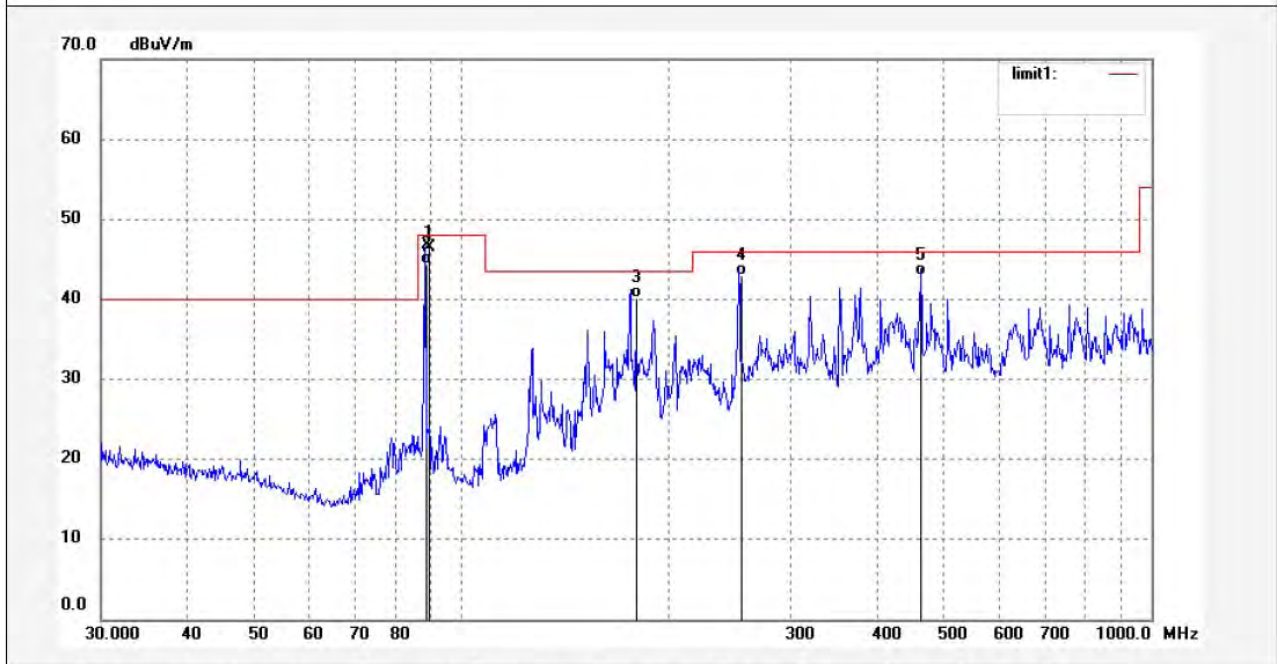

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	89.7070	32.65	13.85	46.50	68.00	-21.50	peak			
2	89.7070	30.53	13.85	44.38	48.00	-3.62	AVG			
3	179.4120	24.41	15.78	40.19	43.50	-3.31	QP			
4	256.5120	24.89	18.09	42.98	46.00	-3.02	QP			
5	461.7260	19.59	23.30	42.89	46.00	-3.11	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1147	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/20/56
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 89.7MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

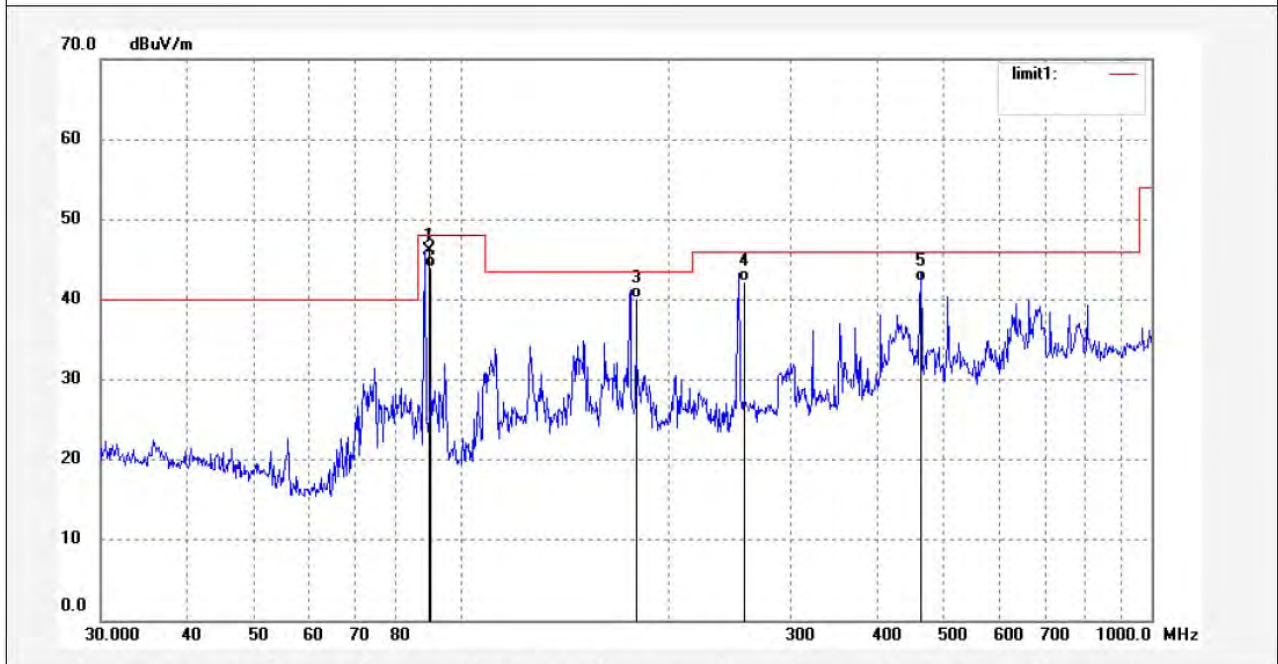

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	89.7070	32.39	13.65	46.04	68.00	-21.96	peak			
2	89.7070	30.32	13.65	43.97	48.00	-4.03	AVG			
3	179.4120	24.36	15.78	40.14	43.50	-3.36	QP			
4	256.5120	24.23	18.09	42.32	46.00	-3.68	QP			
5	461.7260	18.95	23.30	42.25	46.00	-3.75	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1149	Polarization: Horizontal
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/30/36
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 91.1MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

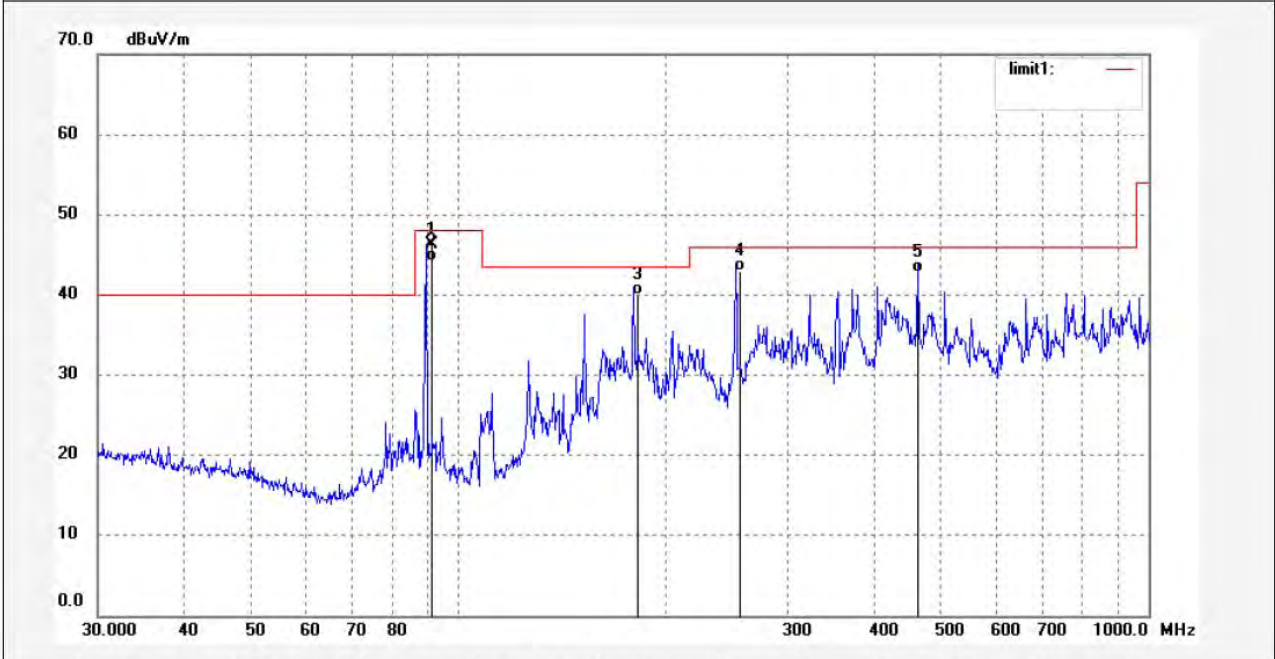

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	91.1070	32.30	13.91	46.21	68.00	-21.79	peak			
2	91.1070	30.21	13.91	44.12	48.00	-3.88	AVG			
3	182.2119	24.17	15.89	40.06	43.50	-3.44	QP			
4	256.5120	24.84	18.09	42.93	46.00	-3.07	QP			
5	461.7260	19.55	23.30	42.85	46.00	-3.15	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396


Job No.: joe #1148	Polarization: Vertical
Standard: FCC PART 15 (FMT)	Power Source: DC 12V
Test item: Radiation Test	Date: 10/11/23/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 9/26/19
EUT: Roof mount monitor with DVD	Engineer Signature: Joe
Mode: TX 91.1MHz with SD card	Distance: 3m
Model: AVXMTG10U	
Manufacturer: Huizhou Hengdu Electronics Co., Ltd.	

Note: Sample No.:102473 Report No.:ATE20102191

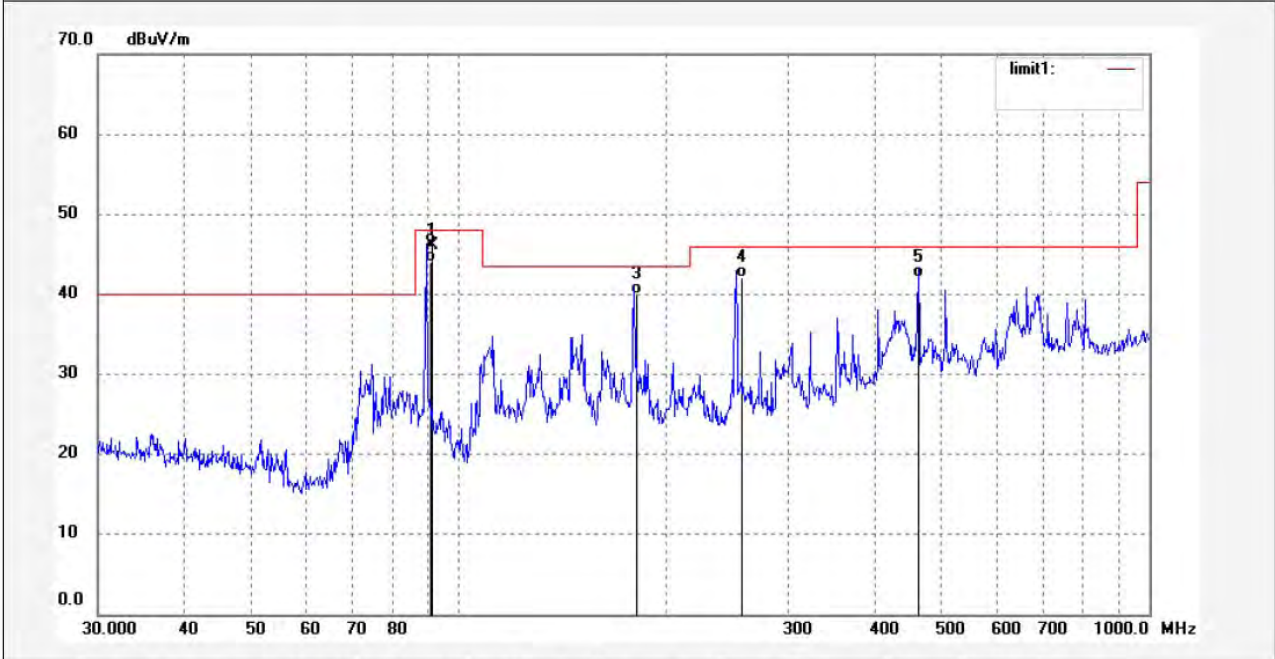


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	91.1070	32.47	13.68	46.15	68.00	-21.85	peak			
2	91.1070	30.38	13.68	44.06	48.00	-3.94	AVG			
3	182.2119	24.22	15.84	40.06	43.50	-3.44	QP			
4	256.5120	23.94	18.09	42.03	46.00	-3.97	QP			
5	461.7260	18.83	23.30	42.13	46.00	-3.87	QP			

FM 88.1MHz with DVD

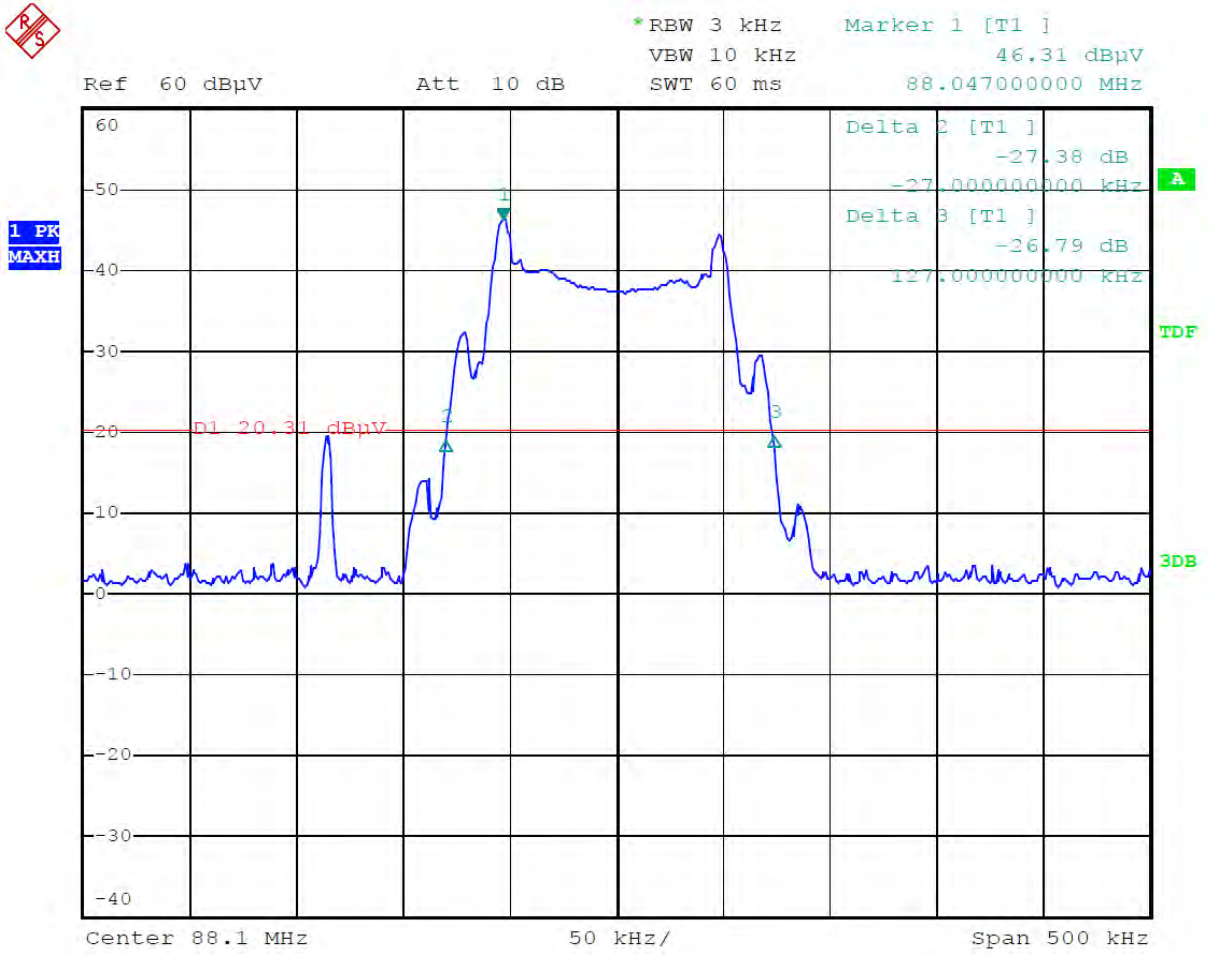


Date: 22.NOV.2010 09:55:42

FM 89.7MHz with DVD

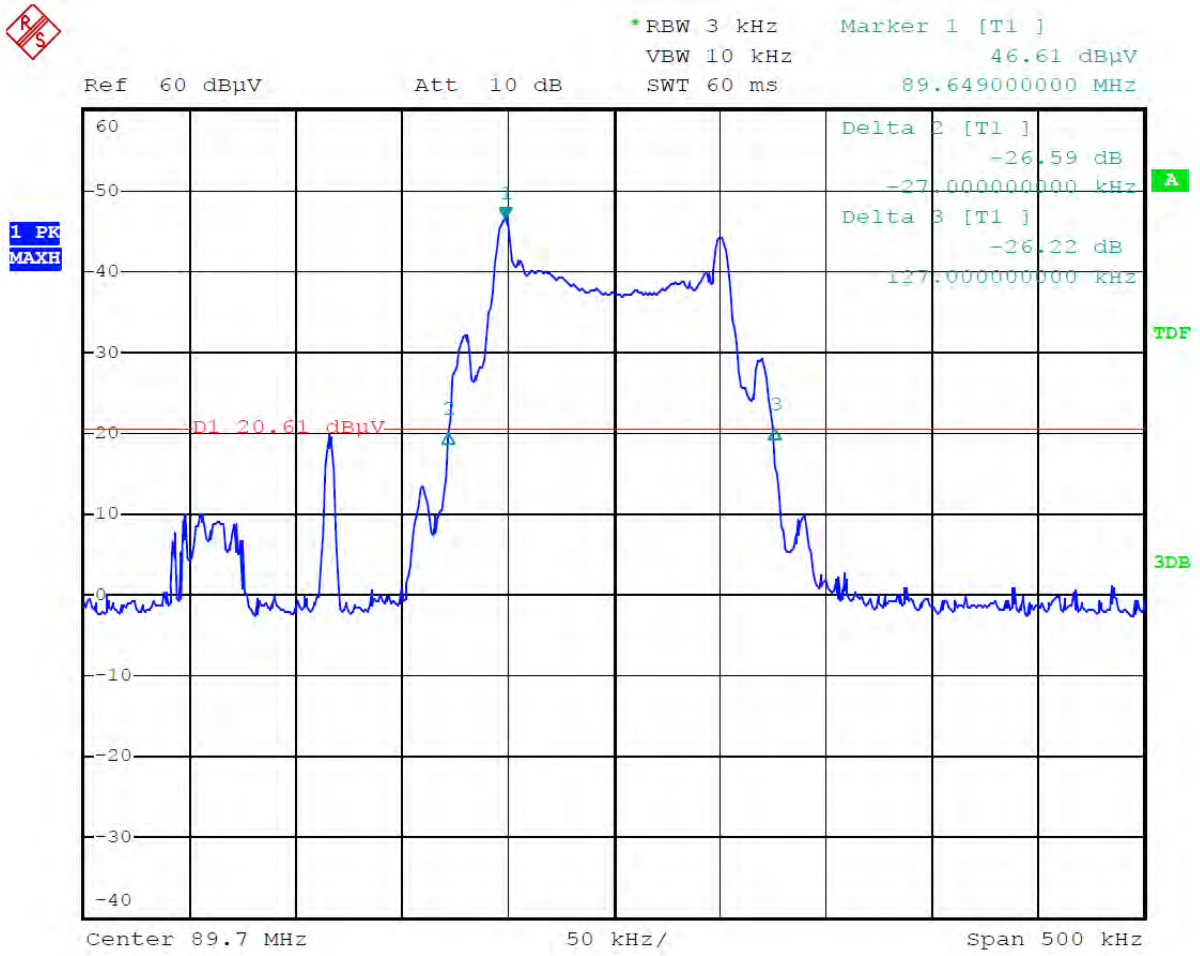


Date: 22.NOV.2010 10:03:52

FM 91.1MHz with DVD

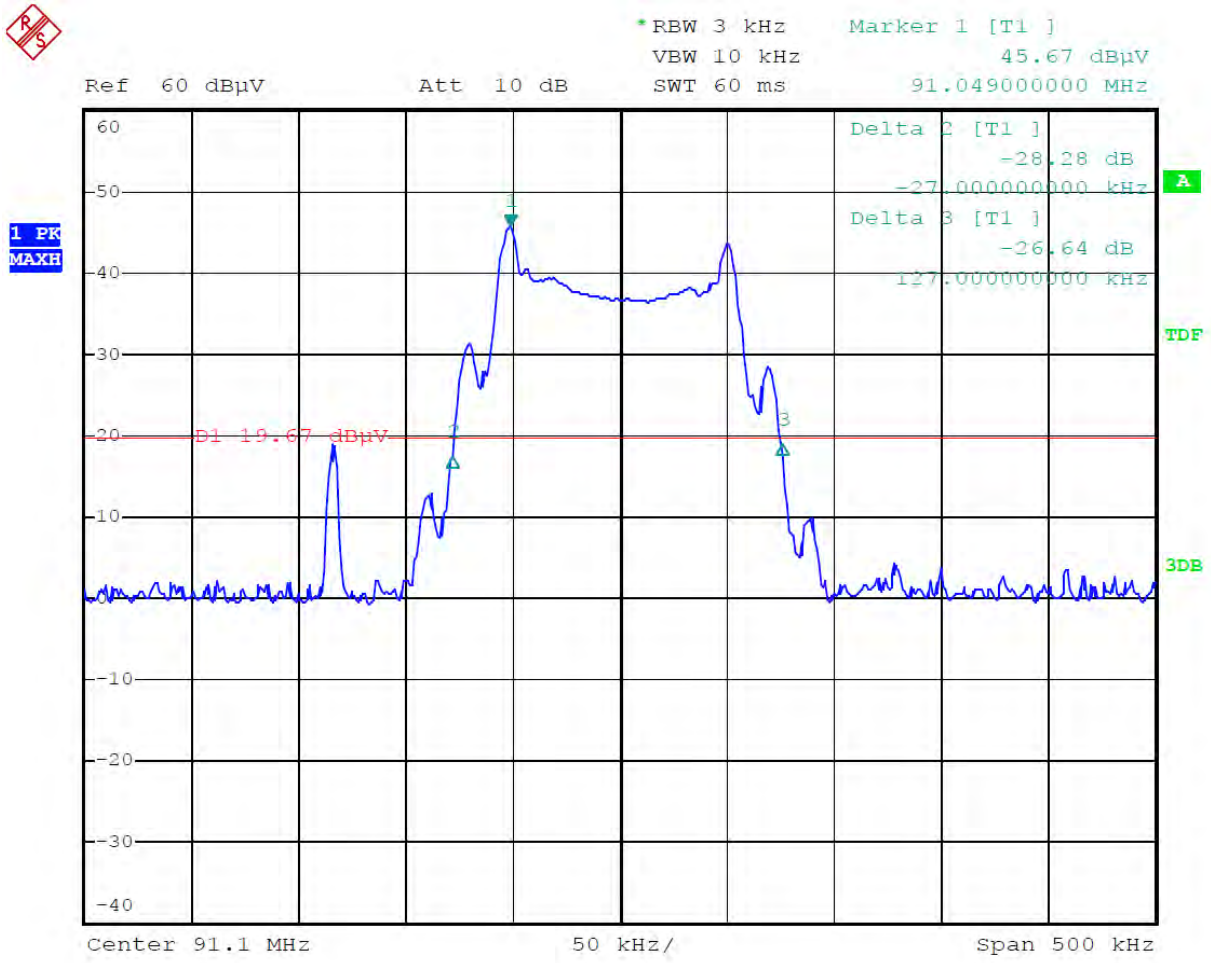


Date: 22.NOV.2010 10:09:35

FM 88.1MHz with SD card

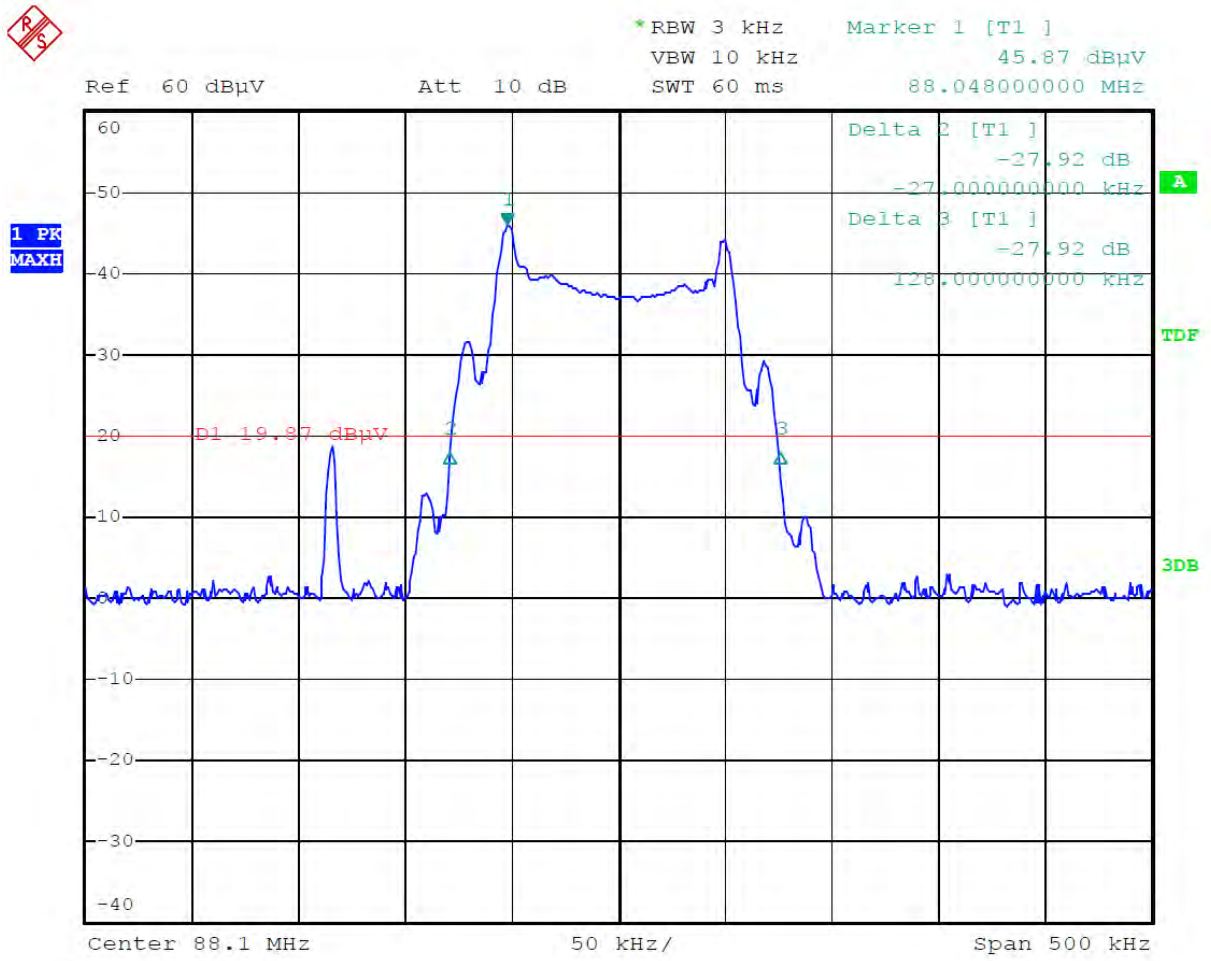

Date: 22.NOV.2010 10:14:09

FM 89.7MHz with SD card

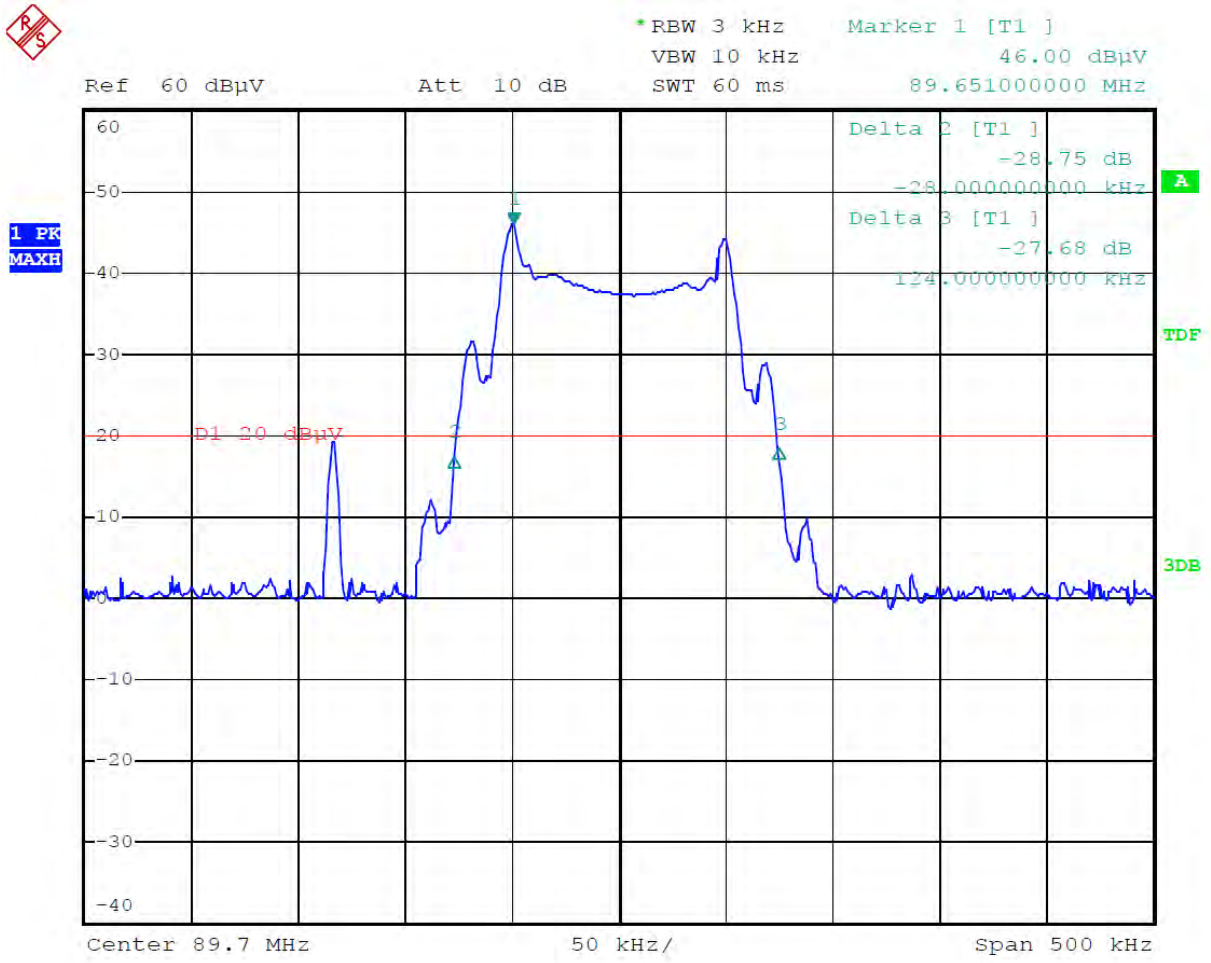

Date: 22.NOV.2010 10:22:55

