


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

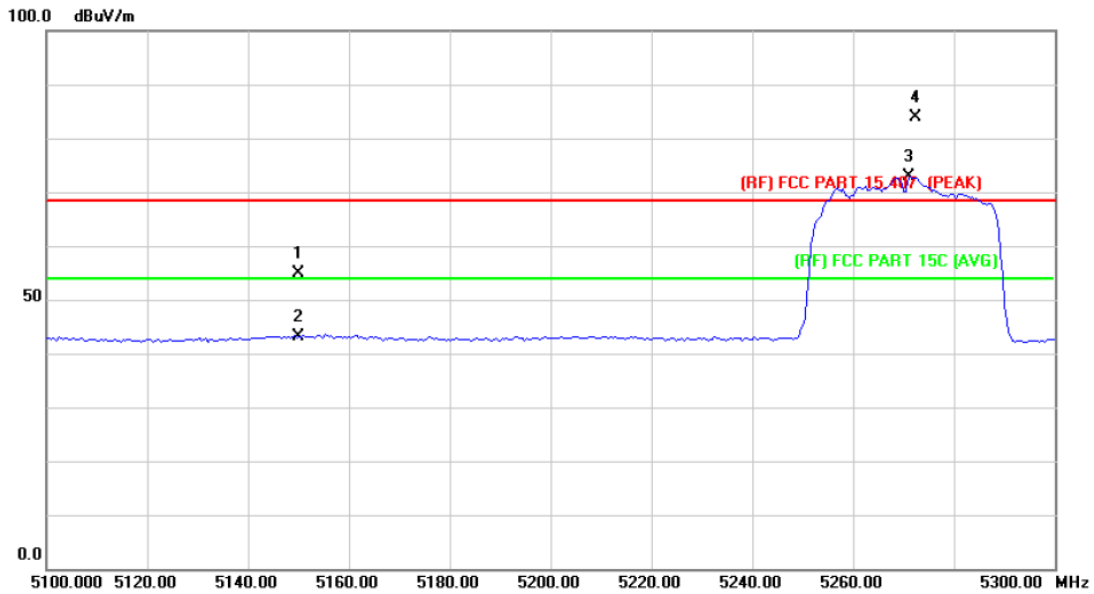


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.15	14.67	54.82	68.30	-13.48	peak
2		5150.000	28.38	14.67	43.05	54.00	-10.95	AVG
3	*	5271.200	57.98	14.85	72.83	Fundamental Frequency		AVG
4	X	5272.400	69.08	14.85	83.93	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

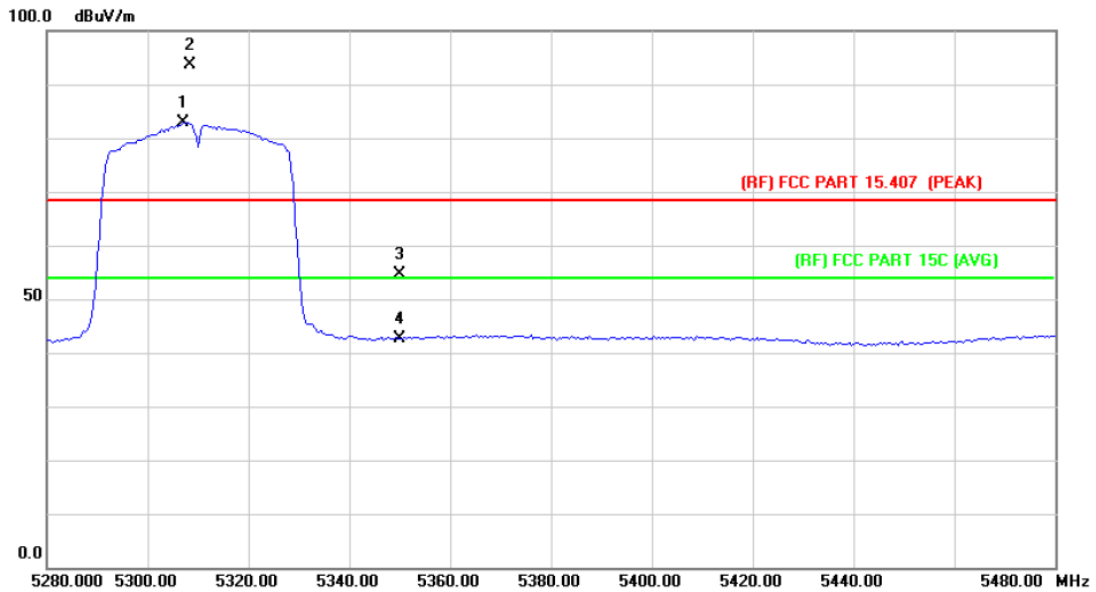


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5307.200	67.92	14.91	82.83	Fundamental Frequency	3	AVG
2	X	5308.400	78.73	14.91	93.64	Fundamental Frequency	↓	peak
3		5350.000	39.55	14.97	54.52	68.30	-13.78	peak
4		5350.000	27.69	14.97	42.66	54.00	-11.34	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

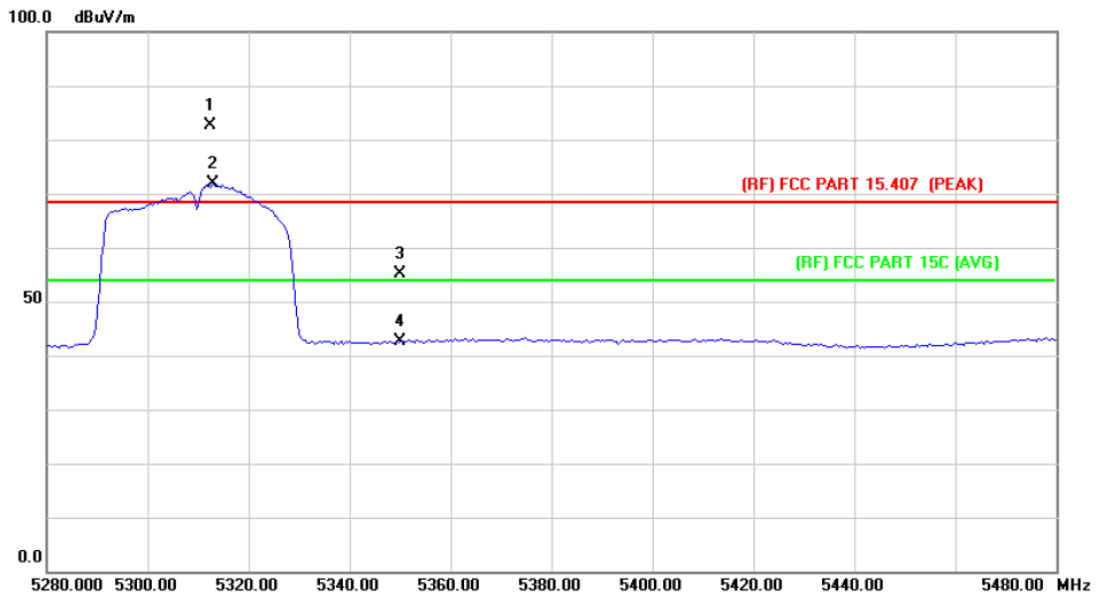


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5312.400	67.76	14.92	82.68	Fundamental Frequency		peak
2	*	5312.800	56.94	14.91	71.85	Fundamental Frequency		AVG
3		5350.000	40.05	14.97	55.02	68.30	-13.28	peak
4		5350.000	27.76	14.97	42.73	54.00	-11.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz(U-NII-2A)		
Remark:			

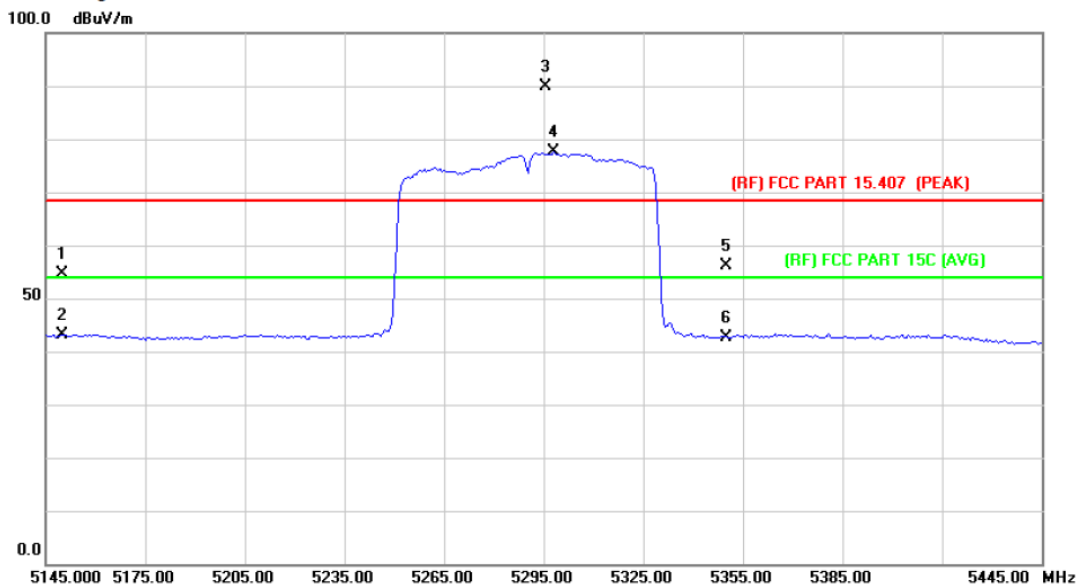


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.02	14.67	54.69	68.30	-13.61	peak
2		5150.000	28.47	14.67	43.14	54.00	-10.86	AVG
3	X	5295.600	74.97	14.88	89.85	Fundamental Frequency		peak
4	*	5298.000	62.69	14.89	77.58	Fundamental Frequency		AVG
5		5350.000	41.12	14.97	56.09	68.30	-12.21	peak
6		5350.000	27.76	14.97	42.73	54.00	-11.27	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:			

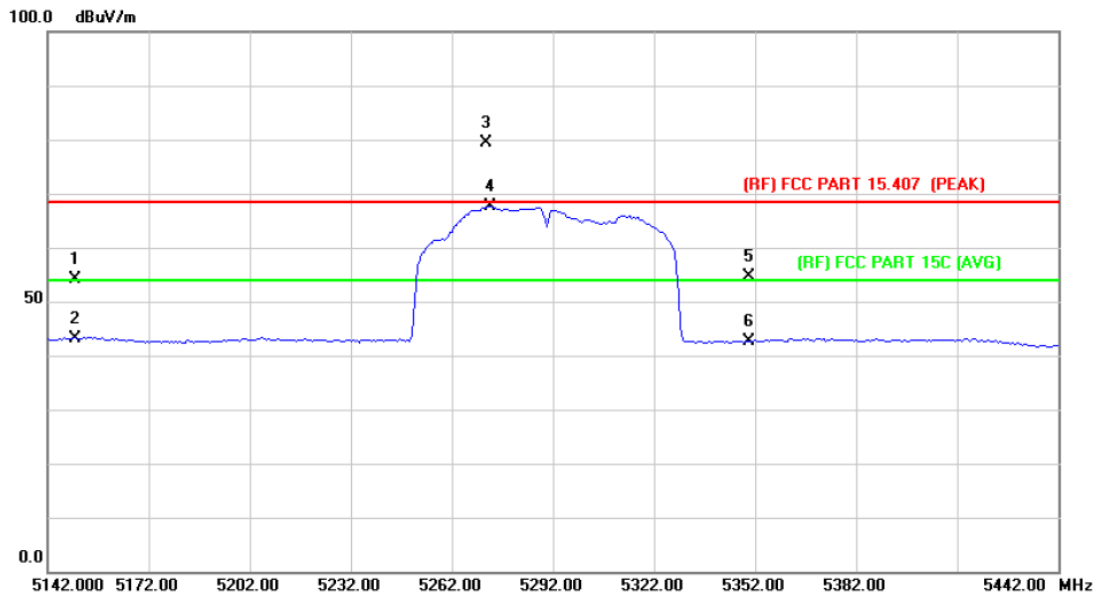


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	39.36	14.67	54.03	68.30	-14.27	peak
2		5150.000	28.58	14.67	43.25	54.00	-10.75	AVG
3	X	5272.200	64.45	14.85	79.30	Fundamental Frequency		peak
4	*	5273.400	52.71	14.85	67.56	Fundamental Frequency		AVG
5		5350.000	39.61	14.97	54.58	68.30	-13.72	peak
6		5350.000	27.61	14.97	42.58	54.00	-11.42	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

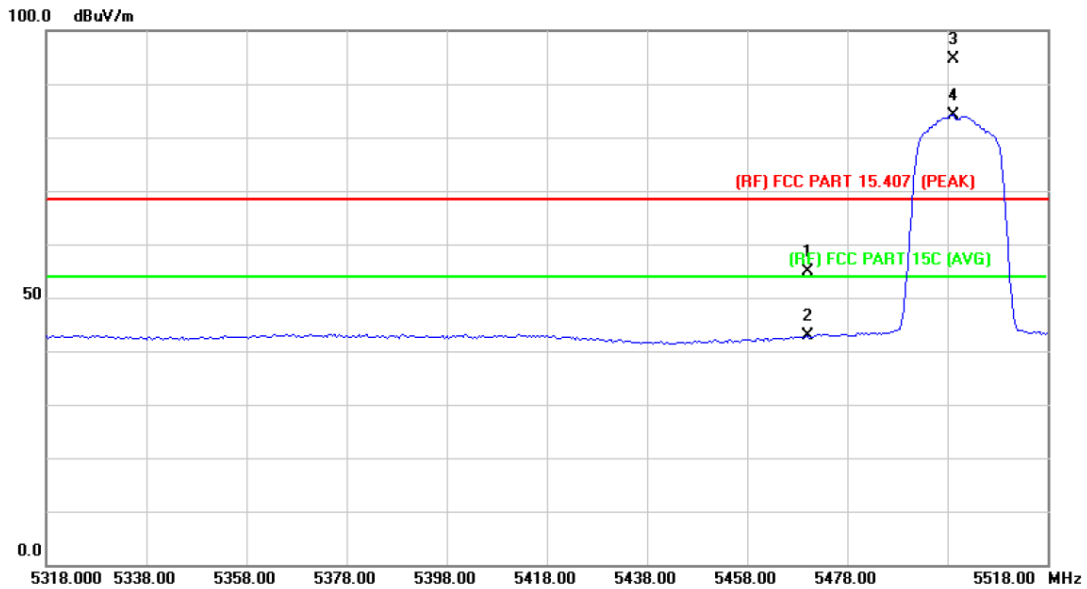


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.76	15.15	54.91	68.30	-13.39	peak
2		5470.000	27.61	15.15	42.76	54.00	-11.24	AVG
3	X	5499.200	79.43	15.19	94.62	Fundamental Frequency		peak
4	*	5499.200	69.06	15.19	84.25	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

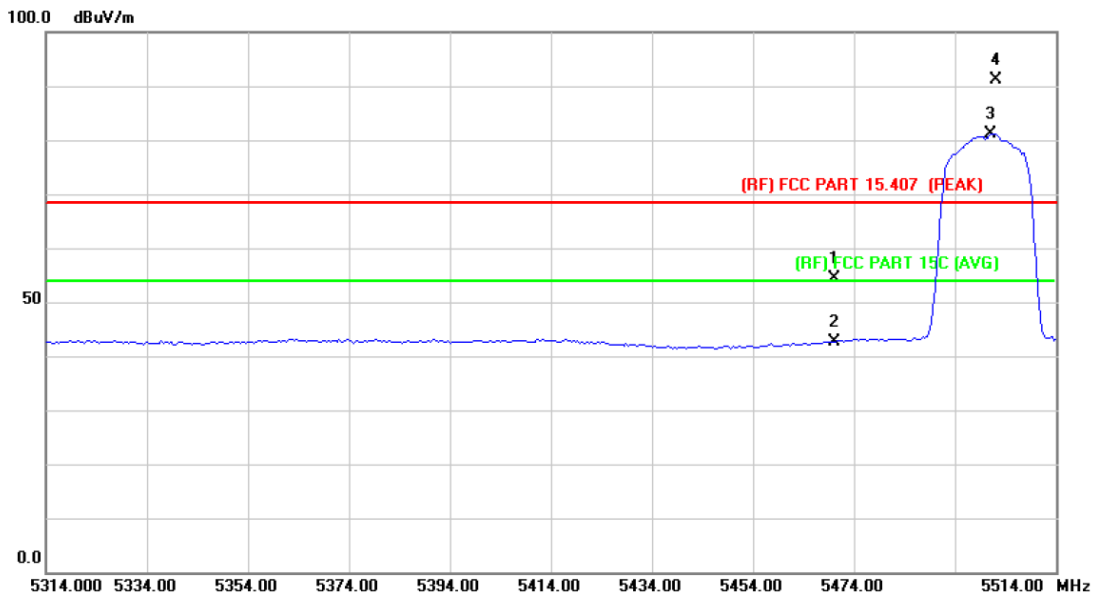


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.28	15.15	54.43	68.30	-13.87	peak
2		5470.000	27.38	15.15	42.53	54.00	-11.47	AVG
3	*	5501.200	65.86	15.19	81.05	Fundamental Frequency		AVG
4	X	5502.000	76.03	15.20	91.23	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

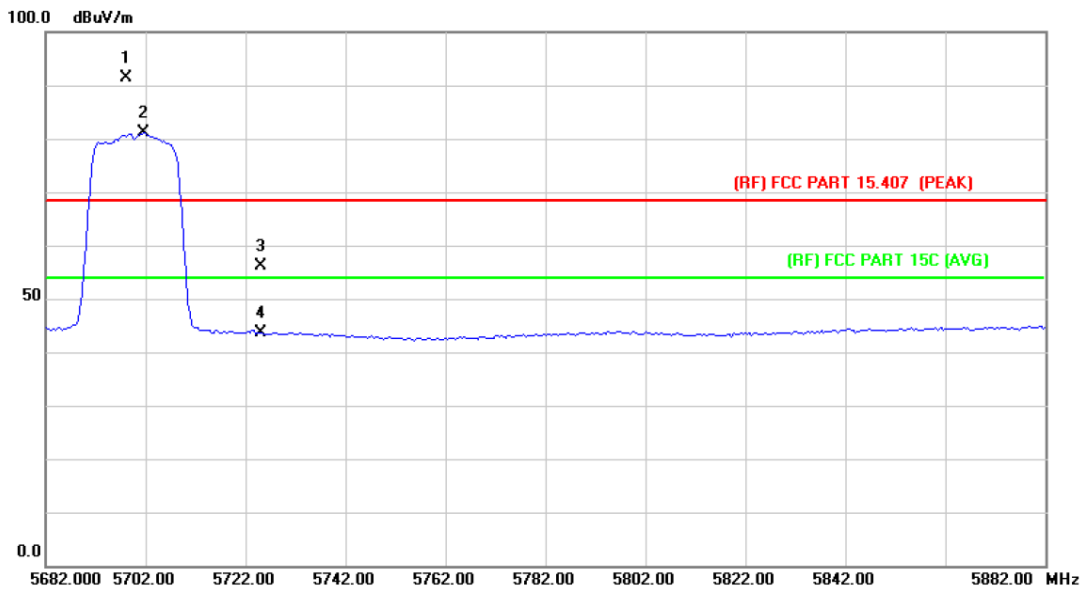


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5698.000	75.67	15.79	91.46	Fundamental Frequency		peak
2	*	5701.600	65.28	15.81	81.09	Fundamental Frequency		AVG
3		5725.000	40.20	15.88	56.08	68.30	-12.22	peak
4		5725.000	27.69	15.88	43.57	54.00	-10.43	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

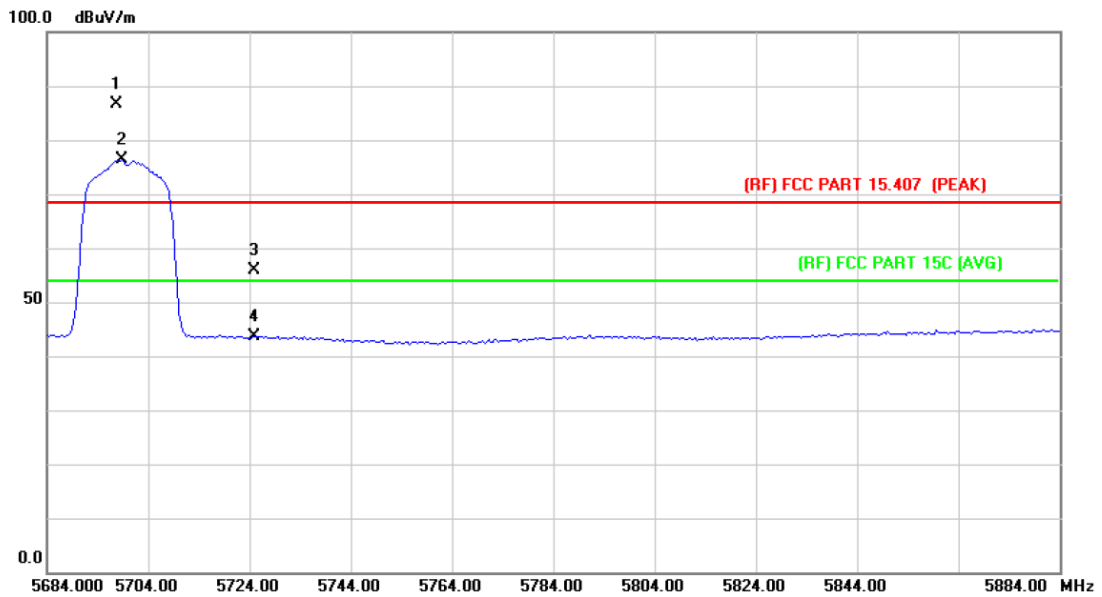


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5697.800	70.87	15.79	86.66	Fundamental Frequency		peak
2	*	5698.800	60.50	15.81	76.31	Fundamental Frequency		AVG
3		5725.000	39.99	15.88	55.87	68.30	-12.43	peak
4		5725.000	27.80	15.88	43.68	54.00	-10.32	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

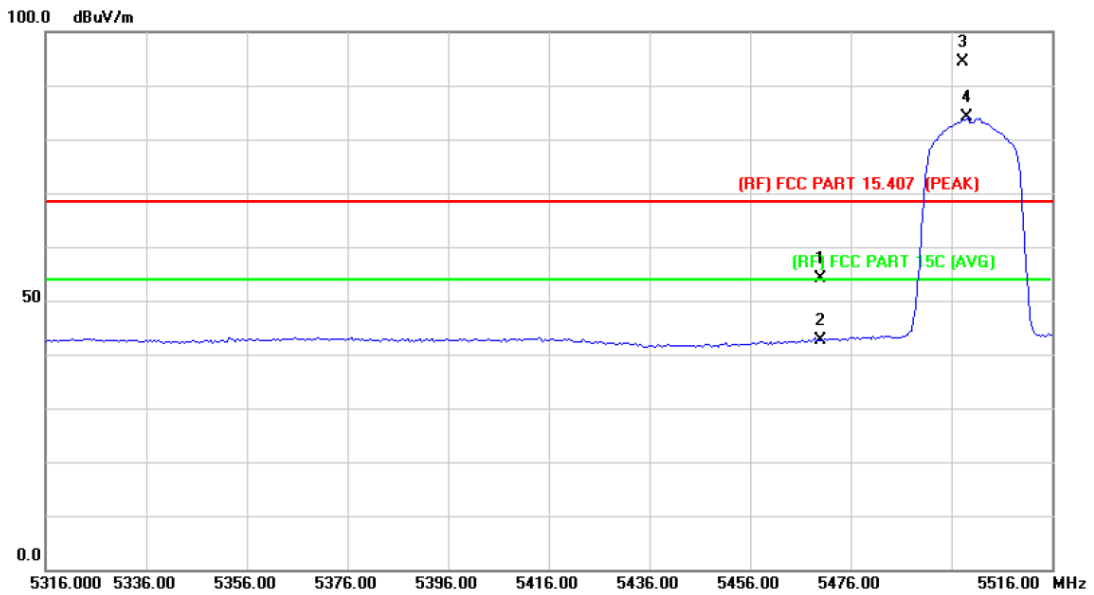


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.00	15.15	54.15	68.30	-14.15	peak
2		5470.000	27.48	15.15	42.63	54.00	-11.37	AVG
3	X	5498.400	79.07	15.19	94.26	Fundamental Frequency		peak
4	*	5499.200	68.82	15.19	84.01	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

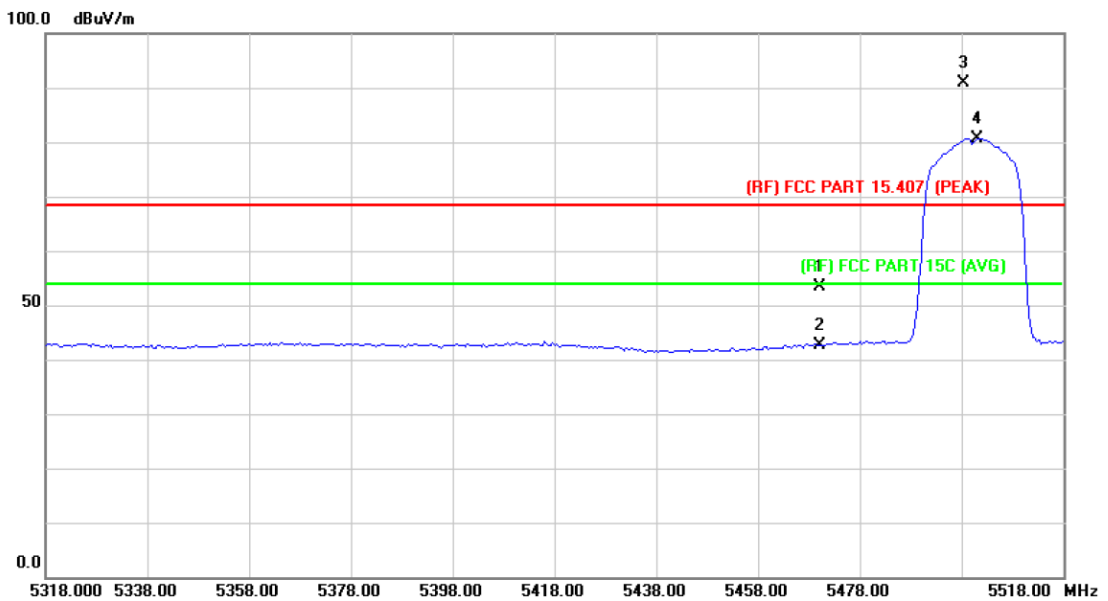


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	38.33	15.15	53.48	68.30	-14.82	peak
2		5470.000	27.55	15.15	42.70	54.00	-11.30	AVG
3	X	5498.400	75.74	15.19	90.93	Fundamental Frequency		peak
4	*	5501.200	65.50	15.19	80.69	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

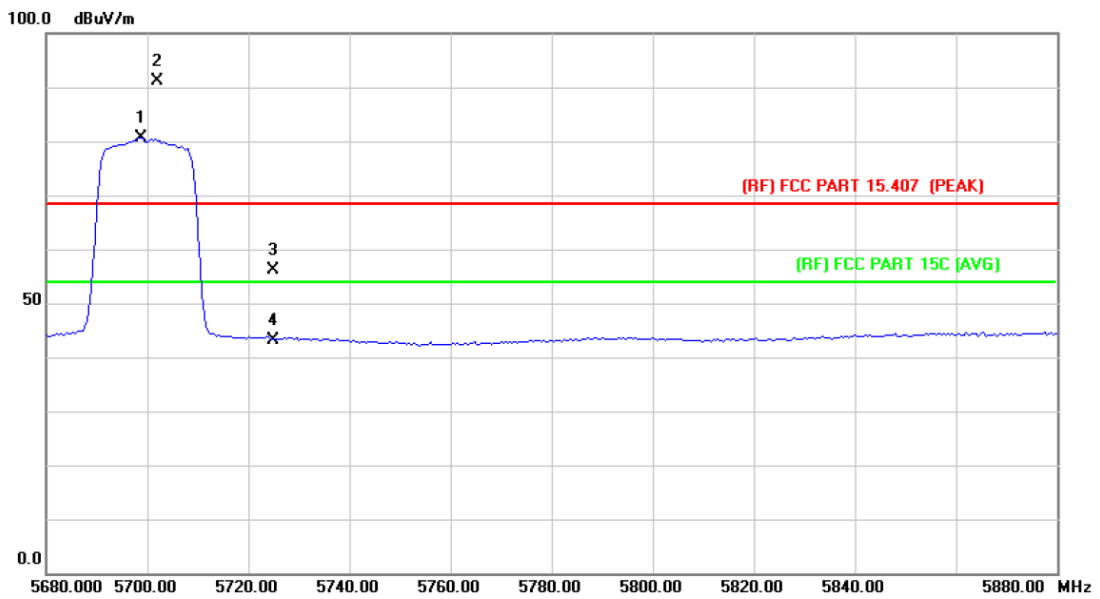


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.800	64.83	15.81	80.64	Fundamental Frequency		AVG
2	X	5702.000	75.20	15.82	91.02	Fundamental Frequency		peak
3		5725.000	40.35	15.88	56.23	68.30	-12.07	peak
4		5725.000	27.36	15.88	43.24	54.00	-10.76	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

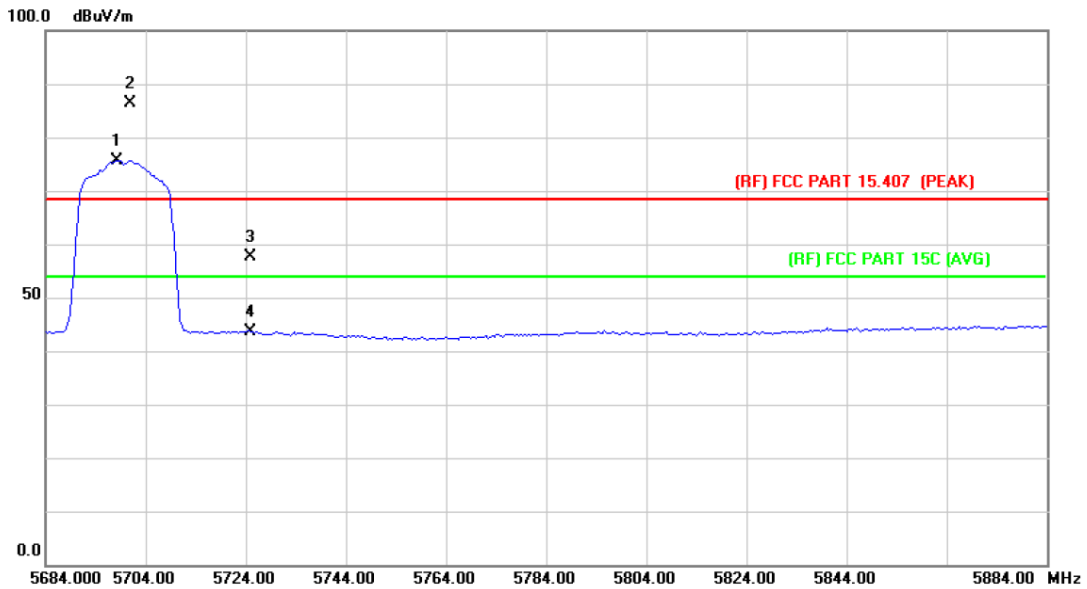


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.400	59.92	15.81	75.73	Fundamental Frequency		AVG
2	X	5700.800	70.46	15.81	86.27	Fundamental Frequency		peak
3		5725.000	41.75	15.88	57.63	68.30	-10.67	peak
4		5725.000	27.68	15.88	43.56	54.00	-10.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

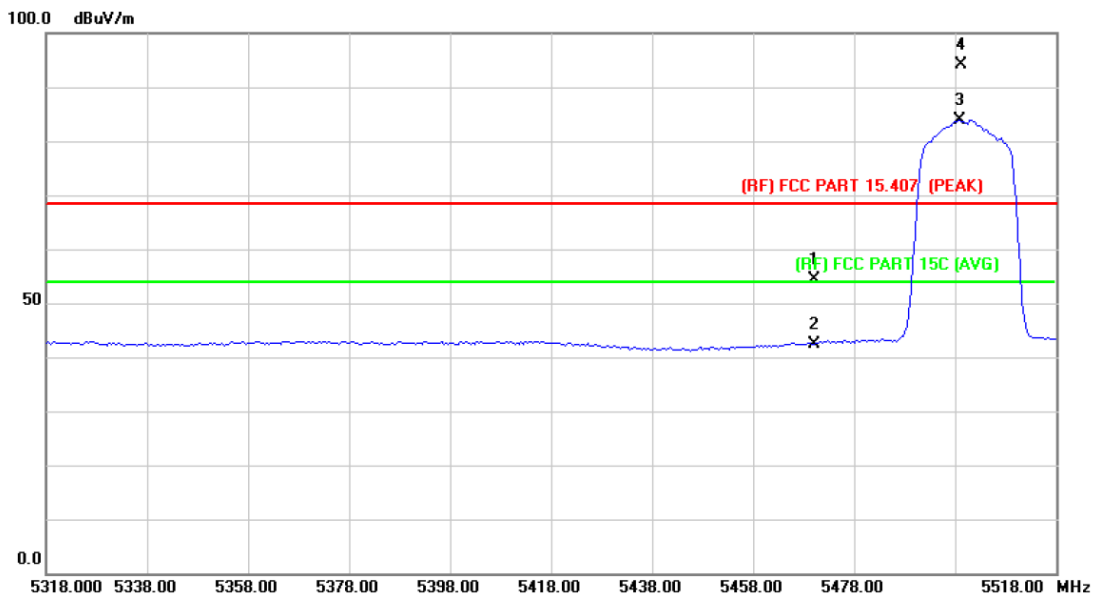


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.30	15.15	54.45	68.30	-13.85	peak
2		5470.000	27.31	15.15	42.46	54.00	-11.54	AVG
3	*	5498.800	68.77	15.19	83.96	Fundamental Frequency		AVG
4	X	5499.200	79.04	15.19	94.23	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

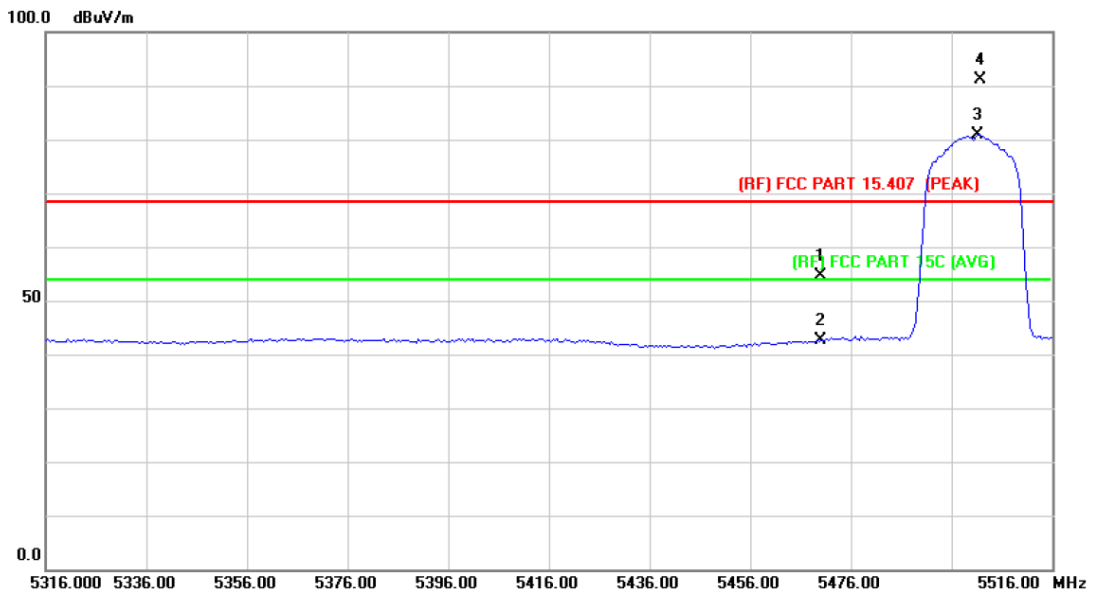


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.42	15.15	54.57	68.30	-13.73	peak
2		5470.000	27.52	15.15	42.67	54.00	-11.33	AVG
3	*	5501.200	65.75	15.19	80.94	Fundamental Frequency		AVG
4	X	5501.600	75.87	15.19	91.06	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

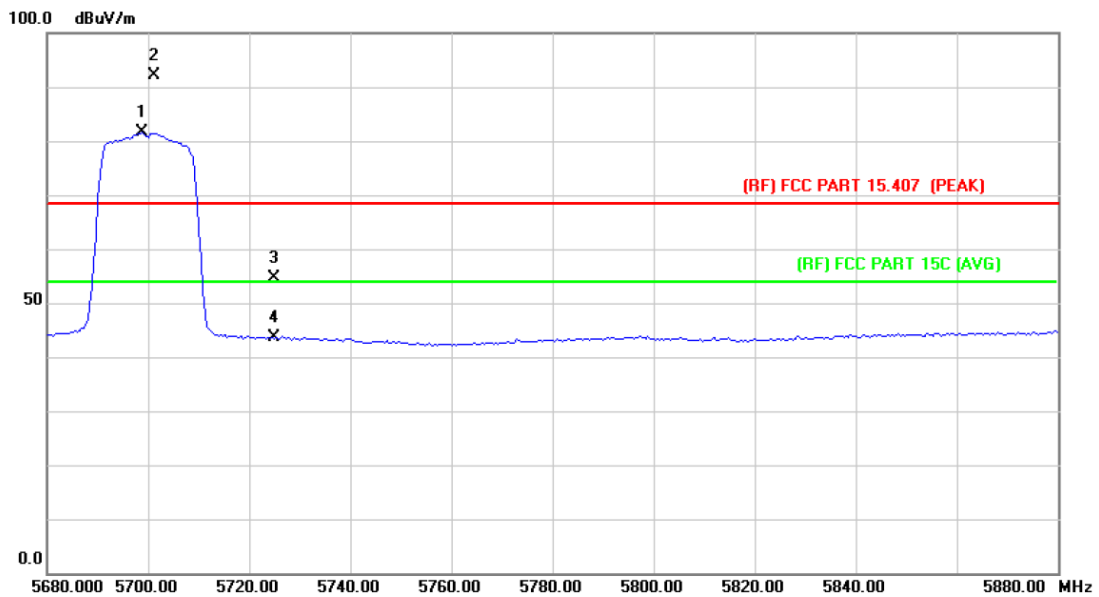


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.800	65.83	15.81	81.64	Fundamental Frequency		AVG
2	X	5701.200	76.29	15.81	92.10	Fundamental Frequency		peak
3		5725.000	38.74	15.88	54.62	68.30	-13.68	peak
4		5725.000	27.66	15.88	43.54	54.00	-10.46	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

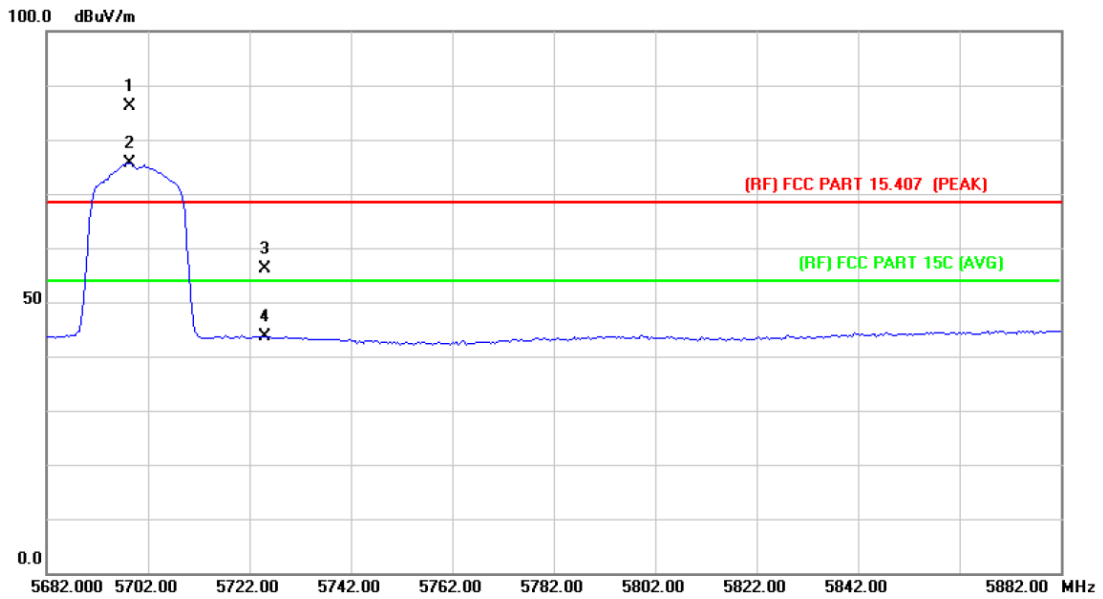


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5698.400	70.30	15.81	86.11	Fundamental Frequency		peak
2	*	5698.400	59.93	15.81	75.74	Fundamental Frequency		AVG
3		5725.000	40.14	15.88	56.02	68.30	-12.28	peak
4		5725.000	27.68	15.88	43.56	54.00	-10.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

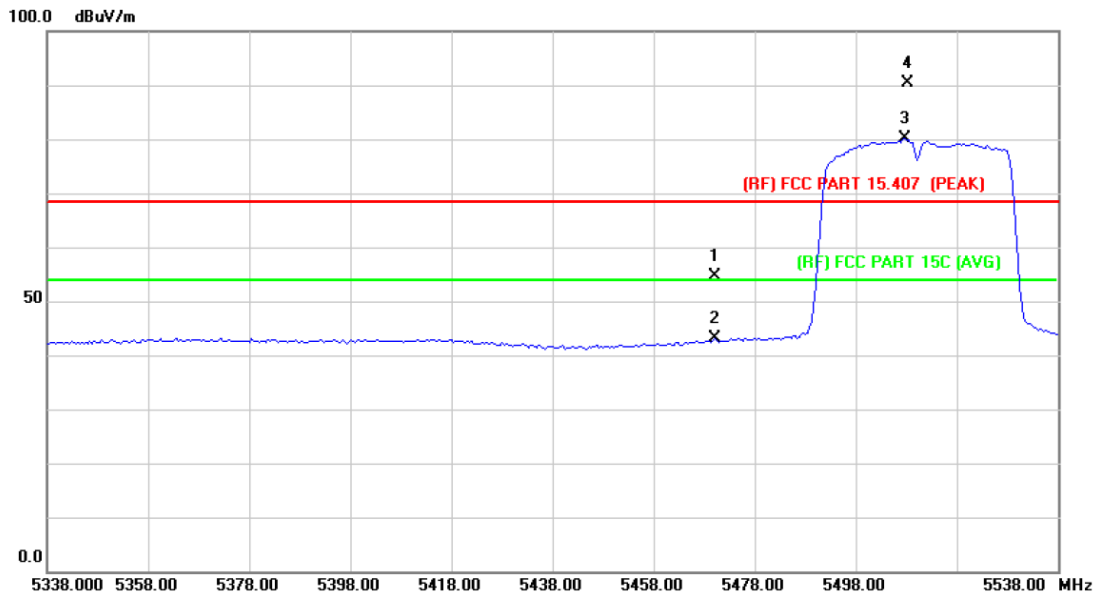


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.58	15.15	54.73	68.30	-13.57	peak
2		5470.000	27.91	15.15	43.06	54.00	-10.94	AVG
3	*	5507.600	64.83	15.21	80.04	Fundamental Frequency		AVG
4	X	5508.400	75.17	15.21	90.38	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

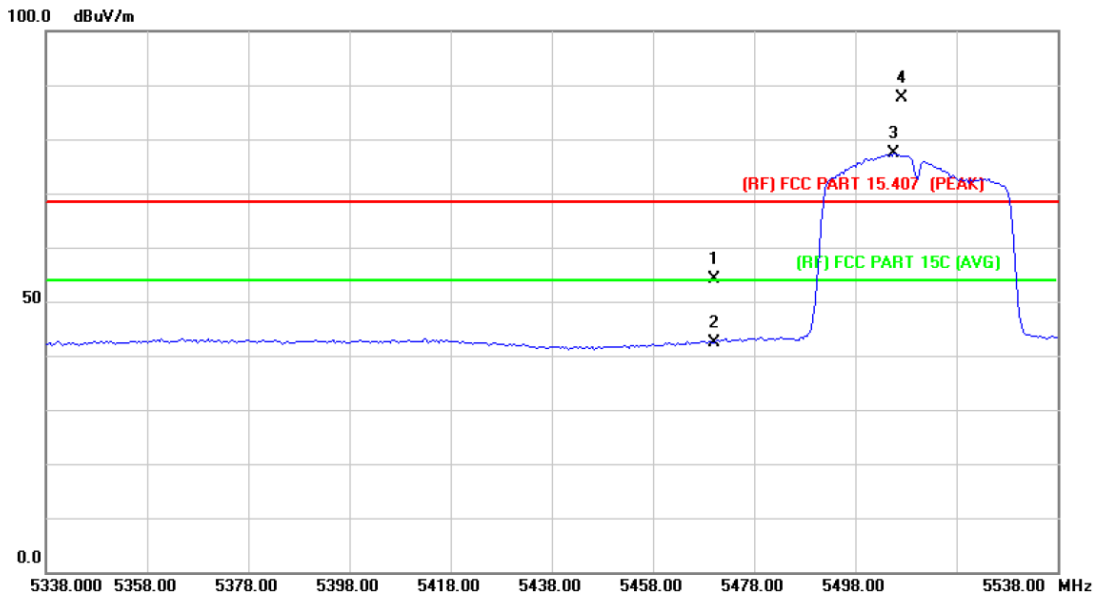


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	38.95	15.15	54.10	68.30	-14.20	peak
2		5470.000	27.20	15.15	42.35	54.00	-11.65	AVG
3	*	5505.600	62.11	15.21	77.32	Fundamental Frequency		AVG
4	X	5507.200	72.53	15.21	87.74	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

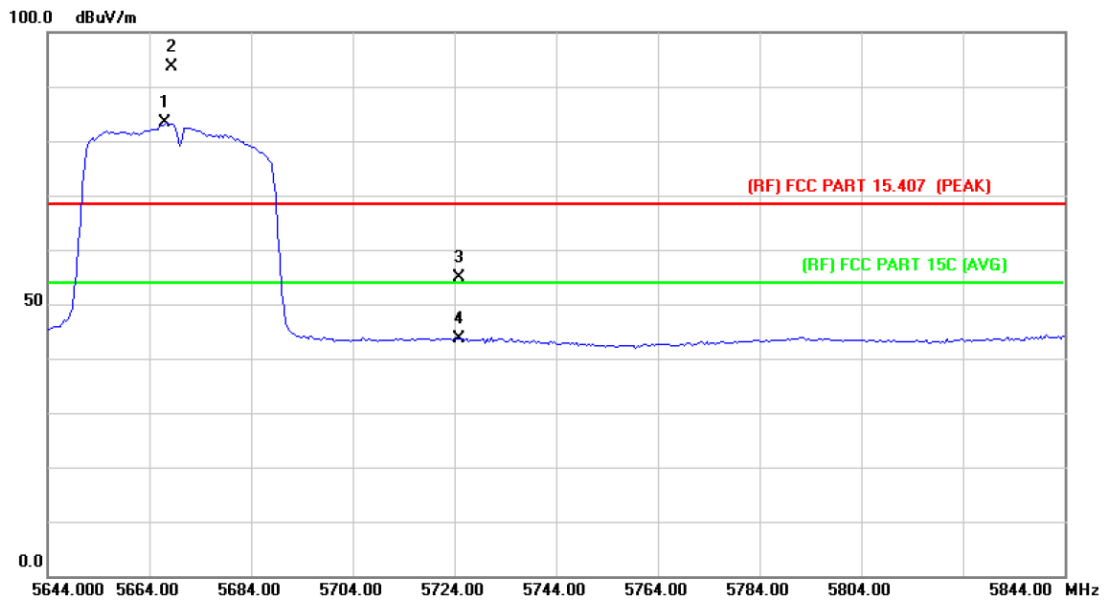


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5667.200	67.74	15.71	83.45	Fundamental Frequency		AVG
2	X	5668.400	77.92	15.71	93.63	Fundamental Frequency		peak
3		5725.000	38.98	15.88	54.86	68.30	-13.44	peak
4		5725.000	27.64	15.88	43.52	54.00	-10.48	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:	5710MHz Straddle 5.47-5.725GHz		

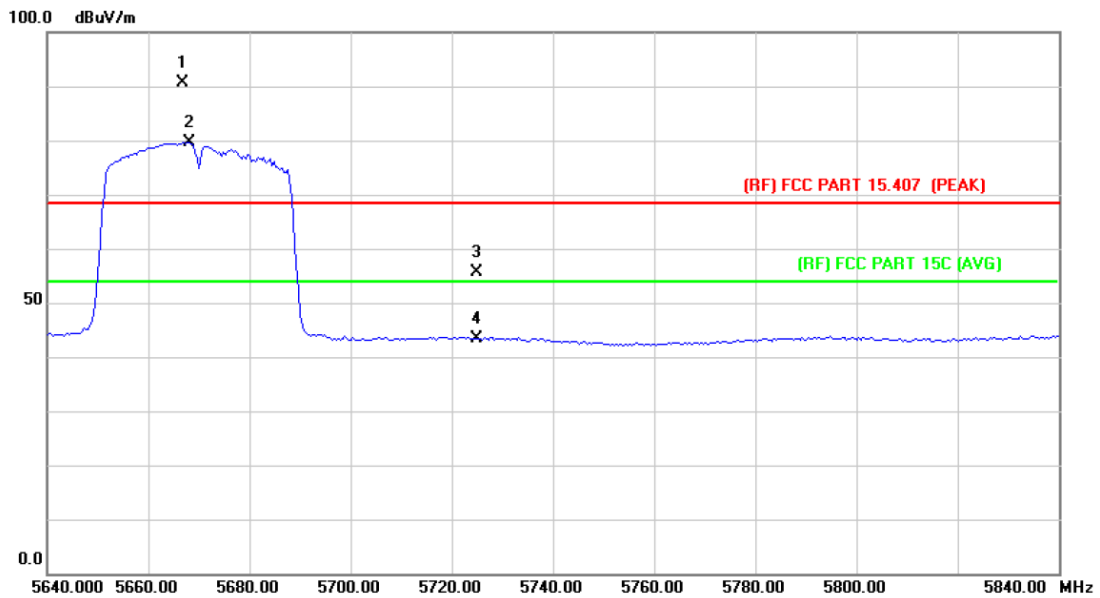


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5666.800	74.82	15.71	90.53	Fundamental Frequency		peak
2	*	5668.000	64.04	15.71	79.75	Fundamental Frequency		AVG
3		5725.000	39.80	15.88	55.68	68.30	-12.62	peak
4		5725.000	27.45	15.88	43.33	54.00	-10.67	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

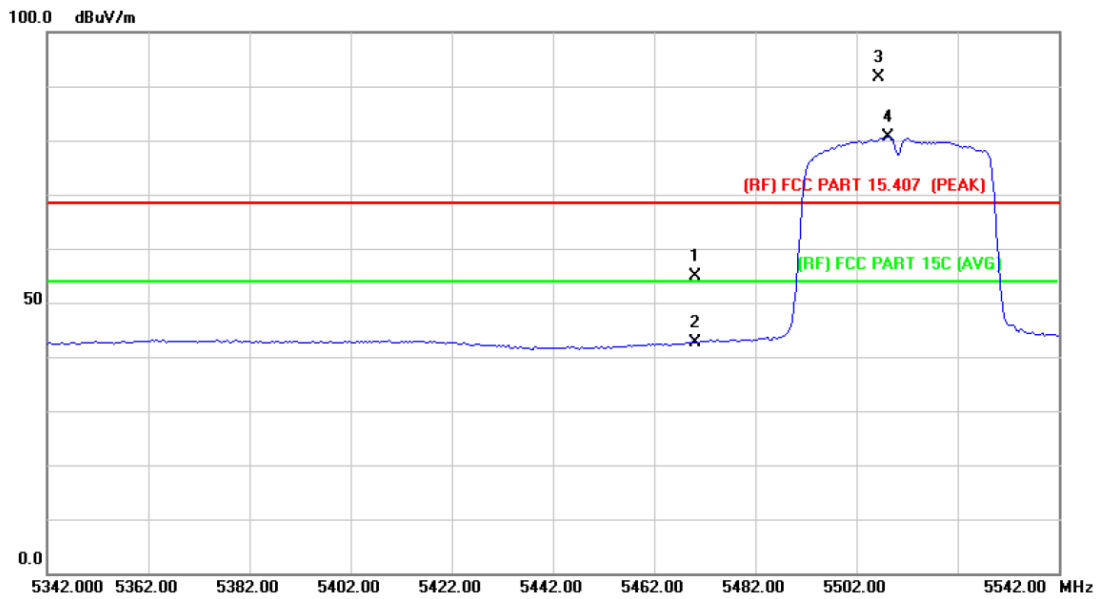


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.69	15.15	54.84	68.30	-13.46	peak
2		5470.000	27.60	15.15	42.75	54.00	-11.25	AVG
3	X	5506.400	76.46	15.21	91.67	Fundamental Frequency		peak
4	*	5508.400	65.37	15.21	80.58	Fundamental Frequency		AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

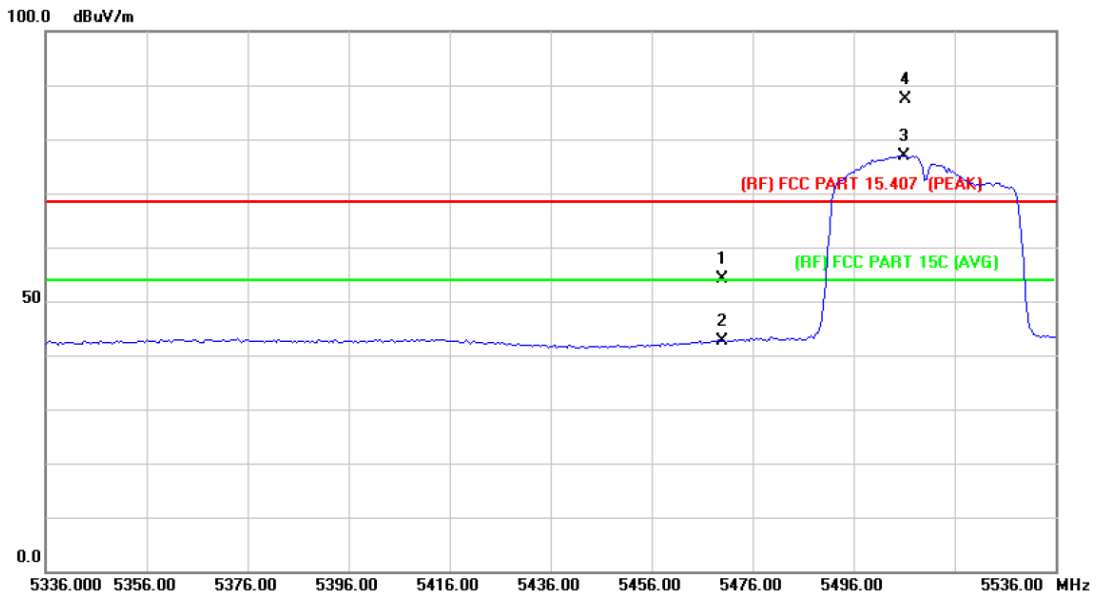


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.05	15.15	54.20	68.30	-14.10	peak
2		5470.000	27.44	15.15	42.59	54.00	-11.41	AVG
3	*	5506.000	61.73	15.21	76.94	Fundamental Frequency		AVG
4	X	5506.400	72.16	15.21	87.37	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

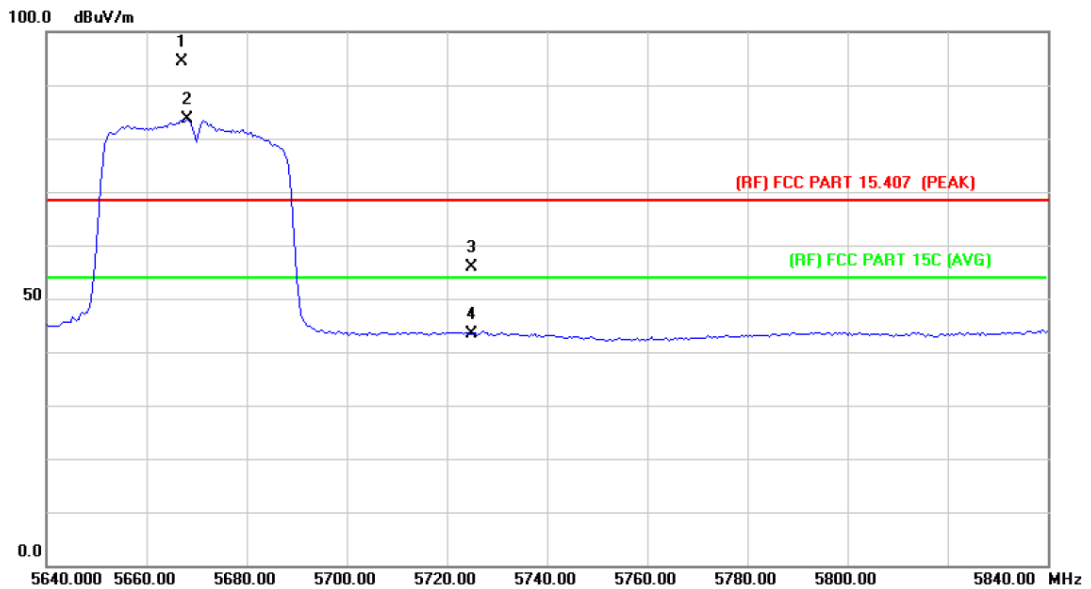


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5667.200	78.63	15.71	94.34	Fundamental Frequency		peak
2	*	5668.000	67.82	15.71	83.53	Fundamental Frequency		AVG
3		5725.000	39.96	15.88	55.84	68.30	-12.46	peak
4		5725.000	27.49	15.88	43.37	54.00	-10.63	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

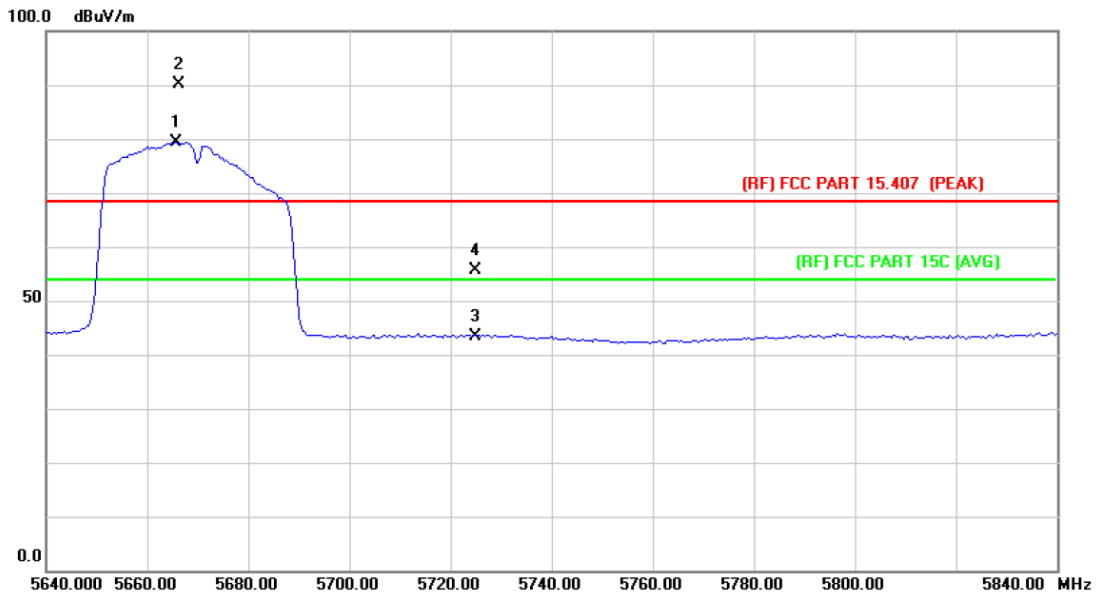

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5665.600	63.70	15.70	79.40	Fundamental Frequency		AVG
2	X	5666.400	74.47	15.71	90.18	Fundamental Frequency		peak
3		5725.000	27.53	15.88	43.41	54.00	-10.59	AVG
4		5725.000	39.85	15.88	55.73	68.30	-12.57	peak

Remark:
 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

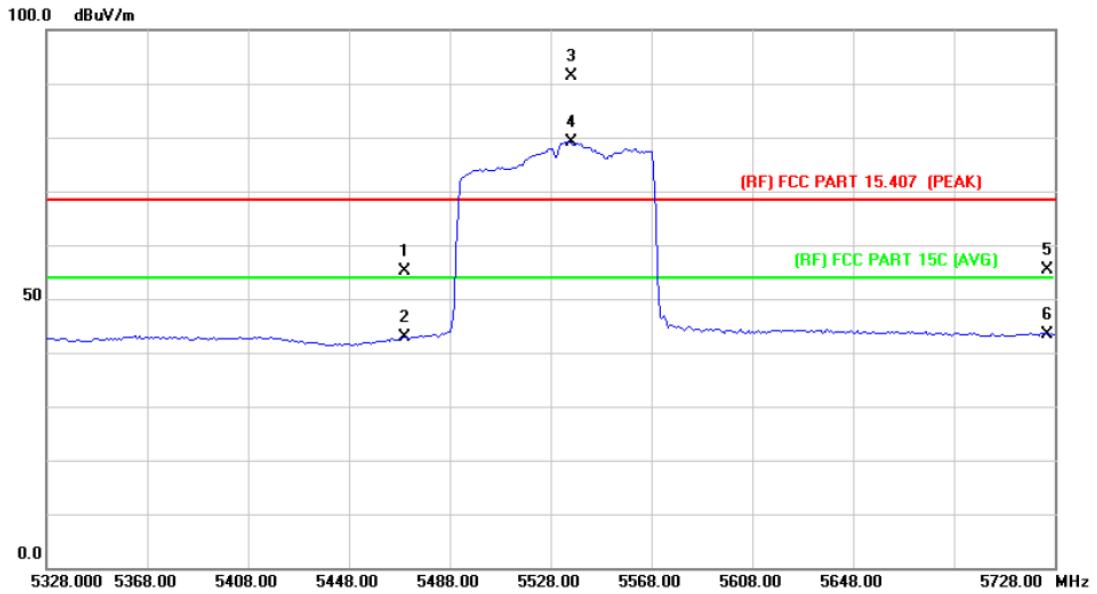


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	40.08	15.15	55.23	68.30	-13.07	peak
2		5470.000	27.63	15.15	42.78	54.00	-11.22	AVG
3	X	5536.000	76.09	15.30	91.39	Fundamental Frequency		peak
4	*	5536.000	63.82	15.30	79.12	Fundamental Frequency		AVG
5		5725.000	39.60	15.88	55.48	68.30	-12.82	peak
6		5725.000	27.46	15.88	43.34	54.00	-10.66	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

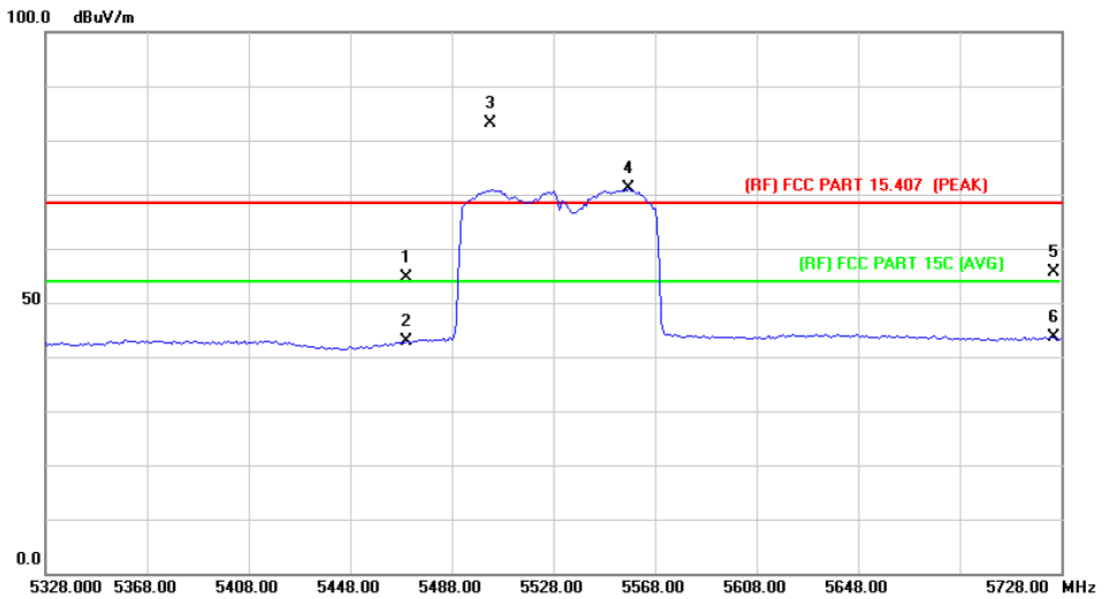


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.37	15.15	54.52	68.30	-13.78	peak
2		5470.000	27.64	15.15	42.79	54.00	-11.21	AVG
3	X	5503.200	67.97	15.20	83.17	Fundamental Frequency		peak
4	*	5557.600	55.65	15.37	71.02	Fundamental Frequency		AVG
5		5725.000	39.72	15.88	55.60	68.30	-12.70	peak
6		5725.000	27.77	15.88	43.65	54.00	-10.35	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

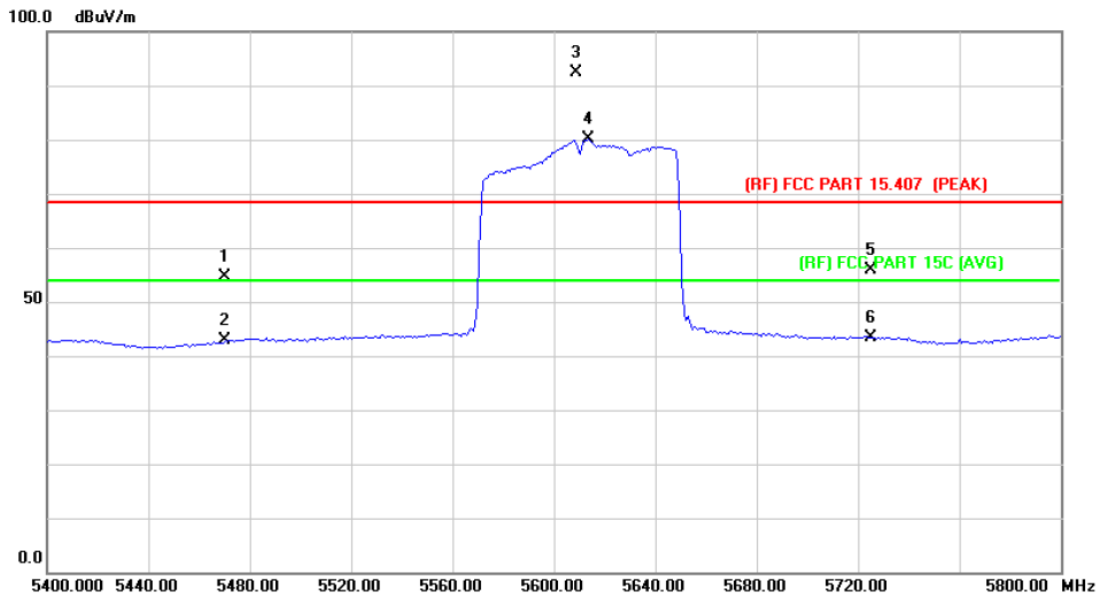


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.57	15.15	54.72	68.30	-13.58	peak
2		5470.000	27.69	15.15	42.84	54.00	-11.16	AVG
3	X	5608.800	76.79	15.52	92.31	Fundamental Frequency		peak
4	*	5613.600	64.62	15.54	80.16	Fundamental Frequency		AVG
5		5725.000	39.99	15.88	55.87	68.30	-12.43	peak
6		5725.000	27.52	15.88	43.40	54.00	-10.60	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

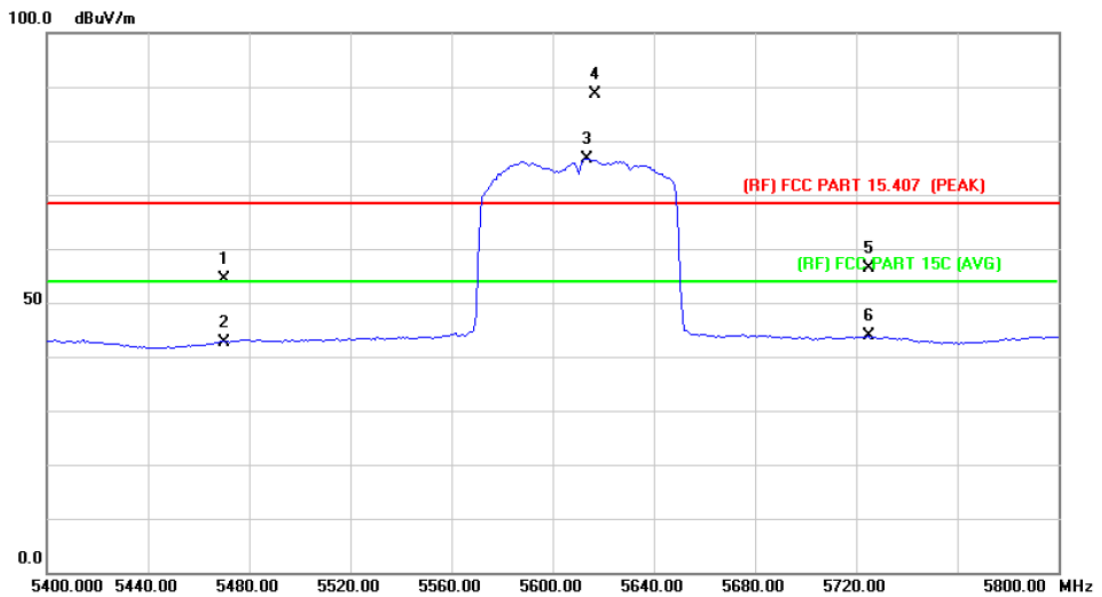


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	39.30	15.15	54.45	68.30	-13.85	peak
2		5470.000	27.51	15.15	42.66	54.00	-11.34	AVG
3	*	5613.600	61.02	15.54	76.56	Fundamental Frequency		AVG
4	X	5616.800	73.12	15.56	88.68	Fundamental Frequency		peak
5		5725.000	40.47	15.88	56.35	68.30	-11.95	peak
6		5725.000	27.89	15.88	43.77	54.00	-10.23	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

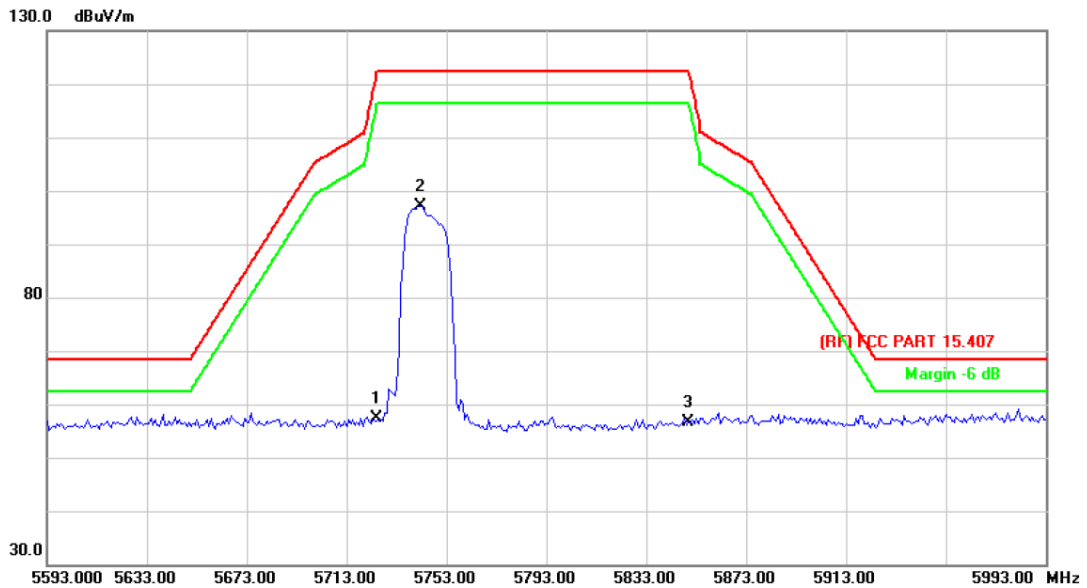


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.61	15.88	57.49	122.30	-64.81	peak
2	*	5742.600	81.16	15.94	97.10	122.30	-25.20	peak
3		5850.000	40.47	16.27	56.74	122.30	-65.56	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

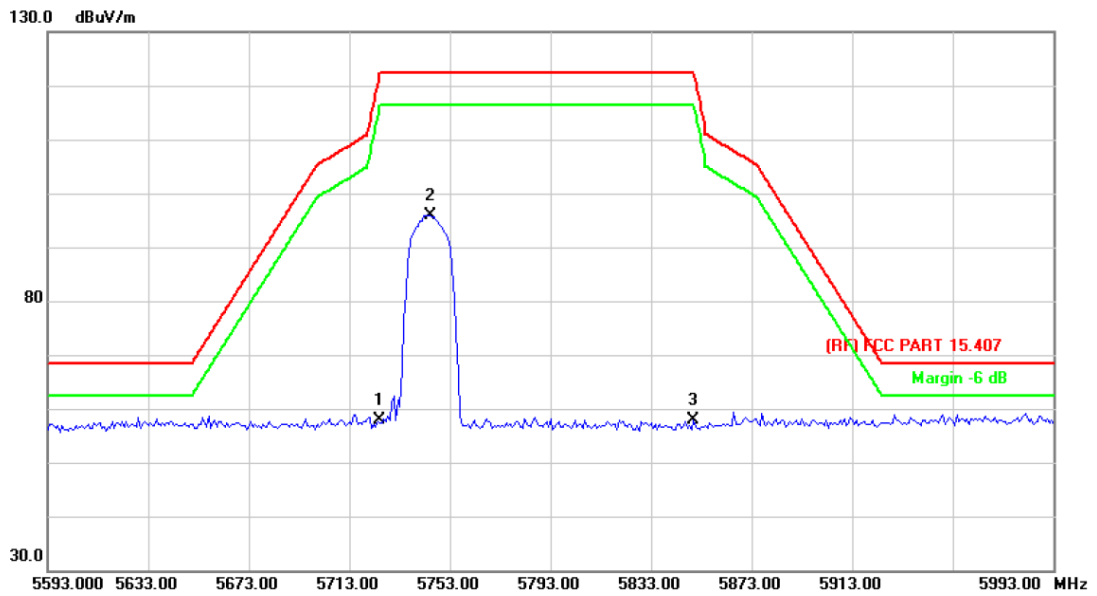


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.94	15.88	57.82	122.30	-64.48	peak
2	*	5745.000	80.01	15.95	95.96	122.30	-26.34	peak
3		5850.000	41.64	16.27	57.91	122.30	-64.39	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

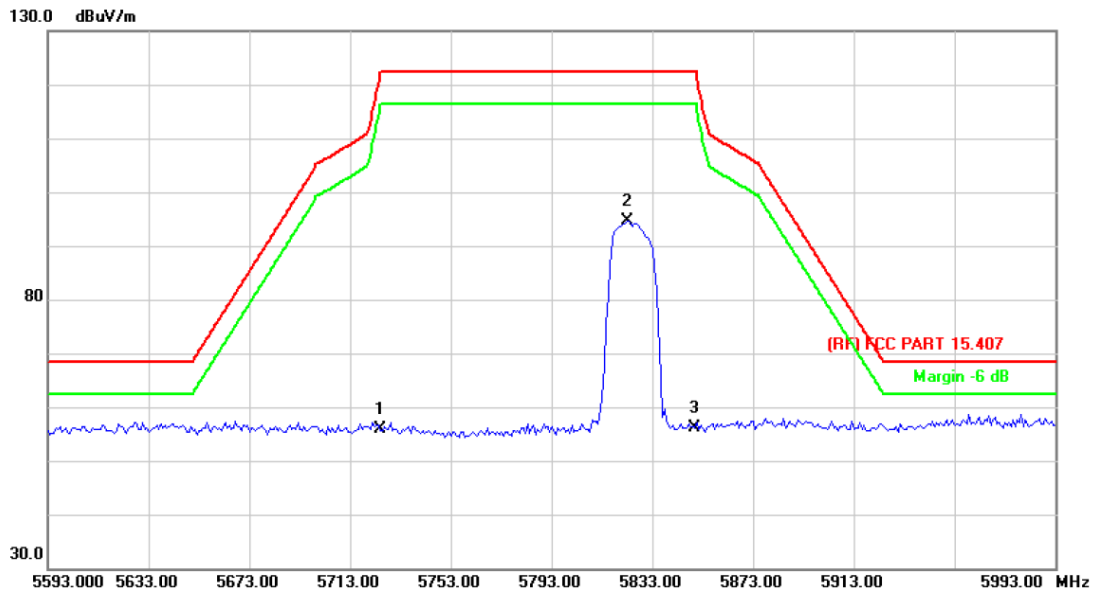


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	39.90	15.88	55.78	122.30	-66.52	peak
2	*	5823.400	78.53	16.20	94.73	122.30	-27.57	peak
3		5850.000	39.78	16.27	56.05	122.30	-66.25	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

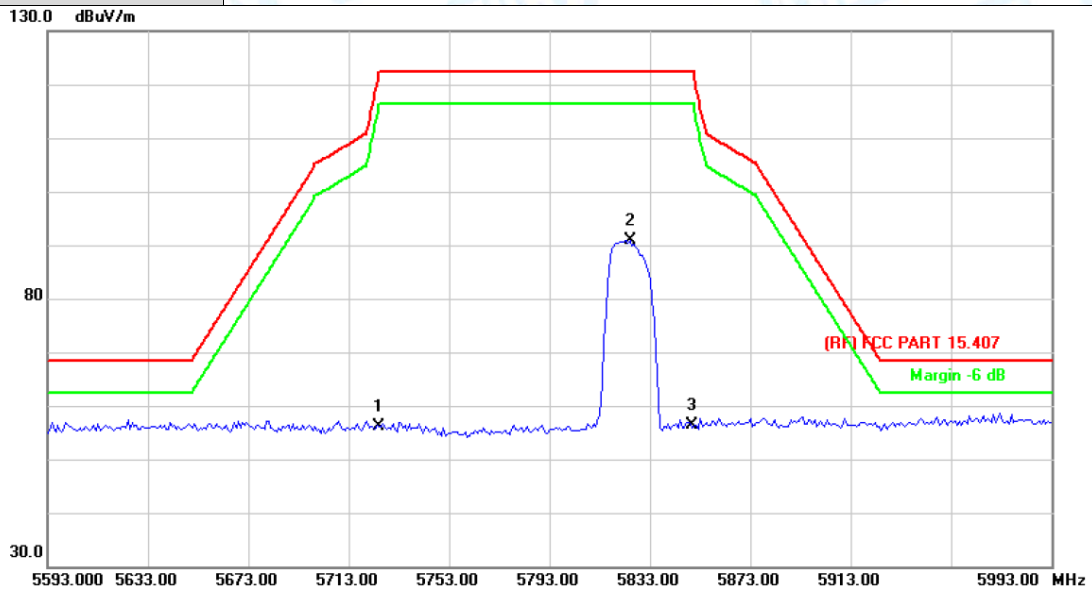


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.37	15.88	56.25	122.30	-66.05	peak
2	*	5825.000	74.59	16.20	90.79	122.30	-31.51	peak
3		5850.000	40.07	16.27	56.34	122.30	-65.96	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

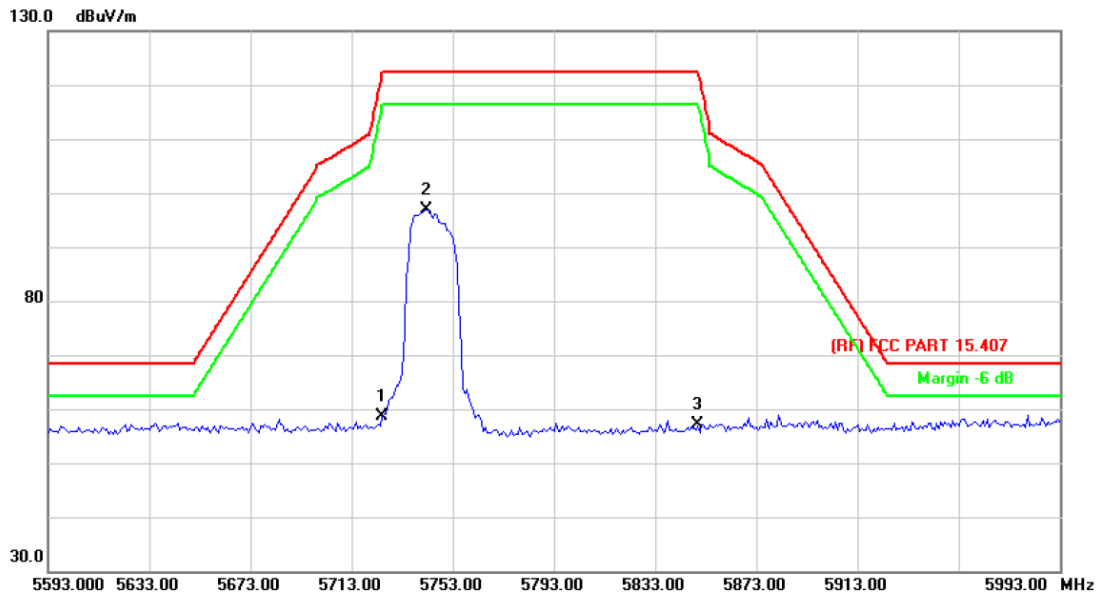


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.64	13.89	60.53	122.30	-61.77	peak
2	*	5742.400	83.71	13.95	97.66	122.30	-24.64	peak
3		5850.000	43.79	14.23	58.02	122.30	-64.28	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

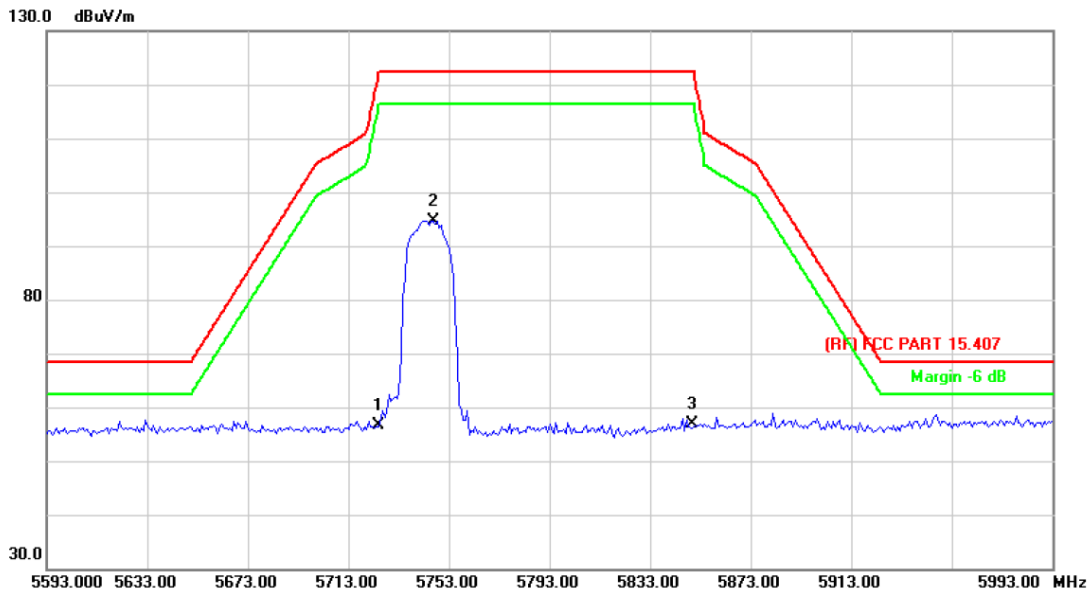


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.86	15.88	56.74	122.30	-65.56	peak
2	*	5746.600	78.80	15.95	94.75	122.30	-27.55	peak
3		5850.000	40.58	16.27	56.85	122.30	-65.45	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

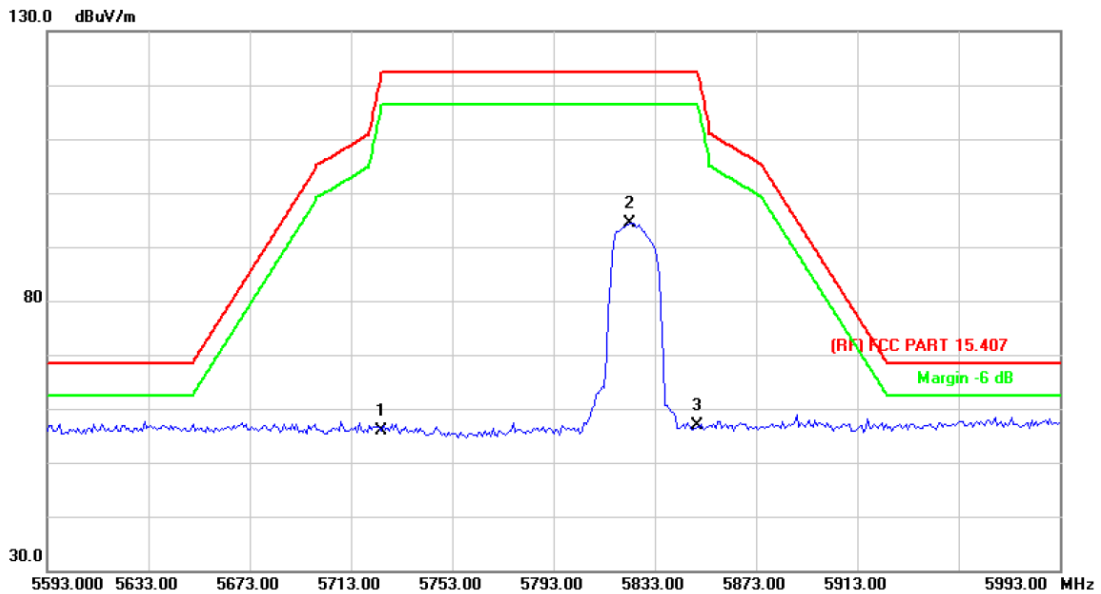


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.11	15.88	55.99	122.30	-66.31	peak
2	*	5823.400	78.28	16.20	94.48	122.30	-27.82	peak
3		5850.000	40.52	16.27	56.79	122.30	-65.51	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

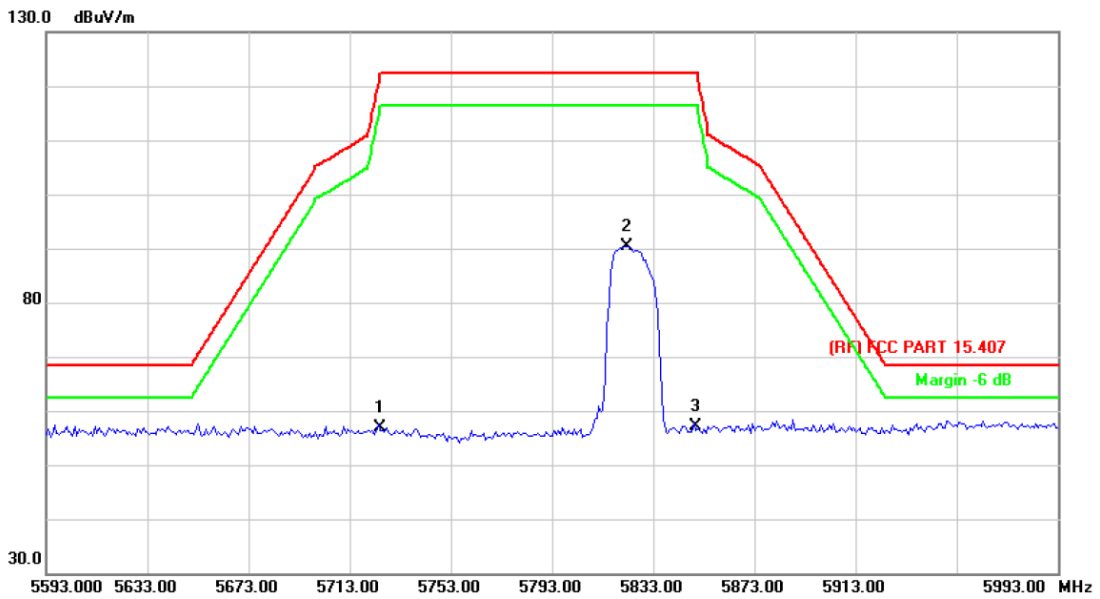


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.03	15.88	56.91	122.30	-65.39	peak
2	*	5822.600	74.31	16.18	90.49	122.30	-31.81	peak
3		5850.000	40.76	16.27	57.03	122.30	-65.27	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

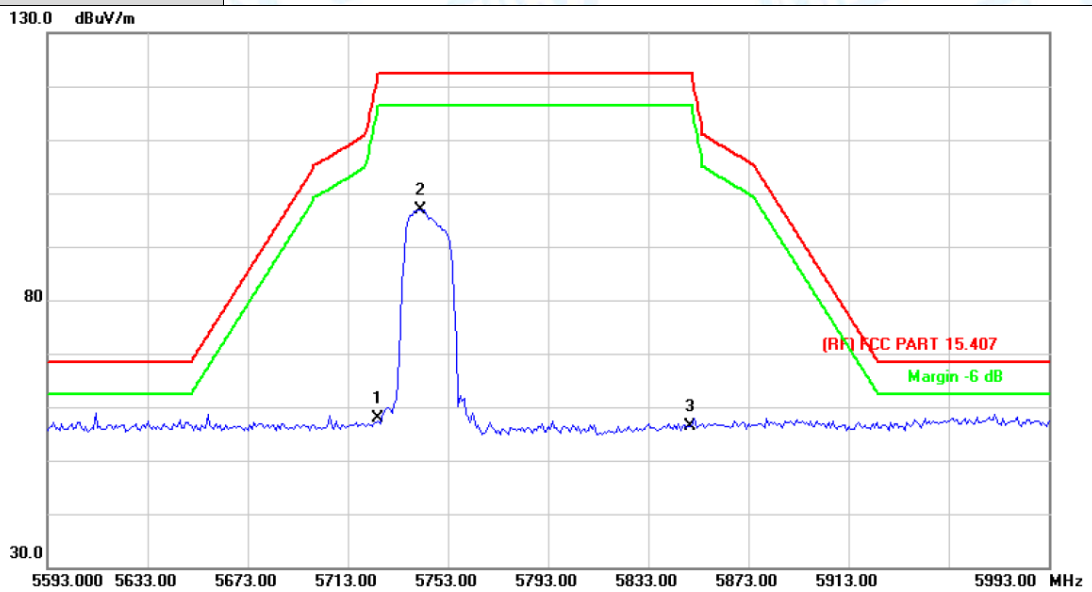


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	42.07	15.88	57.95	122.30	-64.35	peak
2	*	5741.800	80.94	15.94	96.88	122.30	-25.42	peak
3		5850.000	40.17	16.27	56.44	122.30	-65.86	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

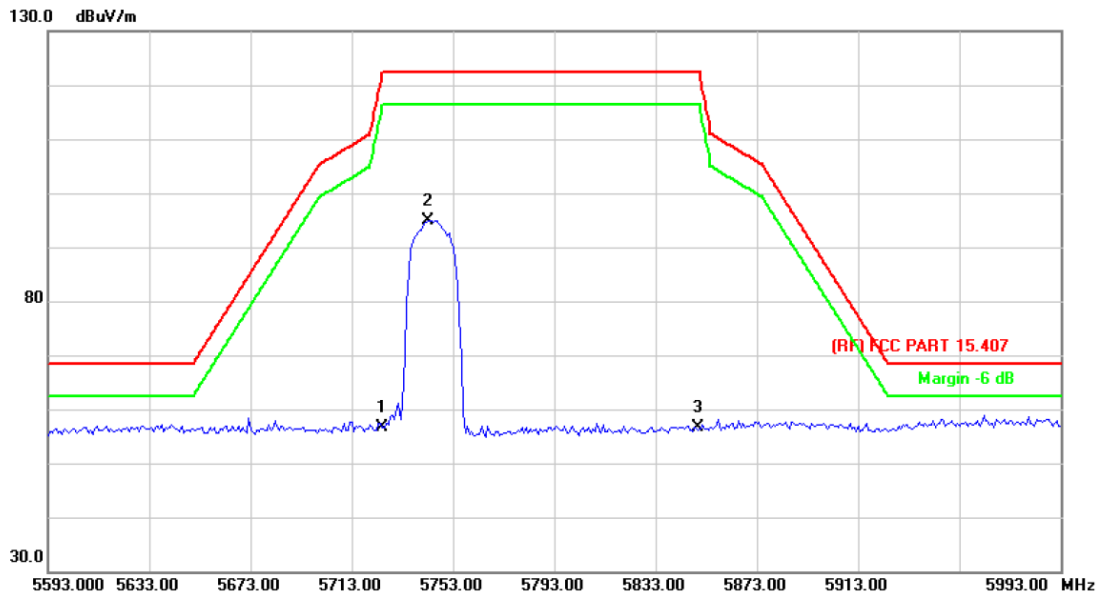


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.65	15.88	56.53	122.30	-65.77	peak
2	*	5743.400	79.03	15.94	94.97	122.30	-27.33	peak
3		5850.000	40.28	16.27	56.55	122.30	-65.75	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

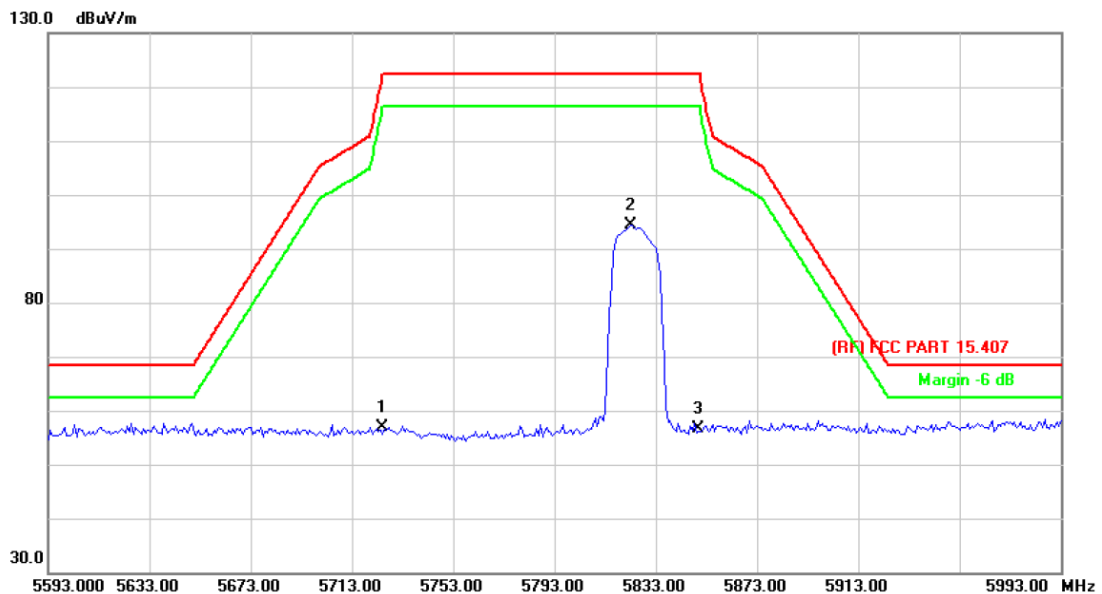


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.95	15.88	56.83	122.30	-65.47	peak
2	*	5823.400	78.12	16.20	94.32	122.30	-27.98	peak
3		5850.000	40.43	16.27	56.70	122.30	-65.60	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

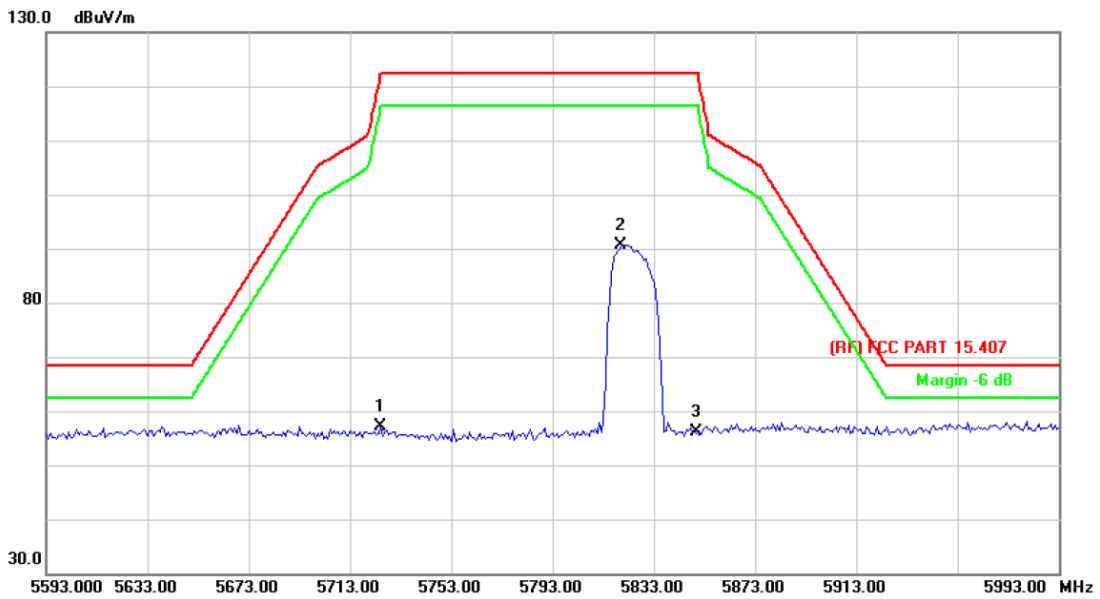


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.27	15.88	57.15	122.30	-65.15	peak
2	*	5820.200	74.46	16.18	90.64	122.30	-31.66	peak
3		5850.000	39.90	16.27	56.17	122.30	-66.13	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

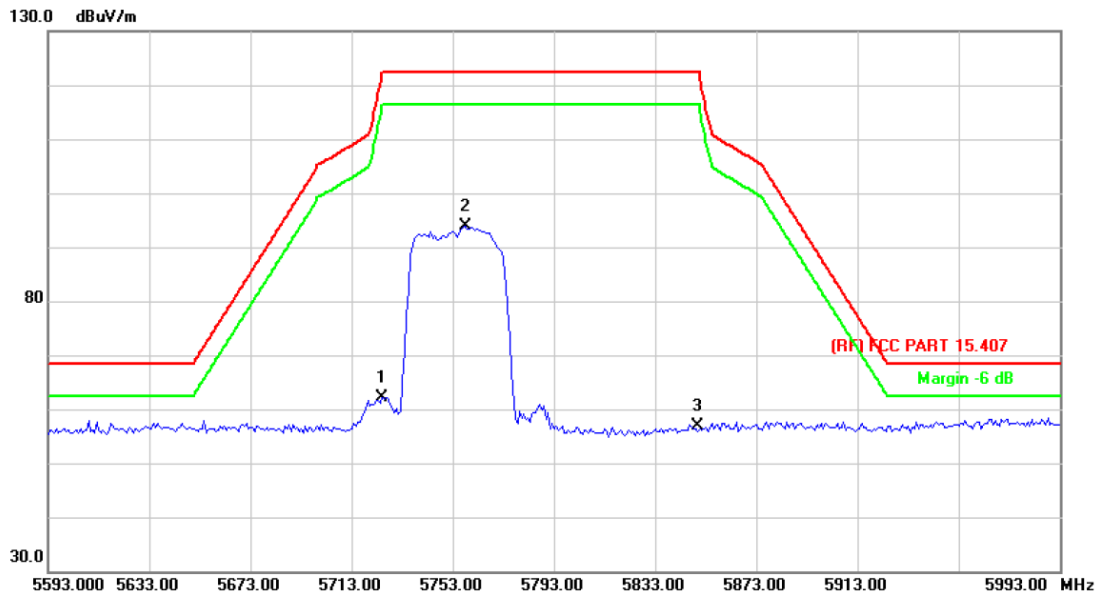


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.24	15.88	62.12	122.30	-60.18	peak
2	*	5757.800	77.89	15.98	93.87	122.30	-28.43	peak
3		5850.000	40.62	16.27	56.89	122.30	-65.41	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

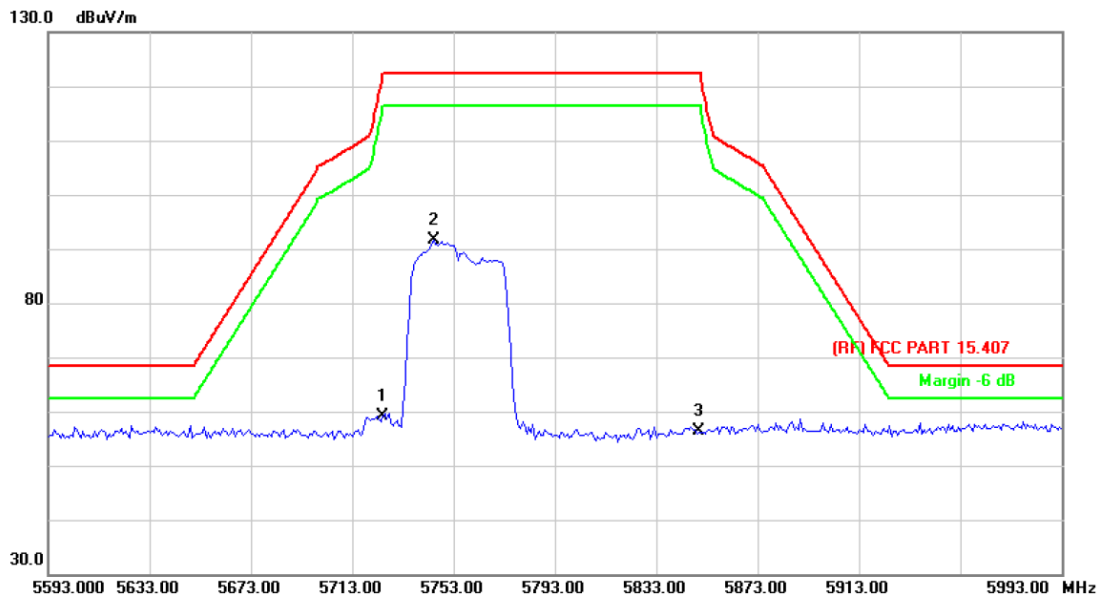


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.33	15.88	59.21	122.30	-63.09	peak
2	*	5745.000	75.70	15.95	91.65	122.30	-30.65	peak
3		5850.000	40.00	16.27	56.27	122.30	-66.03	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

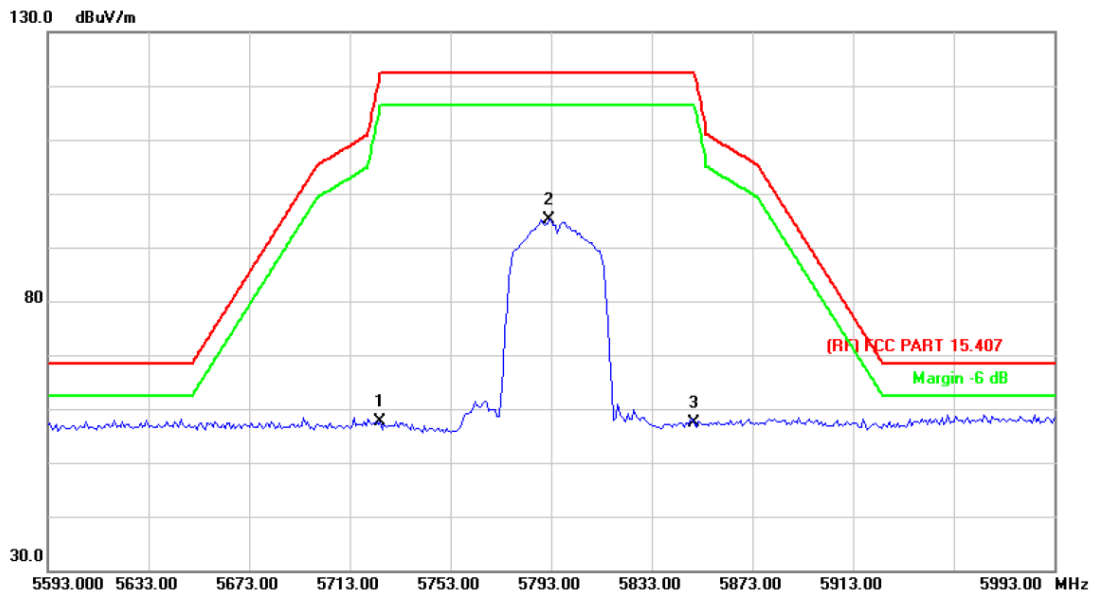


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.83	15.88	57.71	122.30	-64.59	peak
2	*	5792.200	78.92	16.09	95.01	122.30	-27.29	peak
3		5850.000	41.21	16.27	57.48	122.30	-64.82	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

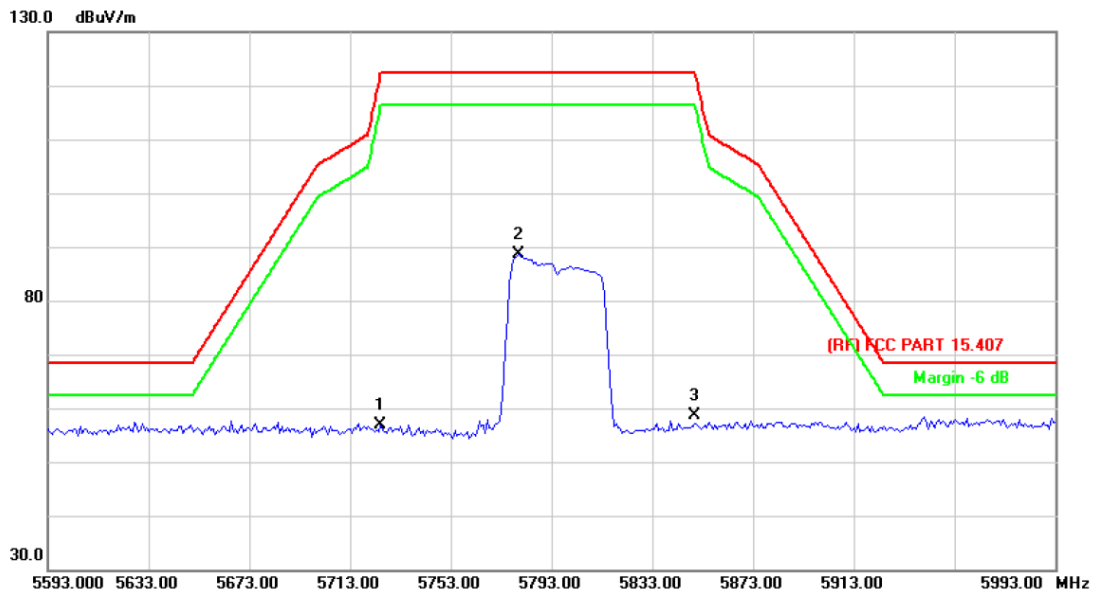


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.00	15.88	56.88	122.30	-65.42	peak
2	*	5780.200	72.52	16.04	88.56	122.30	-33.74	peak
3		5850.000	42.27	16.27	58.54	122.30	-63.76	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

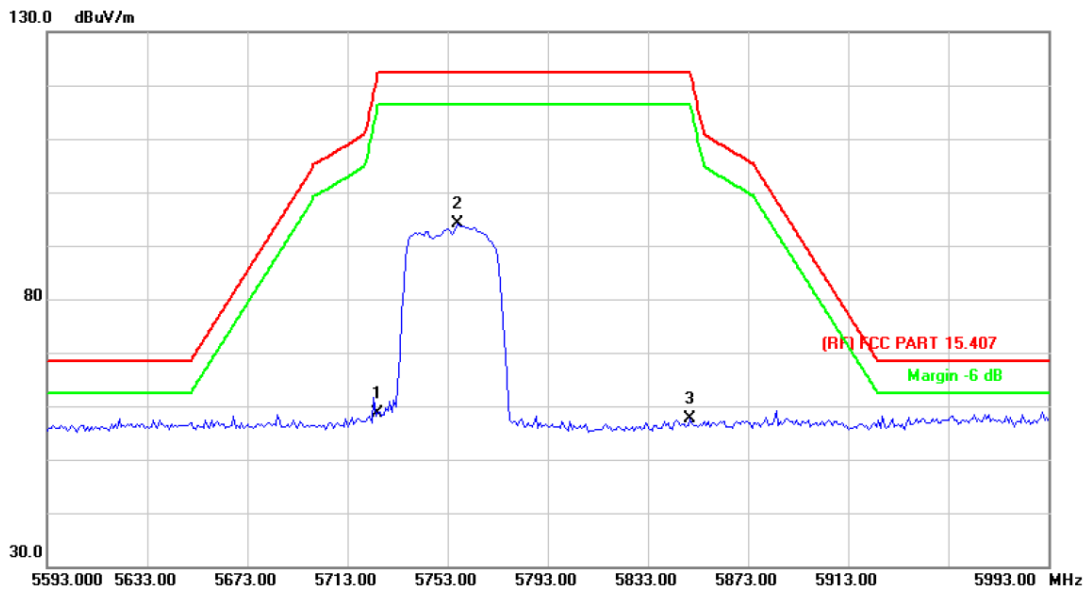


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	42.68	15.88	58.56	122.30	-63.74	peak
2	*	5757.000	78.08	15.98	94.06	122.30	-28.24	peak
3		5850.000	41.40	16.27	57.67	122.30	-64.63	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

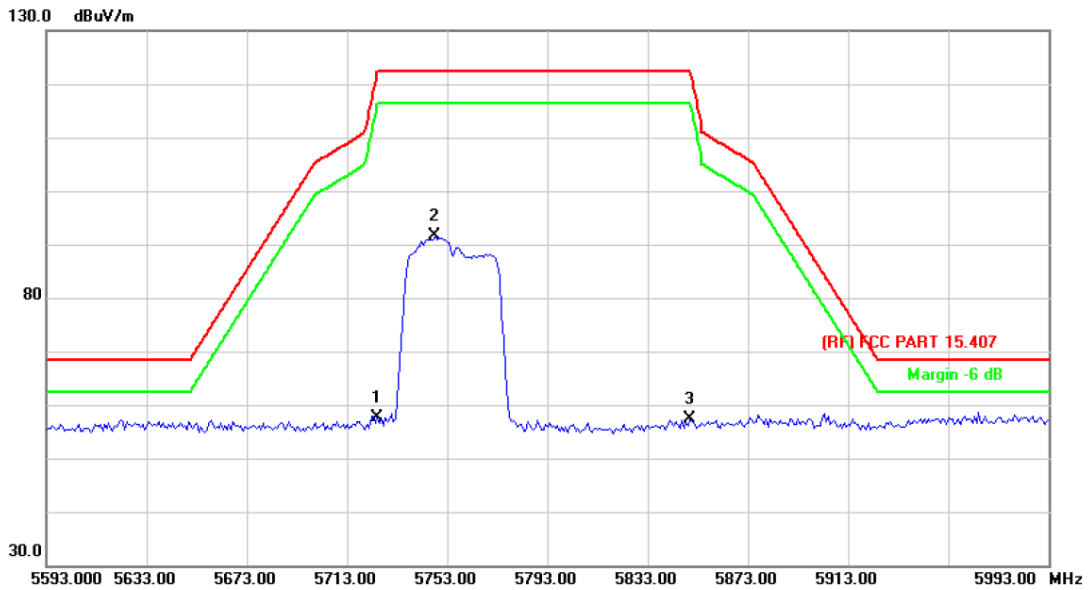


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.69	15.88	57.57	122.30	-64.73	peak
2	*	5748.200	75.59	15.95	91.54	122.30	-30.76	peak
3		5850.000	41.11	16.27	57.38	122.30	-64.92	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

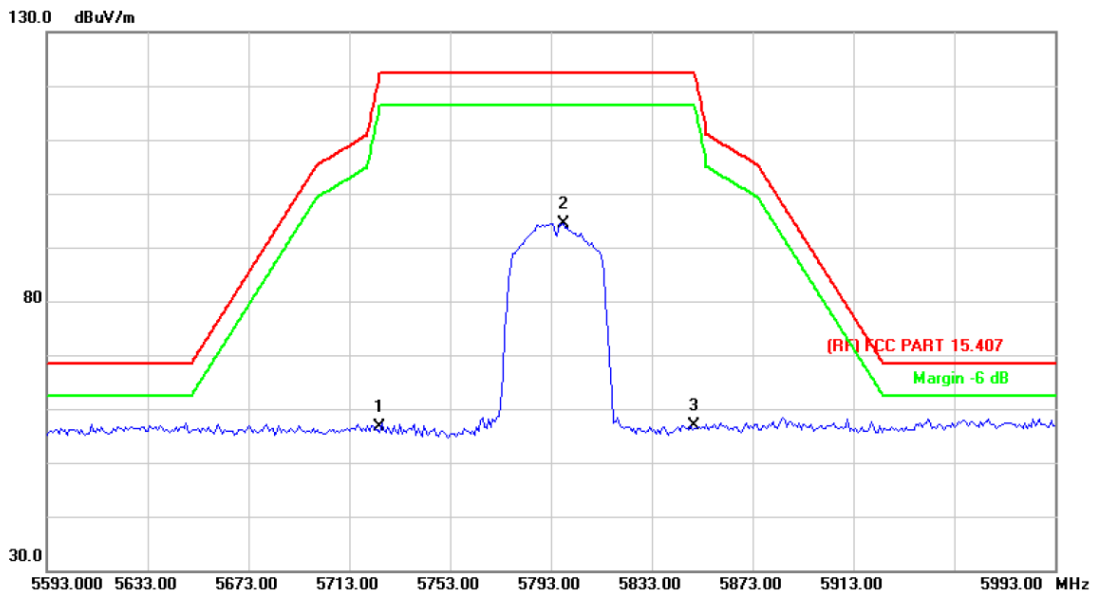


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	40.78	15.88	56.66	122.30	-65.64	peak
2	*	5797.800	78.35	16.10	94.45	122.30	-27.85	peak
3		5850.000	40.58	16.27	56.85	122.30	-65.45	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

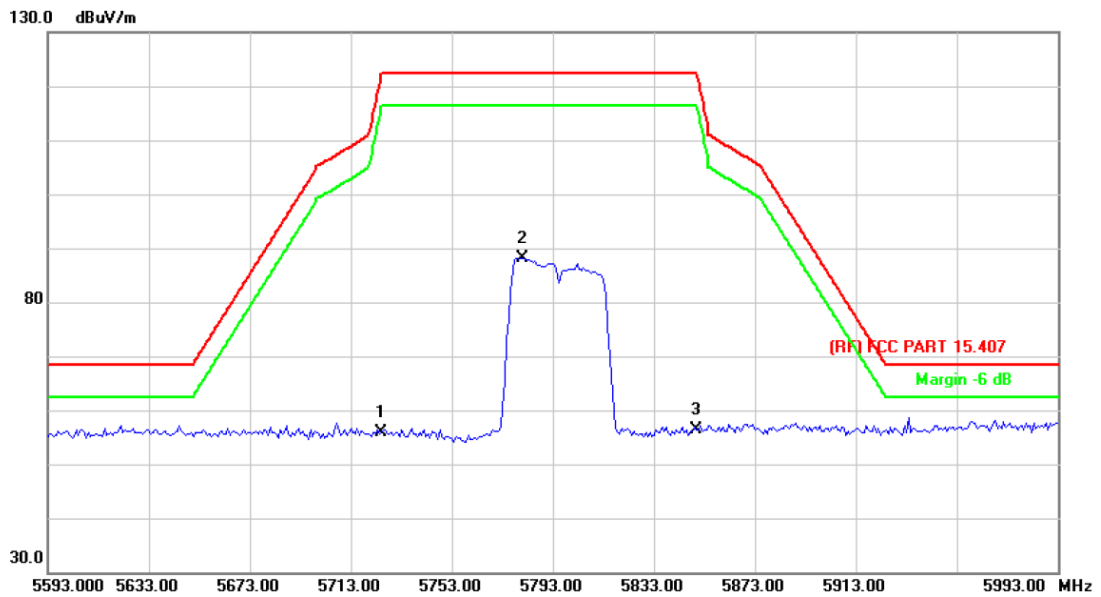


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	39.98	15.88	55.86	122.30	-66.44	peak
2	*	5781.000	72.13	16.05	88.18	122.30	-34.12	peak
3		5850.000	40.22	16.27	56.49	122.30	-65.81	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

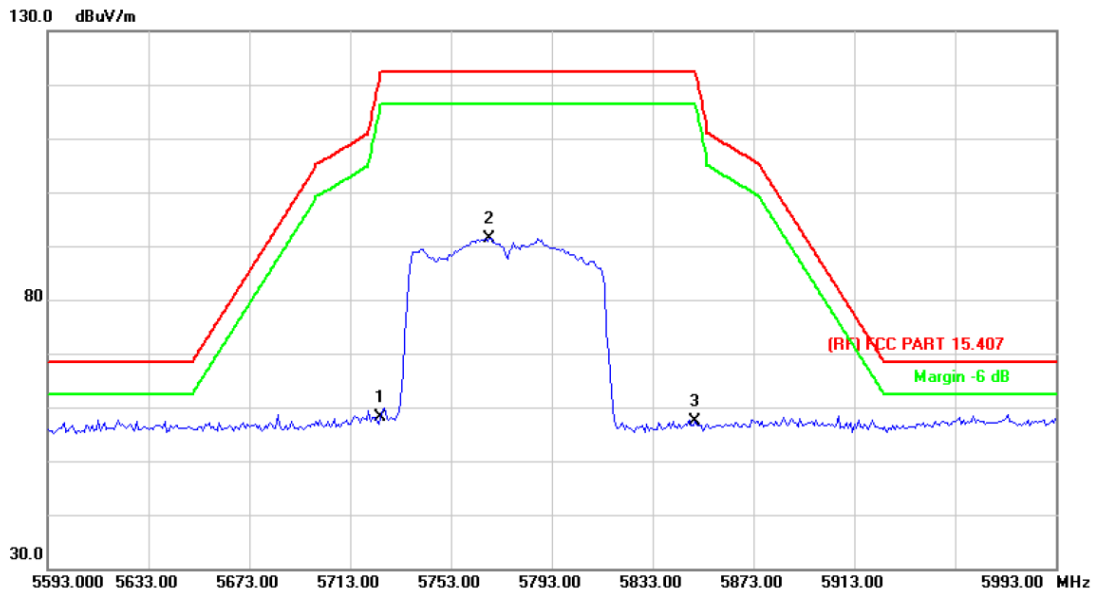


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	42.23	15.88	58.11	122.30	-64.19	peak
2	*	5768.200	75.45	16.02	91.47	122.30	-30.83	peak
3		5850.000	40.99	16.27	57.26	122.30	-65.04	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

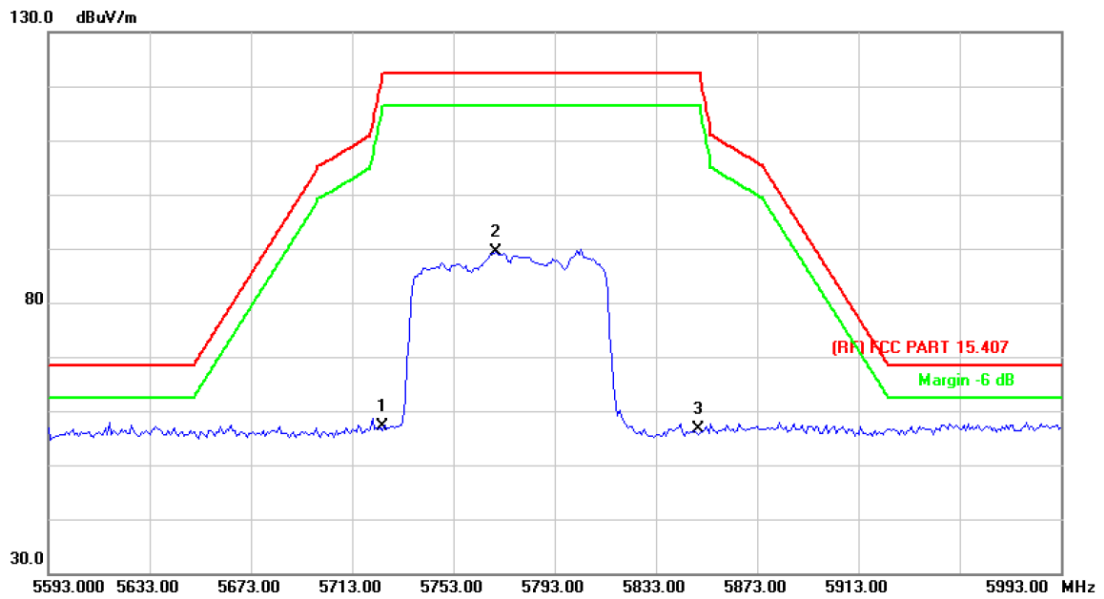


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	41.31	15.88	57.19	122.30	-65.11	peak
2	*	5769.800	73.30	16.03	89.33	122.30	-32.97	peak
3		5850.000	40.48	16.27	56.75	122.30	-65.55	peak

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Attachment D--Bandwidth Test Data

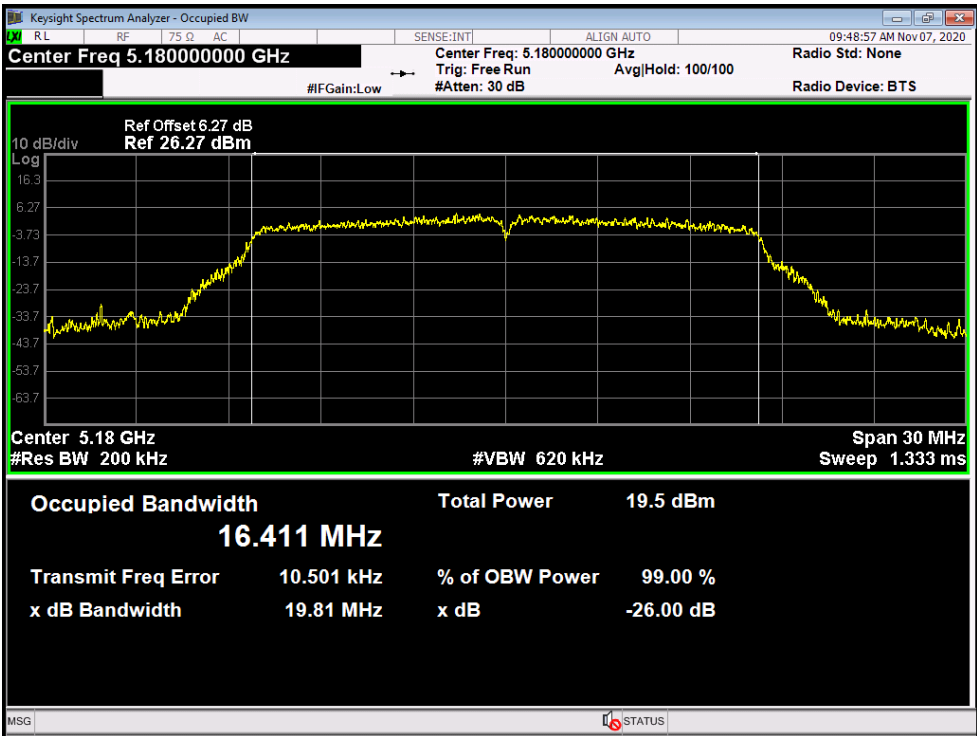Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.81	16.411
40	5200	19.68	16.383
48	5240	19.75	16.378
802.11a Mode			
5180 MHz			
			


802.11a Mode

5200 MHz

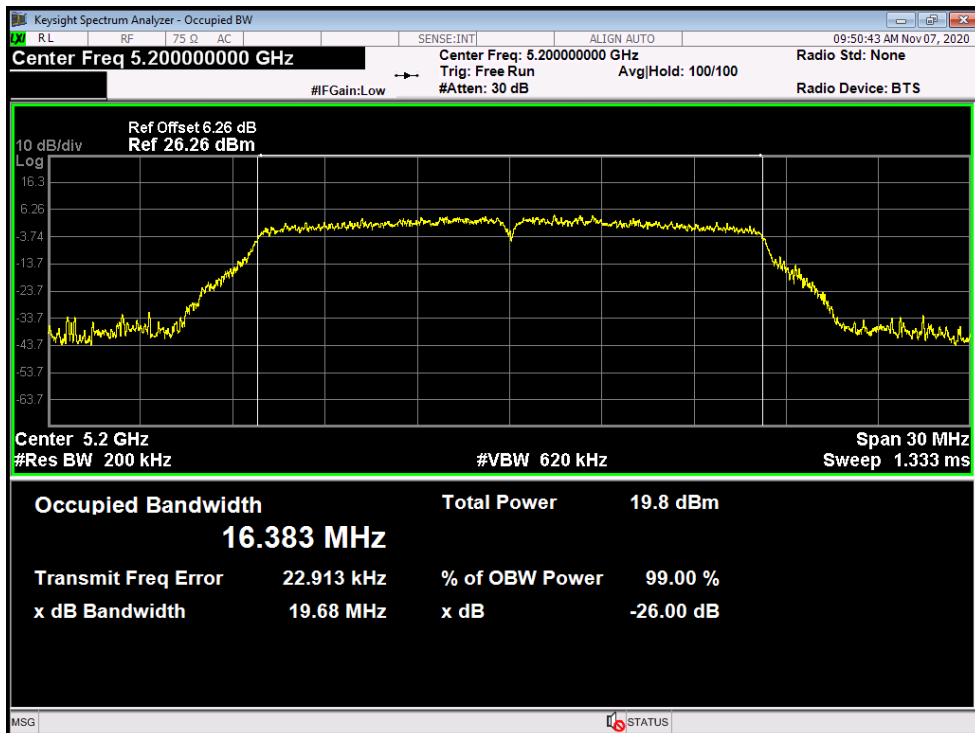

802.11a Mode


5240 MHz

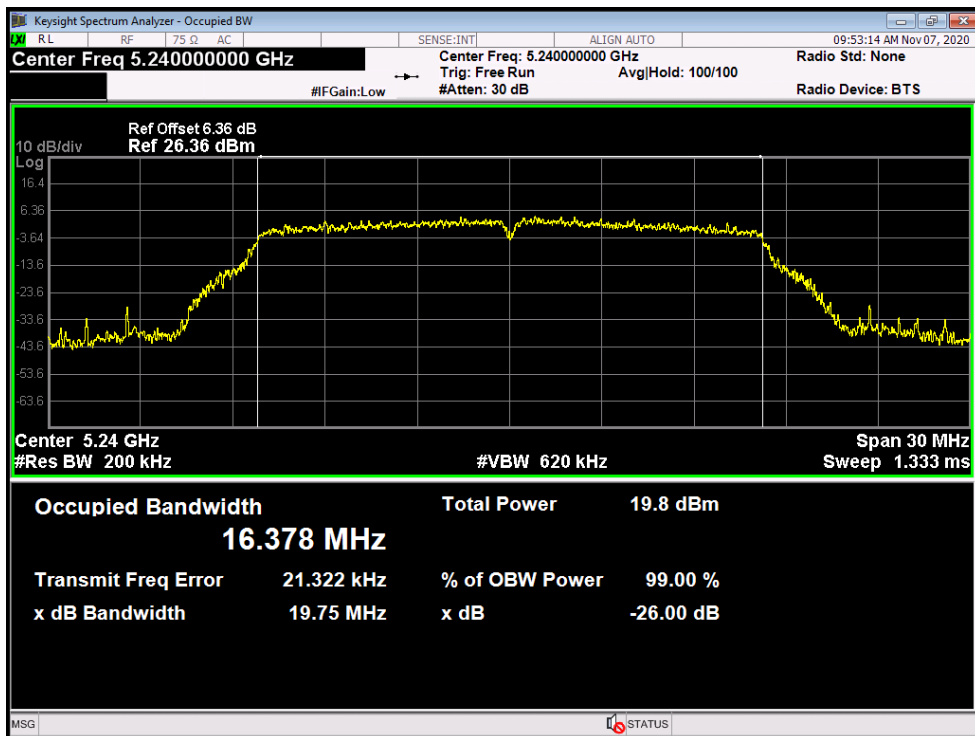

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.21	17.559
40	5200	20.01	17.553
48	5240	19.97	17.537
802.11n(HT20) Mode			
5180 MHz			


802.11n(HT20) Mode

5200 MHz

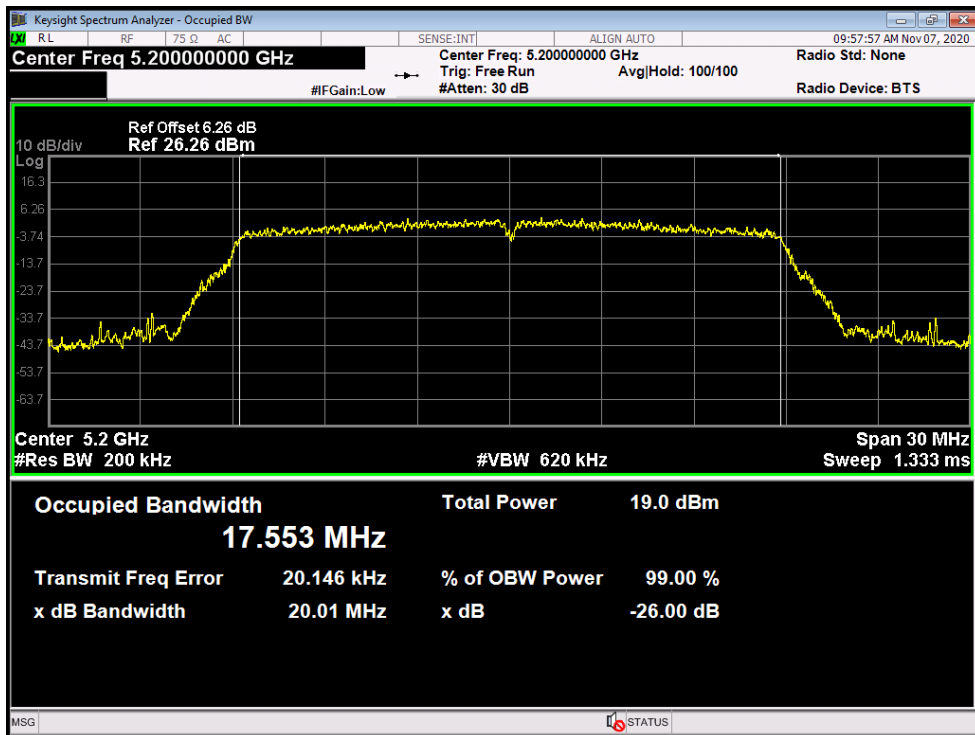

802.11n(HT20) Mode


5240 MHz

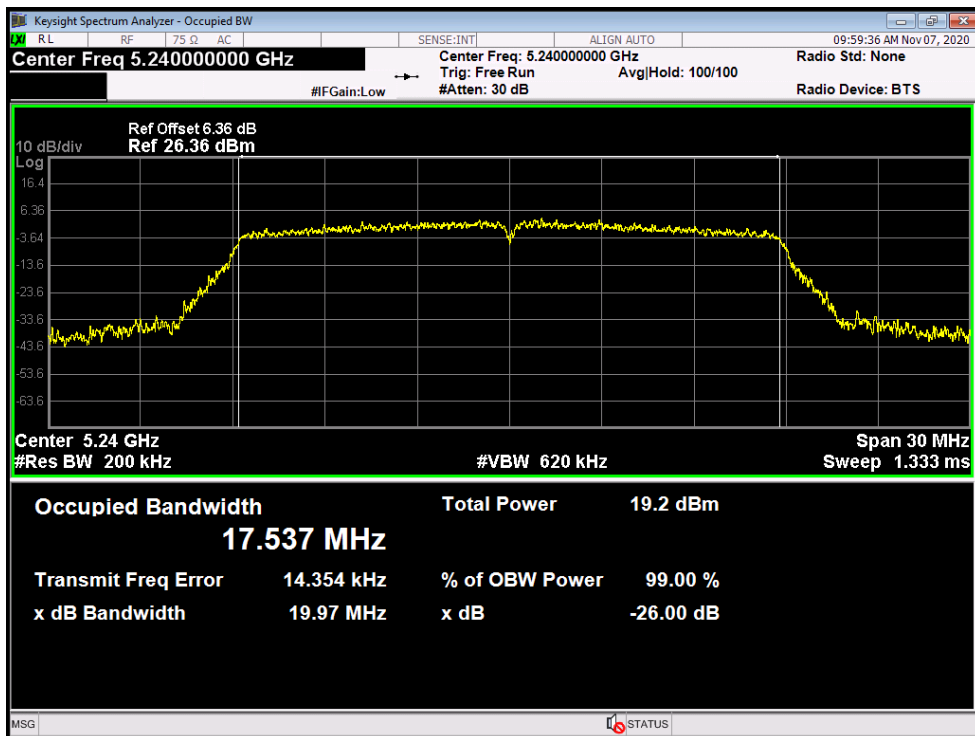

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.04	17.573
40	5200	20.06	17.581
48	5240	19.86	17.555


802.11ac(VHT20) Mode

5180 MHz

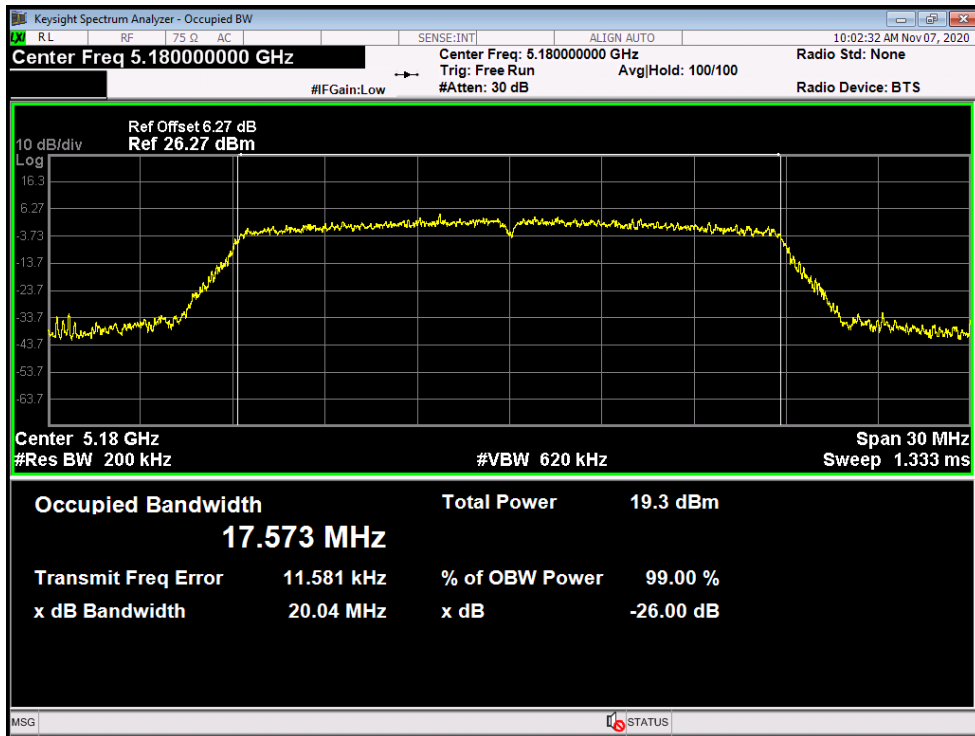


802.11ac(VHT20) Mode

5200 MHz

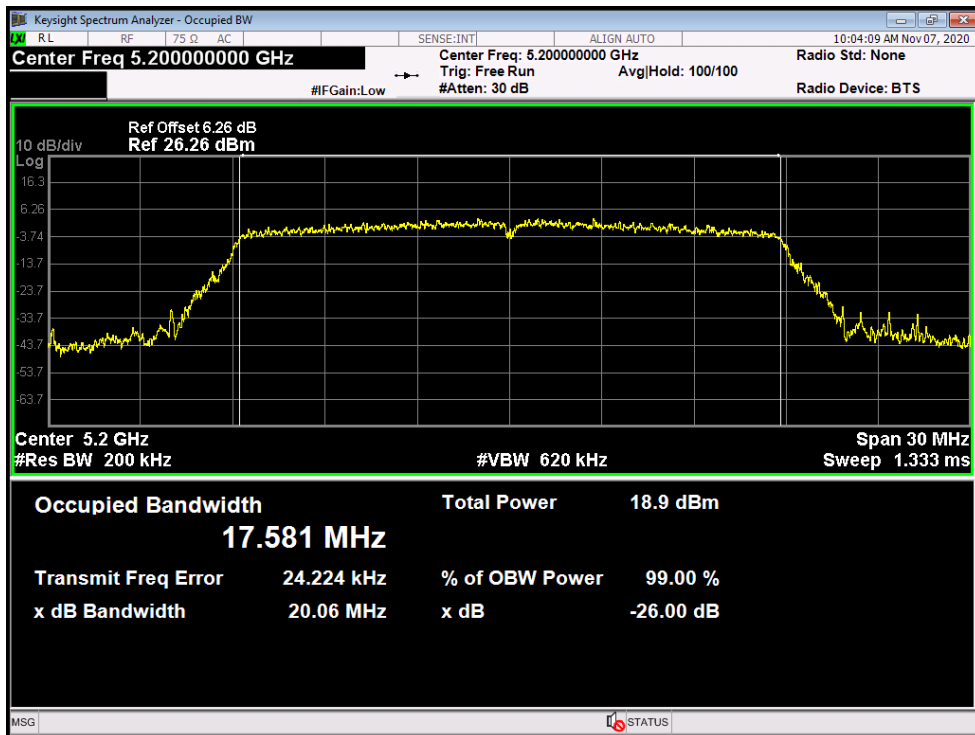

802.11ac(VHT20) Mode


5240 MHz

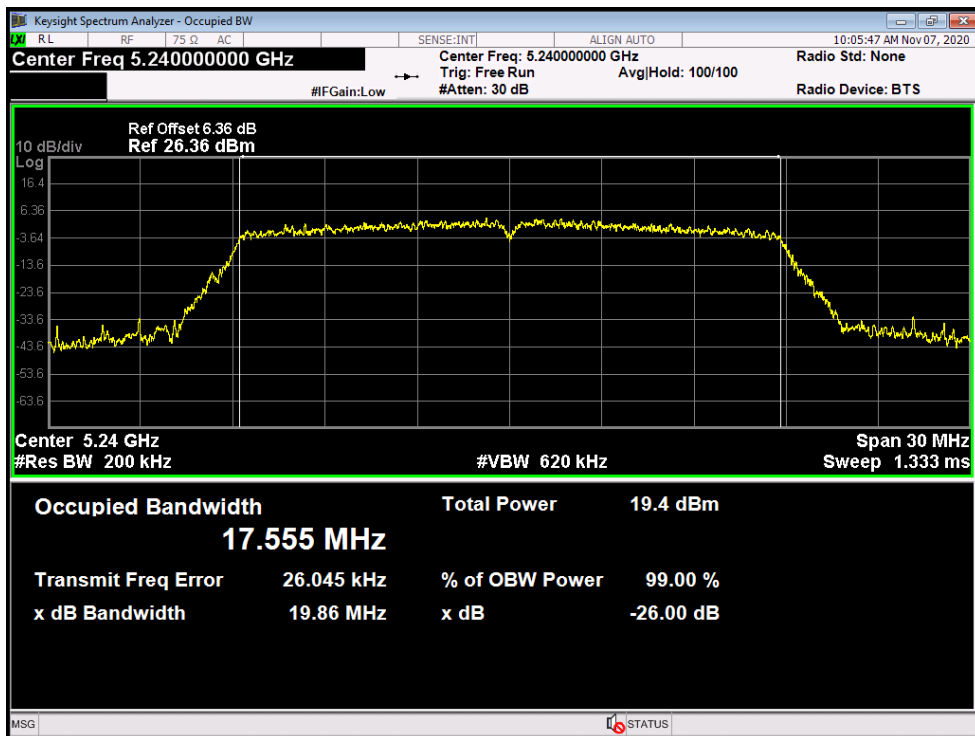

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11N(HT40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.76	35.940
46	5230	46.08	35.957
802.11N(HT40) Mode			
5190 MHz			
Occupied Bandwidth		Total Power	19.5 dBm
35.940 MHz			
Transmit Freq Error	34.667 kHz	% of OBW Power	99.00 %
x dB Bandwidth	40.76 MHz	x dB	-26.00 dB

802.11N(HT40) Mode


5230 MHz

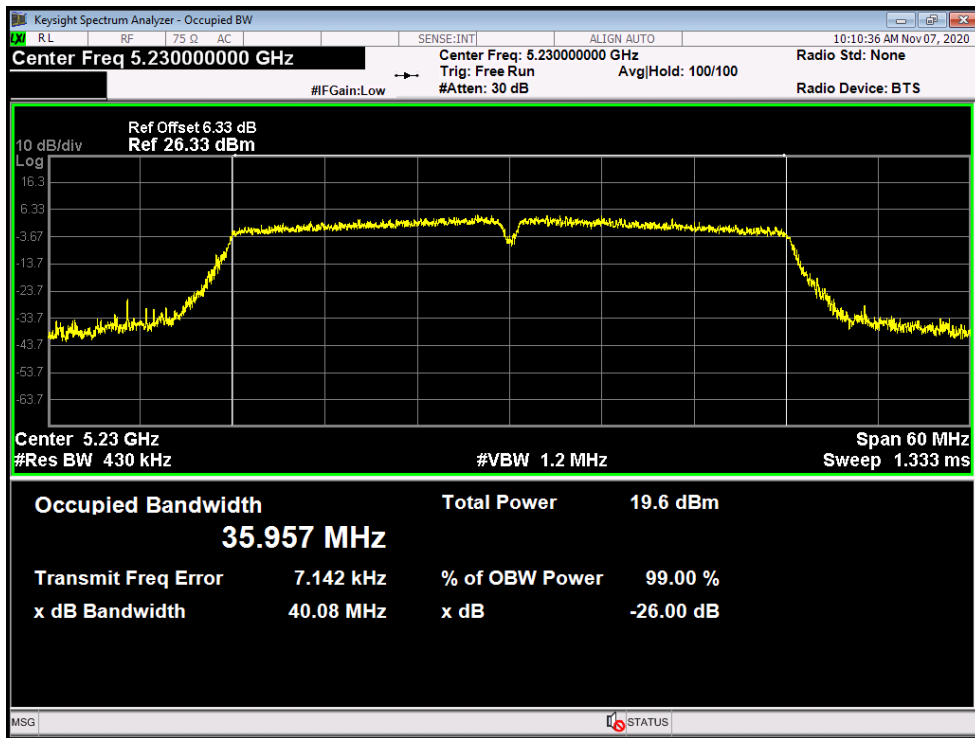

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.79	36.090
46	5230	40.86	36.035


802.11ac(VHT40) Mode

5190 MHz

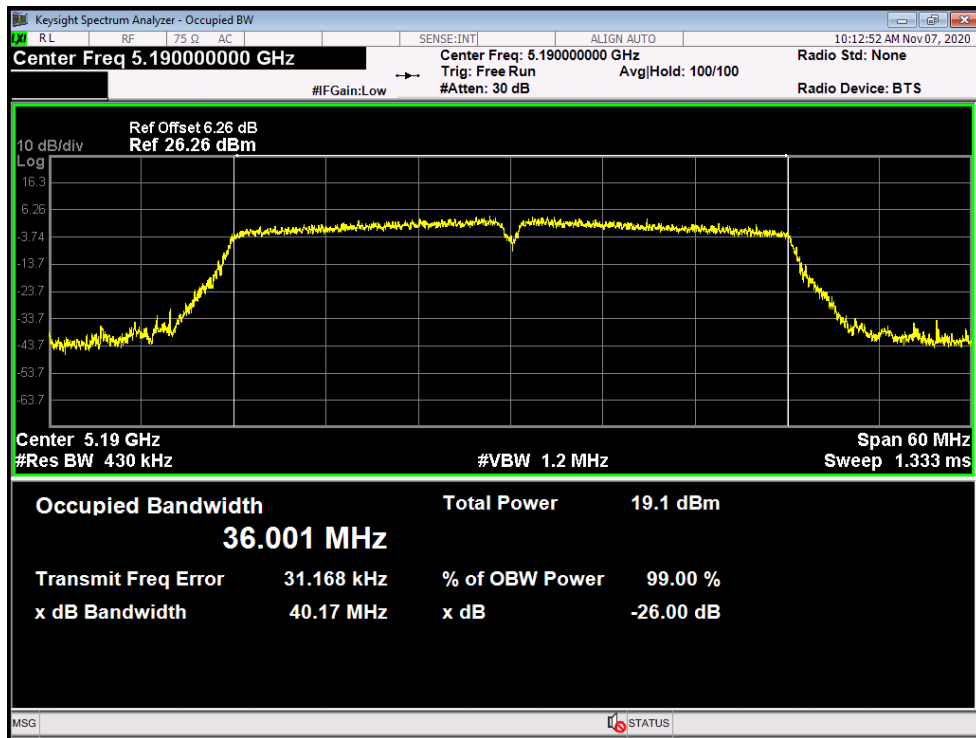

802.11ac(VHT40) Mode


5230 MHz

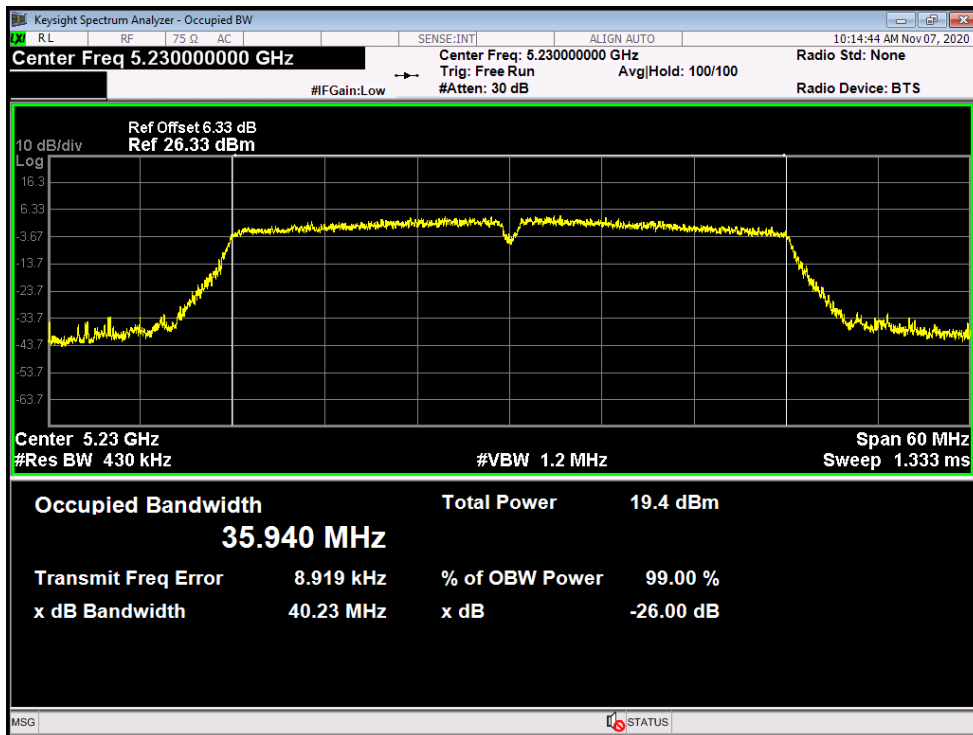

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT80) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
42	5210	75.147	80.36

802.11ac(VHT80) Mode


5210 MHz

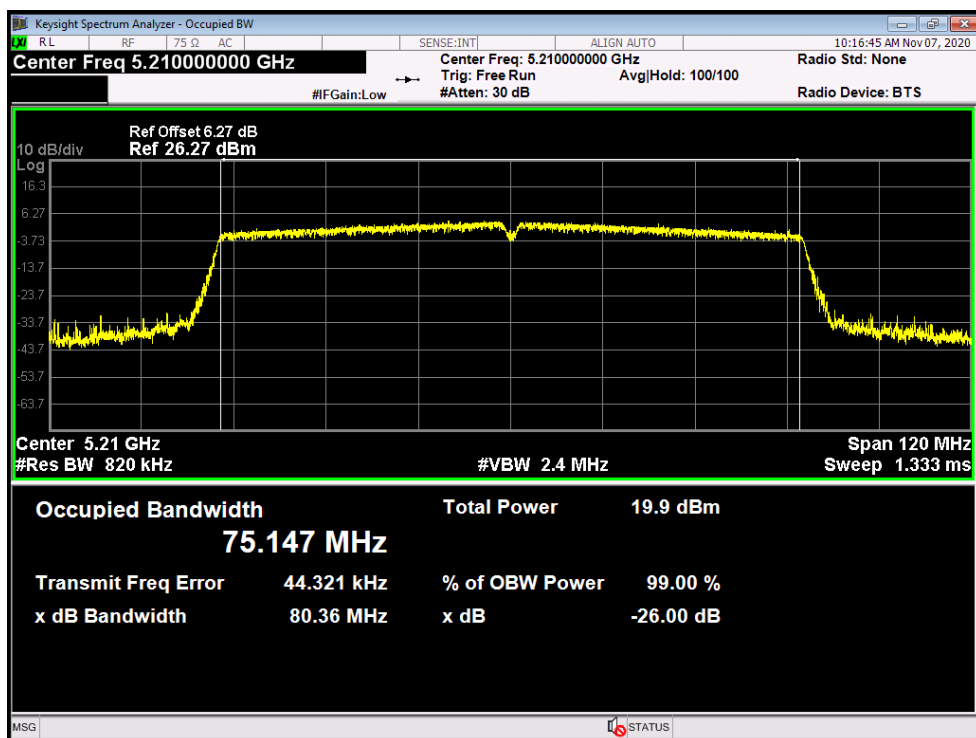

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-2A)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
52	5260	19.63	16.403
56	5280	19.70	16.386
64	5320	19.82	16.361


802.11a Mode

5260 MHz

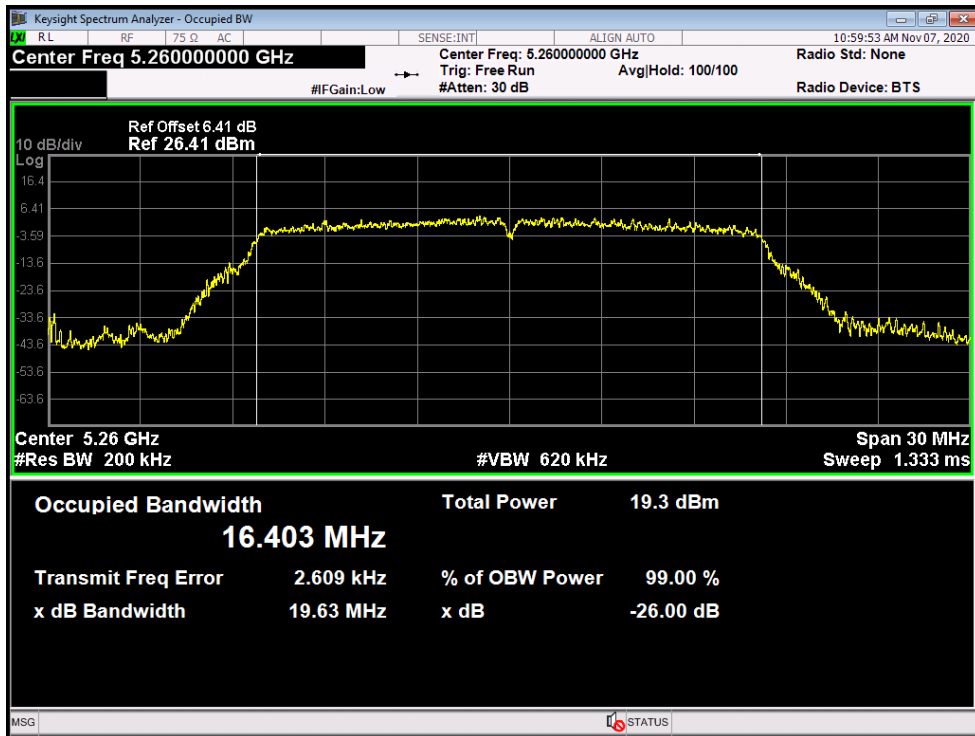


802.11a Mode

5280 MHz

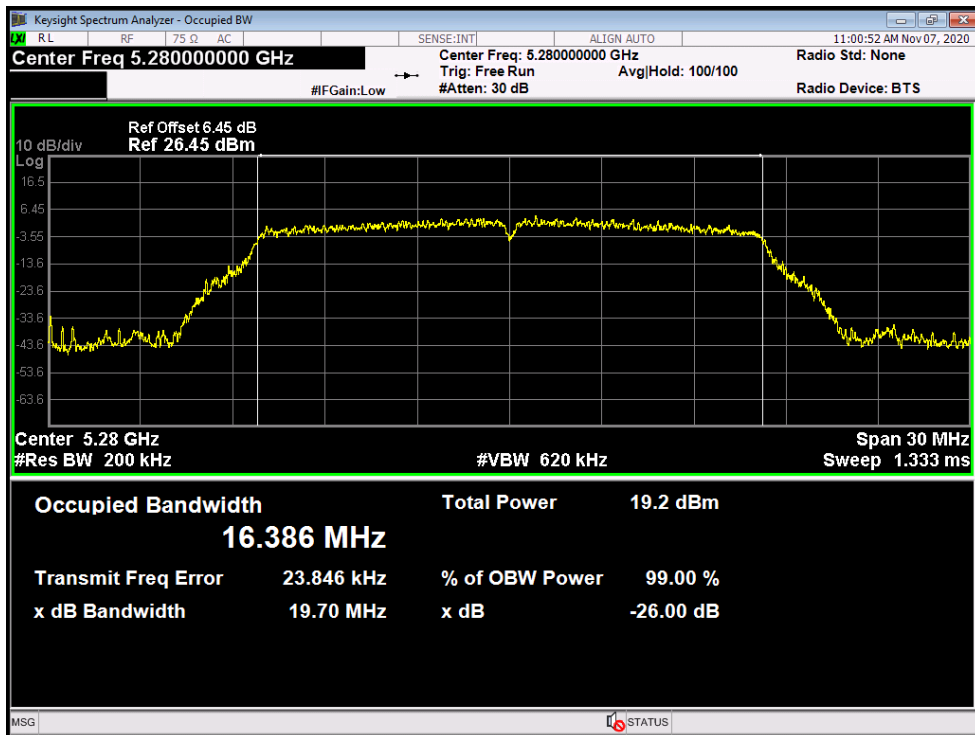

802.11a Mode


5320 MHz

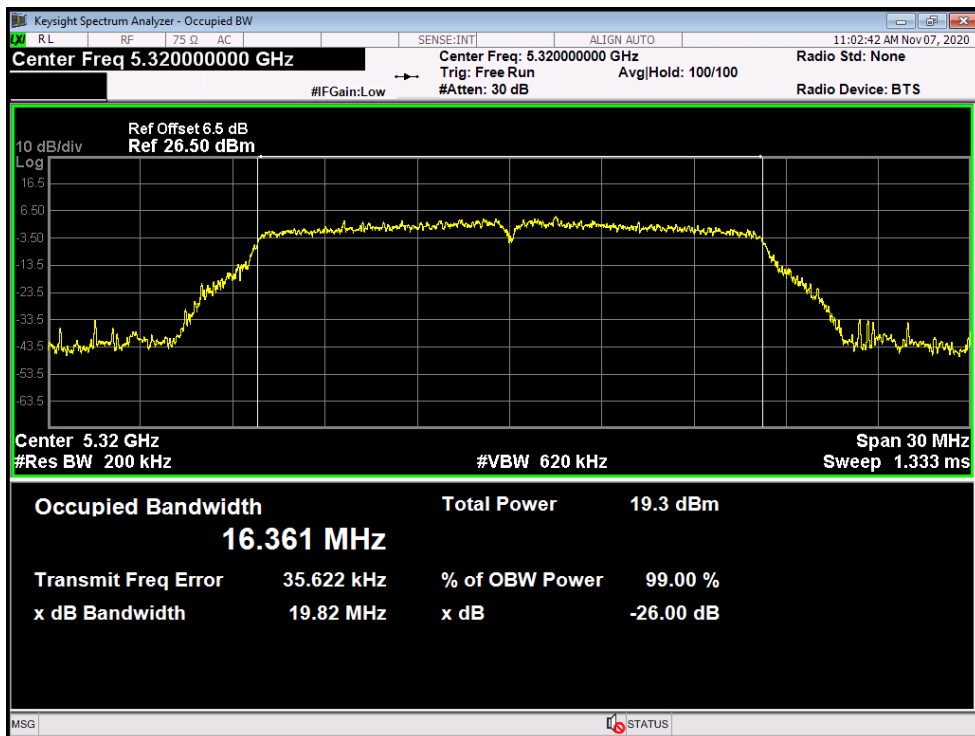

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2A)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
52	5260	20.28	17.552
56	5280	20.12	17.534
64	5320	20.18	17.543
802.11n(HT20) Mode			
5260 MHz			


802.11n(HT20) Mode

5280 MHz

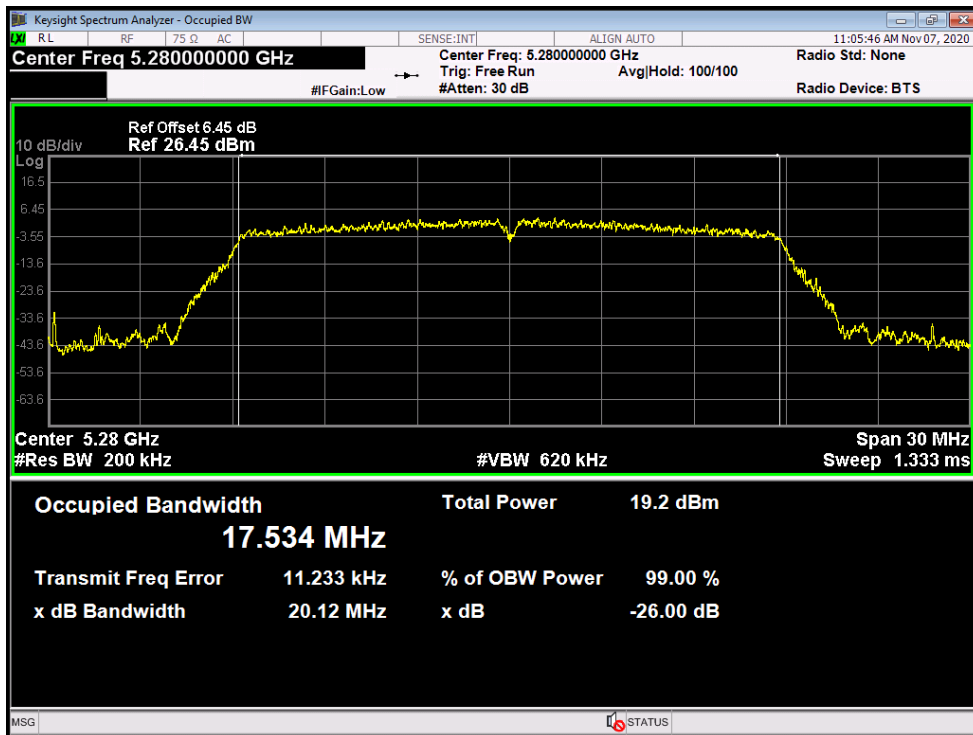

802.11n(HT20) Mode


5320 MHz

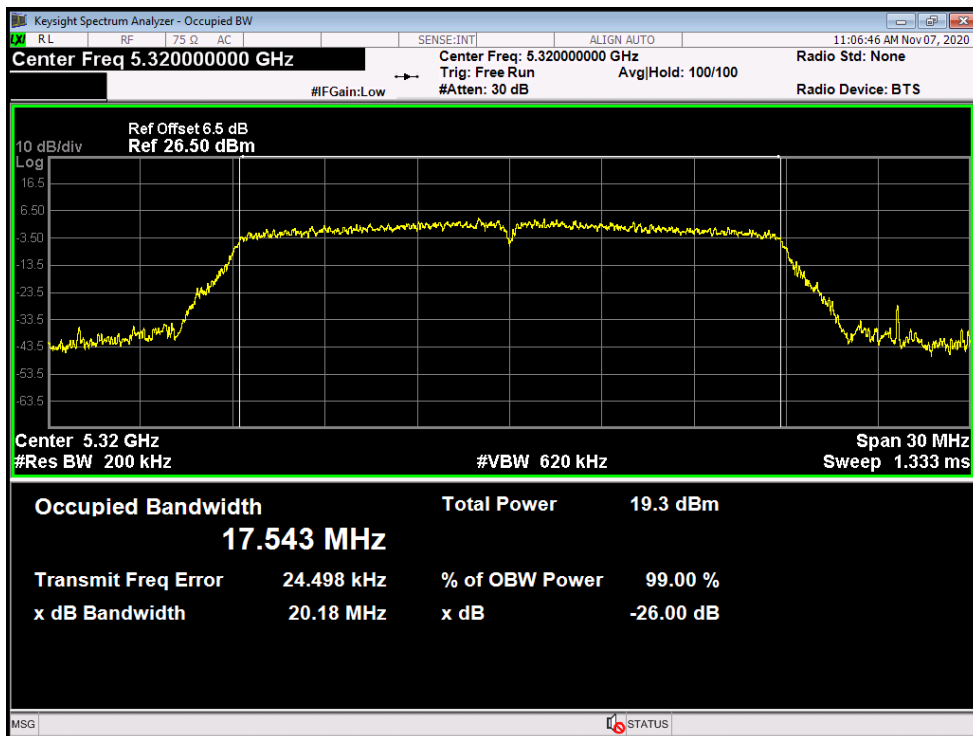

Temperature:	25 °C	Relative Humidity:	55%																
Test Voltage:	DC 3.8V																		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-2A)																		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)																
52	5260	20.04	17.562																
56	5280	20.06	17.545																
64	5320	19.95	17.569																
802.11ac(VHT20) Mode																			
5260 MHz																			
<p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 5.260000000 GHz</p> <p>Center Freq: 5.260000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>#FGain: Low</p> <p>#Atten: 30 dB</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.41 dB</p> <p>Ref 26.41 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 5.26 GHz</p> <p>#Res BW 200 kHz</p> <p>#VBW 620 kHz</p> <p>Span 30 MHz</p> <p>Sweep 1.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">19.1 dBm</td> </tr> <tr> <td>17.562 MHz</td> <td></td> <td colspan="2"></td> </tr> <tr> <td>Transmit Freq Error</td> <td>13.942 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>20.04 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>				Occupied Bandwidth	Total Power	19.1 dBm		17.562 MHz				Transmit Freq Error	13.942 kHz	% of OBW Power	99.00 %	x dB Bandwidth	20.04 MHz	x dB	-26.00 dB
Occupied Bandwidth	Total Power	19.1 dBm																	
17.562 MHz																			
Transmit Freq Error	13.942 kHz	% of OBW Power	99.00 %																
x dB Bandwidth	20.04 MHz	x dB	-26.00 dB																


802.11ac(VHT20) Mode

5280 MHz

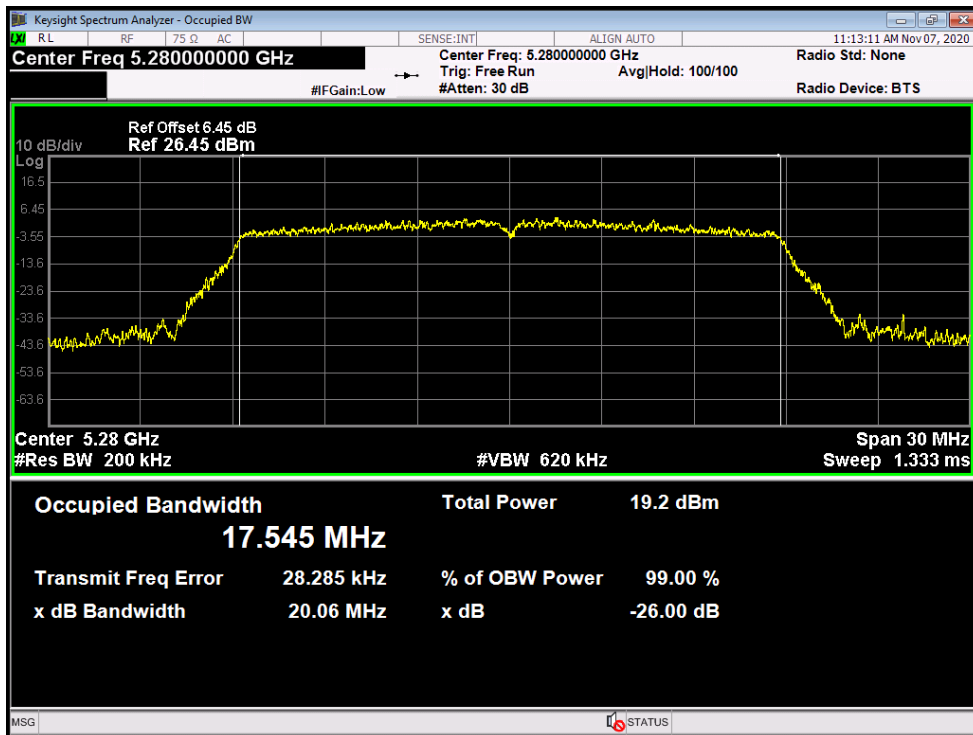

802.11ac(VHT20) Mode


5320 MHz

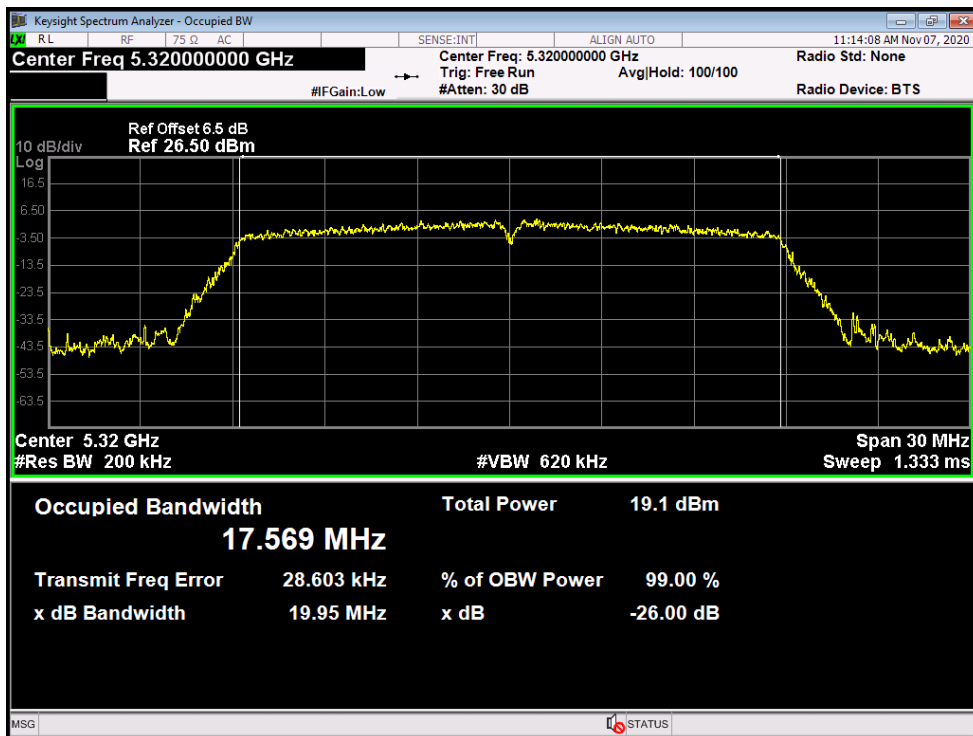

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11N(HT40) Mode (U-NII-2A)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	40.54	35.905
62	5310	40.14	35.891
802.11N(HT40) Mode			
5270 MHz			

802.11N(HT40) Mode


5310 MHz

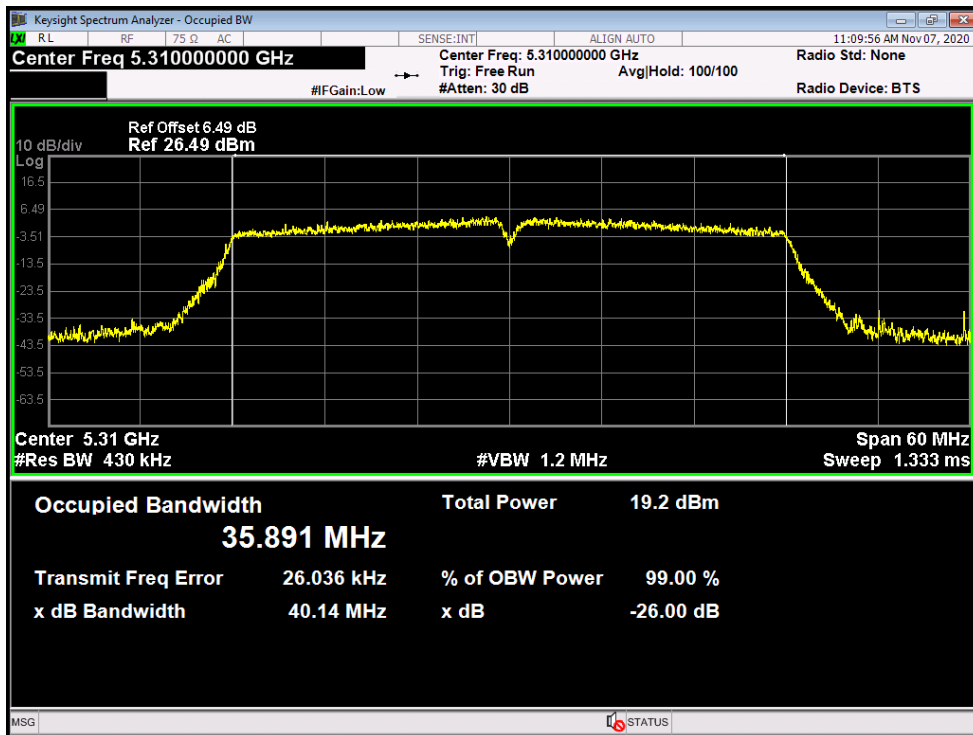

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT40) Mode (U-NII-2A)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
54	5270	40.02	36.019
62	5310	40.16	35.880


802.11ac(VHT40) Mode

5270 MHz

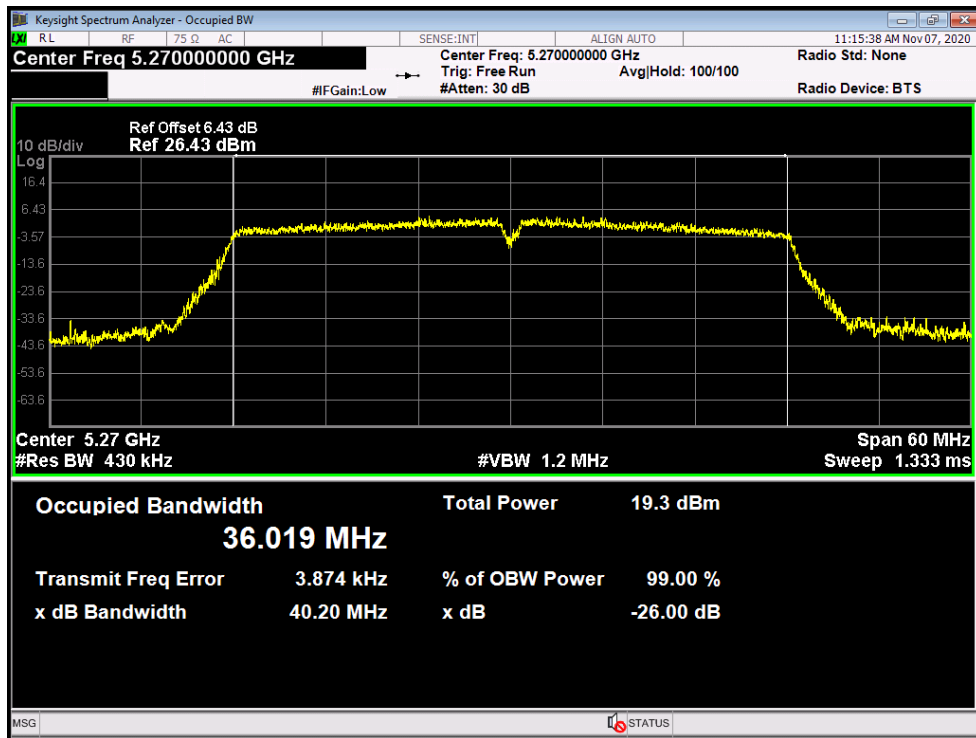

802.11ac(VHT40) Mode


5310 MHz

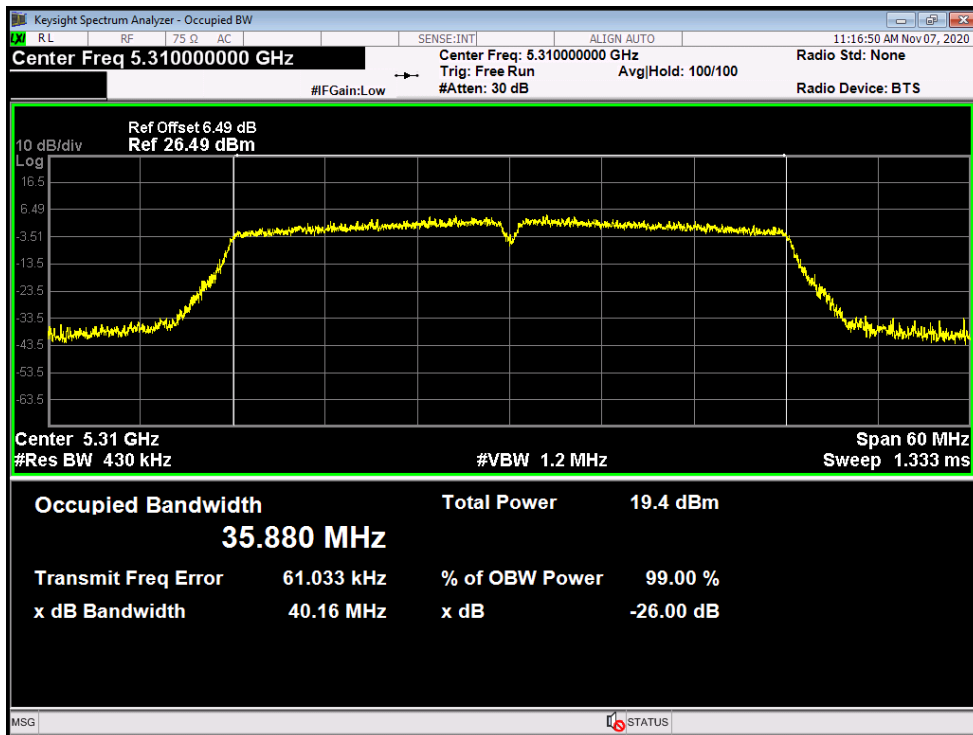

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT80) Mode (U-NII-2A)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
58	5290	80.54	75.362

802.11ac(VHT80) Mode


5290 MHz

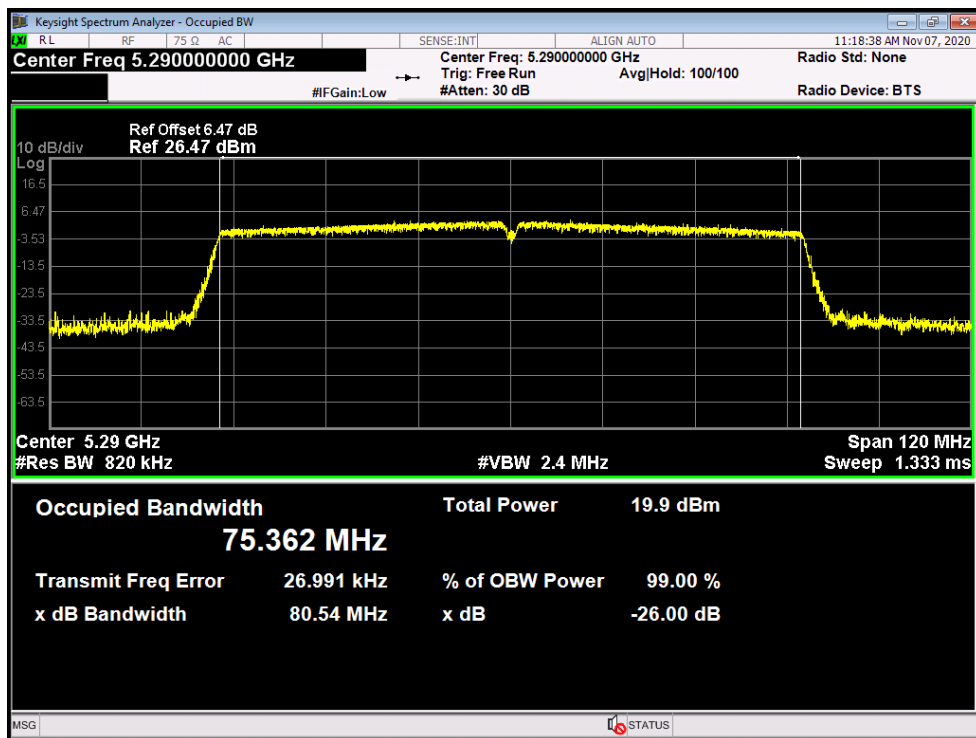

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-2C)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
100	5500	19.94	16.410
116	5600	19.81	16.439
144	5720	19.70	16.411


802.11a Mode

5500 MHz

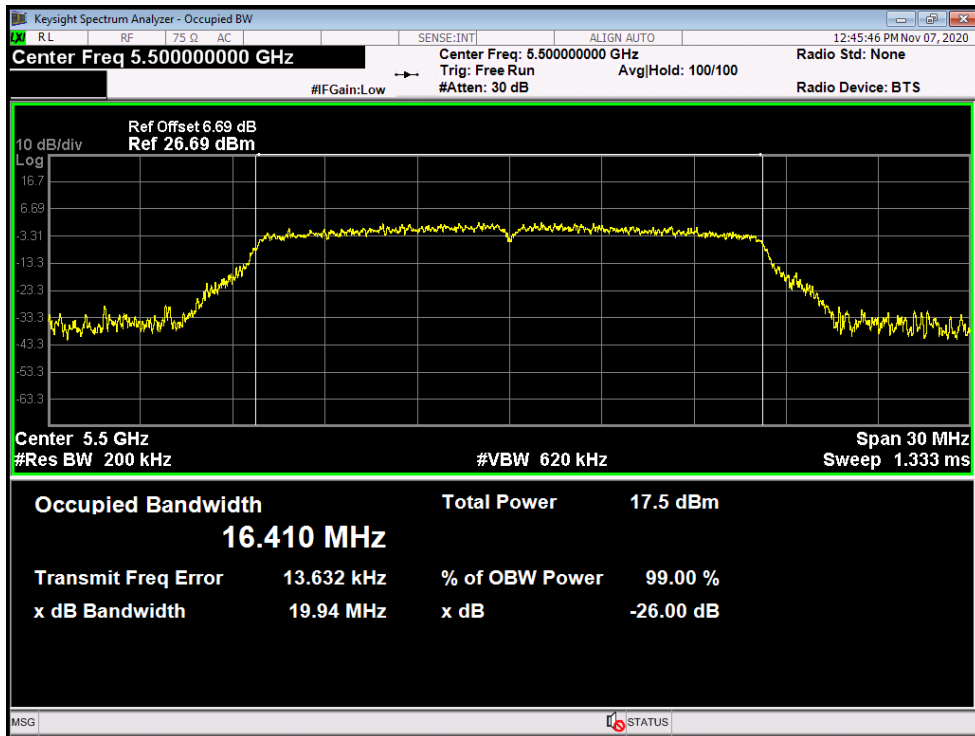


802.11a Mode

5600 MHz

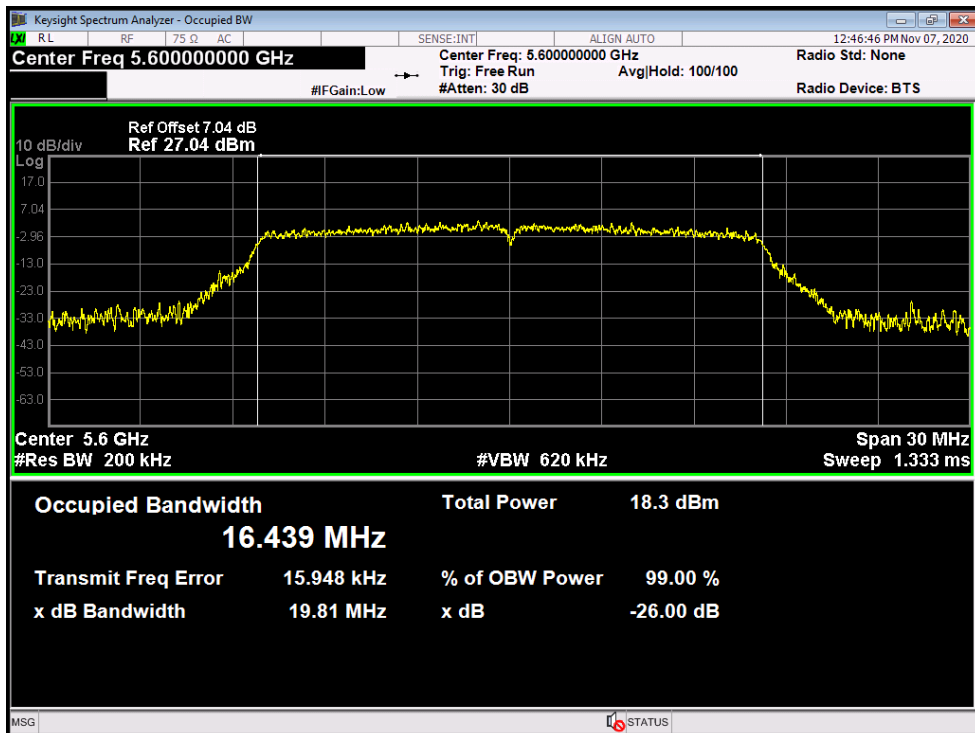

802.11a Mode


5720 MHz

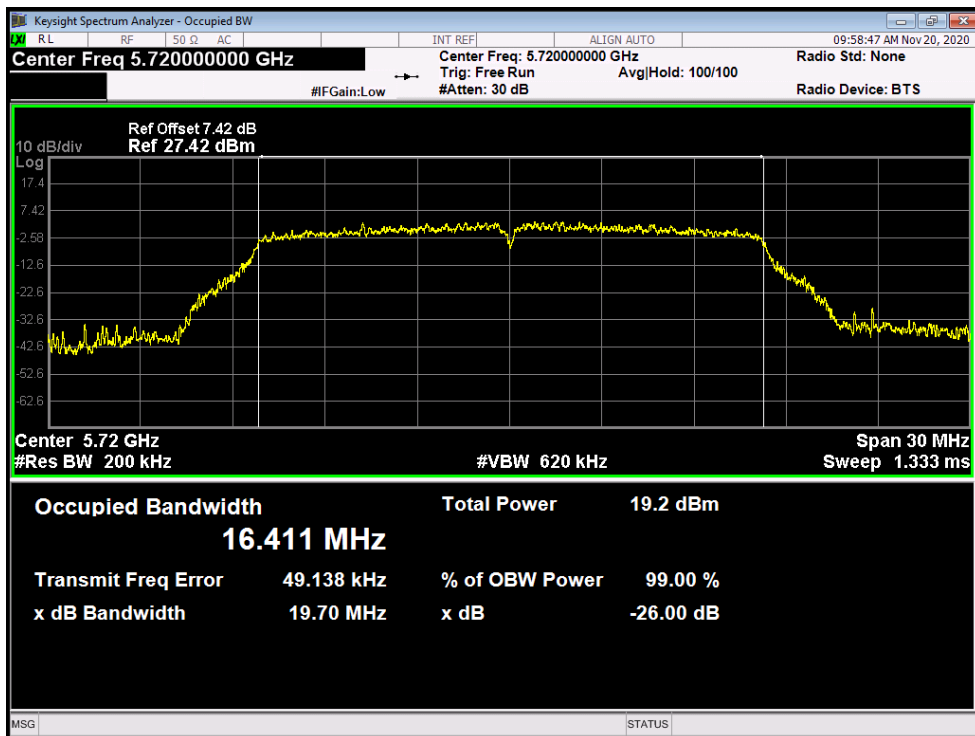

Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	DC 3.8V			
Test Mode:	TX 802.11a Mode (U-NII-2C)			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	14.99	----	13.211
		----	3.151	3.9314


802.11a Mode

5720 MHz Straddle 5.47-5.725GHz

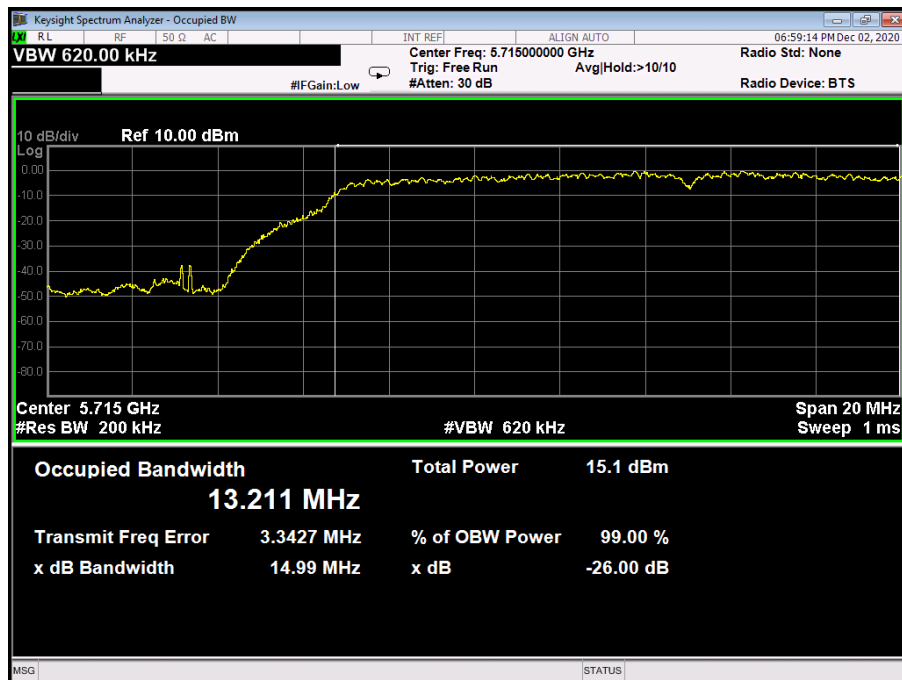

802.11a Mode


5720 MHz Straddle 5.725-5.85GHz

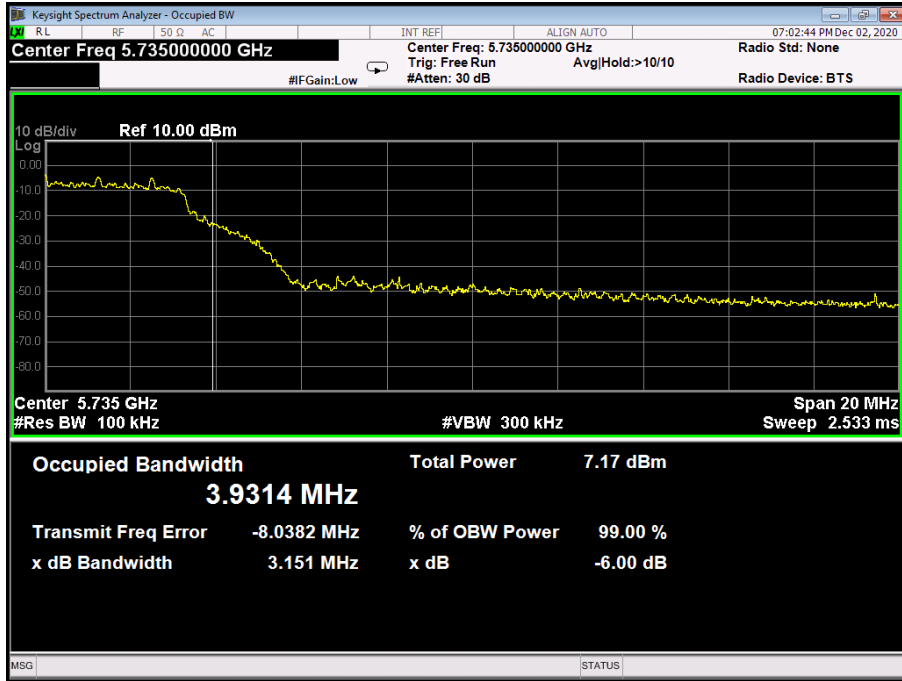

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2C)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
100	5500	19.96	17.563
116	5600	19.94	17.569
144	5720	20.34	17.574
802.11n(HT20) Mode			
5500 MHz			
Occupied Bandwidth		Total Power	17.5 dBm
17.563 MHz			
Transmit Freq Error	17.775 kHz	% of OBW Power	99.00 %
x dB Bandwidth	19.96 MHz	x dB	-26.00 dB


802.11n(HT20) Mode

5600 MHz

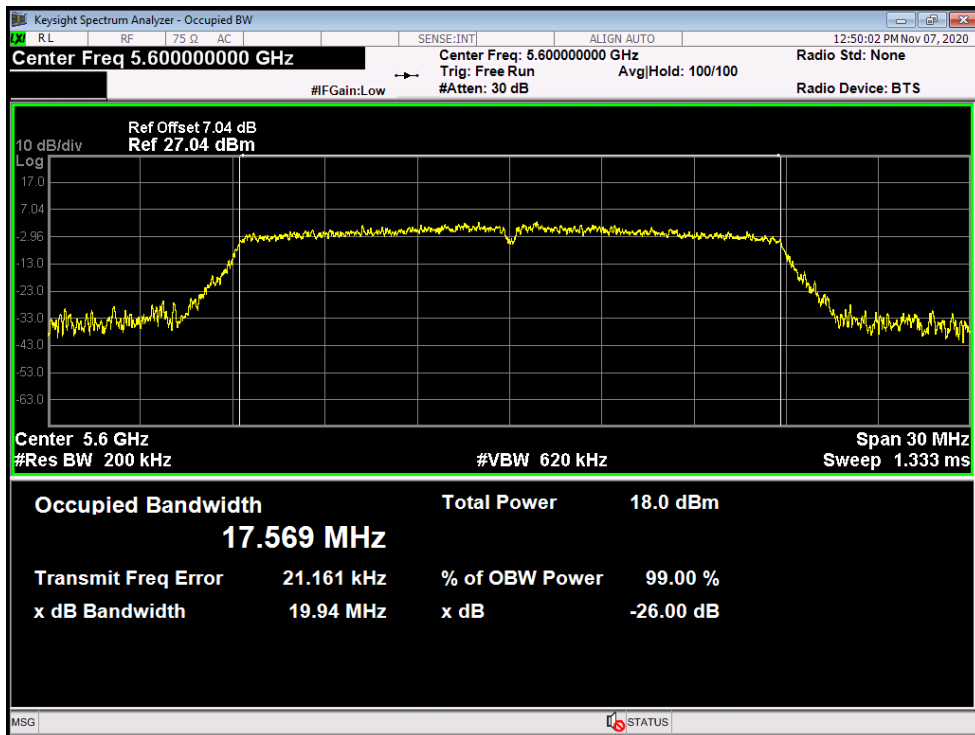

802.11n(HT20) Mode


5720 MHz

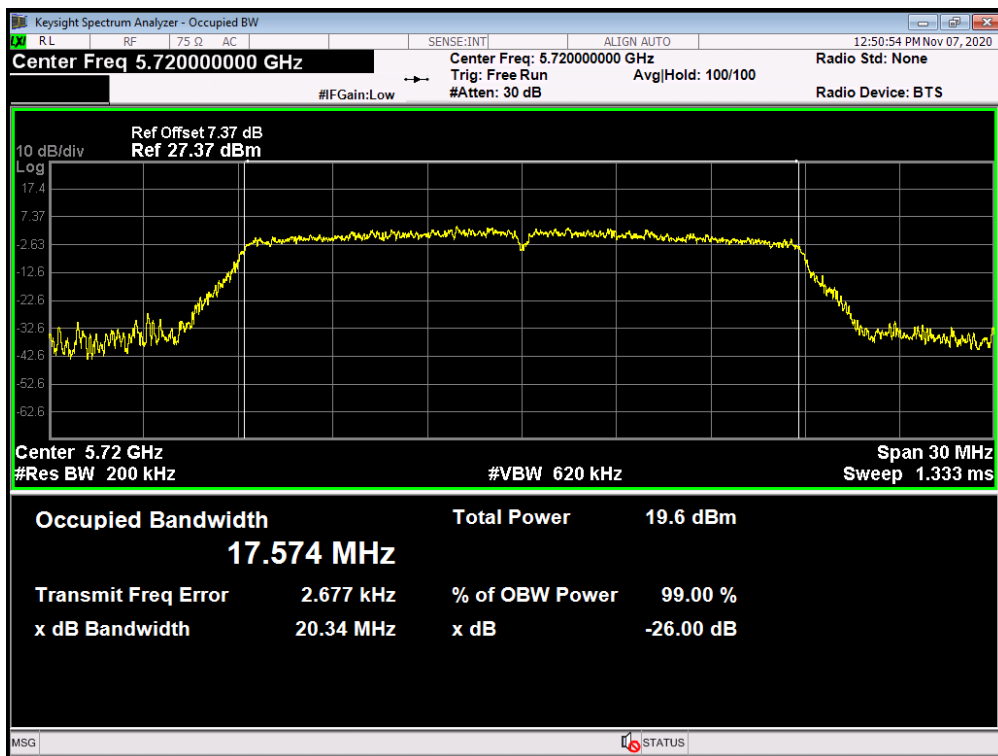

Temperature:	25 °C	Relative Humidity:	55%	
Test Voltage:	DC 3.8V			
Test Mode:	TX 802.11n(HT20) Mode (U-NII-2C)			
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
144	5720	15.00	----	13.737
		----	3.530	4.1941


802.11n(HT20) Mode

5720 MHz Straddle 5.47-5.725GHz

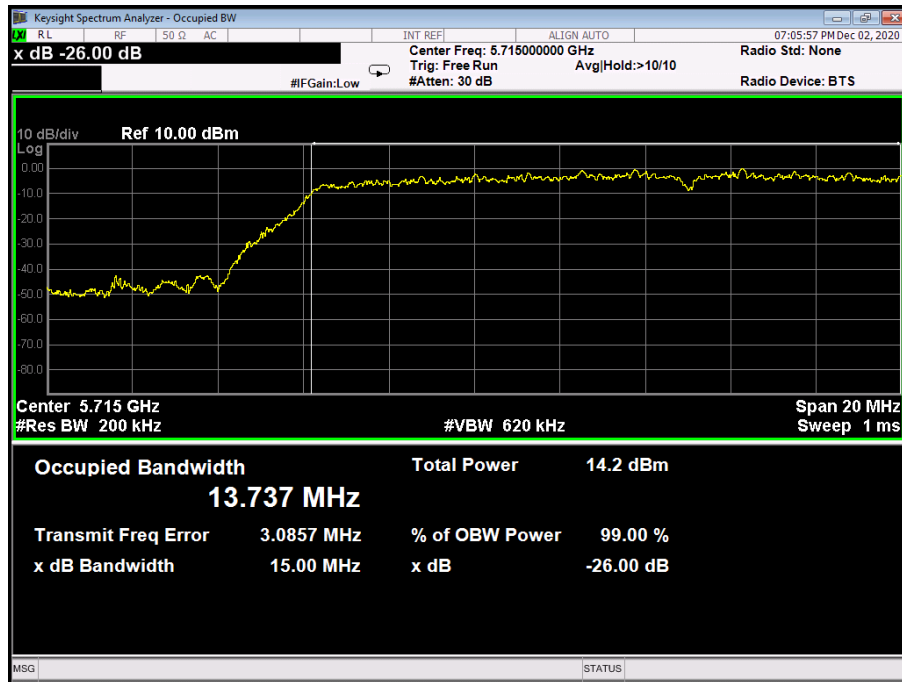

802.11n(HT20) Mode

5720 MHz Straddle 5.725-5.85GHz

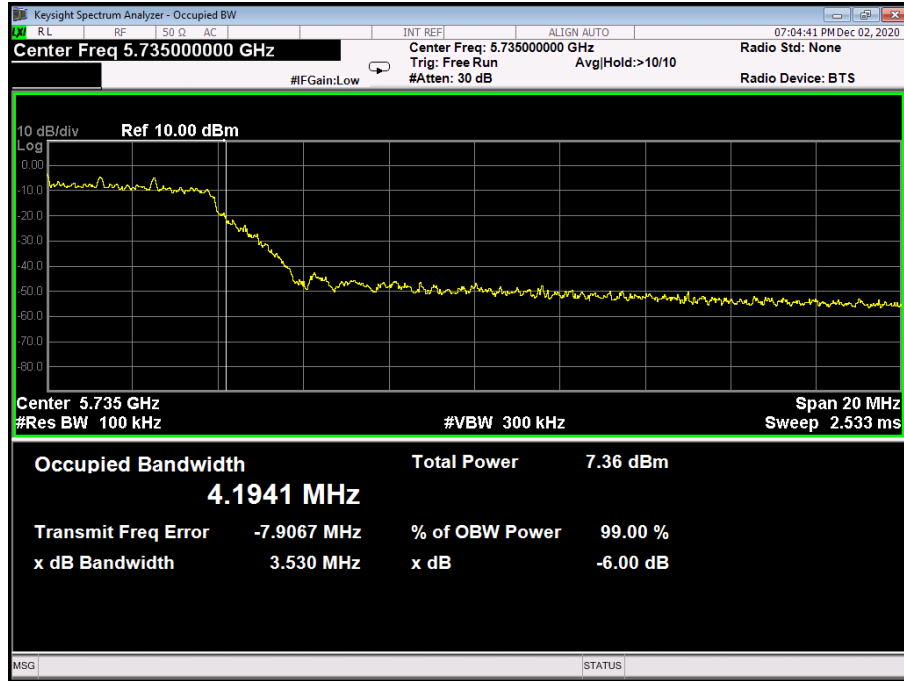

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11ac(VHT20) Mode (U-NII-2C)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
100	5500	20.12	17.561
116	5600	20.02	17.593
144	5720	19.97	17.563
802.11ac(VHT20) Mode			
5500 MHz			
Occupied Bandwidth		Total Power	17.4 dBm
17.561 MHz			
Transmit Freq Error	19.372 kHz	% of OBW Power	99.00 %
x dB Bandwidth	20.12 MHz	x dB	-26.00 dB