

Appendix A


Spurious Emission (30M-1G)

Note: All test modes have been arranged testing separately, and the worst test mode were record in the Appendix A.

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

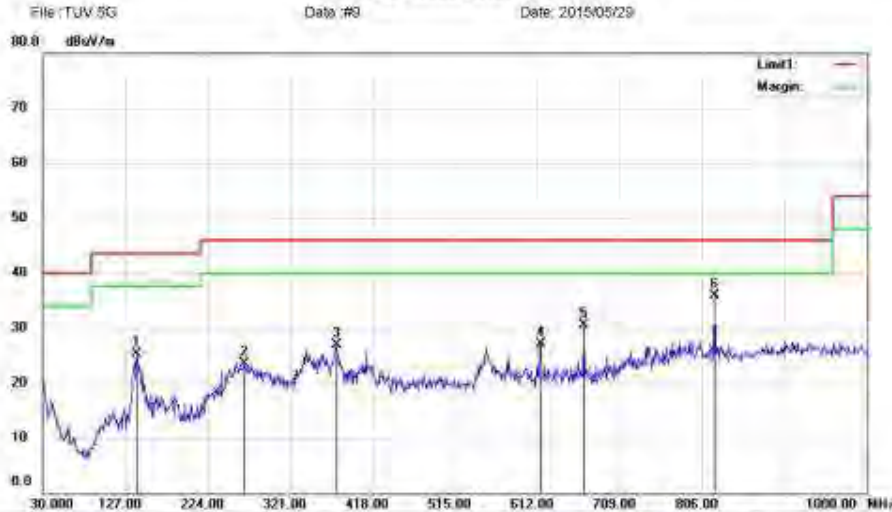

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH157 5785
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	140.5800	43.15	-17.80	25.35	43.50	-18.15			QP	
2	266.6800	36.16	-12.72	23.44	46.00	-22.56			QP	
3	375.3200	37.13	-10.17	26.96	46.00	-19.04			QP	
4	615.8800	34.03	-6.83	27.20	46.00	-18.80			QP	
5	667.2900	36.80	-6.30	30.50	46.00	-15.50			QP	
6 *	820.5500	38.34	-2.41	35.93	46.00	-10.07			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data :#9

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

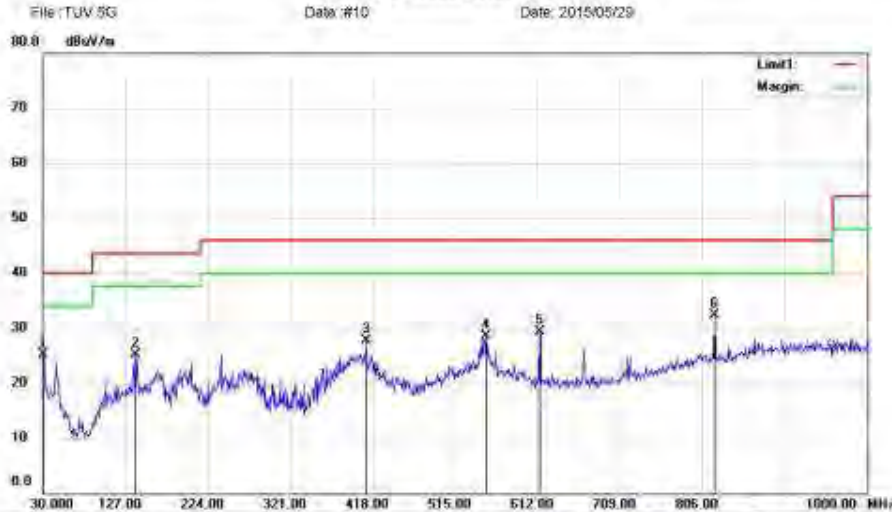

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1	30.9700	41.31	-16.27	25.04	40.00	-14.96			QP	
2	138.6400	42.82	-17.70	25.12	43.50	-18.38			QP	
3	410.2400	36.89	-9.16	27.73	46.00	-18.27			QP	
4	551.8600	35.95	-7.38	28.57	46.00	-17.43			QP	
5	614.9100	36.09	-6.85	29.24	46.00	-16.76			QP	
6 *	820.5500	34.80	-2.41	32.39	46.00	-13.61			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#10


Page: 1

Spurious Emission (1G-18G)

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

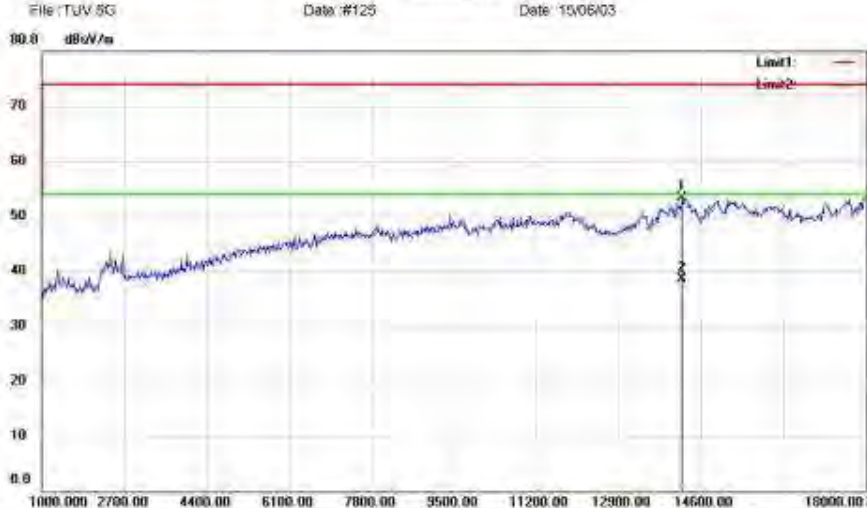


Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH36 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14209.00	50.89	2.32	53.21	74.00	-20.79	peak		
2	*	14209.00	36.27	2.32	38.59	54.00	-15.41	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

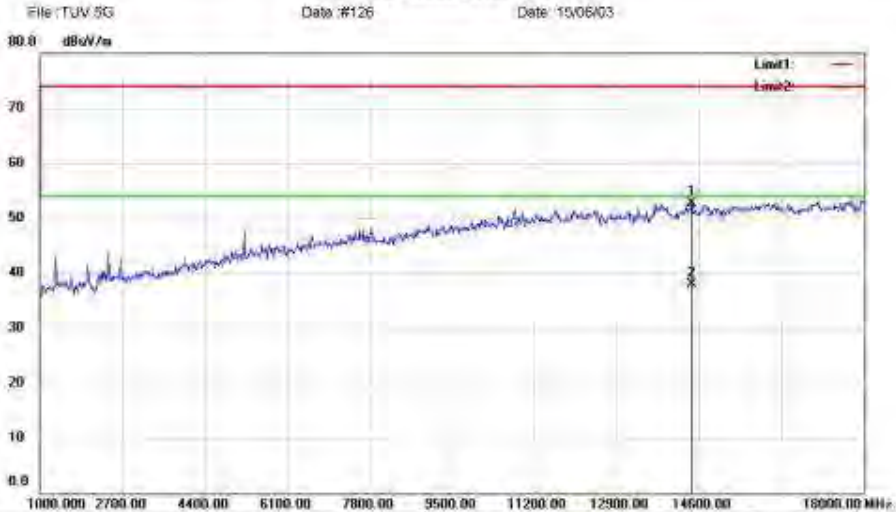

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH36 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14447.00	50.45	2.16	52.61	74.00	-21.39	peak		
2	*	14447.00	35.79	2.16	37.95	54.00	-16.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#126

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

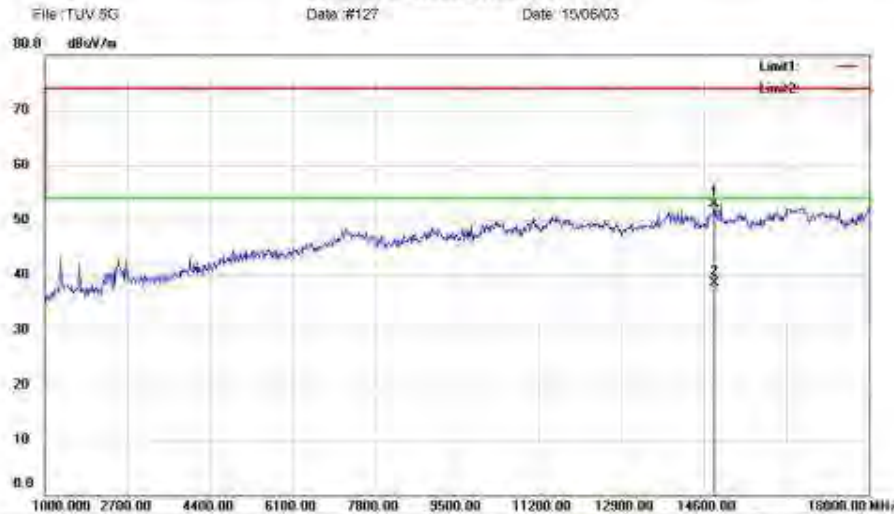

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14804.00	51.01	1.90	52.91	74.00	-21.09	peak		
2	*	14804.00	36.64	1.90	38.54	54.00	-15.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#127

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

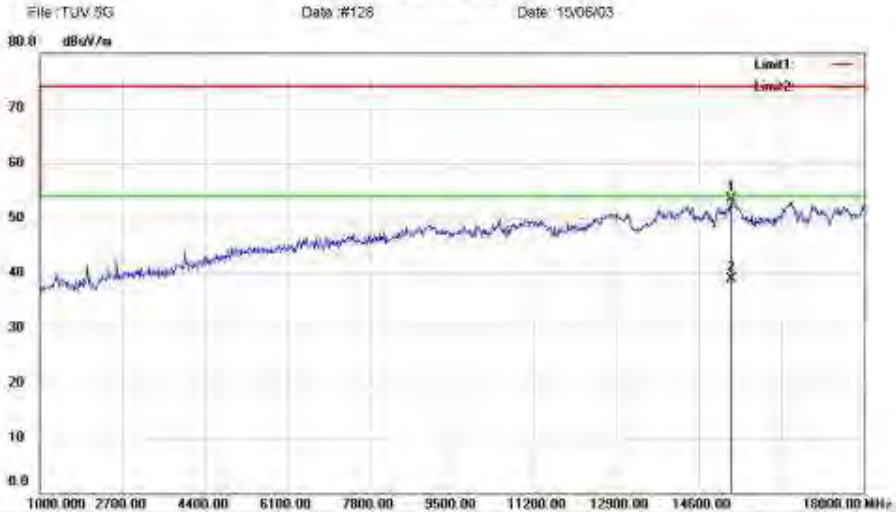

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15263.00	52.75	0.74	53.49	74.00	-20.51	peak		
2	*	15263.00	38.23	0.74	38.97	54.00	-15.03	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#128

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

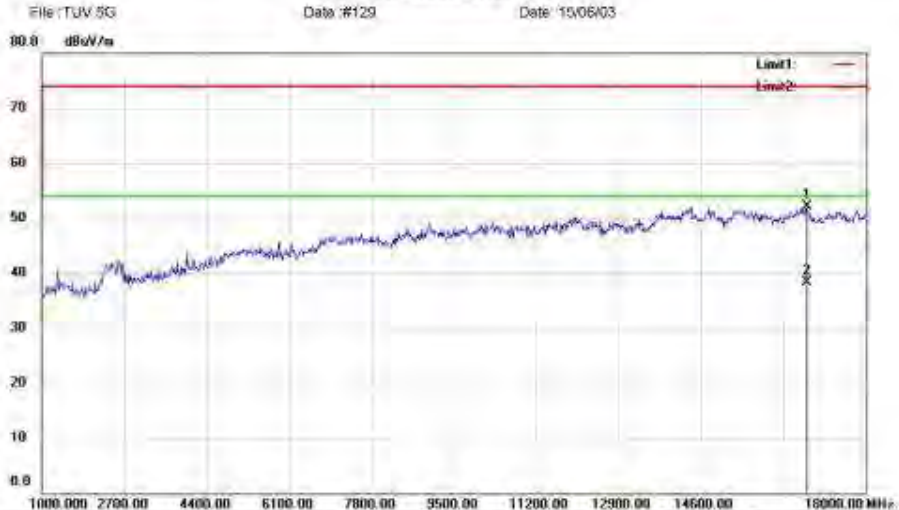

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16776.00	51.00	1.14	52.14	74.00	-21.86	peak		
2	*	16776.00	37.10	1.14	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#129

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

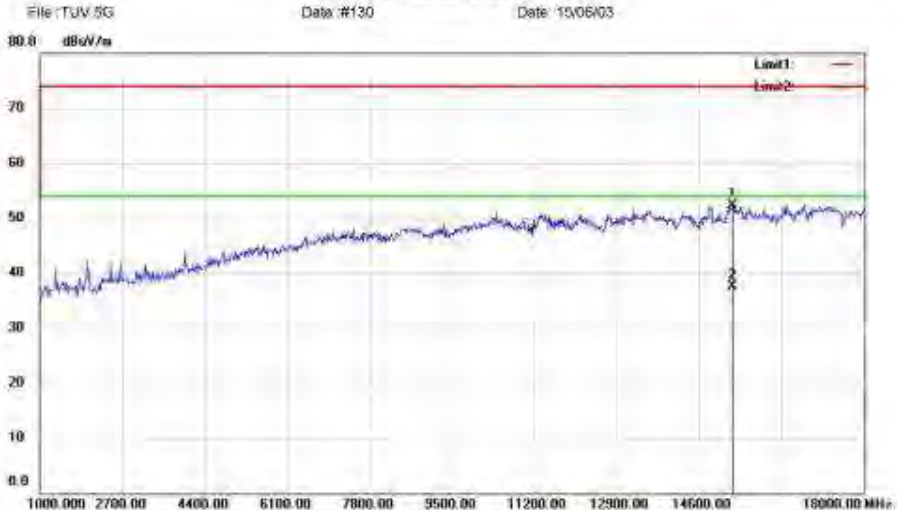

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15297.00	51.77	0.62	52.39	74.00	-21.61	peak		
2	*	15297.00	36.86	0.62	37.48	54.00	-16.52	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#130

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #131

Date: 15/06/20

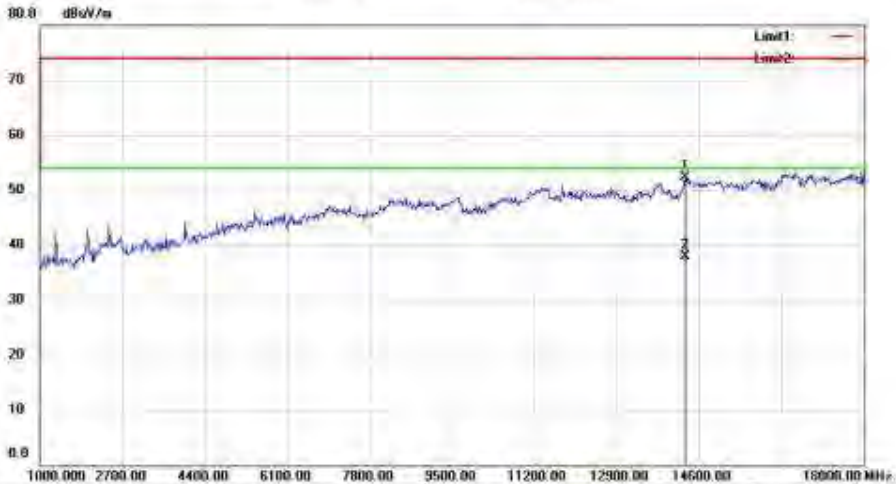

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	50.07	2.25	52.32	74.00	-21.68	peak		
2	*	14311.00	35.59	2.25	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#131

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

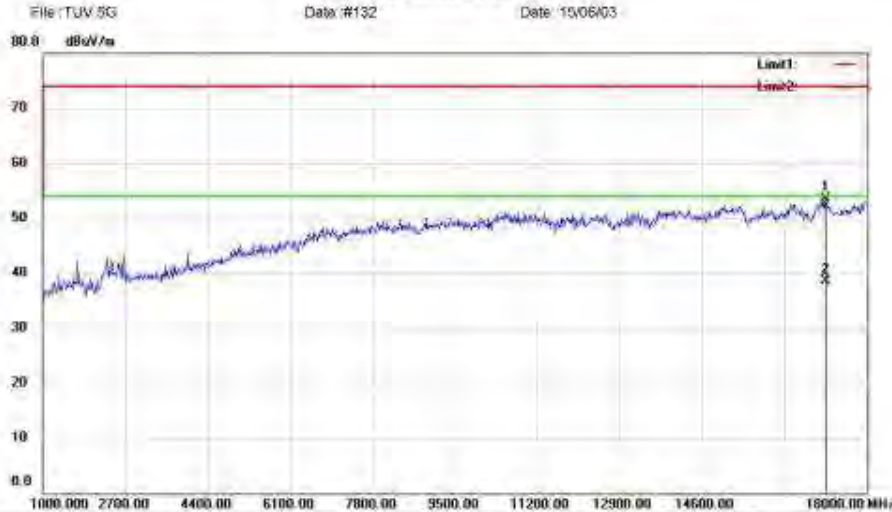

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17150.00	49.45	4.04	53.49	74.00	-20.51	peak		
2	*	17150.00	34.53	4.04	38.57	54.00	-15.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#132

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

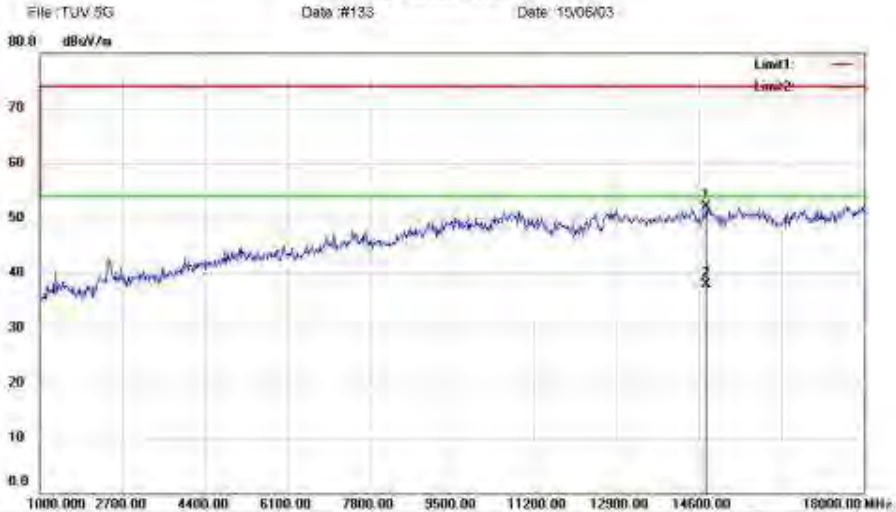

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH36 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14753.00	50.17	1.95	52.12	74.00	-21.88	peak		
2	*	14753.00	36.00	1.95	37.95	54.00	-16.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#133

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

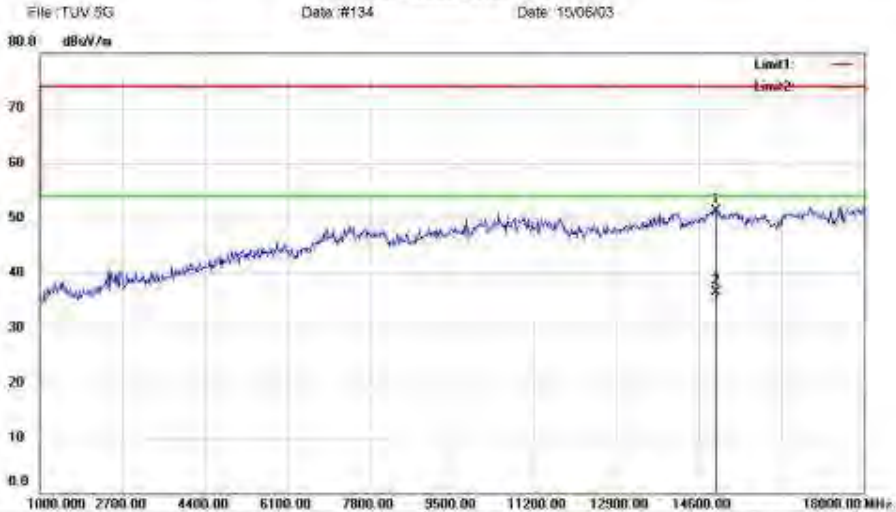

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH35 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14940.00	49.49	1.82	51.31	74.00	-22.69	peak		
2	*	14940.00	34.77	1.82	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#134

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

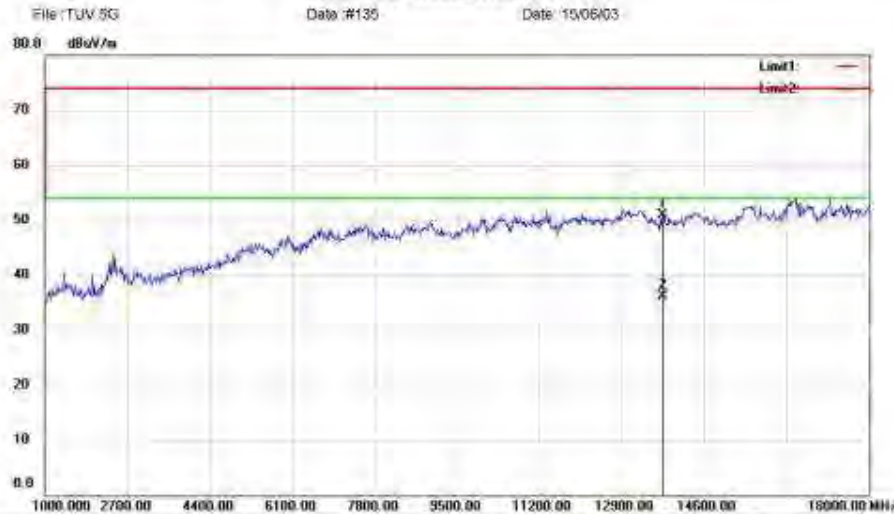

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH38 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13750.00	49.55	1.42	50.97	74.00	-23.03	peak		
2	*	13750.00	34.78	1.42	36.20	54.00	-17.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#135

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

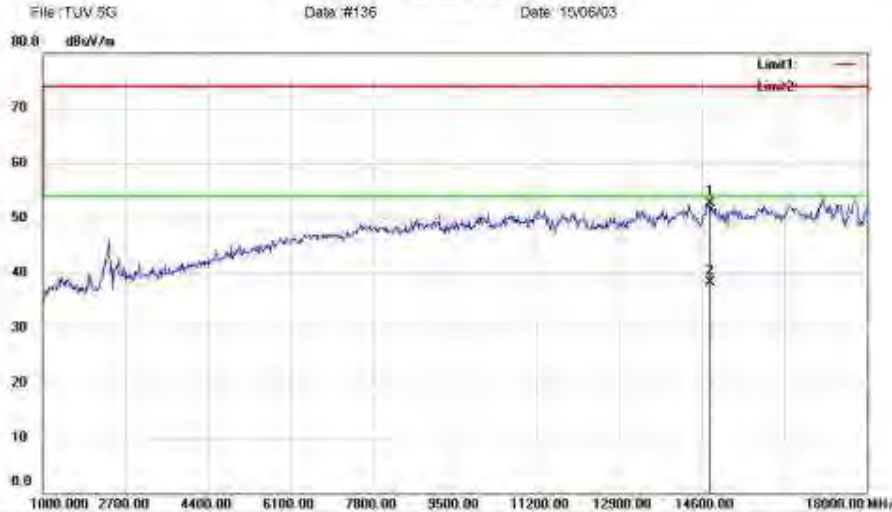

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH38 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14770.00	50.74	1.93	52.67	74.00	-21.33	peak		
2	*	14770.00	36.31	1.93	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#136

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

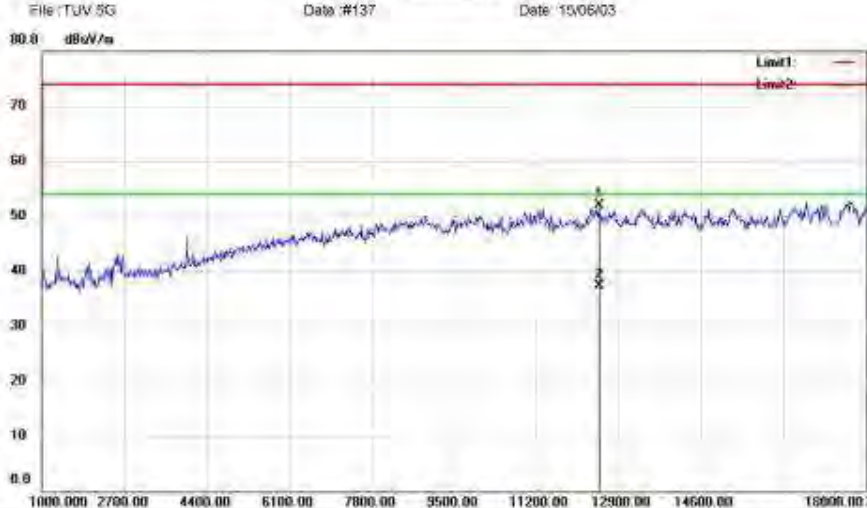


File: TUV 5G Date: #137 Date: 15/06/20
 Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH36 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		12492.00	54.77	-2.84	51.93	74.00	-22.07	peak		
2	*	12492.00	40.14	-2.84	37.30	54.00	-16.70	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

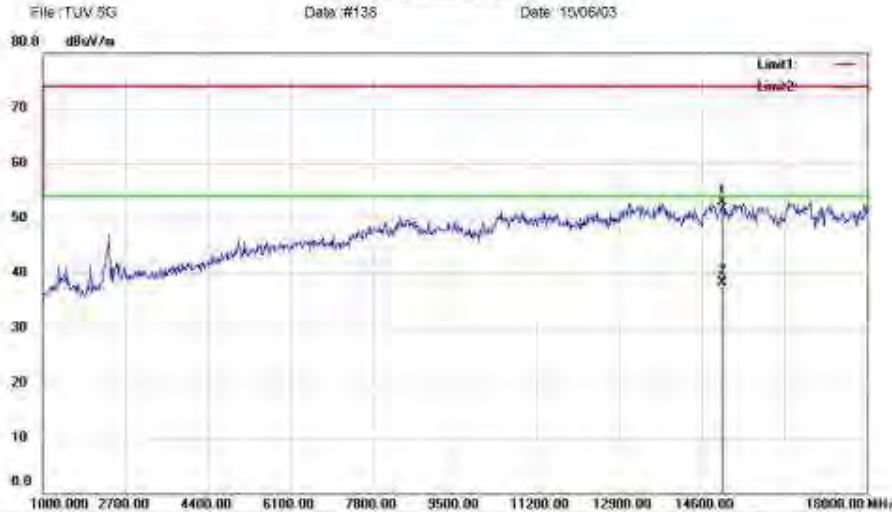

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH36 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15008.00	51.20	1.74	52.94	74.00	-21.06	peak		
2	*	15008.00	36.52	1.74	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#138

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

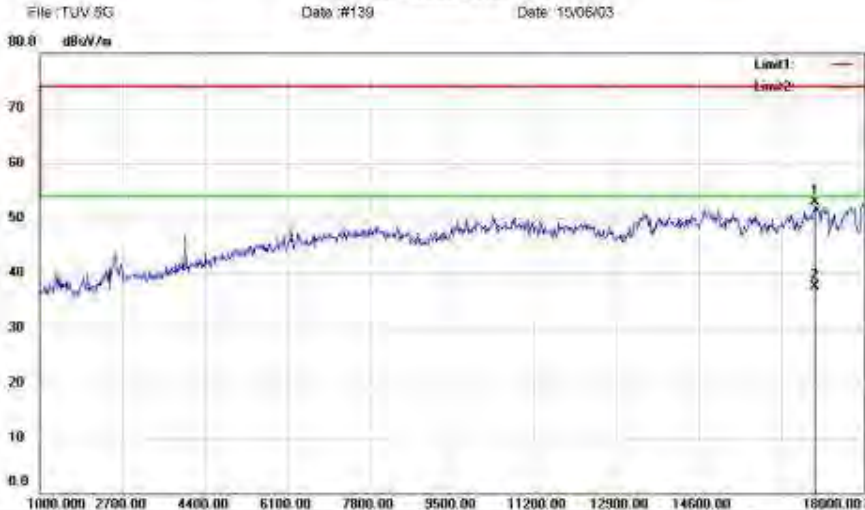

Site: site #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH38 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16997.00	50.75	2.06	52.81	74.00	-21.19	peak		
2	*	16997.00	35.51	2.06	37.57	54.00	-16.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#139

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Date: #140

Date: 15/06/20



Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH38 5190
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16045.00	53.92	-1.91	52.01	74.00	-21.99	peak		
2	*	16045.00	39.45	-1.91	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#140

Page: 1

Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

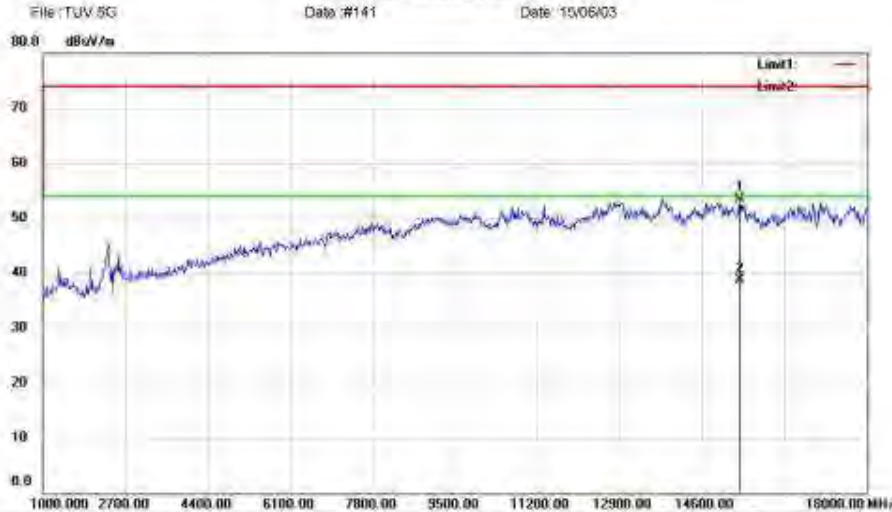

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 80M CH42 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15382.00	53.23	0.30	53.53	74.00	-20.47	peak		
2	*	15382.00	38.38	0.30	38.68	54.00	-15.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#141

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

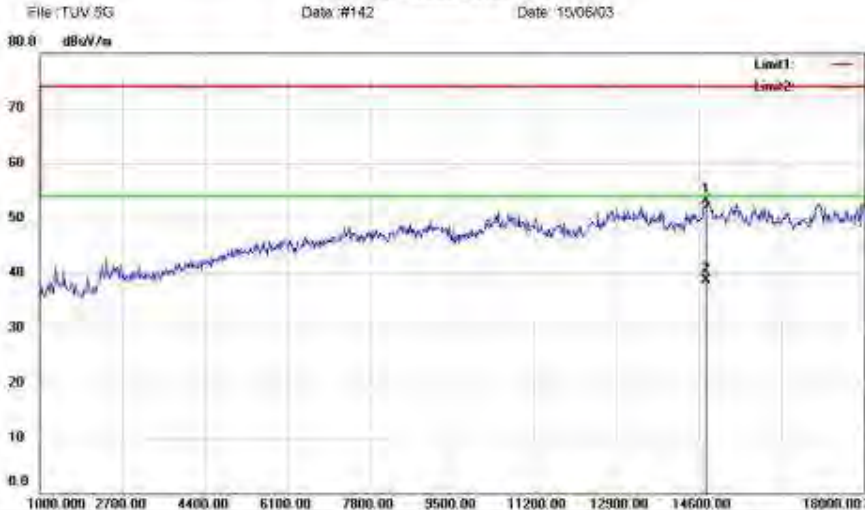

Site: site #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 80M CH42 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14753.00	51.08	1.95	53.03	74.00	-20.97	peak		
2	*	14753.00	36.72	1.95	38.67	54.00	-15.33	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#142

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

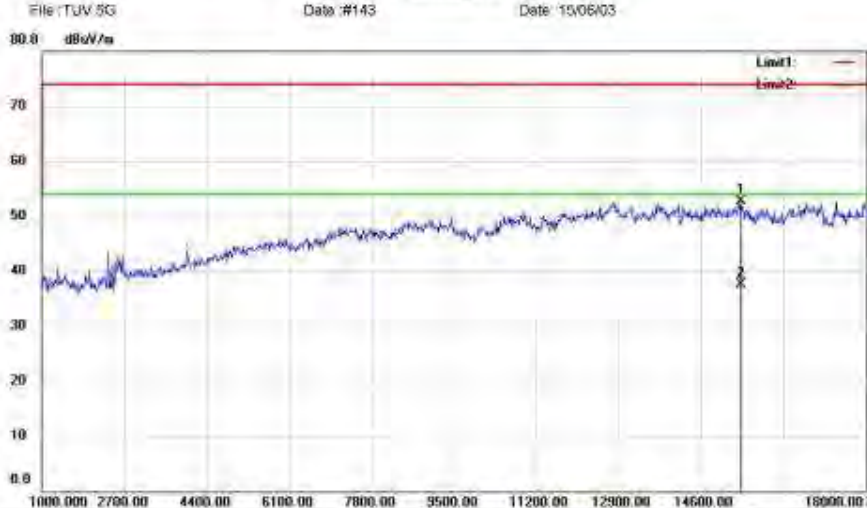


Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH40 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15416.00	52.57	0.16	52.73	74.00	-21.27	peak		
2	*	15416.00	37.36	0.16	37.52	54.00	-16.48	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 Majiechang Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

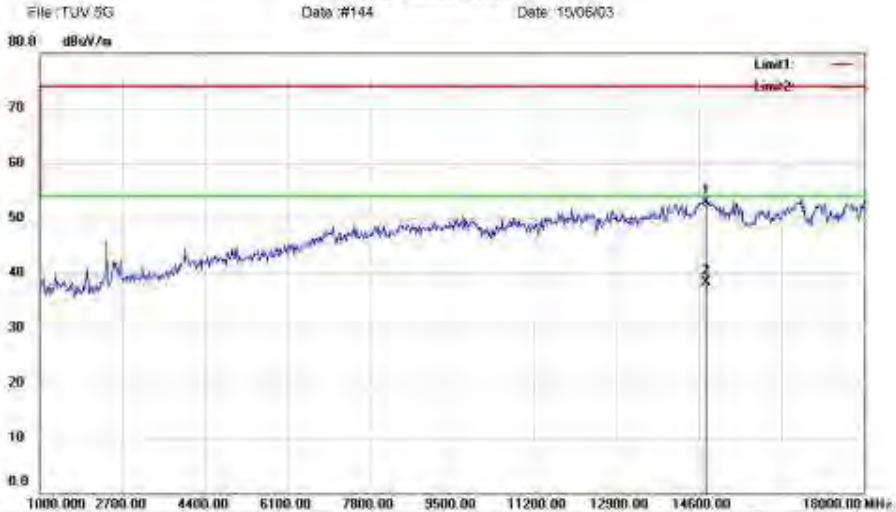

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH40 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14753.00	51.05	1.95	53.00	74.00	-21.00	peak		
2	*	14753.00	36.30	1.95	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#144

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 Majieqiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

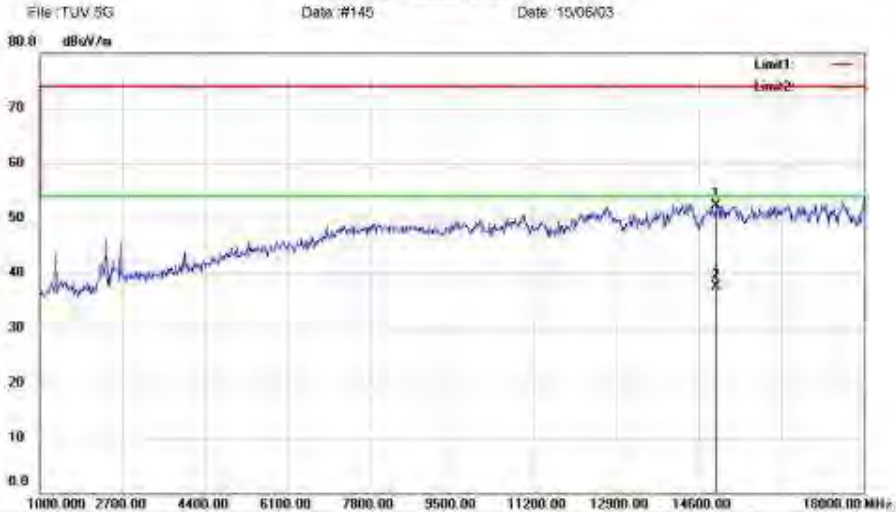

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14940.00	50.55	1.82	52.37	74.00	-21.63	peak		
2	*	14940.00	35.77	1.82	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#145

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #146

Date: 15/06/20

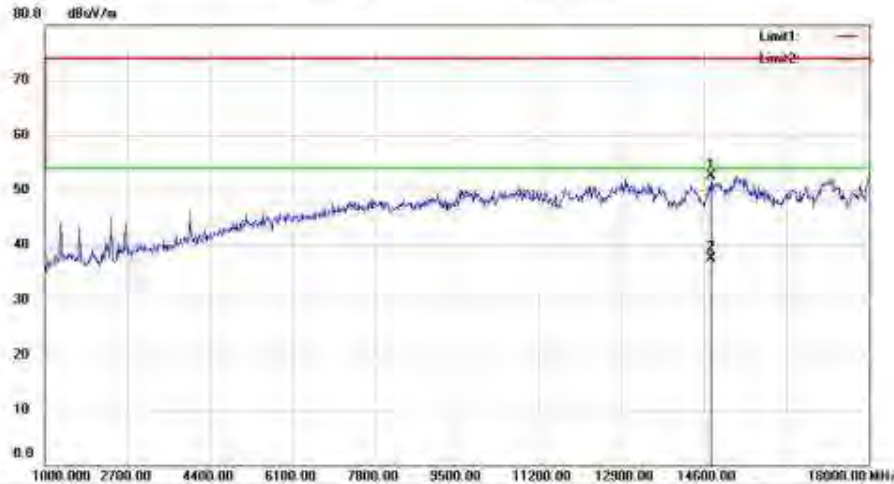

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14753.00	50.56	1.95	52.51	74.00	-21.49	peak		
2	*	14753.00	35.63	1.95	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#146

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

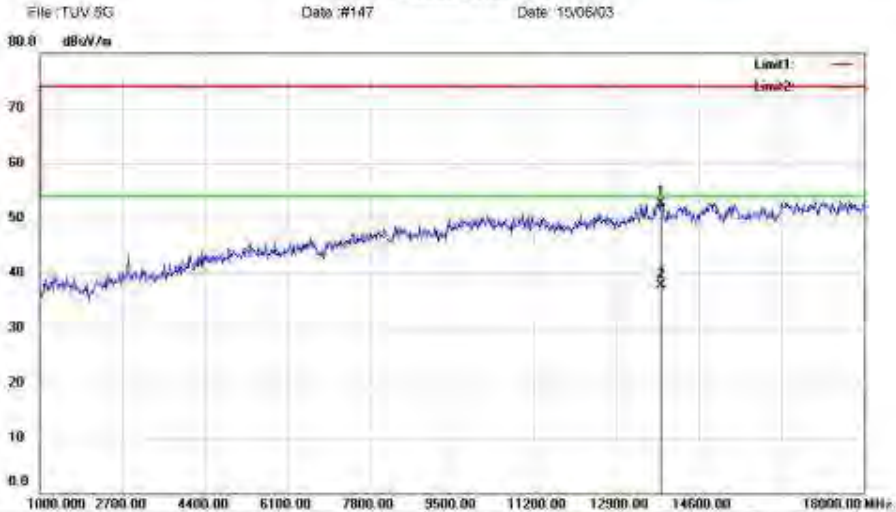

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH44 5220
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		13818.00	47.80	4.93	52.73	74.00	-21.27	peak	
2	*	13818.00	32.71	4.93	37.64	54.00	-16.36	AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#147

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

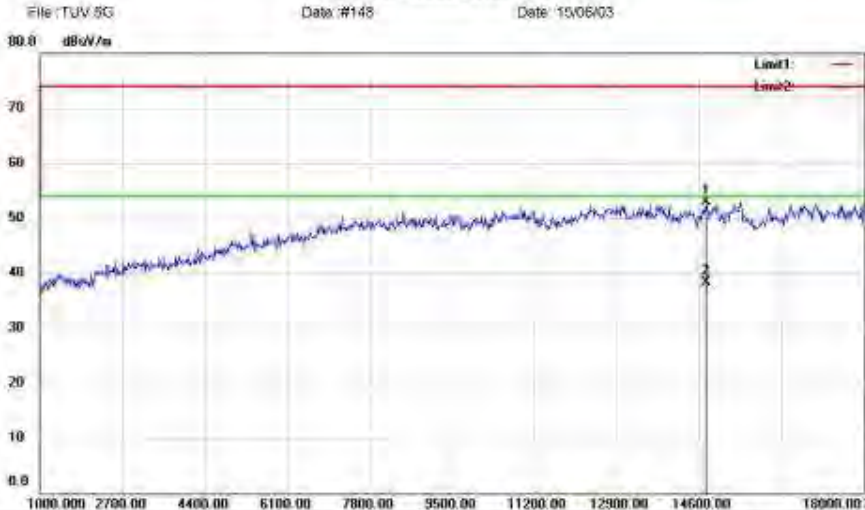

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH44 5220
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak		
2	*	14753.00	32.91	5.33	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#148

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

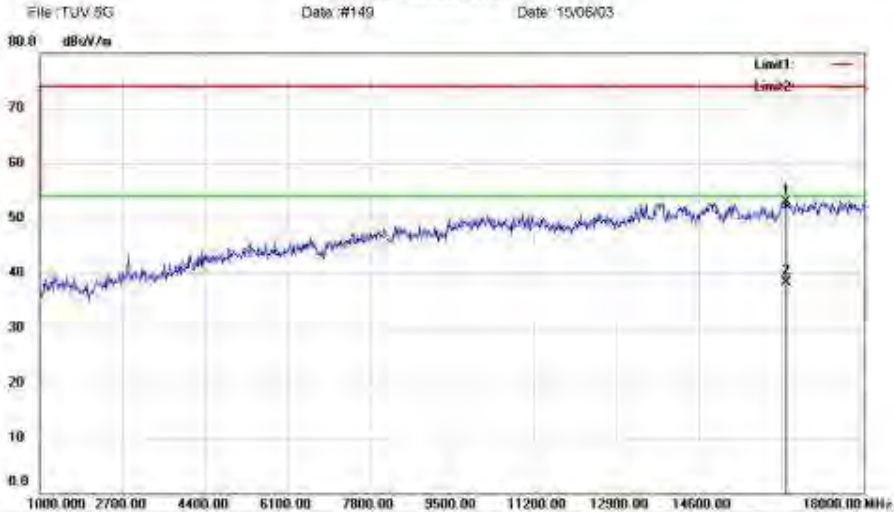

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16402.00	49.85	3.10	52.95	74.00	-21.05	peak		
2	*	16402.00	35.13	3.10	38.23	54.00	-15.77	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#149

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

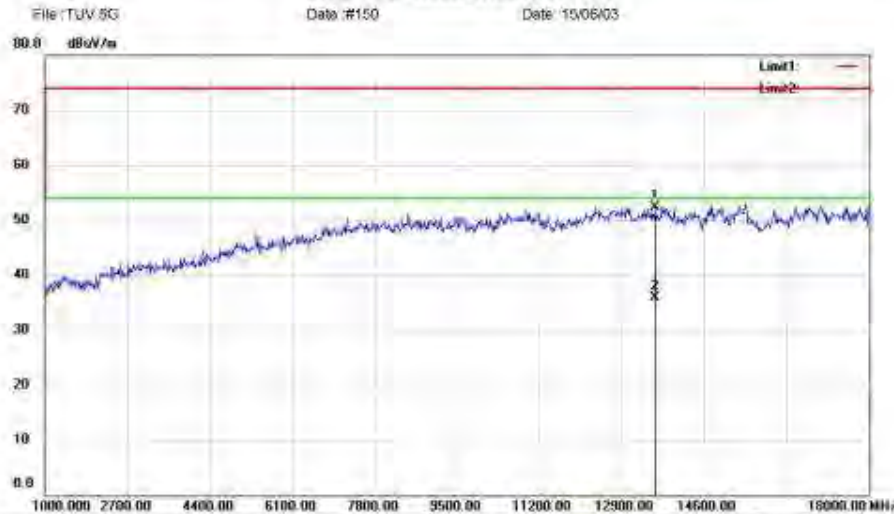

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13580.00	48.43	3.96	52.39	74.00	-21.61	peak		
2	*	13580.00	31.98	3.96	35.94	54.00	-18.06	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data: #150

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

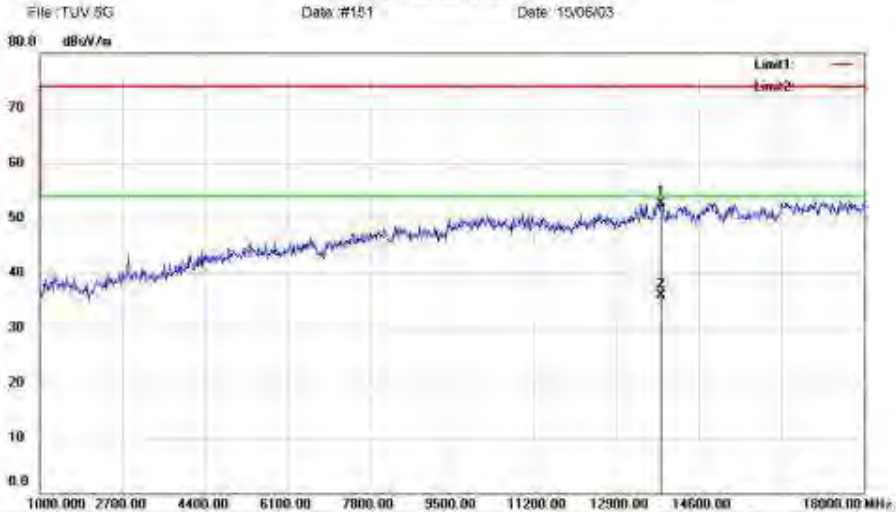

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13818.00	47.80	4.93	52.73	74.00	-21.27	peak		
2	*	13818.00	31.01	4.93	35.94	54.00	-18.06	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#151

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

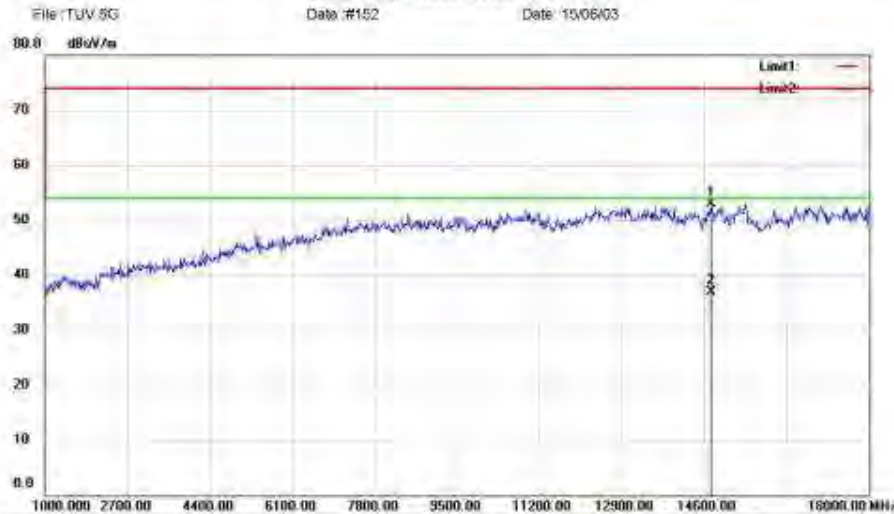

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak		
2	*	14753.00	31.52	5.33	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data :#152

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

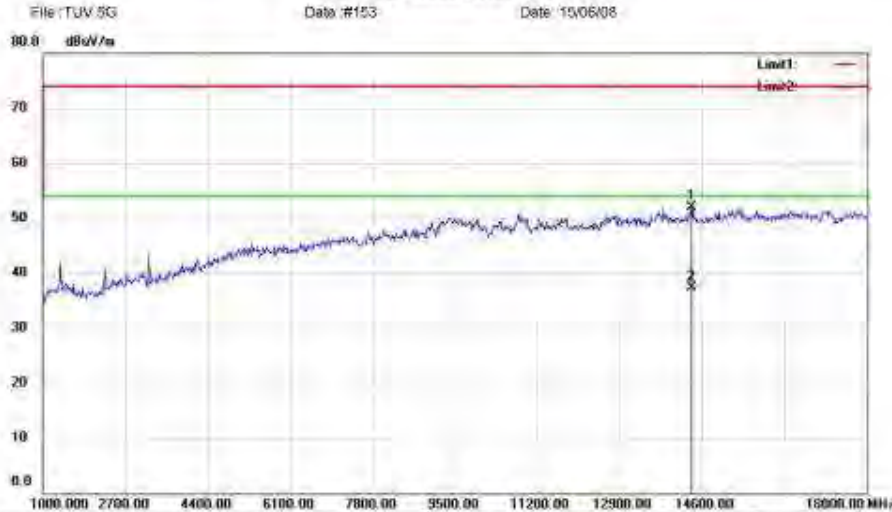

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14379.00	48.63	3.33	51.96	74.00	-22.04	peak		
2	*	14379.00	33.96	3.33	37.29	54.00	-16.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#153

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

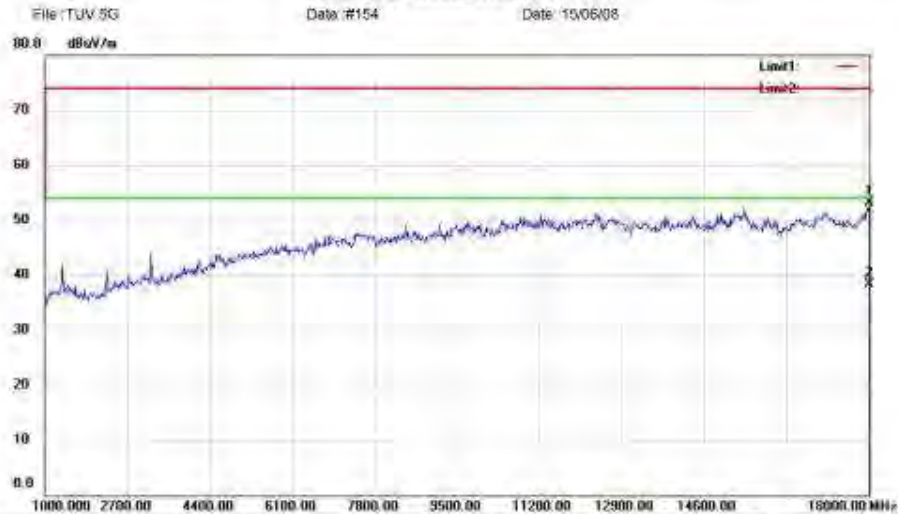

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	37.96	15.12	53.08	74.00	-20.92	peak		
2	*	18000.00	23.12	15.12	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data: #154

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

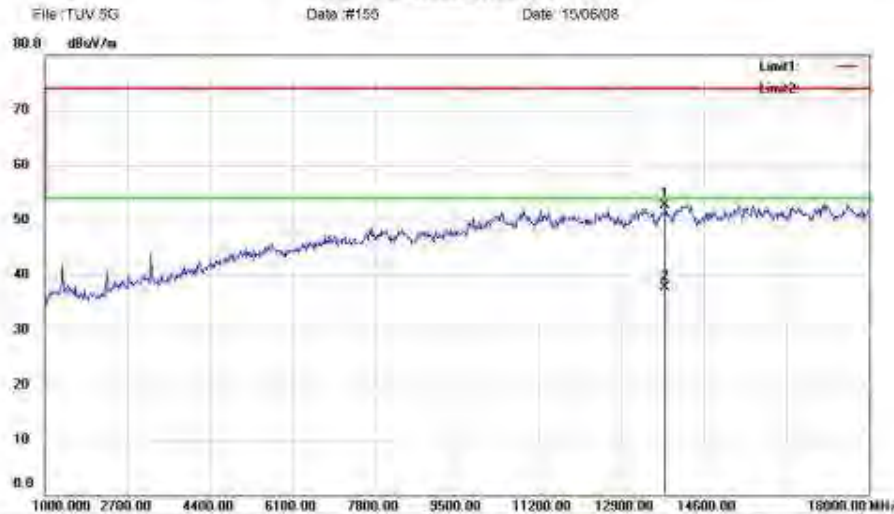

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13801.00	49.77	2.96	52.73	74.00	-21.27	peak		
2	*	13801.00	34.68	2.96	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#155

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

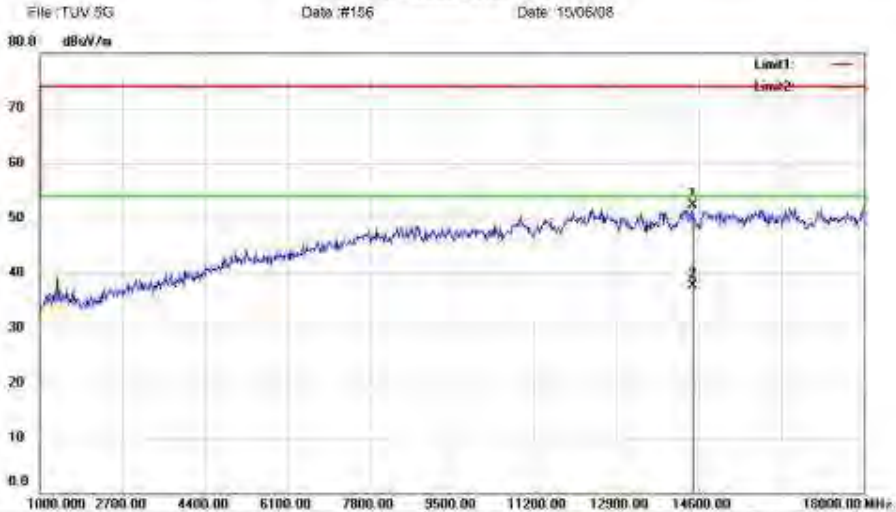

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 20M CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14464.00	49.09	3.21	52.30	74.00	-21.70	peak		
2	*	14464.00	34.47	3.21	37.68	54.00	-16.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#156

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

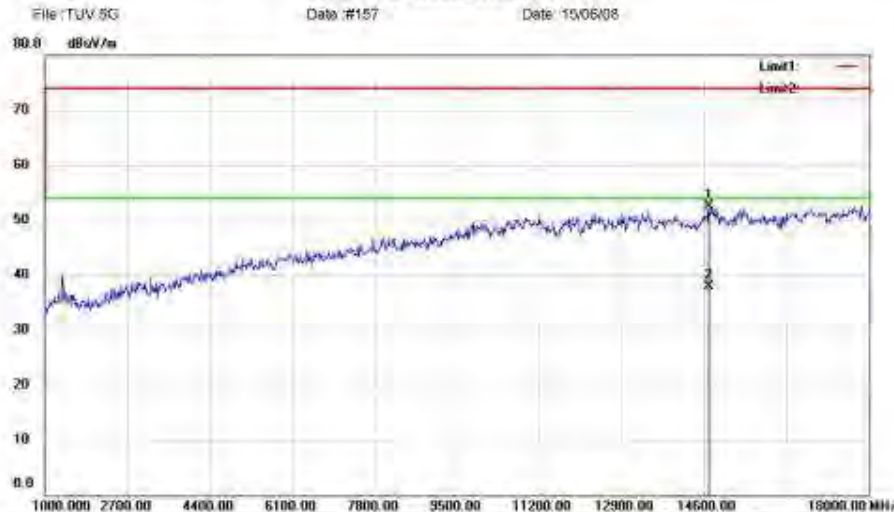

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH46 5230
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14702.00	49.59	2.88	52.47	74.00	-21.53	peak		
2	*	14702.00	34.96	2.88	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin Operator: KK

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

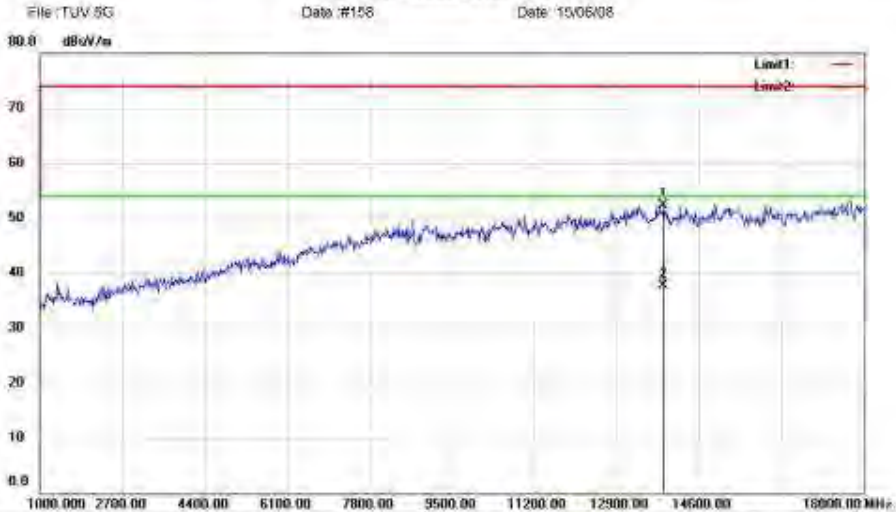

Site: site #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH46 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13869.00	49.09	3.28	52.37	74.00	-21.63	peak		
2	*	13869.00	34.34	3.28	37.62	54.00	-16.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#158

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

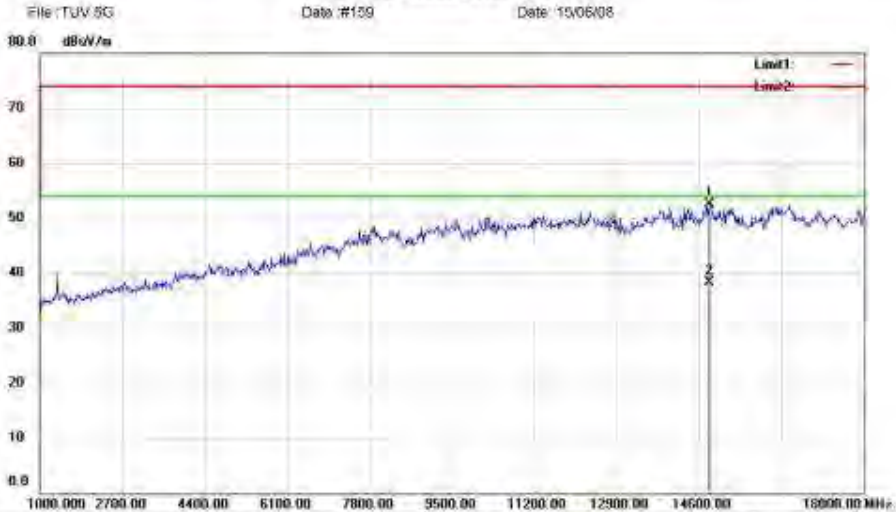

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH151 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14804.00	49.84	2.72	52.56	74.00	-21.44	peak		
2	*	14804.00	35.52	2.72	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#159

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Date: #160

Date: 15/06/08



Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH151 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16844.00	50.37	2.20	52.57	74.00	-21.43	peak		
2	*	16844.00	35.44	2.20	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#160

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

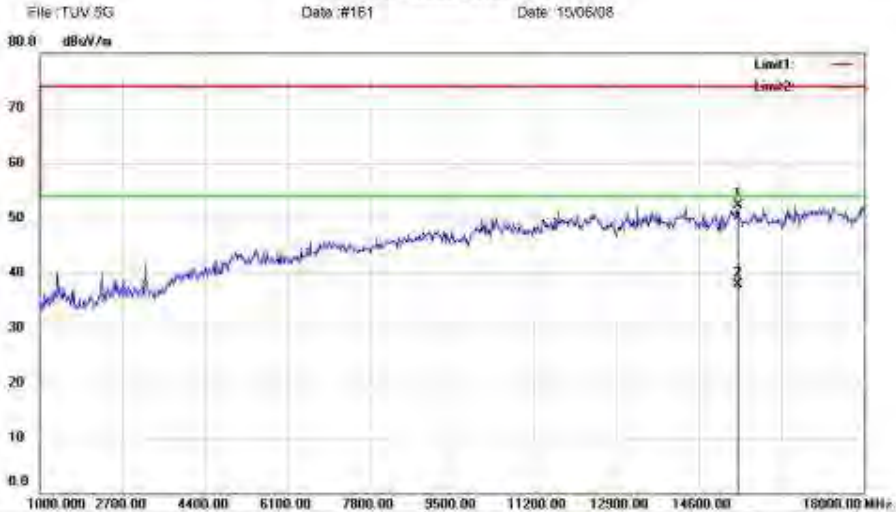

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH159 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15399.00	51.44	0.95	52.39	74.00	-21.61	peak		
2	*	15399.00	36.87	0.95	37.82	54.00	-16.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#161

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

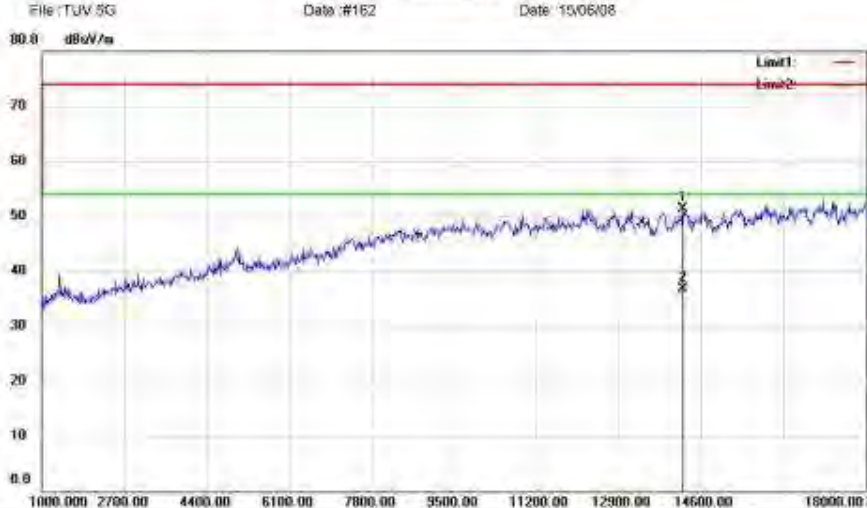


Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N 40M CH159 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14226.00	47.69	3.55	51.24	74.00	-22.76	peak		
2	*	14226.00	33.09	3.55	36.64	54.00	-17.36	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

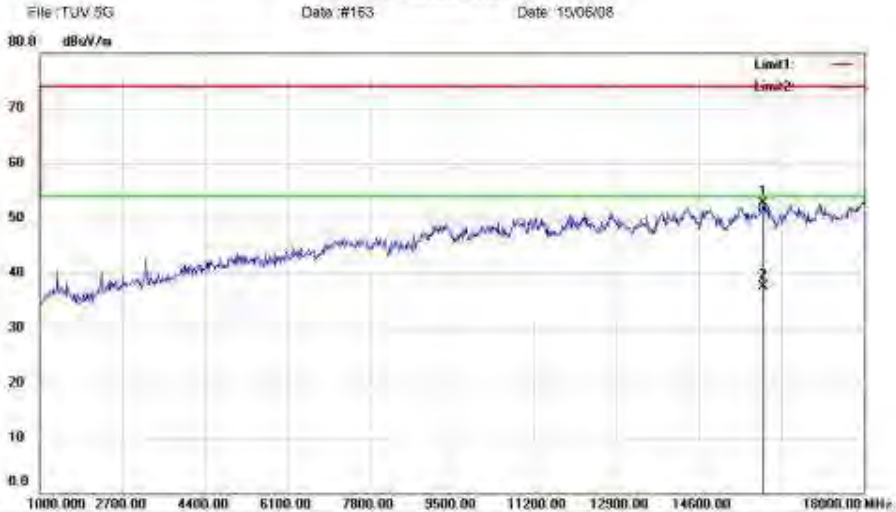

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH44 5220
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15926.00	53.68	-1.03	52.65	74.00	-21.35	peak		
2	*	15926.00	38.57	-1.03	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#163

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

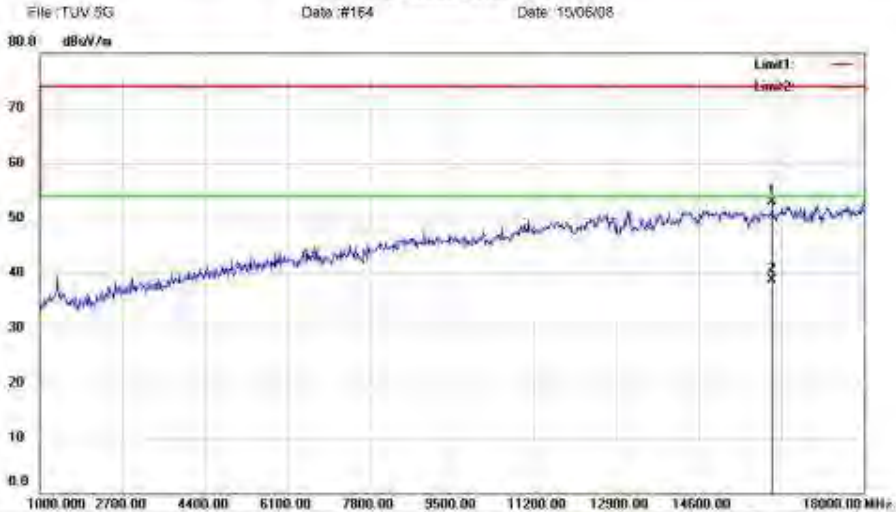

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH44 5220
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16113.00	53.83	-0.83	53.00	74.00	-21.00	peak		
2	*	16113.00	39.45	-0.83	38.62	54.00	-15.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data #164

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

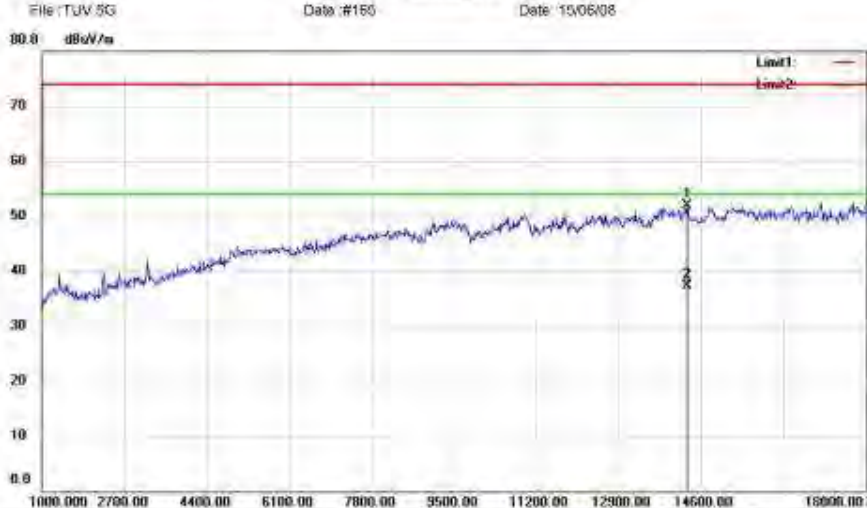


Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	48.53	3.43	51.96	74.00	-22.04	peak		
2	*	14311.00	33.81	3.43	37.24	54.00	-16.76	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

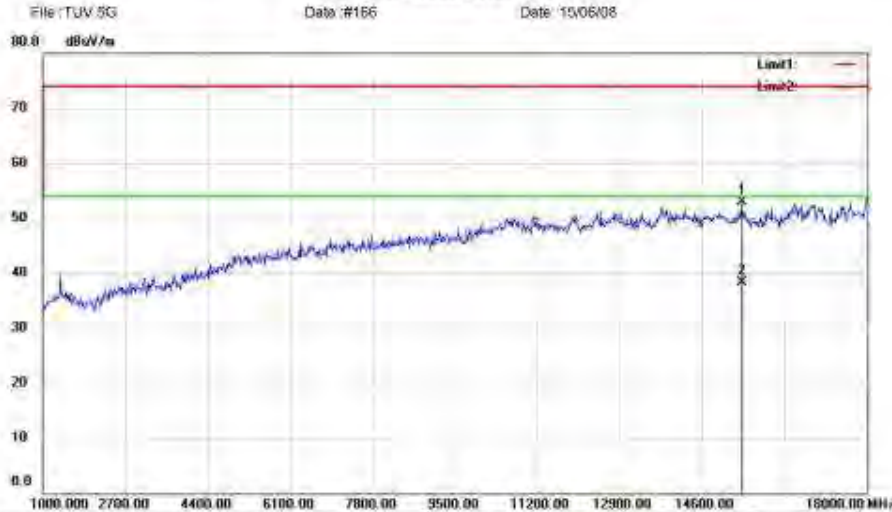

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH48 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15416.00	51.99	0.89	52.88	74.00	-21.12	peak		
2	*	15416.00	37.45	0.89	38.34	54.00	-15.66	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#166

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

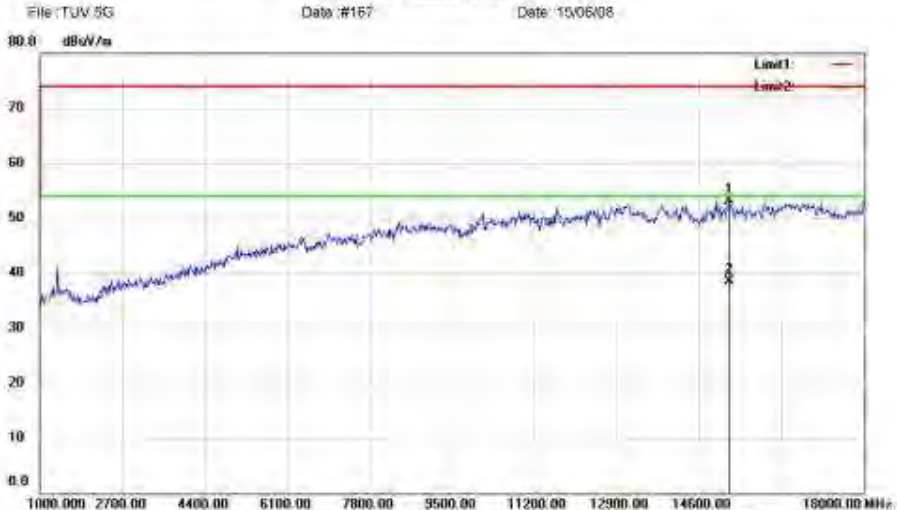

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15229.00	51.61	1.59	53.20	74.00	-20.80	peak		
2	*	15229.00	36.83	1.59	38.42	54.00	-15.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G\Data_#167

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

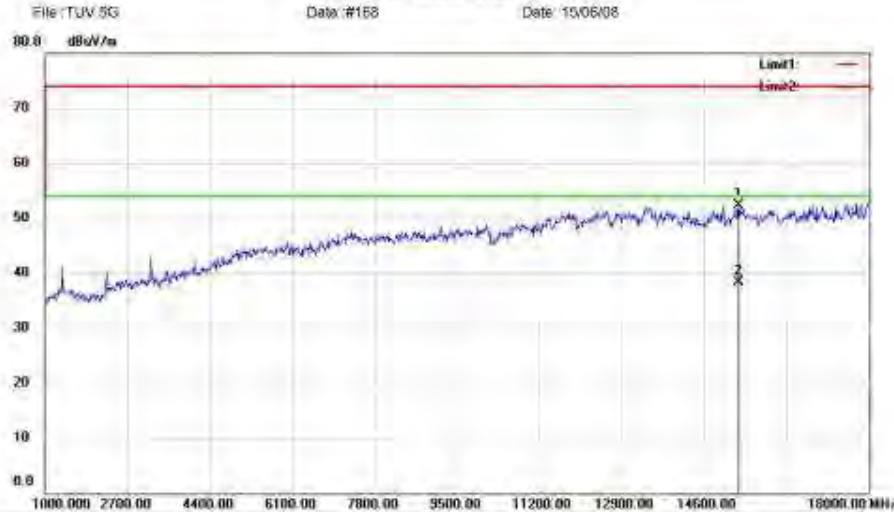

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH149 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15314.00	50.96	1.27	52.23	74.00	-21.77	peak		
2	*	15314.00	36.94	1.27	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#168

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

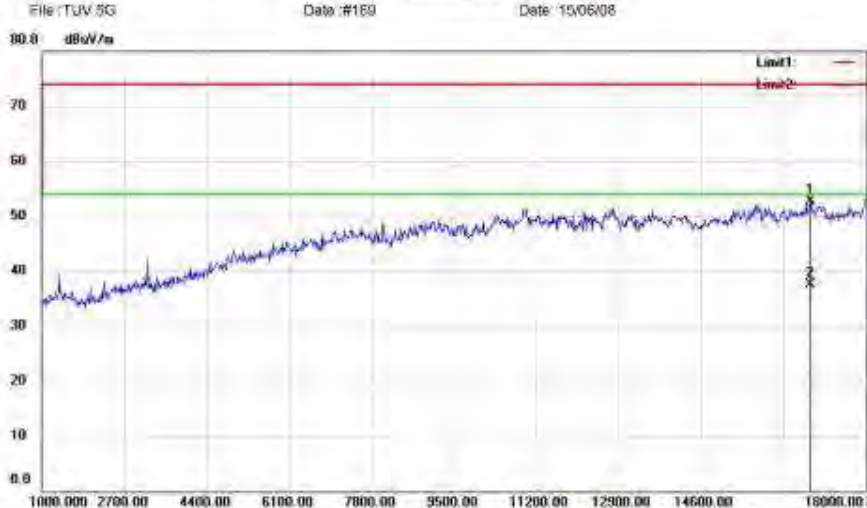


Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16844.00	50.42	2.20	52.62	74.00	-21.38	peak		
2	*	16844.00	35.32	2.20	37.52	54.00	-16.48	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

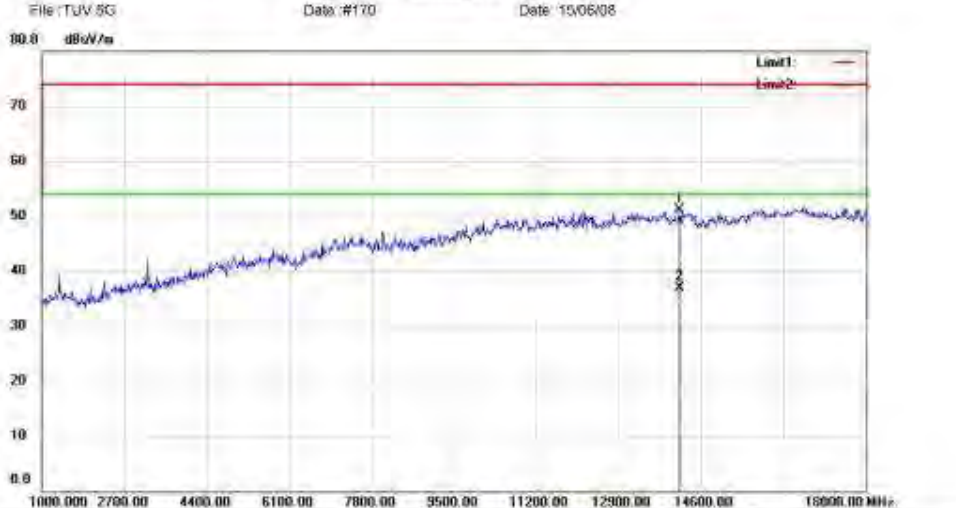


Site: site #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH157 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14158.00	47.37	3.65	51.02	74.00	-22.98	peak		
2	*	14158.00	33.19	3.65	36.84	54.00	-17.16	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

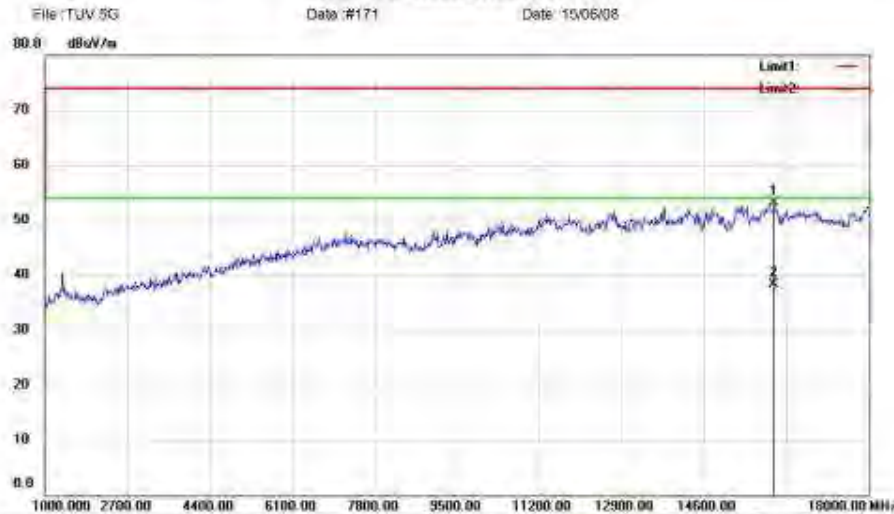

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16045.00	54.30	-1.11	53.19	74.00	-20.81	peak		
2	*	16045.00	39.34	-1.11	38.23	54.00	-15.77	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#171

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

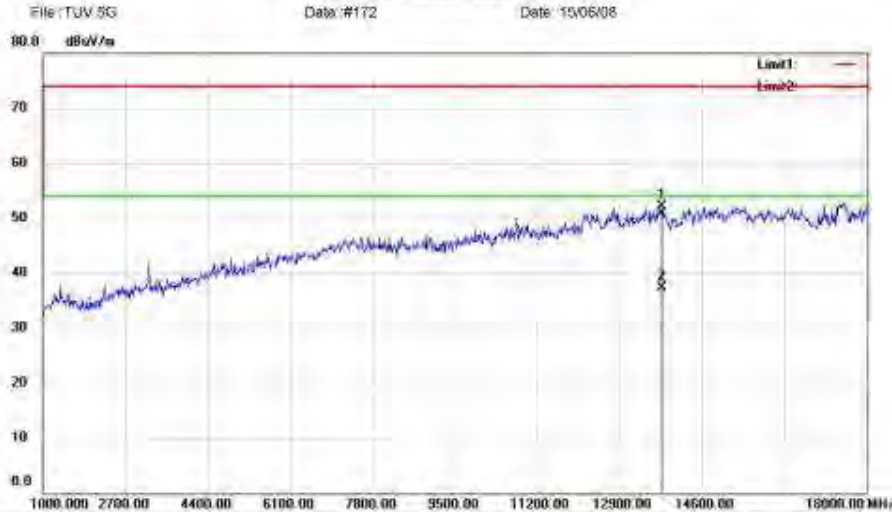

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 20M CH165 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13767.00	49.24	2.80	52.04	74.00	-21.96	peak		
2	*	13767.00	34.41	2.80	37.21	54.00	-16.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#172

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

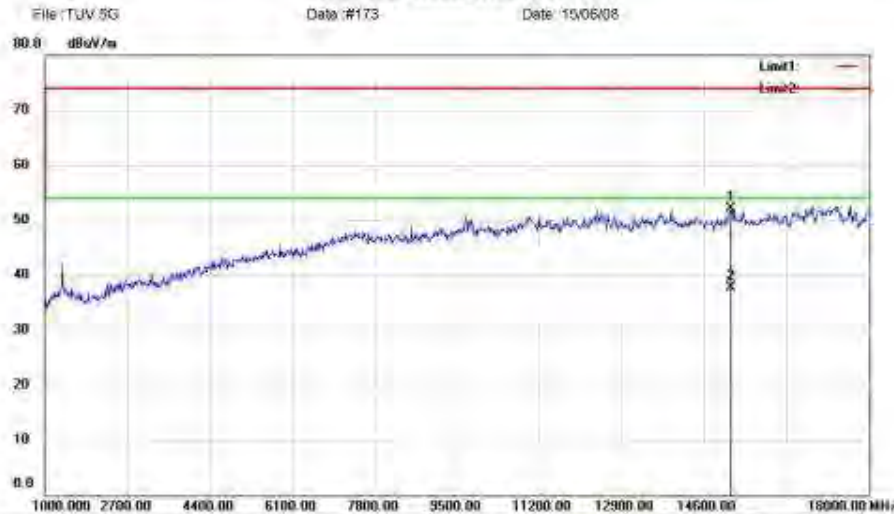

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH46 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15161.00	50.28	1.85	52.13	74.00	-21.87	peak		
2	*	15161.00	35.79	1.85	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#173

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement



Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH46 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15926.00	54.21	-1.03	53.18	74.00	-20.82	peak		
2	*	15926.00	39.37	-1.03	38.34	54.00	-15.66	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#174

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

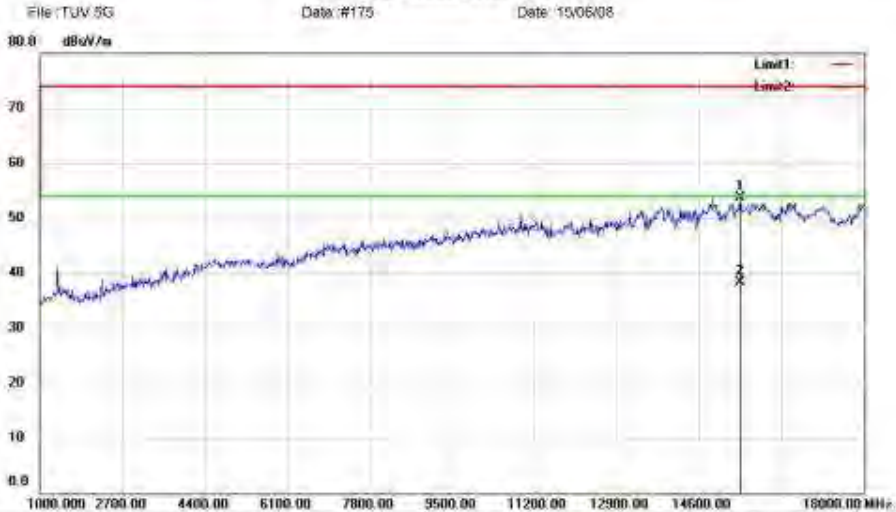

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH151 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15450.00	52.90	0.75	53.65	74.00	-20.35	peak		
2	*	15450.00	37.49	0.75	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#175

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

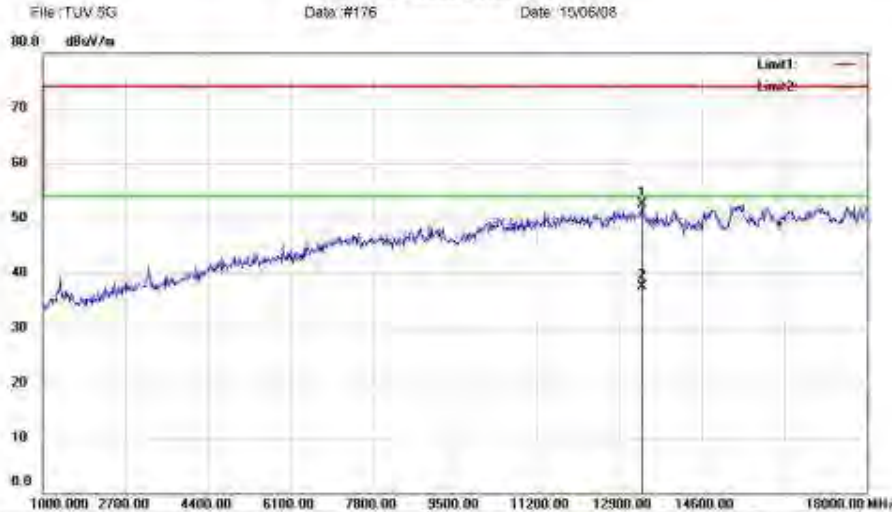

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH151 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13359.00	51.48	0.96	52.44	74.00	-21.56	peak		
2	*	13359.00	36.62	0.96	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#176

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone Nanshan District Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

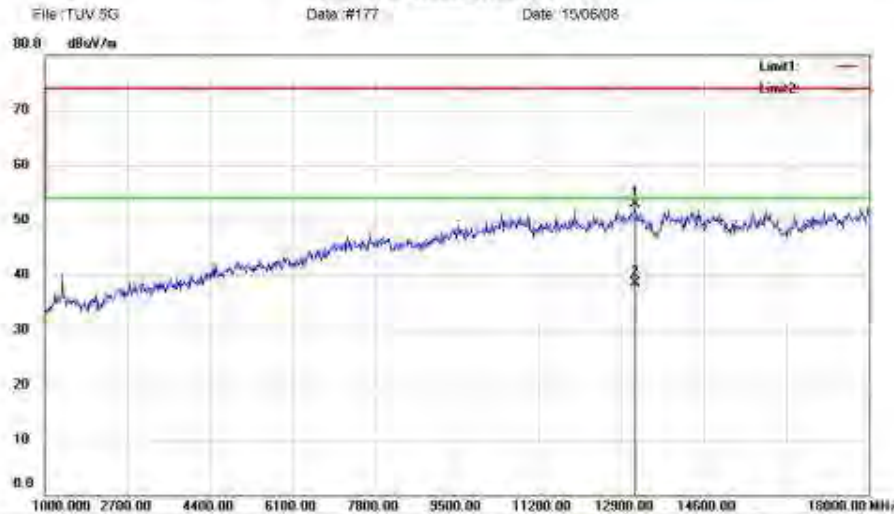

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH159 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13172.00	52.72	0.12	52.84	74.00	-21.16	peak		
2	*	13172.00	38.29	0.12	38.41	54.00	-15.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#177

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Date: #178

Date: 15/06/08



Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 40M CH159 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16895.00	50.57	2.41	52.98	74.00	-21.02	peak		
2	*	16895.00	35.43	2.41	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G\Data_#178

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

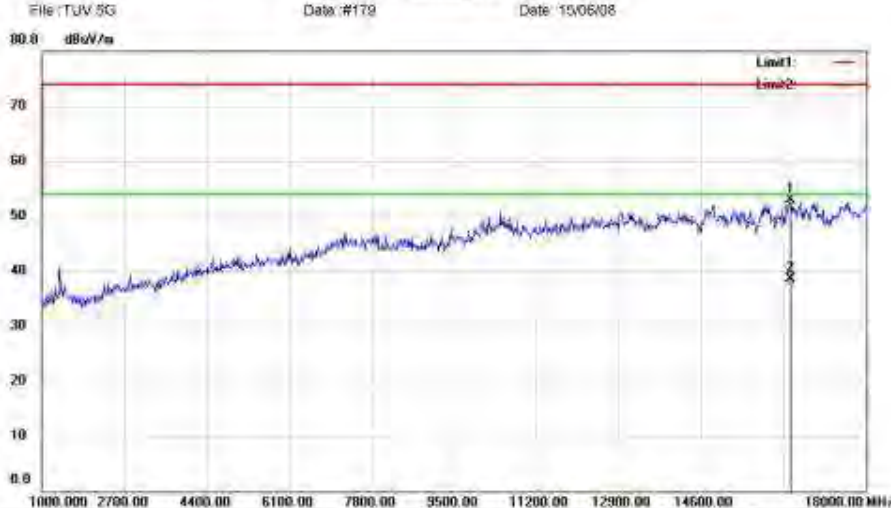


Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 80M CH155 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16453.00	52.43	0.57	53.00	74.00	-21.00	peak		
2	*	16453.00	37.97	0.57	38.54	54.00	-15.46	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

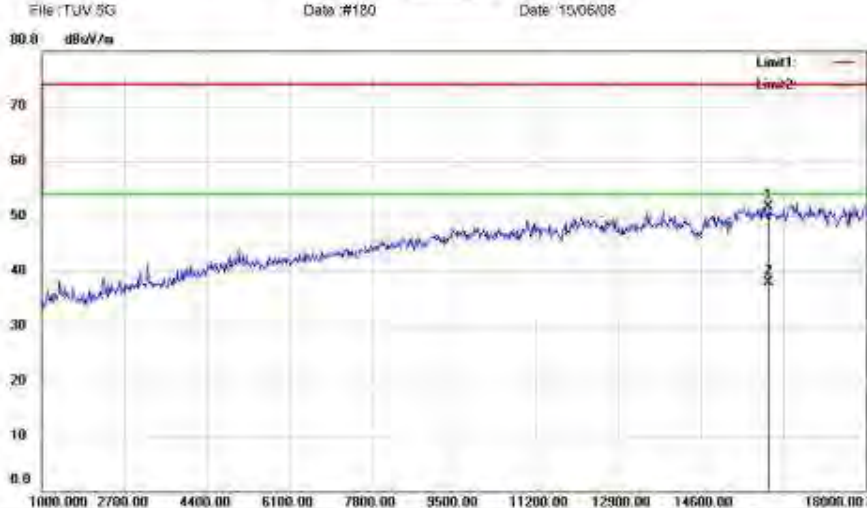

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC 80M CH155 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15994.00	52.90	-1.28	51.62	74.00	-22.38	peak		
2	*	15994.00	39.23	-1.28	37.95	54.00	-16.05	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #301

Date: 15/06/11

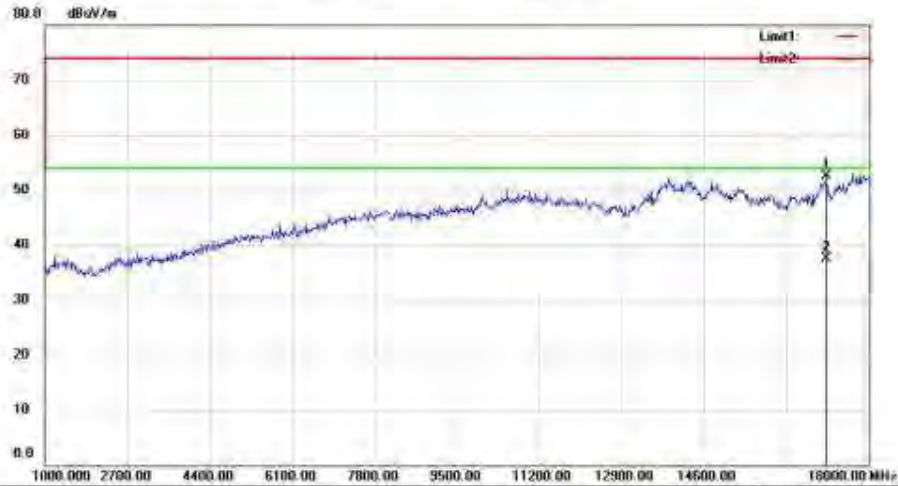

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.46	-3.91	52.55	74.00	-21.45	peak		
2	*	17133.00	41.33	-3.91	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #301

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

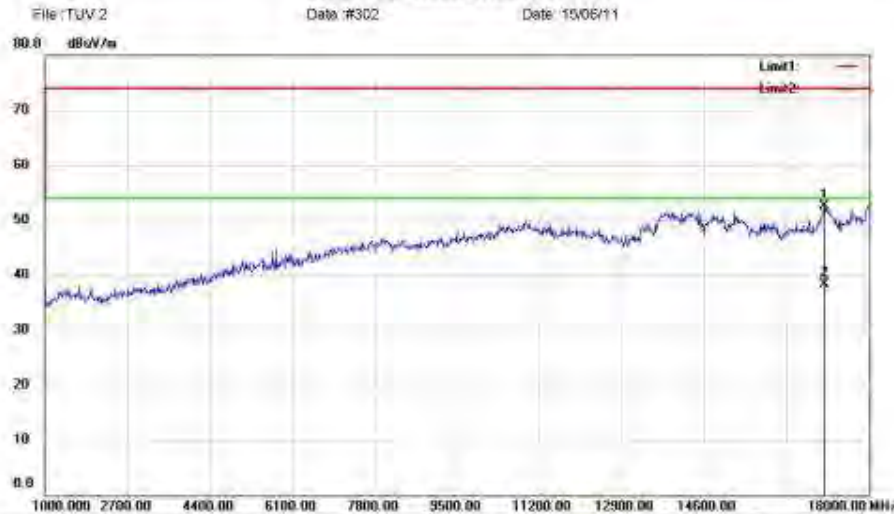

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.91	-4.31	52.60	74.00	-21.40	peak		
2	*	17082.00	42.57	-4.31	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #302

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

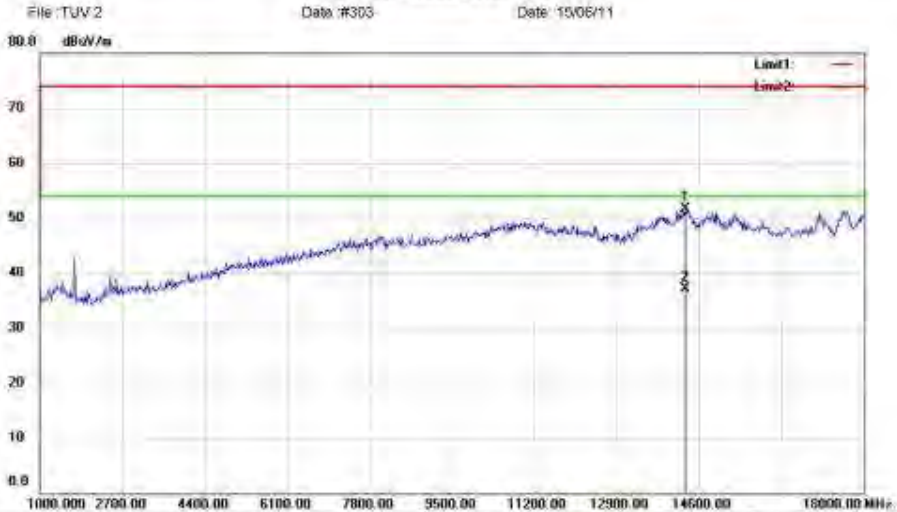

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5220 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	57.53	-5.78	51.75	74.00	-22.25	peak		
2	*	14311.00	42.94	-5.78	37.16	54.00	-16.84	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #303

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone Nanshan District Shenzhen Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #304

Date: 15/06/11

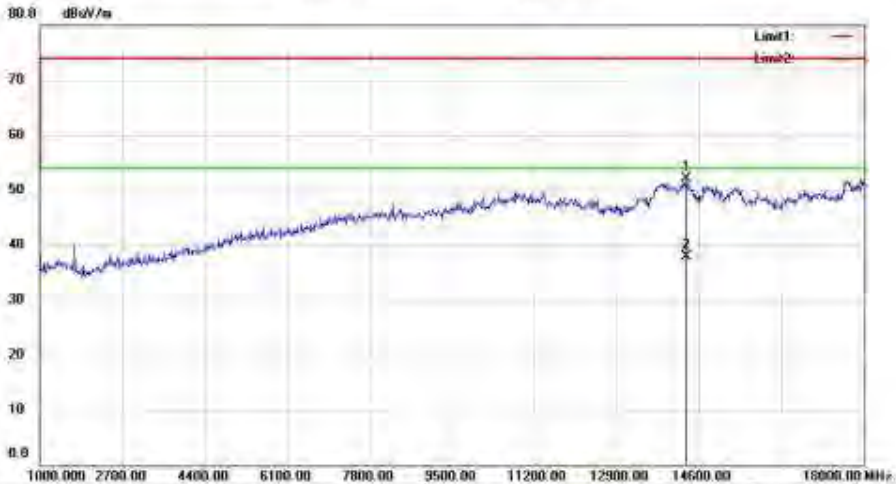

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5220 Ant1
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	57.96	-5.81	52.15	74.00	-21.85	peak		
2	*	14328.00	43.67	-5.81	37.86	54.00	-16.14	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #304

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

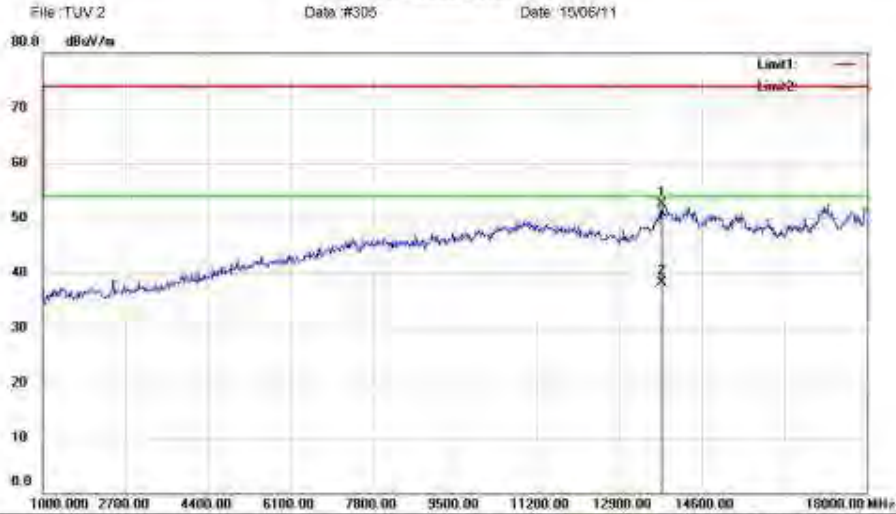

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		13767.00	58.84	-6.42	52.42	74.00	-21.58	peak		
2	*	13767.00	44.66	-6.42	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #305

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieLong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

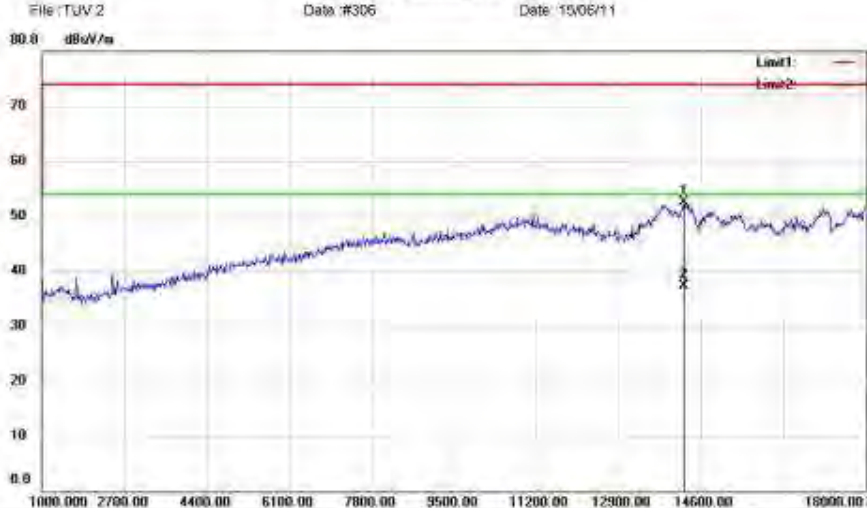

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14243.00	58.23	-5.68	52.55	74.00	-21.45	peak		
2	*	14243.00	42.94	-5.68	37.26	54.00	-16.74	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #307

Date: 15/06/11

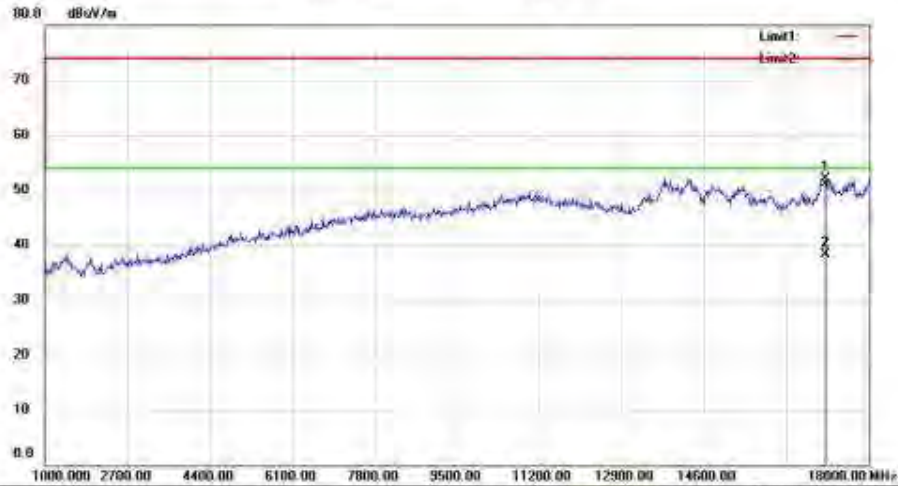

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	56.30	-4.19	52.11	74.00	-21.89	peak		
2	*	17099.00	42.44	-4.19	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #307

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement



Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.28	-3.91	52.37	74.00	-21.63	peak		
2	*	17133.00	41.67	-3.91	37.76	54.00	-16.24	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #308

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #309

Date: 15/06/11

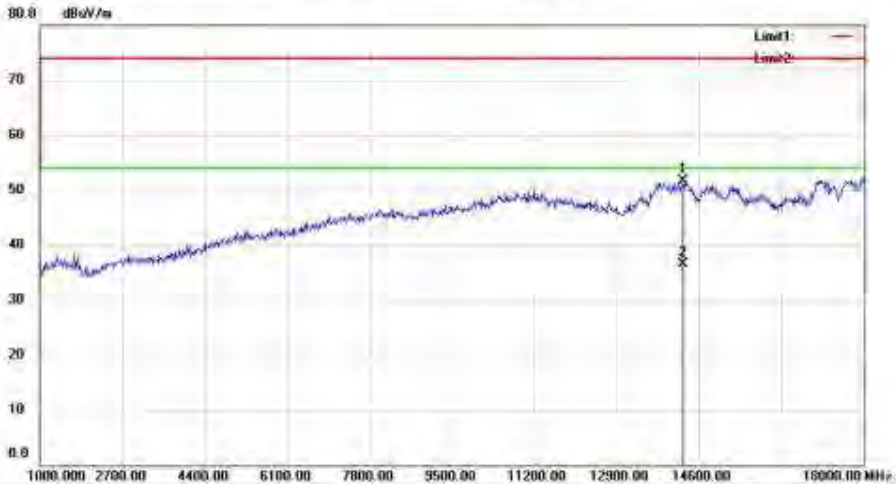

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5785 Ant1
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	57.34	-5.73	51.61	74.00	-22.39	peak		
2	*	14277.00	42.32	-5.73	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #309

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

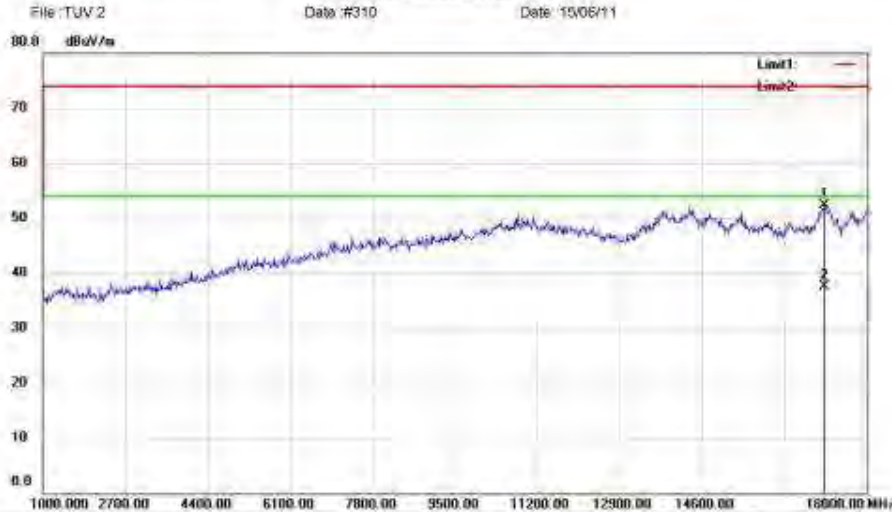

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5785 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.17	-3.91	52.26	74.00	-21.74	peak		
2	*	17133.00	41.50	-3.91	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #310

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District Shenzhen Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

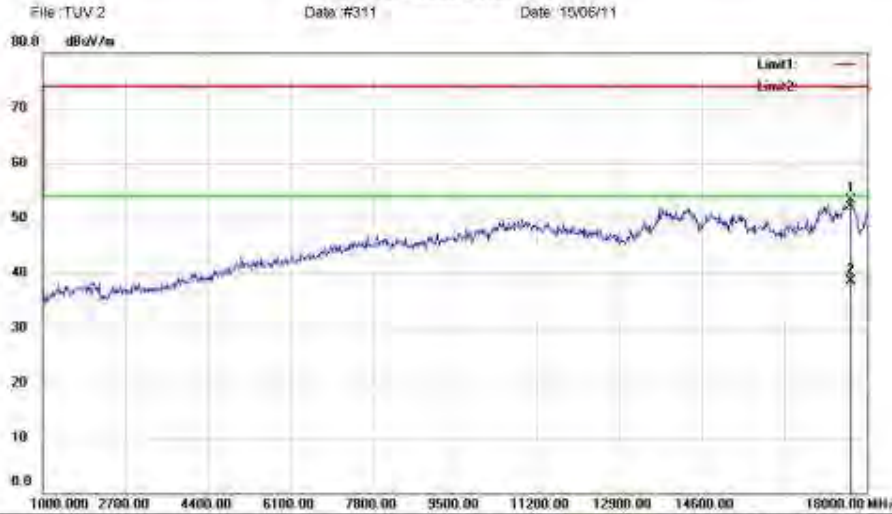

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17660.00	53.11	0.24	53.35	74.00	-20.65	peak		
2	*	17660.00	38.28	0.24	38.52	54.00	-15.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #311

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

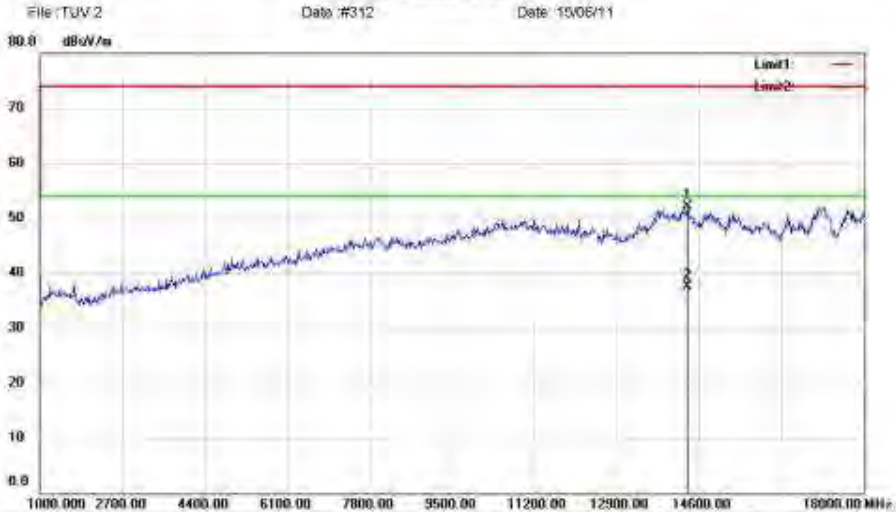

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Table	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14362.00	57.99	-5.86	52.13	74.00	-21.87	peak		
2	*	14362.00	43.45	-5.86	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #312

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

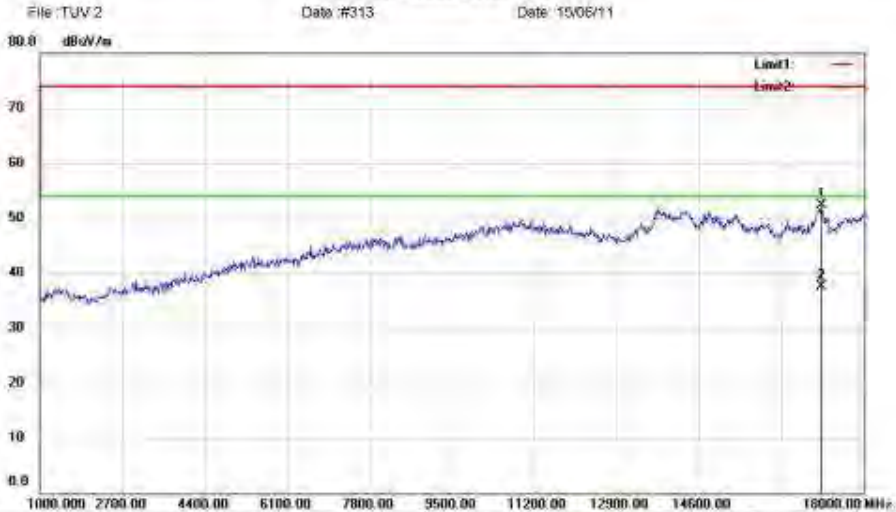

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	56.35	-4.04	52.31	74.00	-21.69	peak		
2	*	17116.00	41.63	-4.04	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #313

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #314

Date: 15/06/11



Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5180 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17150.00	56.02	-3.79	52.23	74.00	-21.77	peak		
2	*	17150.00	42.05	-3.79	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #314

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

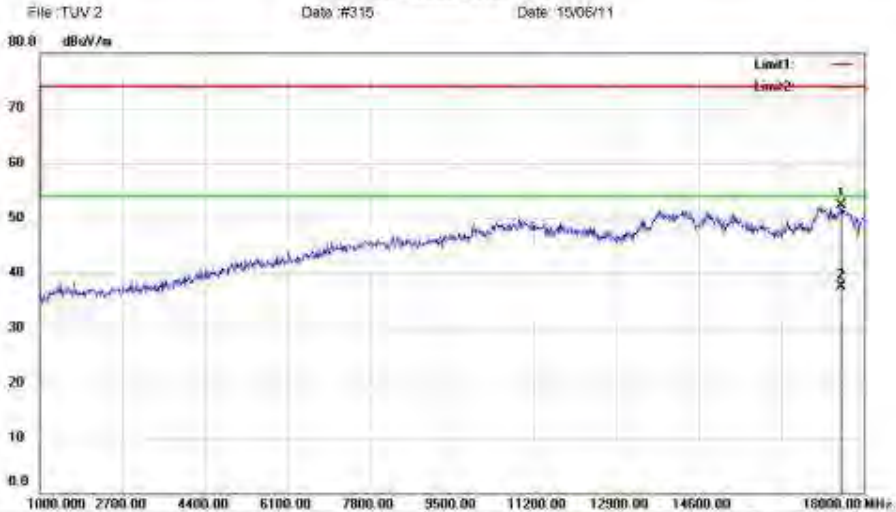

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5220 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
				dB	dBuV/m			cm	degree	
1		17541.00	53.08	-0.71	52.37	74.00	-21.63	peak		
2	*	17541.00	38.23	-0.71	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #315

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #316

Date: 15/06/11

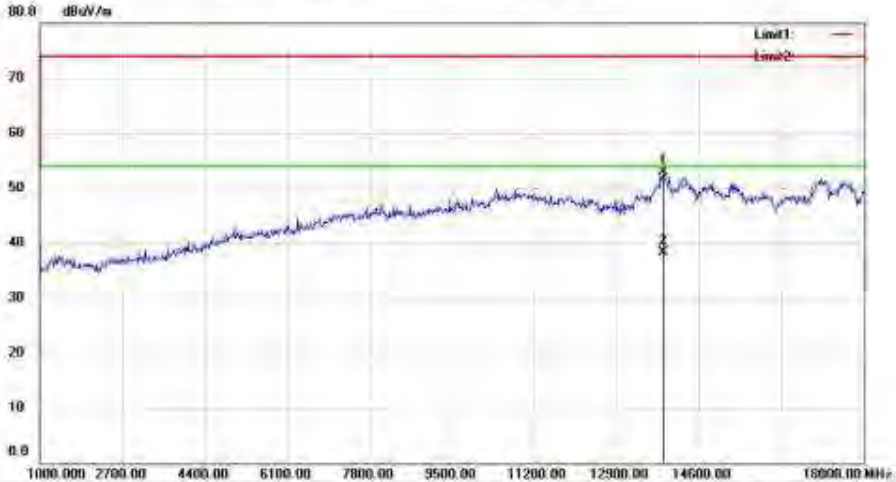

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5220 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13869.00	58.75	-5.93	52.82	74.00	-21.18	peak		
2	*	13869.00	44.19	-5.93	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #316

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

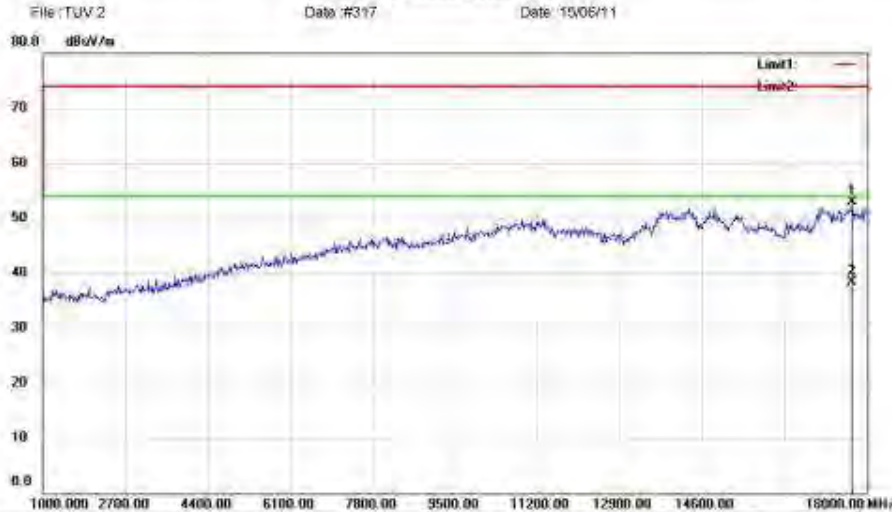

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17694.00	52.47	0.51	52.98	74.00	-21.02	peak		
2	*	17694.00	37.70	0.51	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #317

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

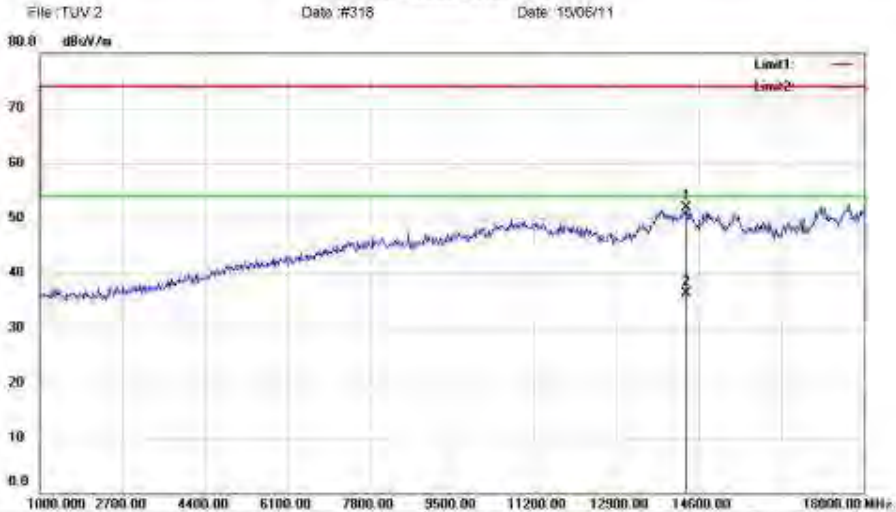

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	57.74	-5.81	51.93	74.00	-22.07	peak		
2	*	14328.00	42.10	-5.81	36.29	54.00	-17.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #318

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #319

Date: 15/06/11

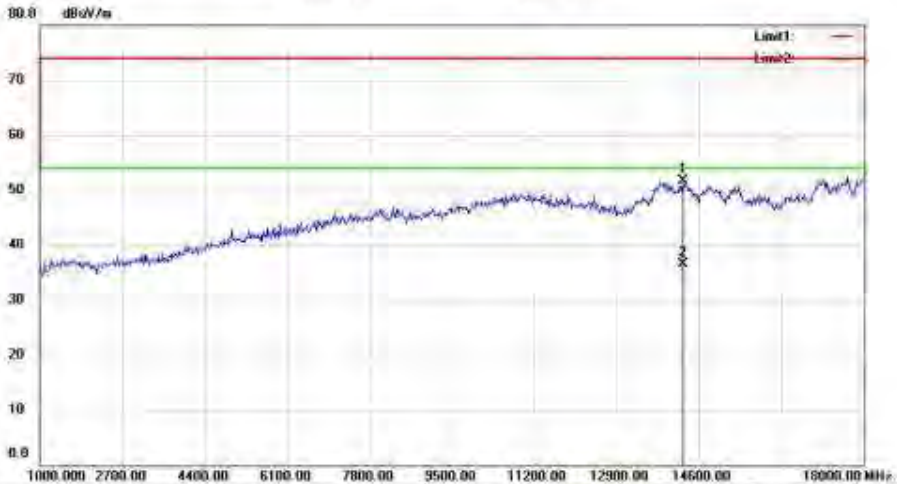

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5745 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		14277.00	57.48	-5.73	51.75	74.00	-22.25	peak	
2	*	14277.00	42.32	-5.73	36.59	54.00	-17.41	AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #319

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #320

Date: 15/06/11

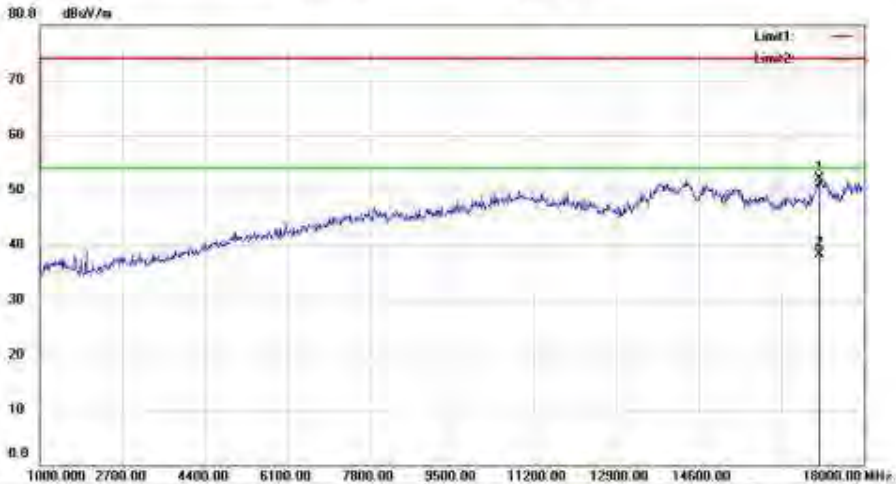

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.48	-4.31	52.17	74.00	-21.83	peak		
2	*	17082.00	42.57	-4.31	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #320

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #321

Date: 15/06/11

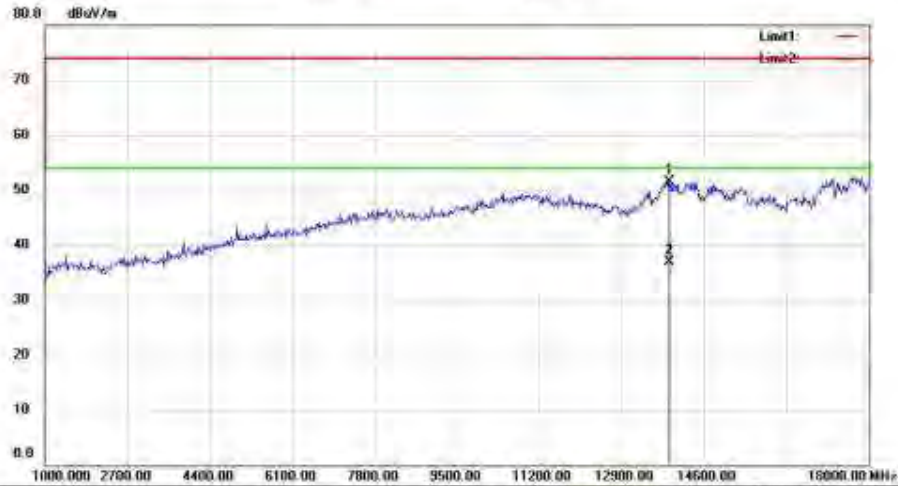

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5785 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13886.00	57.41	-5.85	51.56	74.00	-22.44	peak		
2	*	13886.00	42.74	-5.85	36.89	54.00	-17.11	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #321

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

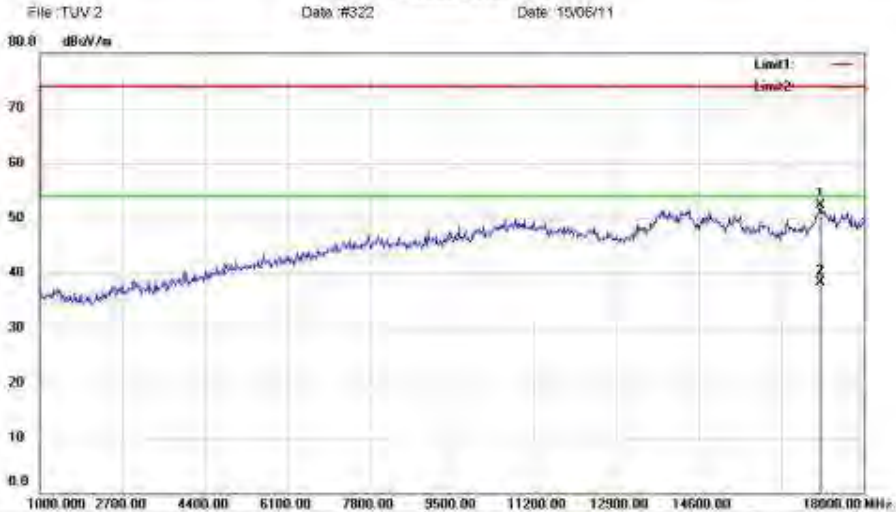

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5785 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	56.40	-4.19	52.21	74.00	-21.79	peak		
2	*	17099.00	42.45	-4.19	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #322

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #323

Date: 15/06/11

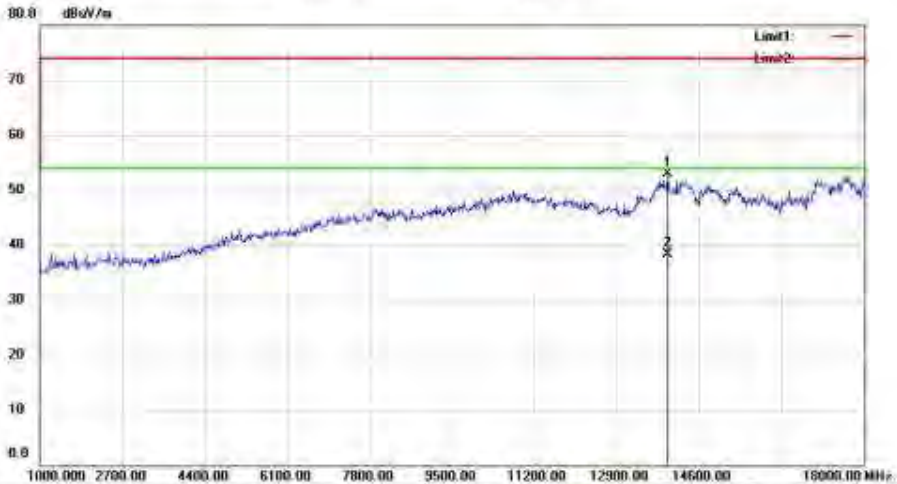

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13954.00	58.48	-5.52	52.96	74.00	-21.04	peak		
2	*	13954.00	43.78	-5.52	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #323

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

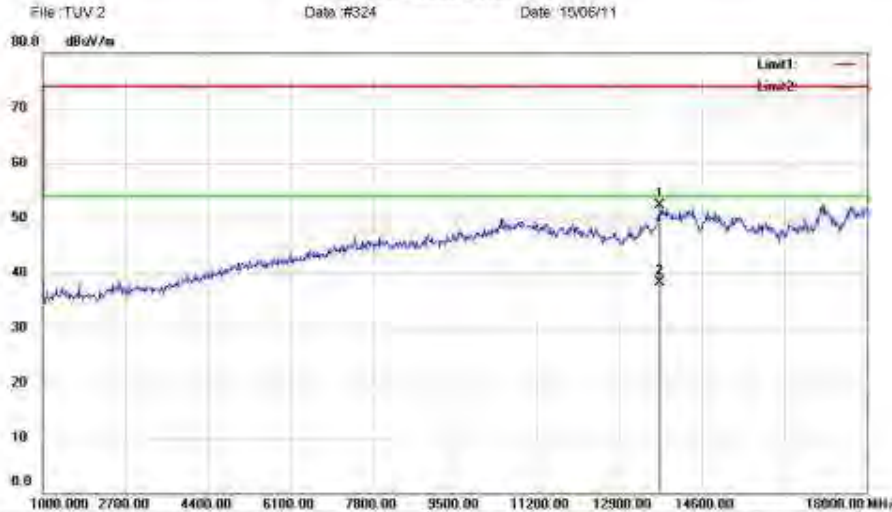

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		13733.00	58.83	-6.57	52.26	74.00	-21.74	peak		
2	*	13733.00	44.83	-6.57	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #324

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

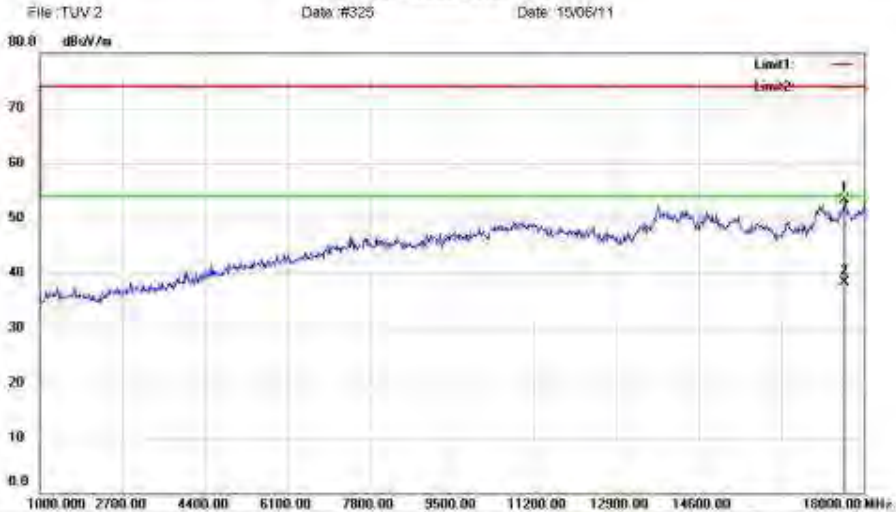

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17609.00	53.38	-0.16	53.22	74.00	-20.78	peak		
2	*	17609.00	38.45	-0.16	38.29	54.00	-15.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #325

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #326

Date: 15/06/11

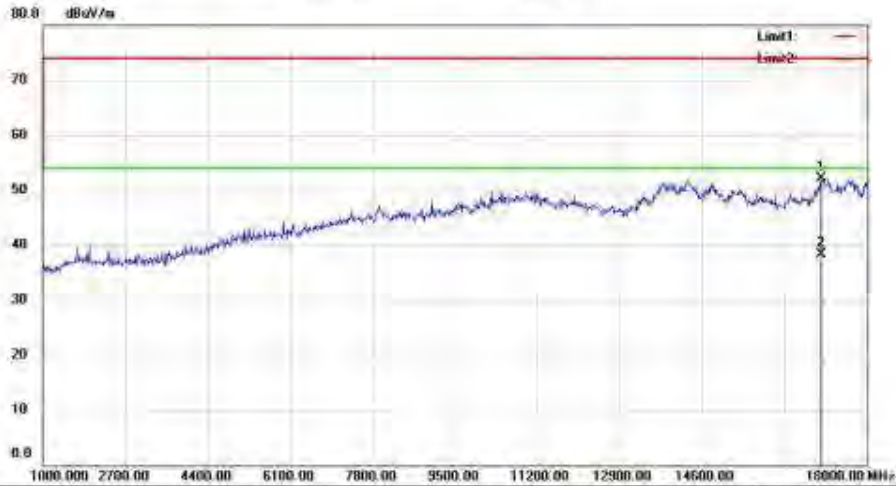

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5190 Ant1
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17065.00	56.62	-4.44	52.18	74.00	-21.82	peak		
2	*	17065.00	42.68	-4.44	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2/Data: #326

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #327

Date: 15/06/11

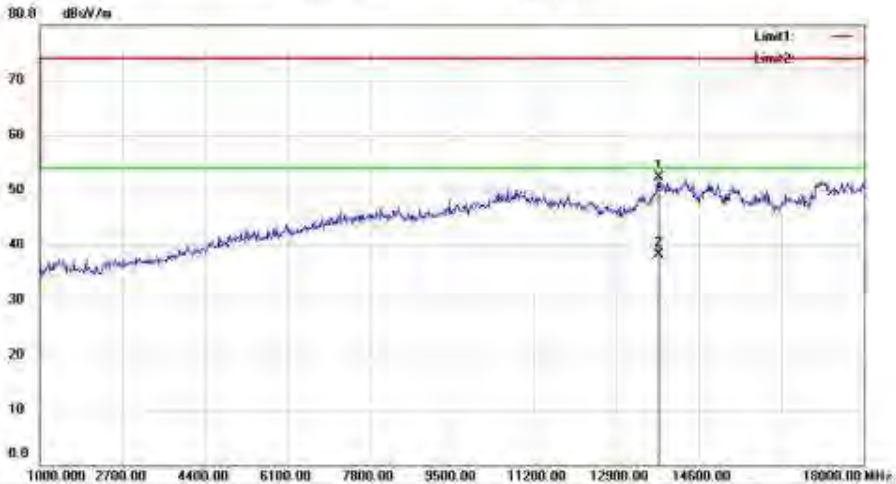

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5230 Ant1
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13767.00	58.82	-6.42	52.40	74.00	-21.60	peak		
2	*	13767.00	44.68	-6.42	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #327

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

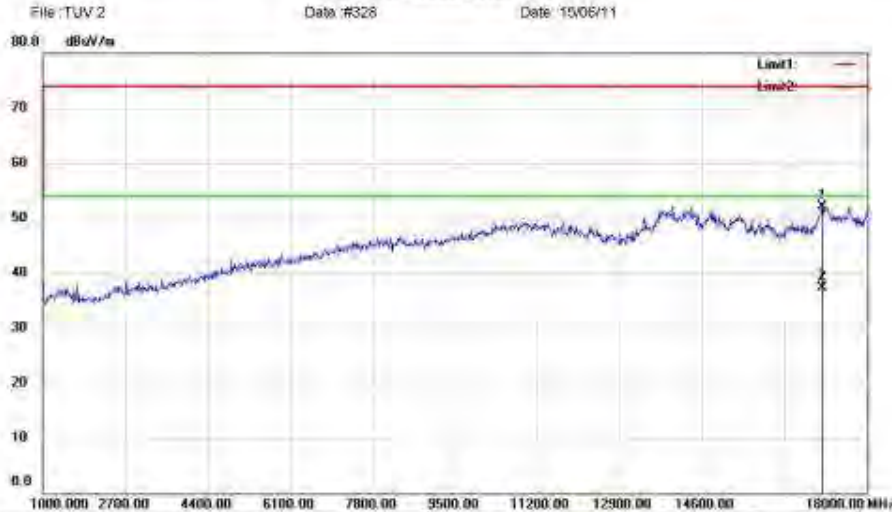

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.39	-4.31	52.08	74.00	-21.92	peak		
2	*	17082.00	41.60	-4.31	37.29	54.00	-16.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #328

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #329

Date: 15/06/11

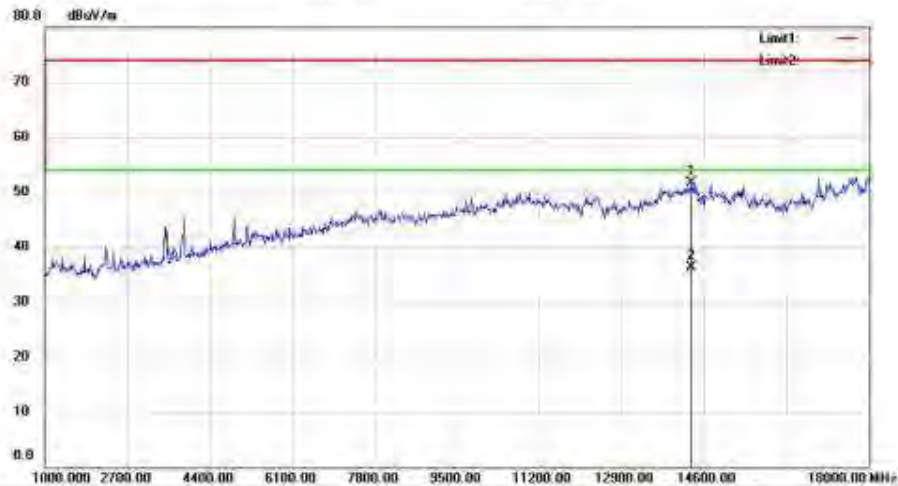

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5755 Ant1
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14345.00	57.46	-5.84	51.62	74.00	-22.38	peak		
2	*	14345.00	42.08	-5.84	36.24	54.00	-17.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2/Data: #329

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

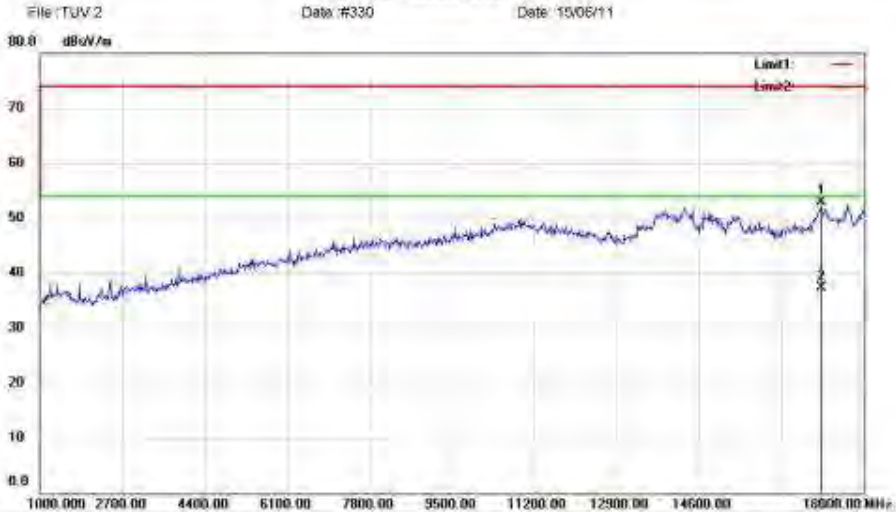

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	57.03	-4.04	52.99	74.00	-21.01	peak		
2	*	17116.00	41.32	-4.04	37.28	54.00	-16.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data #330

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #331

Date: 15/06/11

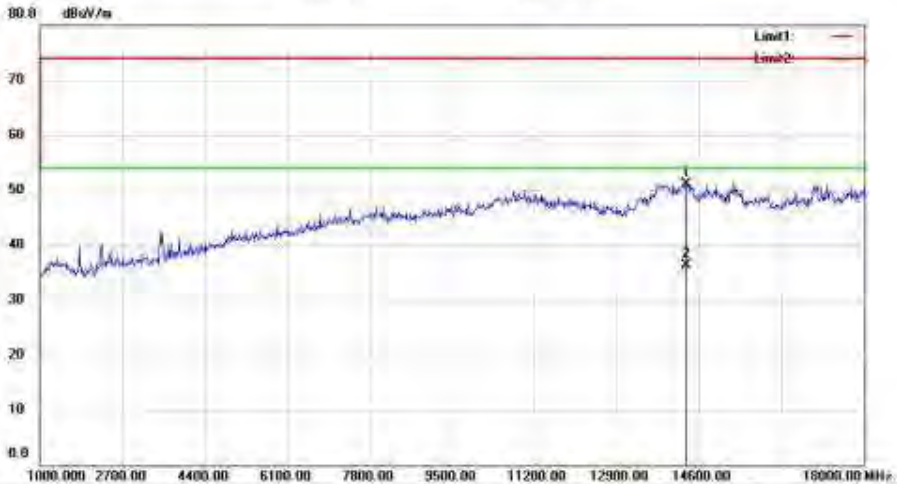

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5795 Ant1
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	56.96	-5.81	51.15	74.00	-22.85	peak		
2	*	14328.00	42.02	-5.81	36.21	54.00	-17.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #331

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

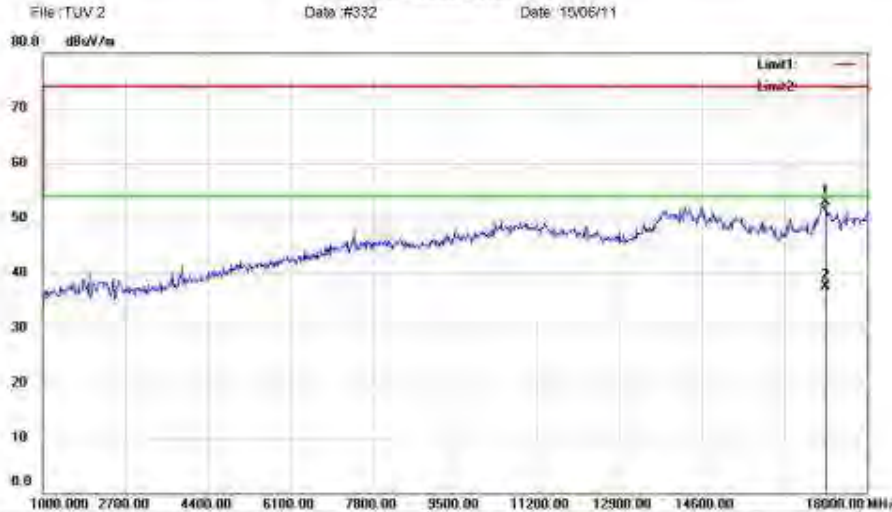

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5795 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17150.00	56.62	-3.79	52.83	74.00	-21.17	peak		
2	*	17150.00	41.33	-3.79	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #332

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #333

Date: 15/06/11



Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5190 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17507.00	53.90	-0.96	52.94	74.00	-21.06	peak		
2	*	17507.00	39.22	-0.96	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2\Data_#333

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

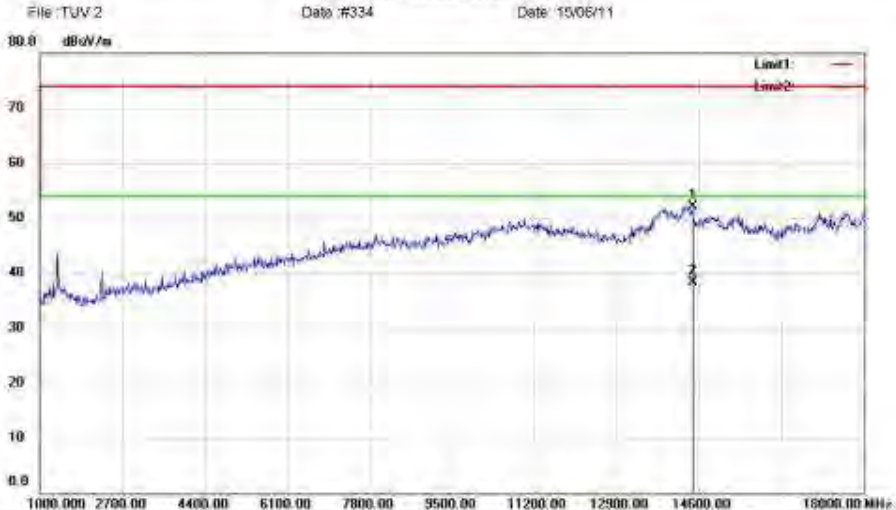

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14464.00	58.18	-6.02	52.16	74.00	-21.84	peak		
2	*	14464.00	44.27	-6.02	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data #334

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

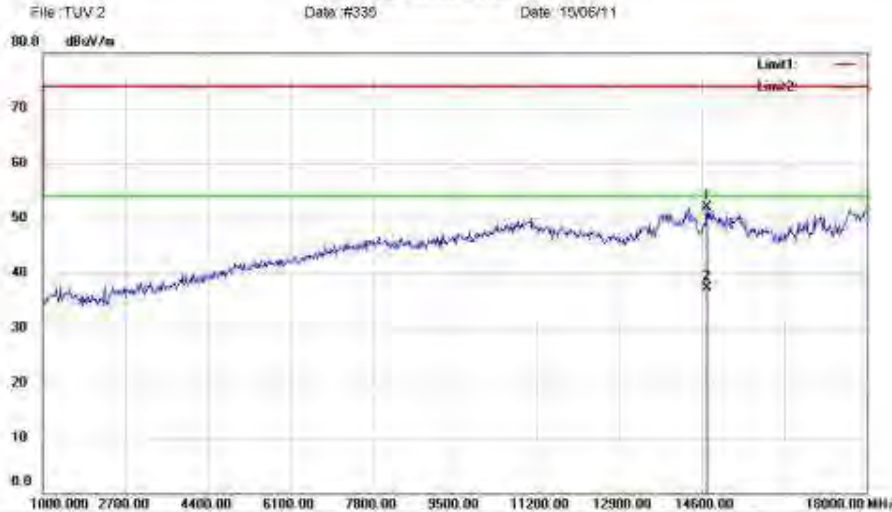

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14702.00	58.21	-6.39	51.82	74.00	-22.18	peak		
2	*	14702.00	43.65	-6.39	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2/Data: #335

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

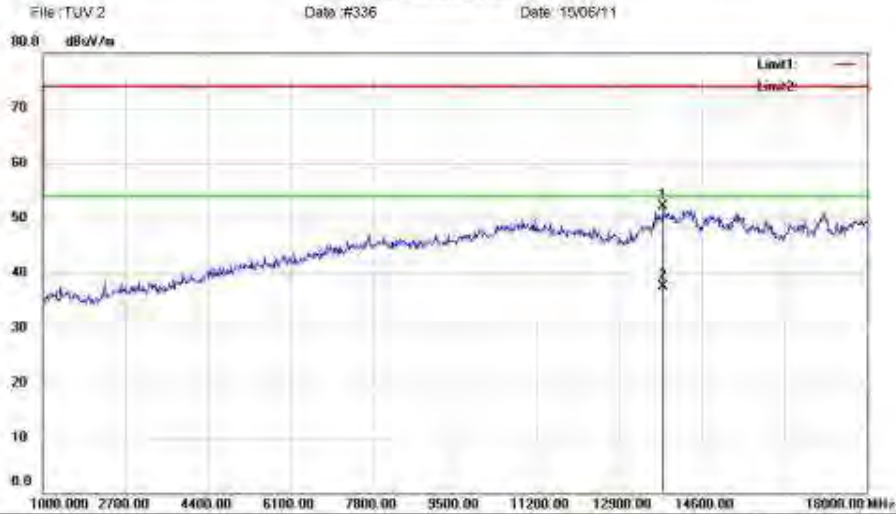

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13801.00	58.31	-6.26	52.05	74.00	-21.95	peak		
2	*	13801.00	43.85	-6.26	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #336

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

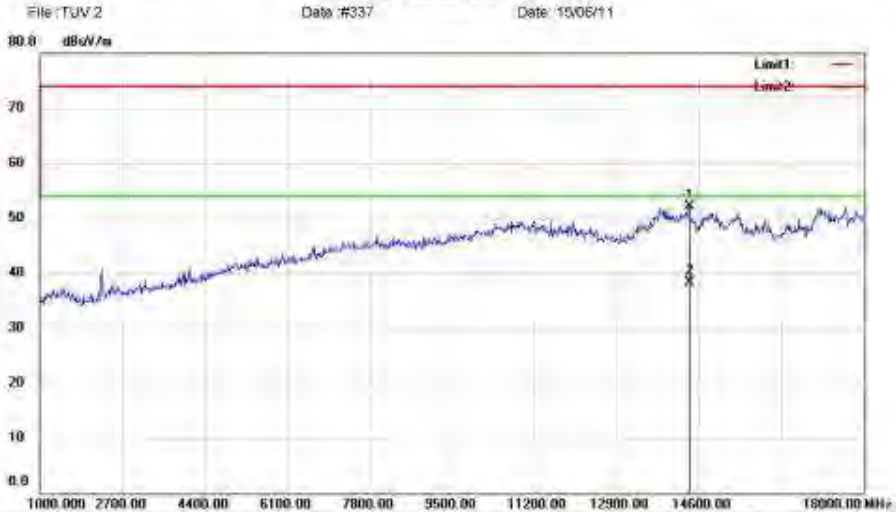

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14396.00	58.09	-5.92	52.17	74.00	-21.83	peak		
2	*	14396.00	44.17	-5.92	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #337

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #338

Date: 15/06/11



Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5755 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17184.00	55.59	-3.51	52.08	74.00	-21.92	peak		
2	*	17184.00	40.72	-3.51	37.21	54.00	-16.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #338

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #339

Date: 15/06/11

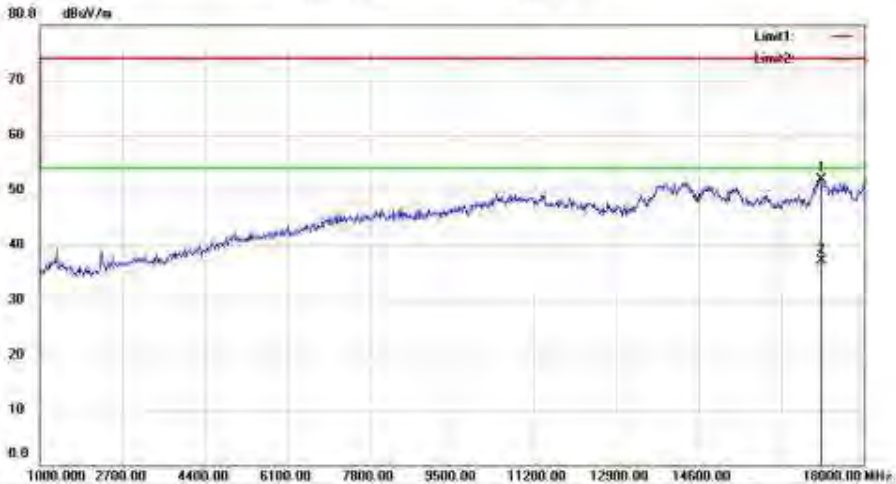

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5795 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	56.01	-4.04	51.97	74.00	-22.03	peak		
2	*	17116.00	41.17	-4.04	37.13	54.00	-16.87	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data_#339

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

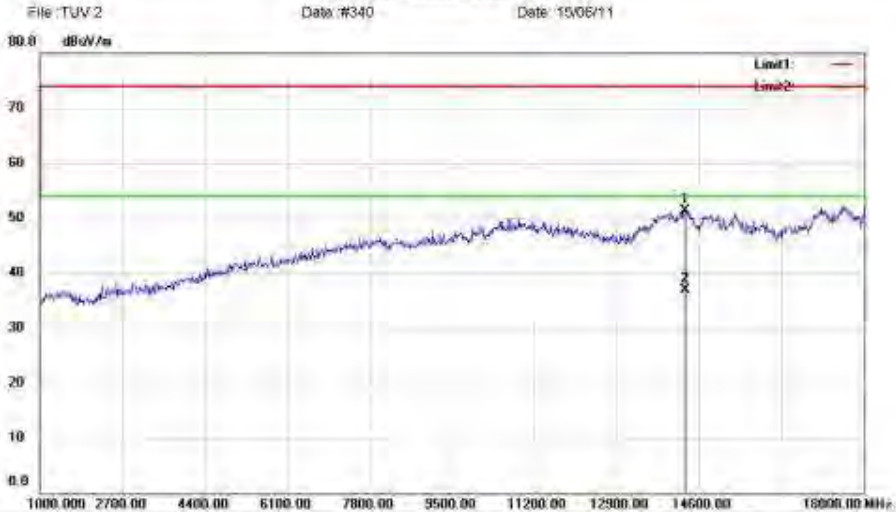

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 5795 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	57.17	-5.78	51.39	74.00	-22.61	peak		
2	*	14311.00	42.63	-5.78	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #340

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

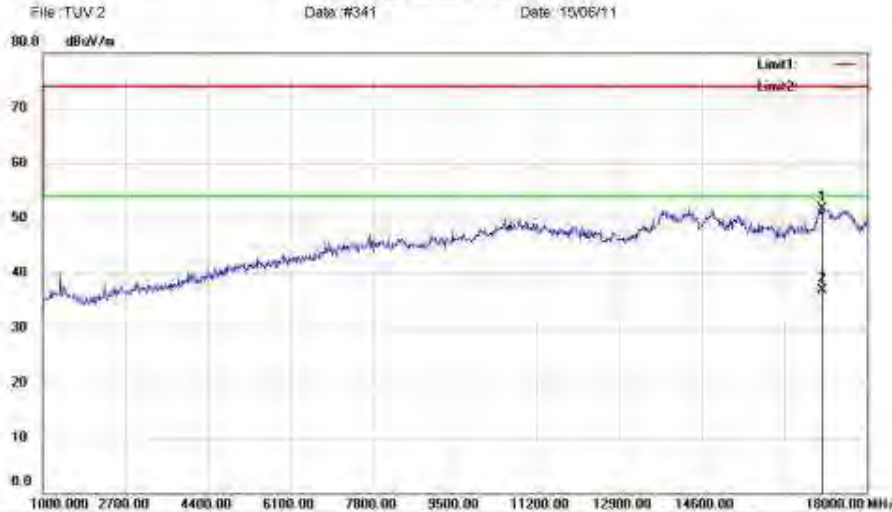

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.00	-4.31	51.69	74.00	-22.31	peak		
2	*	17082.00	41.16	-4.31	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #341

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #342

Date: 15/06/11



Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17201.00	55.68	-3.37	52.31	74.00	-21.69	peak		
2	*	17201.00	41.58	-3.37	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #342

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

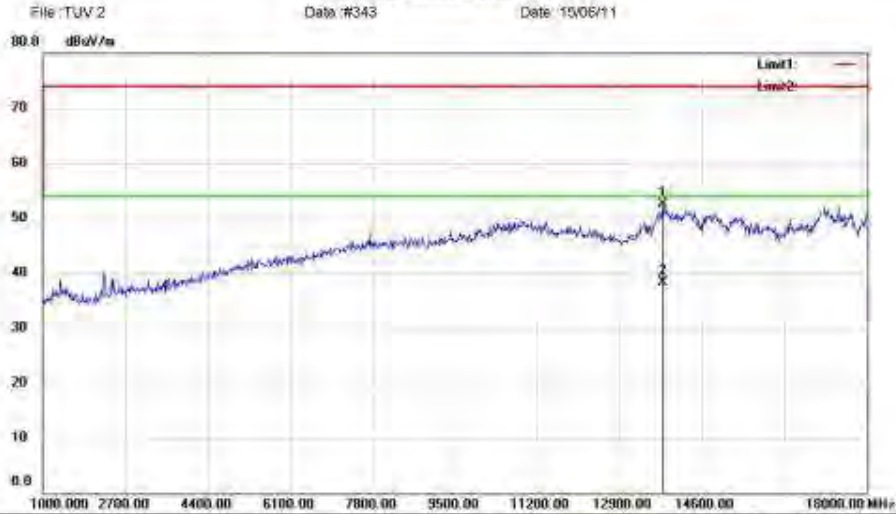

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5220 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13784.00	58.84	-6.34	52.50	74.00	-21.50	peak		
2	*	13784.00	44.55	-6.34	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #343

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #344

Date: 15/06/11

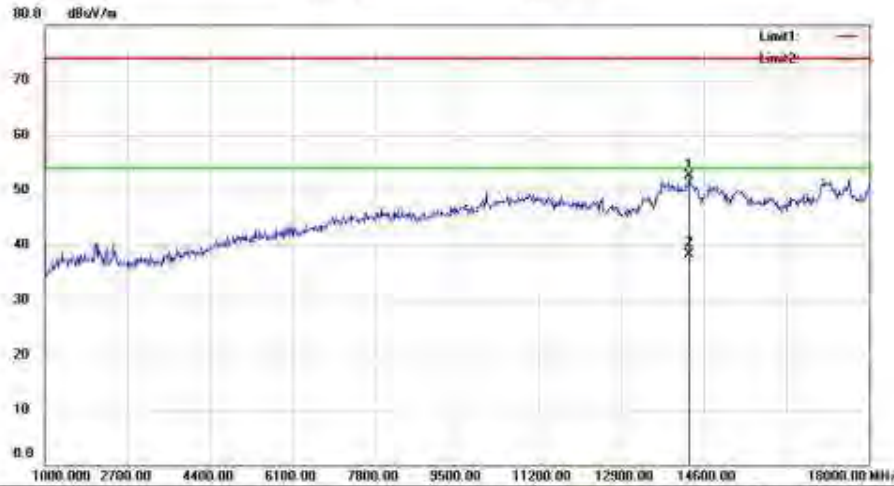

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5220 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14294.00	58.23	-5.76	52.47	74.00	-21.53	peak		
2	*	14294.00	44.00	-5.76	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2\Data #344

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

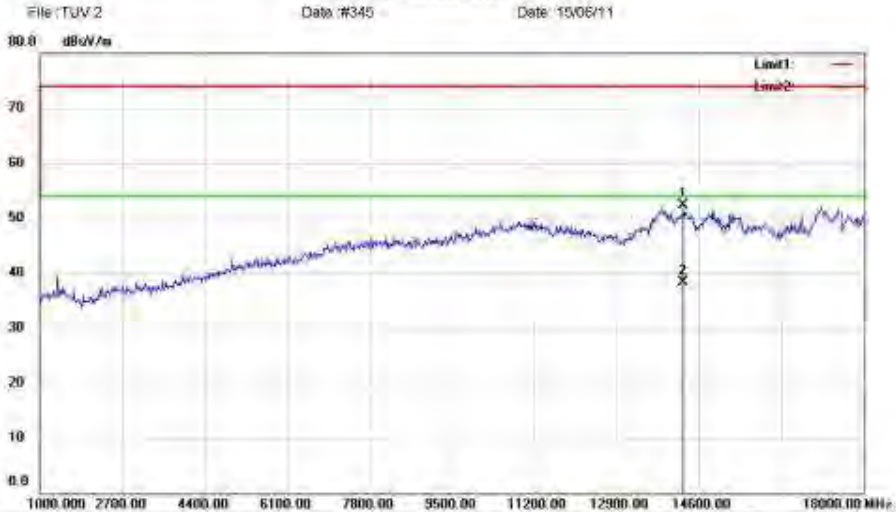

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	58.05	-5.73	52.32	74.00	-21.68	peak		
2	*	14277.00	43.94	-5.73	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #345

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Data: #346

Date: 15/06/11

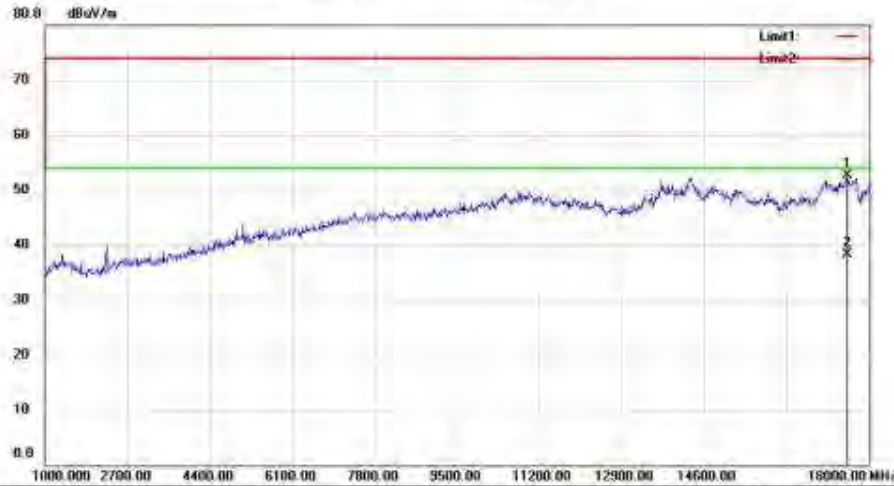

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5240 Ant1
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17558.00	53.32	-0.56	52.76	74.00	-21.24	peak		
2	*	17558.00	38.80	-0.56	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #346

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #347

Date: 15/06/11

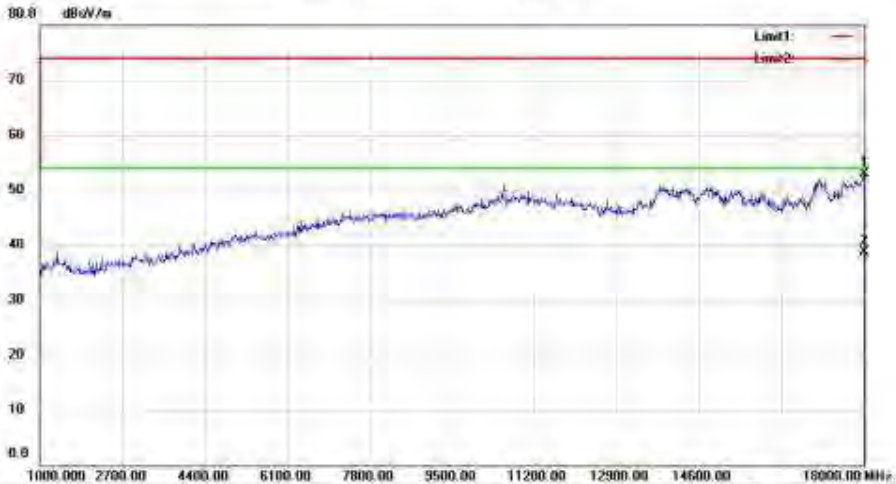

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	49.91	2.92	52.83	74.00	-21.17	peak		
2	*	18000.00	35.70	2.92	38.62	54.00	-15.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #347

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone Nanshan District Shenzhen Guangdong 518058 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #348

Date: 15/06/11

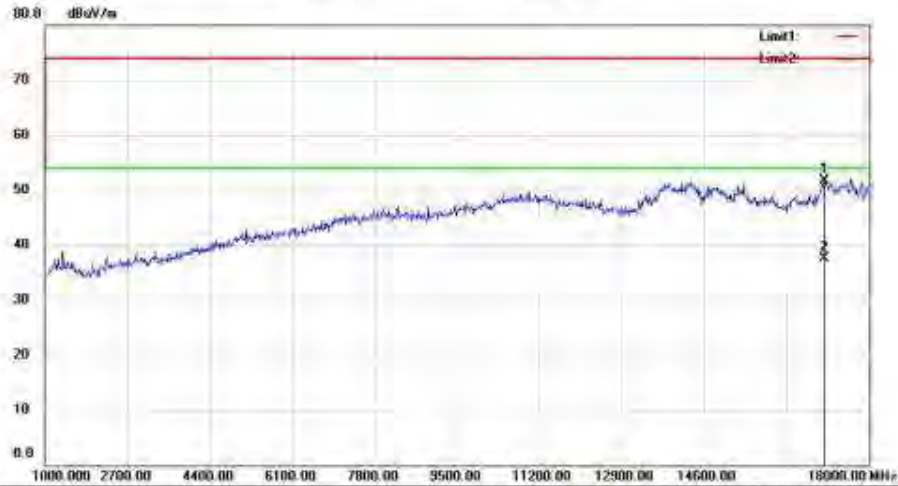

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5745 Ant1
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.06	-4.31	51.75	74.00	-22.25	peak		
2	*	17082.00	41.82	-4.31	37.51	54.00	-16.49	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data #348

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

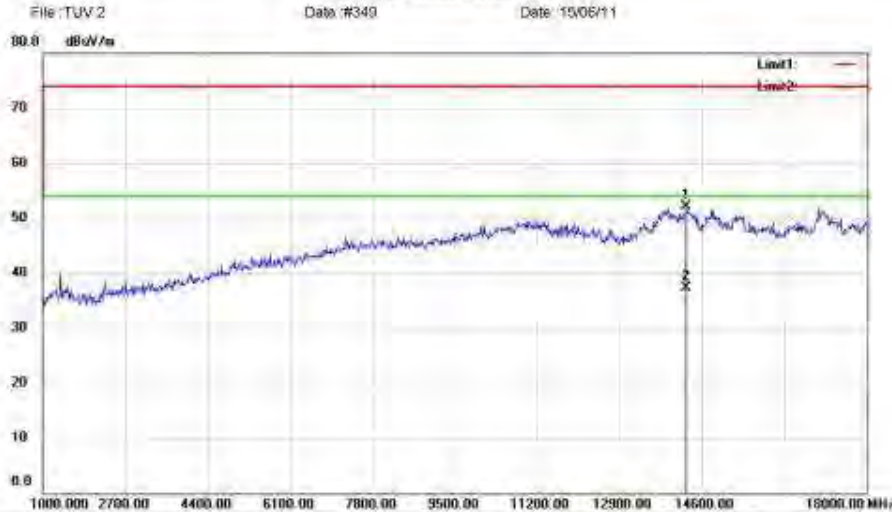

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5785 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	57.78	-5.73	52.05	74.00	-21.95	peak		
2	*	14277.00	42.99	-5.73	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #349

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

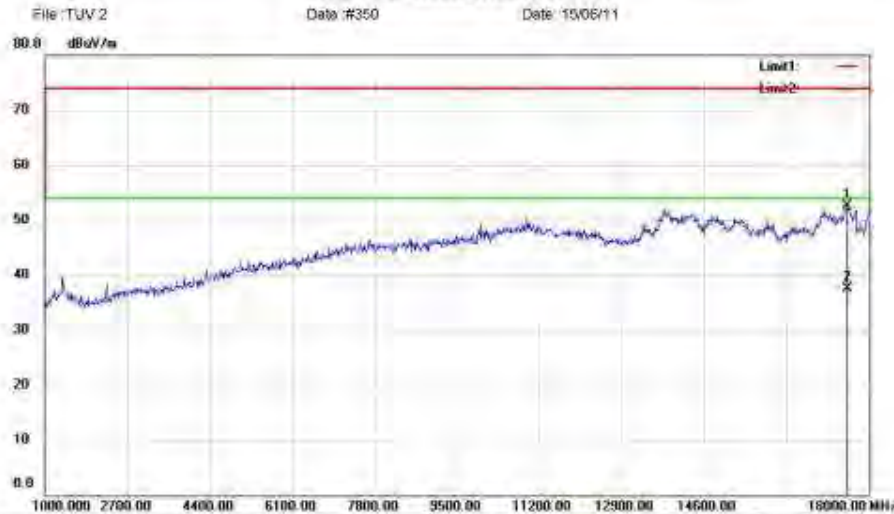

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5785 Ant1
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
				dB	dBuV/m			cm	degree	
1		17558.00	53.08	-0.56	52.52	74.00	-21.48	peak		
2	*	17558.00	38.10	-0.56	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #350

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

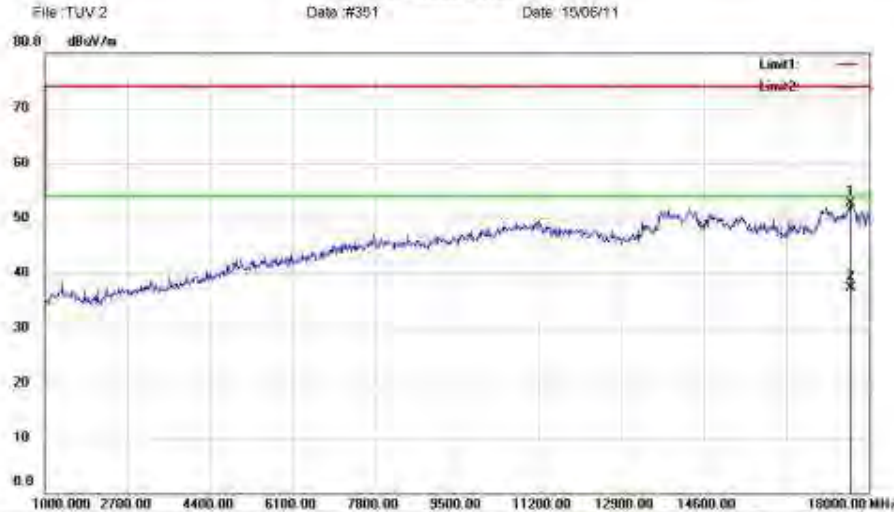

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17626.00	52.83	-0.03	52.80	74.00	-21.20	peak		
2	*	17626.00	37.27	-0.03	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #351

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518052, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

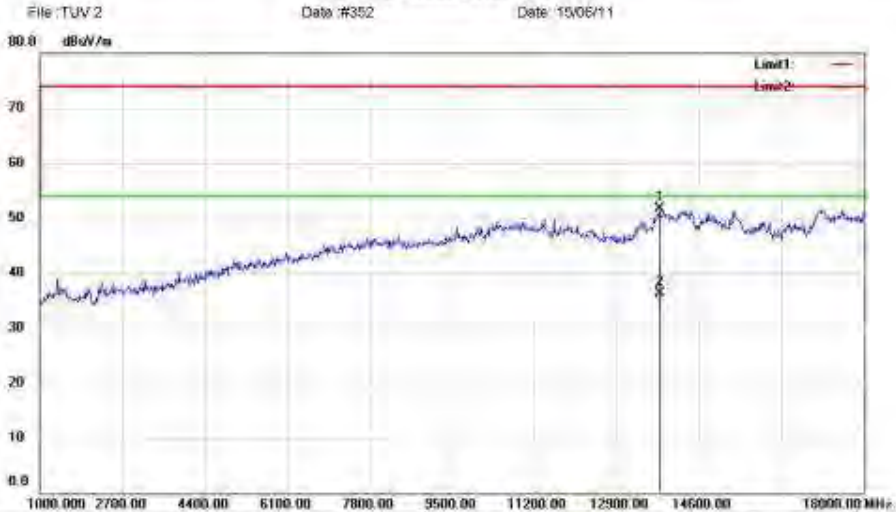

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13784.00	57.95	-6.34	51.61	74.00	-22.39	peak		
2	*	13784.00	42.63	-6.34	36.29	54.00	-17.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #352

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

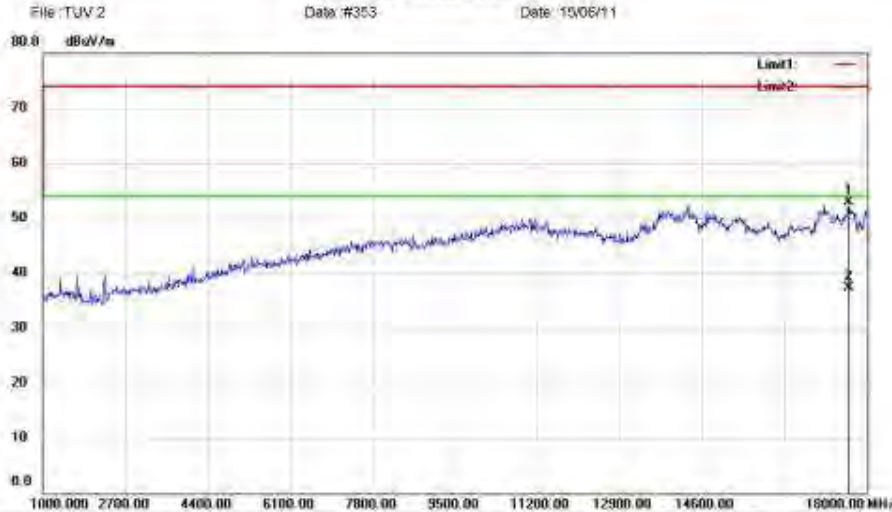

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Table	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17626.00	52.89	-0.03	52.86	74.00	-21.14	peak		
2	*	17626.00	37.28	-0.03	37.25	54.00	-16.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #353

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #354

Date: 15/06/11

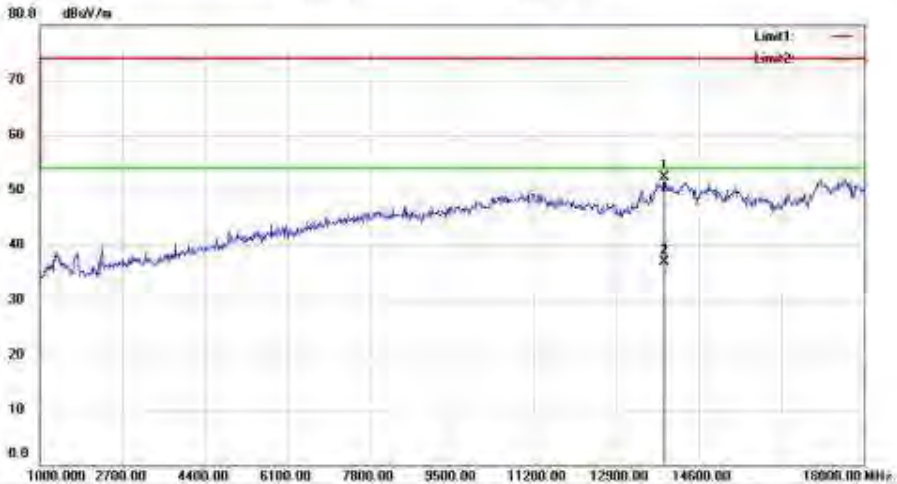

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5180 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13886.00	58.14	-5.85	52.29	74.00	-21.71	peak		
2	*	13886.00	42.67	-5.85	36.82	54.00	-17.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #354

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

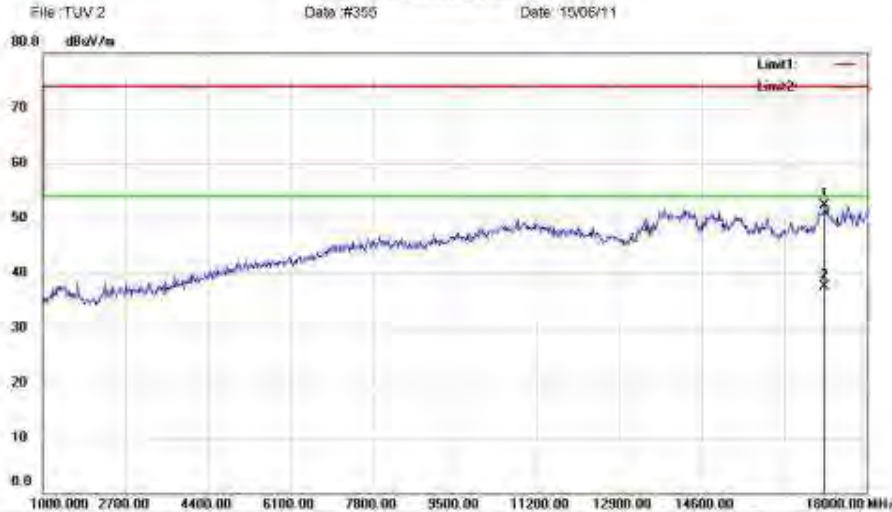

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5220 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Table	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17133.00	56.20	-3.91	52.29	74.00	-21.71	peak		
2	*	17133.00	41.33	-3.91	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #355

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #356

Date: 15/06/11

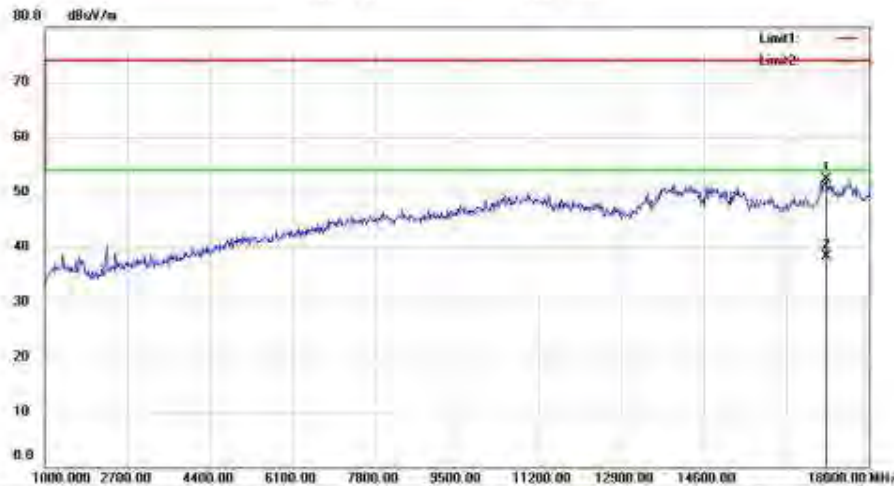

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5220 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Area	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17116.00	56.29	-4.04	52.25	74.00	-21.75	peak		
2	*	17116.00	42.28	-4.04	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #356

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #357

Date: 15/06/11

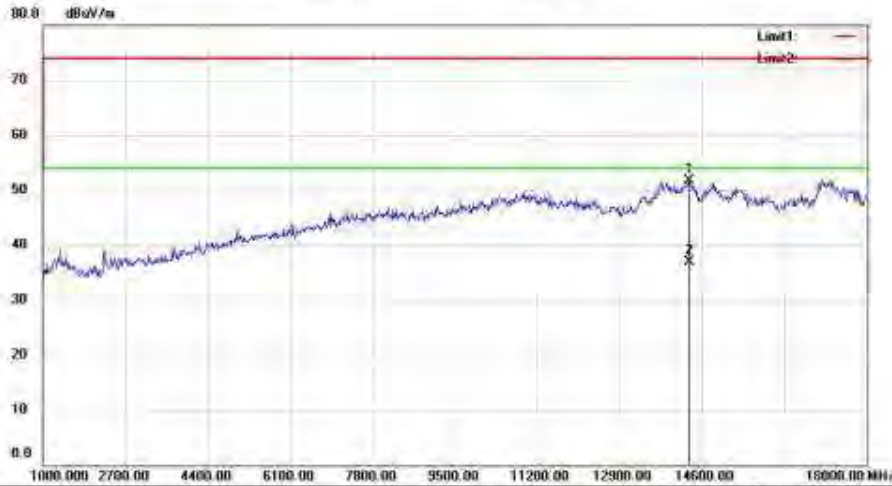

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	57.44	-5.81	51.63	74.00	-22.37	peak		
2	*	14328.00	42.76	-5.81	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #357

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

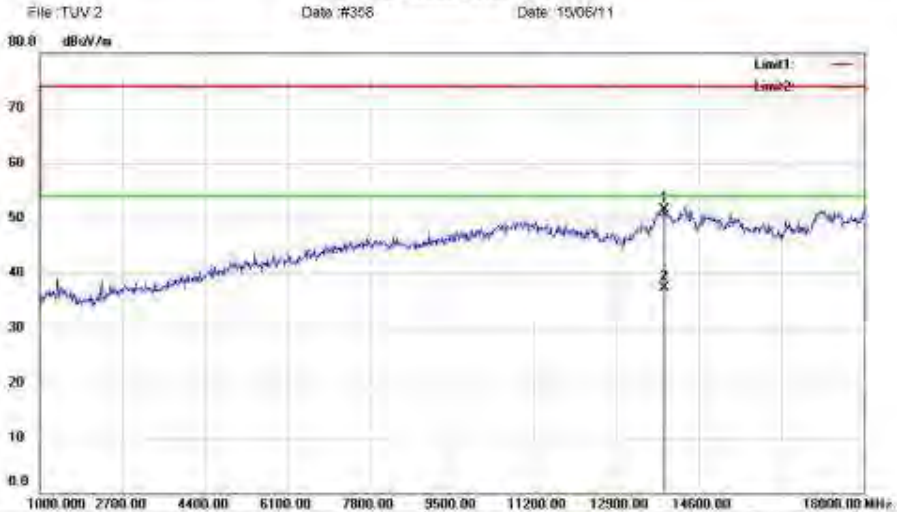

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		13886.00	57.27	-5.85	51.42	74.00	-22.58	peak		
2	*	13886.00	43.09	-5.85	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #358

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

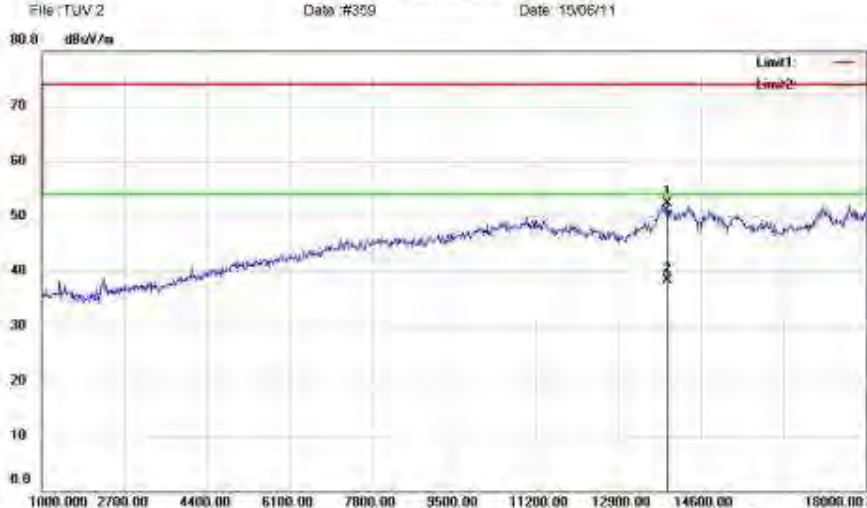

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13903.00	58.08	-5.76	52.32	74.00	-21.68	peak		
2	*	13903.00	44.00	-5.76	38.24	54.00	-15.76	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieLong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #360

Date: 15/06/11

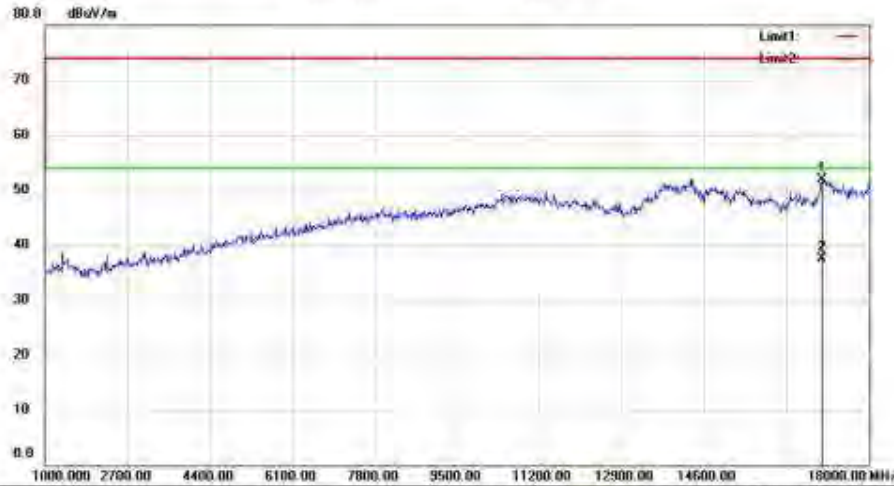

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17031.00	56.54	-4.71	51.83	74.00	-22.17	peak		
2	*	17031.00	42.12	-4.71	37.41	54.00	-16.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2\Data: #360

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

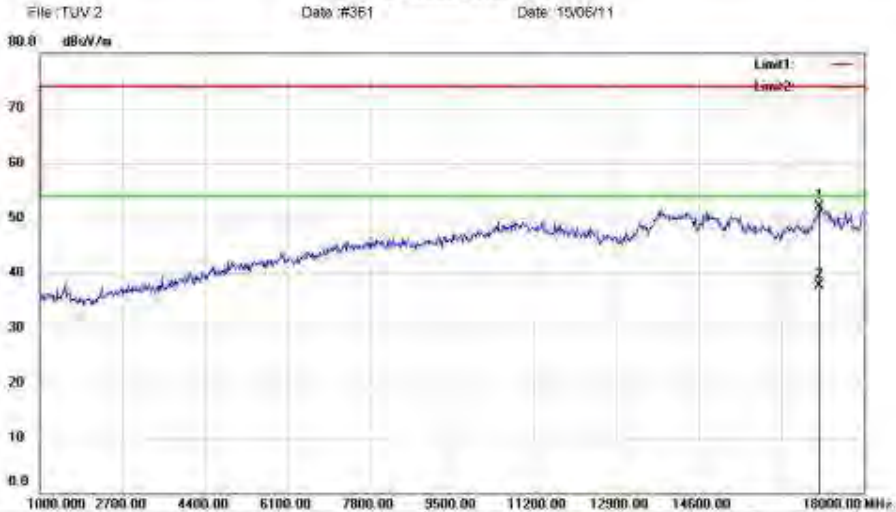

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5785 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.39	-4.31	52.08	74.00	-21.92	peak		
2	*	17082.00	41.95	-4.31	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #361

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

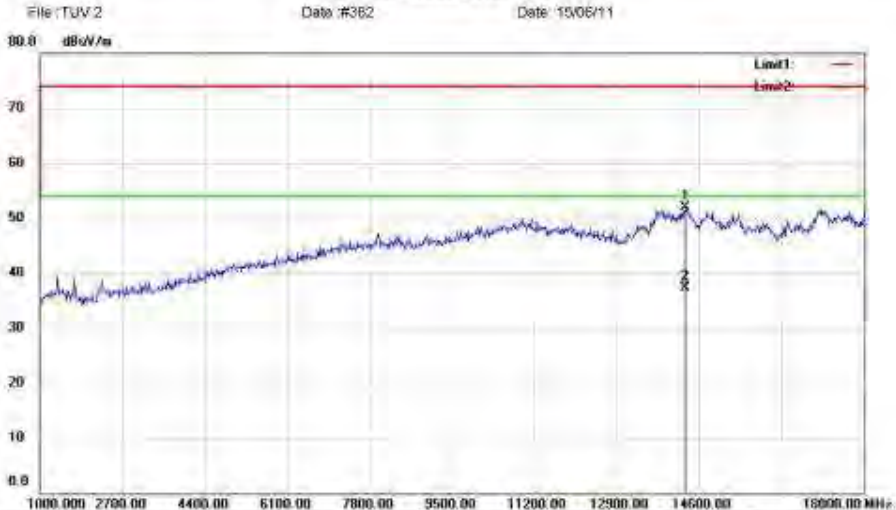

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5785 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	57.62	-5.78	51.84	74.00	-22.16	peak		
2	*	14311.00	43.04	-5.78	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #362

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement



Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17184.00	56.40	-3.51	52.89	74.00	-21.11	peak		
2	*	17184.00	40.78	-3.51	37.27	54.00	-16.73	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #363

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #364

Date: 15/06/11

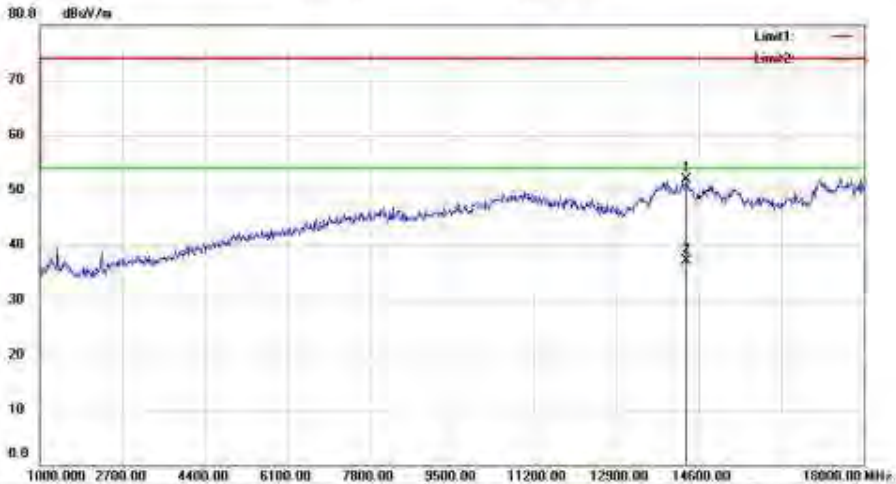

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 5825 Ant2
 Note:

Polarization: *Vertical*
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14345.00	57.75	-5.84	51.91	74.00	-22.09	peak		
2	*	14345.00	42.99	-5.84	37.15	54.00	-16.85	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #364

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #365

Date: 15/06/11

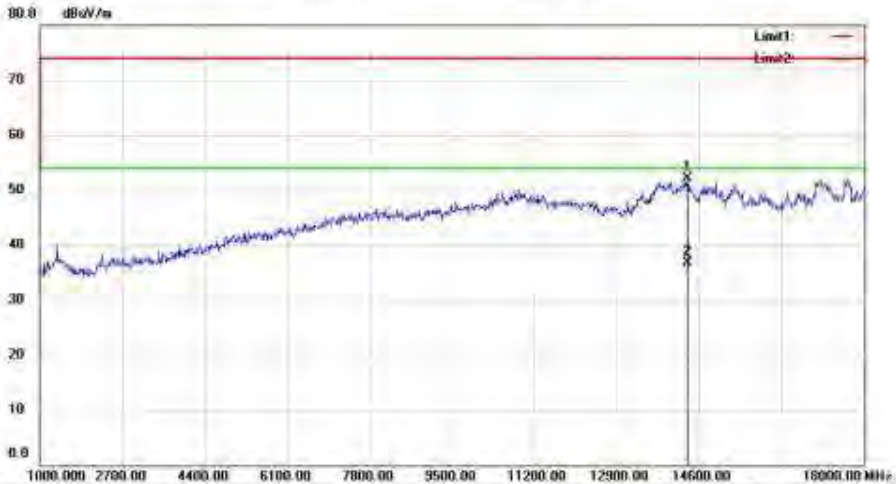

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5190 Ant1
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14362.00	57.88	-5.86	52.02	74.00	-21.98	peak		
2	*	14362.00	42.65	-5.86	36.79	54.00	-17.21	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #365

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #366

Date: 15/06/11

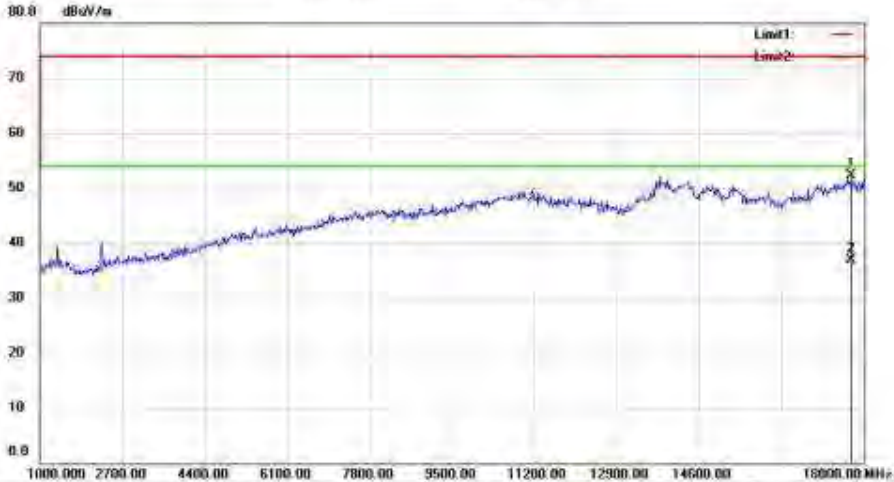

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17728.00	51.43	0.78	52.21	74.00	-21.79	peak		
2	*	17728.00	36.17	0.78	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #366

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement



Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.58	-3.91	52.67	74.00	-21.33	peak		
2	*	17133.00	40.76	-3.91	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #367

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

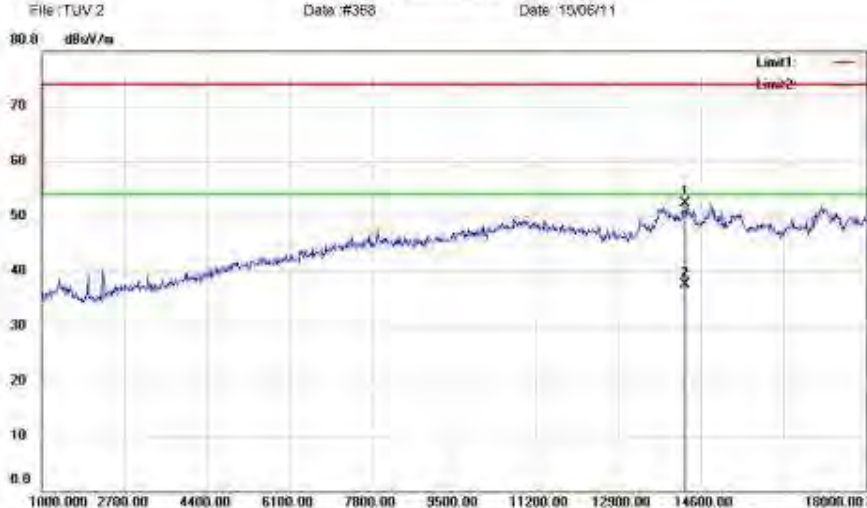

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5230 Ant1
 Note:


Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	58.07	-5.73	52.34	74.00	-21.66	peak		
2	*	14277.00	43.26	-5.73	37.53	54.00	-16.47	AVG		

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

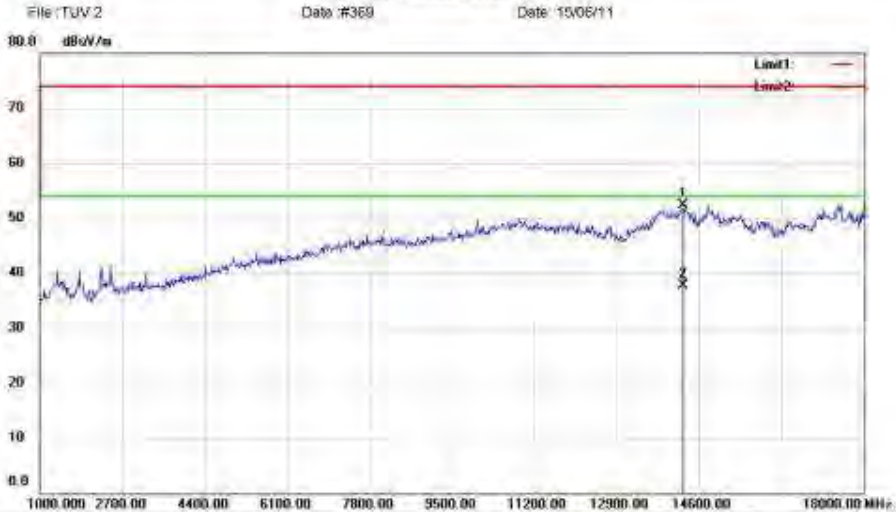

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	57.99	-5.73	52.26	74.00	-21.74	peak		
2	*	14277.00	43.44	-5.73	37.71	54.00	-16.29	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2\Data: #369

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

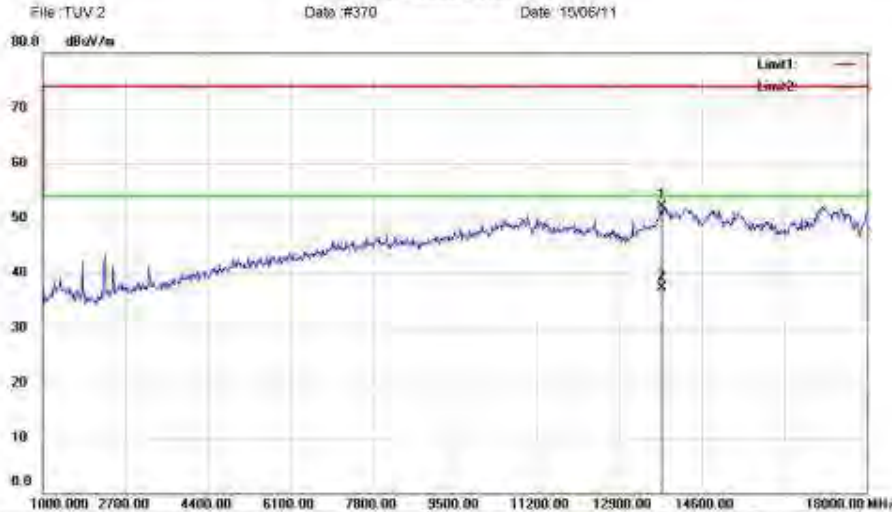

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13767.00	58.47	-6.42	52.05	74.00	-21.95	peak		
2	*	13767.00	43.66	-6.42	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #370

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

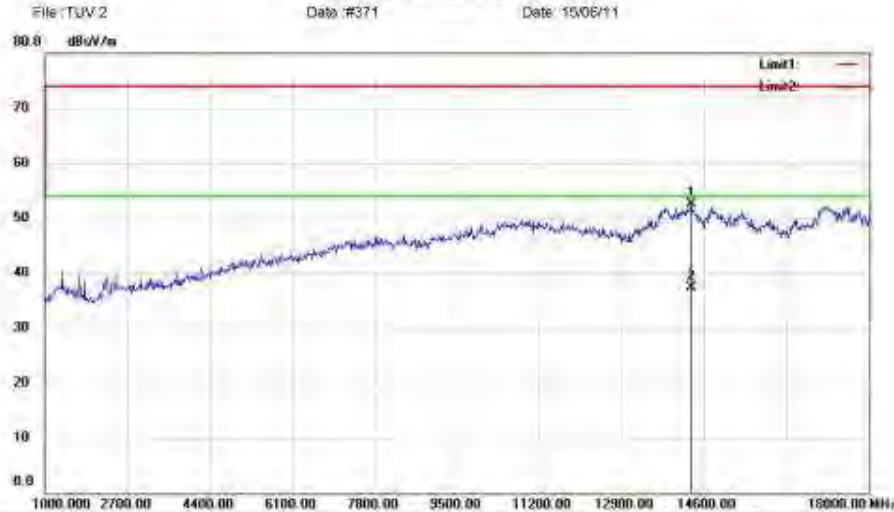

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5795 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	58.25	-5.81	52.44	74.00	-21.56	peak		
2	*	14328.00	43.05	-5.81	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #371

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #372

Date: 15/06/11

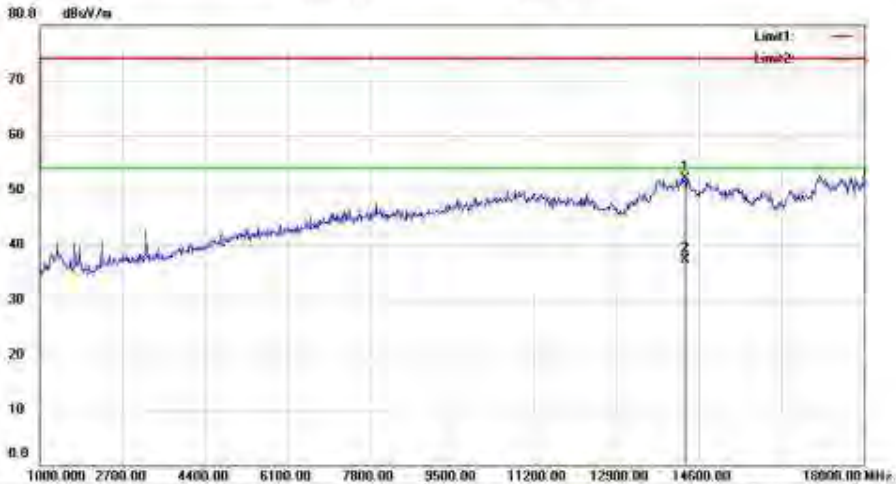

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5795 Ant1
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	57.90	-5.78	52.12	74.00	-21.88	peak		
2	*	14311.00	43.09	-5.78	37.31	54.00	-16.69	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #372

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

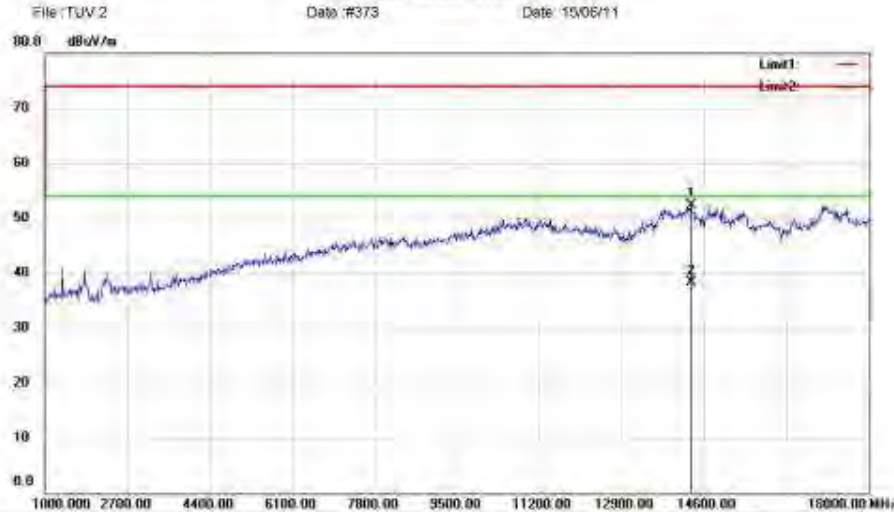

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	58.19	-5.81	52.38	74.00	-21.62	peak		
2	*	14328.00	44.05	-5.81	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #373

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

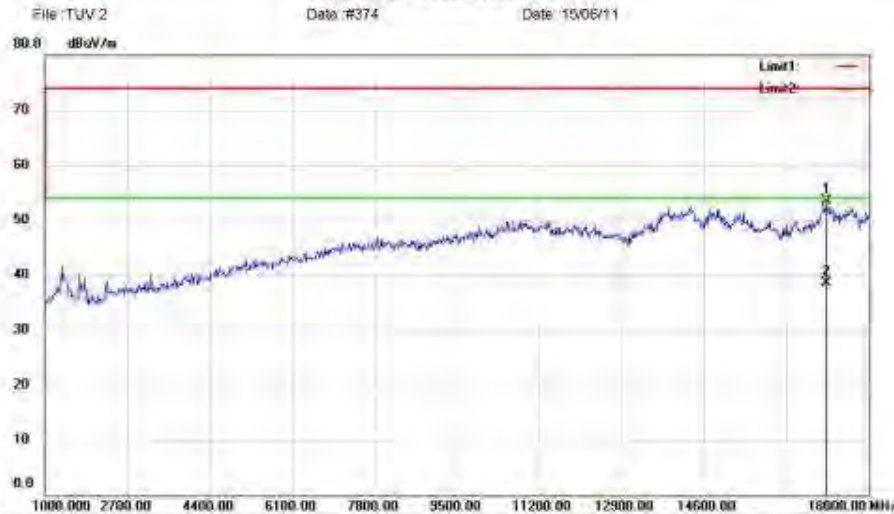

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	57.33	-3.91	53.42	74.00	-20.58	peak		
2	*	17133.00	42.32	-3.91	38.41	54.00	-15.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #374

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

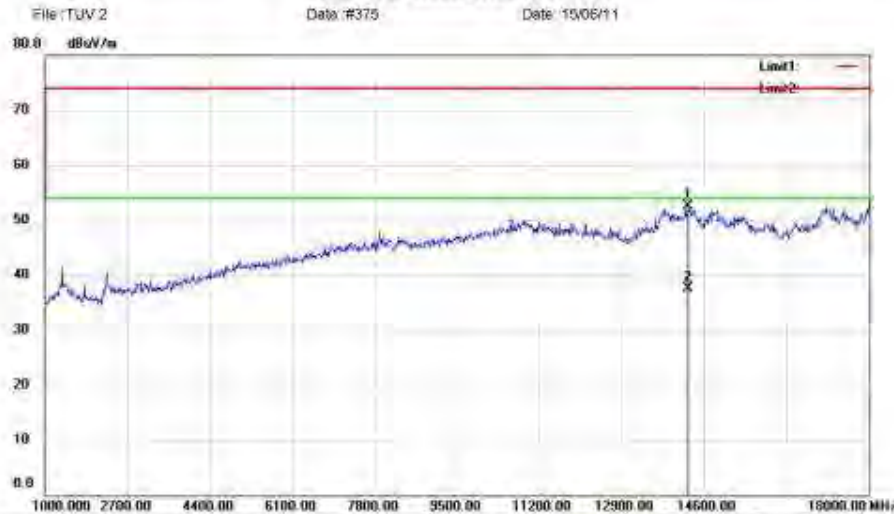

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	58.16	-5.73	52.43	74.00	-21.57	peak		
2	*	14277.00	43.15	-5.73	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #375

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

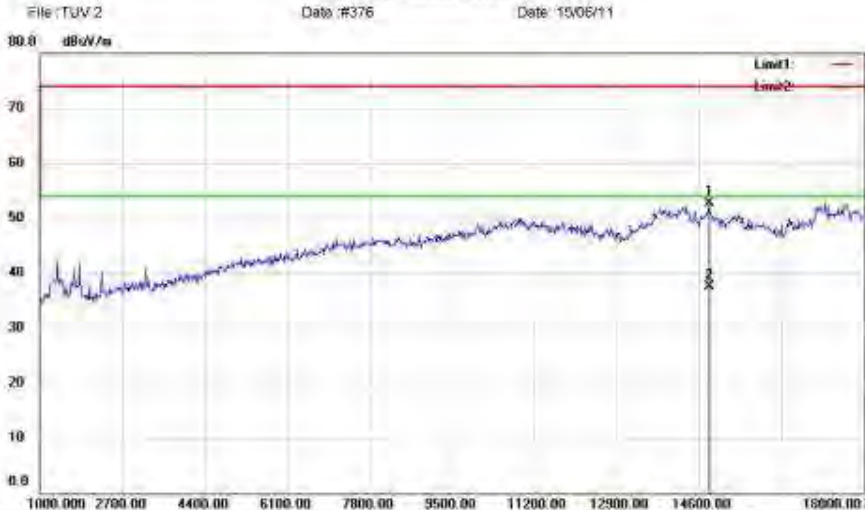

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14804.00	59.29	-6.56	52.73	74.00	-21.27	peak		
2	*	14804.00	44.04	-6.56	37.48	54.00	-16.52	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #376

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

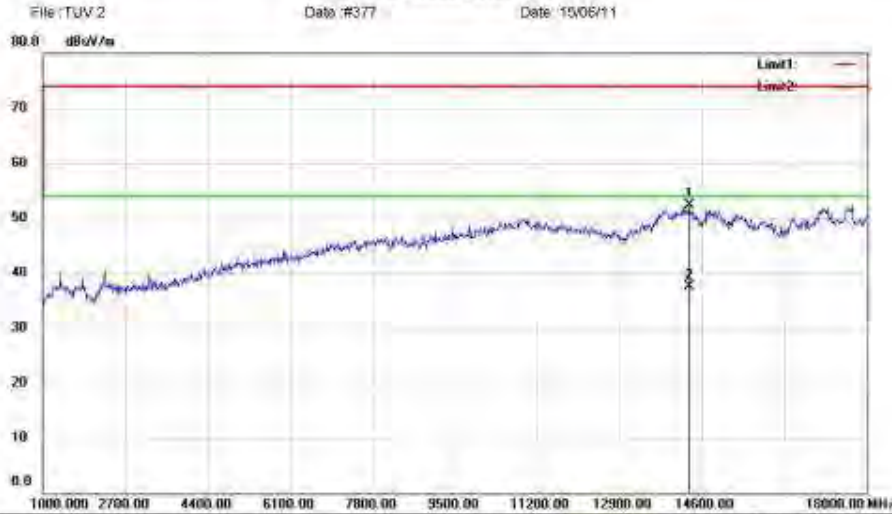

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	58.21	-5.81	52.40	74.00	-21.60	peak		
2	*	14328.00	43.35	-5.81	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #377

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

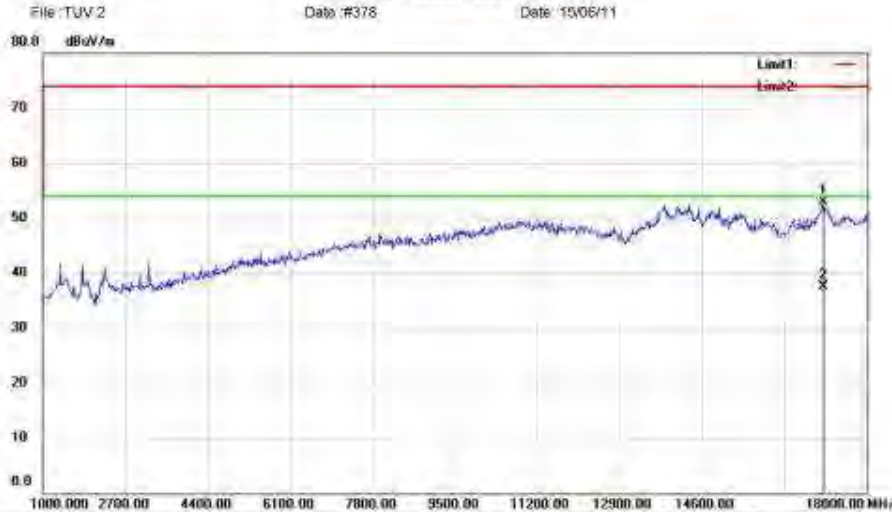

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	57.15	-4.19	52.96	74.00	-21.04	peak		
2	*	17099.00	41.68	-4.19	37.49	54.00	-16.51	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #378

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 08 MajieJiang Industry Zone Nanshan District, Shenzhen, Guangdong 518058 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #379

Date: 15/06/11

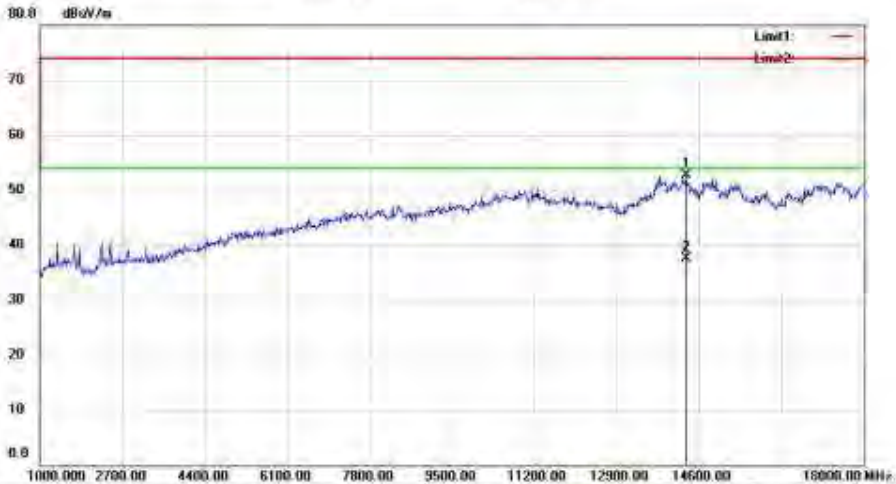

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5795 Ant2
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	58.48	-5.81	52.67	74.00	-21.33	peak		
2	*	14328.00	43.39	-5.81	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #379

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #6 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #380

Date: 15/06/11

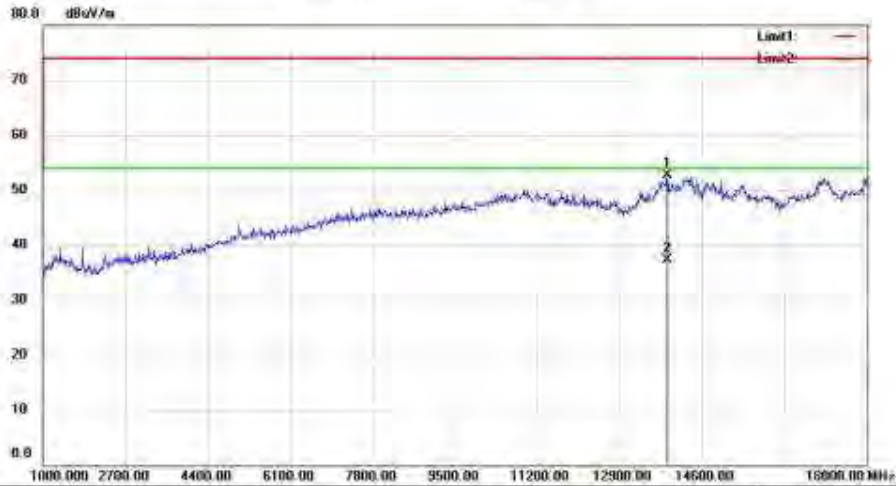

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 5795 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13886.00	58.63	-5.85	52.78	74.00	-21.22	peak		
2	*	13886.00	43.20	-5.85	37.35	54.00	-16.65	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #380

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

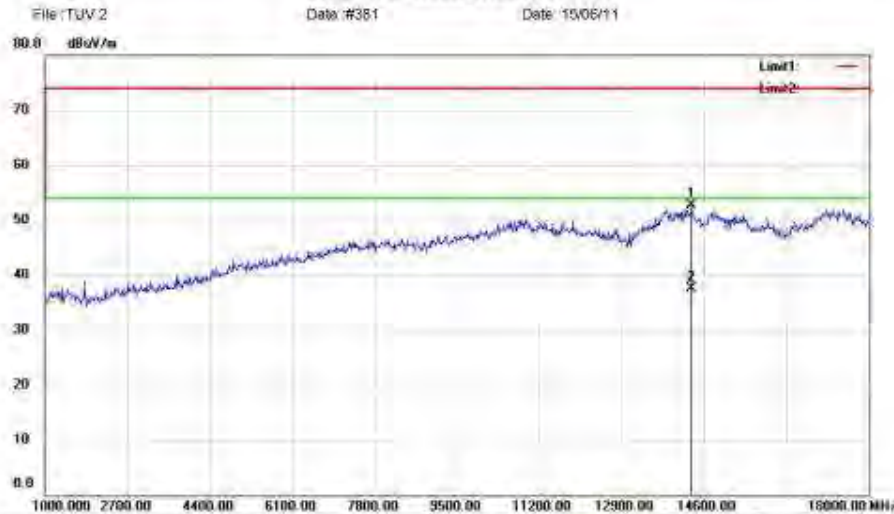

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14345.00	58.57	-5.84	52.73	74.00	-21.27	peak		
2	*	14345.00	43.43	-5.84	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #381

Page: 1