


Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4362



Radiated Emission Measurement

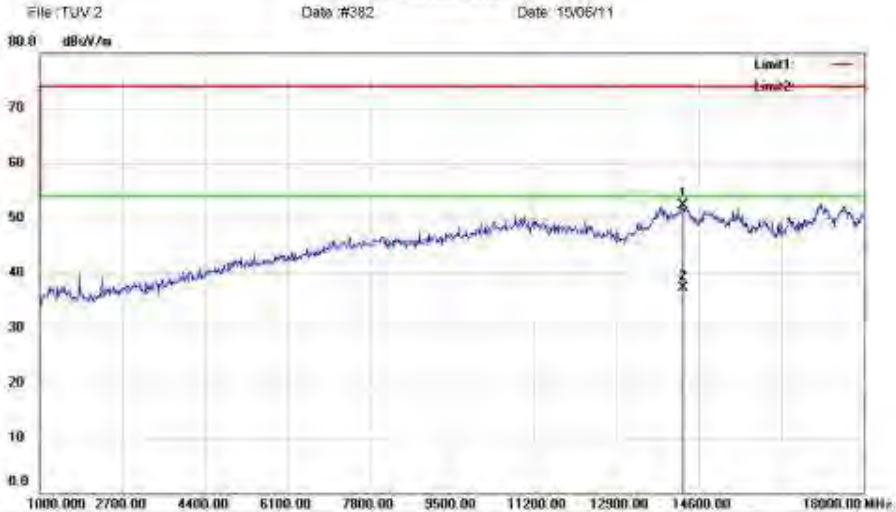

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	57.98	-5.73	52.25	74.00	-21.75	peak		
2	*	14277.00	42.97	-5.73	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #382

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

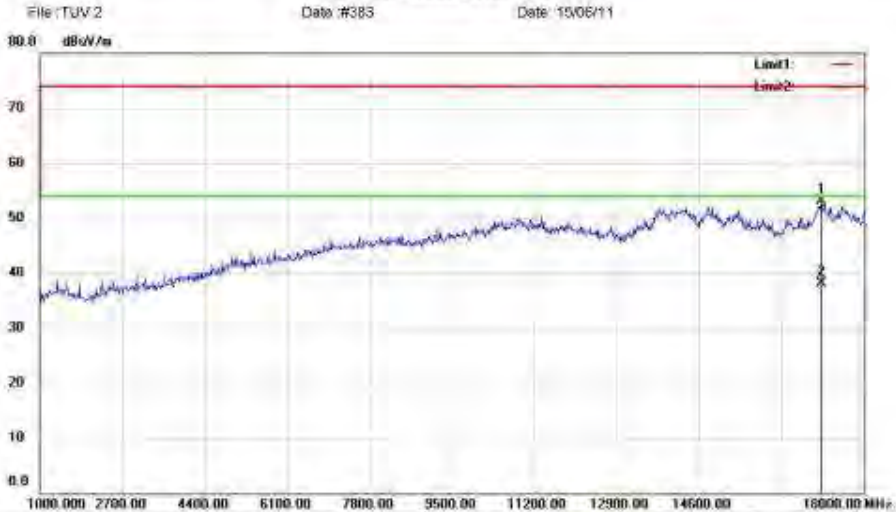

Site: site #1 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5775 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	57.14	-4.04	53.10	74.00	-20.90	peak		
2	*	17116.00	42.19	-4.04	38.15	54.00	-15.85	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 2/Data: #383

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. 06 MajieJiang Industry Zone, Minshan District, Shenzhen, Guangdong 518052, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

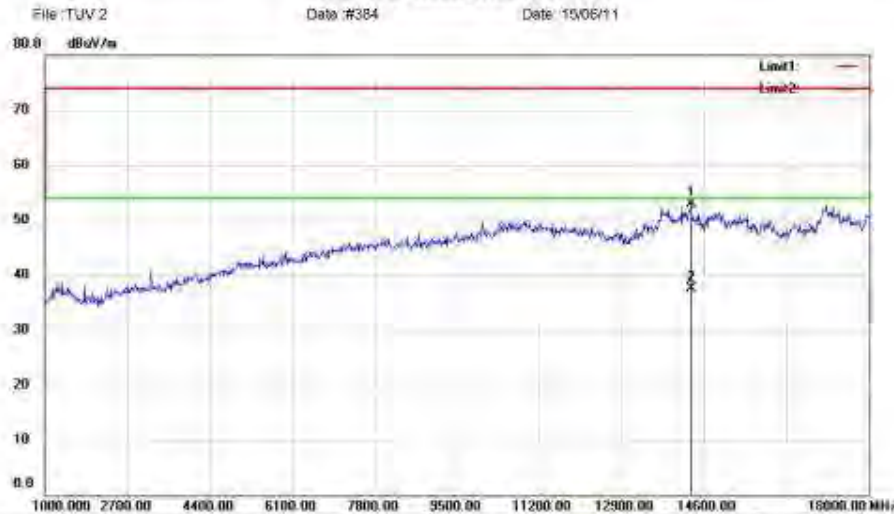

Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5775 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	58.72	-5.81	52.91	74.00	-21.09	peak		
2	*	14328.00	43.40	-5.81	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #384

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #385

Date: 15/06/11



Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5210 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17473.00	53.35	-1.23	52.12	74.00	-21.88	peak		
2	*	17473.00	38.49	-1.23	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #385

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg 06 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #386

Date: 15/06/11

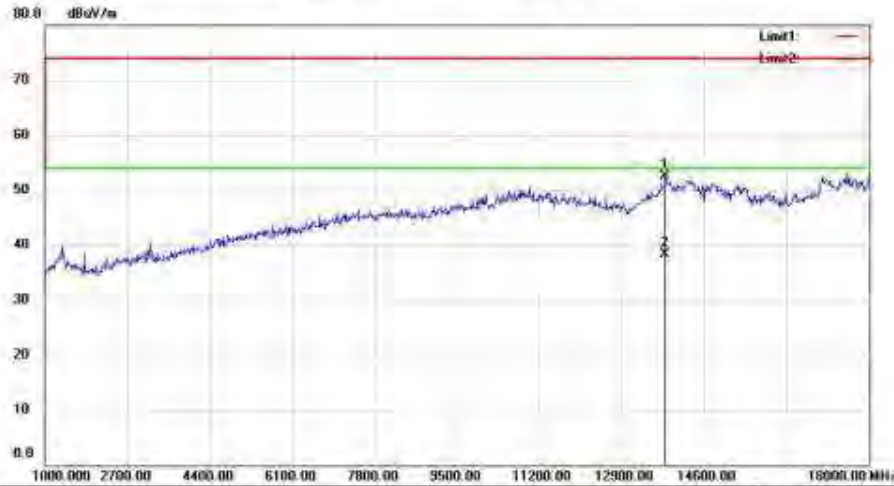

Site: site #1
 Limit: (RE)FCC PART 15 CLASS B
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5210 Ant2
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13801.00	58.74	-6.26	52.48	74.00	-21.52	peak		
2	*	13801.00	44.47	-6.26	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV2\Data: #386

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

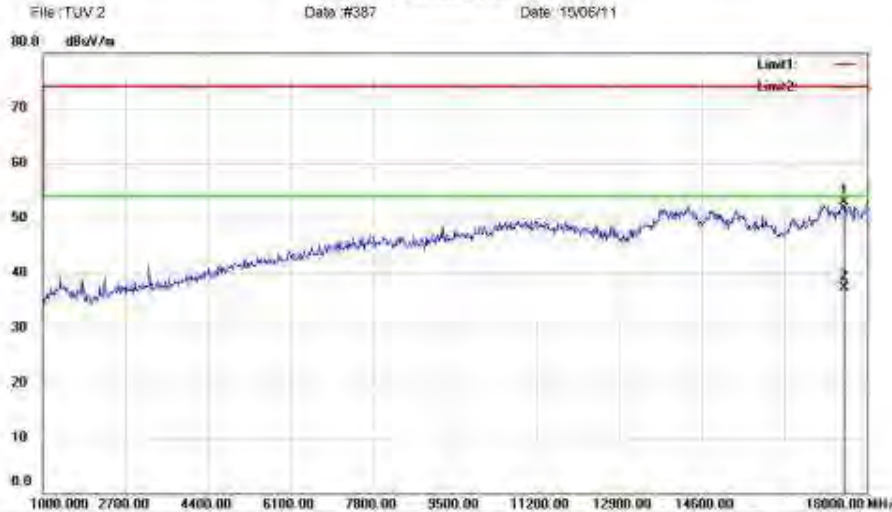

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17524.00	53.66	-0.83	52.83	74.00	-21.17	peak		
2	*	17524.00	38.09	-0.83	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #387

Page: 1

Shenzhen EMTEK Co., Ltd
 Bldg. #8 MajieJiang Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement



Site: site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17626.00	52.90	-0.03	52.87	74.00	-21.13	peak		
2	*	17626.00	37.55	-0.03	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2/Data: #388

Page: 1

Spurious Emission (18G-26.5G)

Note: All test modes have been arranged testing separately, and the worst test mode were record in the Appendix A.

Shenzhen EMTEK Co., Ltd.
 Bldg. 89, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 2

Data #652

Date: 15/06/12



Site site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25981.50	87.18	-35.81	51.37	74.00	-22.63	peak		
2	*	25981.50	73.06	-35.81	37.25	54.00	-16.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2\Data :#652

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 89, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 2

Data: #653

Date: 15/06/12

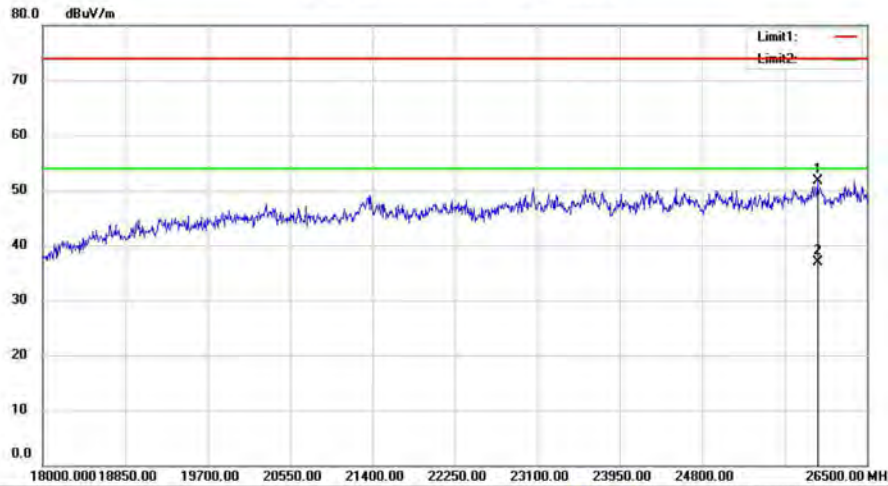

Site site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25990.00	87.55	-35.80	51.75	74.00	-22.25	peak		
2	*	25990.00	72.64	-35.80	36.84	54.00	-17.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2\Data :#653

Page: 1

Spurious Emission (26.5G-40G)


Note: All test modes have been arranged testing separately, and the worst test mode were record in the Appendix A.

Radiated Emission Measurement

File:TUV 2

Data:#844

Date:15/06/12

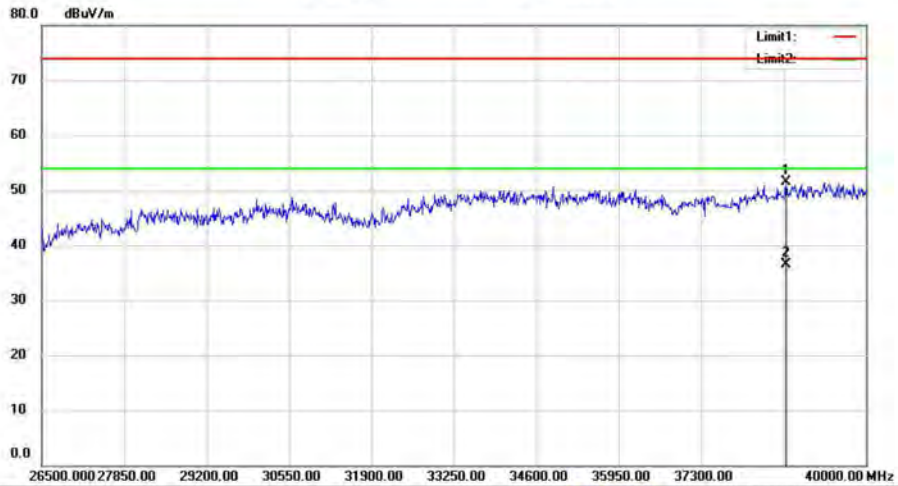

Site site #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode:11N HT40 5795 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38690.50	86.22	-34.68	51.54	74.00	-22.46	peak		
2	*	38690.50	71.20	-34.68	36.52	54.00	-17.48	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUV 2Data:#844

Page: 1

Radiated Emission Measurement

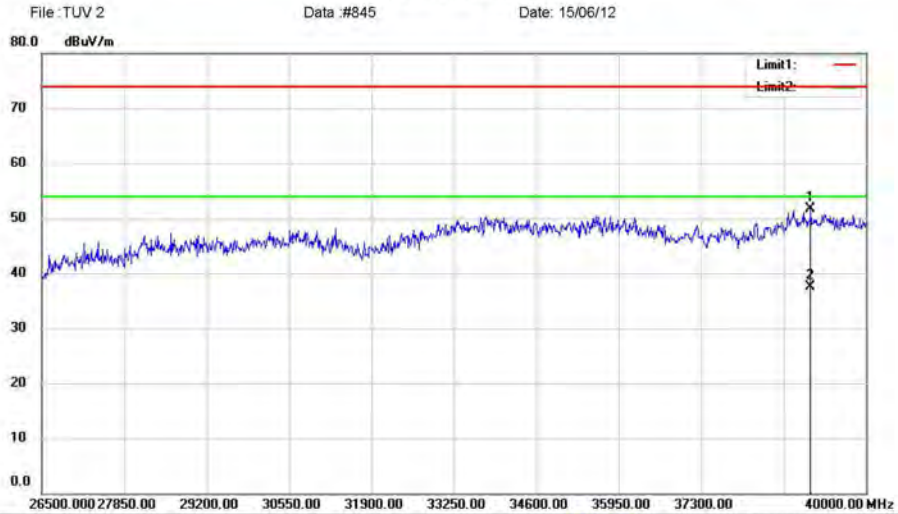

Site site #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode:11N HT40 5795 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		39095.50	85.42	-33.75	51.67	74.00	-22.33	peak			
2	*	39095.50	71.17	-33.75	37.42	54.00	-16.58	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUV 2Data:#845

Page: 1

Band Edge

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #291

Date: 15/06/19/

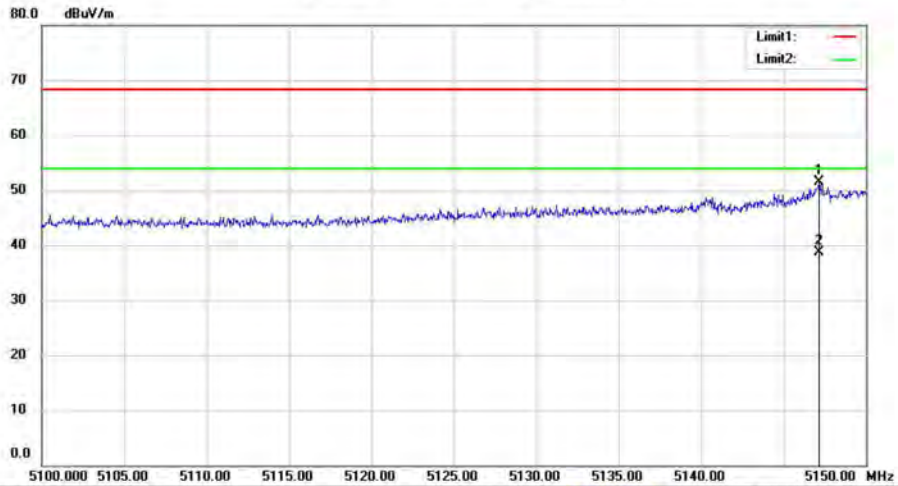

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH36 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.150	65.68	-14.24	51.44	68.20	-16.76	peak		
2	*	5147.150	52.88	-14.24	38.64	54.00	-15.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G>Data :#291

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #292

Date: 15/06/19/

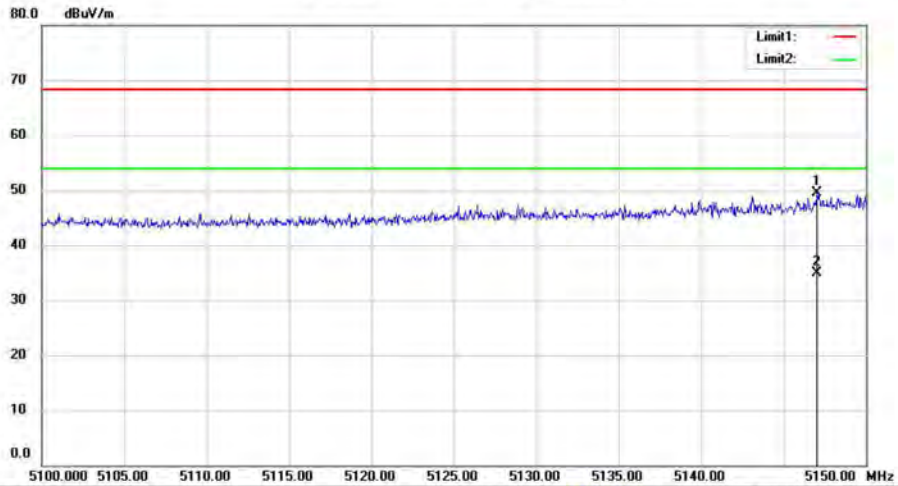

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH36 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5147.050	63.66	-14.24	49.42	68.20	-18.78	peak			
2		5147.050	49.09	-14.24	34.85	54.00	-19.15	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#292

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #293

Date: 15/06/19/

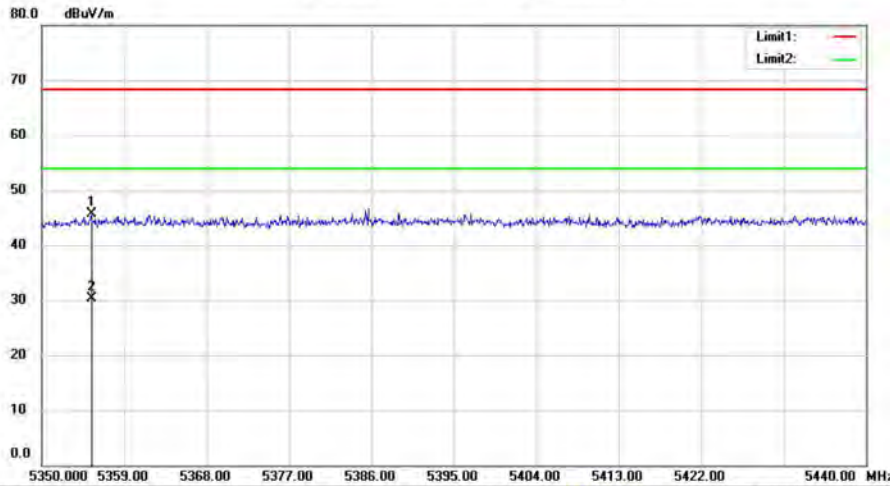

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5355.400	59.68	-14.00	45.68	68.20	-22.52	peak		
2		5355.400	44.26	-14.00	30.26	54.00	-23.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#293

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

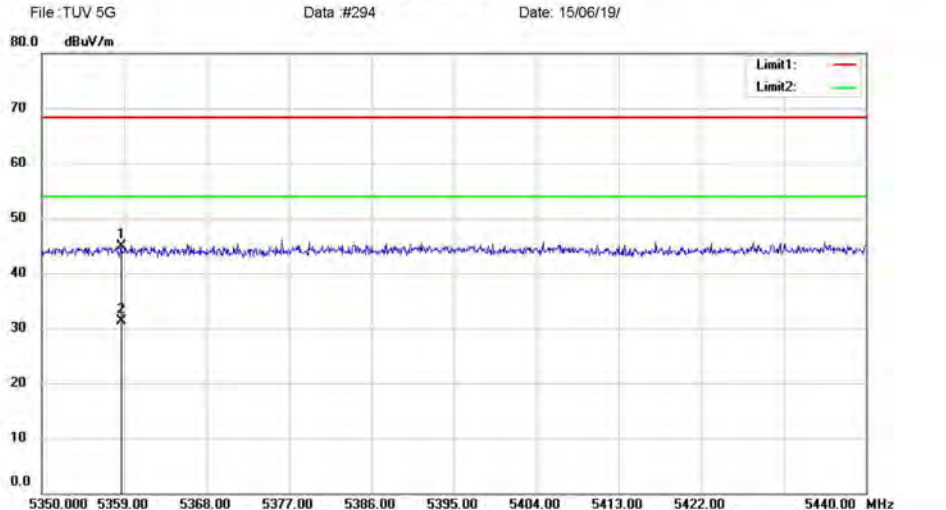

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5358.640	58.97	-13.99	44.98	68.20	-23.22	peak		
2	*	5358.640	45.25	-13.99	31.26	54.00	-22.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#294

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

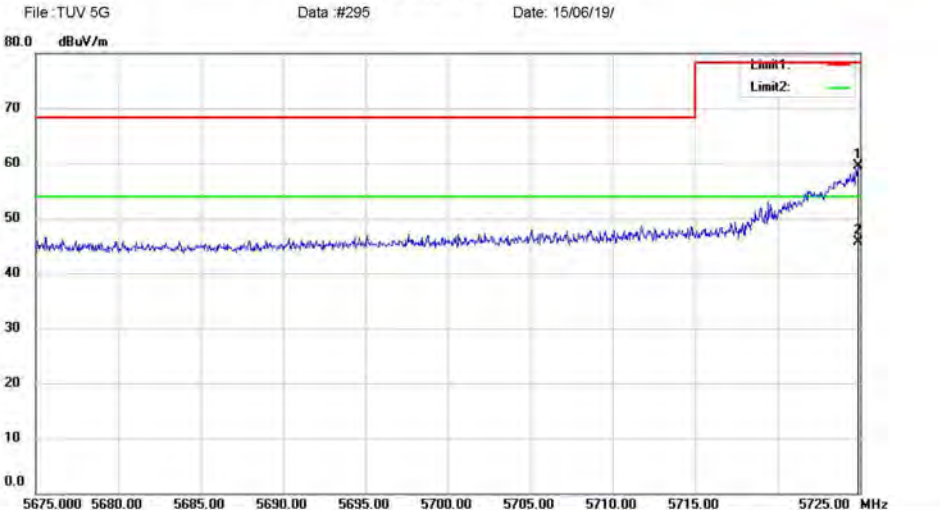

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.900	72.98	-13.56	59.42	78.20	-18.78	peak		
2	*	5724.900	59.19	-13.56	45.63	54.00	-8.37	AVG		


*:Maximum data x:Over limit !:over margin Operator: KK

File: TUV 5G>Data :#295 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

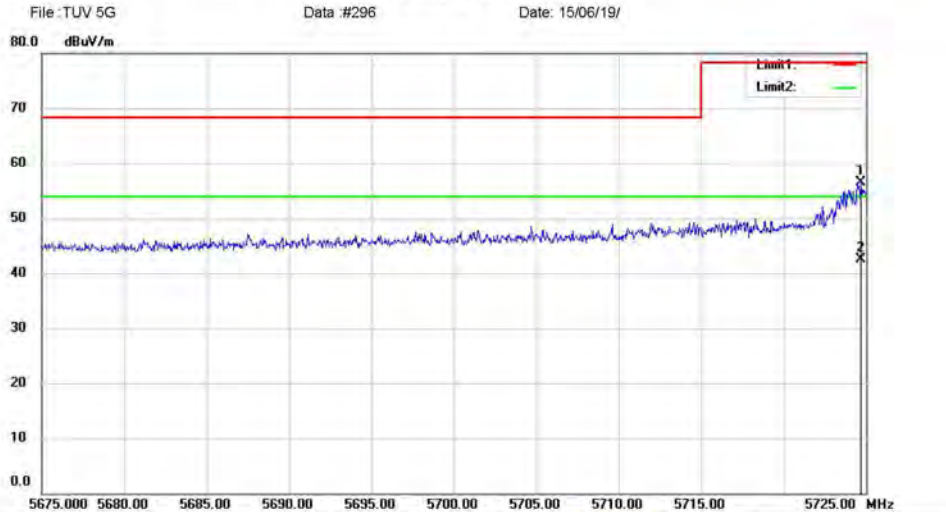

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.700	70.16	-13.56	56.60	78.20	-21.60	peak		
2	*	5724.700	56.15	-13.56	42.59	54.00	-11.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#296

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

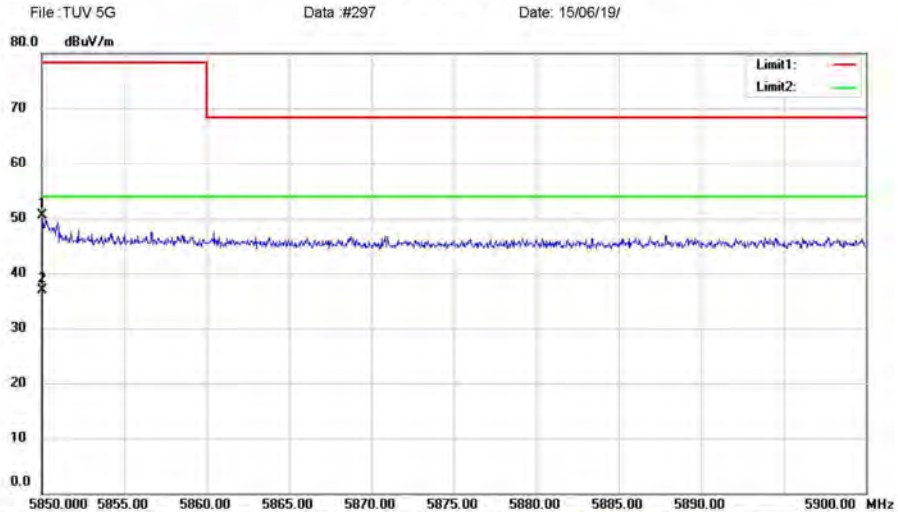

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.050	63.85	-13.41	50.44	78.20	-27.76	peak		
2	*	5850.050	50.36	-13.41	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#297

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

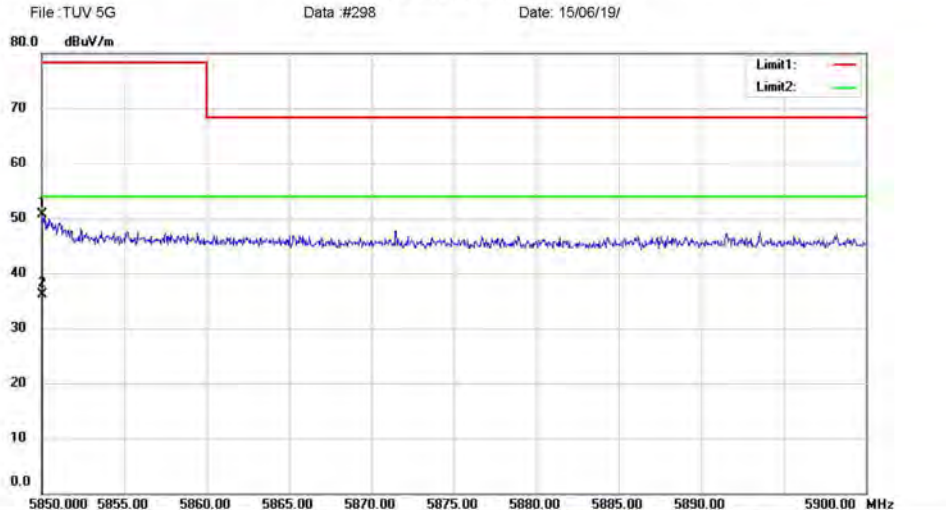

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11A CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.050	64.11	-13.41	50.70	78.20	-27.50	peak		
2	*	5850.050	49.56	-13.41	36.15	54.00	-17.85	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#298

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

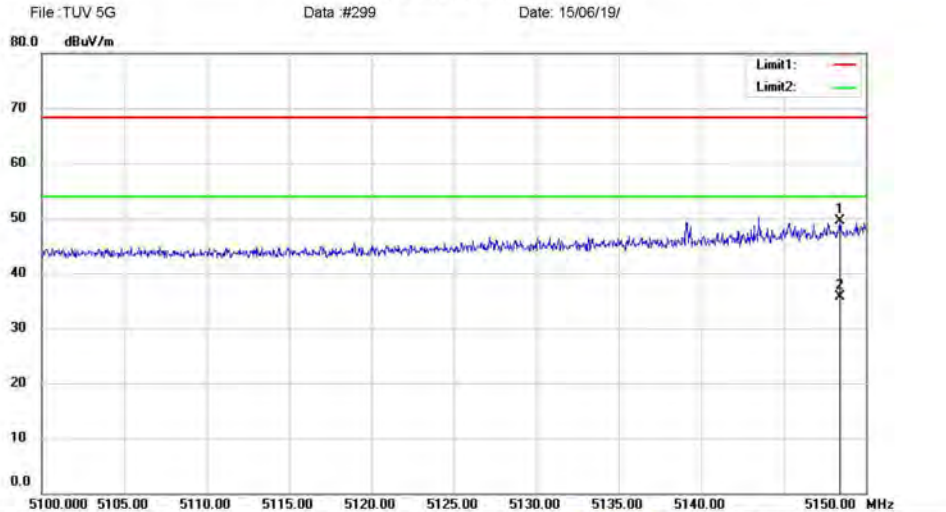

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.400	63.65	-14.24	49.41	68.20	-18.79	peak		
2	*	5148.400	49.88	-14.24	35.64	54.00	-18.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#299

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

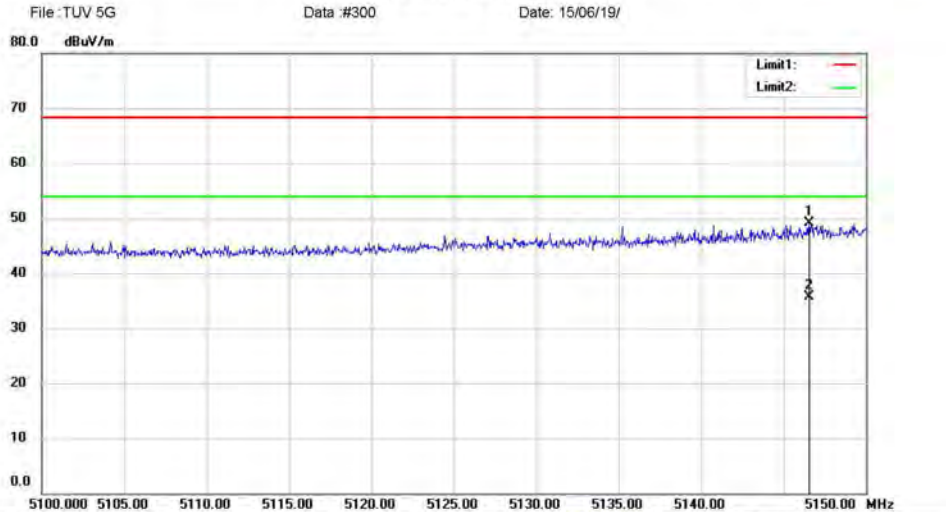

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.550	63.32	-14.24	49.08	68.20	-19.12	peak		
2	*	5146.550	49.88	-14.24	35.64	54.00	-18.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#300

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

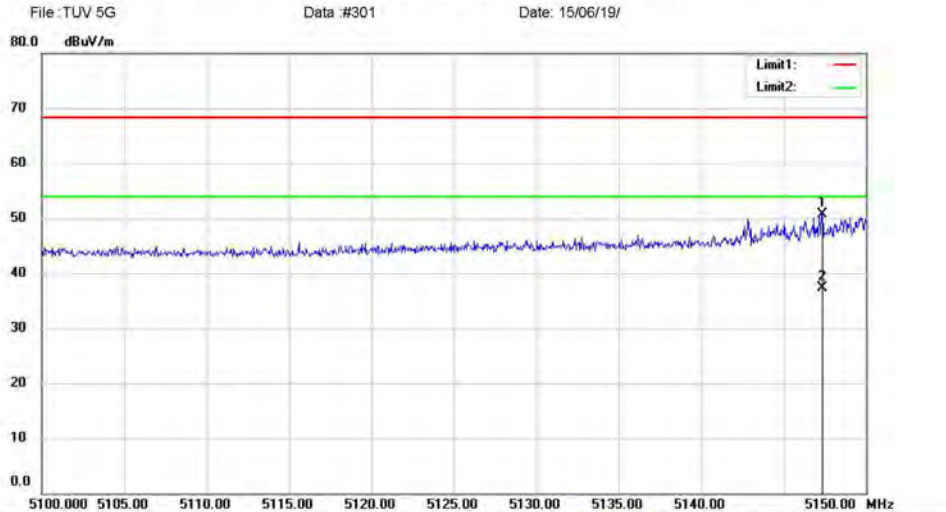

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.350	65.03	-14.24	50.79	68.20	-17.41	peak		
2	*	5147.350	51.49	-14.24	37.25	54.00	-16.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#301

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

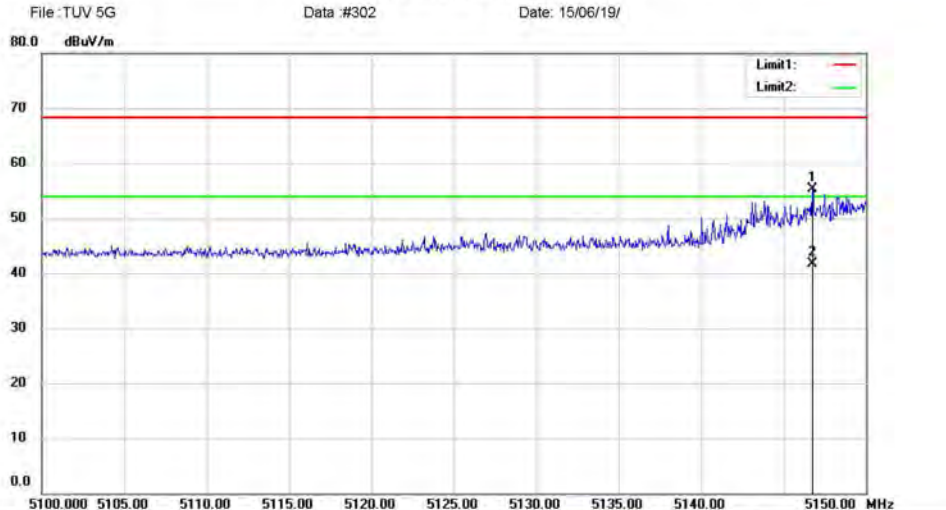

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.750	69.52	-14.24	55.28	68.20	-12.92	peak		
2	*	5146.750	55.85	-14.24	41.61	54.00	-12.39	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#302

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

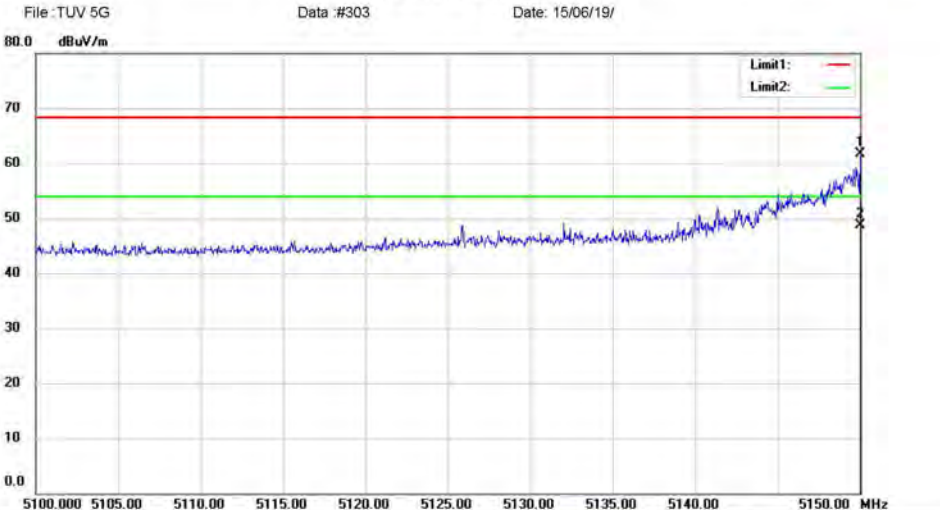

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5150.000	75.97	-14.24	61.73	68.20	-6.47	peak		
2	*	5150.000	62.85	-14.24	48.61	54.00	-5.39	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#303

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

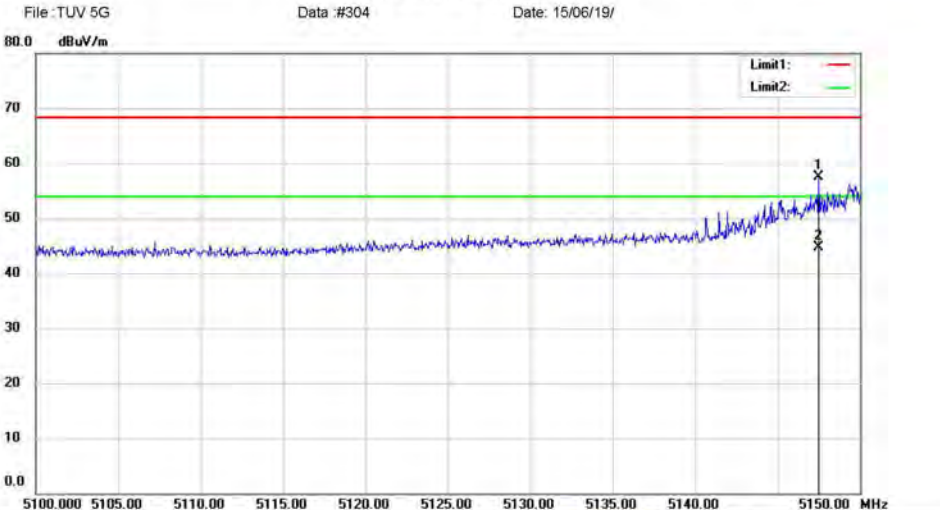

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH38 5180 Ant1+2
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5147.500	71.66	-14.24	57.42	68.20	-10.78	peak		
2	*	5147.500	58.91	-14.24	44.67	54.00	-9.33	AVG		

*:Maximum data x:Over limit !:over margin Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

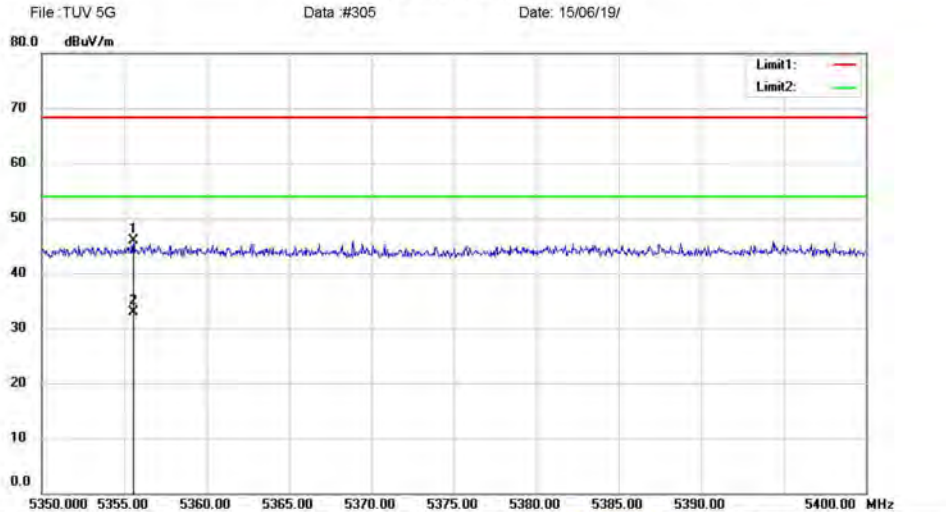

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.550	59.95	-14.00	45.95	68.20	-22.25	peak		
2	*	5355.550	46.84	-14.00	32.84	54.00	-21.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G Data :#305

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #306

Date: 15/06/19/

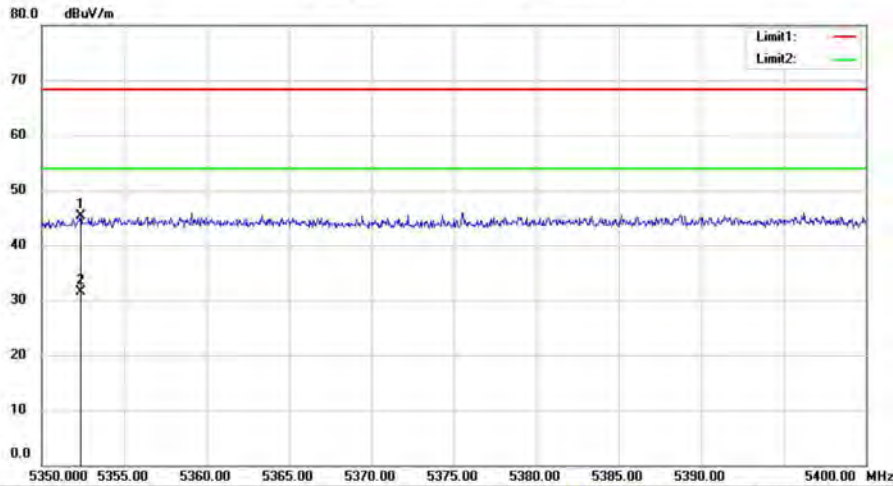

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5352.350	59.21	-14.00	45.21	68.20	-22.99	peak		
2	*	5352.350	45.54	-14.00	31.54	54.00	-22.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G\Data :#306

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

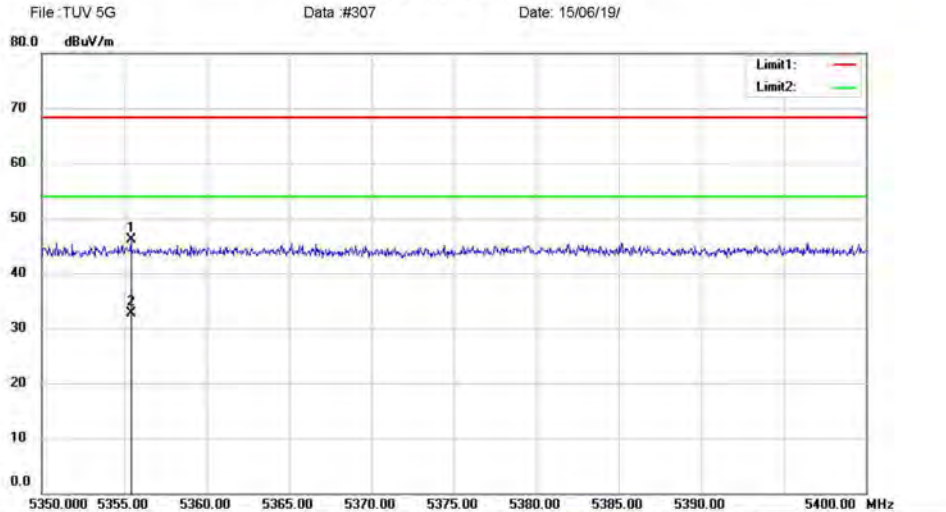

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5355.400	60.04	-14.00	46.04	68.20	-22.16	peak		
2	*	5355.400	46.75	-14.00	32.75	54.00	-21.25	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#307

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

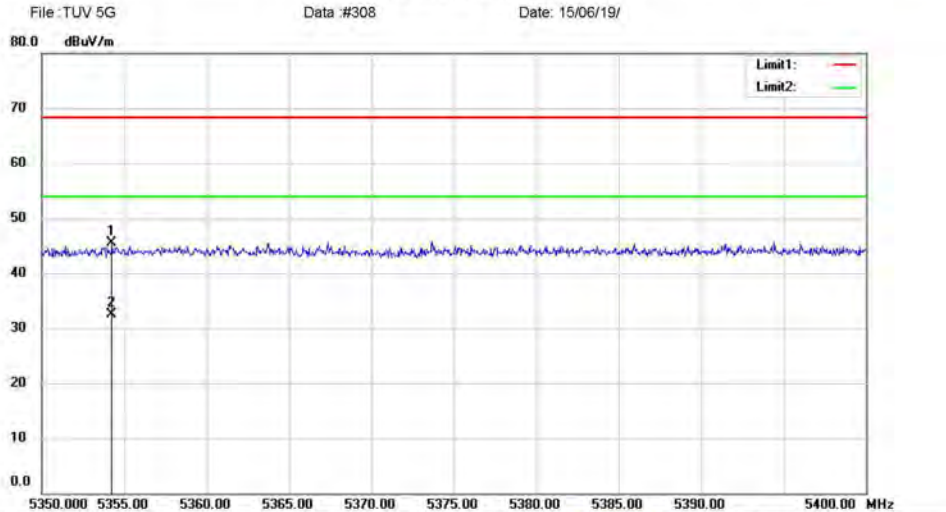

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5354.250	59.48	-14.00	45.48	68.20	-22.72	peak		
2	*	5354.250	46.42	-14.00	32.42	54.00	-21.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#308

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

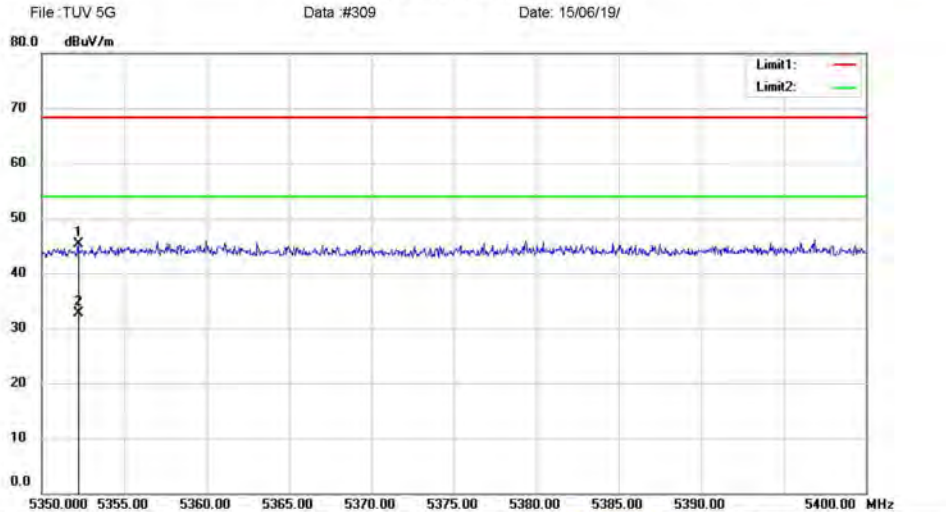

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5352.200	59.28	-14.00	45.28	68.20	-22.92	peak		
2	*	5352.200	46.71	-14.00	32.71	54.00	-21.29	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#309

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

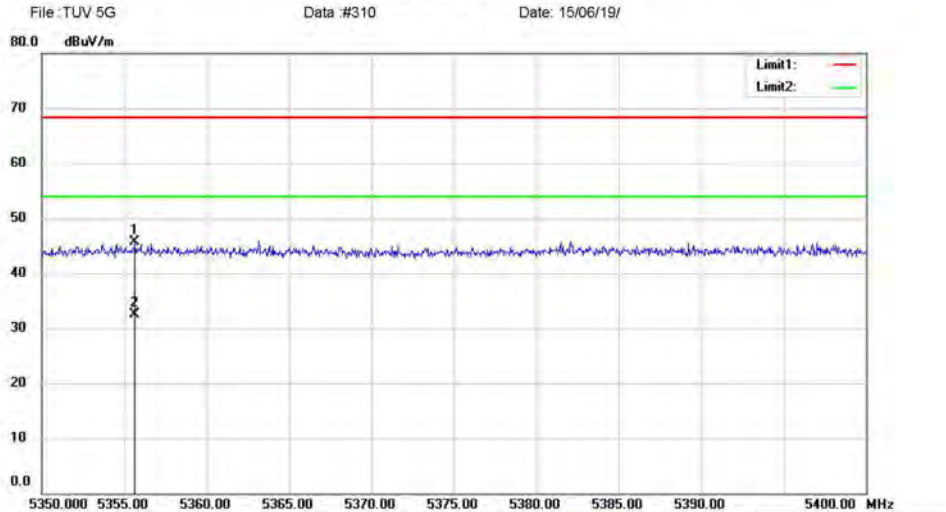

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH48 5240 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.650	59.68	-14.00	45.68	68.20	-22.52	peak		
2	*	5355.650	46.51	-14.00	32.51	54.00	-21.49	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#310

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

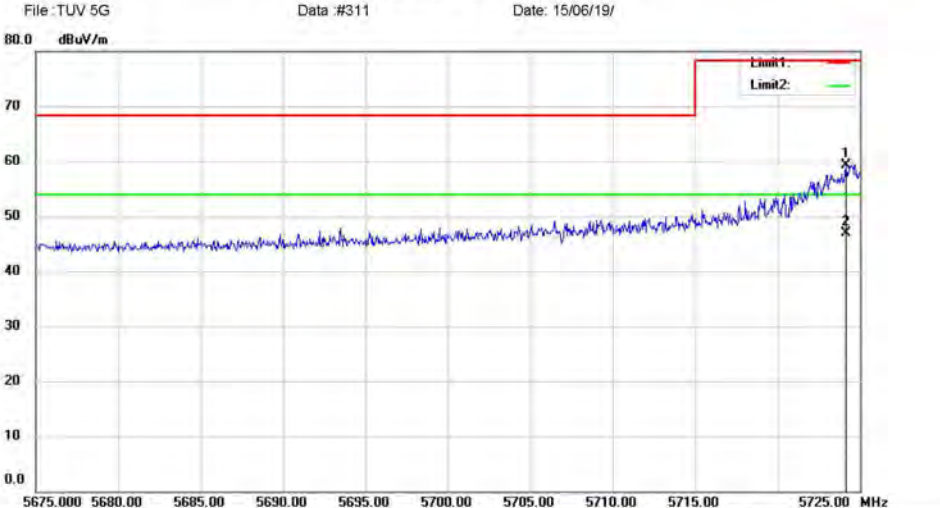


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.150	72.80	-13.56	59.24	78.20	-18.96	peak		
2	*	5724.150	60.39	-13.56	46.83	54.00	-7.17	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

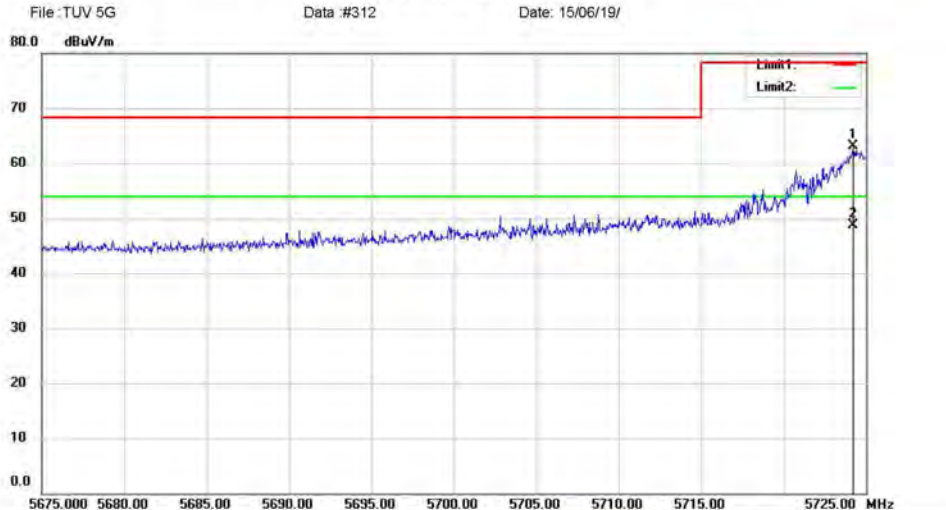

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.250	76.72	-13.56	63.16	78.20	-15.04	peak		
2	*	5724.250	62.25	-13.56	48.69	54.00	-5.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#312

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

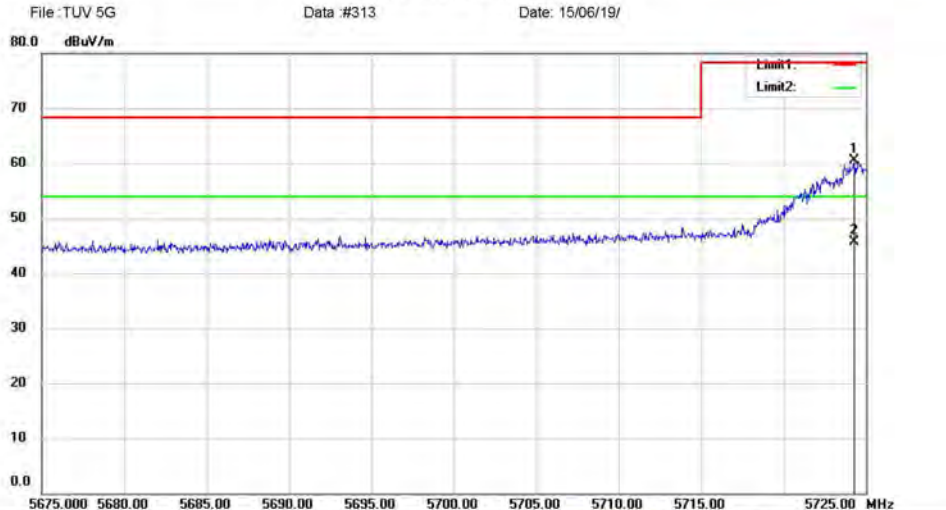

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.300	74.10	-13.56	60.54	78.20	-17.66	peak		
2	*	5724.300	59.19	-13.56	45.63	54.00	-8.37	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#313

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

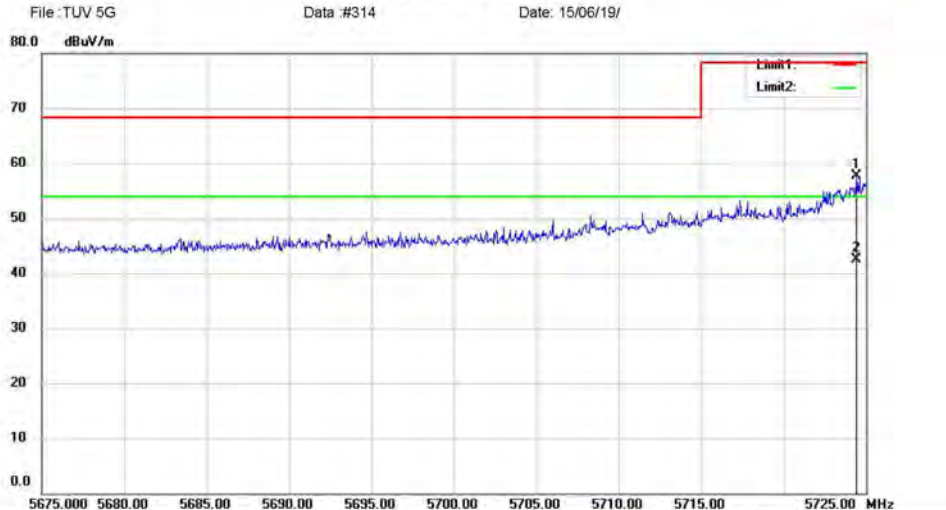

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.450	71.32	-13.56	57.76	78.20	-20.44	peak		
2	*	5724.450	56.10	-13.56	42.54	54.00	-11.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#314

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

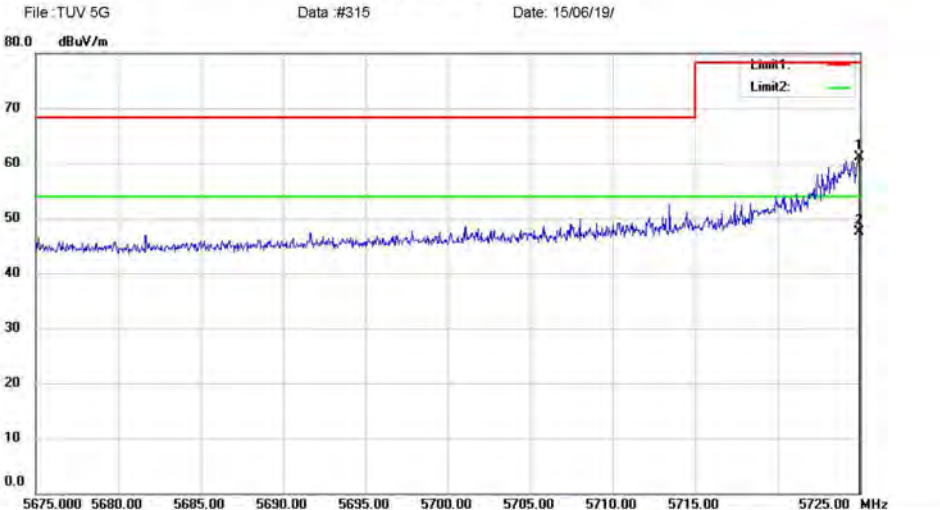


Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.950	74.65	-13.56	61.09	78.20	-17.11	peak		
2	*	5724.950	61.15	-13.56	47.59	54.00	-6.41	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

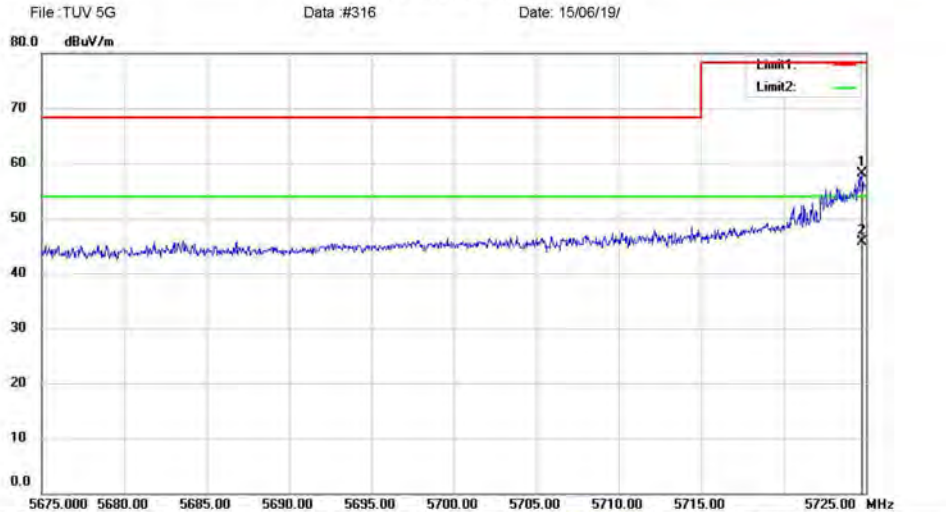

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH149 5745 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.750	71.64	-13.56	58.08	78.20	-20.12	peak		
2	*	5724.750	59.18	-13.56	45.62	54.00	-8.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#316

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

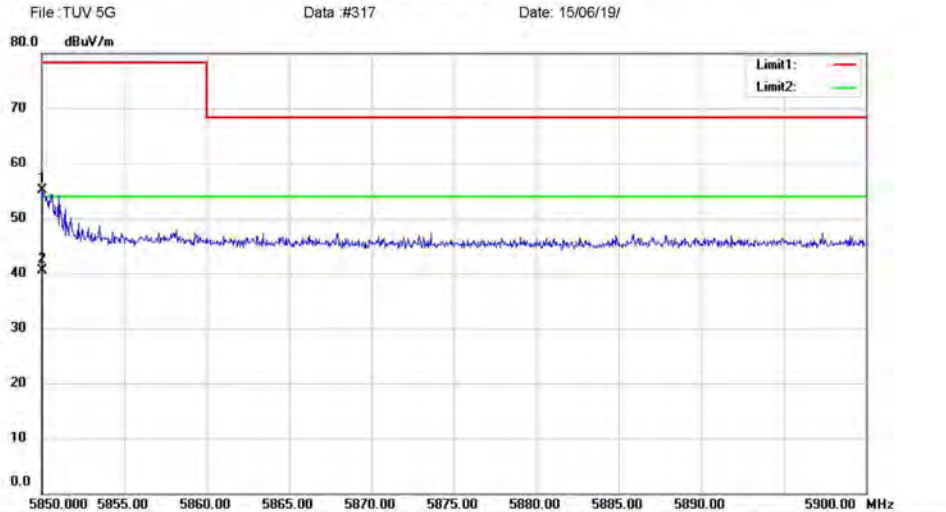

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	68.58	-13.41	55.17	78.20	-23.03			peak
2	*	5850.000	53.99	-13.41	40.58	54.00	-13.42			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#317

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

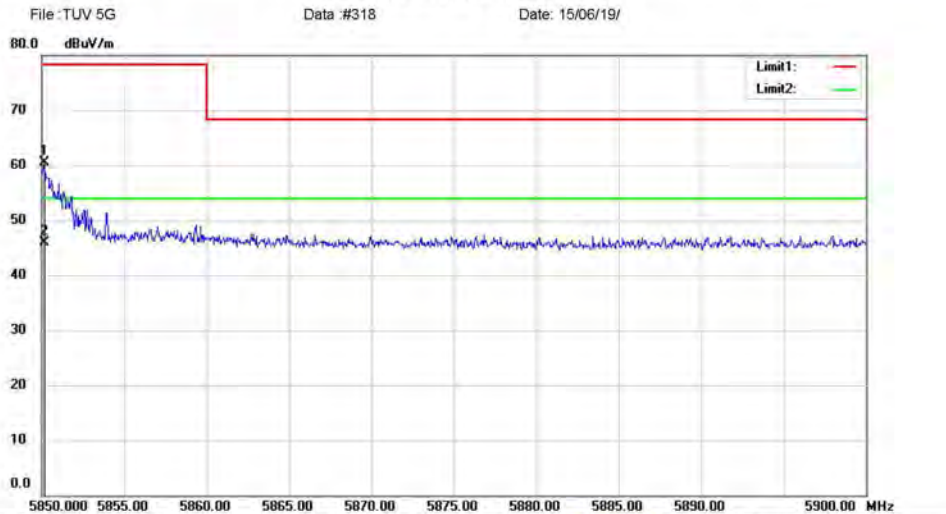

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.150	73.93	-13.41	60.52	78.20	-17.68	peak		
2	*	5850.150	59.26	-13.41	45.85	54.00	-8.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#318

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

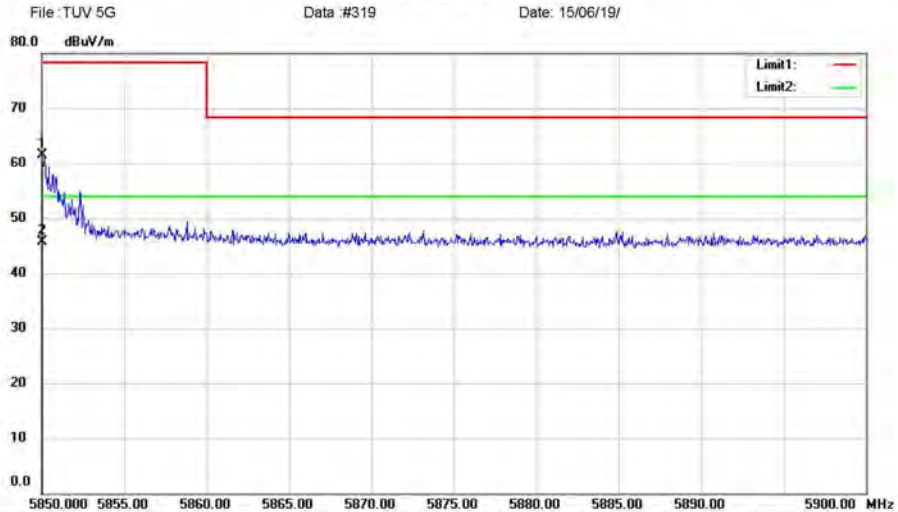

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	74.88	-13.41	61.47	78.20	-16.73	peak		
2	*	5850.000	59.14	-13.41	45.73	54.00	-8.27	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#319

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

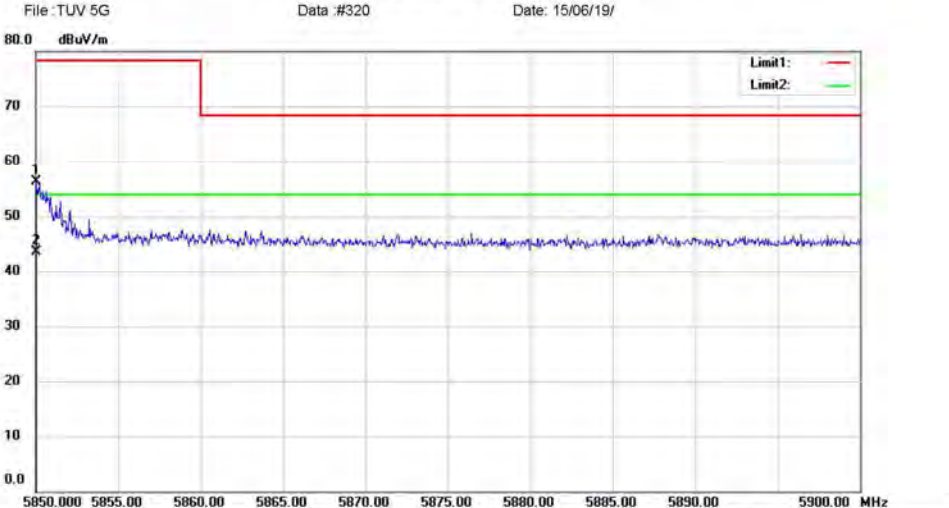


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.000	69.65	-13.41	56.24	78.20	-21.96	peak		
2	*	5850.000	56.94	-13.41	43.53	54.00	-10.47	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

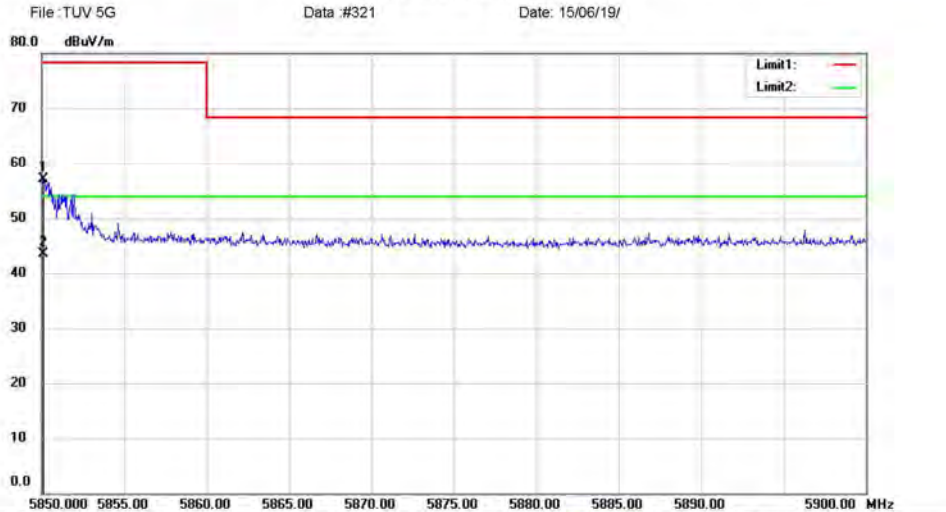

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.100	70.54	-13.41	57.13	78.20	-21.07	peak		
2	*	5850.100	56.92	-13.41	43.51	54.00	-10.49	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#321

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

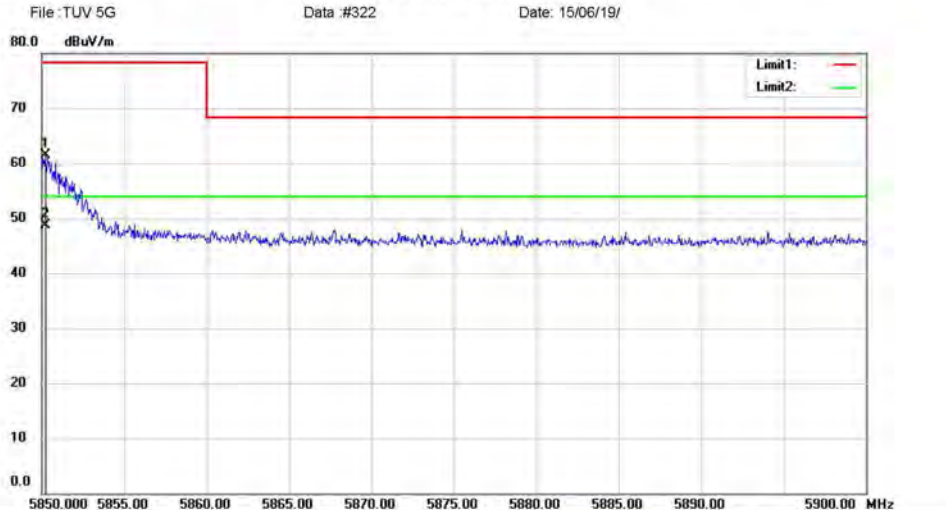

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT20 CH165 5825 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.200	74.99	-13.41	61.58	78.20	-16.62	peak		
2	*	5850.200	62.04	-13.41	48.63	54.00	-5.37	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#322

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

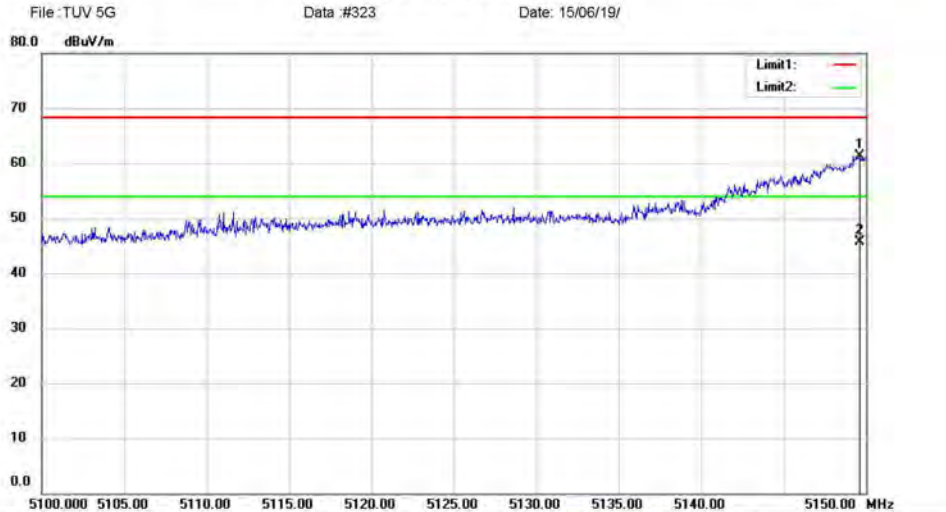

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.650	75.54	-14.24	61.30	68.20	-6.90	peak		
2		5149.650	59.86	-14.24	45.62	54.00	-8.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#323

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

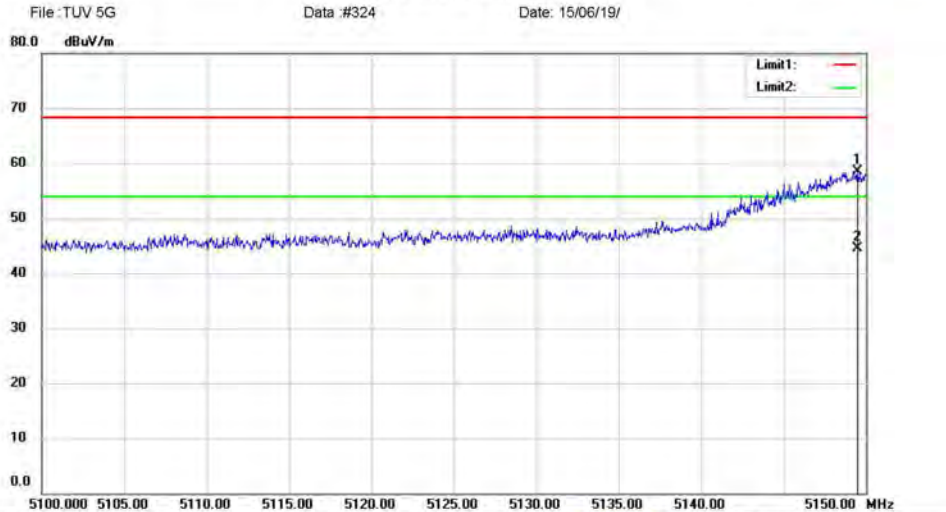

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE) FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.500	72.73	-14.24	58.49	68.20	-9.71	peak		
2	*	5149.500	58.76	-14.24	44.52	54.00	-9.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#324


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #325 Date: 15/06/19/

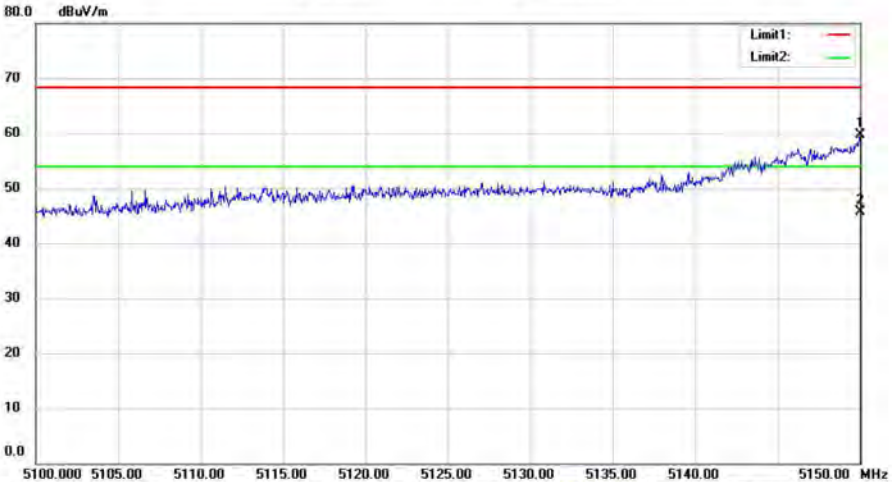

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5150.000	73.91	-14.24	59.67	68.20	-8.53	peak			
2	*	5150.000	59.91	-14.24	45.67	54.00	-8.33	AVG			


*:Maximum data x:Over limit !:over margin Operator: KK

File :TUV 5G>Data :#325 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

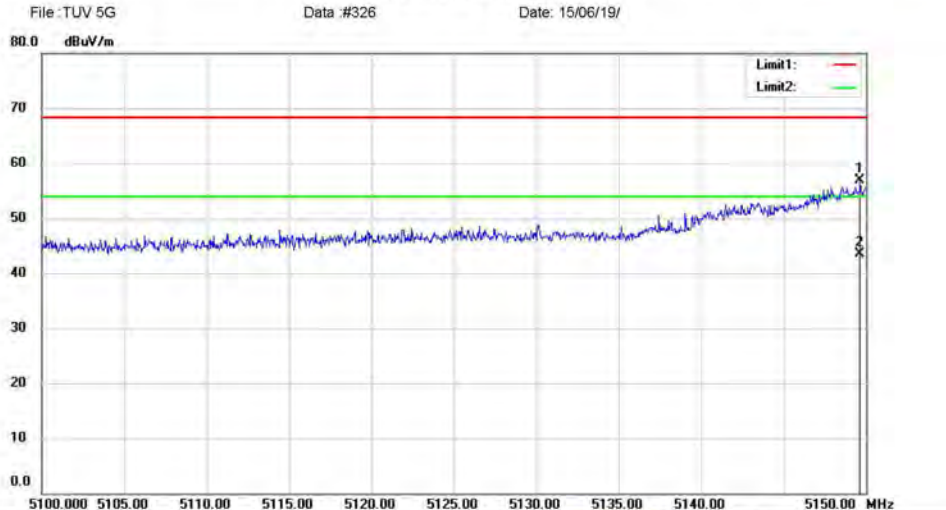

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.650	71.05	-14.24	56.81	68.20	-11.39	peak		
2	*	5149.650	57.78	-14.24	43.54	54.00	-10.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#326

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

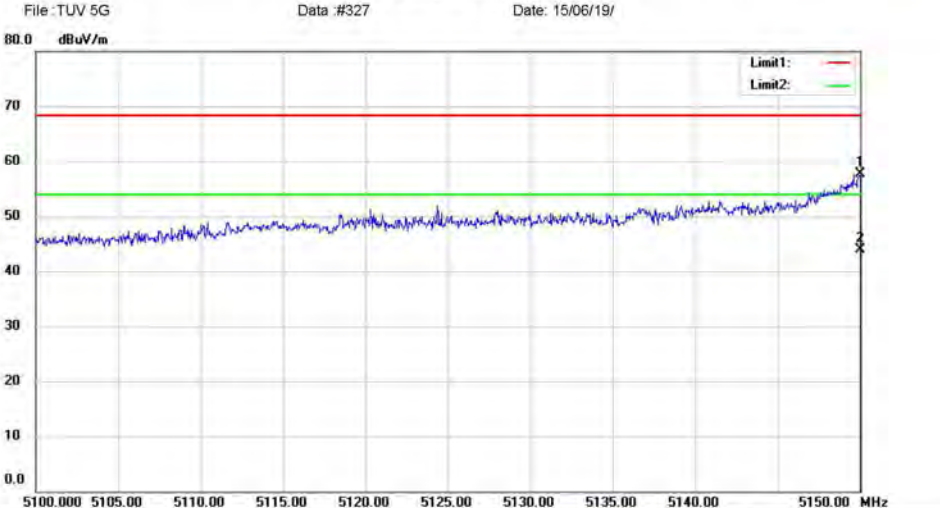


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5150.000	71.95	-14.24	57.71	68.20	-10.49	peak		
2	*	5150.000	58.06	-14.24	43.82	54.00	-10.18	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

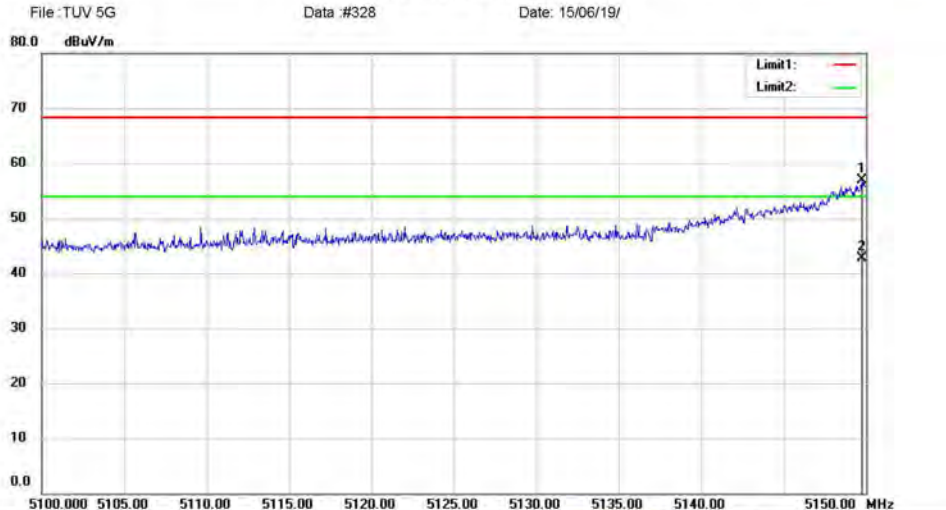

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH38 5190 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.750	71.06	-14.24	56.82	68.20	-11.38	peak		
2	*	5149.750	56.92	-14.24	42.68	54.00	-11.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#328

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

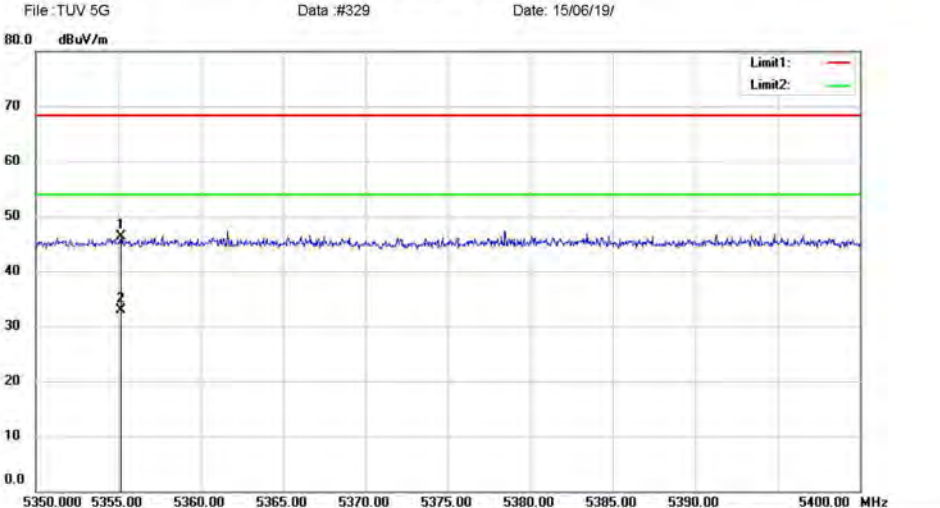


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.150	60.28	-14.00	46.28	68.20	-21.92	peak		
2	*	5355.150	46.84	-14.00	32.84	54.00	-21.16	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

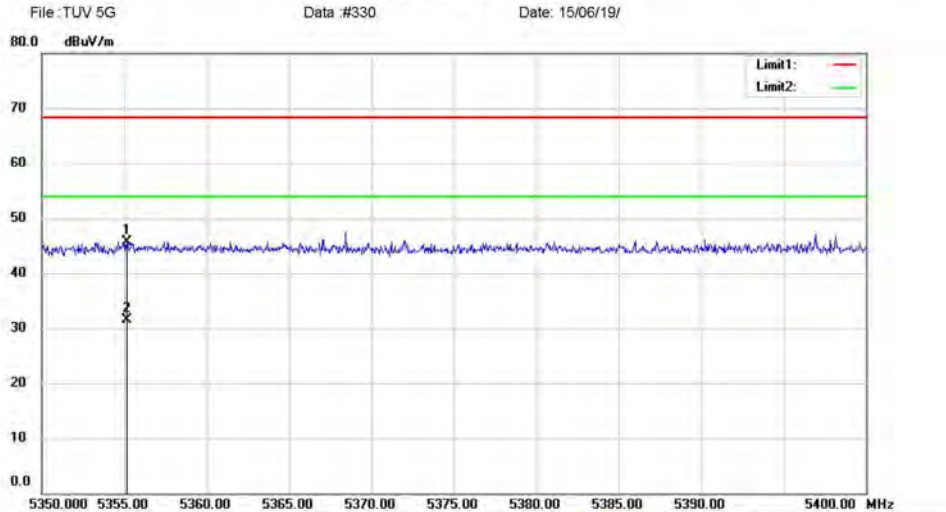

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.150	59.70	-14.00	45.70	68.20	-22.50	peak		
2	*	5355.150	45.53	-14.00	31.53	54.00	-22.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#330

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

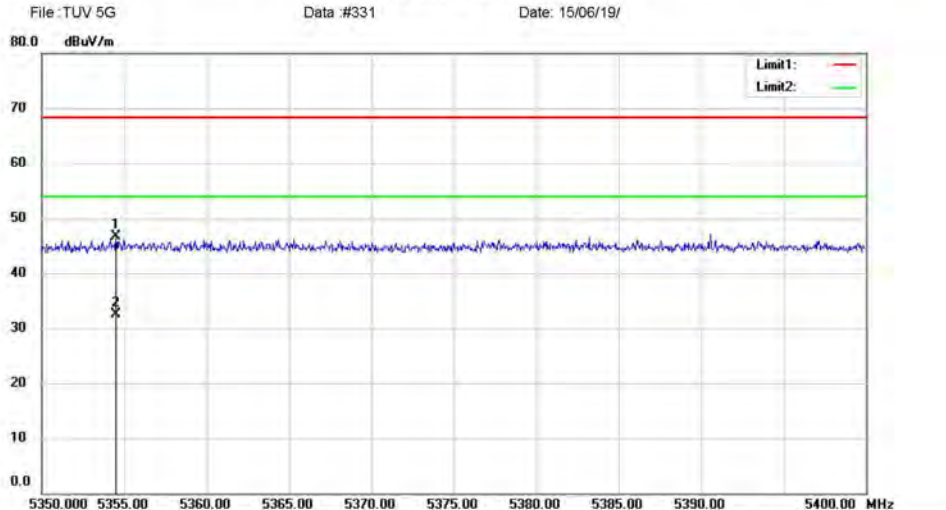

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5354.500	60.71	-14.00	46.71	68.20	-21.49	peak		
2	*	5354.500	46.53	-14.00	32.53	54.00	-21.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#331

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

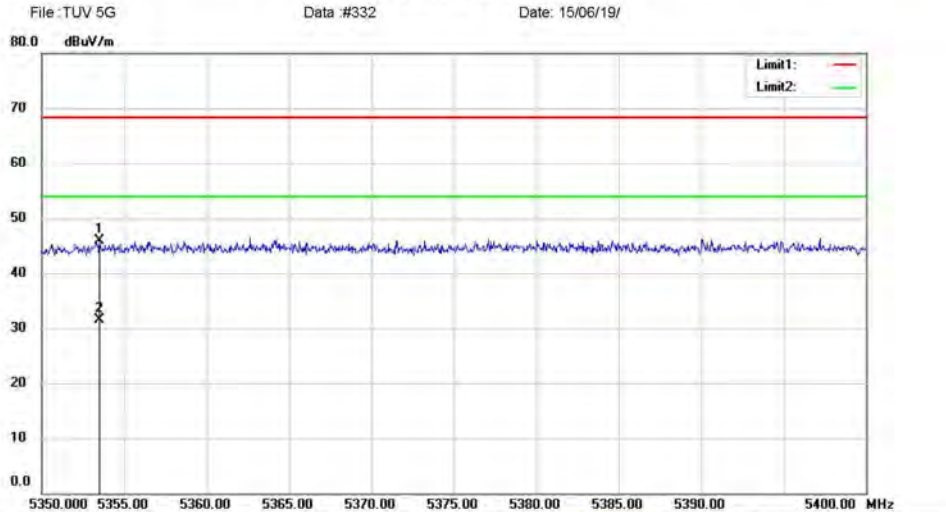

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5353.500	59.86	-14.00	45.86	68.20	-22.34	peak		
2		5353.500	45.51	-14.00	31.51	54.00	-22.49	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#332

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

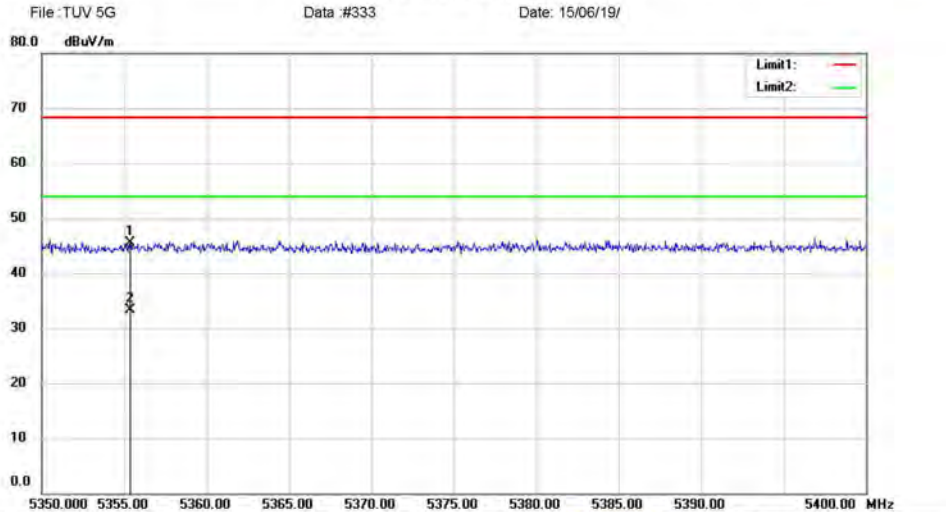

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5355.350	59.48	-14.00	45.48	68.20	-22.72	peak		
2	*	5355.350	47.24	-14.00	33.24	54.00	-20.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#333

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

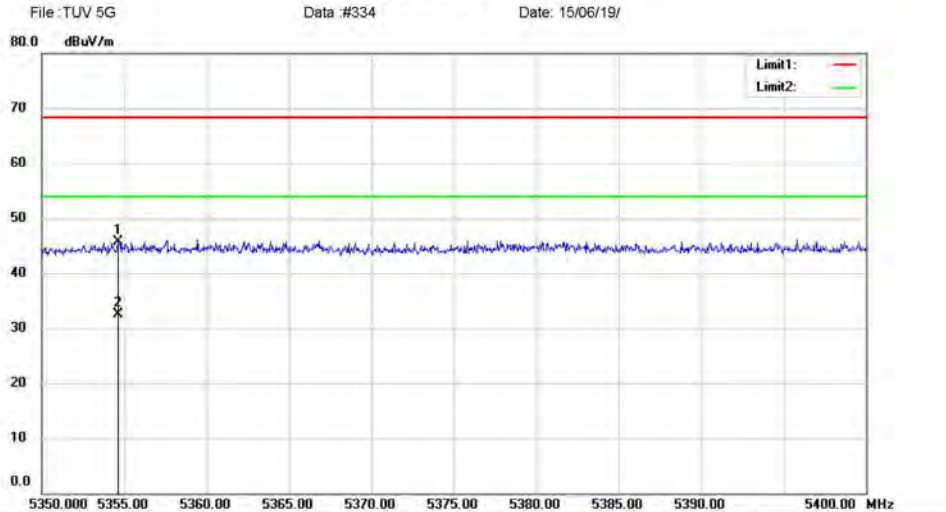

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH46 5230 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5354.600	59.69	-14.00	45.69	68.20	-22.51	peak		
2	*	5354.600	46.58	-14.00	32.58	54.00	-21.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G Data :#334

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #335 Date: 15/06/19/




Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.950	71.76	-13.56	58.20	78.20	-20.00	peak		
2	*	5724.950	58.09	-13.56	44.53	54.00	-9.47	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

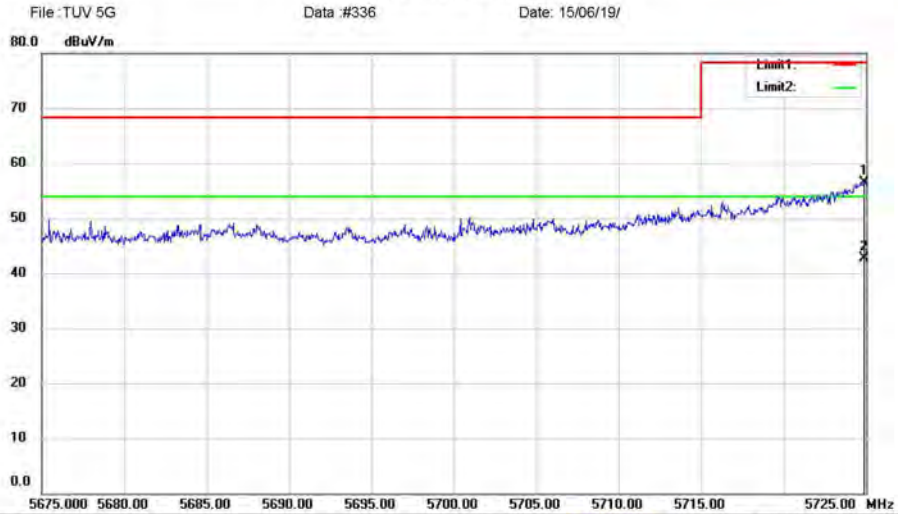

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.900	70.05	-13.56	56.49	78.20	-21.71	peak		
2	*	5724.900	56.24	-13.56	42.68	54.00	-11.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#336

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

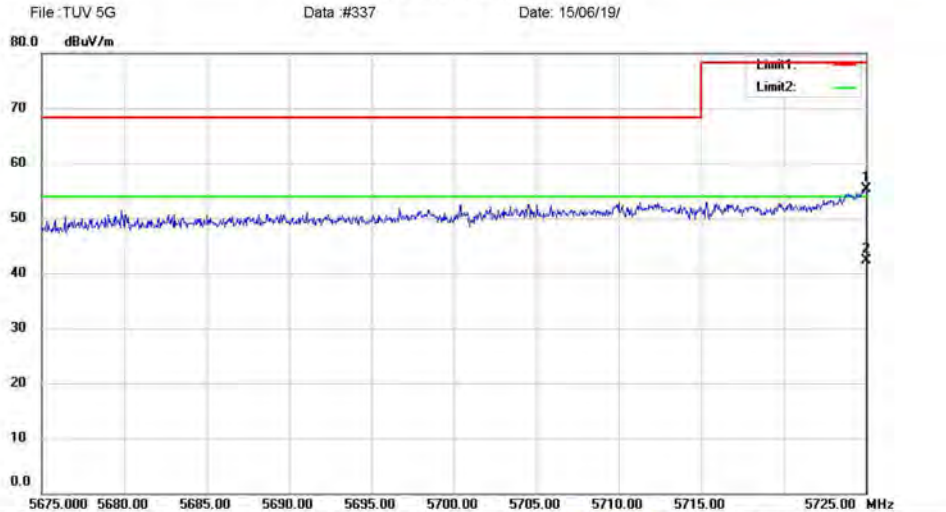

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5725.000	68.89	-13.56	55.33	78.20	-22.87	peak		
2	*	5725.000	55.80	-13.56	42.24	54.00	-11.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#337

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

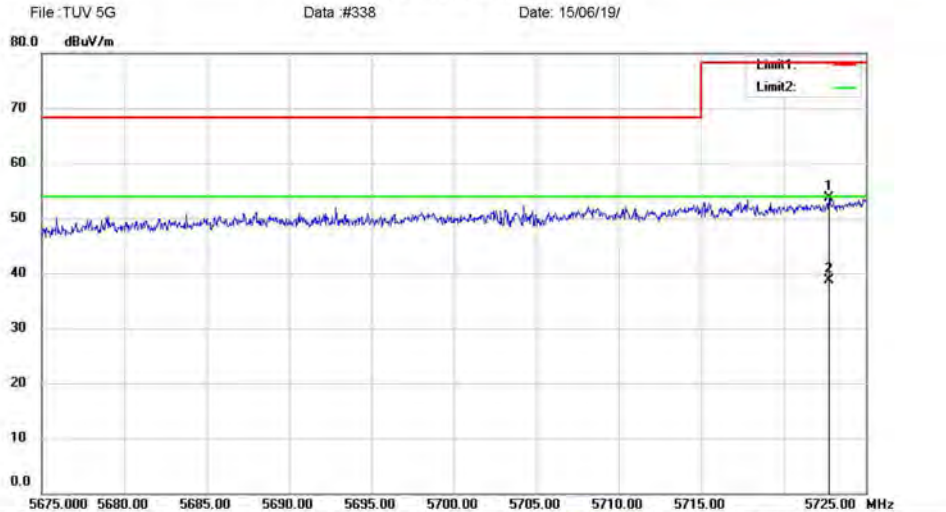

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5722.750	67.30	-13.56	53.74	78.20	-24.46	peak		
2	*	5722.750	52.21	-13.56	38.65	54.00	-15.35	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#338

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

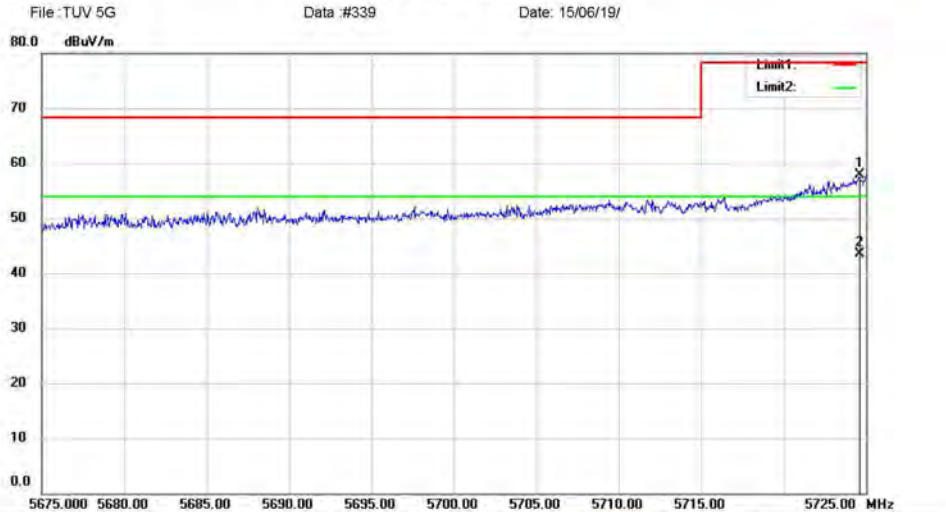

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.600	71.43	-13.56	57.87	78.20	-20.33	peak		
2	*	5724.600	57.08	-13.56	43.52	54.00	-10.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#339

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

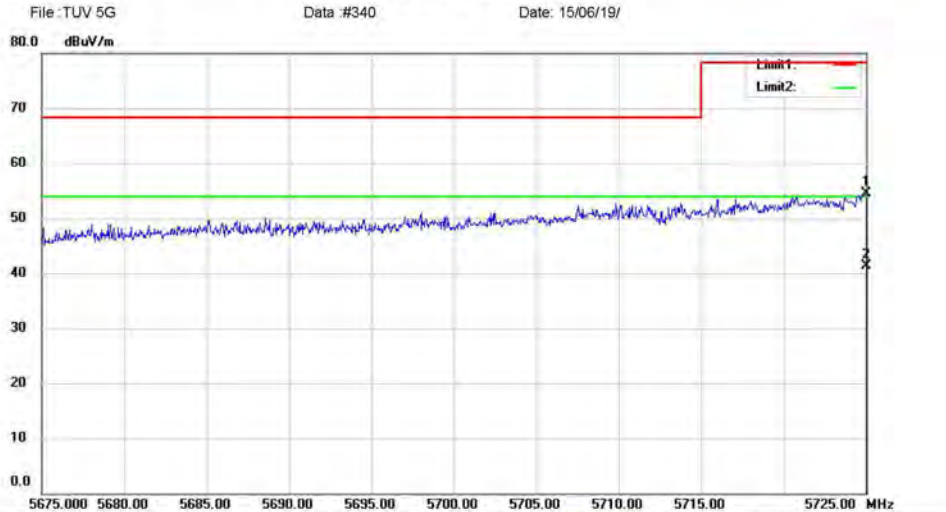

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH151 5755 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5725.000	67.99	-13.56	54.43	78.20	-23.77	peak		
2	*	5725.000	54.84	-13.56	41.28	54.00	-12.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#340

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

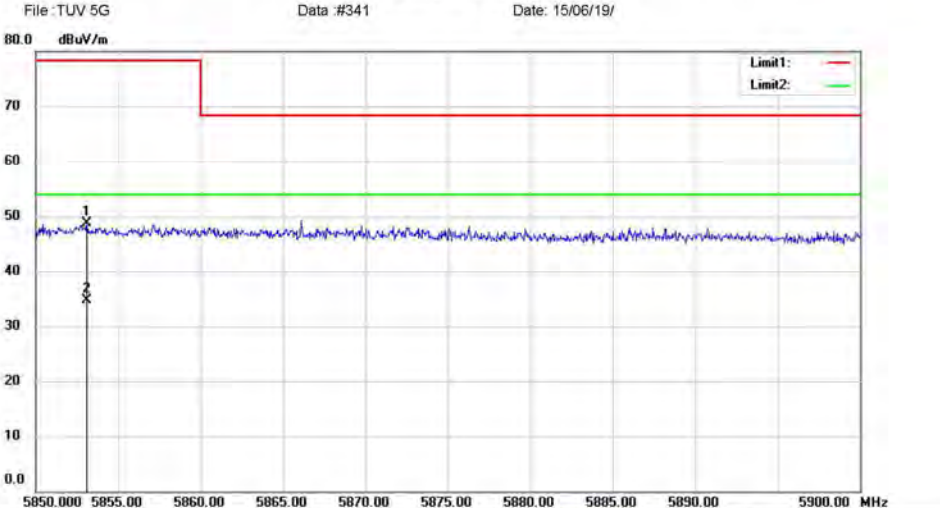

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant1
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5853.100	62.12	-13.41	48.71	78.20	-29.49	peak		
2	*	5853.100	48.03	-13.41	34.62	54.00	-19.38	AVG		

*:Maximum data x:Over limit !:over margin Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

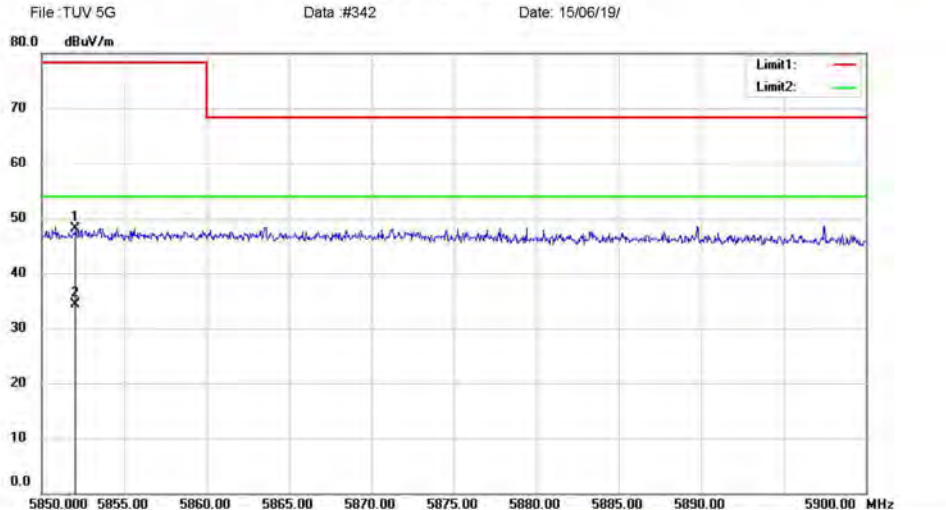

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.050	61.61	-13.41	48.20	78.20	-30.00	peak		
2	*	5852.050	47.69	-13.41	34.28	54.00	-19.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5GData :#342

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

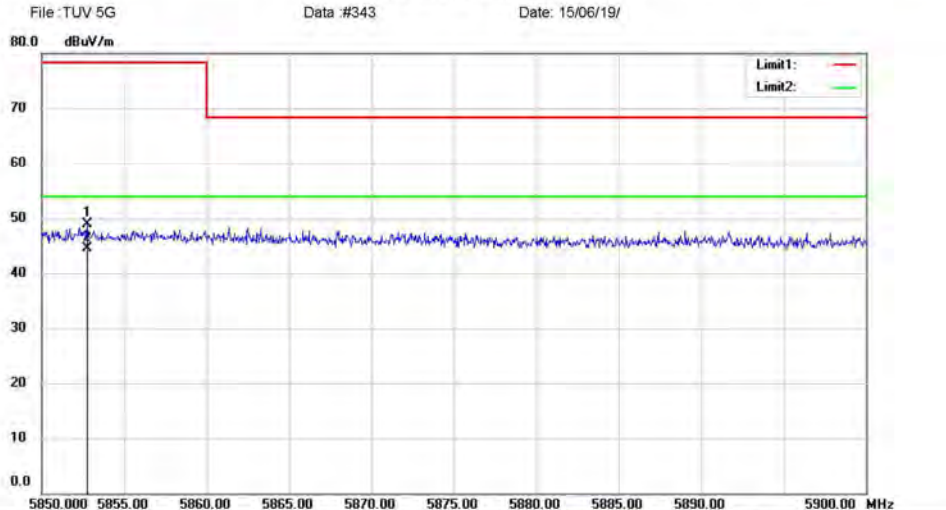

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.750	62.25	-13.41	48.84	78.20	-29.36	peak		
2	*	5852.750	57.98	-13.41	44.57	54.00	-9.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#343

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

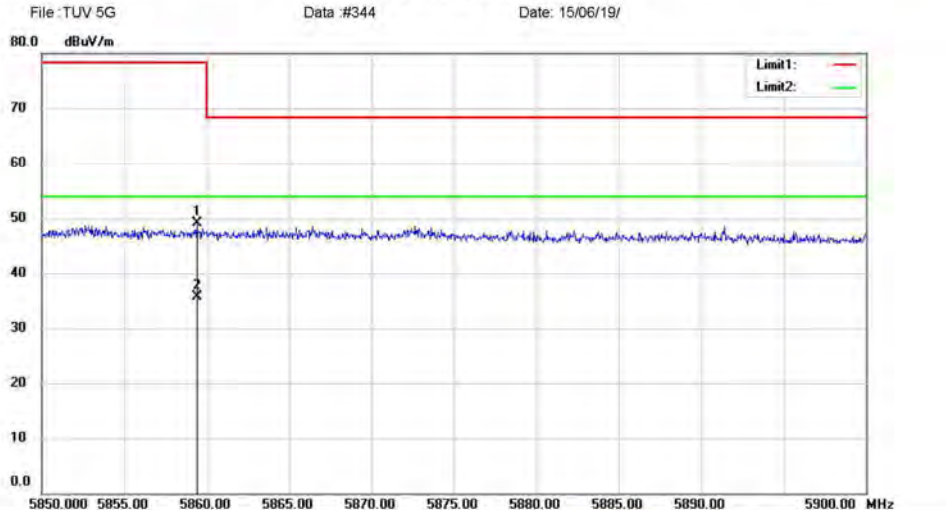

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5859.400	62.42	-13.39	49.03	78.20	-29.17	peak		
2	*	5859.400	49.01	-13.39	35.62	54.00	-18.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#344

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

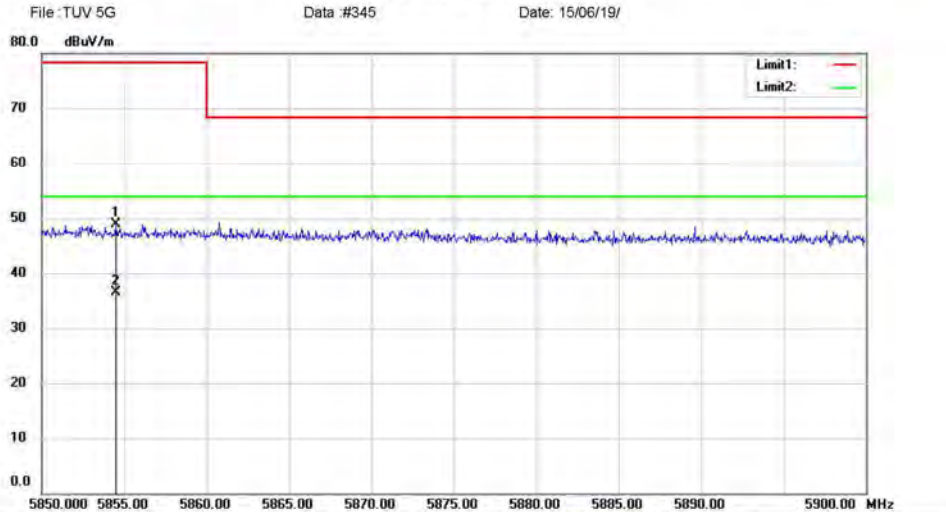

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5854.500	62.39	-13.40	48.99	78.20	-29.21	peak		
2	*	5854.500	49.92	-13.40	36.52	54.00	-17.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#345

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

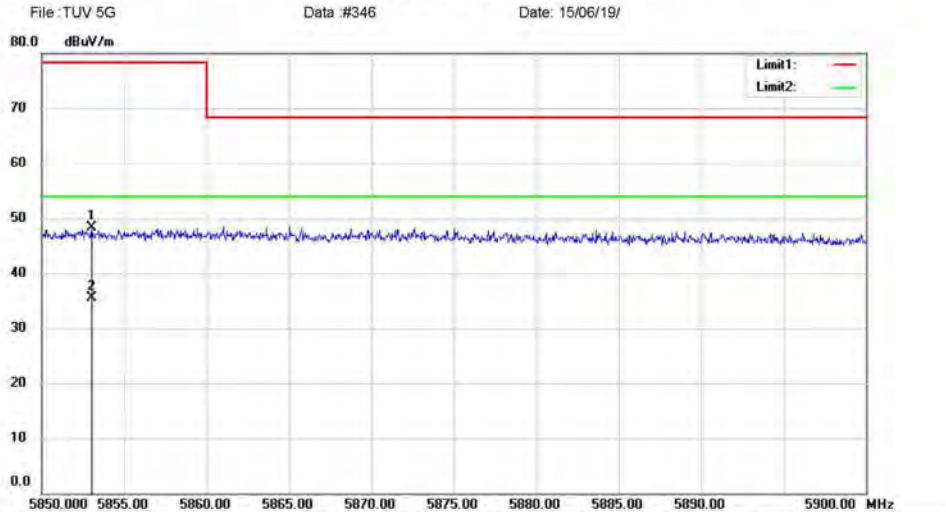

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11N HT40 CH159 5795 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5853.000	61.79	-13.41	48.38	78.20	-29.82	peak		
2	*	5853.000	48.83	-13.41	35.42	54.00	-18.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#346

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

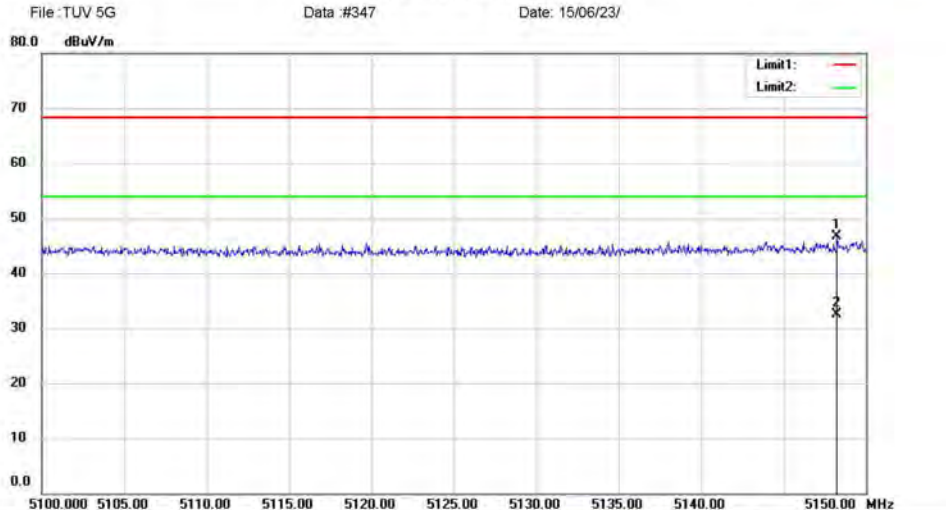

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.250	60.97	-14.24	46.73	68.20	-21.47	peak		
2	*	5148.250	46.78	-14.24	32.54	54.00	-21.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#347


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #348 Date: 15/06/23/

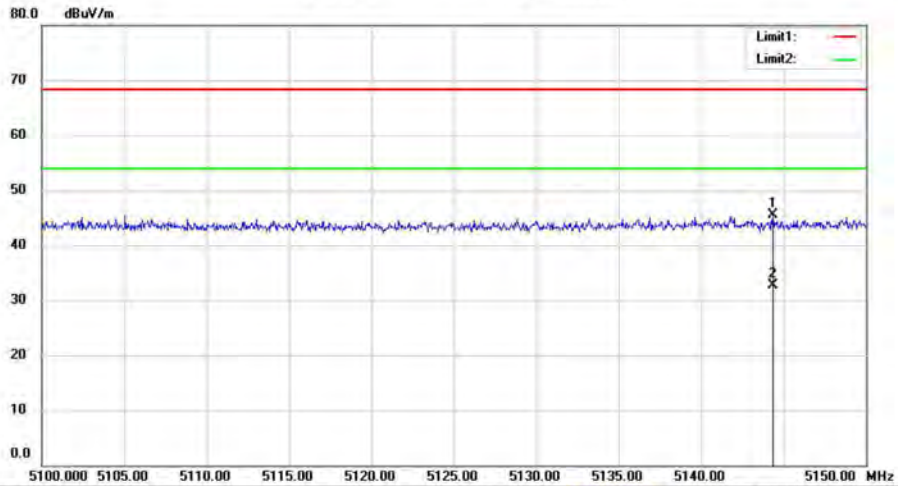

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5144.350	59.69	-14.25	45.44	68.20	-22.76	peak		
2	*	5144.350	46.99	-14.25	32.74	54.00	-21.26	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#348

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

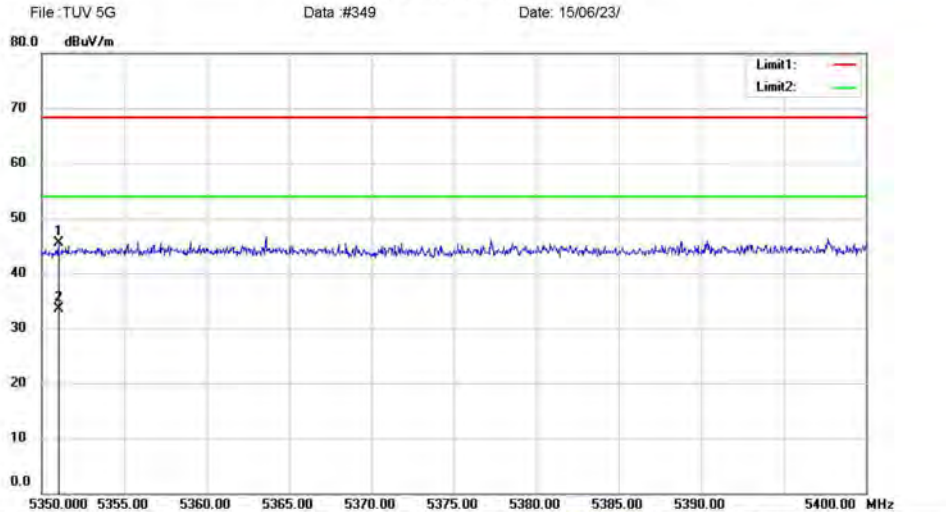

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5351.000	59.43	-14.00	45.43	68.20	-22.77	peak		
2	*	5351.000	47.42	-14.00	33.42	54.00	-20.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#349

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

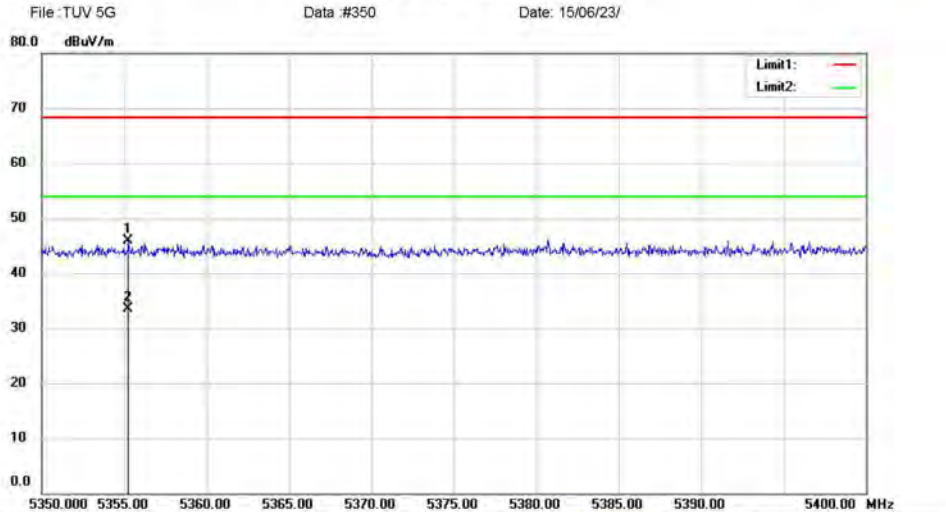

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.250	59.81	-14.00	45.81	68.20	-22.39	peak		
2	*	5355.250	47.43	-14.00	33.43	54.00	-20.57	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#350

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

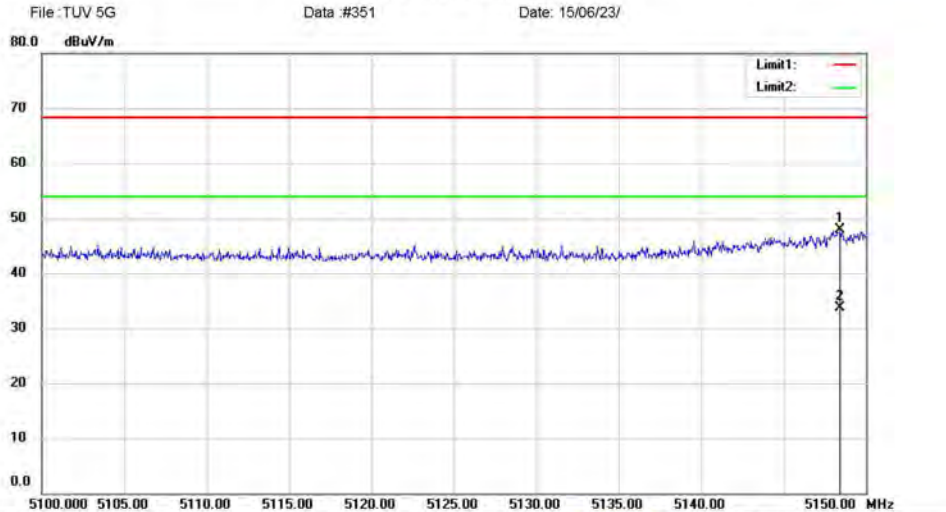

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.450	62.14	-14.24	47.90	68.20	-20.30	peak		
2	*	5148.450	47.96	-14.24	33.72	54.00	-20.28	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#351

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

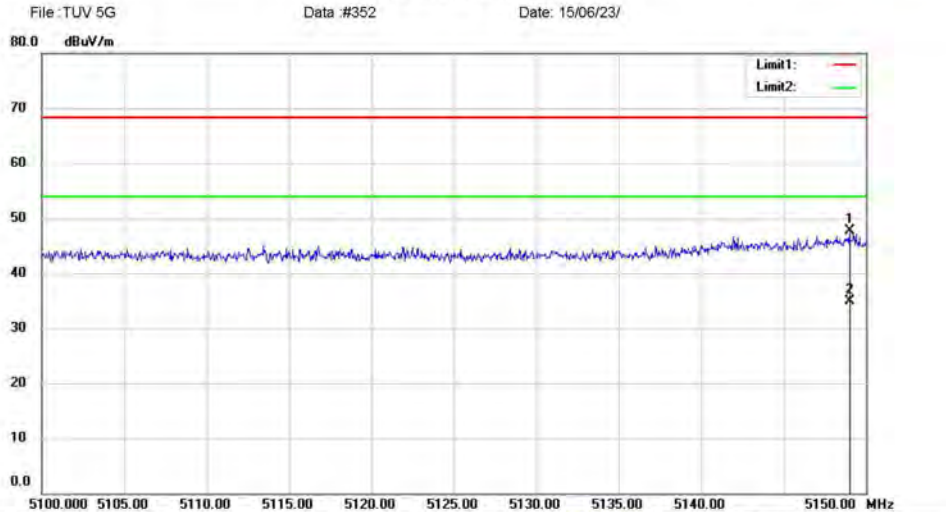

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.000	61.85	-14.24	47.61	68.20	-20.59	peak		
2	*	5149.000	49.19	-14.24	34.95	54.00	-19.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#352

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

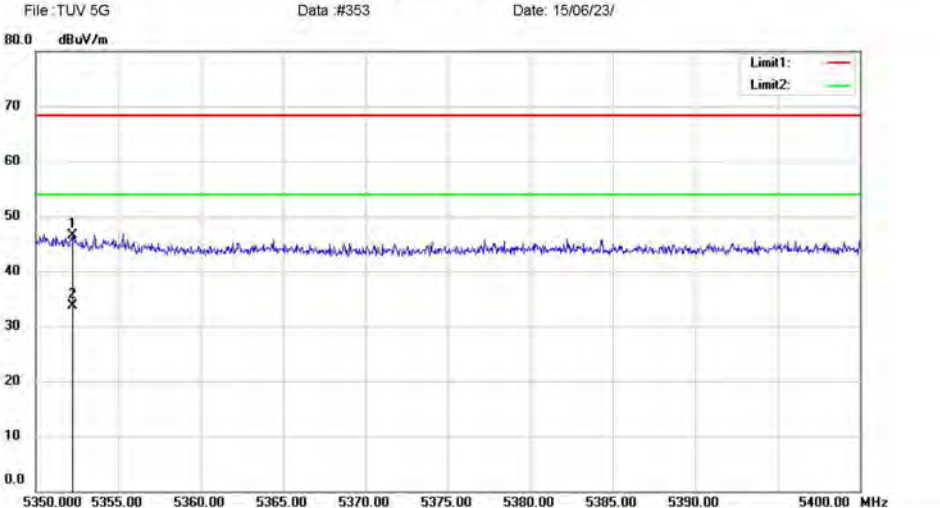

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5352.200	60.52	-14.00	46.52	68.20	-21.68	peak			
2	*	5352.200	47.72	-14.00	33.72	54.00	-20.28	AVG			


*:Maximum data x:Over limit !:over margin Operator: KK

File :TUV 5G>Data :#353 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

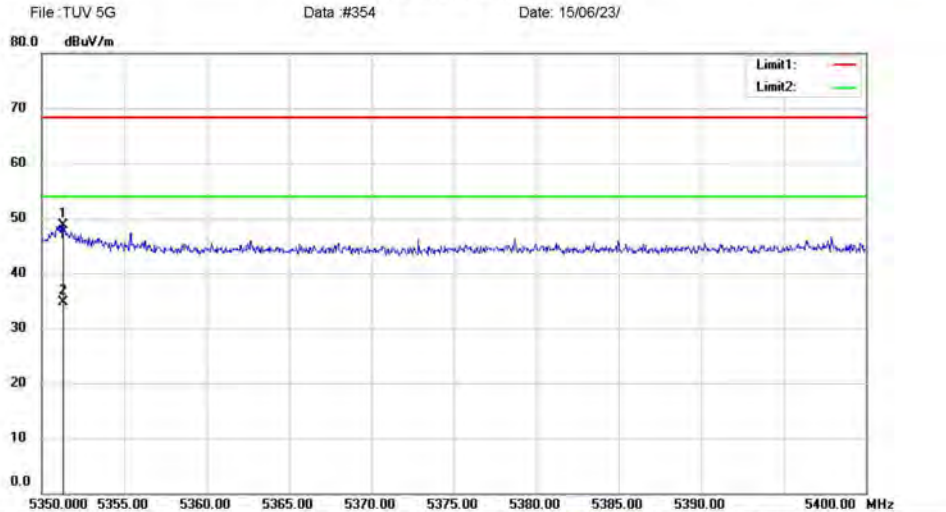

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5351.300	62.79	-14.00	48.79	68.20	-19.41			peak
2	*	5351.300	48.73	-14.00	34.73	54.00	-19.27			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#354

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

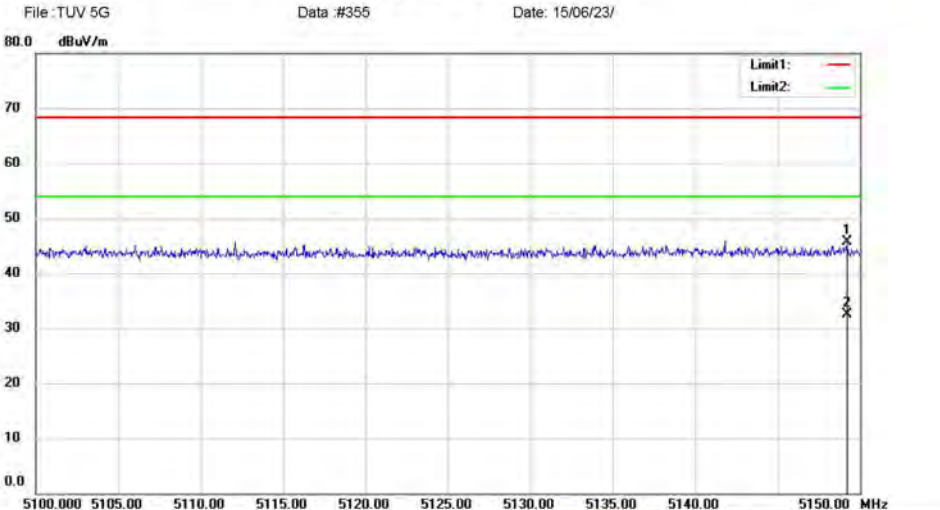

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.200	59.87	-14.24	45.63	68.20	-22.57	peak		
2	*	5149.200	46.78	-14.24	32.54	54.00	-21.46	AVG		


*:Maximum data x:Over limit !:over margin Operator: KK

File :TUV 5G>Data :#355 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

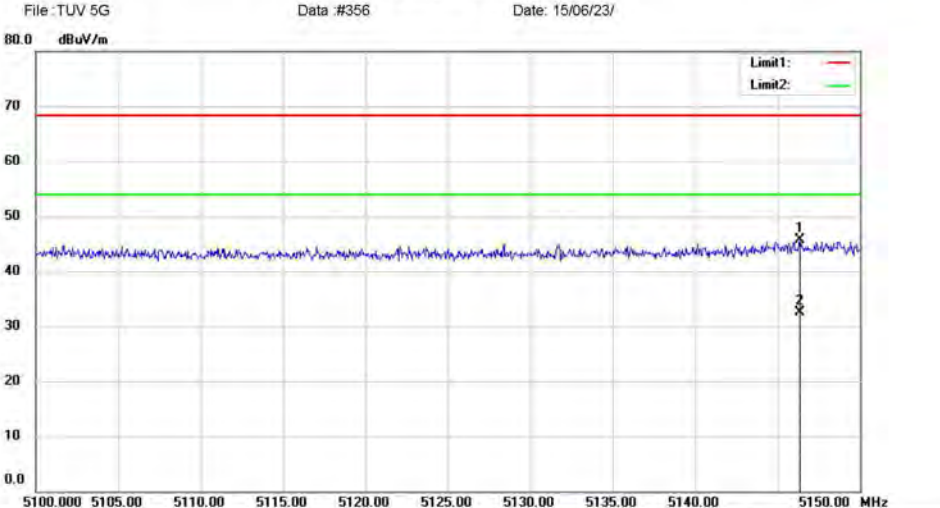

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH36 5180 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.350	59.94	-14.24	45.70	68.20	-22.50	peak		
2	*	5146.350	46.82	-14.24	32.58	54.00	-21.42	AVG		

Radiated Emission Measurement

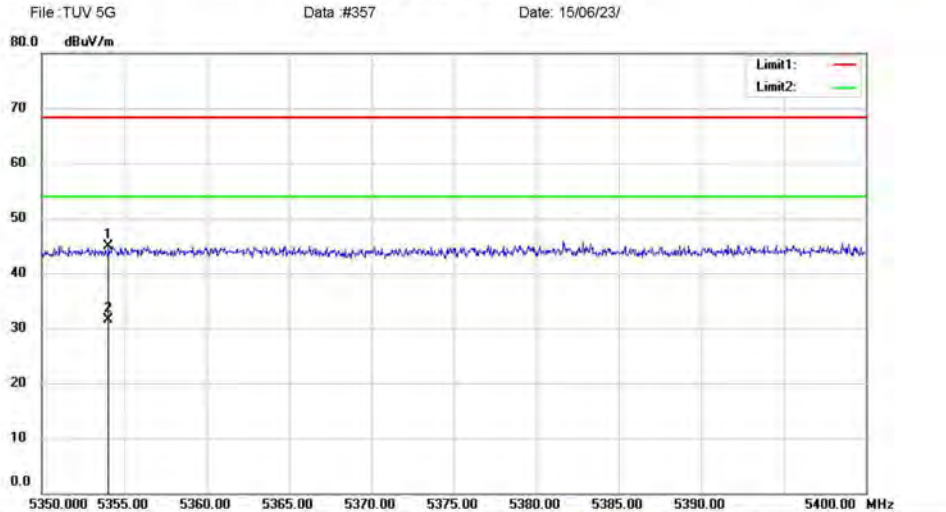

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5354.050	58.94	-14.00	44.94	68.20	-23.26	peak		
2	*	5354.050	45.54	-14.00	31.54	54.00	-22.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#357

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

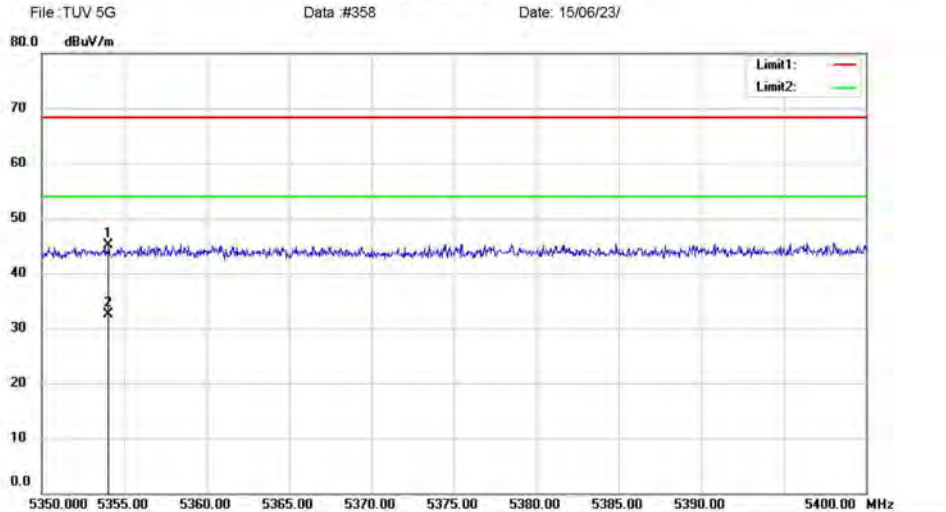

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH48 5240 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5354.050	59.04	-14.00	45.04	68.20	-23.16	peak		
2	*	5354.050	46.42	-14.00	32.42	54.00	-21.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#358


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #359 Date: 15/06/23/

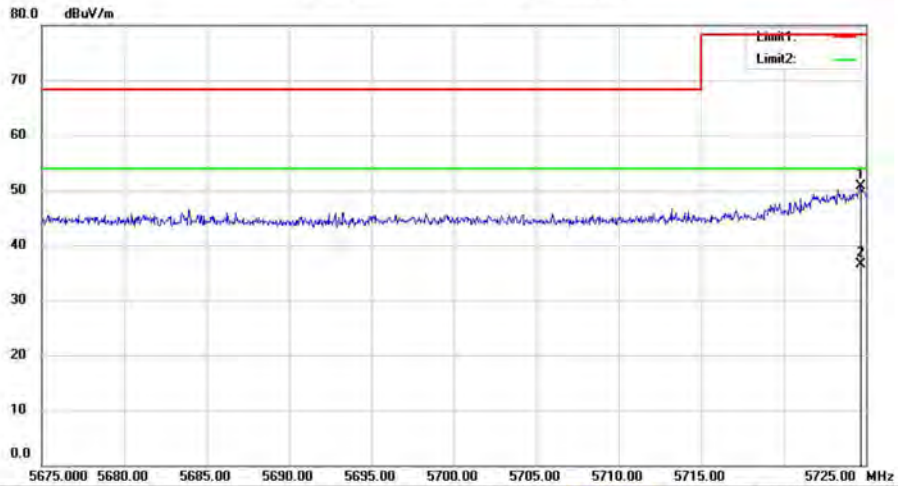

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.700	64.27	-13.56	50.71	78.20	-27.49	peak		
2	*	5724.700	50.10	-13.56	36.54	54.00	-17.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#359

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

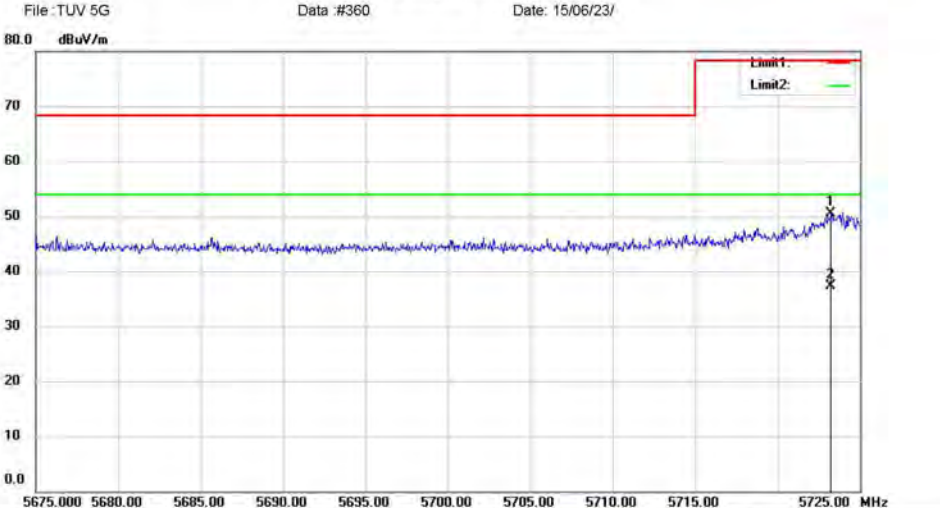

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5723.250	64.16	-13.56	50.60	78.20	-27.60	peak		
2	*	5723.250	50.77	-13.56	37.21	54.00	-16.79	AVG		


*:Maximum data x:Over limit !:over margin Operator: KK

File :TUV 5G>Data :#360 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

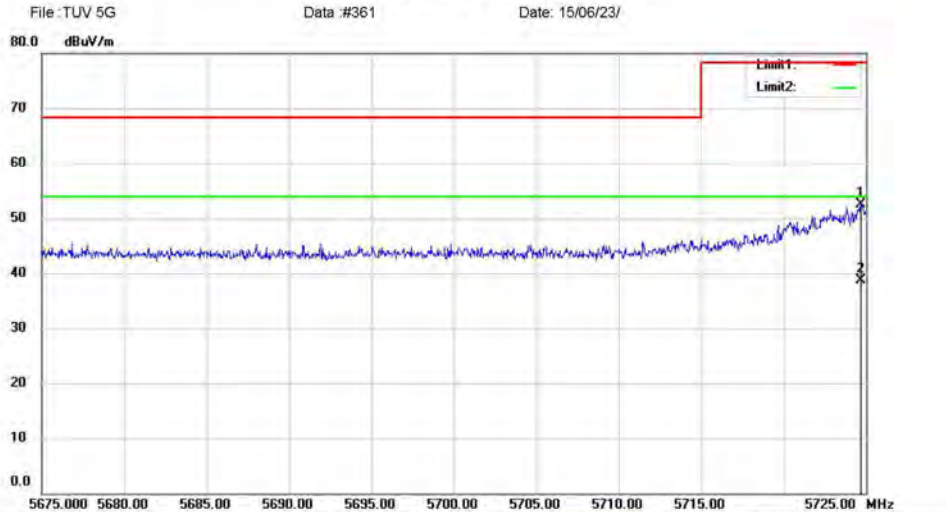

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.700	66.02	-13.56	52.46	78.20	-25.74	peak		
2	*	5724.700	52.30	-13.56	38.74	54.00	-15.26	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#361


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #362 Date: 15/06/23/

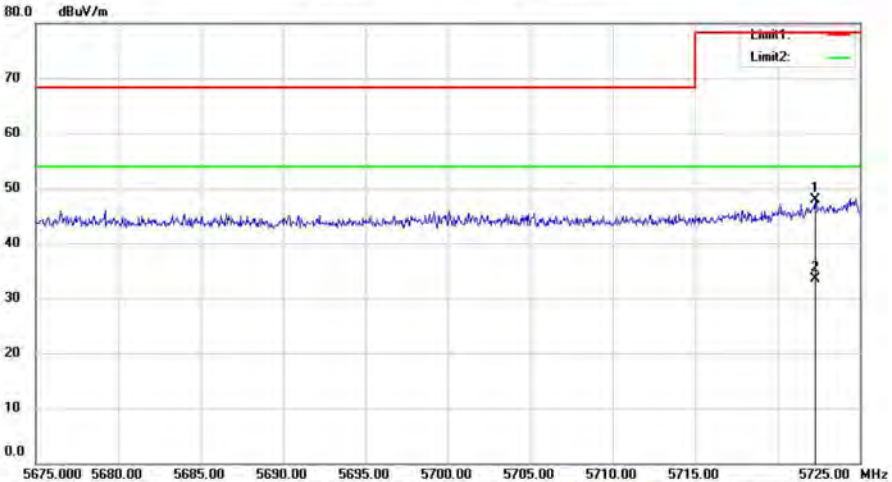

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5722.300	61.40	-13.56	47.84	78.20	-30.36	peak		
2	*	5722.300	47.13	-13.56	33.57	54.00	-20.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#362

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

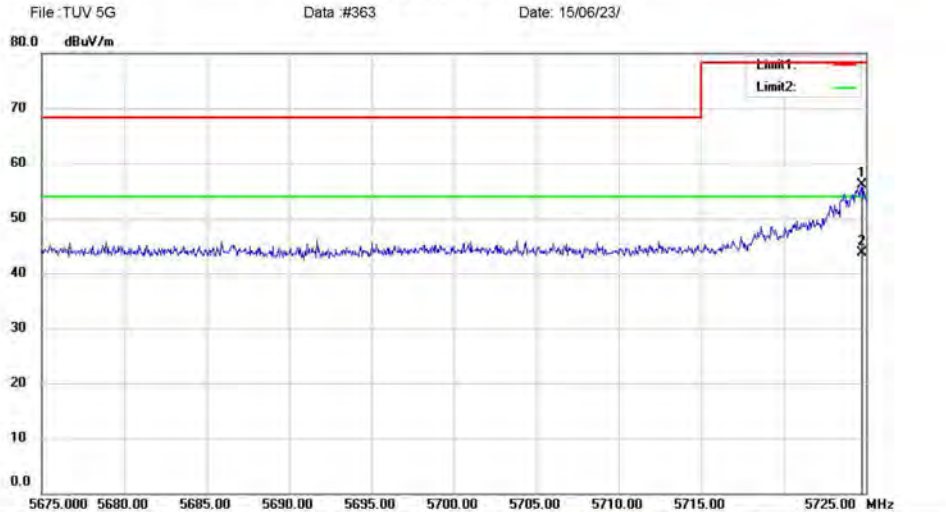

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.750	69.68	-13.56	56.12	78.20	-22.08	peak		
2	*	5724.750	57.17	-13.56	43.61	54.00	-10.39	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#363


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #364 Date: 15/06/23/

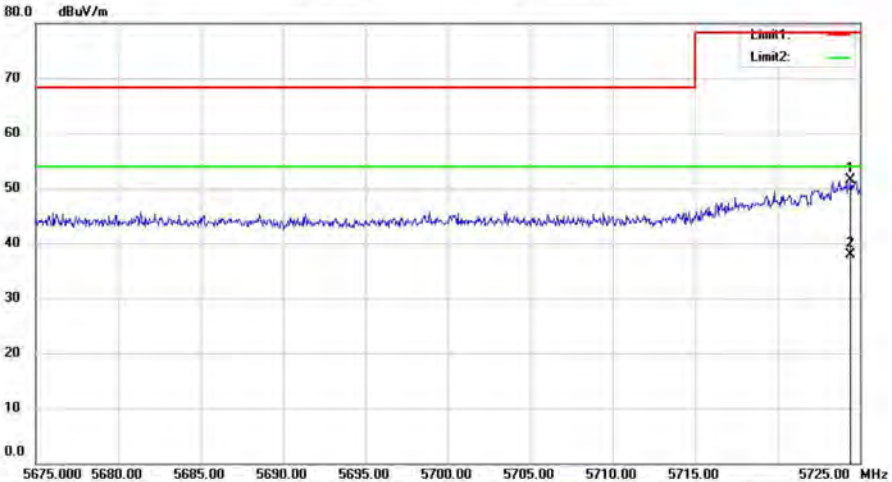

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH149 5745 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.450	64.99	-13.56	51.43	78.20	-26.77	peak		
2	*	5724.450	51.39	-13.56	37.83	54.00	-16.17	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#364

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

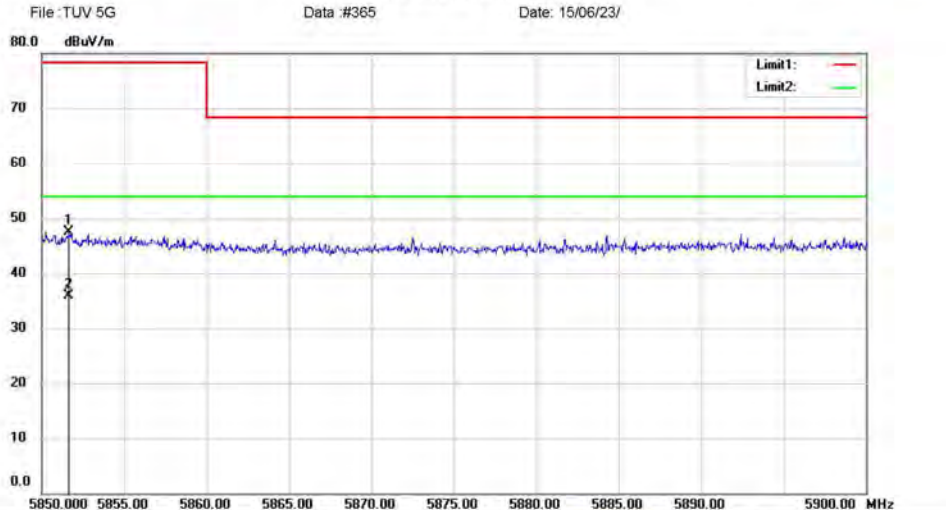

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5851.650	60.91	-13.41	47.50	78.20	-30.70	peak		
2	*	5851.650	49.33	-13.41	35.92	54.00	-18.08	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#365

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

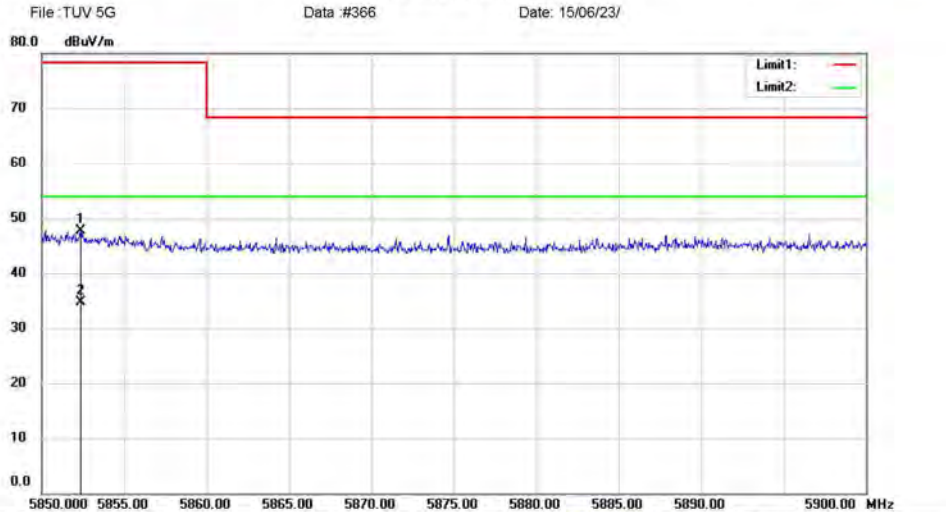

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.350	61.14	-13.41	47.73	78.20	-30.47	peak		
2	*	5852.350	48.06	-13.41	34.65	54.00	-19.35	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#366

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

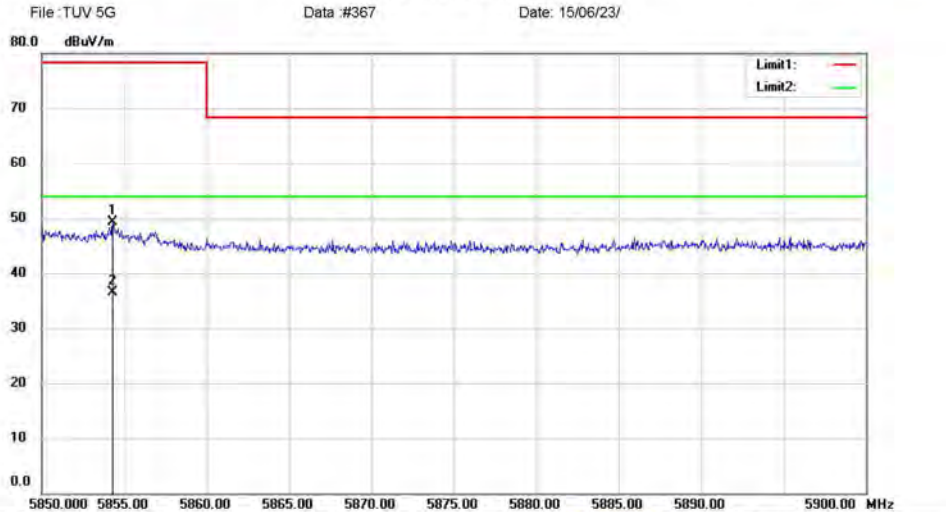

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5854.300	62.63	-13.40	49.23	78.20	-28.97	peak		
2	*	5854.300	49.99	-13.40	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#367

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

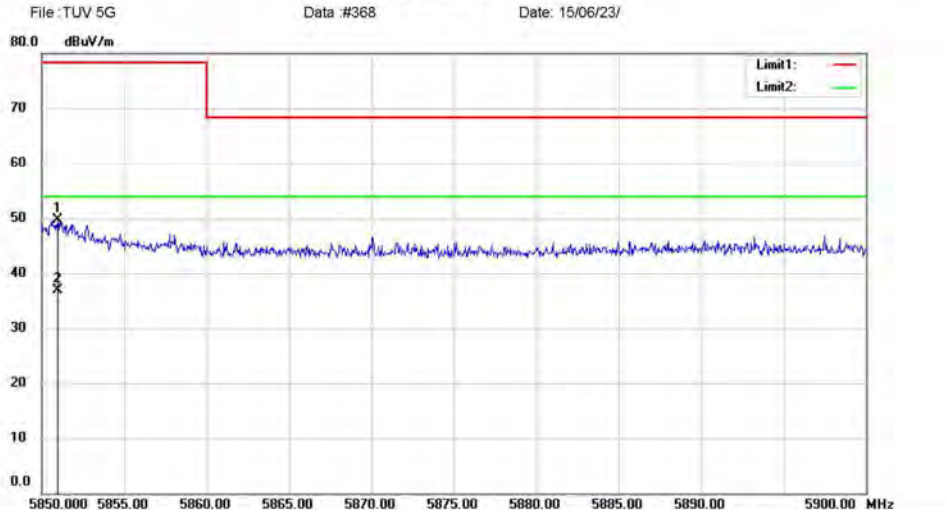

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.950	63.06	-13.41	49.65	78.20	-28.55	peak		
2	*	5850.950	50.23	-13.41	36.82	54.00	-17.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#368

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

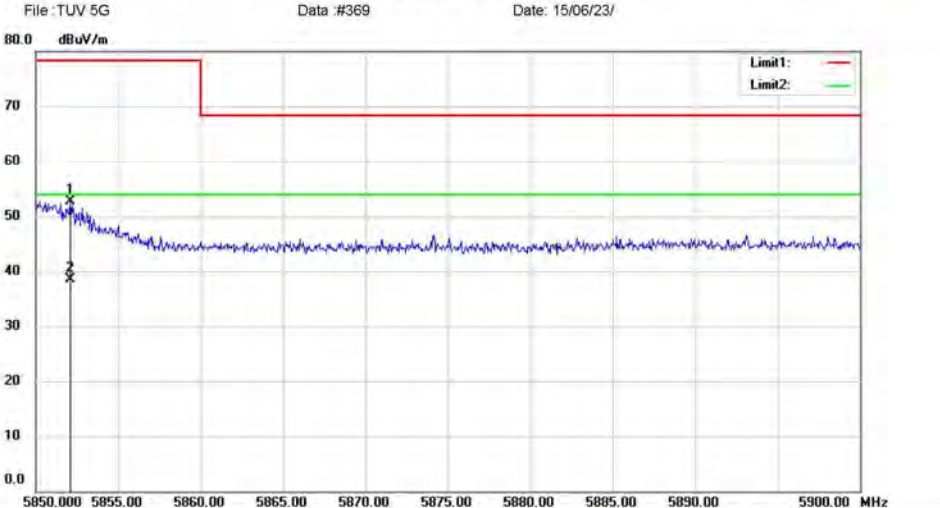

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.100	66.05	-13.41	52.64	78.20	-25.56	peak		
2	*	5852.100	51.94	-13.41	38.53	54.00	-15.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#369

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

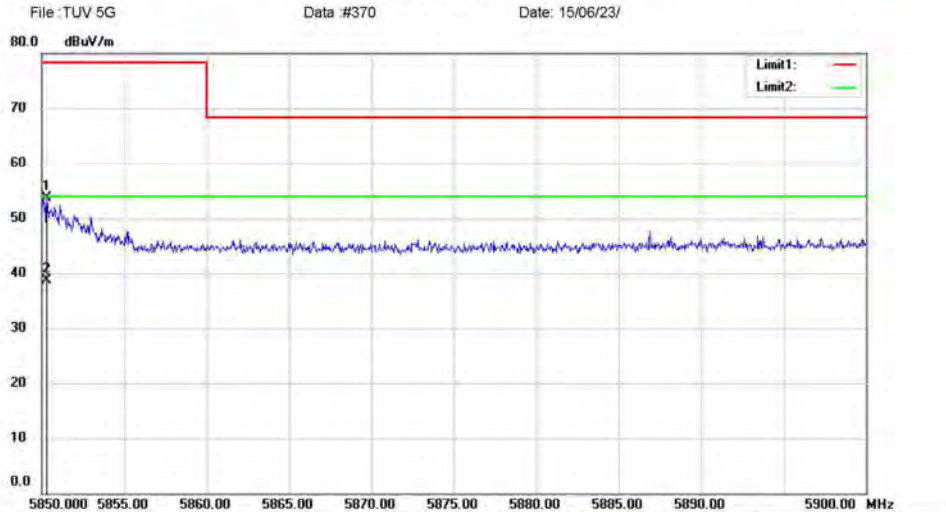

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT20 CH165 5825 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.300	67.13	-13.41	53.72	78.20	-24.48	peak		
2	*	5850.300	52.10	-13.41	38.69	54.00	-15.31	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#370

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

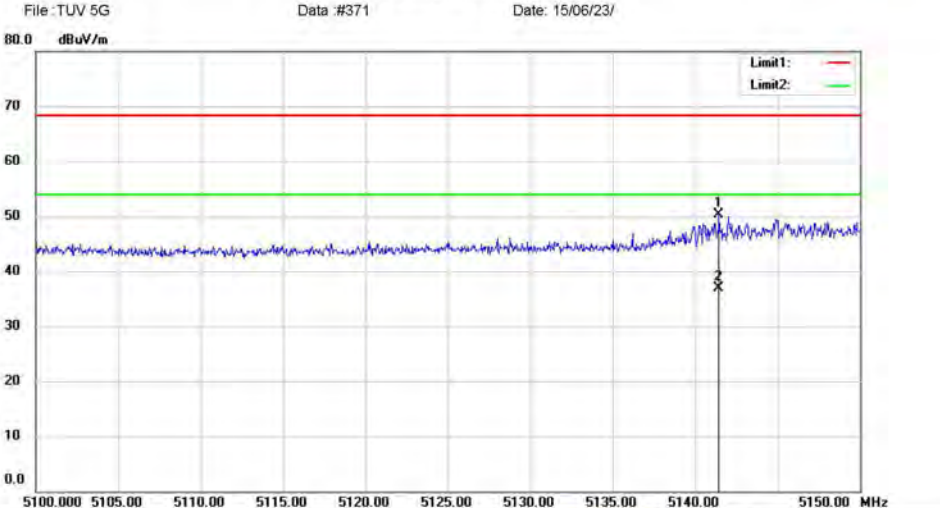


Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5141.450	64.64	-14.26	50.38	68.20	-17.82	peak		
2	*	5141.450	51.10	-14.26	36.84	54.00	-17.16	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

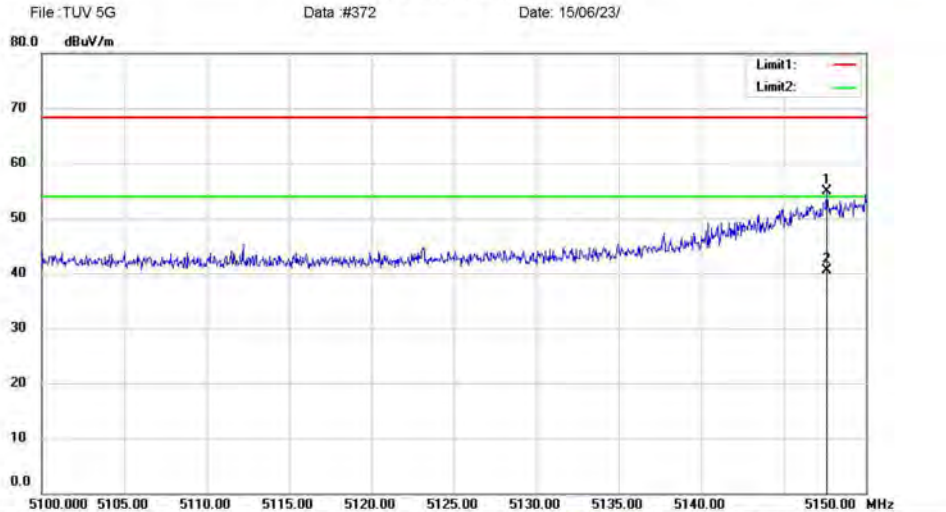

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5147.600	69.05	-14.24	54.81	68.20	-13.39	peak		
2		5147.600	54.82	-14.24	40.58	54.00	-13.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#372

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

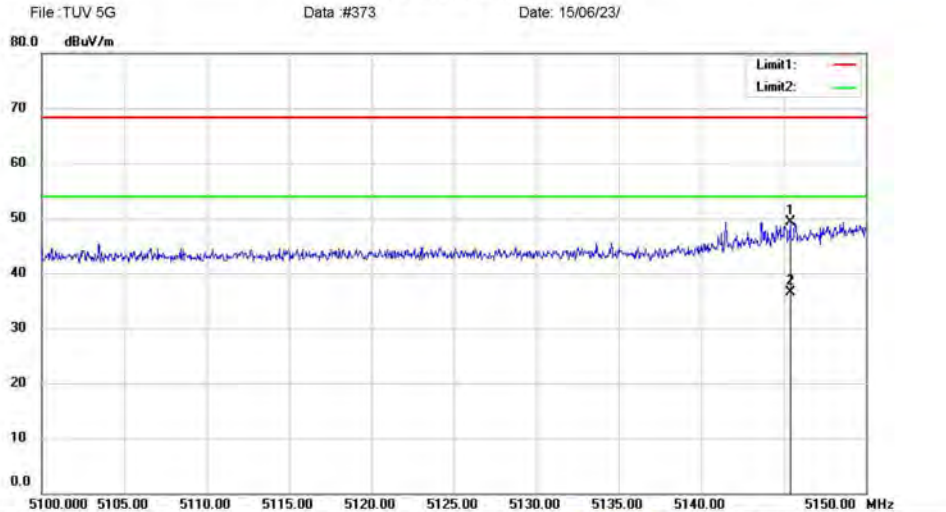

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5145.400	63.59	-14.25	49.34	68.20	-18.86	peak		
2	*	5145.400	50.77	-14.25	36.52	54.00	-17.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G Data :#373


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #374 Date: 15/06/23/

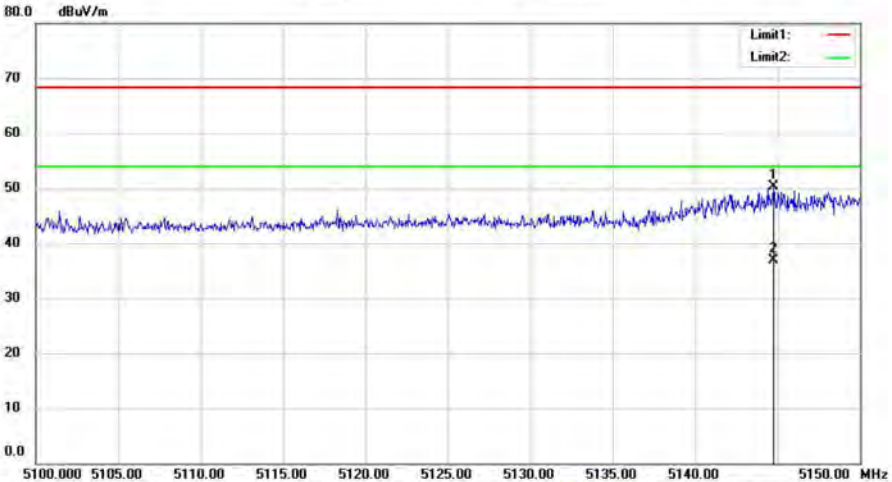

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5144.750	64.51	-14.25	50.26	68.20	-17.94	peak		
2	*	5144.750	51.10	-14.25	36.85	54.00	-17.15	AVG		


*:Maximum data x:Over limit !:over margin Operator: KK

File: TUV 5G>Data :#374 Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

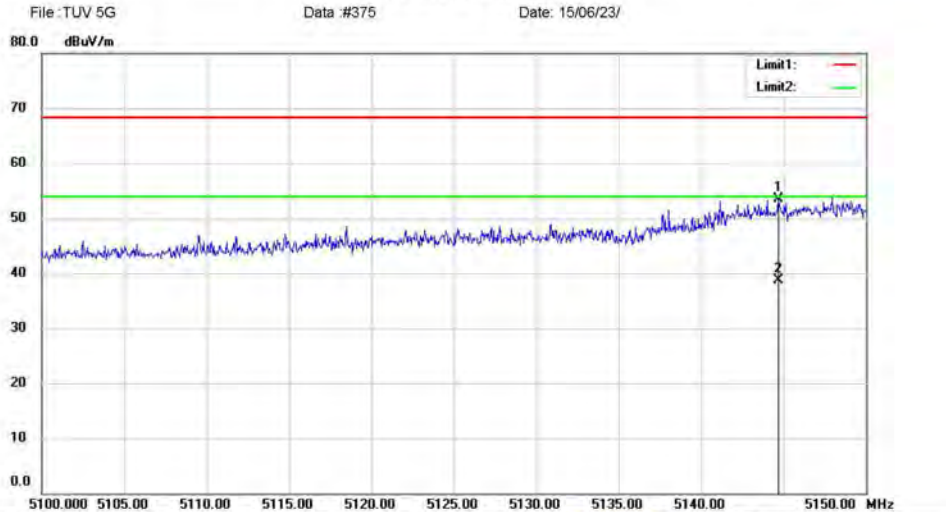

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5144.700	67.81	-14.25	53.56	68.20	-14.64	peak		
2		5144.700	52.90	-14.25	38.65	54.00	-15.35	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#375

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

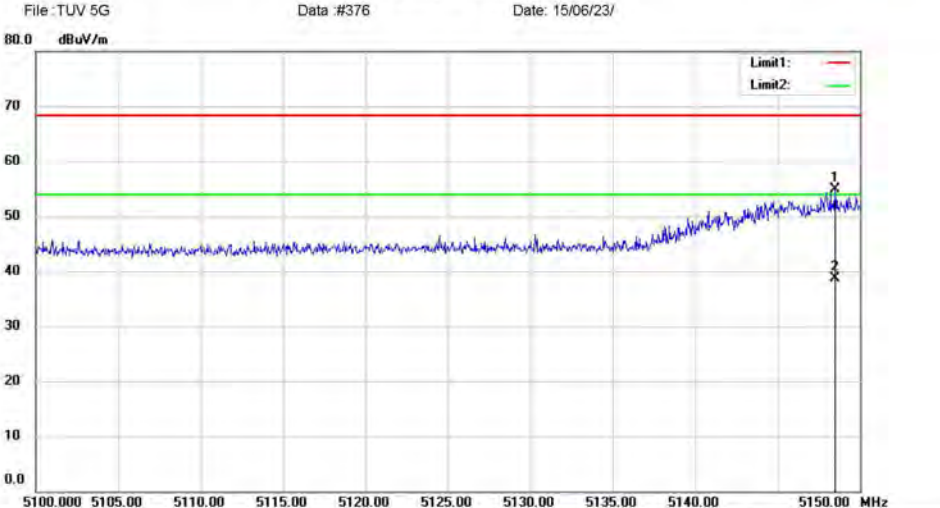

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH38 5190 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5148.500	69.11	-14.24	54.87	68.20	-13.33	peak		
2		5148.500	52.92	-14.24	38.68	54.00	-15.32	AVG		

*:Maximum data x:Over limit !:over margin Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #377

Date: 15/06/23/

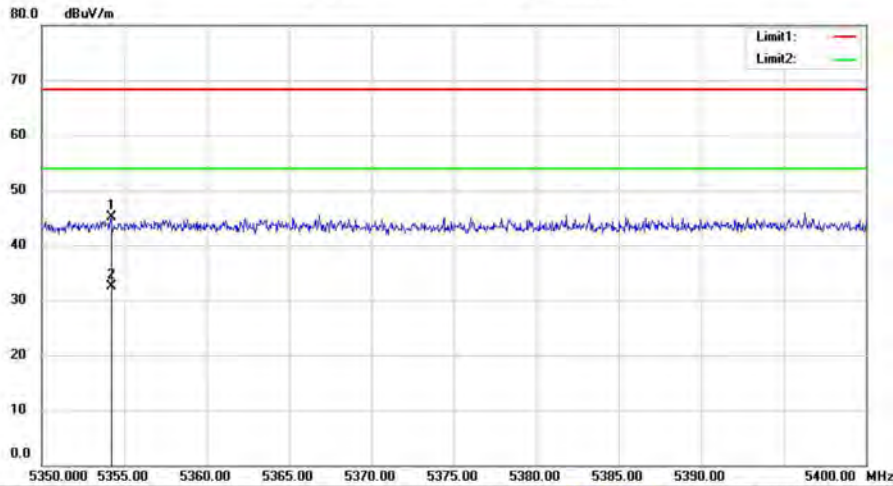

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5354.200	59.04	-14.00	45.04	68.20	-23.16	peak			
2	*	5354.200	46.58	-14.00	32.58	54.00	-21.42	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G>Data :#377

Page: 1

Radiated Emission Measurement

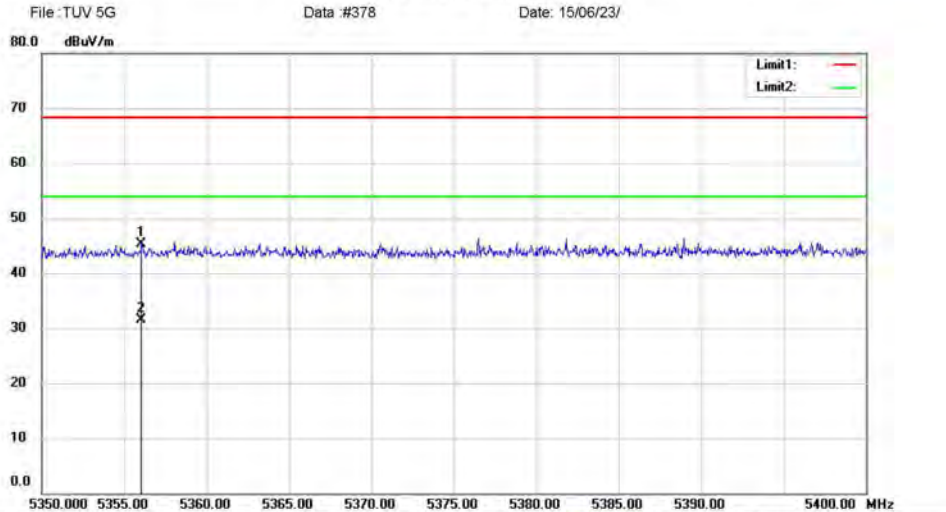

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5356.050	59.23	-14.00	45.23	68.20	-22.97	peak		
2	*	5356.050	45.56	-14.00	31.56	54.00	-22.44	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#378

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

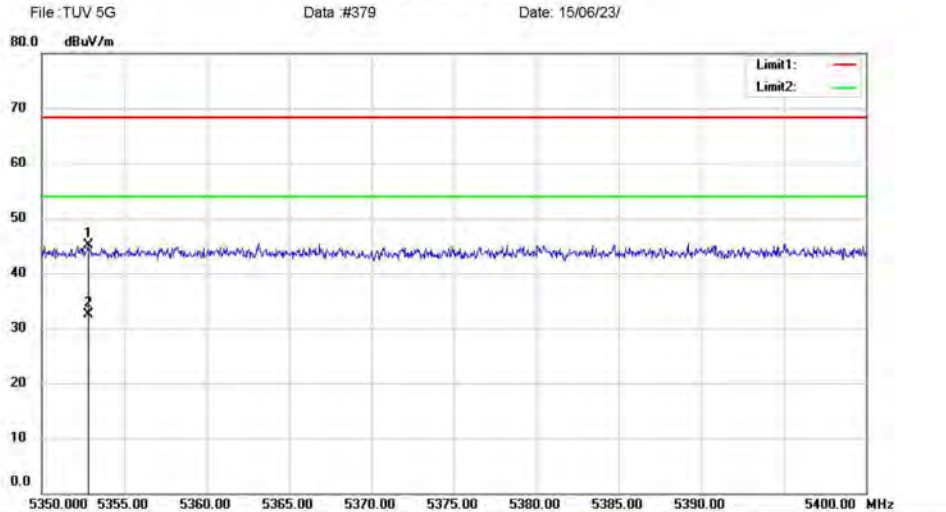

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5352.800	59.15	-14.00	45.15	68.20	-23.05	peak		
2	*	5352.800	46.59	-14.00	32.59	54.00	-21.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#379

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

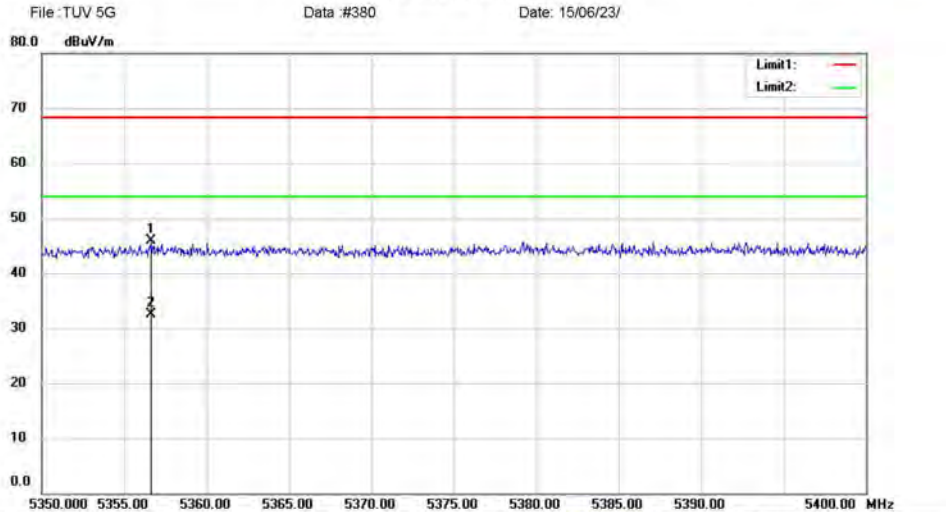

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5356.650	59.97	-13.99	45.98	68.20	-22.22	peak		
2	*	5356.650	46.55	-13.99	32.56	54.00	-21.44	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#380

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

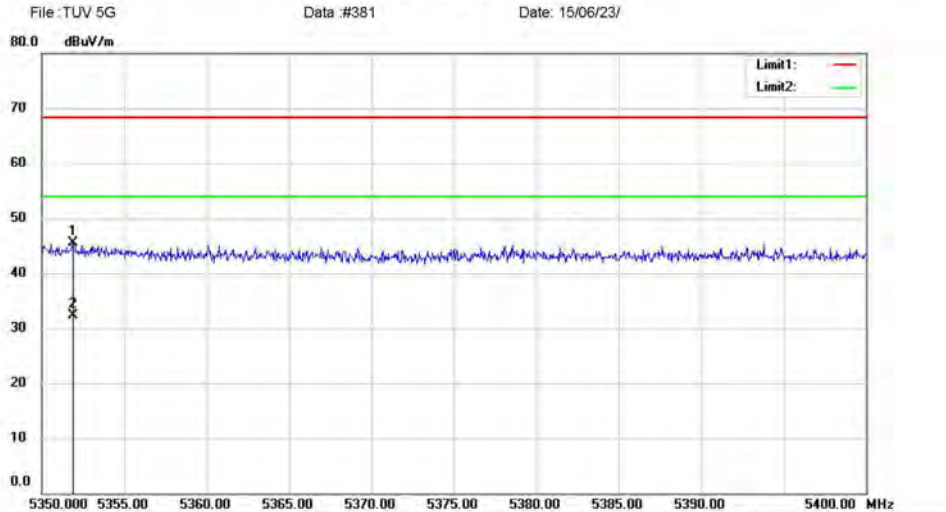

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5351.900	59.51	-14.00	45.51	68.20	-22.69	peak		
2	*	5351.900	46.34	-14.00	32.34	54.00	-21.66	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#381

Page: 1

Radiated Emission Measurement

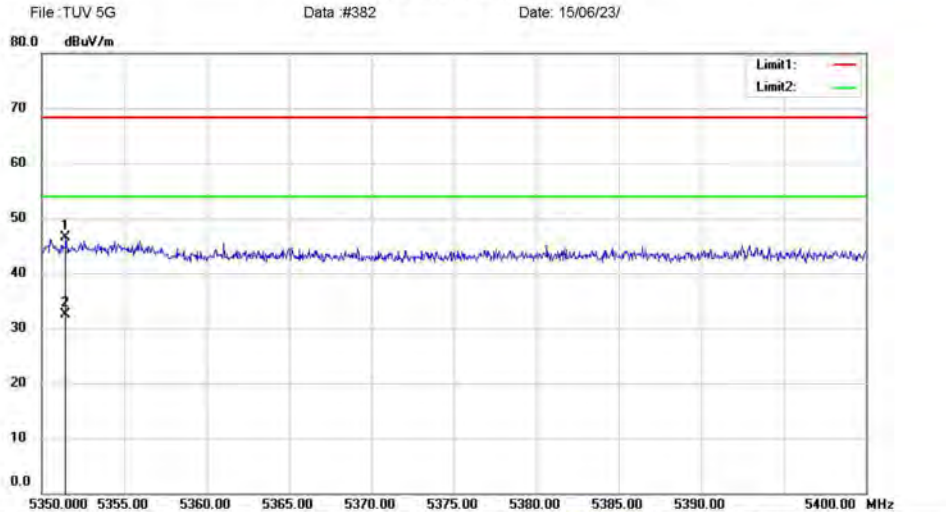

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH46 5230 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5351.450	60.42	-14.00	46.42	68.20	-21.78	peak		
2	*	5351.450	46.56	-14.00	32.56	54.00	-21.44	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#382

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

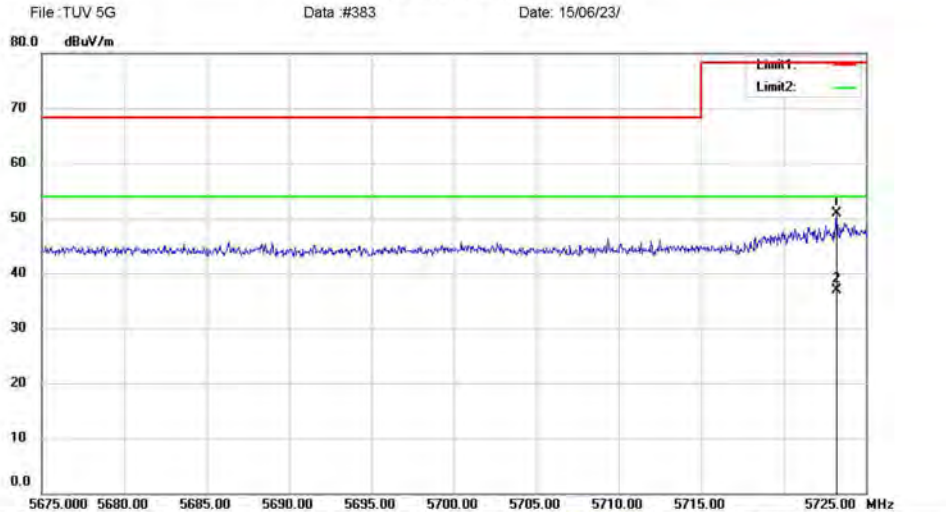

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5723.250	64.54	-13.56	50.98	78.20	-27.22	peak		
2	*	5723.250	50.51	-13.56	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#383

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

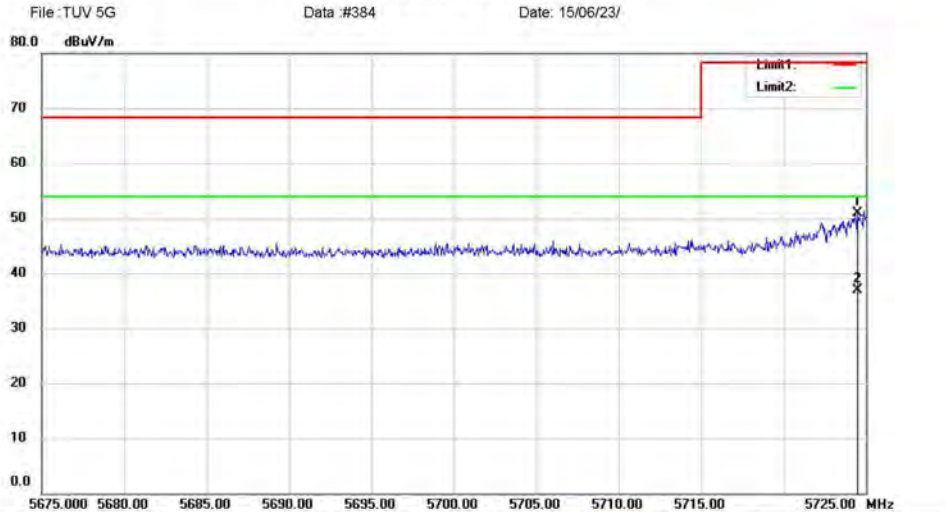

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.500	64.45	-13.56	50.89	78.20	-27.31	peak		
2	*	5724.500	50.41	-13.56	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#384

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

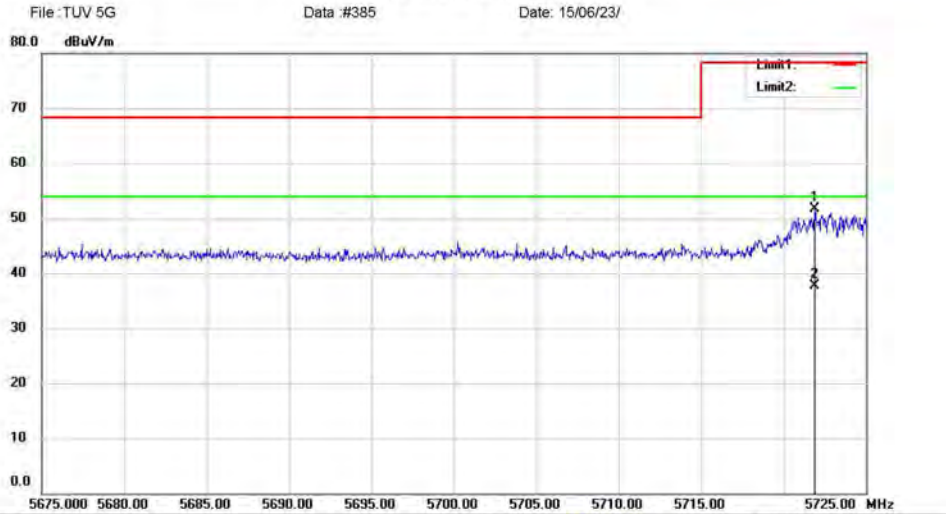

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5721.900	65.22	-13.56	51.66	78.20	-26.54	peak		
2	*	5721.900	51.19	-13.56	37.63	54.00	-16.37	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#385

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #386

Date: 15/06/23/

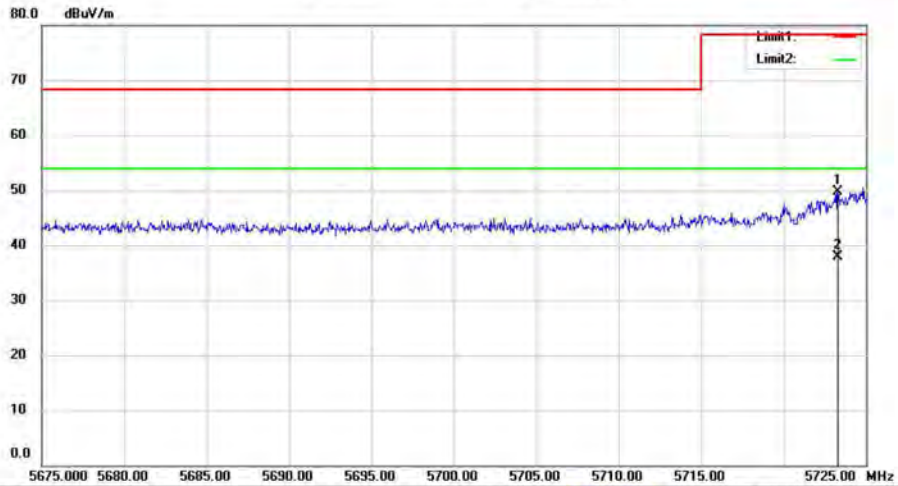

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5723.300	63.35	-13.56	49.79	78.20	-28.41	peak		
2	*	5723.300	51.52	-13.56	37.96	54.00	-16.04	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#386

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

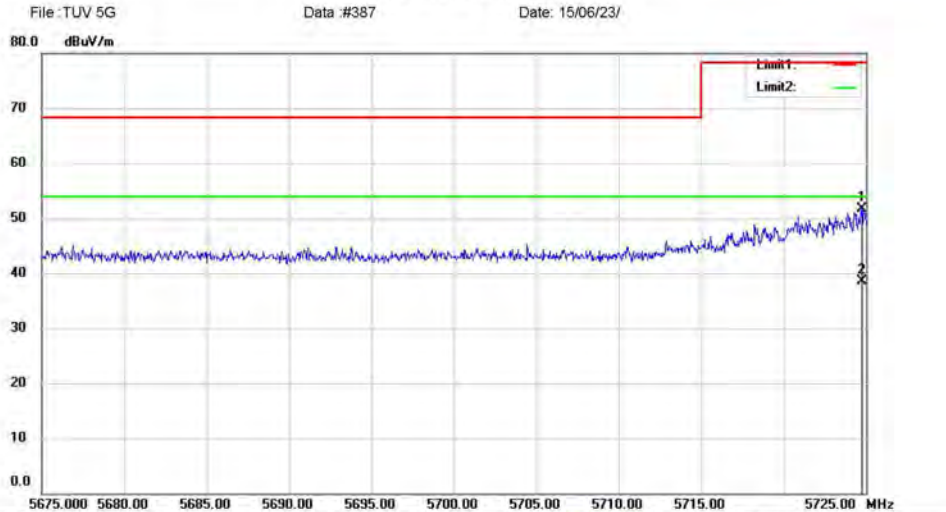

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.750	65.29	-13.56	51.73	78.20	-26.47	peak		
2	*	5724.750	51.98	-13.56	38.42	54.00	-15.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#387


Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #388 Date: 15/06/23/

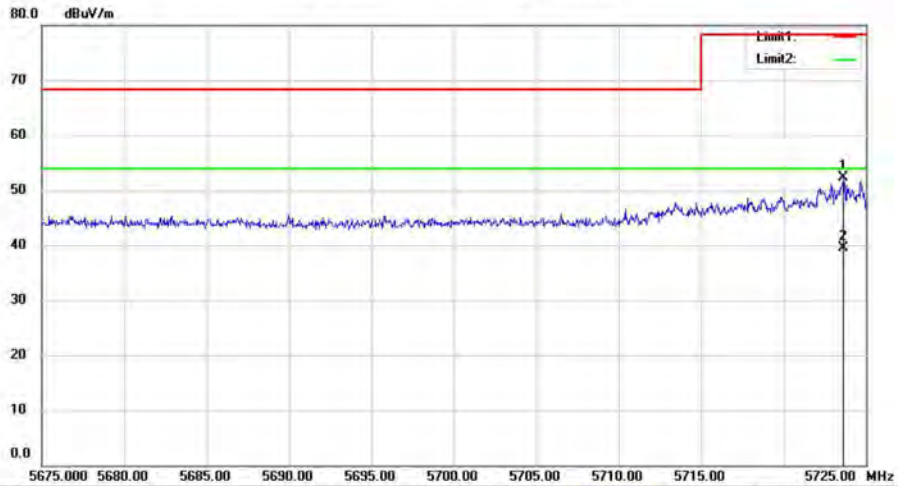

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH151 5755 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5723.650	65.90	-13.56	52.34	78.20	-25.86	peak		
2	*	5723.650	53.09	-13.56	39.53	54.00	-14.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#388

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

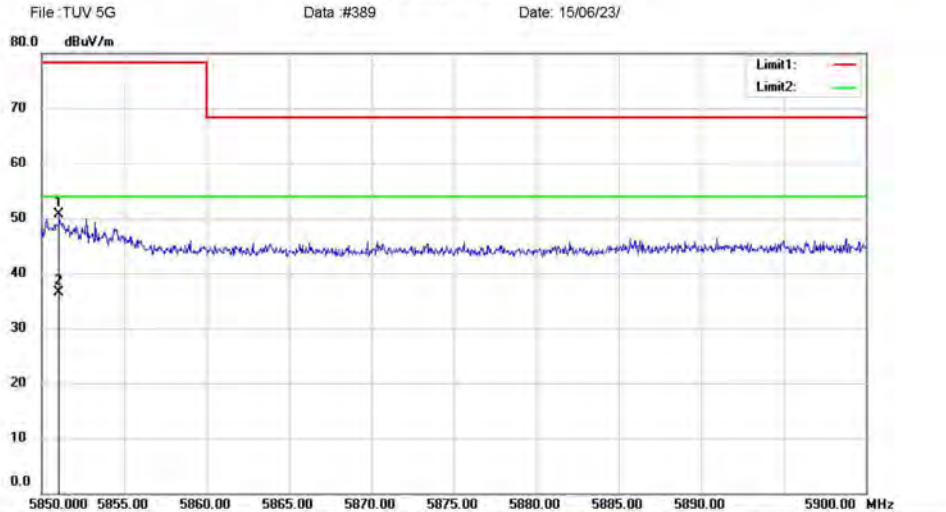

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5851.050	64.02	-13.41	50.61	78.20	-27.59	peak		
2	*	5851.050	49.99	-13.41	36.58	54.00	-17.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#389

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

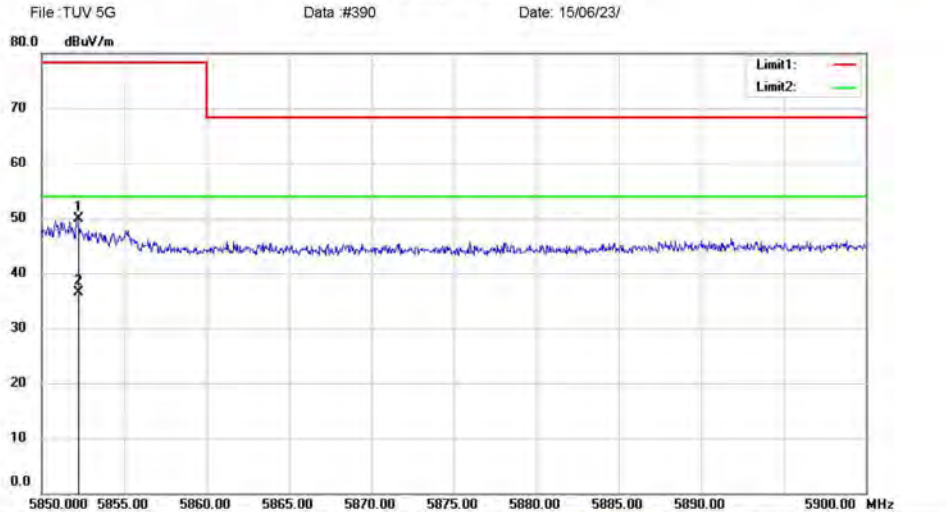

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.200	63.28	-13.41	49.87	78.20	-28.33	peak		
2	*	5852.200	50.00	-13.41	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#390

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

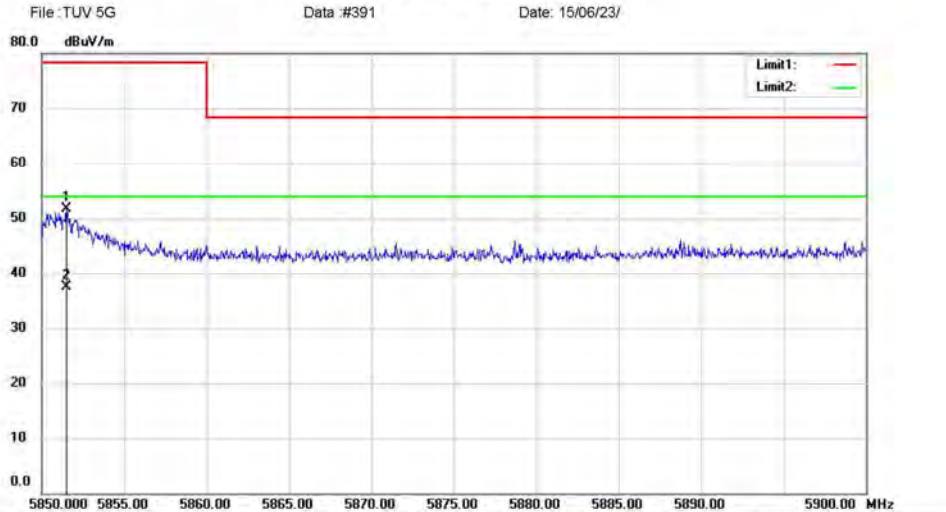

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5851.500	65.13	-13.41	51.72	78.20	-26.48	peak		
2	*	5851.500	50.84	-13.41	37.43	54.00	-16.57	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#391

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

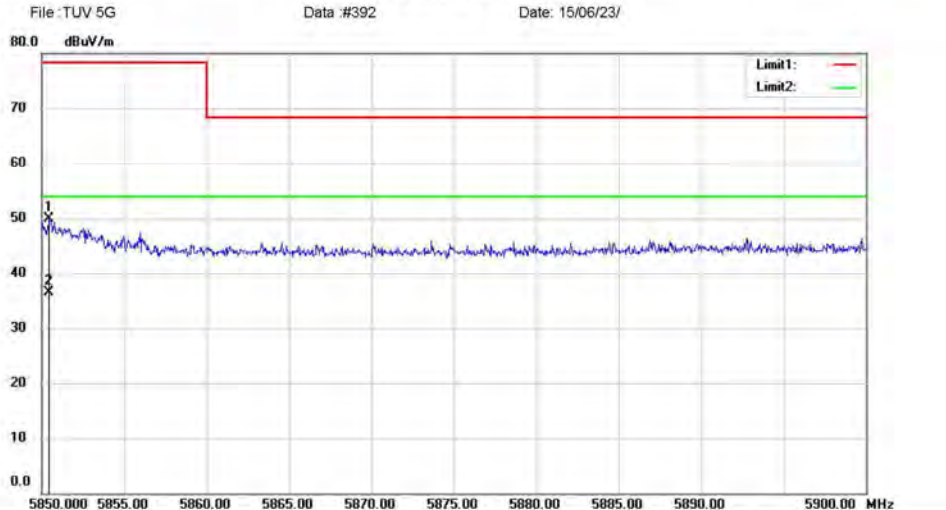

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.450	63.28	-13.41	49.87	78.20	-28.33	peak		
2	*	5850.450	49.98	-13.41	36.57	54.00	-17.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#392

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

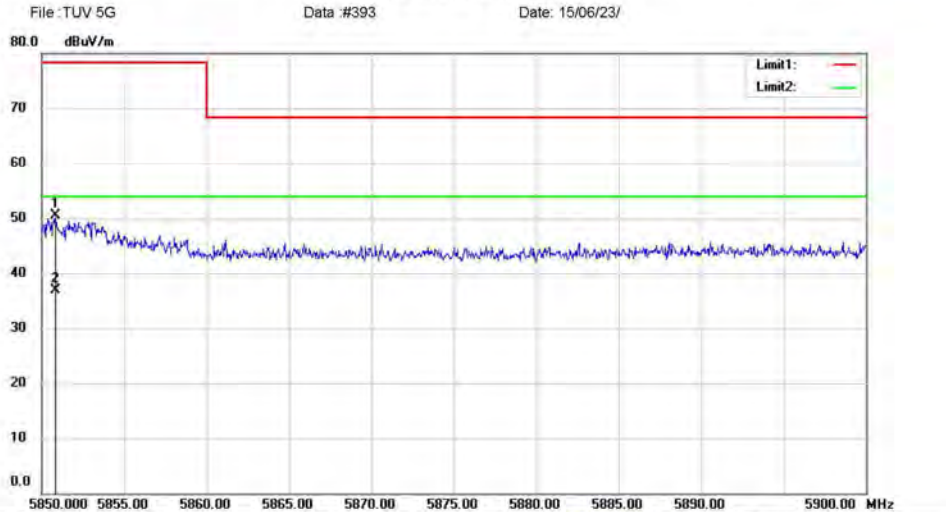

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.800	63.93	-13.41	50.52	78.20	-27.68	peak		
2	*	5850.800	50.25	-13.41	36.84	54.00	-17.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#393

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

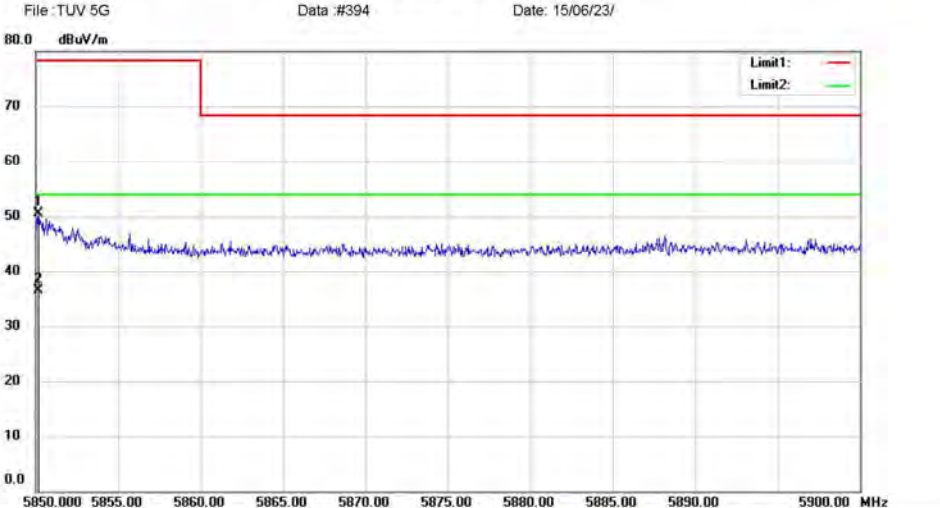

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT40 CH159 5795 Ant1+2
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.150	63.91	-13.41	50.50	78.20	-27.70	peak		
2	*	5850.150	49.95	-13.41	36.54	54.00	-17.46	AVG		

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV 5G Data: #395 Date: 15/06/23/

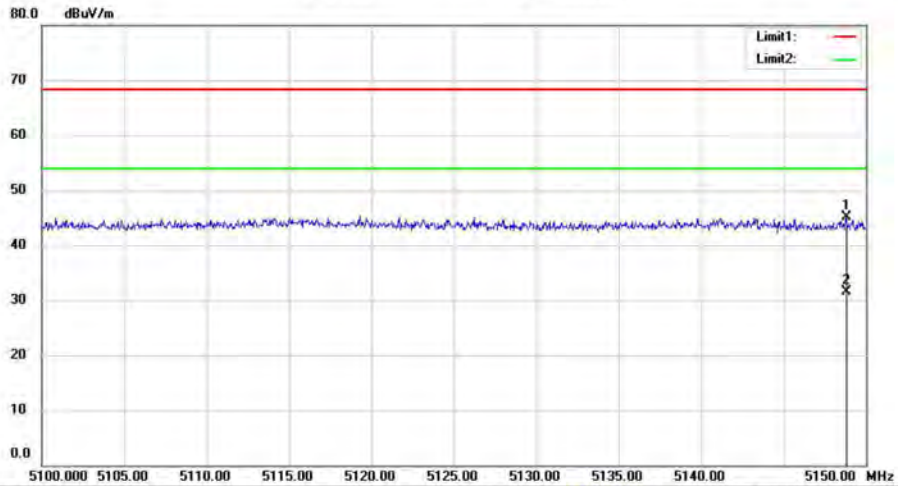

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5148.800	59.27	-14.24	45.03	68.20	-23.17	peak		
2	*	5148.800	45.80	-14.24	31.56	54.00	-22.44	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#395

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

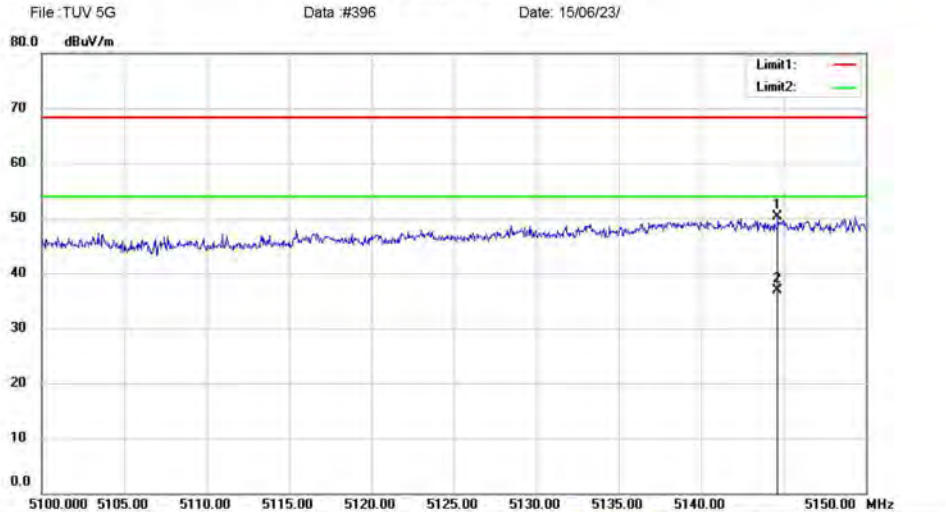

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5144.650	64.49	-14.25	50.24	68.20	-17.96	peak		
2	*	5144.650	51.10	-14.25	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G Data :#396

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #397

Date: 15/06/23/

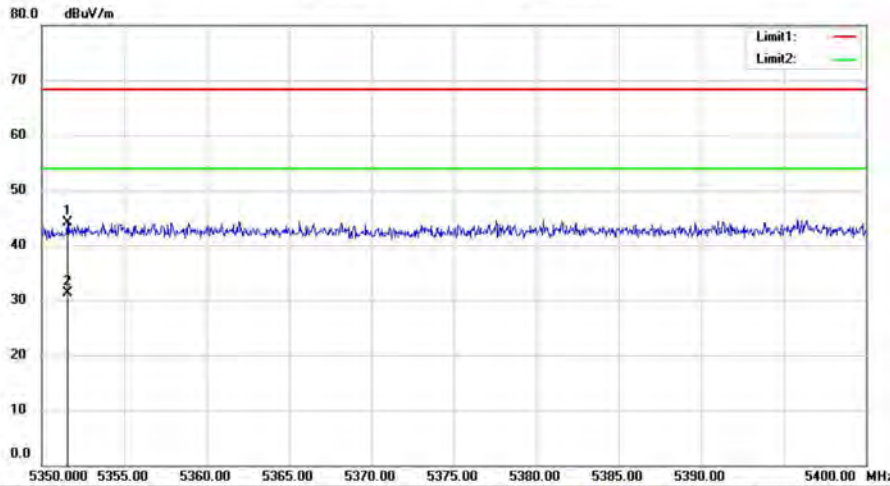

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5351.550	58.12	-14.00	44.12	68.20	-24.08	peak		
2	*	5351.550	45.25	-14.00	31.25	54.00	-22.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#397

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

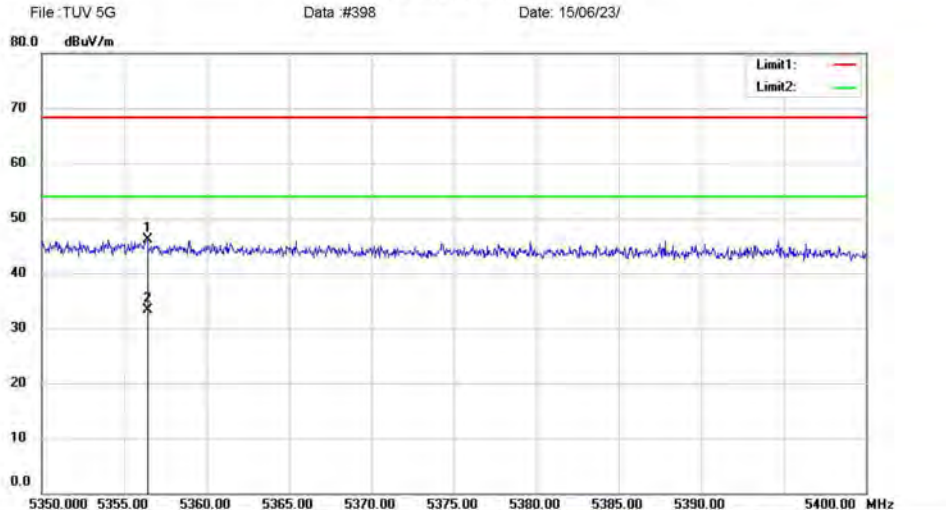

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5356.400	60.18	-13.99	46.19	68.20	-22.01			peak
2	*	5356.400	47.24	-13.99	33.25	54.00	-20.75			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#398

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

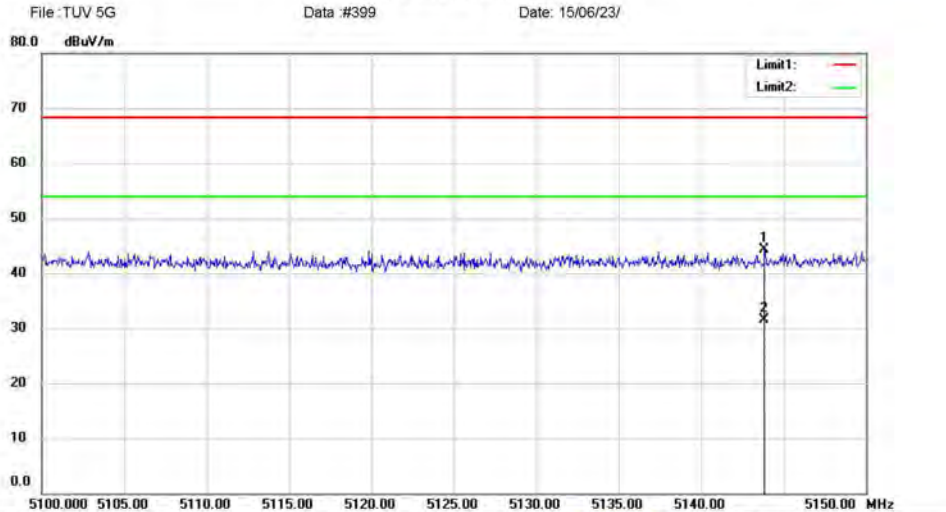

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5143.850	58.51	-14.25	44.26	68.20	-23.94	peak		
2	*	5143.850	45.77	-14.25	31.52	54.00	-22.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#399

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

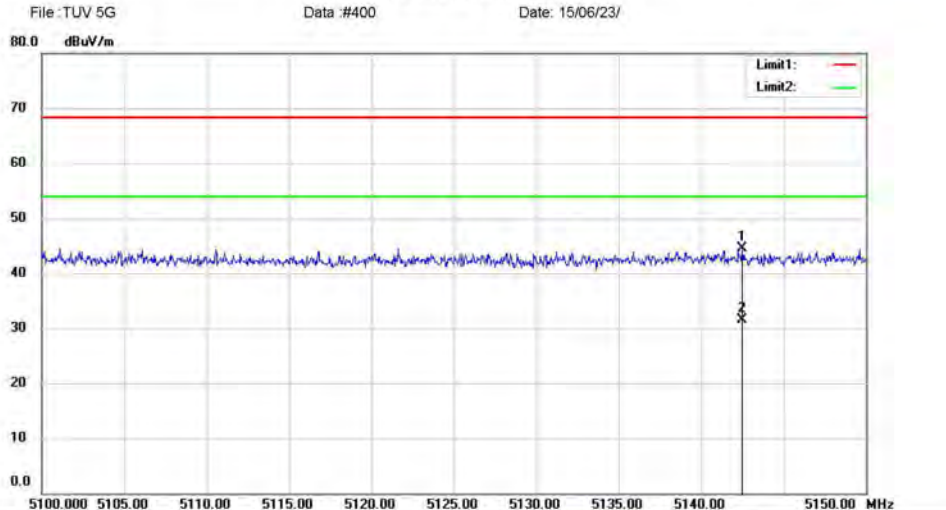

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5142.500	58.77	-14.26	44.51	68.20	-23.69	peak		
2	*	5142.500	45.68	-14.26	31.42	54.00	-22.58	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#400

Page: 1

Radiated Emission Measurement

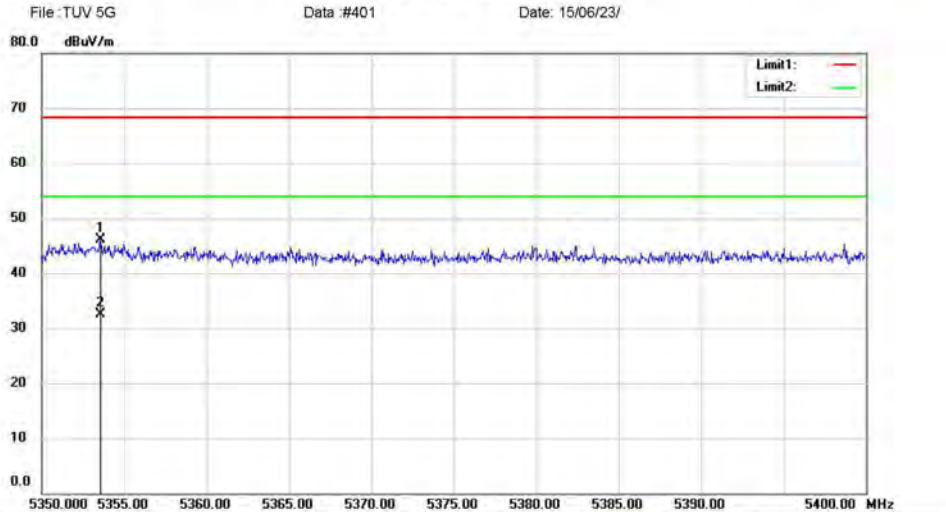

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5353.550	60.05	-14.00	46.05	68.20	-22.15	peak		
2	*	5353.550	46.48	-14.00	32.48	54.00	-21.52	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#401

Page: 1

Radiated Emission Measurement

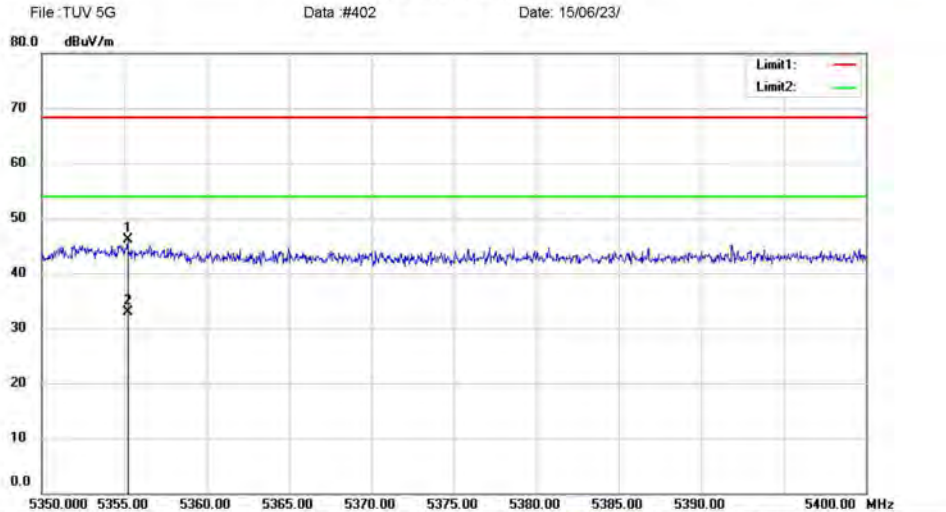

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5355.200	60.04	-14.00	46.04	68.20	-22.16	peak		
2	*	5355.200	46.84	-14.00	32.84	54.00	-21.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#402

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

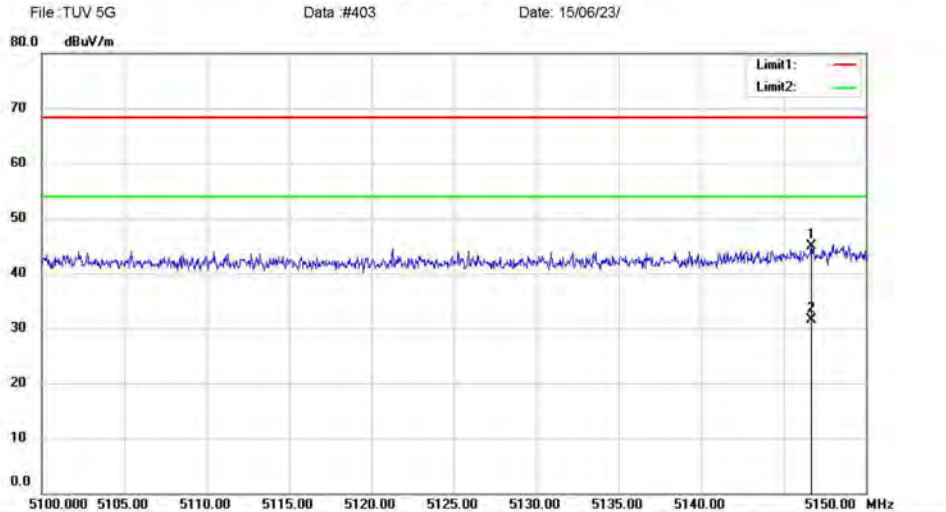

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5146.700	59.09	-14.24	44.85	68.20	-23.35	peak		
2	*	5146.700	45.70	-14.24	31.46	54.00	-22.54	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#403

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

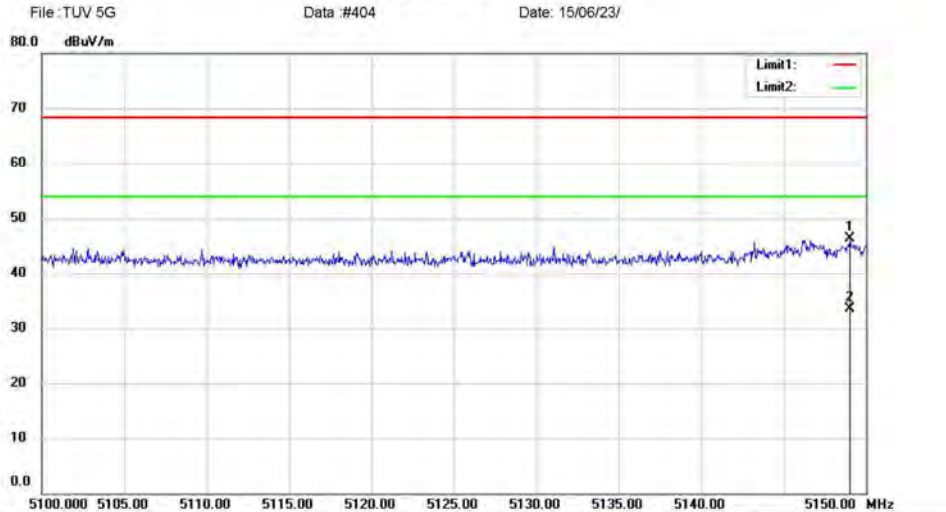

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.050	60.61	-14.24	46.37	68.20	-21.83	peak		
2	*	5149.050	47.66	-14.24	33.42	54.00	-20.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#404

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

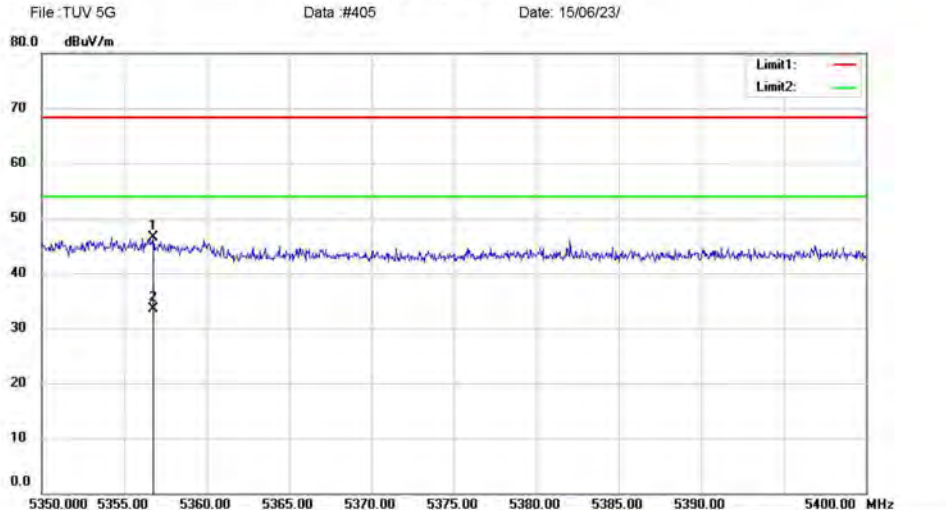

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5356.750	60.40	-13.99	46.41	68.20	-21.79	peak		
2	*	5356.750	47.52	-13.99	33.53	54.00	-20.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#405

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

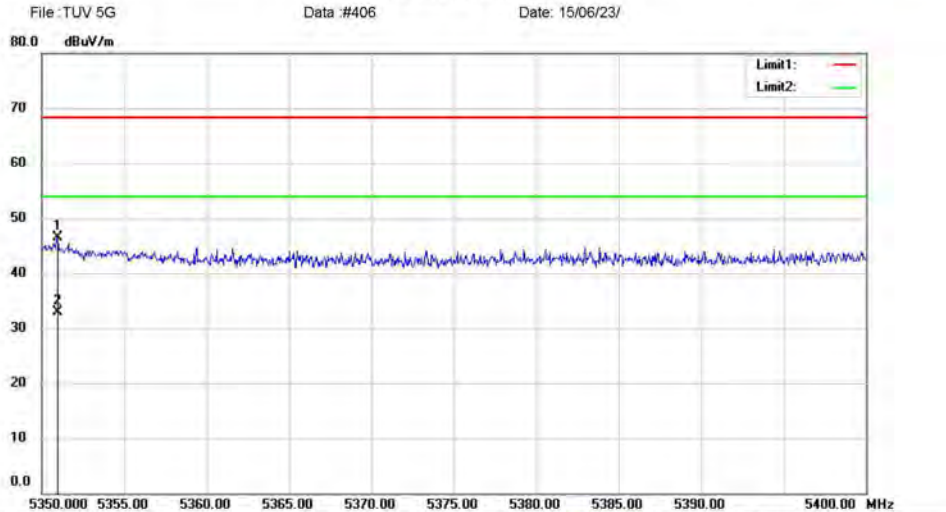

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH42 5210 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5350.950	60.44	-14.00	46.44	68.20	-21.76			peak
2	*	5350.950	46.85	-14.00	32.85	54.00	-21.15			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#406

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

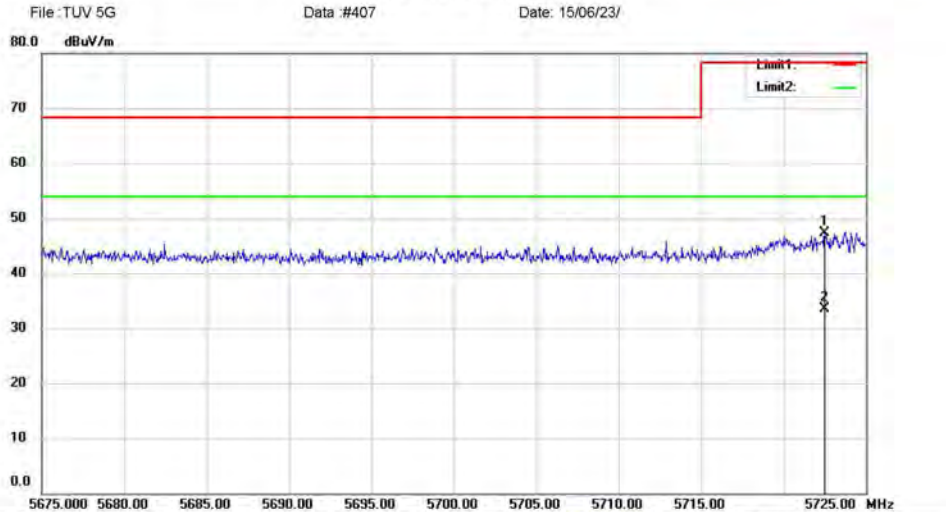

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5722.500	60.81	-13.56	47.25	78.20	-30.95	peak		
2	*	5722.500	47.14	-13.56	33.58	54.00	-20.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G>Data :#407

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

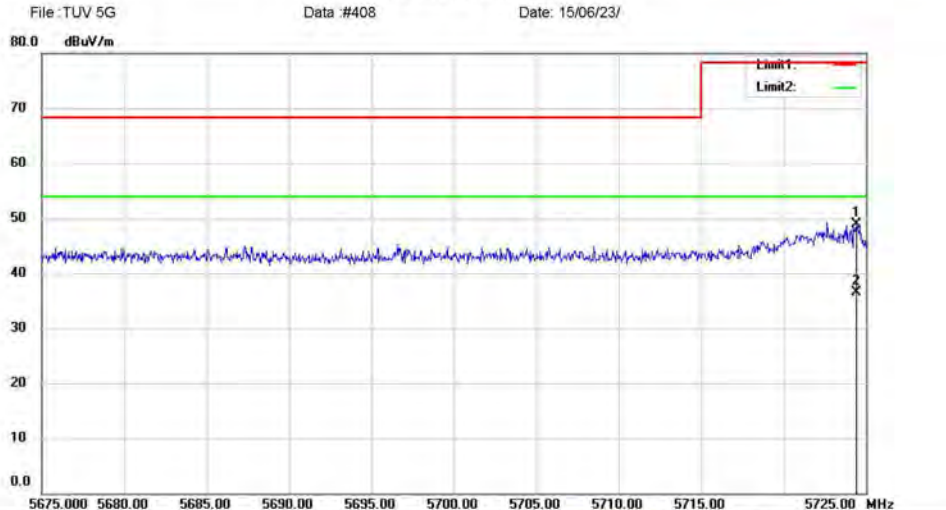

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.400	62.48	-13.56	48.92	78.20	-29.28	peak		
2	*	5724.400	50.12	-13.56	36.56	54.00	-17.44	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#408

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

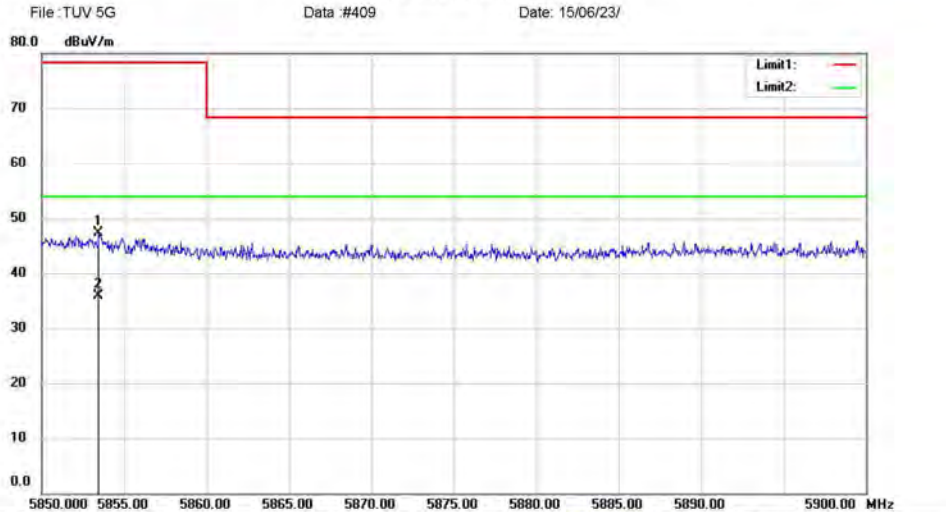

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5853.450	60.80	-13.41	47.39	78.20	-30.81	peak		
2	*	5853.450	49.34	-13.41	35.93	54.00	-18.07	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#409

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

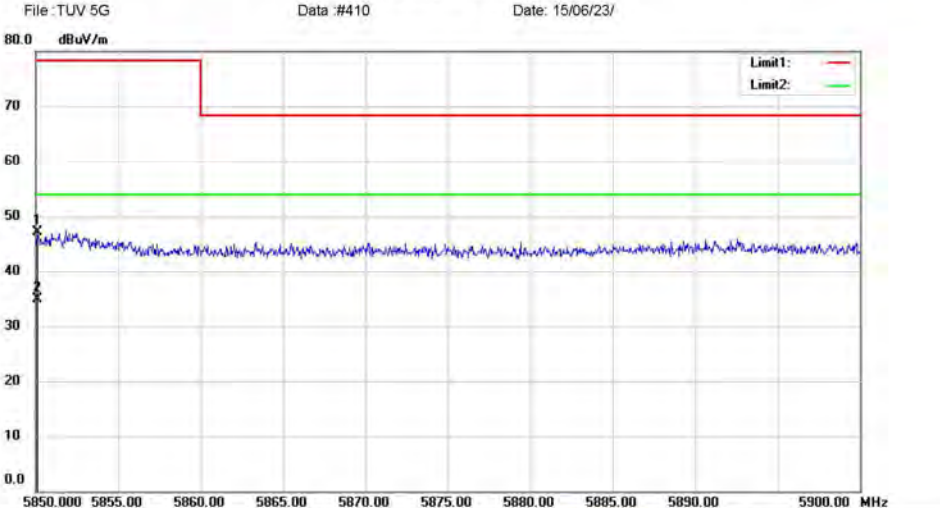

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.100	60.49	-13.41	47.08	78.20	-31.12	peak		
2	*	5850.100	48.24	-13.41	34.83	54.00	-19.17	AVG		

*:Maximum data x:Over limit !:over margin Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

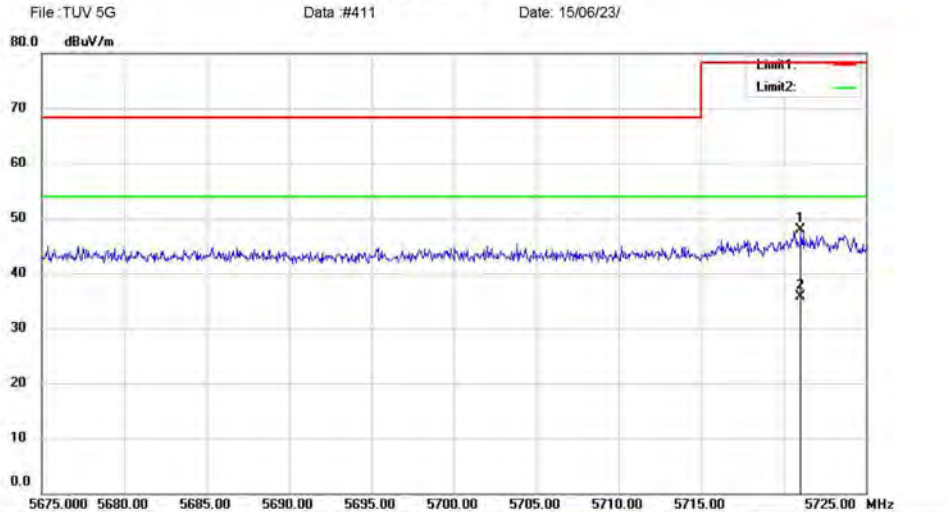

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5721.050	61.42	-13.56	47.86	78.20	-30.34	peak		
2	*	5721.050	49.19	-13.56	35.63	54.00	-18.37	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#411

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #412

Date: 15/06/23/

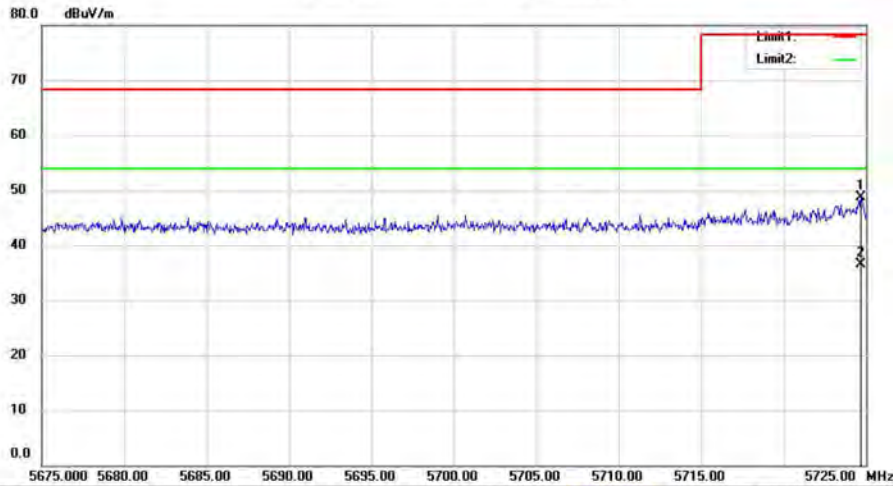

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5724.700	62.17	-13.56	48.61	78.20	-29.59	peak		
2	*	5724.700	50.10	-13.56	36.54	54.00	-17.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#412

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

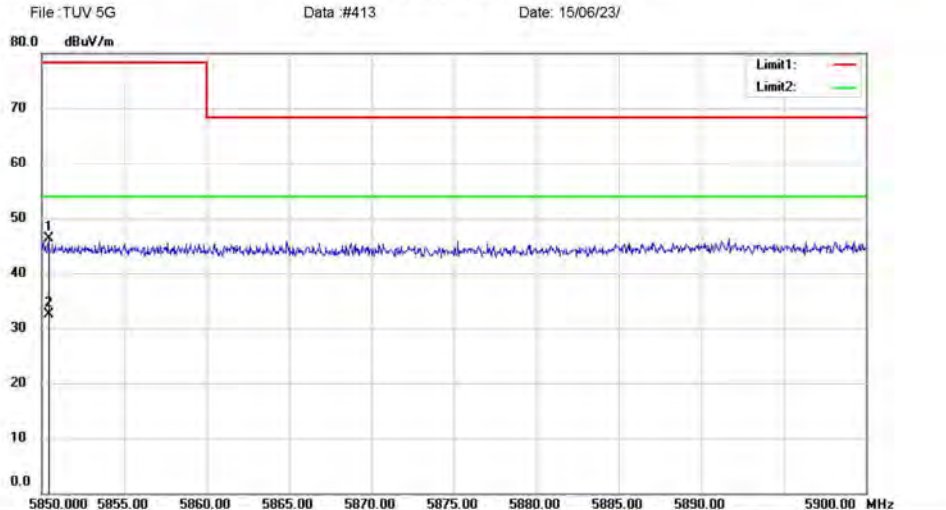

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.400	59.63	-13.41	46.22	78.20	-31.98	peak		
2	*	5850.400	45.83	-13.41	32.42	54.00	-21.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#413

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

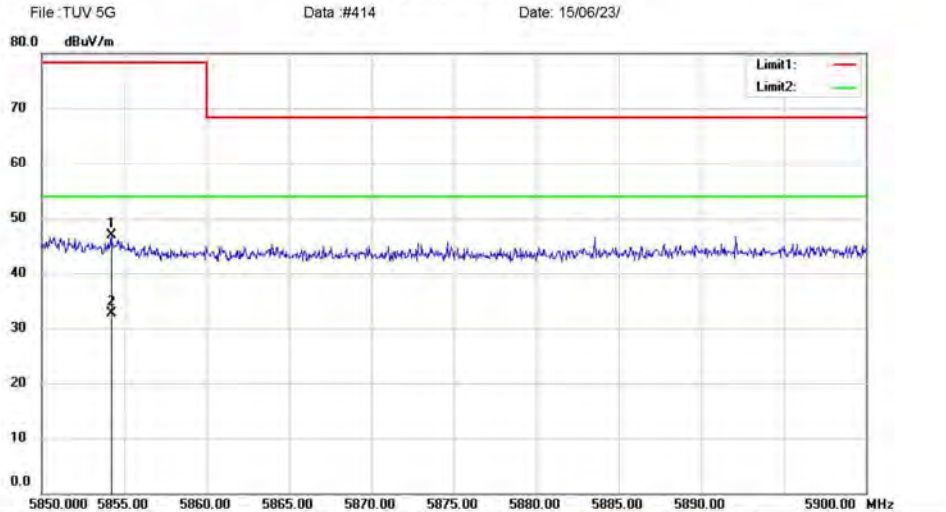

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5854.200	60.34	-13.40	46.94	78.20	-31.26	peak		
2	*	5854.200	46.15	-13.40	32.75	54.00	-21.25	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G>Data :#414

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282




Radiated Emission Measurement

File: TUV 5G

Data: #415

Date: 15/06/23/

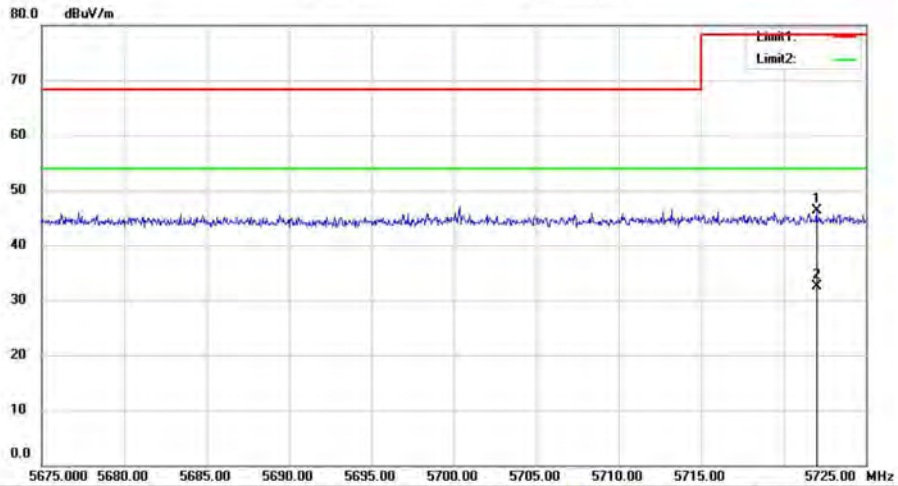

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5722.000	59.80	-13.56	46.24	78.20	-31.96	peak		
2	*	5722.000	46.04	-13.56	32.48	54.00	-21.52	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#415

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

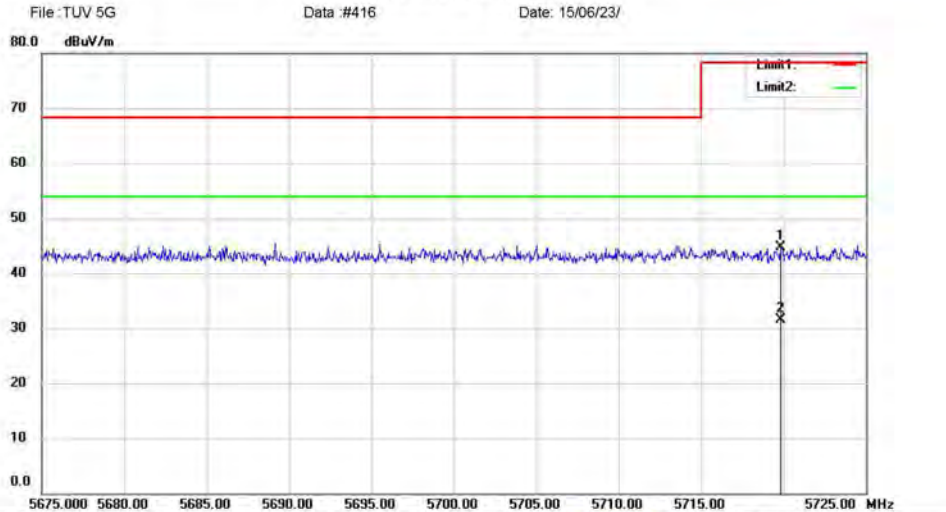

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5719.800	58.33	-13.56	44.77	78.20	-33.43	peak		
2	*	5719.800	45.14	-13.56	31.58	54.00	-22.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File: TUV 5G Data :#416

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

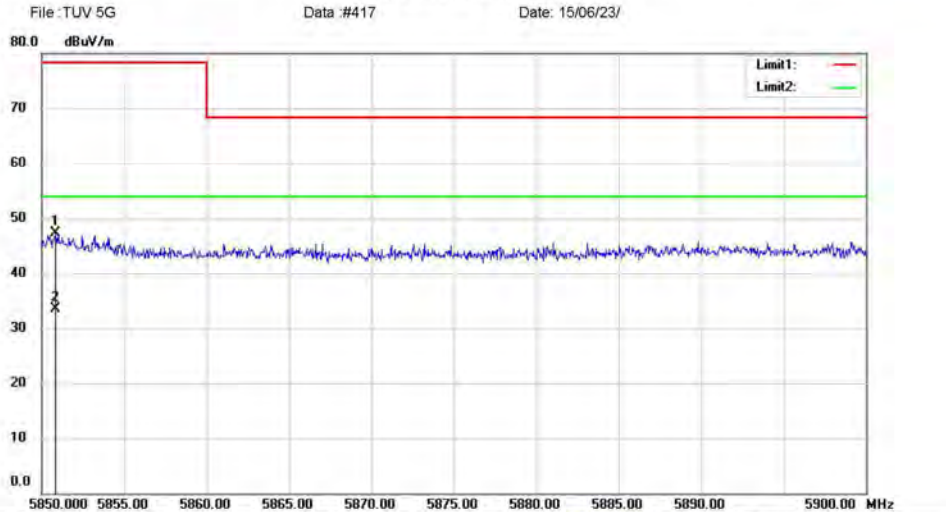

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5850.850	60.67	-13.41	47.26	78.20	-30.94	peak		
2	*	5850.850	46.95	-13.41	33.54	54.00	-20.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV 5G>Data :#417

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

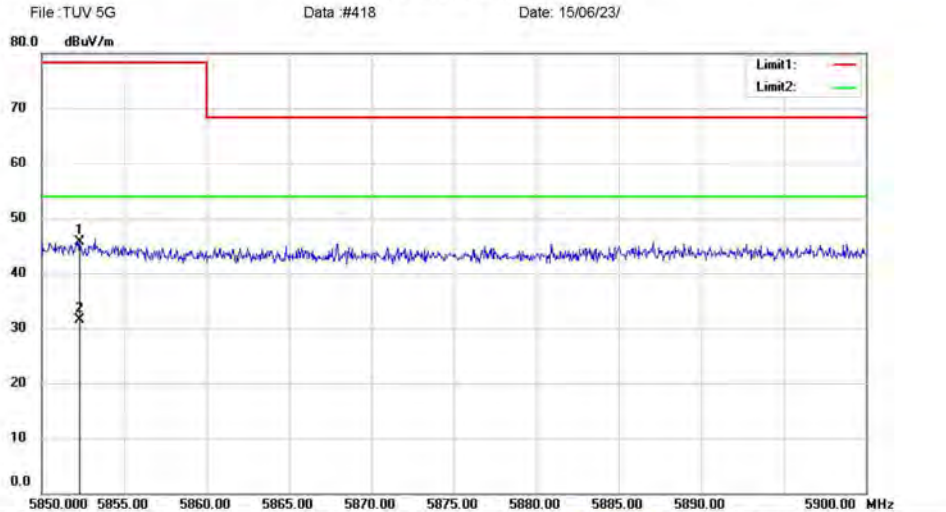

Site: 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C (Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: Pad/Tablet
 M/N: NS-P16AT785HD
 Mode: 11AC HT80 CH155 5775 Ant1+2
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5852.300	59.21	-13.41	45.80	78.20	-32.40	peak		
2	*	5852.300	44.99	-13.41	31.58	54.00	-22.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 5G>Data :#418

Page: 1