


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

120.0 dBuV/m

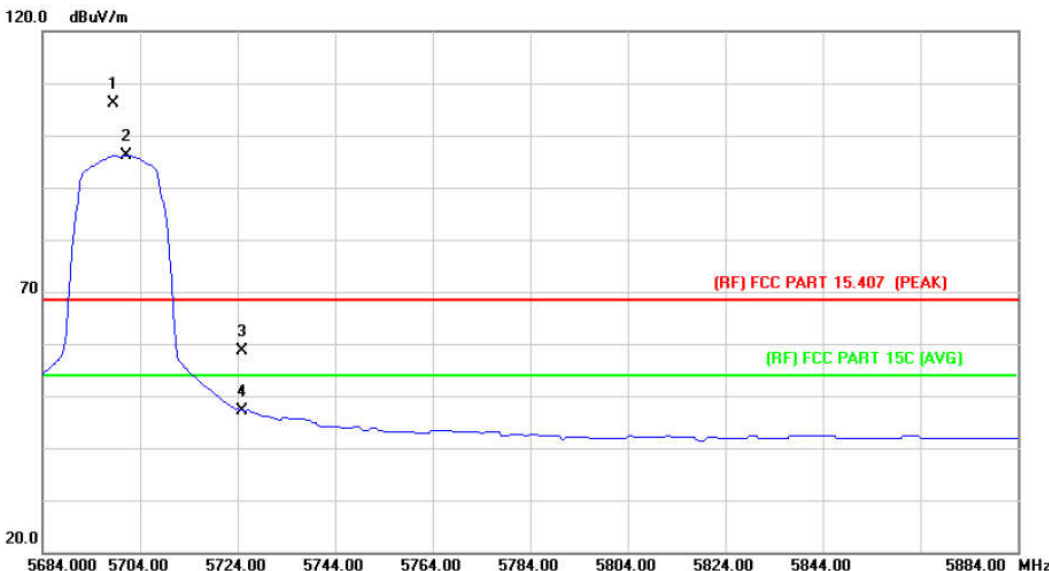

70 (RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)

20.0


5684.00 5704.00 5724.00 5744.00 5764.00 5784.00 5804.00 5824.00 5844.00 5884.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5698.570	88.40	17.73	106.13			peak
2	*	5701.200	78.39	17.73	96.12			AVG
3		5725.000	40.74	17.82	58.56	68.30	-9.74	peak
4		5725.000	29.27	17.82	47.09	54.00	-6.91	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

120.0 dBuV/m

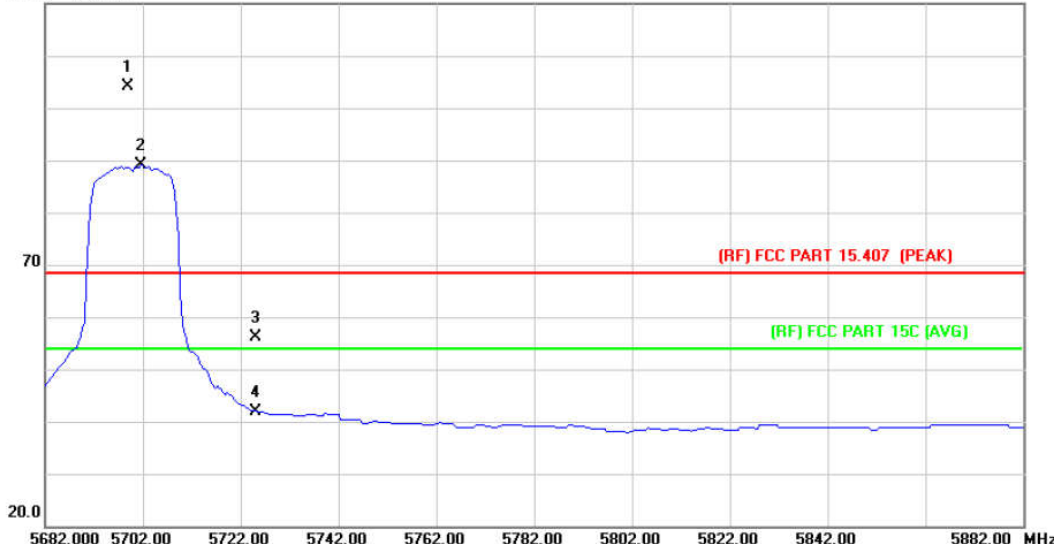

70 (RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


20.0

5682.000 5702.00 5722.00 5742.00 5762.00 5782.00 5802.00 5822.00 5842.00 5882.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5698.970	86.52	17.73	104.25	Fundamental Frequency		peak
2	X	5701.600	71.30	17.73	89.03	Fundamental Frequency		AVG
3		5725.000	38.31	17.82	56.13	68.30	-12.17	peak
4		5725.000	24.11	17.82	41.93	54.00	-12.07	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

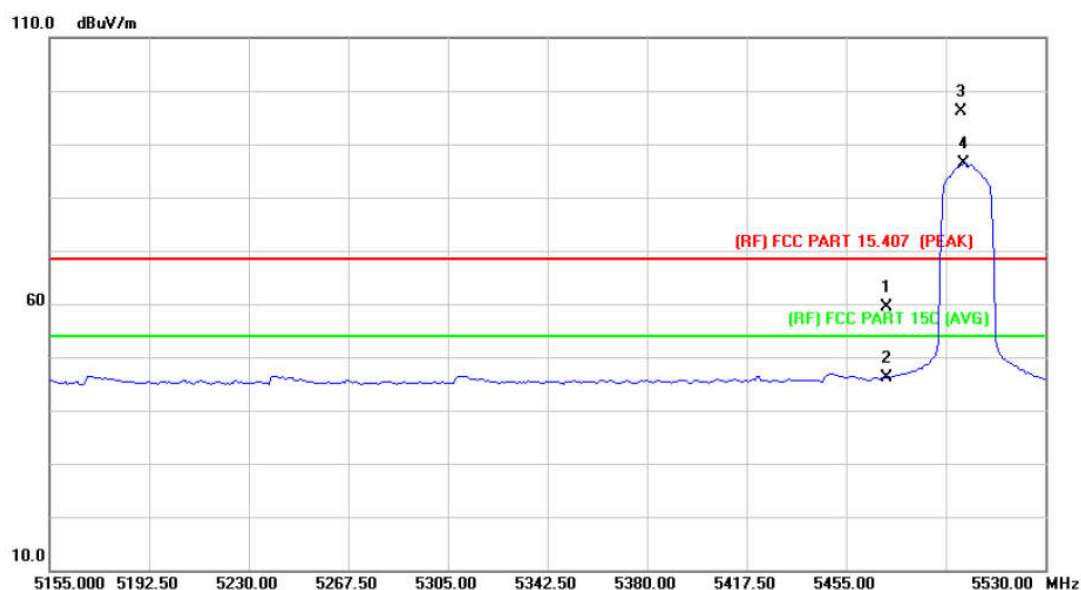

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	45.96	13.31	59.27	68.30	-9.03	peak
2		5470.000	32.82	13.31	46.13	54.00	-7.87	AVG
3	X	5498.190	82.92	13.29	96.21	Fundamental Frequency		peak
4	*	5499.250	73.12	13.29	86.41	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

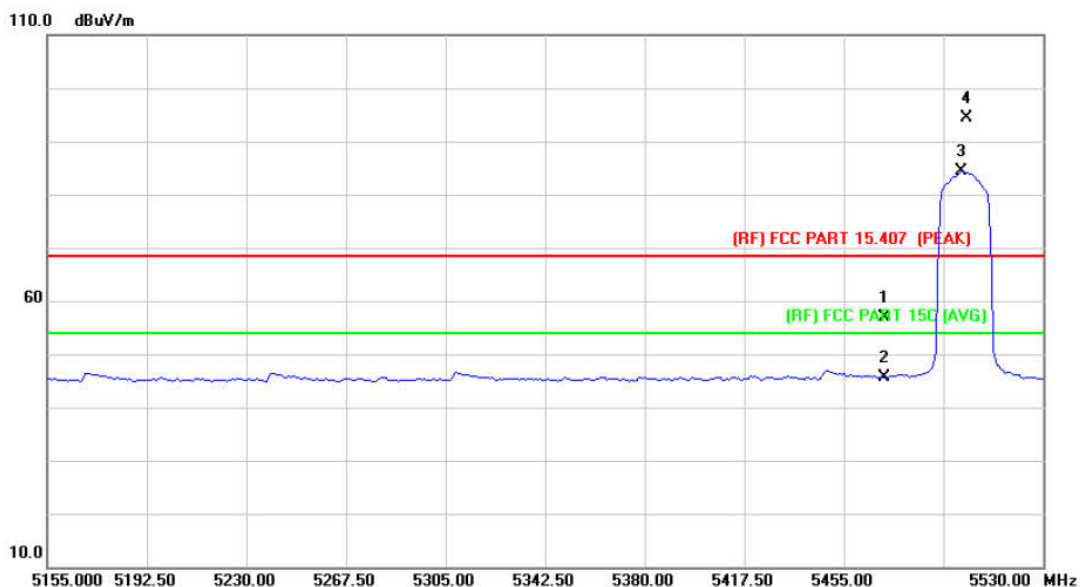

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	33.94	16.61	50.55	54.00	-3.45	AVG
2		5150.600	44.80	16.61	61.41	68.30	-6.89	peak
3	X	5180.000	89.41	16.65	106.06	Fundamental Frequency		peak
4	*	5183.200	80.98	16.65	97.63	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

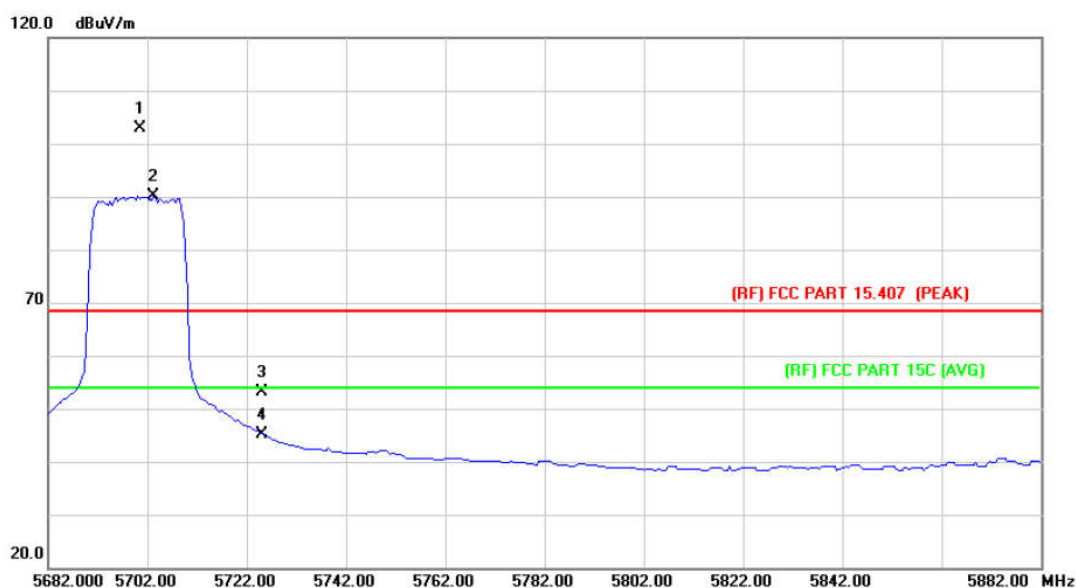

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5700.560	85.19	17.73	102.92	Fundamental Frequency		peak
2	*	5703.200	72.50	17.74	90.24	Fundamental Frequency		AVG
3		5725.000	35.41	17.82	53.23	68.30	-15.07	peak
4		5725.000	27.40	17.82	45.22	54.00	-8.78	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

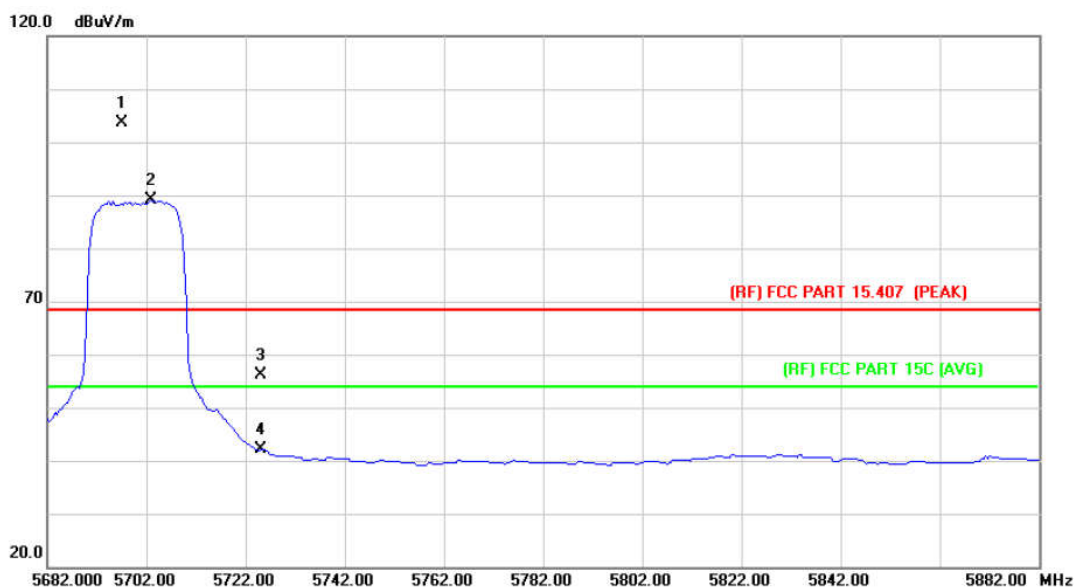

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5696.970	85.84	17.71	103.55	Fundamental Frequency		peak
2	X	5702.800	71.34	17.74	89.08	Fundamental Frequency		AVG
3		5725.000	38.33	17.82	56.15	68.30	-12.15	peak
4		5725.000	24.28	17.82	42.10	54.00	-11.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

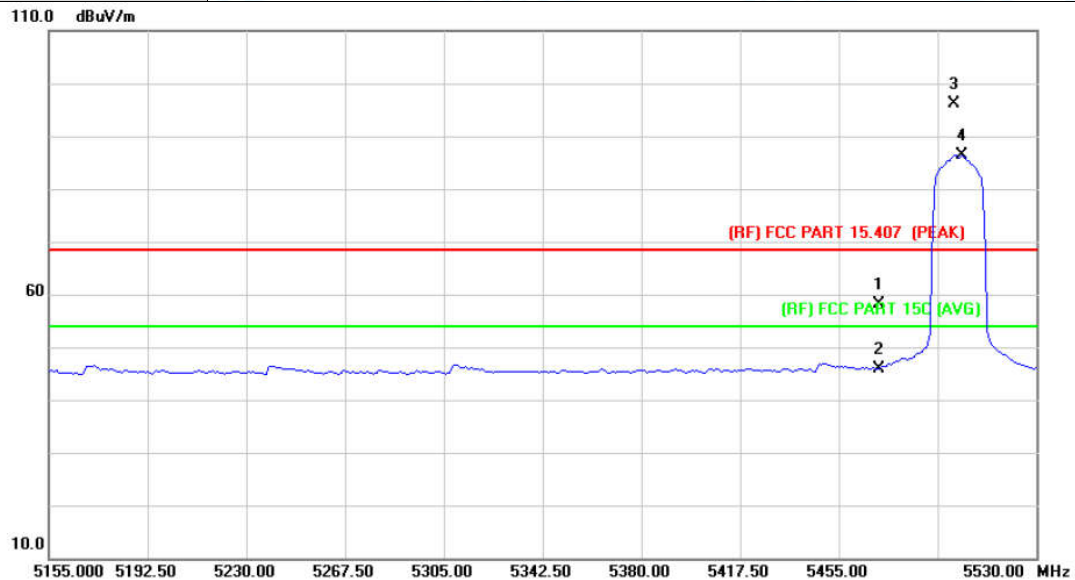

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.77	13.31	58.08	68.30	-10.22	peak
2		5470.000	32.68	13.31	45.99	54.00	-8.01	AVG
3	X	5498.940	82.93	13.29	96.22	Fundamental Frequency		peak
4	*	5501.500	72.99	13.29	86.28	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

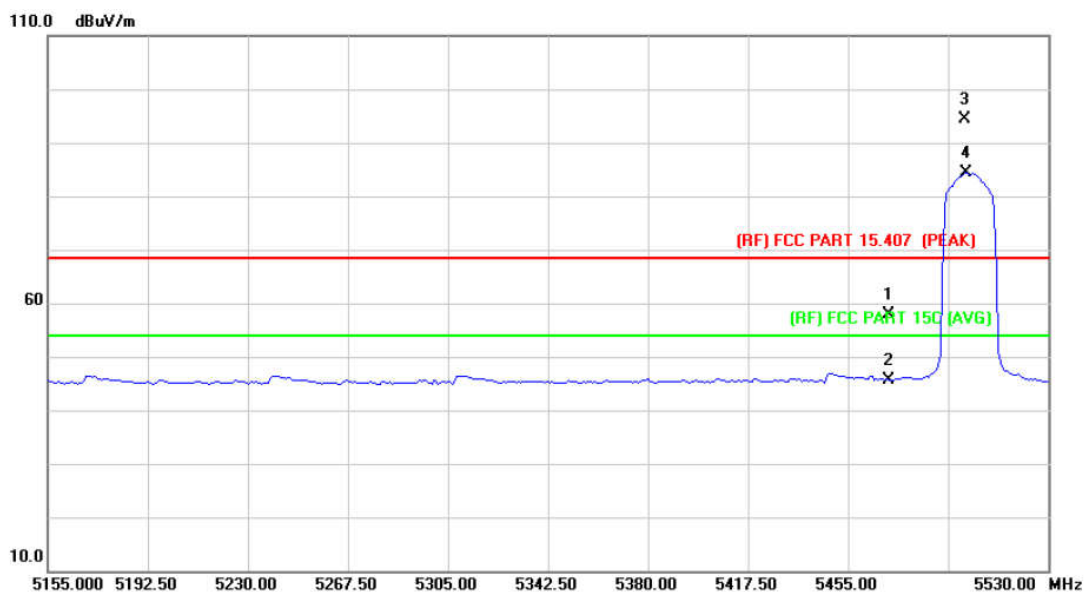

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.58	13.31	57.89	68.30	-10.41	peak
2		5470.000	32.28	13.31	45.59	54.00	-8.41	AVG
3	X	5498.940	81.01	13.29	94.30	Fundamental Frequency		peak
4	*	5499.250	71.13	13.29	84.42	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

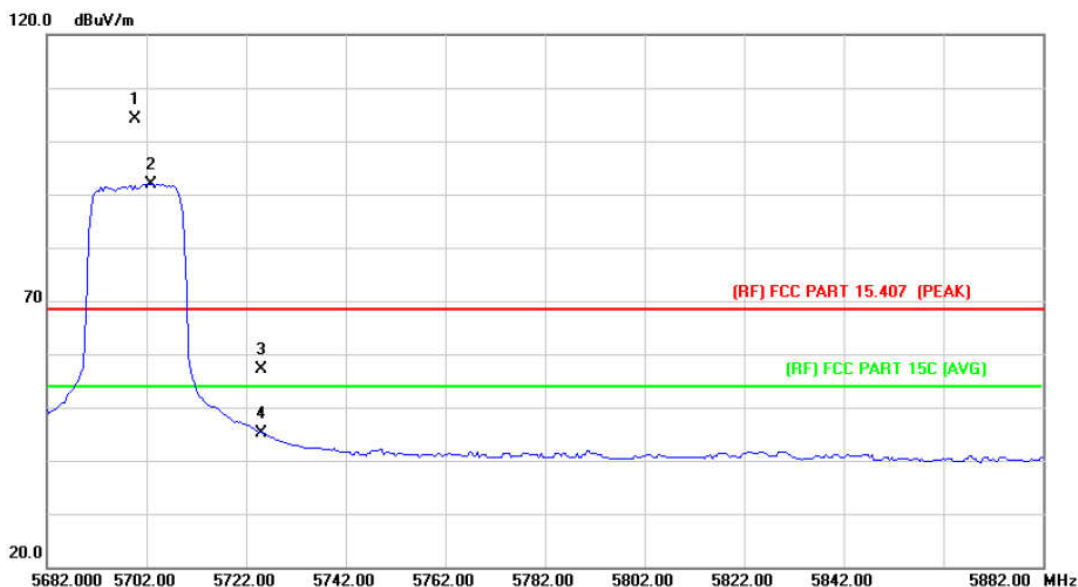

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5699.760	86.52	17.73	104.25	Fundamental Frequency		peak
2	*	5702.800	74.23	17.74	91.97	Fundamental Frequency		AVG
3		5725.000	39.31	17.82	57.13	68.30	-11.17	peak
4		5725.000	27.39	17.82	45.21	54.00	-8.79	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

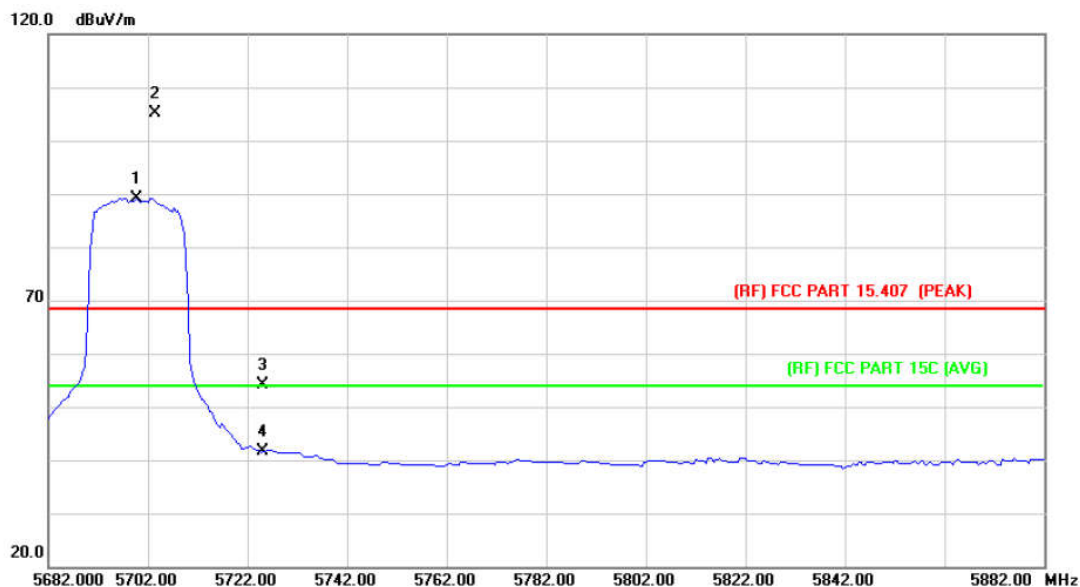

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5699.600	71.49	17.73	89.22	Fundamental Frequency		AVG
2	*	5703.360	87.39	17.74	105.13	Fundamental Frequency		peak
3		5725.000	36.31	17.82	54.13	68.30	-14.17	peak
4		5725.000	23.90	17.82	41.72	54.00	-12.28	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

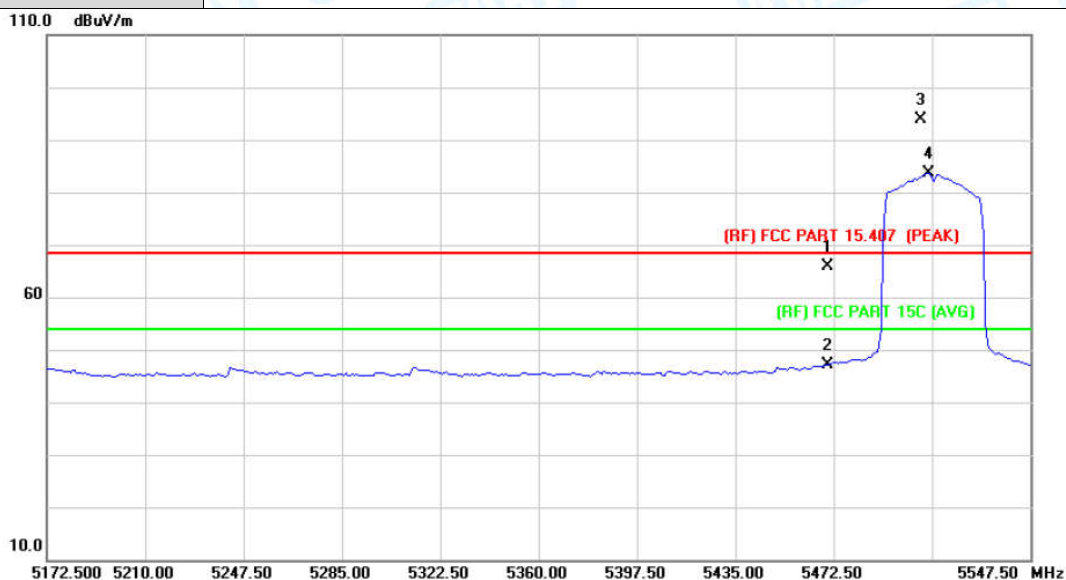

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	52.57	13.31	65.88	68.30	-2.42	peak
2		5470.000	33.91	13.31	47.22	54.00	-6.78	AVG
3	X	5505.960	80.58	13.30	93.88	Fundamental Frequency		peak
4	*	5508.500	70.33	13.31	83.64	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

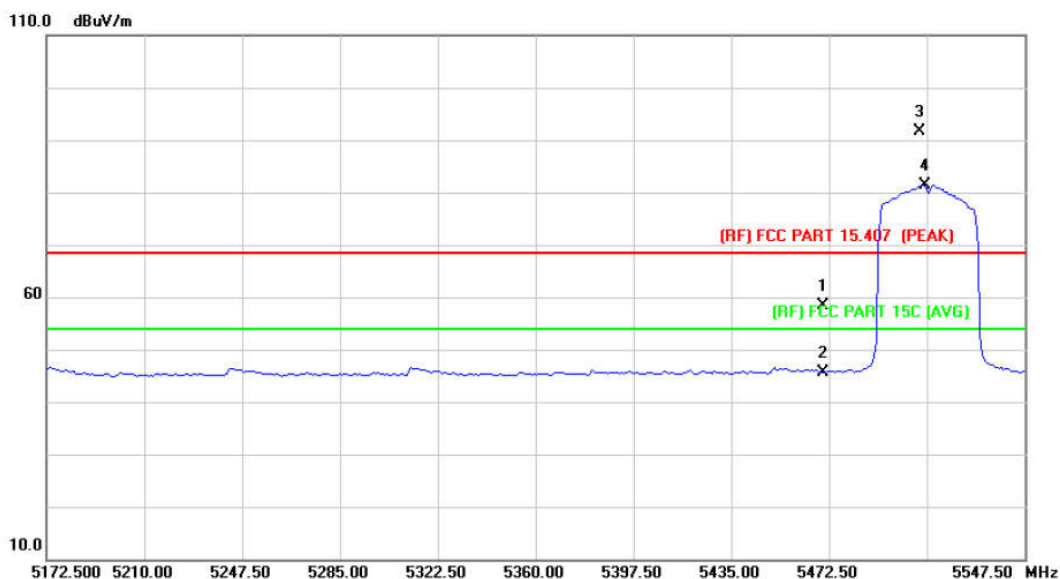

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	45.01	13.31	58.32	68.30	-9.98	peak
2		5470.000	32.26	13.31	45.57	54.00	-8.43	AVG
3	X	5507.460	78.43	13.30	91.73	Fundamental Frequency		peak
4	*	5509.250	68.05	13.31	81.36	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

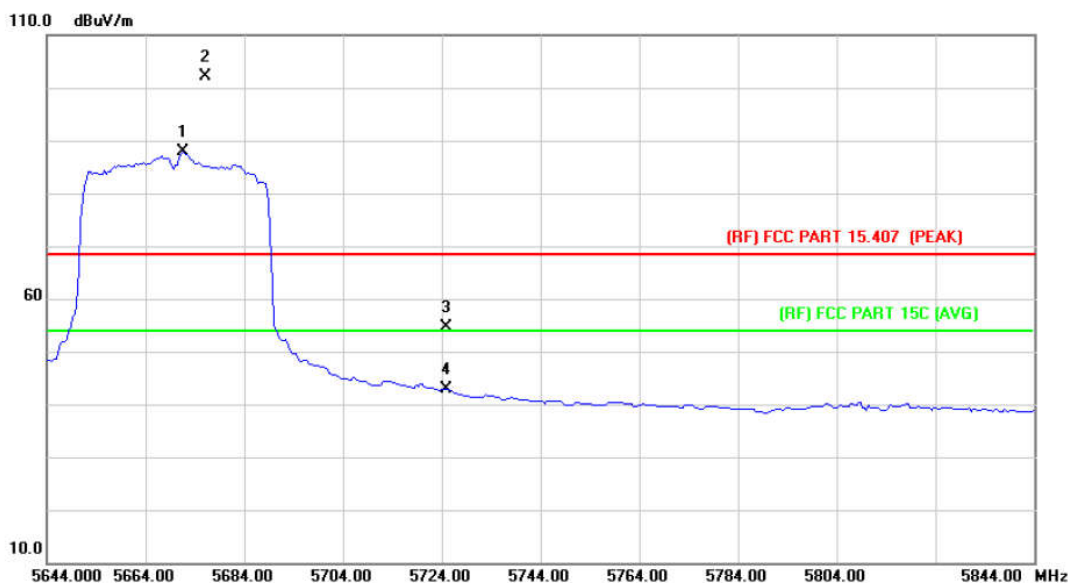

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5671.600	70.28	17.62	87.90	Fundamental Frequency		AVG
2	X	5676.140	84.49	17.63	102.12	Fundamental Frequency		peak
3		5725.000	36.73	17.82	54.55	68.30	-13.75	peak
4		5725.000	24.94	17.82	42.76	54.00	-11.24	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

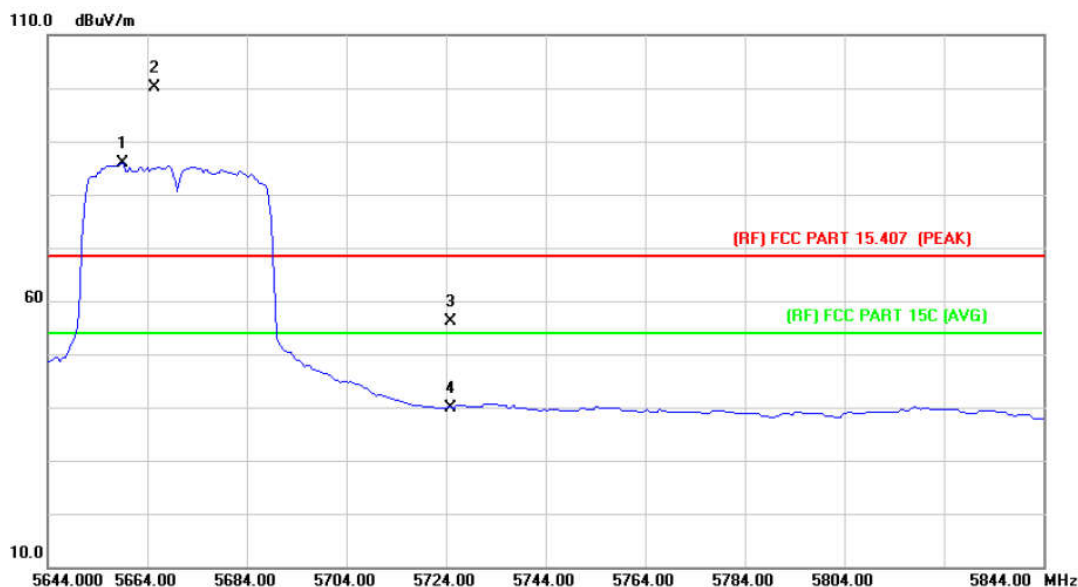

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5659.200	68.20	17.58	85.78	Fundamental Frequency	AVG
2	*	5665.360	82.53	17.60	100.13	Fundamental Frequency	peak
3		5725.000	38.31	17.82	56.13	68.30	-12.17 peak
4		5725.000	22.15	17.82	39.97	54.00	-14.03 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

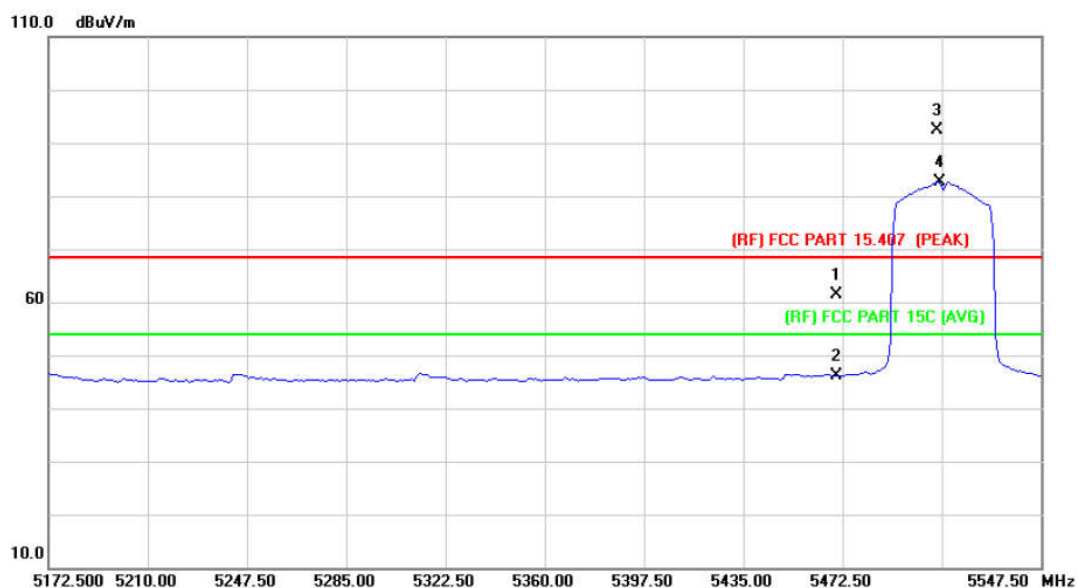

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	47.95	13.31	61.26	68.30	-7.04	peak
2		5470.000	32.78	13.31	46.09	54.00	-7.91	AVG
3	X	5508.200	79.20	13.30	92.50	Fundamental Frequency		peak
4	*	5509.250	69.34	13.31	82.65	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

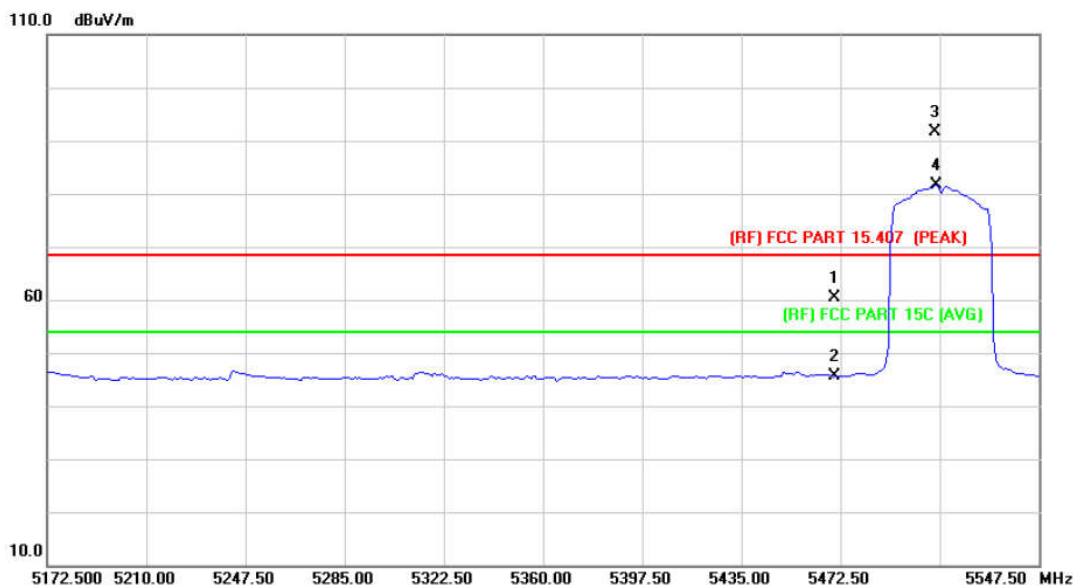

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	47.18	13.31	60.49	68.30	-7.81	peak
2		5470.000	32.26	13.31	45.57	54.00	-8.43	AVG
3	X	5508.200	78.32	13.30	91.62	Fundamental Frequency		peak
4	*	5508.500	68.31	13.31	81.62	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

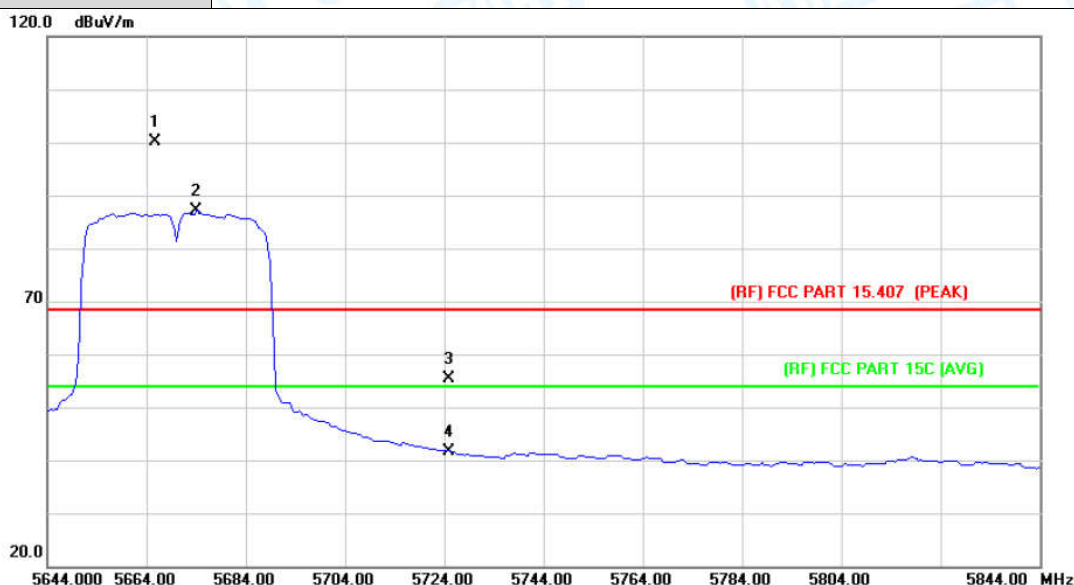

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5665.760	82.53	17.60	100.13	Fundamental Frequency		peak
2	*	5674.000	69.58	17.63	87.21	Fundamental Frequency		AVG
3		5725.000	37.49	17.82	55.31	68.30	-12.99	peak
4		5725.000	23.91	17.82	41.73	54.00	-12.27	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

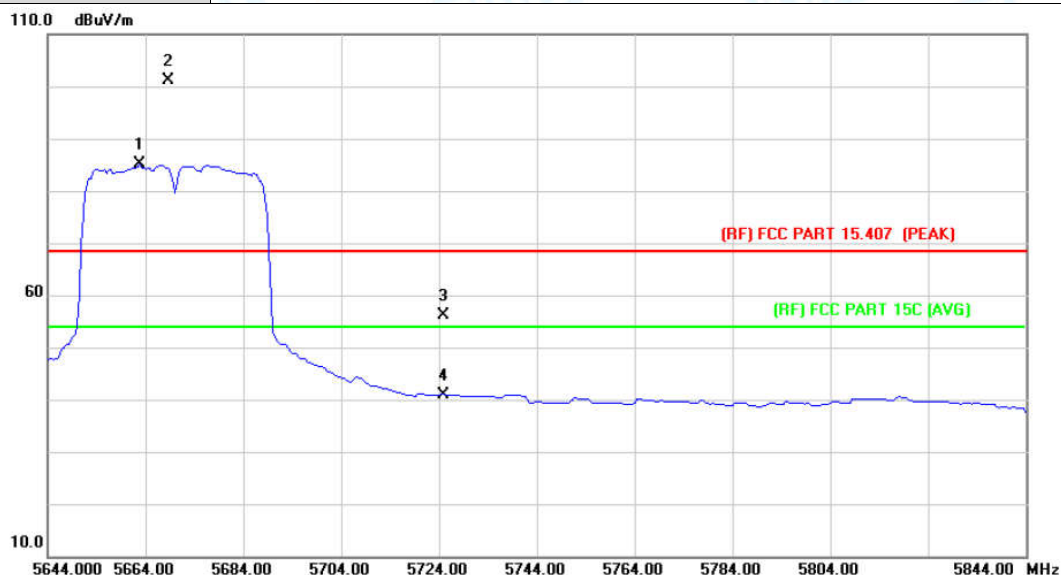

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5662.800	67.65	17.60	85.25	Fundamental Frequency	AVG
2	*	5668.550	83.52	17.61	101.13	Fundamental Frequency	peak
3		5725.000	38.31	17.82	56.13	68.30	-12.17 peak
4		5725.000	23.16	17.82	40.98	54.00	-13.02 AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

110.0 dBuV/m

60


10.0

5213.750 5251.25 5288.75 5326.25 5363.75 5401.25 5438.75 5476.25 5513.75 5588.75 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	50.37	13.31	63.68	Fundamental Frequency		peak
2		5470.000	34.85	13.31	48.16	Fundamental Frequency		AVG
3	X	5518.760	77.08	13.34	90.42	68.30	22.12	peak
4	*	5528.000	66.62	13.36	79.98	54.00	25.98	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

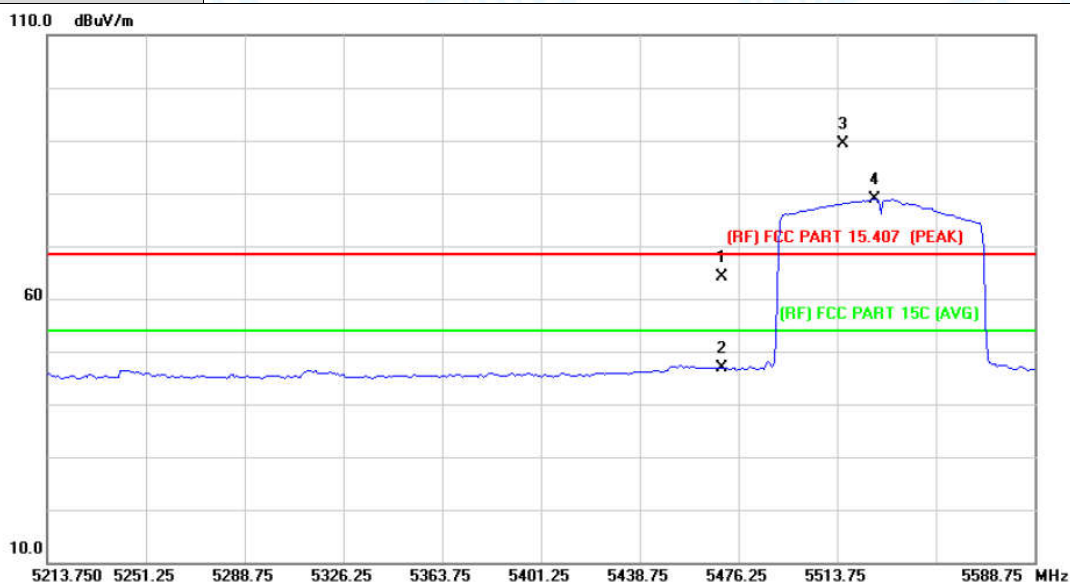

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	50.77	13.31	64.08	Fundamental Frequency	2	peak
2		5470.000	33.53	13.31	46.84	Fundamental Frequency	3	AVG
3	X	5515.770	76.10	13.34	89.44	68.30	21.14	peak
4	*	5528.000	65.59	13.36	78.95	54.00	24.95	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

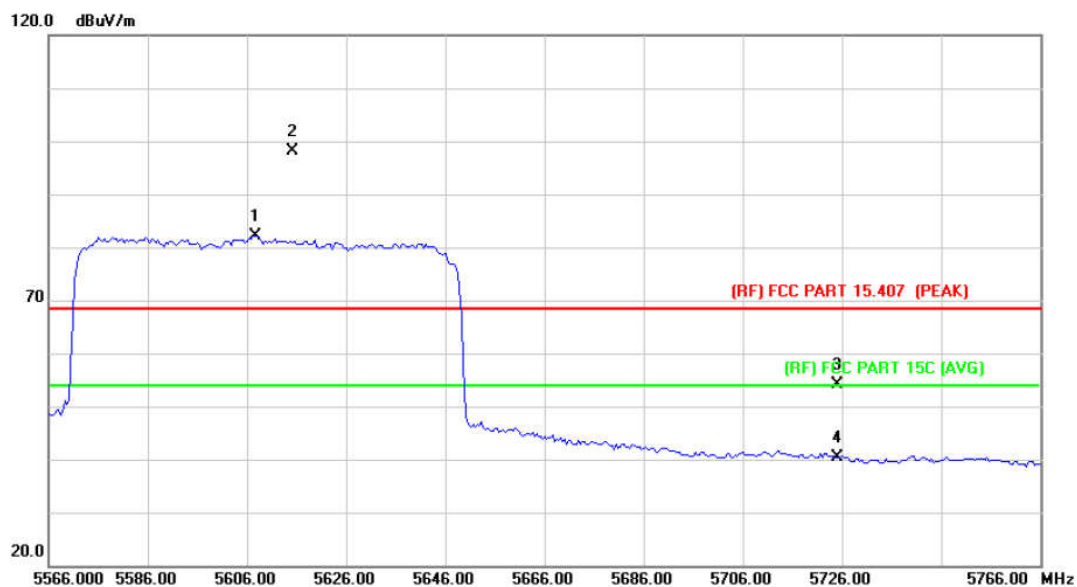

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5607.600	64.82	17.38	82.20	Fundamental Frequency		AVG
2	*	5615.300	80.71	17.42	98.13	Fundamental Frequency		peak
3		5725.000	36.31	17.82	54.13	68.30	-14.17	peak
4		5725.000	22.52	17.82	40.34	54.00	-13.66	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

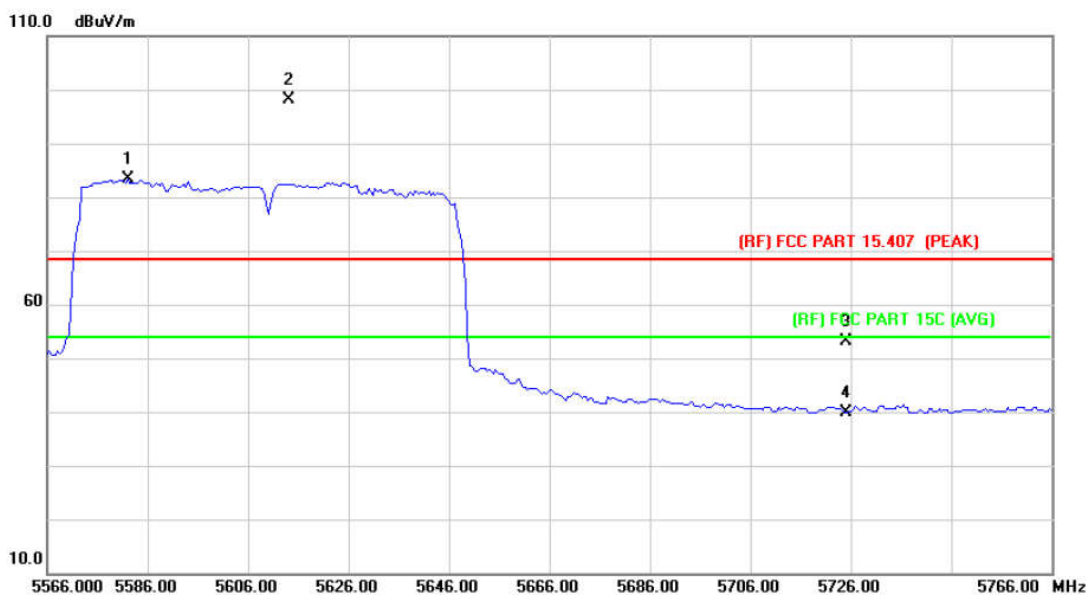

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5582.000	66.16	17.29	83.45	Fundamental Frequency		AVG
2	*	5614.100	80.72	17.41	98.13	Fundamental Frequency		peak
3		5725.000	35.35	17.82	53.17	68.30	-15.13	peak
4		5725.000	22.13	17.82	39.95	54.00	-14.05	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

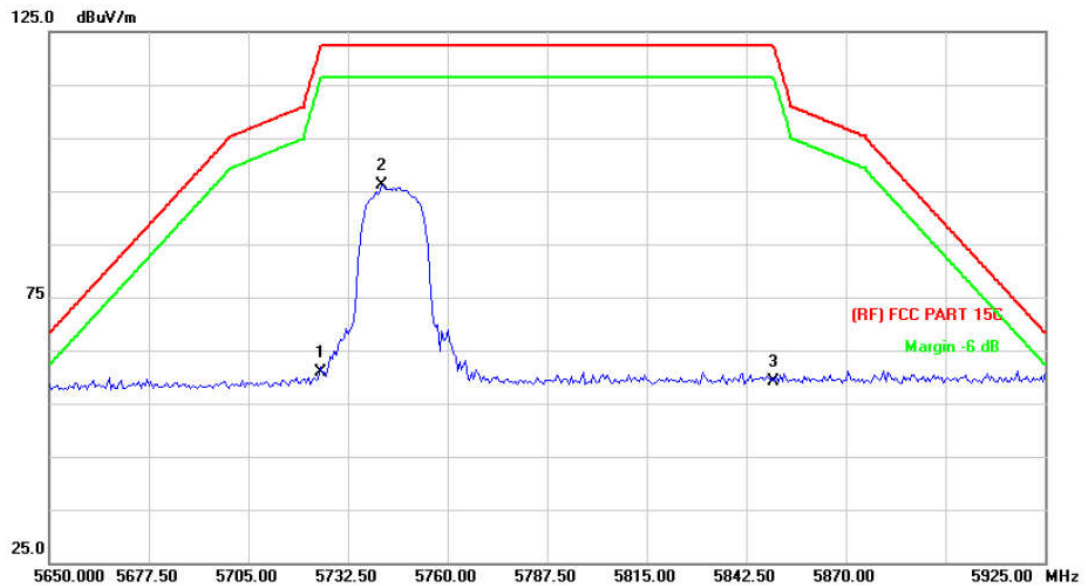

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	47.07	13.89	60.96	122.30	-61.34	peak
2	*	5741.850	82.14	13.95	96.09	Fundamental Frequency		peak
3		5850.000	44.89	14.23	59.12	122.30	-63.18	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

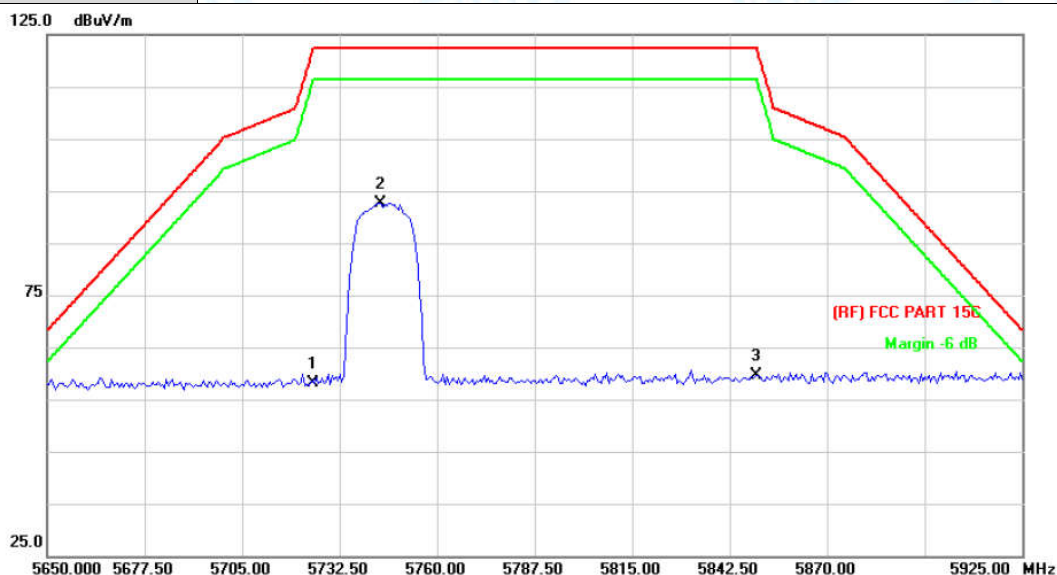

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.29	13.89	58.18	122.30	-64.12	peak
2	*	5744.050	78.62	13.95	92.57	Fundamental Frequency		peak
3		5850.000	45.32	14.23	59.55	122.30	-62.75	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

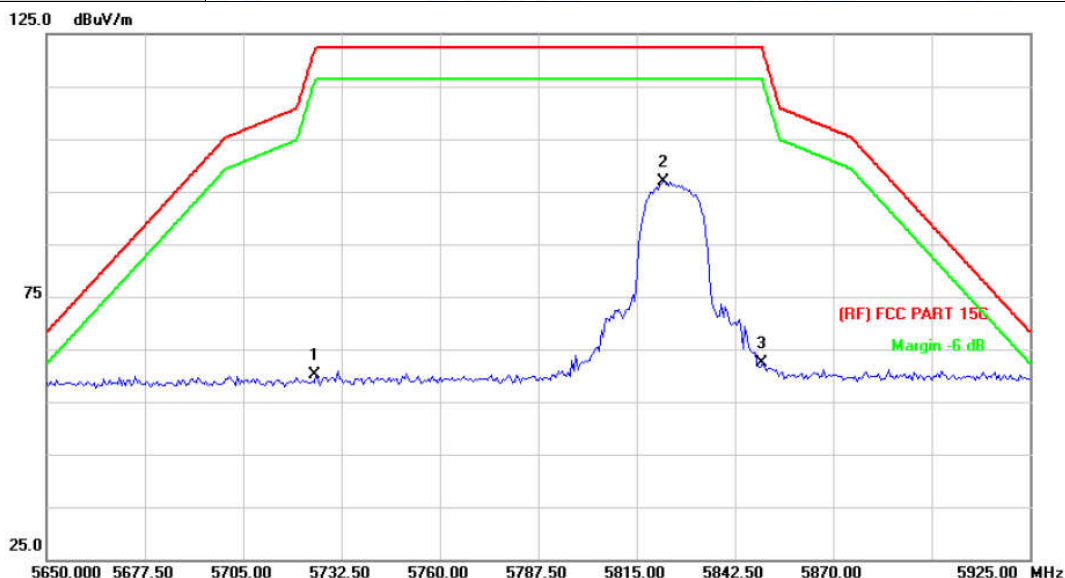

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.33	13.89	60.22	122.30	-62.08	peak
2	*	5822.700	82.68	14.15	96.83	Fundamental Frequency		peak
3		5850.000	48.21	14.23	62.44	122.30	-59.86	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

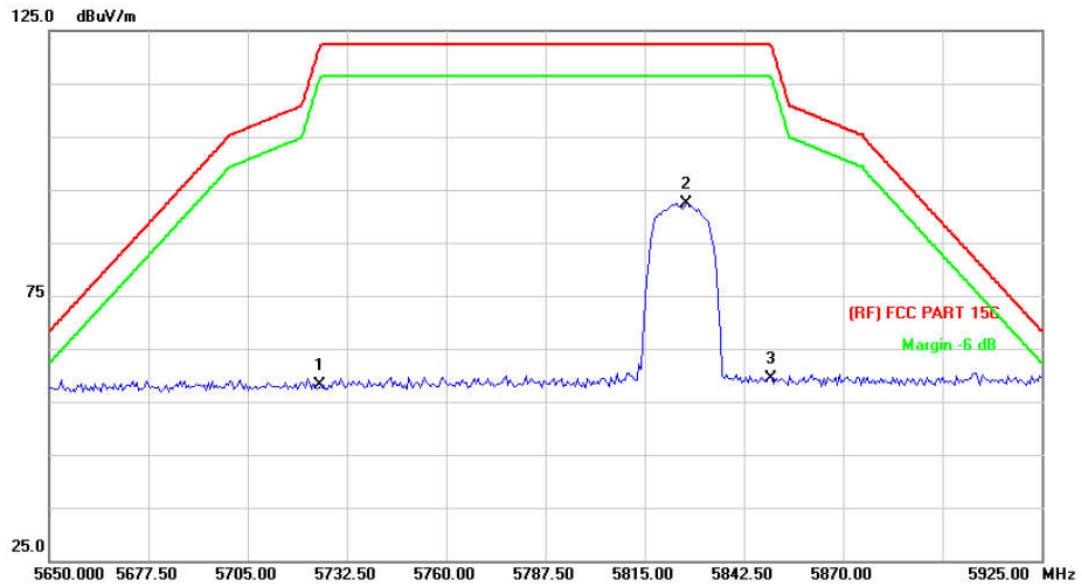

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.27	13.89	58.16	122.30	-64.14	peak
2	*	5826.550	78.25	14.17	92.42	Fundamental Frequency		peak
3		5850.000	45.09	14.23	59.32	122.30	-62.98	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

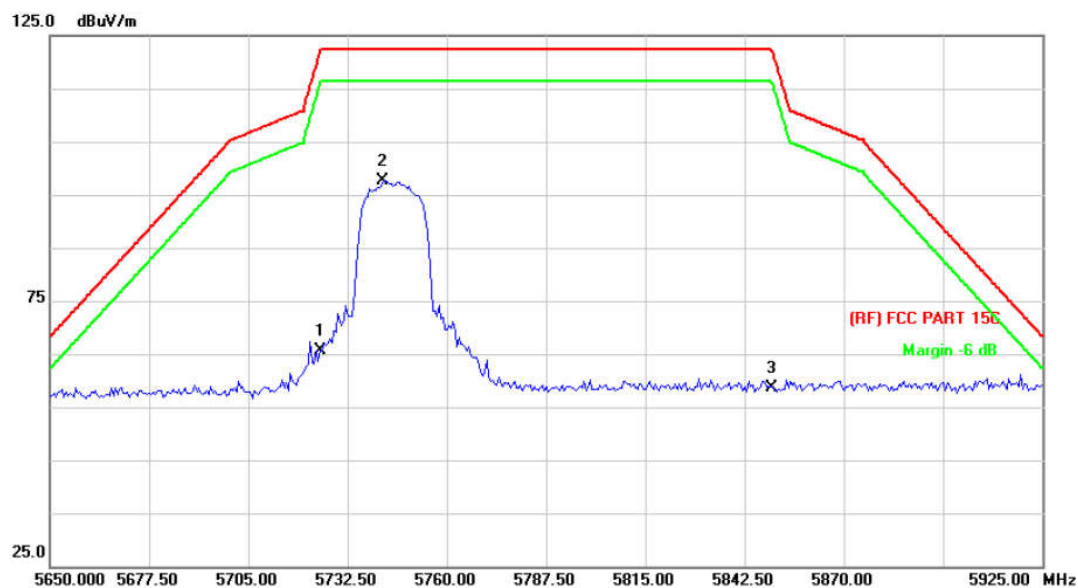

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.64	13.89	65.53	122.30	-56.77	peak
2	*	5742.400	83.71	13.95	97.66	Fundamental Frequency		peak
3		5850.000	44.29	14.23	58.52	122.30	-63.78	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

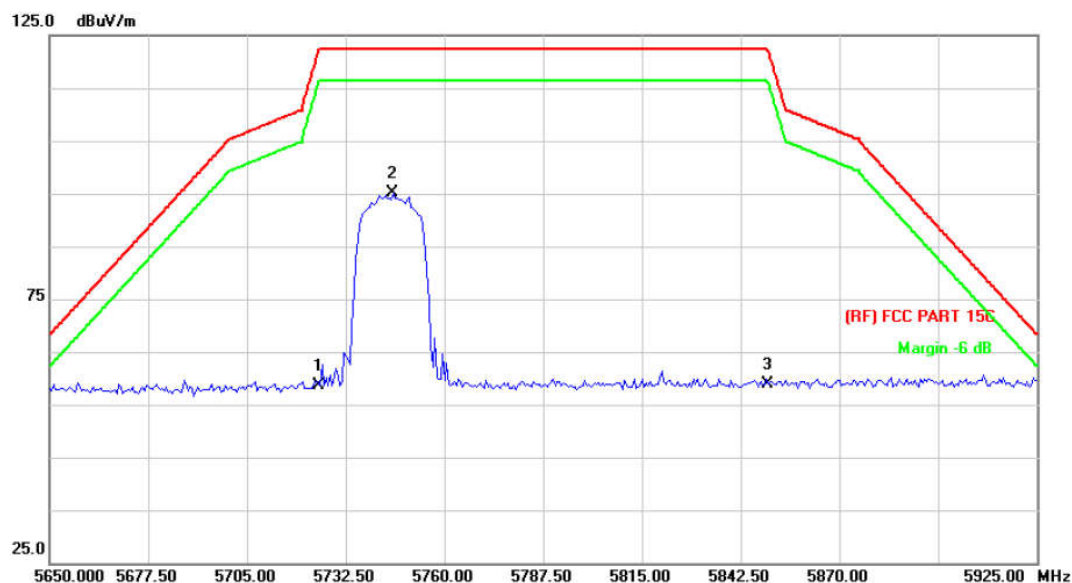

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.84	13.89	58.73	122.30	-63.57	peak
2	*	5745.700	81.07	13.95	95.02	Fundamental Frequency		peak
3		5850.000	44.69	14.23	58.92	122.30	-63.38	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

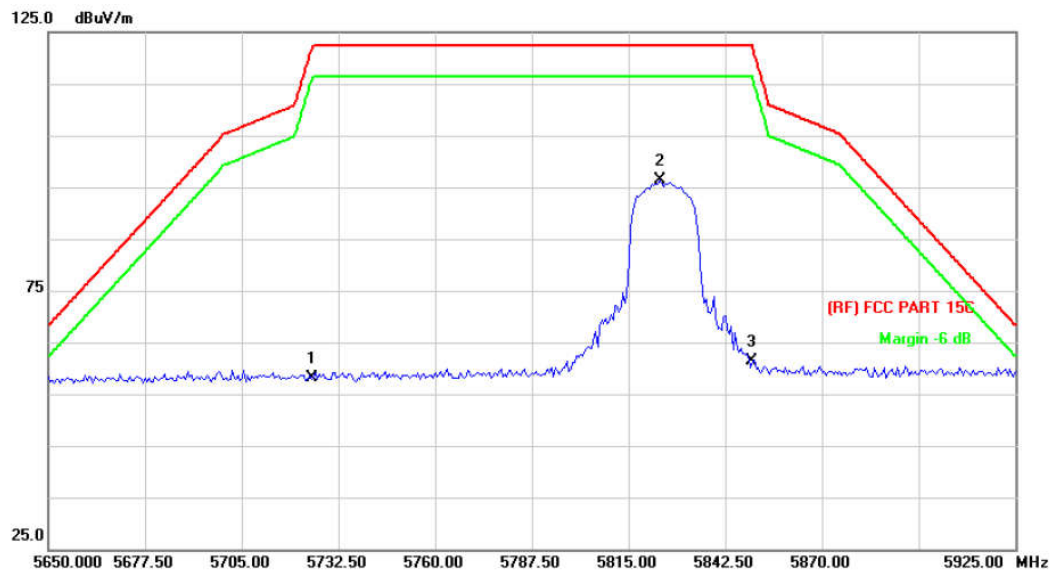


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.23	13.89	58.12	122.30	-64.18	peak
2	*	5823.800	82.18	14.16	96.34	Fundamental Frequency		peak
3		5850.000	47.19	14.23	61.42	122.30	-60.88	peak

Emission Level= Read Level+ Correct Factor

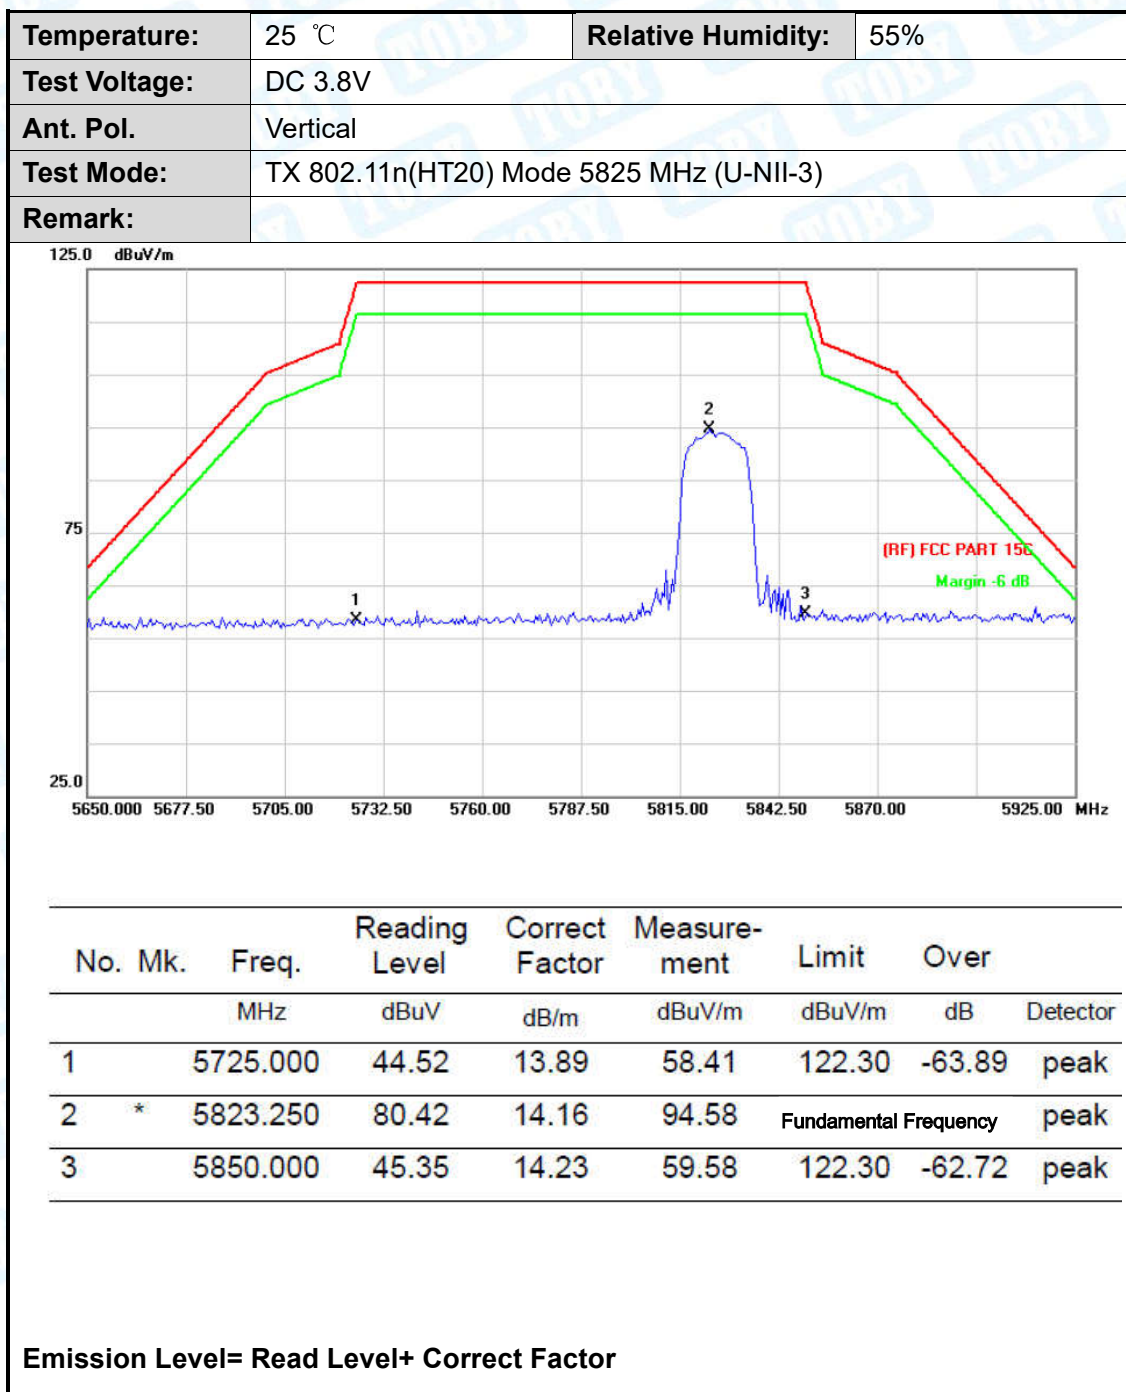


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

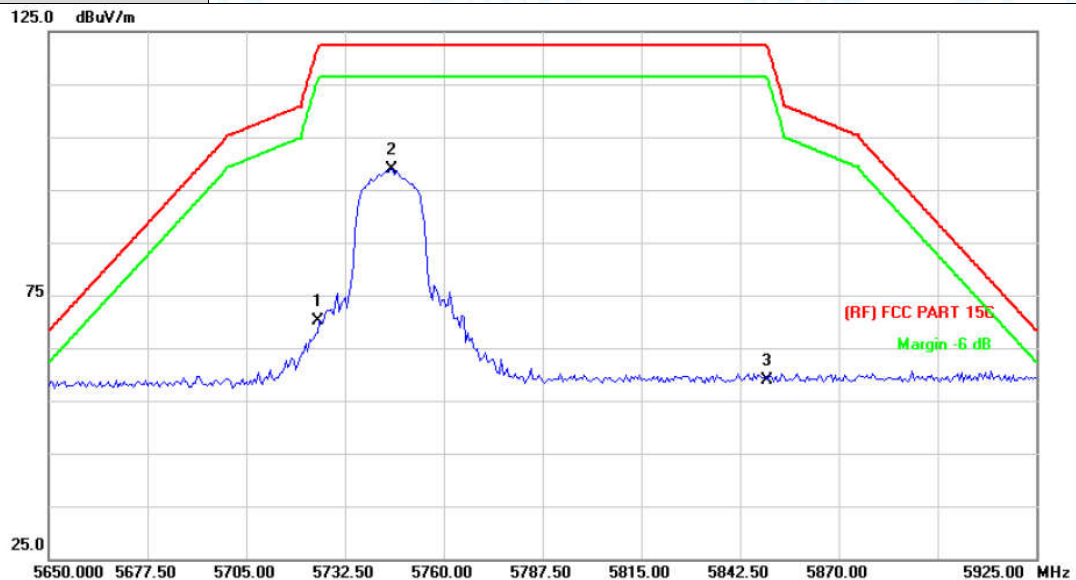

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	56.25	13.89	70.14	122.30	-52.16	peak
2	*	5745.700	84.93	13.95	98.88	Fundamental Frequency		peak
3		5850.000	44.63	14.23	58.86	122.30	-63.44	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

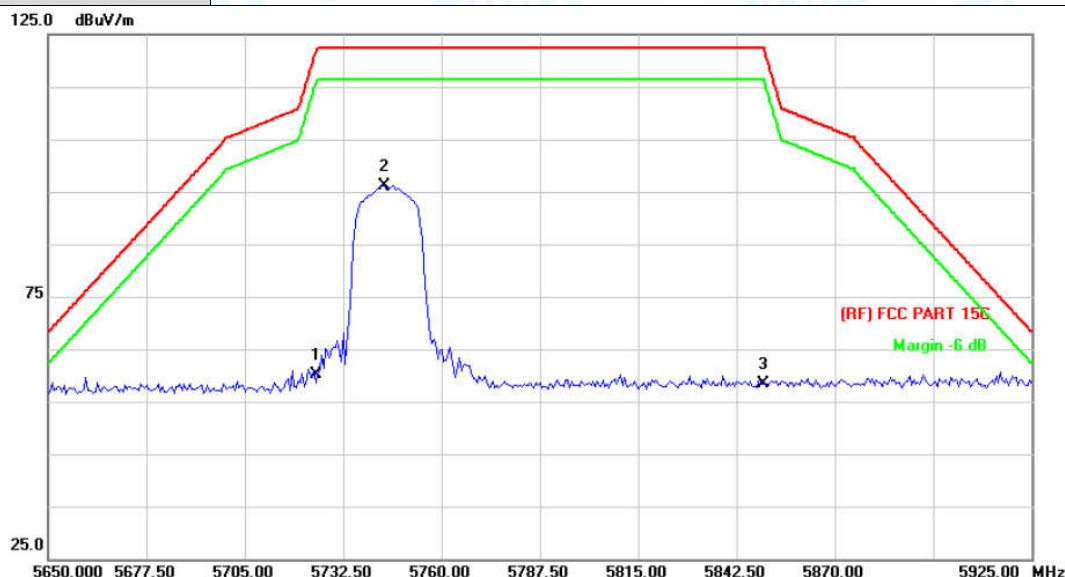

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.13	13.89	60.02	122.30	-62.28	peak
2	*	5744.050	82.07	13.95	96.02	Fundamental Frequency		peak
3		5850.000	44.25	14.23	58.48	122.30	-63.82	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

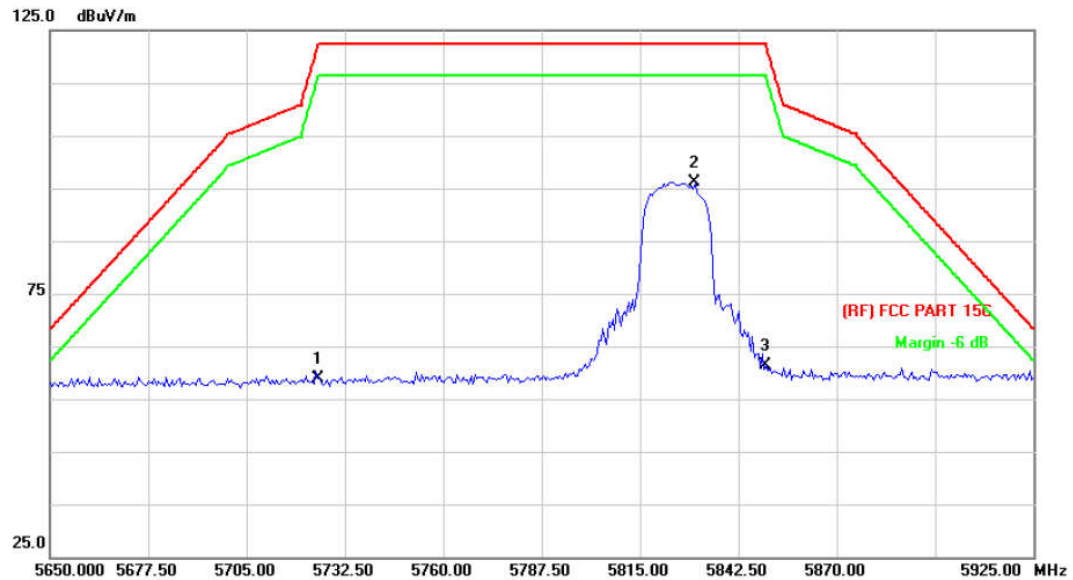

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.00	13.89	58.89	122.30	-63.41	peak
2	*	5830.400	82.02	14.17	96.19	Fundamental Frequency		peak
3		5850.000	47.07	14.23	61.30	122.30	-61.00	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

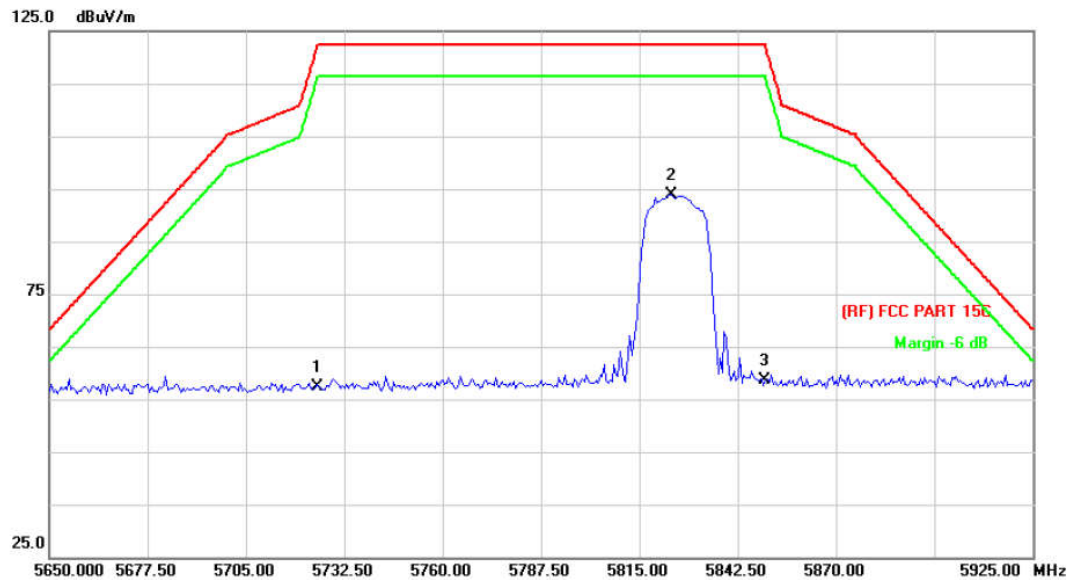

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.52	13.89	57.41	122.30	-64.89	peak
2	*	5823.800	79.70	14.16	93.86	Fundamental Frequency		peak
3		5850.000	44.39	14.23	58.62	122.30	-63.68	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

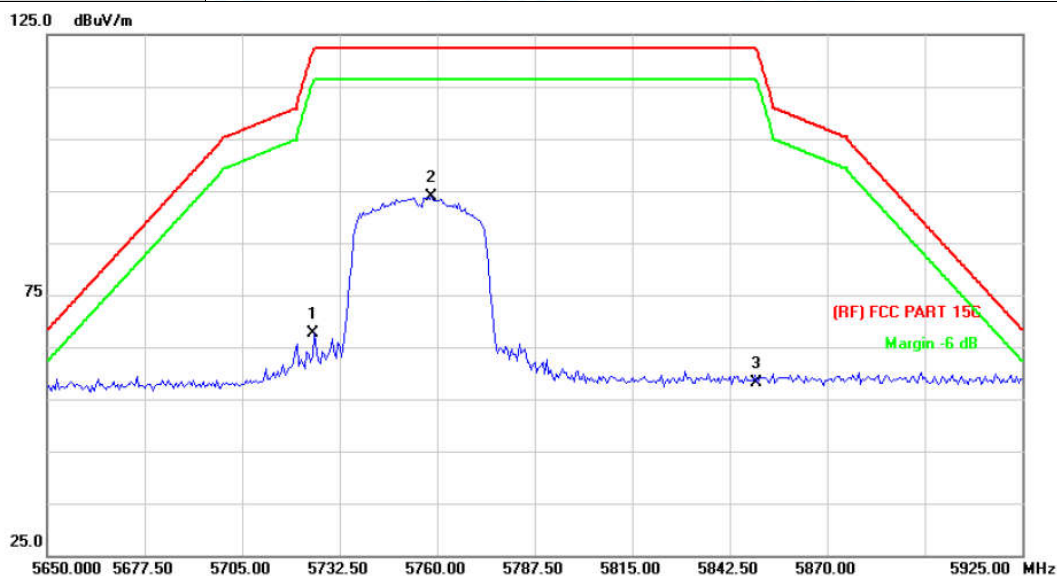

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	53.79	13.89	67.68	122.30	-54.62	peak
2	*	5758.350	80.02	13.97	93.99	Fundamental Frequency		peak
3		5850.000	43.96	14.23	58.19	122.30	-64.11	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

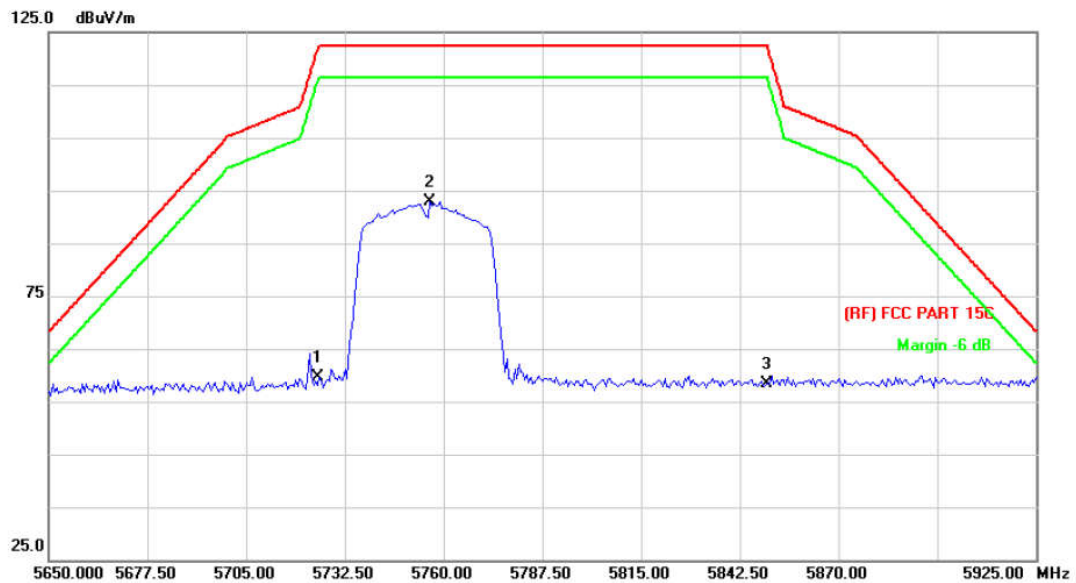

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.78	13.89	59.67	122.30	-62.63	peak
2	*	5756.150	79.02	13.97	92.99	Fundamental Frequency		peak
3		5850.000	44.17	14.23	58.40	122.30	-63.90	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

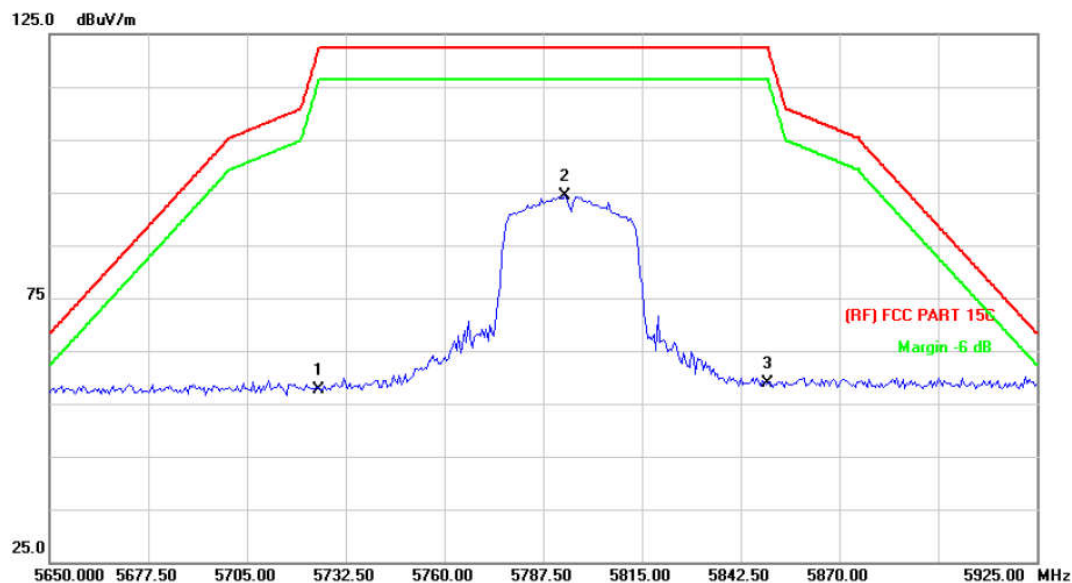

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.84	13.89	57.73	122.30	-64.57	peak
2	*	5793.550	80.35	14.08	94.43	Fundamental Frequency		peak
3		5850.000	44.73	14.23	58.96	122.30	-63.34	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

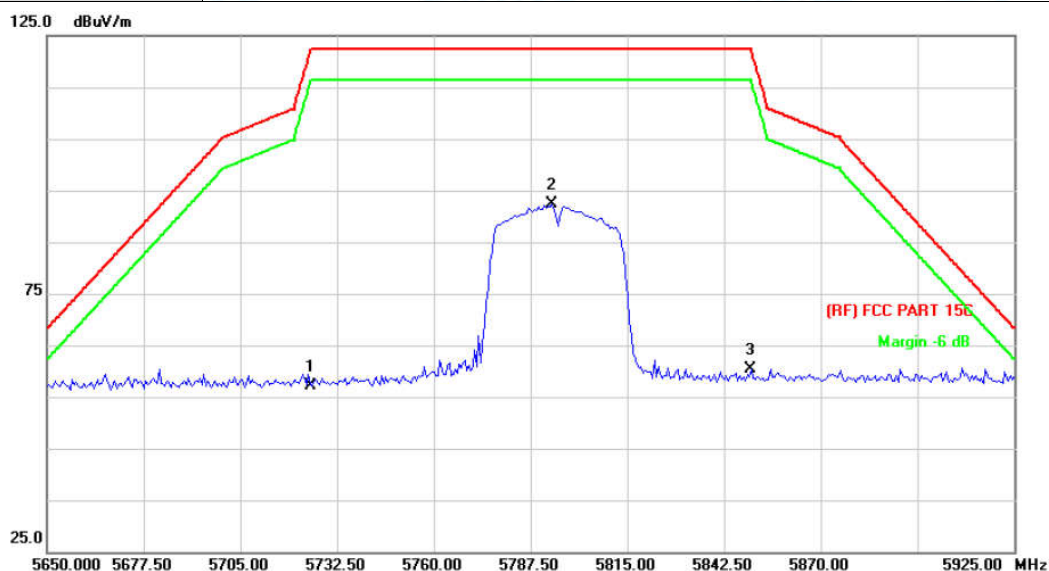

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.16	13.89	57.05	122.30	-65.25	peak
2	*	5793.550	78.26	14.08	92.34	Fundamental Frequency		peak
3		5850.000	46.18	14.23	60.41	122.30	-61.89	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

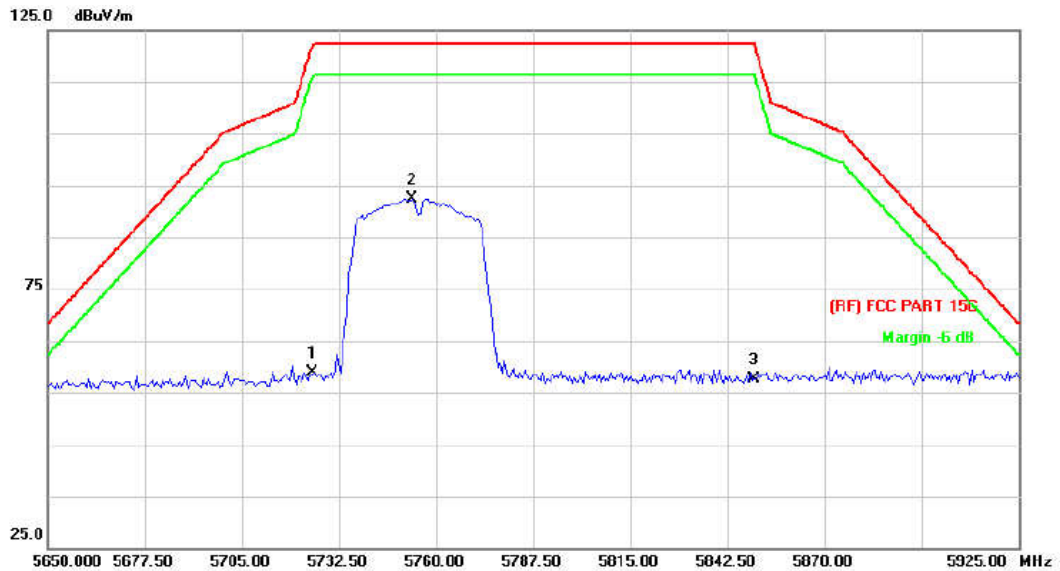

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5725.000	44.91	13.89	58.80	122.30	-63.50	peak
2	*	5753.400	78.44	13.97	92.41	Fundamental Frequency		peak
3		5850.000	43.28	14.23	57.51	122.30	-64.79	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

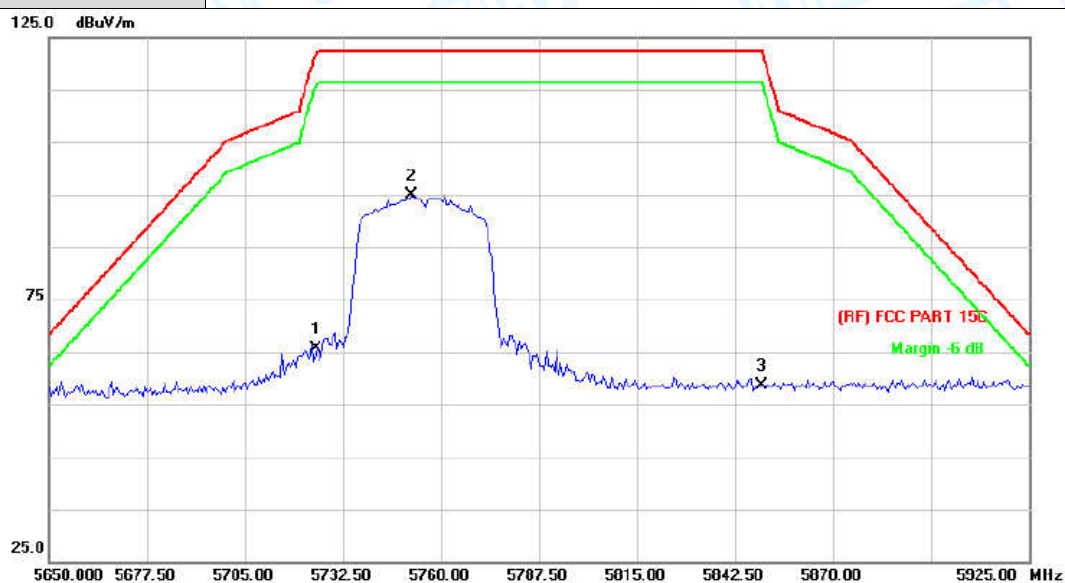


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.86	13.89	65.75	122.30	-56.55	peak
2	*	5751.750	80.98	13.96	94.94	Fundamental Frequency		peak
3		5850.000	44.49	14.23	58.72	122.30	-63.58	peak

Emission Level= Read Level+ Correct Factor

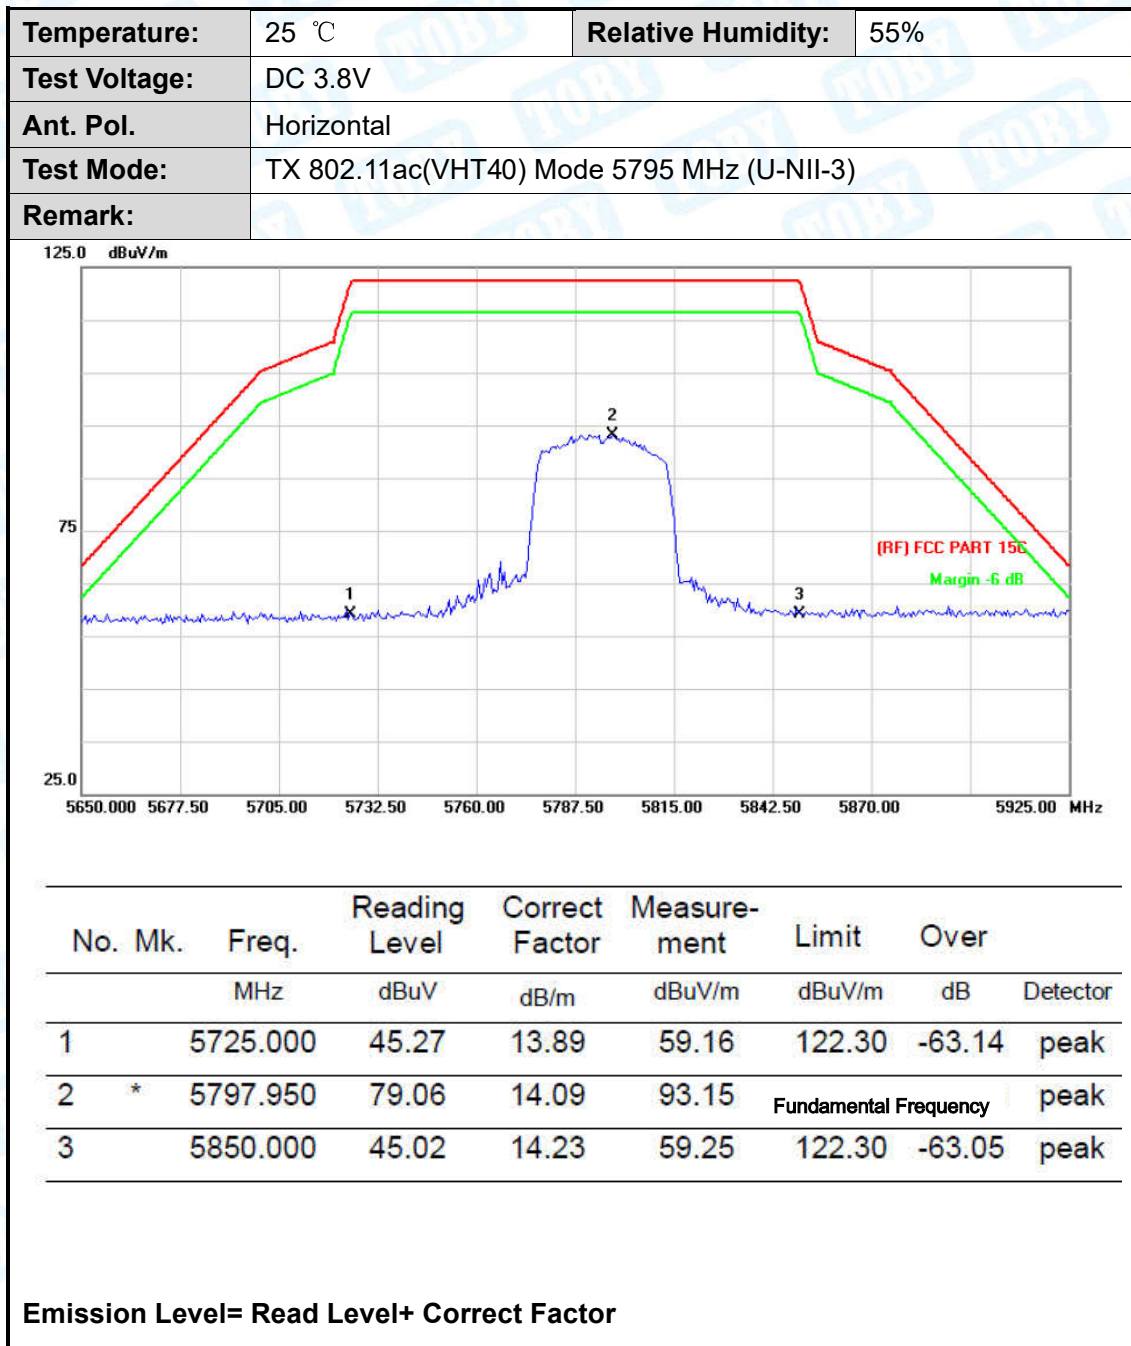


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

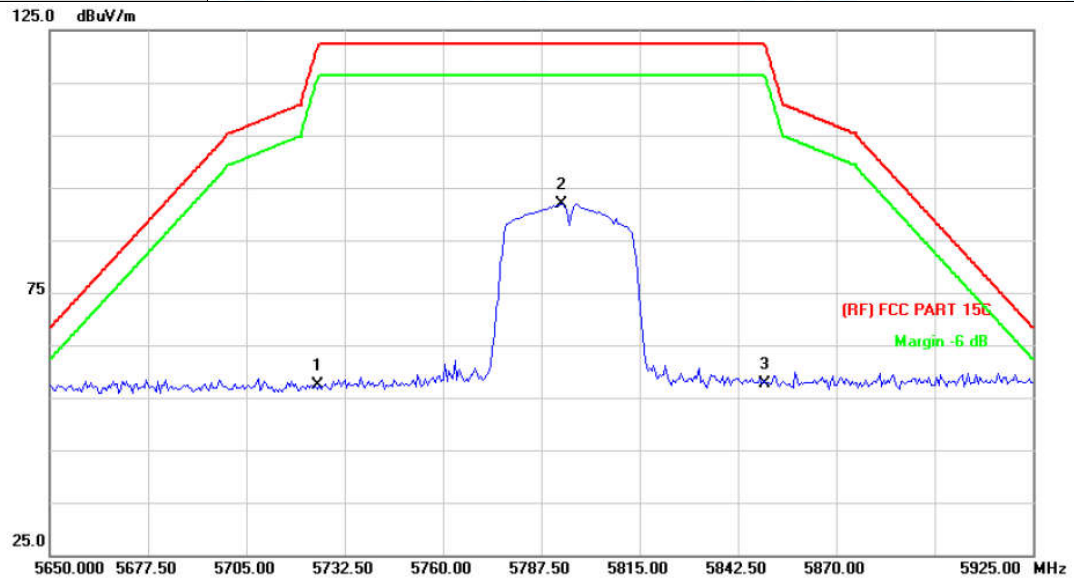

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.48	13.89	57.37	122.30	-64.93	peak
2	*	5793.000	77.80	14.08	91.88	Fundamental Frequency		peak
3		5850.000	43.29	14.23	57.52	122.30	-64.78	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

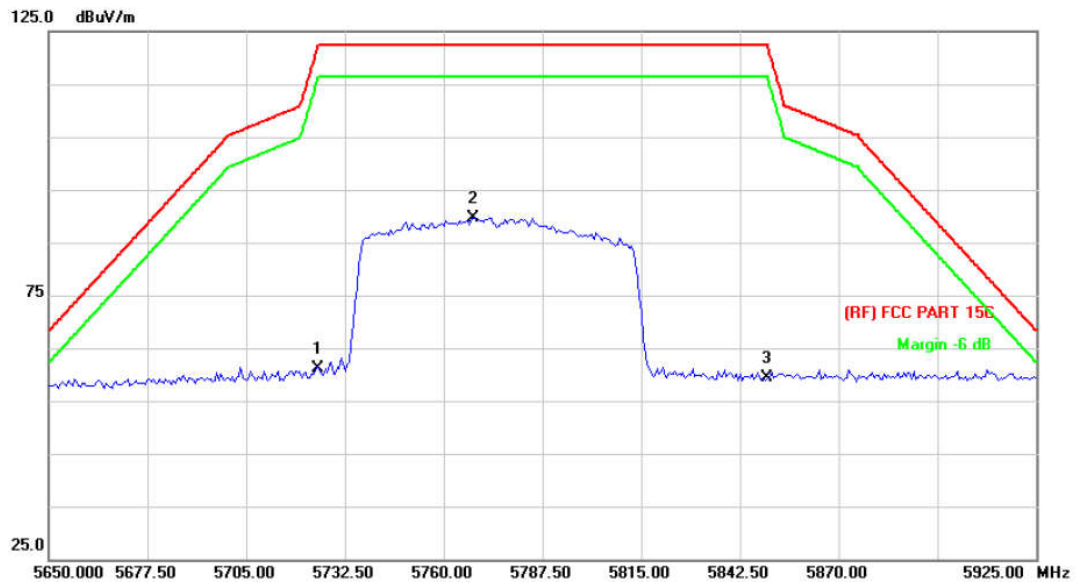

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	47.19	13.89	61.08	122.30	-61.22	peak
2	*	5768.250	75.67	14.01	89.68	Fundamental Frequency		peak
3		5850.000	45.16	14.23	59.39	122.30	-62.91	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

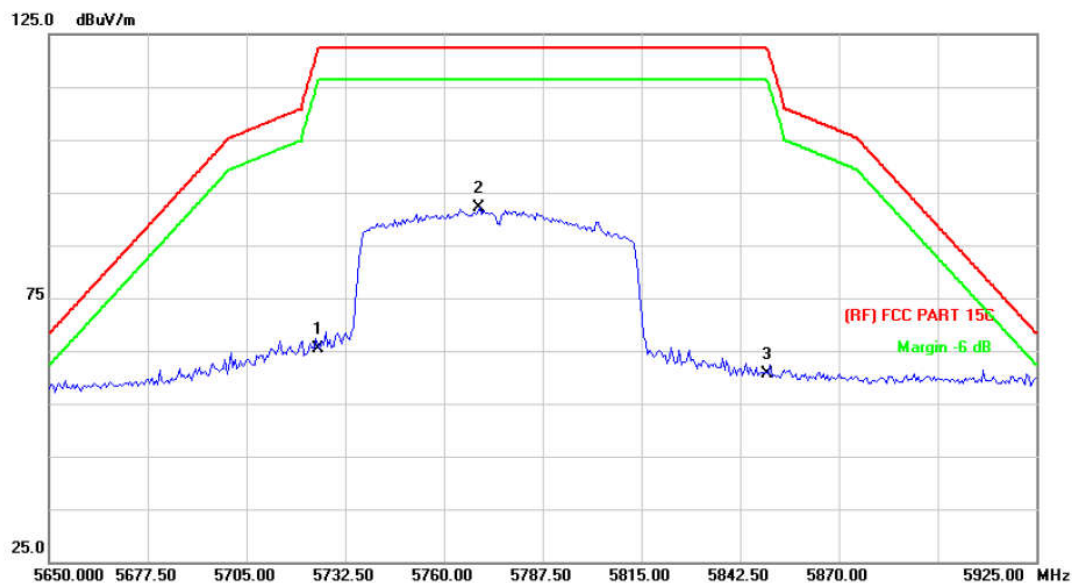

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	51.56	13.89	65.45	122.30	-56.85	peak
2	*	5769.900	78.00	14.02	92.02	Fundamental Frequency		peak
3		5850.000	46.49	14.23	60.72	122.30	-61.58	peak


Emission Level= Read Level+ Correct Factor

Attachment D--Bandwidth Test Data

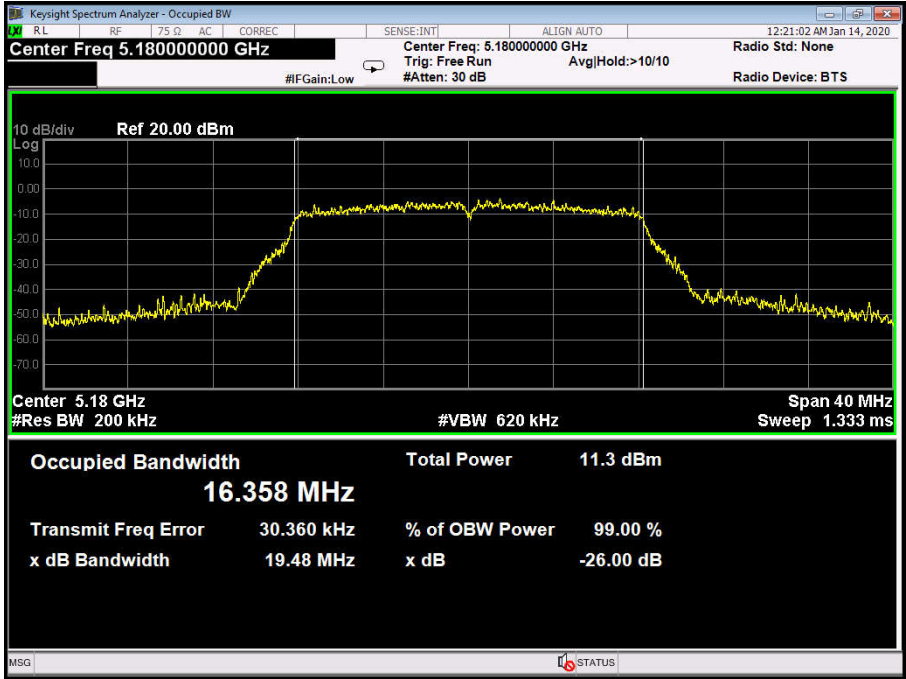Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.48	16.358
40	5200	19.93	16.401
48	5240	19.87	16.399
802.11a Mode			
5180 MHz			
			


802.11a Mode


5200 MHz

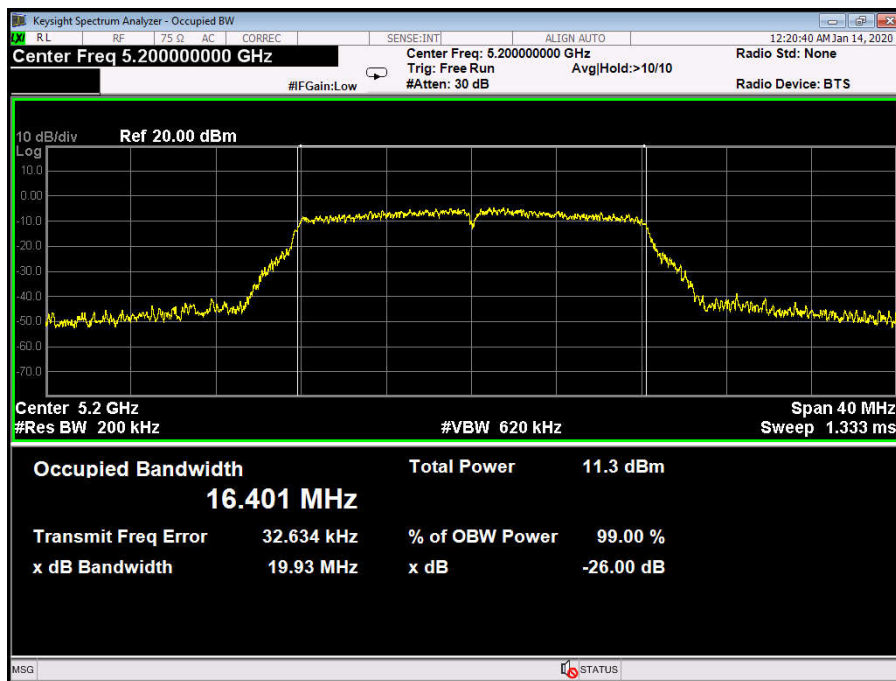

802.11a Mode

5240 MHz

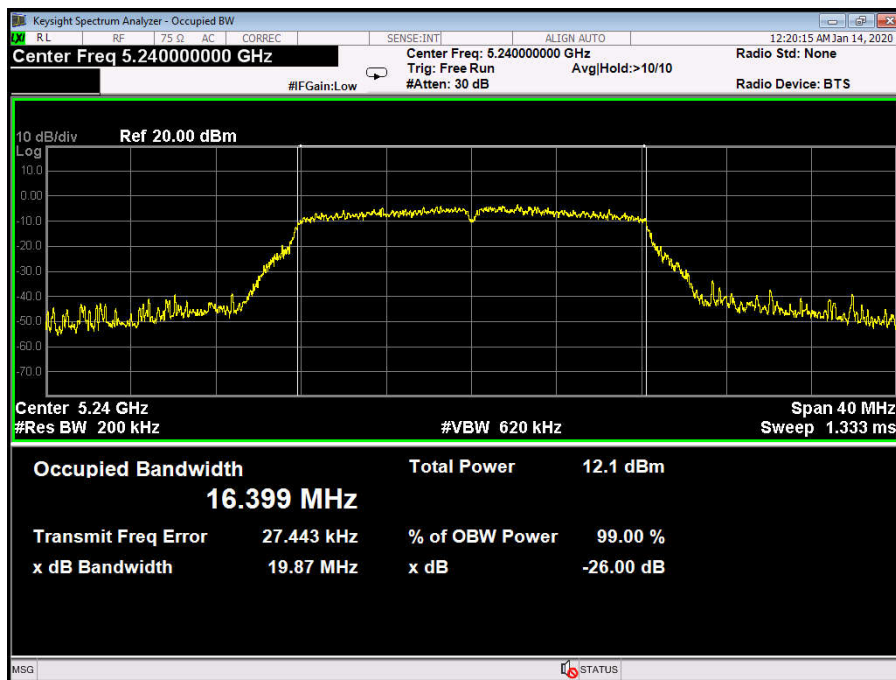

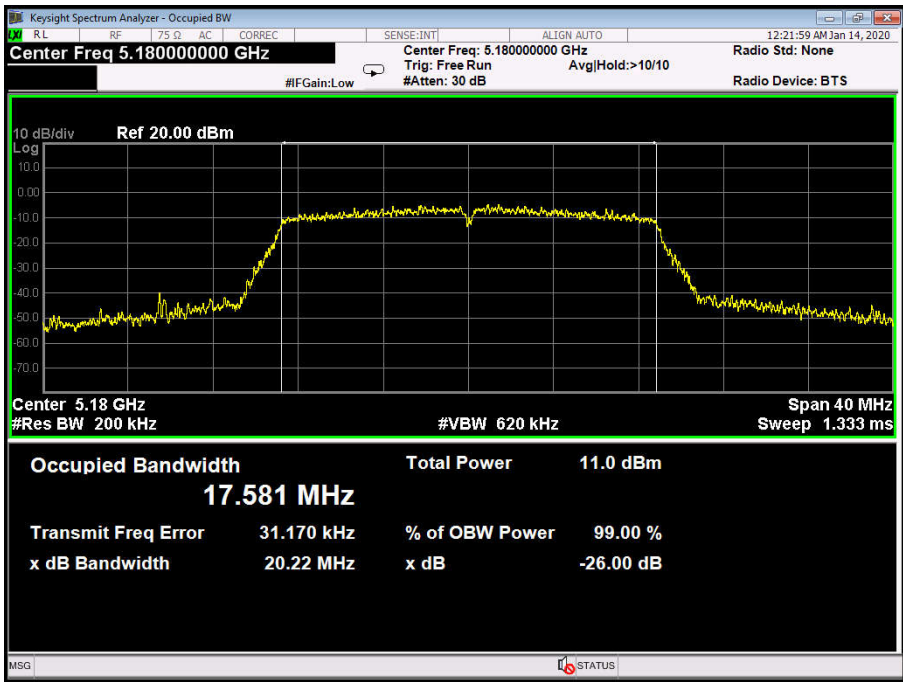Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.22	17.581
40	5200	20.06	17.563
48	5240	20.10	17.544
802.11n(HT20) Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.581 MHz Total Power 11.0 dBm Transmit Freq Error 31.170 kHz % of OBW Power 99.00 % x dB Bandwidth 20.22 MHz x dB -26.00 dB			