



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

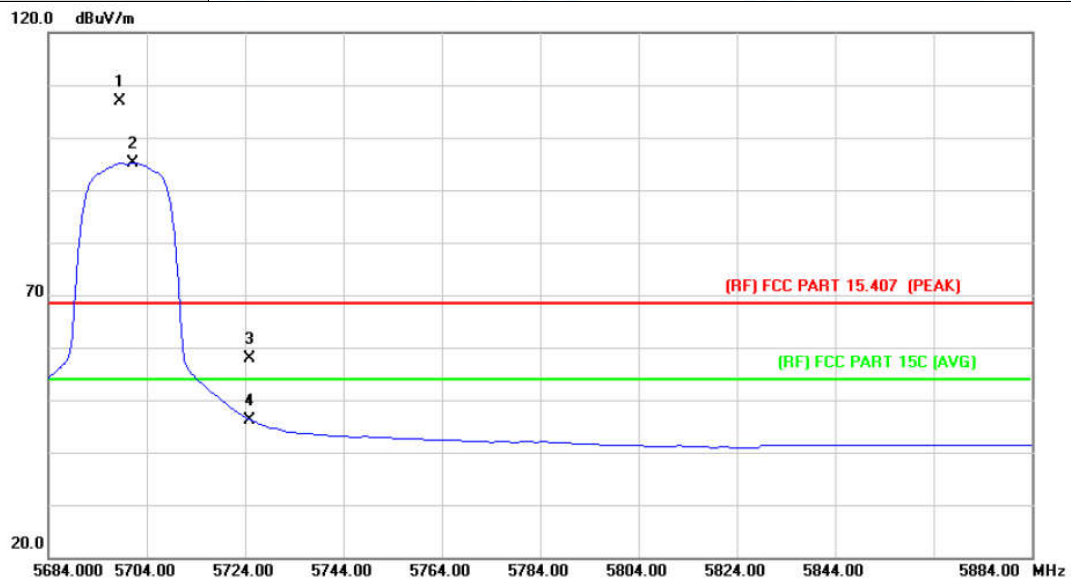

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5698.570	89.05	17.73	106.78	Fundamental Frequency		peak
2	*	5701.200	77.39	17.73	95.12	Fundamental Frequency		AVG
3		5725.000	39.98	17.82	57.80	68.30	-10.50	peak
4		5725.000	28.27	17.82	46.09	54.00	-7.91	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5700 MHz (U-NII-2C)		
Remark:			

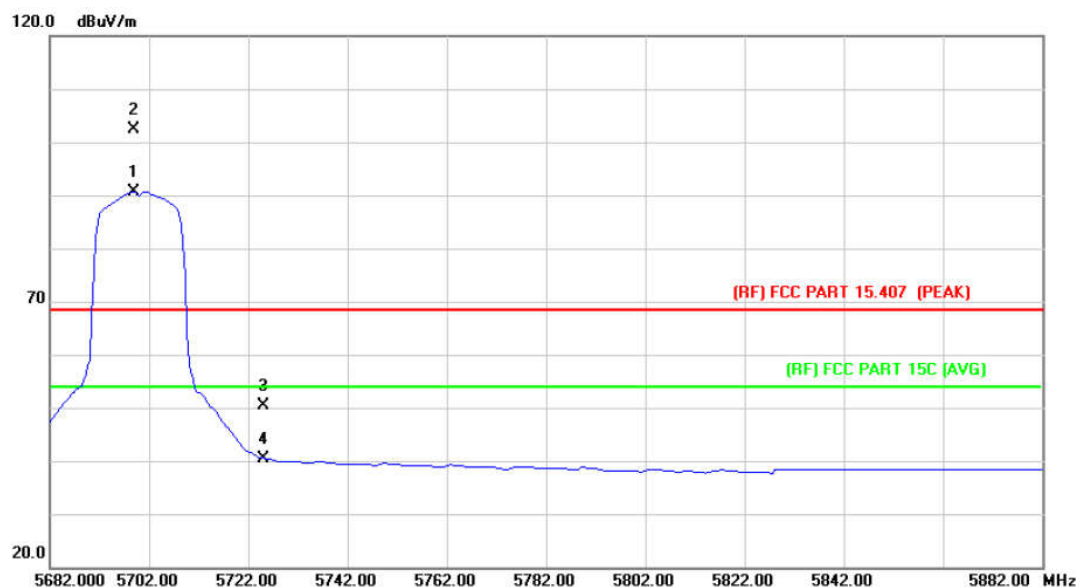

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.800	72.91	17.73	90.64	Fundamental Frequency		AVG
2	X	5698.970	84.69	17.73	102.42	Fundamental Frequency		peak
3		5725.000	32.44	17.82	50.26	68.30	-18.04	peak
4		5725.000	22.61	17.82	40.43	54.00	-13.57	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

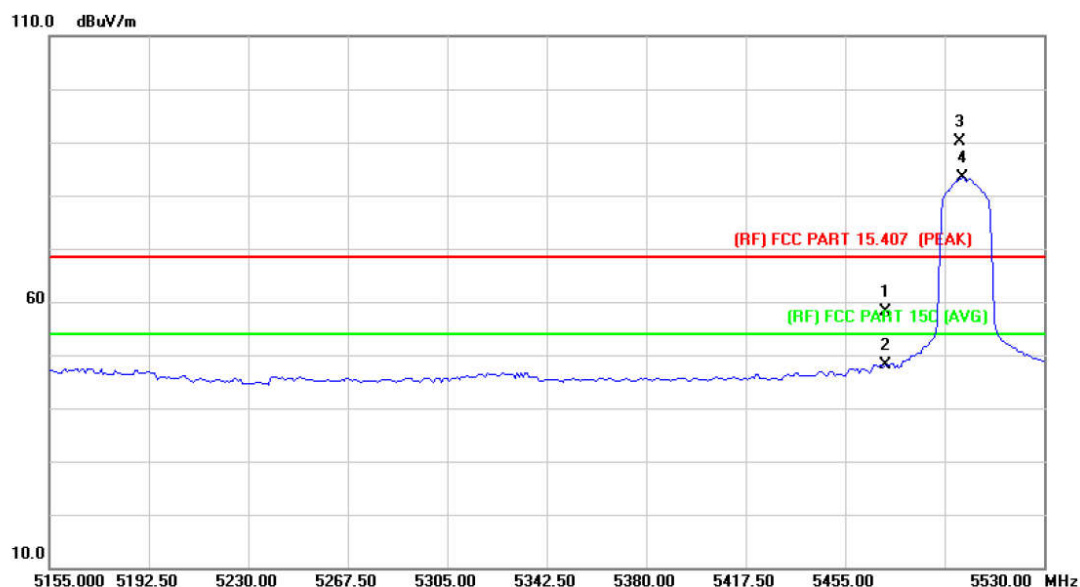


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.82	13.31	58.13	68.30	-10.17	peak
2		5470.000	34.82	13.31	48.13	54.00	-5.87	AVG
3	X	5498.190	76.84	13.29	90.13	Fundamental Frequency		peak
4	*	5499.250	70.12	13.29	83.41	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

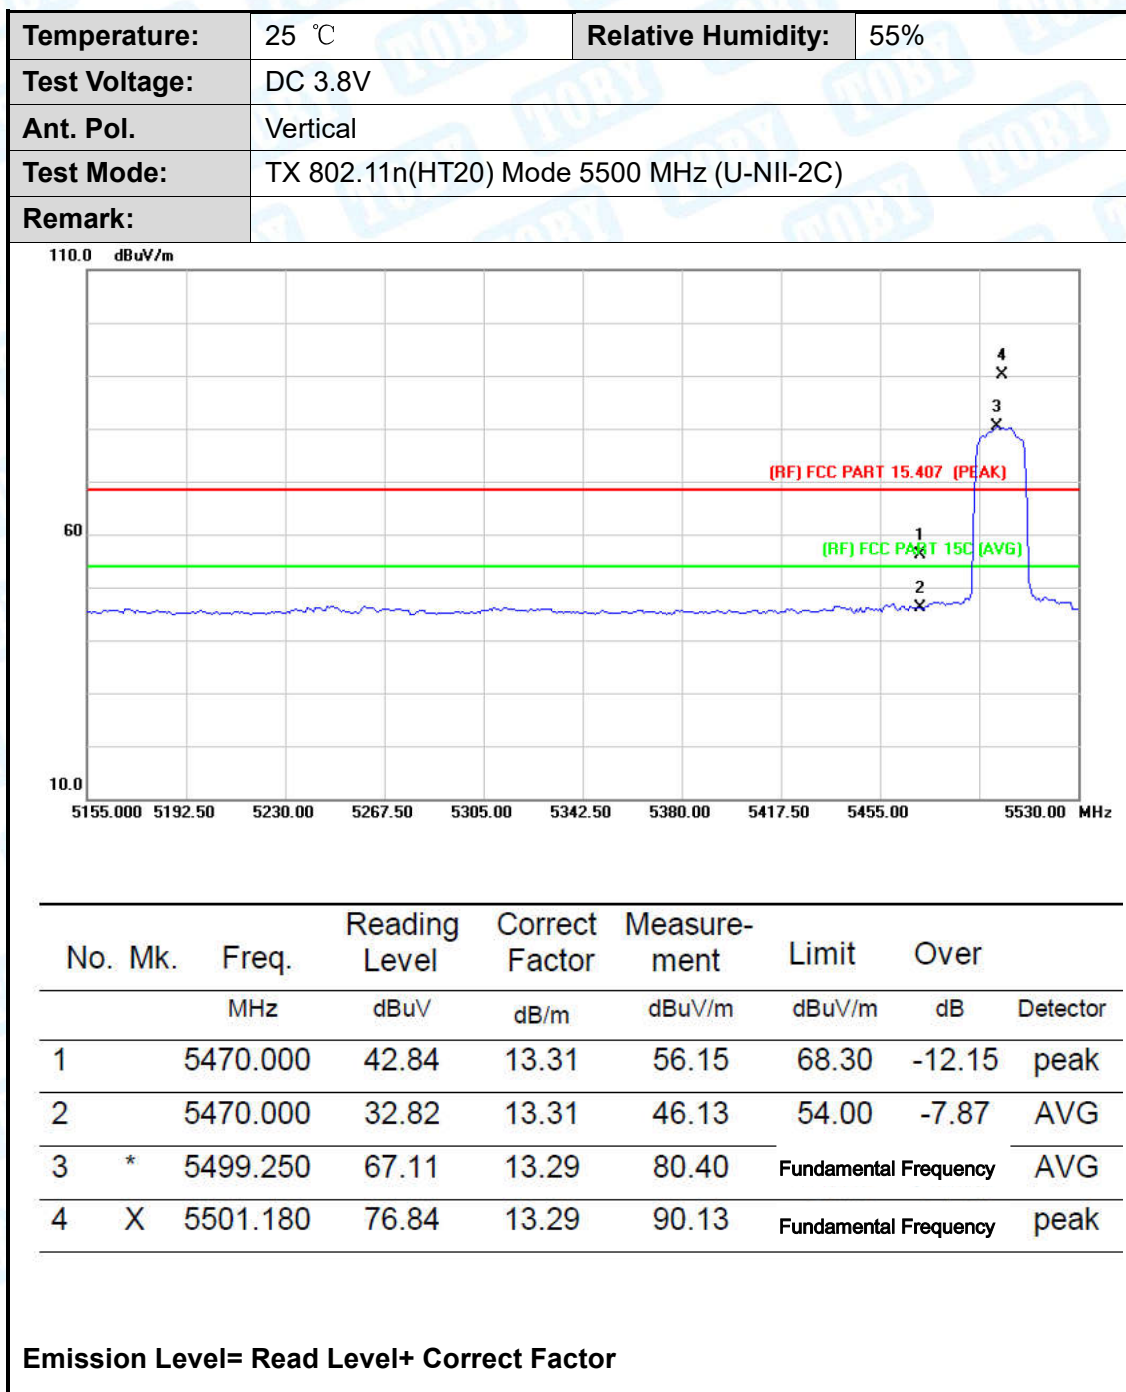


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

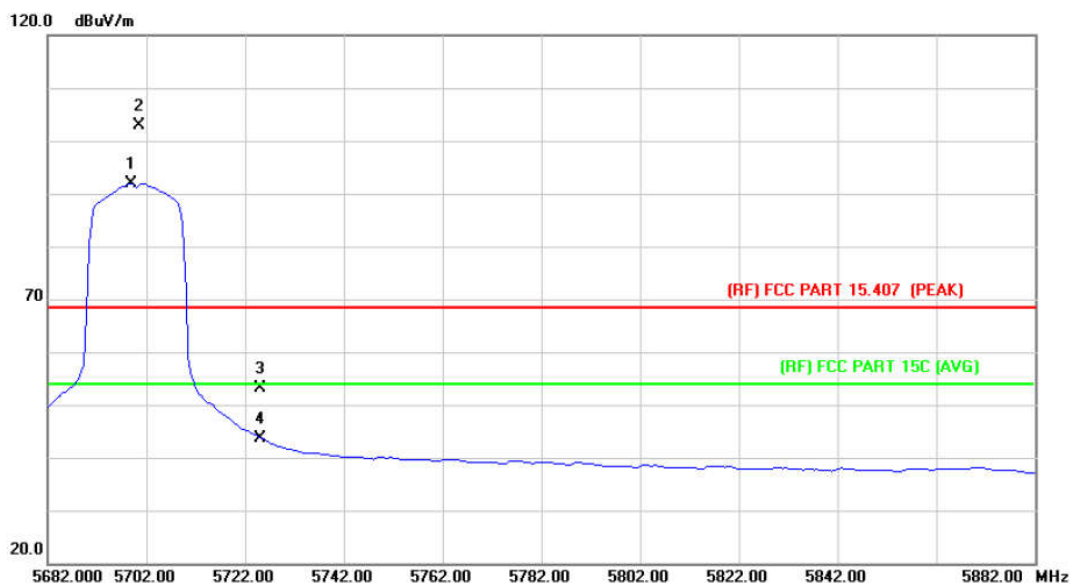

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.800	74.15	17.73	91.88	Fundamental Frequency		AVG
2	X	5700.560	85.19	17.73	102.92	Fundamental Frequency		peak
3		5725.000	35.41	17.82	53.23	68.30	-15.07	peak
4		5725.000	25.90	17.82	43.72	54.00	-10.28	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

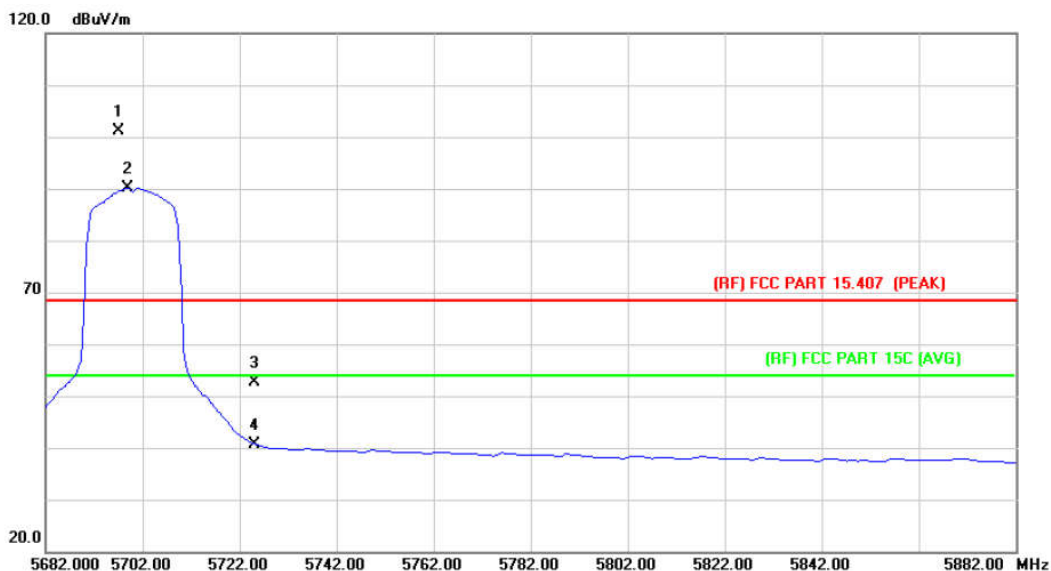

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5696.970	83.30	17.71	101.01	Fundamental Frequency	peak
2	*	5698.800	72.40	17.73	90.13	Fundamental Frequency	AVG
3		5725.000	34.86	17.82	52.68	68.30	-15.62 peak
4		5725.000	22.78	17.82	40.60	54.00	-13.40 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

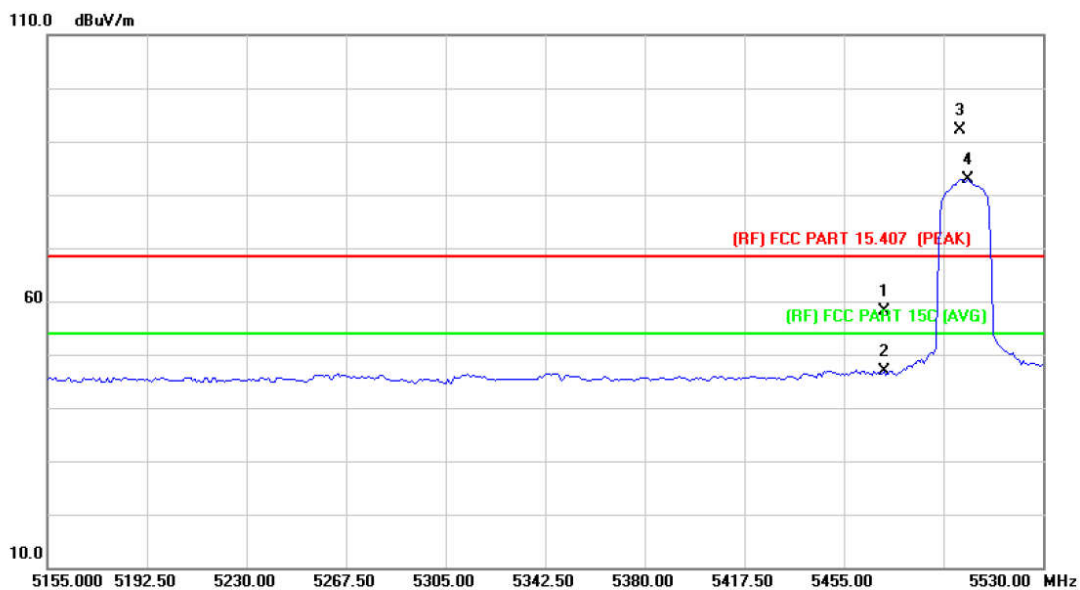

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	44.77	13.31	58.08	68.30	-10.22	peak
2		5470.000	33.68	13.31	46.99	54.00	-7.01	AVG
3	X	5498.940	78.84	13.29	92.13	Fundamental Frequency		peak
4	*	5501.500	69.49	13.29	82.78	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)		
Remark:			

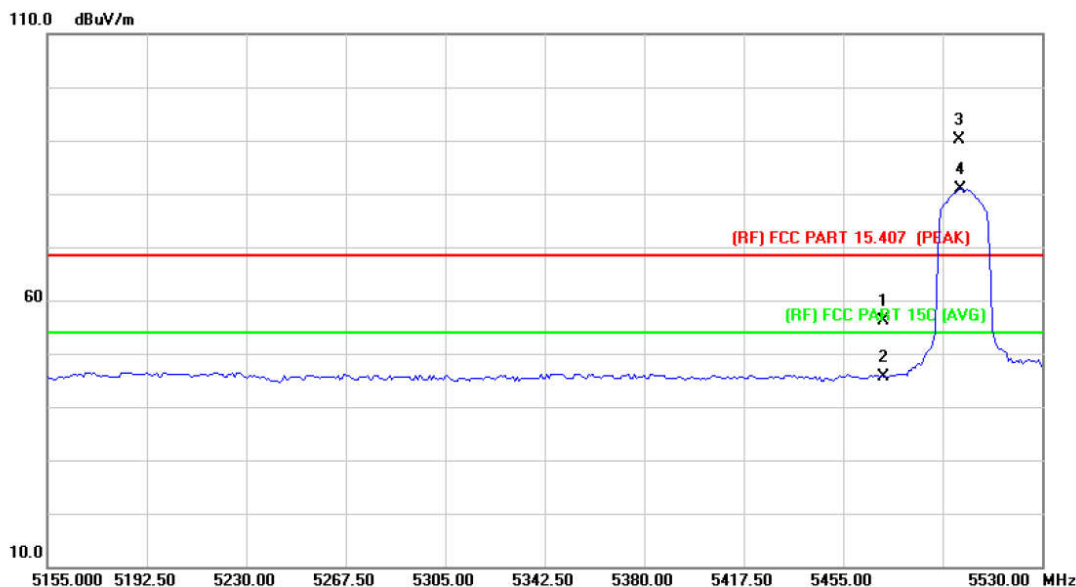

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	42.85	13.31	56.16	68.30	-12.14	peak
2		5470.000	32.28	13.31	45.59	54.00	-8.41	AVG
3	X	5498.940	76.84	13.29	90.13	Fundamental Frequency		peak
4	*	5499.250	67.63	13.29	80.92	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

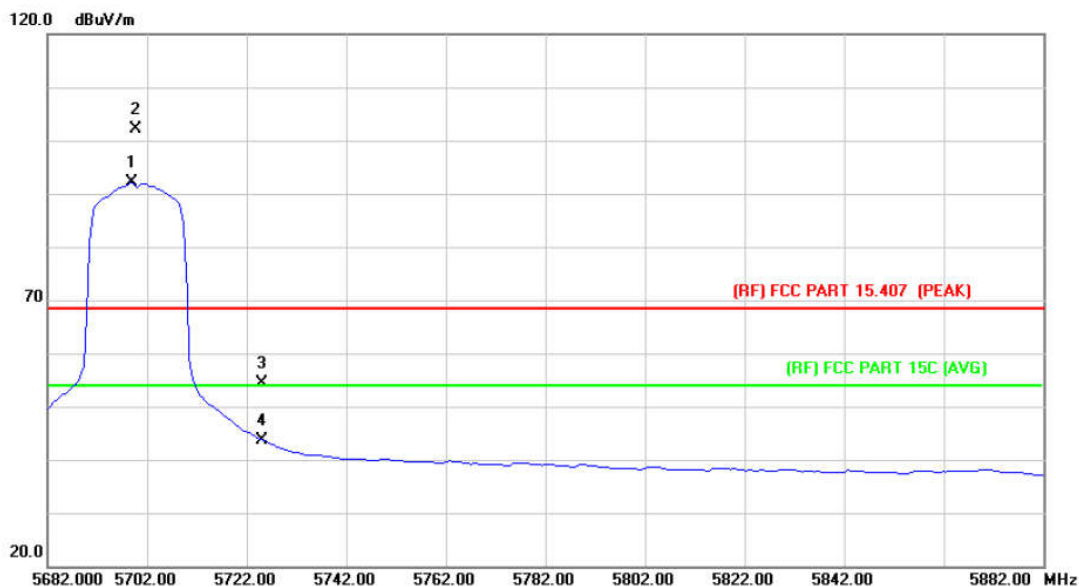

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	*	5698.800	74.28	17.73	92.01	Fundamental Frequency	AVG
2	X	5699.760	84.29	17.73	102.02	Fundamental Frequency	peak
3		5725.000	36.68	17.82	54.50	68.30	-13.80 peak
4		5725.000	25.89	17.82	43.71	54.00	-10.29 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5700 MHz (U-NII-2C)		
Remark:			

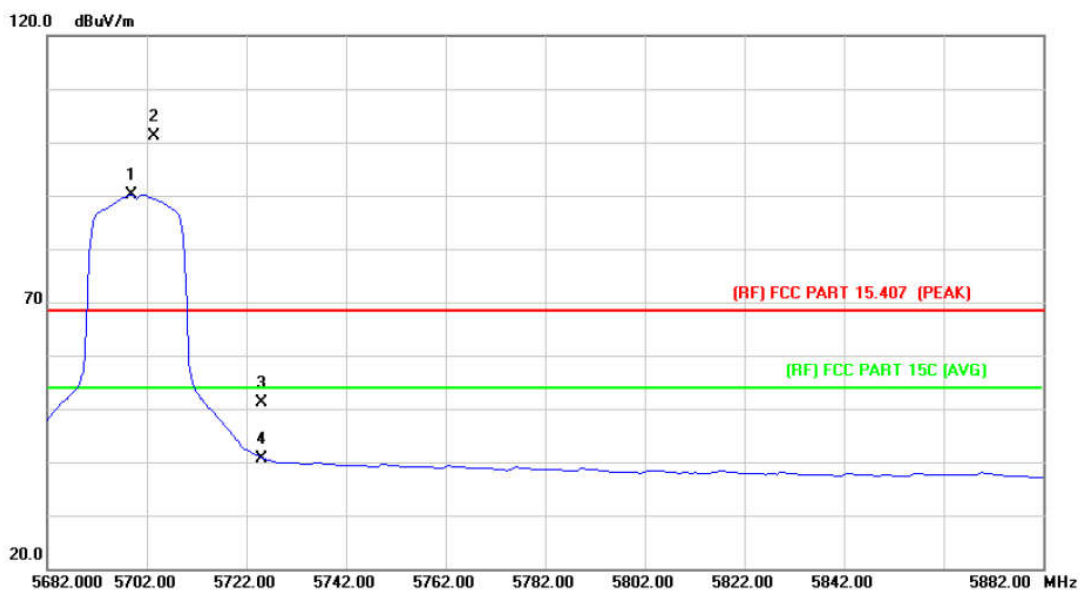

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5698.800	72.44	17.73	90.17	Fundamental Frequency		AVG
2	X	5703.360	83.28	17.74	101.02	Fundamental Frequency		peak
3		5725.000	33.42	17.82	51.24	68.30	-17.06	peak
4		5725.000	22.90	17.82	40.72	54.00	-13.28	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

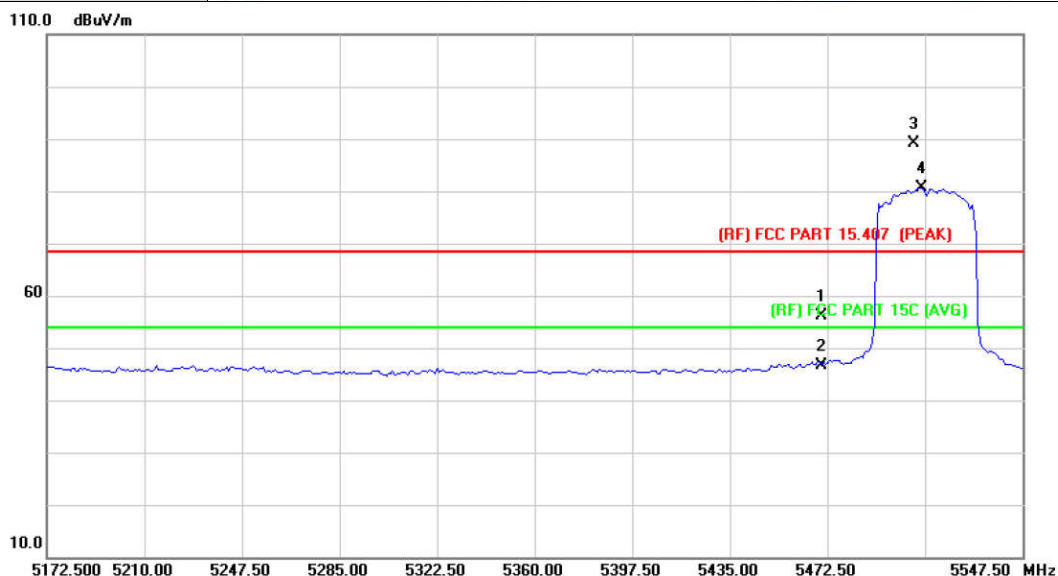


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5470.000	42.82	13.31	56.13	68.30	-12.17 peak
2		5470.000	33.41	13.31	46.72	54.00	-7.28 AVG
3	X	5505.960	75.86	13.30	89.16	Fundamental Frequency 3	
4	*	5508.500	67.33	13.31	80.64	Fundamental Frequency 4	

Emission Level= Read Level+ Correct Factor

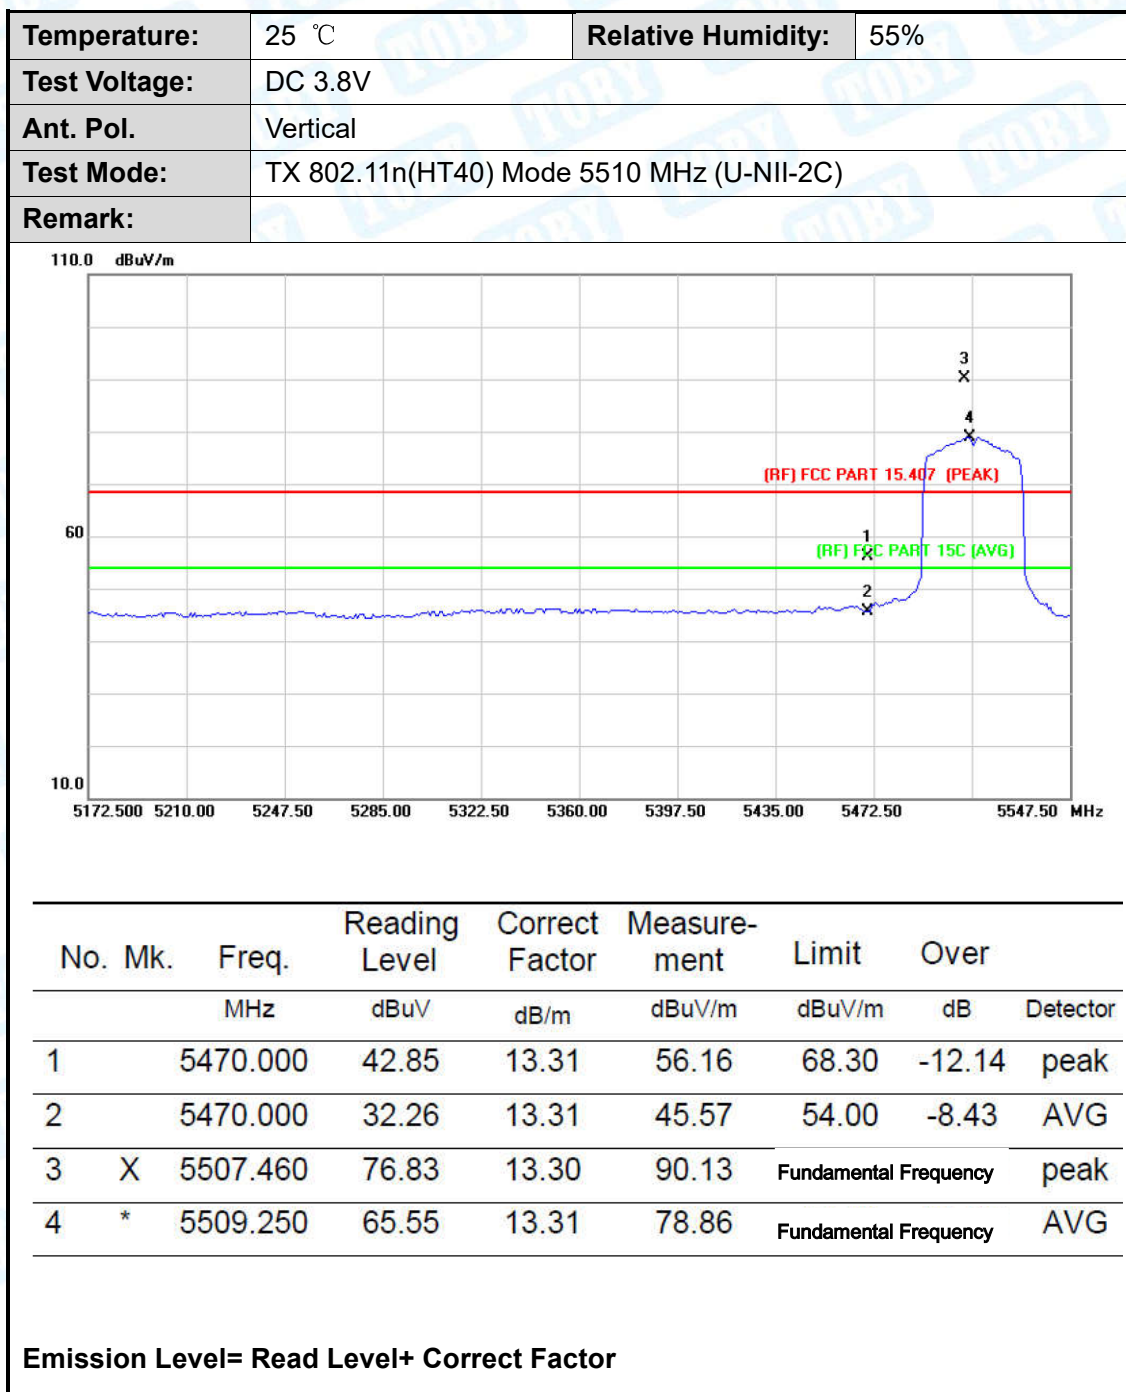


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

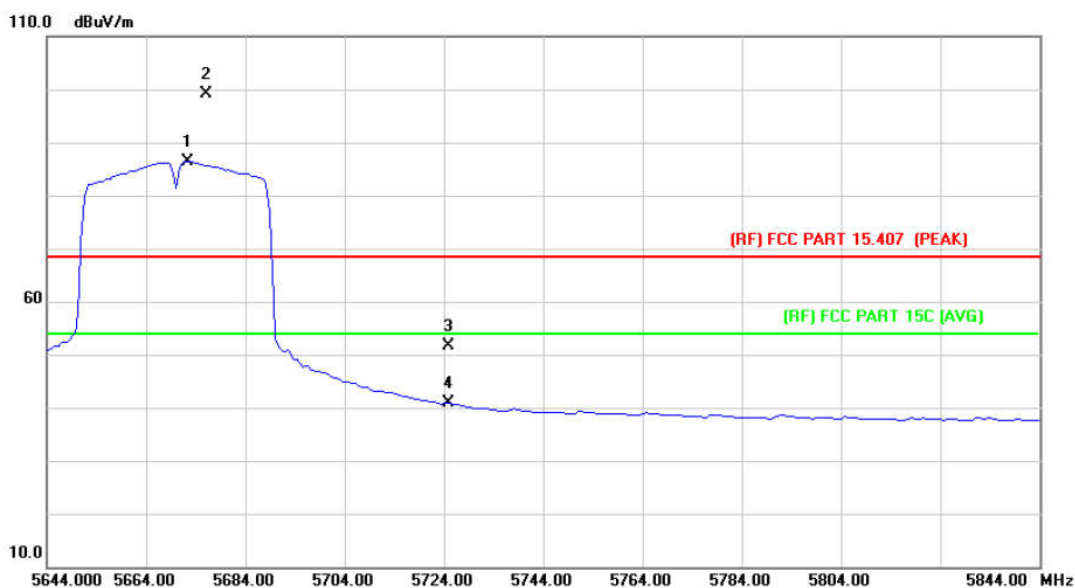

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5672.400	68.88	17.62	86.50	Fundamental Frequency		AVG
2	X	5676.140	81.52	17.63	99.15	Fundamental Frequency		peak
3		5725.000	33.90	17.82	51.72	68.30	-16.58	peak
4		5725.000	22.94	17.82	40.76	54.00	-13.24	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

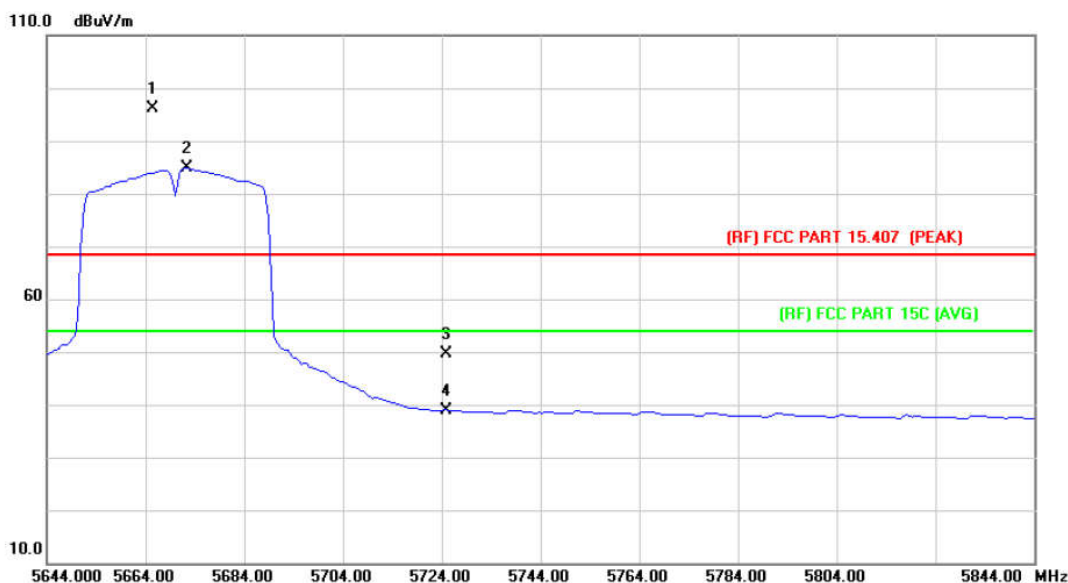

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5665.360	78.56	17.60	96.16	Fundamental Frequency		peak
2	*	5672.400	67.21	17.62	84.83	Fundamental Frequency		AVG
3		5725.000	31.71	17.82	49.53	68.30	-18.77	peak
4		5725.000	21.15	17.82	38.97	54.00	-15.03	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

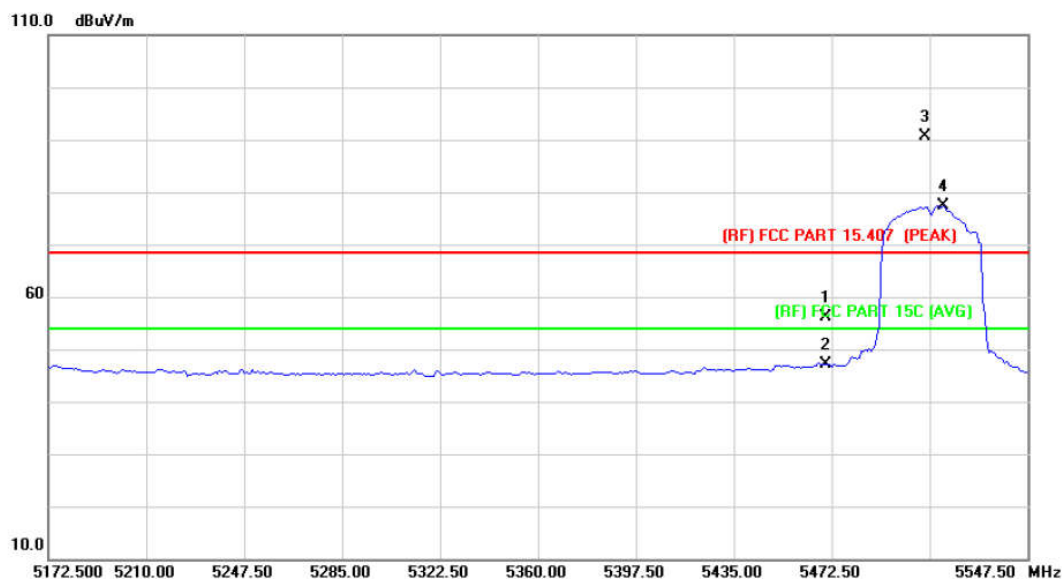


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5470.000	42.87	13.31	56.18	68.30	-12.12 peak
2		5470.000	33.78	13.31	47.09	68.30	-21.21 peak
3	*	5508.200	77.22	13.30	90.52	Fundamental Frequency	peak
4	X	5515.250	64.00	13.34	77.34	Fundamental Frequency	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)		
Remark:			

110.0 dBuV/m

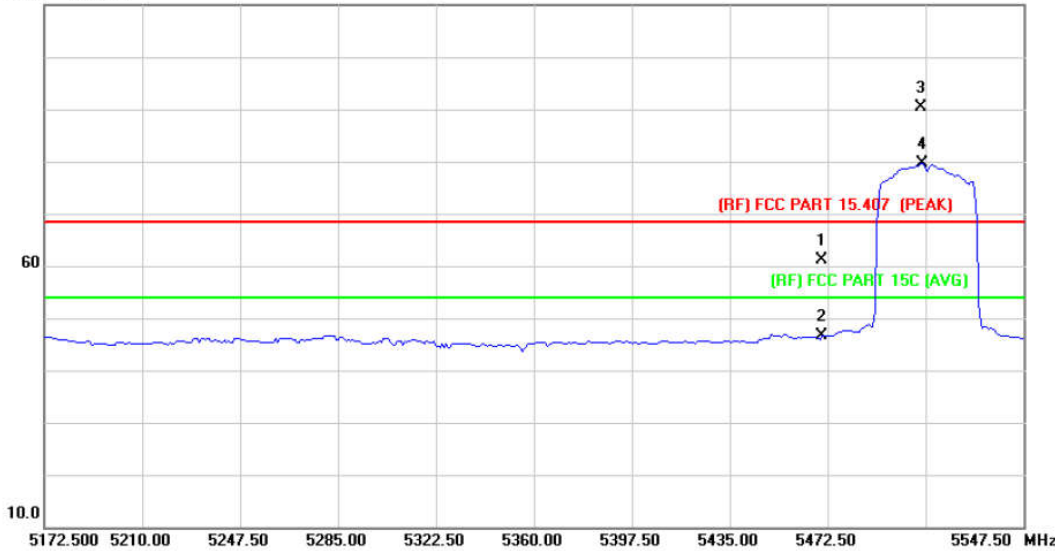

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)

1 X

2 X

3 X

4 X


10.0

5172.500 5210.00 5247.50 5285.00 5322.50 5360.00 5397.50 5435.00 5472.50 5547.50 MHz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	47.82	13.31	61.13	68.30	-7.17	peak
2		5470.000	33.26	13.31	46.57	54.00	-7.43	AVG
3	X	5508.200	77.15	13.30	90.45	Fundamental Frequency		peak
4	*	5508.500	66.31	13.31	79.62	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

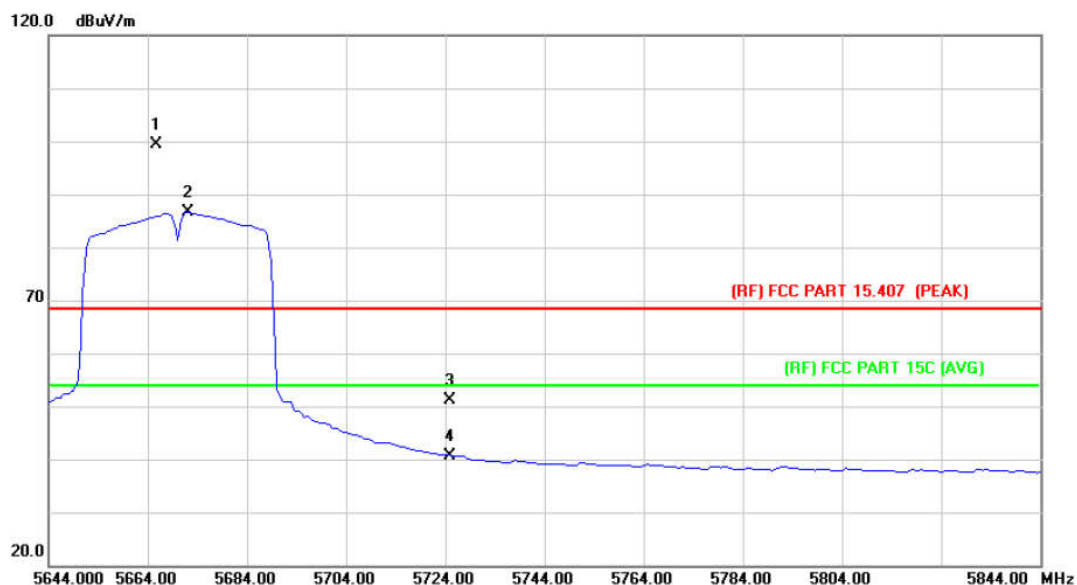


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5665.760	81.72	17.60	99.32	Fundamental Frequency		peak
2	*	5672.000	68.94	17.62	86.56	Fundamental Frequency		AVG
3		5725.000	33.20	17.82	51.02	68.30	-17.28	peak
4		5725.000	22.91	17.82	40.73	54.00	-13.27	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5670 MHz (U-NII-2C)		
Remark:			

110.0 dBuV/m

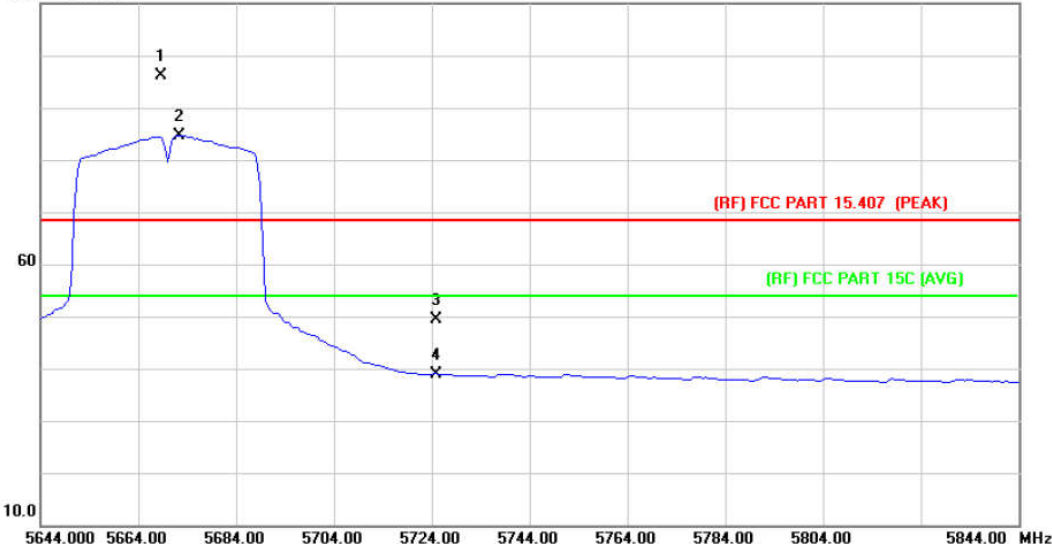

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)

3

4


10.0

5644.000 5664.00 5684.00 5704.00 5724.00 5744.00 5764.00 5784.00 5804.00 5844.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5668.550	78.41	17.61	96.02	Fundamental Frequency		peak
2	*	5672.400	67.07	17.62	84.69	Fundamental Frequency		AVG
3		5725.000	31.47	17.82	49.29	68.30	-19.01	peak
4		5725.000	21.16	17.82	38.98	54.00	-15.02	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

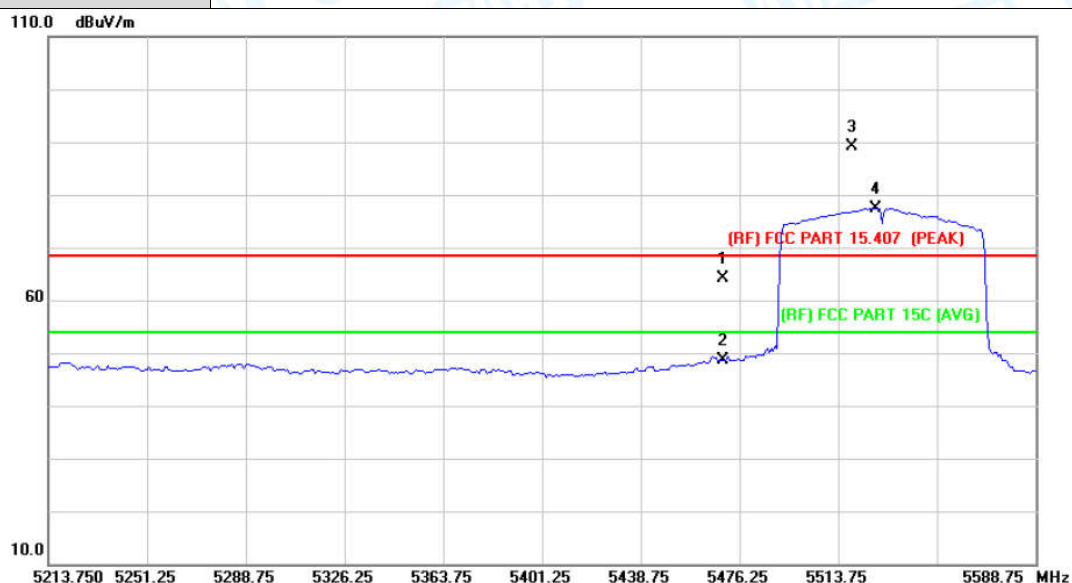

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	50.82	13.31	64.13	Fundamental Frequency		peak
2		5470.000	35.35	13.31	48.66	Fundamental Frequency		AVG
3	X	5518.760	75.79	13.34	89.13		20.83	peak
4	*	5528.000	64.12	13.36	77.48		23.48	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)		
Remark:			

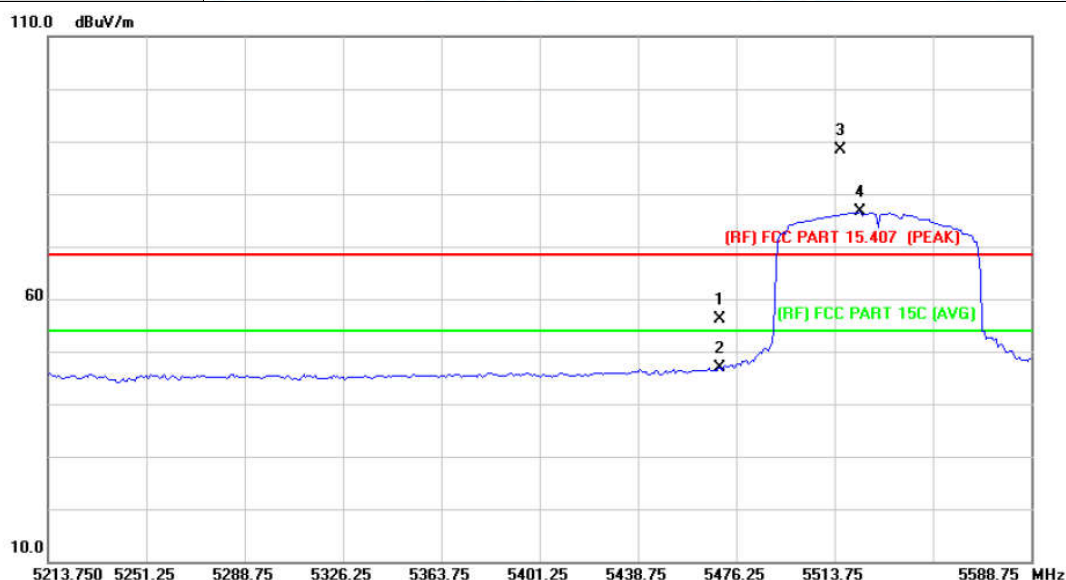

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	42.82	13.31	56.13	Fundamental Frequency		peak
2		5470.000	33.53	13.31	46.84	Fundamental Frequency		AVG
3	X	5515.770	75.00	13.34	88.34	68.30	20.04	peak
4	*	5523.500	63.19	13.35	76.54	54.00	22.54	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

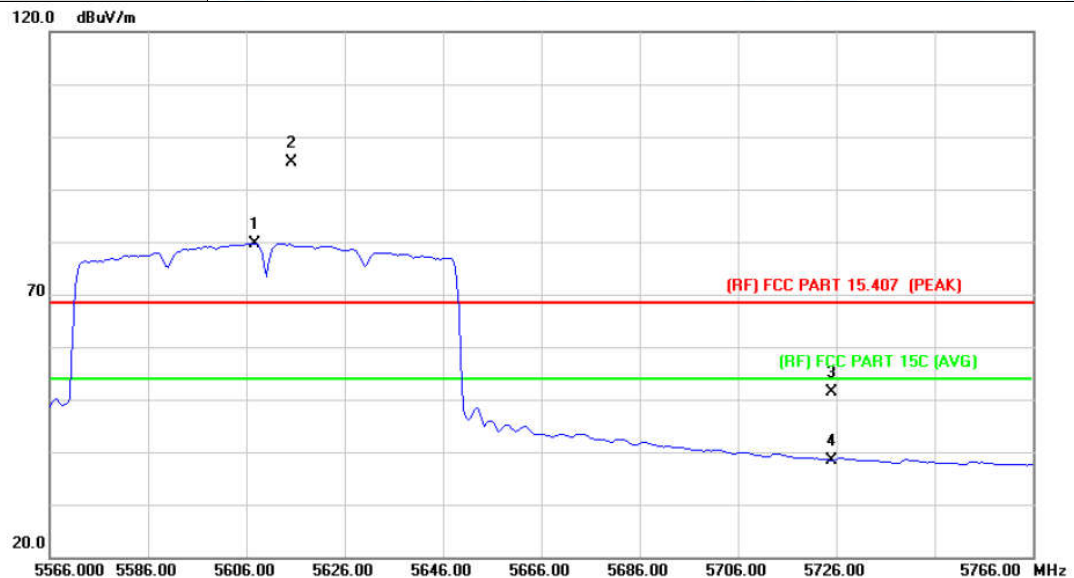

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5607.600	62.32	17.38	79.70	Fundamental Frequency		AVG
2	*	5615.300	77.76	17.42	95.18	Fundamental Frequency		peak
3		5725.000	33.49	17.82	51.31	68.30	-16.99	peak
4		5725.000	20.52	17.82	38.34	54.00	-15.66	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)		
Remark:			

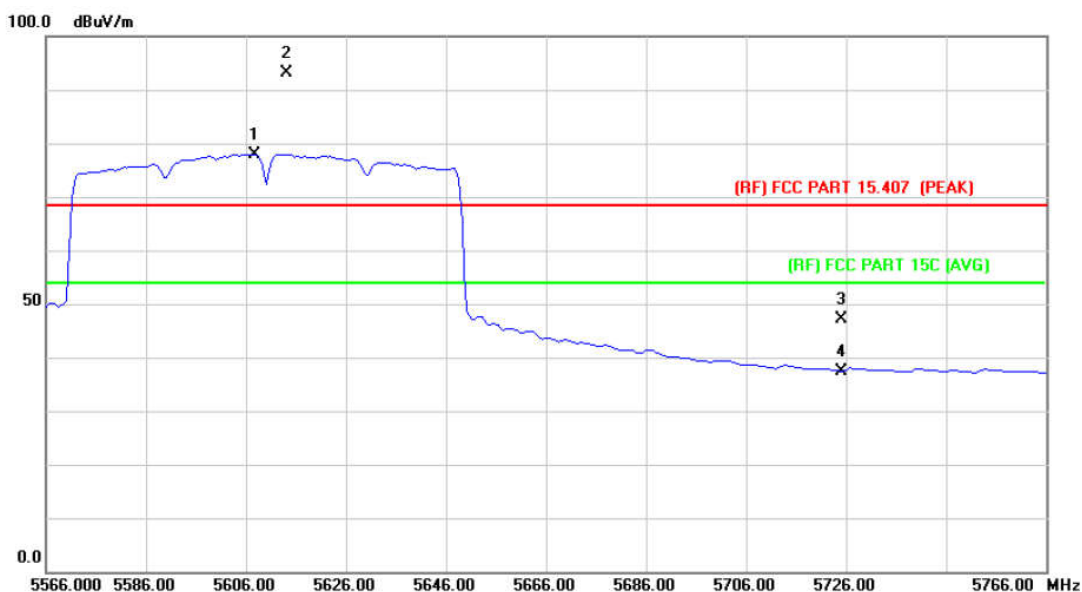


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5607.600	60.62	17.38	78.00	Fundamental Frequency		AVG
2	*	5614.100	75.64	17.41	93.05	Fundamental Frequency		peak
3		5725.000	29.24	17.82	47.06	68.30	-21.24	peak
4		5725.000	19.63	17.82	37.45	54.00	-16.55	AVG

Emission Level= Read Level+ Correct Factor

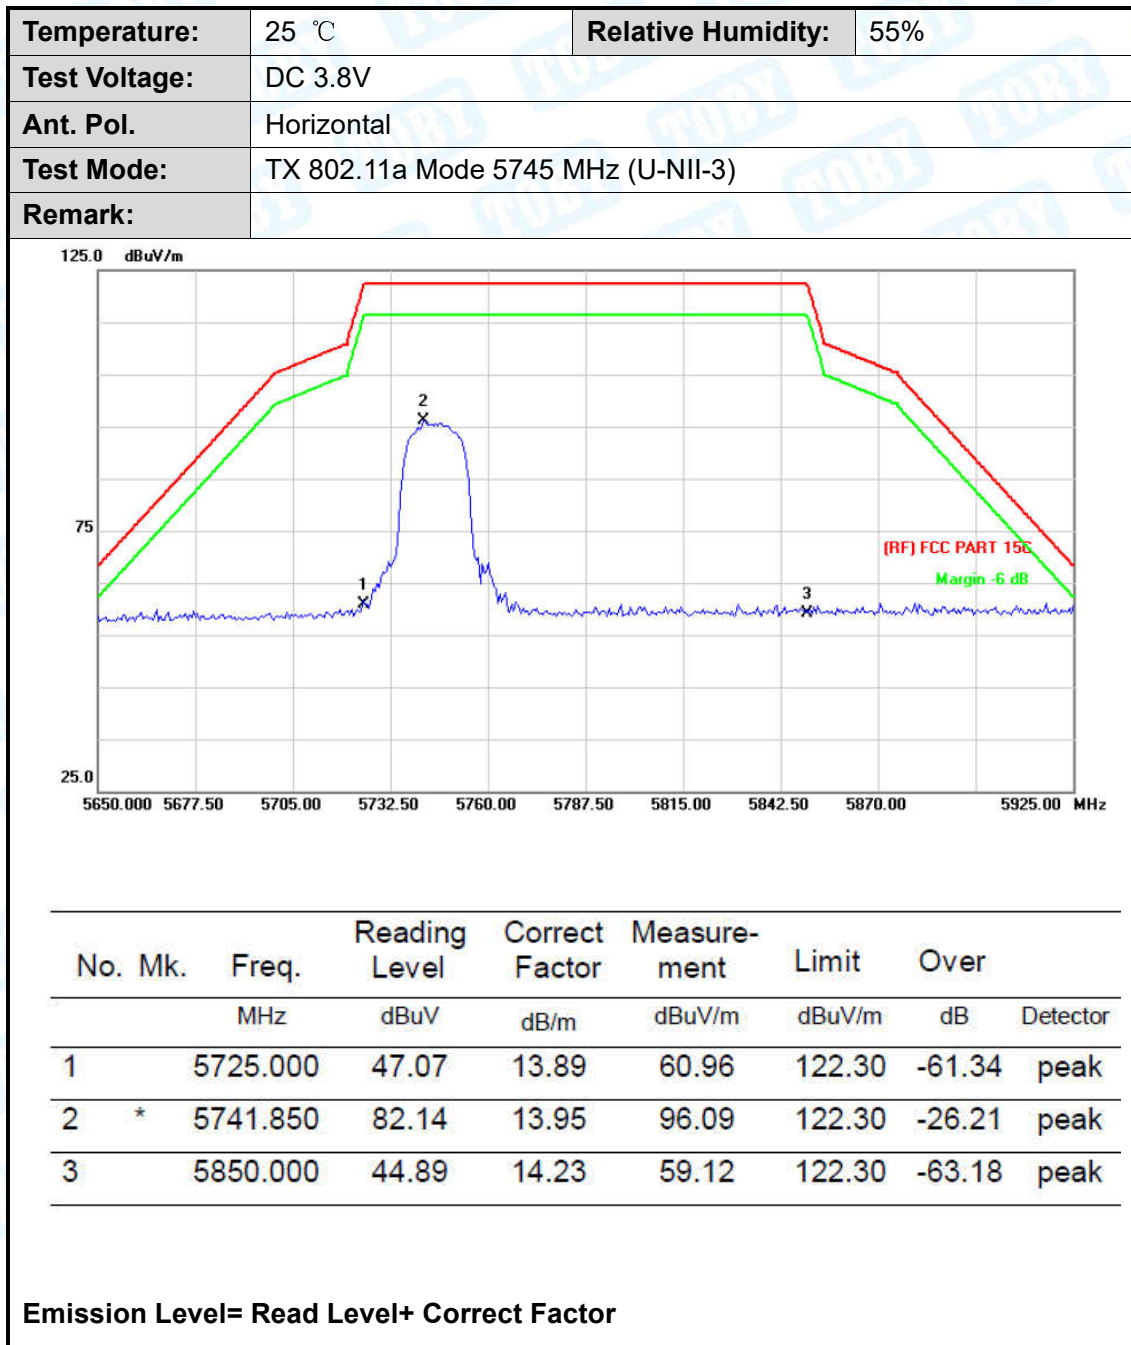


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)		
Remark:			

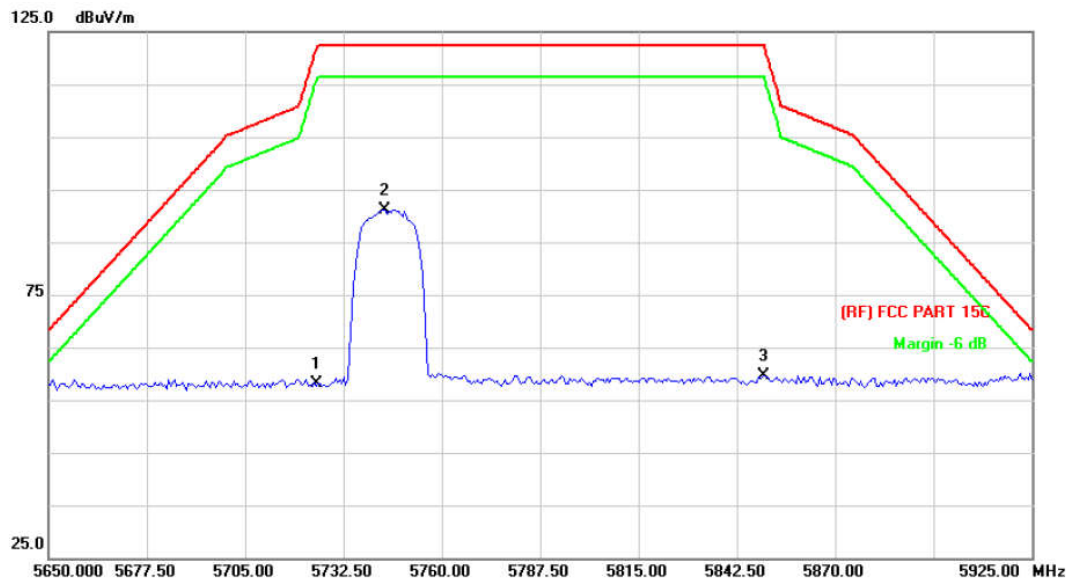

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.29	13.89	58.18	122.30	-64.12	peak
2	*	5744.050	77.12	13.95	91.07	122.30	-31.23	peak
3		5850.000	45.32	14.23	59.55	122.30	-62.75	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

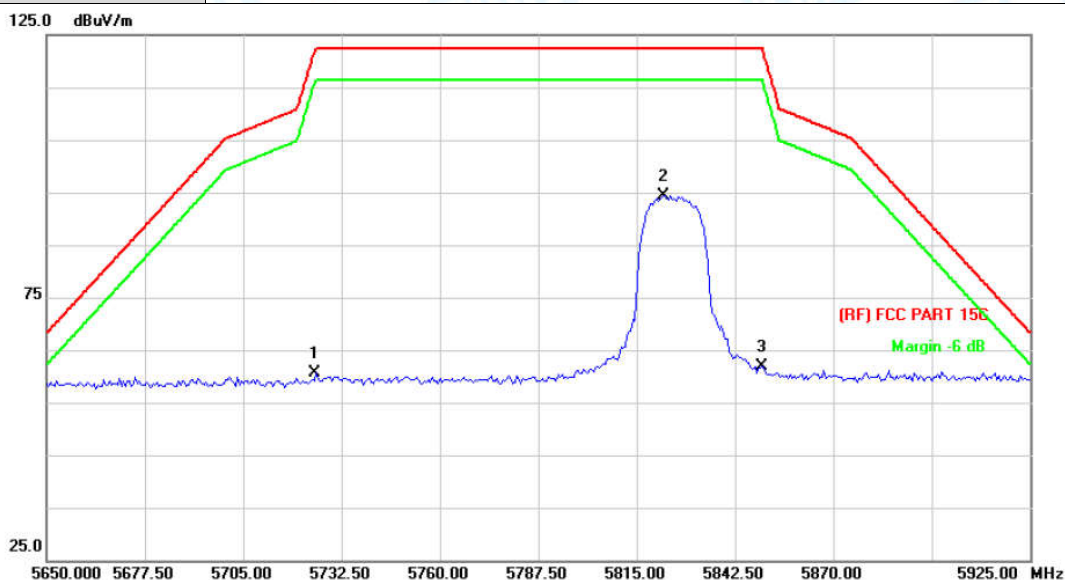

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.83	13.89	60.72	122.30	-61.58	peak
2	*	5822.700	80.18	14.15	94.33	122.30	-27.97	peak
3		5850.000	47.71	14.23	61.94	122.30	-60.36	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)		
Remark:			

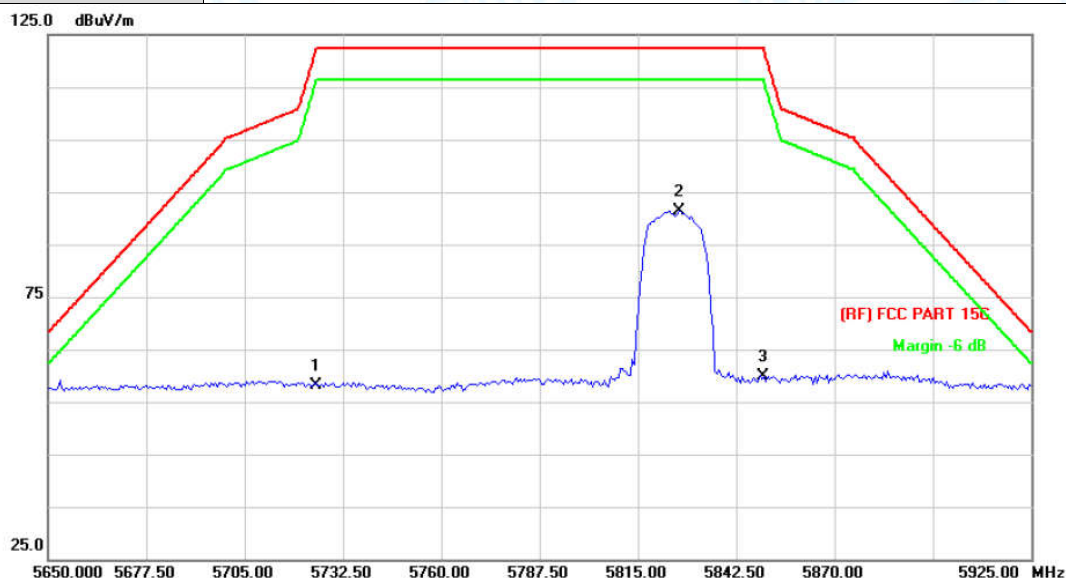

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.27	13.89	58.16	122.30	-64.14	peak
2	*	5826.550	77.25	14.17	91.42	122.30	-30.88	peak
3		5850.000	45.59	14.23	59.82	122.30	-62.48	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

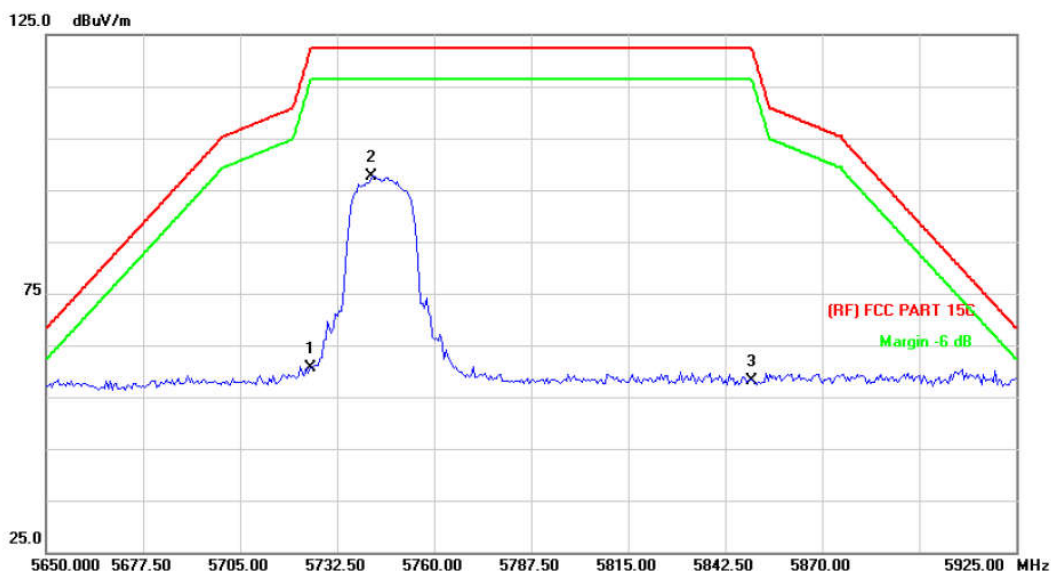

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.64	13.89	60.53	122.30	-61.77	peak
2	*	5742.400	83.71	13.95	97.66	122.30	-24.64	peak
3		5850.000	43.79	14.23	58.02	122.30	-64.28	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)		
Remark:			

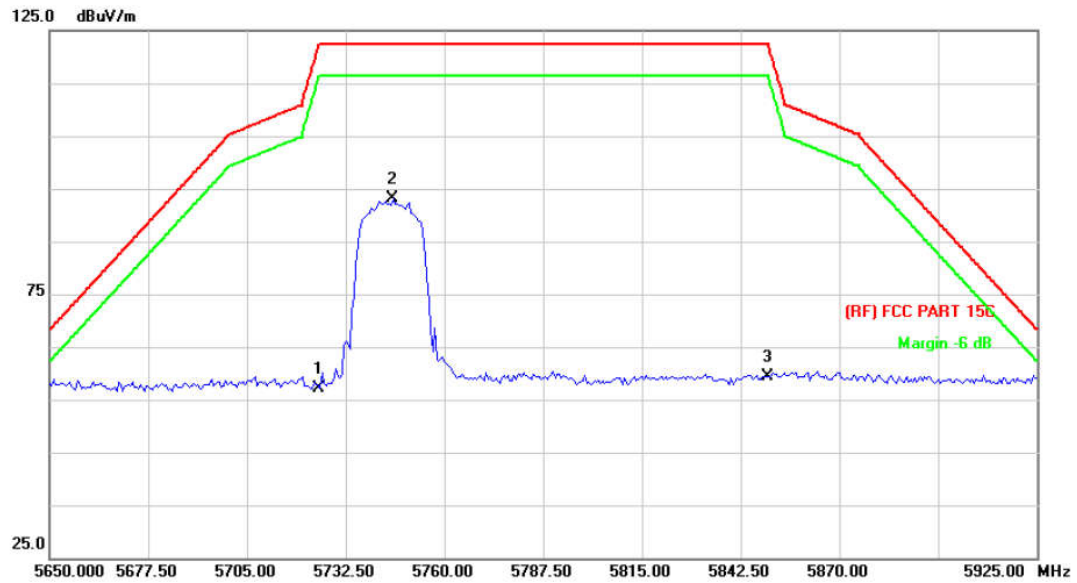


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.34	13.89	57.23	122.30	-65.07	peak
2	*	5745.700	79.07	13.95	93.02	122.30	-29.28	peak
3		5850.000	45.19	14.23	59.42	122.30	-62.88	peak

Emission Level= Read Level+ Correct Factor

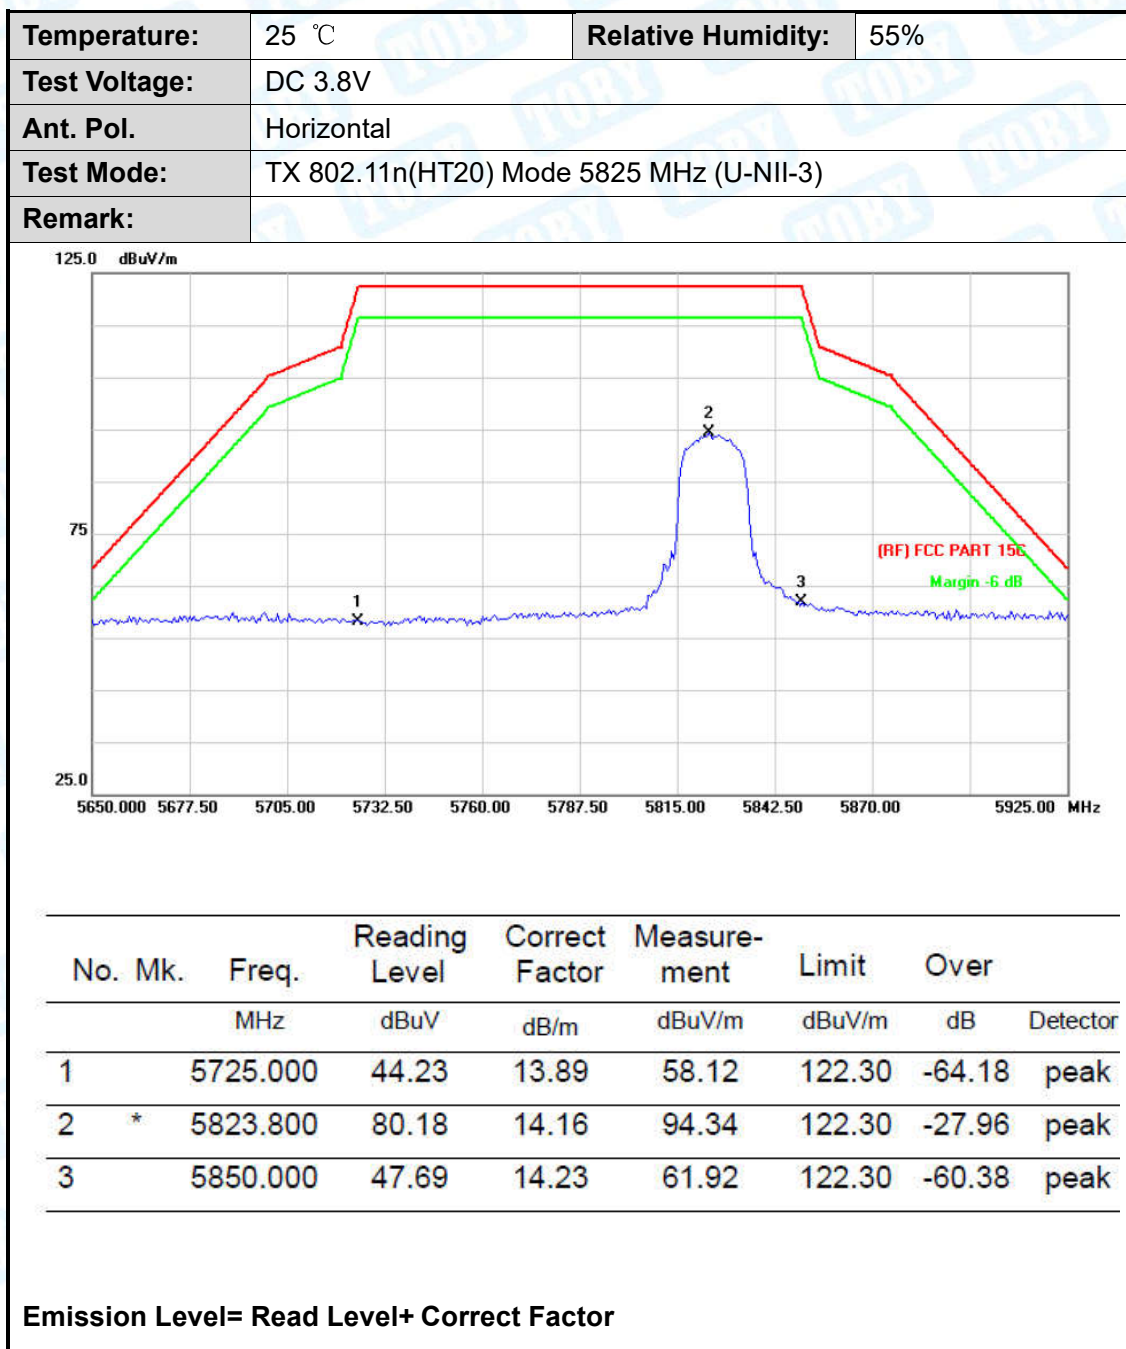


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)		
Remark:			

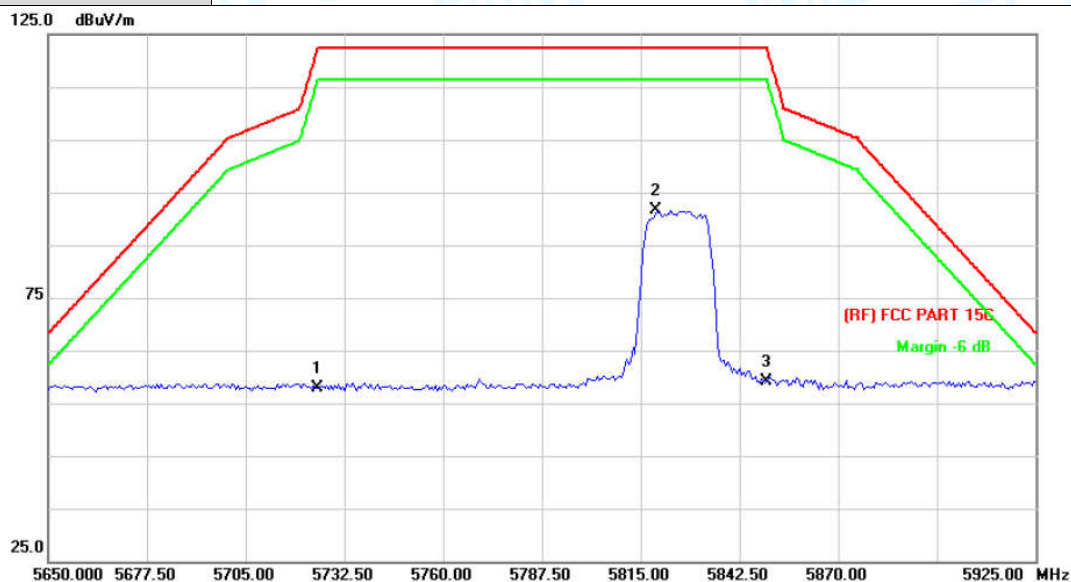

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.02	13.89	57.91	122.30	-64.39	peak
2	*	5819.400	77.48	14.14	91.62	122.30	-30.68	peak
3		5850.000	44.85	14.23	59.08	122.30	-63.22	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)		
Remark:			

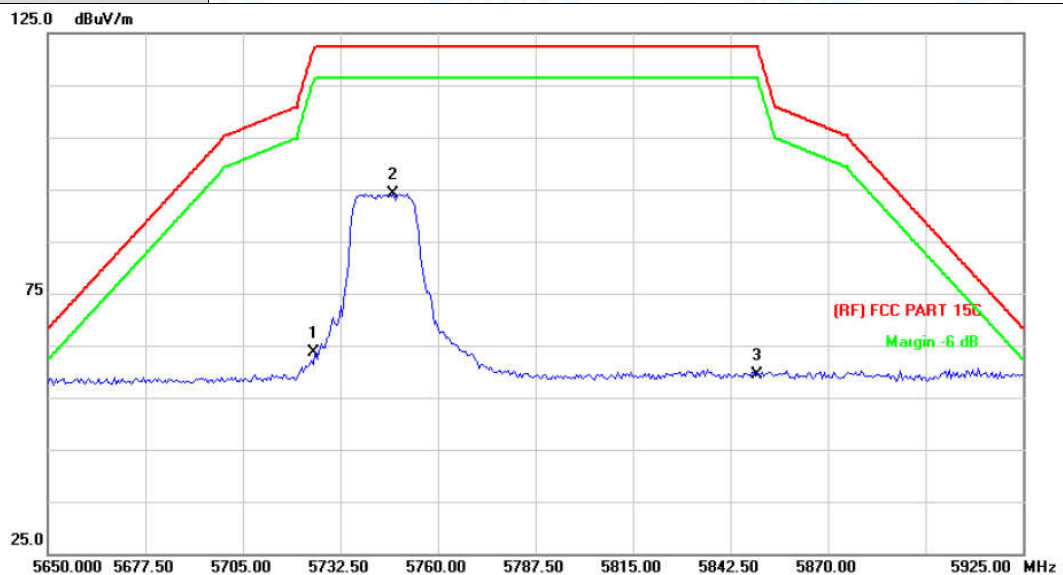


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	49.75	13.89	63.64	122.30	-58.66	peak
2	*	5747.350	80.22	13.96	94.18	122.30	-28.12	peak
3		5850.000	45.13	14.23	59.36	122.30	-62.94	peak

Emission Level= Read Level+ Correct Factor

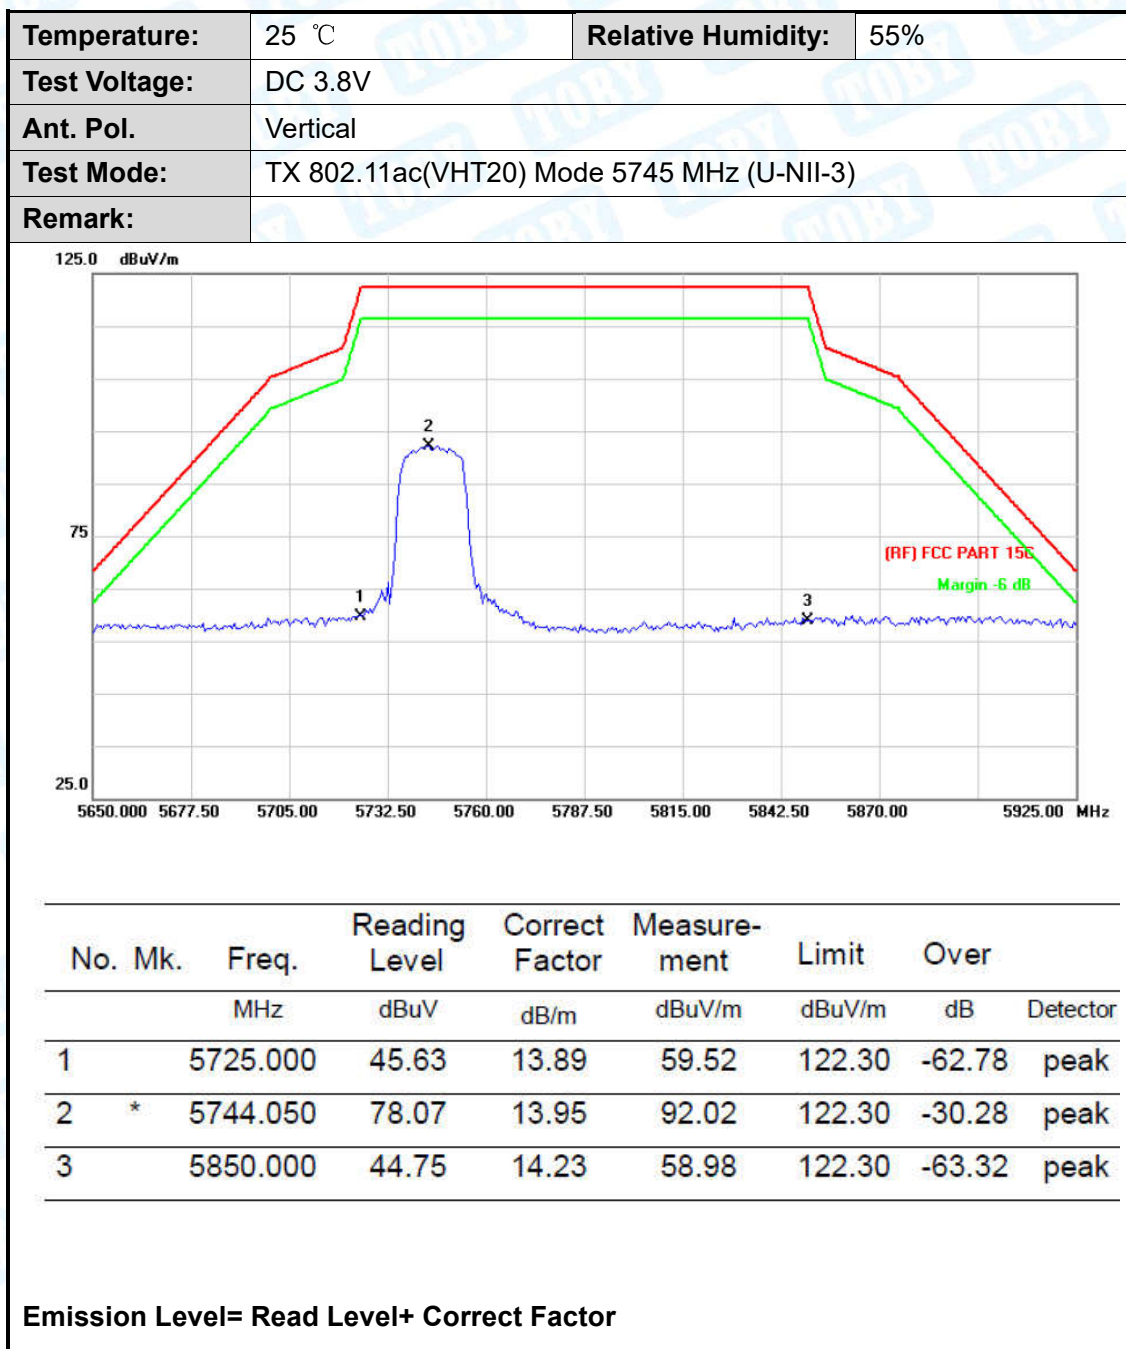


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

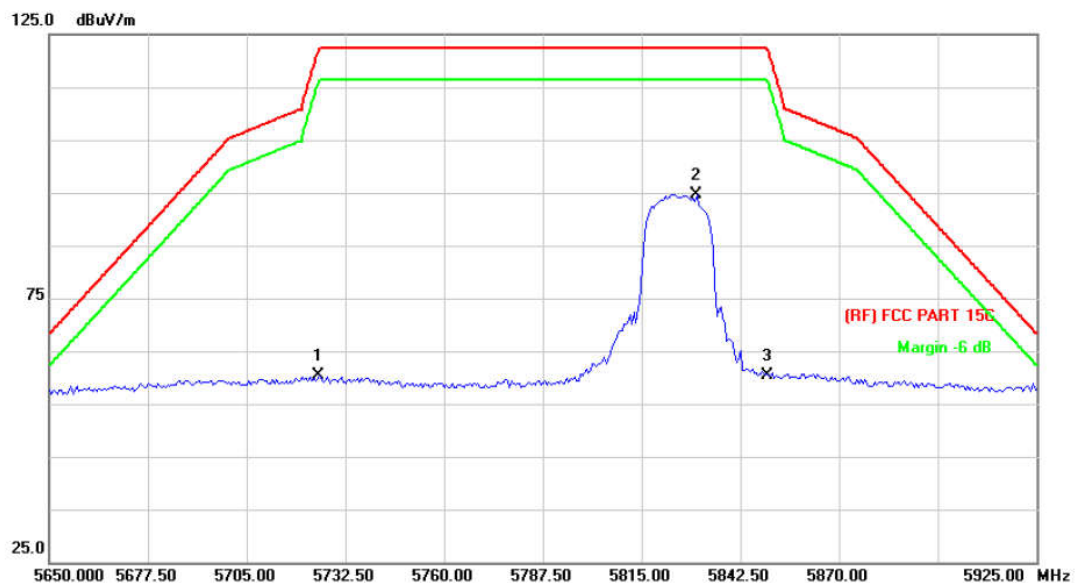

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.50	13.89	60.39	122.30	-61.91	peak
2	*	5830.400	80.52	14.17	94.69	122.30	-27.61	peak
3		5850.000	46.07	14.23	60.30	122.30	-62.00	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)		
Remark:			

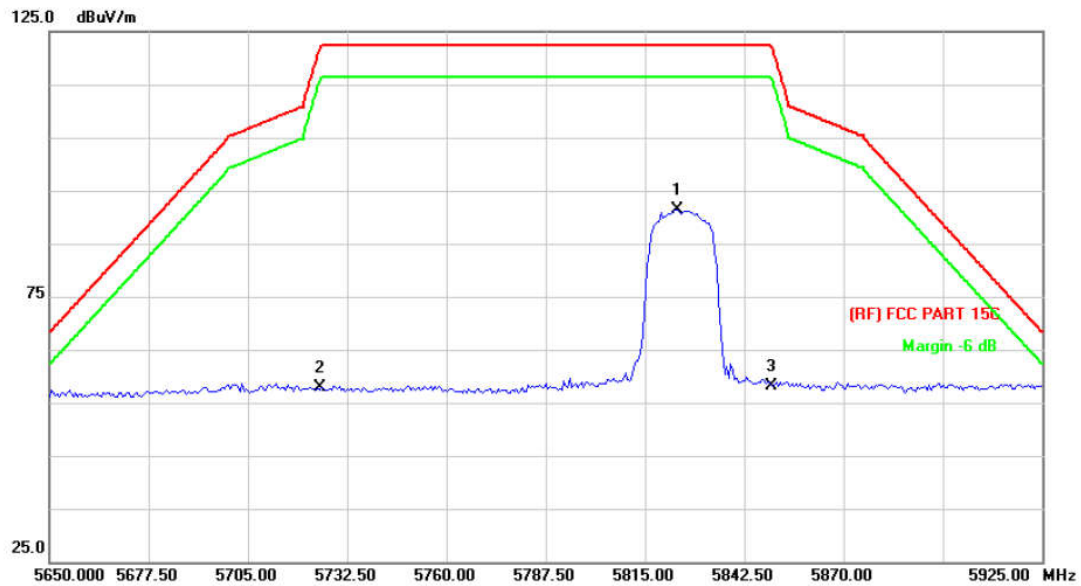

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5823.800	77.20	14.16	91.36	122.30	-30.94	peak
2		5725.000	44.02	13.89	57.91	122.30	-64.39	peak
3		5850.000	43.89	14.23	58.12	122.30	-64.18	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

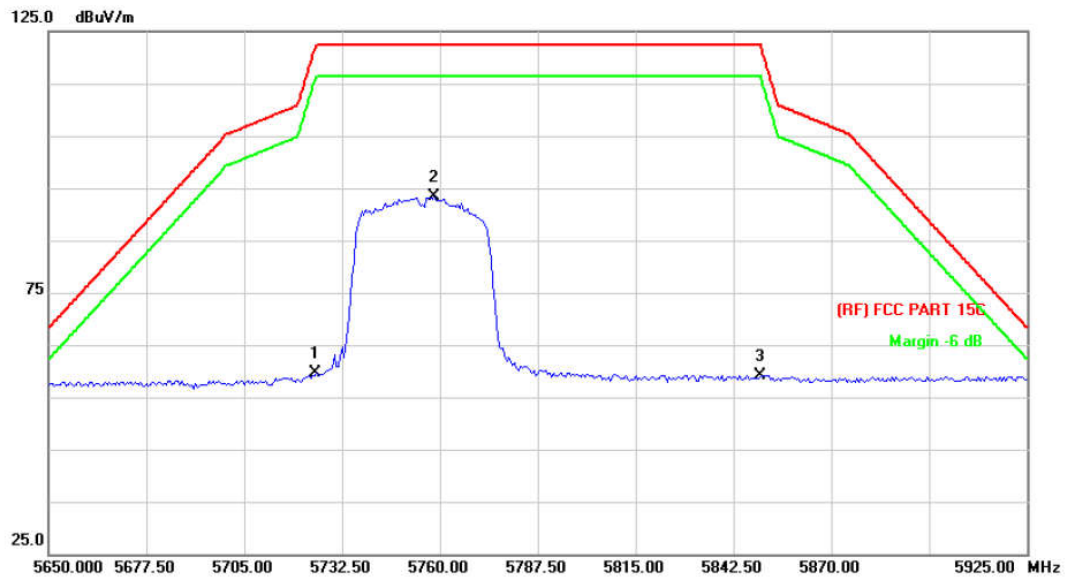

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5725.000	45.79	13.89	59.68	122.30	-62.62 peak
2	*	5758.350	79.52	13.97	93.49	122.30	-28.81 peak
3		5850.000	44.96	14.23	59.19	122.30	-63.11 peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)		
Remark:			

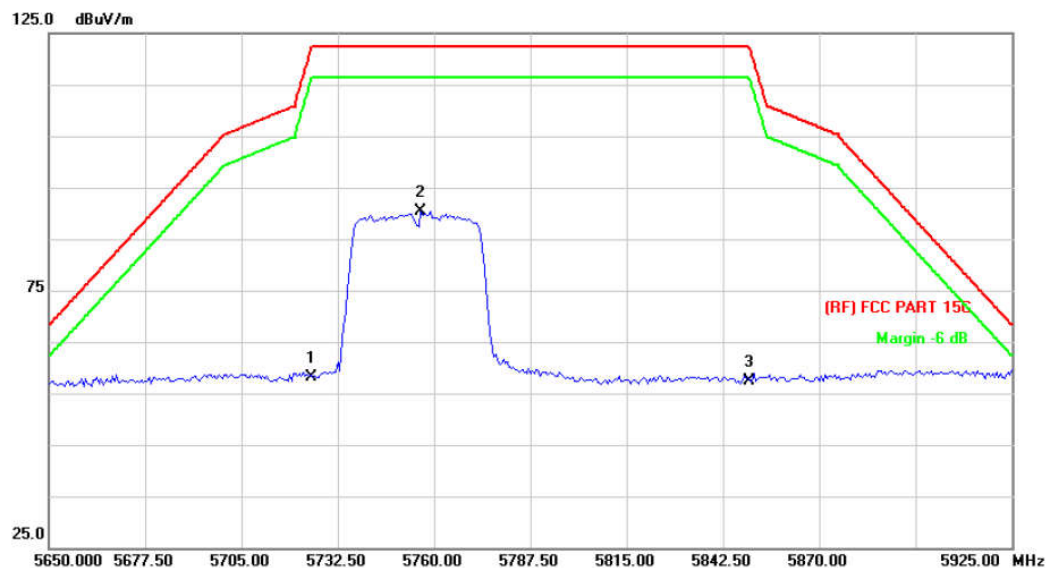

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	44.28	13.89	58.17	122.30	-64.13	peak
2	*	5756.150	76.52	13.97	90.49	122.30	-31.81	peak
3		5850.000	43.17	14.23	57.40	122.30	-64.90	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)		
Remark:			

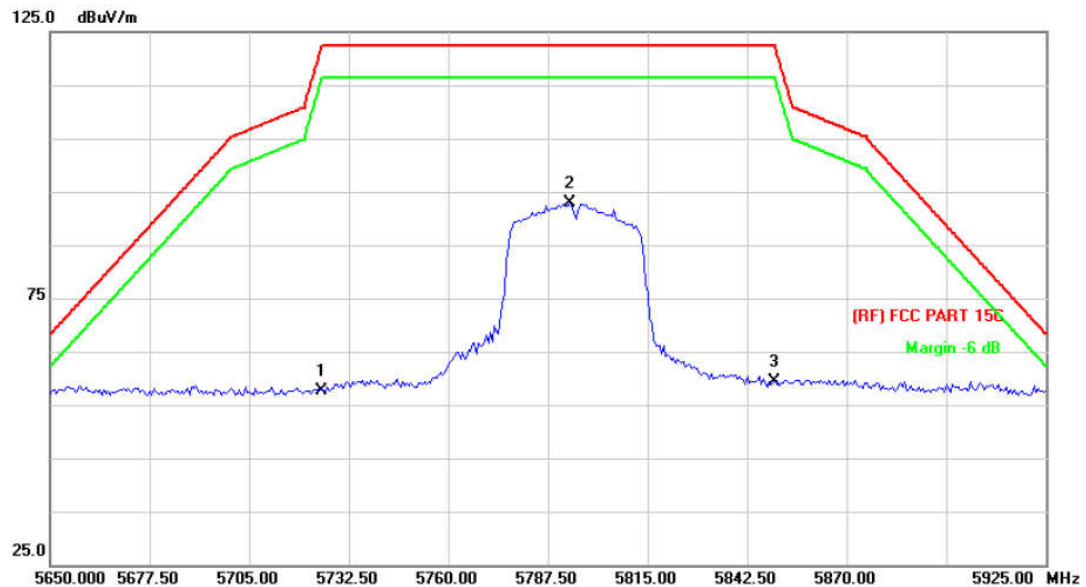


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	43.84	13.89	57.73	122.30	-64.57	peak
2	*	5793.550	78.85	14.08	92.93	122.30	-29.37	peak
3		5850.000	45.23	14.23	59.46	122.30	-62.84	peak

Emission Level= Read Level+ Correct Factor

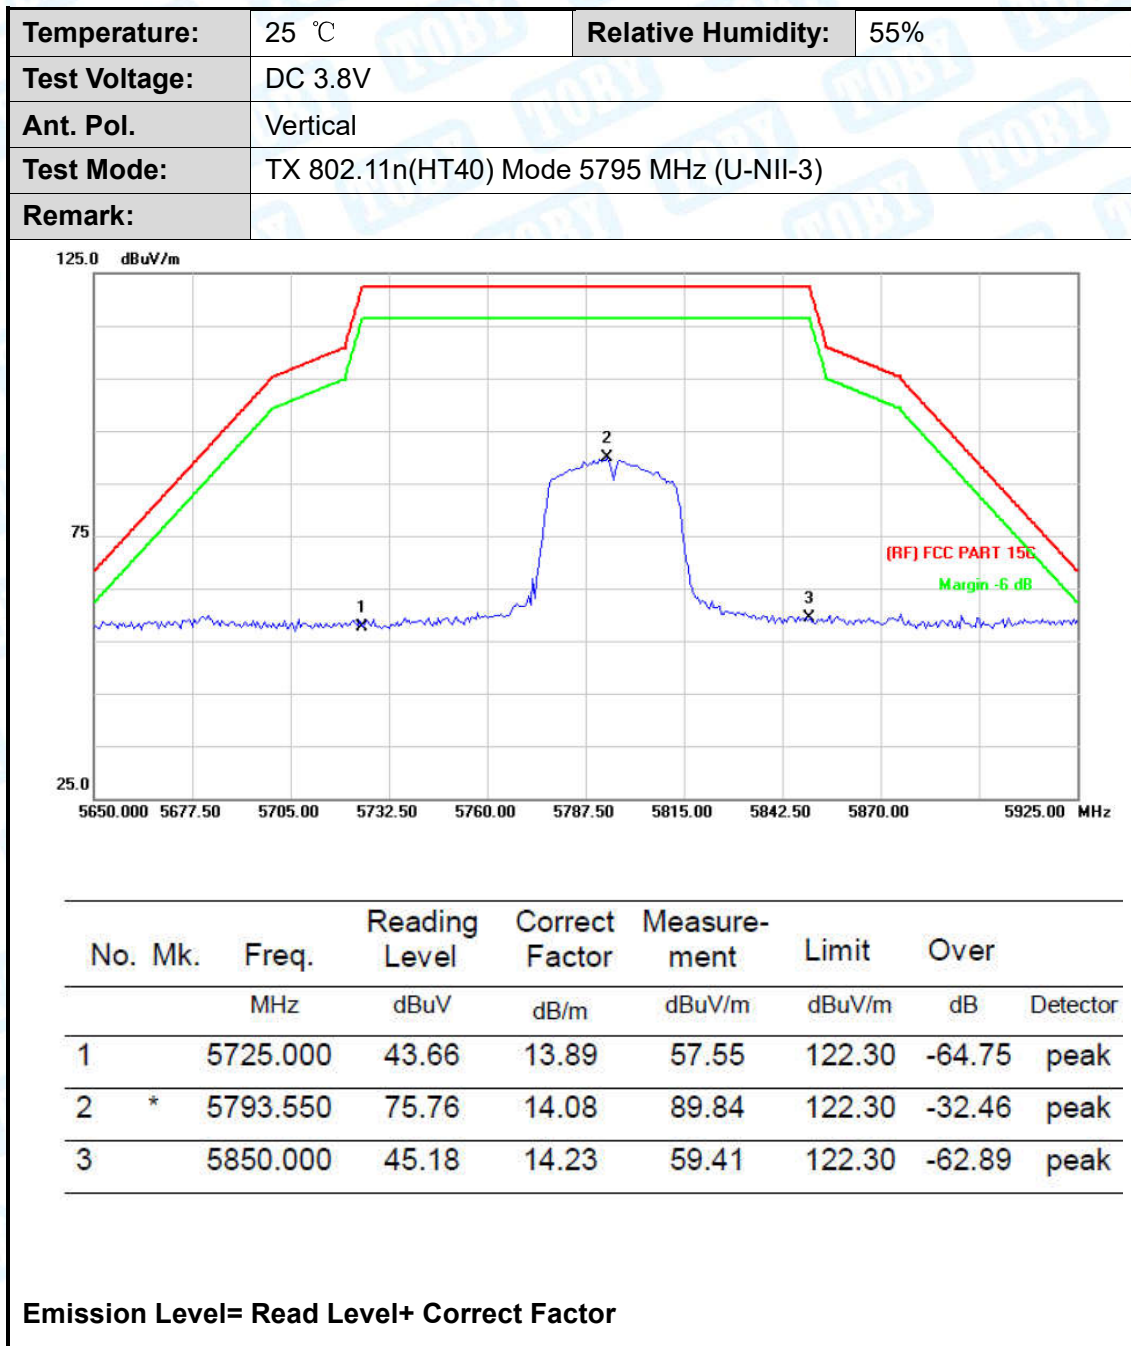


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

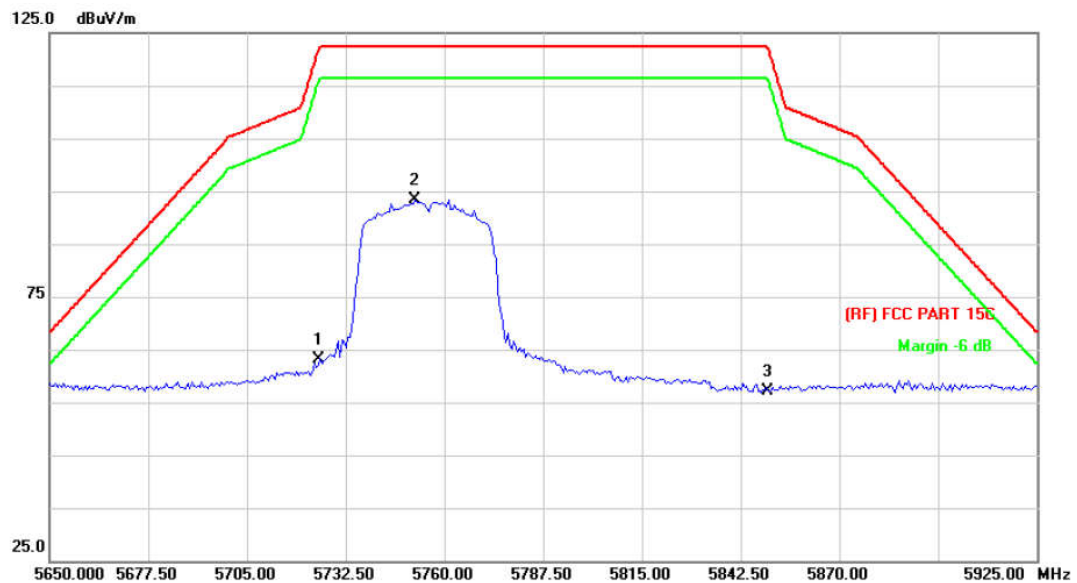

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	49.36	13.89	63.25	122.30	-59.05	peak
2	*	5751.750	79.48	13.96	93.44	122.30	-28.86	peak
3		5850.000	42.99	14.23	57.22	122.30	-65.08	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)		
Remark:			

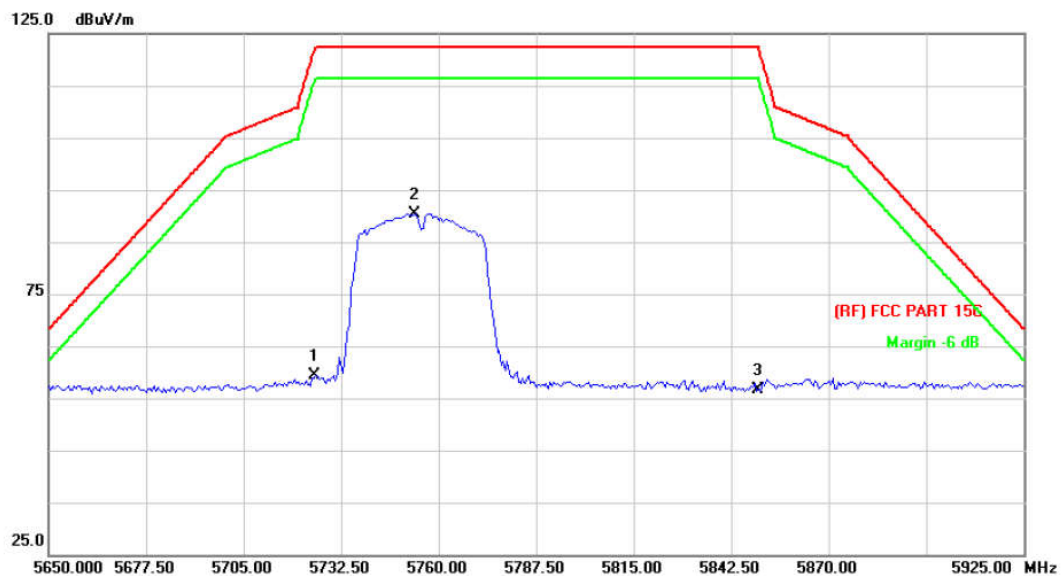

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	45.41	13.89	59.30	122.30	-63.00	peak
2	*	5753.400	76.44	13.97	90.41	122.30	-31.89	peak
3		5850.000	42.28	14.23	56.51	122.30	-65.79	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

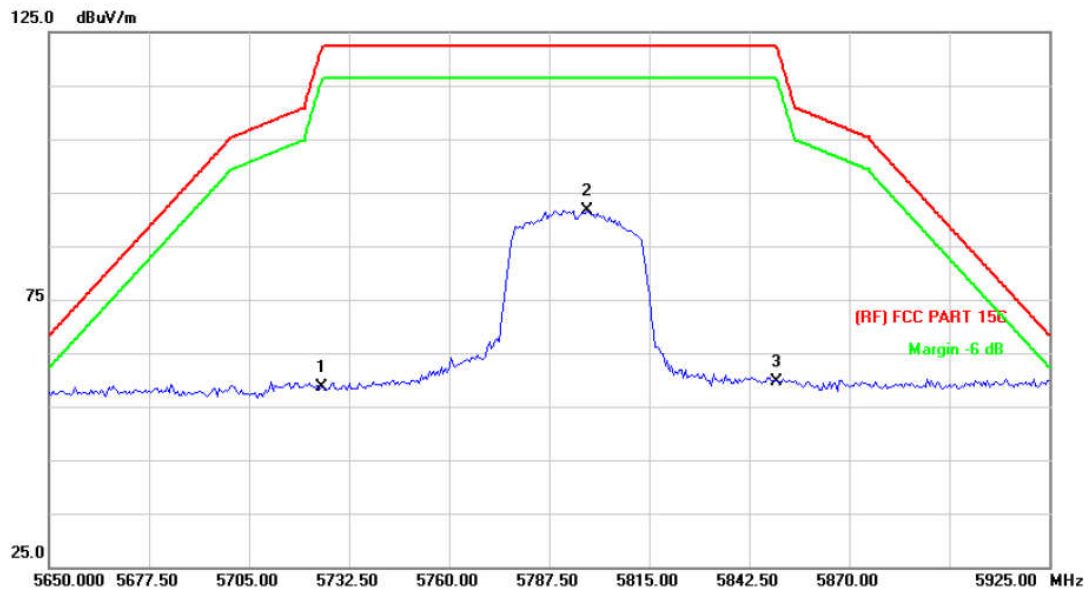

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5725.000	44.77	13.89	58.66	122.30	-63.64 peak
2	*	5797.950	77.56	14.09	91.65	122.30	-30.65 peak
3		5850.000	45.52	14.23	59.75	122.30	-62.55 peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)		
Remark:			

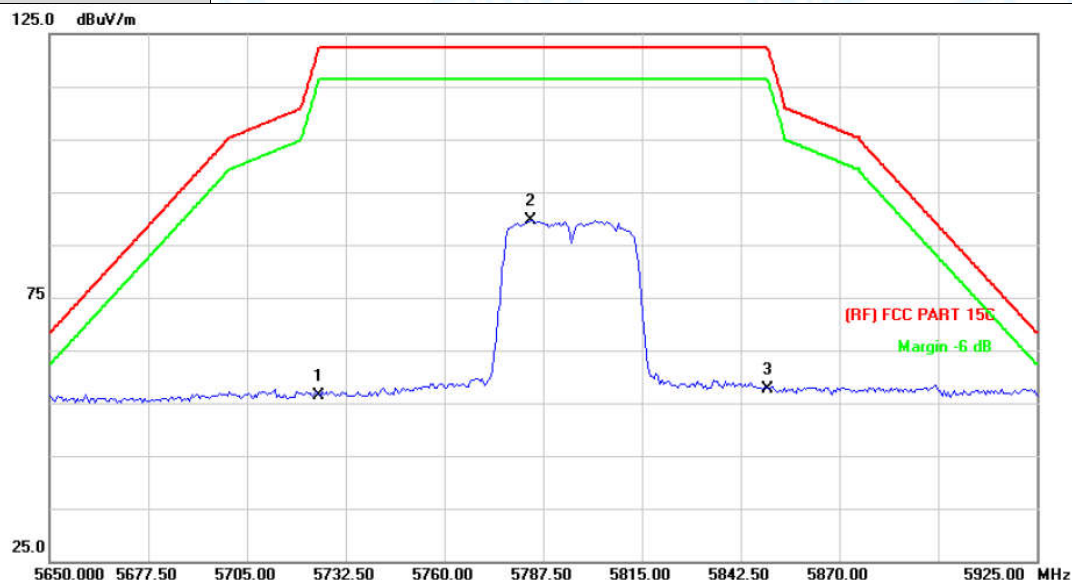

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	42.48	13.89	56.37	122.30	-65.93	peak
2	*	5784.200	75.57	14.05	89.62	122.30	-32.68	peak
3		5850.000	43.29	14.23	57.52	122.30	-64.78	peak


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)		
Remark:			

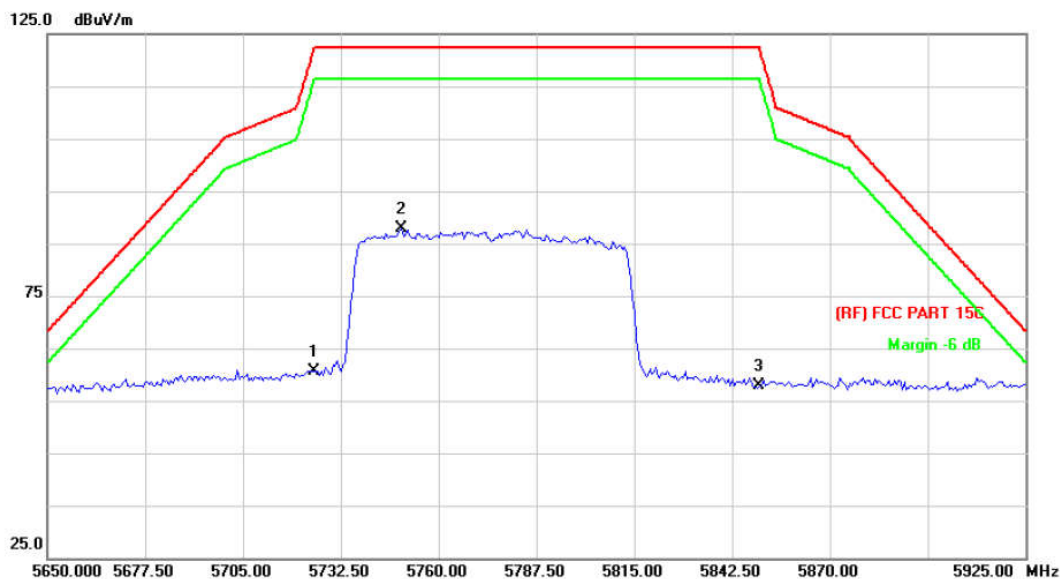


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5725.000	46.69	13.89	60.58	122.30	-61.72	peak
2	*	5749.550	73.84	13.96	87.80	122.30	-34.50	peak
3		5850.000	43.66	14.23	57.89	122.30	-64.41	peak

Emission Level= Read Level+ Correct Factor

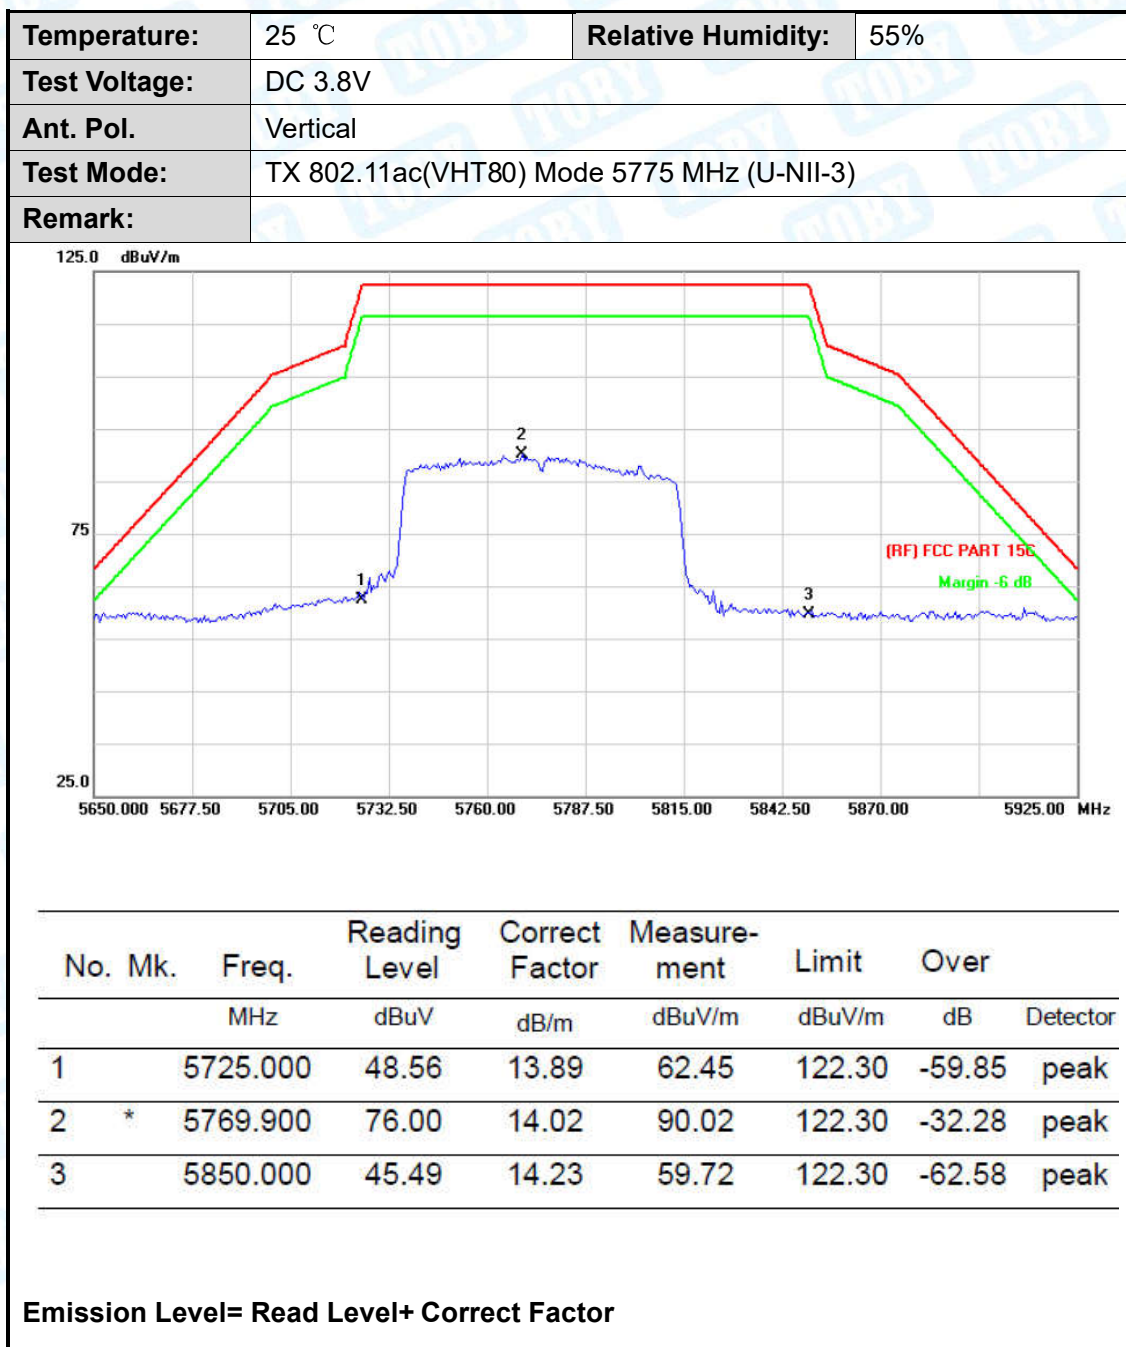


Attachment D--Bandwidth Test Data

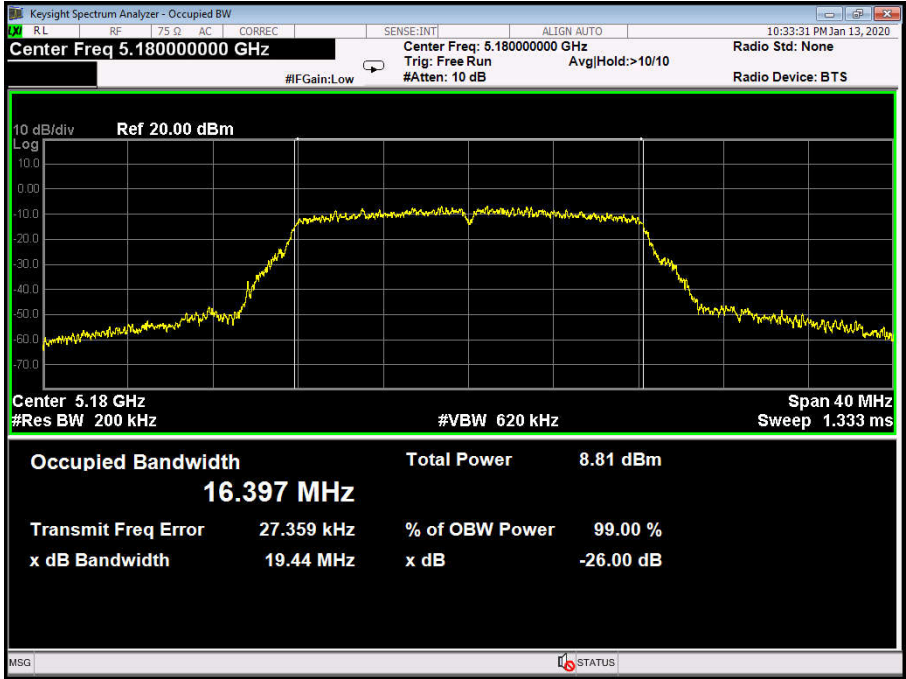Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11a Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	20.18	16.756
40	5200	20.13	16.731
48	5240	20.10	16.717
802.11a Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq: 5.180000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 16.397 MHz Total Power 8.81 dBm Transmit Freq Error 27.359 kHz % of OBW Power 99.00 % x dB Bandwidth 19.44 MHz x dB -26.00 dB			


802.11a Mode


5200 MHz

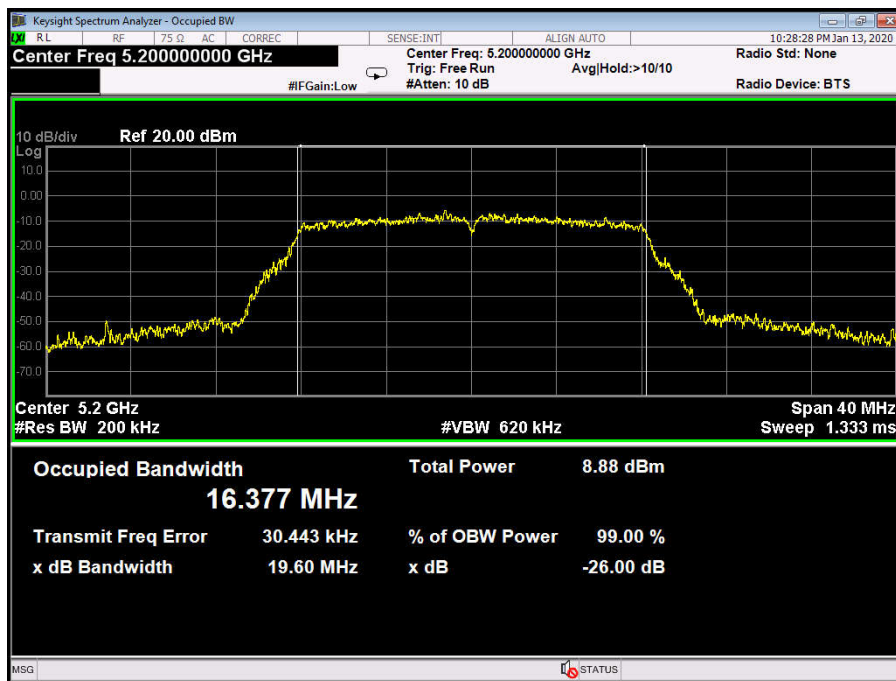

802.11a Mode

5240 MHz

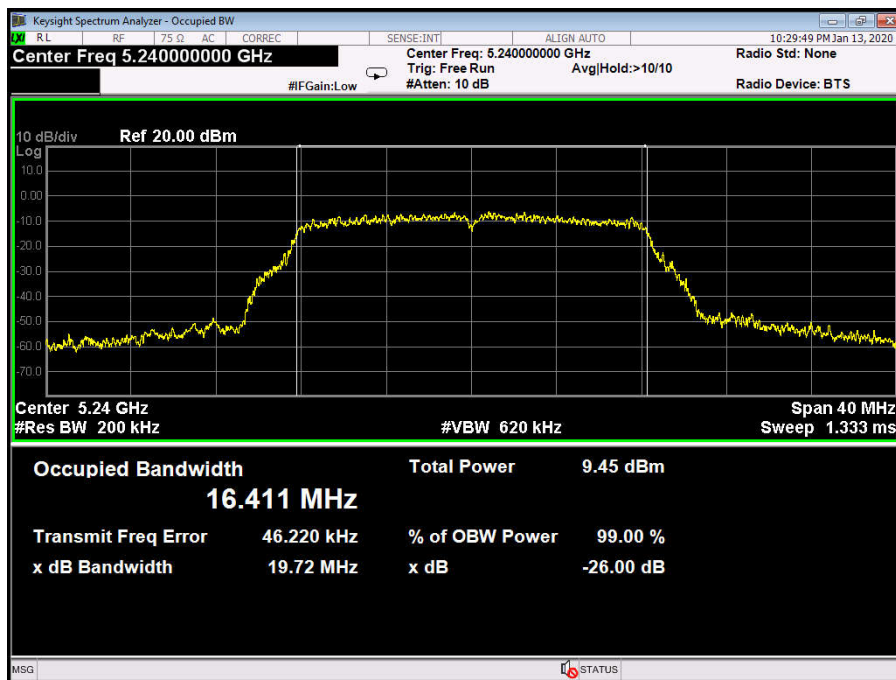

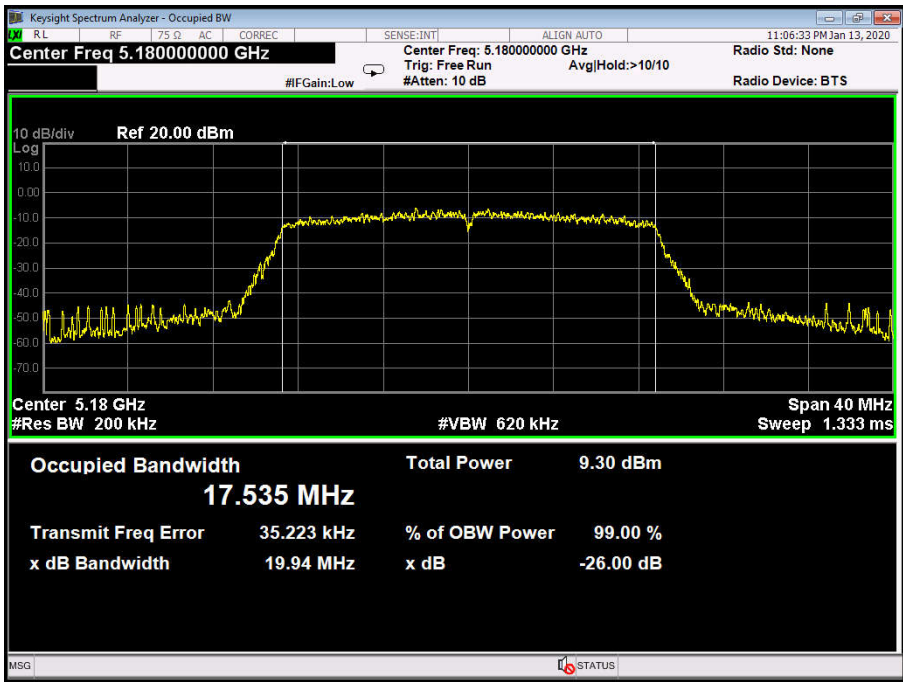Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Test Mode:	TX 802.11n(HT20) Mode (U-NII-1)		
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	22.17	17.732
40	5200	20.53	17.733
48	5240	20.31	17.742
802.11n(HT20) Mode			
5180 MHz			
 Keysight Spectrum Analyzer - Occupied BW Center Freq 5.180000000 GHz Center Freq: 5.180000000 GHz Trig: Free Run #Gain: Low #Atten: 10 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Ref 20.00 dBm Center 5.18 GHz #Res BW 200 kHz #VBW 620 kHz Span 40 MHz Sweep 1.333 ms Occupied Bandwidth 17.535 MHz Total Power 9.30 dBm Transmit Freq Error 35.223 kHz % of OBW Power 99.00 % x dB Bandwidth 19.94 MHz x dB -26.00 dB			