



Shenzhen VITE Technology Co., Ltd
Tel: +86-755-89486194 Fax: +86-755-89486187

FCC PART 90 & RSS-119 TEST REPORT

FCC ID: XMHQ-650V1, IC: 8502A-QP650V1

Report Reference No. **VITE1003027R**

Compiled by

(position+printed name+signature) ..: File administrators Tracy Qi

Supervised by

(position+printed name+signature) ..: Test Engineer Tracy Qi

Approved by

(position+printed name+signature) ..: Manager Andy Zhang

Date of issue : Mar 25, 2009

Testing Laboratory Name **Shenzhen VITE Technology Co., Ltd**

Address : Room 1702, Building 1A, Xi'an Guandi, 87 District Xin'an, Bao'an District, Shenzhen 518101, P.R. China

Applicant's name **Quantun Electronics, LLC**

Address : 1379 Shotgun Road Sunrise, Florida 33326, USA

Test specification:

Standard : **FCC Part 90: PRIVATE LAND MOBILE RADIO SERVICES**

RSS-119: Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz

TRF Originator : Shenzhen VITE Technology Co., Ltd

Master TRF : Dated 2009-03

Shenzhen VITE Technology Co., Ltd All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen VITE Technology Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen VITE Technology Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : Two-way Radio

Trade Mark : Quantun

Model/Type reference : QP-650V1

Listed Models : /

Modulation : FM

Emission Type : 16K0F3E for 25KHz; 11K0F3E for 12.5KHz

Power Supply : DC 7.4 V 1.45A

Maximum Transmitter Power : 5W

Operating Frequency Range : 136MHz~174MHz

Result : **Positive**

TEST REPORT

Test Report No. :	VITE1003027R	Mar 25, 2009
		Date of issue

Equipment under Test : Two-way Radio

Model /Type : QP-650V1

Listed Models : /

Applicant : Quantun Electronics, LLC

Address : 1379 Shotgun Road Sunrise, Florida 33326, USA

Manufacture : Shenzhen Surwave Technologies Co., LTD

Address : B-3001 Cityelite Building, Bagua RD.2 Bagualing, Futian District, Shenzhen, China

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
3.7.	General Technical Requirements and Summary of Test Results	8
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
4.1.	Conducted Emissions Test	9
4.2.	Occupied Bandwidth and Emission Mask	10
4.3.	Radiated Spurious Emission Test	17
4.4.	Spurious Emission On Antenna Port	25
4.5.	Modulation Characteristics	32
4.6.	Frequency Stability Measurement	35
4.7.	Conducted Output Power	39
4.8.	Transmitter Frequency Behavior	45
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>48</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>49</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[**FCC Part 90: PRIVATE LAND MOBILE RADIO SERVICES**](#)

[**RSS-119: Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz**](#)

[**TIA/EIA 603: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.**](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Jan 12, 2009

Testing commenced on : Jan 13, 2009

Testing concluded on : Jan 25, 2009

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 120V / 60 Hz 115V / 60Hz
 12 V DC 24 V DC
 Other (specified in blank below)

DC 7.4V from battery

2.3. Short description of the Equipment under Test (EUT)

Two-way Radio

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **XMHQP-650V1** and IC: **8502A-QP650V1** filing to comply with the FCC Part 90 Rules and RSS-119 Issue 9.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements
of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

IC Registration No.: 7631A

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2008.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

No.	Product	Manufacturer	Model No.	Serial No.	

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2009/04
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2009/04
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2009/04
4	TURNTABLE	ETS	2088	2149	2009/04
5	ANTENNA MAST	ETS	2075	2346	2009/04
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2009/04

3.7. General Technical Requirements and Summary of Test Results


The EUT has been tested according to the following specifications:

FCC Rules	RS-119	Description Of Test	Result
§15.207	RS-Gen	Conducted Emission	N/A
§90.205	§5.4	Maximum Transmitter Power	Compliant
§90.207	§5.13	Modulation Characteristic	Compliant
§90.209	§5.5	Occupied Bandwidth	Compliant
§90.210	§5.8	Emission Mask	Compliant
§90.213	§5.3	Frequency Tolerance	Compliant
§90.214	§5.9	Transient Frequency Behavior	Compliant

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emissions Test

TEST CONFIGURATION

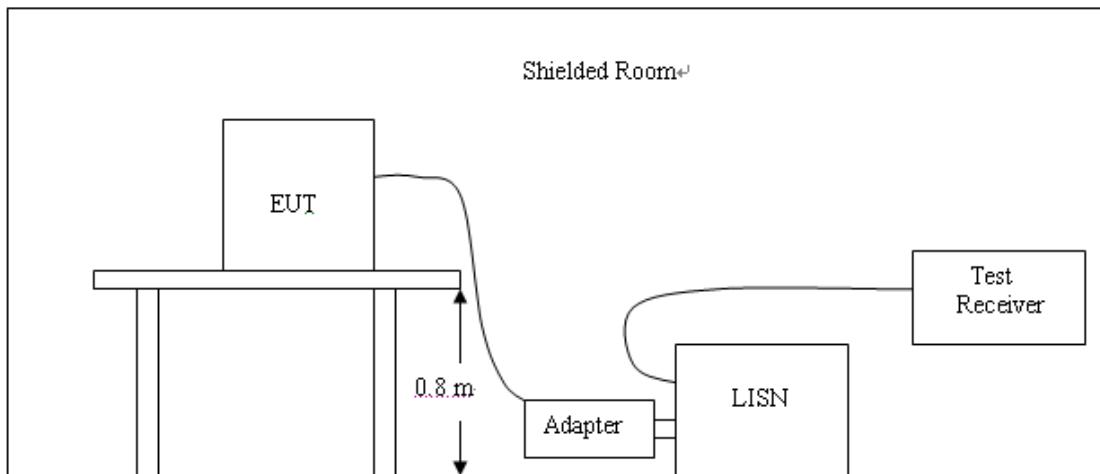

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC7.4 V power from the battery.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

TEST RESULTS

Owing to the DC operation of EUT, this test item is not performed.

4.2. Occupied Bandwidth and Emission Mask

PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz and 20 KHz for 25 KHz.

For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB. On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 (f_d 2.88 kHz) dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

$$50 + 10 \log P = 50 + 10 \log (4.80) = 56.81 \text{ dB}$$


For 25 KHz:

$$43 + 10 \log (4.78) = 49.79 \text{ dB}$$

MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). Set EUT as normal operation
- 3). Set SPA Center Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =100 KHz.

TEST SETUP BLOCK DIAGRAM

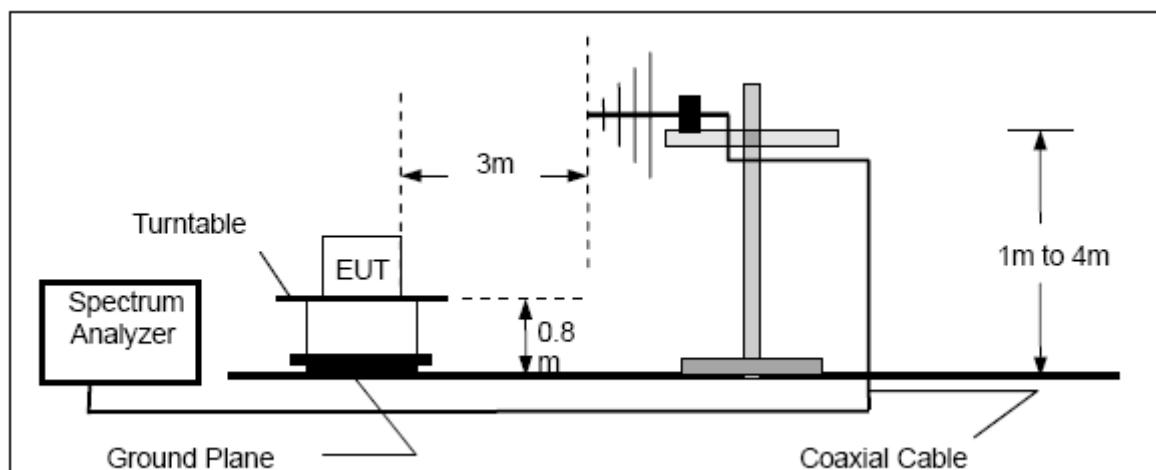

TEST RESULTS:

Referred as the attached plot hereinafter

Note: The blue curve represents unmodulated signal.


The black curve represents modulated signal.

99% Bandwidth Measurement Result						
Operation Frequency	12.5 KHz Channel Separation			25KHz Channel Separation		
	Test Data	Limits	Result	Test Data	Limits	Result
Bottom Channel	9.70KHz	11.25KHz	Pass	14.70KHz	20.00KHz	Pass
Middle Channel	10.20KHz	11.25KHz	Pass	15.30KHz	20.00KHz	Pass
Top Channel	10.20KHz	11.25KHz	Pass	15.30KHz	20.00KHz	Pass

26dB Bandwidth Measurement Result						
Operation Frequency	12.5 KHz Channel Separation			25KHz Channel Separation		
	Test Data	Limits	Result	Test Data	Limits	Result
Bottom Channel	10.50KHz	11.25KHz	Pass	15.50KHz	20.00KHz	Pass
Middle Channel	10.70KHz	11.25KHz	Pass	15.60KHz	20.00KHz	Pass
Top Channel	10.70KHz	11.25KHz	Pass	15.60KHz	20.00KHz	Pass


For 25 KHz:

Occupied Bandwidth of Bottom Channel

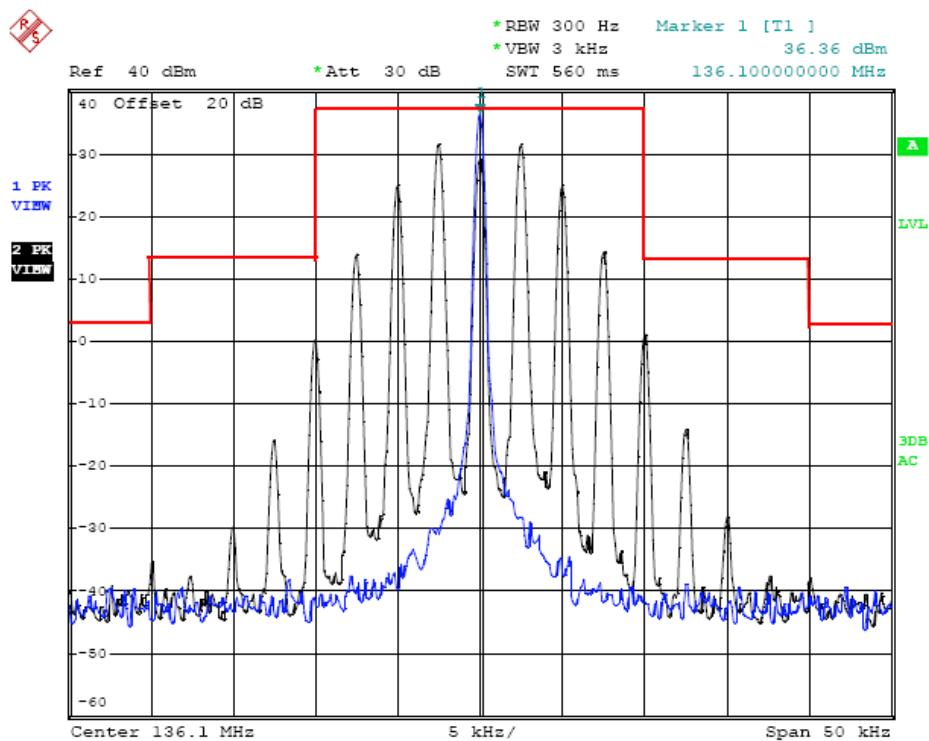


Date: 25.JAN.2010 19:19:20

25 kHz Channel Spacing, 136MHz, 2500 Hz Audio Modulation Only

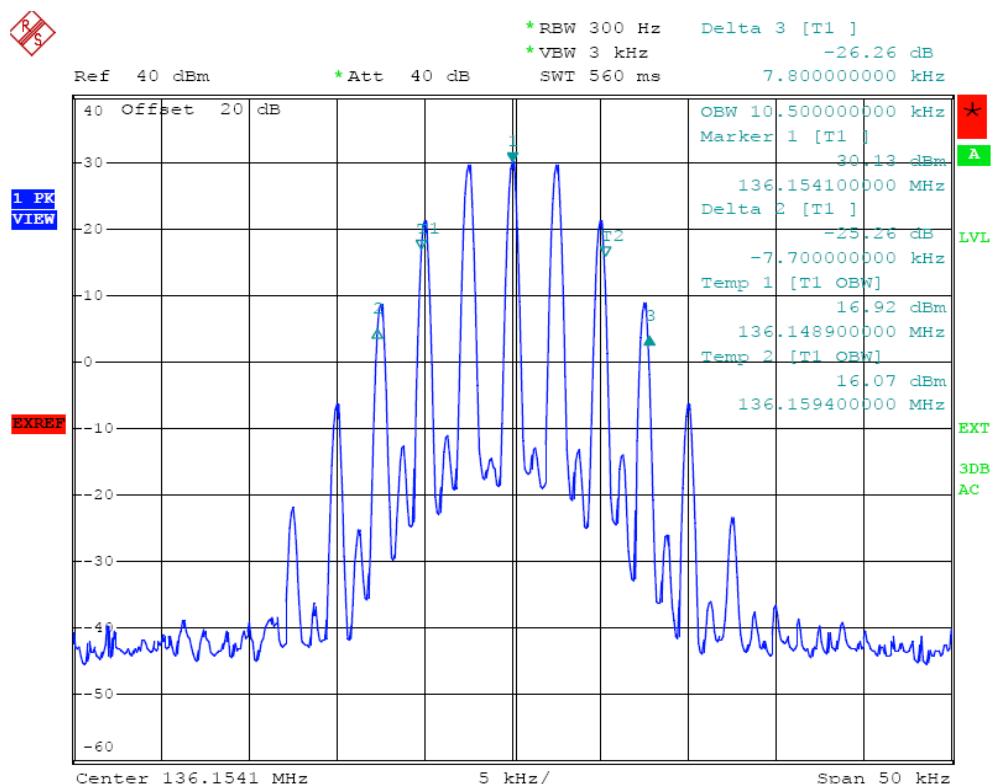


Date: 07.APR.2010 14:16:00

Occupied Bandwidth of Middle Channel

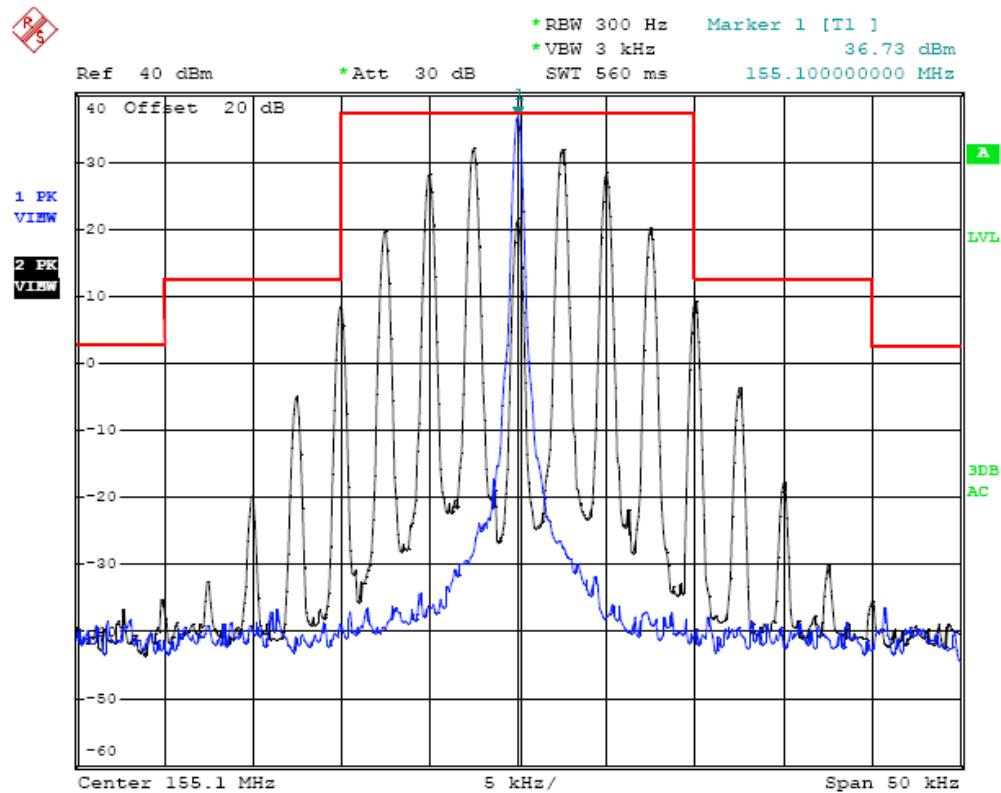


Date: 25.JAN.2010 19:05:18

25 kHz Channel Spacing, 155 MHz, 2500 Hz Audio Modulation Only

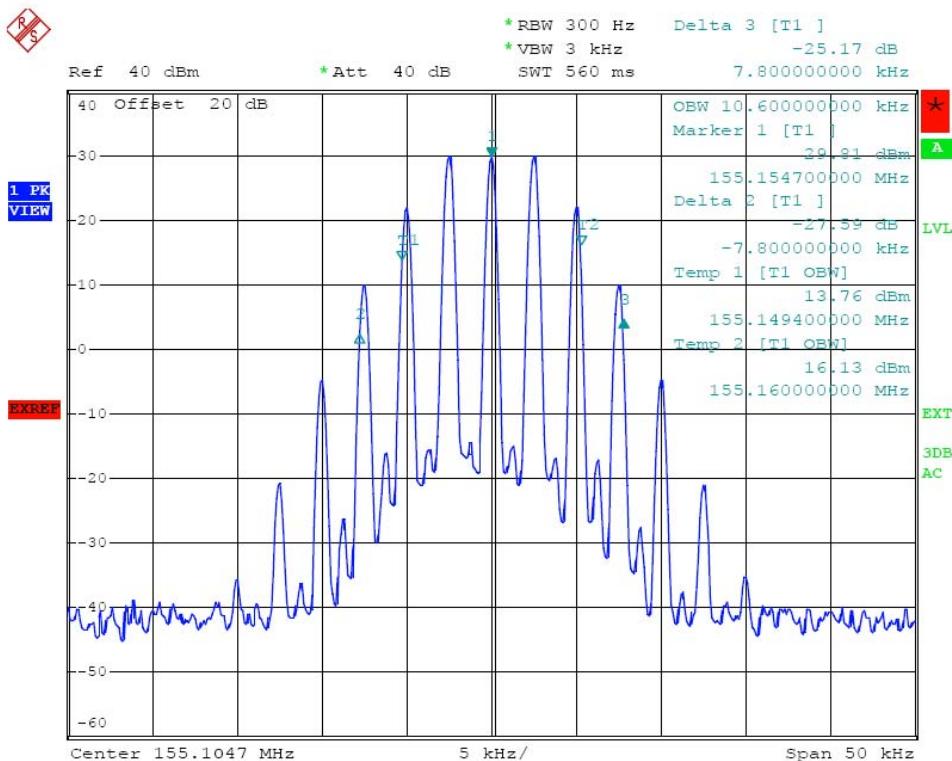


Date: 07.APR.2010 14:11:50

Occupied Bandwidth of Top Channel

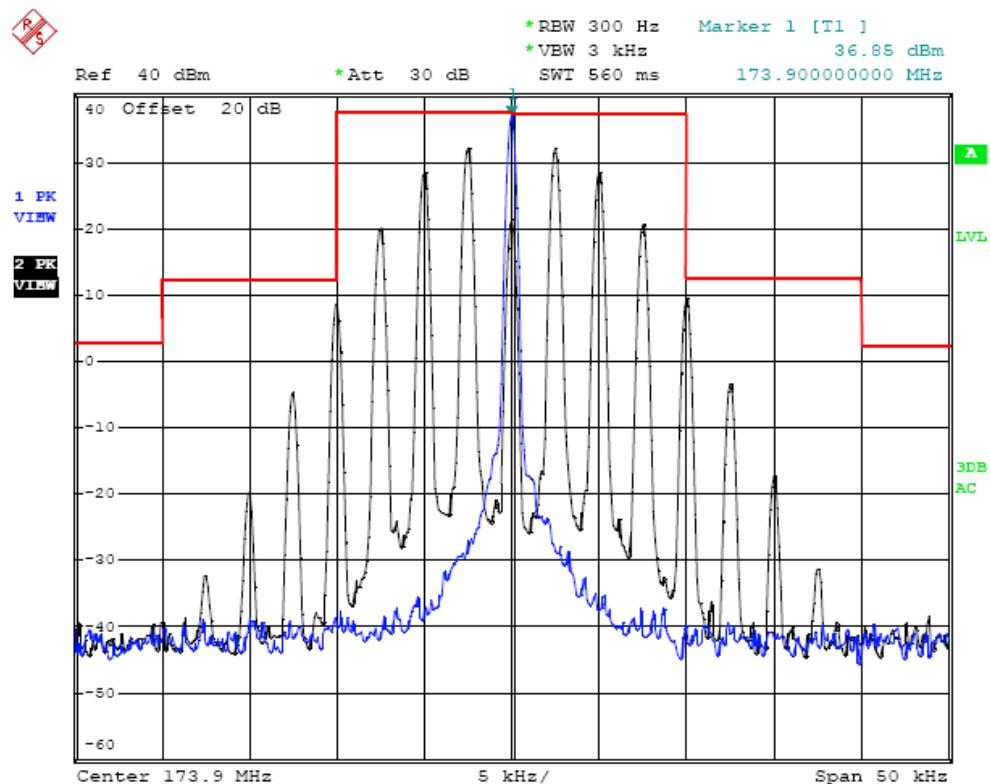

Date: 25.JAN.2010 18:57:41


25 kHz Channel Spacing, 174 MHz, 2500 Hz Audio Modulation Only

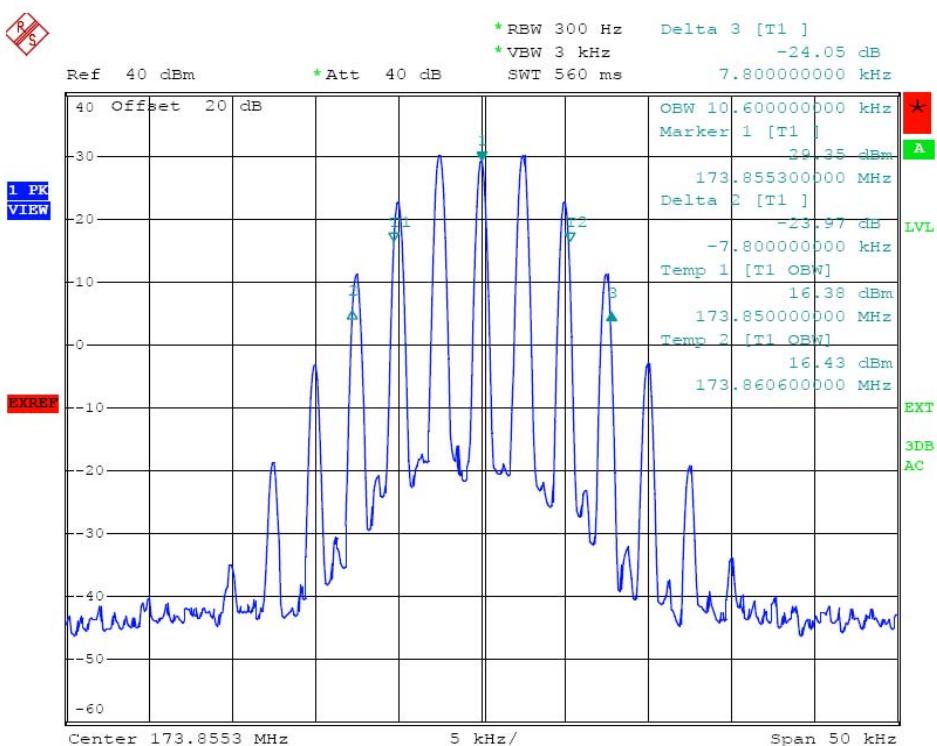


Date: 07.APR.2010 14:03:57

For 12.5 KHz

Occupied Bandwidth of Top Channel

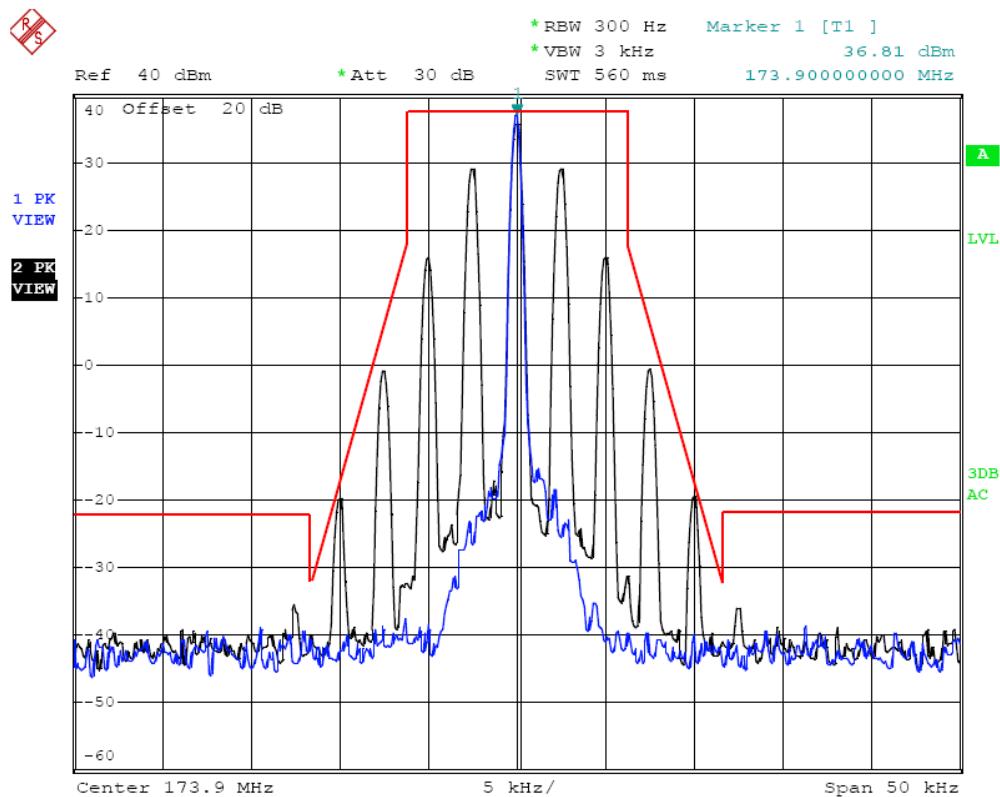


Date: 25.JAN.2010 18:56:59
 12.5 kHz Channel Spacing, 174 MHz, 2500 Hz Audio Modulation Only

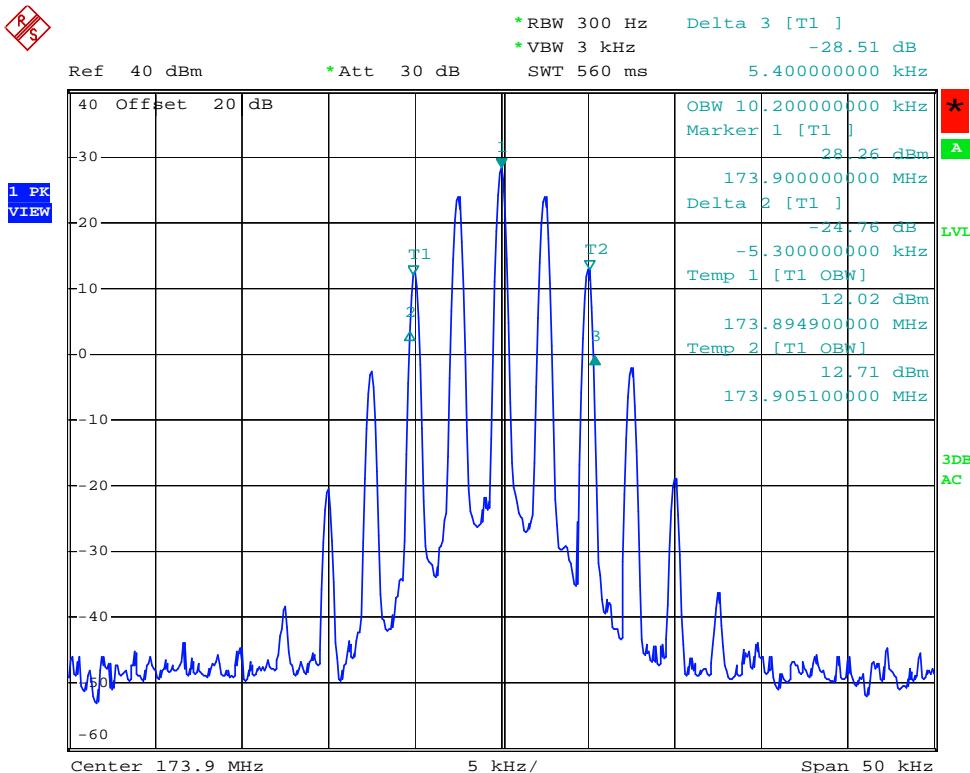


Date: 25.JAN.2010 19:02:15

Occupied Bandwidth of Middle Channel

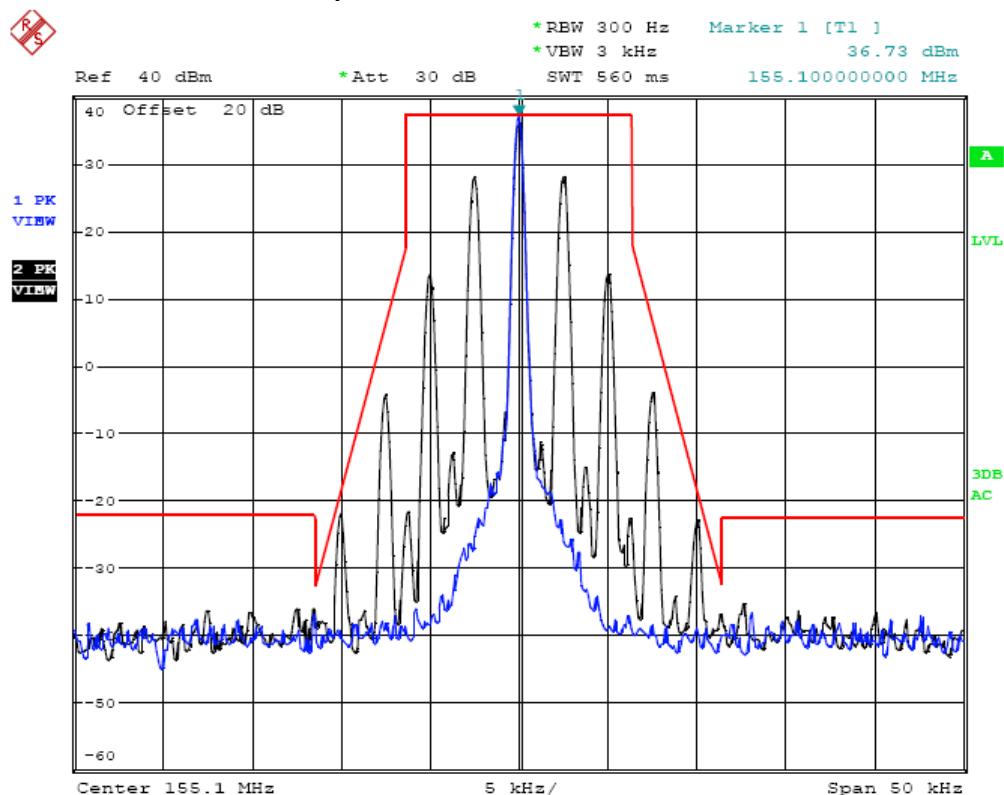


Date: 25.JAN.2010 19:06:10
 12.5 kHz Channel Spacing, 155 MHz, 2500 Hz Audio Modulation Only

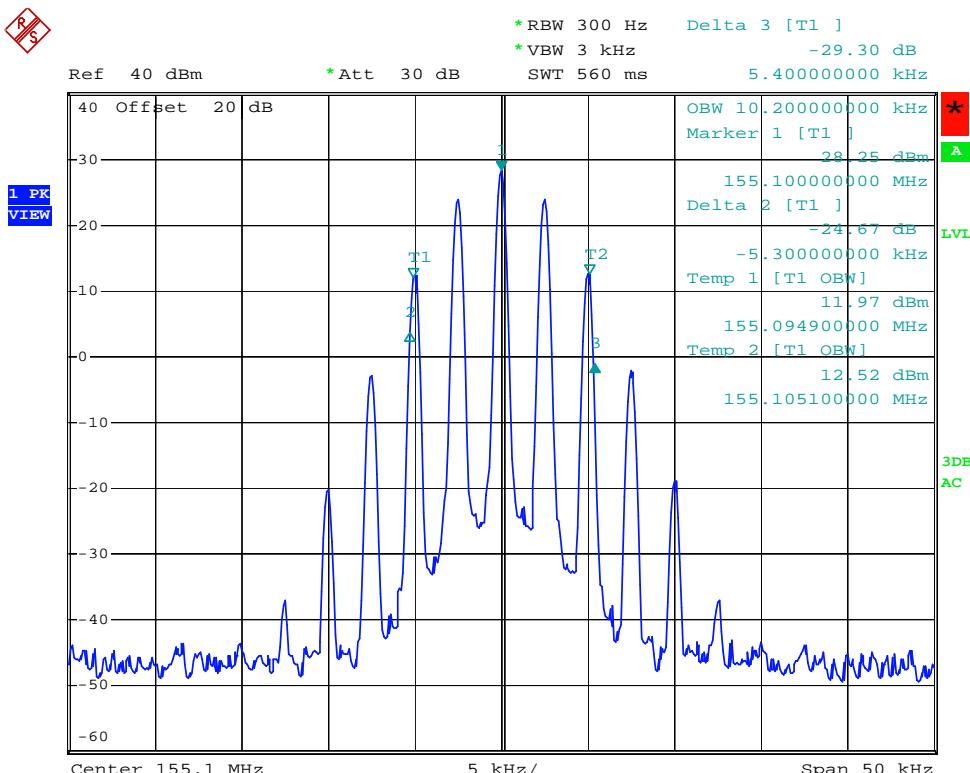


Date: 25.JAN.2010 19:03:10

Occupied Bandwidth of Bottom Channel

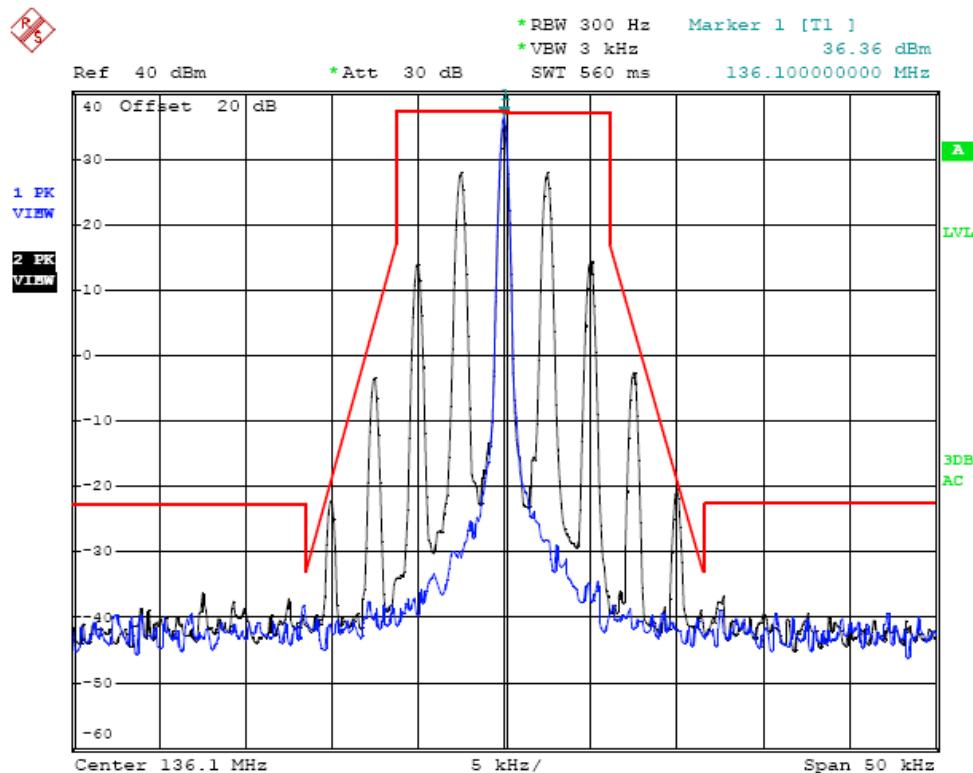

Date: 25.JAN.2010 19:19:52

12.5 kHz Channel Spacing, 136 MHz, 2500 Hz Audio Modulation Only

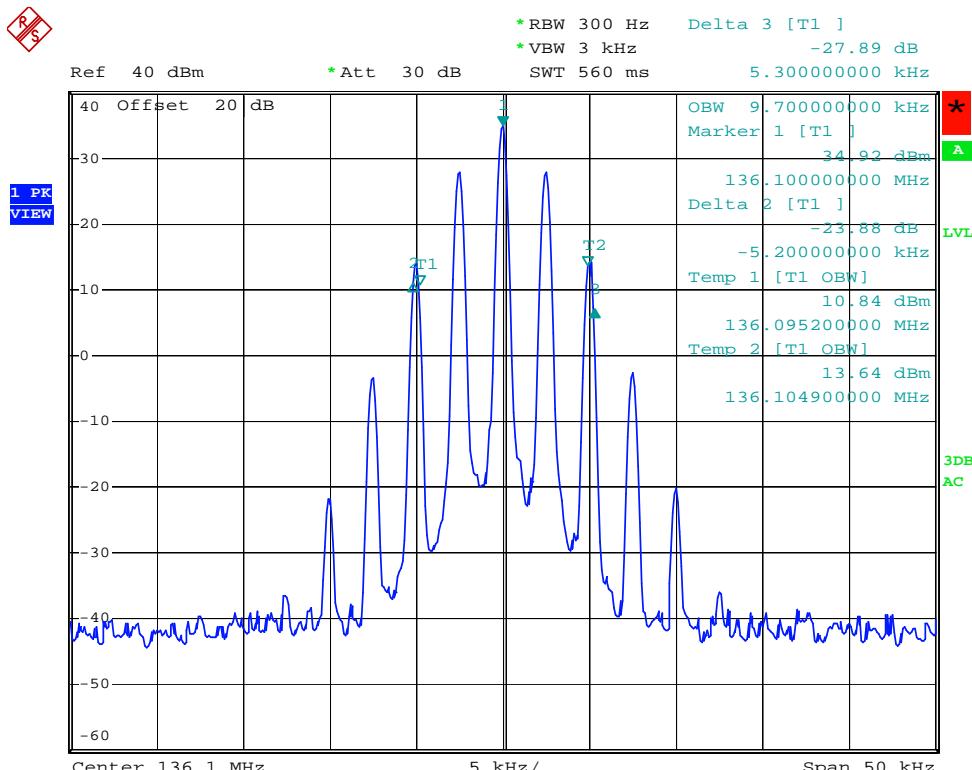

Date: 25.JAN.2010 19:07:24

4.3. Radiated Spurious Emission Test

PROVISIONS APPLICABLE

According to Section 90.210., the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:


- 1). On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- 2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
- 3). On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50+10 \log (P)$ dB or 70 dB, which ever is lesser attenuation.

For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:


- 1). On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2). On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3). On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10\log (P)$ dB.

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

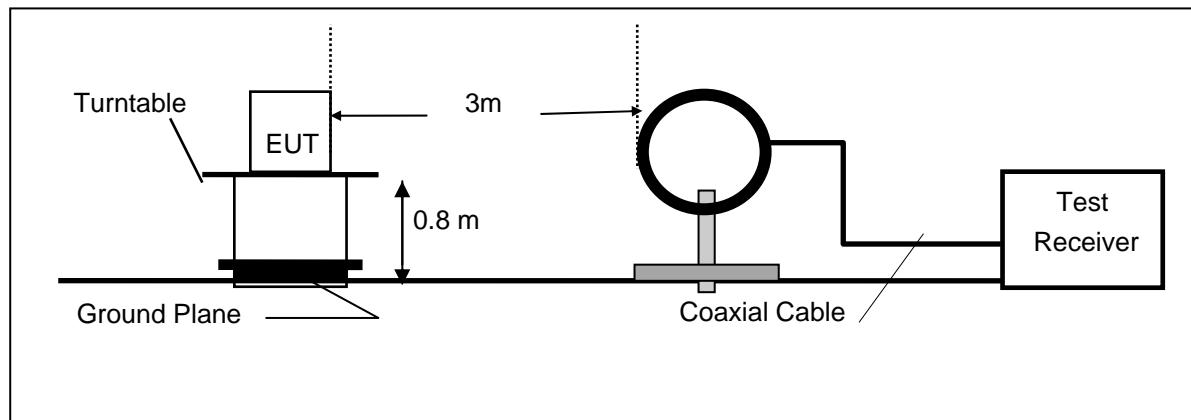

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

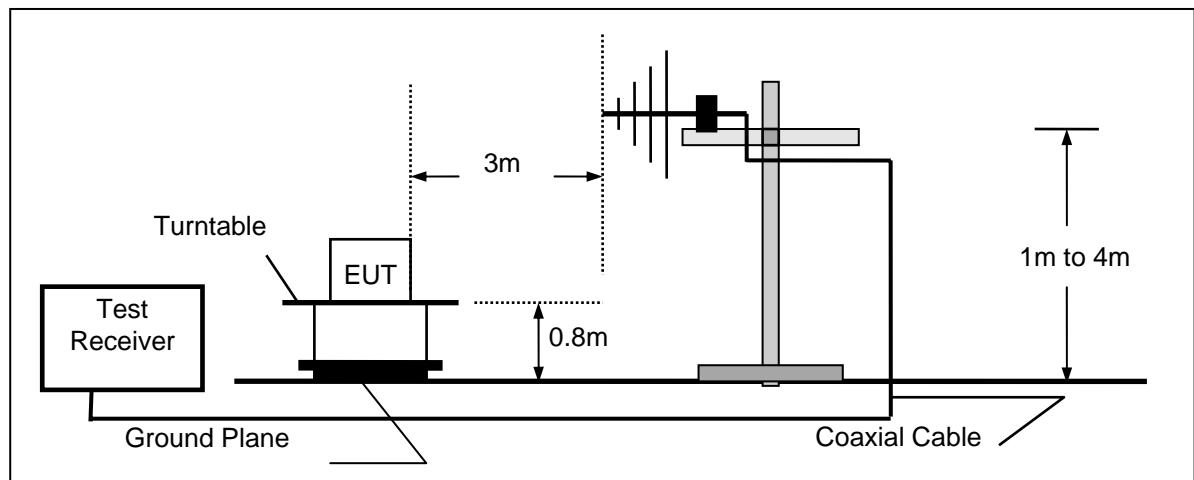

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

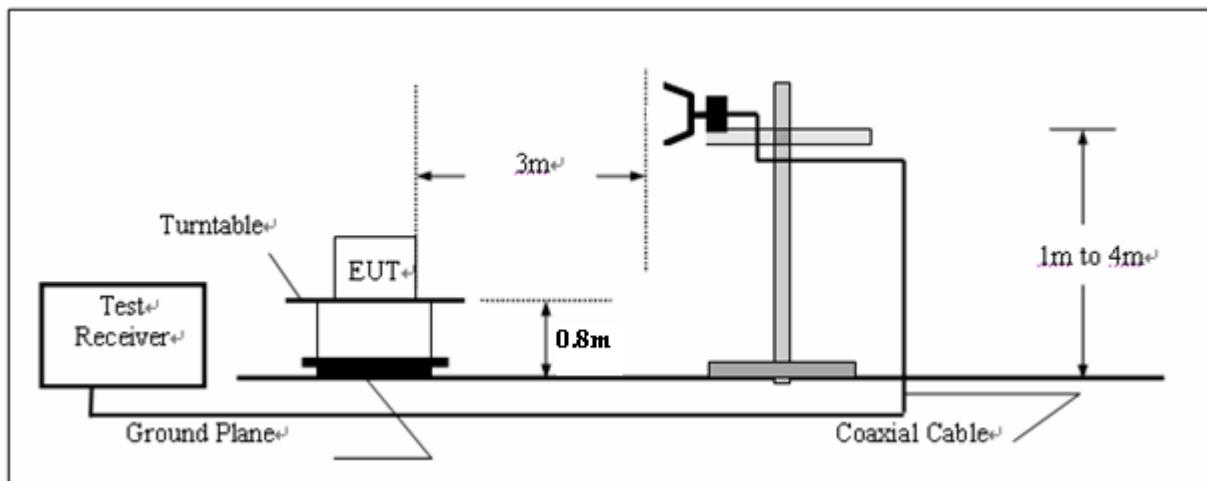

TEST PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10). Replace the antenna with a proper Antenna (substitution antenna).
- 11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12). The substitution antenna shall be connected to a calibrated signal generator.
- 13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization

TEST RESULTS

FCC Part 22.359, 74.462, 80.211 and 90.210 (25 kHz bandwidth only):

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

Low: $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (4.25) = 49.28 \text{ dB}$

High: $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (4.78) = 49.79 \text{ dB}$

FCC Part 90.210 (12.5 kHz Bandwidth only):

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:

Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.28) = 56.31 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.80) = 56.81 \text{ dB}$

Note: In general, the worse case attenuation requirement shown above was applied.

For 25 KHz

Calculation: Limit (dBm) = $EL - 43 - 10 \log_{10} (TP)$

Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is 36.79 dBm.

Limit (dBm) = $36.79 - 43 - 10 \log_{10} (4.78) = -13 \text{ dBm}$

The Bottom Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
272.2	-63.31	H	22.1	-41.21	-13	-28.21
408.3	-75.70	H	24.4	-51.30	-13	-38.30
680.5	-88.07	H	27.5	-60.57	-13	-47.57
***	--	H		--	-13	
272.2	-67.35	V	22.1	-45.25	-13	-32.25
408.3	-80.04	V	24.4	-55.64	-13	-42.64
680.5	-90.05	V	27.5	-62.55	-13	-49.55
***	--	V		--	-13	

The Middle Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
310.2	-75.42	H	23.2	-52.22	-13	-39.22
465.3	-87.66	H	25.1	-62.56	-13	-49.56
775.5	-94.95	H	29.8	-65.15	-13	-52.15
***	--	H		--	-13	
310.2	-79.44	V	23.2	-56.24	-13	-43.24
465.3	-88.04	V	25.1	-62.94	-13	-49.94
775.5	-96.34	V	29.8	-66.54	-13	-53.54
***	--	V		--	-13	

The Top Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
347.8	-85.51	H	24.1	-61.41	-13	-48.41
521.7	-96.13	H	26.8	-69.33	-13	-56.33
869.5	-95.46	H	31.2	-64.26	-13	-51.26
***	--	H		--	-13	
347.8	-88.53	V	24.1	-64.43	-13	-51.43
521.7	-92.34	V	26.8	-65.54	-13	-52.54
869.5	-99.75	V	31.2	-68.55	-13	-55.55
***	--	V		--	-13	

***Note:**

*** means that the emission level is too low to be measured or at least 20 dB down than the limit.

For 12.5 KHz

Calculation: Limit (dBm) = EL-50-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,
In this application, the EL is 36.81dBm.

Limit (dBm) = 36.81-50-10log10 (4.80) = -20 dBm

The Bottom Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
272.2	-72.21	H	22.1	-50.11	-20	-30.11
408.3	-86.65	H	24.4	-62.25	-20	-42.25
680.5	-93.05	H	27.5	-65.55	-20	-45.55
***	--	H		--	-20	
272.2	-78.61	V	22.1	-56.51	-20	-36.51
408.3	-88.63	V	24.4	-64.23	-20	-44.23
680.5	-93.73	V	27.5	-66.23	-20	-46.23
***	--	V		--	-20	

The Middle Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
310.2	-85.45	H	23.2	-62.25	-20	-42.25
465.3	-89.43	H	25.1	-64.33	-20	-44.33
775.5	-91.38	H	29.8	-61.58	-20	-41.58
***	--	H		--	-20	
310.2	-81.05	V	23.2	-57.85	-20	-37.85
465.3	-90.95	V	25.1	-65.85	-20	-45.85
775.5	-94.05	V	29.8	-64.25	-20	-44.25
***	--	V		--	-20	

The Top Channel

Frequency (MHz)	Reading level (dBm)	Antenna Polarization	Transd (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
347.88	-76.42	H	24.1	-52.32	-20	-32.32
521.81	-91.15	H	26.8	-64.35	-20	-44.35
869.69	-97.36	H	31.2	-66.16	-20	-46.16
***	--	H		--	-20	
347.93	-79.32	V	24.1	-55.22	-20	-35.22
695.95	-91.13	V	26.8	-64.33	-20	-44.33
869.83	-95.64	V	31.2	-64.44	-20	-44.44
***	--	V		--	-20	


***Note:**

*** means that the emission level is too low to be measured or at least 20 dB down than the limit.

For Receiver Spurious radiation

SCAN TABLE: "test Field(30M-1G) QP"

Short Description:		Field Strength(30M-1G)				
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	QuasiPeak	1.0 s	120 kHz	HL562 09

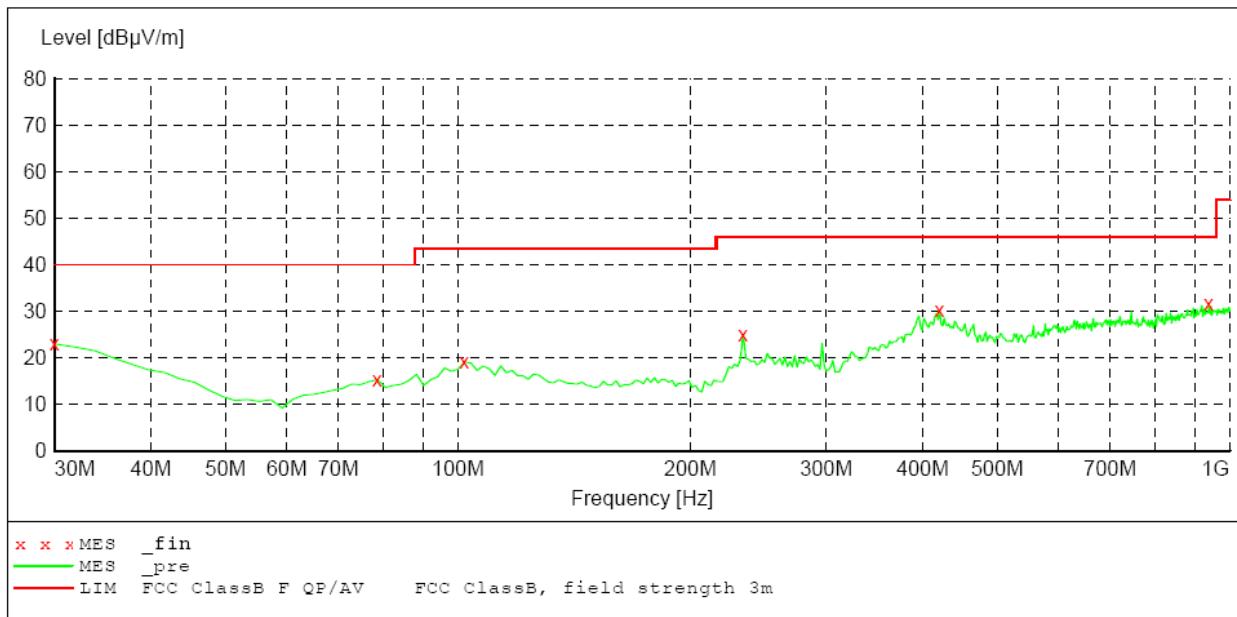


MEASUREMENT RESULT:

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
30.000000	23.00	21.2	40.0	17.0	QP	300.0	338.00	HORIZONTAL
78.590000	15.30	11.3	40.0	24.7	QP	300.0	232.00	HORIZONTAL
101.900000	19.10	14.6	43.5	24.4	QP	300.0	62.00	HORIZONTAL
234.100000	25.10	11.7	46.0	20.9	QP	100.0	52.00	HORIZONTAL
420.700000	30.20	20.2	46.0	15.8	QP	100.0	136.00	HORIZONTAL
939.700000	31.60	25.5	46.0	14.4	QP	100.0	114.00	HORIZONTAL

SCAN TABLE: "test Field(30M-1G)QP"

Short Description: Field Strength(30M-1G)
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 30.0 MHz 1.0 GHz 60.0 kHz QuasiPeak 1.0 s 120 kHz HL562 09

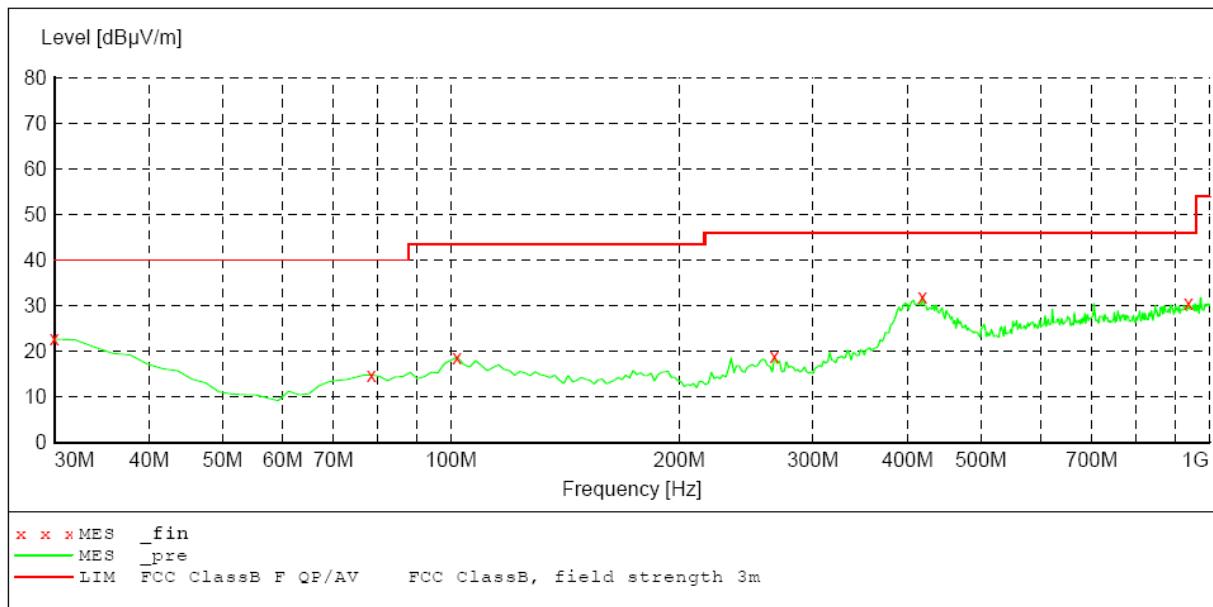**MEASUREMENT RESULT:**

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
30.000000	22.70	21.2	40.0	17.3	QP	100.0	303.00	VERTICAL
78.590000	14.80	11.3	40.0	25.2	QP	100.0	176.00	VERTICAL
101.900000	18.70	14.6	43.5	24.8	QP	100.0	347.00	VERTICAL
267.150000	18.80	12.7	46.0	27.2	QP	100.0	26.00	VERTICAL
418.700000	32.00	20.2	46.0	14.0	QP	100.0	197.00	VERTICAL
939.700000	30.60	25.5	46.0	15.4	QP	100.0	153.00	VERTICAL

4.4. Spurious Emission On Antenna Port

PROVISIONS APPLICABLE

The same as Section 6.1.


MEASUREMENT PROCEDURE

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. RBW 100 kHz, VBW 300 kHz,

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

During test process, the EUT worked by a external regulated power supply DC 7.4V.

TEST SETUP BLOCK DIAGRAM

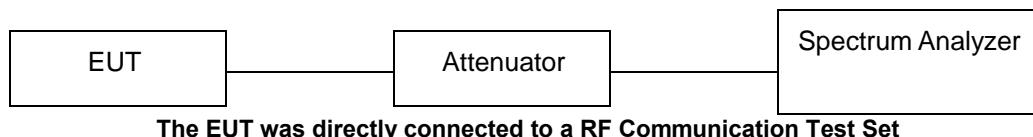

TEST RESULTS:

FCC Part 22.359, 74.462, 80.211, 90.210 and RSS Gen, RSS 119 Issue 9 section 5.8.1 (25 kHz bandwidth only):

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

Low: $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (4.25) = 49.28 \text{ dB}$

High: $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (4.78) = 49.79 \text{ dB}$

FCC Part 90.210 (12.5 kHz Bandwidth only):

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f d in kHz) of more than 12.5 kHz at least:


Low: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.28) = 56.31 \text{ dB}$

High: $50 + 10 \log (P_{\text{watts}}) = 50 + 10 \log (4.80) = 56.81 \text{ dB}$


Note: In general, the worse case attenuation requirement shown above was applied.

For 12.5 KHz

Product : Two-way Radio	Test Mode : 136 MHz
Test Item : Spurious Emission on Antenna Port	Temperatu: 25 °C
Test Voltaç: DC 7.4V (External Power Supply)	Humidity : 56%RH
Test Resul: PASS	

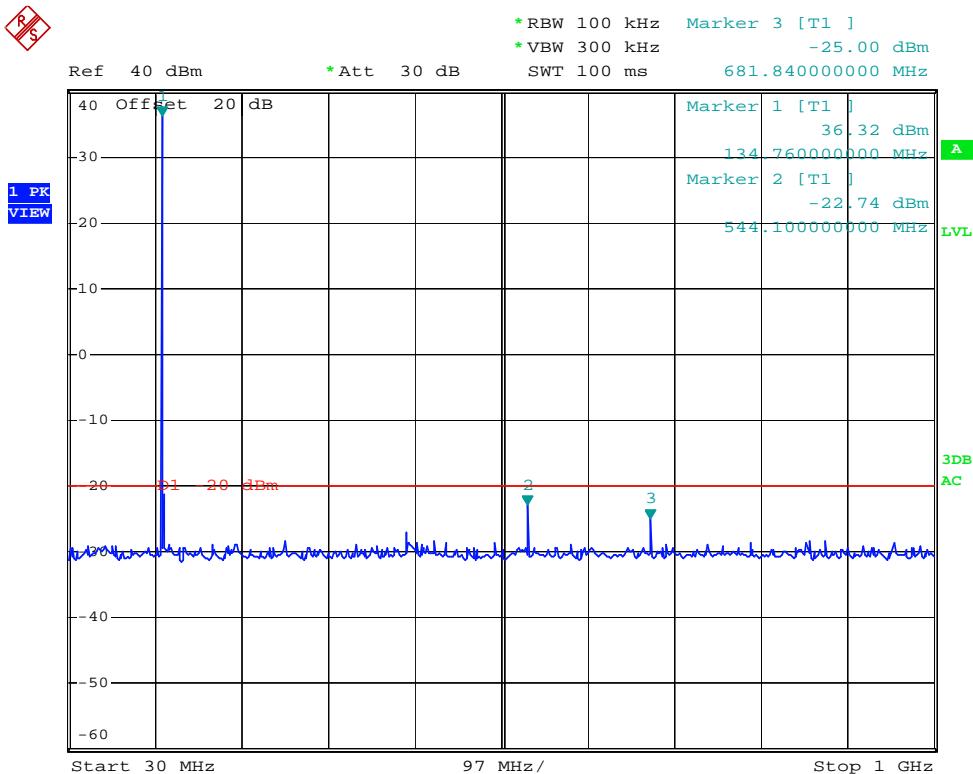

Date: 25.JAN.2010 19:21:56

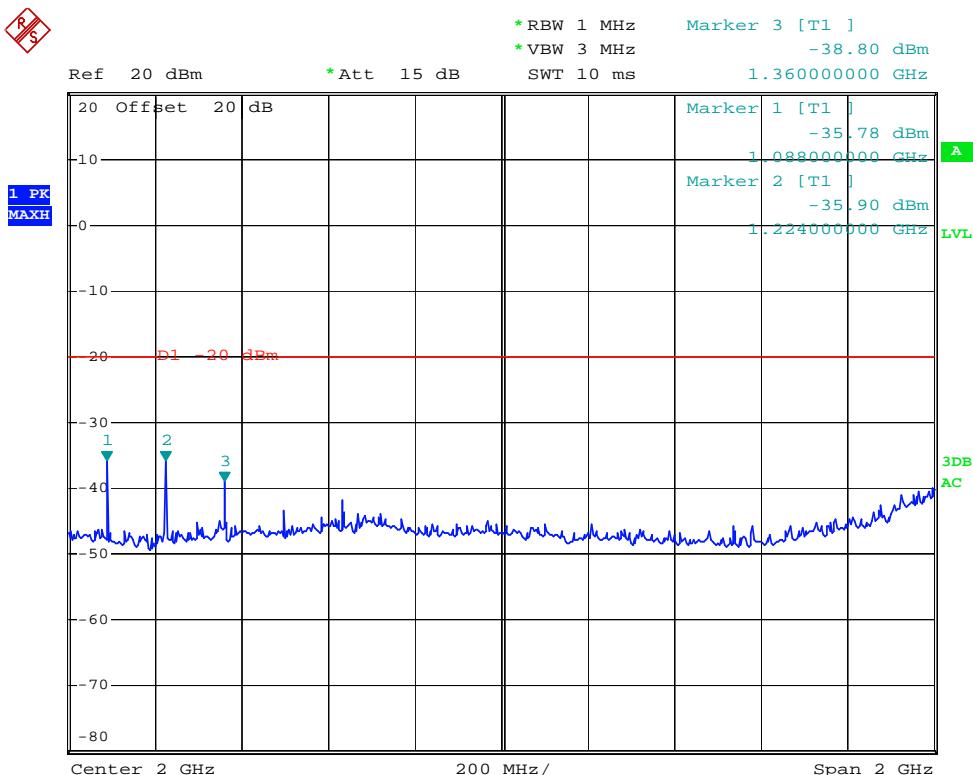

Date: 25.JAN.2010 19:30:05

Product : Two-way Radio


Test Mode: 155 MHz

Test Item : Spurious Emission on Antenna Port


Temperatu: 25 °C

Test Voltage: DC 7.4V (External Power Supply)

Humidity : 56%RH

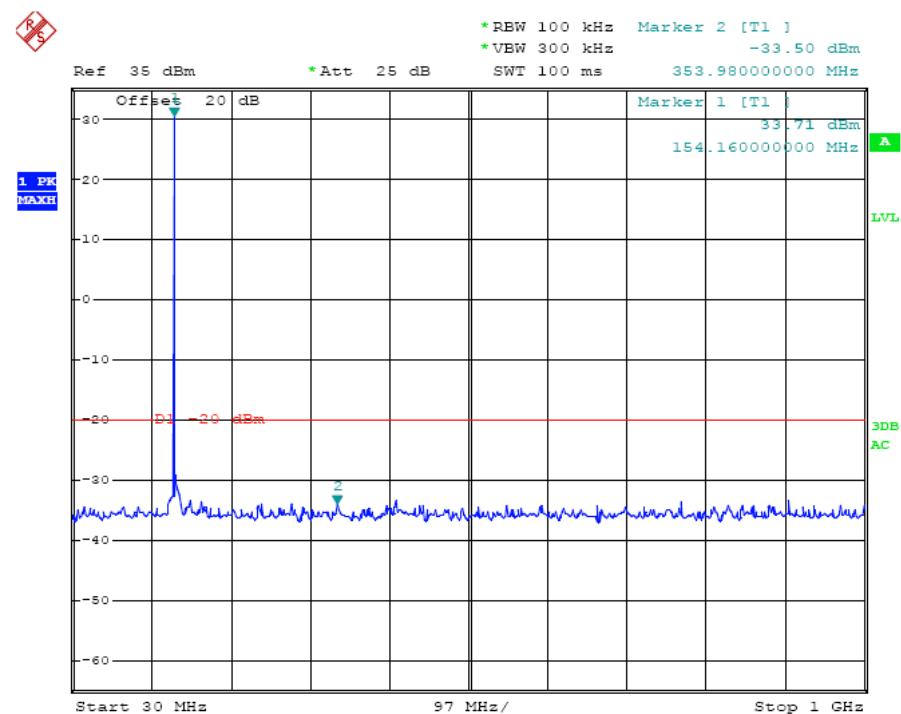Test Result: **PASS**

Date: 25.JAN.2010 19:24:25

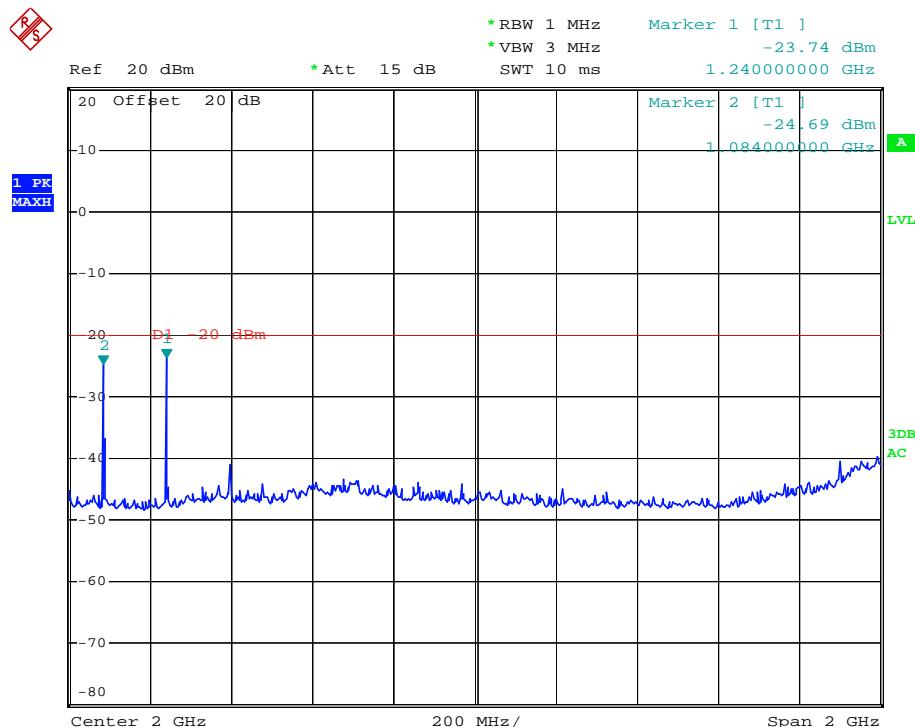

Date: 25.JAN.2010 19:30:32

Product : Two-way Radio


Test Mode: 174 MHz

Test Item : Spurious Emission on Antenna Port


Temperatu: 25 °C

Test Voltaç: DC 7.4V (External Power Supply)

Humidity : 56%RH

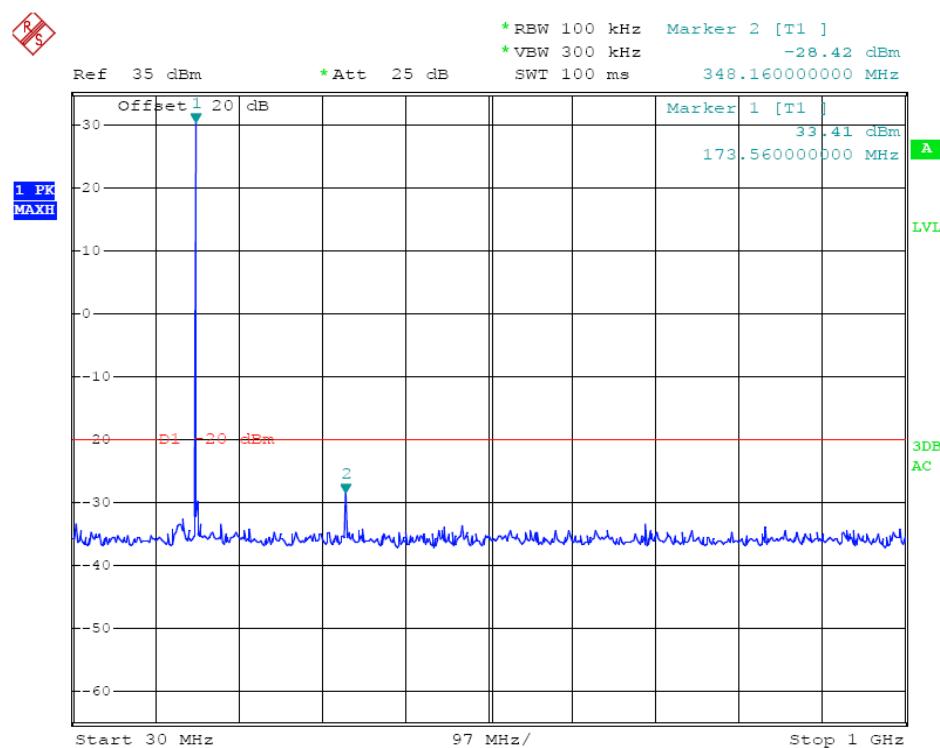Test Result: **PASS**

Date: 25.JAN.2010 19:27:54

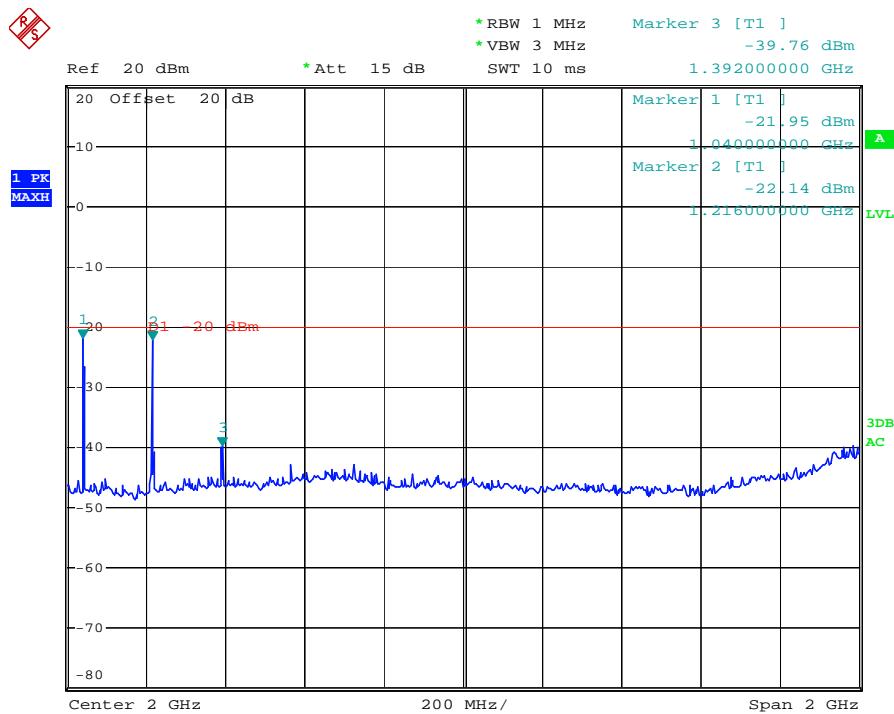

Date: 25.JAN.2010 19:31:03

For 25 KHz

Product : Two-way Radio


Test Mode : 136 MHz

Test Item : Spurious Emission on Antenna Port


Temperatu: 25 °C

Test Voltag: DC 7.4V (External Power Supply)

Humidity : 56%RH

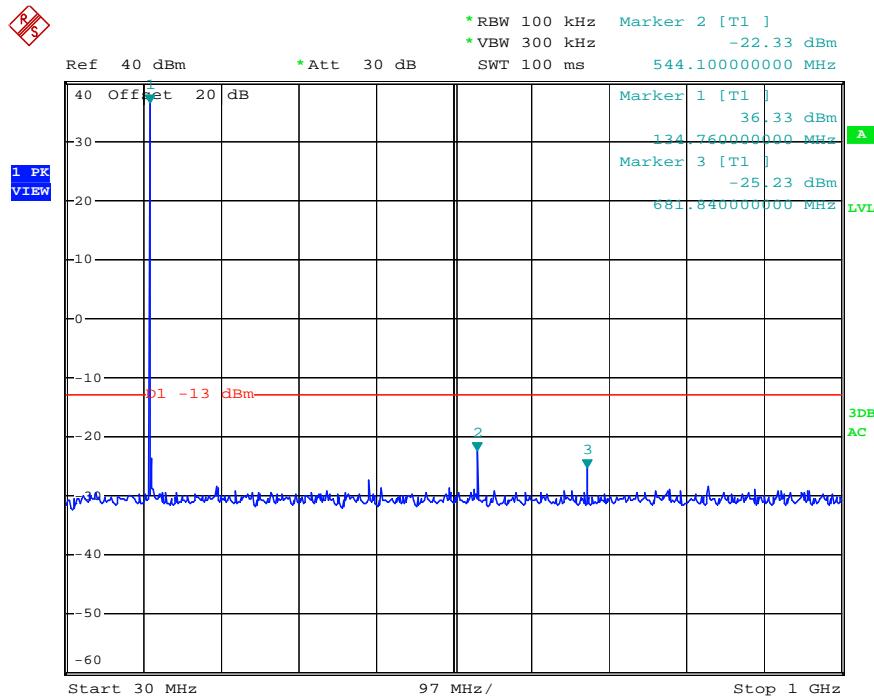Test Result: **PASS**

Date: 25.JAN.2010 19:25:18

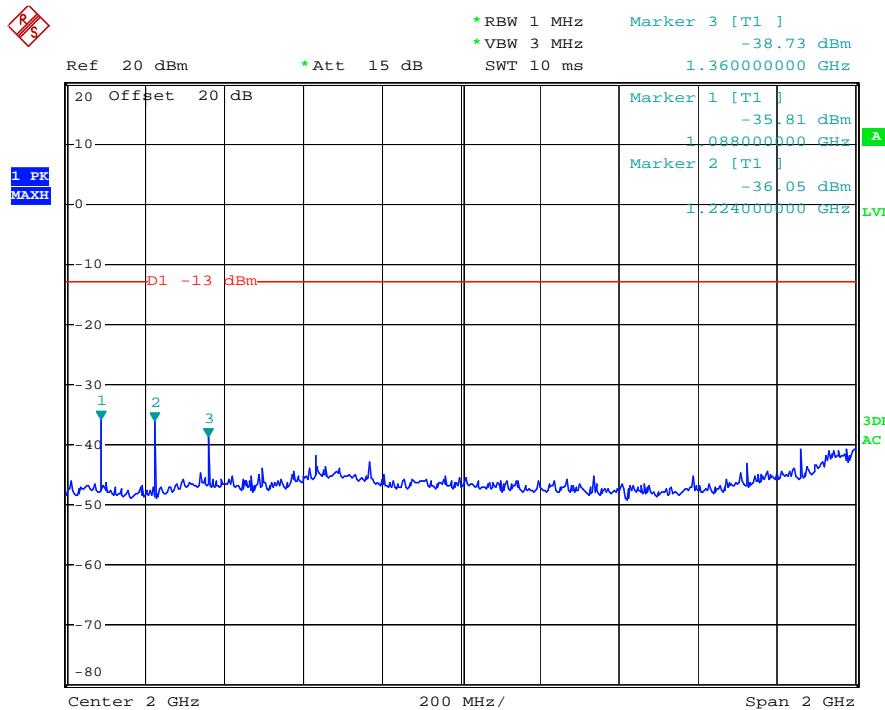

Date: 25.JAN.2010 19:29:25

Product : Two-way Radio


Test Mode: 155 MHz

Test Item : Spurious Emission on Antenna Port


Temperatu: 25 °C

Test Voltage: DC 7.4V (External Power Supply)

Humidity : 56%RH

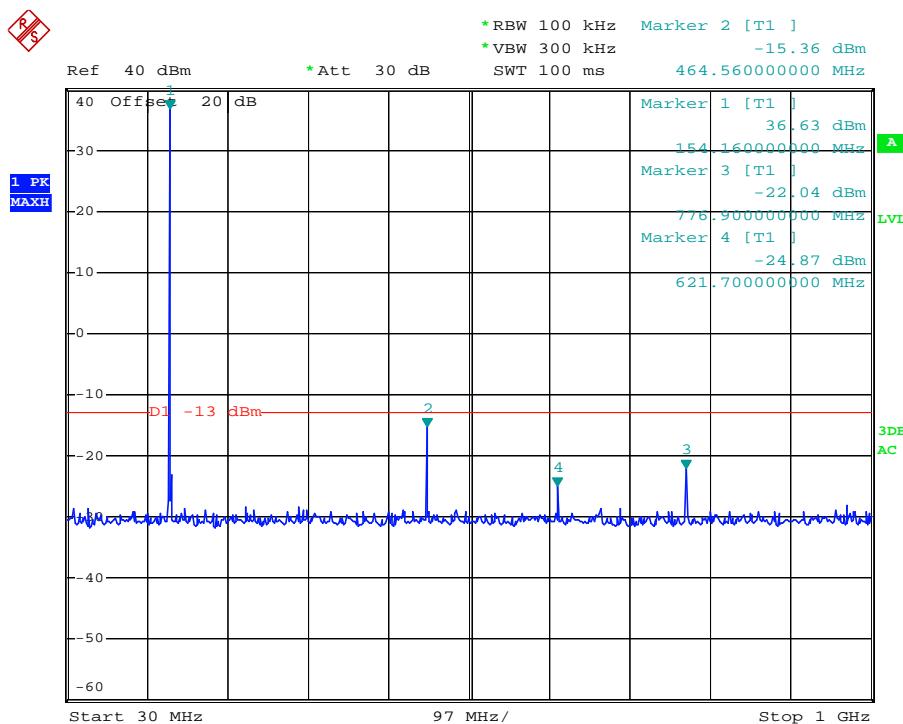Test Result: **PASS**

Date: 25.JAN.2010 19:25:52

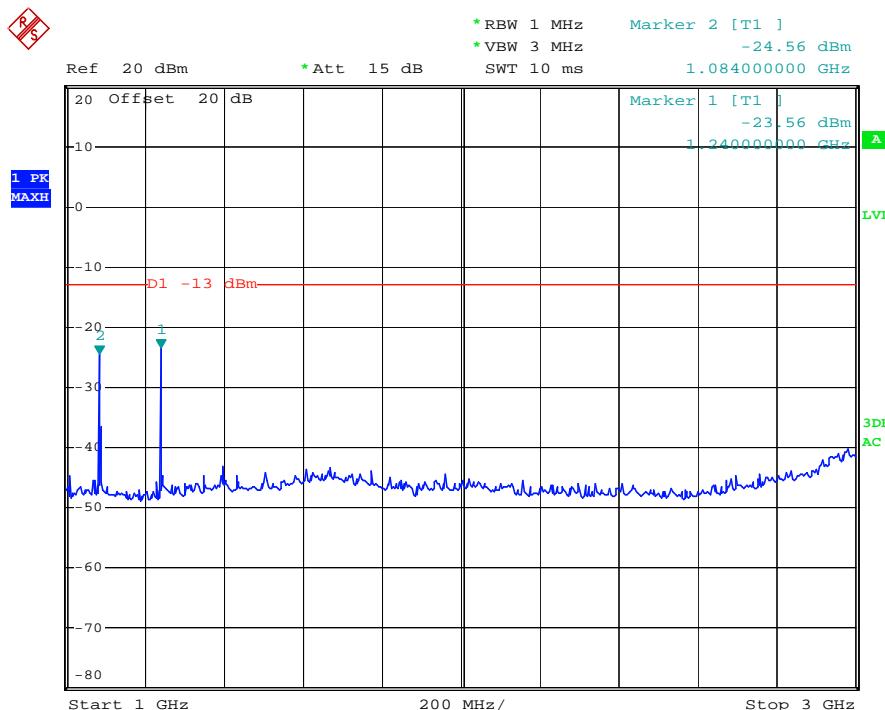

Date: 25.JAN.2010 19:28:55

Product : Two-way Radio


Test Mode: 174 MHz

Test Item : Spurious Emission on Antenna Port


Temperatu: 25 °C

Test Voltage: DC 7.4V (External Power Supply)

Humidity : 56%RH

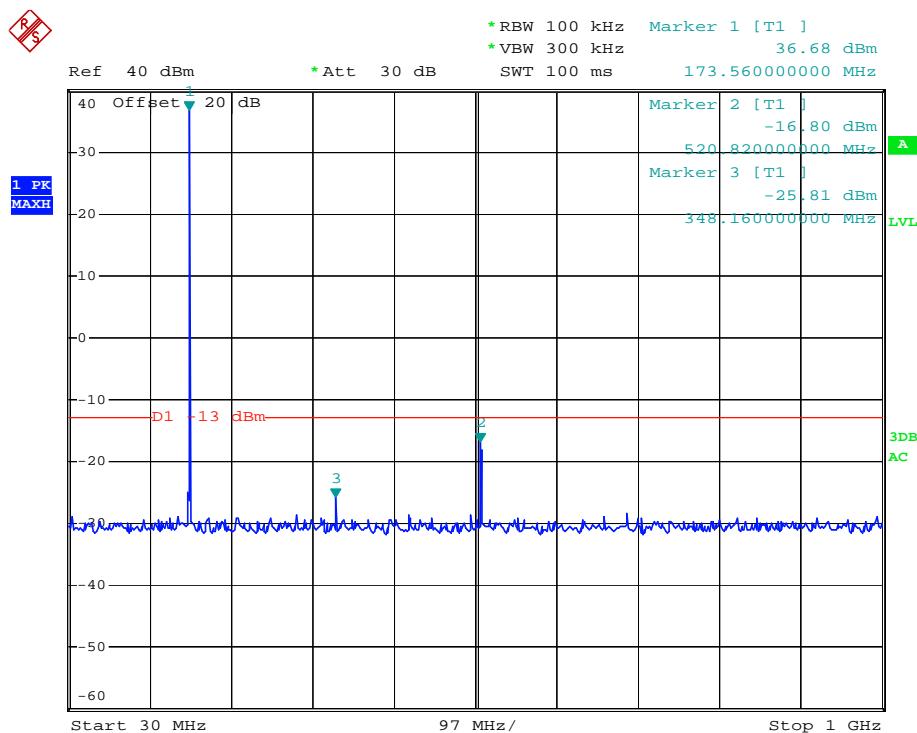Test Result: **PASS**

Date: 25.JAN.2010 19:26:24

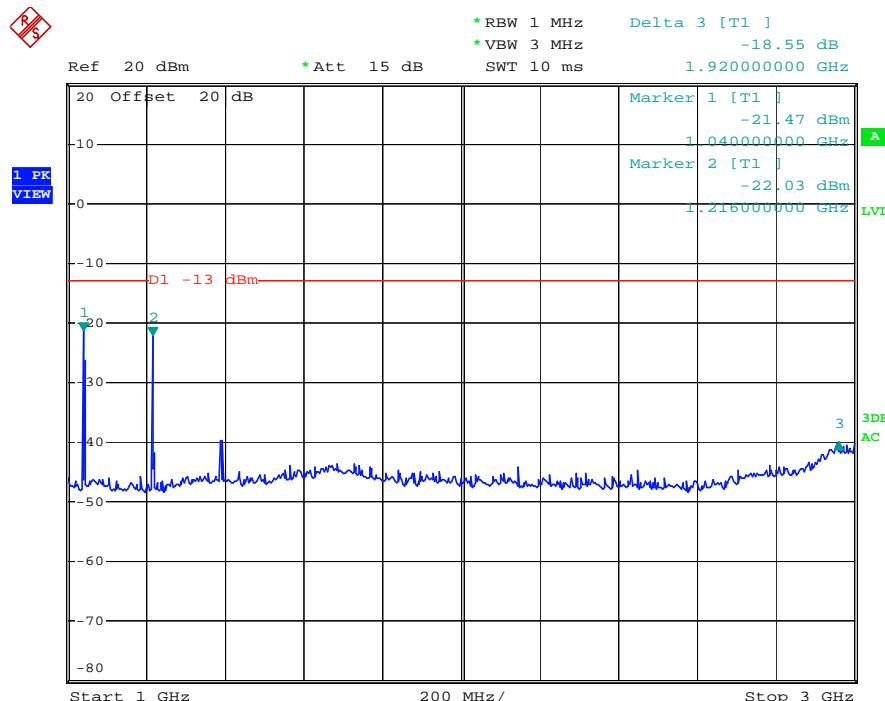

Date: 25.JAN.2010 19:27:15

4.5. Modulation Characteristics

PROVISIONS APPLICABLE

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.


MEASUREMENT METHOD

Modulation Limit

- 1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2). Repeat step 1 with input frequency changing to 300, 1004, and 2500Hz in sequence.

Audio Frequency Response

- 1). Configure the EUT as shown in figure 1.
- 2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0dB).
- 3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- 4) Audio Frequency Response = $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$.

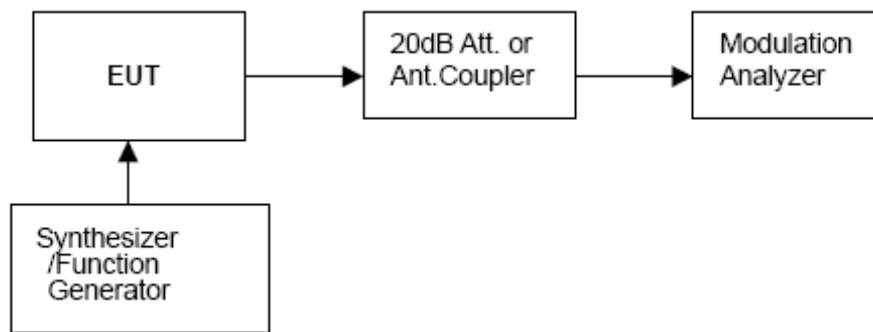


TEST RESULTS:


a). Modulation Limit:

25 KHz Channel Separation

Modulation Level(dB)	Peak Freq. Deviation At 300 Hz(KHz)	Peak Freq. Deviation At 1004 Hz(KHz)	Peak Freq. Deviation At 1500 Hz(KHz)	Peak Freq. Deviation At 2500 Hz(KHz)
-20	0.47	0.97	1.31	1.74
-15	0.61	1.49	2.09	2.83
-10	0.90	2.54	3.60	3.49
-5	1.30	3.53	3.97	3.48
0	1.51	3.72	3.99	3.57
+5	1.64	3.94	4.08	3.56
+10	1.77	4.07	4.09	3.59
+15	1.90	4.19	4.10	3.59
+20	2.07	4.28	4.12	3.58

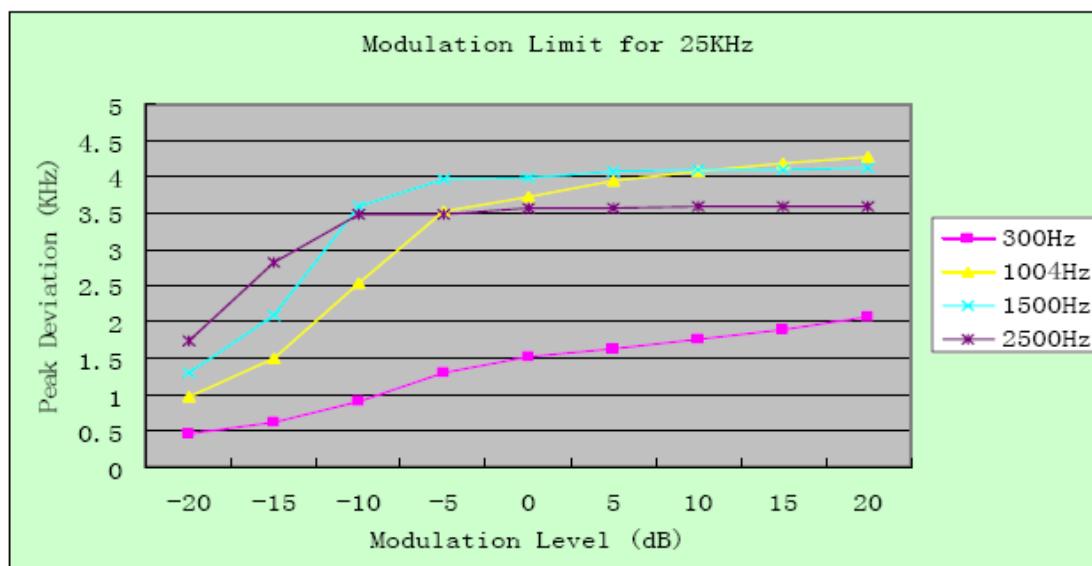


Modulation Level(dB)	12.5 KHz Channel Separation			
	Peak Freq. Deviation At 300 Hz(KHz)	Peak Freq. Deviation At 1004 H(KHz)	Peak Freq. Deviation At 1500 Hz(KHz)	Peak Freq. Deviation At 2500 Hz(KHz)
-20	0.38	0.62	0.79	1.01
-15	0.45	0.88	1.17	1.58
-10	0.59	1.39	1.96	1.92
-5	0.78	1.93	2.17	1.93
0	0.88	1.99	2.19	1.93
+5	0.96	2.08	2.19	1.92
+10	1.04	2.16	2.20	1.92
+15	1.12	2.23	2.21	1.93
+20	1.23	2.29	2.21	1.92

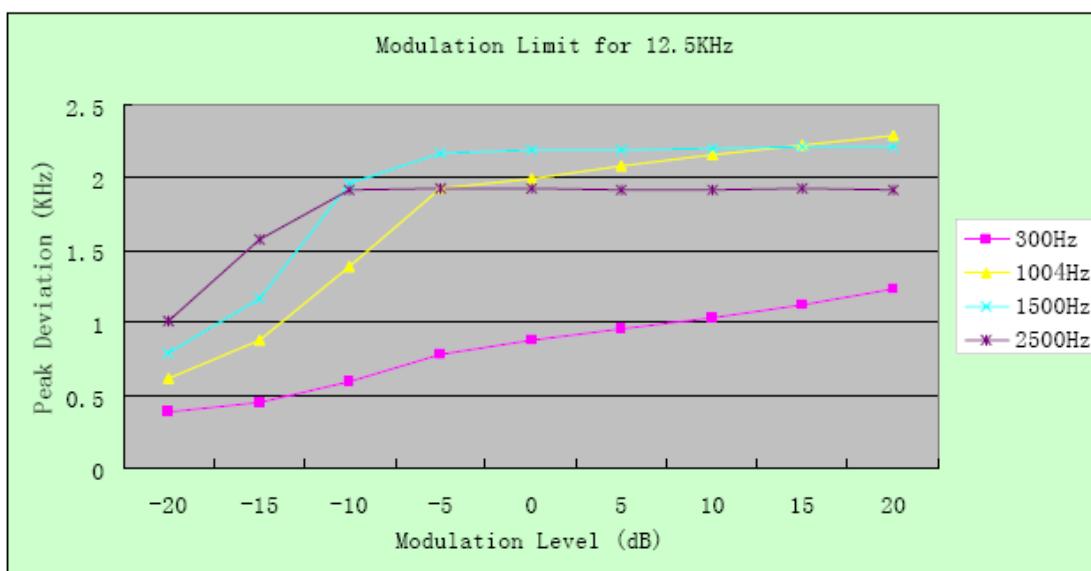


b). Audio Frequency Response:

Note:

- 1 Not applicable to new standard. However, tests are conducted under FCC's recommendation.
- 2 The Audio Frequency Response is identical for 12.5 KHz and 25 KHz channel separation

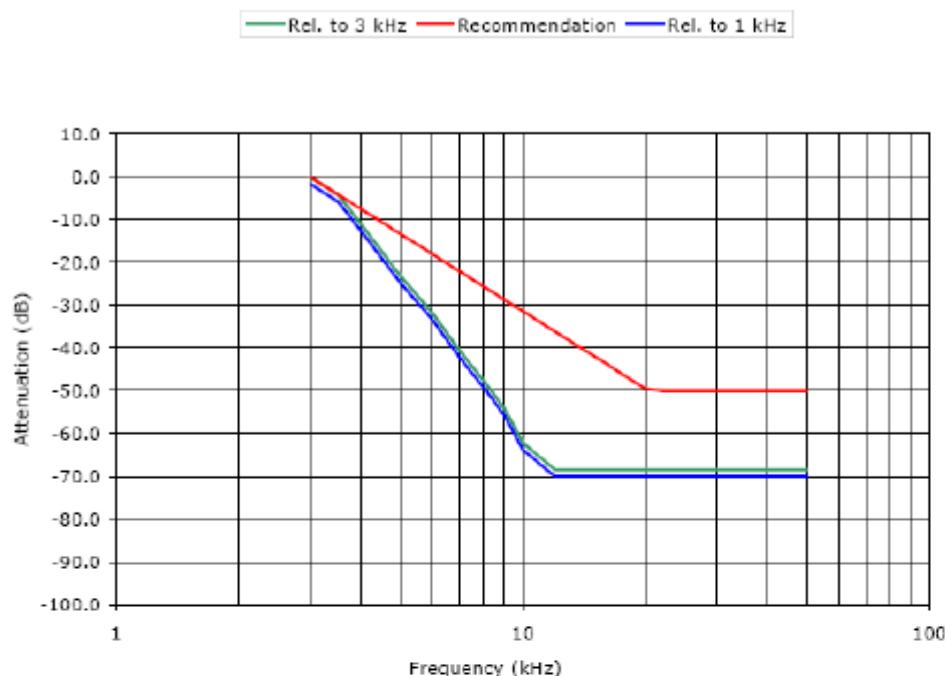

12.5KHz Channel Separation

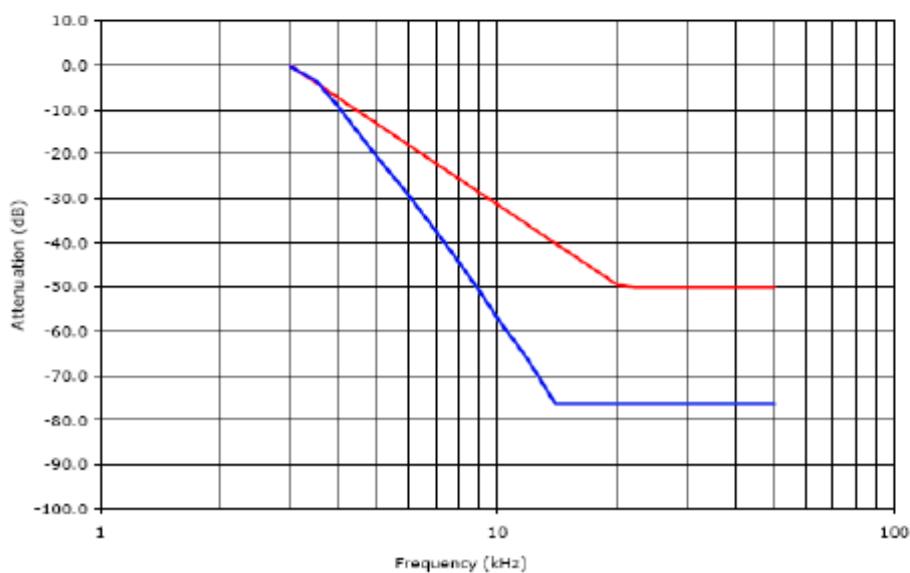

25 KHz Channel Separation

4.6. Frequency Stability Measurement


PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055 (a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +60°C centigrade.
- b). According to FCC Part 2 Section 2.1055 (a)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to §90.213, the frequency stability limit is 2.5 ppm for 12.5KHz channel separation and 5 ppm for 25KHz channel separation.

MEASUREMENT PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer ESI 26. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to an DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

TEST SETUP BLOCK DIAGRAM

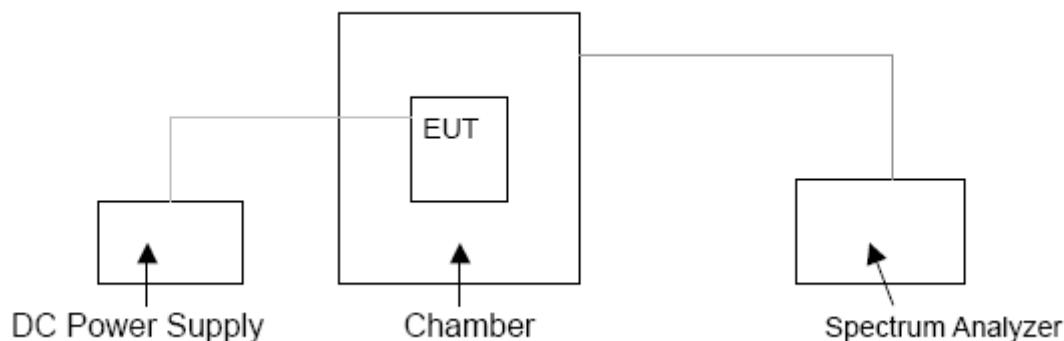

TEST RESULTS:

a. Frequency stability versus input voltage (battery operation end point voltage is 6.71 V)

For 25 KHz:

Channel	Reference Frequency (MHz)	Frequency Measured at end point	Frequency Deviation (%)	Limit (%)
01	136.10000	136.10044	0.00030	0.0005
02	155.10000	155.10036	0.00023	0.0005
03	173.90000	173.90040	0.00023	0.0005

For 12.5 KHz:

Channel	Reference Frequency (MHz)	Frequency Measured at end point	Frequency Deviation (%)	Limit (%)
04	136.10000	136.10025	0.00018	0.00025
05	155.10000	155.10021	0.00014	0.00025
06	173.90000	173.90030	0.00017	0.00025

b. Frequency stability versus ambient temperature

For 25 KHz:

The Bottom Channel

Reference Frequency: 136.10000 MHz			Limit: 0.0005%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapse (10 minutes)	%
(MHz)	%		
50	7.4V	136.10040	0.00029
40	7.4V	136.10026	0.00019
30	7.4V	136.10020	0.00015
20	7.4V	136.10000	0.00000
10	7.4V	136.10020	0.00015
0	7.4V	136.10030	0.00022
-10	7.4V	136.10040	0.00029
-20	7.4V	136.10045	0.00033
-30	7.4V	136.10045	0.00033

The Middle Channel

Reference Frequency: 155.10000 MHz			Limit: 0.0005%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapse (10 minutes)	%
(MHz)	%		
50	7.4V	155.10030	0.00019
40	7.4V	155.10025	0.00016
30	7.4V	155.10012	0.00008
20	7.4V	155.10000	0.00000
10	7.4V	155.10010	0.00008
0	7.4V	155.10020	0.00013
-10	7.4V	155.10025	0.00016
-20	7.4V	155.10030	0.00019
-30	7.4V	155.10030	0.00019

The Top Channel

Reference Frequency: 173.90000 MHz			Limit: 0.0005%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapse (10 minutes)	%
(MHz)	%		
50	7.4V	173.90045	0.00026
40	7.4V	173.90035	0.00020
30	7.4V	173.90020	0.00012
20	7.4V	173.90000	0.00000
10	7.4V	173.90010	0.00006
0	7.4V	173.90020	0.00012
-10	7.4V	173.90035	0.00020
-20	7.4V	173.90040	0.00023
-30	7.4V	173.90040	0.00023

For 12.5 KHz:

The Bottom Channel

Reference Frequency: 136.10000 MHz			Limit: 0.00025%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapse (10 minutes)	%
(MHz)	%		
50	7.4V	136.10013	0.00010
40	7.4V	136.10012	0.00009
30	7.4V	136.10010	0.00007
20	7.4V	136.10000	0.00000
10	7.4V	136.10010	0.00007
0	7.4V	136.10012	0.00009
-10	7.4V	136.10012	0.00009
-20	7.4V	136.10015	0.00011
-30	7.4V	136.10015	0.00011

The Middle Channel

Reference Frequency: 155.10000 MHz			Limit: 0.00025%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapsed (10 minutes)	%
50	7.4V	155.10013	0.00008
40	7.4V	155.10011	0.00007
30	7.4V	155.10010	0.00007
20	7.4V	155.10000	0.00000
10	7.4V	155.10011	0.00007
0	7.4V	155.10012	0.00008
-10	7.4V	155.10013	0.00008
-20	7.4V	155.10015	0.00010
-30	7.4V	155.10015	0.00010

The Top Channel

Reference Frequency: 173.90000 MHz			Limit: 0.00025%
Environment Temperature (°C)	Power Supply (DC)	Frequency deviation measured with time	
		Elapsed (10 minutes)	%
50	7.4V	173.90014	0.00008
40	7.4V	173.90012	0.00007
30	7.4V	173.90012	0.00007
20	7.4V	173.90000	0.00000
10	7.4V	173.90010	0.00006
0	7.4V	173.90012	0.00007
-10	7.4V	173.90012	0.00007
-20	7.4V	173.90015	0.00009
-30	7.4V	173.90015	0.00009

4.7. Conducted Output Power

PROVISIONS APPLICABLE

Per FCC «2.1046 and «90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

TEST PROCEDURE


Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 20 dB attenuator.

Measurement with Spectrum Analyzer ESI 26 conducted, external power supply with 13.6V stabilized supply voltage.

TEST SETUP BLOCK DIAGRAM




The EUT was directly connected to a RF Communication Test Set

TEST RESULTS:


For 25 KHz

Freq.(MHz)	Measurement (dBm)	FCC Limit
136.000	36.28	Varies

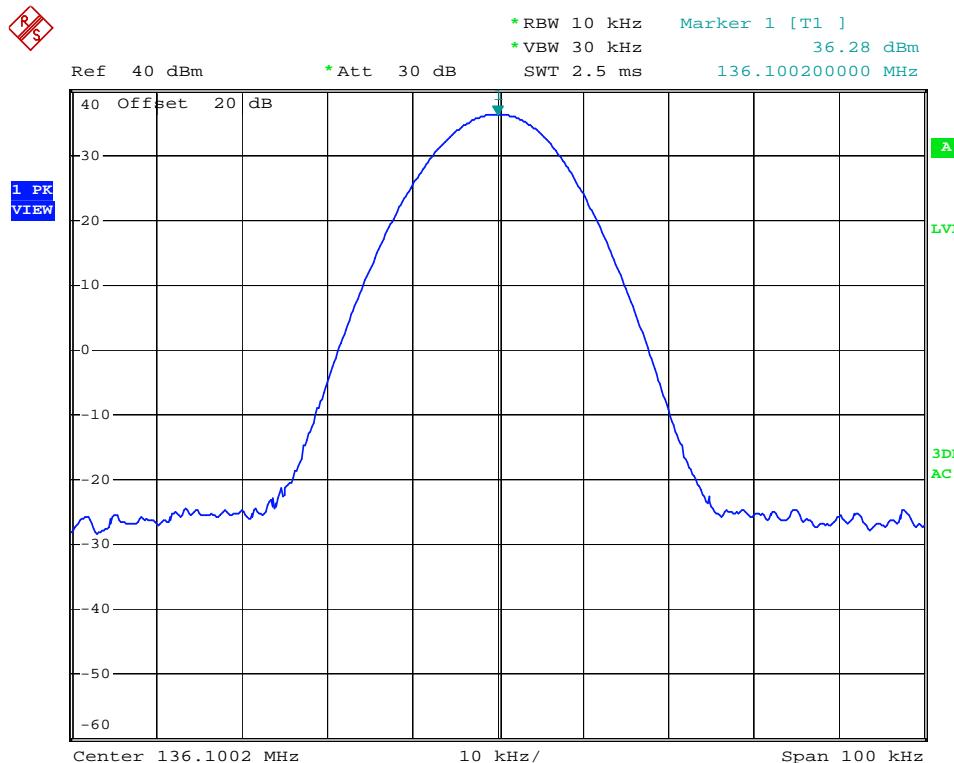


Date: 25.JAN.2010 18:47:50

Freq. (MHz)	Measurement (dBm)	FCC Limit
155.000	36.69	Varies

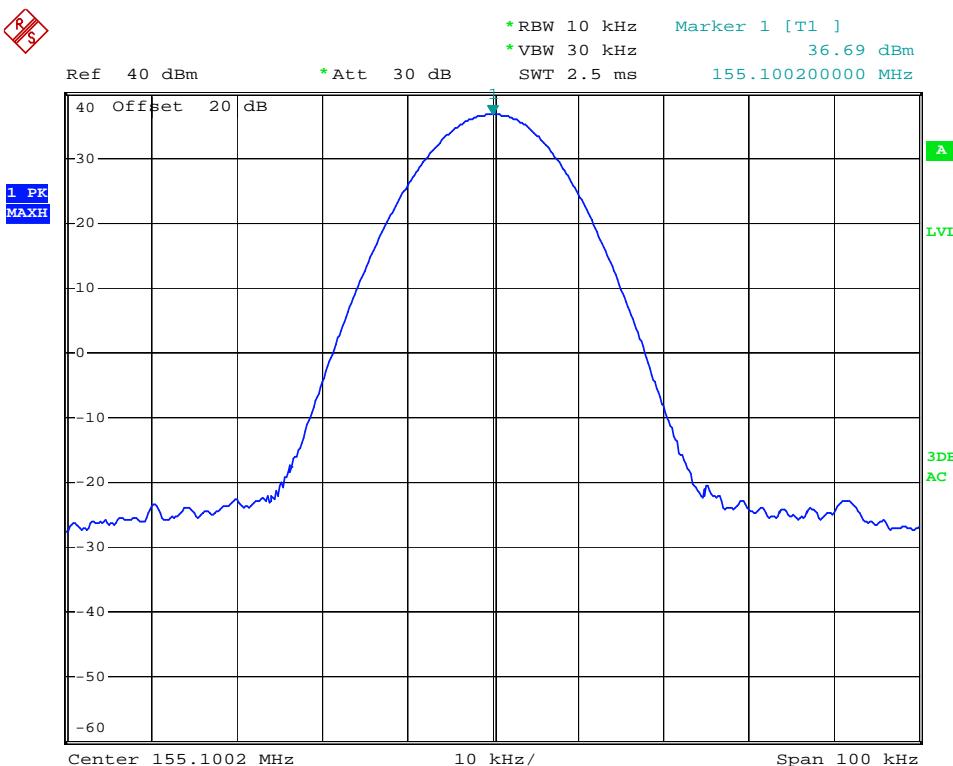

Date: 25.JAN.2010 18:48:42


Freq. (MHz)	Measurement (dBm)	FCC Limit
174.000	36.79	Varies

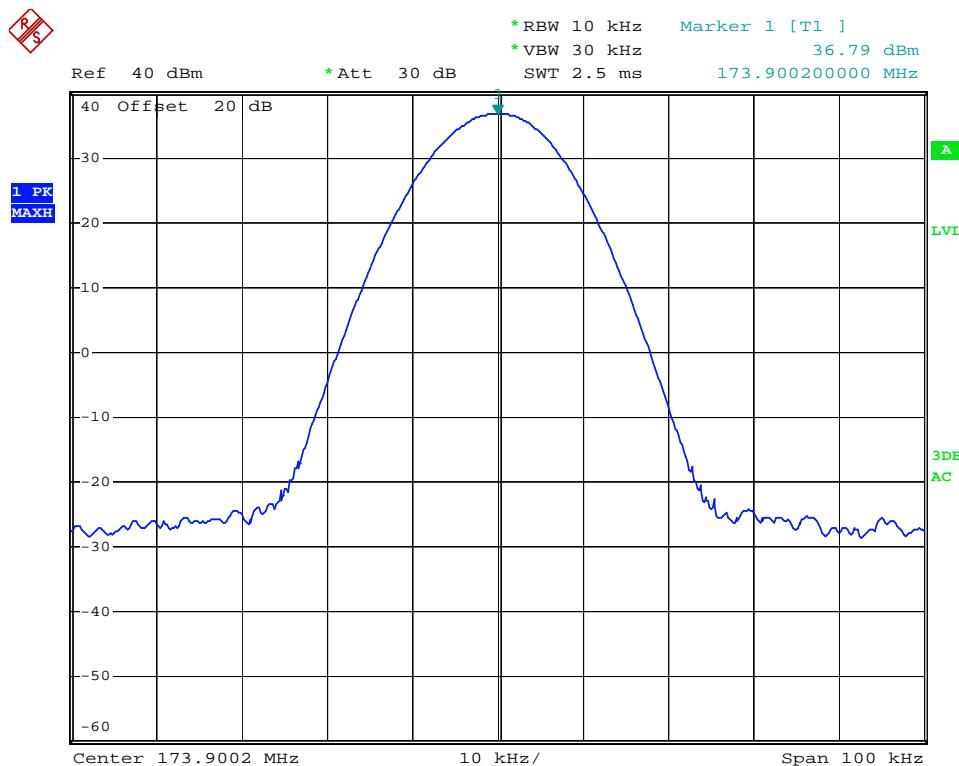

Date: 25.JAN.2010 18:49:14


For 12.5 KHz

Freq. (MHz)	Measurement (dBm)	FCC Limit
136.000	36.31	Varies

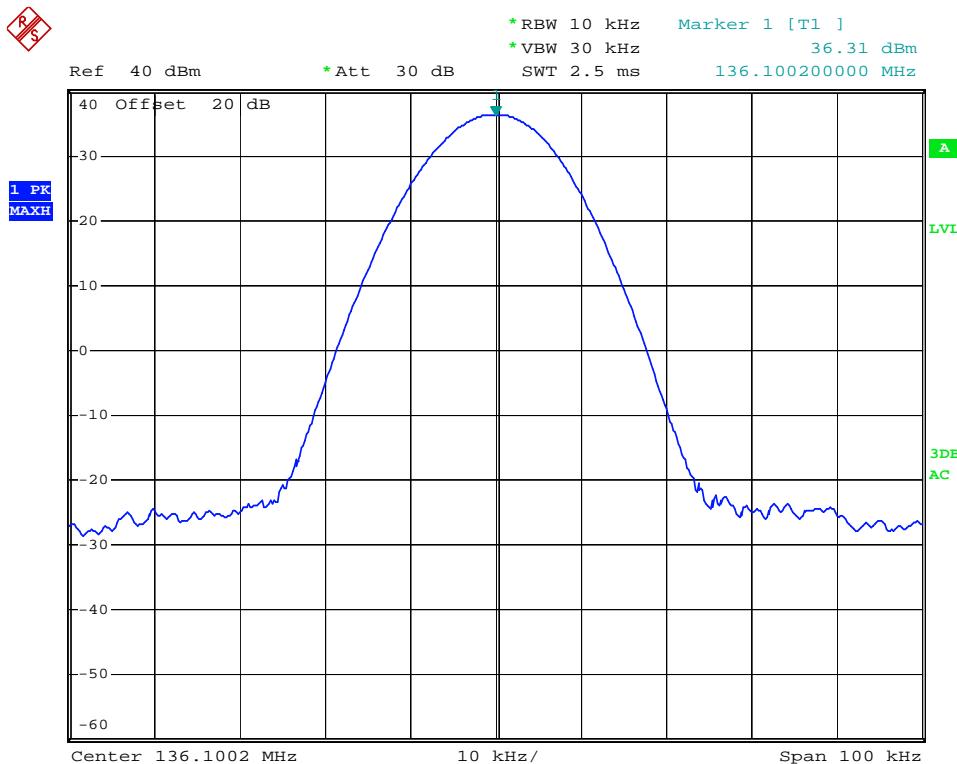


Date: 25.JAN.2010 18:50:27

Freq. (MHz)	Measurement (dBm)	FCC Limit
155.000	36.72	Varies

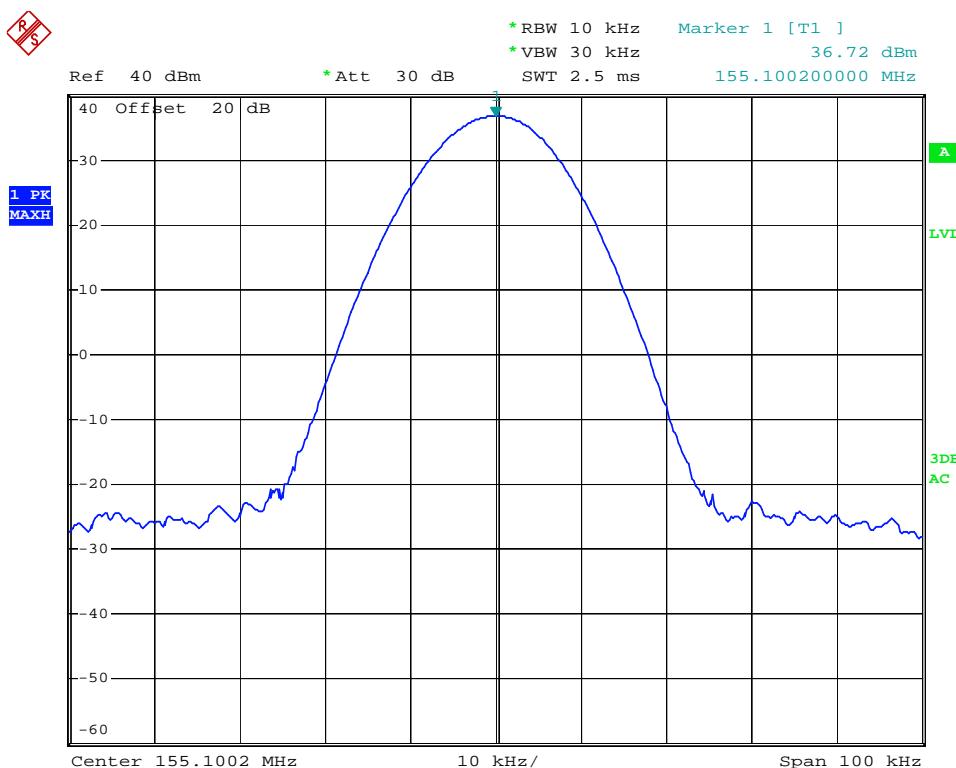

Date: 25.JAN.2010 18:50:56

Freq. (MHz)	Measurement (dBm)	FCC Limit
174.000	36.81	Varies

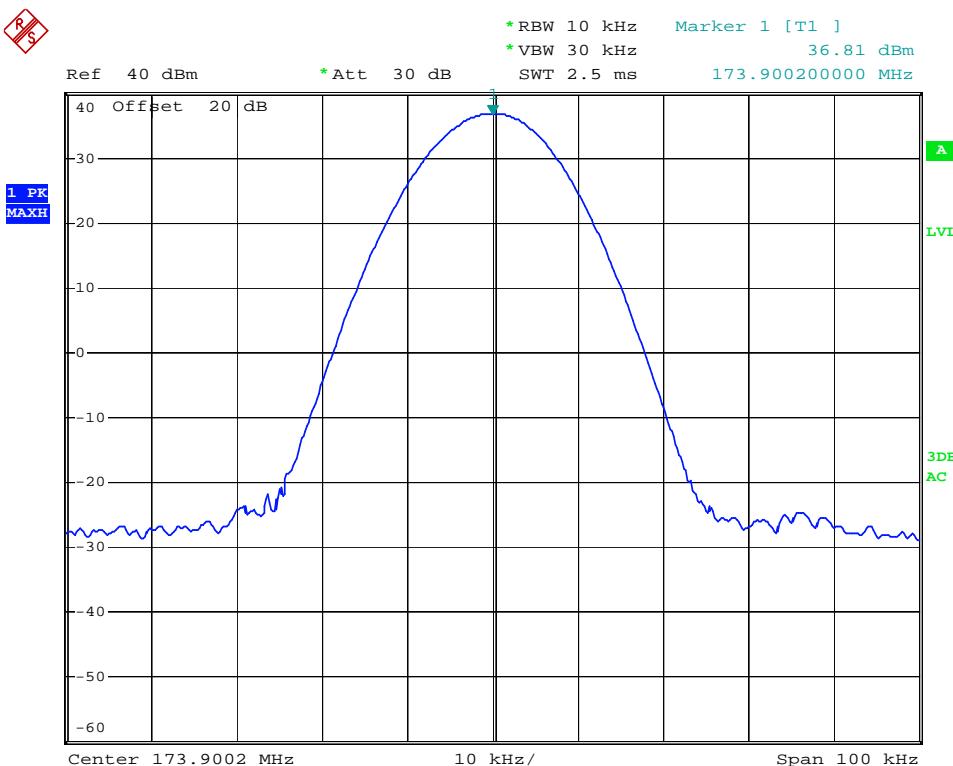

Date: 25.JAN.2010 18:51:21

4.8. Transmitter Frequency Behavior

PROVISIONS APPLICABLE

Section 90.214


The transient periods are given in following table:

Frequency Range	30 MHz to 300 MHz	Above 300 MHz to 500 MHz	Above 500 MHz to 1000MHz
t ₁ (ms)	5.0	10.0	20.0
t ₂ (ms)	20.0	25.0	50.0
t ₃ (ms)	5.0	10.0	10.0

TEST METHOD

TIA/EIA-603 2.2.19


TEST SETUP BLOCK DIAGRAM

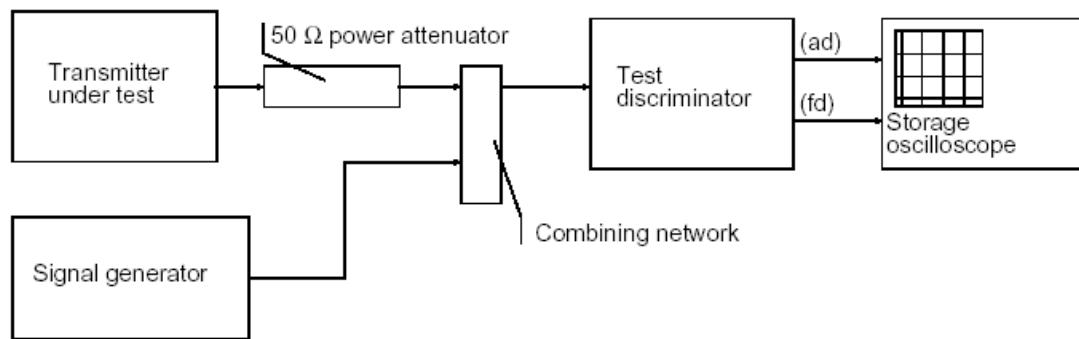


TEST RESULTS:

Please refer to the following plots.


Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----Off – On

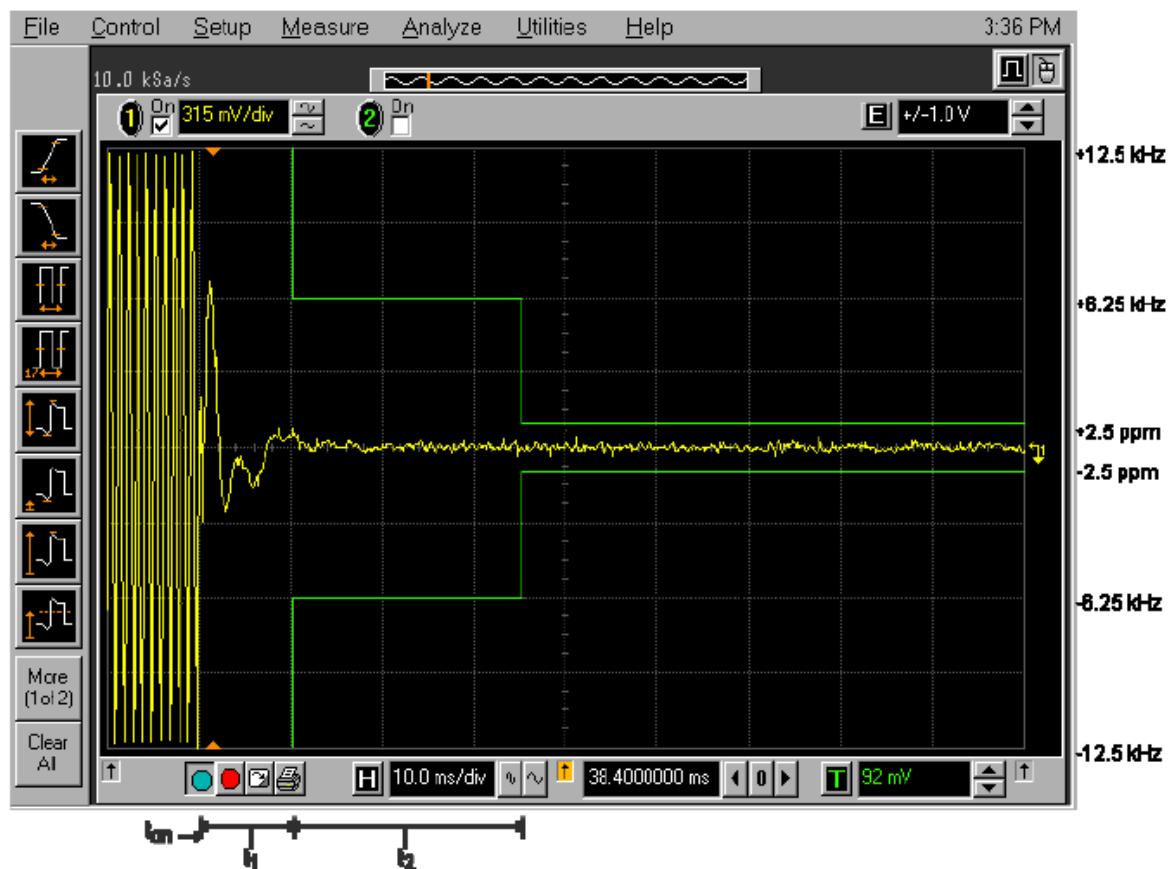


Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----On - Off

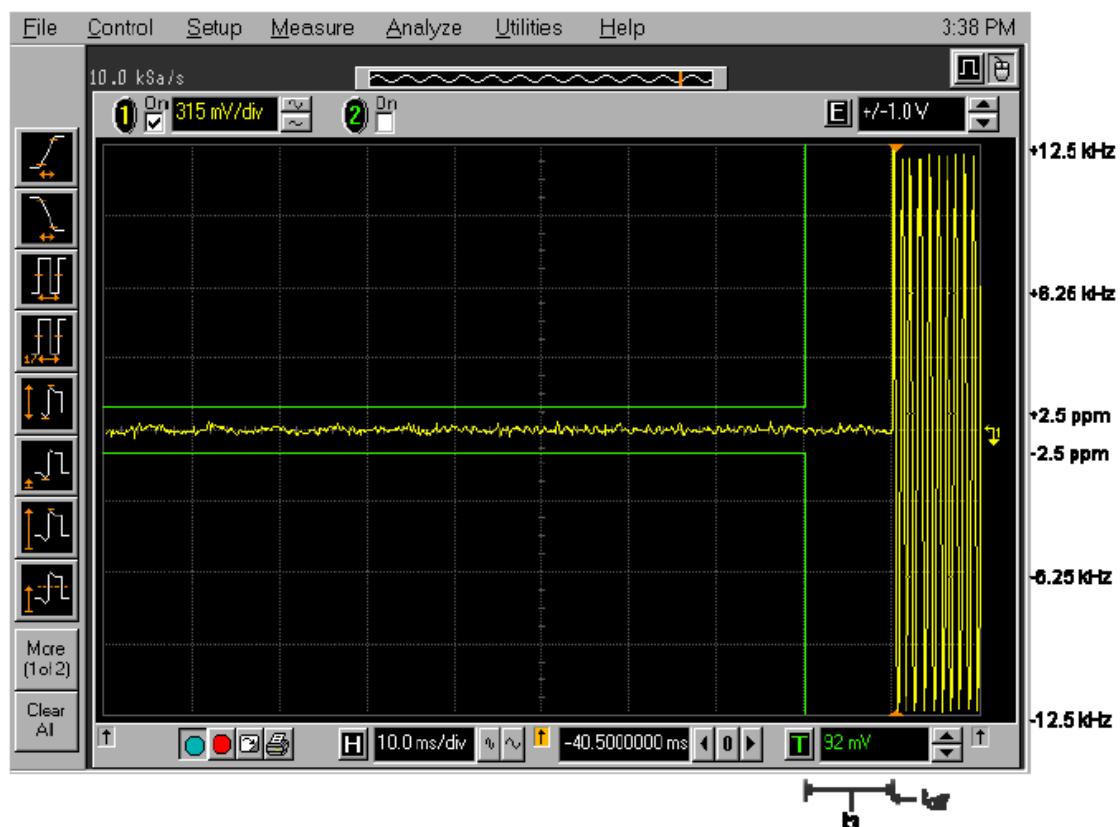

Transmitter Frequency Behaviour @ 25 KHz Channel Separation-----Off – On

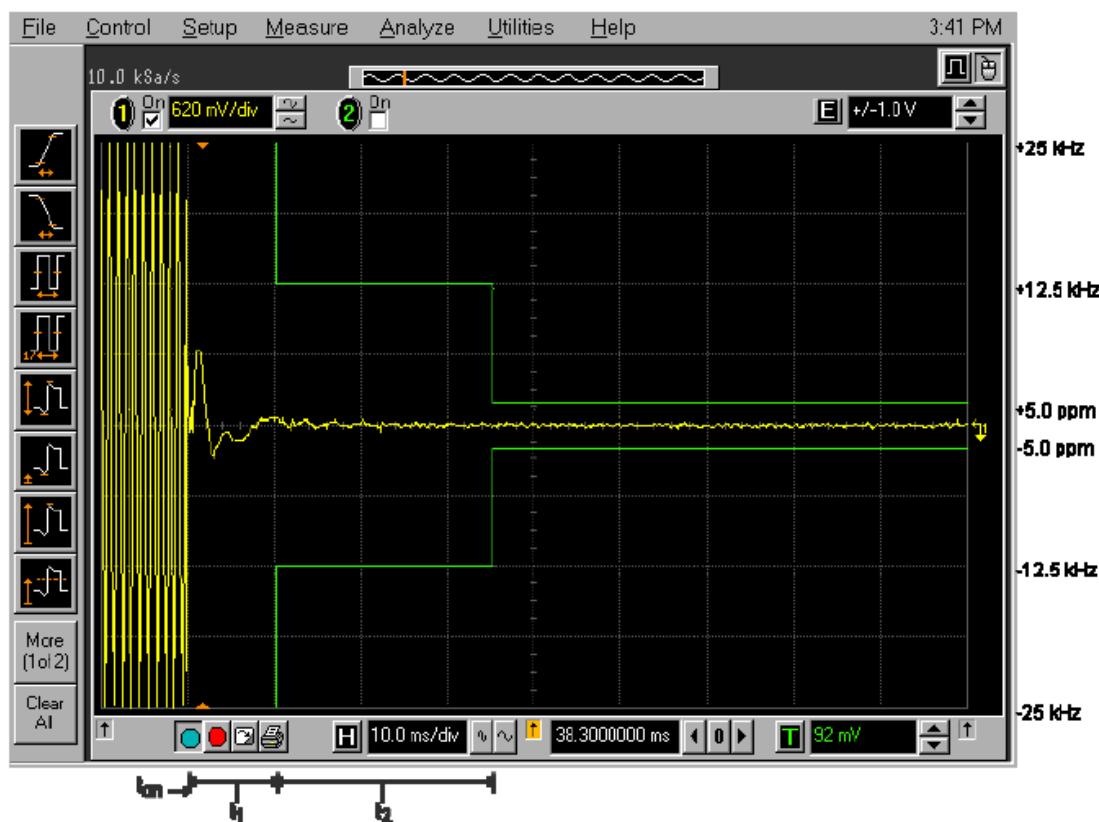

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----On – Off

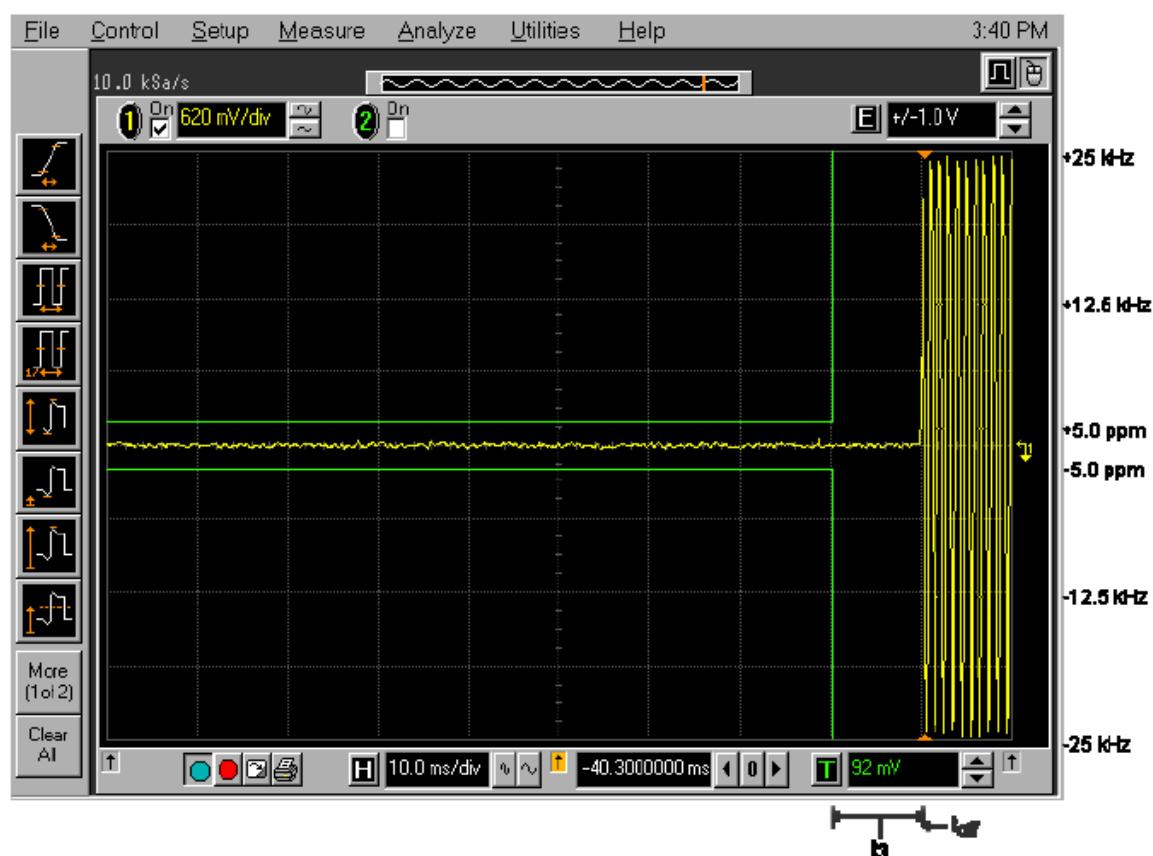

5. Test Setup Photos of the EUT




6. External and Internal Photos of the EUT

External Photos



Distance between device and user body

Internal Photos

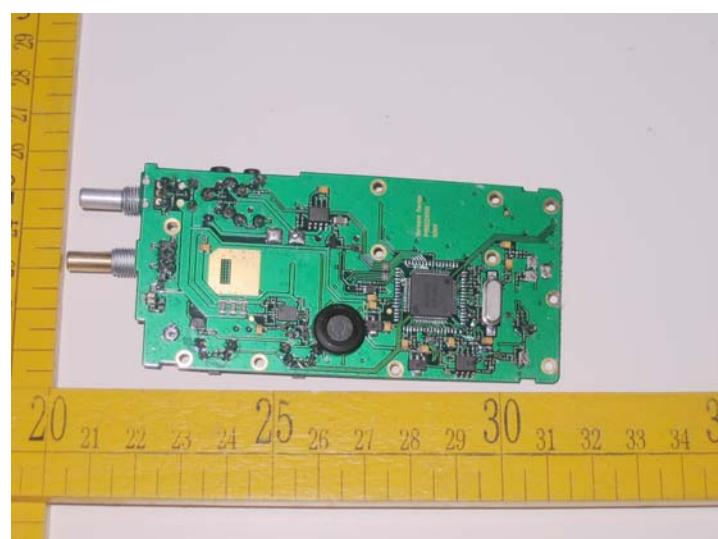

.....**End of Report**.....