



15MHz Channel Bandwidth


Low Channel

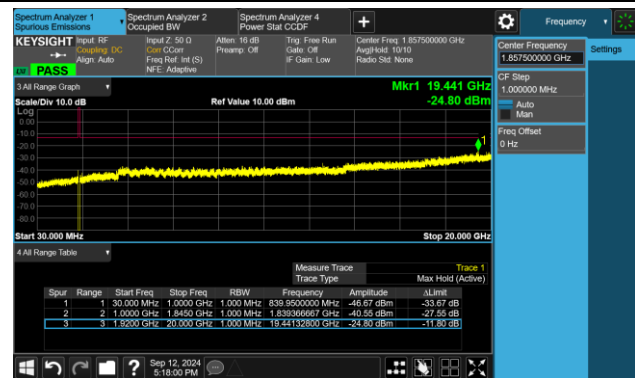

Middle Channel

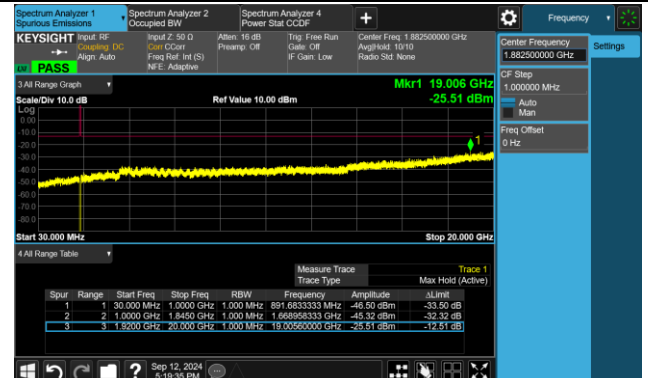


High Channel

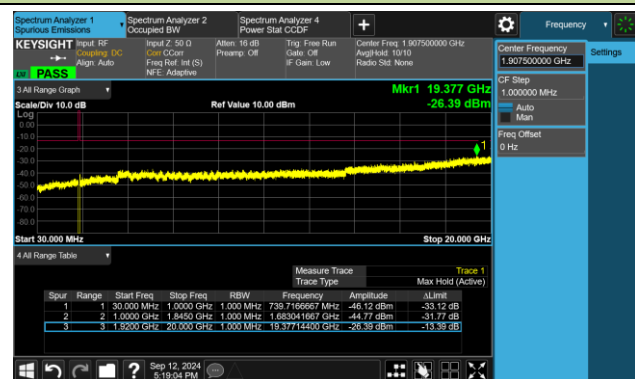


20MHz Channel Bandwidth


Low Channel

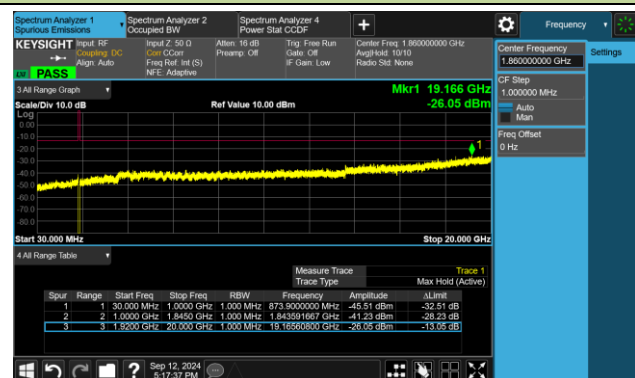

Middle Channel

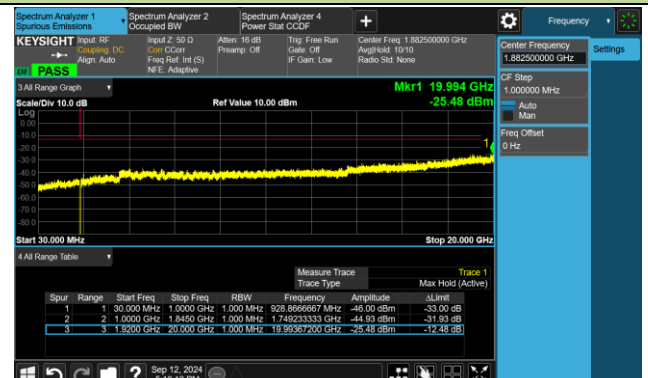

High Channel

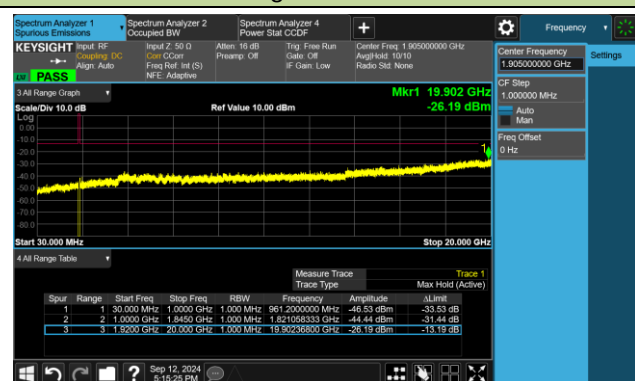


Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2024-09-12 ~ 2024-09-26	Test Band	Band 4/66

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
1.4	1710.70	30 ~ 18000	-29.39	≤ -13.00	Pass
1.4	1745.00	30 ~ 18000	-28.97	≤ -13.00	Pass
1.4	1779.30	30 ~ 18000	-29.66	≤ -13.00	Pass
3	1711.50	30 ~ 18000	-29.63	≤ -13.00	Pass
3	1745.00	30 ~ 18000	-29.94	≤ -13.00	Pass
3	1778.50	30 ~ 18000	-29.33	≤ -13.00	Pass
5	1712.50	30 ~ 18000	-29.57	≤ -13.00	Pass
5	1745.00	30 ~ 18000	-30.19	≤ -13.00	Pass
5	1777.50	30 ~ 18000	-29.39	≤ -13.00	Pass
10	1715.00	30 ~ 18000	-28.36	≤ -13.00	Pass
10	1745.00	30 ~ 18000	-29.30	≤ -13.00	Pass
10	1775.00	30 ~ 18000	-29.69	≤ -13.00	Pass
15	1717.50	30 ~ 18000	-27.47	≤ -13.00	Pass
15	1745.00	30 ~ 18000	-29.47	≤ -13.00	Pass
15	1772.50	30 ~ 18000	-28.50	≤ -13.00	Pass
20	1720.00	30 ~ 18000	-30.05	≤ -13.00	Pass
20	1745.00	30 ~ 18000	-29.29	≤ -13.00	Pass
20	1770.00	30 ~ 18000	-29.35	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

1.4MHz Channel Bandwidth


Low Channel

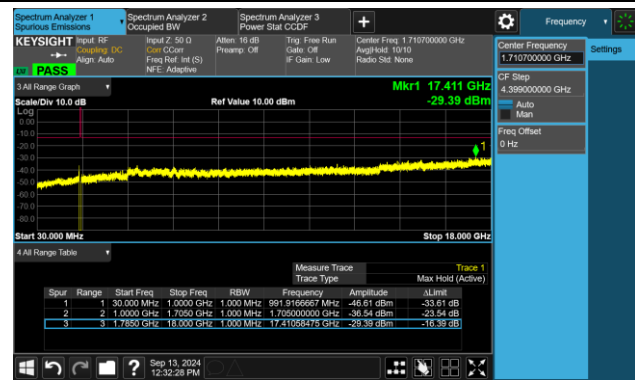

Middle Channel

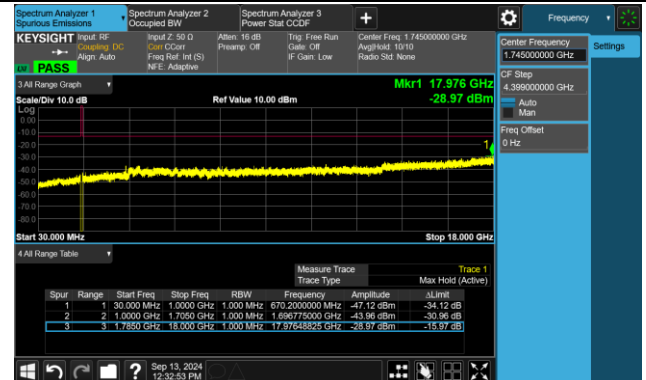


High Channel

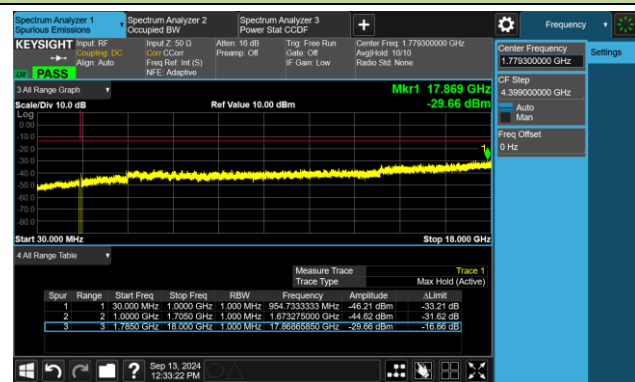


3MHz Channel Bandwidth


Low Channel

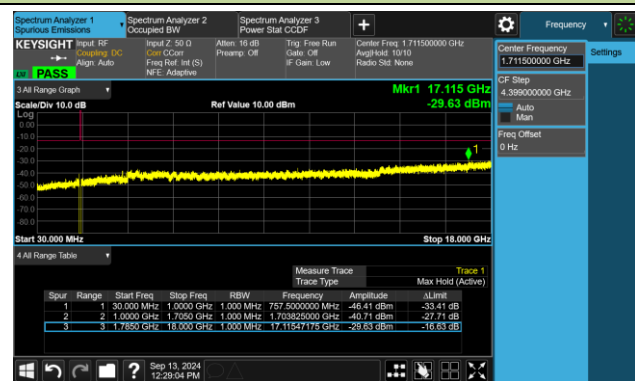

Middle Channel

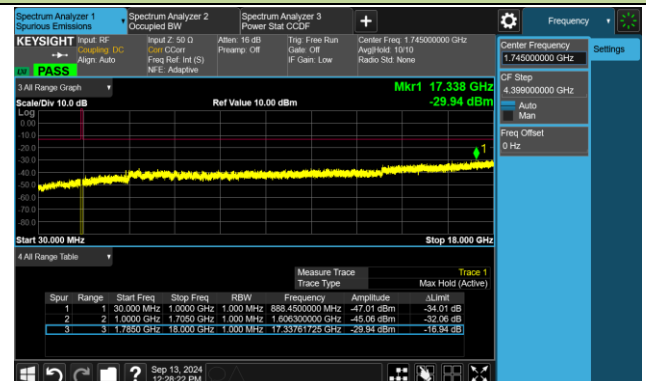


High Channel

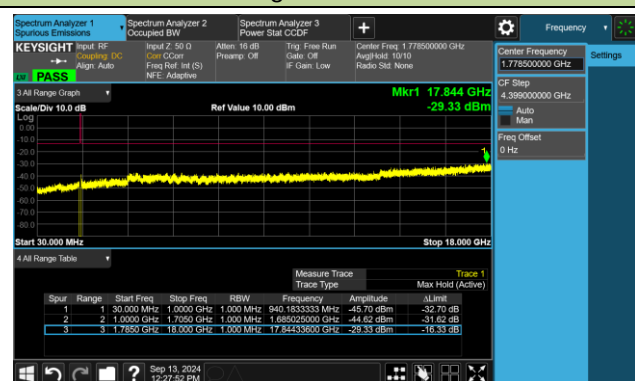


5MHz Channel Bandwidth


Low Channel

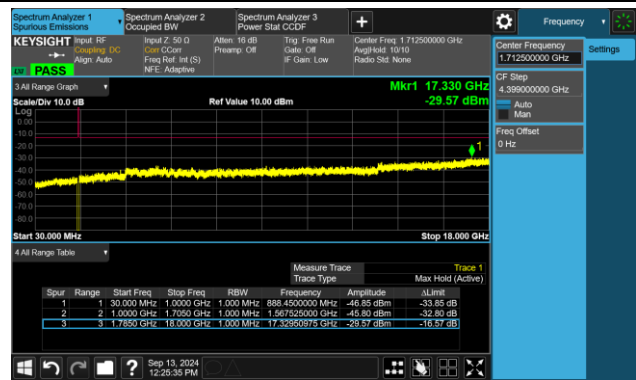

Middle Channel

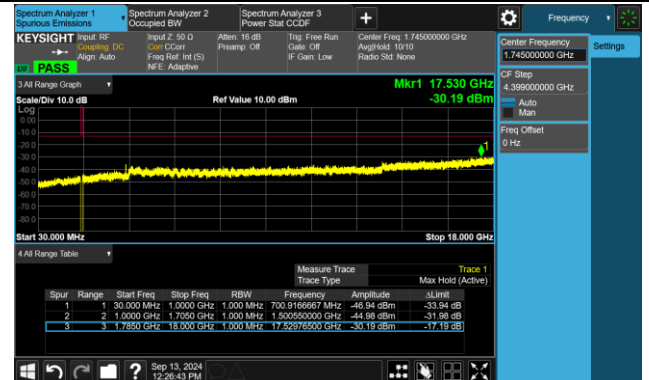


High Channel

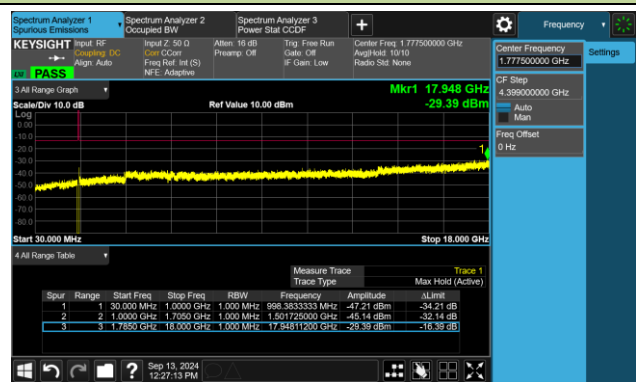


10MHz Channel Bandwidth


Low Channel

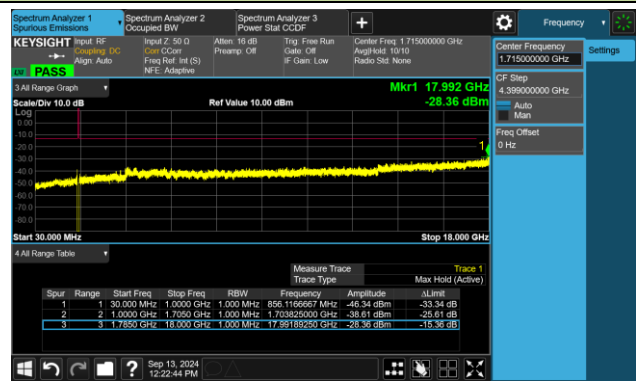

Middle Channel

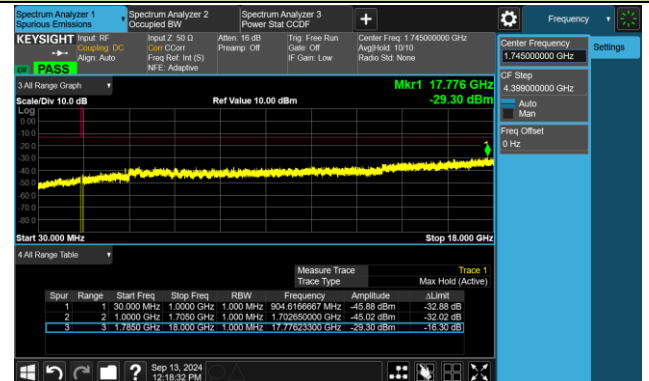


High Channel

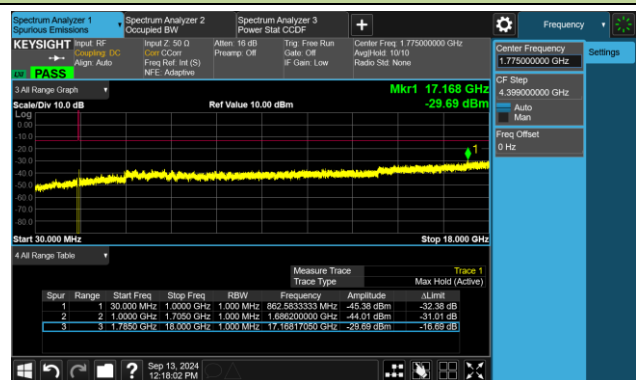


15MHz Channel Bandwidth


Low Channel

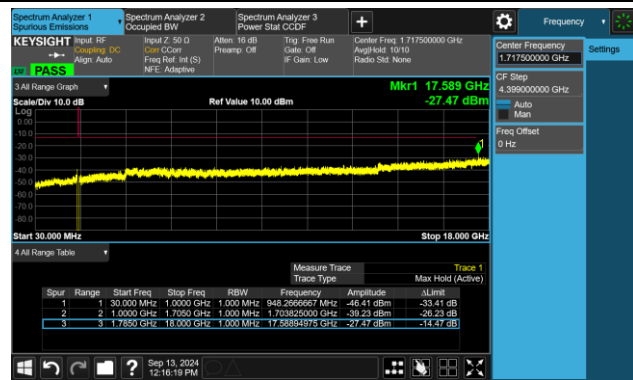

Middle Channel

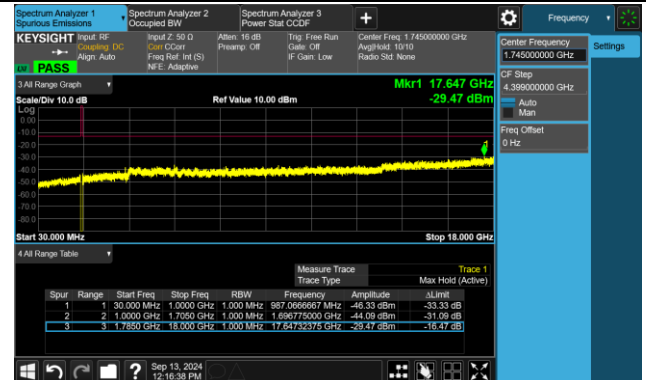


High Channel

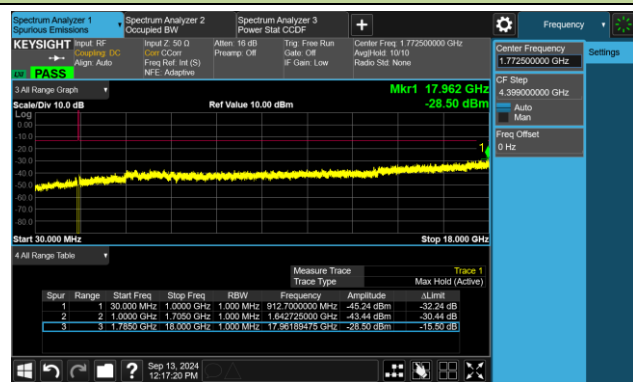


20MHz Channel Bandwidth


Low Channel

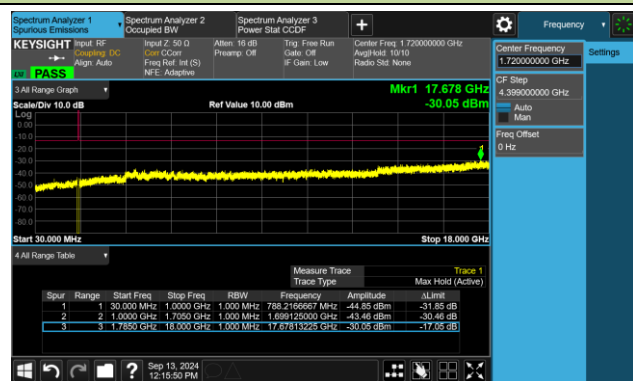

Middle Channel

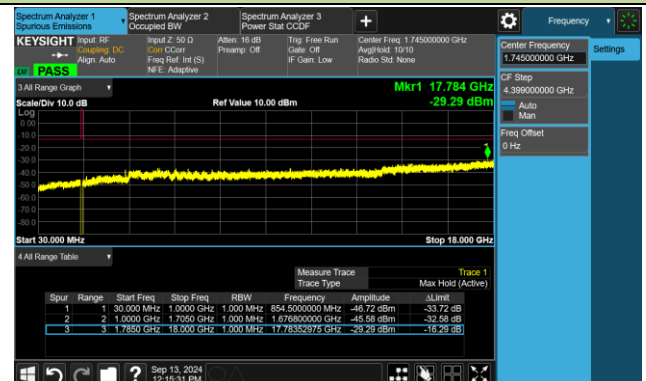

High Channel

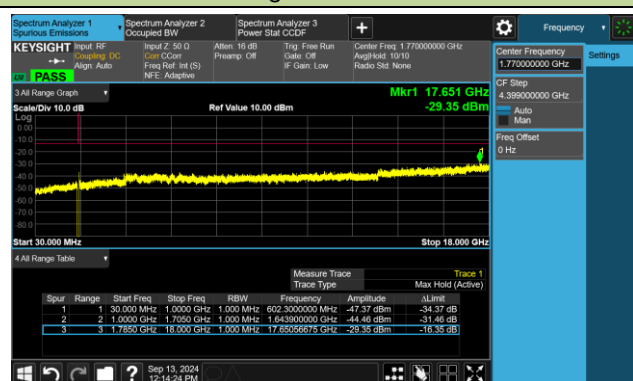


Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2024-09-12 ~ 2024-09-26	Test Band	Band 5/26

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
1.4	824.70	30 ~ 9000	-37.45	≤ -13.00	Pass
1.4	836.50	30 ~ 9000	-37.30	≤ -13.00	Pass
1.4	848.30	30 ~ 9000	-37.28	≤ -13.00	Pass
3	825.50	30 ~ 9000	-37.28	≤ -13.00	Pass
3	836.50	30 ~ 9000	-36.80	≤ -13.00	Pass
3	847.50	30 ~ 9000	-35.55	≤ -13.00	Pass
5	826.50	30 ~ 9000	-37.51	≤ -13.00	Pass
5	836.50	30 ~ 9000	-36.25	≤ -13.00	Pass
5	846.50	30 ~ 9000	-37.51	≤ -13.00	Pass
10	829.00	30 ~ 9000	-37.43	≤ -13.00	Pass
10	836.50	30 ~ 9000	-37.24	≤ -13.00	Pass
10	844.00	30 ~ 9000	-36.59	≤ -13.00	Pass
15	831.5	30 ~ 9000	-36.99	≤ -13.00	Pass
15	836.5	30 ~ 9000	-36.39	≤ -13.00	Pass
15	841.5	30 ~ 9000	-36.80	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

1.4MHz Channel Bandwidth


Low Channel

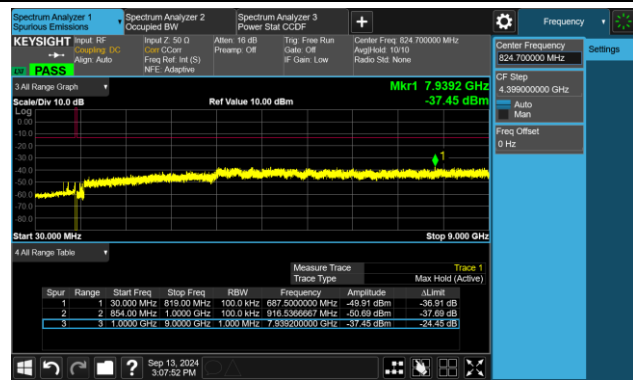

Middle Channel

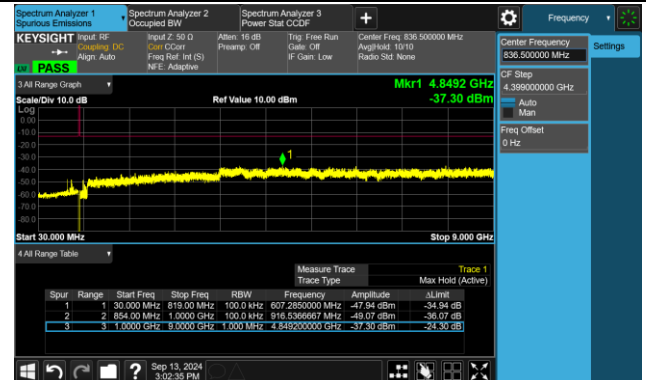


High Channel

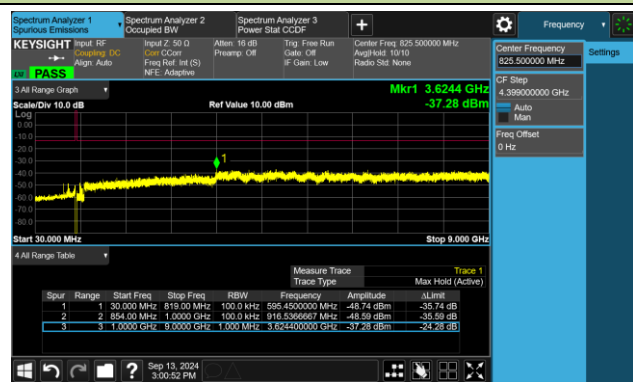


3MHz Channel Bandwidth


Low Channel

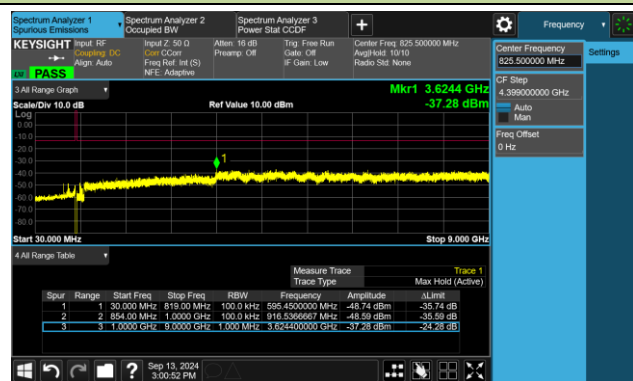

Middle Channel

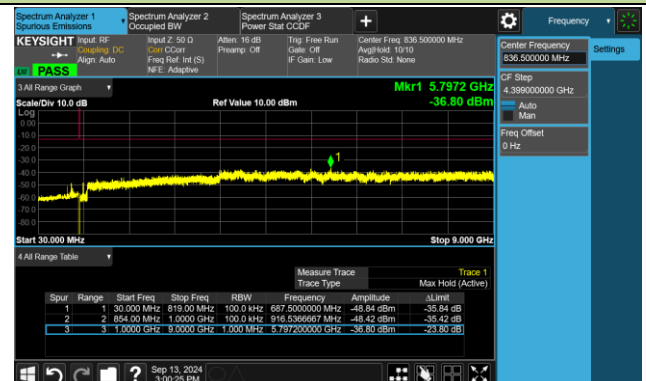


High Channel

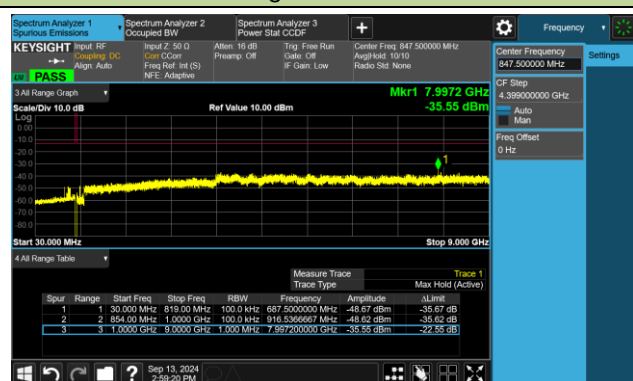


5MHz Channel Bandwidth


Low Channel

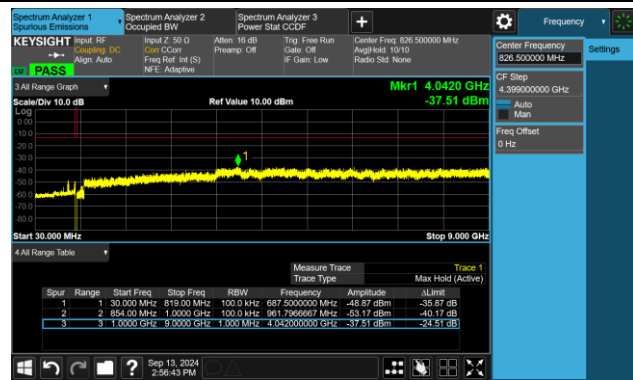

Middle Channel

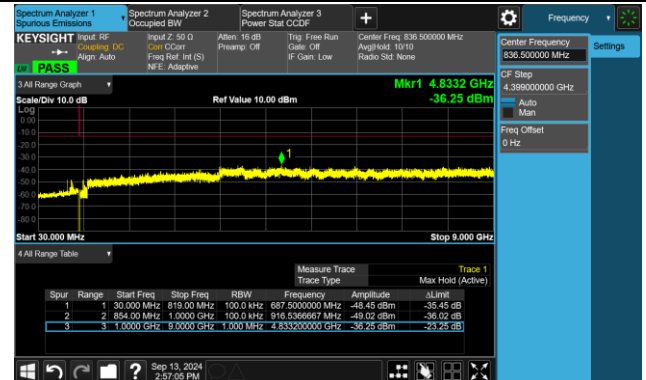


High Channel

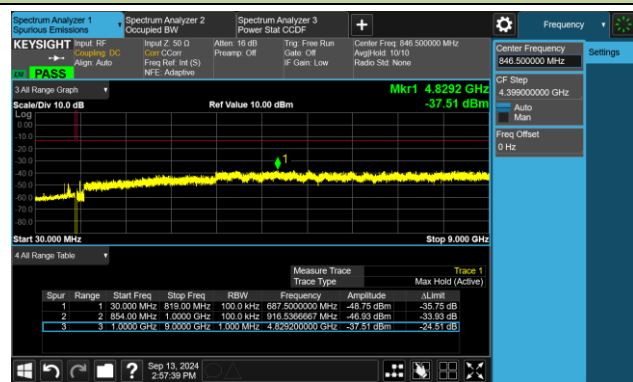


10MHz Channel Bandwidth


Low Channel

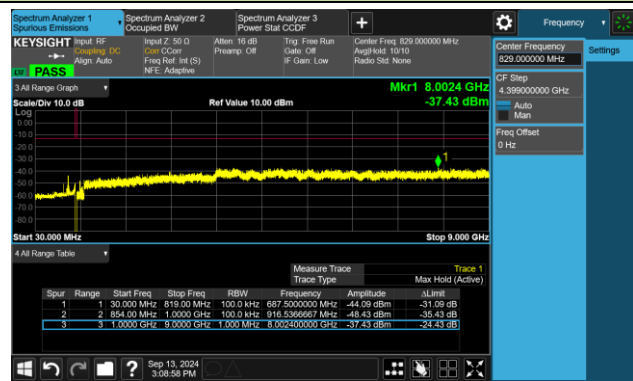

Middle Channel

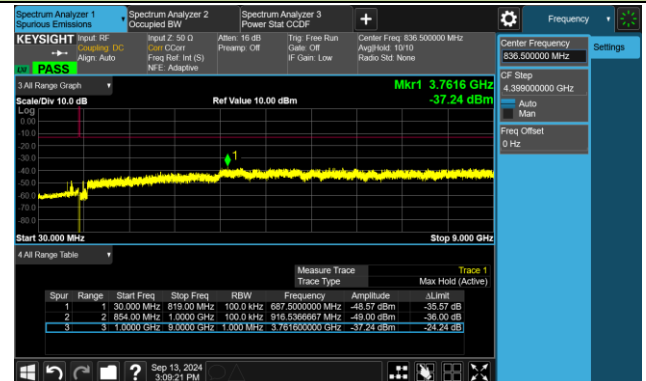


High Channel

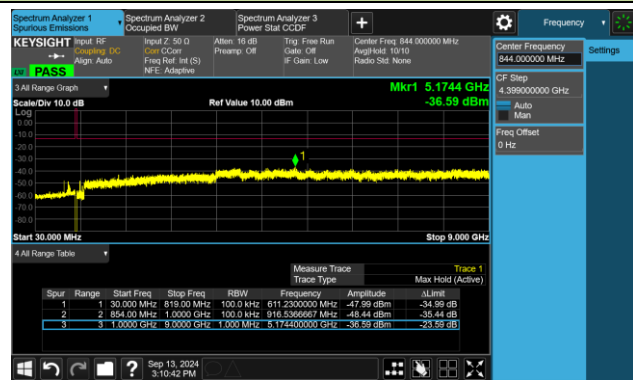


15MHz Channel Bandwidth


Low Channel

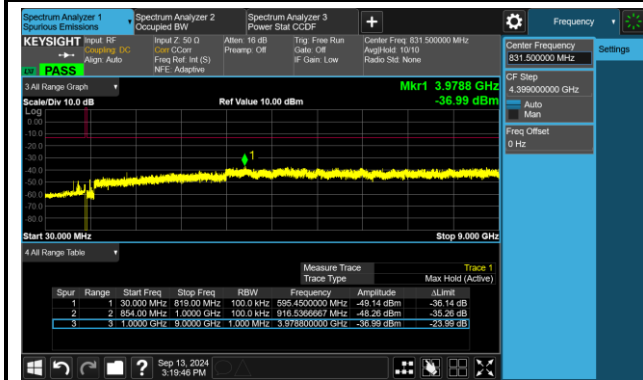

Middle Channel

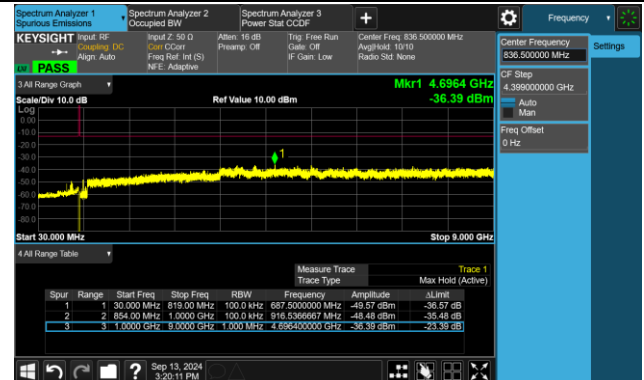

High Channel

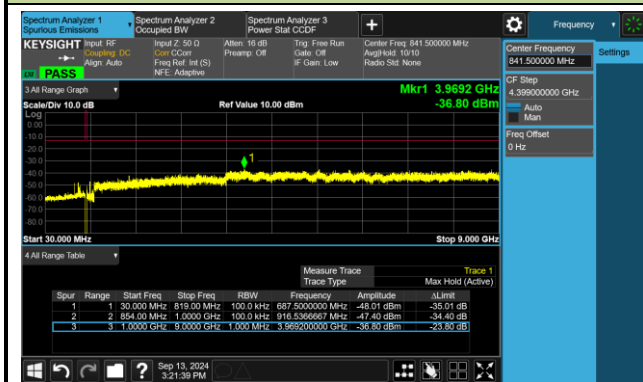


Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2024-09-12 ~ 2024-09-26	Test Band	Band 12

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
1.4	699.70	30 ~ 8000	-45.99	≤ -13.00	Pass
1.4	707.50	30 ~ 8000	-46.03	≤ -13.00	Pass
1.4	715.30	30 ~ 8000	-45.54	≤ -13.00	Pass
3	700.50	30 ~ 8000	-42.56	≤ -13.00	Pass
3	707.50	30 ~ 8000	-44.70	≤ -13.00	Pass
3	714.50	30 ~ 8000	-45.76	≤ -13.00	Pass
5	701.50	30 ~ 8000	-44.03	≤ -13.00	Pass
5	707.50	30 ~ 8000	-43.03	≤ -13.00	Pass
5	713.50	30 ~ 8000	-44.94	≤ -13.00	Pass
10	704.00	30 ~ 8000	-43.90	≤ -13.00	Pass
10	707.50	30 ~ 8000	-46.00	≤ -13.00	Pass
10	711.00	30 ~ 8000	-43.23	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

1.4MHz Channel Bandwidth


Low Channel

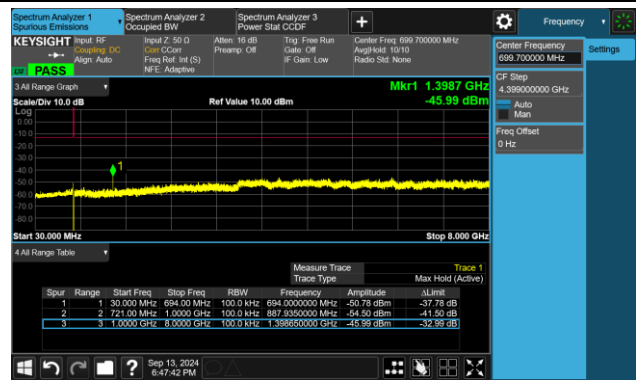

Middle Channel

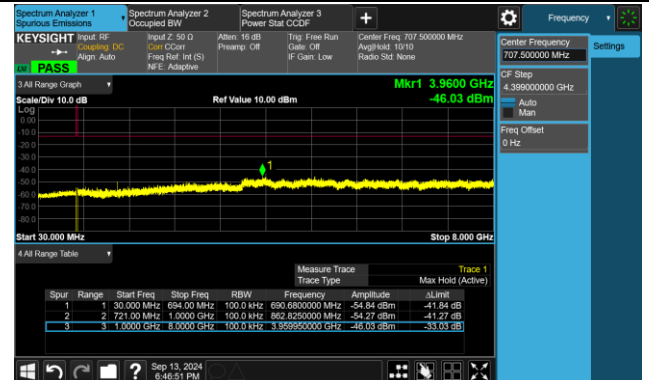


High Channel

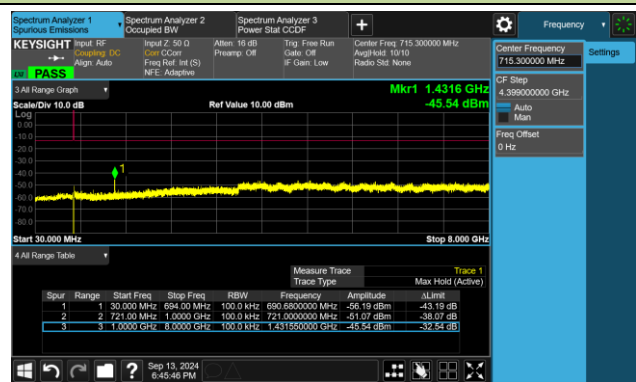


3MHz Channel Bandwidth


Low Channel

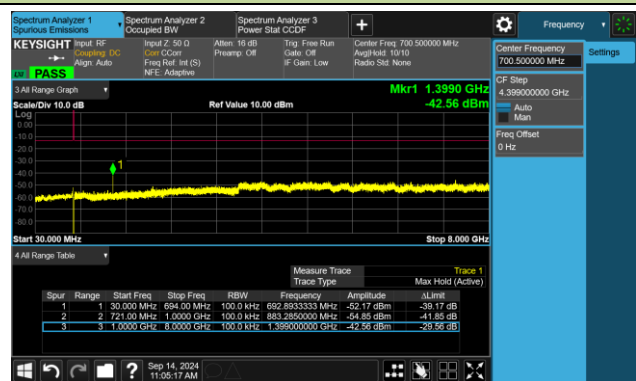

Middle Channel

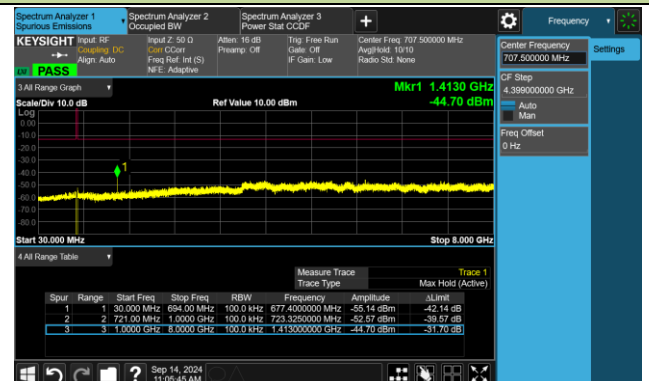


High Channel

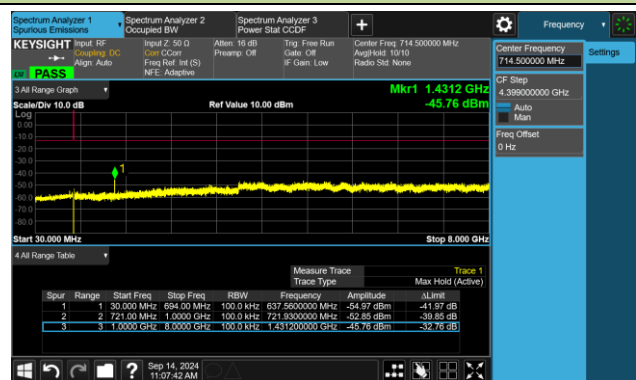


5MHz Channel Bandwidth


Low Channel

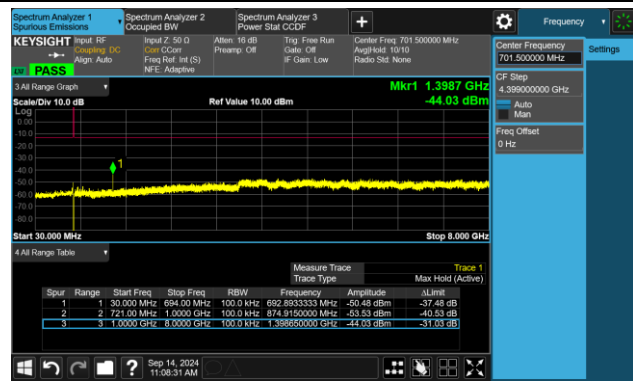

Middle Channel

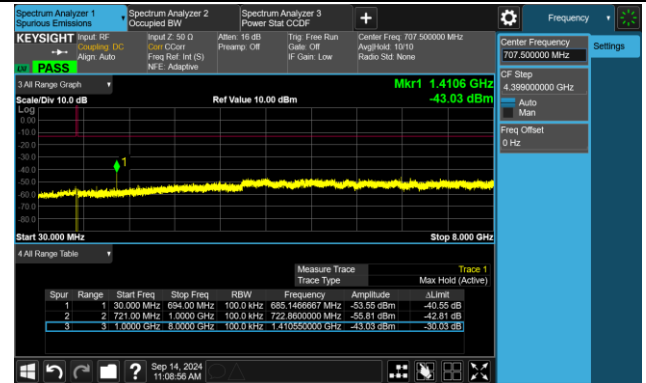


High Channel

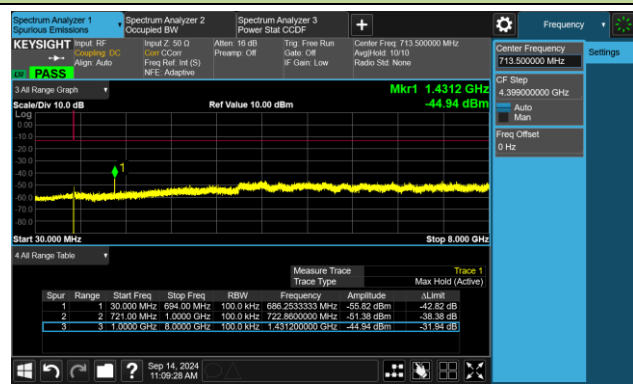


10MHz Channel Bandwidth


Low Channel

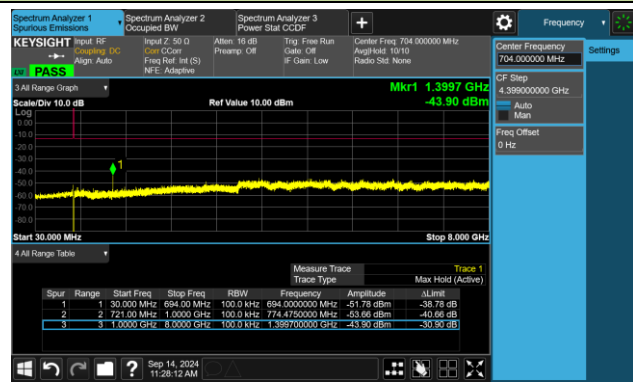

Middle Channel

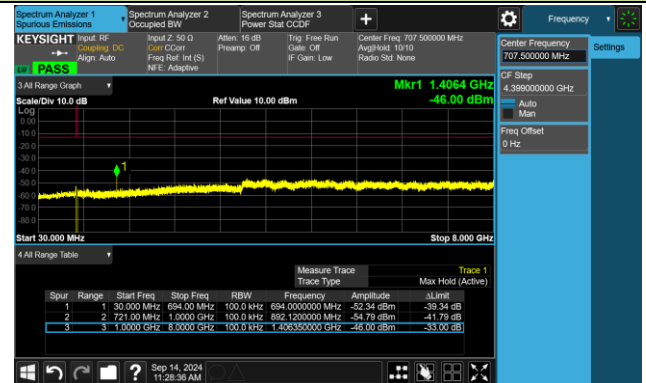

High Channel

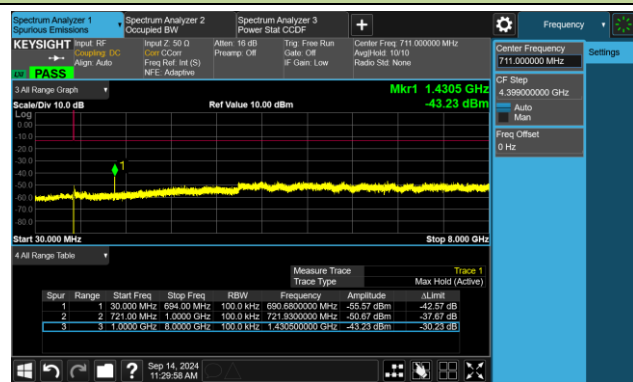


Test Site	WZ-SR6	Test Engineer	Lucas Wang
Test Date	2024-09-12 ~ 2024-09-26	Test Band	Band 13

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	779.50	30 ~ 8000	-46.14	≤ -13.00	Pass
5	782.00	30 ~ 8000	-46.57	≤ -13.00	Pass
5	784.50	30 ~ 8000	-46.46	≤ -13.00	Pass
10	782.00	30 ~ 8000	-46.14	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5MHz Channel Bandwidth


Low Channel

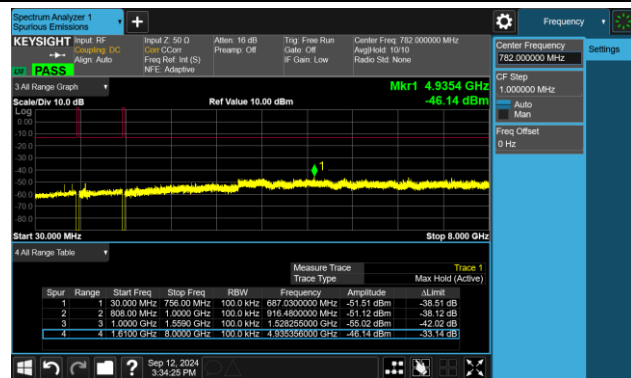

Middle Channel

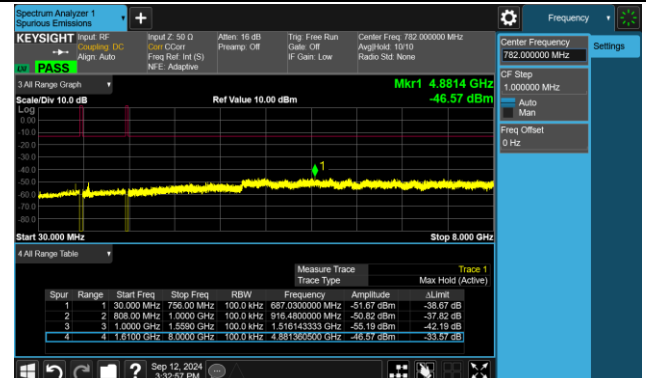


High Channel

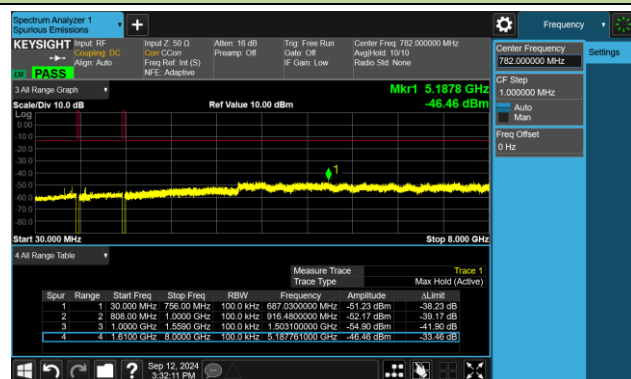

10MHz Channel Bandwidth

Middle Channel

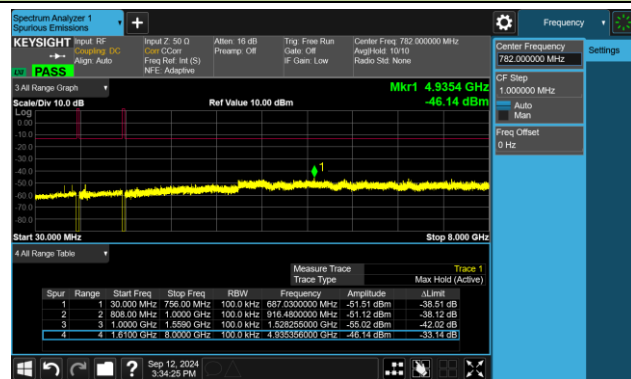

A.7 Radiated Spurious Emissions Test Result

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-09-18 ~ 2024-09-23	Test Band	Band 2/25

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
120.024	14.1	15.1	29.2	82.3	-53.1	Quasi-peak	Horizontal
180.017	15.2	15.7	30.9	82.3	-51.4	Quasi-peak	Horizontal
33.014	17.4	16.3	33.7	82.3	-48.6	Quasi-peak	Vertical
34.517	18.6	16.5	35.1	82.3	-47.2	Quasi-peak	Vertical
10299.000	48.9	2.1	51.0	82.3	-31.3	Peak	Horizontal
17767.100	45.9	9.4	55.3	82.3	-27.0	Peak	Horizontal
5550.900	55.6	-5.5	50.1	82.3	-32.2	Peak	Vertical
17745.000	46.1	9.1	55.2	82.3	-27.1	Peak	Vertical
Middle Channel							
150.011	14.4	17.1	31.5	82.3	-50.8	Quasi-peak	Horizontal
180.017	16.2	15.7	31.9	82.3	-50.4	Quasi-peak	Horizontal
32.956	17.6	16.3	33.9	82.3	-48.4	Quasi-peak	Vertical
34.529	18.1	16.5	34.6	82.3	-47.7	Quasi-peak	Vertical
11116.700	49.0	1.2	50.2	82.3	-32.1	Peak	Horizontal
17848.700	45.0	10.0	55.0	82.3	-27.3	Peak	Horizontal
5646.100	57.2	-5.9	51.3	82.3	-31.0	Peak	Vertical
17996.600	43.4	11.0	54.4	82.3	-27.9	Peak	Vertical
High Channel							
137.517	11.5	16.5	28.0	82.3	-54.3	Quasi-peak	Horizontal
150.011	12.6	17.1	29.7	82.3	-52.6	Quasi-peak	Horizontal
33.037	17.3	16.3	33.6	82.3	-48.7	Quasi-peak	Vertical
34.517	18.6	16.5	35.1	82.3	-47.2	Quasi-peak	Vertical
10756.300	49.1	1.5	50.6	82.3	-31.7	Peak	Horizontal
17457.700	45.8	9.0	54.8	82.3	-27.5	Peak	Horizontal
10586.300	49.8	1.1	50.9	82.3	-31.4	Peak	Vertical
17877.600	45.7	9.5	55.2	82.3	-27.1	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-09-18 ~ 2024-09-23	Test Band	Band 4/66

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
33.527	18.7	16.4	35.1	82.3	-47.2	Quasi-peak	Horizontal
82.042	21.1	12.6	33.7	82.3	-48.6	Quasi-peak	Horizontal
33.527	33.6	16.4	50.0	82.3	-32.3	Quasi-peak	Vertical
46.765	19.7	17.4	37.1	82.3	-45.2	Quasi-peak	Vertical
14492.900	47.2	3.9	51.1	82.3	-31.2	Peak	Horizontal
17726.300	45.6	8.8	54.4	82.3	-27.9	Peak	Horizontal
15516.300	45.3	6.4	51.7	82.3	-30.6	Peak	Vertical
17726.300	45.8	8.8	54.6	82.3	-27.7	Peak	Vertical
Middle Channel							
33.527	21.3	16.4	37.7	82.3	-44.6	Quasi-peak	Horizontal
136.508	18.2	16.4	34.6	82.3	-47.7	Quasi-peak	Horizontal
33.515	34.1	16.4	50.5	82.3	-31.8	Quasi-peak	Vertical
46.748	21.8	17.4	39.2	82.3	-43.1	Quasi-peak	Vertical
14011.800	46.1	4.3	50.4	82.3	-31.9	Peak	Horizontal
17763.700	44.7	9.5	54.2	82.3	-28.1	Peak	Horizontal
15963.400	45.7	7.3	53.0	82.3	-29.3	Peak	Vertical
17670.200	45.3	9.0	54.3	82.3	-28.0	Peak	Vertical
High Channel							
33.527	18.7	16.4	35.1	82.3	-47.2	Quasi-peak	Horizontal
136.747	17.4	16.4	33.8	82.3	-48.5	Quasi-peak	Horizontal
33.515	32.4	16.4	48.8	82.3	-33.5	Quasi-peak	Vertical
46.765	22.1	17.4	39.5	82.3	-42.8	Quasi-peak	Vertical
15941.300	46.5	6.8	53.3	82.3	-29.0	Peak	Horizontal
17782.400	45.1	9.1	54.2	82.3	-28.1	Peak	Horizontal
15954.900	46.4	7.3	53.7	82.3	-28.6	Peak	Vertical
17462.800	45.1	8.9	54.0	82.3	-28.3	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-09-18 ~ 2024-09-23	Test Band	Band 5/26

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
33.527	20.6	16.4	37.0	82.3	-45.3	Quasi-peak	Horizontal
135.887	21.4	16.4	37.8	82.3	-44.5	Quasi-peak	Horizontal
33.515	33.2	16.4	49.6	82.3	-32.7	Quasi-peak	Vertical
46.081	20.1	17.4	37.5	82.3	-44.8	Quasi-peak	Vertical
1441.900	59.6	-17.4	42.2	82.3	-40.1	Peak	Horizontal
9799.300	49.0	0.6	49.6	82.3	-32.7	Peak	Horizontal
2472.400	66.0	-12.8	53.2	82.3	-29.1	Peak	Vertical
9833.500	48.7	0.8	49.5	82.3	-32.8	Peak	Vertical
Middle Channel							
33.527	18.9	16.4	35.3	82.3	-47.0	Quasi-peak	Horizontal
68.848	18.7	15.5	34.2	82.3	-48.1	Quasi-peak	Horizontal
33.527	34.2	16.4	50.6	82.3	-31.7	Quasi-peak	Vertical
46.765	20.2	17.4	37.6	82.3	-44.7	Quasi-peak	Vertical
4899.700	51.7	-5.6	46.1	82.3	-36.2	Peak	Horizontal
9847.000	49.1	0.7	49.8	82.3	-32.5	Peak	Horizontal
2508.400	67.2	-12.4	54.8	82.3	-27.5	Peak	Vertical
9806.500	49.2	0.6	49.8	82.3	-32.5	Peak	Vertical
High Channel							
33.527	19.0	16.4	35.4	82.3	-46.9	Quasi-peak	Horizontal
137.372	16.0	16.5	32.5	82.3	-49.8	Quasi-peak	Horizontal
33.527	34.5	16.4	50.9	82.3	-31.4	Quasi-peak	Vertical
46.748	20.6	17.4	38.0	82.3	-44.3	Quasi-peak	Vertical
2410.300	57.9	-12.8	45.1	82.3	-37.2	Peak	Horizontal
9775.000	48.8	0.8	49.6	82.3	-32.7	Peak	Horizontal
2543.500	60.2	-12.2	48.0	82.3	-34.3	Peak	Vertical
9783.100	48.7	0.8	49.5	82.3	-32.8	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-09-18 ~ 2024-09-23	Test Band	Band 12

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
33.527	18.5	16.4	34.9	82.3	-47.4	Quasi-peak	Horizontal
134.985	17.5	16.3	33.8	82.3	-48.5	Quasi-peak	Horizontal
33.527	34.1	16.4	50.5	82.3	-31.8	Quasi-peak	Vertical
46.748	20.5	17.4	37.9	82.3	-44.4	Quasi-peak	Vertical
5089.600	51.6	-5.7	45.9	82.3	-36.4	Peak	Horizontal
9777.700	49.4	0.8	50.2	82.3	-32.1	Peak	Horizontal
1398.700	63.2	-17.8	45.4	82.3	-36.9	Peak	Vertical
9828.100	49.5	0.8	50.3	82.3	-32.0	Peak	Vertical
Middle Channel							
33.539	20.0	16.4	36.4	82.3	-45.9	Quasi-peak	Horizontal
136.556	18.6	16.4	35.0	82.3	-47.3	Quasi-peak	Horizontal
33.515	32.5	16.4	48.9	82.3	-33.4	Quasi-peak	Vertical
46.765	21.1	17.4	38.5	82.3	-43.8	Quasi-peak	Vertical
1440.100	59.7	-17.4	42.3	82.3	-40.0	Peak	Horizontal
9827.200	48.3	0.8	49.1	82.3	-33.2	Peak	Horizontal
2413.900	55.0	-12.7	42.3	82.3	-40.0	Peak	Vertical
9820.900	48.9	0.7	49.6	82.3	-32.7	Peak	Vertical
High Channel							
33.539	20.1	16.4	36.5	82.3	-45.8	Quasi-peak	Horizontal
135.649	18.3	16.4	34.7	82.3	-47.6	Quasi-peak	Horizontal
33.515	34.7	16.4	51.1	82.3	-31.2	Quasi-peak	Vertical
46.765	20.1	17.4	37.5	82.3	-44.8	Quasi-peak	Vertical
1440.100	59.3	-17.4	41.9	82.3	-40.4	Peak	Horizontal
9788.500	49.4	0.8	50.2	82.3	-32.1	Peak	Horizontal
2414.800	55.9	-12.7	43.2	82.3	-39.1	Peak	Vertical
9786.700	48.5	0.8	49.3	82.3	-33.0	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Test Site	SIP-AC3	Test Engineer	Mero Zhou
Test Date	2024-09-18 ~ 2024-09-23	Test Band	Band 13

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
33.539	21.7	16.4	38.1	82.3	-44.2	Quasi-peak	Horizontal
135.887	17.6	16.4	34.0	82.3	-48.3	Quasi-peak	Horizontal
33.527	32.8	16.4	49.2	82.3	-33.1	Quasi-peak	Vertical
46.765	22.2	17.4	39.6	82.3	-42.7	Quasi-peak	Vertical
1603.900	51.1	-16.3	34.8	55.3	-20.5	Peak	Horizontal
9833.500	48.4	0.8	49.2	82.3	-33.1	Peak	Horizontal
1577.800	51.0	-16.5	34.5	55.3	-20.8	Peak	Vertical
9838.000	49.2	0.8	50.0	82.3	-32.3	Peak	Vertical
Middle Channel							
33.539	20.0	16.4	36.4	82.3	-45.9	Quasi-peak	Horizontal
135.887	18.2	16.4	34.6	82.3	-47.7	Quasi-peak	Horizontal
33.539	31.8	16.4	48.2	82.3	-34.1	Quasi-peak	Vertical
46.748	21.4	17.4	38.8	82.3	-43.5	Quasi-peak	Vertical
1583.200	51.2	-16.5	34.7	55.3	-20.6	Peak	Horizontal
9821.800	48.4	0.7	49.1	82.3	-33.2	Peak	Horizontal
1582.300	51.0	-16.5	34.5	55.3	-20.8	Peak	Vertical
9815.500	48.5	0.7	49.2	82.3	-33.1	Peak	Vertical
High Channel							
33.515	19.9	16.4	36.3	82.3	-46.0	Quasi-peak	Horizontal
137.661	14.1	16.5	30.6	82.3	-51.7	Quasi-peak	Horizontal
33.527	33.5	16.4	49.9	82.3	-32.4	Quasi-peak	Vertical
46.748	20.3	17.4	37.7	82.3	-44.6	Quasi-peak	Vertical
1603.000	51.5	-16.3	35.2	55.3	-20.1	Peak	Horizontal
9823.600	48.4	0.8	49.2	82.3	-33.1	Peak	Horizontal
1581.400	51.2	-16.5	34.7	55.3	-20.6	Peak	Vertical
9814.600	48.5	0.7	49.2	82.3	-33.1	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than average-detection value. In a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Appendix B - Test Setup Photograph

Refer to “2406RSU025-UT” file.

Appendix C - EUT Photograph

Refer to “2406RSU025-UE” file.