



RF TEST REPORT

Applicant Quectel Wireless Solutions Company Limited
FCC ID XMR201705BG96NA
Product Quectel BG96-NA
Brand Quectel
Model BG96-NA
Report No. RXA1705-0129RF01R1
Issue Date June 2, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR47 Part 27C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Jiang peng Lan

Performed by: Jiangpeng Lan

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applied Standards.....	7
3	Test Configuration.....	8
4	Test Information.....	9
4.1	RF Power Output.....	9
4.2	Effective Isotropic Radiated Power.....	14
4.3	Occupied Bandwidth.....	20
4.4	Band Edge Compliance.....	31
4.5	Peak-to-Average Power Ratio (PAPR).....	44
4.6	Frequency Stability.....	47
4.7	Spurious Emissions at Antenna Terminals.....	52
4.8	Radiates Spurious Emission.....	64
5	Main Test Equipment.....	79
	ANNEX A: EUT Appearance and Test Setup.....	80
A.1	EUT Appearance.....	80
A.2	Test Setup.....	82

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4) 27.50(b)(10)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h) 27.53(g)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 27.53(h) 27.53(g)	PASS
8	Radiates Spurious Emission	2.1053 27.53(h) 27.53(g)	PASS
Date of Testing: May 9, 2017 ~ May 23, 2017			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Company Limited
Applicant address	Room 501, Building 13 No.99 TianZhou Road,Xuhui District, Shanghai, China
Manufacturer	Quectel Wireless Solutions Company Limited
Manufacturer address	Room 501, Building 13 No.99 TianZhou Road,Xuhui District, Shanghai, China

General information

EUT Description			
Model:	BG96-NA		
IMEI:	864508030005877		
Hardware Version:	R1.0		
Software Version:	BG96NAMAR01A01M1G		
Power Supply:	External power supply		
Antenna Type:	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Test Mode(s):	LTE Band 4; LTE Band 13		
LTE Release:	13		
LTE Category:	M1		
Maximum E.I.R.P./ E.R.P.	LTE Band 4: 27.95dBm LTE Band 13: 22.74dBm		
Rated Power Supply Voltage:	3.8V		
Extreme Voltage:	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature:	Lowest: -40°C Highest: +85°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 13	777 ~ 787	746 ~ 756
Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.			

Accessory equipment	
Evaluation Board	RF Cable
RS232-to-USB Cable	Antenna: Dipole Antenna
Headset	USB Cable



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2017)

FCC CFR47 Part 27C (2017)

ANSI/TIA-603-D (2010)

KDB 971168 D01 Power Meas License Digital Systems v02r02

3 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/13:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H	
RF power output	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 13	-	-	O	O	-	-	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O	
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O	
Occupied Bandwidth	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O	
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O	
Band Edge Compliance	LTE 4	O	O	O	O	O	O	O	O	O	-	O	O	-	O	
	LTE 13	-	-	O	O	-	-	O	O	O	-	O	O	-	O	
Peak-to-Average Power Ratio	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O	
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	O	O	O	
Frequency Stability	LTE 4	O	O	O	O	O	O	O	O	-	-	O	-	O	-	
	LTE 13	-	-	O	O	-	-	O	O	-	-	O	-	O	-	
Spurious Emissions at Antenna Terminals	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O	
	LTE 13	-	-	O	O	-	-	O	-	O	-	-	O	O	O	
Radiates Spurious Emission	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O	
	LTE 13	-	-	O	O	-	-	O	-	O	-	-	O	O	O	
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.															

4 Test Information

4.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

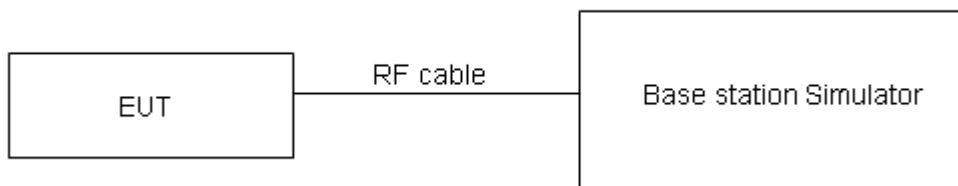

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE TDD Band 4				AV Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19957/1710.7	20175/1732.5	20393/1754.3
1.4MHz	QPSK	1	0	23.27	23.17	23.17
		1	2	23.25	23.13	23.16
		1	5	23.30	23.17	23.16
		3	0	23.28	23.18	23.14
		3	2	23.16	23.18	23.18
		3	3	23.31	23.14	23.14
	6	0	23.06	23.05	23.09	
	16QAM	1	0	23.23	23.12	23.13
		1	2	23.14	23.06	23.07
		1	5	23.13	23.05	23.09
		3	0	23.05	22.96	23.02
		3	2	23.11	23.01	23.09
		3	3	23.08	23.04	22.98
		5	0	23.01	22.93	22.96
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19965/1711.5	20175/1732.5	20385/1753.5
3MHz	QPSK	1	0	23.29	23.21	23.20
		1	3	23.28	23.18	23.20
		1	5	23.33	23.22	23.20
		3	0	23.28	23.20	23.17
		3	2	23.18	23.18	23.20
		3	3	23.31	23.15	23.14
	6	0	23.09	23.09	23.12	
	16QAM	1	0	23.26	23.14	23.16
		1	3	23.17	23.11	23.11
		1	5	23.15	23.09	23.12
		3	0	23.06	22.99	23.04
		3	2	23.12	23.04	23.11
		3	3	23.08	23.06	23.01
		5	0	23.04	22.97	22.99
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19975/1712.5	20175/1732.5	20375/1752.5
5MHz	QPSK	1	0	23.26	23.19	23.16
		1	3	23.26	23.14	23.17
		1	5	23.30	23.17	23.16
		3	0	23.25	23.15	23.13
		3	2	23.16	23.14	23.15
		3	3	23.29	23.13	23.10
		6	0	23.07	23.08	23.10



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20000/1715	20175/1732.5	20350/1750
	16QAM	1	0	23.23	23.10	23.13
		1	3	23.14	23.09	23.08
		1	5	23.12	23.07	23.08
		3	0	23.04	22.95	23.01
		3	2	23.09	22.99	23.07
		3	3	23.05	23.01	22.97
		5	0	23.02	22.93	22.94
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
10MHz	QPSK	1	0	23.28	23.20	23.19
		1	3	23.29	23.19	23.21
		1	5	23.32	23.21	23.19
		3	0	23.28	23.20	23.17
		3	2	23.19	23.19	23.19
		3	3	23.31	23.17	23.15
		6	0	23.15	23.10	23.14
	16QAM	1	0	23.25	23.13	23.15
		1	3	23.17	23.13	23.11
		1	5	23.15	23.09	23.11
		3	0	23.07	23.00	23.05
		3	2	23.11	23.03	23.10
		3	3	23.08	23.06	23.01
		5	0	23.05	22.98	22.98
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20050/1720	20175/1732.5	20300/1745
15MHz	QPSK	1	0	23.27	23.16	23.17
		1	3	23.27	23.18	23.18
		1	5	23.29	23.16	23.15
		3	0	23.26	23.16	23.14
		3	2	23.16	23.14	23.15
		3	3	23.28	23.14	23.11
		6	0	23.13	23.06	23.09
	16QAM	1	0	23.20	23.11	23.13
		1	3	23.15	23.10	23.09
		1	5	23.12	23.05	23.08
		3	0	23.04	22.98	23.02
		3	2	23.08	22.98	23.06
		3	3	23.06	23.02	22.98
		5	0	23.02	22.93	22.94
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20050/1720	20175/1732.5	20300/1745
20MHz	QPSK	1	0	23.24	23.12	23.14
		1	3	23.26	23.14	23.16



		1	5	23.27	23.15	23.12
		3	0	23.23	23.11	23.10
		3	2	23.14	23.10	23.12
		3	3	23.25	23.09	23.07
		6	0	23.10	23.01	23.05
	16QAM	1	0	23.18	23.07	23.08
		1	3	23.11	23.08	23.05
		1	5	23.10	23.02	23.06
		3	0	23.01	22.94	22.99
		3	2	23.05	22.96	23.03
		3	3	23.03	22.97	22.94
		5	0	23.00	22.89	22.91

Note: 1) The following testing in worst case based on the maximum RF Output Power.

LTE FDD Band 13				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				23205/779.5	23230/782	23255/784.5
5MHz	QPSK	1	0	22.65	22.66	22.84
		1	3	22.70	22.84	22.92
		1	5	22.71	22.77	22.79
		3	0	21.81	21.86	21.94
		3	2	21.86	21.90	21.95
		3	3	22.18	21.84	21.91
	16QAM	6	0	21.53	21.31	21.88
		1	0	22.43	22.58	22.55
		1	3	22.45	22.67	22.57
		1	5	22.46	22.55	22.54
		3	0	21.32	21.42	21.38
		3	2	21.71	21.78	21.76
		3	3	21.33	21.49	21.56
		5	0	20.58	21.03	20.84
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				/	23230/782	/
10MHz	QPSK	1	0	/	22.66	/
		1	3	/	22.63	/
		1	5	/	22.59	/
		3	0	/	22.60	/
		3	2	/	22.61	/
		3	3	/	22.58	/
	16QAM	6	0	/	22.06	/
		1	0	/	22.55	/
		1	3	/	22.57	/



		1	5	/	22.50	/
		3	0	/	22.42	/
		3	2	/	22.46	/
		3	3	/	22.47	/
		5	0	/	21.76	/

4.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.

2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC’s permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).

5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

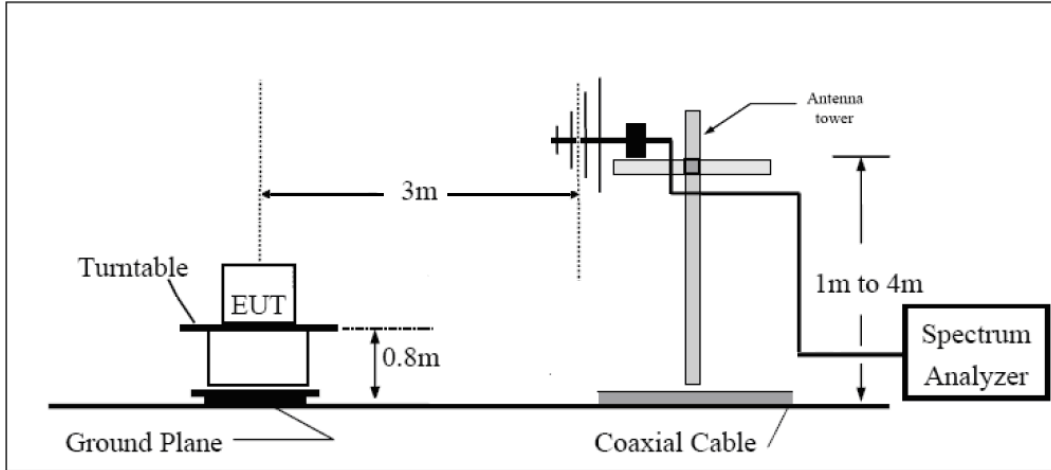

Above 1GHz

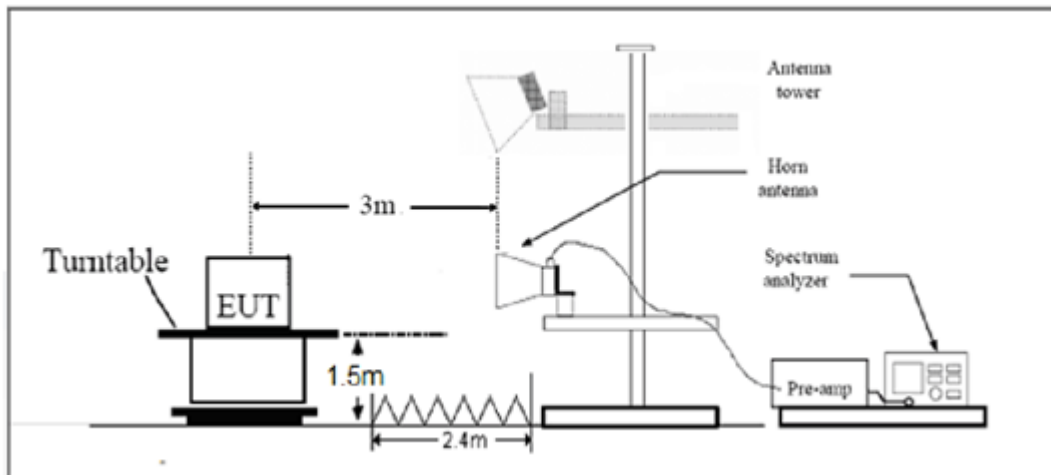

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Part 27.50(b)(10)Limit (ERP)	$\leq 3 \text{ W}$ (34.77 dBm)
Part 27.50(d)(4)Limit (EIRP)	$\leq 1 \text{ W}$ (30 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results

LTE Band 4								
Bandwidth	Frequency (MHz)	Ant Pot (H/V)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	Conclusion
1.4MHz (QPSK)	1710.7	H	-29.97	-54.30	0.00	1.44	25.77	Pass
	1732.5	H	-30.06	-54.32	0.00	1.57	25.82	Pass
	1754.3	H	-30.94	-54.10	0.00	1.72	24.88	Pass
	1710.7	V	-30.24	-54.35	0.00	1.44	25.55	Pass
	1732.5	V	-31.40	-54.41	0.00	1.57	24.58	Pass
	1754.3	V	-32.01	-54.52	0.00	1.72	24.23	Pass
1.4MHz (16QAM)	1710.7	H	-30.29	-54.30	0.00	1.44	25.45	Pass
	1732.5	H	-30.37	-54.32	0.00	1.57	25.51	Pass
	1754.3	H	-31.27	-54.10	0.00	1.72	24.55	Pass
	1710.7	V	-30.55	-54.35	0.00	1.44	25.24	Pass
	1732.5	V	-31.71	-54.41	0.00	1.57	24.27	Pass
	1754.3	V	-32.32	-54.52	0.00	1.72	23.92	Pass
3MHz (QPSK)	1711.5	H	-29.80	-54.33	0.00	1.44	25.97	Pass
	1732.5	H	-30.57	-54.32	0.00	1.57	25.31	Pass
	1753.5	H	-30.89	-54.11	0.00	1.72	24.94	Pass
	1711.5	V	-30.07	-54.35	0.00	1.44	25.72	Pass
	1732.5	V	-31.20	-54.41	0.00	1.57	24.78	Pass
	1753.5	V	-31.90	-54.48	0.00	1.72	24.30	Pass
3MHz (16QAM)	1711.5	H	-30.11	-54.33	0.00	1.44	25.66	Pass
	1732.5	H	-30.88	-54.32	0.00	1.57	25.00	Pass
	1753.5	H	-31.20	-54.11	0.00	1.72	24.63	Pass
	1711.5	V	-30.37	-54.35	0.00	1.44	25.42	Pass
	1732.5	V	-31.41	-54.41	0.00	1.57	24.57	Pass
	1753.5	V	-32.20	-54.48	0.00	1.72	24.00	Pass
5MHz (QPSK)	1712.5	H	-28.81	-54.34	0.00	1.44	26.97	Pass
	1732.5	H	-29.27	-54.32	0.00	1.57	26.61	Pass
	1752.5	H	-29.99	-54.13	0.00	1.72	25.85	Pass
	1712.5	V	-29.09	-54.38	0.00	1.44	26.73	Pass
	1732.5	V	-29.90	-54.41	0.00	1.57	26.08	Pass
	1752.5	V	-30.98	-54.47	0.00	1.72	25.21	Pass
5MHz (16QAM)	1712.5	H	-29.12	-54.34	0.00	1.44	26.66	Pass
	1732.5	H	-29.57	-54.32	0.00	1.57	26.31	Pass
	1752.5	H	-30.29	-54.13	0.00	1.72	25.55	Pass
	1712.5	V	-29.41	-54.38	0.00	1.44	26.41	Pass
	1732.5	V	-30.21	-54.41	0.00	1.57	25.77	Pass
	1752.5	V	-31.29	-54.47	0.00	1.72	24.90	Pass
10MHz (QPSK)	1715	H	-29.33	-54.33	0.00	1.44	26.44	Pass
	1732.5	H	-29.70	-54.32	0.00	1.57	26.18	Pass
	1750	H	-29.94	-54.12	0.00	1.66	25.84	Pass



	1715	V	-29.61	-54.32	0.00	1.44	26.15	Pass
	1732.5	V	-30.33	-54.41	0.00	1.57	25.65	Pass
	1750	V	-30.97	-54.52	0.00	1.66	25.21	Pass
10MHz (16QAM)	1715	H	-29.64	-54.33	0.00	1.44	26.13	Pass
	1732.5	H	-30.03	-54.32	0.00	1.57	25.85	Pass
	1750	H	-30.24	-54.12	0.00	1.66	25.54	Pass
	1715	V	-29.92	-54.32	0.00	1.44	25.84	Pass
	1732.5	V	-30.63	-54.41	0.00	1.57	25.35	Pass
	1750	V	-31.38	-54.52	0.00	1.66	24.80	Pass
15MHz (QPSK)	1717.5	H	-32.46	-54.35	0.00	1.49	23.37	Pass
	1732.5	H	-32.71	-54.32	0.00	1.57	23.17	Pass
	1747.5	H	-32.35	-54.17	0.00	1.66	23.48	Pass
	1717.5	V	-32.82	-54.39	0.00	1.49	23.06	Pass
	1732.5	V	-33.84	-54.41	0.00	1.57	22.14	Pass
	1747.5	V	-32.69	-54.51	0.00	1.66	23.48	Pass
15MHz (16QAM)	1717.5	H	-32.78	-54.35	0.00	1.49	23.05	Pass
	1732.5	H	-33.03	-54.32	0.00	1.57	22.85	Pass
	1747.5	H	-32.65	-54.17	0.00	1.66	23.18	Pass
	1717.5	V	-33.13	-54.39	0.00	1.49	22.75	Pass
	1732.5	V	-34.15	-54.41	0.00	1.57	21.83	Pass
	1747.5	V	-32.99	-54.51	0.00	1.66	23.18	Pass
20MHz (QPSK)	1720	H	-29.65	-54.37	0.00	1.49	26.21	Pass
	1732.5	H	-27.93	-54.32	0.00	1.57	27.95	Pass
	1745	H	-28.90	-54.23	0.00	1.63	26.96	Pass
	1720	V	-29.04	-54.44	0.00	1.49	26.89	Pass
	1732.5	V	-30.92	-54.41	0.00	1.57	25.06	Pass
	1745	V	-30.82	-54.59	0.00	1.63	25.40	Pass
20MHz (16QAM)	1720	H	-29.74	-54.37	0.00	1.49	26.12	Pass
	1732.5	H	-28.23	-54.32	0.00	1.57	27.65	Pass
	1745	H	-29.08	-54.23	0.00	1.63	26.78	Pass
	1720	V	-29.16	-54.44	0.00	1.49	26.77	Pass
	1732.5	V	-31.20	-54.41	0.00	1.57	24.78	Pass
	1745	V	-31.01	-54.59	0.00	1.63	25.21	Pass

LTE Band 13								
Bandwidth	Frequency (MHz)	Ant Pot (H/V)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	Conclusion
5MHz (QPSK)	779.5	H	-29.47	-49.85	0.00	2.06	22.44	Pass
	782	H	-29.77	-50.19	0.00	2.05	22.48	Pass
	784.5	H	-30.07	-50.45	0.00	2.04	22.42	Pass
	779.5	V	-29.12	-49.80	0.00	2.06	22.74	Pass
	782	V	-29.26	-49.92	0.00	2.05	22.71	Pass
	784.5	V	-29.53	-50.13	0.00	2.04	22.63	Pass
5MHz (16QAM)	779.5	H	-30.01	-50.05	0.00	2.06	22.10	Pass
	782	H	-30.08	-50.19	0.00	2.05	22.17	Pass
	784.5	H	-30.39	-50.45	0.00	2.04	22.10	Pass
	779.5	V	-29.46	-49.80	0.00	2.06	22.40	Pass
	782	V	-29.66	-49.92	0.00	2.05	22.31	Pass
	784.5	V	-30.36	-50.13	0.00	2.04	21.80	Pass
10MHz (QPSK)	782	H	-30.99	-50.75	0.00	2.07	21.84	Pass
	782	V	-30.05	-50.10	0.00	2.02	22.07	Pass
10MHz (16QAM)	782	H	-30.73	-50.22	0.00	2.04	21.53	Pass
	782	V	-30.74	-50.43	0.00	2.07	21.76	Pass

Note: 1. EIRP= E.R.P+2.15

4.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (1.4MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4 (3MHz).


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/13 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/13 (10MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4 (15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

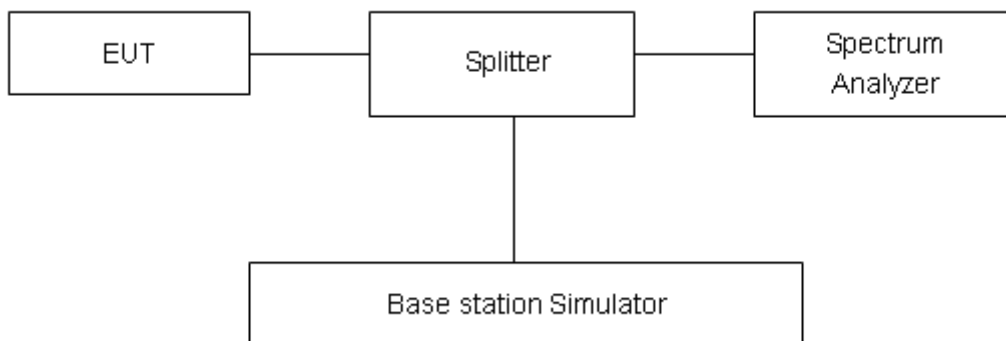

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.







Test Result







LTE Band 4						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	19957	1710.7	1.1064	1.322
			20175	1732.5	1.1067	1.337
			20393	1754.3	1.1089	1.362
		3	19965	1711.5	1.2548	2.359
			20175	1732.5	1.3298	2.468
			20385	1753.5	1.2908	2.359
		5	19975	1712.5	1.3328	2.422
			20175	1732.5	1.2914	2.054
			20375	1752.5	1.2641	1.970
		10	20000	1715	1.9849	3.829
			20175	1732.5	1.7695	3.499
			20350	1750	1.8287	3.175
		15	20025	1717.5	2.1167	3.413
			20175	1732.5	1.9632	2.963
			20325	1747.5	2.1132	3.631
		20	20050	1720	2.0875	3.818
			20175	1732.5	2.2284	3.917
			20300	1745	2.5955	3.932
	16QAM	1.4	19957	1710.7	1.1307	1.350
			20175	1732.5	1.1143	1.334
			20393	1754.3	1.1119	1.341
		3	19965	1711.5	1.2736	2.358
			20175	1732.5	1.3627	2.468
			20385	1753.5	1.3141	2.359
5		19975	1712.5	1.3316	2.422	
		20175	1732.5	1.2923	2.068	
		20375	1752.5	1.2770	1.970	
10		20000	1715	2.1282	3.817	
		20175	1732.5	1.8911	3.499	
		20350	1750	1.8809	3.175	
15		20025	1717.5	2.3151	3.582	
		20175	1732.5	2.0033	3.224	
		20325	1747.5	2.1118	3.631	
20		20050	1720	2.1045	3.845	















			20175	1732.5	2.4141	3.925
			20300	1745	2.6052	3.932







LTE Band 13						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	23205	779.5	1.2509	1.544
			23230	782	1.2698	2.202
			23255	784.5	1.2934	2.054
		10	23230	782	2.3599	3.792
	16QAM	5	23205	779.5	1.2893	2.133
			23230	782	1.2525	2.220
			23255	784.5	1.3247	2.168
		10	23230	782	2.5200	3.760

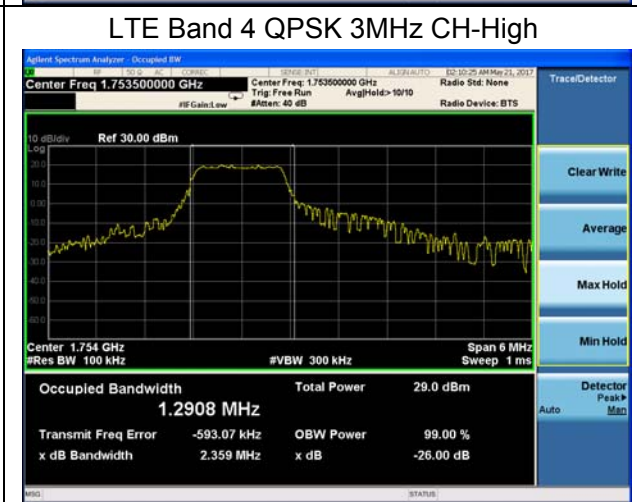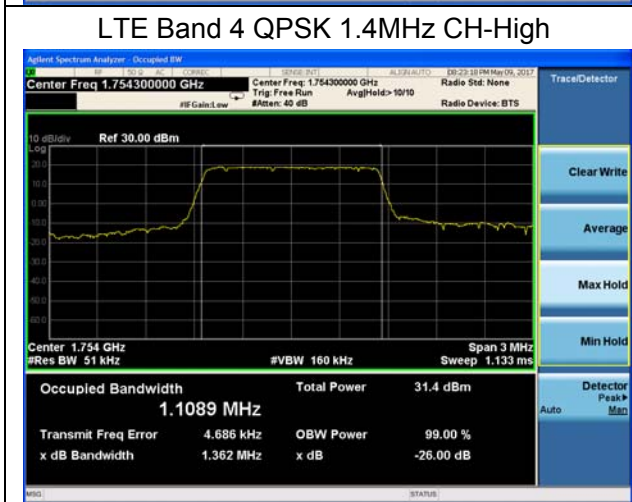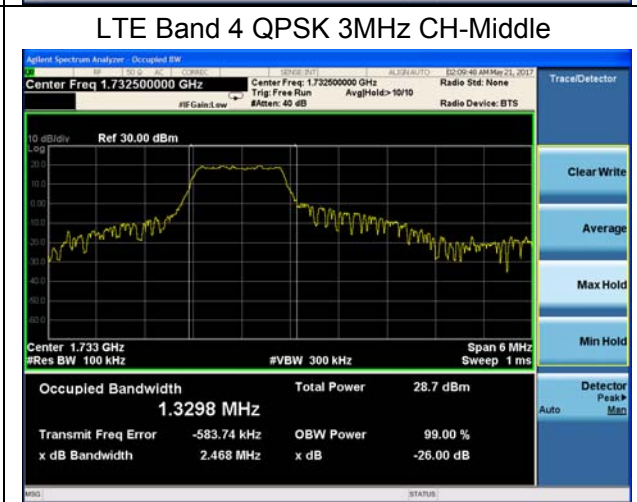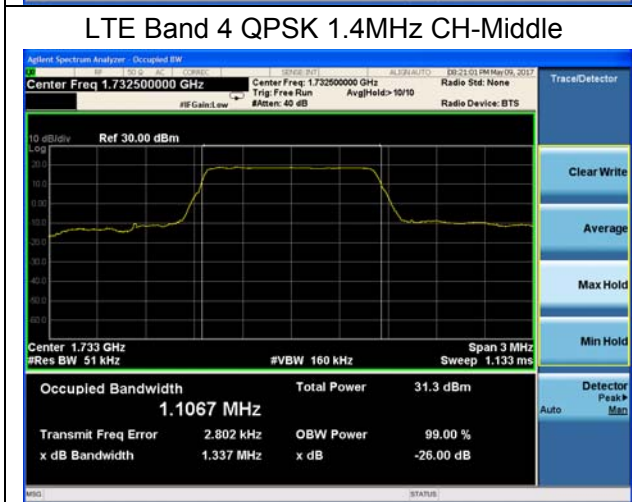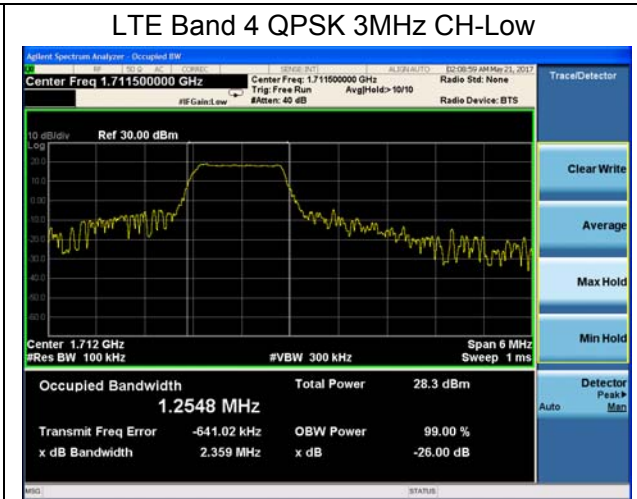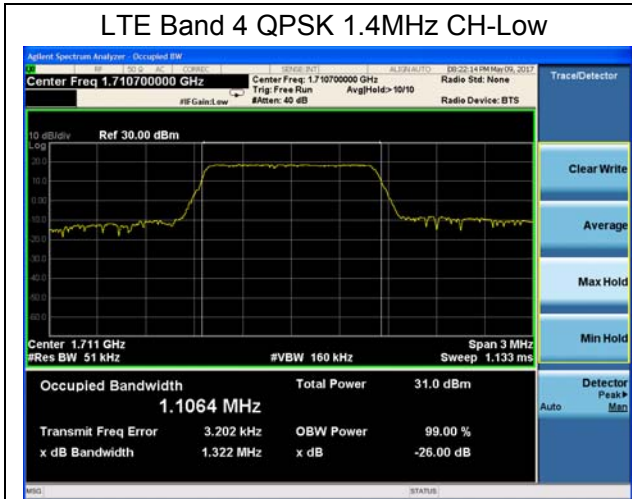

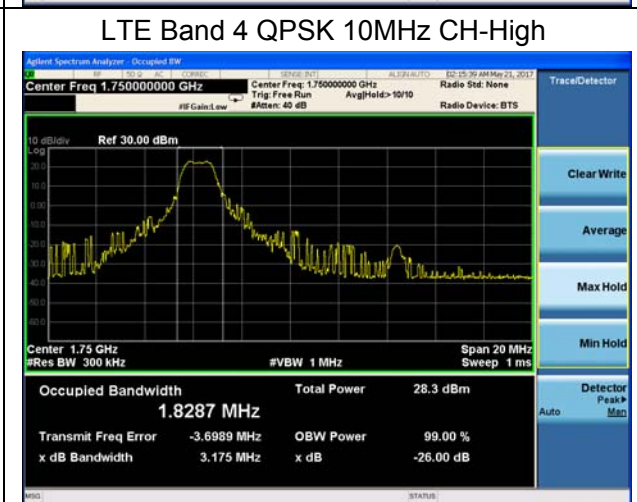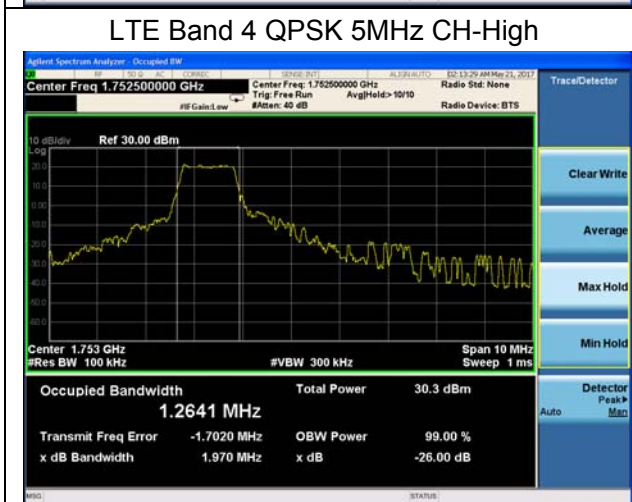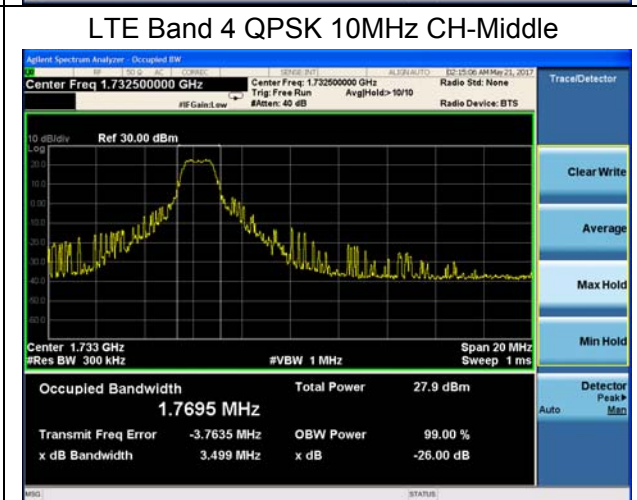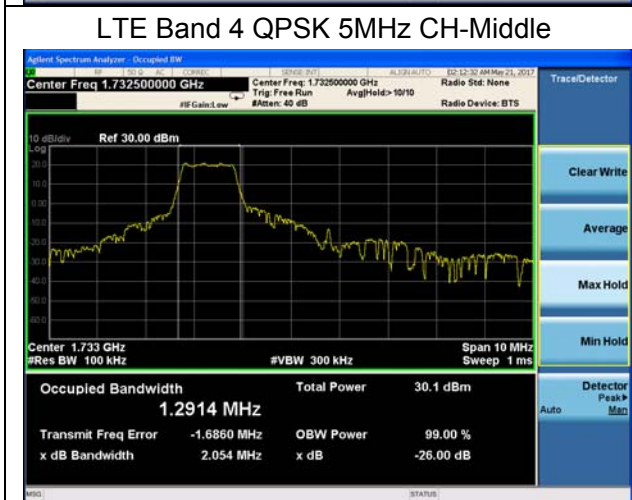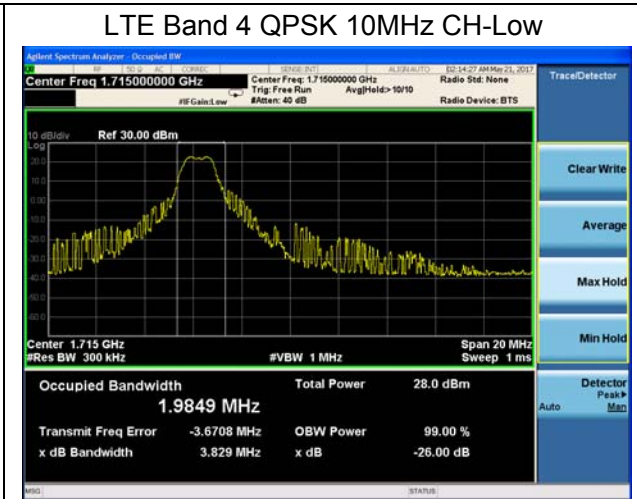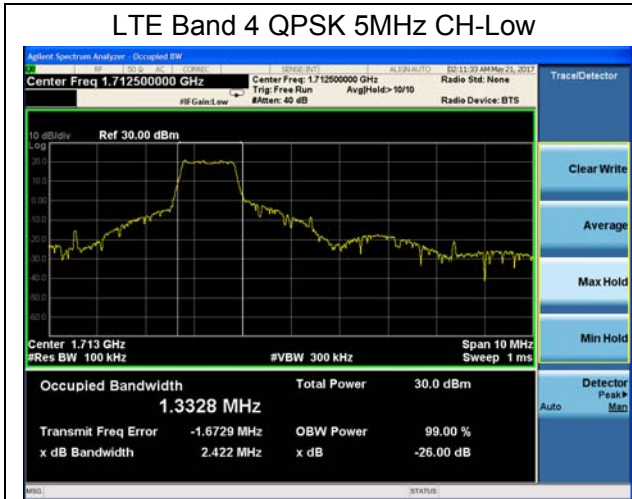

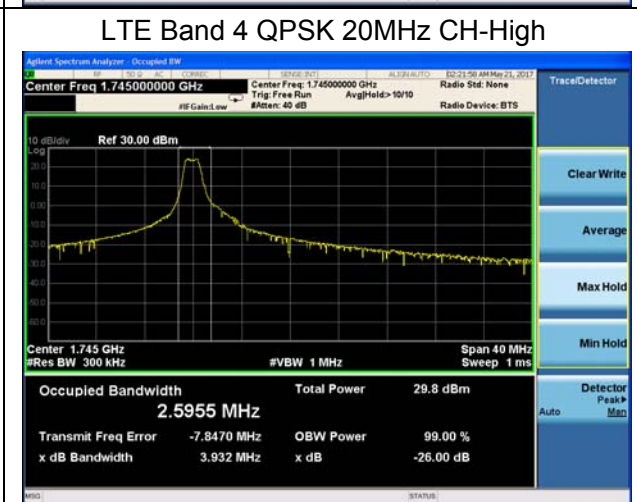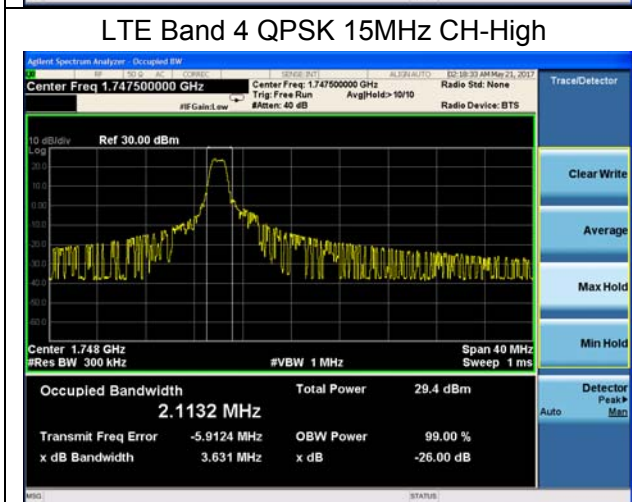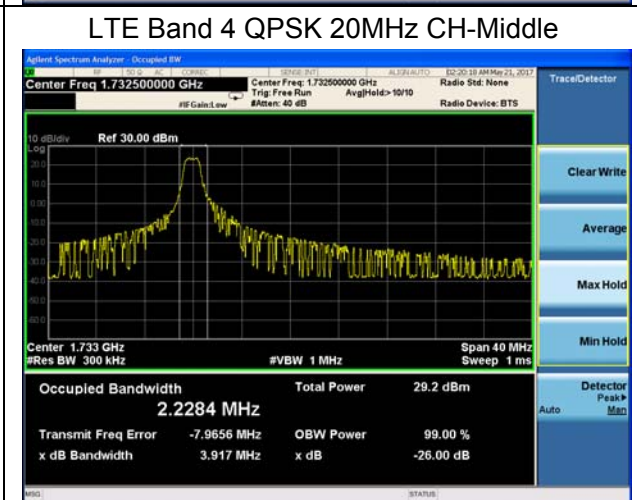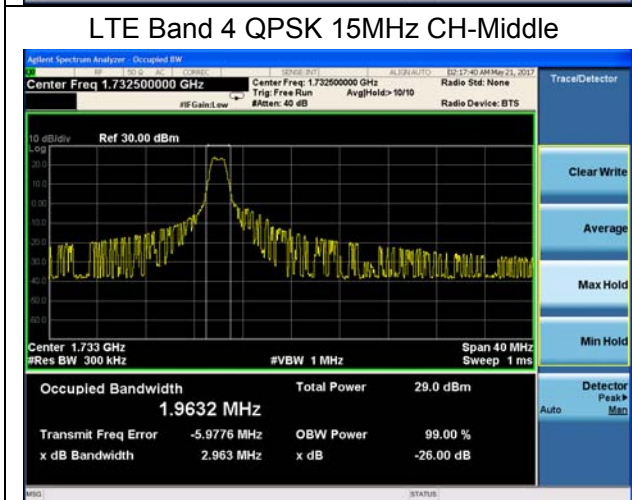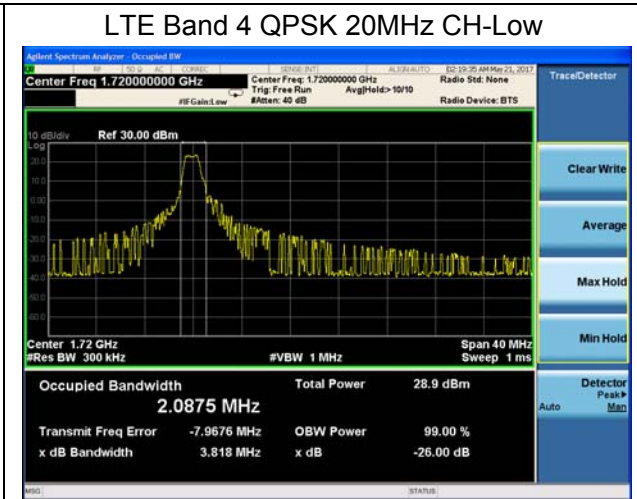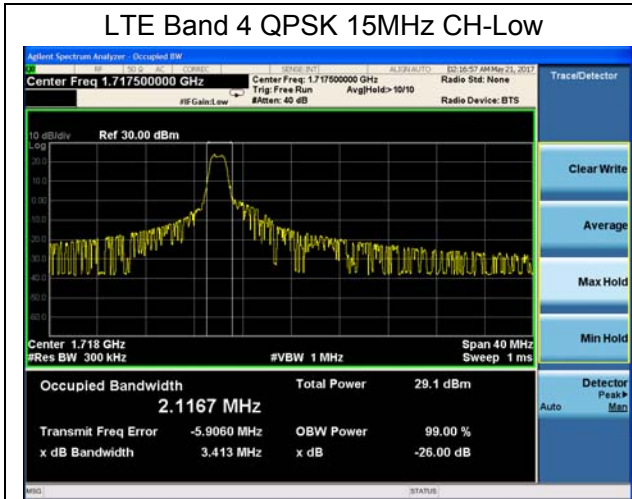


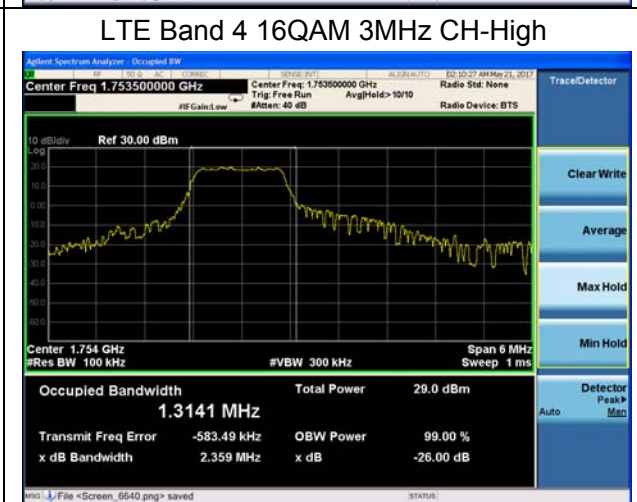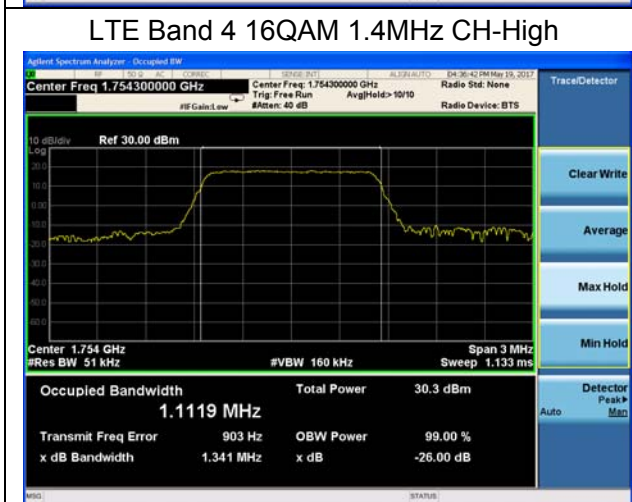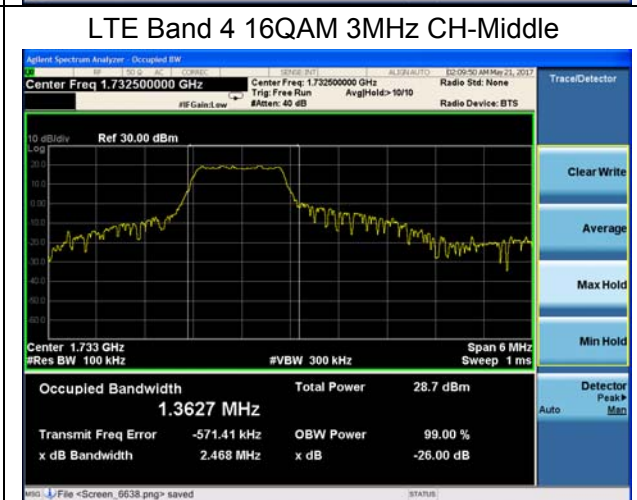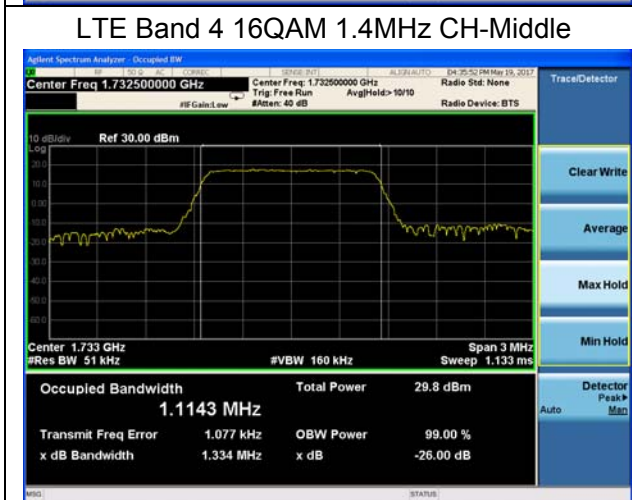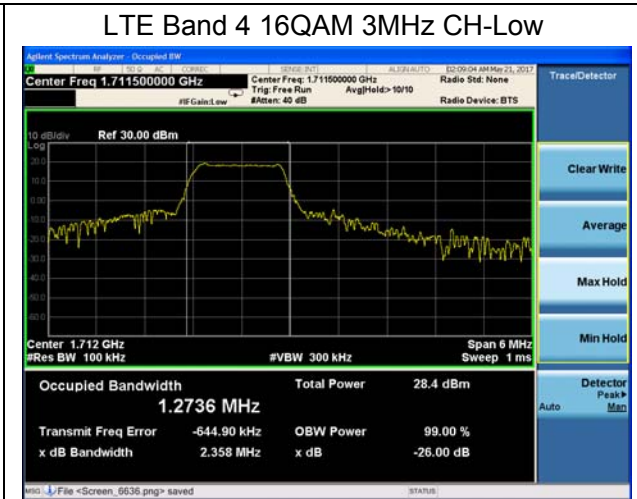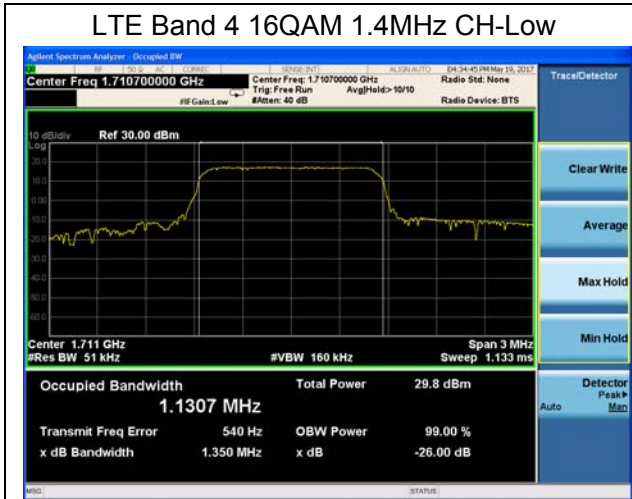

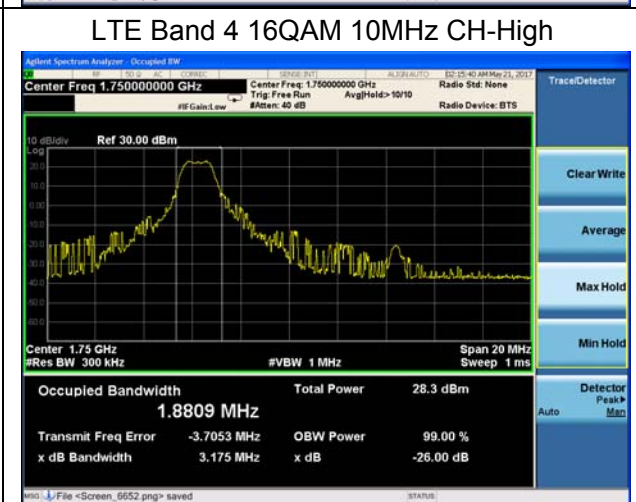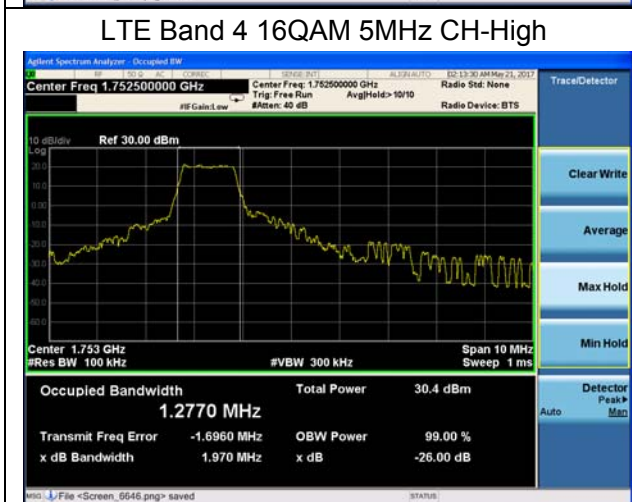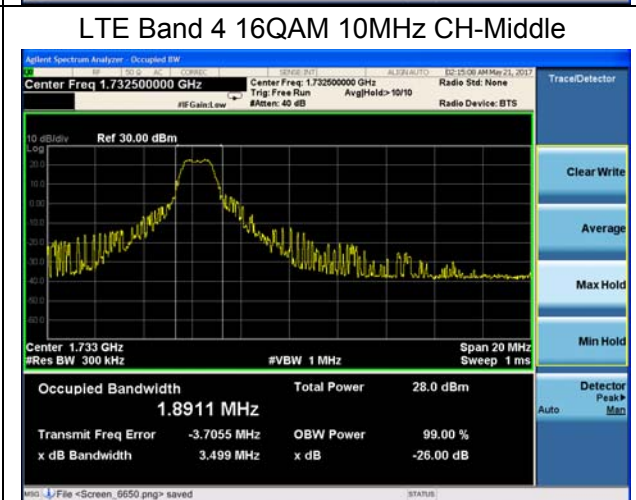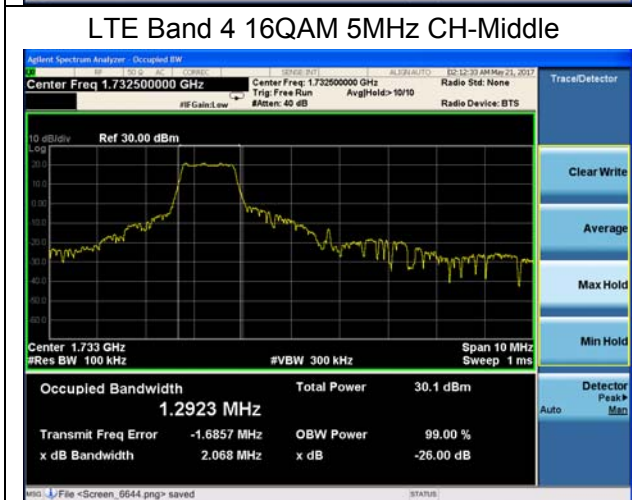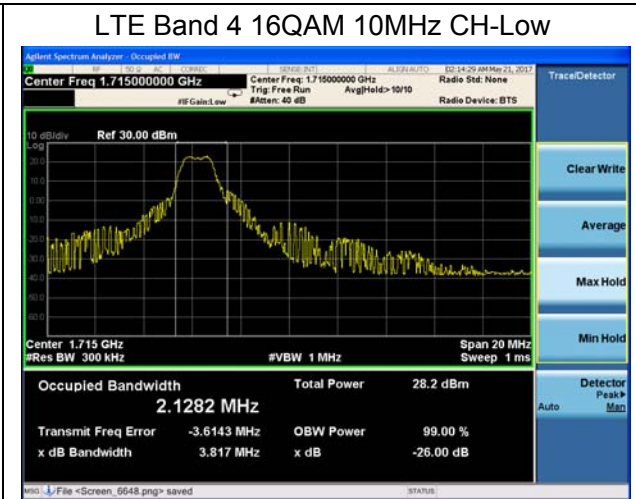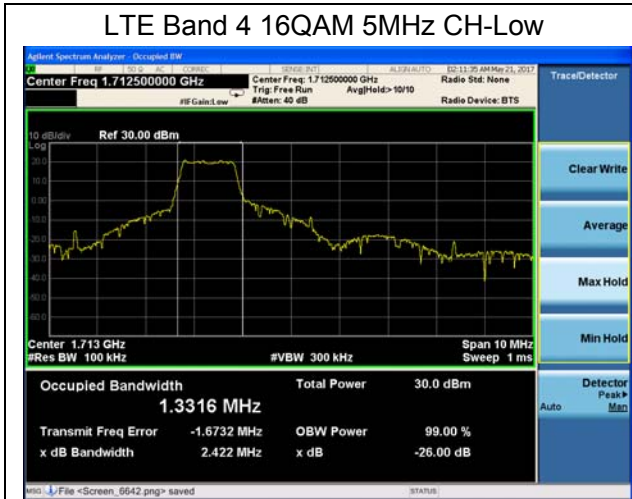





LTE Band 4 16QAM 15MHz CH-Low

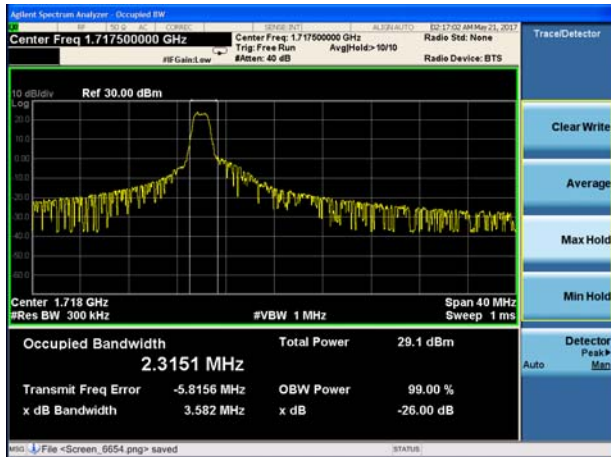

LTE Band 4 16QAM 20MHz CH-Low

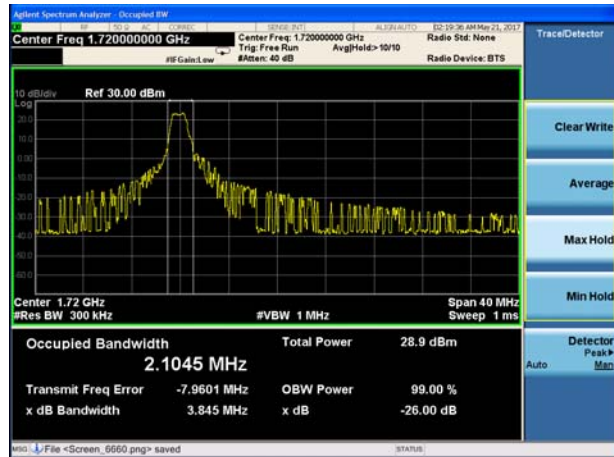


LTE Band 4 16QAM 15MHz CH-Middle

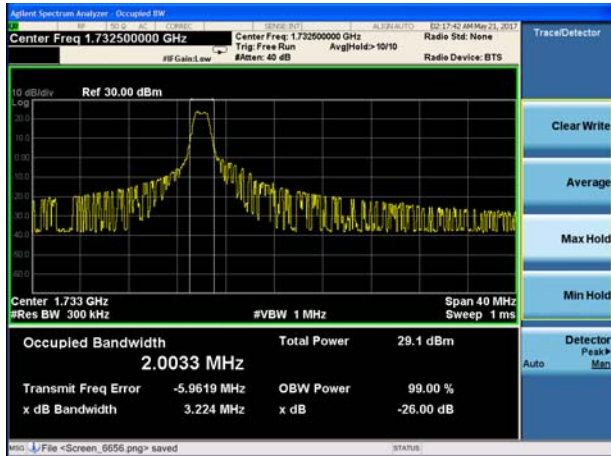


LTE Band 4 16QAM 20MHz CH-Middle










LTE Band 4 16QAM 15MHz CH-High

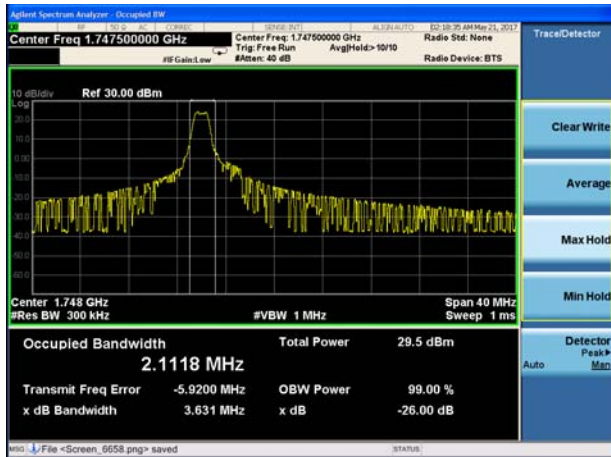

LTE Band 4 16QAM 20MHz CH-High

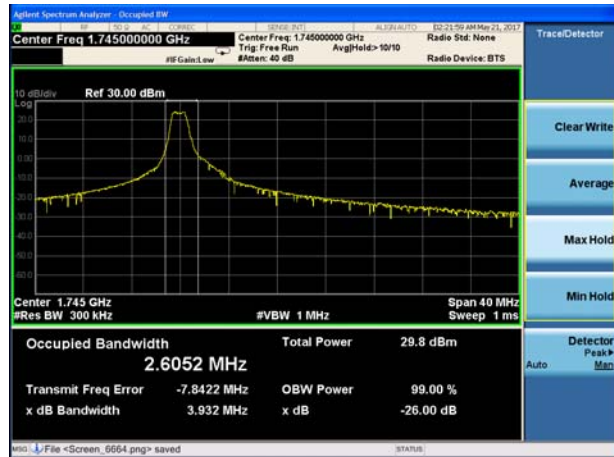

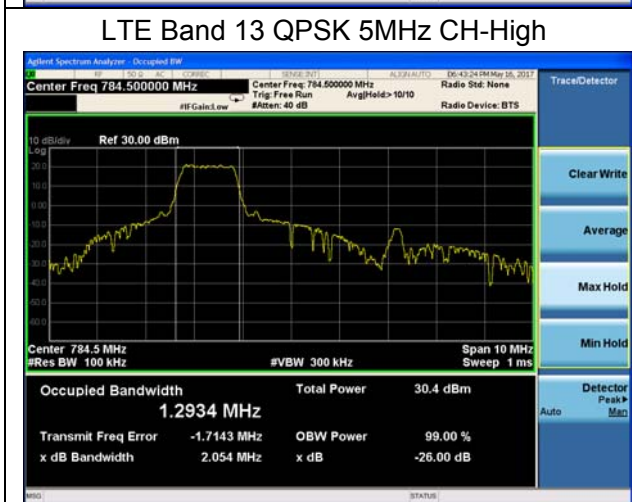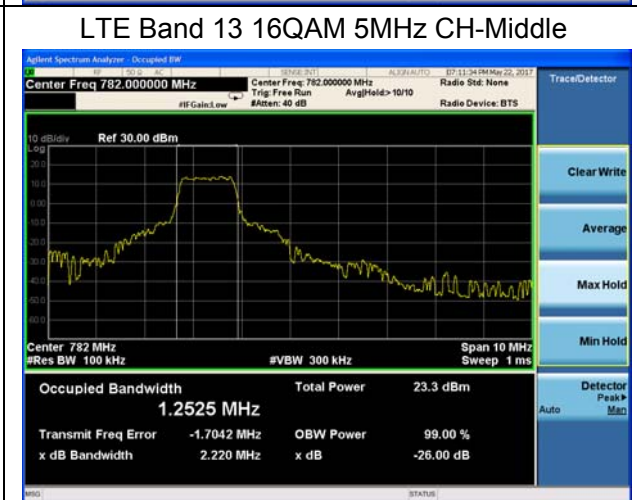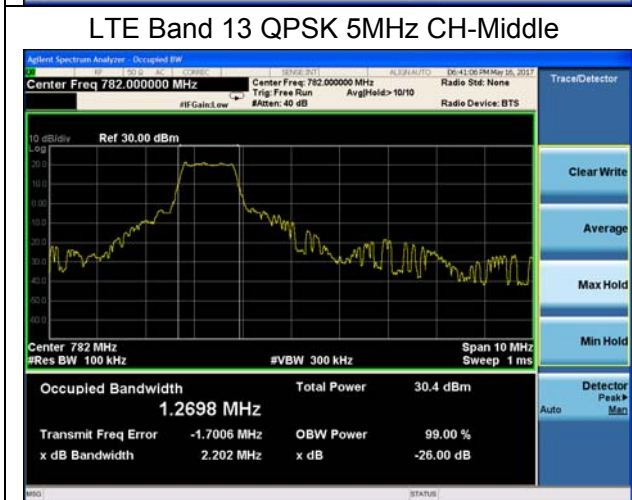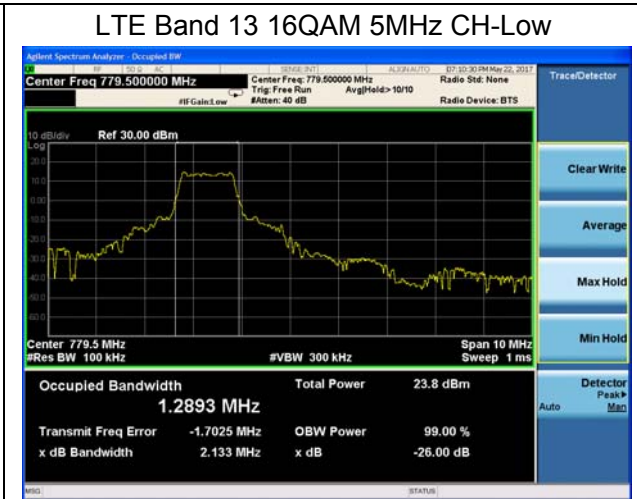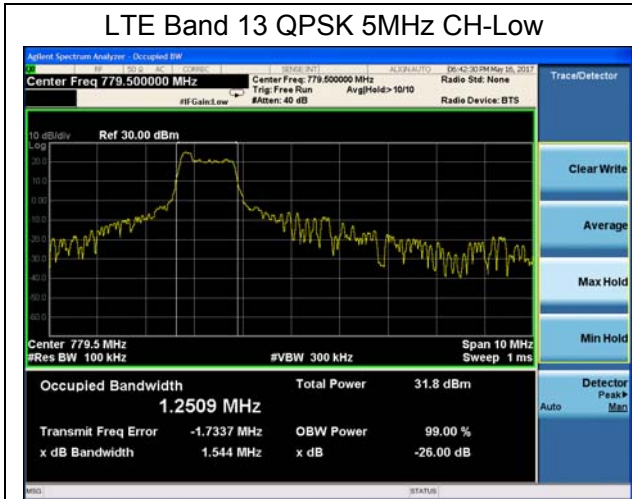

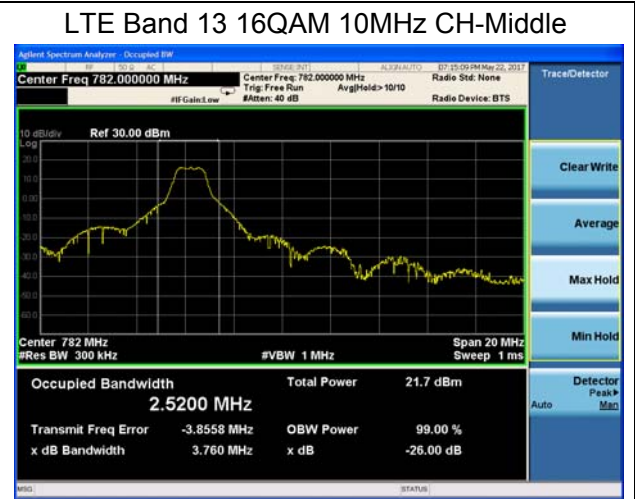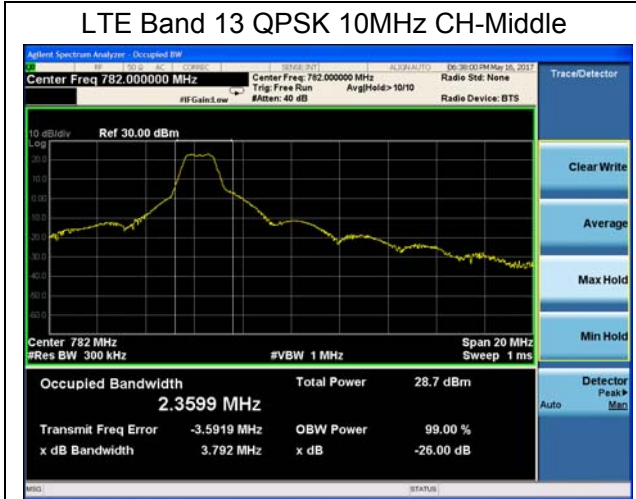

4.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v02r02 Section 6.0

- 1.The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For LTE Band 41 Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 4 (1.4MHz).
RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 4 (3MHz).
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4/13 (5MHz).
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4/13 (10MHz).
RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 4 (15MHz).
RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4 (20MHz) on spectrum analyzer.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Test Setup

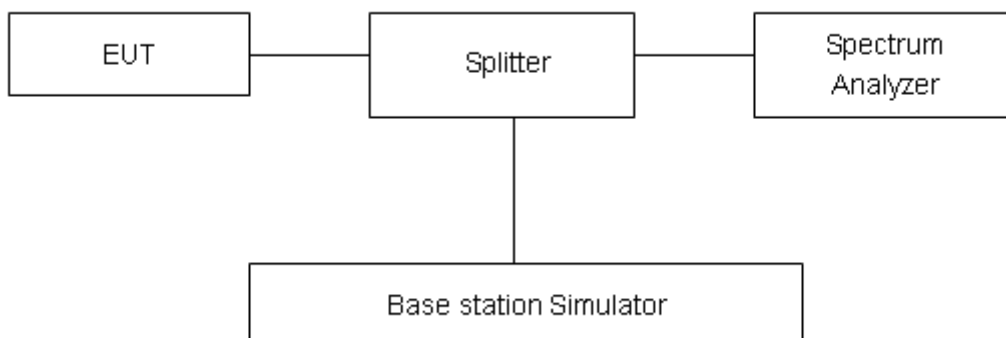

Limits

Rule Part 27.53(h) specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB”


Part 27.53(g) specifies that “ For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log_{10} (P)$ dB.”






Measurement Uncertainty






The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.






Test Result







All the test traces in the plots shows the test results clearly.

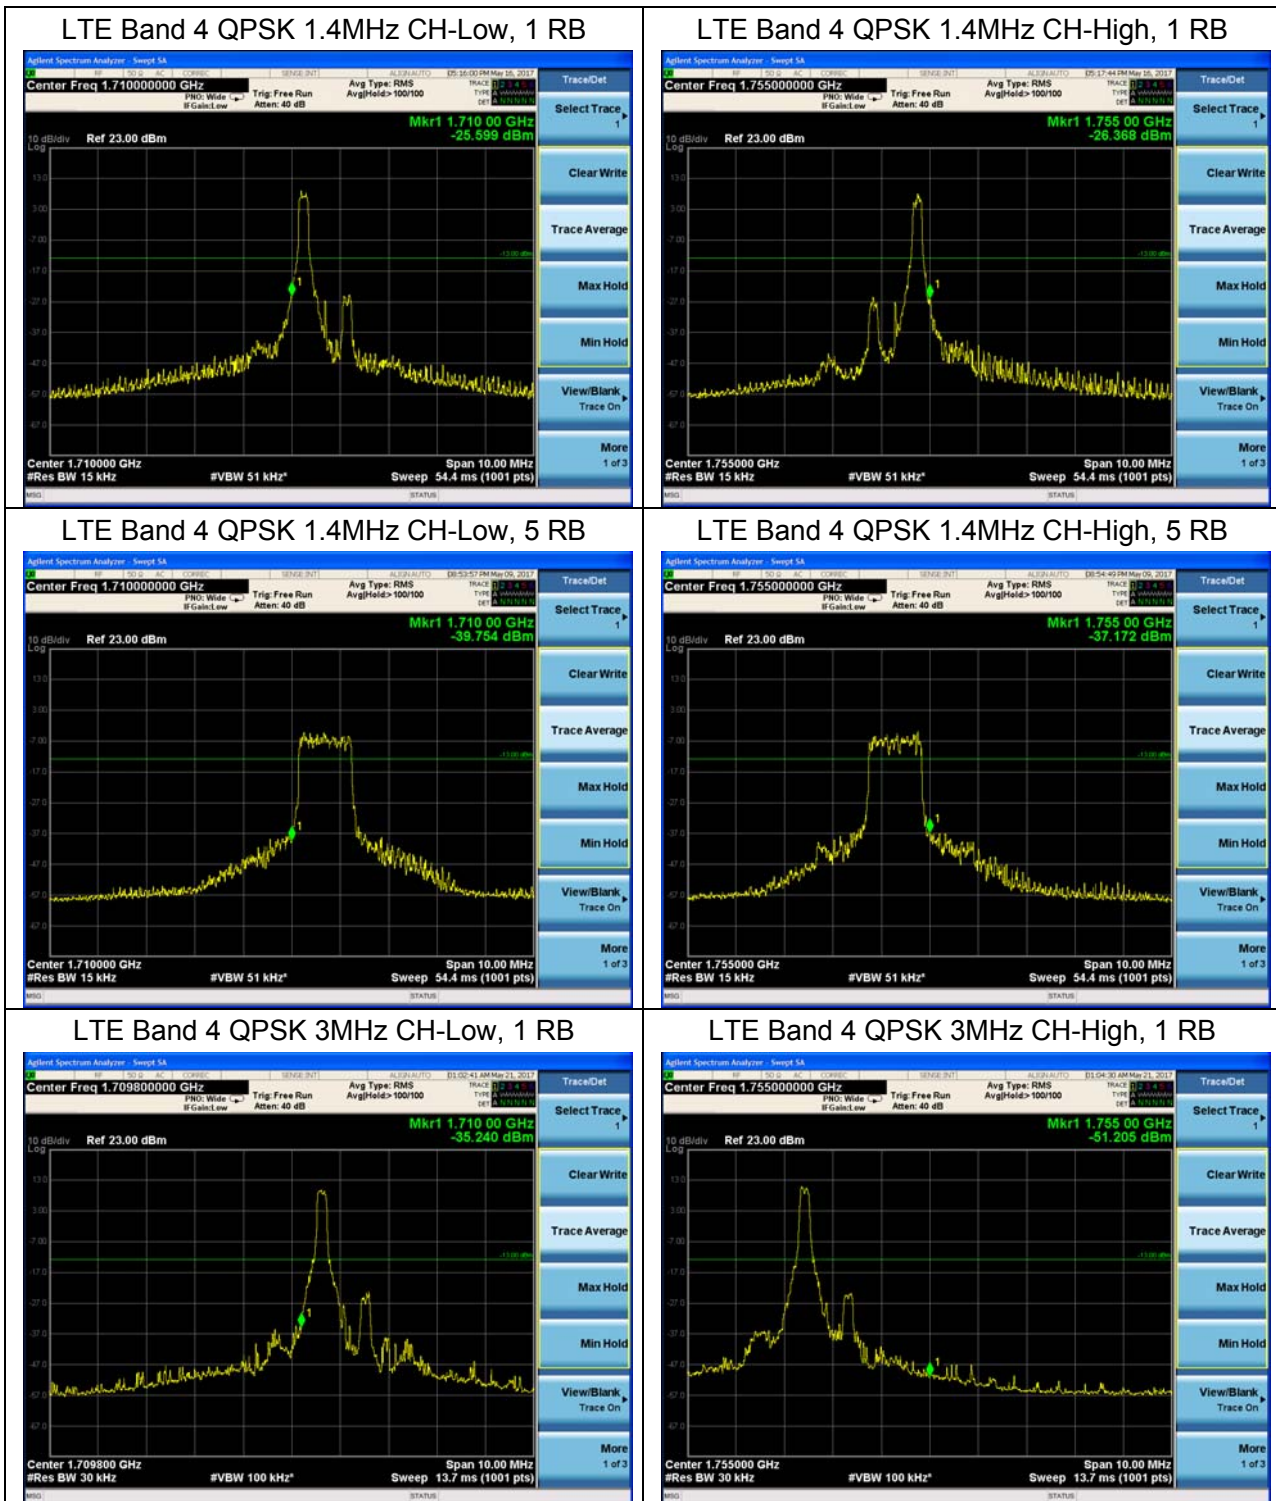

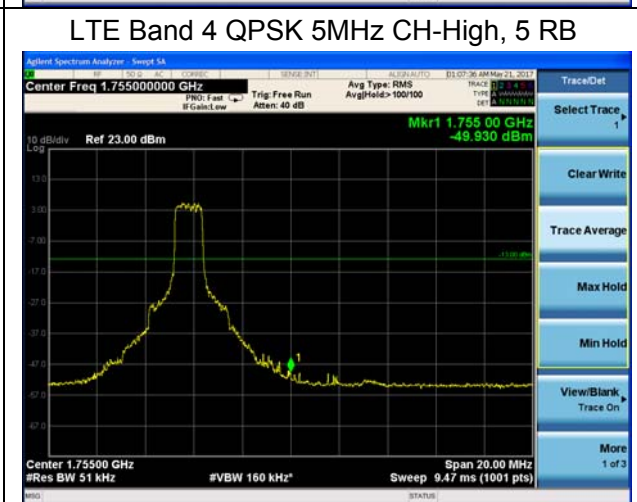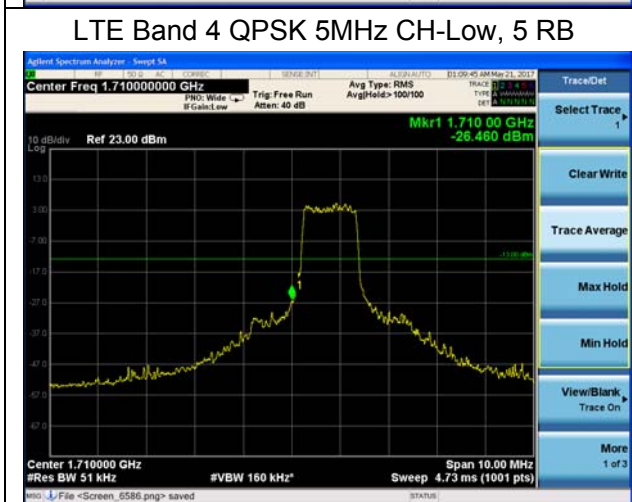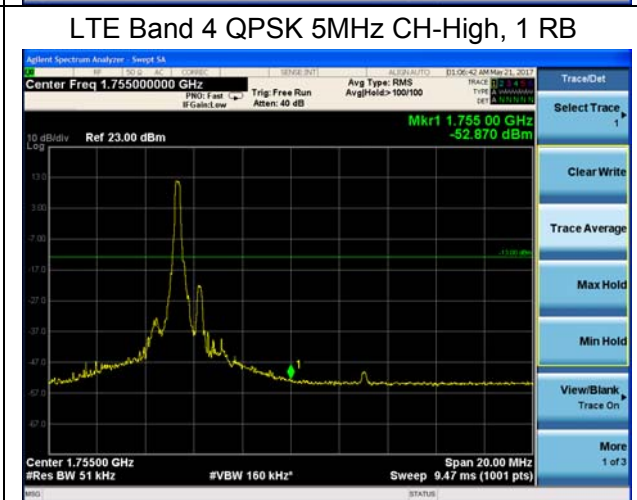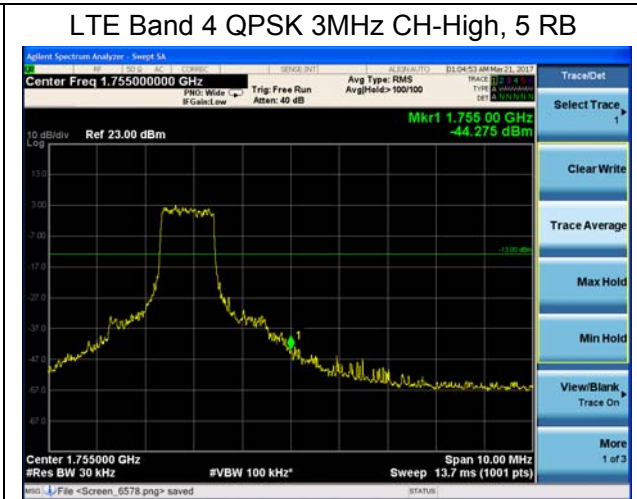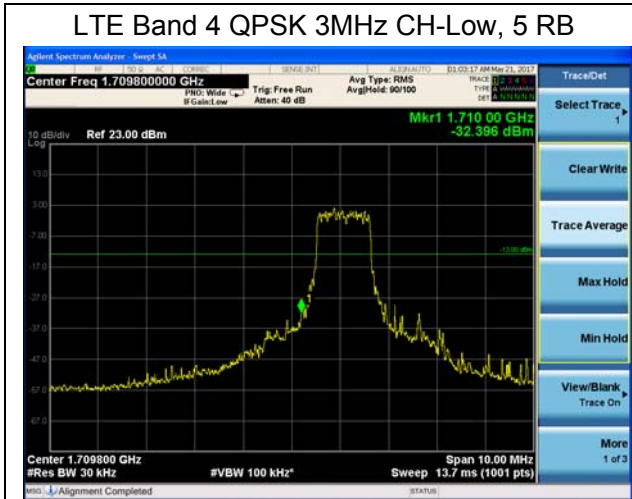

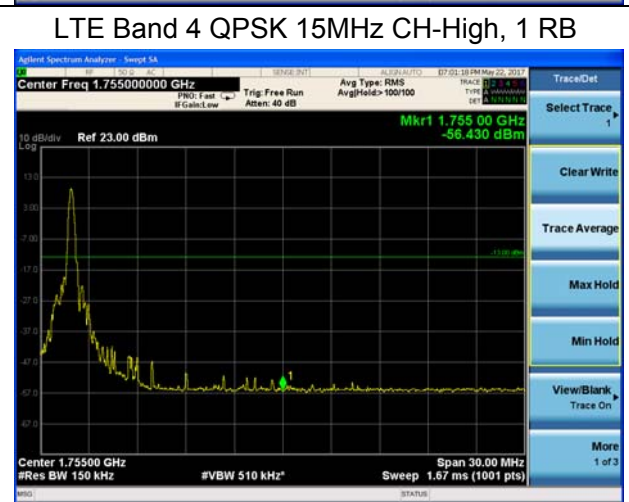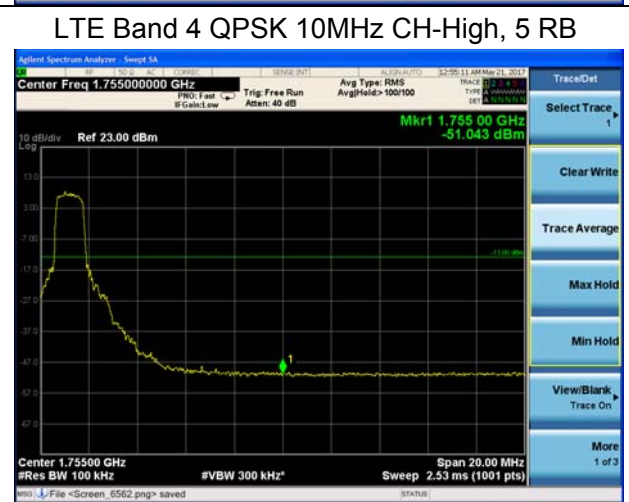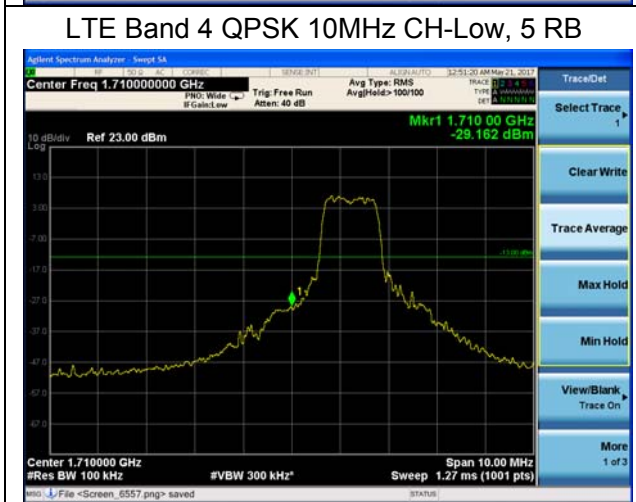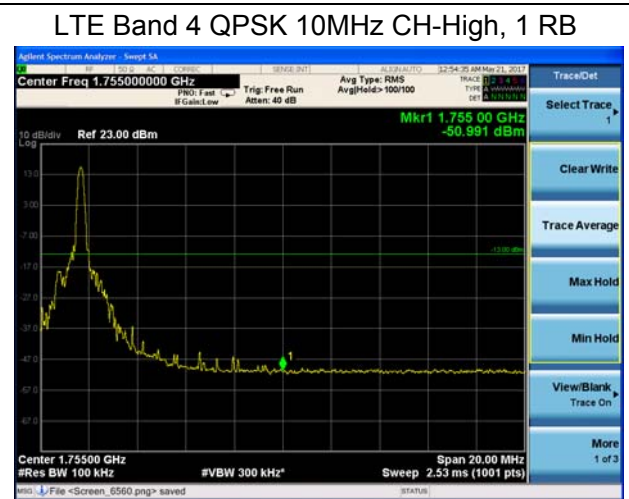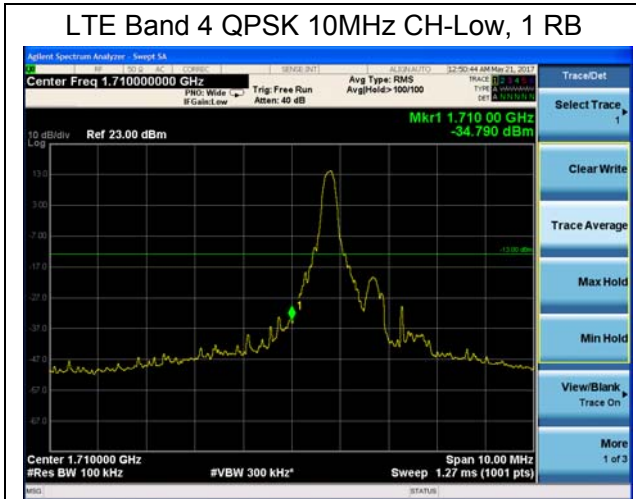

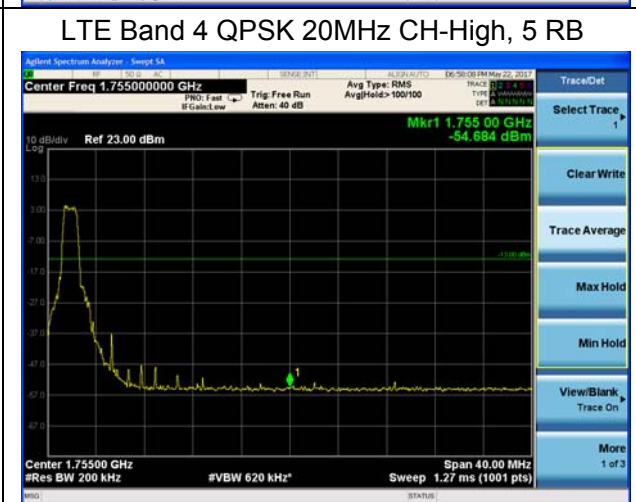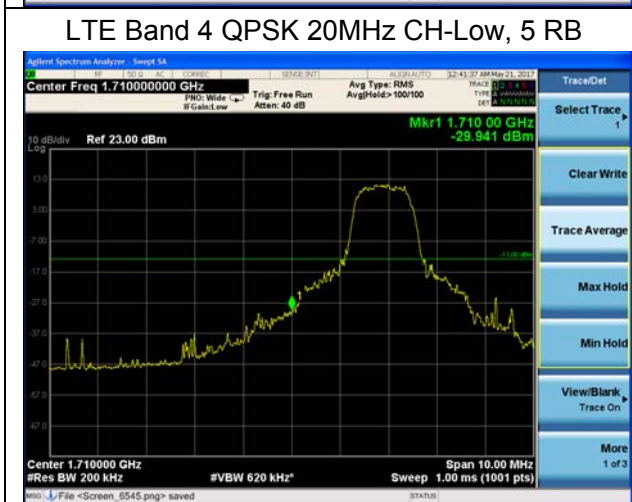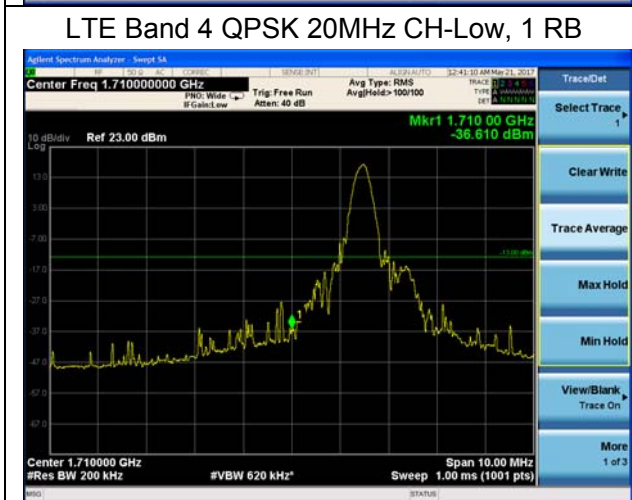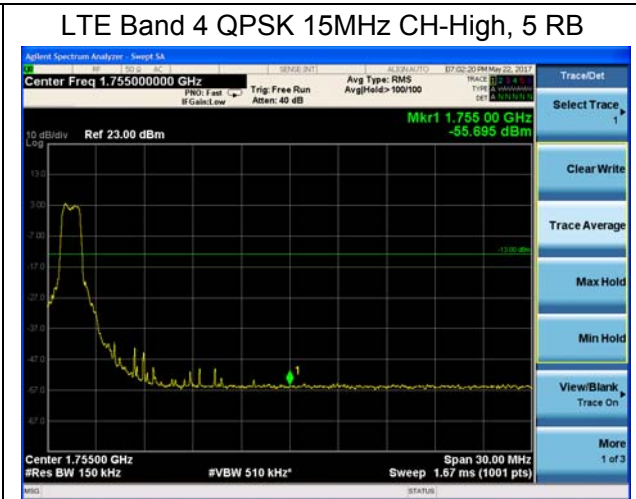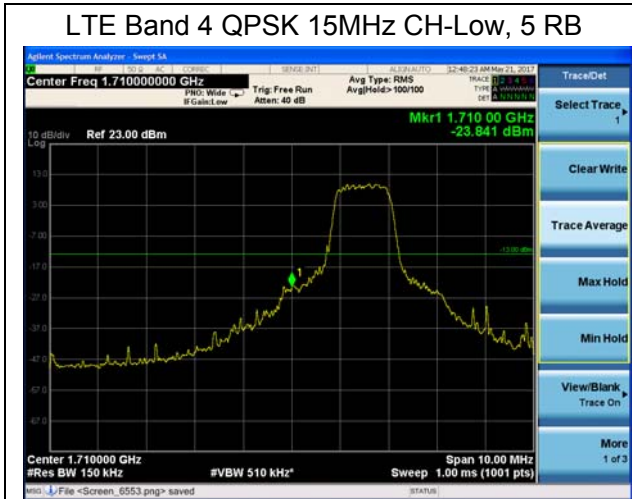

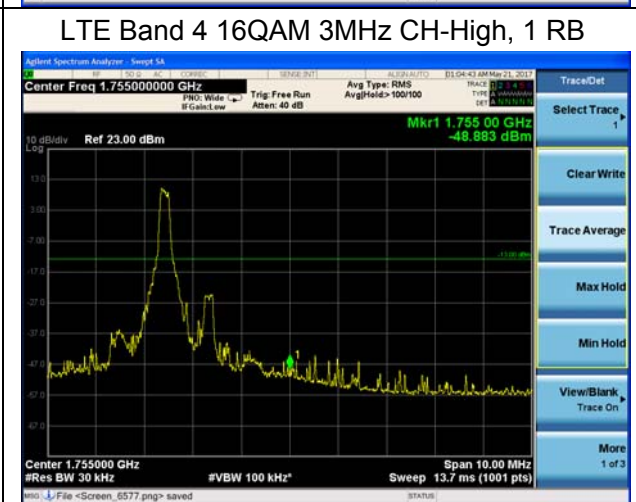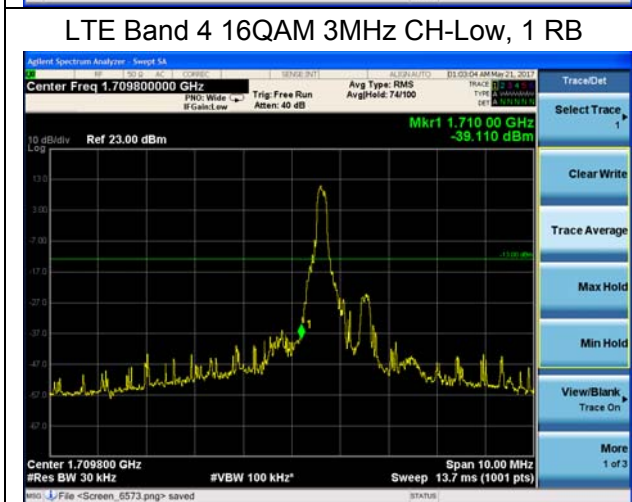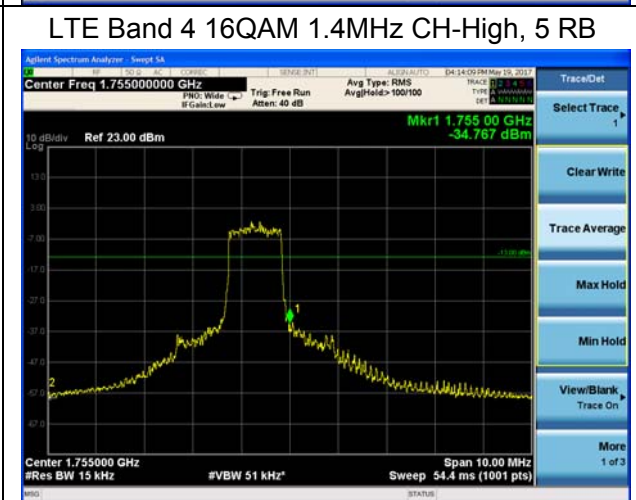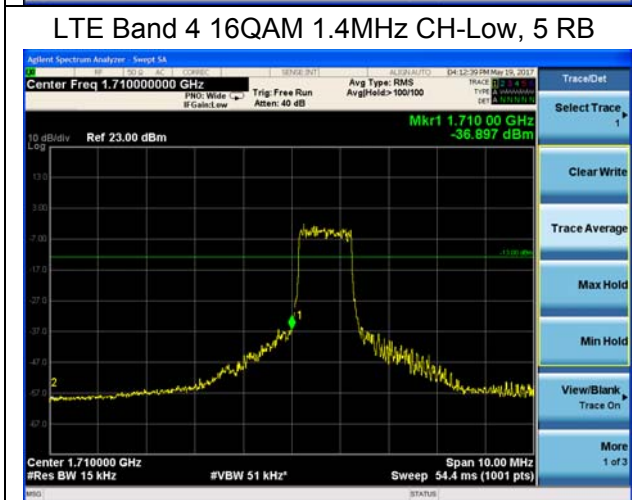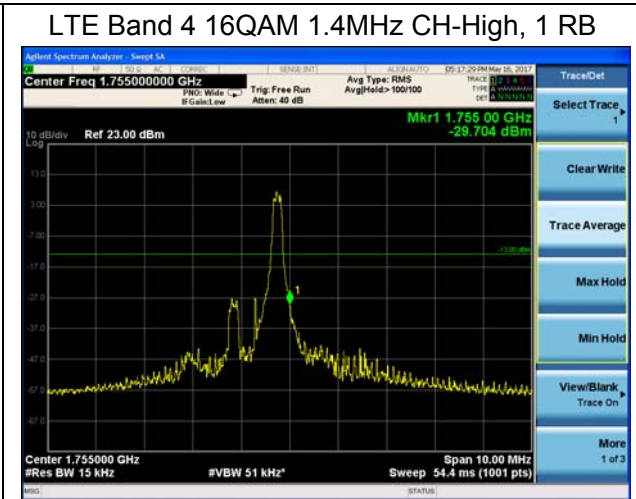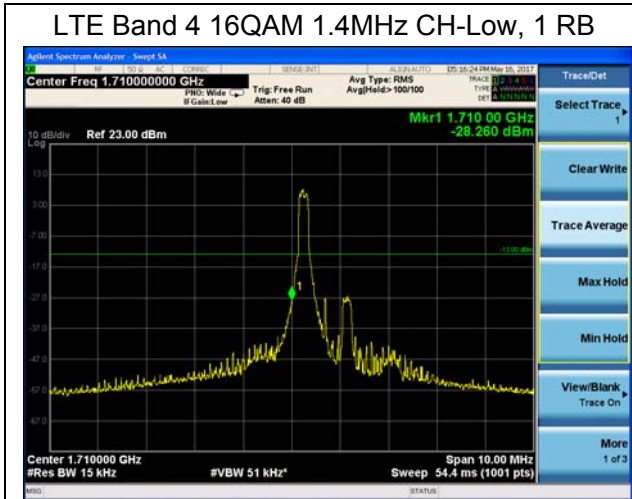





LTE Band 4 16QAM 3MHz CH-Low, 5 RB



LTE Band 4 16QAM 3MHz CH-High, 5 RB

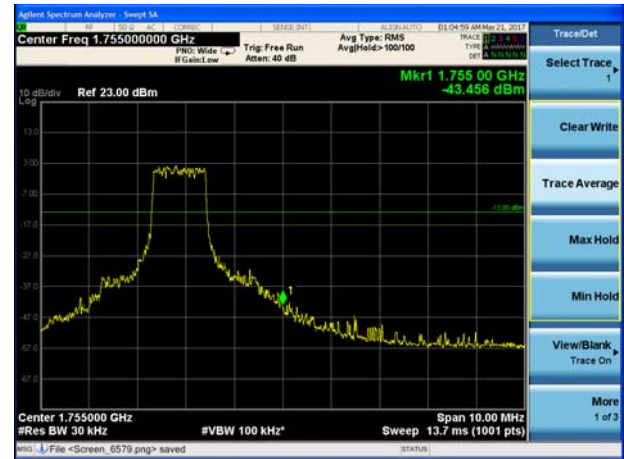


LTE Band 4 16QAM 5MHz CH-Low, 1 RB

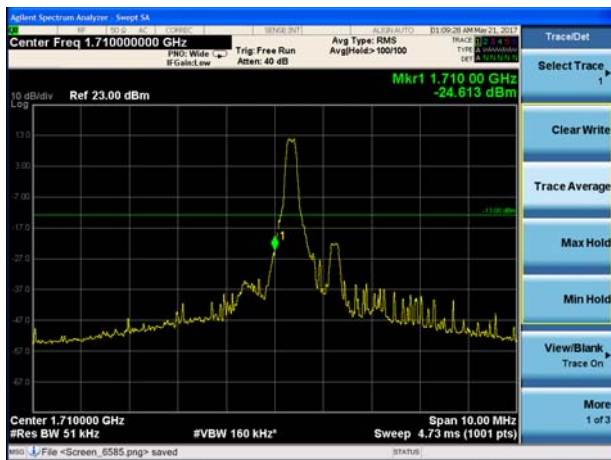


LTE Band 4 16QAM 5MHz CH-High, 1 RB













LTE Band 4 16QAM 5MHz CH-Low, 5 RB

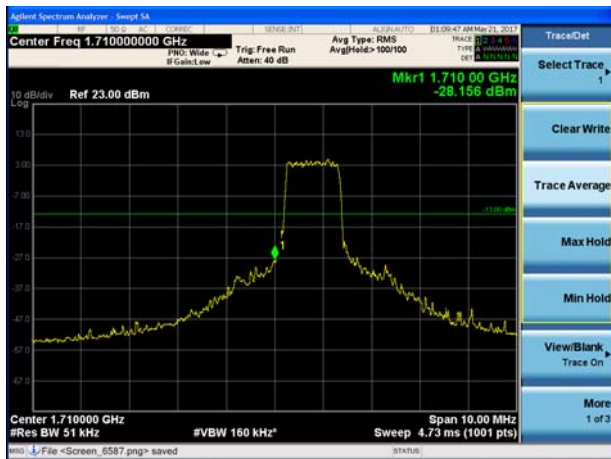

LTE Band 4 16QAM 5MHz CH-High, 5 RB

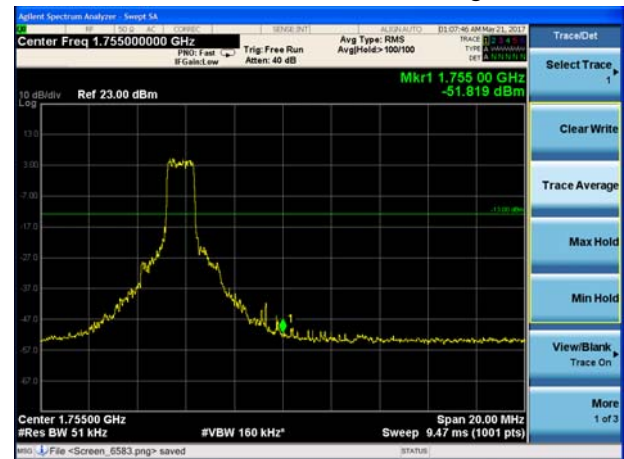


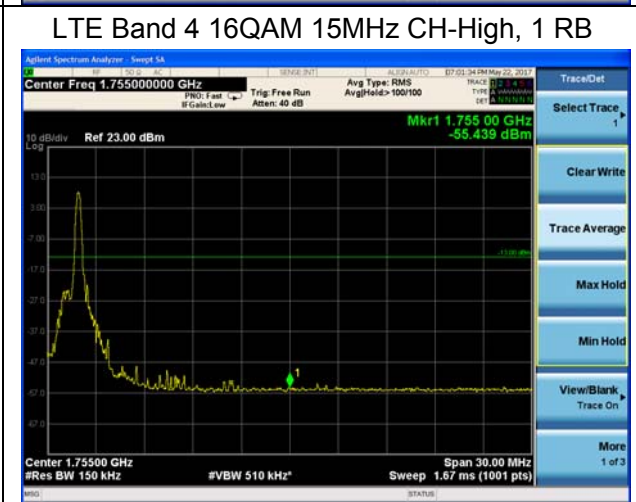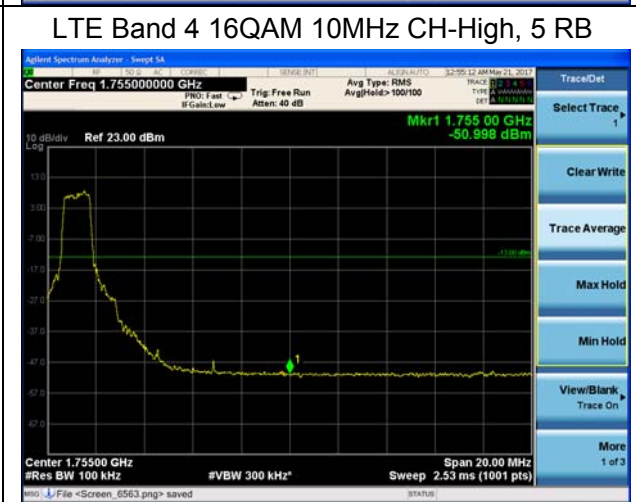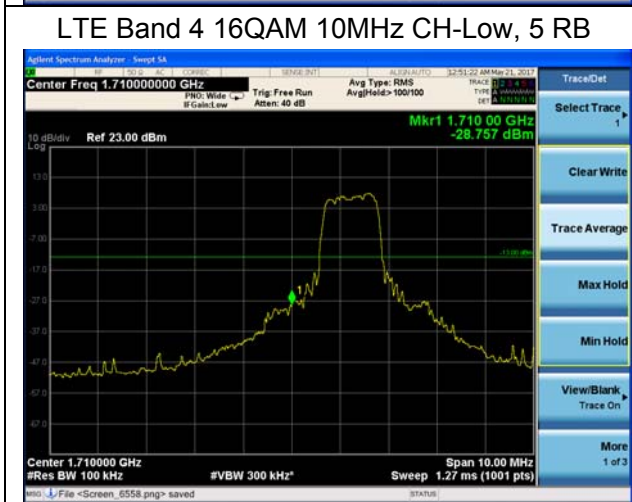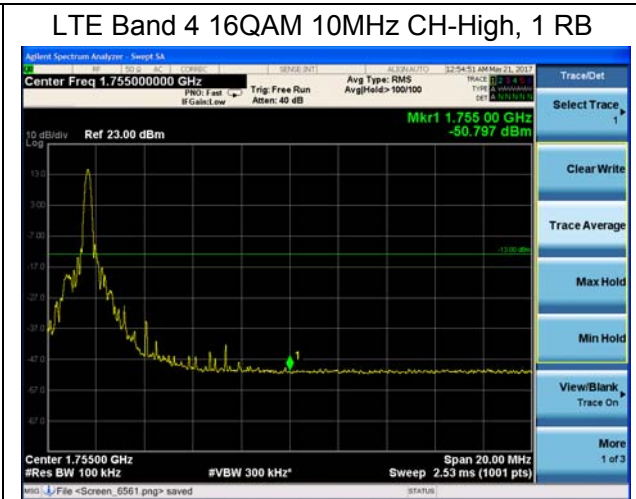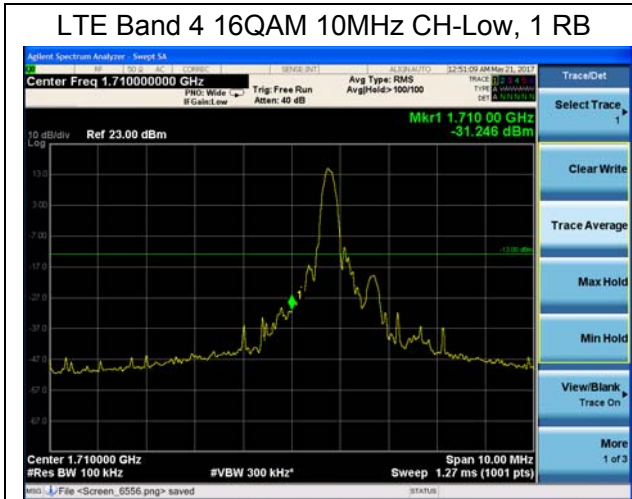

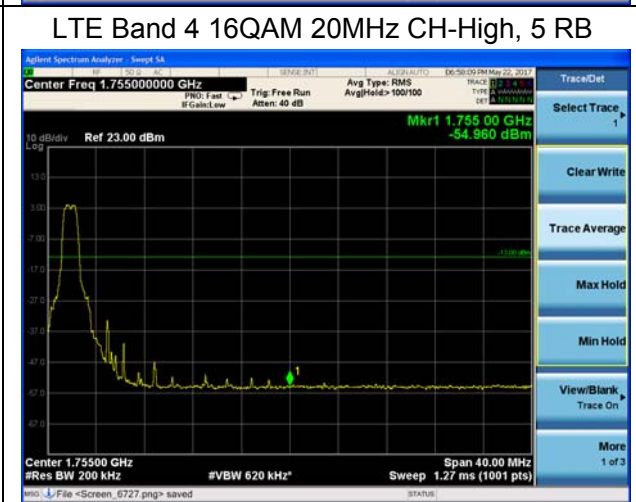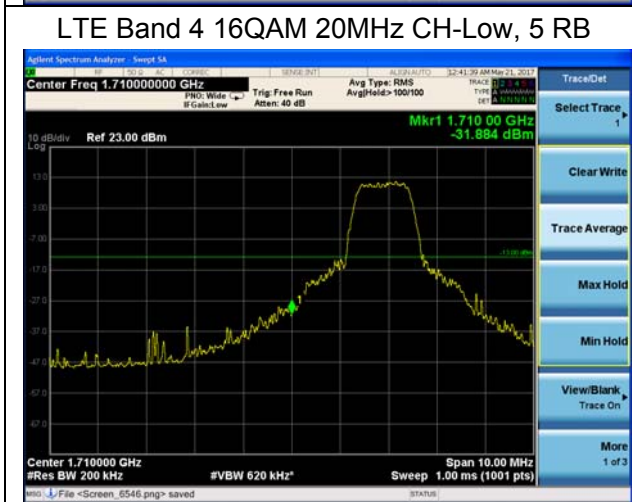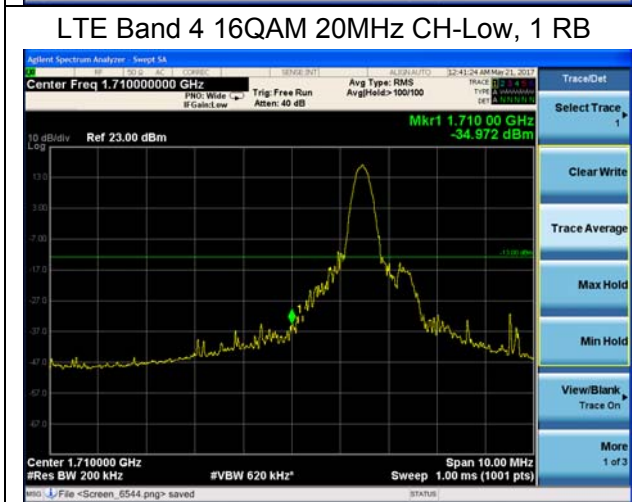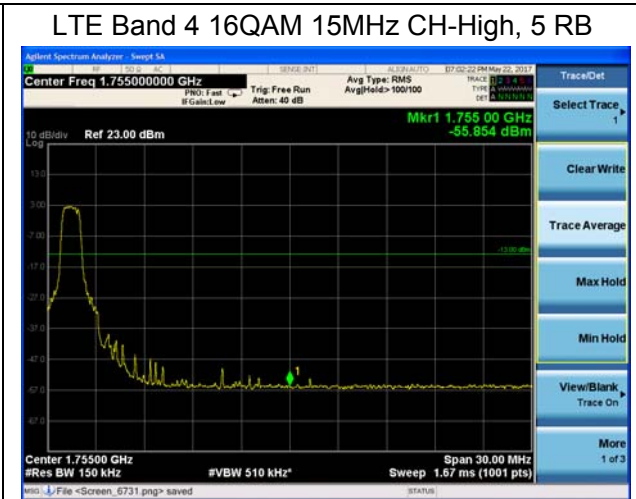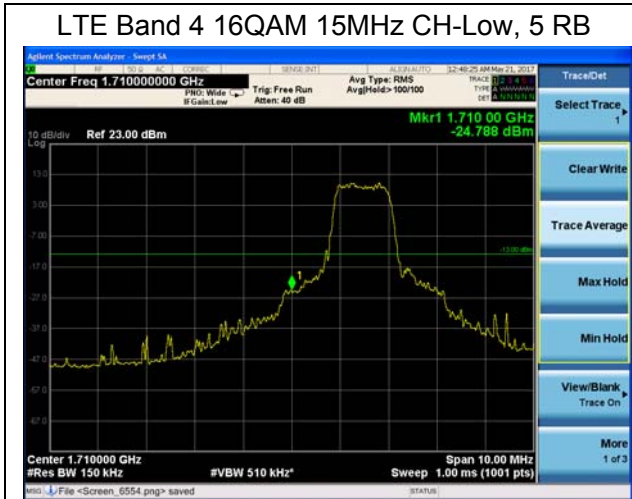



LTE Band 13 QPSK 5MHz CH-Low, 1 RB

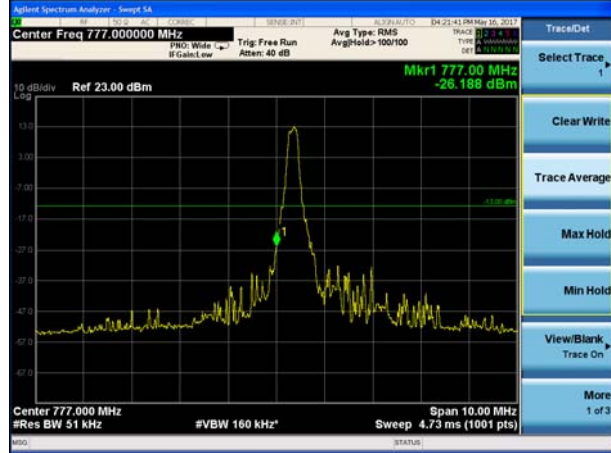


LTE Band 13 QPSK 5MHz CH-High, 1 RB




LTE Band 13 QPSK 5MHz CH-Low, 5 RB



LTE Band 13 QPSK 5MHz CH-High, 5 RB

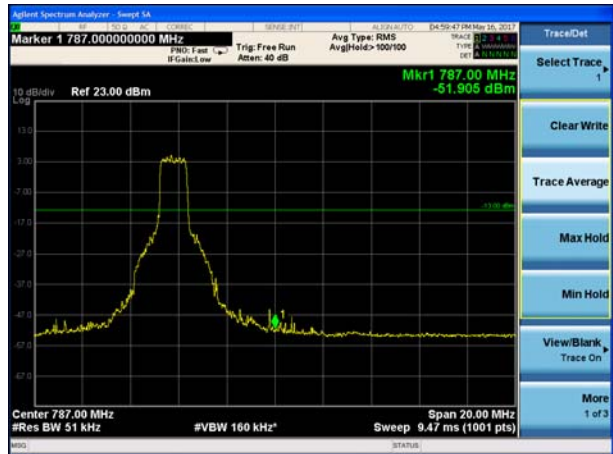

LTE Band 13 QPSK 10MHz CH-Low, 1 RB

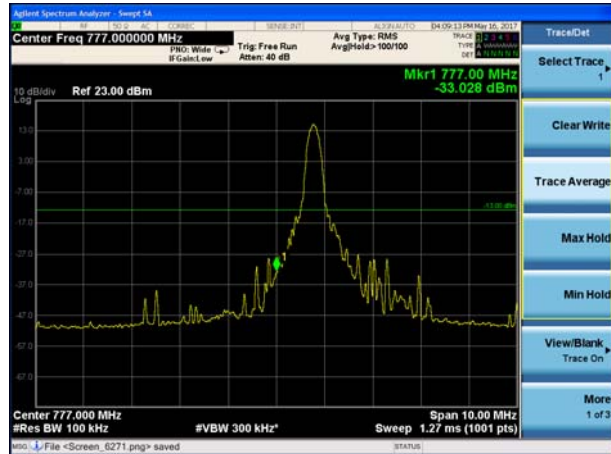


LTE Band 13 QPSK 10MHz CH-High, 1 RB







LTE Band 13 QPSK 10MHz CH-Low, 5 RB

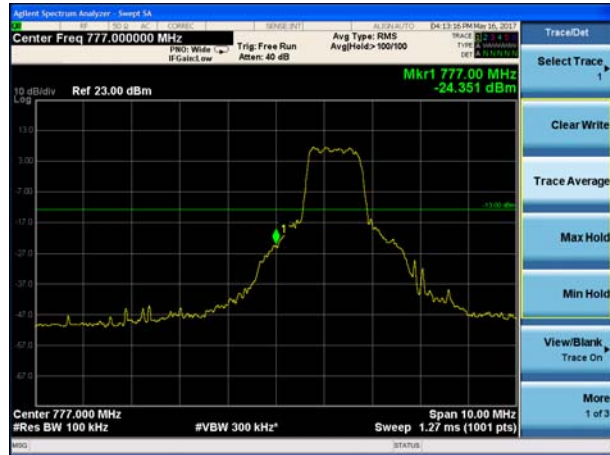


LTE Band 13 QPSK 10MHz CH-High, 5 RB

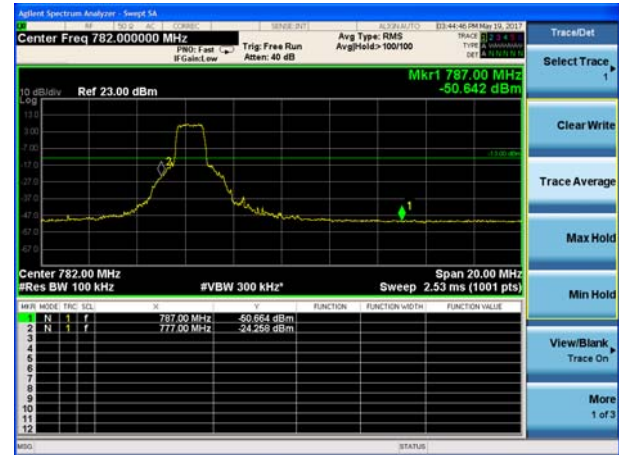

LTE Band 13 16QAM 5MHz CH-Low, 1 RB

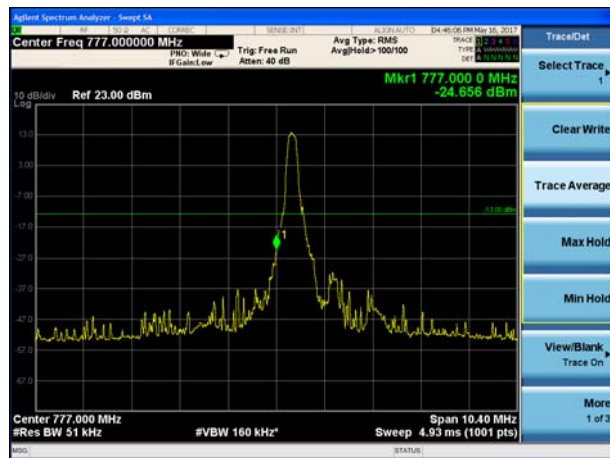

LTE Band 13 16QAM 5MHz CH-High, 1 RB

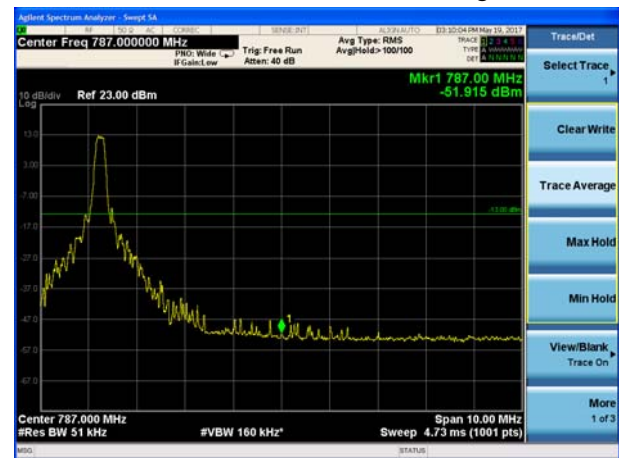

LTE Band 13 16QAM 5MHz CH-Low, 5 RB




LTE Band 13 16QAM 5MHz CH-High, 5 RB







LTE Band 13 16QAM 10MHz CH-Low, 1 RB

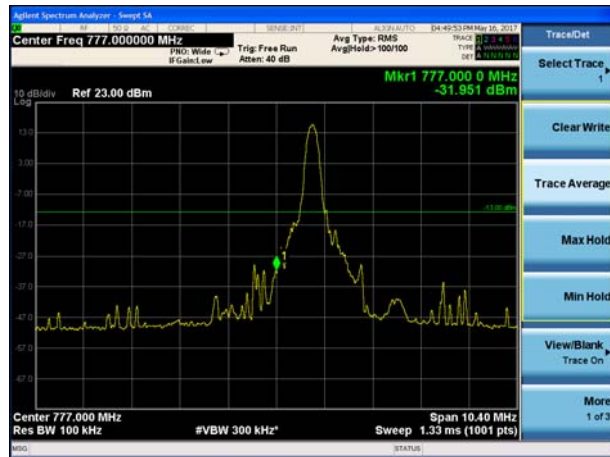


LTE Band 13 16QAM 10MHz CH-High, 1 RB

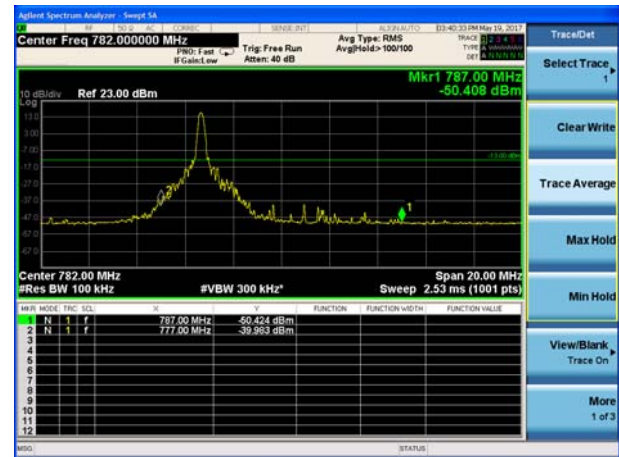

LTE Band 13 16QAM 10MHz CH-Low, 5 RB

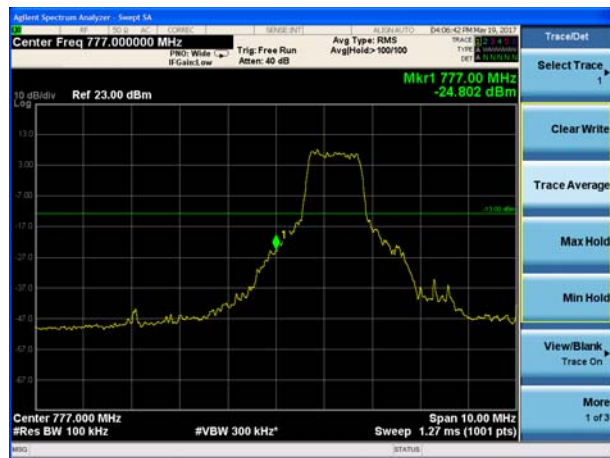

LTE Band 13 16QAM 10MHz CH-High, 5 RB

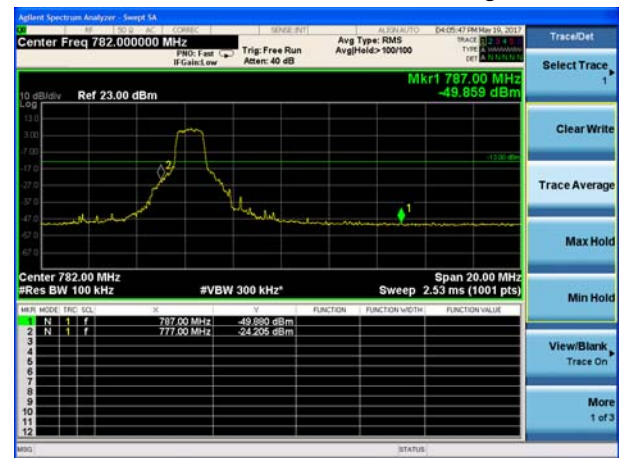

4.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

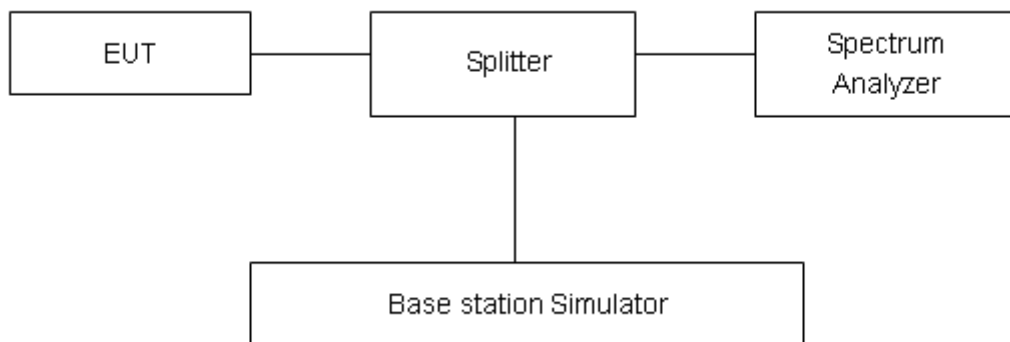

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U= 0.4 dB.

Test Results

LTE Band 4								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	19957	1710.7	33.83	23.06	10.77	≤13	PASS
		20175	1732.5	32.53	23.05	9.48	≤13	PASS
		20393	1754.3	34.34	23.09	11.25	≤13	PASS
	3	19965	1711.5	32.58	23.09	9.49	≤13	PASS
		20175	1732.5	33.11	23.09	10.02	≤13	PASS
		20385	1753.5	33.47	23.12	10.35	≤13	PASS
	5	19975	1712.5	33.48	23.07	10.41	≤13	PASS
		20175	1732.5	32.79	23.08	9.71	≤13	PASS
		20375	1752.5	32.84	23.10	9.74	≤13	PASS
	10	20000	1715	32.43	23.15	9.28	≤13	PASS
		20175	1732.5	32.38	23.10	9.28	≤13	PASS
		20350	1750	32.34	23.14	9.20	≤13	PASS
	15	20025	1717.5	32.26	23.13	9.13	≤13	PASS
		20175	1732.5	31.96	23.06	8.90	≤13	PASS
		20325	1747.5	31.17	23.09	8.08	≤13	PASS
20	20050	1720	31.26	23.10	8.16	≤13	PASS	
	20175	1732.5	31.74	23.01	8.73	≤13	PASS	
	20300	1745	31.25	23.05	8.20	≤13	PASS	
16QAM	1.4	19957	1710.7	32.74	23.01	9.73	≤13	PASS
		20175	1732.5	32.90	22.93	9.97	≤13	PASS
		20393	1754.3	32.14	22.96	9.18	≤13	PASS
	3	19965	1711.5	32.75	23.04	9.71	≤13	PASS
		20175	1732.5	34.10	22.97	11.13	≤13	PASS
		20385	1753.5	32.56	22.99	9.57	≤13	PASS
	5	19975	1712.5	32.83	23.02	9.81	≤13	PASS
		20175	1732.5	31.13	22.93	8.20	≤13	PASS
		20375	1752.5	32.38	22.94	9.44	≤13	PASS
	10	20000	1715	31.77	23.05	8.72	≤13	PASS
		20175	1732.5	31.78	22.98	8.80	≤13	PASS
		20350	1750	32.02	22.98	9.04	≤13	PASS
	15	20025	1717.5	30.63	23.02	7.61	≤13	PASS
		20175	1732.5	31.83	22.93	8.90	≤13	PASS
		20325	1747.5	32.35	22.94	9.41	≤13	PASS
20	20050	1720	30.95	23.00	7.95	≤13	PASS	
	20175	1732.5	32.11	22.89	9.22	≤13	PASS	
	20300	1745	30.52	22.91	7.61	≤13	PASS	

LTE Band 13								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	23205	779.5	31.43	21.53	9.90	≤13	PASS
		23230	782	30.02	21.31	8.71	≤13	PASS
		23255	784.5	31.82	21.88	9.94	≤13	PASS
	10	23230	782	30.31	22.06	8.25	≤13	PASS
16QAM	5	23205	779.5	29.84	20.58	9.26	≤13	PASS
		23230	782	30.19	21.03	9.16	≤13	PASS
		23255	784.5	29.23	20.84	8.39	≤13	PASS
	10	23230	782	30.34	21.76	8.58	≤13	PASS

4.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size.

(1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2)Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

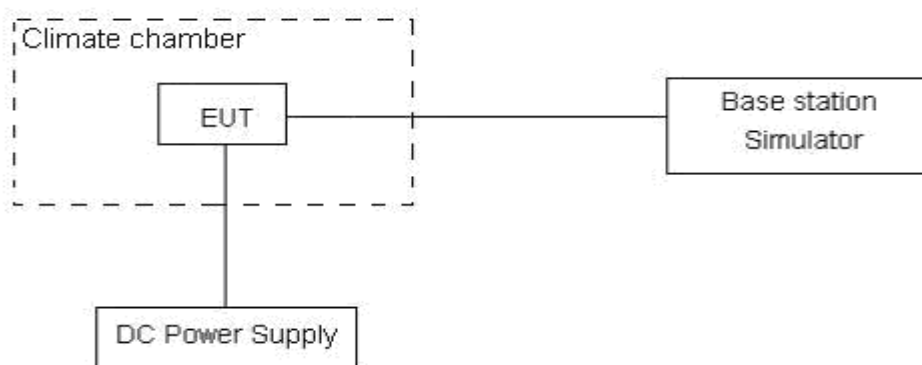

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.

Test Result

Bandwidth	Test status	LTE Band 4 Channel 20175 Test Results (ppm)	
		QPSK	16QAM
1.4MHz	-40°C/Normal Voltage	0.00012	-0.00252
	-30°C/Normal Voltage	-0.00242	-0.00339
	-20°C/Normal Voltage	-0.00436	-0.00436
	-10°C/Normal Voltage	-0.00201	-0.00506
	0°C/Normal Voltage	-0.00046	-0.00237
	10°C/Normal Voltage	-0.00200	-0.00205
	20°C/Normal Voltage	-0.00127	-0.00059
	30°C/Normal Voltage	-0.00163	-0.00397
	40°C/Normal Voltage	-0.00238	-0.00243
	50°C/Normal Voltage	-0.00247	-0.00296
	60°C/Normal Voltage	0.00077	0.00188
	70°C/Normal Voltage	-0.00123	-0.00389
	80°C/Normal Voltage	-0.00480	-0.00421
	85°C/Normal Voltage	-0.00443	-0.00364
	20°C/Min Voltage	-0.00257	-0.00188
	20°C/Max Voltage	-0.00027	-0.00084
3MHz	-40°C/Normal Voltage	-0.00286	-0.00311
	-30°C/Normal Voltage	-0.00271	-0.00207
	-20°C/Normal Voltage	-0.00315	-0.00393
	-10°C/Normal Voltage	-0.00530	-0.00286
	0°C/Normal Voltage	-0.00148	-0.00308
	10°C/Normal Voltage	-0.00365	-0.00478
	20°C/Normal Voltage	-0.00455	-0.00446
	30°C/Normal Voltage	-0.00328	-0.00340
	40°C/Normal Voltage	-0.00302	-0.00586
	50°C/Normal Voltage	-0.00556	-0.00711
	60°C/Normal Voltage	-0.00343	-0.00344
	70°C/Normal Voltage	-0.00155	-0.00014
	80°C/Normal Voltage	-0.00188	0.00029
	85°C/Normal Voltage	-0.00199	-0.00092
	20°C/Min Voltage	-0.00459	-0.00342
	20°C/Max Voltage	-0.00498	-0.00423
5MHz	-40°C/Normal Voltage	0.00045	0.00271
	-30°C/Normal Voltage	-0.00365	-0.00410
	-20°C/Normal Voltage	-0.00342	-0.00613
	-10°C/Normal Voltage	-0.00536	-0.00573



	0°C/Normal Voltage	-0.00373	-0.00441
	10°C/Normal Voltage	-0.00296	-0.00517
	20°C/Normal Voltage	-0.00309	-0.00253
	30°C/Normal Voltage	-0.00472	-0.00130
	40°C/Normal Voltage	-0.00541	-0.00395
	50°C/Normal Voltage	-0.00611	-0.00311
	60°C/Normal Voltage	-0.00310	-0.00443
	70°C/Normal Voltage	-0.00539	-0.00374
	80°C/Normal Voltage	-0.00559	-0.00304
	85°C/Normal Voltage	-0.00483	-0.00185
	20°C/Min Voltage	-0.00438	-0.00471
	20°C/Max Voltage	-0.00663	-0.00345
10MHz	-40°C/Normal Voltage	-0.00179	-0.00114
	-30°C/Normal Voltage	-0.00182	-0.00429
	-20°C/Normal Voltage	-0.00415	-0.00220
	-10°C/Normal Voltage	-0.00477	-0.00228
	0°C/Normal Voltage	-0.00401	-0.00355
	10°C/Normal Voltage	-0.00268	-0.00438
	20°C/Normal Voltage	-0.00243	-0.00554
	30°C/Normal Voltage	-0.00417	-0.00152
	40°C/Normal Voltage	-0.00328	-0.00296
	50°C/Normal Voltage	-0.00192	-0.00136
	60°C/Normal Voltage	-0.00203	-0.00171
	70°C/Normal Voltage	-0.00132	-0.00184
	80°C/Normal Voltage	-0.00031	-0.00167
	85°C/Normal Voltage	0.00074	-0.00136
	20°C/Min Voltage	0.00013	-0.00275
20°C/Max Voltage	-0.00227	-0.00092	
15MHz	-40°C/Normal Voltage	0.00477	-0.00113
	-30°C/Normal Voltage	-0.00443	-0.00364
	-20°C/Normal Voltage	-0.00310	-0.00443
	-10°C/Normal Voltage	-0.00539	-0.00374
	0°C/Normal Voltage	-0.00559	-0.00304
	10°C/Normal Voltage	-0.00483	-0.00185
	20°C/Normal Voltage	-0.00286	-0.00311
	30°C/Normal Voltage	-0.00343	-0.00344
	40°C/Normal Voltage	-0.00155	-0.00014
	50°C/Normal Voltage	-0.00217	0.00006
	60°C/Normal Voltage	0.00111	0.00225
	70°C/Normal Voltage	0.00055	0.00171



	80°C/Normal Voltage	-0.00304	-0.00133
	85°C/Normal Voltage	-0.00276	-0.00180
	20°C/Min Voltage	-0.00480	-0.00421
	20°C/Max Voltage	-0.00123	-0.00389
20MHz	-40°C/Normal Voltage	-0.00028	-0.00102
	-30°C/Normal Voltage	0.00055	0.00171
	-20°C/Normal Voltage	-0.00304	-0.00133
	-10°C/Normal Voltage	-0.00276	-0.00180
	0°C/Normal Voltage	-0.00203	-0.00171
	10°C/Normal Voltage	-0.00132	-0.00184
	20°C/Normal Voltage	-0.00031	-0.00167
	30°C/Normal Voltage	0.00074	-0.00136
	40°C/Normal Voltage	0.00045	0.00271
	50°C/Normal Voltage	0.00077	0.00188
	60°C/Normal Voltage	-0.00202	-0.00072
	70°C/Normal Voltage	-0.00120	-0.00167
	80°C/Normal Voltage	-0.00074	-0.00059
	85°C/Normal Voltage	0.00047	-0.00325
	20°C/Min Voltage	0.00111	0.00225
	20°C/Max Voltage	-0.00179	-0.00114

Bandwidth	Test status	LTE Band 13 Channel 23230 Test Results (ppm)	
		QPSK	16QAM
5MHz	-40°C/Normal Voltage	-0.00294	-0.00465
	-30°C/Normal Voltage	-0.00426	-0.00515
	-20°C/Normal Voltage	-0.00417	-0.00945
	-10°C/Normal Voltage	-0.00208	-0.00425
	0°C/Normal Voltage	-0.00343	-0.00081
	10°C/Normal Voltage	-0.00238	-0.00422
	20°C/Normal Voltage	-0.00879	-0.00308
	30°C/Normal Voltage	-0.00501	-0.00387
	40°C/Normal Voltage	-0.00451	-0.00554
	50°C/Normal Voltage	-0.00450	-0.00574
	60°C/Normal Voltage	-0.00597	-0.00376
	70°C/Normal Voltage	-0.00376	-0.00508
	80°C/Normal Voltage	-0.00224	-0.00203
	85°C/Normal Voltage	-0.00545	-0.00157
	20°C/Min Voltage	-0.00230	-0.00550
	20°C/Max Voltage	-0.00137	-0.00038
10MHz	-40°C/Normal Voltage	-0.00396	-0.00352
	-30°C/Normal Voltage	-0.00480	-0.00419
	-20°C/Normal Voltage	-0.00252	-0.00258
	-10°C/Normal Voltage	-0.00423	-0.01091
	0°C/Normal Voltage	-0.00566	-0.00831
	10°C/Normal Voltage	-0.00035	-0.00719
	20°C/Normal Voltage	-0.00271	-0.01170
	30°C/Normal Voltage	-0.00284	-0.01451
	40°C/Normal Voltage	-0.00136	-0.01192
	50°C/Normal Voltage	-0.00059	-0.00918
	60°C/Normal Voltage	-0.00597	-0.00376
	70°C/Normal Voltage	-0.00376	-0.00508
	80°C/Normal Voltage	-0.00224	-0.00203
	85°C/Normal Voltage	-0.00545	-0.00157
	20°C/Min Voltage	-0.00269	-0.00078
	20°C/Max Voltage	-0.00527	-0.00662

4.7 Spurious Emissions at Antenna Terminals

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz for the carrier frequency, or RBW and VBW are set to 1MHz (other frequency), Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Test setup

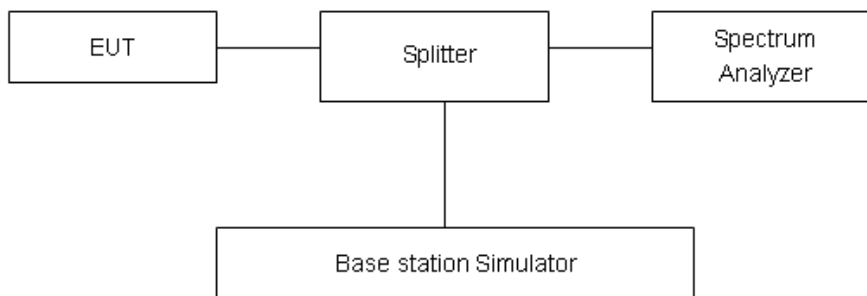

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log₁₀ (P) dB..”

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to –70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and –80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

LTE -4/13 Limit	-13 dBm
-----------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.



Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-18GHz	1.407 dB


Test Result: PASS

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier in the following plots.


Test Data File Name	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
CSE_LTE B4_3M_CHLOW_RB6_0.03-3GHz	2034.0	-21.08	-13.00	8.08
CSE_LTE B4_3M_CHMID_RB6_0.03-3GHz	1405.5	-13.76	-13.00	0.76
CSE_LTE B4_3M_CHHIGH_RB6_0.03-3GHz	1437.3	-16.27	-13.00	3.27
CSE_LTE B4_5M_CHLOW_RB6_0.03-3GHz	1389.3	-17.79	-13.00	4.79
CSE_LTE B4_5M_CHMID_RB6_0.03-3GHz	1402.8	-13.85	-13.00	0.85
CSE_LTE B4_5M_CHHIGH_RB6_0.03-3GHz	1420.5	-16.67	-13.00	3.67
CSE_LTE B4_10M_CHLOW_RB6_0.03-3GHz	1399.3	-23.37	-13.00	10.37
CSE_LTE B4_10M_CHMID_RB6_0.03-3GHz	1425.0	-16.86	-13.00	3.86
CSE_LTE B4_10M_CHHIGH_RB6_0.03-3GHz	1424.0	-18.75	-13.00	5.75
CSE_LTE B4_15M_CHLOW_RB6_0.03-3GHz	2027.3	-16.21	-13.00	3.21
CSE_LTE B4_15M_CHMID_RB6_0.03-3GHz	1430.8	-14.53	-13.00	1.53
CSE_LTE B4_15M_CHHIGH_RB6_0.03-3GHz	1448.5	-18.17	-13.00	5.17
CSE_LTE B4_20M_CHLOW_RB6_0.03-3GHz	1402.0	-20.18	-13.00	7.18
CSE_LTE B4_20M_CHMID_RB6_0.03-3GHz	2059.0	-14.52	-13.00	1.52
CSE_LTE B4_20M_CHHIGH_RB6_0.03-3GHz	2051.0	-18.74	-13.00	5.74
CSE_LTE B13_5M_CHLOW_RB6_1-3GHz	1563.3	-32.70	-13.00	19.70
CSE_LTE B13_5M_CHMID_RB6_1-3GHz	1568.0	-33.91	-13.00	20.91
CSE_LTE B13_10M_CHLOW_RB6_1-3GHz	1572.8	-33.12	-13.00	20.12
CSE_LTE B13_10M_CHMID_RB6_1-3GHz_	1573.0	-32.82	-13.00	19.82




LTE Band 4 1.4MHz CH-Low 30MHz~3GHz

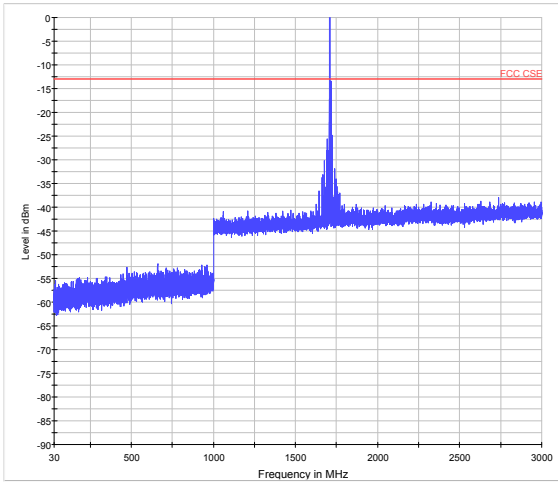


LTE Band 4 1.4MHz CH-Low 3GHz~18GHz

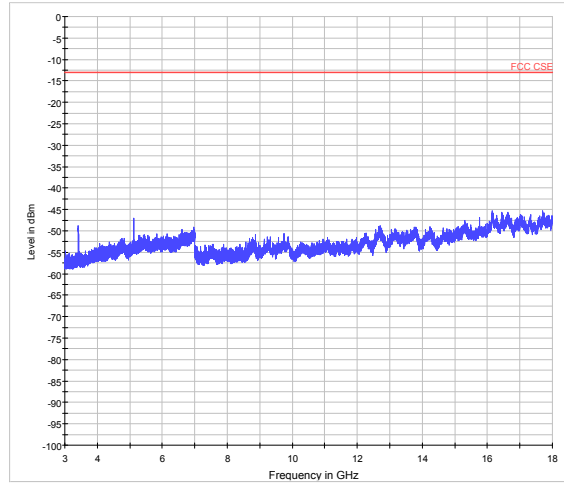


LTE Band 4 1.4MHz CH-Middle 30MHz~3GHz

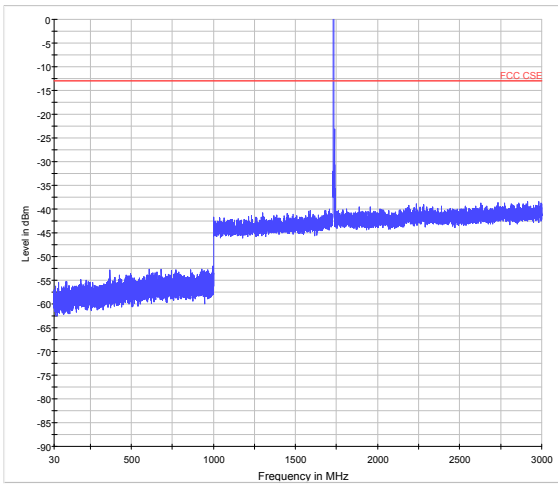


LTE Band 4 1.4MHz CH-Middle 3GHz~18GHz

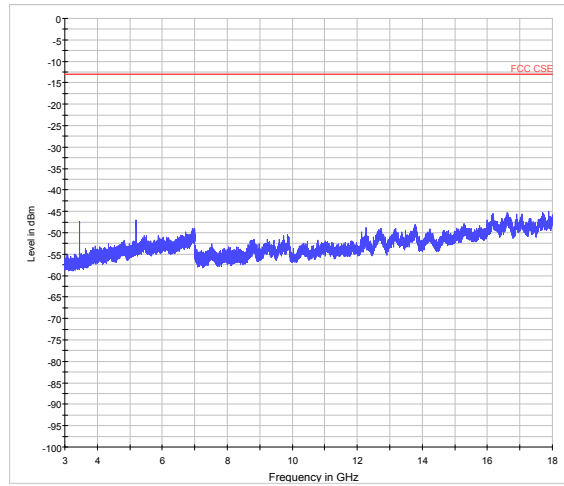

LTE Band 4 1.4MHz CH-High 30MHz~3GHz

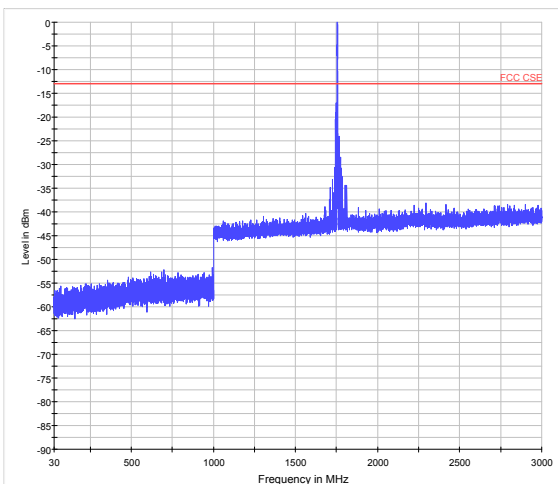


LTE Band 4 1.4MHz CH-High 3GHz~18GHz

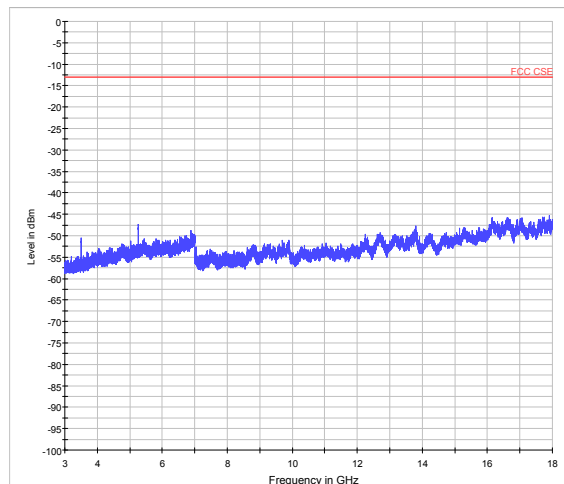





LTE Band 4 3MHz CH-Low 30MHz~3GHz

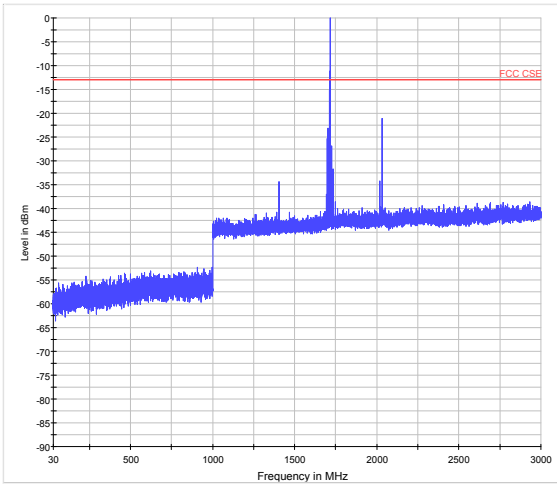


LTE Band 4 3MHz CH-Low 3GHz~18GHz

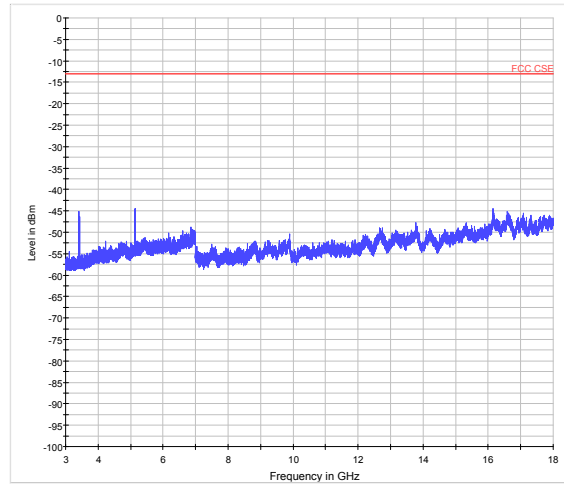


LTE Band 4 3MHz CH-Middle 30MHz~3GHz

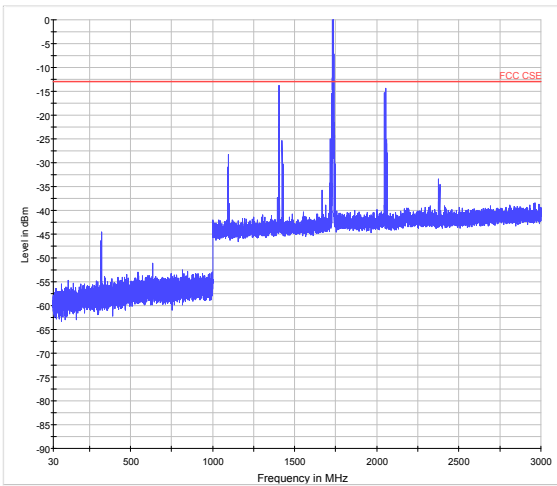


LTE Band 4 3MHz CH-Middle 3GHz~18GHz

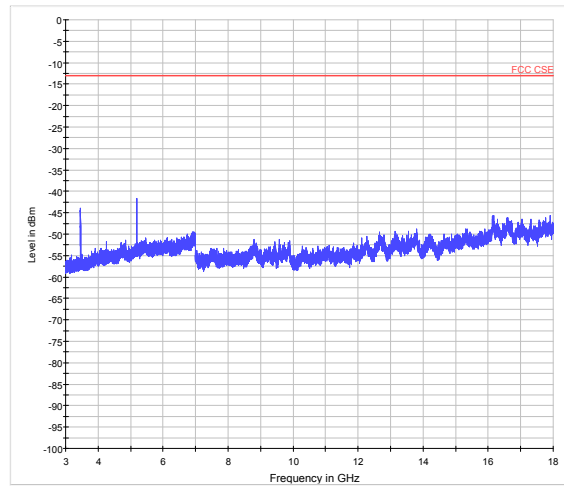

LTE Band 4 3MHz CH-High 30MHz~3GHz

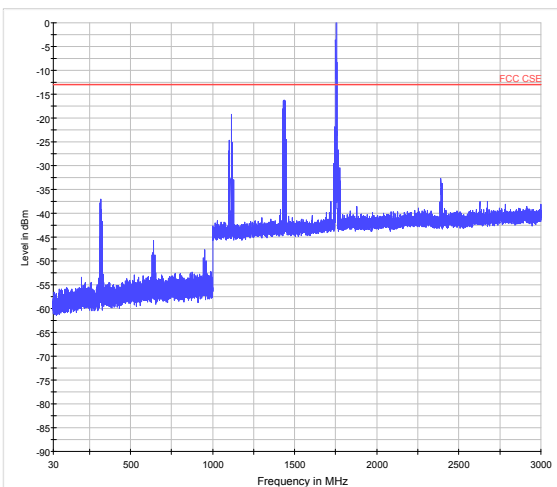


LTE Band 4 3MHz CH-High 3GHz~18GHz

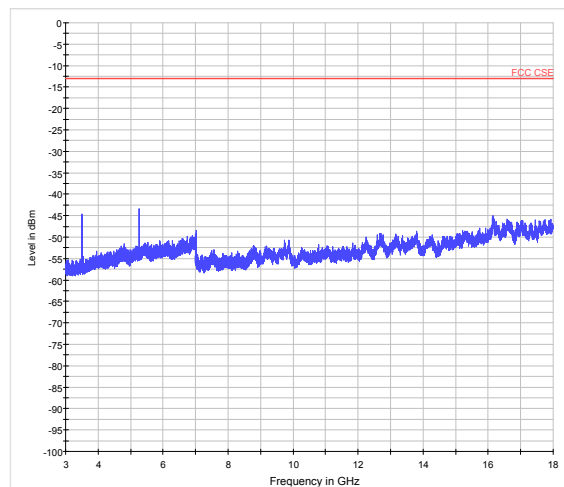





LTE Band 4 5MHz CH-Low 30MHz~3GHz

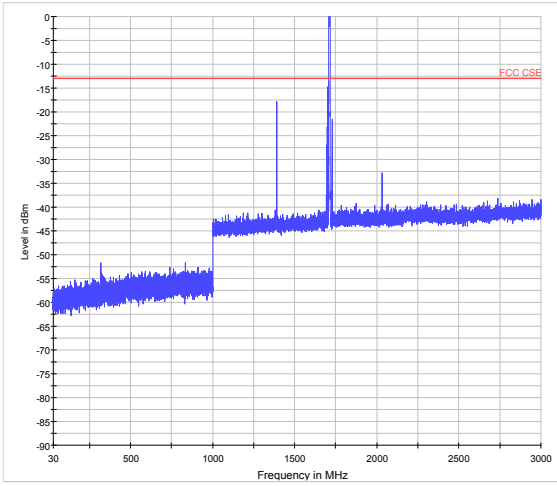


LTE Band 4 5MHz CH-Low 3GHz~18GHz

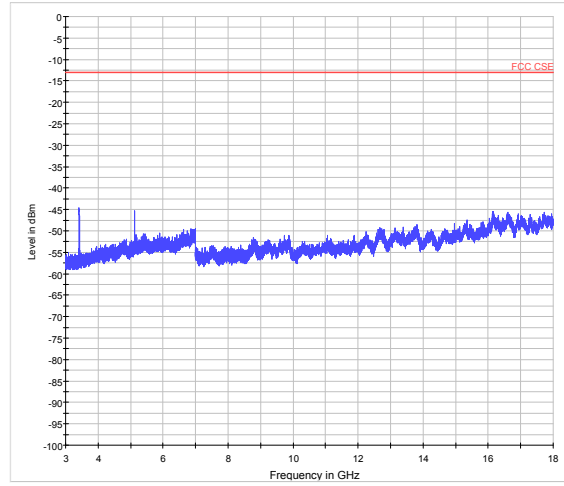


LTE Band 4 5MHz CH-Middle 30MHz~3GHz

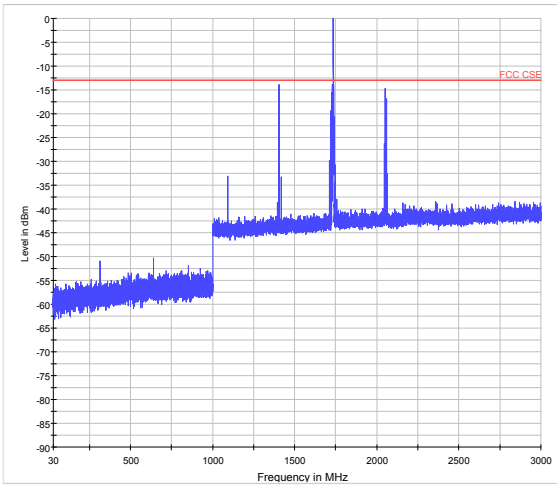


LTE Band 4 5MHz CH-Middle 3GHz~18GHz

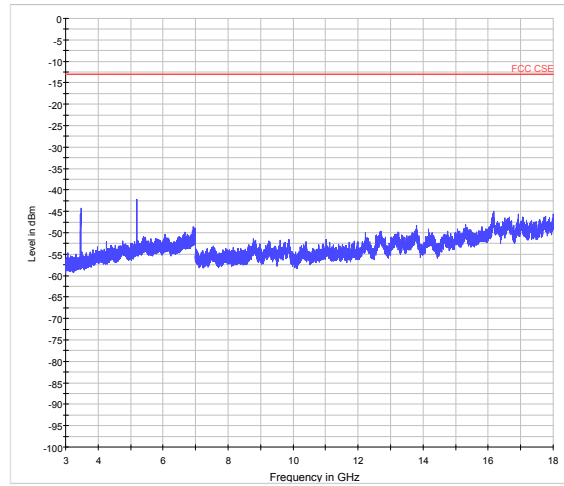

LTE Band 4 5MHz CH-High 30MHz~3GHz

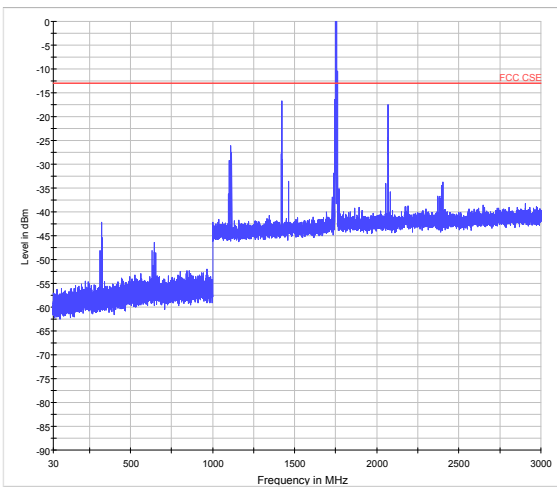


LTE Band 4 5MHz CH-High 3GHz~18GHz

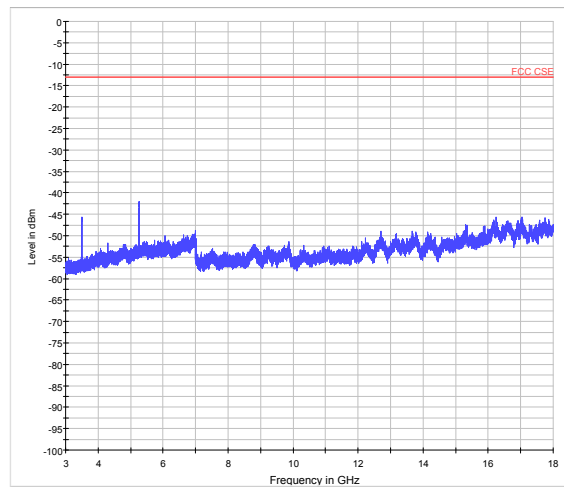





LTE Band 4 10MHz CH-Low 30MHz~3GHz

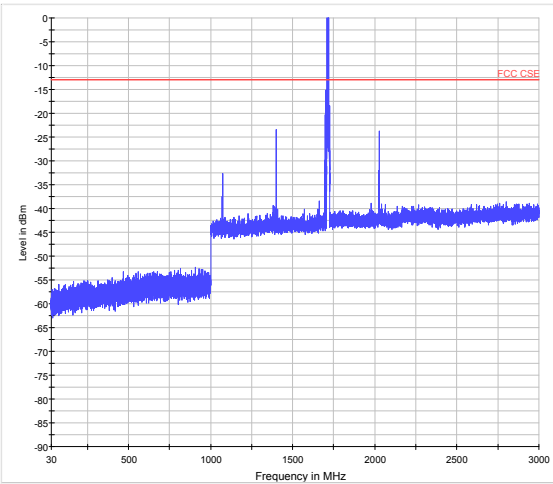


LTE Band 4 10MHz CH-Low 3GHz~18GHz

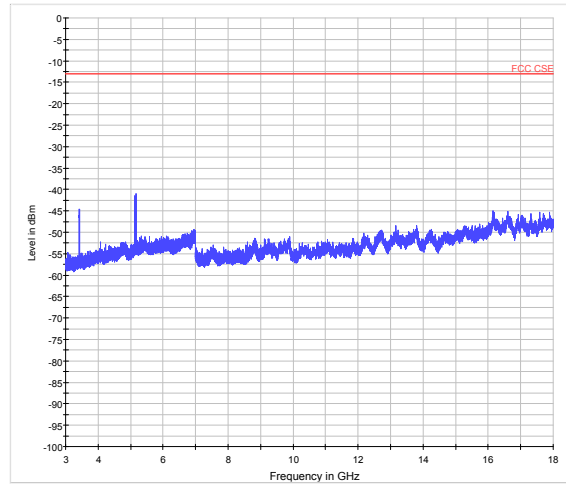


LTE Band 4 10MHz CH-Middle 30MHz~3GHz

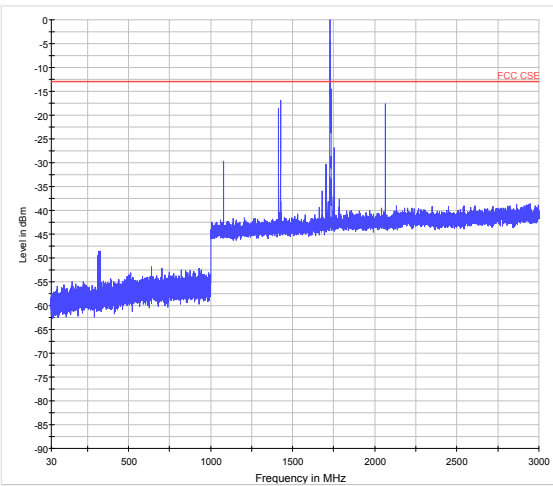


LTE Band 4 10MHz CH-Middle 3GHz~18GHz

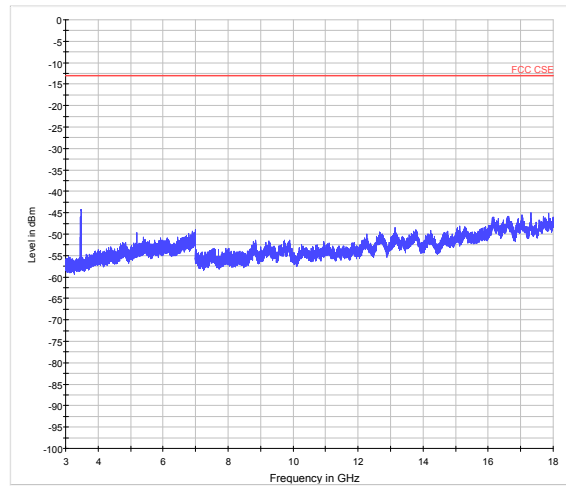

LTE Band 4 10MHz CH-High 30MHz~3GHz

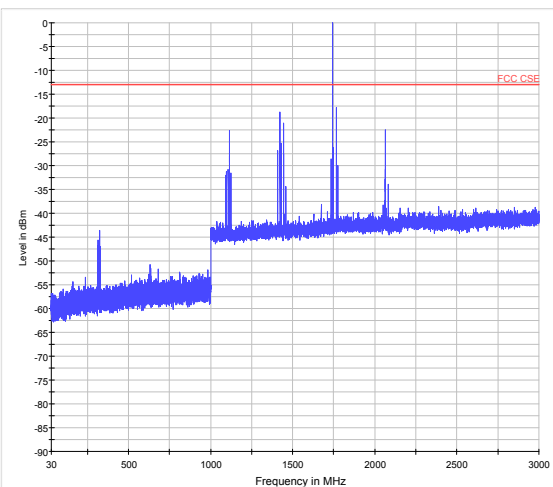


LTE Band 4 10MHz CH-High 3GHz~18GHz

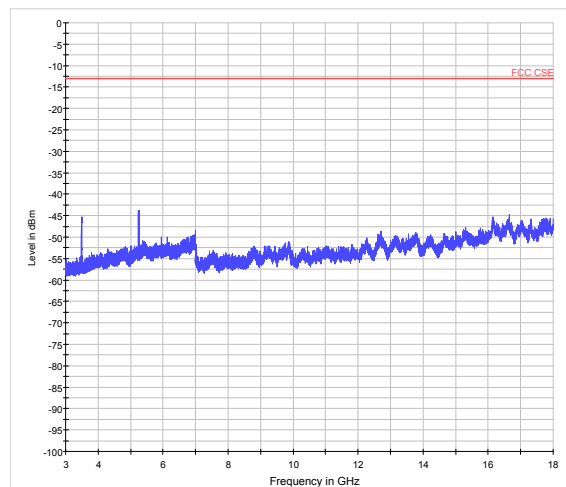





LTE Band 4 15MHz CH-Low 30MHz~3GHz

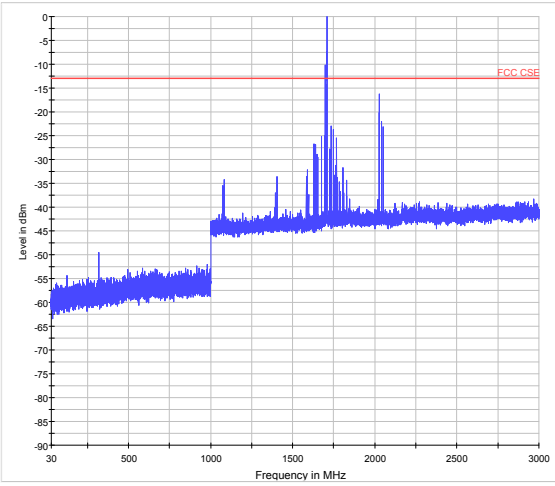


LTE Band 4 15MHz CH-Low 3GHz~18GHz

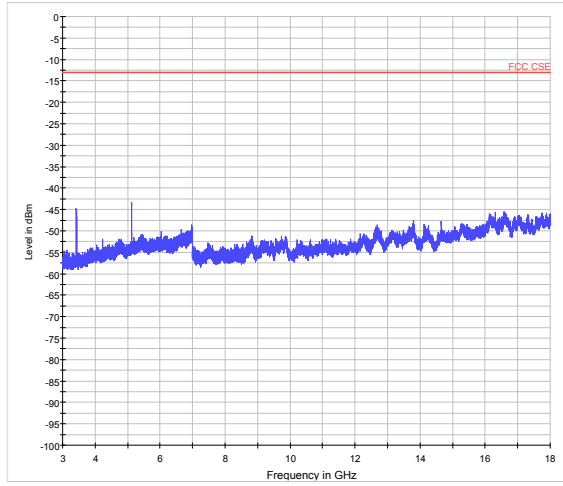


LTE Band 4 15MHz CH-Middle 30MHz~3GHz

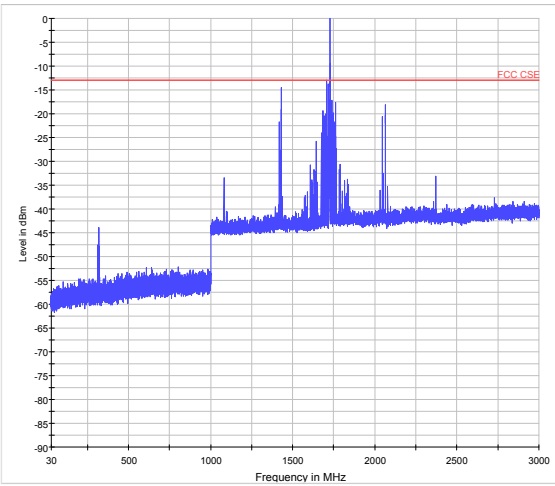


LTE Band 4 15MHz CH-Middle 3GHz~18GHz

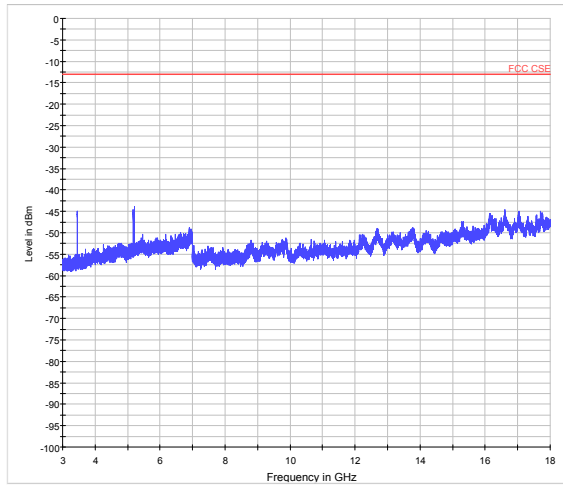

LTE Band 4 15MHz CH-High 30MHz~3GHz

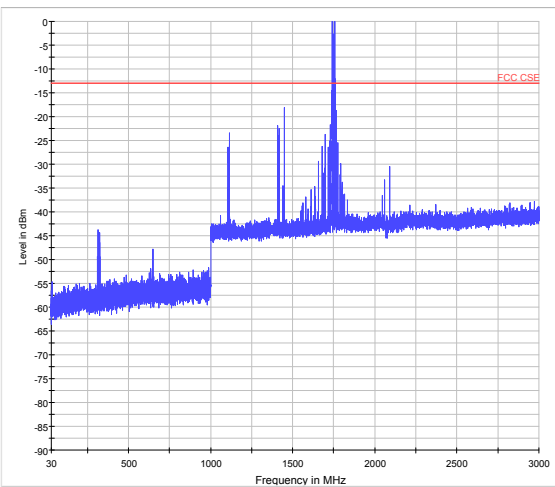


LTE Band 4 15MHz CH-High 3GHz~18GHz

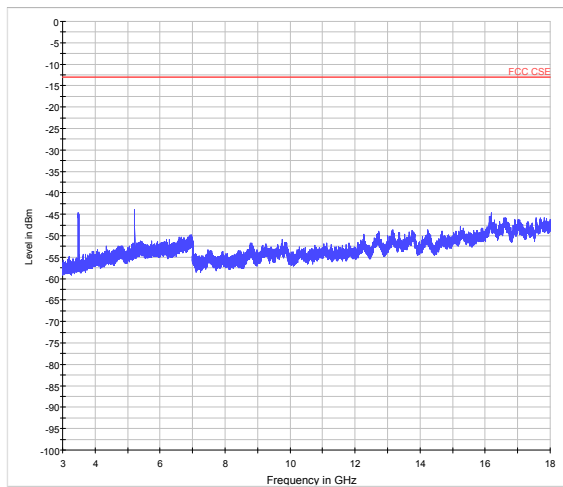





LTE Band 4 20MHz CH-Low 30MHz~3GHz

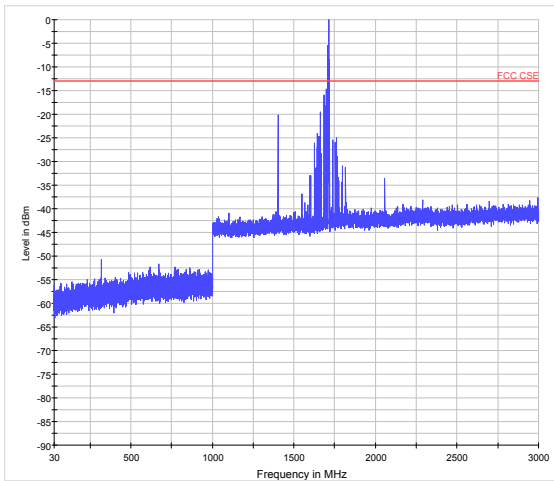


LTE Band 4 20MHz CH-Low 3GHz~18GHz

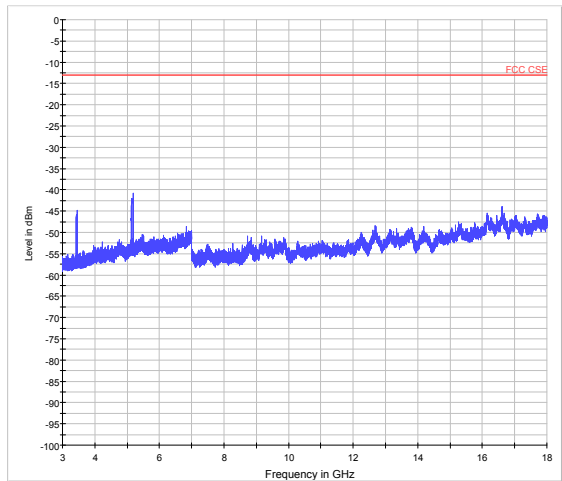


LTE Band 4 20MHz CH-Middle 30MHz~3GHz

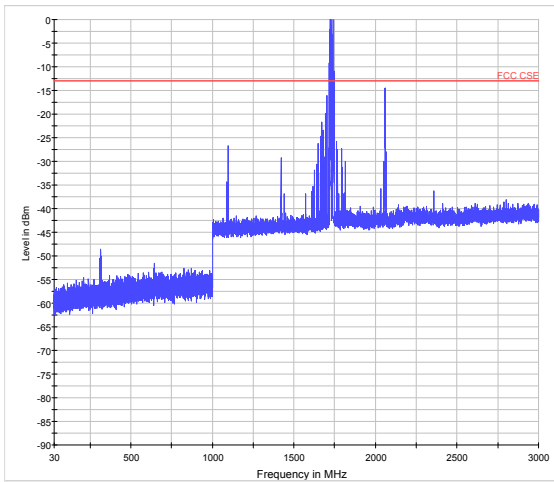


LTE Band 4 20MHz CH-Middle 3GHz~18GHz

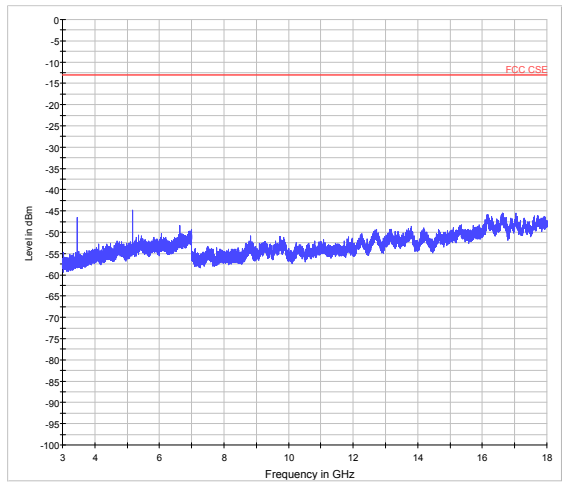

LTE Band 4 20MHz CH-High 30MHz~3GHz

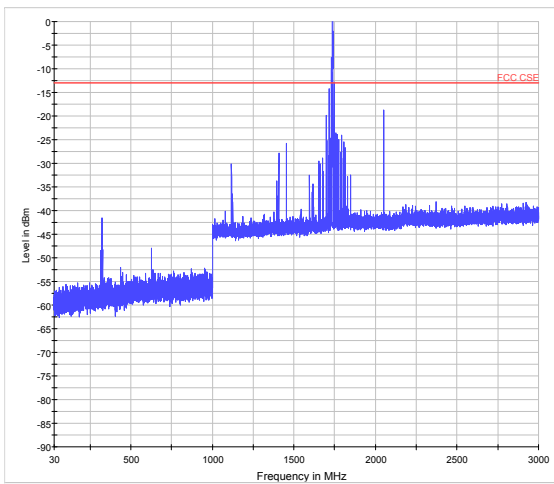


LTE Band 4 20MHz CH-High 3GHz~18GHz

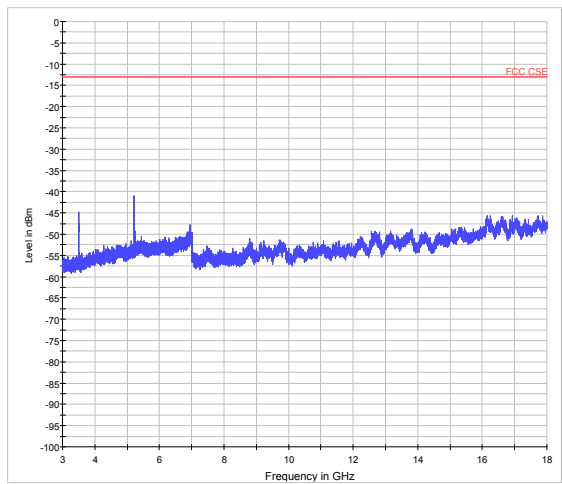





LTE Band 13 5MHz CH-Low 30MHz~1GHz

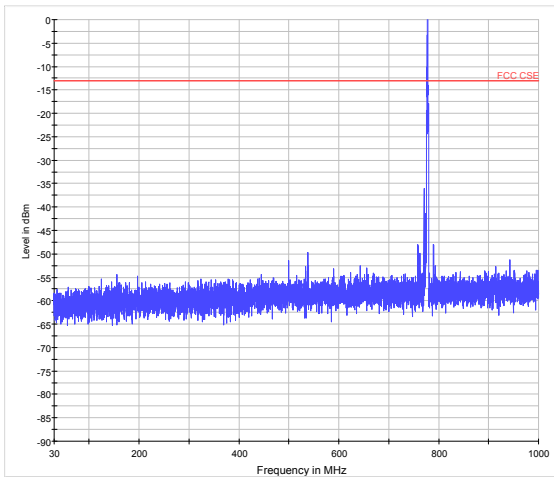


LTE Band 13 5MHz CH-Middle 30MHz~1GHz

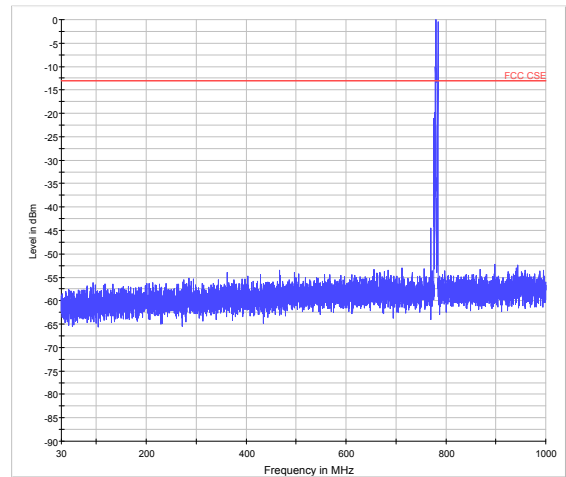


LTE Band 13 5MHz CH-Low 1GHz~3GHz

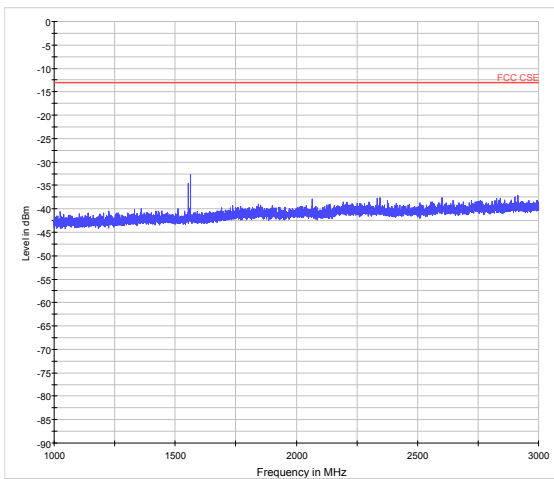


LTE Band 13 5MHz CH-Middle 1GHz~3GHz

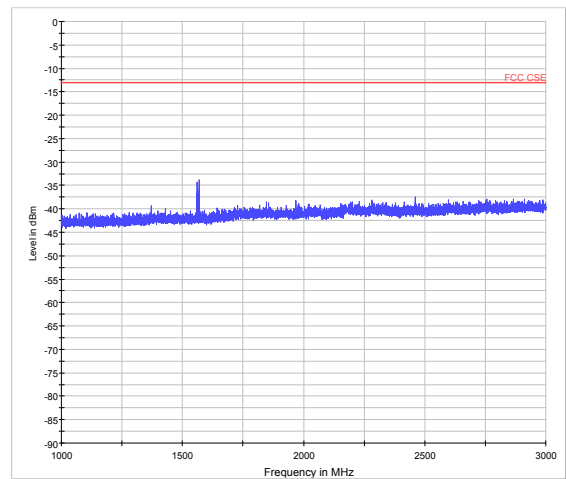

LTE Band 13 5MHz CH-Low 3GHz~9GHz

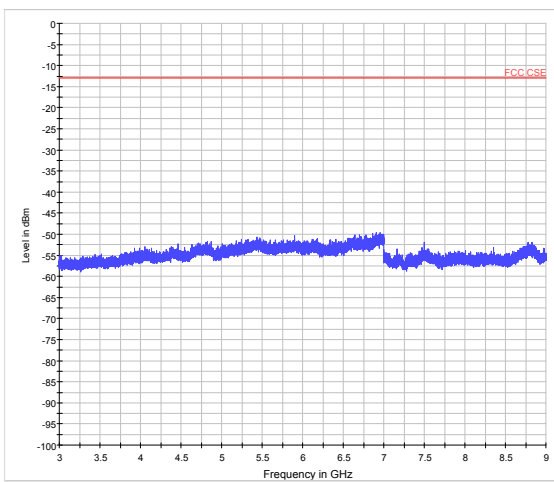


LTE Band 13 5MHz CH-Middle 3GHz~9GHz

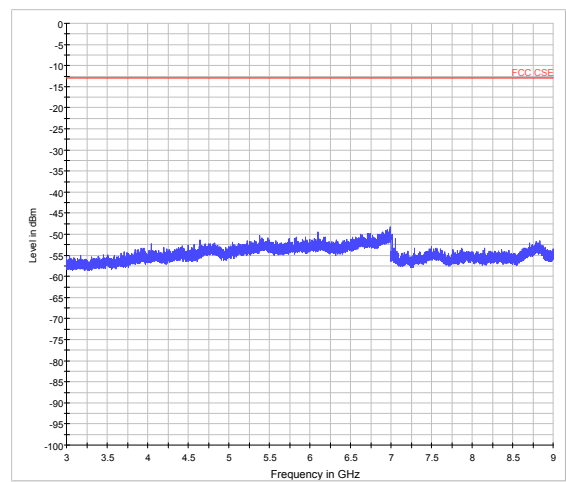





LTE Band 13 5MHz CH-High 30MHz~1.5GHz

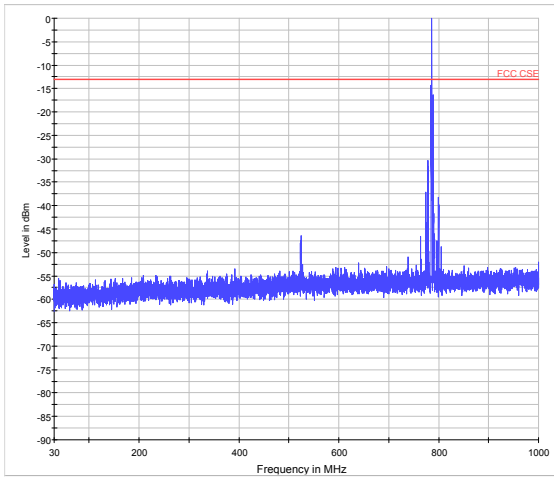


LTE Band 13 10MHz CH-Middle 30MHz~1.5GHz

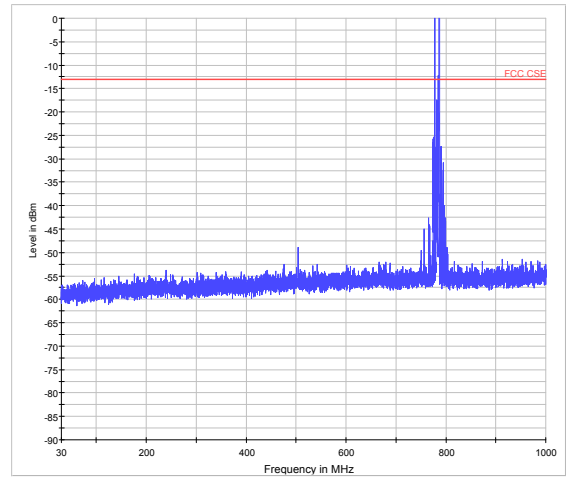


LTE Band 13 5MHz CH-High 1GHz~3GHz

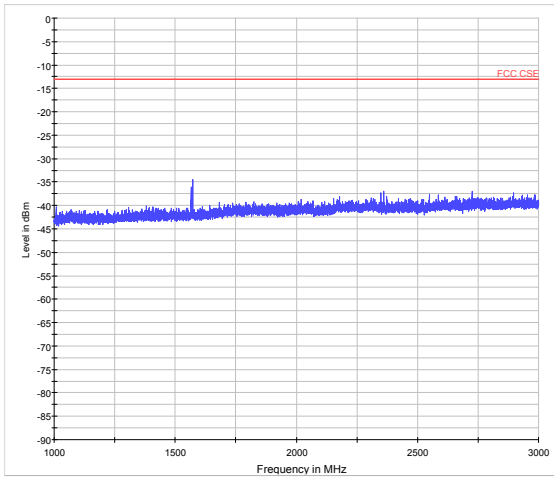


LTE Band 13 10MHz CH-Middle 1GHz~3GHz

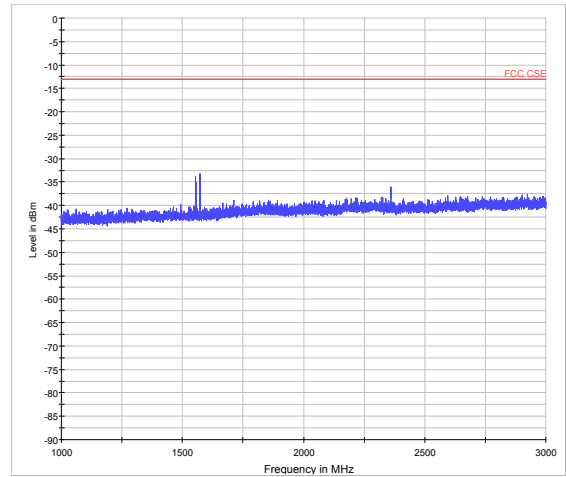

LTE Band 13 5MHz CH-High 3GHz~9GHz

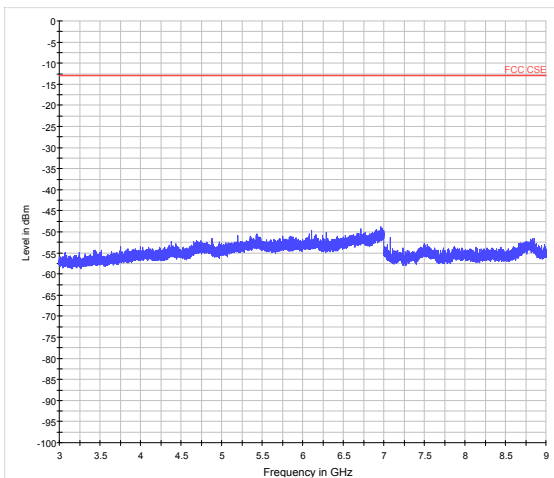


LTE Band 13 10MHz CH-Middle 3GHz~9GHz

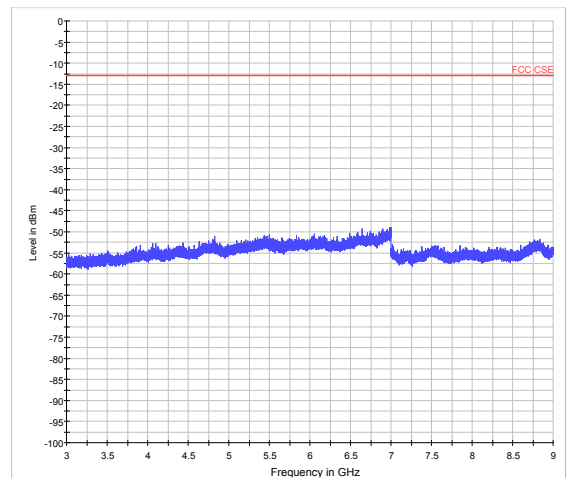





LTE Band 13 10MHz CH-Middle 30MHz~1.5GHz

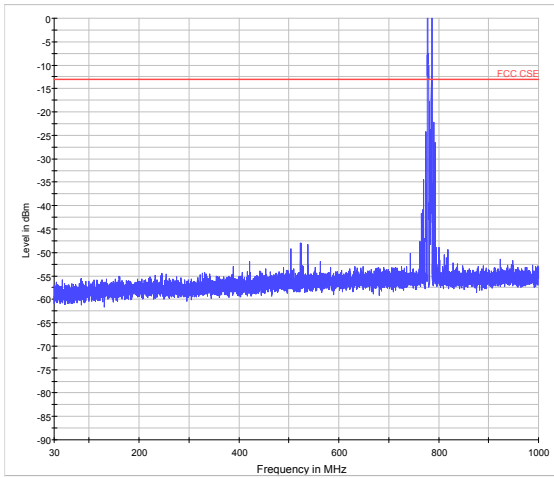


LTE Band 13 10MHz CH-Middle 30MHz~1.5GHz

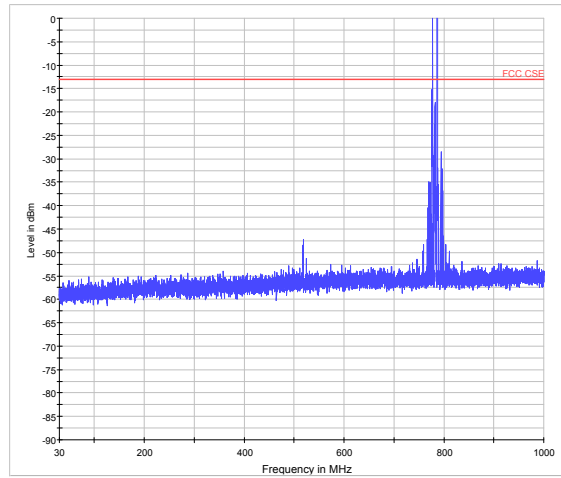


LTE Band 13 10MHz CH-Middle 1GHz~3GHz

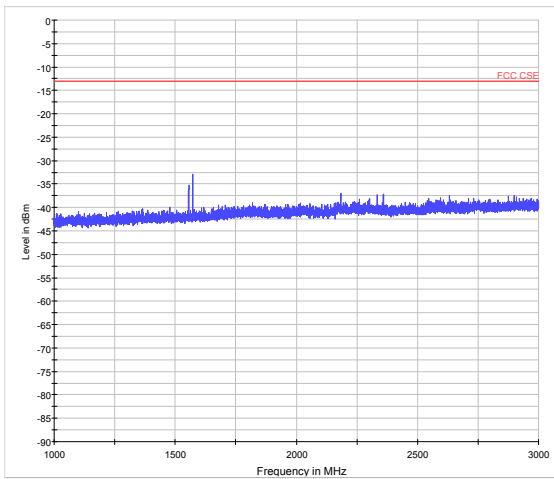


LTE Band 13 10MHz CH-Middle 1GHz~3GHz

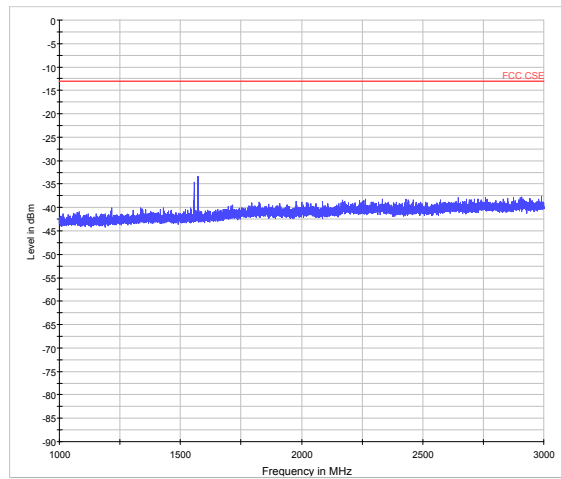

LTE Band 13 10MHz CH-Middle 3GHz~9GHz

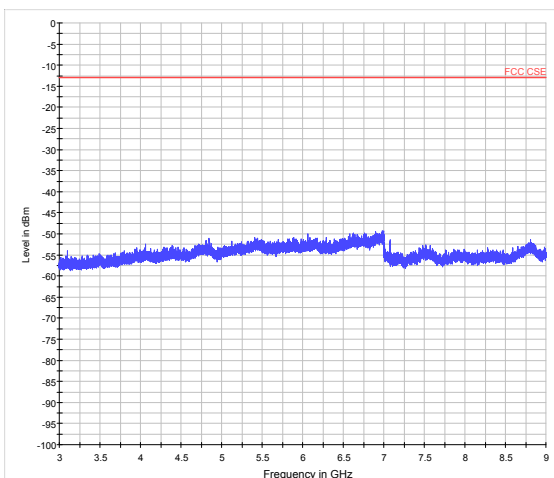

LTE Band 13 10MHz CH-Middle 3GHz~9GHz

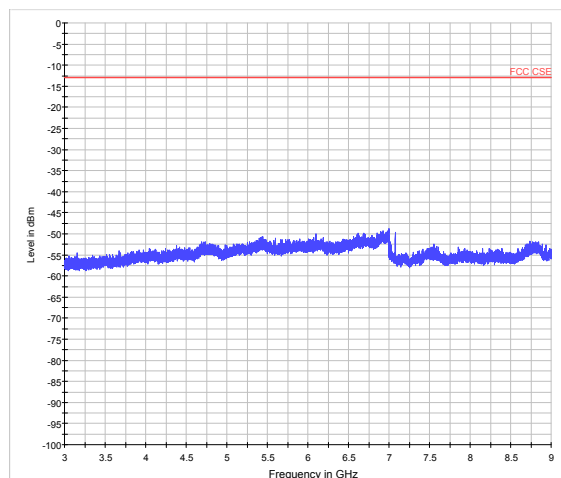

4.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

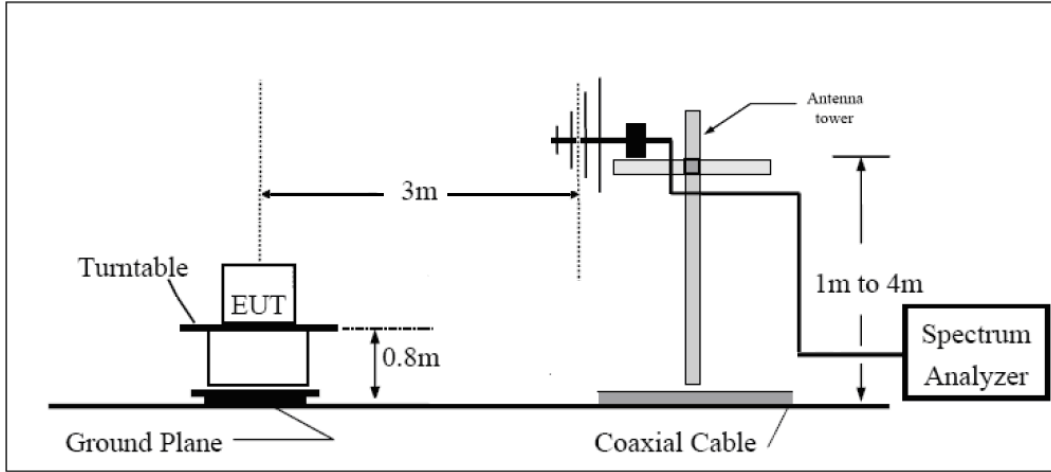

Above 1GHz

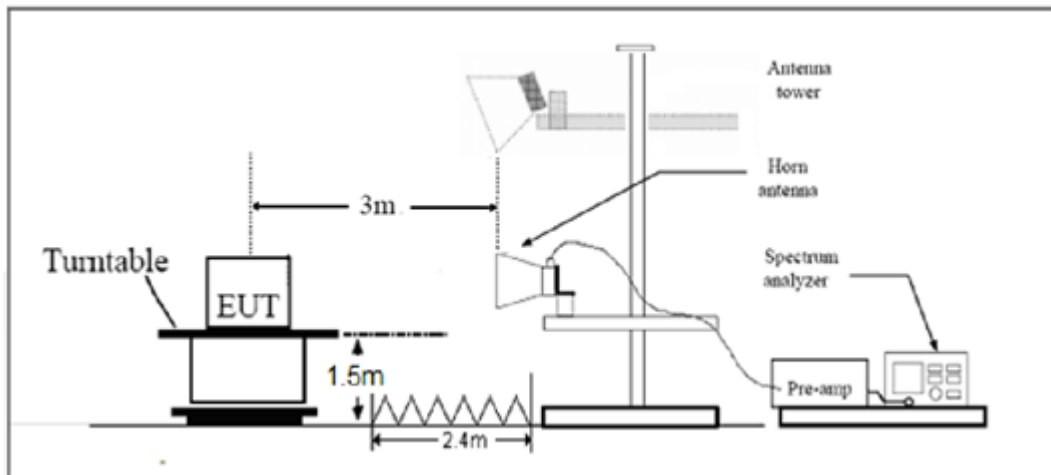

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 27.53(h) specifies that “the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.”

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

LTE -4/13 Limit	-13 dBm
-----------------	---------



Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

LTE Band 4 QPSK 1.4MHz CH-Low, 1 RB

Harmonic	CH19957 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.4	-45.80	2.6	10.15	Vertical	-40.4	-13.0	27.40	45
3	5132.1	-44.40	2.4	11.35	Vertical	-37.6	-13.0	24.60	0
4	6842.8	-45.70	4.5	10.85	Vertical	-41.5	-13.0	28.50	135
5	8553.5	-48.60	5.1	11.35	Vertical	-44.5	-13.0	31.50	225
6	10264.2	-47.10	5.3	11.95	Vertical	-42.6	-13.0	29.60	135
7	11974.9	-45.10	5.5	13.55	Vertical	-39.2	-13.0	26.20	45
8	13685.6	-45.40	6.3	13.75	Vertical	-40.1	-13.0	27.10	90
9	15396.3	-43.20	6.7	13.85	Vertical	-38.2	-13.0	25.20	225
10	17107.0	-46.80	6.8	14.25	Vertical	-41.5	-13.0	28.50	45

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 1.4MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-45.80	2.6	10.75	Vertical	-39.8	-13.0	26.80	135
3	5197.5	-40.70	2.4	11.05	Vertical	-34.2	-13.0	21.20	45
4	6930.0	-43.80	4.5	11.15	Vertical	-39.3	-13.0	26.30	90
5	8662.5	-51.70	5.1	11.35	Vertical	-47.6	-13.0	34.60	225
6	10395.0	-49.50	5.3	11.95	Vertical	-45.0	-13.0	32.00	45
7	12127.5	-54.70	5.5	13.55	Vertical	-48.8	-13.0	35.80	90
8	13860.0	-48.60	6.3	13.75	Vertical	-43.3	-13.0	30.30	135
9	15592.5	-45.20	6.7	13.85	Vertical	-40.2	-13.0	27.20	135
10	17325.0	-46.60	6.8	14.25	Vertical	-41.3	-13.0	28.30	90

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 1.4MHz CH-High, 1 RB

Harmonic	CH20393 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3508.6	-46.50	2.6	10.15	Vertical	-41.1	-13.0	28.10	45
3	5262.9	-41.70	2.4	11.05	Vertical	-35.2	-13.0	22.20	45
4	7017.2	-45.70	4.5	11.15	Vertical	-41.2	-13.0	28.20	135
5	8771.5	-50.00	5.1	11.35	Vertical	-45.9	-13.0	32.90	45
6	10525.8	-49.70	5.3	11.95	Vertical	-45.2	-13.0	32.20	90
7	12280.1	-48.50	5.5	13.55	Vertical	-42.6	-13.0	29.60	135
8	14034.4	-48.90	6.3	13.75	Vertical	-43.6	-13.0	30.60	45
9	15788.7	-44.70	6.7	13.85	Vertical	-39.7	-13.0	26.70	90
10	17543.0	-46.00	6.8	14.25	Vertical	-40.7	-13.0	27.70	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 3MHz CH-Low, 1 RB

Harmonic	CH19965 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3420.0	-45.90	2.6	10.15	Vertical	-40.5	-13.0	27.50	180
3	5131.1	-38.50	2.4	11.35	Vertical	-31.7	-13.0	18.70	225
4	6846.0	-43.70	4.5	10.85	Vertical	-39.5	-13.0	26.50	135
5	8557.5	-46.00	5.1	11.35	Vertical	-41.9	-13.0	28.90	225
6	10269.0	-44.40	5.3	11.95	Vertical	-39.9	-13.0	26.90	90
7	11980.5	-42.60	5.5	13.55	Vertical	-36.7	-13.0	23.70	90
8	13692.0	-41.20	6.3	13.75	Vertical	-35.9	-13.0	22.90	45
9	15403.5	-42.10	6.7	13.85	Vertical	-37.1	-13.0	24.10	180
10	17115.0	-40.20	6.8	14.25	Vertical	-34.9	-13.0	21.90	45

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 3MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3462.4	-45.80	2.6	10.75	Vertical	-39.8	-13.0	26.80	0
3	5193.8	-38.10	2.4	11.05	Vertical	-31.6	-13.0	18.60	135
4	6930.0	-42.60	4.5	11.15	Vertical	-38.1	-13.0	25.10	225
5	8662.5	-45.70	5.1	11.35	Vertical	-41.6	-13.0	28.60	315
6	10395.0	-43.90	5.3	11.95	Vertical	-39.4	-13.0	26.40	270
7	12127.5	-43.60	5.5	13.55	Vertical	-37.7	-13.0	24.70	225
8	13860.0	-41.20	6.3	13.75	Vertical	-35.9	-13.0	22.90	135
9	15592.5	-42.80	6.7	13.85	Vertical	-37.8	-13.0	24.80	225
10	17325.0	-39.70	6.8	14.25	Vertical	-34.4	-13.0	21.40	0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 3MHz CH-High, 1 RB

Harmonic	CH20385 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3505.1	-45.40	2.6	10.15	Vertical	-40.0	-13.0	27.00	135
3	5256.8	-40.90	2.4	11.05	Vertical	-34.4	-13.0	21.40	225
4	7014.0	-43.30	4.5	11.15	Vertical	-38.8	-13.0	25.80	315
5	8767.5	-46.40	5.1	11.35	Vertical	-42.3	-13.0	29.30	270
6	10521.0	-42.30	5.3	11.95	Vertical	-37.8	-13.0	24.80	225
7	12274.5	-43.80	5.5	13.55	Vertical	-37.9	-13.0	24.90	135
8	14028.0	-40.60	6.3	13.75	Vertical	-35.3	-13.0	22.30	225
9	15781.5	-43.10	6.7	13.85	Vertical	-38.1	-13.0	25.10	90
10	17535.0	-41.30	6.8	14.25	Vertical	-36.0	-13.0	23.00	90

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 5MHz CH-Low, 1 RB

Harmonic	CH19975 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3420.4	-46.10	2.6	10.15	Vertical	-40.7	-13.0	27.7	45
3	5131.1	-39.60	2.4	11.35	Vertical	-32.8	-13.0	19.8	180
4	6850.0	-43.60	4.5	10.85	Vertical	-39.4	-13.0	26.4	225
5	8562.5	-45.20	5.1	11.35	Vertical	-41.1	-13.0	28.1	135
6	10275.0	-45.10	5.3	11.95	Vertical	-40.6	-13.0	27.6	225
7	11987.5	-43.10	5.5	13.55	Vertical	-37.2	-13.0	24.2	90
8	13700.0	-40.70	6.3	13.75	Vertical	-35.4	-13.0	22.4	90
9	15412.5	-43.30	6.7	13.85	Vertical	-38.3	-13.0	25.3	45
10	17125.0	-40.20	6.8	14.25	Vertical	-34.9	-13.0	21.9	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 5MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-46.60	2.6	10.75	Vertical	-40.6	-13.0	27.6	45
3	5190.8	-38.30	2.4	11.05	Vertical	-31.8	-13.0	18.8	0
4	6930.0	-42.90	4.5	11.15	Vertical	-38.4	-13.0	25.4	135
5	8662.5	-44.70	5.1	11.35	Vertical	-40.6	-13.0	27.6	225
6	10395.0	-44.70	5.3	11.95	Vertical	-40.2	-13.0	27.2	315
7	12127.5	-42.90	5.5	13.55	Vertical	-37.0	-13.0	24.0	270
8	13860.0	-40.50	6.3	13.75	Vertical	-35.2	-13.0	22.2	225
9	15592.5	-44.10	6.7	13.85	Vertical	-39.1	-13.0	26.1	135
10	17325.0	-38.70	6.8	14.25	Vertical	-33.4	-13.0	20.4	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 5MHz CH-High, 1 RB

Harmonic	CH20375 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3501.0	-43.50	2.6	10.15	Vertical	-38.1	-13.0	25.1	0
3	5251.1	-38.80	2.4	11.05	Vertical	-32.3	-13.0	19.3	135
4	7010.0	-42.10	4.5	11.15	Vertical	-37.6	-13.0	24.6	225
5	8762.5	-44.00	5.1	11.35	Vertical	-39.9	-13.0	26.9	315
6	10515.0	-43.40	5.3	11.95	Vertical	-38.9	-13.0	25.9	270
7	12267.5	-45.20	5.5	13.55	Vertical	-39.3	-13.0	26.3	225
8	14020.0	-40.10	6.3	13.75	Vertical	-34.8	-13.0	21.8	135
9	15772.5	-41.80	6.7	13.85	Vertical	-36.8	-13.0	23.8	225
10	17525.0	-40.40	6.8	14.25	Vertical	-35.1	-13.0	22.1	90

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 10MHz CH-Low, 1 RB

Harmonic	CH20000 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.1	-45.40	2.6	10.15	Vertical	-40.0	-13.0	27.00	90
3	5131.9	-39.20	2.4	11.35	Vertical	-32.4	-13.0	19.40	45
4	6860.0	-43.10	4.5	10.85	Vertical	-38.9	-13.0	25.90	180
5	8575.0	-46.00	5.1	11.35	Vertical	-41.9	-13.0	28.90	225
6	10290.0	-44.70	5.3	11.95	Vertical	-40.2	-13.0	27.20	135
7	12005.0	-45.30	5.5	13.55	Vertical	-39.4	-13.0	26.40	225
8	13720.0	-41.10	6.3	13.75	Vertical	-35.8	-13.0	22.80	90
9	15435.0	-42.30	6.7	13.85	Vertical	-37.3	-13.0	24.30	90
10	17150.0	-40.90	6.8	14.25	Vertical	-35.6	-13.0	22.60	45

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 10MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-47.20	2.6	10.75	Vertical	-41.2	-13.0	28.2	180
3	5184.4	-38.30	2.4	11.05	Vertical	-31.8	-13.0	18.8	45
4	6930.0	-43.40	4.5	11.15	Vertical	-38.9	-13.0	25.9	0
5	8662.5	-44.30	5.1	11.35	Vertical	-40.2	-13.0	27.2	135
6	10395.0	-43.50	5.3	11.95	Vertical	-39.0	-13.0	26.0	225
7	12127.5	-45.10	5.5	13.55	Vertical	-39.2	-13.0	26.2	315
8	13860.0	-40.80	6.3	13.75	Vertical	-35.5	-13.0	22.5	270
9	15592.5	-43.30	6.7	13.85	Vertical	-38.3	-13.0	25.3	225
10	17325.0	-40.80	6.8	14.25	Vertical	-35.5	-13.0	22.5	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 10MHz CH-High, 1 RB

Harmonic	CH20350 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3491.3	-44.00	2.6	10.15	Vertical	-38.6	-13.0	25.6	225
3	5236.5	-39.70	2.4	11.05	Vertical	-33.2	-13.0	20.2	315
4	7000.0	-45.40	4.5	11.15	Vertical	-40.9	-13.0	27.9	270
5	8750.0	-44.50	5.1	11.35	Vertical	-40.4	-13.0	27.4	225
6	10500.0	-44.30	5.3	11.95	Vertical	-39.8	-13.0	26.8	135
7	12250.0	-45.50	5.5	13.55	Vertical	-39.6	-13.0	26.6	225
8	14000.0	-40.80	6.3	13.75	Vertical	-35.5	-13.0	22.5	315
9	15750.0	-43.10	6.7	13.85	Vertical	-38.1	-13.0	25.1	270
10	17500.0	-41.00	6.8	14.25	Vertical	-35.7	-13.0	22.7	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 15MHz CH20025, 1 RB

Harmonic	CH20025 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.9	-46.20	2.6	10.15	Vertical	-40.8	-13.0	27.8	135
3	5132.6	-39.10	2.4	11.35	Vertical	-32.3	-13.0	19.3	225
4	6870.0	-40.20	4.5	10.85	Vertical	-36.0	-13.0	23.0	90
5	8587.5	-44.90	5.1	11.35	Vertical	-40.8	-13.0	27.8	90
6	10305.0	-46.00	5.3	11.95	Vertical	-41.5	-13.0	28.5	45
7	12022.5	-45.00	5.5	13.55	Vertical	-39.1	-13.0	26.1	180
8	13740.0	-41.90	6.3	13.75	Vertical	-36.6	-13.0	23.6	225
9	15457.5	-42.90	6.7	13.85	Vertical	-37.9	-13.0	24.9	135
10	17175.0	-40.90	6.8	14.25	Vertical	-35.6	-13.0	22.6	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 15MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-46.30	2.6	10.75	Vertical	-40.3	-13.0	27.3	90
3	5177.6	-38.30	2.4	11.05	Vertical	-31.8	-13.0	18.8	90
4	6930.0	-43.70	4.5	11.15	Vertical	-39.2	-13.0	26.2	45
5	8662.5	-46.20	5.1	11.35	Vertical	-42.1	-13.0	29.1	180
6	10395.0	-43.20	5.3	11.95	Vertical	-38.7	-13.0	25.7	270
7	12127.5	-44.50	5.5	13.55	Vertical	-38.6	-13.0	25.6	225
8	13860.0	-41.10	6.3	13.75	Vertical	-35.8	-13.0	22.8	135
9	15592.5	-42.70	6.7	13.85	Vertical	-37.7	-13.0	24.7	225
10	17325.0	-41.00	6.8	14.25	Vertical	-35.7	-13.0	22.7	315

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 15MHz CH-High, 1 RB

Harmonic	CH20325 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3481.5	-43.40	2.6	10.15	Vertical	-38.0	-13.0	25.0	270
3	5222.6	-37.30	2.4	11.05	Vertical	-30.8	-13.0	17.8	225
4	6990.0	-43.00	4.5	11.15	Vertical	-38.5	-13.0	25.5	135
5	8737.5	-46.20	5.1	11.35	Vertical	-42.1	-13.0	29.1	225
6	10485.0	-43.50	5.3	11.95	Vertical	-39.0	-13.0	26.0	90
7	12232.5	-45.10	5.5	13.55	Vertical	-39.2	-13.0	26.2	45
8	13980.0	-40.80	6.3	13.75	Vertical	-35.5	-13.0	22.5	180
9	15727.5	-43.30	6.7	13.85	Vertical	-38.3	-13.0	25.3	45
10	17475.0	-40.80	6.8	14.25	Vertical	-35.5	-13.0	22.5	0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 20MHz CH-Low, 1 RB

Harmonic	CH20050 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3422.3	-45.00	2.6	10.15	Vertical	-39.6	-13.0	26.6	135
3	5133.4	-38.70	2.4	11.35	Vertical	-31.9	-13.0	18.9	225
4	6880.0	-44.50	4.5	10.85	Vertical	-40.3	-13.0	27.3	315
5	8600.0	-45.20	5.1	11.35	Vertical	-41.1	-13.0	28.1	270
6	10320.0	-42.50	5.3	11.95	Vertical	-38.0	-13.0	25.0	225
7	12040.0	-44.50	5.5	13.55	Vertical	-38.6	-13.0	25.6	135
8	13760.0	-40.90	6.3	13.75	Vertical	-35.6	-13.0	22.6	225
9	15480.0	-43.00	6.7	13.85	Vertical	-38.0	-13.0	25.0	135
10	17200.0	-41.70	6.8	14.25	Vertical	-36.4	-13.0	23.4	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 20MHz CH-Middle, 1 RB

Harmonic	CH-Middle Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-46.90	2.6	10.75	Vertical	-40.9	-13.0	27.9	315
3	5170.5	-38.10	2.4	11.05	Vertical	-31.6	-13.0	18.6	270
4	6930.0	-43.40	4.5	11.15	Vertical	-38.9	-13.0	25.9	225
5	8662.5	-45.60	5.1	11.35	Vertical	-41.5	-13.0	28.5	135
6	10395.0	-44.80	5.3	11.95	Vertical	-40.3	-13.0	27.3	225
7	12127.5	-42.80	5.5	13.55	Vertical	-36.9	-13.0	23.9	90
8	13860.0	-40.30	6.3	13.75	Vertical	-35.0	-13.0	22.0	90
9	15592.5	-42.10	6.7	13.85	Vertical	-37.1	-13.0	24.1	45
10	17325.0	-40.30	6.8	14.25	Vertical	-35.0	-13.0	22.0	180

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 4 QPSK 20MHz CH-High, 1 RB

Harmonic	CH20300 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3472.1	-47.00	2.6	10.15	Vertical	-41.6	-13.0	28.6	225
3	5208.4	-40.40	2.4	11.05	Vertical	-33.9	-13.0	20.9	135
4	6980.0	-43.60	4.5	11.15	Vertical	-39.1	-13.0	26.1	225
5	8725.0	-45.60	5.1	11.35	Vertical	-41.5	-13.0	28.5	90
6	10470.0	-44.80	5.3	11.95	Vertical	-40.3	-13.0	27.3	90
7	12215.0	-42.80	5.5	13.55	Vertical	-36.9	-13.0	23.9	45
8	13960.0	-40.30	6.3	13.75	Vertical	-35.0	-13.0	22.0	180
9	15705.0	-42.10	6.7	13.85	Vertical	-37.1	-13.0	24.1	45
10	17450.0	-40.30	6.8	14.25	Vertical	-35.0	-13.0	22.0	0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 5MHz CH-Low, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1559.0	-52.50	2.00	10.15	Vertical	-46.5	-13.0	33.50	180
3	2338.5	-46.30	2.50	11.35	Vertical	-39.6	-13.0	26.60	270
4	3118.0	-54.90	4.20	10.85	Vertical	-50.4	-13.0	37.40	135
5	3897.5	-52.50	5.20	11.35	Vertical	-48.5	-13.0	35.50	225
6	4677.0	-48.90	5.50	11.95	Vertical	-44.6	-13.0	31.60	135
7	5456.5	-51.10	5.70	13.55	Vertical	-45.4	-13.0	32.40	90
8	6236.0	-48.50	6.30	13.75	Vertical	-43.2	-13.0	30.20	45
9	7015.5	-47.10	6.80	13.85	Vertical	-42.2	-13.0	29.20	180
10	7795.0	-47.10	6.90	14.25	Vertical	-41.9	-13.0	28.90	45

- Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 5MHz CH-Middle, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-52.20	2.00	10.75	Vertical	-45.6	-13.0	32.60	0
3	2346.0	-47.59	2.51	11.05	Vertical	-41.2	-13.0	28.20	135
4	3128.0	-56.20	4.20	11.15	Vertical	-51.4	-13.0	38.40	225
5	3910.0	-54.30	5.20	11.15	Vertical	-50.5	-13.0	37.50	90
6	4692.0	-52.70	5.50	11.95	Vertical	-48.4	-13.0	35.40	45
7	5474.0	-53.60	5.70	13.55	Vertical	-47.9	-13.0	34.90	180
8	6256.0	-51.10	6.30	13.75	Vertical	-45.8	-13.0	32.80	45
9	7038.0	-47.60	6.80	13.85	Vertical	-42.7	-13.0	29.70	0
10	7820.0	-47.50	6.90	14.25	Vertical	-42.3	-13.0	29.30	135

- Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 5MHz CH-High, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1569.0	-52.90	2.00	10.15	Vertical	-46.9	-13.0	33.9	225
3	2353.5	-47.79	2.51	11.05	Vertical	-41.4	-13.0	28.4	315
4	3138.0	-56.50	4.20	11.15	Vertical	-51.7	-13.0	38.7	270
5	3922.5	-53.80	5.20	11.15	Vertical	-50.0	-13.0	37.0	225
6	4707.0	-53.20	5.50	11.95	Vertical	-48.9	-13.0	35.9	135
7	5491.5	-53.80	5.70	13.55	Vertical	-48.1	-13.0	35.1	225
8	6276.0	-51.40	6.30	13.75	Vertical	-46.1	-13.0	33.1	90
9	7060.5	-47.80	6.80	13.85	Vertical	-42.9	-13.0	29.9	90
10	7845.0	-47.60	6.90	14.25	Vertical	-42.4	-13.0	29.4	45

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 10MHz CH-Low, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-52.85	2.00	10.15	Vertical	-44.7	-13.0	31.7	180
3	2346.0	-50.94	2.51	11.35	Vertical	-42.1	-13.0	29.1	225
4	3128.0	-57.95	4.20	10.85	Vertical	-51.3	-13.0	38.3	135
5	3910.0	-56.95	5.20	11.35	Vertical	-50.8	-13.0	37.8	225
6	4692.0	-54.95	5.50	11.95	Vertical	-48.5	-13.0	35.5	90
7	5474.0	-55.95	5.70	13.55	Vertical	-48.1	-13.0	35.1	90
8	6256.0	-53.75	6.30	13.75	Vertical	-46.3	-13.0	33.3	45
9	7038.0	-49.75	6.80	13.85	Vertical	-42.7	-13.0	29.7	180
10	7820.0	-49.95	6.90	14.25	Vertical	-42.6	-13.0	29.6	45

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 10MHz CH-Middle, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-50.90	2.00	10.75	Vertical	-44.3	-13.0	31.3	0
3	2346.0	-57.49	2.51	11.05	Vertical	-51.1	-13.0	38.1	135
4	3128.0	-56.00	4.20	11.15	Vertical	-51.2	-13.0	38.2	225
5	3910.0	-54.10	5.20	11.15	Vertical	-50.3	-13.0	37.3	315
6	4692.0	-53.40	5.50	11.95	Vertical	-49.1	-13.0	36.1	270
7	5474.0	-54.00	5.70	13.55	Vertical	-48.3	-13.0	35.3	90
8	6256.0	-51.50	6.30	13.75	Vertical	-46.2	-13.0	33.2	45
9	7038.0	-47.70	6.80	13.85	Vertical	-42.8	-13.0	29.8	180
10	7820.0	-47.70	6.90	14.25	Vertical	-42.5	-13.0	29.5	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 13 QPSK 10MHz CH-High, 1 RB

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1564.0	-53.85	2.00	10.15	Vertical	-45.7	-13.0	32.7	0
3	2346.0	-50.44	2.51	11.05	Vertical	-41.9	-13.0	28.9	135
4	3128.0	-58.15	4.20	11.15	Vertical	-51.2	-13.0	38.2	225
5	3910.0	-55.95	5.20	11.15	Vertical	-50.0	-13.0	37.0	315
6	4692.0	-55.05	5.50	11.95	Vertical	-48.6	-13.0	35.6	270
7	5474.0	-56.05	5.70	13.55	Vertical	-48.2	-13.0	35.2	225
8	6256.0	-53.45	6.30	13.75	Vertical	-46.0	-13.0	33.0	135
9	7038.0	-49.15	6.80	13.85	Vertical	-42.1	-13.0	29.1	225
10	7820.0	-49.75	6.90	14.25	Vertical	-42.4	-13.0	29.4	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.


2. The worst emission was found in the antenna is vertical position.

5 Main Test Instruments


Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Base Station Simulator	CMW500	R&S	113645	2017-05-14	2018-05-13
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	2017-05-14	2018-05-13
Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2017-05-14	2018-05-13
Spectrum Analyzer	N9010A	Agilent	MY47191109	2017-05-14	2018-05-13
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
Signal generator	SMB 100A	R&S	102594	2017-05-14	2018-05-13
EMI Test Receiver	ESCI3	R&S	100948	2016-12-16	2017-12-15
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
Climatic Chamber	PT-30B	Re Ce	20101891	2016-07-17	2017-07-16
RF Cable	SMA 15cm	Agilent	0001	2017-02-06	2017-08-05

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance

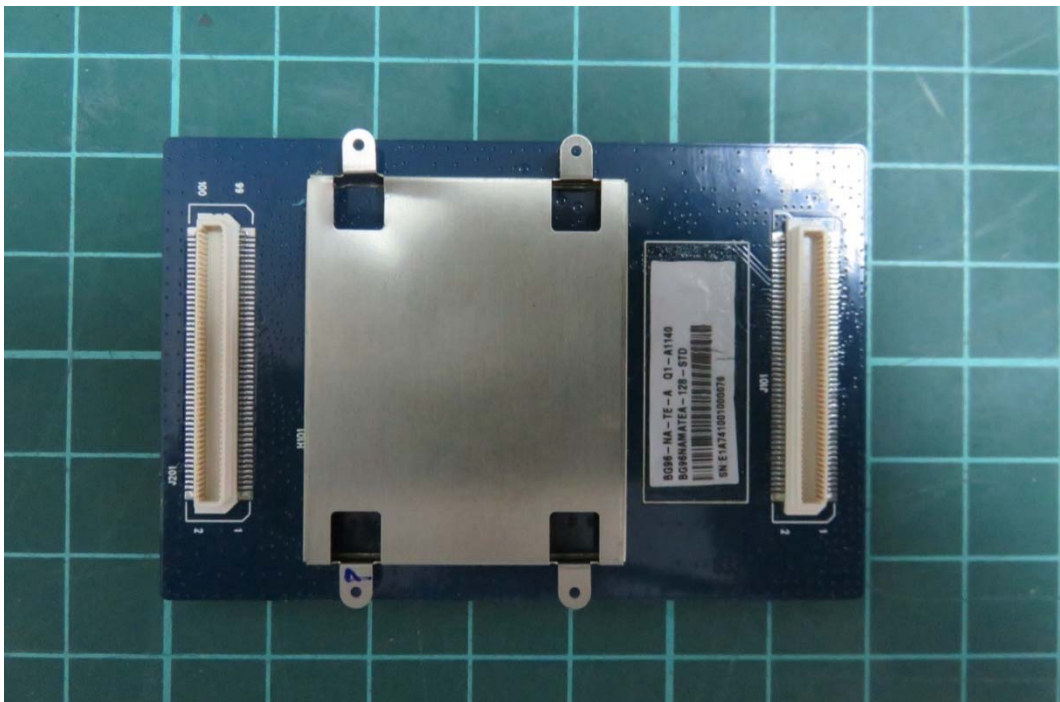


a: EUT

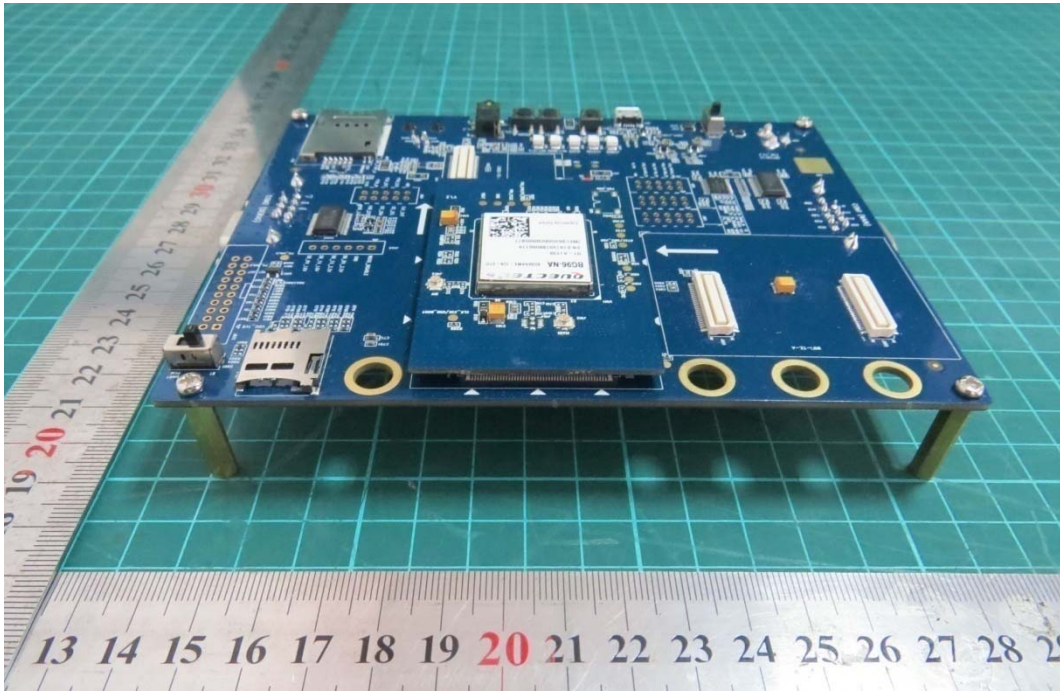

b: Evaluation Board

Picture 1 EUT and Accessory

A.2 Test Setup

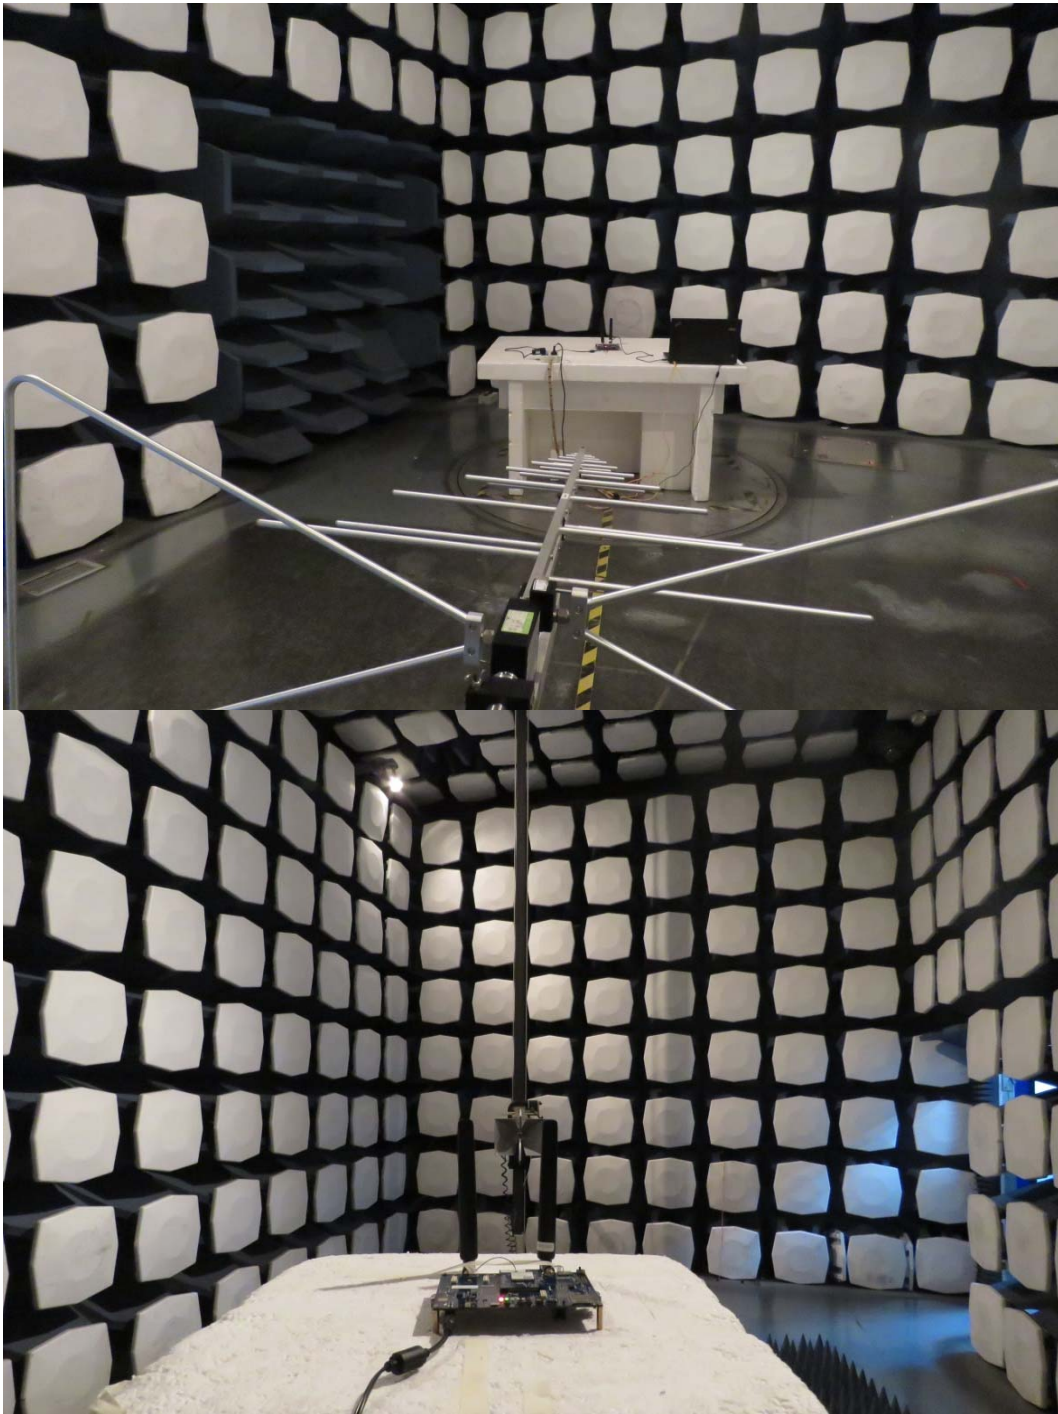

Picture 2: Radiated Spurious Emissions Test setup