



# RF TEST REPORT

<b>Applicant</b>	Quectel Wireless Solutions Co., Ltd.
<b>FCC ID</b>	XMR201707BG96
<b>Product</b>	Quectel BG96
<b>Brand</b>	Quectel
<b>Model</b>	BG96
<b>Report No.</b>	R2003A0151-R4
<b>Issue Date</b>	August 18, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the Test Report .....	4
1.2. Test facility .....	4
1.3. Testing Location .....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	10
5.1. RF Power Output.....	10
5.2. Effective Radiated Power .....	13
5.3. Occupied Bandwidth .....	19
5.4. Band Edge Compliance.....	33
5.5. Peak-to-Average Power Ratio (PAPR) .....	47
5.6. Frequency Stability .....	50
5.7. Spurious Emissions at Antenna Terminals .....	56
5.8. Radiates Spurious Emission .....	66
6. Main Test Instruments .....	84

### Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	Refer to the Original
2	Effective Radiated Power	22.913(a)(2)	Refer to the Original
3	Occupied Bandwidth	2.1049	Refer to the Original
4	Band Edge Compliance	2.1051 / 22.917(a)	Only test LTE Band
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	Refer to the Original
6	Frequency Stability	2.1055 / 22.355	Refer to the Original
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	Refer to the Original
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	Refer to the Original

Date of Testing: June 24, 2017~July 3, 2017 and August10, 2020 ~ August12, 2020

Note: PASS: The EUT complies with the essential requirements in the standard.  
FAIL: The EUT does not comply with the essential requirements in the standard.

**BG96 (Report No.: R2003A0151-R4) is a variant model of BG96 (Report No.: RXA1706-0199RF01R1). Test values partial duplicated from original for variant. There is only tested Band Edge Compliance of LTE Band for variant in this report. The detailed product change description please refers to the Statement letter\_BG96.**



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

### 1.2. Test facility

#### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer address	7th Floor, Hongye Building, No. 1801 Hongmei Road, Xuhui District, Shanghai, China

### General Information

EUT Description			
Model	BG96		
IMEI	864508030012063		
Hardware Version	R1.0		
Software Version	BG96MAR02A09M1G		
Power Supply	External power supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Test Mode(s)	GSM 850: LTE Band 5/26;		
Test Modulation	(GSM)GMSK,8PSK; (LTE)QPSK 16QAM;		
LTE Category	M1		
Maximum E.R.P.	GSM 850:	32.13 dBm	
	LTE Band 5:	28.29 dBm	
	LTE Band 26:	28.60 dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V    Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C    Highest: +85°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
	LTE Band 26	824 ~ 849	869 ~ 894
Note: The information of the EUT is declared by the manufacturer.			



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 22H (2019)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2019)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (X, Y axis), lie-down position (Z axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	GSM 850
RF power output	GPRS(1Tx slot) EGPRS(1Tx slot)
Occupied Bandwidth	GPRS(1Tx slot) EGPRS(1Tx slot)
Band Edge Compliance	GPRS(1Tx slot) EGPRS(1Tx slot)
Peak-to-Average Power Ratio	GPRS(1Tx slot) EGPRS(1Tx slot)
Frequency Stability	GPRS(1Tx slot) EGPRS(1Tx slot)
Spurious Emissions at Antenna Terminals	GPRS(1Tx slot)
Effective Radiated Power	GPRS(1Tx slot) EGPRS(1Tx slot)
Radiates Spurious Emission	GPRS(1Tx slot)





Test modes are chosen as the worst case configuration below for LTE Band 5/26

Test items	Modes	Bandwidth (MHz)					Modulation		RB			Test Channel		
		1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 5	O	O	O	O	-	O	O	O	O	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	-	-	O	O	O	O
Occupied Bandwidth	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 5	O	O	O	O	-	O	O	O	-	O	O	-	O
	LTE 26	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 5	O	O	O	O	-	O	O	-	-	O	O	O	O
	LTE 26	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 5	O	O	O	O	-	O	O	-	-	O	-	O	-
	LTE 26	O	O	O	O	O	O	O	-	-	O	-	O	-
Spurious Emissions at Antenna Terminals	LTE 5	O	O	O	O	-	O	-	O	-	-	O	O	O
	LTE 26	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 5	O	O	O	O	-	O	-	O	-	-	O	O	O
	LTE 26	O	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

## 5. Test Case Results

### 5.1. RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

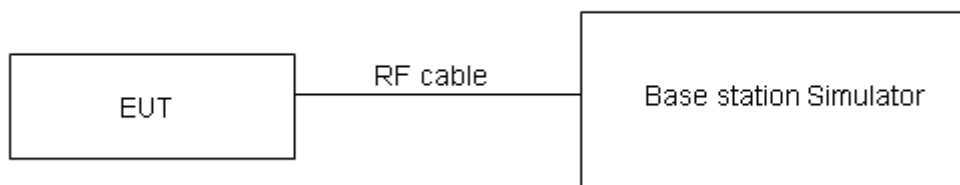

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



**Test Results**

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GPRS (GMSK)	1TXslot	32.25	32.28	32.31
	2TXslots	32.11	32.05	32.10
	3TXslots	31.21	31.26	31.31
	4TXslots	30.01	30.11	30.28
EGPRS (8PSK)	1TXslot	26.58	26.65	26.78
	2TXslots	26.51	26.48	26.61
	3TXslots	26.27	26.28	26.42
	4TXslots	26.05	26.06	26.19

Mode	Bandwidth	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
					QPSK	16QAM
Band5	1.4MHz	20407/824.7	0	1#0	22.66	23.79
			0	6#0	22.62	22.67
		20525/836.5	0	1#0	23.15	22.63
			0	6#0	22.71	23.20
		20643/848.3	0	1#5	23.21	23.14
			0	6#0	22.86	23.00
	3MHz	20415/825.5	0	1#0	22.68	23.81
			0	6#0	22.70	22.70
		20525/836.5	0	1#0	23.16	22.66
			0	6#0	22.73	23.25
		20635/847.5	1	1#5	23.24	23.16
			1	6#0	22.90	23.04
	5MHz	20425/826.5	3	1#0	22.67	23.76
			0	6#0	22.68	22.67
		20525/836.5	0	1#0	23.12	22.64
			0	6#0	22.69	23.20
		20625/846.5	0	1#5	23.22	23.14
			3	6#0	22.85	23.00
	10MHz	20450/829	3	1#0	22.64	23.74
			0	4#0	22.65	22.65
		20525/836.5	0	1#0	23.08	22.60
			0	4#0	22.64	23.16
		20600/844	4	1#5	23.19	23.09
			7	4#2	22.81	22.97



Band26	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)	
				QPSK	16QAM
1.4MHz	26797/824.7	0	1#0	22.49	23.58
		0	6#0	22.76	23.10
	26915/836.5	0	1#0	22.97	22.59
		0	6#0	22.74	23.19
	27033/848.3	0	1#5	22.81	22.70
		0	6#0	22.75	22.87
3MHz	26805/825.5	0	1#0	22.46	23.55
		0	6#0	22.74	23.08
	26915/836.5	0	1#0	22.95	22.53
		0	6#0	22.73	23.15
	27025/847.5	1	1#5	22.77	22.67
		1	6#0	22.73	22.82
5MHz	26815/826.5	3	1#0	22.48	23.57
		0	6#0	22.82	23.11
	26915/836.5	0	1#0	22.96	22.56
		0	6#0	22.75	23.20
	27015/846.5	0	1#5	22.80	22.69
		3	6#0	22.77	22.86
10MHz	26840/829	3	1#0	22.47	23.52
		0	4#0	22.80	23.08
	26915/836.5	0	1#0	22.92	22.54
		0	4#0	22.71	23.15
	26990/844	4	1#5	22.78	22.67
		7	4#2	22.72	22.82
15MHz	26865/831.5	3	1#0	22.44	23.50
		0	6#0	22.77	23.06
	26915/836.5	0	1#0	22.88	22.50
		0	6#0	22.66	23.11
	26965/841.5	8	1#5	22.75	22.62
		11	6#0	22.68	22.79

## 5.2. Effective Radiated Power

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement


1. The testing follows ANSI C63.26 (2015) Section 5.5.2.3.
2. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna between 1.0m and 4.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

**Test configuration**

**Below 1GHz:**

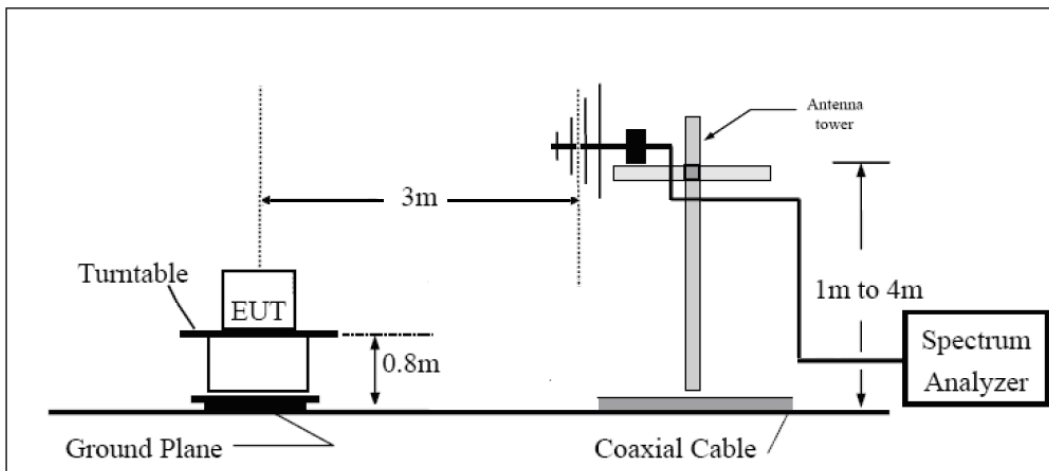

**Above 1GHz:**

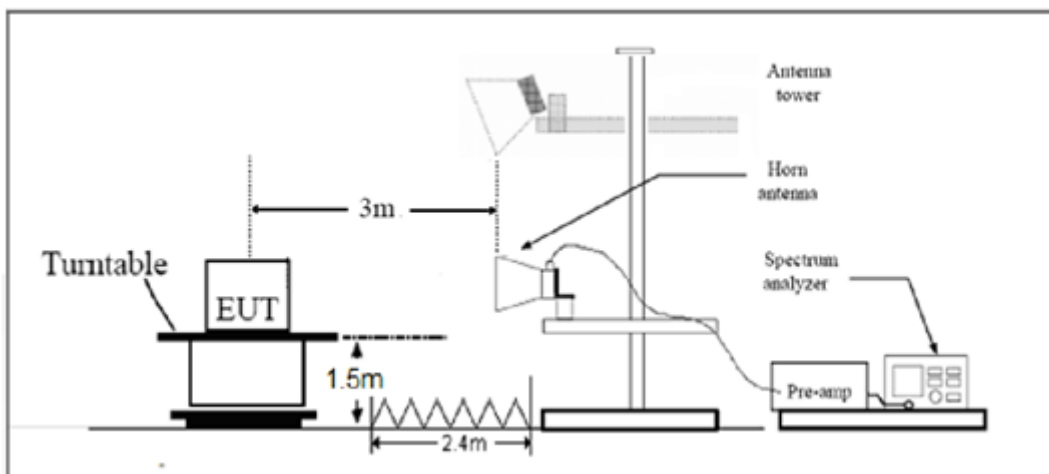

**Limits**

Rule Part 22.913(a) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7\text{ W}$ (38.45 dBm)
-------	-------------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19\text{ dB}$



## Test Results:

Mode	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
GPRS 850	H	824.2	-24.38	-45.53	0.00	1.06	32.13	38.45	Pass
	H	836.6	-24.85	-45.38	0.00	1.24	31.80	38.45	Pass
	H	848.8	-25.27	-45.37	0.00	1.38	31.09	38.45	Pass
	V	824.2	-28.28	-45.65	0.00	1.06	28.23	38.45	Pass
	V	836.6	-27.19	-45.46	0.00	1.24	27.18	38.45	Pass
	V	848.8	-37.77	-45.49	0.00	1.38	25.68	38.45	Pass
EGPRS 850	H	824.2	-24.16	-45.53	0.00	1.06	26.43	38.45	Pass
	H	836.6	-24.88	-45.38	0.00	1.24	26.50	38.45	Pass
	H	848.8	-25.23	-45.37	0.00	1.38	26.63	38.45	Pass
	V	824.2	-37.36	-45.65	0.00	1.06	24.93	38.45	Pass
	V	836.6	-37.54	-45.46	0.00	1.24	25.00	38.45	Pass
	V	848.8	-37.48	-45.49	0.00	1.38	25.13	38.45	Pass



LTE Band 5									
bandwidth	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	H	824.7	-27.63	-47.61	0.00	1.06	26.04	38.45	Pass
	H	836.5	-27.88	-47.75	0.00	1.24	26.98	38.45	Pass
	H	848.3	-28.74	-48.23	0.00	1.38	28.29	38.45	Pass
	V	824.7	-42.56	-47.29	0.00	1.06	23.39	38.45	Pass
	V	836.5	-42.26	-47.15	0.00	1.24	23.29	38.45	Pass
	V	848.3	-42.88	-47.48	0.00	1.38	23.94	38.45	Pass
1.4 MHz (16QAM)	H	824.7	-27.96	-47.61	0.00	1.06	25.70	38.45	Pass
	H	836.5	-28.19	-47.75	0.00	1.24	26.66	38.45	Pass
	H	848.3	-29.06	-48.23	0.00	1.38	27.95	38.45	Pass
	V	824.7	-42.86	-47.29	0.00	1.06	23.07	38.45	Pass
	V	836.5	-42.57	-47.15	0.00	1.24	22.98	38.45	Pass
	V	848.3	-43.20	-47.48	0.00	1.38	23.60	38.45	Pass
3 MHz (QPSK)	H	825.5	-27.89	-47.59	0.00	1.06	25.72	38.45	Pass
	H	836.5	-28.18	-47.75	0.00	1.24	27.17	38.45	Pass
	H	847.5	-28.63	-48.18	0.00	1.38	27.95	38.45	Pass
	V	825.5	-42.57	-47.26	0.00	1.06	23.23	38.45	Pass
	V	836.5	-42.60	-47.15	0.00	1.24	23.59	38.45	Pass
	V	847.5	-43.73	-47.44	0.00	1.38	23.97	38.45	Pass
3 MHz (16QAM)	H	825.5	-27.92	-47.59	0.00	1.06	25.40	38.45	Pass
	H	836.5	-28.49	-47.75	0.00	1.24	26.85	38.45	Pass
	H	847.5	-28.94	-48.18	0.00	1.38	27.65	38.45	Pass
	V	825.5	-42.91	-47.26	0.00	1.06	22.90	38.45	Pass
	V	836.5	-42.91	-47.15	0.00	1.24	23.26	38.45	Pass
	V	847.5	-44.03	-47.44	0.00	1.38	23.65	38.45	Pass
5 MHz (QPSK)	H	826.5	-27.81	-47.60	0.00	1.13	25.49	38.45	Pass
	H	836.5	-28.20	-47.75	0.00	1.24	26.73	38.45	Pass
	H	846.5	-28.85	-48.12	0.00	1.38	27.53	38.45	Pass
	V	826.5	-42.46	-47.24	0.00	1.13	23.20	38.45	Pass
	V	836.5	-42.64	-47.15	0.00	1.24	23.10	38.45	Pass
	V	846.5	-43.02	-47.40	0.00	1.38	22.93	38.45	Pass
5 MHz (16QAM)	H	826.5	-28.11	-47.60	0.00	1.13	25.17	38.45	Pass
	H	836.5	-28.54	-47.75	0.00	1.24	26.40	38.45	Pass
	H	846.5	-29.18	-48.12	0.00	1.38	27.20	38.45	Pass
	V	826.5	-42.77	-47.24	0.00	1.13	22.88	38.45	Pass
	V	836.5	-42.94	-47.15	0.00	1.24	22.77	38.45	Pass
	V	846.5	-43.36	-47.40	0.00	1.38	22.60	38.45	Pass





LTE Band 5									
bandwidth	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
10 MHz (QPSK)	H	829	-27.65	-47.61	0.00	1.13	24.43	38.45	Pass
	H	836.5	-27.96	-47.75	0.00	1.24	26.06	38.45	Pass
	H	844	-28.46	-48.01	0.00	1.33	26.22	38.45	Pass
	V	829	-42.44	-47.19	0.00	1.13	21.91	38.45	Pass
	V	836.5	-42.49	-47.15	0.00	1.24	22.84	38.45	Pass
	V	844	-42.36	-47.29	0.00	1.33	22.03	38.45	Pass
10 MHz (16QAM)	H	829	-27.96	-47.61	0.00	1.13	24.10	38.45	Pass
	H	836.5	-28.24	-47.75	0.00	1.24	25.75	38.45	Pass
	H	844	-28.78	-48.01	0.00	1.33	25.90	38.45	Pass
	V	829	-42.77	-47.19	0.00	1.13	21.60	38.45	Pass
	V	836.5	-42.79	-47.15	0.00	1.24	22.51	38.45	Pass
	V	844	-42.61	-47.29	0.00	1.33	21.70	38.45	Pass

LTE Band 26									
bandwidth	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	H	824.7	-27.76	-47.61	0.00	1.06	26.69	38.45	Pass
	H	836.5	-27.84	-47.75	0.00	1.24	27.83	38.45	Pass
	H	848.3	-28.32	-48.23	0.00	1.38	28.11	38.45	Pass
	V	824.7	-38.14	-47.29	0.00	1.06	23.52	38.45	Pass
	V	836.5	-38.81	-47.75	0.00	1.24	24.37	38.45	Pass
	V	848.3	-38.25	-47.48	0.00	1.38	24.74	38.45	Pass
1.4 MHz (16QAM)	H	824.7	-28.25	-47.61	0.00	1.06	26.37	38.45	Pass
	H	836.5	-28.46	-47.75	0.00	1.24	27.50	38.45	Pass
	H	848.3	-29.00	-48.23	0.00	1.38	27.80	38.45	Pass
	V	824.7	-38.59	-47.29	0.00	1.06	23.20	38.45	Pass
	V	836.5	-39.38	-47.75	0.00	1.24	24.06	38.45	Pass
	V	848.3	-39.21	-47.48	0.00	1.38	24.43	38.45	Pass
3 MHz (QPSK)	H	825.5	-27.65	-47.59	0.00	1.06	26.68	38.45	Pass
	H	836.5	-27.73	-47.75	0.00	1.24	27.76	38.45	Pass
	H	847.5	-27.98	-48.18	0.00	1.38	28.60	38.45	Pass
	V	825.5	-38.00	-47.26	0.00	1.06	23.90	38.45	Pass
	V	836.5	-38.50	-47.75	0.00	1.24	24.38	38.45	Pass
	V	847.5	-37.96	-47.44	0.00	1.38	24.50	38.45	Pass
3 MHz (16QAM)	H	825.5	-28.20	-47.59	0.00	1.06	26.37	38.45	Pass
	H	836.5	-28.48	-47.75	0.00	1.24	27.45	38.45	Pass
	H	847.5	-28.93	-48.18	0.00	1.38	28.27	38.45	Pass
	V	825.5	-38.52	-47.26	0.00	1.06	23.60	38.45	Pass



LTE Band 26									
bandwidth	Polarization	Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	Limit (dBm)	Conclusion
	V	836.5	-39.07	-47.75	0.00	1.24	24.06	38.45	Pass
	V	847.5	-38.62	-47.44	0.00	1.38	24.15	38.45	Pass
5 MHz (QPSK)	H	826.5	-27.97	-47.60	0.00	1.13	26.17	38.45	Pass
	H	836.5	-28.06	-47.75	0.00	1.24	27.43	38.45	Pass
	H	846.5	-28.20	-48.12	0.00	1.38	28.13	38.45	Pass
	V	826.5	-38.39	-47.24	0.00	1.13	23.75	38.45	Pass
	V	836.5	-38.82	-47.75	0.00	1.24	24.22	38.45	Pass
	V	846.5	-38.17	-47.40	0.00	1.38	23.09	38.45	Pass
5 MHz (16QAM)	H	826.5	-28.70	-47.60	0.00	1.13	25.86	38.45	Pass
	H	836.5	-28.83	-47.75	0.00	1.24	27.10	38.45	Pass
	H	846.5	-28.79	-48.12	0.00	1.38	27.82	38.45	Pass
	V	826.5	-39.02	-47.24	0.00	1.13	23.45	38.45	Pass
	V	836.5	-39.40	-47.75	0.00	1.24	23.90	38.45	Pass
	V	846.5	-38.81	-47.40	0.00	1.38	22.78	38.45	Pass
10 MHz (QPSK)	H	829	-27.51	-47.61	0.00	1.13	25.12	38.45	Pass
	H	836.5	-27.99	-47.75	0.00	1.24	25.83	38.45	Pass
	H	844	-27.87	-48.01	0.00	1.33	26.96	38.45	Pass
	V	829	-37.89	-47.19	0.00	1.13	22.16	38.45	Pass
	V	836.5	-38.90	-47.75	0.00	1.24	23.36	38.45	Pass
	V	844	-37.83	-47.29	0.00	1.33	23.63	38.45	Pass
10 MHz (16QAM)	H	829	-28.30	-47.61	0.00	1.13	24.80	38.45	Pass
	H	836.5	-28.14	-47.75	0.00	1.24	25.47	38.45	Pass
	H	844	-28.39	-48.01	0.00	1.33	26.65	38.45	Pass
	V	829	-38.38	-47.19	0.00	1.13	21.85	38.45	Pass
	V	836.5	-39.48	-47.75	0.00	1.24	23.05	38.45	Pass
	V	844	-38.38	-47.29	0.00	1.33	23.30	38.45	Pass
15 MHz (QPSK)	H	831.5	-27.66	-47.64	0.00	1.18	24.68	38.45	Pass
	H	836.5	-28.06	-47.75	0.00	1.24	25.59	38.45	Pass
	H	841.5	-27.85	-47.93	0.00	1.28	26.06	38.45	Pass
	V	831.5	-37.97	-47.15	0.00	1.18	21.88	38.45	Pass
	V	836.5	-38.86	-47.75	0.00	1.24	22.49	38.45	Pass
	V	841.5	-37.93	-47.23	0.00	1.28	22.51	38.45	Pass
15 MHz (16QAM)	H	831.5	-28.29	-47.64	0.00	1.18	24.35	38.45	Pass
	H	836.5	-28.56	-47.75	0.00	1.24	25.17	38.45	Pass
	H	841.5	-28.37	-47.93	0.00	1.28	25.75	38.45	Pass
	V	831.5	-38.49	-47.15	0.00	1.18	21.56	38.45	Pass
	V	836.5	-39.34	-47.75	0.00	1.24	22.15	38.45	Pass
	V	841.5	-38.55	-47.23	0.00	1.28	22.18	38.45	Pass

### 5.3. Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5/26,

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

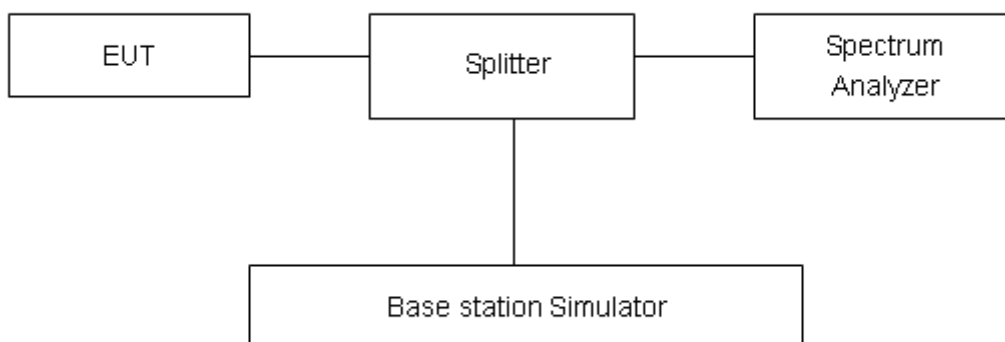

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

**Test Result**







Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
<b>GPRS 850 (GMSK)</b>	128	824.2	0.24584	0.3134
	190	836.6	0.24471	0.3148
	251	848.8	0.24419	0.3039
<b>EGPRS 850 (8-PSK)</b>	128	824.2	0.24858	0.2973
	190	836.6	0.24438	0.3111
	251	848.8	0.24744	0.3130




LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20407	824.7	1.1075	1.316
			20525	836.5	1.1074	1.329
			20643	848.3	1.1082	1.348
		3	20415	825.5	1.1606	1.845
			20525	836.5	1.1561	1.848
			20635	847.5	1.1630	1.859
		5	20425	826.5	1.1552	1.879
			20525	836.5	1.1536	1.866
			20625	846.5	1.1629	1.986
		10	20450	829	1.2027	1.767
			20525	836.5	1.1952	1.920
			20600	844	1.1780	1.735
	16QAM	1.4	20407	824.7	0.94471	1.214
			20525	836.5	0.94726	1.198
			20643	848.3	0.94381	1.173
		3	20415	825.5	0.97884	1.373
			20525	836.5	0.98345	1.345
			20635	847.5	0.98361	1.339
		5	20425	826.5	1.0052	1.451
			20525	836.5	1.0072	1.453
			20625	846.5	1.0025	1.447
		10	20450	829	1.0349	1.513
			20525	836.5	1.0457	1.661
			20600	844	1.0258	1.504





LTE Band 26						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	26797	824.7	1.1080	1.320
			26915	836.5	1.1092	1.331
			27033	848.3	1.1071	1.322
		3	26805	825.5	1.1343	1.535
			26915	836.5	1.1398	1.623
			27025	847.5	1.1666	1.86
		5	26815	826.5	1.1524	1.466
			26915	836.5	1.1531	1.488
			27015	846.5	1.1296	1.472
		10	26840	829	1.211	2.049
			26915	836.5	1.1901	2.035
			26990	844	1.1955	2.044
	15	26865	831.5	1.1982	1.841	
		26915	836.5	1.1913	1.961	
		26965	841.5	1.2049	1.972	
	16QAM	1.4	26797	824.7	0.94796	1.212
			26915	836.5	0.94121	1.205
			27033	848.3	0.94791	1.214
		3	26805	825.5	0.98579	1.334
			26915	836.5	0.98773	1.345
			27025	847.5	0.99320	1.410
		5	26815	826.5	0.99601	1.549
			26915	836.5	1.0185	1.578
			27015	846.5	1.0013	1.578
10		26840	829	1.0527	1.660	
		26915	836.5	1.0557	1.671	
		26990	844	1.0551	1.662	
15	26865	831.5	1.060	1.642		
	26915	836.5	1.0588	1.632		
	26965	841.5	1.0577	1.649		

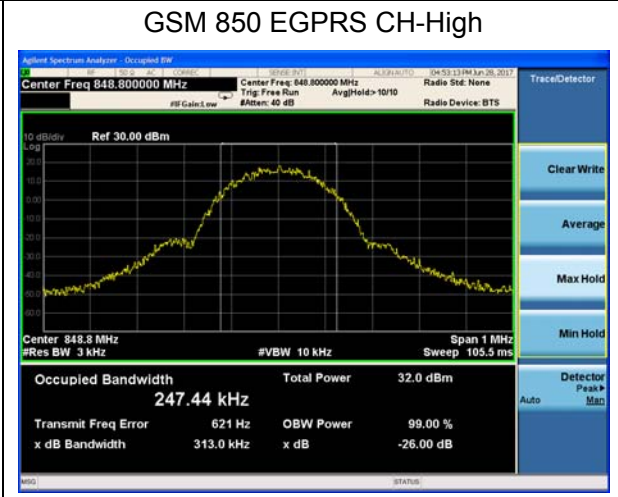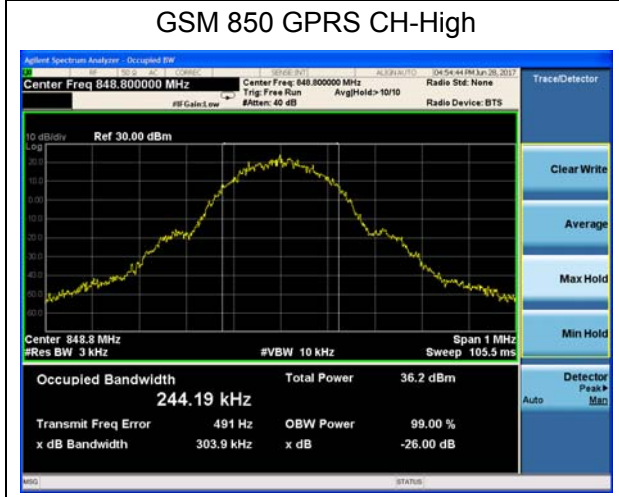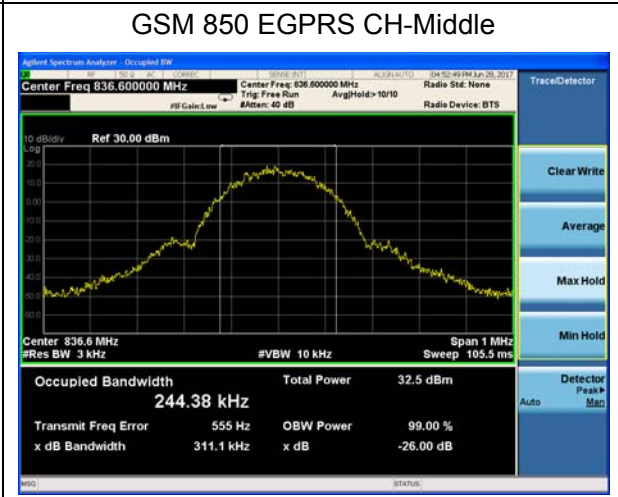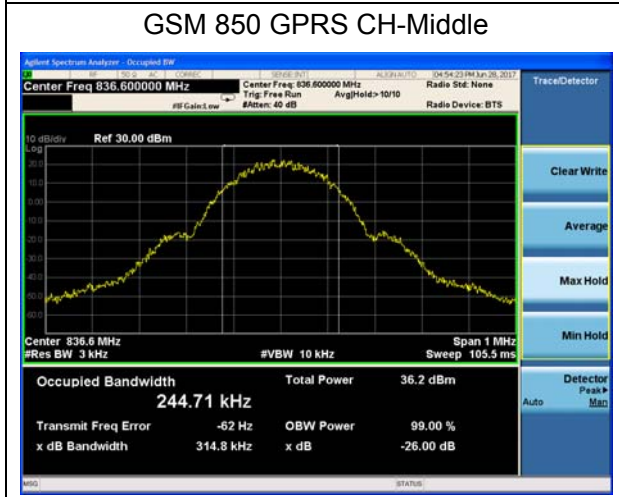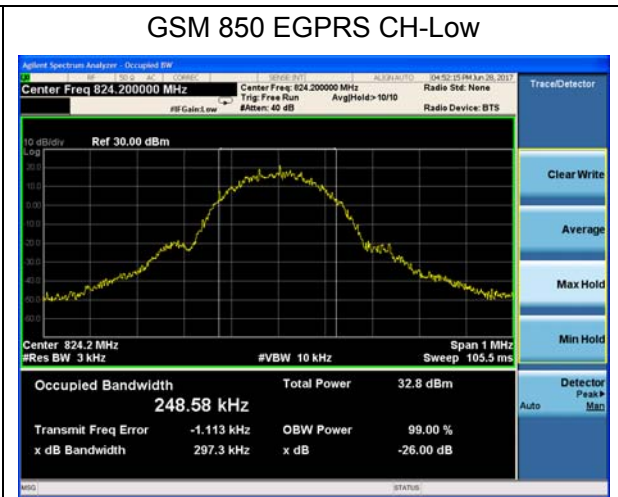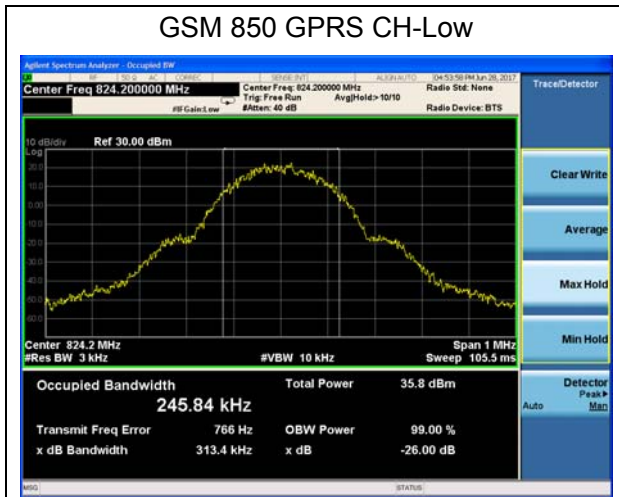


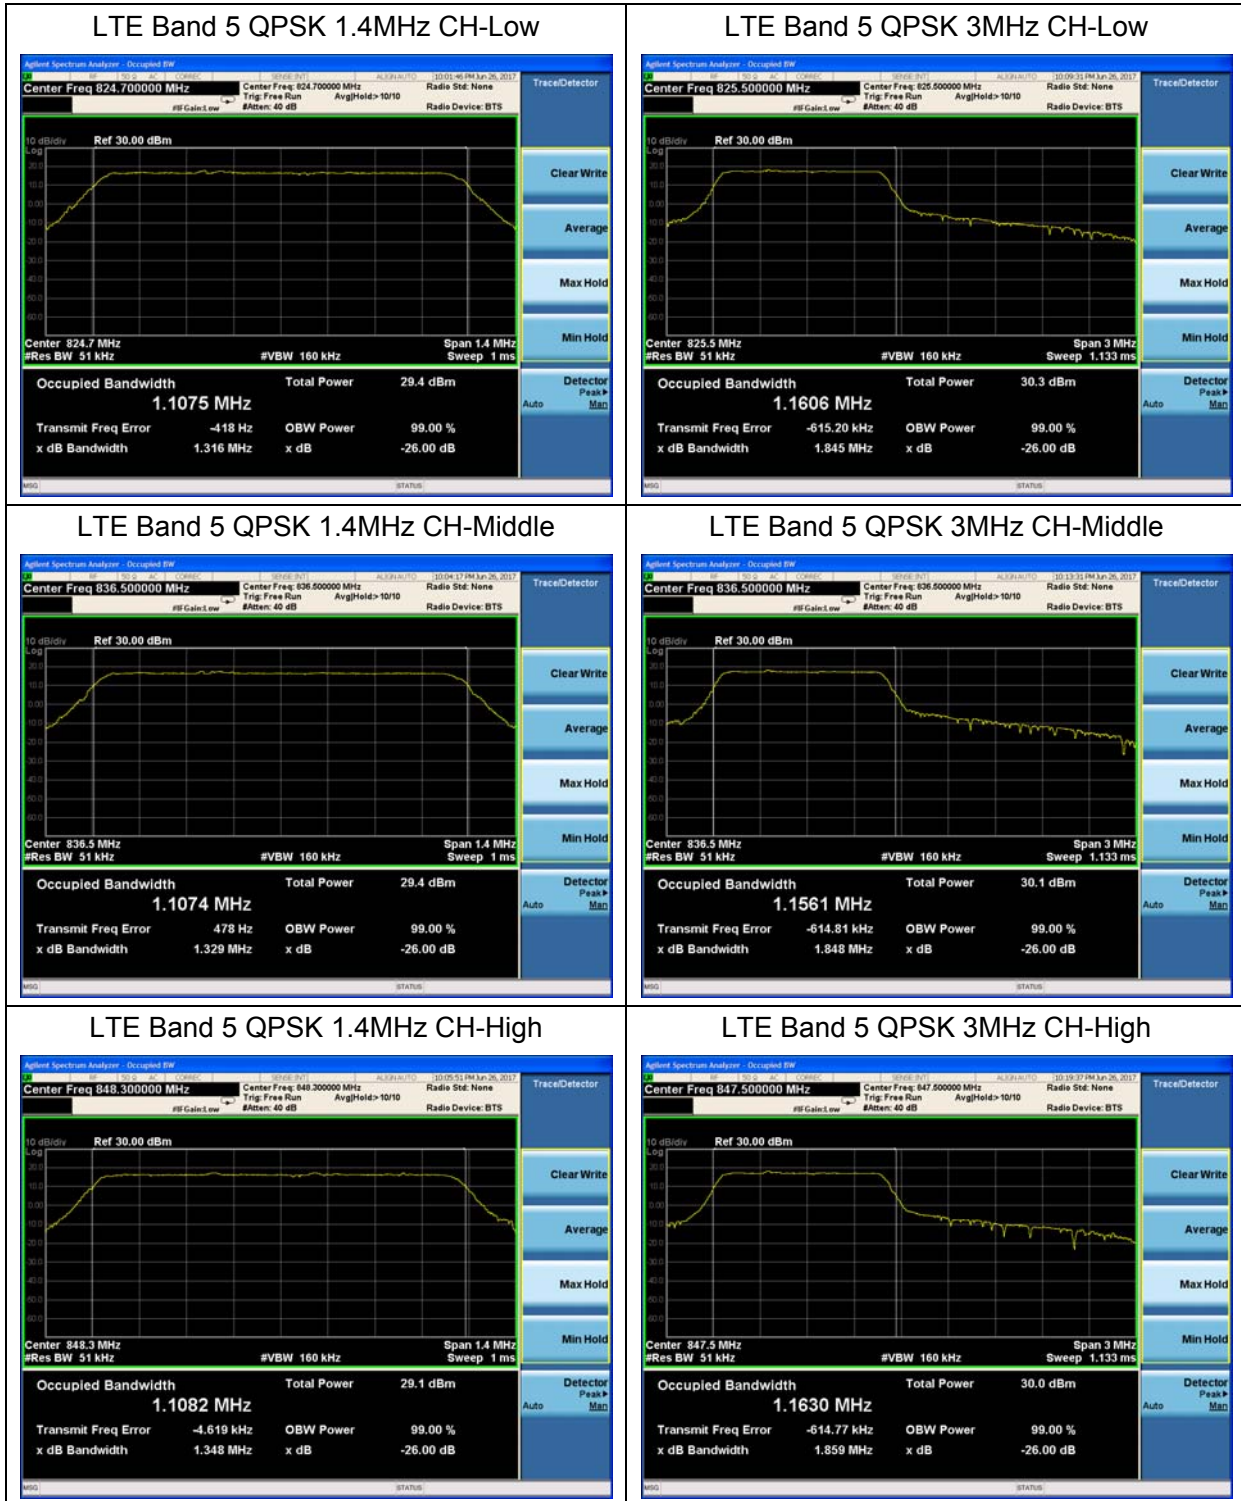










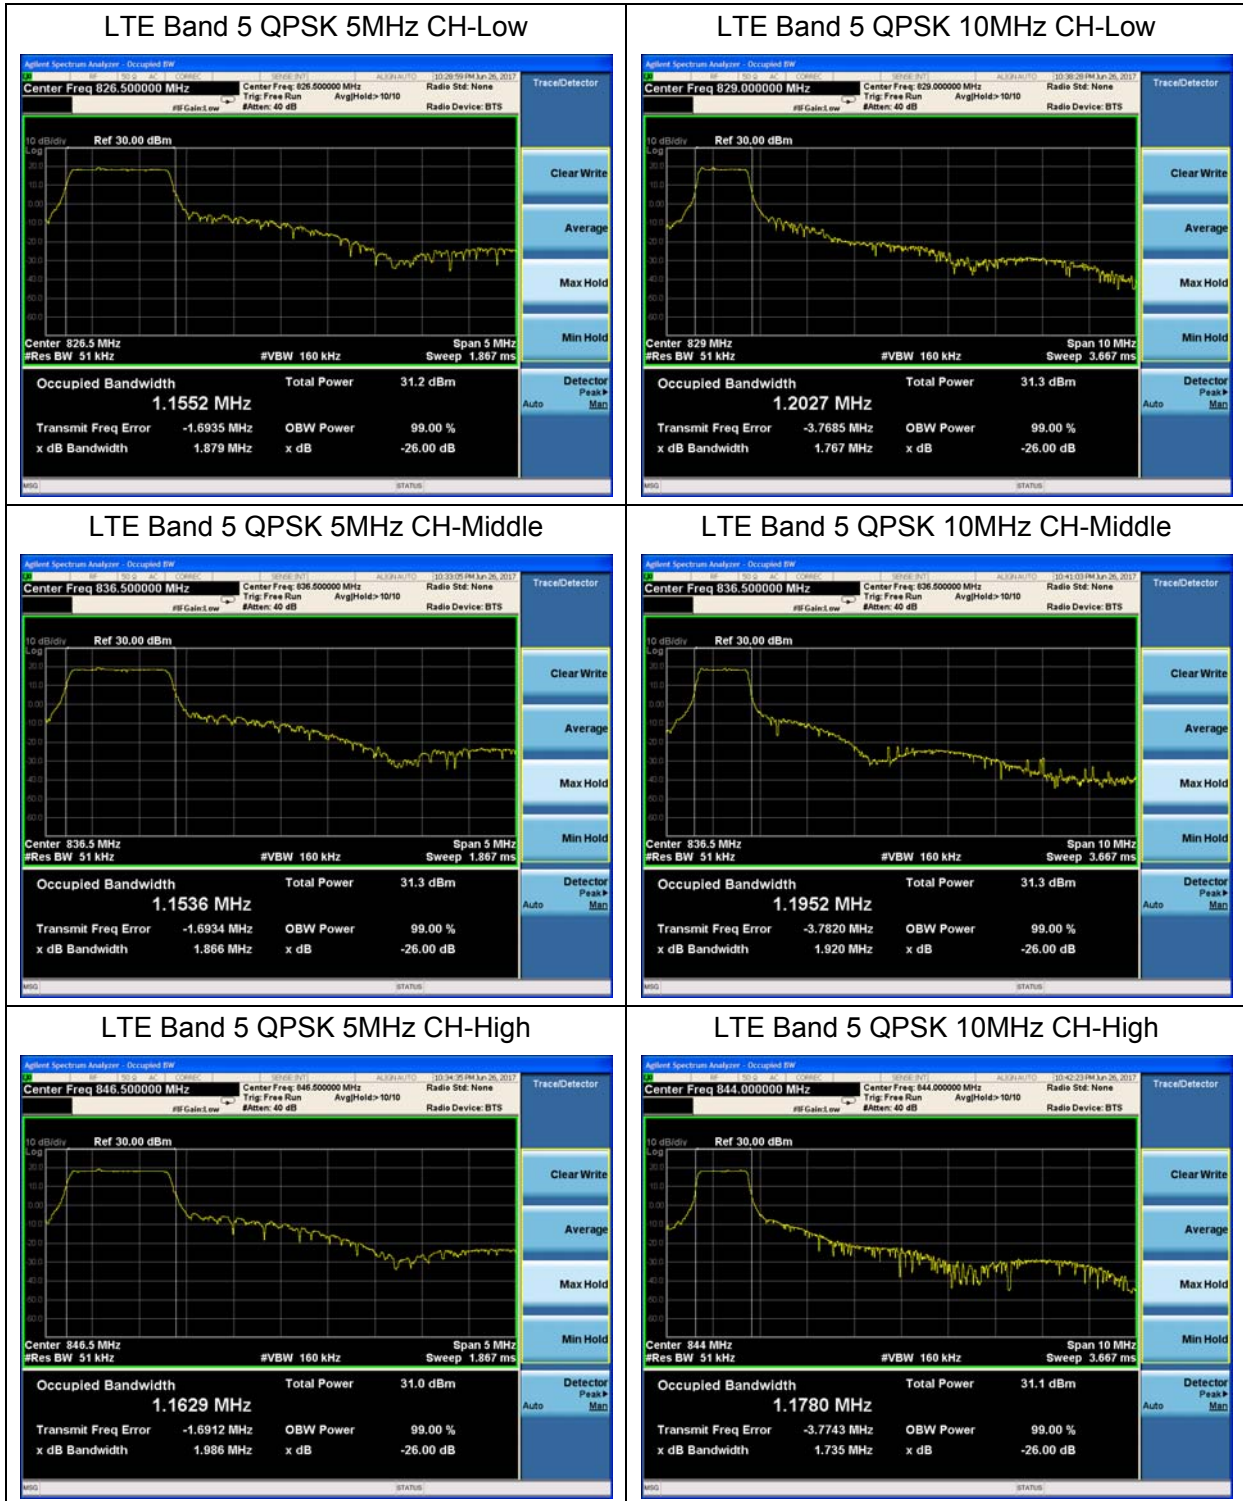


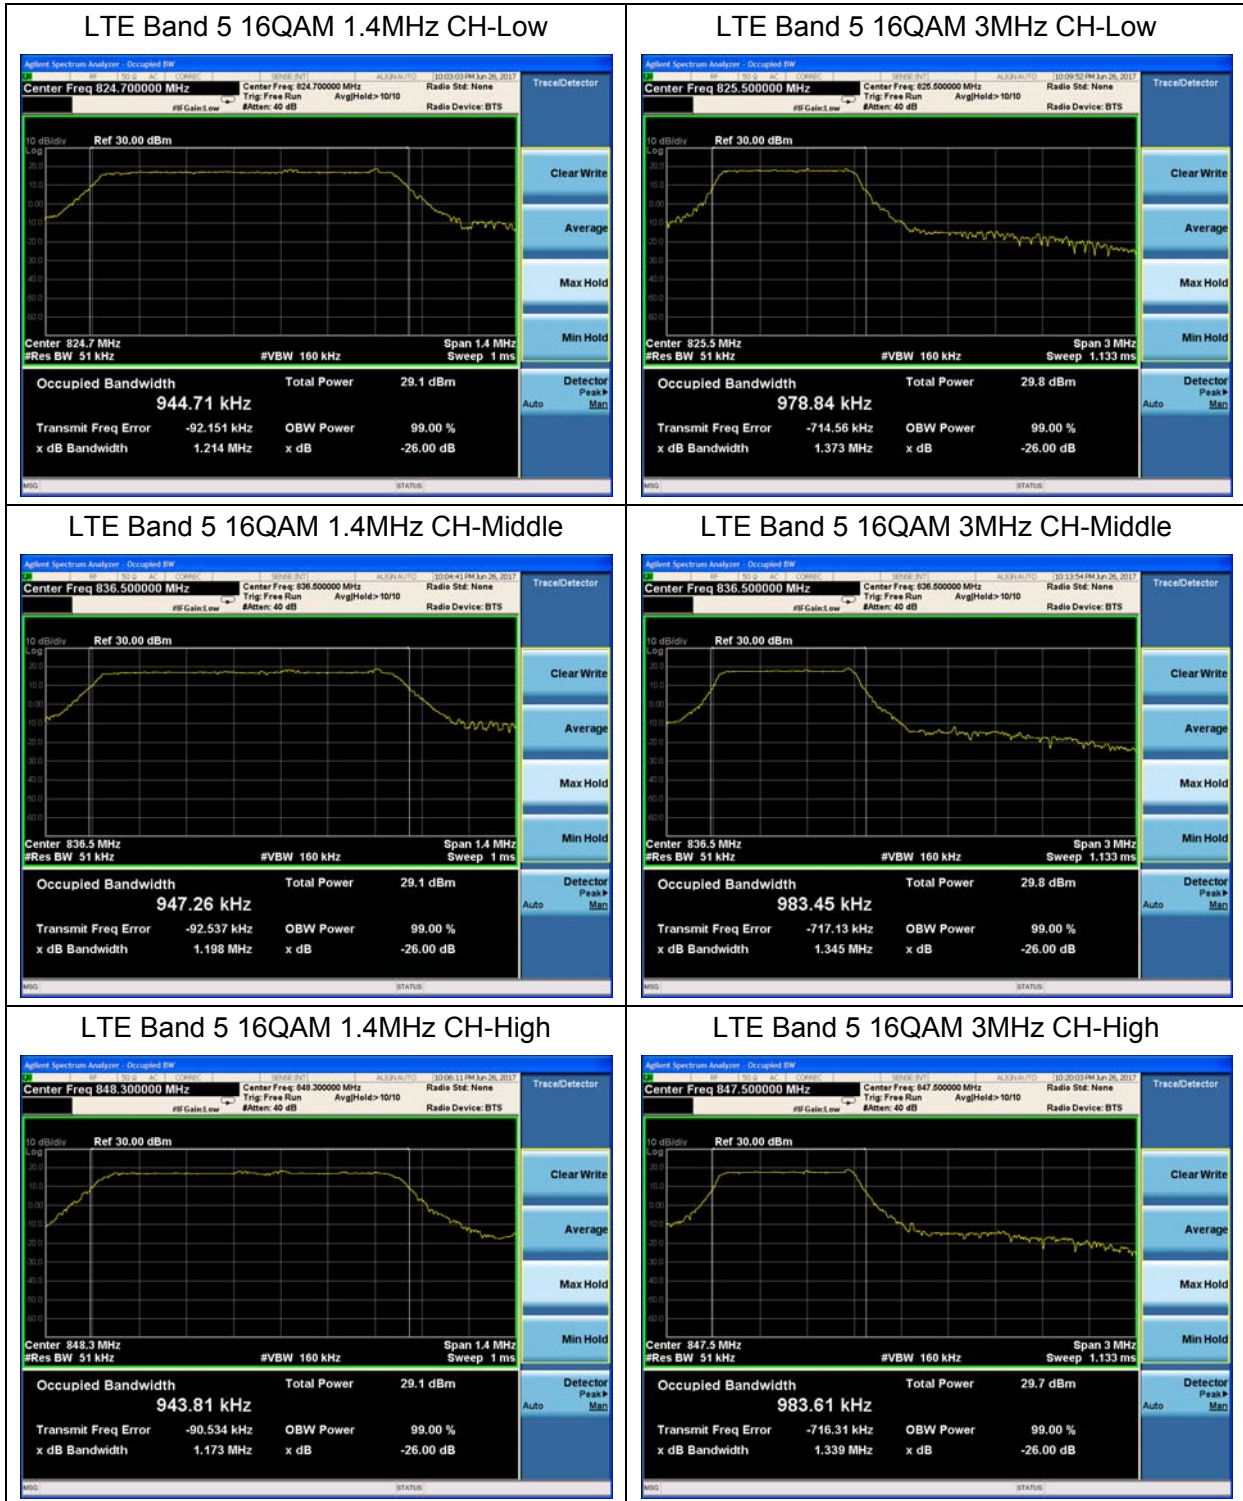


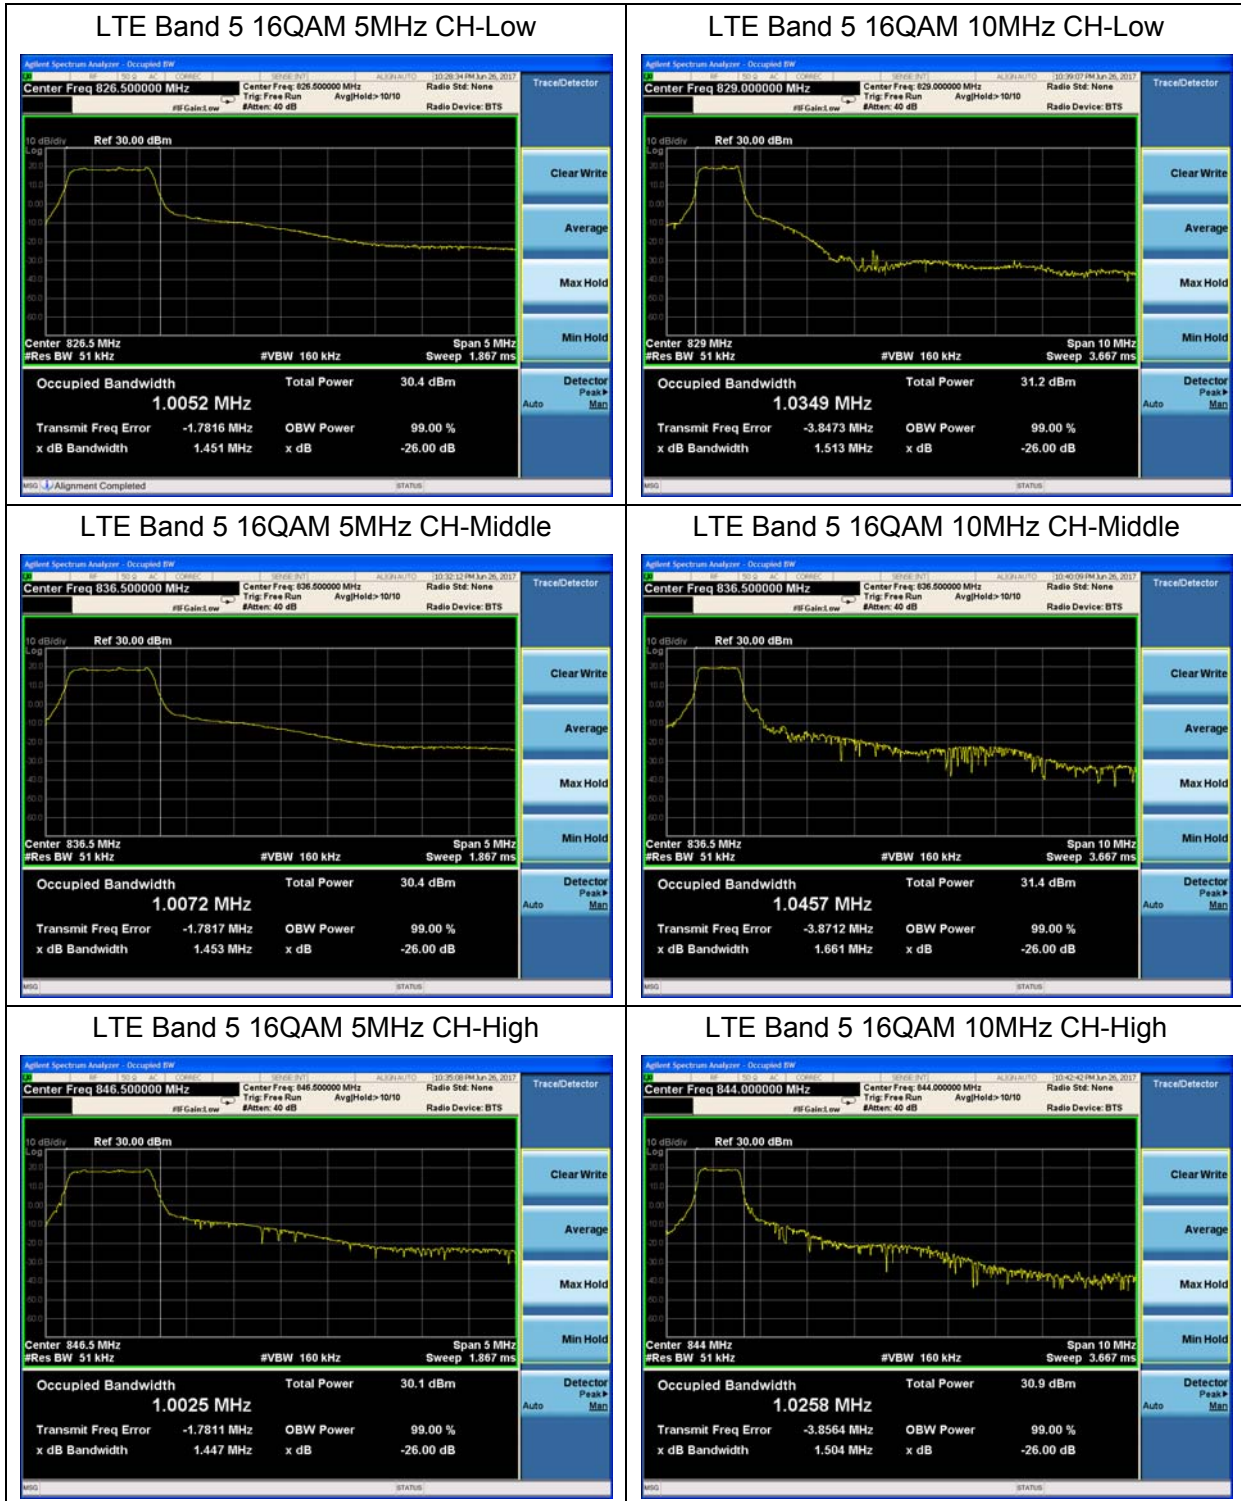


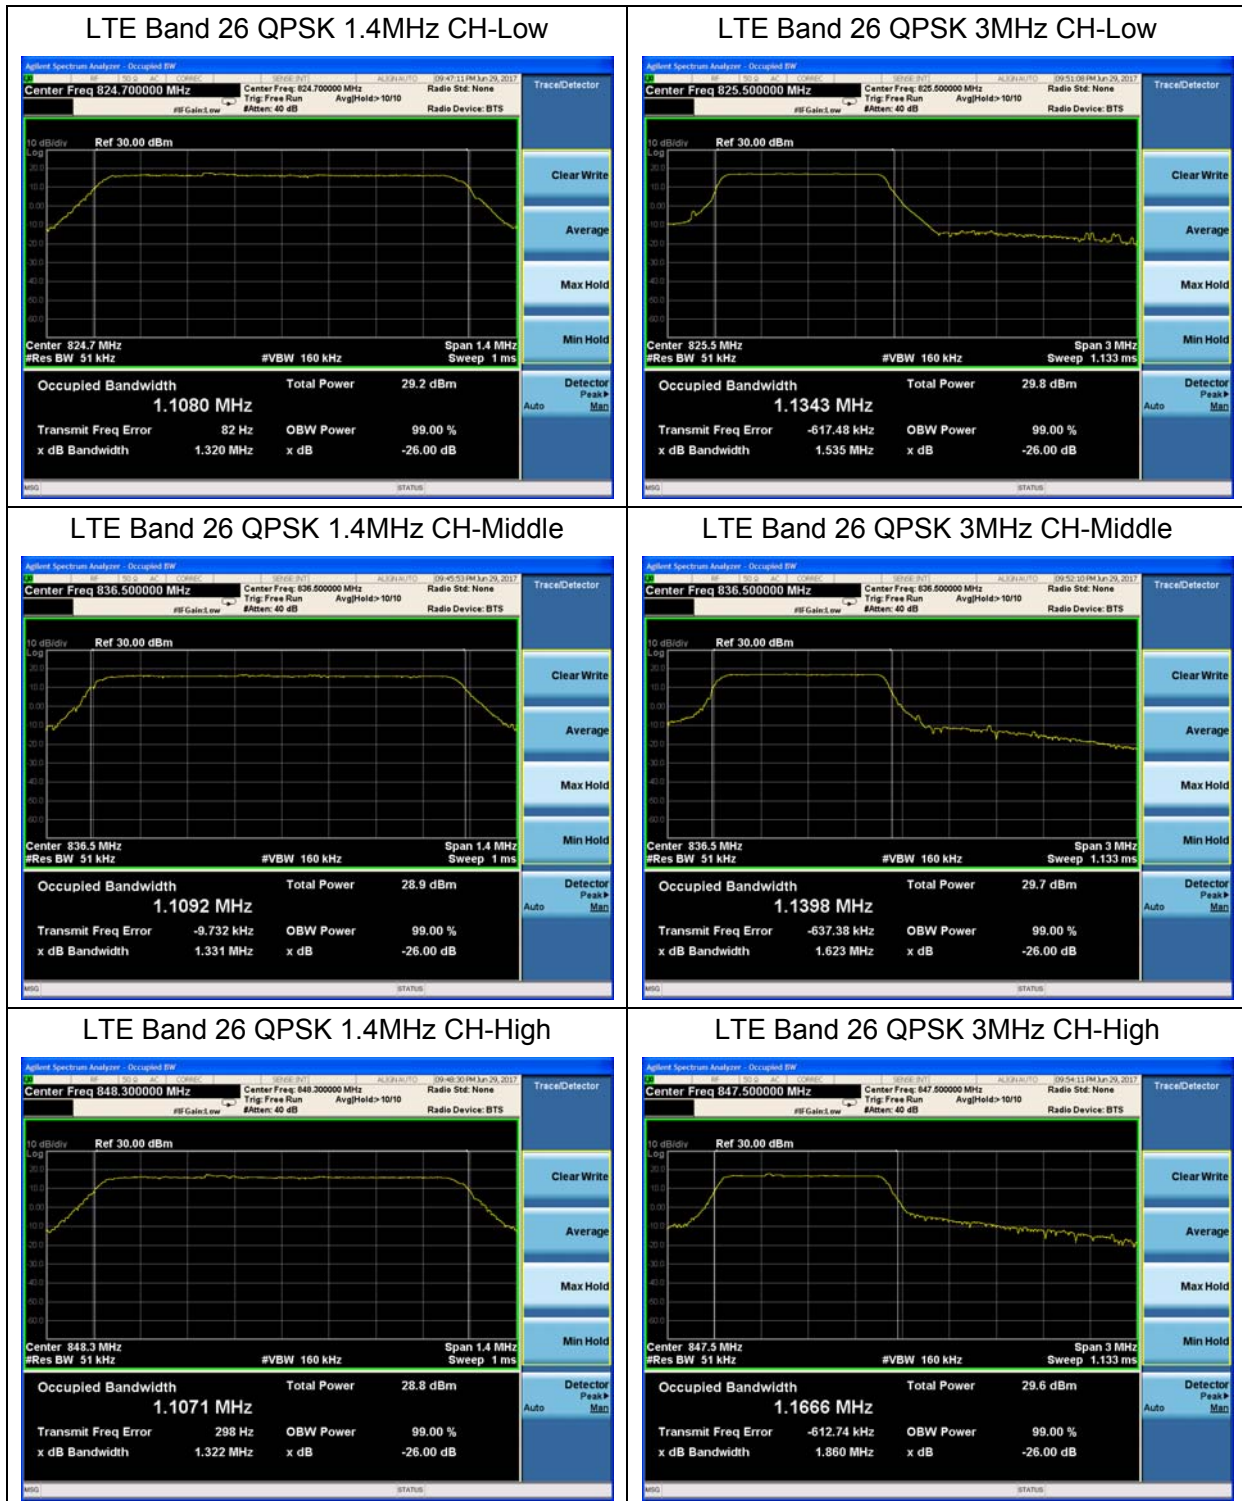

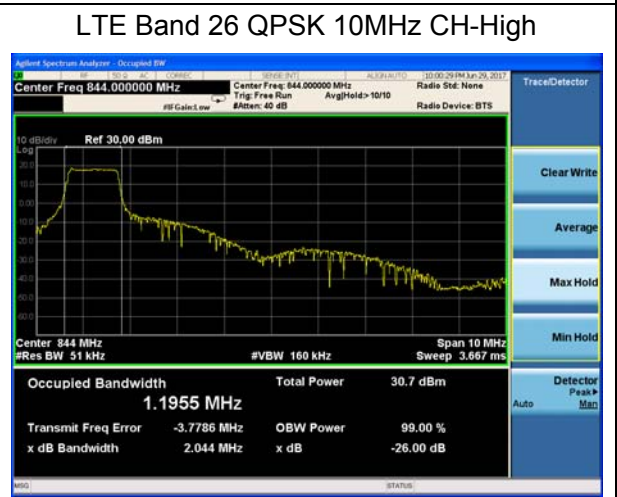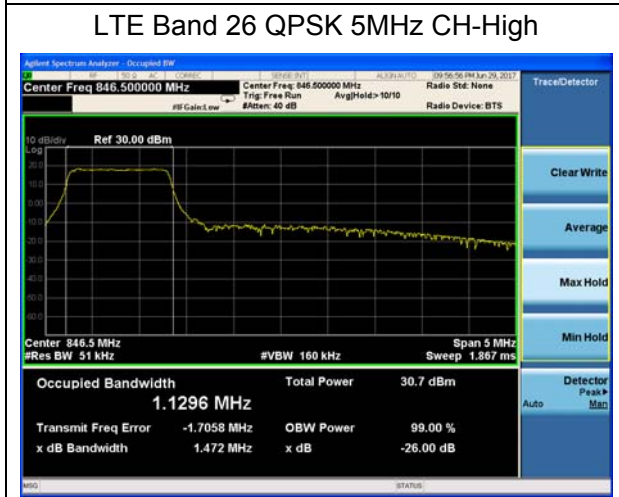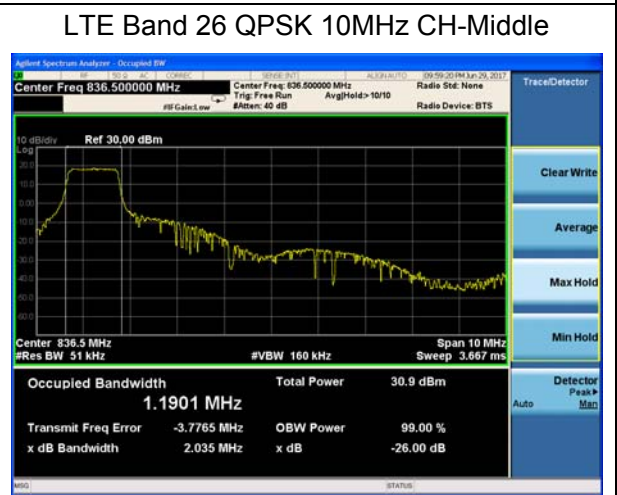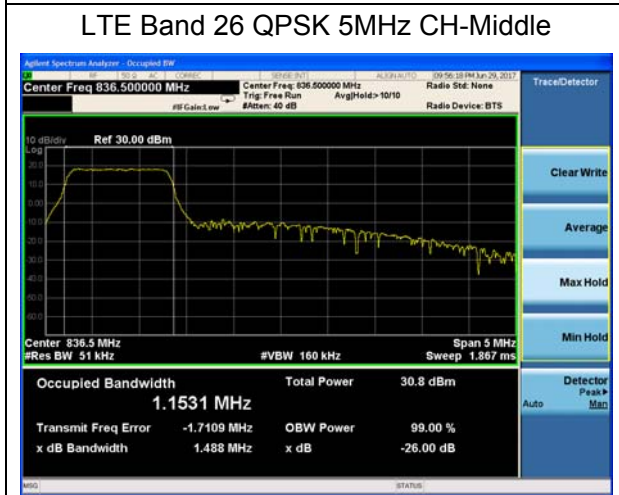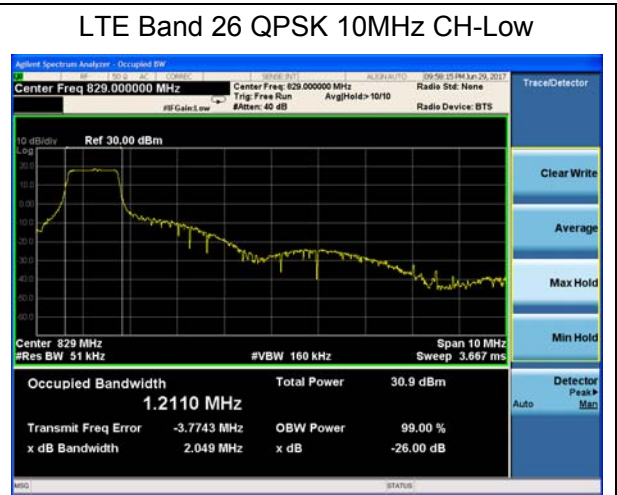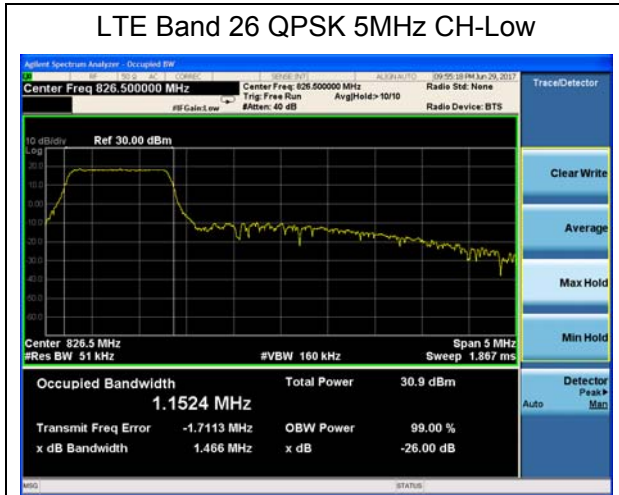

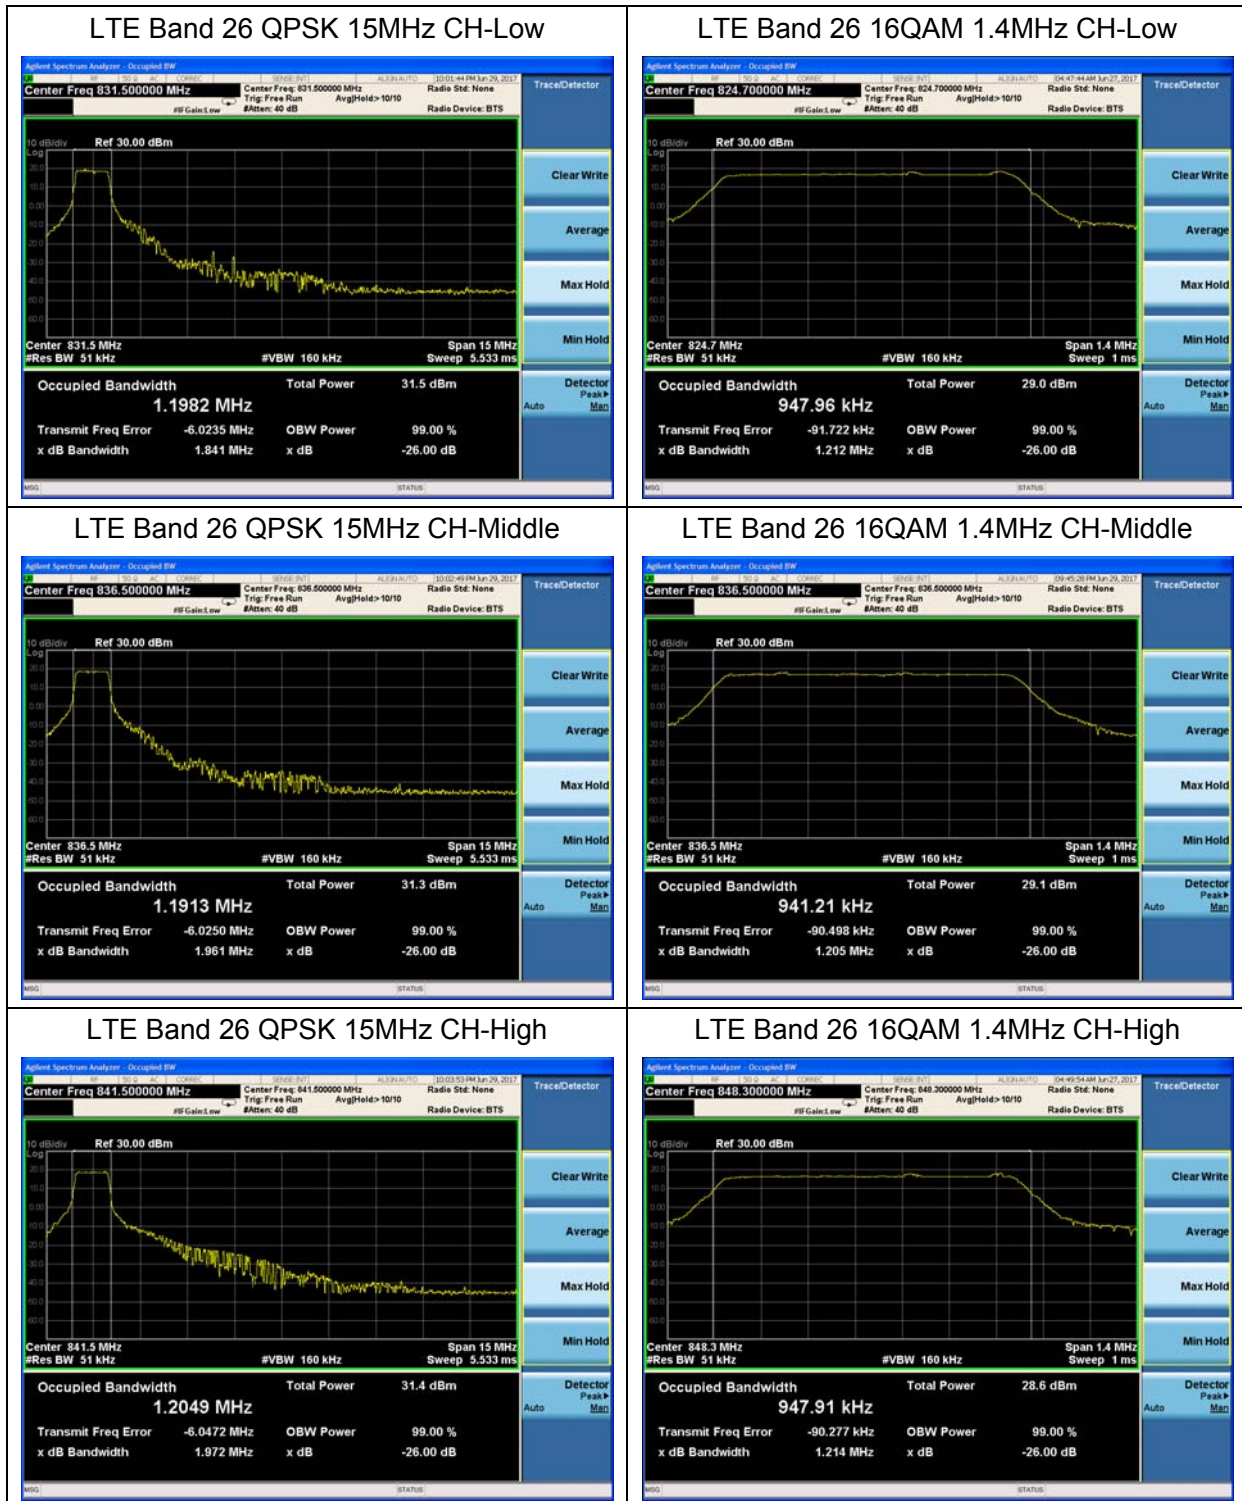

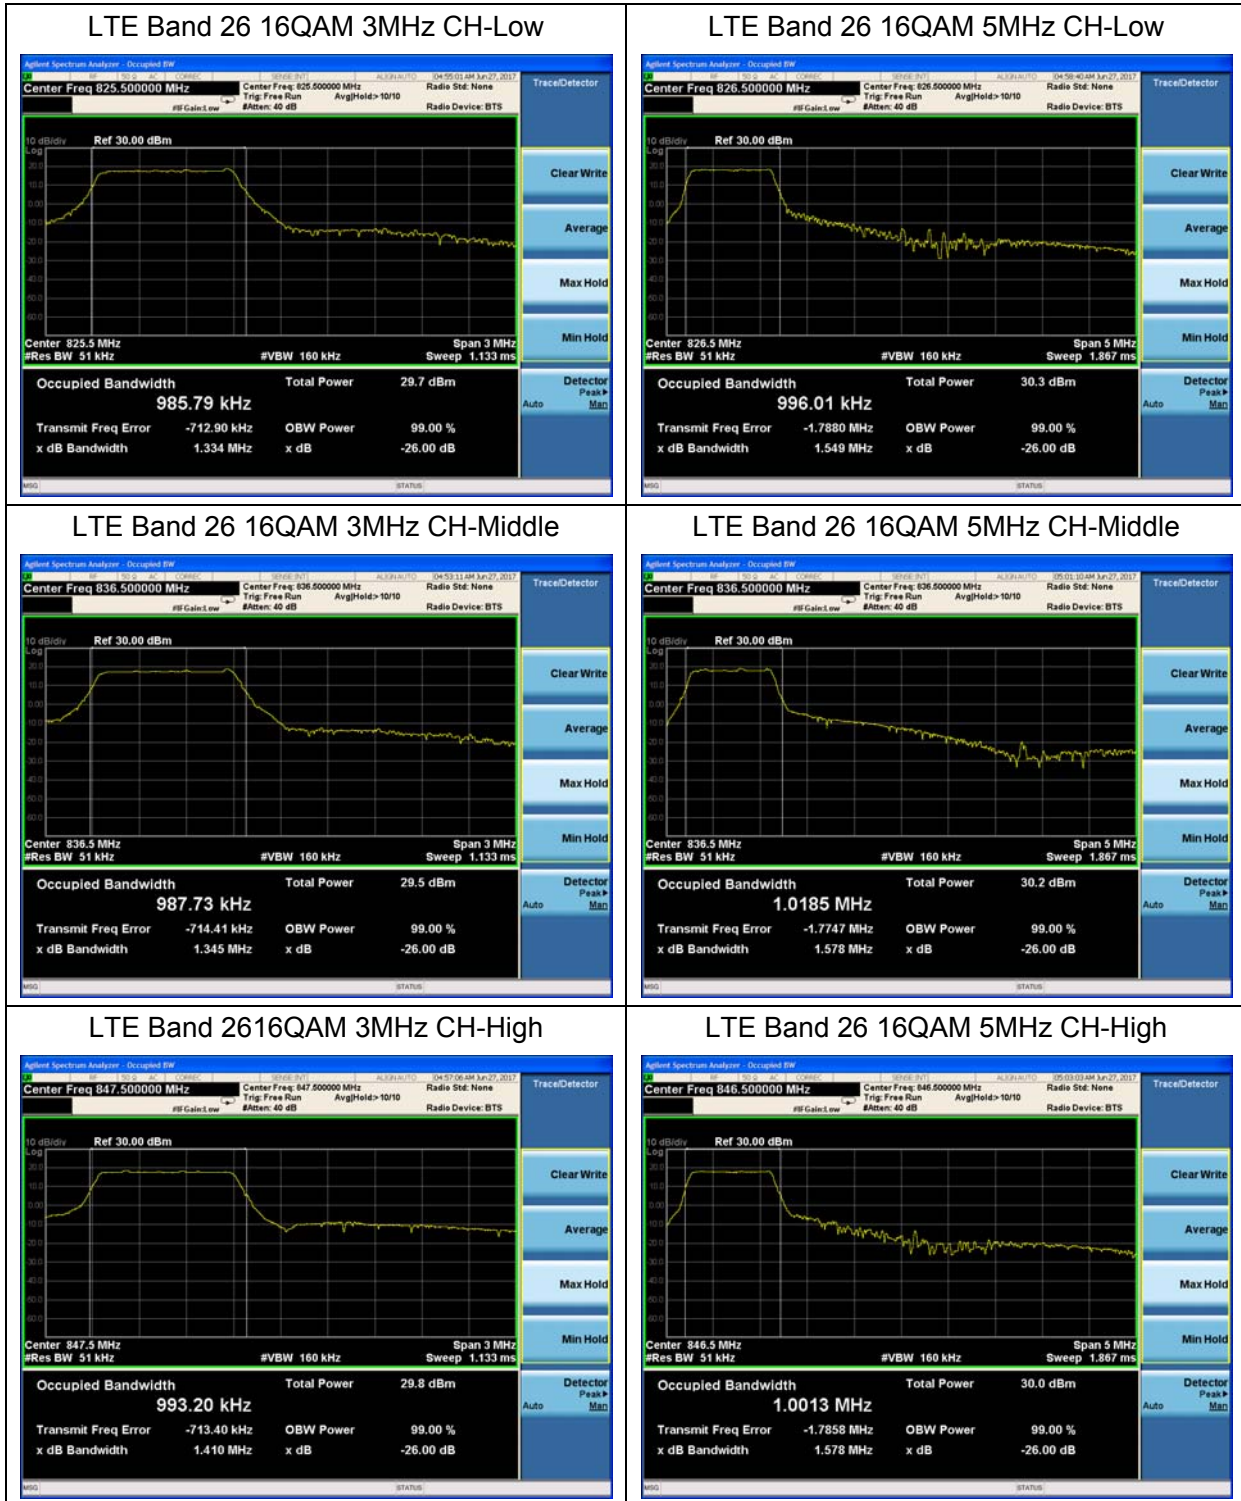

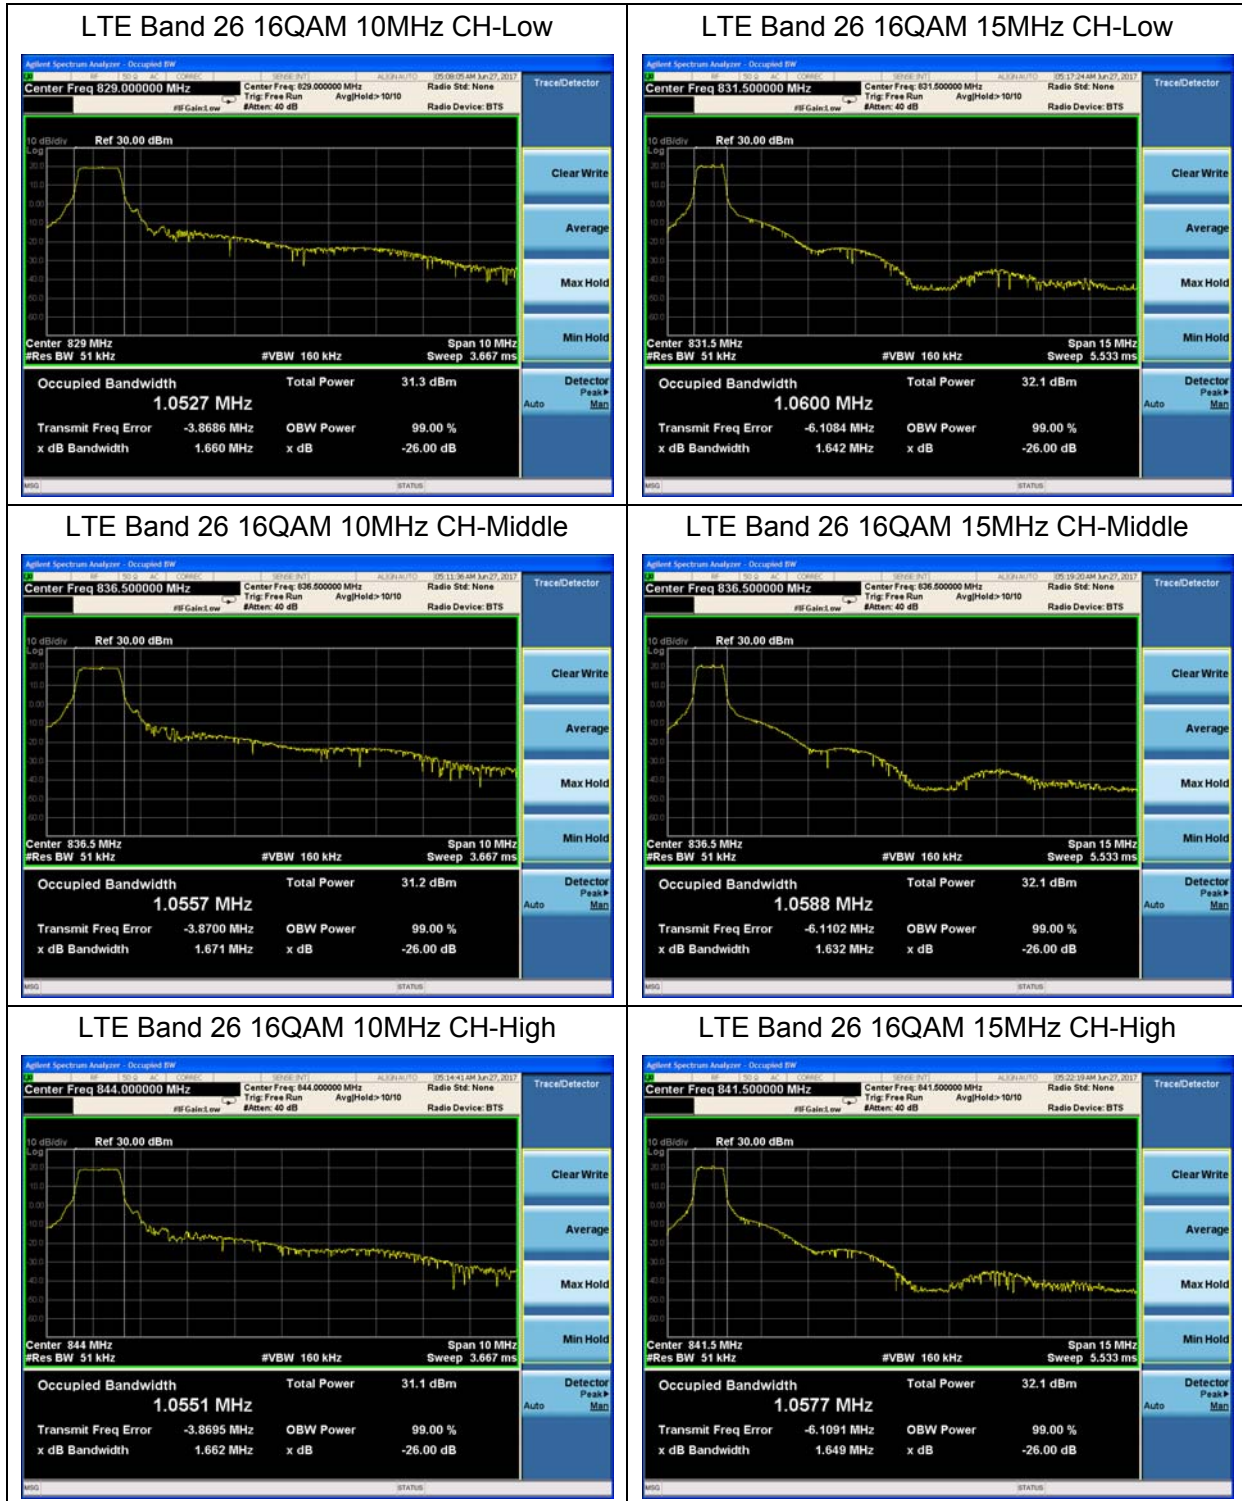



### 5.4. Band Edge Compliance


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. RBW is set to 3kHz,VBW is set to 10kHz for GSM 850, RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5/26. Spectrum analyzer plots are included on the following pages.

#### Test Setup

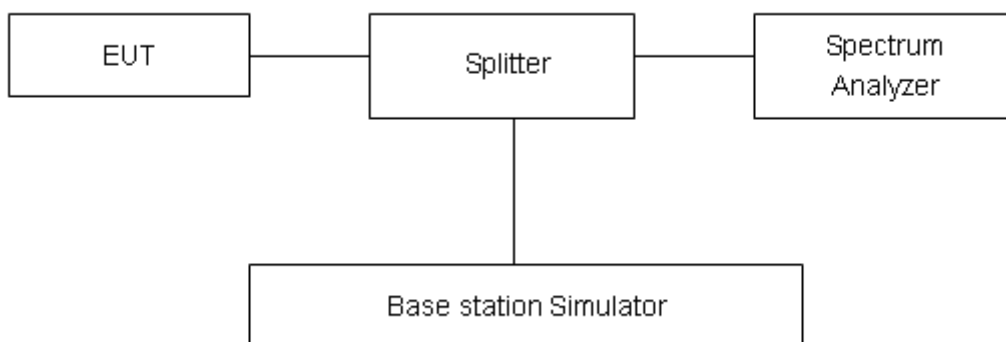

#### Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.”

Limit	-13 dBm
-------	---------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

Test Result:

Original

GSM 850 GPRS CH-Low




GSM 850 GPRS CH-High




GSM 850 EGPRS CH-Low




GSM 850 EGPRS CH-High

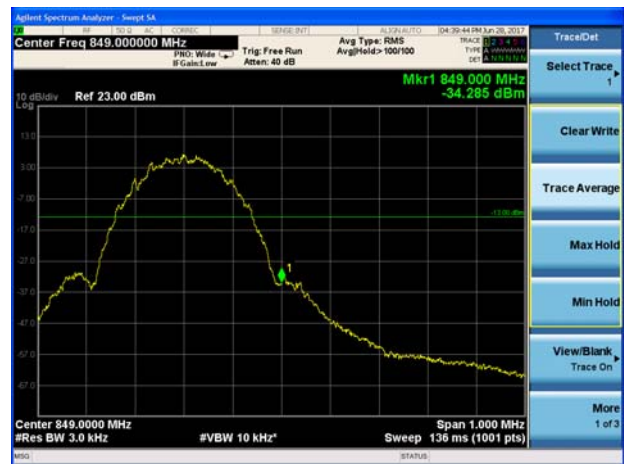

LTE Band 5 QPSK 1.4MHz CH-Low 1RB

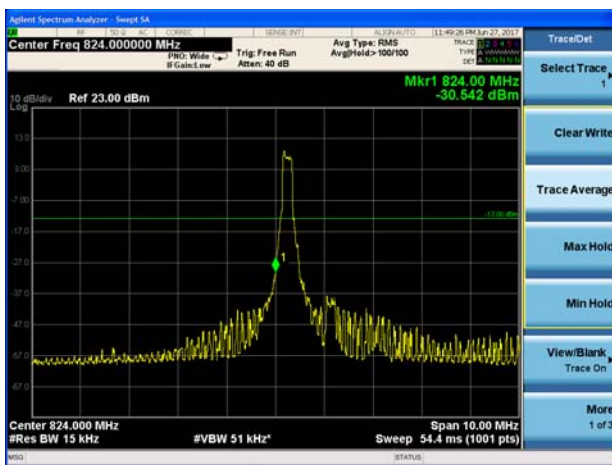


LTE Band 5 QPSK 1.4MHz CH-High 1RB

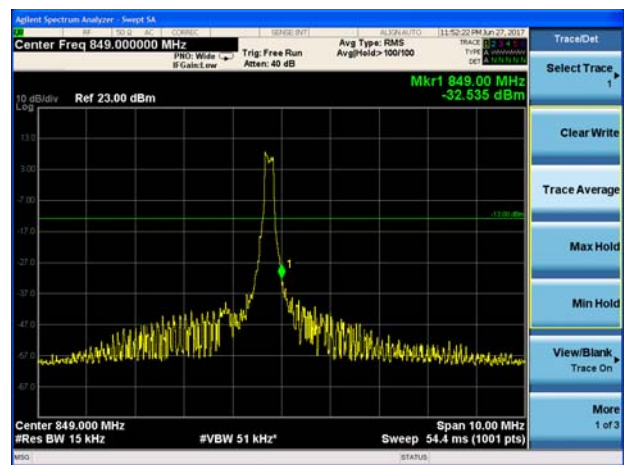


Variant


LTE Band 5 QPSK 1.4MHz CH-Low 1RB

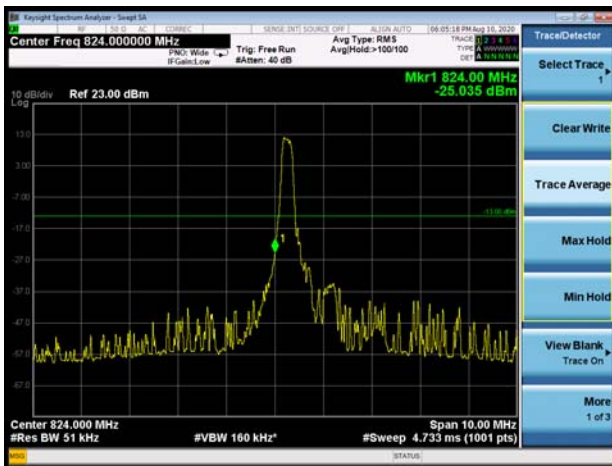


LTE Band 5 QPSK 1.4MHz CH-High 1RB

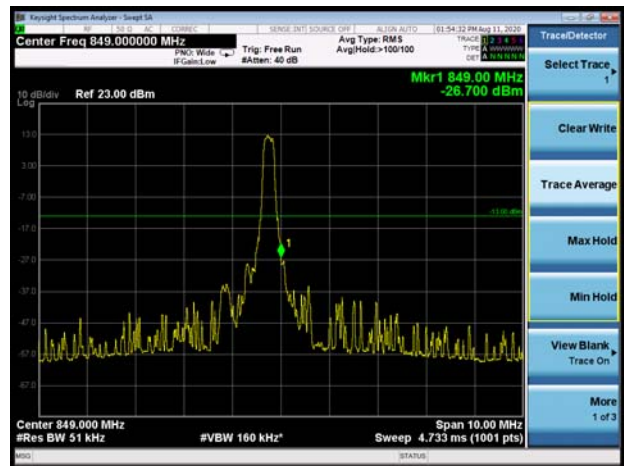


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB

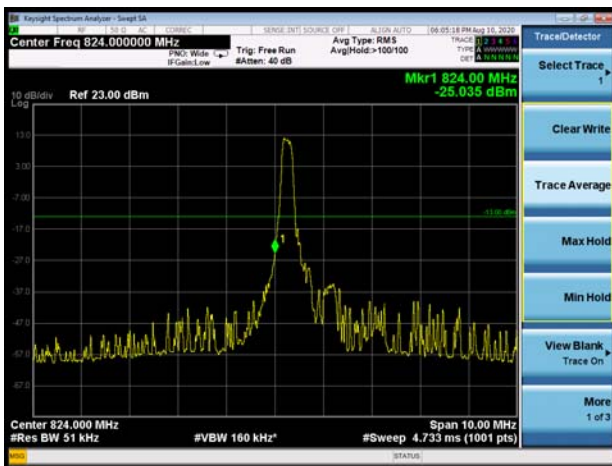

LTE Band 5 QPSK 1.4MHz CH-High 100%RB

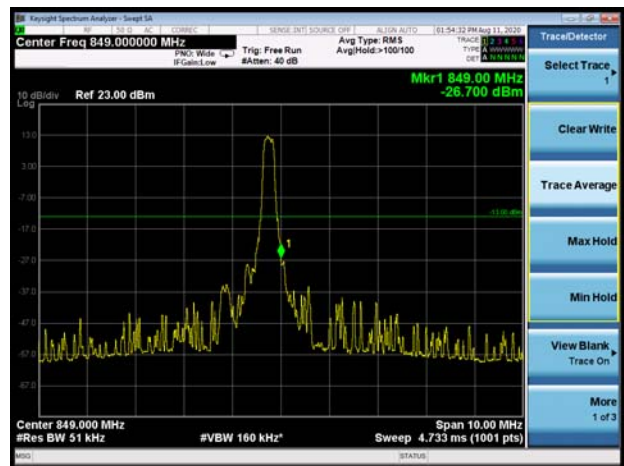


LTE Band 5 QPSK 3MHz CH-Low 1RB

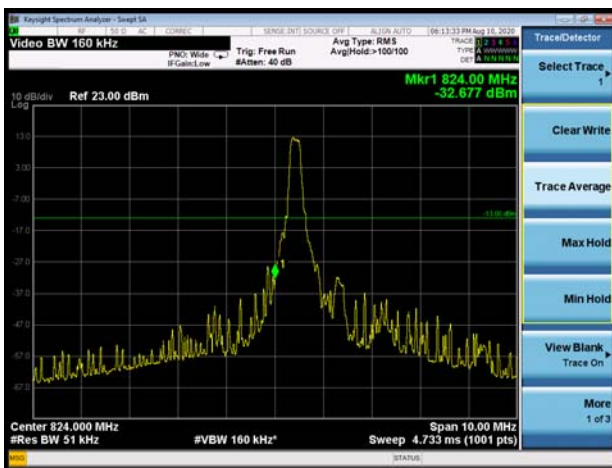


LTE Band 5 QPSK 3MHz CH-High 1RB




LTE Band 5 QPSK 3MHz CH-Low 100%RB

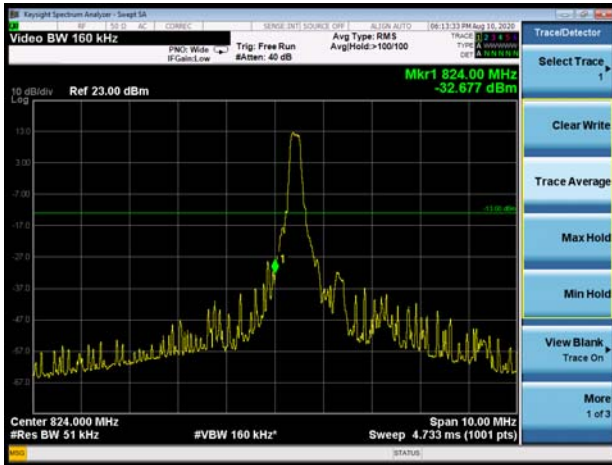

LTE Band 5 QPSK 3MHz CH-High 100%RB

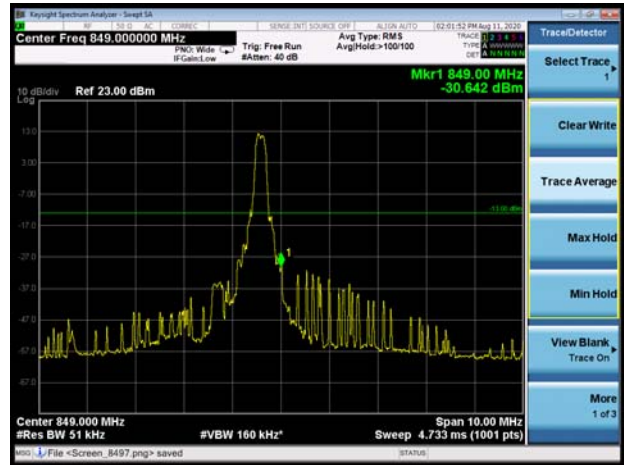


LTE Band 5 QPSK 5MHz CH-Low 1RB

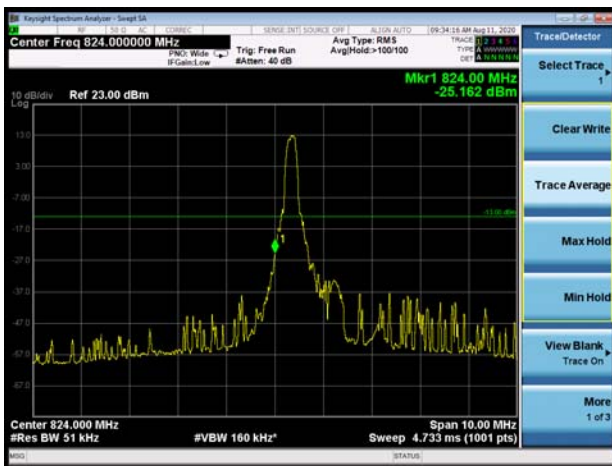


LTE Band 5 QPSK 5MHz CH-High 1RB




LTE Band 5 QPSK 5MHz CH-Low 100%RB

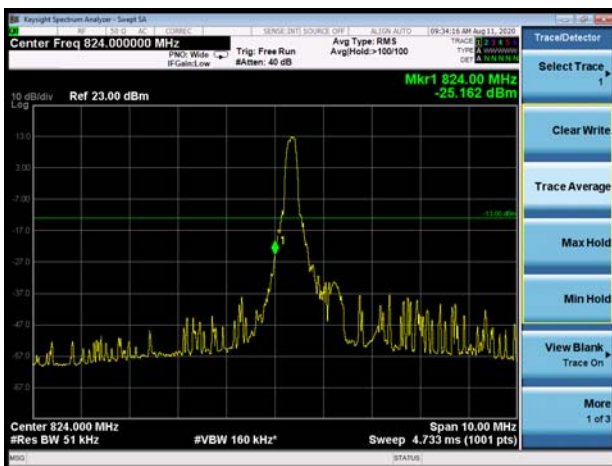


LTE Band 5 QPSK 5MHz CH-High 100%RB

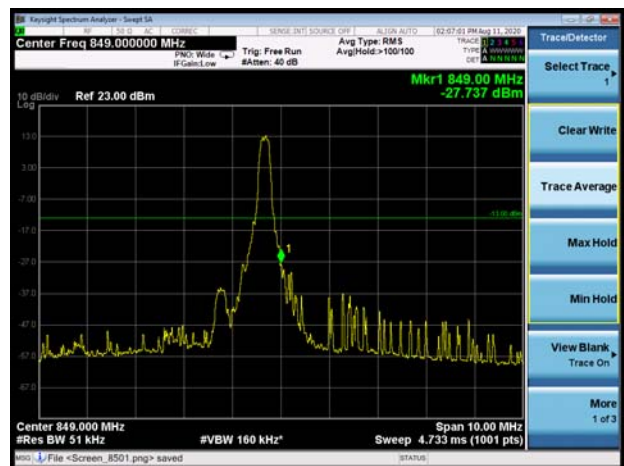


LTE Band 5 QPSK 10MHz CH-Low 1RB

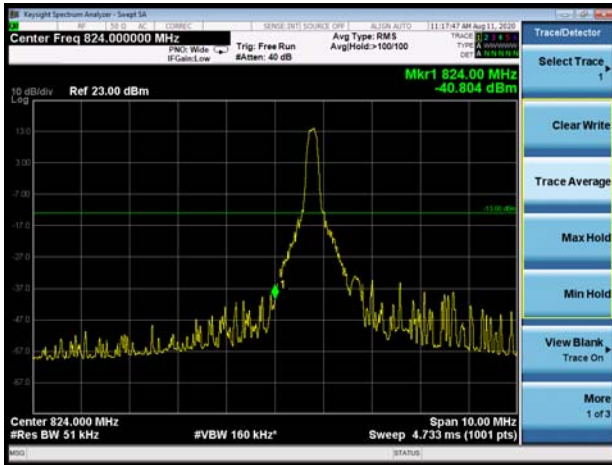


LTE Band 5 QPSK 10MHz CH-High 1RB

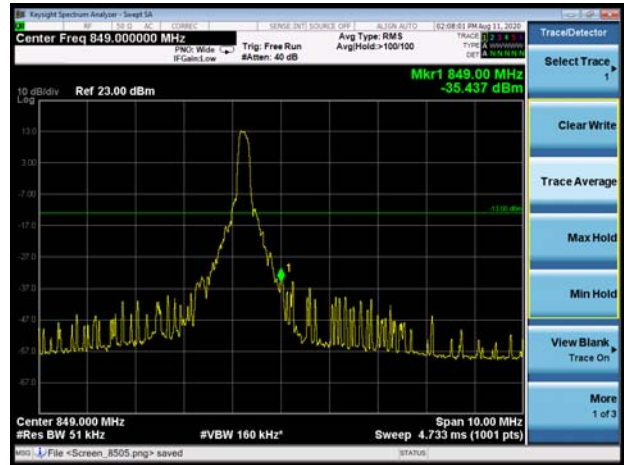


LTE Band 5 QPSK 10MHz CH-Low 100%RB

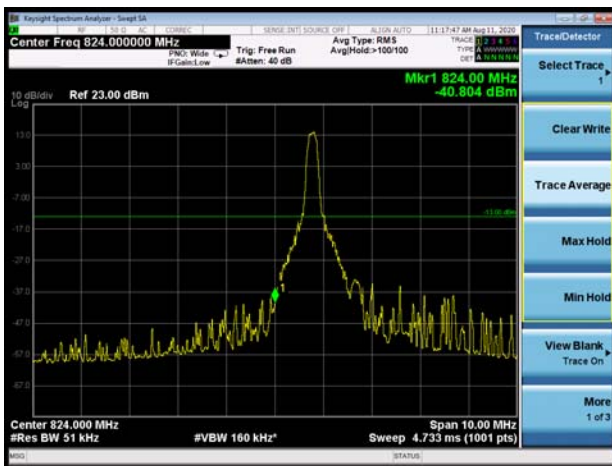


LTE Band 5 QPSK 10MHz CH-High 100%RB

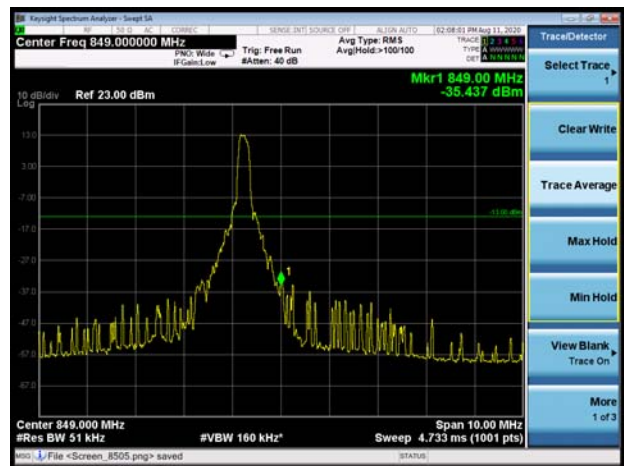


LTE Band 5 16QAM 1.4MHz CH-Low 1RB

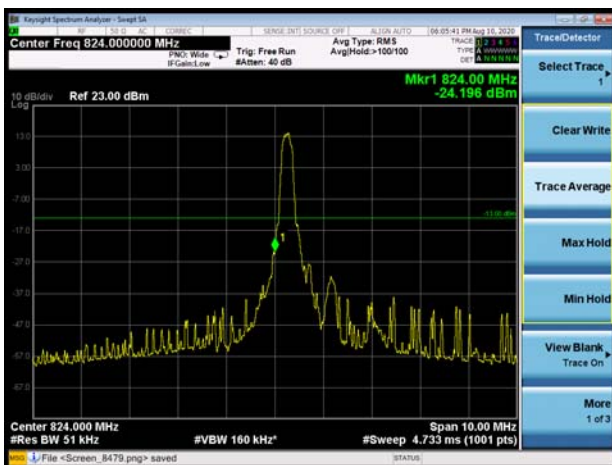


LTE Band 5 16QAM 1.4MHz CH-High 1RB

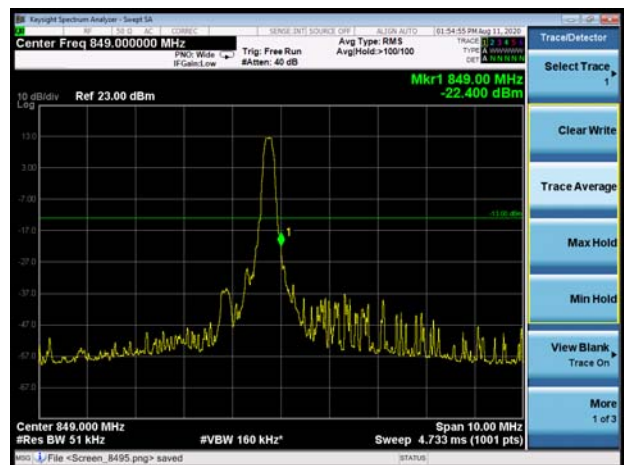


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

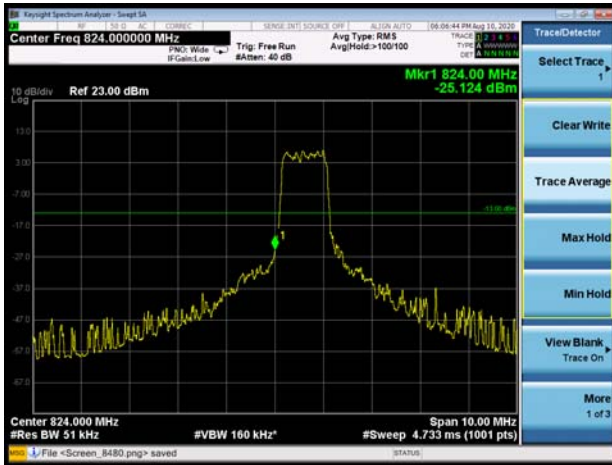


LTE Band 5 16QAM 1.4MHz CH-High 100%RB

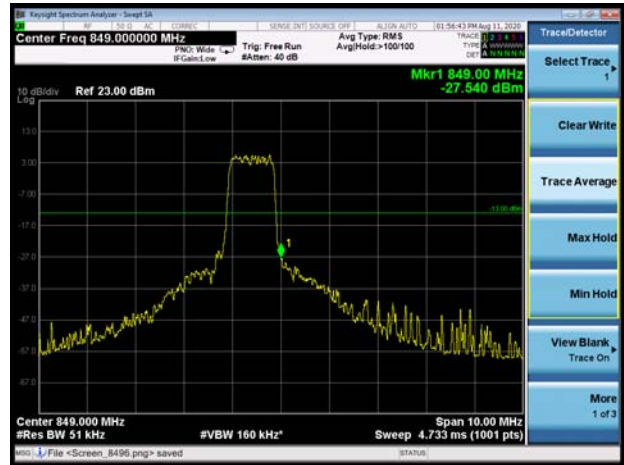


LTE Band 5 16QAM 3MHz CH-Low 1RB

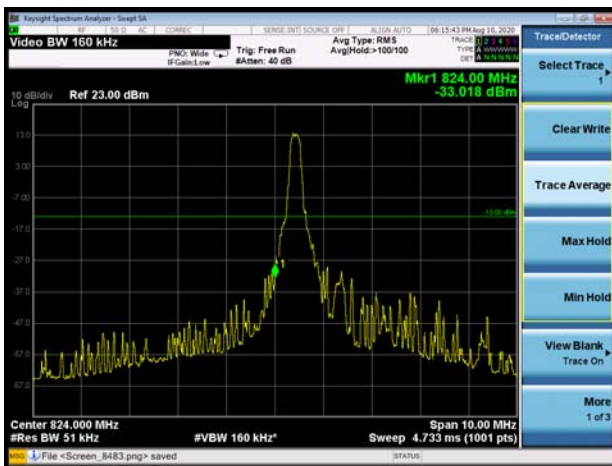


LTE Band 5 16QAM 3MHz CH-High 1RB

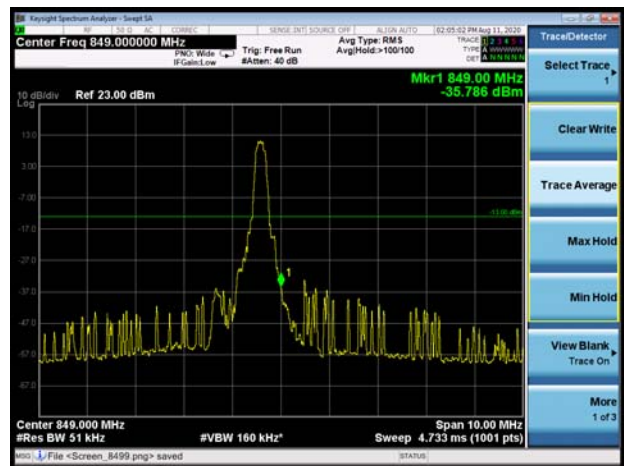


LTE Band 5 16QAM 3MHz CH-Low 100%RB

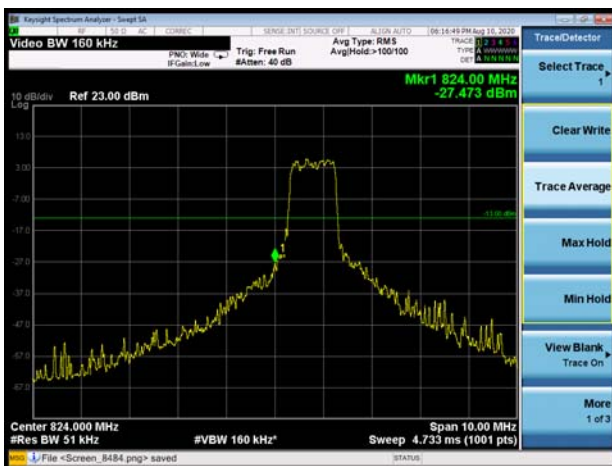

LTE Band 5 16QAM 3MHz CH-High 100%RB

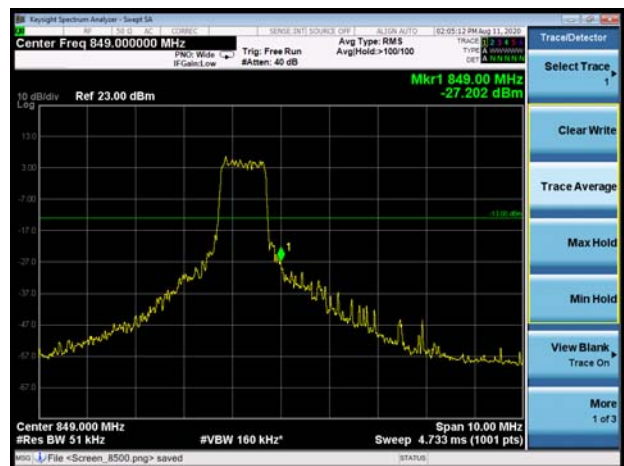


LTE Band 5 16QAM 5MHz CH-Low 1RB

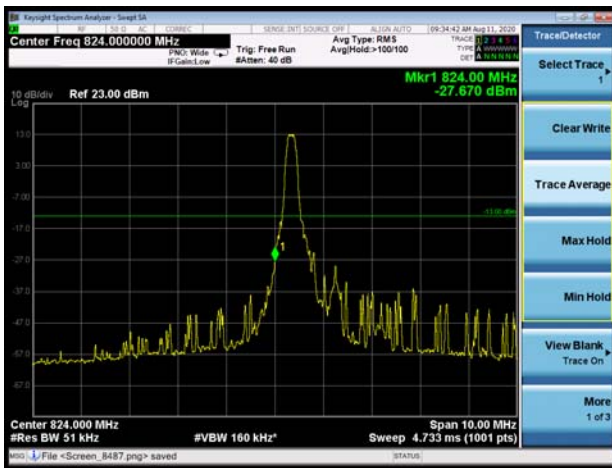


LTE Band 5 16QAM 5MHz CH-High 1RB




LTE Band 5 16QAM 5MHz CH-Low 100%RB

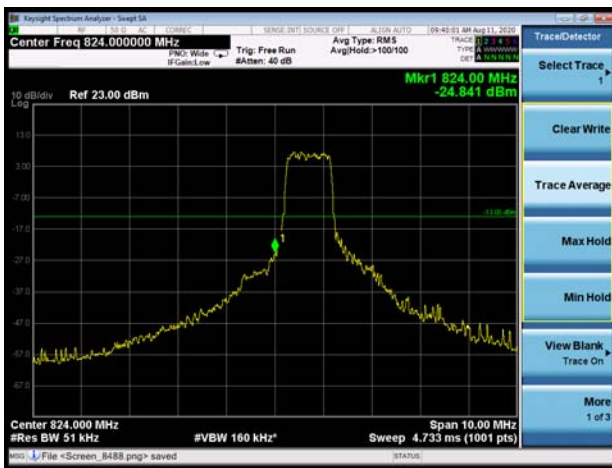


LTE Band 5 16QAM 5MHz CH-High 100%RB

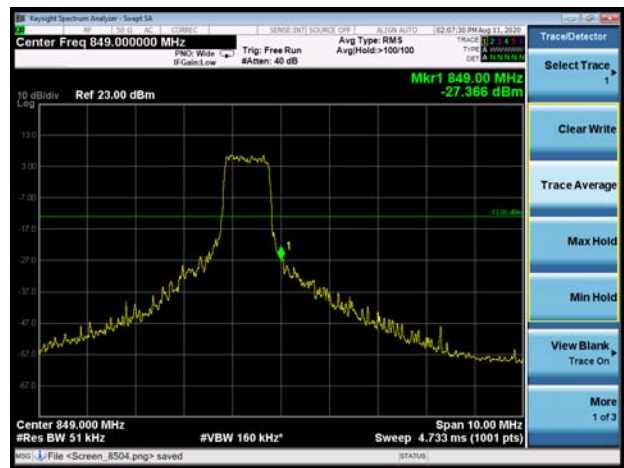


LTE Band 5 16QAM 10MHz CH-Low 1RB

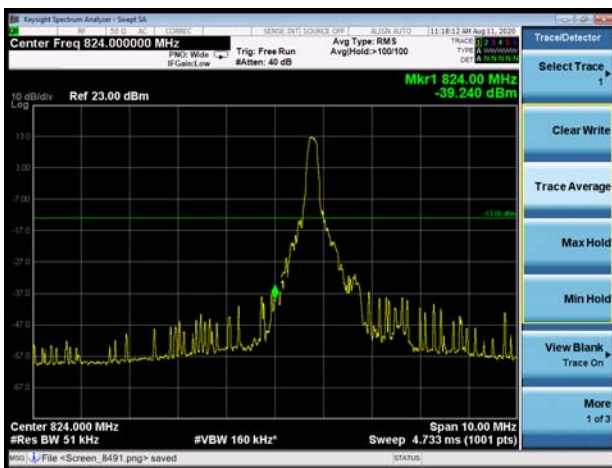


LTE Band 5 16QAM 10MHz CH-High 1RB

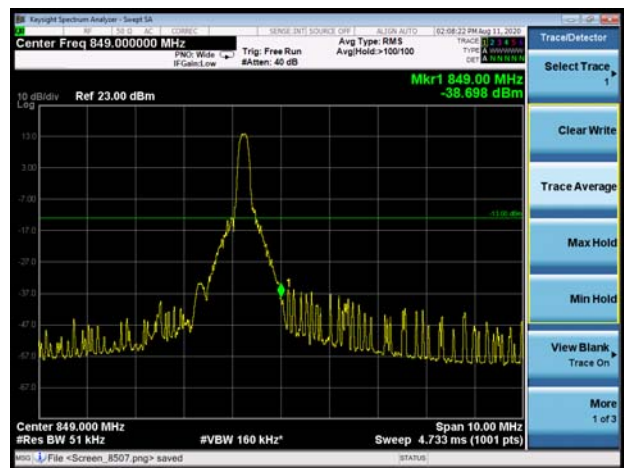


LTE Band 5 16QAM 10MHz CH-Low 100%RB

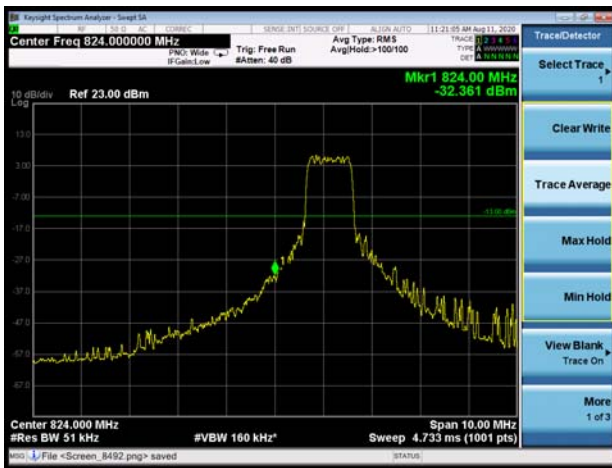

LTE Band 5 16QAM 10MHz CH-High 100%RB

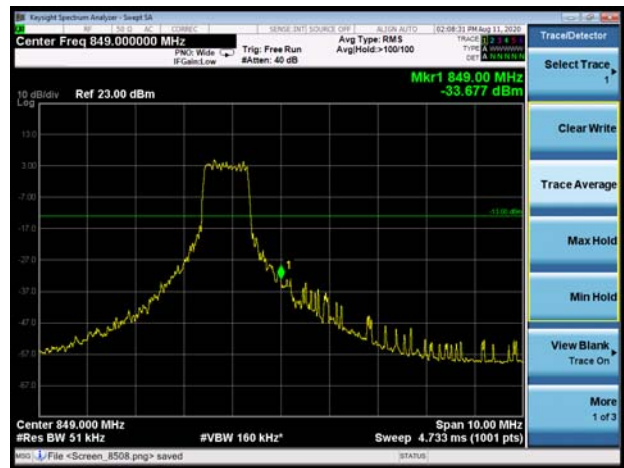


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

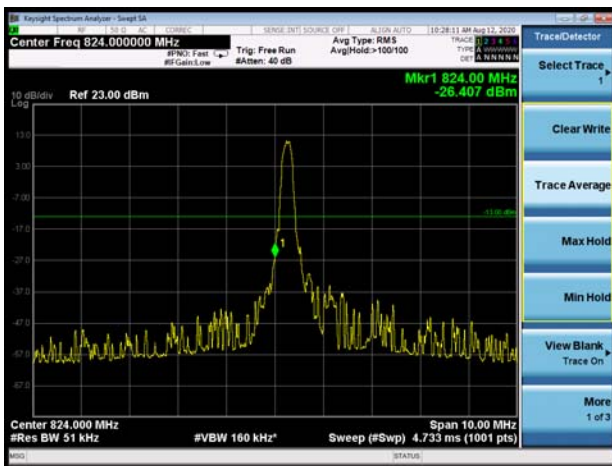


LTE Band 26 QPSK 1.4MHz CH-High 1RB



LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

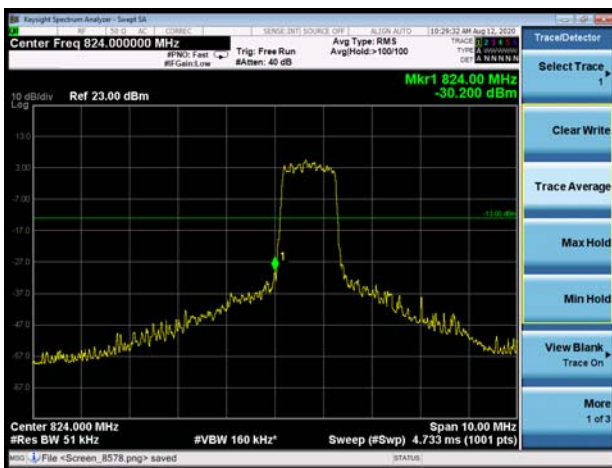

LTE Band 26 QPSK 1.4MHz CH-High 100%RB

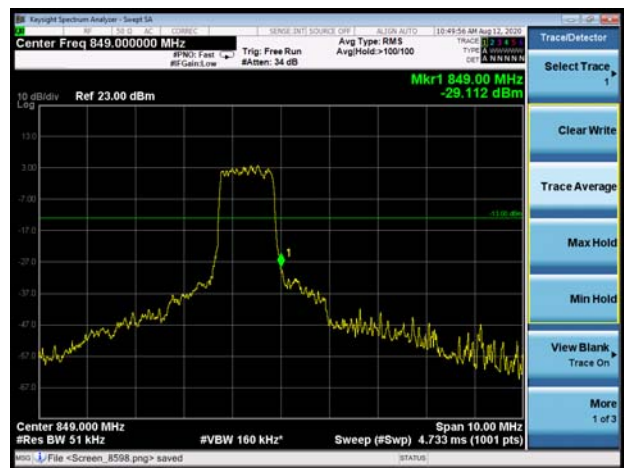





LTE Band 26 QPSK 3MHz CH-Low 1RB



LTE Band 26 QPSK 3MHz CH-High 1RB

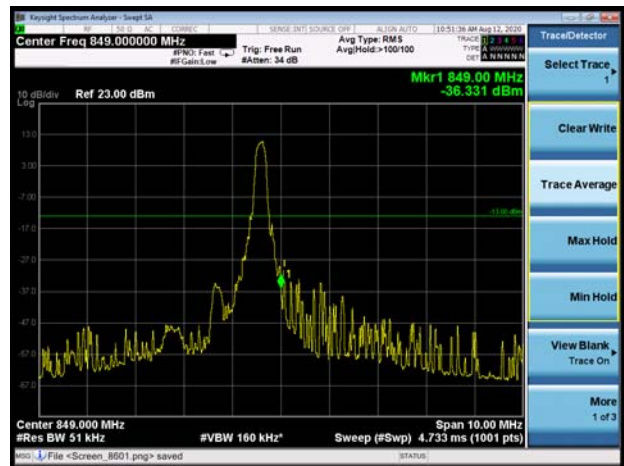


LTE Band 26 QPSK 3MHz CH-Low 100%RB

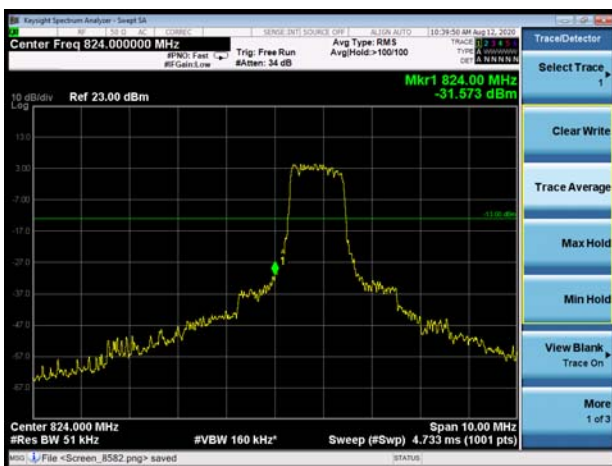

LTE Band 26 QPSK 3MHz CH-High 100%RB




LTE Band 26 QPSK 5MHz CH-Low 1RB

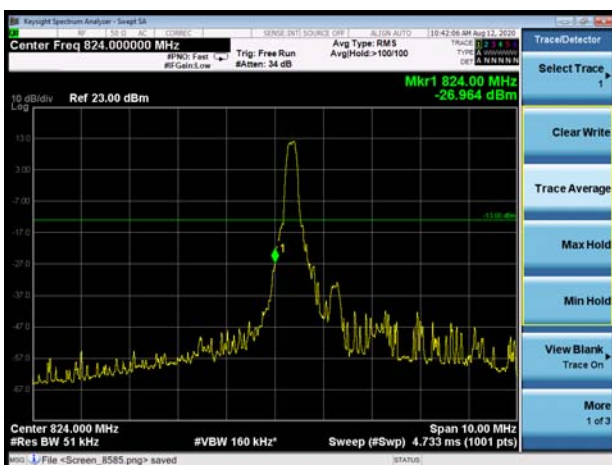


LTE Band 26 QPSK 5MHz CH-High 1RB




LTE Band 26 QPSK 5MHz CH-Low 100%RB

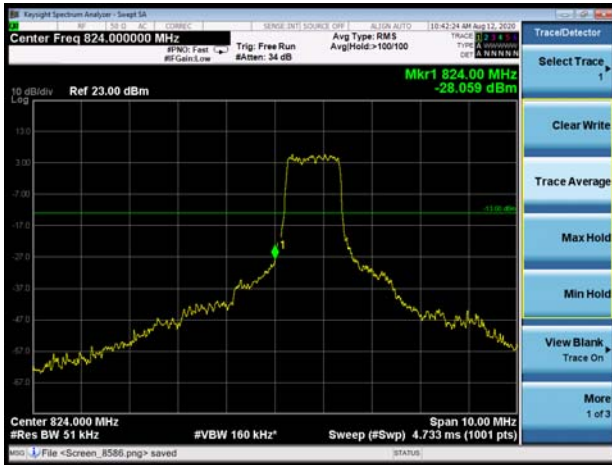


LTE Band 26 QPSK 5MHz CH-High 100%RB

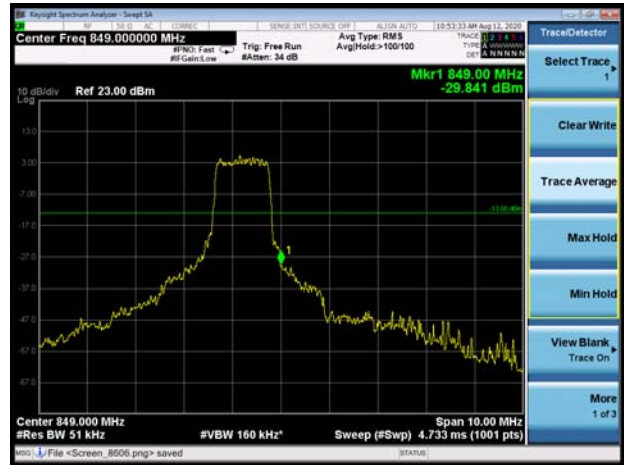


LTE Band 26 QPSK 10MHz CH-Low 1RB

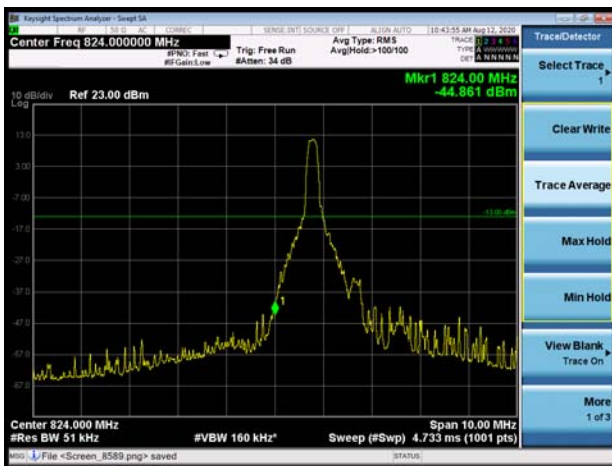


LTE Band 26 QPSK 10MHz CH-High 1RB

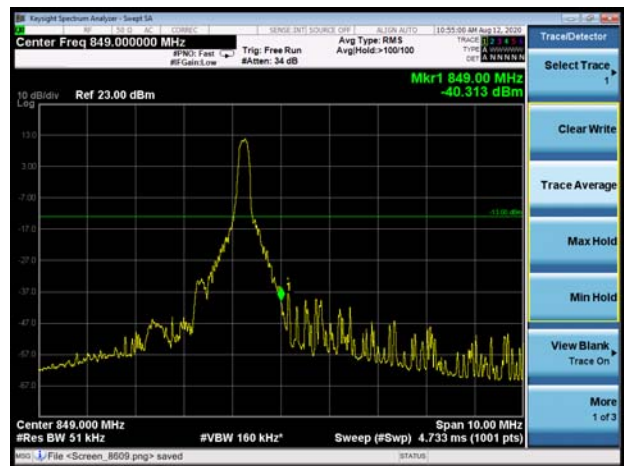


LTE Band 26 QPSK 10MHz CH-Low 100%RB

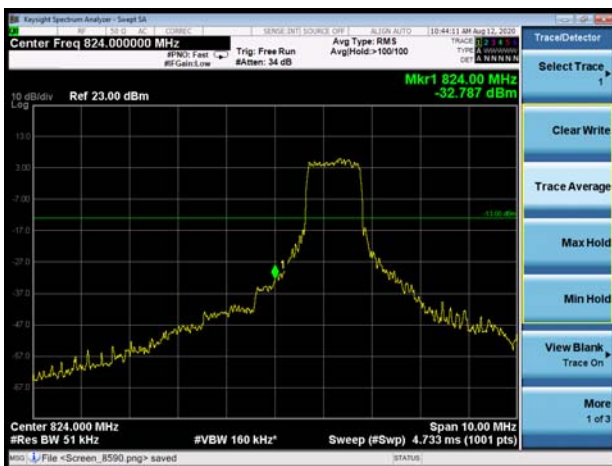


LTE Band 26 QPSK 10MHz CH-High 100%RB

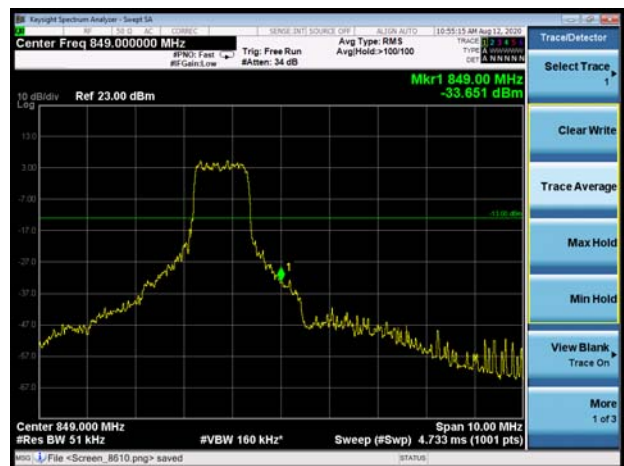


LTE Band 26 QPSK 15MHz CH-Low 1RB

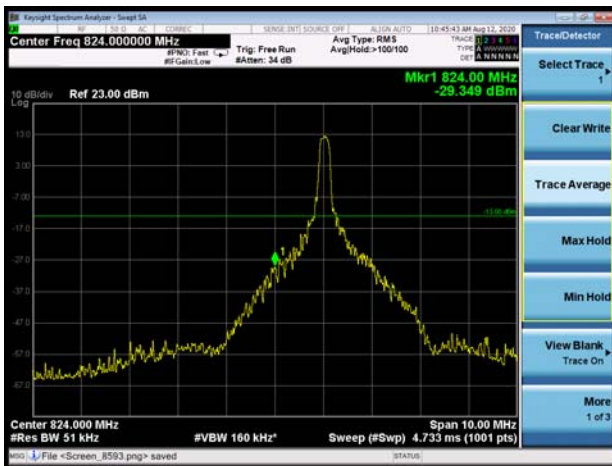


LTE Band 26 QPSK 15MHz CH-High 1RB

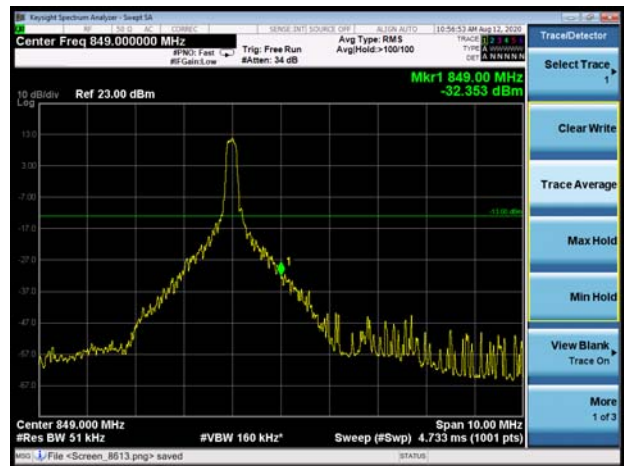


LTE Band 26 QPSK 15MHz CH-Low 100%RB

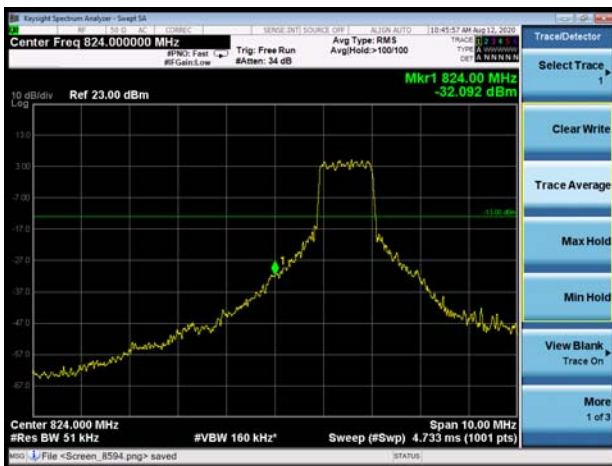

LTE Band 26 QPSK 15MHz CH-High 100%RB

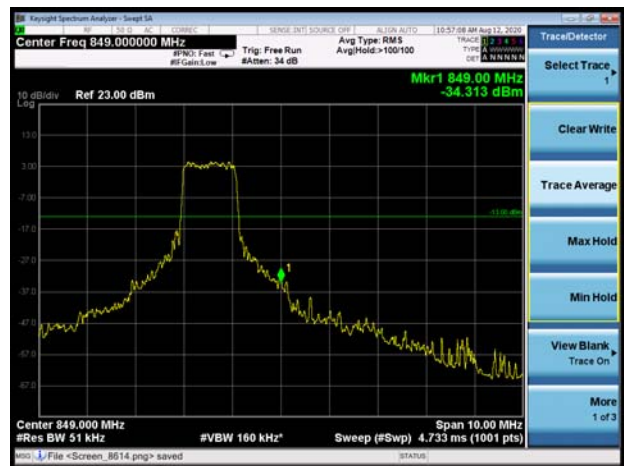

LTE Band 26 16QAM 1.4MHz CH-Low 1RB

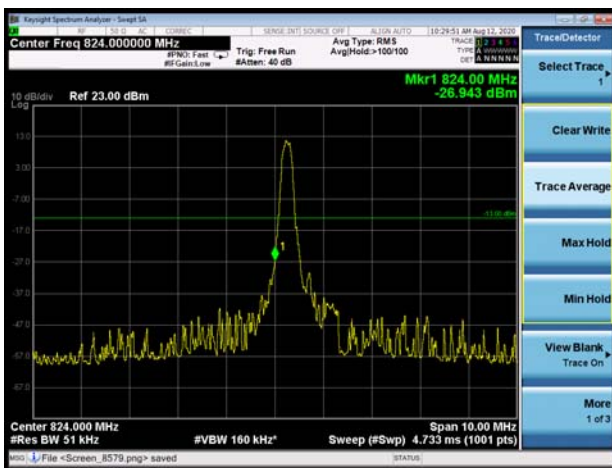


LTE Band 26 16QAM 1.4MHz CH-High 1RB







LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

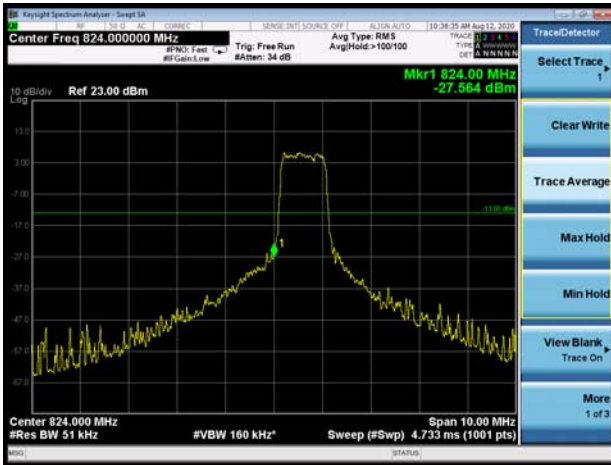

LTE Band 26 16QAM 1.4MHz CH-High 100%RB

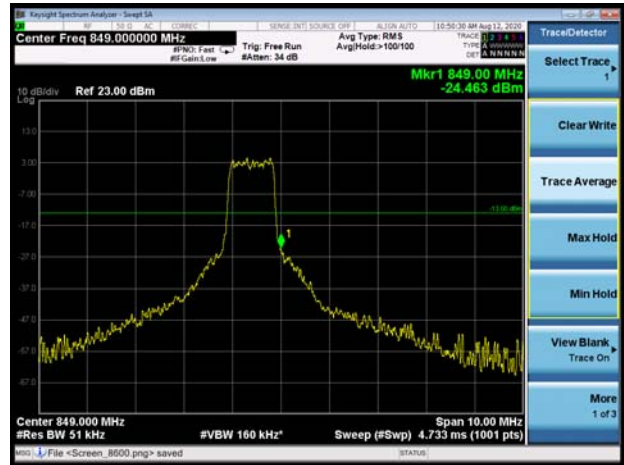


LTE Band 26 16QAM 3MHz CH-Low 1RB

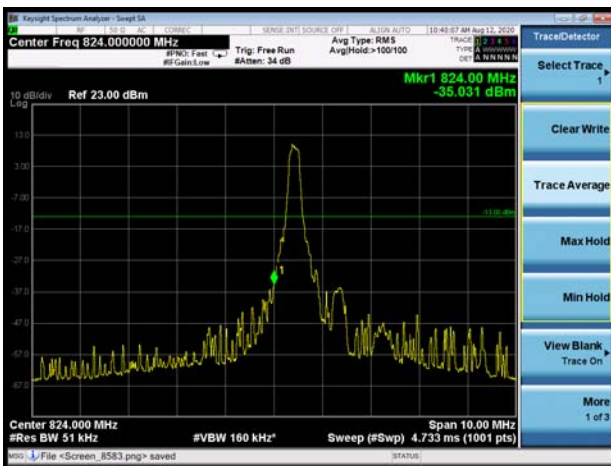


LTE Band 26 16QAM 3MHz CH-High 1RB



LTE Band 26 16QAM 3MHz CH-Low 100%RB

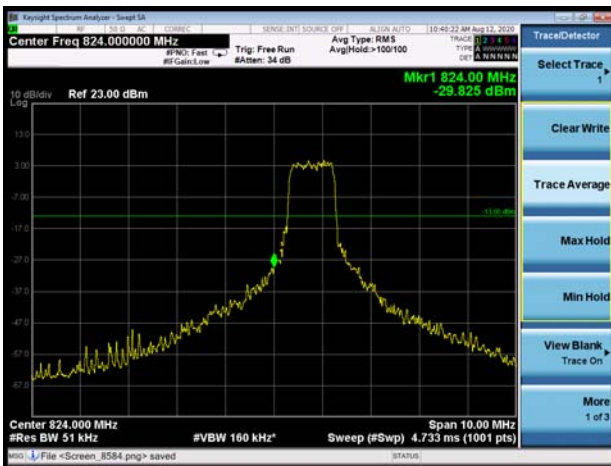


LTE Band 26 16QAM 3MHz CH-High 100%RB

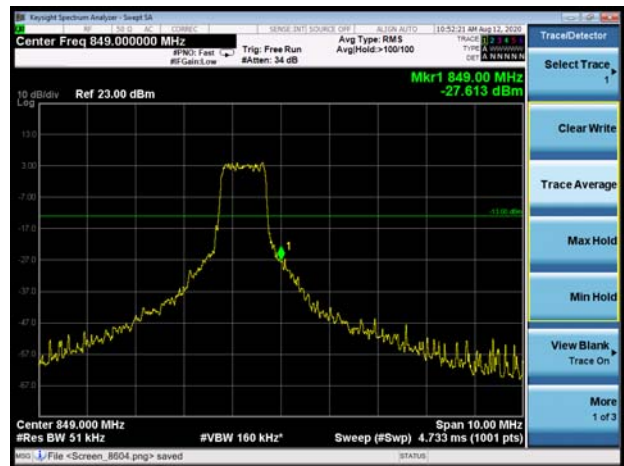


LTE Band 26 16QAM 5MHz CH-Low 1RB




LTE Band 26 16QAM 5MHz CH-High 1RB

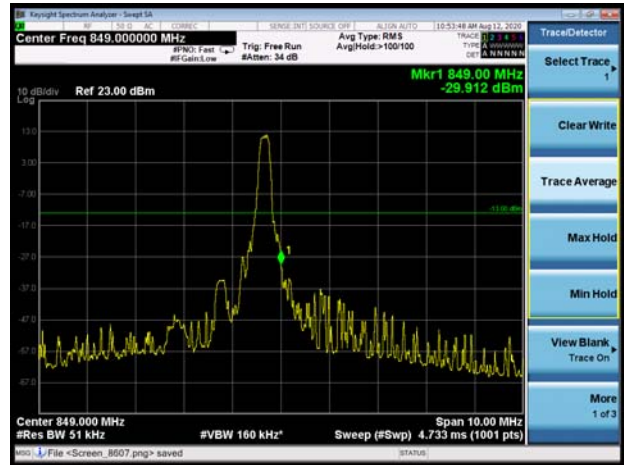


LTE Band 26 16QAM 5MHz CH-Low 100%RB

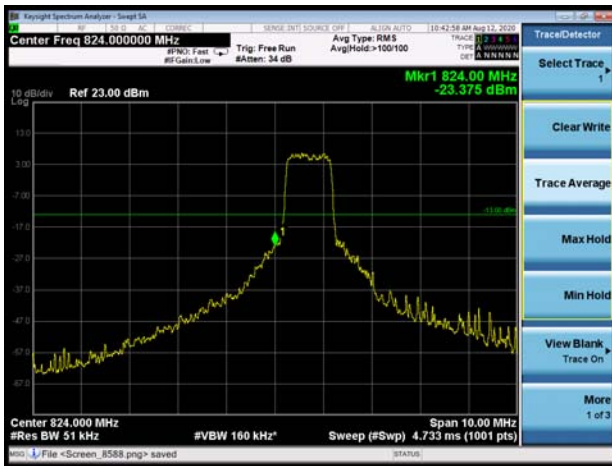


LTE Band 26 16QAM 5MHz CH-High 100%RB

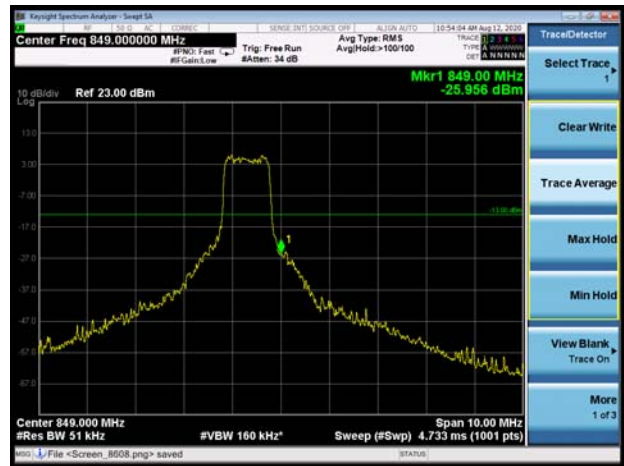

LTE Band 26 16QAM 10MHz CH-Low 1RB

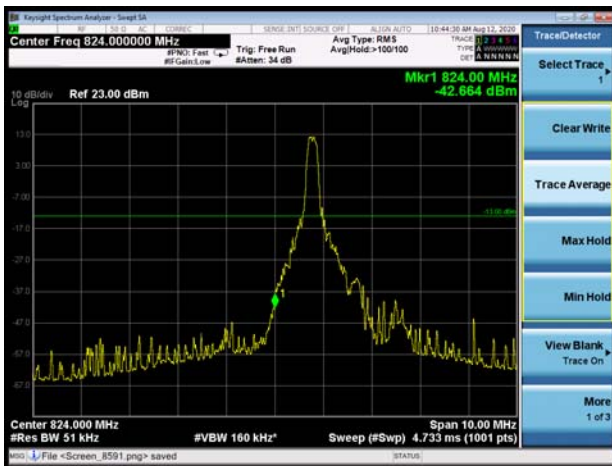


LTE Band 26 16QAM 10MHz CH-High 1RB

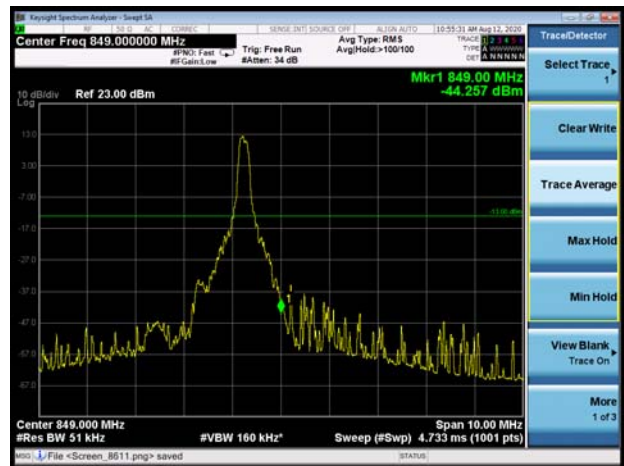





LTE Band 26 16QAM 10MHz CH-Low 100%RB

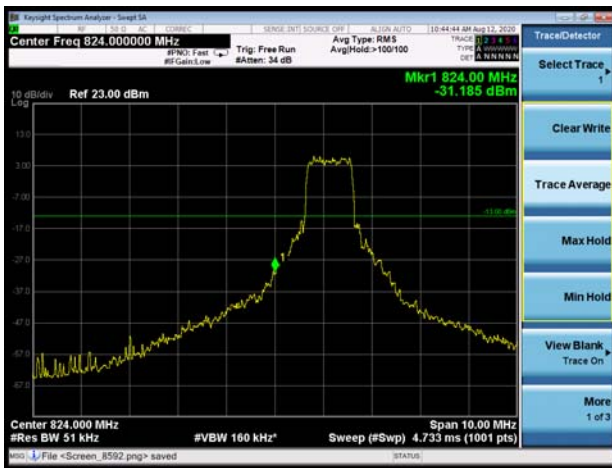


LTE Band 26 16QAM 10MHz CH-High 100%RB

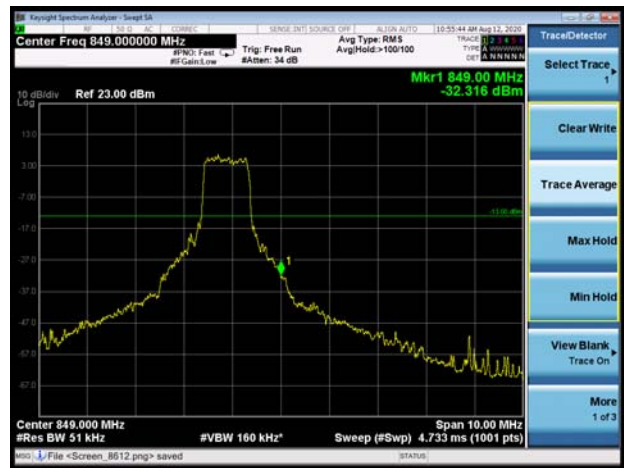


LTE Band 26 16QAM 15MHz CH-Low 1RB

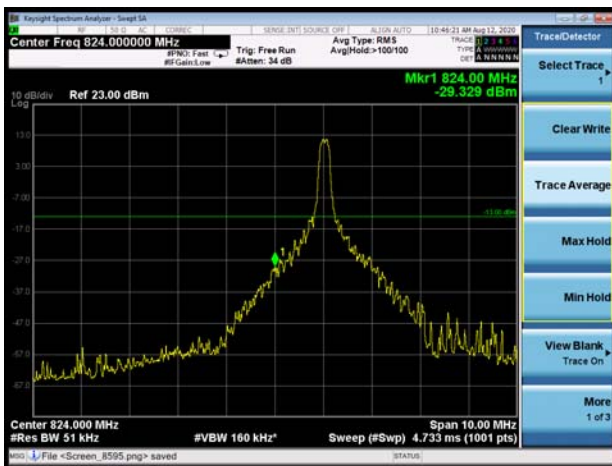


LTE Band 26 16QAM 15MHz CH-High 1RB

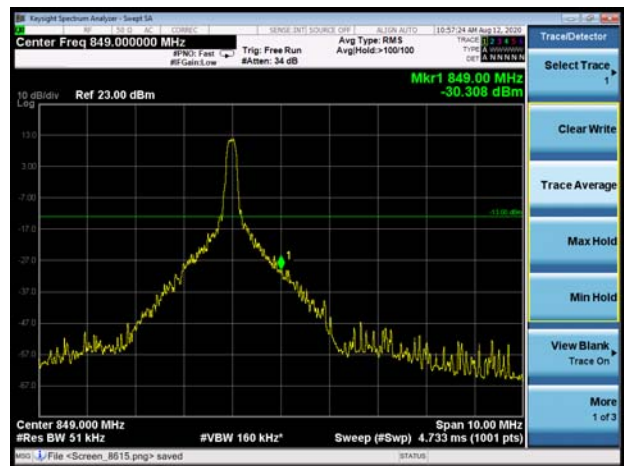

LTE Band 26 16QAM 15MHz CH-Low 100%RB

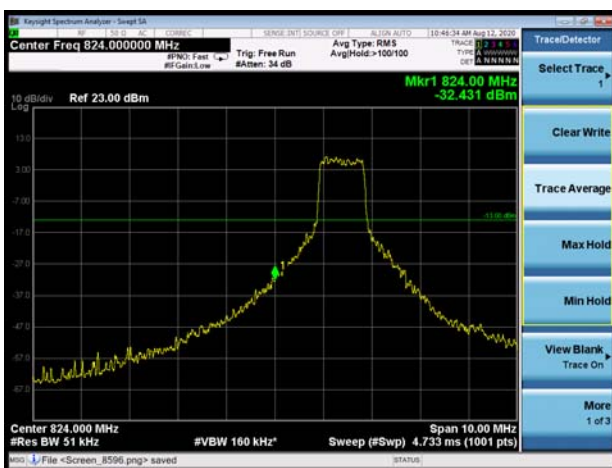

LTE Band 26 16QAM 15MHz CH-High 100%RB

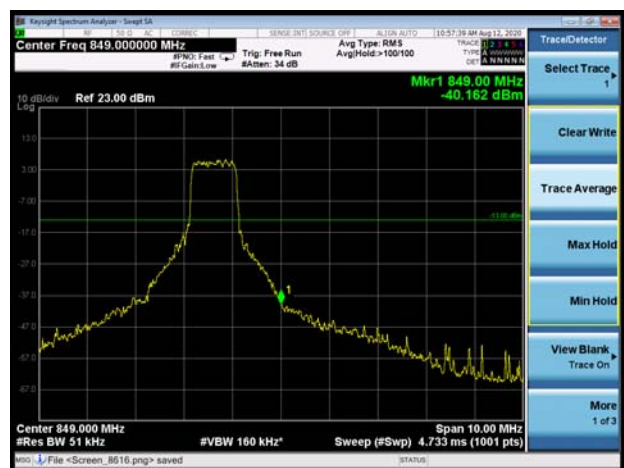

### 5.5. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as  $P_{Pk}$ . And measure the total average power and record as  $P_{Avg}$ . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

#### Test Setup

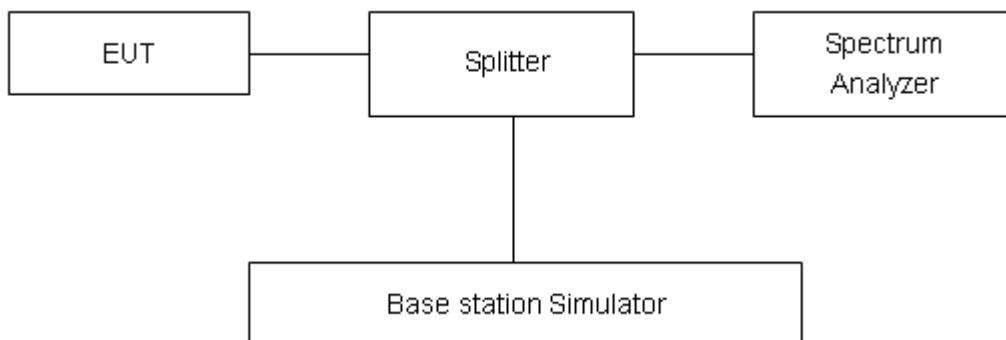

#### Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
<b>GPRS 850 (GMSK)</b>	128	824.2	30.69	30.01	0.68	≤13	PASS
	190	836.6	30.82	30.11	0.71	≤13	PASS
	251	848.8	30.92	30.28	0.64	≤13	PASS
<b>EGPRS 850 (8-PSK)</b>	128	824.2	26.84	26.05	0.79	≤13	PASS
	190	836.6	26.97	26.06	0.91	≤13	PASS
	251	848.8	27.00	26.19	0.81	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	32.89	22.62	10.27	≤13	PASS
		20525	836.5	32.98	22.71	10.27	≤13	PASS
		20643	848.3	34.59	22.86	11.73	≤13	PASS
	3	20415	825.5	32.71	22.70	10.01	≤13	PASS
		20525	836.5	32.95	22.73	10.22	≤13	PASS
		20635	847.5	34.52	22.90	11.62	≤13	PASS
	5	20425	826.5	32.69	22.68	10.01	≤13	PASS
		20525	836.5	33.21	22.69	10.52	≤13	PASS
		20625	846.5	32.99	22.85	10.14	≤13	PASS
	10	20450	829	32.56	22.65	9.91	≤13	PASS
		20525	836.5	32.60	22.64	9.96	≤13	PASS
		20600	844	32.87	22.81	10.06	≤13	PASS
16QAM	1.4	20407	824.7	33.44	22.67	10.77	≤13	PASS
		20525	836.5	34.24	23.20	11.04	≤13	PASS
		20643	848.3	34.79	23.00	11.79	≤13	PASS
	3	20415	825.5	34.01	22.70	11.31	≤13	PASS
		20525	836.5	34.24	23.25	10.99	≤13	PASS
		20635	847.5	35.15	23.04	12.11	≤13	PASS
	5	20425	826.5	33.86	22.67	11.19	≤13	PASS
		20525	836.5	34.41	23.20	11.21	≤13	PASS
		20625	846.5	33.85	23.00	10.85	≤13	PASS
	10	20450	829	33.35	22.65	10.70	≤13	PASS
		20525	836.5	33.28	23.16	10.12	≤13	PASS
		20600	844	32.99	22.97	10.02	≤13	PASS



LTE Band 26								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	26797	824.7	33.12	22.76	10.36	≤13	PASS
		26915	836.5	34.32	22.74	11.58	≤13	PASS
		27033	848.3	34.27	22.75	11.52	≤13	PASS
	3	26805	825.5	32.83	22.74	10.09	≤13	PASS
		26915	836.5	34.86	22.73	12.13	≤13	PASS
		27025	847.5	34.05	22.73	11.32	≤13	PASS
	5	26815	826.5	33.04	22.82	10.22	≤13	PASS
		26915	836.5	32.82	22.75	10.07	≤13	PASS
		27015	846.5	33.18	22.77	10.41	≤13	PASS
	10	26840	829	33.13	22.80	10.33	≤13	PASS
		26915	836.5	33.01	22.71	10.30	≤13	PASS
		26990	844	32.72	22.72	10.00	≤13	PASS
	15	26865	831.5	31.94	22.77	9.17	≤13	PASS
		26915	836.5	32.64	22.66	9.98	≤13	PASS
		26965	841.5	33.86	22.68	11.18	≤13	PASS
16QAM	1.4	26797	824.7	34.28	23.10	11.18	≤13	PASS
		26915	836.5	36.11	23.19	12.92	≤13	PASS
		27033	848.3	35.77	22.87	12.90	≤13	PASS
	3	26805	825.5	34.12	23.08	11.04	≤13	PASS
		26915	836.5	35.43	23.15	12.28	≤13	PASS
		27025	847.5	35.59	22.82	12.77	≤13	PASS
	5	26815	826.5	33.94	23.11	10.83	≤13	PASS
		26915	836.5	34.20	23.20	11.00	≤13	PASS
		27015	846.5	33.77	22.86	10.91	≤13	PASS
	10	26840	829	33.08	23.08	10.00	≤13	PASS
		26915	836.5	33.76	23.15	10.61	≤13	PASS
		26990	844	33.41	22.82	10.59	≤13	PASS
	15	26865	831.5	32.47	23.06	9.41	≤13	PASS
		26915	836.5	32.80	23.11	9.69	≤13	PASS
		26965	841.5	33.03	22.79	10.24	≤13	PASS

## 5.6. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

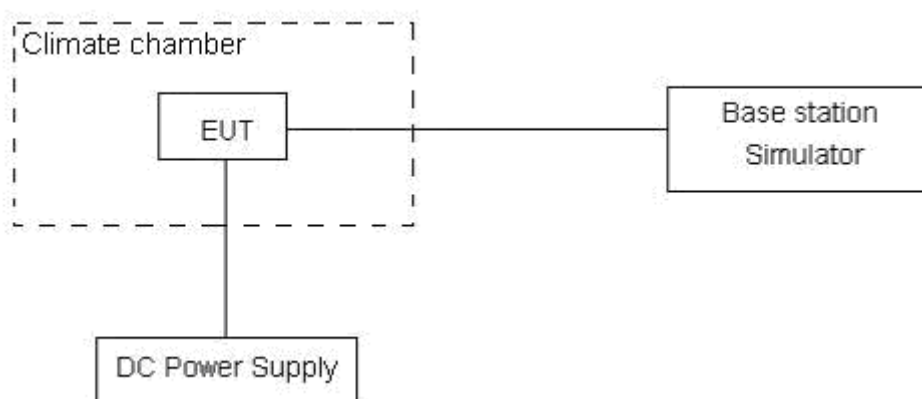

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	$\leq 2.5$ ppm
--------	----------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01$  ppm.

**Test Result**

Mode	Test status	Test Results (ppm)		Limit (ppm)	Conclusion
		GPRS (GMSK)	EGPRS (8PSK)		
GSM 850 Middle Channel	-40°C/Normal Voltage	0.0211	0.0202	2.5	PASS
	-30°C/Normal Voltage	0.0294	0.0242	2.5	PASS
	-20°C/Normal Voltage	0.0297	0.0257	2.5	PASS
	-10°C/Normal Voltage	0.0292	0.0253	2.5	PASS
	0°C/Normal Voltage	0.0301	0.0250	2.5	PASS
	10°C/Normal Voltage	0.0333	0.0241	2.5	PASS
	20°C/Normal Voltage	0.0395	0.0317	2.5	PASS
	30°C/Normal Voltage	0.0312	0.0262	2.5	PASS
	40°C/Normal Voltage	0.0343	0.0248	2.5	PASS
	50°C/Normal Voltage	0.0355	0.0288	2.5	PASS
	60°C/Normal Voltage	0.0325	0.0302	2.5	PASS
	70°C/Normal Voltage	0.0349	0.0273	2.5	PASS
	80°C/Normal Voltage	0.0350	0.0266	2.5	PASS
	85°C/Normal Voltage	0.0338	0.0279	2.5	PASS
	20°C/Minimum Voltage	0.0273	0.0234	2.5	PASS
	20°C/Maximum Voltage	0.0217	0.0208	2.5	PASS

Bandwidth	Test status	LTE Band 5 Middle Channel Test Results (ppm)			
		QPSK	16QAM	Limit (ppm)	Conclusion
1.4MHz	-40°C/Normal Voltage	-0.00147	-0.01488	2.5	PASS
	-30°C/Normal Voltage	-0.00025	-0.01676	2.5	PASS
	-20°C/Normal Voltage	-0.00142	-0.01840	2.5	PASS
	-10°C/Normal Voltage	-0.00279	-0.01732	2.5	PASS
	0°C/Normal Voltage	-0.00198	-0.02276	2.5	PASS
	10°C/Normal Voltage	-0.00053	-0.02736	2.5	PASS
	20°C/Normal Voltage	-0.00059	-0.01711	2.5	PASS
	30°C/Normal Voltage	0.00234	-0.01736	2.5	PASS
	40°C/Normal Voltage	0.00104	-0.02404	2.5	PASS
	50°C/Normal Voltage	0.00429	-0.01883	2.5	PASS
	60°C/Normal Voltage	0.00430	-0.02723	2.5	PASS
	70°C/Normal Voltage	-0.00128	-0.02343	2.5	PASS
	80°C/Normal Voltage	-0.00143	-0.01695	2.5	PASS
	85°C/Normal Voltage	0.00212	-0.01592	2.5	PASS
	20°C/Minimum Voltage	-0.00146	-0.01522	2.5	PASS
	20°C/Maximum Voltage	0.00099	-0.02527	2.5	PASS
3MHz	-40°C/Normal Voltage	-0.00178	-0.01886	2.5	PASS
	-30°C/Normal Voltage	-0.00259	-0.01704	2.5	PASS
	-20°C/Normal Voltage	-0.00334	-0.01677	2.5	PASS
	-10°C/Normal Voltage	-0.00158	-0.02166	2.5	PASS
	0°C/Normal Voltage	-0.00031	-0.01933	2.5	PASS
	10°C/Normal Voltage	-0.00438	-0.01900	2.5	PASS
	20°C/Normal Voltage	-0.00491	-0.01522	2.5	PASS
	30°C/Normal Voltage	-0.00392	-0.00512	2.5	PASS
	40°C/Normal Voltage	-0.00197	-0.00279	2.5	PASS
	50°C/Normal Voltage	-0.00160	0.00207	2.5	PASS
	60°C/Normal Voltage	-0.00361	0.00385	2.5	PASS
	70°C/Normal Voltage	-0.00209	-0.00123	2.5	PASS
	80°C/Normal Voltage	-0.00061	0.00393	2.5	PASS
	85°C/Normal Voltage	-0.00164	0.00286	2.5	PASS
	20°C/Minimum Voltage	-0.00197	0.00123	2.5	PASS
	20°C/Maximum Voltage	0.00099	0.00146	2.5	PASS
5MHz	-40°C/Normal Voltage	-0.00219	-0.02227	2.5	PASS
	-30°C/Normal Voltage	-0.00092	-0.01994	2.5	PASS
	-20°C/Normal Voltage	-0.00499	-0.01961	2.5	PASS



	-10°C/Normal Voltage	-0.00552	-0.01583	2.5	PASS
	0°C/Normal Voltage	-0.00453	-0.00573	2.5	PASS
	10°C/Normal Voltage	-0.00258	-0.00340	2.5	PASS
	20°C/Normal Voltage	-0.00221	0.00146	2.5	PASS
	30°C/Normal Voltage	-0.00422	0.00324	2.5	PASS
	40°C/Normal Voltage	-0.00056	-0.01977	2.5	PASS
	50°C/Normal Voltage	-0.00463	-0.01600	2.5	PASS
	60°C/Normal Voltage	-0.00516	-0.00589	2.5	PASS
	70°C/Normal Voltage	-0.00417	-0.00356	2.5	PASS
	80°C/Normal Voltage	-0.00222	0.00129	2.5	PASS
	85°C/Normal Voltage	-0.00185	0.00307	2.5	PASS
	20°C/Minimum Voltage	-0.00386	-0.02244	2.5	PASS
	20°C/Maximum Voltage	-0.00183	-0.02011	2.5	PASS
	10MHz	-40°C/Normal Voltage	-0.00252	0.01378	2.5
-30°C/Normal Voltage		-0.00126	0.00426	2.5	PASS
-20°C/Normal Voltage		-0.00532	-0.00082	2.5	PASS
-10°C/Normal Voltage		-0.00586	0.01753	2.5	PASS
0°C/Normal Voltage		-0.00487	0.00326	2.5	PASS
10°C/Normal Voltage		-0.00292	0.00164	2.5	PASS
20°C/Normal Voltage		-0.00255	0.00186	2.5	PASS
30°C/Normal Voltage		-0.00455	-0.01739	2.5	PASS
40°C/Normal Voltage		-0.00090	-0.01339	2.5	PASS
50°C/Normal Voltage		-0.00496	-0.01176	2.5	PASS
60°C/Normal Voltage		-0.00550	-0.01542	2.5	PASS
70°C/Normal Voltage		-0.00243	-0.00532	2.5	PASS
80°C/Normal Voltage		-0.00094	-0.00299	2.5	PASS
85°C/Normal Voltage		-0.00197	0.00186	2.5	PASS
20°C/Minimum Voltage	-0.00231	0.00365	2.5	PASS	
20°C/Maximum Voltage	0.00066	-0.01578	2.5	PASS	

Bandwidth	Test status	LTE Band 26 Middle Channel Test Results (ppm)			
		QPSK	16QAM	Limit (ppm)	Conclusion
1.4MHz	-40°C/Normal Voltage	-0.00255	-0.00904	2.5	PASS
	-30°C/Normal Voltage	-0.00082	-0.00258	2.5	PASS
	-20°C/Normal Voltage	-0.00245	-0.00454	2.5	PASS
	-10°C/Normal Voltage	-0.00195	-0.00467	2.5	PASS
	0°C/Normal Voltage	-0.00237	-0.00055	2.5	PASS
	10°C/Normal Voltage	-0.00209	-0.00196	2.5	PASS



	20°C/Normal Voltage	-0.00316	0.00197	2.5	PASS
	30°C/Normal Voltage	0.00110	0.00117	2.5	PASS
	40°C/Normal Voltage	0.00018	-0.01288	2.5	PASS
	50°C/Normal Voltage	-0.00241	-0.01149	2.5	PASS
	60°C/Normal Voltage	-0.00175	-0.00275	2.5	PASS
	70°C/Normal Voltage	-0.00218	-0.00581	2.5	PASS
	80°C/Normal Voltage	-0.00326	-0.00439	2.5	PASS
	85°C/Normal Voltage	-0.00109	-0.00863	2.5	PASS
	20°C/Minimum Voltage	-0.00053	-0.00961	2.5	PASS
	20°C/Maximum Voltage	-0.00207	-0.01095	2.5	PASS
3MHz	-40°C/Normal Voltage	-0.00073	-0.01100	2.5	PASS
	-30°C/Normal Voltage	-0.00258	-0.01870	2.5	PASS
	-20°C/Normal Voltage	-0.00261	-0.01069	2.5	PASS
	-10°C/Normal Voltage	-0.00302	-0.01623	2.5	PASS
	0°C/Normal Voltage	-0.00081	-0.00377	2.5	PASS
	10°C/Normal Voltage	-0.00209	-0.01283	2.5	PASS
	20°C/Normal Voltage	-0.00219	-0.01866	2.5	PASS
	30°C/Normal Voltage	-0.00185	-0.02007	2.5	PASS
	40°C/Normal Voltage	-0.00112	-0.01834	2.5	PASS
	50°C/Normal Voltage	0.00104	-0.01458	2.5	PASS
	60°C/Normal Voltage	-0.00322	-0.01830	2.5	PASS
	70°C/Normal Voltage	-0.00081	-0.01652	2.5	PASS
	80°C/Normal Voltage	-0.00292	-0.01957	2.5	PASS
	85°C/Normal Voltage	-0.00253	-0.01998	2.5	PASS
	20°C/Minimum Voltage	-0.00082	-0.02011	2.5	PASS
20°C/Maximum Voltage	-0.00062	-0.01874	2.5	PASS	
5MHz	-40°C/Normal Voltage	-0.00377	-0.01621	2.5	PASS
	-30°C/Normal Voltage	-0.00441	-0.01817	2.5	PASS
	-20°C/Normal Voltage	-0.00294	-0.01724	2.5	PASS
	-10°C/Normal Voltage	-0.00087	-0.01276	2.5	PASS
	0°C/Normal Voltage	-0.00381	-0.02108	2.5	PASS
	10°C/Normal Voltage	-0.00455	-0.01305	2.5	PASS
	20°C/Normal Voltage	-0.00348	-0.00441	2.5	PASS
	30°C/Normal Voltage	-0.00316	-0.00631	2.5	PASS
	40°C/Normal Voltage	-0.00092	-0.00910	2.5	PASS
	50°C/Normal Voltage	0.00149	-0.00814	2.5	PASS
	60°C/Normal Voltage	0.00143	-0.00483	2.5	PASS
	70°C/Normal Voltage	-0.00383	-0.00781	2.5	PASS
	80°C/Normal Voltage	-0.00246	-0.00750	2.5	PASS
85°C/Normal Voltage	0.00236	-0.01982	2.5	PASS	



	20°C/Minimum Voltage	-0.00310	-0.01586	2.5	PASS	
	20°C/Maximum Voltage	0.00005	-0.01339	2.5	PASS	
10MHz	-40°C/Normal Voltage	0.00022	0.00374	2.5	PASS	
	-30°C/Normal Voltage	-0.00258	0.00269	2.5	PASS	
	-20°C/Normal Voltage	-0.00281	-0.00081	2.5	PASS	
	-10°C/Normal Voltage	-0.00347	-0.00122	2.5	PASS	
	0°C/Normal Voltage	-0.00201	-0.00212	2.5	PASS	
	10°C/Normal Voltage	-0.00300	-0.00171	2.5	PASS	
	20°C/Normal Voltage	-0.00126	-0.00060	2.5	PASS	
	30°C/Normal Voltage	-0.00228	-0.00116	2.5	PASS	
	40°C/Normal Voltage	-0.00081	0.00389	2.5	PASS	
	50°C/Normal Voltage	0.00237	0.00440	2.5	PASS	
	60°C/Normal Voltage	-0.00122	0.00307	2.5	PASS	
	70°C/Normal Voltage	-0.00100	0.00085	2.5	PASS	
	80°C/Normal Voltage	-0.00336	-0.00016	2.5	PASS	
	85°C/Normal Voltage	-0.00024	0.00495	2.5	PASS	
		20°C/Minimum Voltage	-0.00279	0.00288	2.5	PASS
		20°C/Maximum Voltage	-0.00112	0.00154	2.5	PASS
	15MHz	-40°C/Normal Voltage	-0.00257	-0.01834	2.5	PASS
		-30°C/Normal Voltage	-0.00241	0.00308	2.5	PASS
-20°C/Normal Voltage		-0.00202	0.03394	2.5	PASS	
-10°C/Normal Voltage		-0.00255	0.04132	2.5	PASS	
0°C/Normal Voltage		-0.00128	-0.02313	2.5	PASS	
10°C/Normal Voltage		-0.00300	0.03032	2.5	PASS	
20°C/Normal Voltage		-0.00127	0.03543	2.5	PASS	
30°C/Normal Voltage		-0.00165	0.03247	2.5	PASS	
40°C/Normal Voltage		-0.00200	0.03540	2.5	PASS	
50°C/Normal Voltage		-0.00130	0.03388	2.5	PASS	
60°C/Normal Voltage		-0.00353	0.03145	2.5	PASS	
70°C/Normal Voltage		-0.00329	0.04016	2.5	PASS	
80°C/Normal Voltage		-0.00313	0.04157	2.5	PASS	
85°C/Normal Voltage		-0.00331	0.03741	2.5	PASS	
		20°C/Minimum Voltage	-0.00288	0.03040	2.5	PASS
		20°C/Maximum Voltage	-0.00172	0.02449	2.5	PASS