



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR201910BG95M3
Product LTE Cat M1 & Cat NB2 & EGPRS Module
Brand Quectel
Model BG95-M3, BG95-M3 MINIPCIE
Report No. R2106A0549-R5
Issue Date September 6, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 24E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	8
5.1. RF Power Output and Effective Isotropic Radiated Power	8
5.2. Occupied Bandwidth	11
5.3. Band Edge Compliance	18
5.4. Peak-to-Average Power Ratio (PAPR)	23
5.5. Frequency Stability	25
5.6. Spurious Emissions at Antenna Terminals	30
5.7. Radiates Spurious Emission	34
6. Main Test Instruments	43
ANNEX A: The EUT Appearance	45
ANNEX B: Test Setup Photos	46
ANNEX C: Product Change Description	47

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 /24.238(a)	PASS
4	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
7	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing(original): March 5, 2020 ~March 30, 2020 and June 6, 2020 (variant): July 14, 2021 ~ August 9, 2021			
<p>Note: PASS: The EUT complies with the essential requirements in the standard.</p> <p>FAIL: The EUT does not comply with the essential requirements in the standard.</p> <p>All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

BG95-M3, BG95-M3 MINIPCIE (Report No.: R2106A0549-R5) is a variant model of BG95-M3, BG95-M3 MINIPCIE (Report No.: R2006A0361-R5V1). The product only changes PA components. Test values duplicated from Original for variant. Test items tested see the table below.

Test Case	original	variant
RF Power Output and Effective Isotropic Radiated Power	PASS	Retest
Occupied Bandwidth	PASS	Refer to original
Band Edge Compliance	PASS	Refer to original
Peak-to-Average Power Ratio	PASS	Refer to original
Frequency Stability	PASS	Refer to original
Spurious Emissions at Antenna Terminals	PASS	Refer to original
Radiates Spurious Emission	PASS	Refer to original

The detailed product change description please refers to the Difference Declaration Letter.



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

General information

EUT Description			
Model	BG95-M3, BG95-M3 MINIPCIE		
IMEI	BG95-M3: 864475048391303 BG95-M3 MINIPCIE: 864475048389810		
Hardware Version	R2.1		
Software Version	BG95M3LAR02A03		
Power Supply	External Power Supply		
Antenna Type	External Antenna		
Antenna Gain	NB-IoT 2:1.6dBi NB-IoT 25:1.7dBi		
Test Mode(s)	NB-IoT Band 2/25;		
Test Modulation:	BPSK, QPSK		
Category	NB2		
Deployment:	stand-alone		
Sub-carrier spacing:	3.75KHz, 15KHz		
Ntones:	single-tone, multi-tone		
Maximum E.I.R.P	NB-IoT Band 2	22.61dBm	
	NB-IoT Band 25	22.72dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	NB-IoT Band 2	1850 ~ 1910	1930 ~ 1990
	NB-IoT Band 25	1850 ~ 1915	1930 ~ 1995
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. The series model number is: BG95-M3 MINIPCIE. The difference of these models are have different marketing requirement.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2020)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2020)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All modes as Subcarrier Spacing, modulations, Channel were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in NB-IoT is set based on the maximum RF Output Power.

The following testing in different mode is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for NB-IoT Band 2/25

Test items	Deployment mode	Subcarrier Spacing (kHz)		Modulation		Test Channel		
	Stand-alone	3.75	15	BPSK	QPSK	L	M	H
RF Power Output and Effective Isotropic Radiated Power	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O
Conducted Spurious Emissions	O	-	O	-	O	O	O	O
Radiates Spurious Emission	O	-	O	-	O	O	O	O
Note 1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.								

5. Test Case Results

5.1.RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

Test Setup

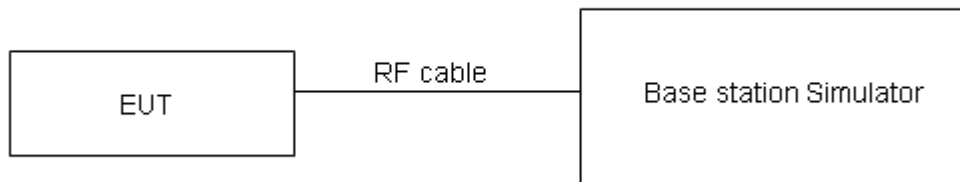

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$.

Test Results

Original

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/middle/high channel		
				18602/1850.2	18900/1880.0	19198/1909.8
NB-IOT Band 2 Standalone	BPSK	3.75	1@0	20.15	20.01	20.35
			1@47	20.07	19.96	20.29
		15	1@0	20.27	20.05	20.37
			1@11	20.23	20.01	20.35
	QPSK	3.75	1@0	20.11	19.97	20.33
			1@47	20.08	19.94	20.25
		15	1@0	20.30	20.06	20.37
			1@11	20.32	20.10	20.31
		15	12@0	19.32	18.01	18.32
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/middle/high channel		
				26042/1850.2	26365/1882.5	26688/1914.8
NB-IOT Band 25 Standalone	BPSK	3.75	1@0	19.88	19.97	19.86
			1@47	19.84	19.91	19.78
		15	1@0	19.97	19.89	19.95
			1@11	19.96	19.98	19.89
	QPSK	3.75	1@0	19.83	19.92	19.86
			1@47	19.74	19.93	19.96
		15	1@0	19.92	19.97	19.84
			1@11	19.94	19.91	19.86
		15	12@0	18.37	18.45	18.41



Variant

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power(dBm)			EIRP (dBm)		
				18602/ 1850.2	18900/ 1880.0	19198/ 1909.8	18602/ 1850.2	18900/ 1880.0	19198/ 1909.8
Band 2 Standalone	BPSK	3.75	1@0	20.81	20.68	20.90	22.41	22.28	22.50
			1@47	20.77	20.71	20.85	22.37	22.31	22.45
		15	1@0	20.87	20.76	21.01	22.47	22.36	22.61
			1@11	20.83	20.68	20.99	22.43	22.28	22.59
	QPSK	3.75	1@0	20.85	20.75	20.91	22.45	22.35	22.51
			1@47	20.76	20.70	20.98	22.36	22.30	22.58
		15	1@0	20.88	20.72	20.89	22.48	22.32	22.49
			1@11	20.87	20.75	20.94	22.47	22.35	22.54
		15	12@0	19.02	18.92	18.91	20.62	20.52	20.51

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Maximum Output Power(dBm)			EIRP (dBm)		
				26042/ 1850.2	26365/ 1882.5	26688/ 1914.8	26042/ 1850.2	26365/ 1882.5	26688/ 1914.8
Band 25 Standalone	BPSK	3.75	1@0	20.54	20.62	20.80	22.24	22.32	22.50
			1@47	20.51	20.61	20.73	22.21	22.31	22.43
		15	1@0	20.76	20.53	21.02	22.46	22.23	22.72
			1@11	20.68	20.65	20.93	22.38	22.35	22.63
	QPSK	3.75	1@0	20.51	20.57	20.87	22.21	22.27	22.57
			1@47	20.52	20.58	20.76	22.22	22.28	22.46
		15	1@0	20.84	20.60	21.00	22.54	22.30	22.70
			1@11	20.71	20.71	20.90	22.41	22.41	22.60
		15	12@0	18.73	18.74	18.91	20.43	20.44	20.61

5.2.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 2kHz, VBW is set to 6.2kHz for NB-IoT Band 2/25.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

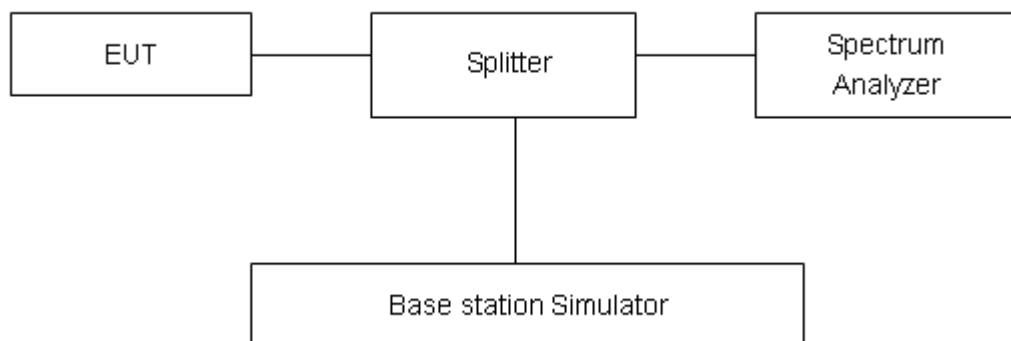

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result


Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				18602/1850.2		18900/1880.0		19198/1909.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
NB-IoT Band 2 Standalone	BPSK	3.75	1@0	60.55	41.16	60.34	41.01	59.98	41.17
	QPSK	3.75	1@0	69.37	40.44	67.60	40.20	68.79	40.53
	BPSK	15	1@0	119.60	112.40	130.16	120.00	128.36	118.40
	QPSK	15	1@0	117.19	115.50	116.51	103.60	120.79	116.20
	QPSK	15	12@0	184.89	240.00	185.35	247.00	183.77	242.60

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				26042/1850.2		26365/1882.5		26688/1914.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
NB-IoT Band 25 Standalone	BPSK	3.75	1@0	60.46	41.01	61.30	40.93	60.74	41.00
	QPSK	3.75	1@0	67.59	41.15	69.46	40.71	67.37	39.83
	BPSK	15	1@0	127.63	118.50	123.89	106.00	119.14	103.00
	QPSK	15	1@0	118.25	116.60	120.07	131.90	119.81	117.50
	QPSK	15	12@0	183.83	252.50	184.39	240.60	185.43	242.10


NB-IoT Band 2 BPSK 3.75kHz 1@0 CH-Low

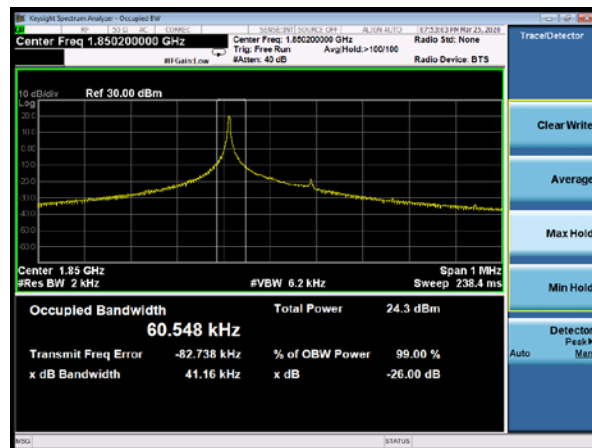


NB-IoT Band 2 BPSK 15kHz 1@0 CH-Low

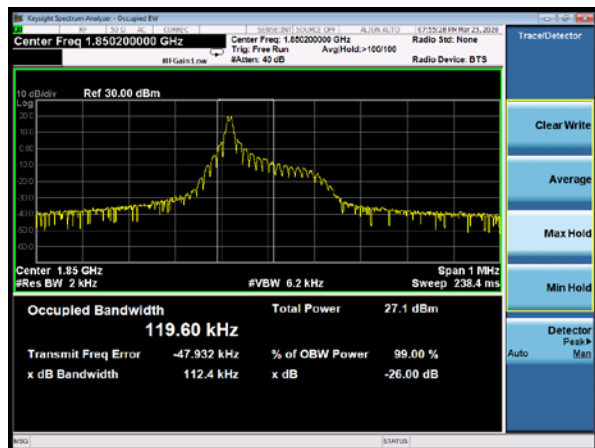


NB-IoT Band 2 BPSK 3.75kHz 1@0 CH-Middle

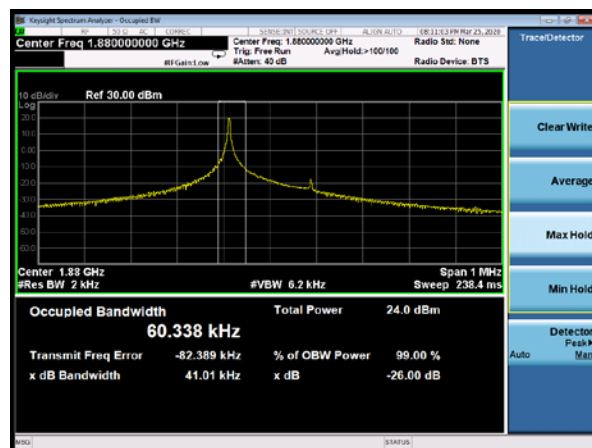


NB-IoT Band 2 BPSK 15kHz 1@0 CH-Middle

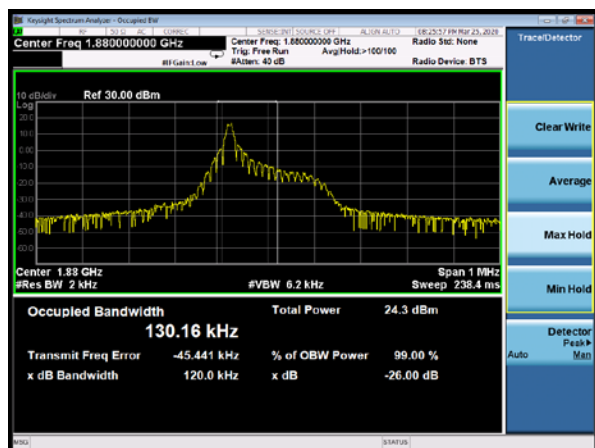

NB-IoT Band 2 BPSK 3.75kHz 1@0 CH-High

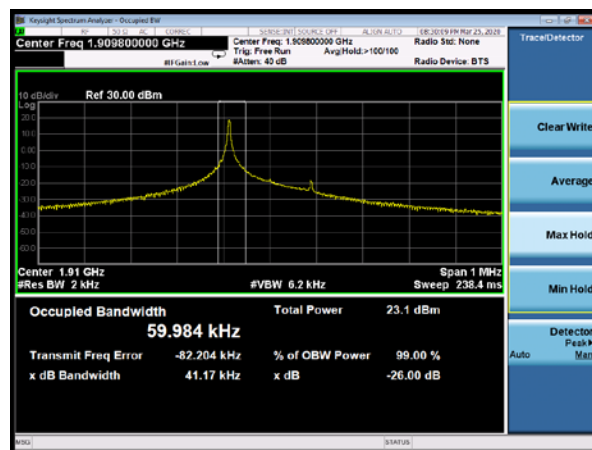


NB-IoT Band 2 BPSK 15kHz 1@0 CH-High

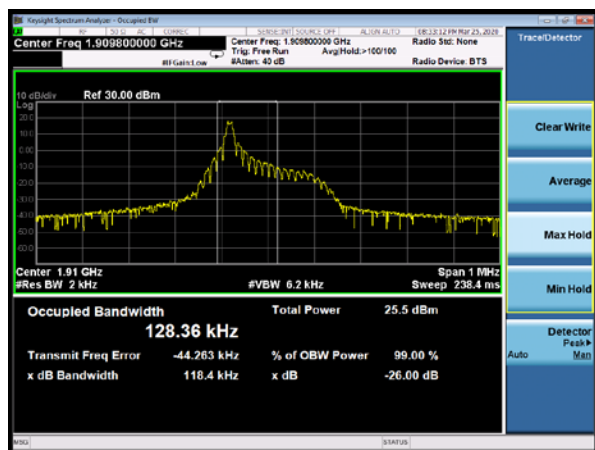





NB-IoT Band 2 QPSK 3.75kHz 1@0 CH-Low

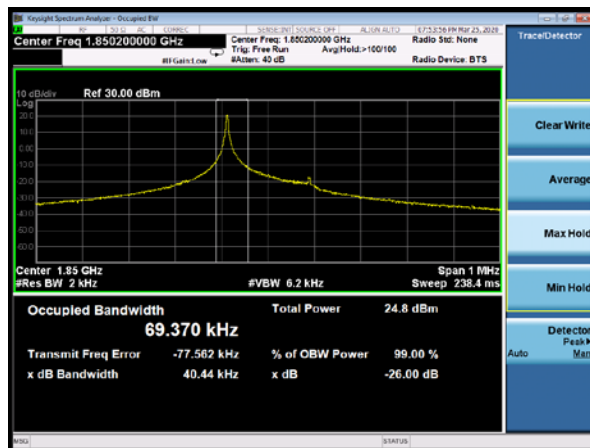


NB-IoT Band 2 QPSK 15kHz 1@0 CH-Low

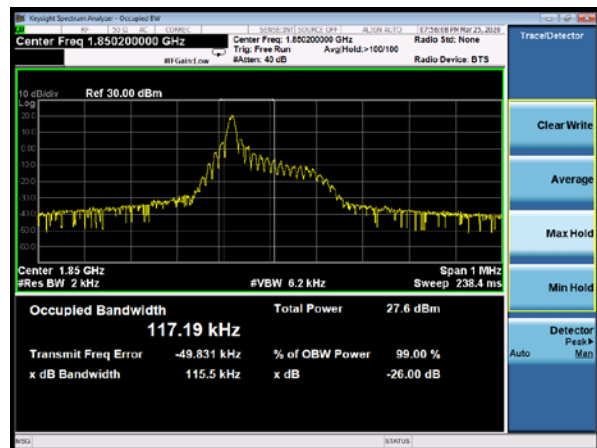


NB-IoT Band 2 QPSK 3.75kHz 1@0 CH-Middle

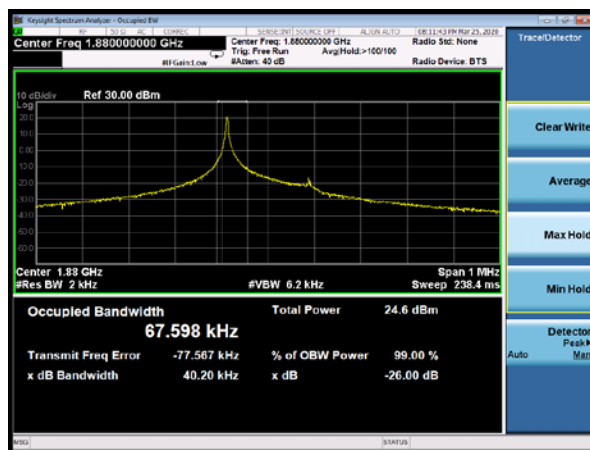


NB-IoT Band 2 QPSK 15kHz 1@0 CH-Middle

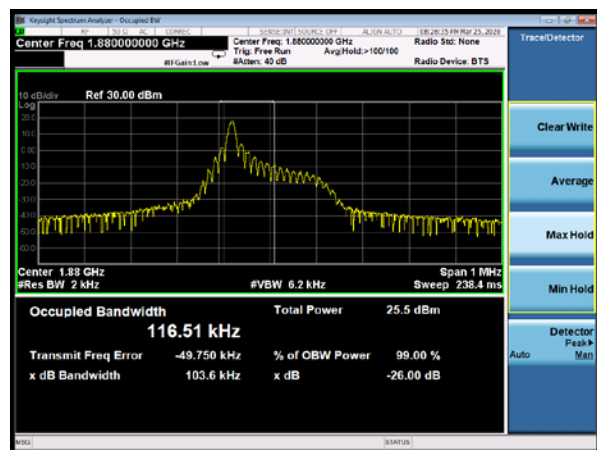


NB-IoT Band 2 QPSK 3.75kHz 1@0 CH-High

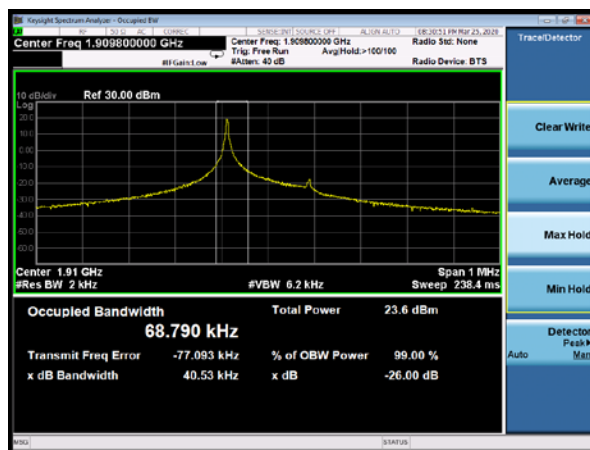


NB-IoT Band 2 QPSK 15kHz 1@0 CH-High

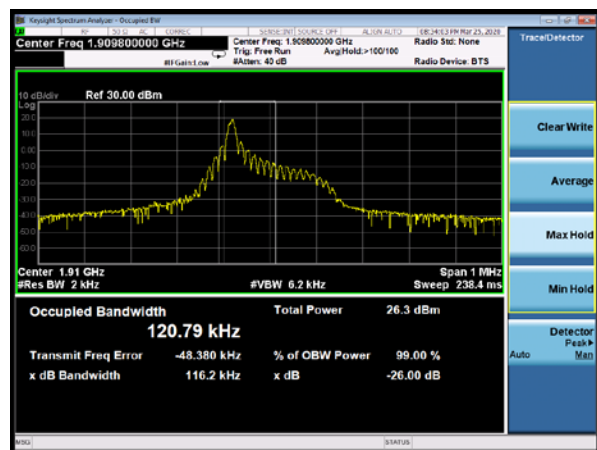


NB-IoT Band 2 QPSK 15kHz 12@0 CH-Low

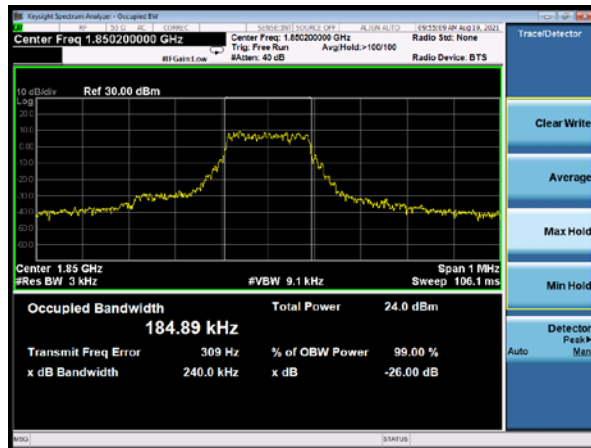


NB-IoT Band 25 BPSK 3.75kHz 1@0 CH-Low

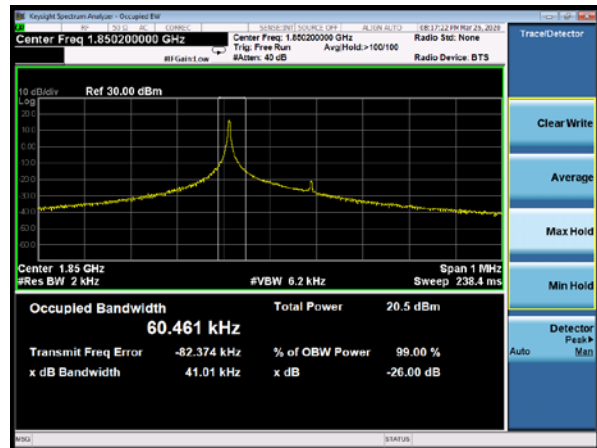


NB-IoT Band 2 QPSK 15kHz 12@0 CH-Middle

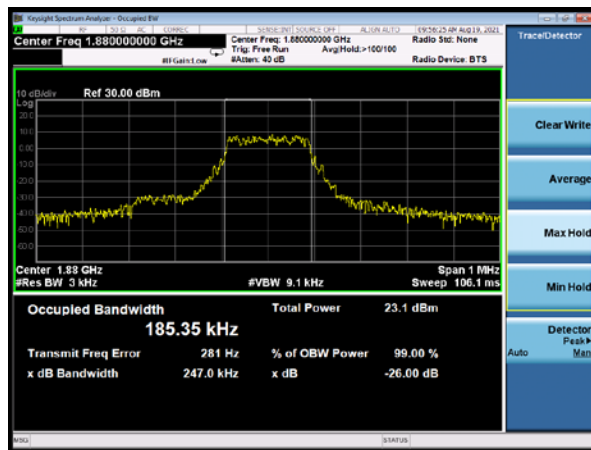


NB-IoT Band 25 BPSK 3.75kHz 1@0 CH-Middle

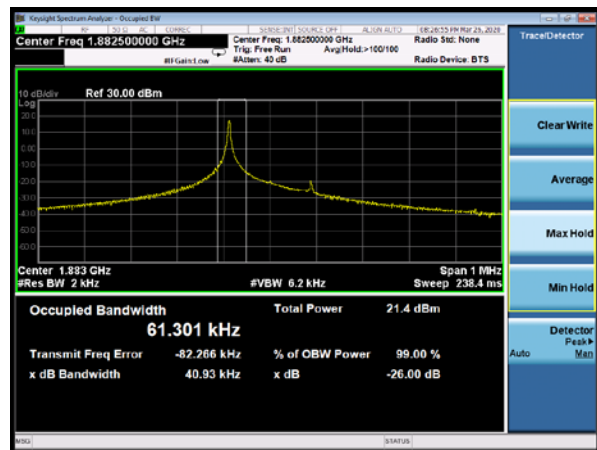

NB-IoT Band 2 QPSK 15kHz 12@0 CH-High

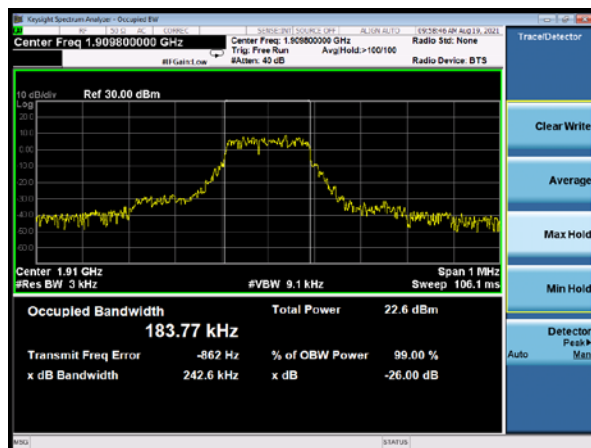

NB-IoT Band 25 BPSK 3.75kHz 1@0 CH-High

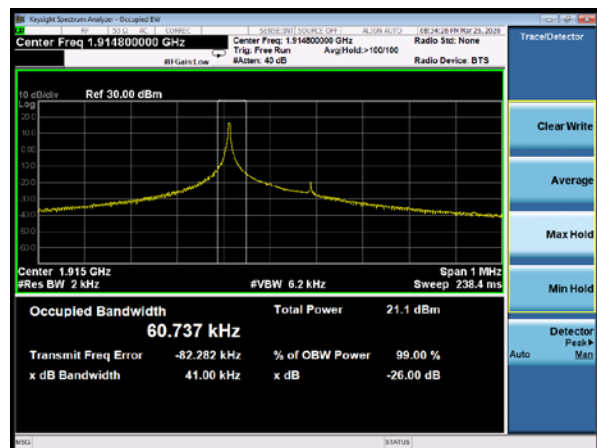




NB-IoT Band 25 BPSK 15kHz 1@0 CH-Low




NB-IoT Band 25 QPSK 3.75kHz 1@0 CH-Low

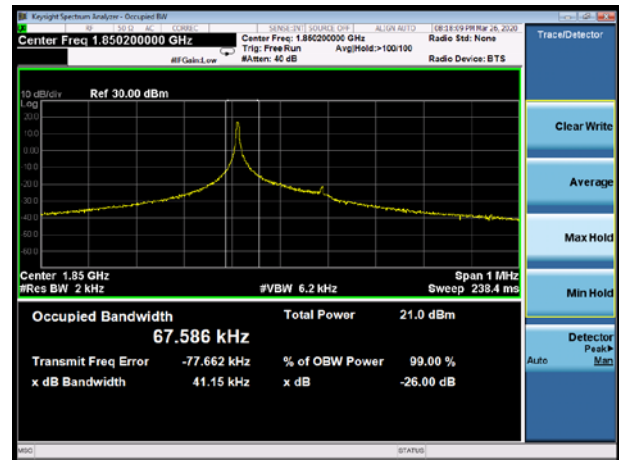

NB-IoT Band 25 BPSK 15kHz 1@0 CH-Middle




NB-IoT Band 25 QPSK 3.75kHz 1@0 CH-Middle

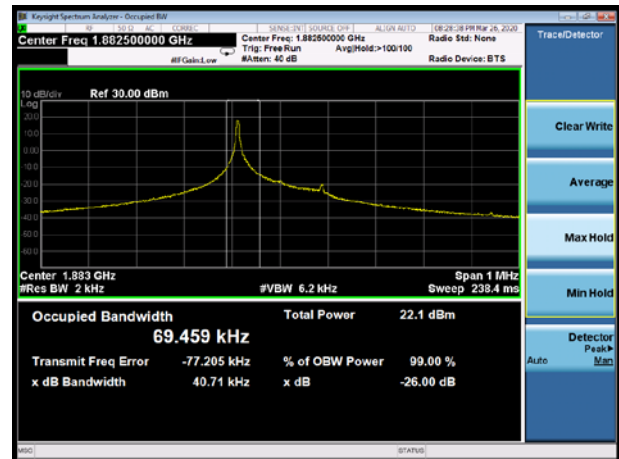

NB-IoT Band 25 BPSK 15kHz 1@0 CH-High



NB-IoT Band 25 QPSK 3.75kHz 1@0 CH-High

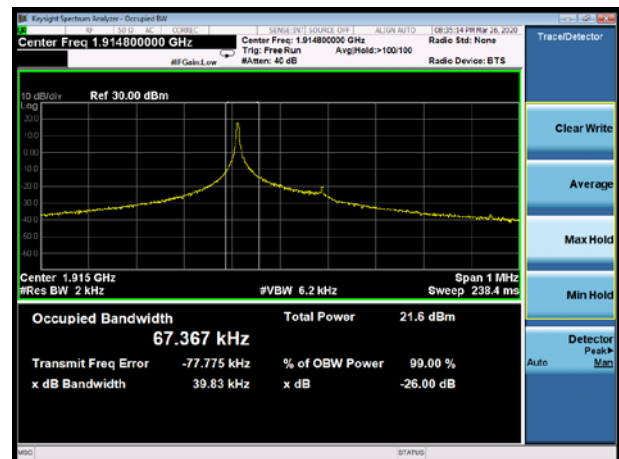

NB-IoT Band 25 QPSK 15kHz 1@0 CH-Low




NB-IoT Band 25 QPSK 15kHz 12@0 CH-Low




NB-IoT Band 25 QPSK 15kHz 1@0 CH-Middle




NB-IoT Band 25 QPSK 15kHz 12@0 CH-Middle

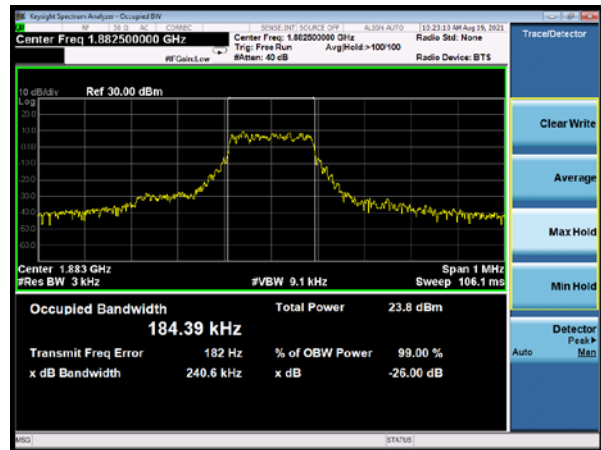

NB-IoT Band 25 QPSK 15kHz 1@0 CH-High

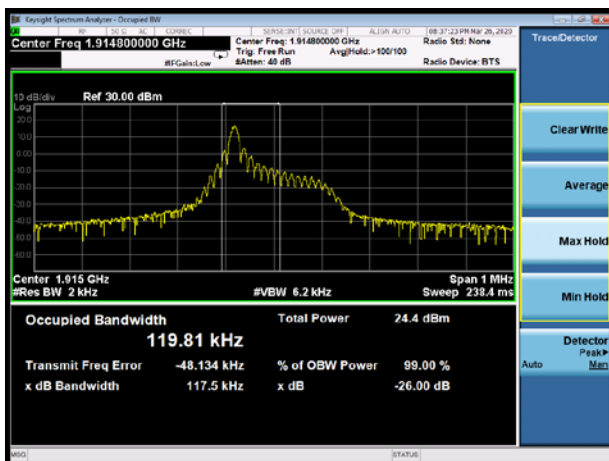

NB-IoT Band 25 QPSK 15kHz 12@0 CH-High

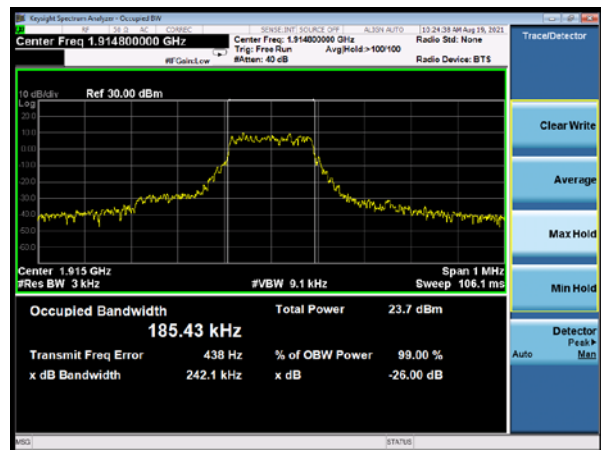

5.3.Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 750Hz, VBW is set to 2.4kHz for 3.75KHz single carrier, RBW is set to 1.2kHz, VBW is set to 3.6kHz for 15KHz single carrier, RBW is set to 1.3kHz, VBW is set to 3.9kHz for 15KHz single carrier, RBW is set to 2kHz, VBW is set to 6.2KHz for 15KHz full carrier. Spectrum analyzer plots are included on the following pages.

Test Setup

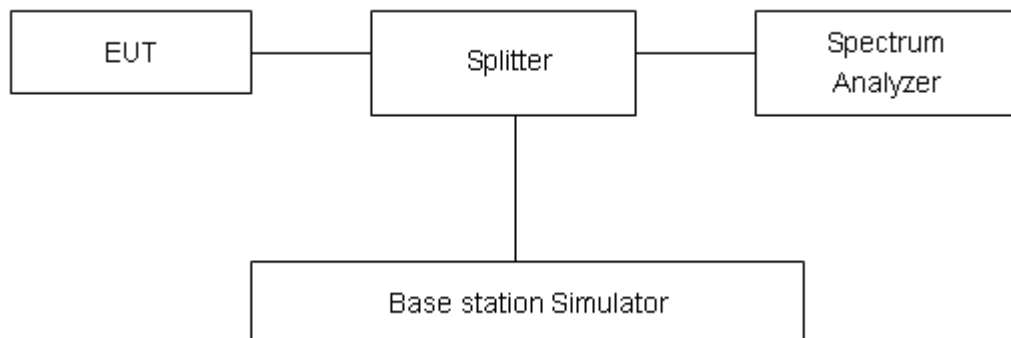

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”


Limit	-13 dBm
-------	---------

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Result:


NB-IoT Band 2 BPSK 3.75kHz 1@0 CH-Low

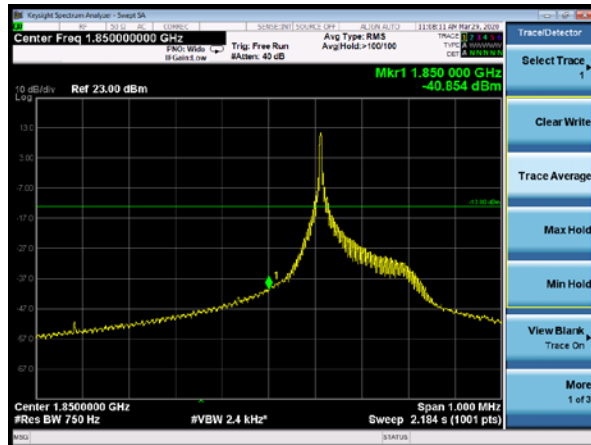


NB-IoT Band 2 BPSK 3.75kHz 1@47 CH-High

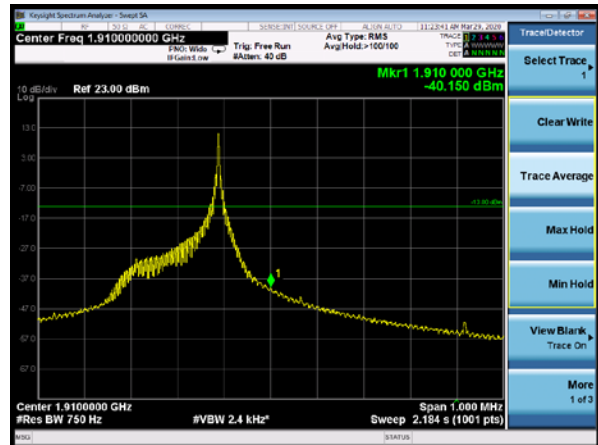


NB-IoT Band 2 BPSK 15kHz 1@0 CH-Low

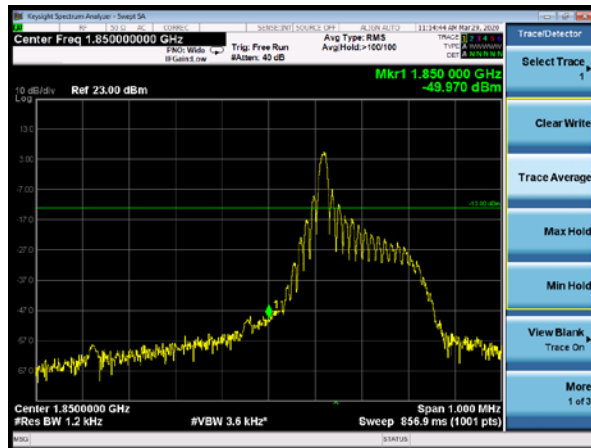


NB-IoT Band 2 BPSK 15kHz 1@11 CH-High

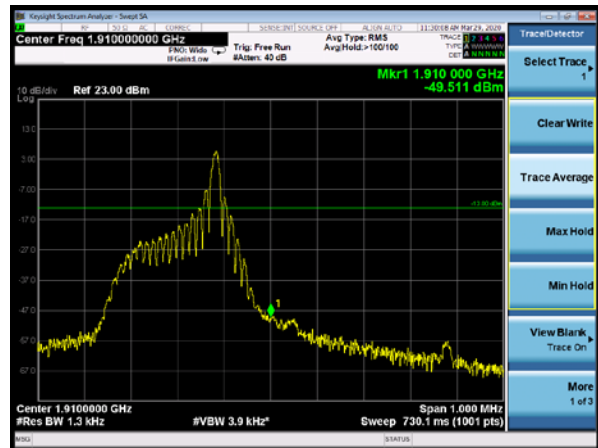


NB-IoT Band 2 QPSK 3.75kHz 1@0 CH-Low

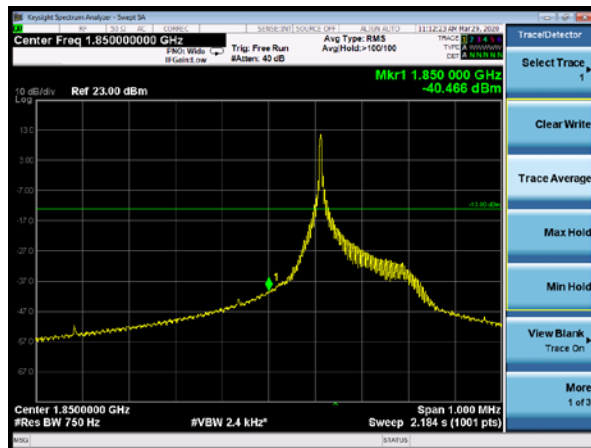


NB-IoT Band 2 QPSK 3.75kHz 1@47 CH-High

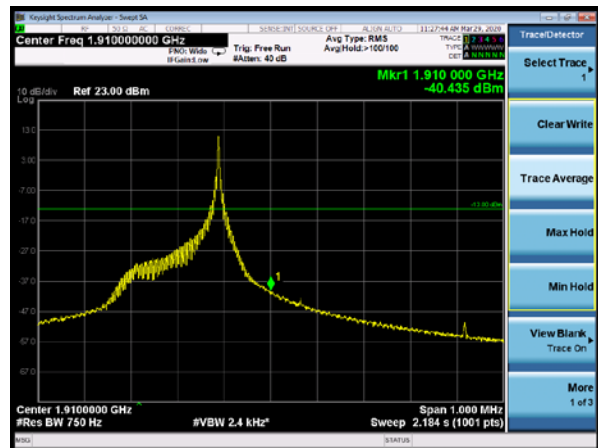


NB-IoT Band 2 QPSK 15kHz 1@0 CH-Low

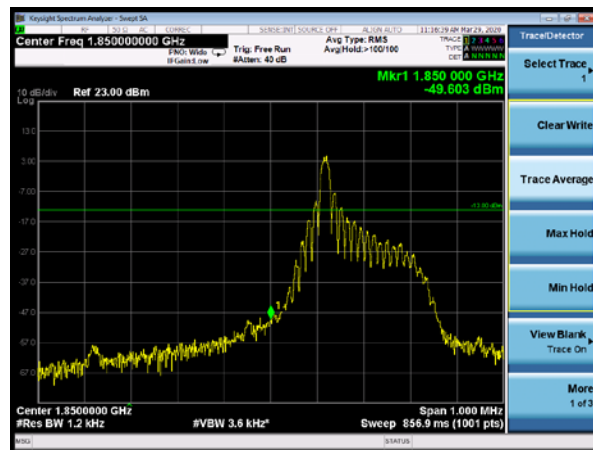


NB-IoT Band 2 QPSK 15kHz 1@11 CH-High

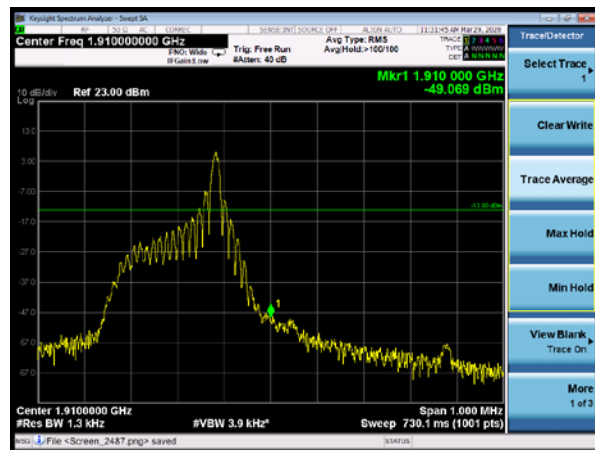


NB-IoT Band 2 QPSK 15kHz 12@0 CH-Low

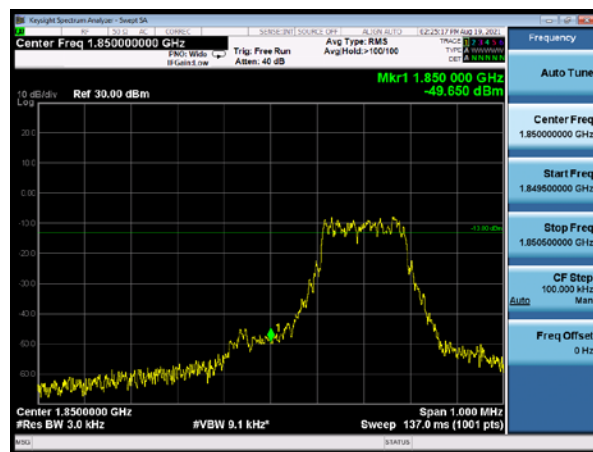


NB-IoT Band 2 QPSK 15kHz 12@0 CH-High

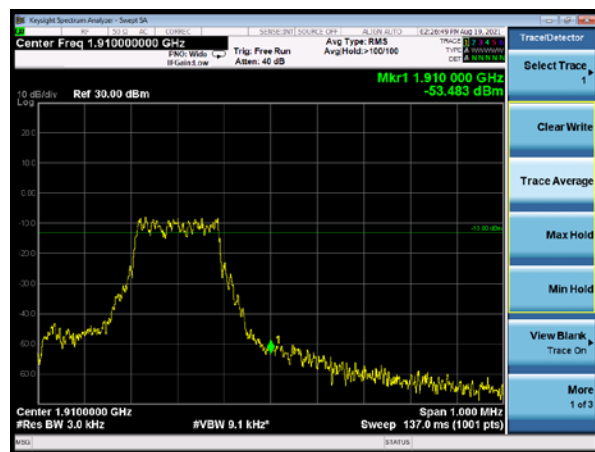


NB-IoT Band 25 BPSK 3.75kHz 1@0 CH-Low

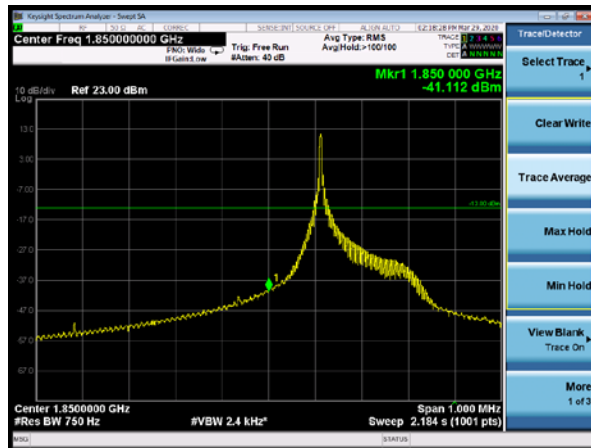


NB-IoT Band 25 BPSK 3.75kHz 1@47 CH-High

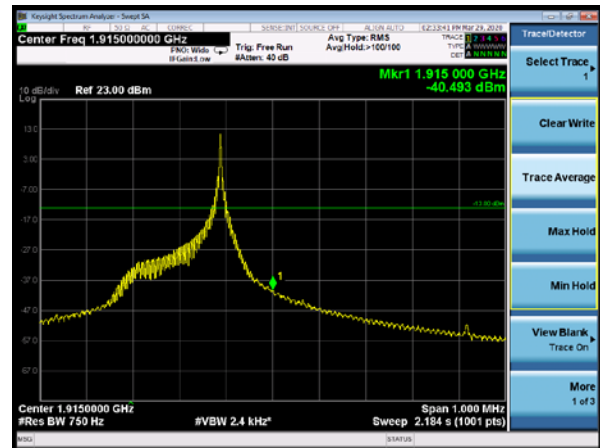


NB-IoT Band 25 BPSK 15kHz 1@0 CH-Low

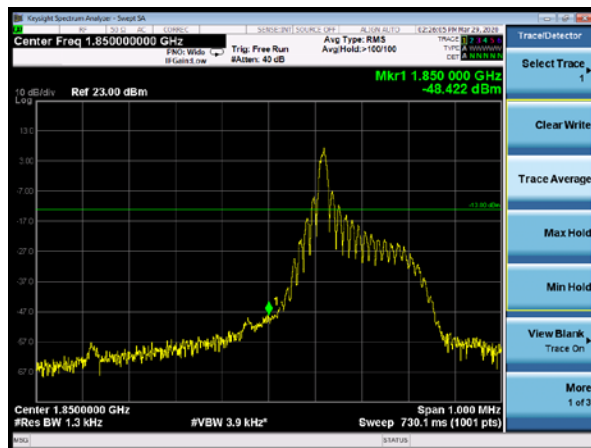


NB-IoT Band 25 BPSK 15kHz 1@11 CH-High

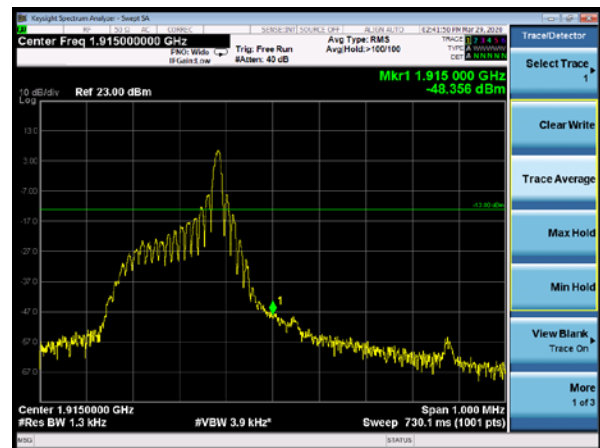

NB-IoT Band 25 QPSK 3.75kHz 1@0 CH-Low

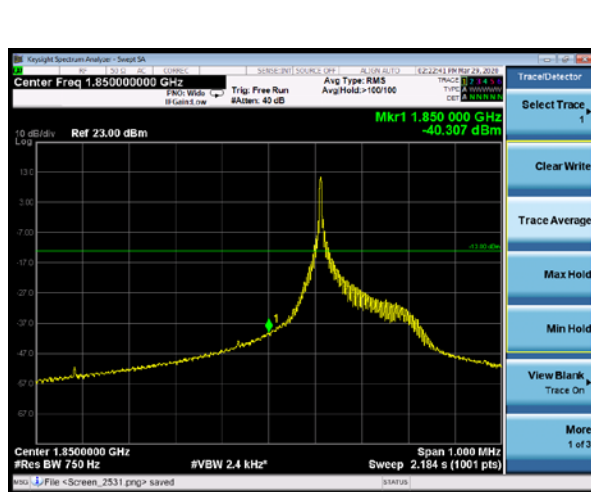


NB-IoT Band 25 QPSK 3.75kHz 1@47 CH-High

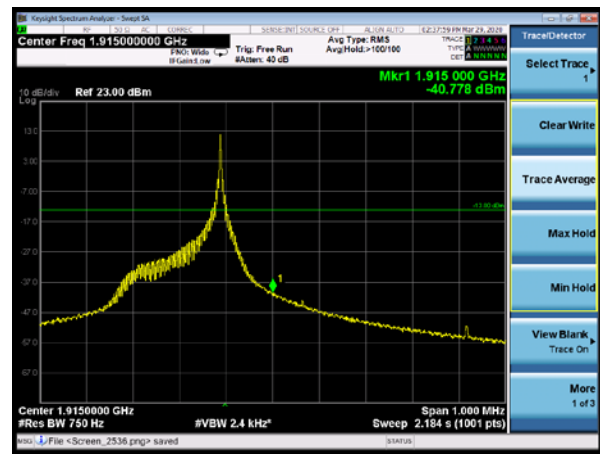





NB-IoT Band 25 QPSK 15kHz 1@0 CH-Low

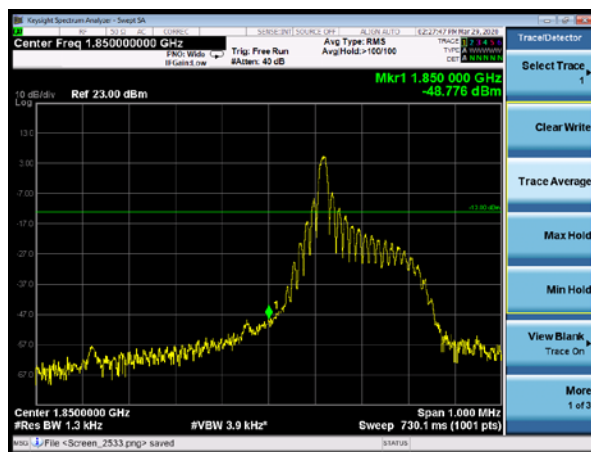


NB-IoT Band 25 QPSK 15kHz 1@11 CH-High

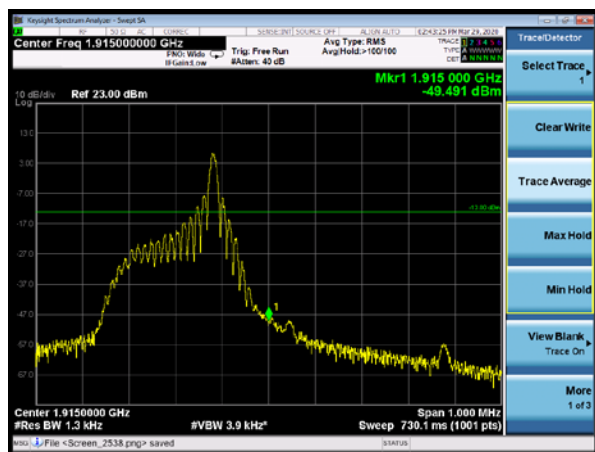

NB-IoT Band 25 QPSK 15kHz 12@0 CH-Low

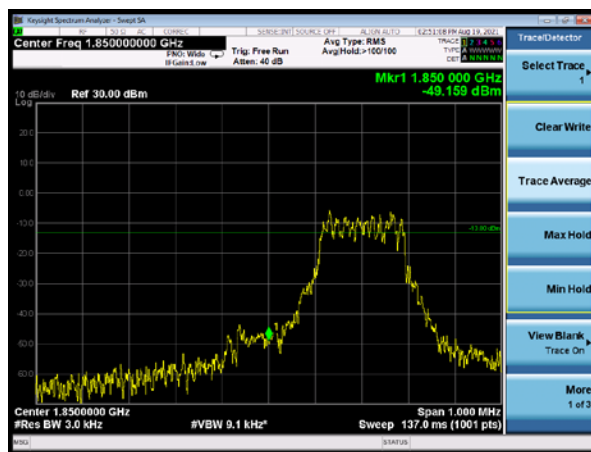

NB-IoT Band 25 QPSK 15kHz 12@0 CH-High

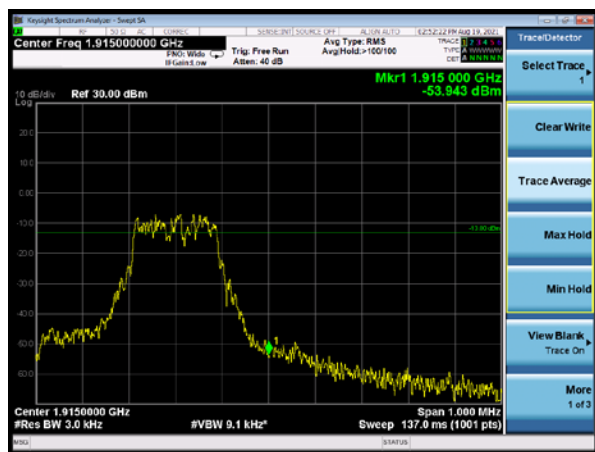

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

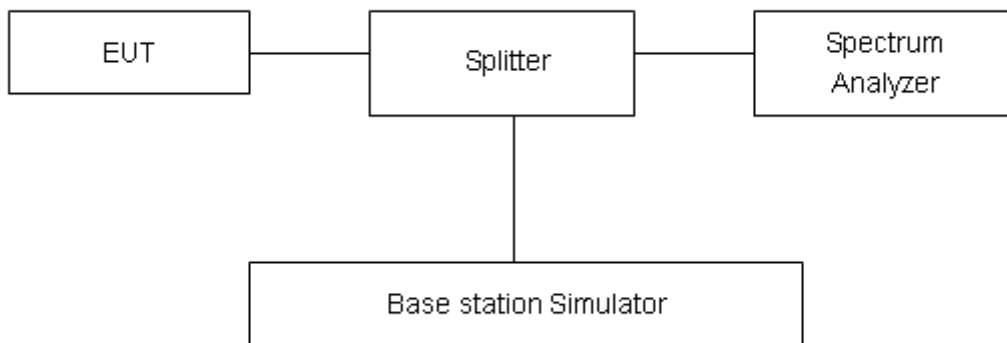

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Modulation	Sub-carrier spacing (KHz)	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak(dBm)	Avg(dBm)	PAPR(dB)		
NB-IoT Band 2 Standalone	BPSK	3.75	18900/1880.0	21.62	17.76	3.86	≤13	PASS
	QPSK	3.75	18900/1880.0	21.19	17.75	3.44	≤13	PASS
	BPSK	15	18900/1880.0	21.91	15.55	6.36	≤13	PASS
	QPSK	15	18900/1880.0	21.84	15.41	6.43	≤13	PASS

Mode	Modulation	Sub-carrier spacing (KHz)	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak(dBm)	Avg(dBm)	PAPR(dB)		
NB-IoT Band 25 Standalone	BPSK	3.75	26365/1882.5	21.52	17.67	3.85	≤13	PASS
	QPSK	3.75	26365/1882.5	21.04	17.61	3.43	≤13	PASS
	BPSK	15	26365/1882.5	21.60	15.13	6.47	≤13	PASS
	QPSK	15	26365/1882.5	21.53	15.16	6.37	≤13	PASS

5.5.Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3V, with a nominal voltage of 3.8V.

Test setup

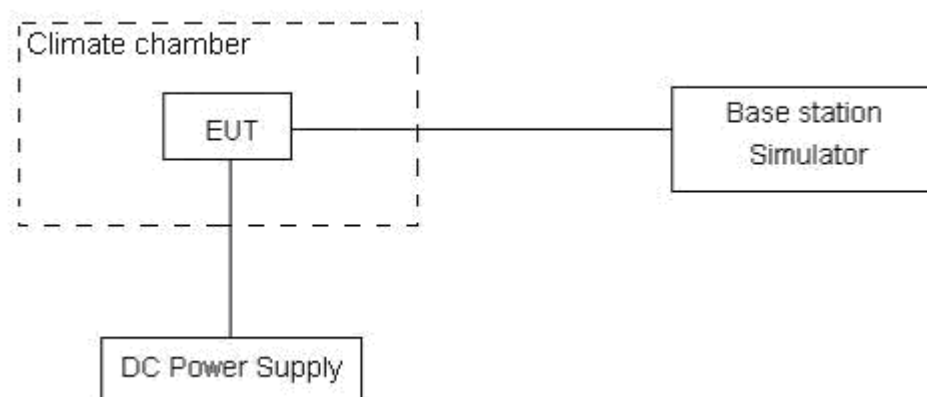

Limits

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.



Test Result

NB-IoT Band 2						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
Sub-carrier spacing (KHz)	3.75					
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal(25℃)	Normal	9.44	7.00	0.00502	0.00372	PASS
Extreme(85℃)		13.02	11.73	0.00692	0.00624	PASS
Extreme(80℃)		10.99	5.93	0.00584	0.00316	PASS
Extreme(70℃)		16.31	13.51	0.00868	0.00719	PASS
Extreme(60℃)		11.71	15.01	0.00623	0.00799	PASS
Extreme(50℃)		4.60	9.19	0.00245	0.00489	PASS
Extreme(40℃)		9.34	2.71	0.00497	0.00144	PASS
Extreme(30℃)		9.97	9.56	0.00530	0.00509	PASS
Extreme(20℃)		9.09	1.81	0.00484	0.00096	PASS
Extreme(10℃)		13.32	1.86	0.00709	0.00099	PASS
Extreme(0℃)		3.64	16.74	0.00194	0.00891	PASS
Extreme(-10℃)		15.69	6.35	0.00835	0.00338	PASS
Extreme(-20℃)		11.02	1.07	0.00586	0.00057	PASS
Extreme(-30℃)		14.04	17.54	0.00747	0.00933	PASS
Extreme(-40℃)		16.80	11.82	0.00894	0.00629	PASS
25℃	LV	12.78	1.25	0.00680	0.00066	PASS
	HV	14.36	11.85	0.00764	0.00631	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
Sub-carrier spacing (KHz)	15					
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal(25℃)	Normal	12.13	15.76	0.00645	0.00838	PASS
Extreme(85℃)		12.75	7.99	0.00678	0.00425	PASS
Extreme(80℃)		4.49	1.03	0.00239	0.00055	PASS
Extreme(70℃)		6.20	13.48	0.00330	0.00717	PASS
Extreme(60℃)		10.77	6.29	0.00573	0.00334	PASS
Extreme(50℃)		12.34	17.99	0.00656	0.00957	PASS
Extreme(40℃)		5.74	3.29	0.00305	0.00175	PASS
Extreme(30℃)		6.30	2.55	0.00335	0.00135	PASS
Extreme(20℃)		12.66	4.54	0.00674	0.00242	PASS
Extreme(10℃)		16.94	14.78	0.00901	0.00786	PASS
Extreme(0℃)		14.59	3.69	0.00776	0.00196	PASS
Extreme(-10℃)		13.80	5.84	0.00734	0.00311	PASS



Extreme(-20℃)		12.70	4.16	0.00675	0.00221	PASS
Extreme(-30℃)		7.45	9.17	0.00396	0.00488	PASS
Extreme(-40℃)		2.90	9.68	0.00155	0.00515	PASS
25℃	LV	4.98	1.05	0.00265	0.00056	PASS
	HV	9.85	10.16	0.00524	0.00540	PASS

NB-IoT Band 25						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
Sub-carrier spacing (KHz)	3.75					
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal(25℃)	Normal	1.51	7.81	0.00080	0.00415	PASS
Extreme(85℃)		15.03	11.15	0.00799	0.00593	PASS
Extreme(80℃)		14.39	2.79	0.00765	0.00148	PASS
Extreme(70℃)		4.50	9.45	0.00239	0.00503	PASS
Extreme(60℃)		1.79	11.96	0.00095	0.00636	PASS
Extreme(50℃)		12.74	9.11	0.00678	0.00484	PASS
Extreme(40℃)		3.12	6.95	0.00166	0.00370	PASS
Extreme(30℃)		1.95	9.59	0.00104	0.00510	PASS
Extreme(20℃)		1.41	8.24	0.00075	0.00438	PASS
Extreme(10℃)		17.47	6.56	0.00930	0.00349	PASS
Extreme(0℃)		9.42	3.85	0.00501	0.00205	PASS
Extreme(-10℃)		4.41	15.53	0.00234	0.00826	PASS
Extreme(-20℃)		13.19	10.62	0.00702	0.00565	PASS
Extreme(-30℃)		4.92	16.98	0.00262	0.00903	PASS
Extreme(-40℃)		1.34	1.75	0.00071	0.00093	PASS
25℃	LV	15.61	2.65	0.00830	0.00141	PASS
	HV	4.12	13.39	0.00219	0.00712	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability(ppm)	Frequency Stability(ppm)	Verdict
Sub-carrier spacing (KHz)	15					
Temperature	Voltage	BPSK	QPSK	BPSK	QPSK	
Normal(25℃)	Normal	10.60	2.69	0.00564	0.00143	PASS
Extreme(85℃)		1.64	17.13	0.00087	0.00911	PASS
Extreme(80℃)		7.79	4.68	0.00415	0.00249	PASS
Extreme(70℃)		8.46	13.40	0.00450	0.00713	PASS
Extreme(60℃)		9.64	8.02	0.00513	0.00427	PASS
Extreme(50℃)		14.05	14.84	0.00748	0.00789	PASS
Extreme(40℃)		10.72	4.47	0.00570	0.00238	PASS



Extreme(30℃)		7.85	3.72	0.00417	0.00198	PASS
Extreme(20℃)		10.61	3.99	0.00565	0.00212	PASS
Extreme(10℃)		9.01	2.81	0.00479	0.00149	PASS
Extreme(0℃)		14.93	2.35	0.00794	0.00125	PASS
Extreme(-10℃)		13.59	11.66	0.00723	0.00620	PASS
Extreme(-20℃)		15.19	8.18	0.00808	0.00435	PASS
Extreme(-30℃)		10.54	15.71	0.00561	0.00835	PASS
Extreme(-40℃)		17.78	9.33	0.00946	0.00497	PASS
25℃	LV	1.72	12.54	0.00092	0.00667	PASS
	HV	8.19	15.54	0.00435	0.00827	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

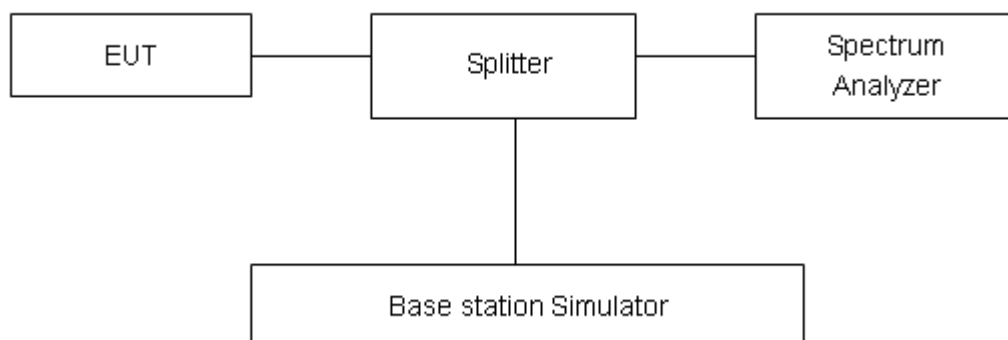

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
30MHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB



Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

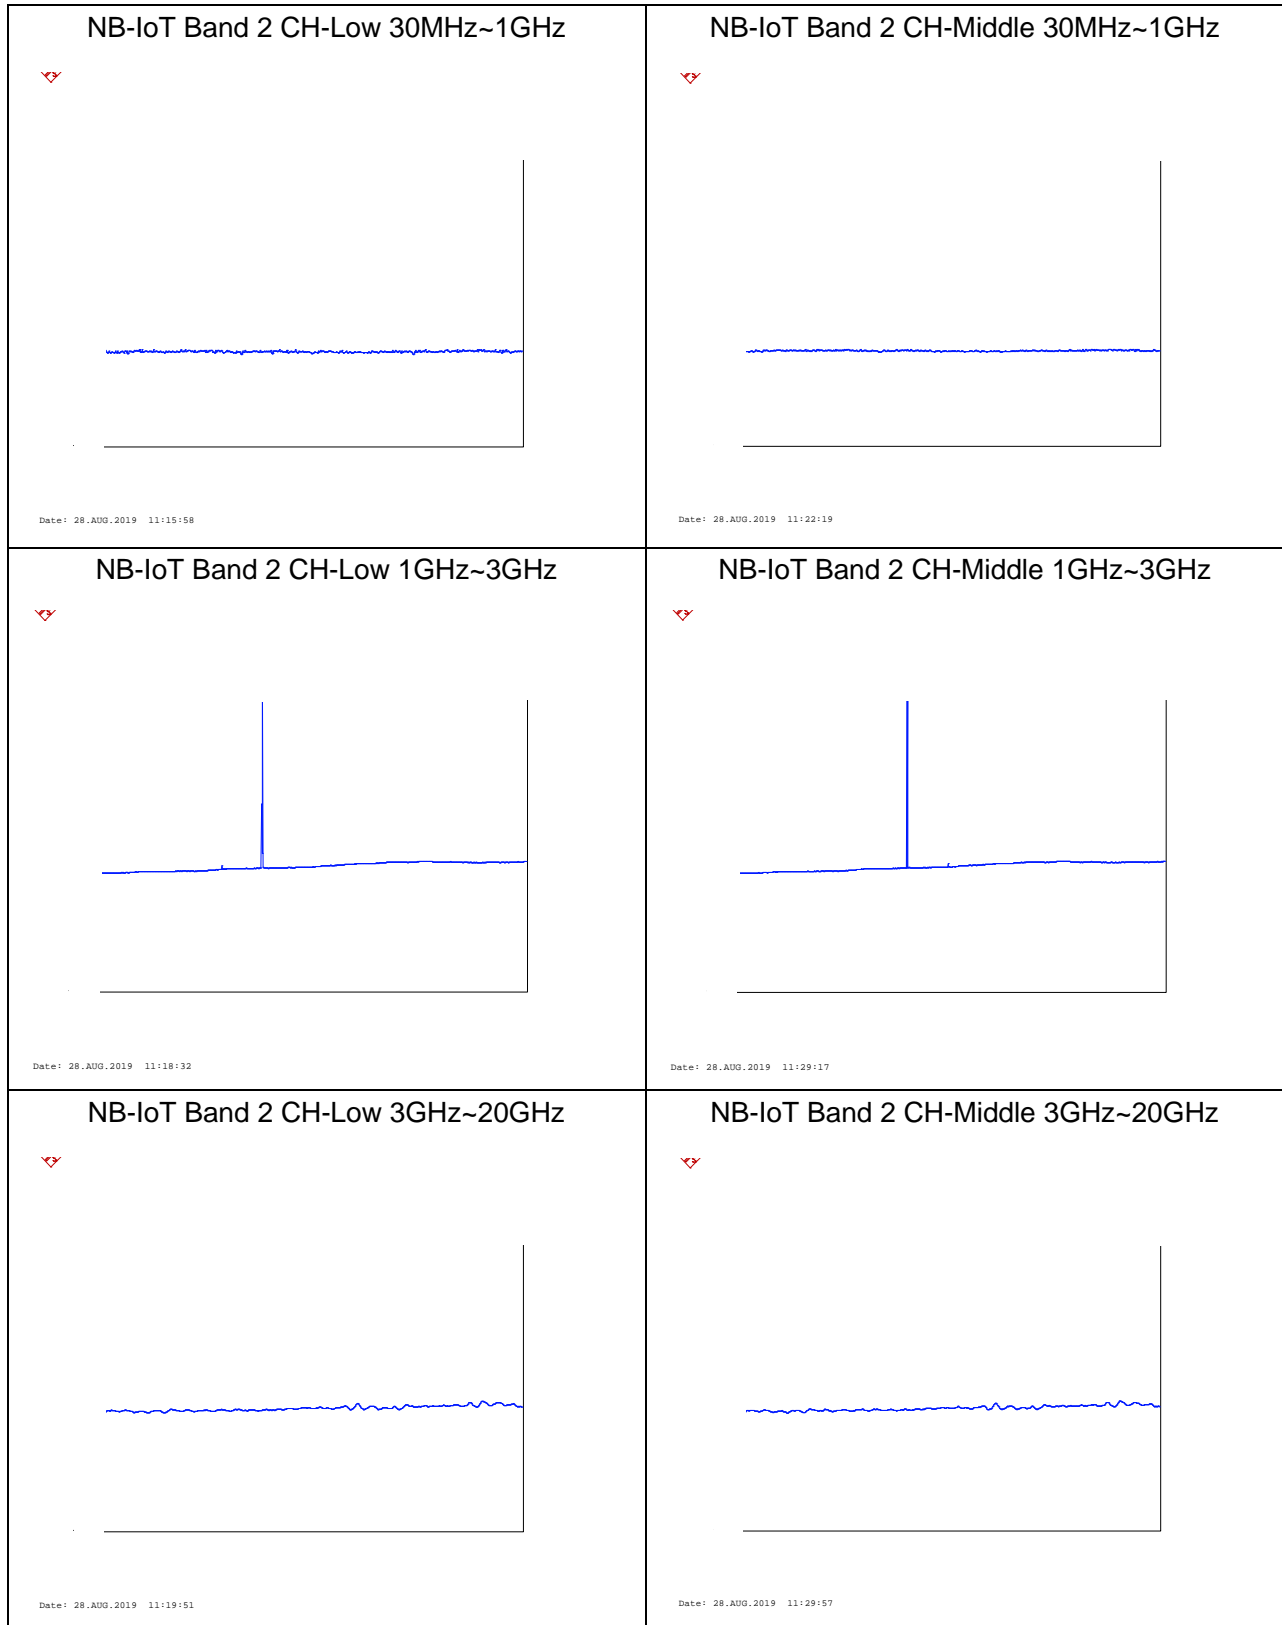




NB-IoT Band 2 CH-High 30MHz~1GHz

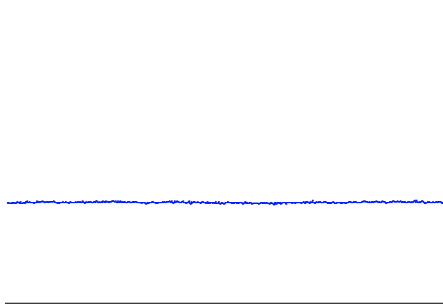


Date: 28.AUG.2019 11:31:53

NB-IoT Band 25 CH-Low 30MHz~1GHz

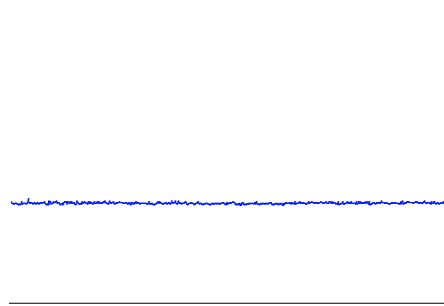


Date: 28.AUG.2019 11:43:33

NB-IoT Band 2 CH-High 1GHz~3GHz

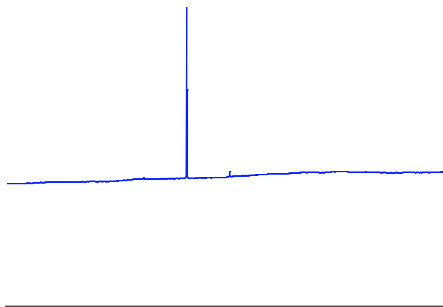


Date: 28.AUG.2019 11:32:40

NB-IoT Band 25 CH-Low 1GHz~3GHz

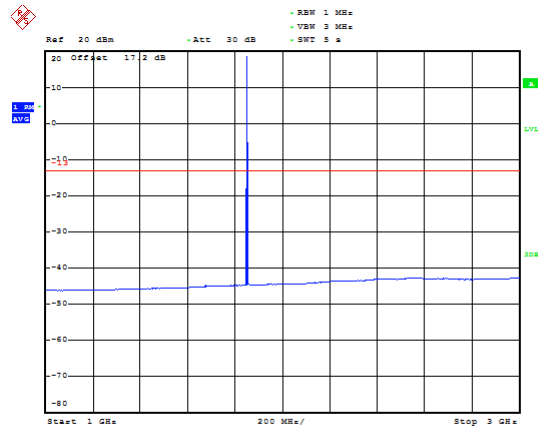


Date: 28.AUG.2019 13:18:47

NB-IoT Band 2 CH-High 3GHz~20GHz

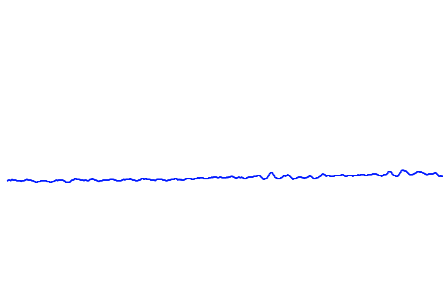

Date: 28.AUG.2019 11:33:11


NB-IoT Band 25 CH-Low 3GHz~20GHz

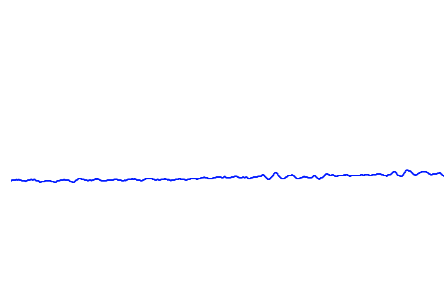

Date: 28.AUG.2019 13:24:43




NB-IoT Band 25 CH-Middle 30MHz~1GHz

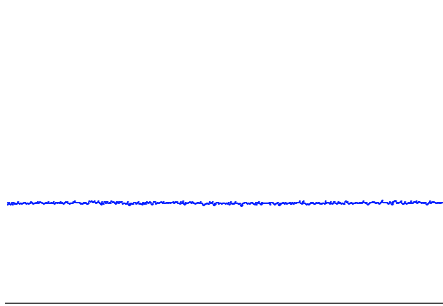


Date: 28.AUG.2019 11:49:10

NB-IoT Band 25 CH-High 30MHz~1GHz

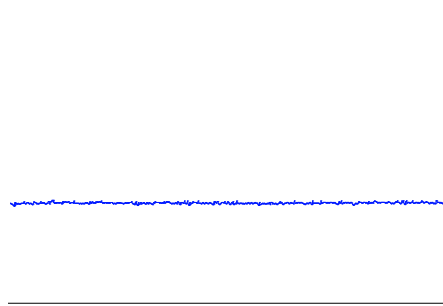


Date: 28.AUG.2019 11:50:58

NB-IoT Band 25 CH-Middle 1GHz~3GHz

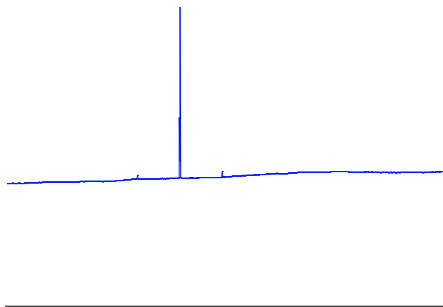


Date: 28.AUG.2019 13:22:17

NB-IoT Band 25 CH-High 1GHz~3GHz

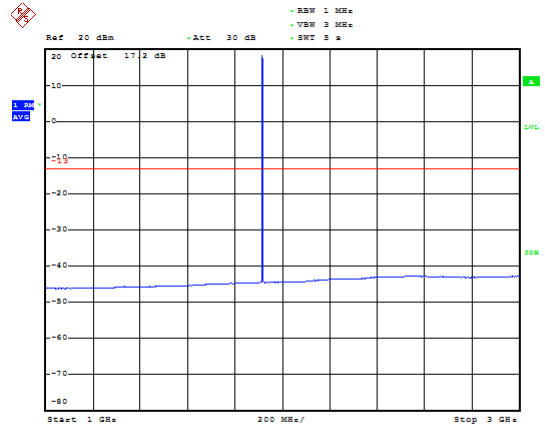


Date: 28.AUG.2019 13:22:21

NB-IoT Band 25 CH-Middle 3GHz~20GHz

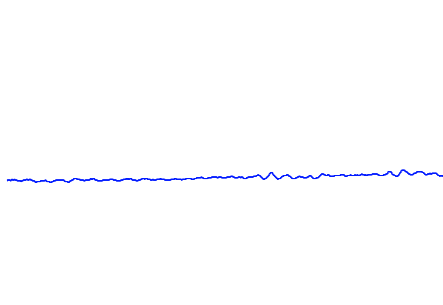

Date: 28.AUG.2019 13:30:52

NB-IoT Band 25 CH-High 3GHz~20GHz

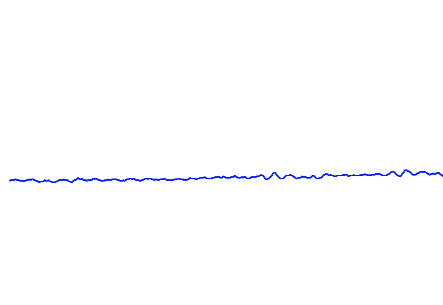

Date: 28.AUG.2019 13:31:32

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

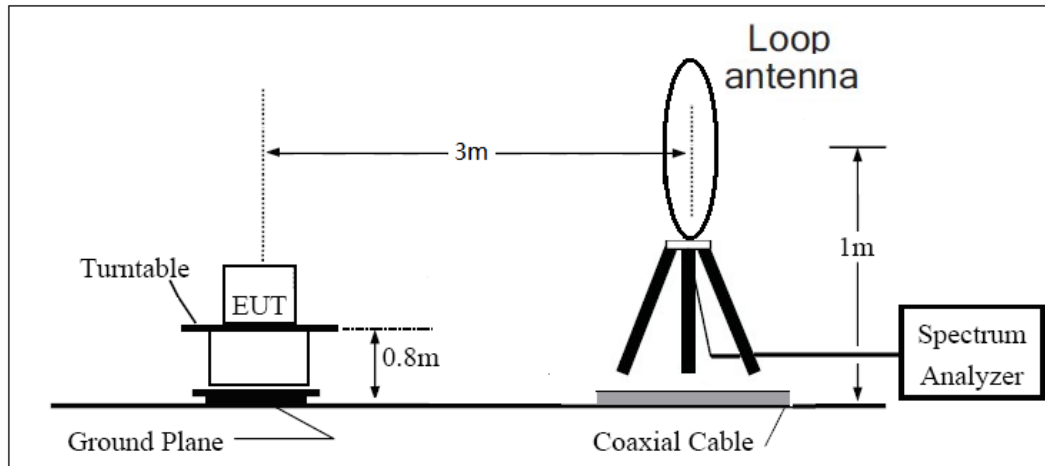

30MHz ~ 1GHz

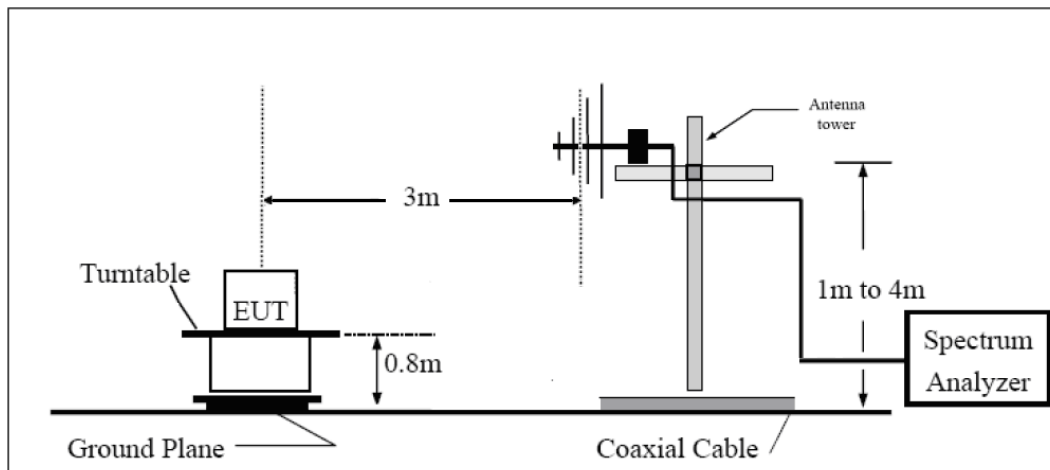

Above 1GHz

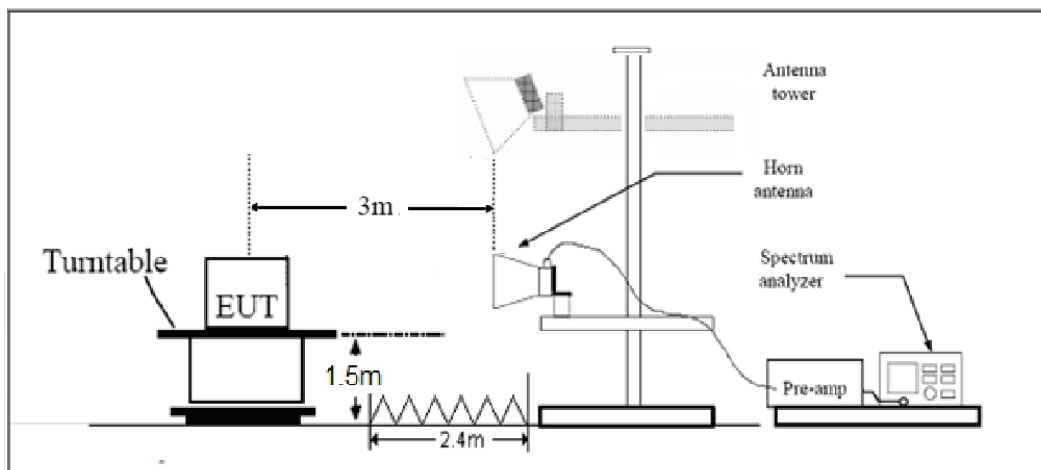

Note: Area side: 2.4mX3.6m

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

BG95-M3:

NB-IoT Band 2 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.5	-58.36	5.10	11.05	Horizontal	-52.41	-13.00	39.41	225
3	5550.8	-56.43	5.42	12.65	Horizontal	-49.20	-13.00	36.20	180
4	7402.8	-54.65	6.70	13.85	Horizontal	-47.50	-13.00	34.50	180
5	9253.5	-52.94	7.01	14.75	Horizontal	-45.20	-13.00	32.20	90
6	11104.2	-52.97	7.48	15.95	Horizontal	-44.50	-13.00	31.50	45
7	12954.9	-52.84	7.51	16.55	Horizontal	-43.80	-13.00	30.80	90
8	14805.6	-48.71	8.24	15.35	Horizontal	-41.60	-13.00	28.60	135
9	16656.3	-47.44	8.41	14.95	Horizontal	-40.90	-13.00	27.90	180
10	18507.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 2 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.8	-57.81	5.10	11.05	Horizontal	-51.86	-13.00	38.86	315
3	5638.9	-57.09	5.42	12.65	Horizontal	-49.86	-13.00	36.86	135
4	7520.0	-55.06	6.70	13.85	Horizontal	-47.91	-13.00	34.91	225
5	9400.0	-53.63	7.01	14.75	Horizontal	-45.89	-13.00	32.89	90
6	11280.0	-52.95	7.48	15.95	Horizontal	-44.48	-13.00	31.48	90
7	13160.0	-52.04	7.51	16.55	Horizontal	-43.00	-13.00	30.00	45
8	15040.0	-48.62	8.24	15.35	Horizontal	-41.51	-13.00	28.51	270
9	16920.0	-47.37	8.41	14.95	Horizontal	-40.83	-13.00	27.83	315
10	18800.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 2 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-57.21	5.10	11.05	Horizontal	-51.26	-13.00	38.26	180
3	5726.6	-56.53	5.42	12.65	Horizontal	-49.30	-13.00	36.30	180
4	7637.2	-54.37	6.70	13.85	Horizontal	-47.22	-13.00	34.22	90
5	9546.5	-52.84	7.01	14.75	Horizontal	-45.10	-13.00	32.10	45
6	11455.8	-52.72	7.48	15.95	Horizontal	-44.25	-13.00	31.25	90
7	13365.1	-52.95	7.51	16.55	Horizontal	-43.91	-13.00	30.91	135
8	15274.4	-48.41	8.24	15.35	Horizontal	-41.30	-13.00	28.30	180
9	17183.7	-46.79	8.41	14.95	Horizontal	-40.25	-13.00	27.25	45
10	19093.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

NB-IoT Band 25 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.13	-60.88	5.10	11.05	Horizontal	-54.93	-13.00	41.93	180
3	5550.38	-61.83	5.42	12.65	Horizontal	-54.60	-13.00	41.60	90
4	7230.00	-57.45	6.70	13.85	Horizontal	-50.30	-13.00	37.30	45
5	9255.38	-55.84	7.01	14.75	Horizontal	-48.10	-13.00	35.10	90
6	11109.37	-53.97	7.48	15.95	Horizontal	-45.50	-13.00	32.50	135
7	12942.0	-53.91	7.51	16.55	Horizontal	-44.87	-13.00	31.87	180
8	14831.63	-51.82	8.24	15.35	Horizontal	-44.71	-13.00	31.71	90
9	16666.50	-49.09	8.41	14.95	Horizontal	-42.55	-13.00	29.55	45
10	18515.00	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



NB-IoT Band 25 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3764.63	-62.76	5.10	11.05	Horizontal	-56.81	-13.00	43.81	180
3	5647.50	-62.50	5.42	12.65	Horizontal	-55.27	-13.00	42.27	90
4	7444.88	-57.34	6.70	13.85	Horizontal	-50.19	-13.00	37.19	45
5	9459.75	-56.07	7.01	14.75	Horizontal	-48.33	-13.00	35.33	90
6	11296.50	-54.92	7.48	15.95	Horizontal	-46.45	-13.00	33.45	135
7	13294.50	-54.73	7.51	16.55	Horizontal	-45.69	-13.00	32.69	180
8	14991.38	-54.92	8.24	15.35	Horizontal	-47.81	-13.00	34.81	90
9	16900.80	-48.31	8.41	14.95	Horizontal	-41.77	-13.00	28.77	45
10	18800.00	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 25 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3829.50	-62.62	5.10	11.05	Horizontal	-56.67	-13.00	43.67	180
3	5743.88	-62.42	5.42	12.65	Horizontal	-55.19	-13.00	42.19	315
4	7659.60	-57.86	6.70	13.85	Horizontal	-50.71	-12.00	38.71	0
5	9570.75	-56.33	7.01	14.75	Horizontal	-48.59	-13.00	35.59	135
6	11503.13	-53.79	7.48	15.95	Horizontal	-45.32	-13.00	32.32	225
7	13398.30	-53.02	7.51	16.55	Horizontal	-43.98	-13.00	30.98	90
8	15316.50	-52.83	8.24	15.35	Horizontal	-45.72	-13.00	32.72	135
9	17247.30	-49.93	8.41	14.95	Horizontal	-43.39	-13.00	30.39	45
10	19085.00	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

BG95-M3 MINIPCIE:

NB-IoT Band 2 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-58.79	5.10	11.05	Horizontal	-52.84	-13.00	39.84	90
3	5640.0	-61.42	5.42	12.65	Horizontal	-54.19	-13.00	41.19	45
4	7520.0	-56.51	6.70	13.85	Horizontal	-49.36	-13.00	36.36	270
5	9400.0	-55.82	7.01	14.75	Horizontal	-48.08	-13.00	35.08	0
6	11280.0	-51.78	7.48	15.95	Horizontal	-43.31	-13.00	30.31	0
7	13160.0	-52.05	7.51	16.55	Horizontal	-43.01	-13.00	30.01	315
8	15040.0	-52.77	8.24	15.35	Horizontal	-45.66	-13.00	32.66	135
9	16920.0	-48.31	8.41	14.95	Horizontal	-41.77	-13.00	28.77	45
10	18800.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

NB-IoT Band 2 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.2	-61.85	5.10	11.05	Horizontal	-55.90	-13.00	42.90	90
3	5550.3	-61.04	5.42	12.65	Horizontal	-53.81	-13.00	40.81	270
4	7400.4	-57.87	6.70	13.85	Horizontal	-50.72	-13.00	37.72	45
5	9250.5	-54.31	7.01	14.75	Horizontal	-46.57	-13.00	33.57	315
6	11100.6	-53.72	7.48	15.95	Horizontal	-45.25	-13.00	32.25	0
7	12950.7	-53.74	7.51	16.55	Horizontal	-44.70	-13.00	31.70	45
8	14800.8	-51.03	8.24	15.35	Horizontal	-43.92	-13.00	30.92	45
9	16650.9	-49.15	8.41	14.95	Horizontal	-42.61	-13.00	29.61	270
10	18501.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

NB-IoT Band 2 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3819.8	-61.51	5.10	11.05	Horizontal	-55.56	-13.00	42.56	270
3	5729.7	-61.36	5.42	12.65	Horizontal	-54.13	-13.00	41.13	45
4	7639.6	-56.76	6.70	13.85	Horizontal	-49.61	-13.00	36.61	90
5	9549.5	-54.11	7.01	14.75	Horizontal	-46.37	-13.00	33.37	90
6	11459.4	-53.33	7.48	15.95	Horizontal	-44.86	-13.00	31.86	0
7	13369.3	-53.85	7.51	16.55	Horizontal	-44.81	-13.00	31.81	315
8	15279.2	-53.33	8.24	15.35	Horizontal	-46.22	-13.00	33.22	180
9	17189.1	-47.94	8.41	14.95	Horizontal	-41.40	-13.00	28.40	45
10	19099.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 25 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.2	-52.37	5.10	11.05	Horizontal	-46.42	-13.00	33.42	90
3	5550.3	-61.04	5.42	12.65	Horizontal	-53.81	-13.00	40.81	135
4	7400.4	-56.75	6.70	13.85	Horizontal	-49.60	-13.00	36.60	180
5	9250.5	-54.50	7.01	14.75	Horizontal	-46.76	-13.00	33.76	315
6	11100.6	-53.00	7.48	15.95	Horizontal	-44.53	-13.00	31.53	45
7	12950.7	-53.78	7.51	16.55	Horizontal	-44.74	-13.00	31.74	270
8	14800.8	-48.99	8.24	15.35	Horizontal	-41.88	-13.00	28.88	180
9	16650.9	-52.64	8.41	14.95	Horizontal	-46.10	-13.00	33.10	225
10	18501.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



NB-IoT Band 25 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3765.0	-53.53	5.10	11.05	Horizontal	-47.58	-13.00	34.58	225
3	5647.5	-60.31	5.42	12.65	Horizontal	-53.08	-13.00	40.08	0
4	7530.0	-56.59	6.70	13.85	Horizontal	-49.44	-13.00	36.44	180
5	9412.5	-53.80	7.01	14.75	Horizontal	-46.06	-13.00	33.06	315
6	11295.0	-54.03	7.48	15.95	Horizontal	-45.56	-13.00	32.56	90
7	13177.5	-53.97	7.51	16.55	Horizontal	-44.93	-13.00	31.93	45
8	15060.0	-48.91	8.24	15.35	Horizontal	-41.80	-13.00	28.80	315
9	16942.5	-48.63	8.41	14.95	Horizontal	-42.09	-13.00	29.09	180
10	18825.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

NB-IoT Band 25 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3829.8	-56.63	5.10	11.05	Horizontal	-50.68	-13.00	37.68	135
3	5744.7	-61.32	5.42	12.65	Horizontal	-54.09	-13.00	41.09	45
4	7659.6	-56.56	6.70	13.85	Horizontal	-49.41	-13.00	36.41	0
5	9574.5	-55.29	7.01	14.75	Horizontal	-47.55	-13.00	34.55	90
6	11489.4	-52.41	7.48	15.95	Horizontal	-43.94	-13.00	30.94	180
7	13404.3	-53.01	7.51	16.55	Horizontal	-43.97	-13.00	30.97	315
8	15319.2	-54.07	8.24	15.35	Horizontal	-46.96	-13.00	33.96	270
9	17234.1	-48.33	8.41	14.95	Horizontal	-41.79	-13.00	28.79	225
10	19149.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Date of Testing (original) March 5, 2020 ~March 30, 2020 and June 6, 2020:

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/
Wireless Test Set	StarPoint	SP8315	SP8315-1202	2020-05-18	2021-05-17
Wireless Test Set	StarPoint	SP8315	SP8315-1203	2020-05-18	2021-05-17

**Date of Testing (variant): July 14, 2021 ~ August 9, 2021**

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2021-05-15	2022-05-14
Base Station Simulator	R&S	CMW500	113824	2021-05-15	2022-05-14
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2021-5-15	2022-5-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Signal generator	R&S	SMB 100A	102594	2021-05-15	2022-05-14
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2021-06-09	2021-12-08
RF Cable	Agilent	SMA 15cm	0001	2021-06-09	2021-12-08
Software	R&S	EMC32	9.26.0	/	/

*******END OF REPORT *******



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Product Change Description

The Product Change Description are submitted separately.