



RF TEST REPORT

Applicant Quectel Wireless Solutions Co., Ltd
FCC ID XMR201910BG95M3
Product LTE Cat M1 & Cat NB2 & EGPRS Module
Brand Quectel
Model BG95-M3, BG95-M3 MINIPCIE
Report No. R2106A0549-R8
Issue Date September 6, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 90S (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Peng Tao

Prepared by: Peng Tao

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	8
5.1. RF Power Output and Effective Radiated Power	8
5.2. Occupied Bandwidth	11
5.3. Emission Mask	15
5.4. Peak-to-Average Power Ratio (PAPR)	22
5.5. Frequency Stability	24
5.6. Spurious Emissions at Antenna Terminals	27
5.7. Radiates Spurious Emission	32
6. Main Test Instruments	39
ANNEX A: The EUT Appearance	41
ANNEX B: Test Setup Photos	42
ANNEX C: Product Change Description	43

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.691	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 90.213	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 90.691	PASS
7	Radiates Spurious Emission	2.1053 /90.691	PASS
Date of Testing: original :August 20, 2019 ~ September 11, 2019 and June 5, 2020 (variant): July 14, 2021 ~ August 9, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

BG95-M3, BG95-M3 MINIPCIE (Report No.: R2106A0549-R8) is a variant model of BG95-M3, BG95-M3 MINIPCIE (Report No.: R2006A0361-R8V1). The product only changes PA components. Test values duplicated from Original for variant. Test items tested see the table below.

Test Case	original	variant
RF Power Output and Effective Radiated Power	PASS	Retest
Occupied Bandwidth	PASS	Refer to original
Band Edge Compliance	PASS	Refer to original
Peak-to-Average Power Ratio	PASS	Refer to original
Frequency Stability	PASS	Refer to original
Spurious Emissions at Antenna Terminals	PASS	Refer to original
Radiates Spurious Emission	PASS	Refer to original

The detailed product change description please refers to the Difference Declaration Letter.



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

General Information

General Information

EUT Description			
Model	BG95-M3, BG95-M3 MINIPCIE		
IMEI	BG95-M3: 864475048391303 BG95-M3 MINIPCIE: 864475048389810		
Hardware Version	R2.1		
Software Version	BG95M3LAR02A03		
Power Supply	External power supply		
Antenna Type	External Antenna		
Antenna Gain	LTE Band 26: 3dBi		
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK 16QAM;		
LTE Category	M1		
Maximum E.R.P.	LTE Band 26:	22.38dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C Highest: +85°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	814 ~ 824	859 ~ 869
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			
2. The series model number is: BG95-M3 MINIPCIE. The difference of these models are have different marketing requirement.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 90S (2020)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2020)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF Power Output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	-	O	-
Emission Mask	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}.$$

Test Setup

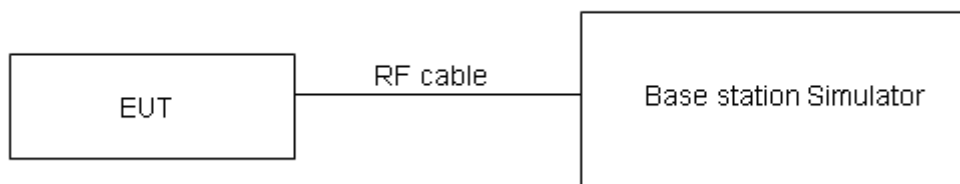

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$.

**Test Results****Original**

Band26	Channel/ Frequency(MHz)	Index	RB# RB start	Conducted Power (dBm)	
				QPSK	16QAM
1.4MHz	26697/814.7	0	1#0	20.05	20.10
		0	6#0	18.81	18.61
	26740/819	0	1#0	20.03	20.05
		0	6#0	18.78	18.53
	26783/823.3	0	1#5	19.83	19.94
		0	6#0	18.57	18.34
3MHz	26705/815.5	0	1#0	20.31	20.23
		0	6#0	18.73	18.75
	26740/819	0	1#0	20.28	20.22
		0	6#0	18.73	18.85
	26775/822.5	1	1#5	19.92	19.80
		1	6#0	18.57	18.35
5MHz	26715/816.5	3	1#0	20.46	19.80
		0	6#0	19.86	19.99
	26740/819	0	1#0	20.28	19.64
		0	6#0	19.86	19.83
	26765/821.5	0	1#5	20.06	20.31
		3	6#0	19.77	20.00
10MHz	26740/819	0	1#0	20.52	19.86
		0	4#0	19.89	20.55

Variant

Band26	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)		ERP(dBm)	
				QPSK	16QAM	QPSK	16QAM
1.4MHz	26697/814.7	0	1#0	21.22	20.23	22.07	21.08
		0	6#0	19.06	19.24	19.91	20.09
	26740/819	0	1#0	21.26	20.22	22.11	21.07
		0	6#0	19.06	19.13	19.91	19.98
	26783/823.3	0	1#5	21.17	20.14	22.02	20.99
		0	6#0	19.07	18.95	19.92	19.80
3MHz	26705/815.5	0	1#0	21.26	20.27	22.11	21.12
		0	6#0	19.07	19.14	19.92	19.99
	26740/819	0	1#0	21.46	20.01	22.31	20.86
		0	6#0	19.06	19.00	19.91	19.85
	26775/822.5	1	1#5	21.15	20.18	22.00	21.03
		0	6#0	18.99	19.08	19.84	19.93
5MHz	26715/816.5	3	1#0	21.50	21.44	22.35	22.29
		0	6#0	19.93	20.07	20.78	20.92
	26740/819	0	1#0	21.30	21.41	22.15	22.26
		0	6#0	19.95	20.04	20.80	20.89
	26765/821.5	0	1#5	21.04	20.05	21.89	20.90
		0	6#0	19.93	20.14	20.78	20.99
10MHz	26740/819	0	1#0	21.50	21.53	22.35	22.38
		0	4#0	21.01	21.03	21.86	21.88

5.2. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 26

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

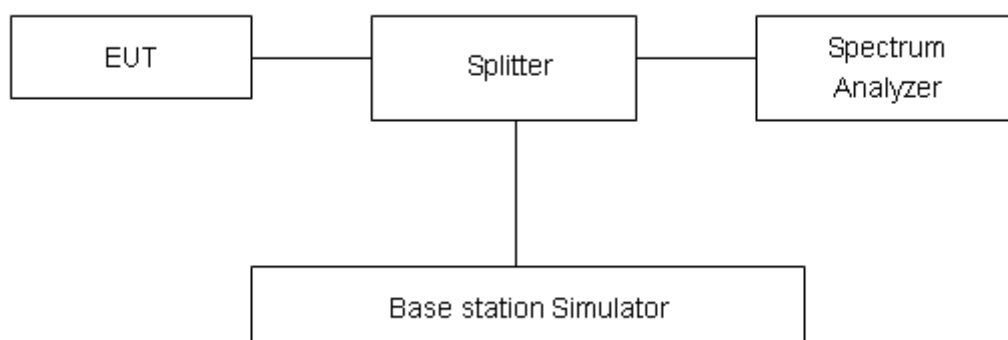

Limits

No specific occupied bandwidth requirements in part 2.1049.

Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.


**Test Result**

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
Band26	1.4MHz	QPSK	26740/819	6#0	0	1.1053	1.311
		16QAM	26740/819	6#0	0	0.9432	1.159
	3MHz	QPSK	26740/819	6#0	0	1.1083	1.345
		16QAM	26740/819	6#0	0	0.9496	1.165
	5MHz	QPSK	26740/819	6#0	0	1.1118	1.320
		16QAM	26740/819	6#0	0	0.9481	1.196
	10MHz	QPSK	26740/819	6#0	0	1.1279	1.340
		16QAM	26740/819	6#0	0	0.9647	1.208


LTE Band 26 QPSK 1.4MHz CH-Middle

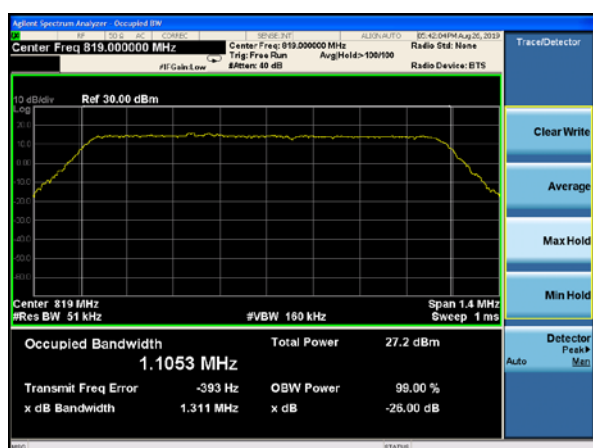


LTE Band 26 QPSK 3MHz CH-Middle

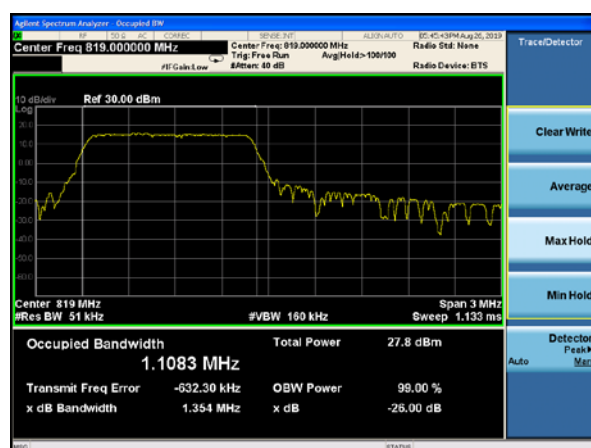


LTE Band 26 QPSK 5MHz CH-Middle

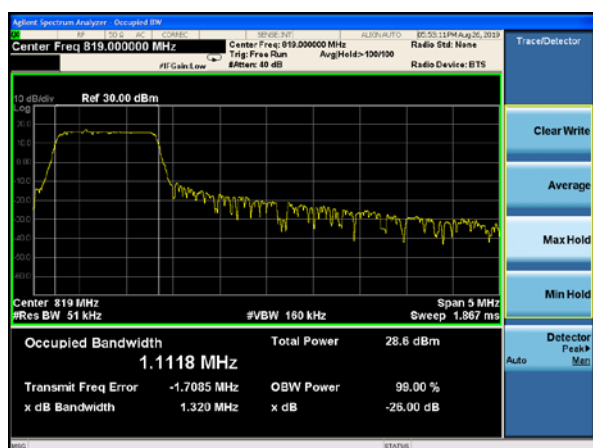


LTE Band 26 QPSK 10MHz CH-Middle

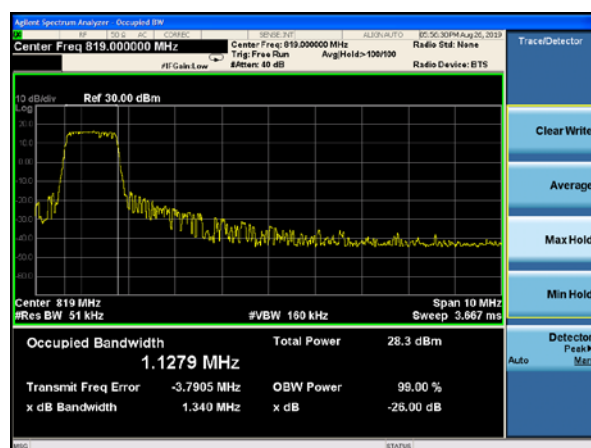


LTE Band 26 16QAM 1.4MHz CH-Middle

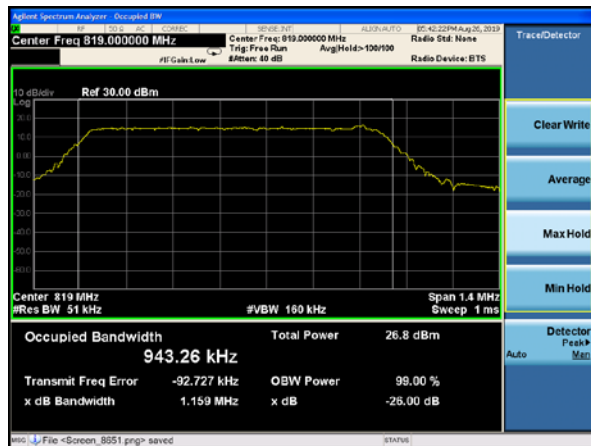


LTE Band 26 16QAM 3MHz CH-Middle

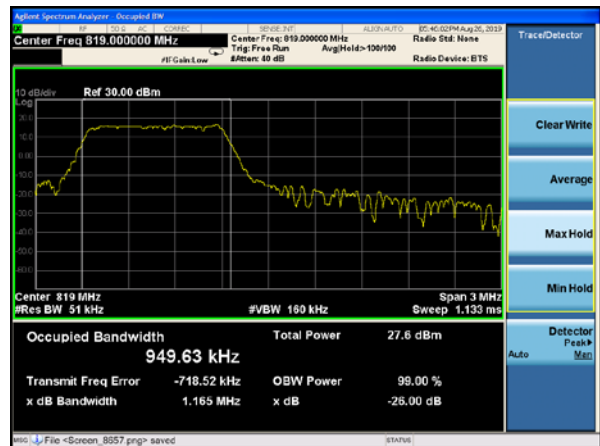

LTE Band 26 16QAM 5MHz CH-Middle

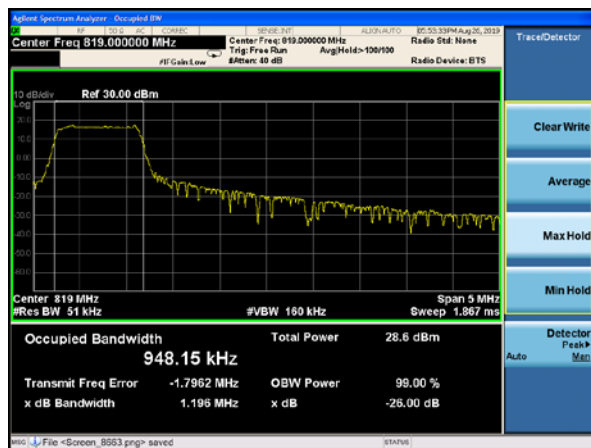

LTE Band 26 16QAM 10MHz CH-Middle

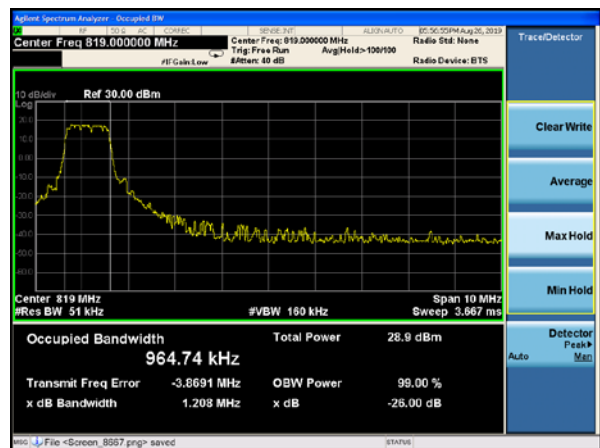

5.3. Emission Mask


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. For Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.

Test Setup

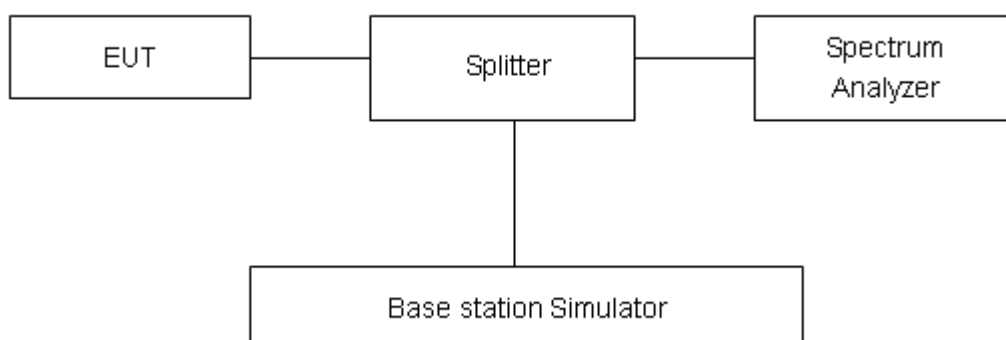

Limits

Rule Part 90.691(a) specifies that “ For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.




Test Result:


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

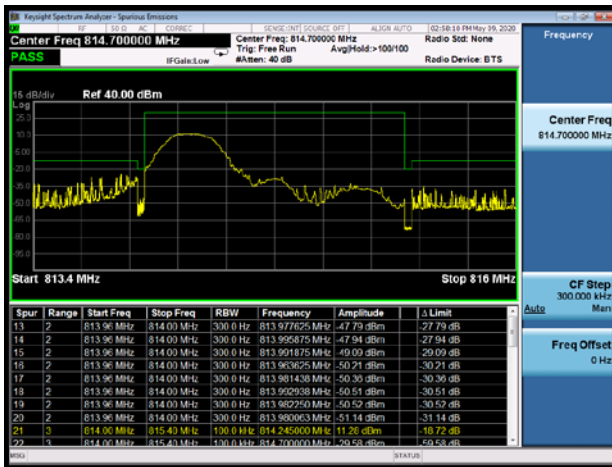


LTE Band 26 QPSK 1.4MHz CH-High 1RB

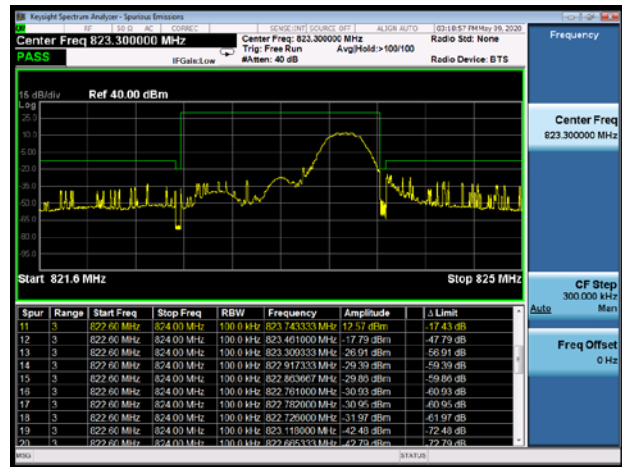


LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

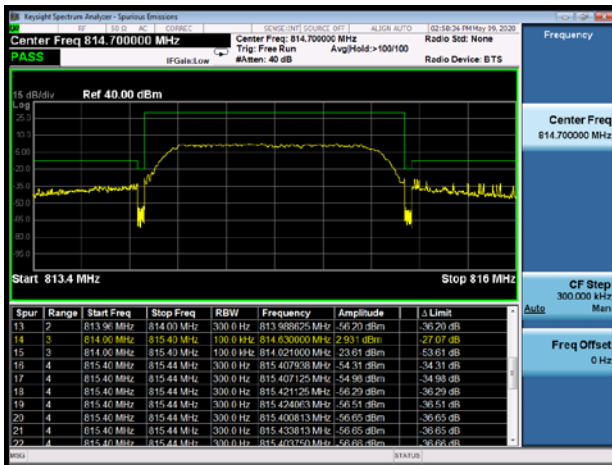


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

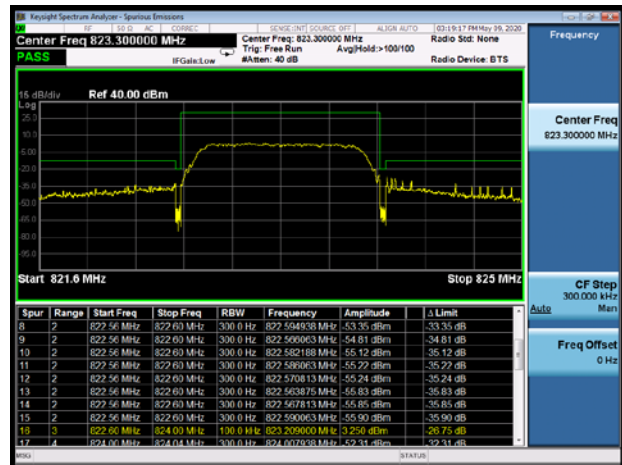

LTE Band 26 QPSK 3MHz CH-Low 1RB

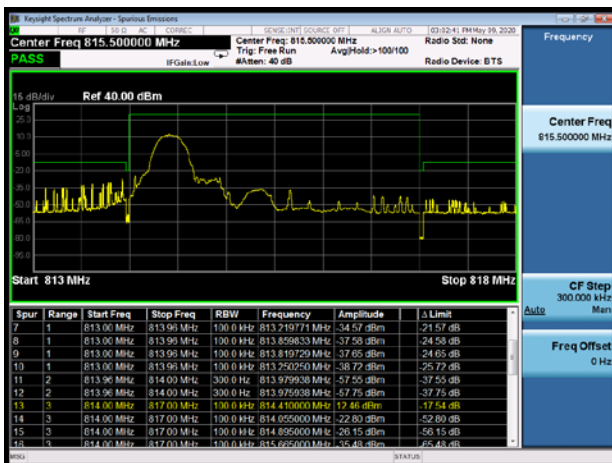


LTE Band 26 QPSK 3MHz CH-High 1RB

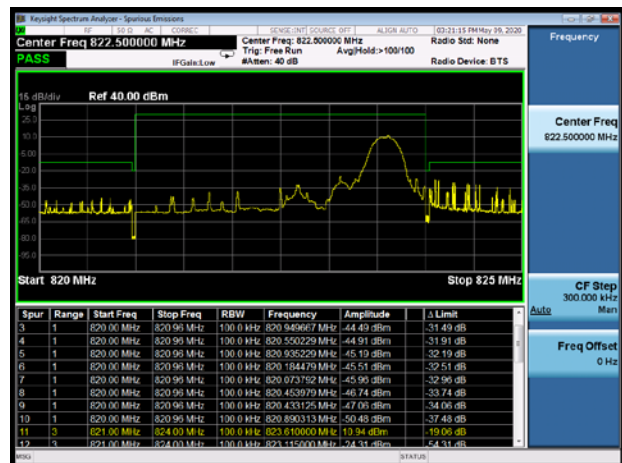

LTE Band 26 QPSK 3MHz CH-Low 100%RB




LTE Band 26 QPSK 3MHz CH-High 100%RB

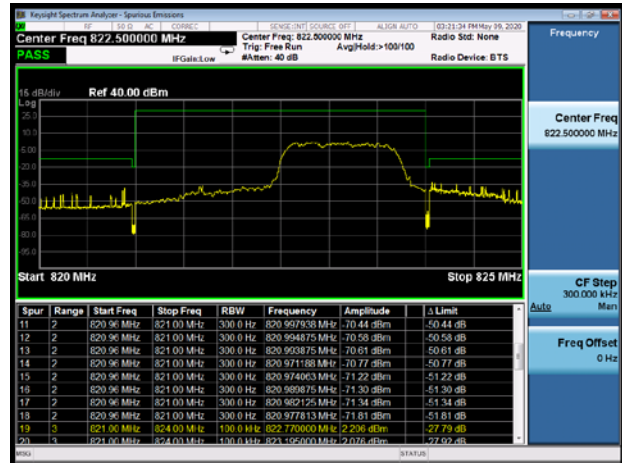


LTE Band 26 QPSK 5MHz CH-Low 1RB




LTE Band 26 QPSK 5MHz CH-High 1RB

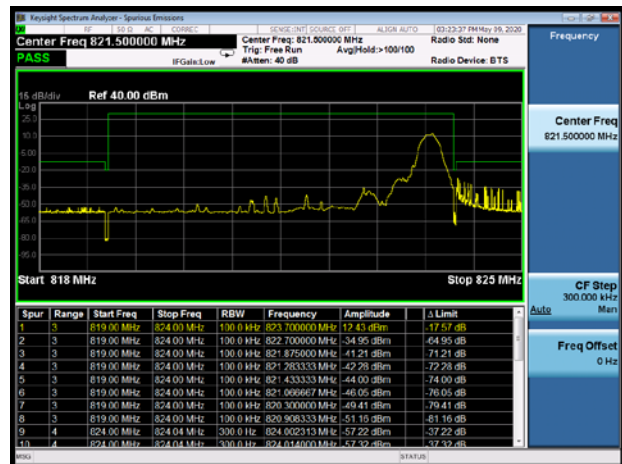

LTE Band 26 QPSK 5MHz CH-Low 100%RB

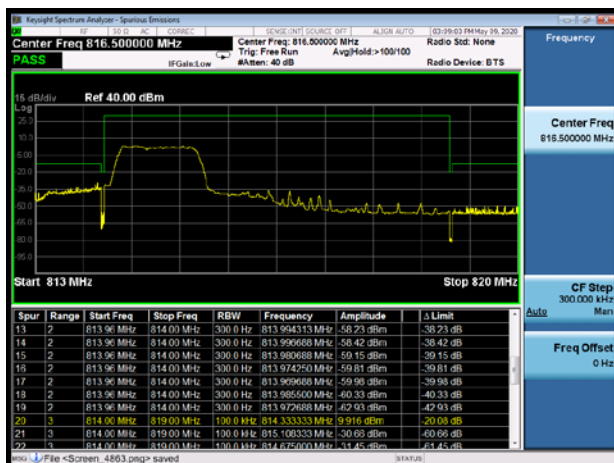


LTE Band 26 QPSK 5MHz CH-High 100%RB

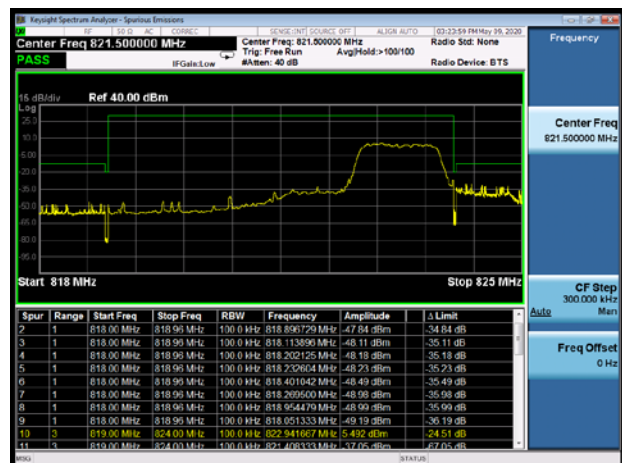





LTE Band 26 QPSK 10MHz CH-Low 1RB

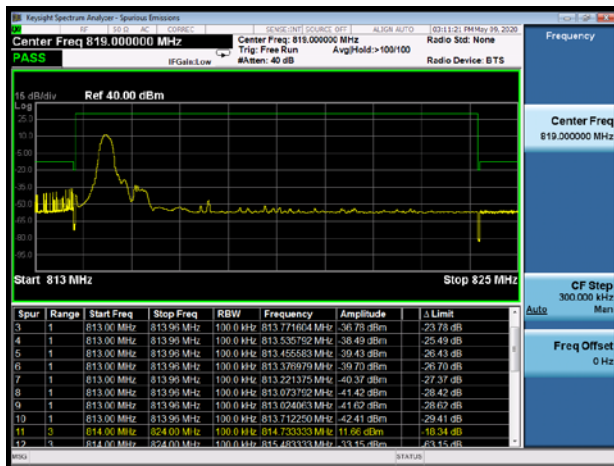


LTE Band 26 QPSK 10MHz CH-High 1RB

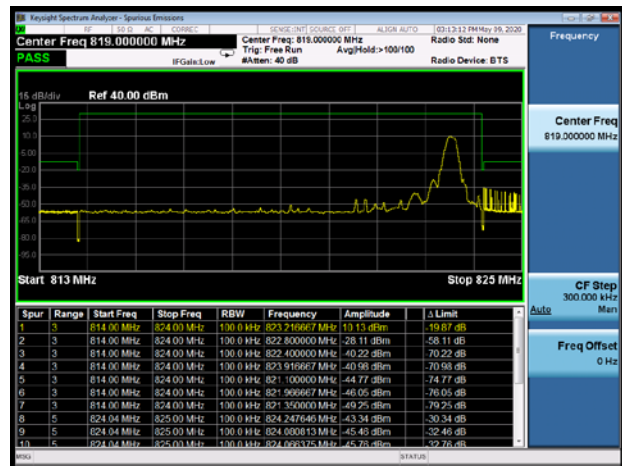

LTE Band 26 QPSK 10MHz CH-Low 100%RB

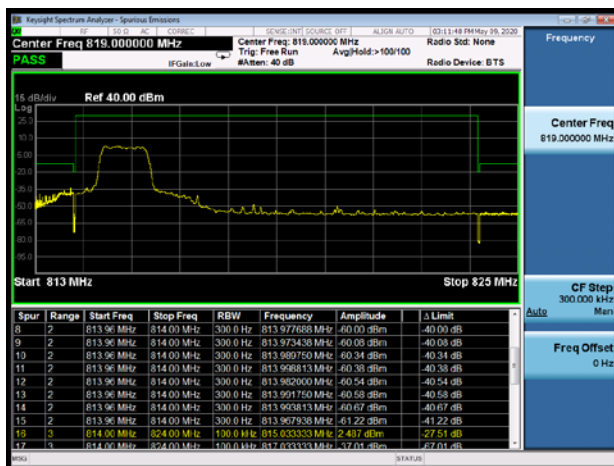


LTE Band 26 QPSK 10MHz CH-High 100%RB

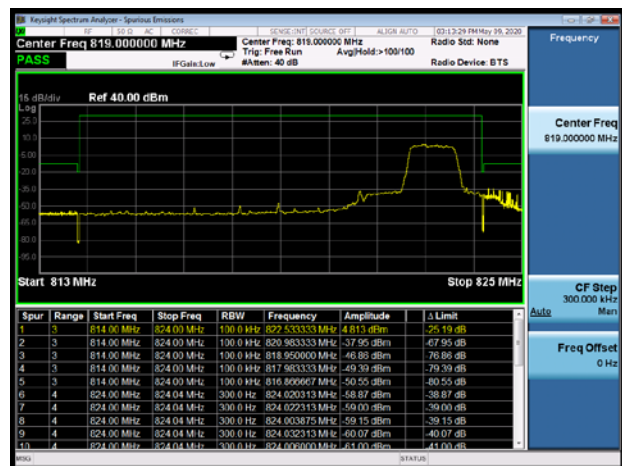

LTE Band 26 16QAM 1.4MHz CH-Low 1RB




LTE Band 26 16QAM 1.4MHz CH-High 1RB

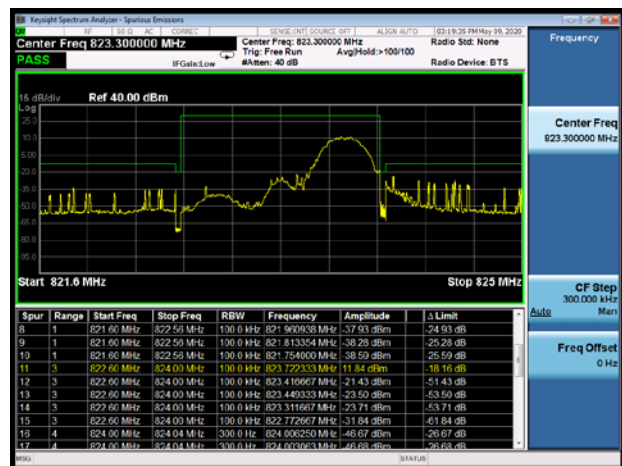





LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

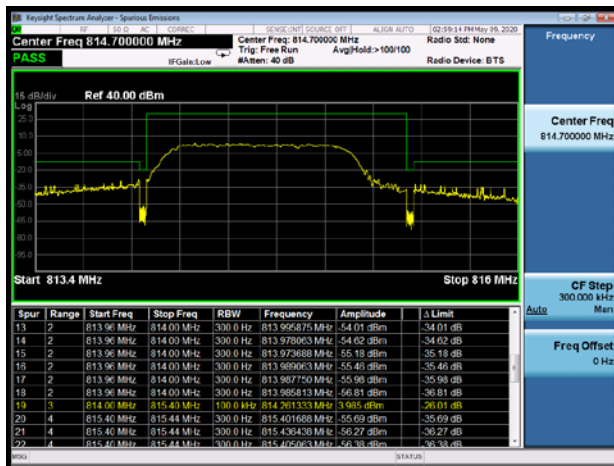


LTE Band 26 16QAM 1.4MHz CH-High 100%RB

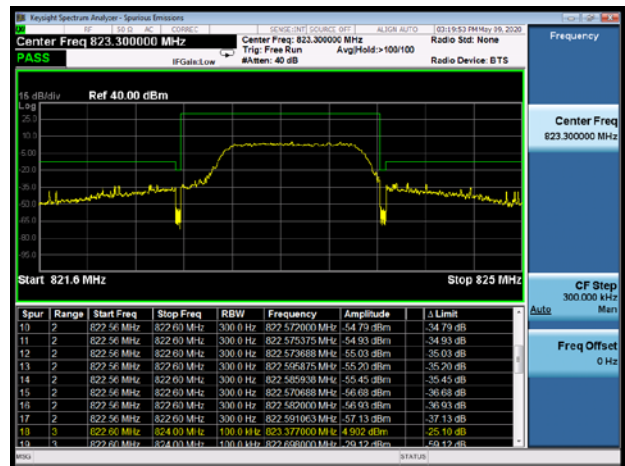


LTE Band 26 16QAM 3MHz CH-Low 1RB

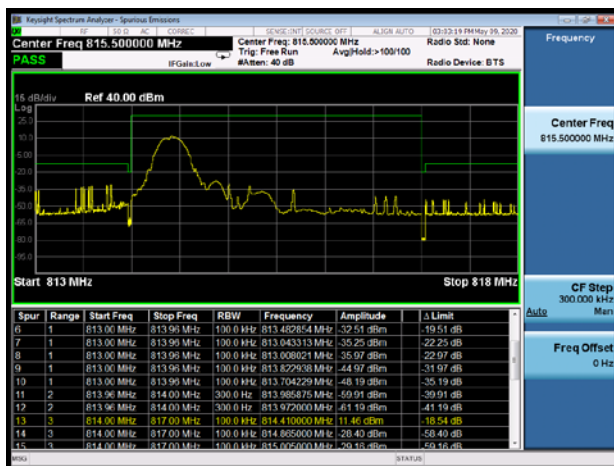

LTE Band 26 16QAM 3MHz CH-High 1RB

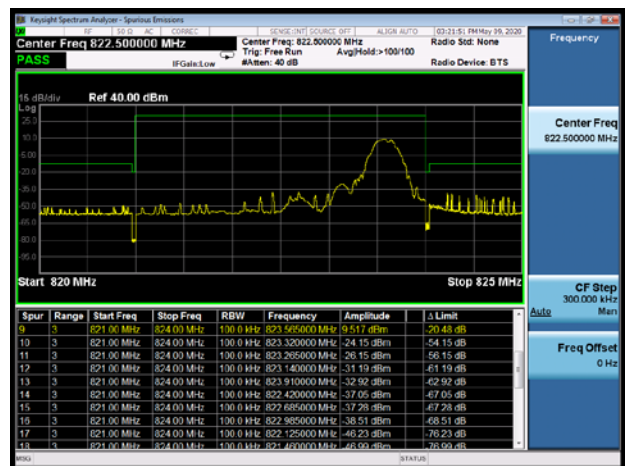

LTE Band 26 16QAM 3MHz CH-Low 100%RB

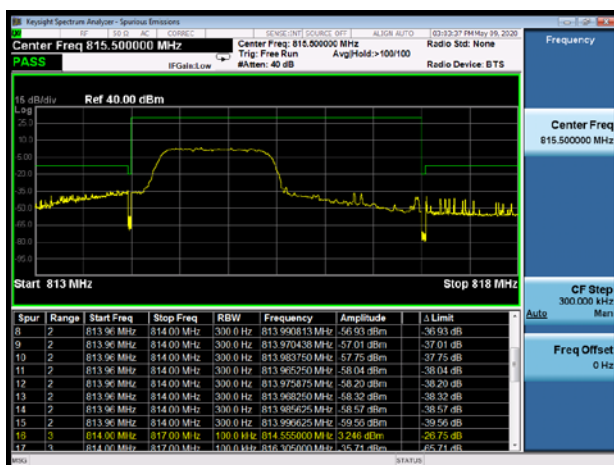


LTE Band 26 16QAM 3MHz CH-High 100%RB






LTE Band 26 16QAM 5MHz CH-Low 1RB

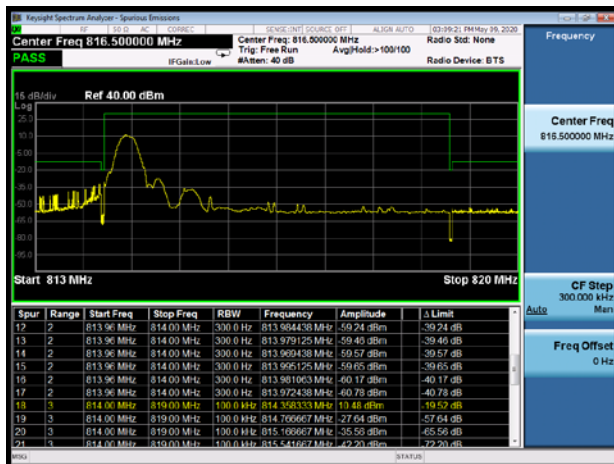

LTE Band 26 16QAM 5MHz CH-High 1RB

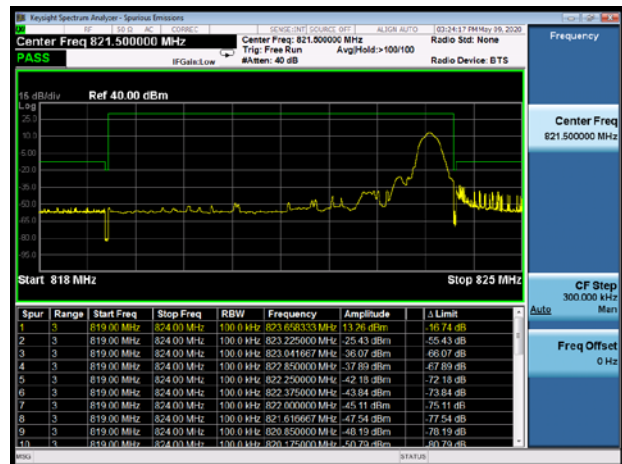


LTE Band 26 16QAM 5MHz CH-Low 100%RB




LTE Band 26 16QAM 5MHz CH-High 100%RB



LTE Band 26 16QAM 10MHz CH-Low 1RB

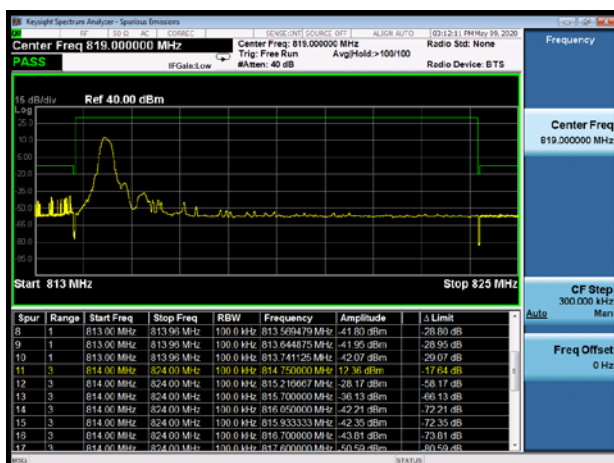

LTE Band 26 16QAM 10MHz CH-High 1RB

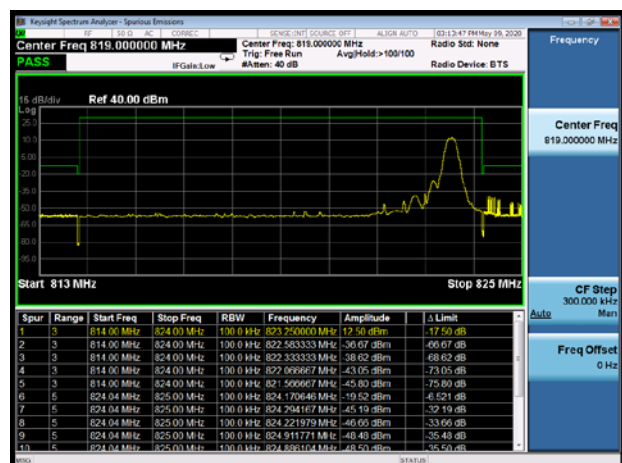



LTE Band 26 16QAM 10MHz CH-Low 100%RB



LTE Band 26 16QAM 10MHz CH-High 100%RB



5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

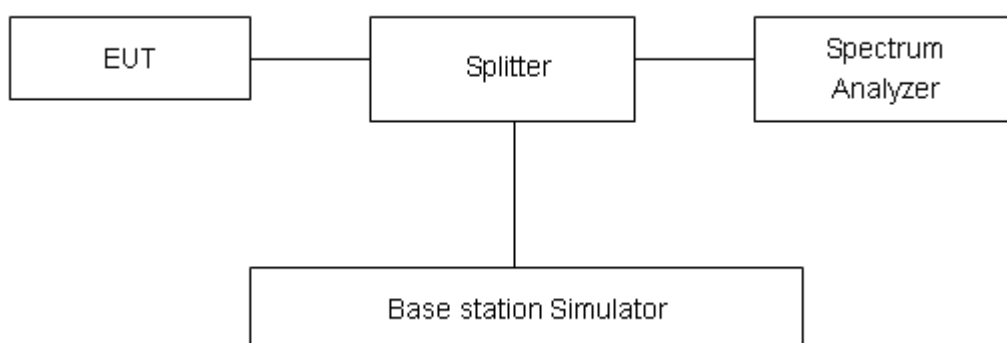

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
Band26	1.4MHz	QPSK	26740/819	23.17	11.98	11.19	≤13	PASS
		16QAM	26740/819	24.45	12.33	12.12	≤13	PASS
	3MHz	QPSK	26740/819	23.17	10.74	12.43	≤13	PASS
		16QAM	26740/819	23.95	12.78	11.17	≤13	PASS
	5MHz	QPSK	26740/819	24.18	14.12	10.06	≤13	PASS
		16QAM	26740/819	25.02	15.20	9.82	≤13	PASS
	10MHz	QPSK	26740/819	24.16	14.69	9.47	≤13	PASS
		16QAM	26740/819	25.34	15.80	9.54	≤13	PASS

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

Test setup

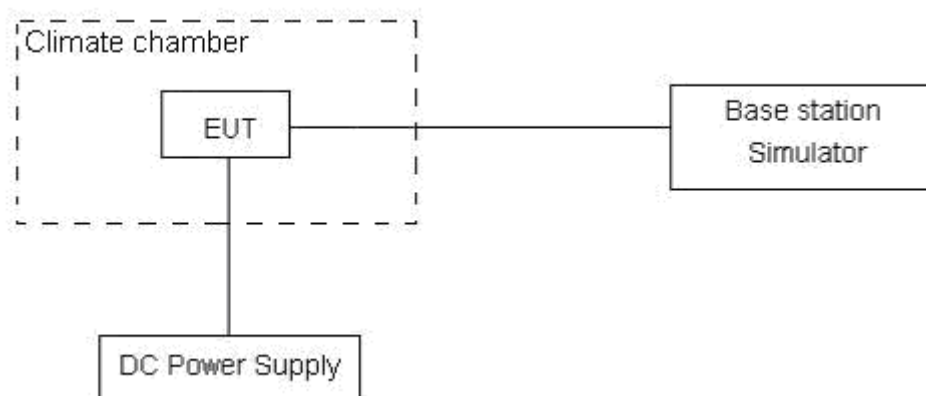

Limits

According to the Sec. 90.213.(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
809-824	1.5	2.5	2.5

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25℃)	Normal	13.15	5.50	0.00700	0.00292	PASS
Extreme (85℃)		5.81	13.15	0.00309	0.00699	PASS
Extreme (80℃)		5.64	2.48	0.00300	0.00132	PASS
Extreme (70℃)		14.19	5.50	0.00755	0.00292	PASS
Extreme (60℃)		9.37	10.79	0.00498	0.00574	PASS
Extreme (50℃)		14.34	7.36	0.00763	0.00391	PASS
Extreme (40℃)		5.40	9.90	0.00287	0.00526	PASS
Extreme (30℃)		1.56	5.32	0.00083	0.00283	PASS
Extreme (20℃)		17.87	5.61	0.00951	0.00298	PASS
Extreme (10℃)		4.14	6.69	0.00220	0.00356	PASS
Extreme (0℃)		3.39	1.28	0.00180	0.00068	PASS
Extreme (-10℃)		5.07	10.02	0.00270	0.00533	PASS
Extreme (-20℃)		12.85	7.71	0.00684	0.00410	PASS
Extreme (-30℃)		10.73	7.48	0.00571	0.00398	PASS
Extreme (-40℃)		16.51	5.72	0.00878	0.00304	PASS
25℃	LV	5.82	5.05	0.00309	0.00269	PASS
	HV	3.16	14.31	0.00168	0.00761	PASS

5.6. Spurious Emissions at Antenna Terminals


Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

Test setup

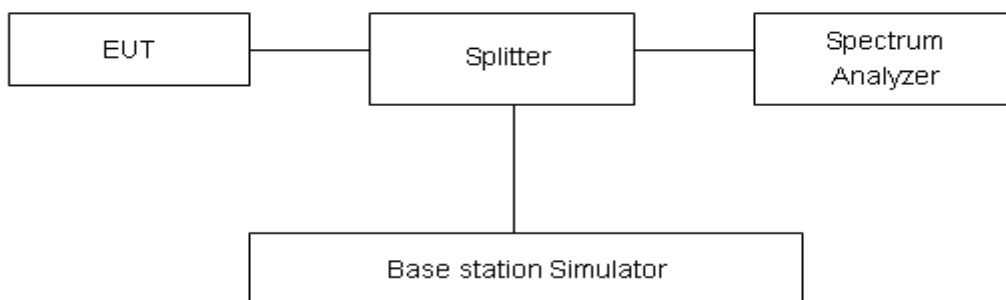

Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-1GHz	0.684 dB
1GHz-12.75GHz	1.407 dB


Test Result

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier.

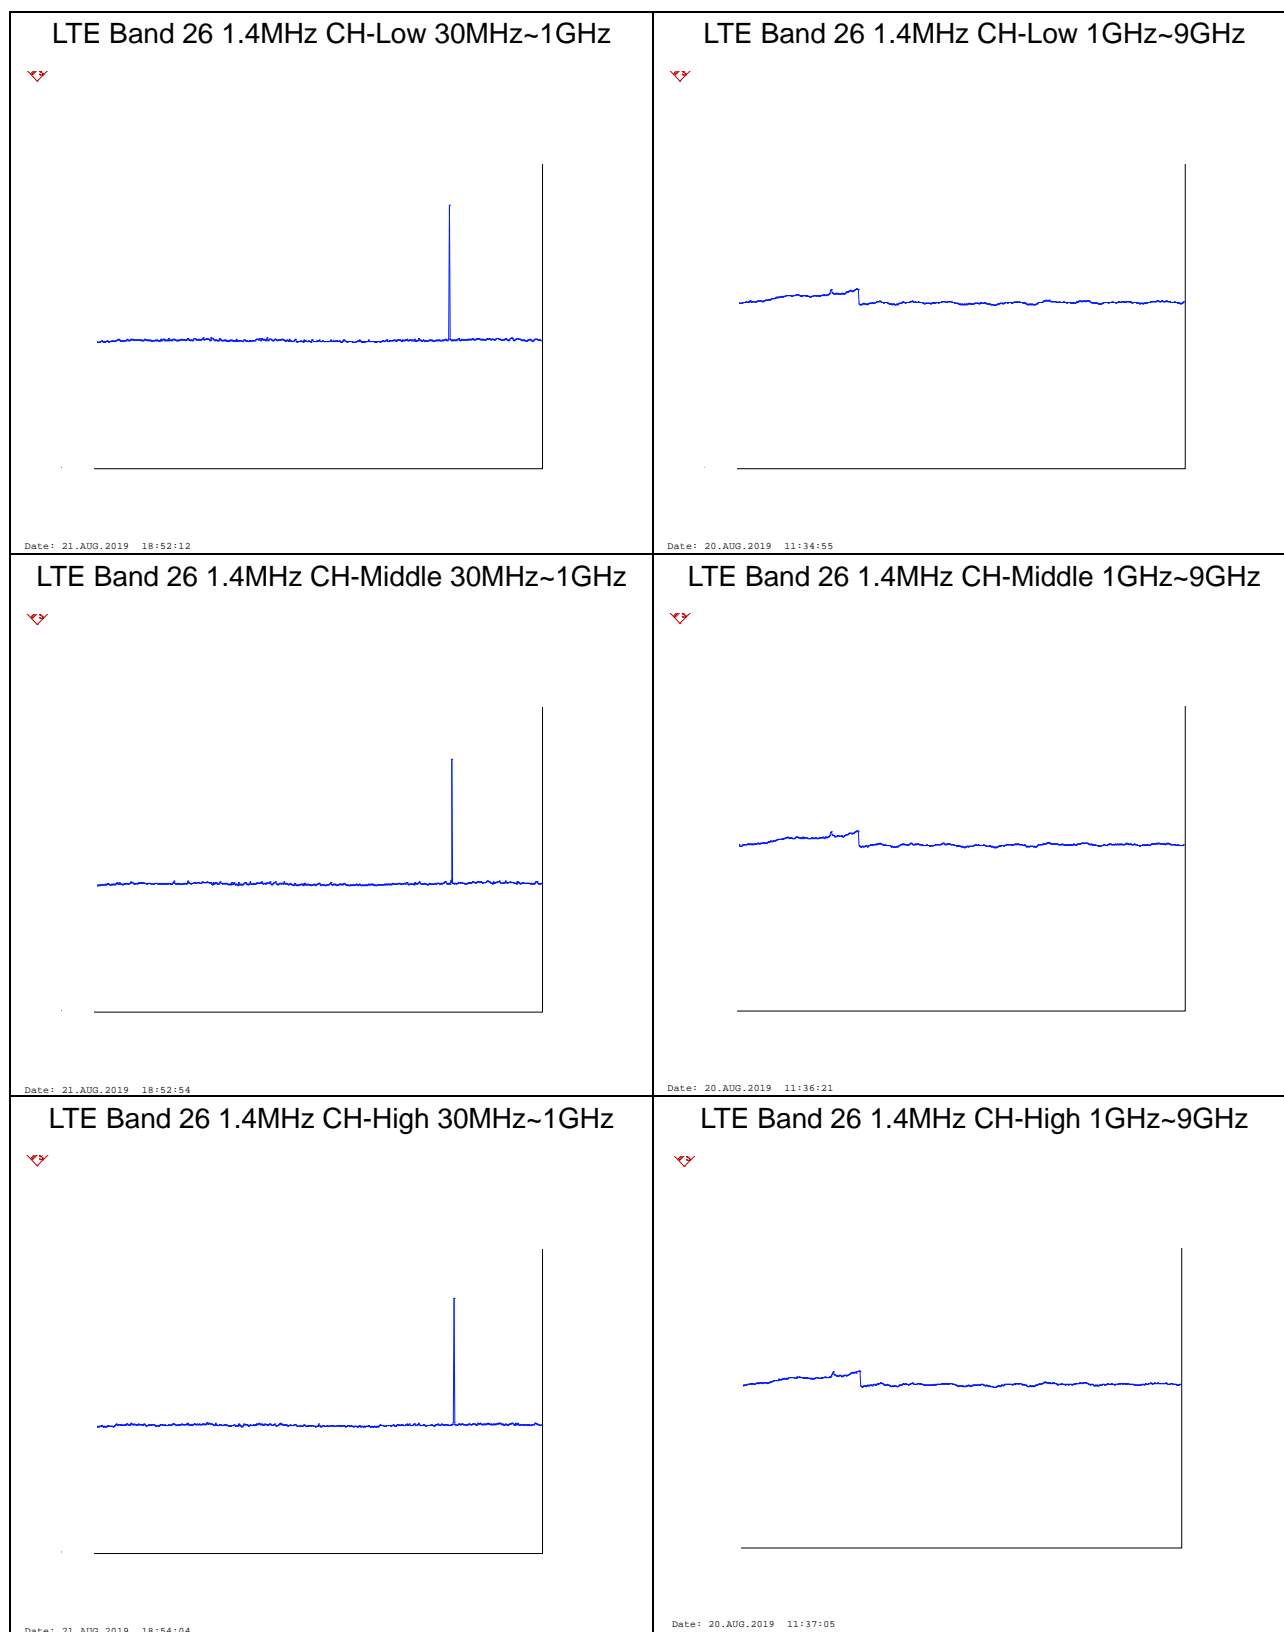




LTE Band 26 3MHz CH-Low 30MHz~1GHz

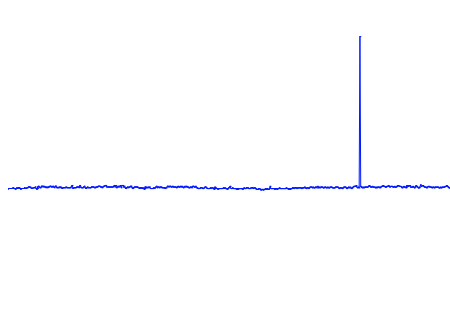


Date: 21.AUG.2019 18:55:19

LTE Band 26 3MHz CH-Low 1GHz~9GHz

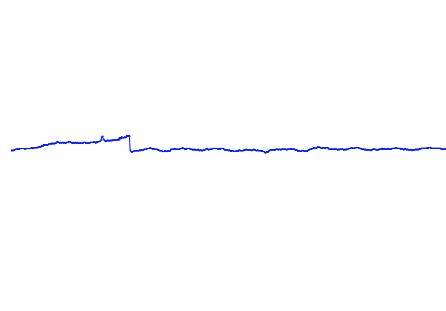


Date: 20.AUG.2019 11:37:33

LTE Band 26 3MHz CH-Middle 30MHz~1GHz

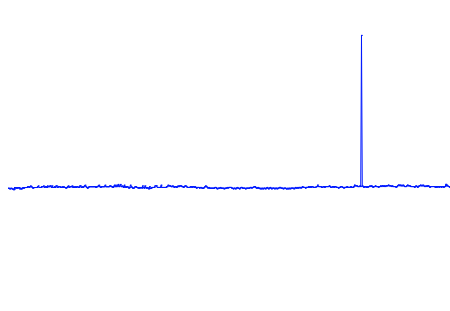


Date: 21.AUG.2019 18:56:49

LTE Band 26 3MHz CH-Middle 1GHz~9GHz

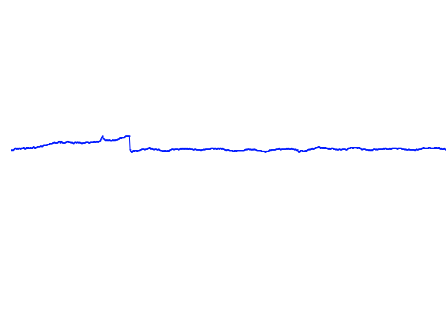


Date: 20.AUG.2019 11:38:31

LTE Band 26 3MHz CH-High 30MHz~1GHz

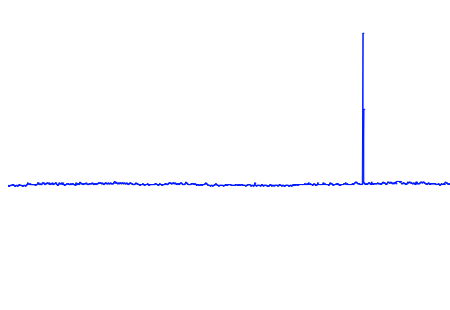

Date: 21.AUG.2019 18:57:45


LTE Band 26 3MHz CH-High 1GHz~9GHz

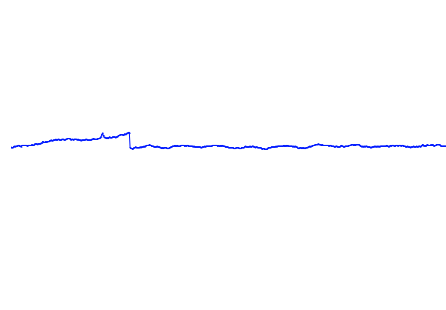

Date: 20.AUG.2019 11:39:02




LTE Band 26 5MHz CH-Low 30MHz~1GHz

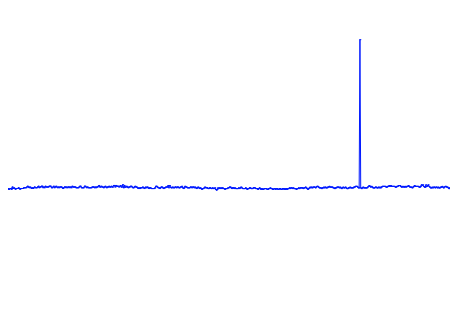


Date: 21.AUG.2019 18:59:12

LTE Band 26 5MHz CH-Low 1GHz~9GHz

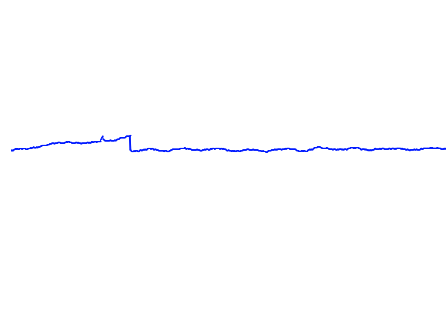


Date: 20.AUG.2019 11:40:08

LTE Band 26 5MHz CH-Middle 30MHz~1GHz

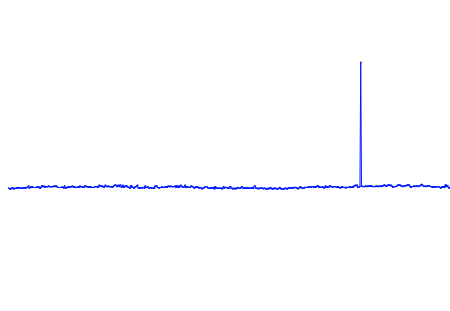


Date: 21.AUG.2019 19:00:42

LTE Band 26 5MHz CH-Middle 1GHz~9GHz

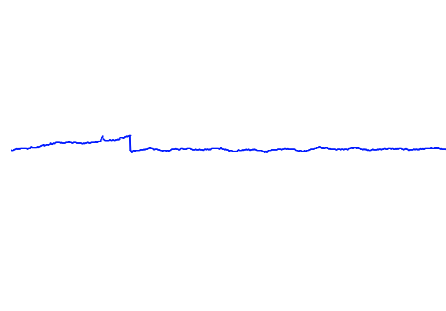


Date: 20.AUG.2019 11:40:35

LTE Band 26 5MHz CH-High 30MHz~1GHz

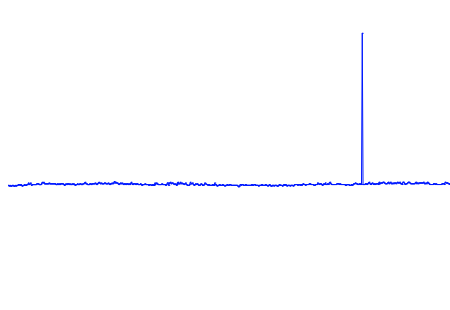

Date: 21.AUG.2019 19:02:28


LTE Band 26 5MHz CH-High 1GHz~9GHz

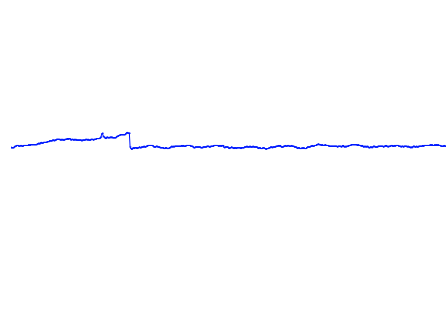

Date: 20.AUG.2019 11:41:04




LTE Band 26 10MHz CH-Middle 30MHz~1GHz

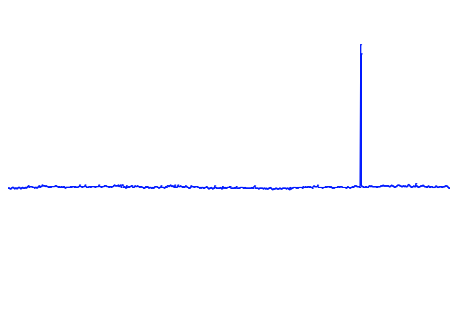

Date: 21.AUG.2019 19:04:52

LTE Band 26 10MHz CH-Middle 1GHz~9GHz

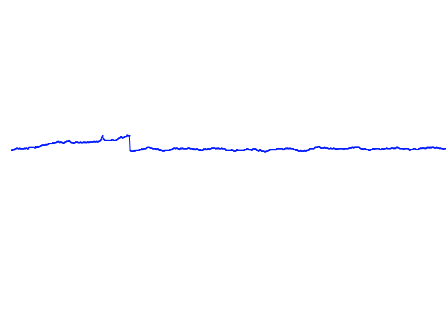

Date: 20.AUG.2019 11:41:24

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26.
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

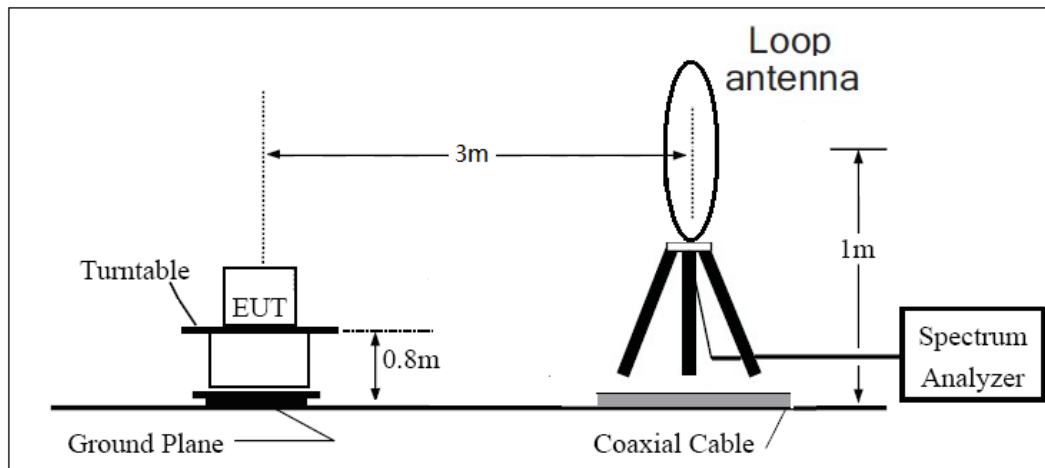

30MHz~~~ 1GHz

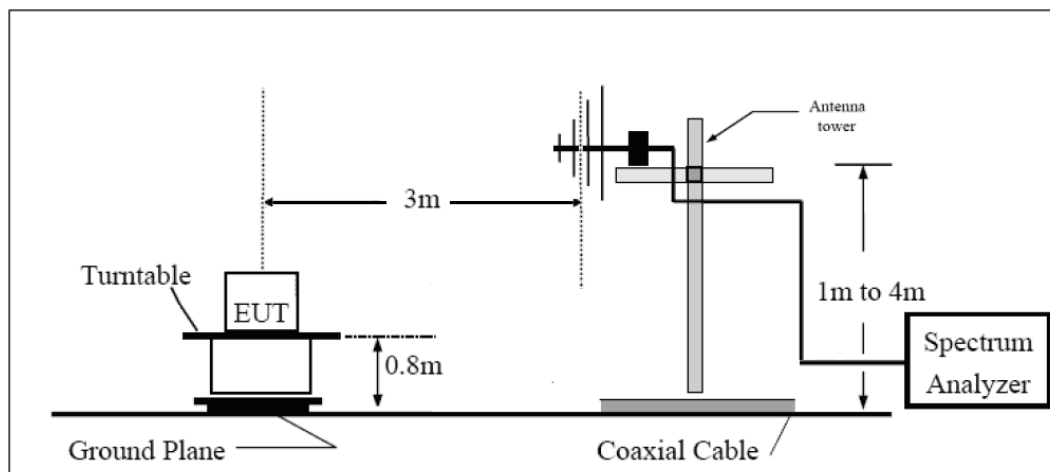

Above 1GHz

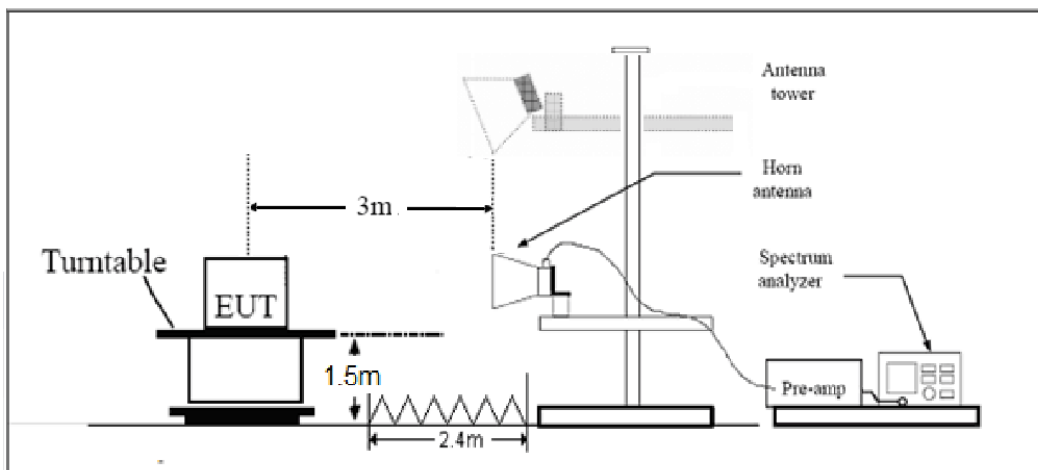



Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

BG95-M3:

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-56.70	2.00	10.75	vertical	-50.10	-13.00	37.10	135
3	2457.00	-56.26	2.51	11.05	vertical	-49.87	-13.00	36.87	225
4	3346.00	-62.65	4.20	11.15	vertical	-57.85	-13.00	44.85	90
5	4182.50	-59.25	5.20	11.15	vertical	-55.45	-13.00	42.45	0
6	5019.00	-58.70	5.50	11.95	vertical	-54.40	-13.00	41.40	135
7	5855.50	-58.36	5.70	13.55	vertical	-52.66	-13.00	39.66	270
8	6692.00	-53.45	6.30	13.75	vertical	-48.15	-13.00	35.15	225
9	7528.50	-55.78	6.80	13.85	vertical	-50.88	-13.00	37.88	90
10	8365.00	-53.52	6.90	14.25	vertical	-48.32	-13.00	35.32	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is vertical position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-56.32	2.00	10.75	vertical	-49.72	-13.00	36.72	90
3	2457.00	-54.89	2.51	11.05	vertical	-48.50	-13.00	35.50	135
4	3276.00	-61.67	4.20	11.15	vertical	-56.87	-13.00	43.87	90
5	4095.00	-59.36	5.20	11.15	vertical	-55.56	-13.00	42.56	45
6	4914.00	-60.15	5.50	11.95	vertical	-55.85	-13.00	42.85	0
7	5733.00	-60.62	5.70	13.55	vertical	-54.92	-13.00	41.92	180
8	6552.00	-59.49	6.30	13.75	vertical	-54.19	-13.00	41.19	225
9	7371.00	-53.57	6.80	13.85	vertical	-48.67	-13.00	35.67	315
10	8190.00	-53.48	6.90	14.25	vertical	-48.28	-13.00	35.28	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is vertical position.

LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.00	-55.80	2.00	10.75	vertical	-49.20	-13.00	36.20	225
3	2457.00	-54.16	2.51	11.05	vertical	-47.77	-13.00	34.77	135
4	3276.00	-60.07	4.20	11.15	vertical	-55.27	-13.00	42.27	135
5	4095.00	-60.22	5.20	11.15	vertical	-56.42	-13.00	43.42	180
6	4914.00	-60.60	5.50	11.95	vertical	-56.30	-13.00	43.30	225
7	5733.00	-60.41	5.70	13.55	vertical	-54.71	-13.00	41.71	0
8	6552.00	-59.32	6.30	13.75	vertical	-54.02	-13.00	41.02	90
9	7371.00	-53.28	6.80	13.85	vertical	-48.38	-13.00	35.38	45
10	8190.00	-53.68	6.90	14.25	vertical	-48.48	-13.00	35.48	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is vertical position.

**BG95-M3 MINIPICIE:**

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-54.71	2.00	10.75	Horizontal	-48.11	-13.00	35.11	135
3	2457.0	-47.82	2.51	11.05	Horizontal	-41.43	-13.00	28.43	225
4	3276.0	-53.66	4.20	11.15	Horizontal	-48.86	-13.00	35.86	225
5	4095.0	-60.72	5.20	11.15	Horizontal	-56.92	-13.00	43.92	0
6	4914.0	-60.41	5.50	11.95	Horizontal	-56.11	-13.00	43.11	180
7	5733.0	-62.34	5.70	13.55	Horizontal	-56.64	-13.00	43.64	90
8	6552.0	-58.60	6.30	13.75	Horizontal	-53.30	-13.00	40.30	315
9	7371.0	-55.02	6.80	13.85	Horizontal	-50.12	-13.00	37.12	45
10	8190.0	-55.49	6.90	14.25	Horizontal	-50.29	-13.00	37.29	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-56.00	2.00	10.75	Horizontal	-49.40	-13.00	36.40	270
3	2457.0	-46.01	2.51	11.05	Horizontal	-39.62	-13.00	26.62	225
4	3269.6	-53.32	4.20	11.15	Horizontal	-48.52	-13.00	35.52	270
5	4086.0	-60.14	5.20	11.15	Horizontal	-56.34	-13.00	43.34	90
6	4903.0	-59.86	5.50	11.95	Horizontal	-55.56	-13.00	42.56	180
7	5720.0	-60.60	5.70	13.55	Horizontal	-54.90	-13.00	41.90	315
8	6538.0	-59.18	6.30	13.75	Horizontal	-53.88	-13.00	40.88	225
9	7355.0	-54.83	6.80	13.85	Horizontal	-49.93	-13.00	36.93	90
10	8172.5	-54.11	6.90	14.25	Horizontal	-48.91	-13.00	35.91	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-55.97	2.00	10.75	Horizontal	-49.37	-13.00	36.37	180
3	2457.0	-46.61	2.51	11.05	Horizontal	-40.22	-13.00	27.22	225
4	3259.0	-52.71	4.20	11.15	Horizontal	-47.91	-13.00	34.91	45
5	4070.0	-59.87	5.20	11.15	Horizontal	-56.07	-13.00	43.07	180
6	4884.0	-60.04	5.50	11.95	Horizontal	-55.74	-13.00	42.74	225
7	5698.0	-60.20	5.70	13.55	Horizontal	-54.50	-13.00	41.50	0
8	6512.0	-58.49	6.30	13.75	Horizontal	-53.19	-13.00	40.19	90
9	7326.0	-54.36	6.80	13.85	Horizontal	-49.46	-13.00	36.46	315
10	8140.0	-54.17	6.90	14.25	Horizontal	-48.97	-13.00	35.97	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Date of Testing (original): June 5, 2020:

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY50210259	2020-05-18	2021-05-17
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Signal generator	R&S	SMF 100A	102235	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/



Date of Testing (variant): July 14, 2021 ~ August 9, 2021

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2021-05-15	2022-05-14
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2021-12-15
Horn Antenna	R&S	HF907	102723	2020-08-11	2023-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2023-06-19
Signal generator	R&S	SMB 100A	180235	2021-05-15	2022-05-14
Climatic Chamber	ESPEC	SU-242	93000506	2020-12-13	2021-12-12
Preamplifier	R&S	SCU18	102327	2021-05-15	2022-05-14
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2021-05-15	2022-05-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Product Change Description

The Product Change Description are submitted separately.