






LTE Band 26 QPSK 15MHz CH-Low 1RB

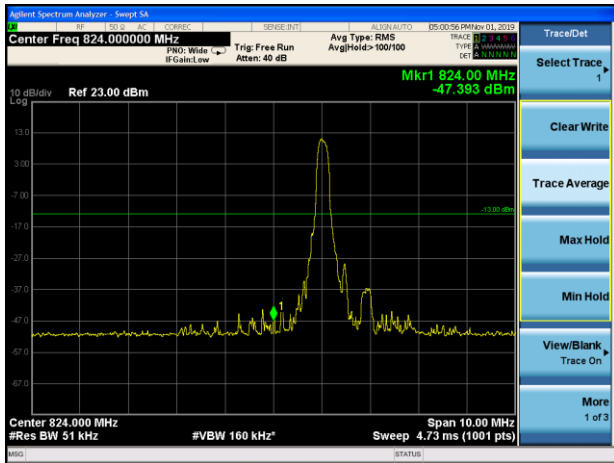


LTE Band 26 QPSK 15MHz CH-High 1RB

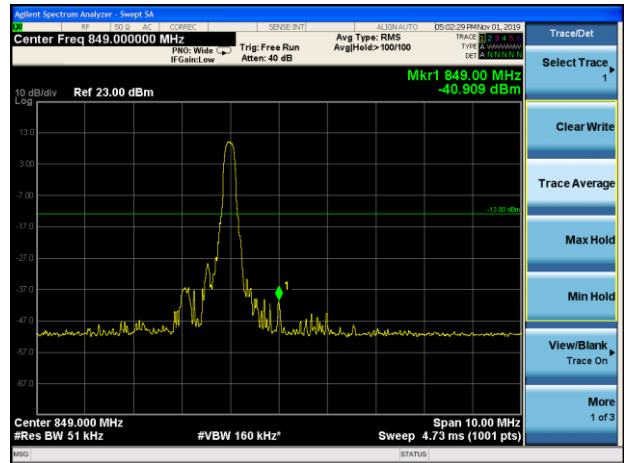


LTE Band 26 QPSK 15MHz CH-Low 100%RB

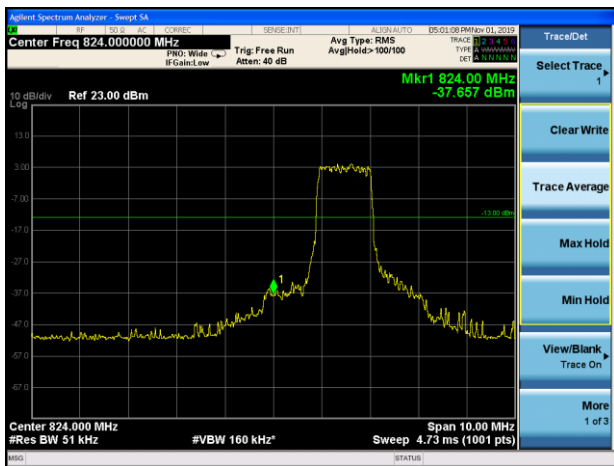


LTE Band 26 QPSK 15MHz CH-High 100%RB

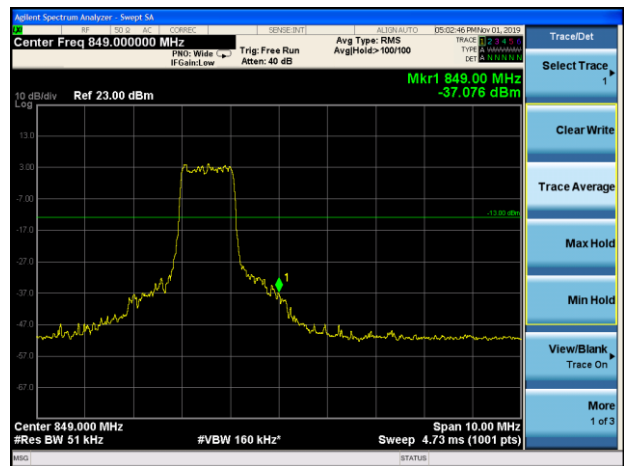

LTE Band 26 16QAM 1.4MHz CH-Low 1RB

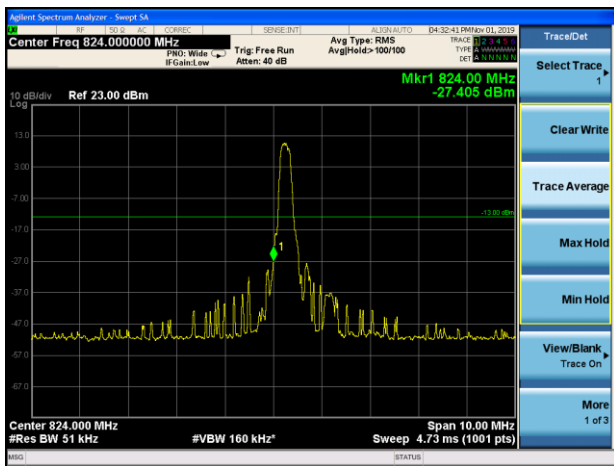


LTE Band 26 16QAM 1.4MHz CH-High 1RB

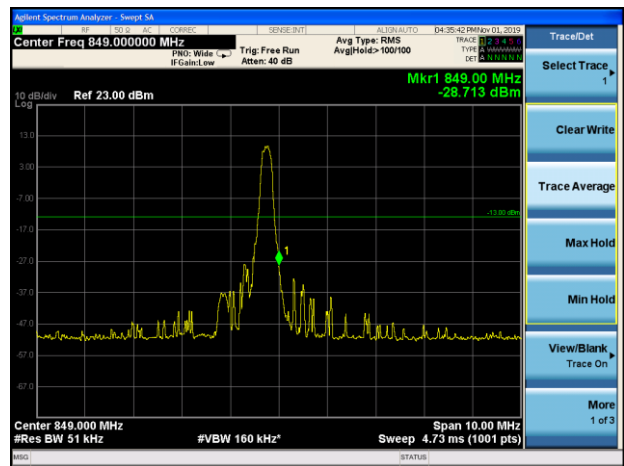





LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

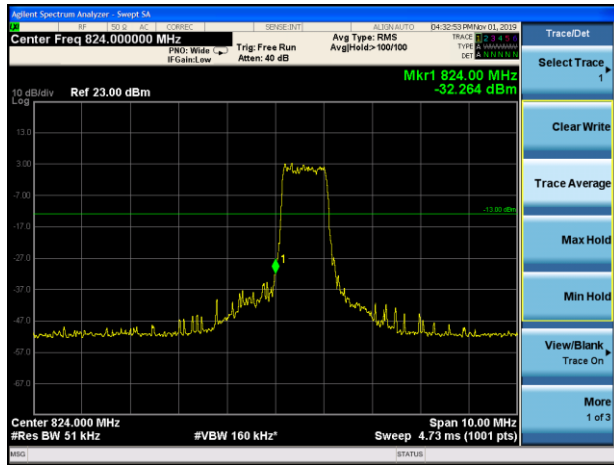


LTE Band 26 16QAM 1.4MHz CH-High 100%RB

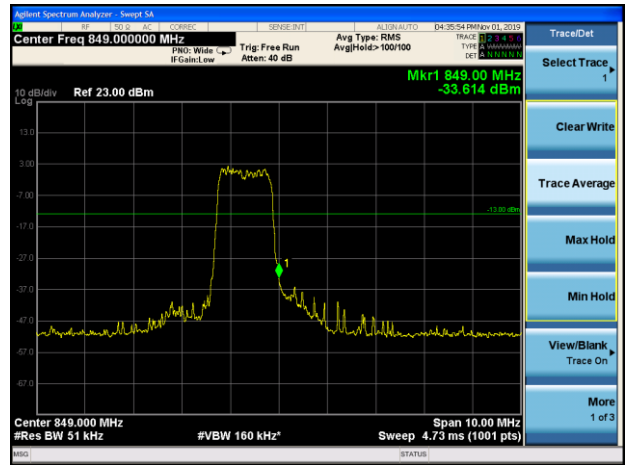


LTE Band 26 16QAM 3MHz CH-Low 1RB

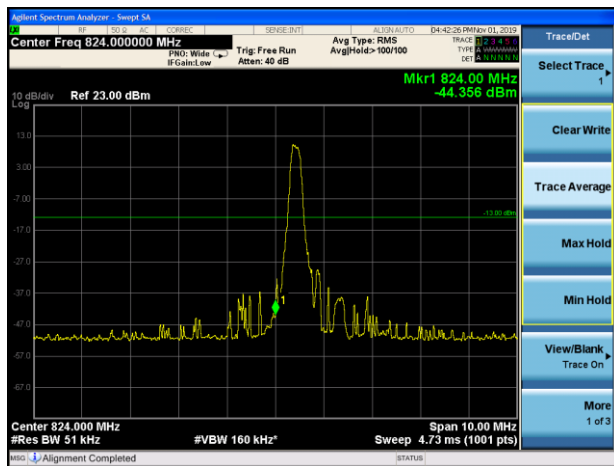


LTE Band 26 16QAM 3MHz CH-High 1RB

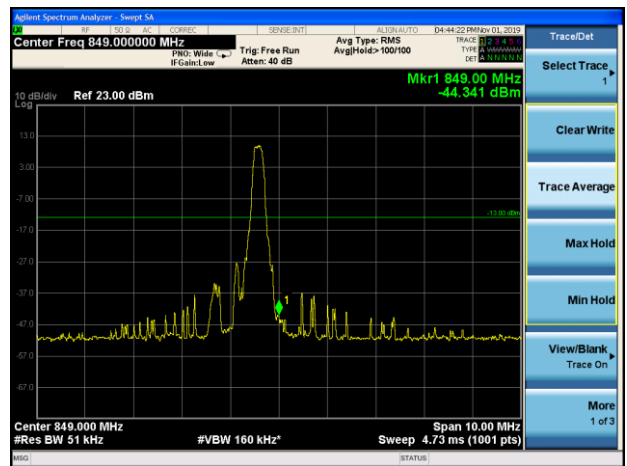


LTE Band 26 16QAM 3MHz CH-Low 100%RB

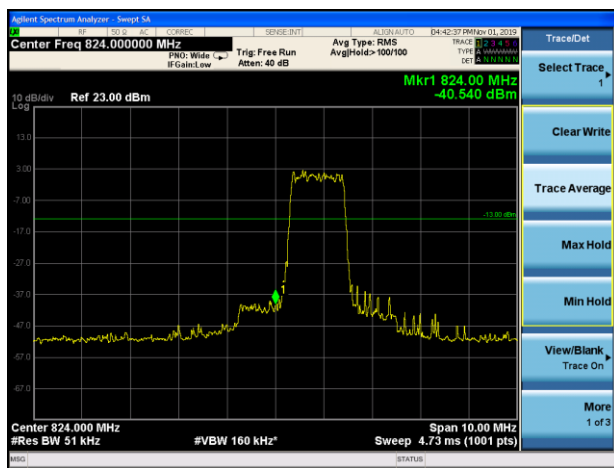


LTE Band 26 16QAM 3MHz CH-High 100%RB

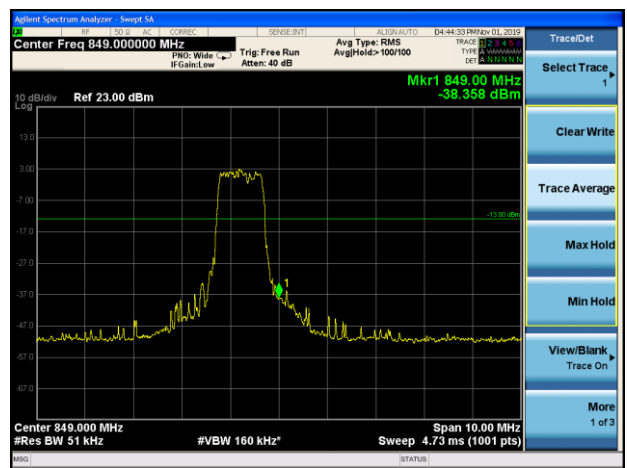


LTE Band 26 16QAM 5MHz CH-Low 1RB

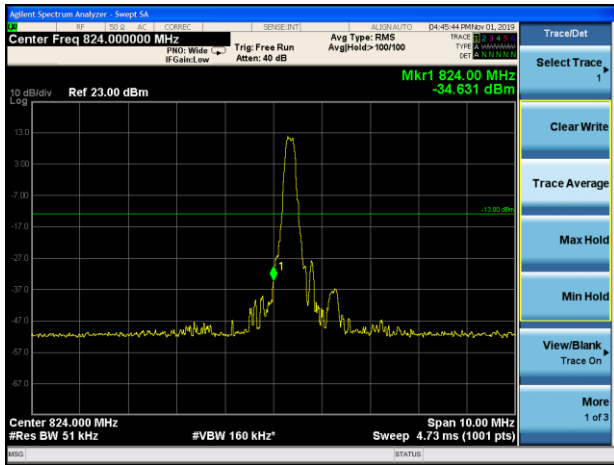


LTE Band 26 16QAM 5MHz CH-High 1RB

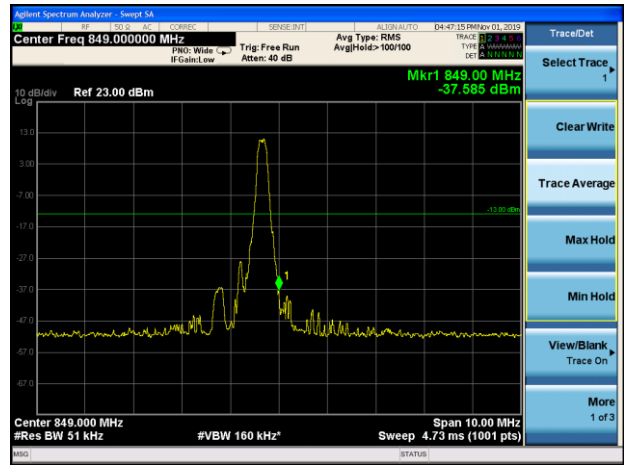


LTE Band 26 16QAM 5MHz CH-Low 100%RB

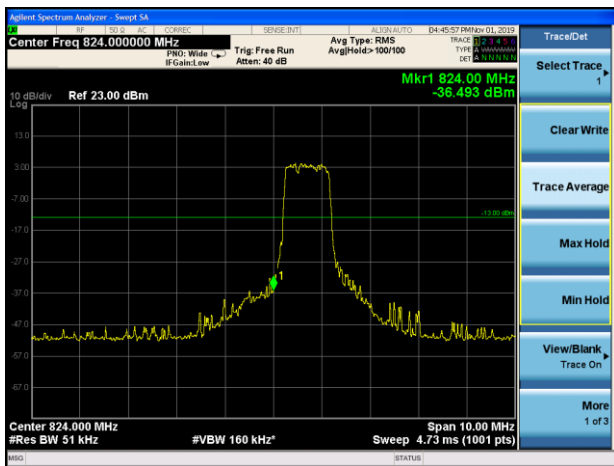


LTE Band 26 16QAM 5MHz CH-High 100%RB

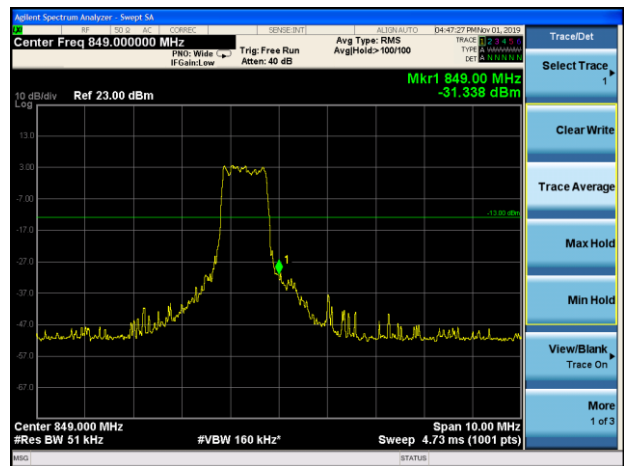

LTE Band 26 16QAM 10MHz CH-Low 1RB

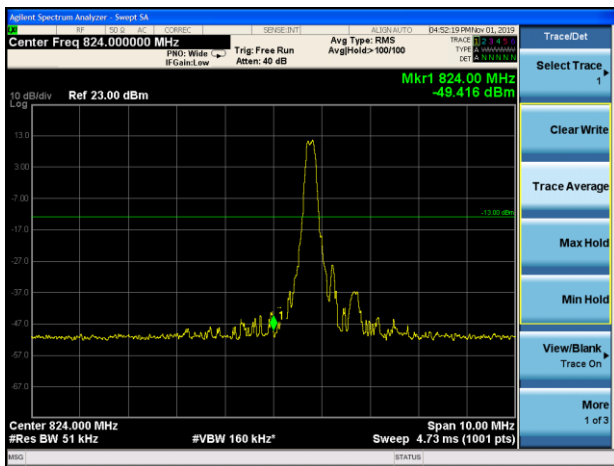


LTE Band 26 16QAM 10MHz CH-High 1RB

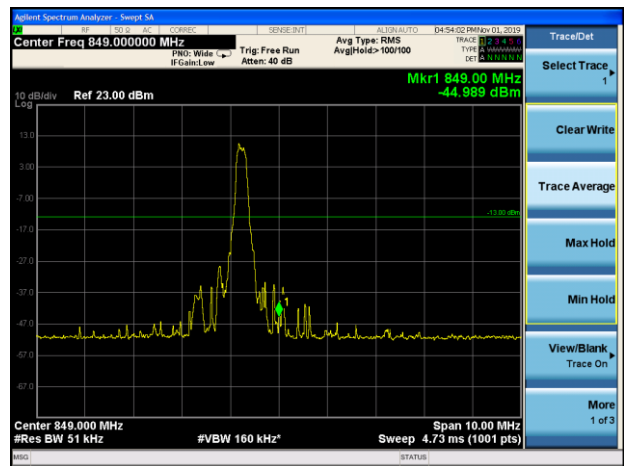





LTE Band 26 16QAM 10MHz CH-Low 100%RB

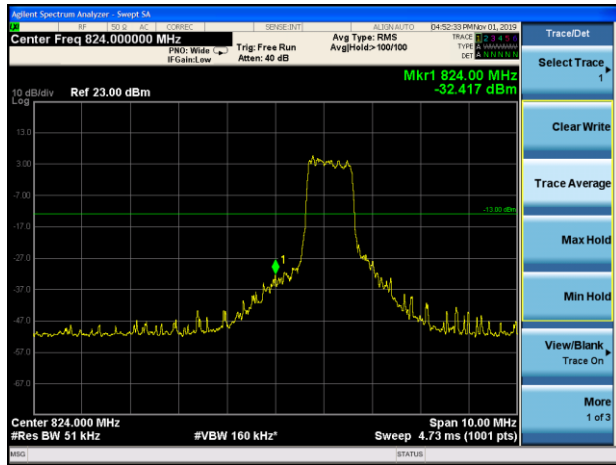


LTE Band 26 16QAM 10MHz CH-High 100%RB

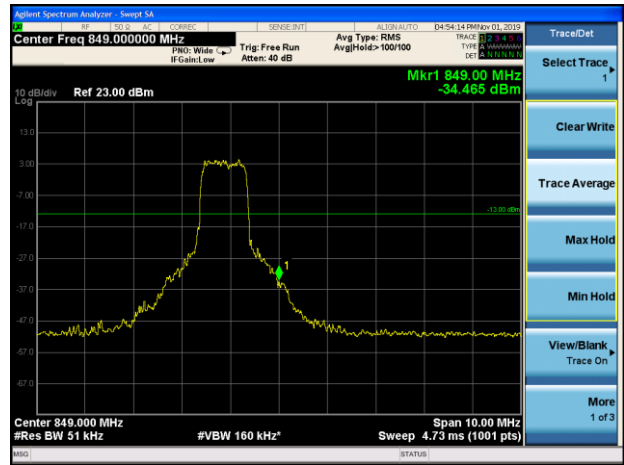


LTE Band 26 16QAM 15MHz CH-Low 1RB

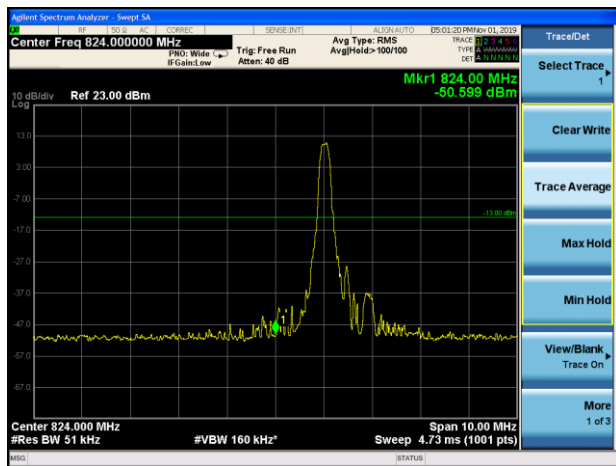


LTE Band 26 16QAM 15MHz CH-High 1RB

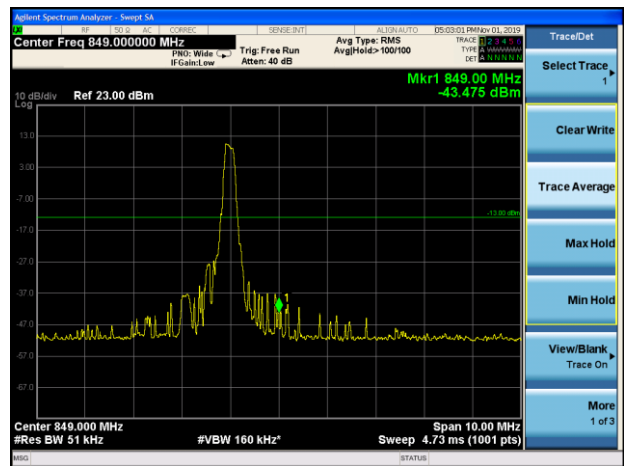

LTE Band 26 16QAM 15MHz CH-Low 100%RB

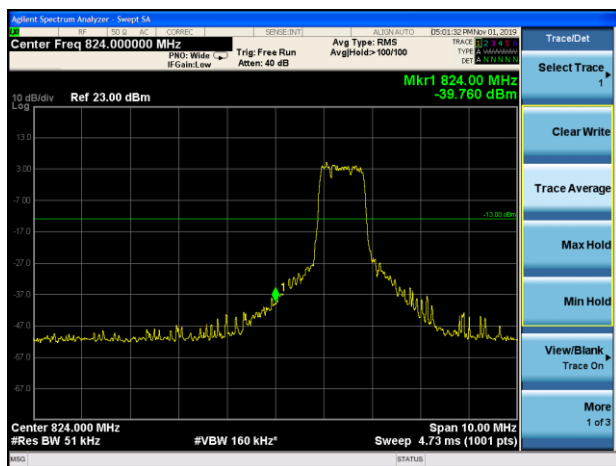

LTE Band 26 16QAM 15MHz CH-High 100%RB

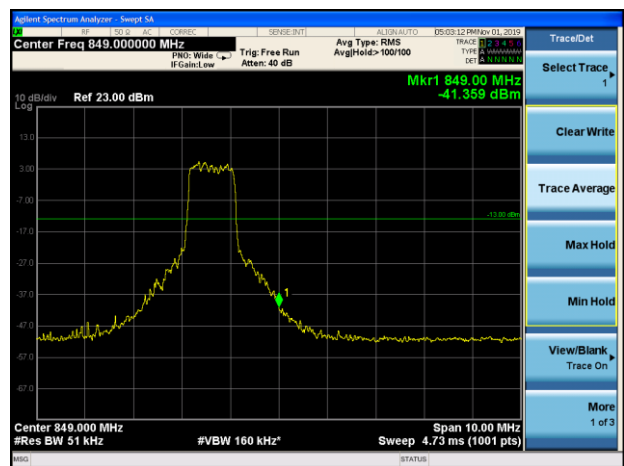

5.6. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

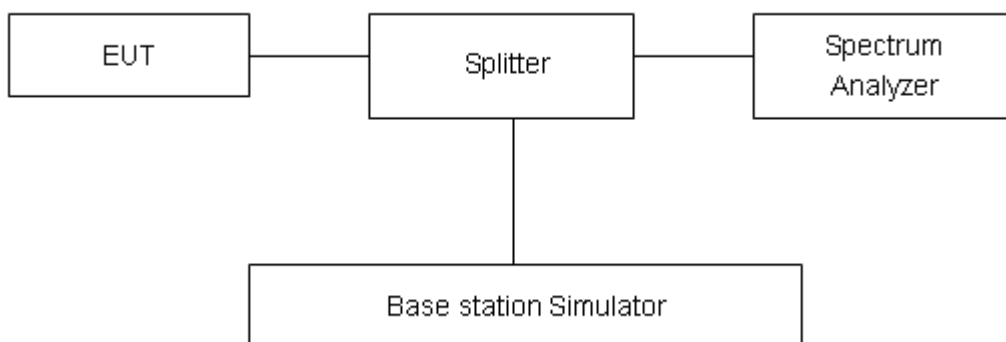

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
Band5	1.4MHz	QPSK	20525/836.5	24.10	13.06	11.04	≤13	PASS
		16QAM	20525/836.5	25.38	13.71	11.67	≤13	PASS
	3MHz	QPSK	20525/836.5	24.09	13.04	11.05	≤13	PASS
		16QAM	20525/836.5	25.11	13.77	11.34	≤13	PASS
	5MHz	QPSK	20525/836.5	25.14	15.49	9.65	≤13	PASS
		16QAM	20525/836.5	25.72	15.74	9.98	≤13	PASS
	10MHz	QPSK	20525/836.5	25.27	16.20	9.07	≤13	PASS
		16QAM	20525/836.5	26.11	16.54	9.57	≤13	PASS

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
Band26	1.4MHz	QPSK	26915/836.5	24.27	12.59	11.68	≤13	PASS
		16QAM	26915/836.5	25.47	13.76	11.71	≤13	PASS
	3MHz	QPSK	26915/836.5	24.25	13.23	11.02	≤13	PASS
		16QAM	26915/836.5	25.23	13.96	11.27	≤13	PASS
	5MHz	QPSK	26915/836.5	25.31	15.72	9.59	≤13	PASS
		16QAM	26915/836.5	25.79	15.91	9.88	≤13	PASS
	10MHz	QPSK	26915/836.5	25.23	15.55	9.68	≤13	PASS
		16QAM	26915/836.5	26.19	16.79	9.40	≤13	PASS
	15MHz	QPSK	26915/836.5	25.91	17.18	8.73	≤13	PASS
		16QAM	26915/836.5	26.26	17.58	8.68	≤13	PASS

5.7. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 2.6 V and 4.8 V, with a nominal voltage of 3.3V.

Test setup

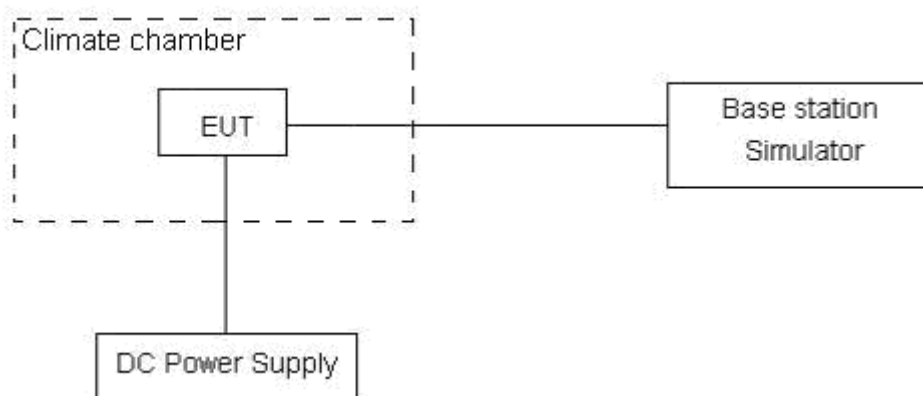

**Limits**

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

LTE Band 5						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz	16QAM	QPSK	16QAM	QPSK	
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	16.36	5.72	0.00870	0.00304	PASS
Extreme (85°C)		8.51	6.53	0.00452	0.00347	PASS
Extreme (80°C)		9.20	9.40	0.00490	0.00500	PASS
Extreme (70°C)		1.61	11.08	0.00086	0.00589	PASS
Extreme (60°C)		13.13	2.75	0.00699	0.00146	PASS
Extreme (50°C)		5.69	5.06	0.00303	0.00269	PASS
Extreme (40°C)		8.35	13.43	0.00444	0.00714	PASS
Extreme (30°C)		10.24	11.32	0.00545	0.00602	PASS
Extreme (20°C)		14.26	9.09	0.00759	0.00484	PASS
Extreme (10°C)		7.35	3.36	0.00391	0.00179	PASS
Extreme (0°C)		13.75	5.04	0.00731	0.00268	PASS
Extreme (-10°C)		4.86	9.36	0.00259	0.00498	PASS
Extreme (-20°C)		11.90	11.89	0.00633	0.00632	PASS
Extreme (-30°C)		2.23	12.10	0.00119	0.00644	PASS
Extreme (-40°C)		9.73	5.74	0.00518	0.00305	PASS
25°C	LV	3.43	14.15	0.00182	0.00753	PASS
	HV	9.31	14.26	0.00495	0.00758	PASS



LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz	16QAM	QPSK	16QAM	QPSK	
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	17.37	12.42	0.00924	0.00661	PASS
Extreme (85°C)		5.28	13.93	0.00281	0.00741	PASS
Extreme (80°C)		5.17	9.39	0.00275	0.00499	PASS
Extreme (70°C)		15.51	10.00	0.00825	0.00532	PASS
Extreme (60°C)		14.44	3.09	0.00768	0.00164	PASS
Extreme (50°C)		6.65	1.30	0.00354	0.00069	PASS
Extreme (40°C)		15.45	11.16	0.00822	0.00594	PASS
Extreme (30°C)		10.93	2.22	0.00581	0.00118	PASS
Extreme (20°C)		5.84	10.37	0.00311	0.00552	PASS
Extreme (10°C)		16.78	15.23	0.00893	0.00810	PASS
Extreme (0°C)		6.84	9.78	0.00364	0.00520	PASS
Extreme (-10°C)		17.50	11.70	0.00931	0.00622	PASS
Extreme (-20°C)		6.59	6.13	0.00351	0.00326	PASS
Extreme (-30°C)		8.04	3.42	0.00427	0.00182	PASS
Extreme (-40°C)		15.93	1.99	0.00847	0.00106	PASS
25°C		LV	13.17	12.44	0.00701	0.00661
	HV	14.83	6.91	0.00789	0.00368	PASS

5.8. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

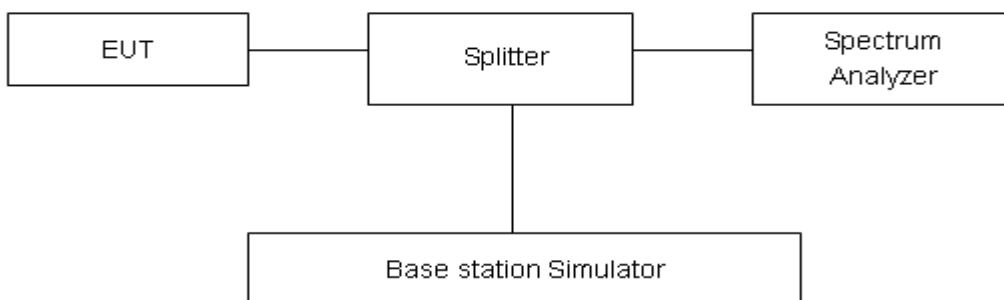

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB



Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.

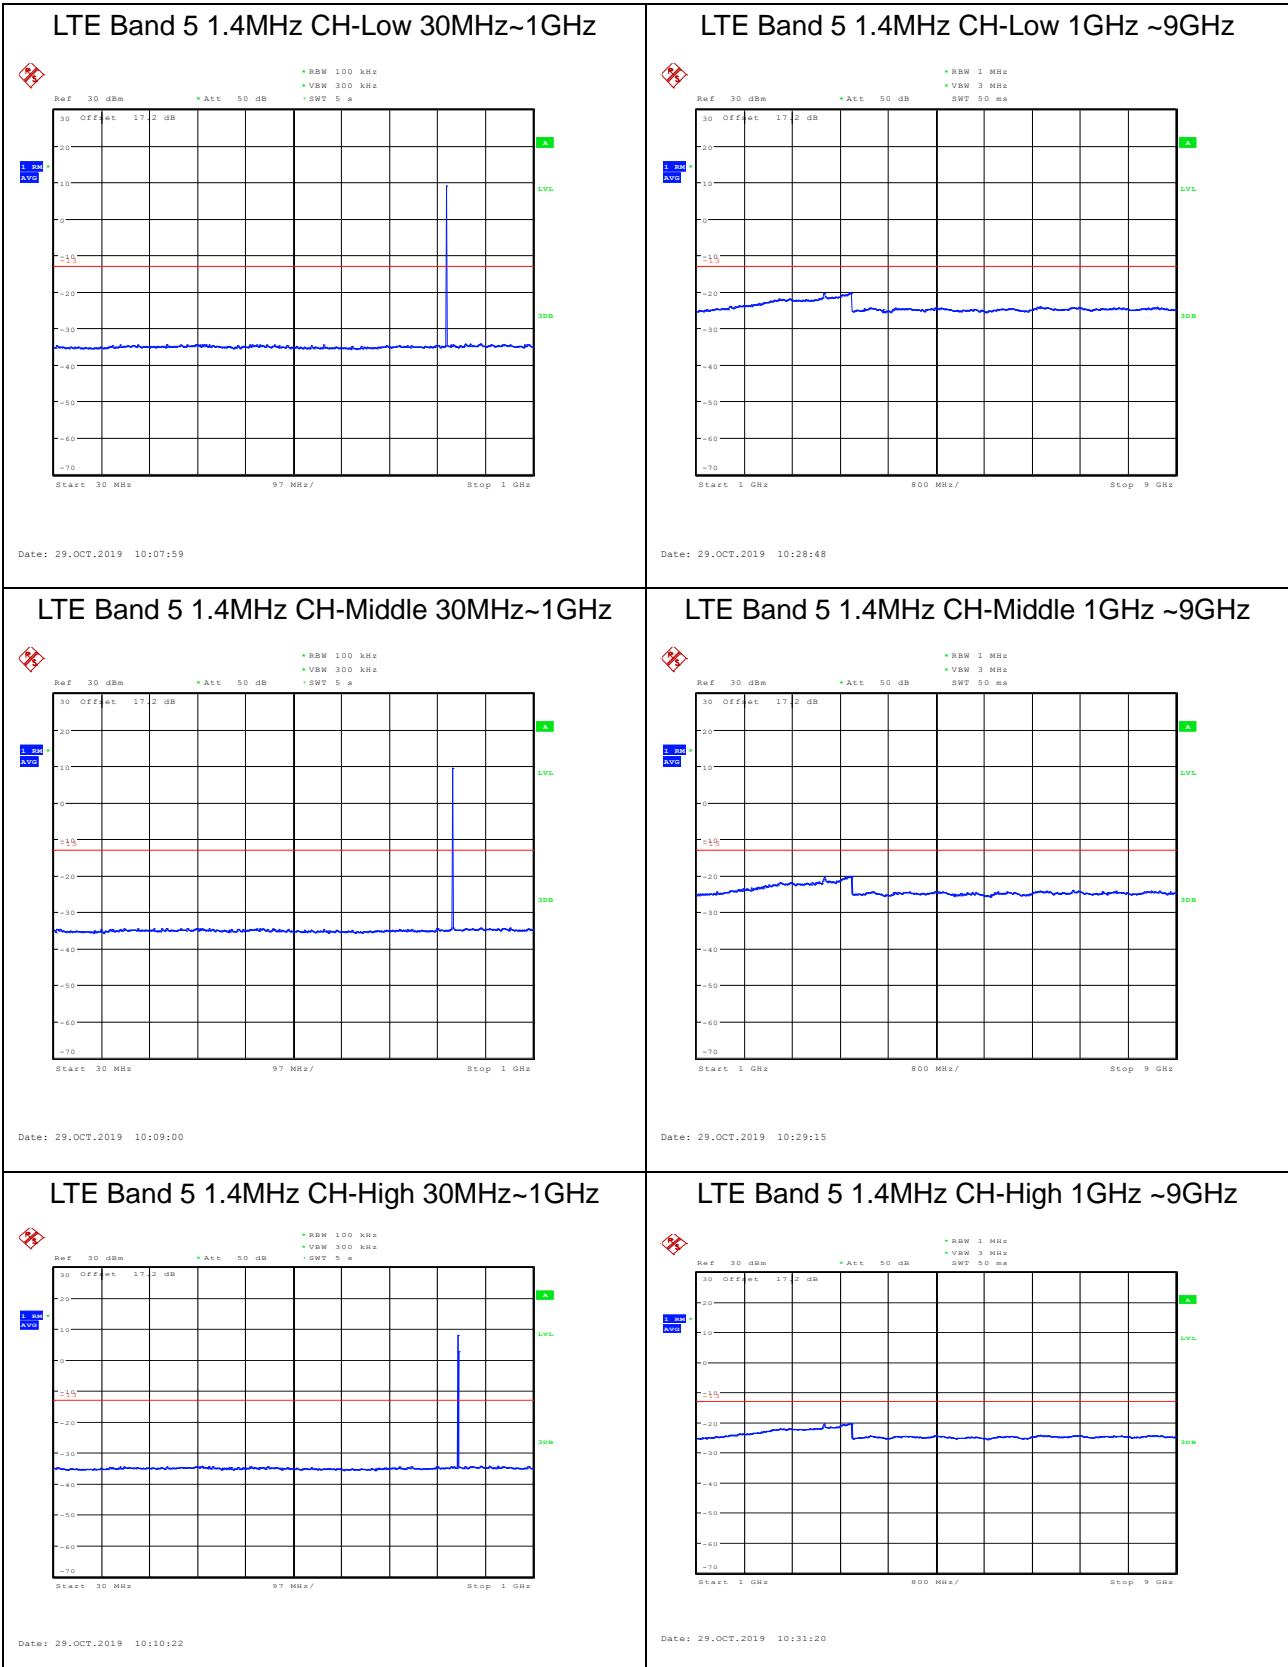




LTE Band 5 3MHz CH-Low 30MHz~1GHz

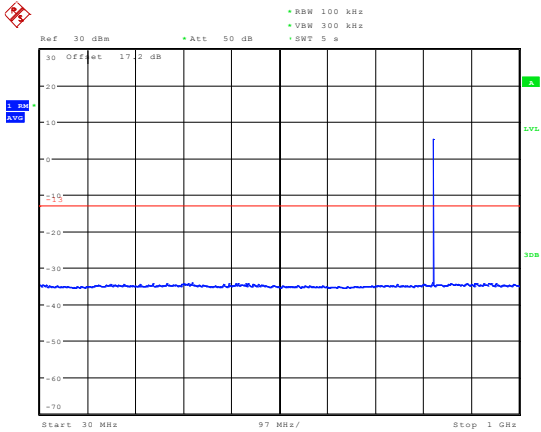


Date: 29.OCT.2019 10:16:12

LTE Band 5 3MHz CH-Low 1GHz ~9GHz

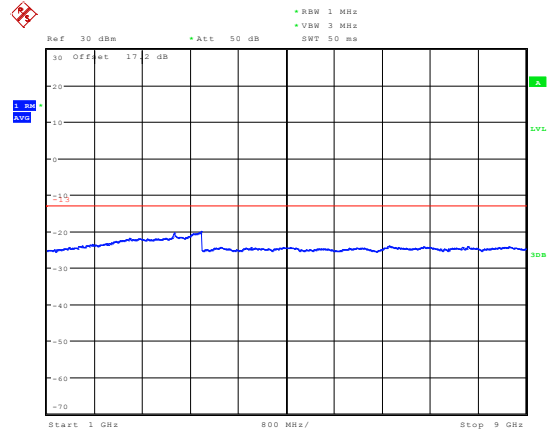


Date: 29.OCT.2019 10:31:46

LTE Band 5 3MHz CH-Middle 30MHz~1GHz

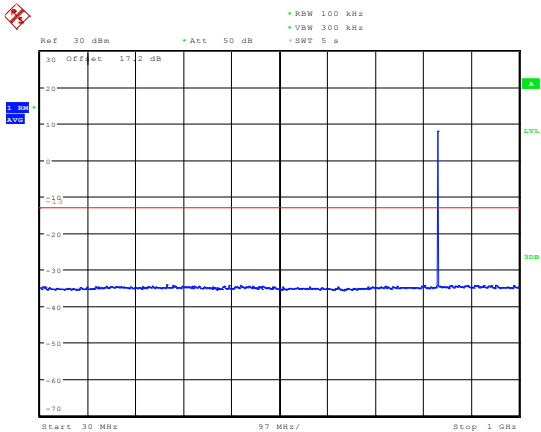


Date: 29.OCT.2019 10:18:17

LTE Band 5 3MHz CH-Middle 1GHz ~9GHz

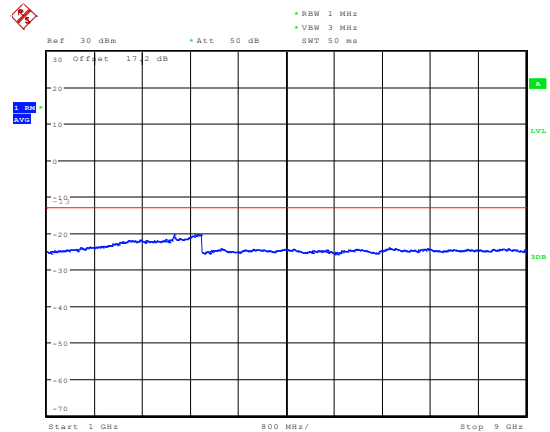


Date: 29.OCT.2019 10:32:52

LTE Band 5 3MHz CH-High 30MHz~1GHz

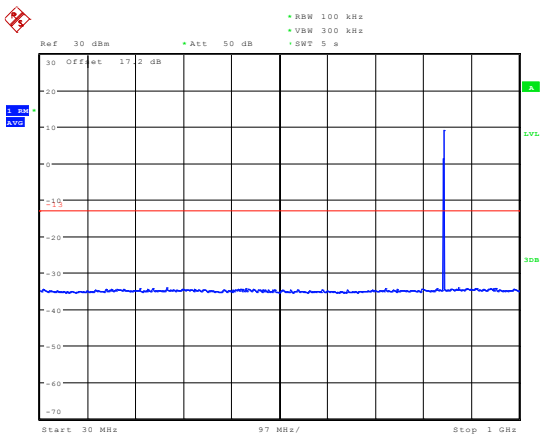

Date: 29.OCT.2019 10:19:29


LTE Band 5 3MHz CH-High 1GHz ~9GHz

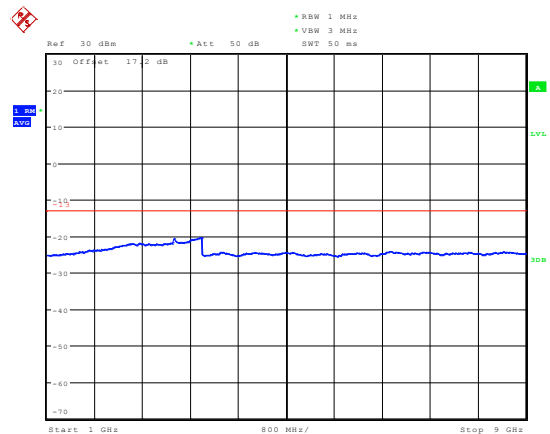

Date: 29.OCT.2019 10:33:15




LTE Band 5 5MHz CH-Low 30MHz~1GHz

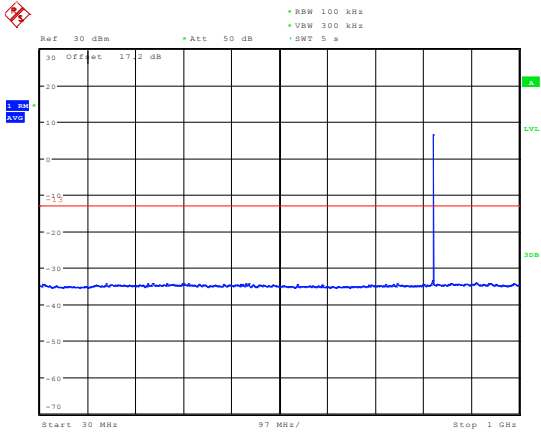


Date: 29.OCT.2019 10:20:46

LTE Band 5 5MHz CH-Low 1GHz ~9GHz

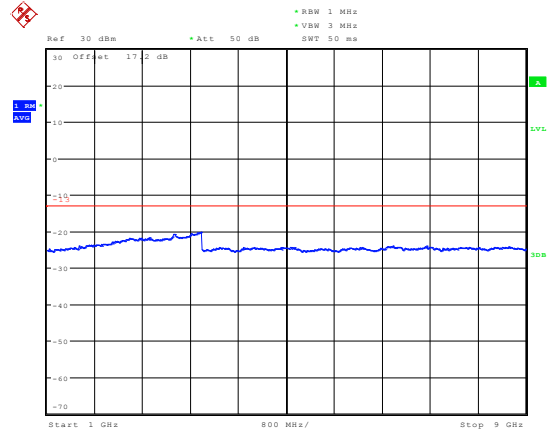


Date: 29.OCT.2019 10:33:39

LTE Band 5 5MHz CH-Middle 30MHz~1GHz

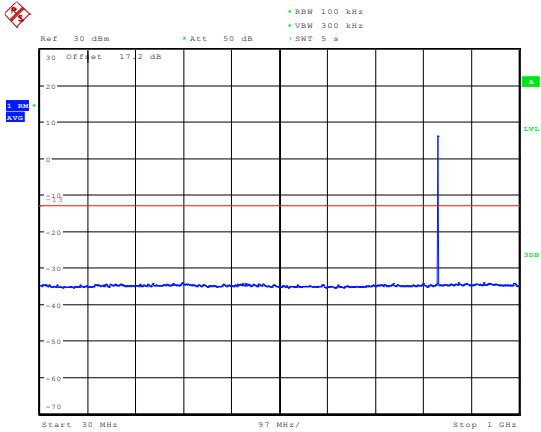


Date: 29.OCT.2019 10:23:32

LTE Band 5 5MHz CH-Middle 1GHz ~9GHz

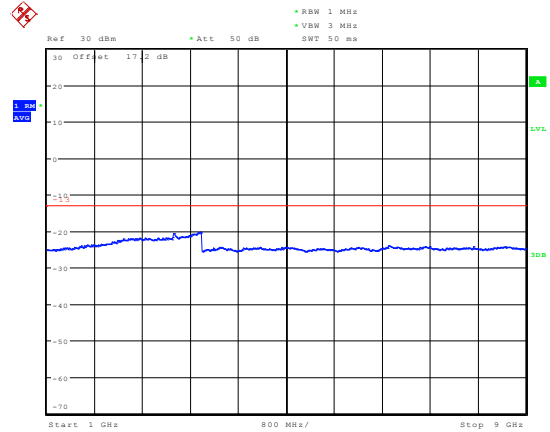


Date: 29.OCT.2019 10:33:57

LTE Band 5 5MHz CH-High 30MHz~1GHz

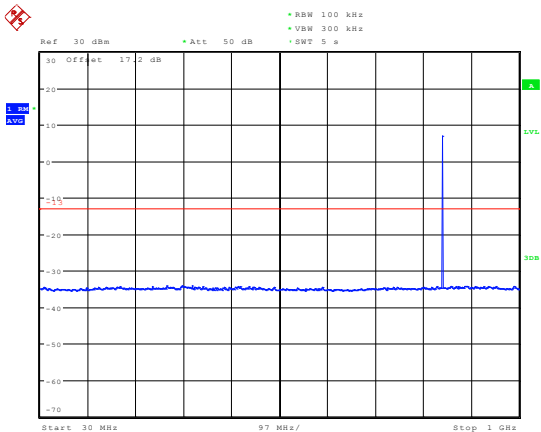

Date: 29.OCT.2019 10:24:24


LTE Band 5 5MHz CH-High 1GHz ~9GHz

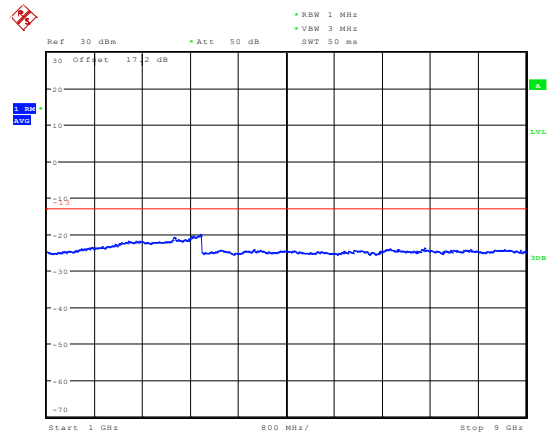

Date: 29.OCT.2019 10:34:20




LTE Band 5 10MHz CH-Low 30MHz~1GHz

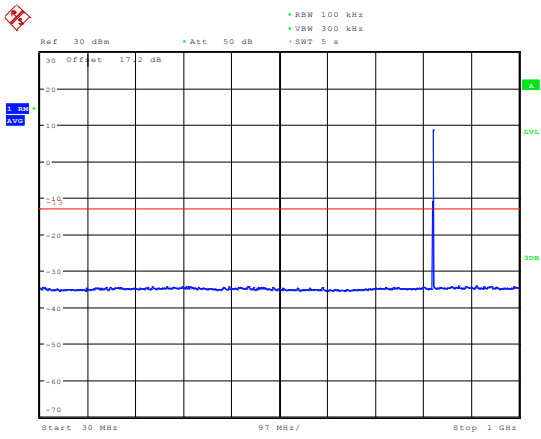


Date: 29.OCT.2019 10:25:06

LTE Band 5 10MHz CH-Low 1GHz ~9GHz

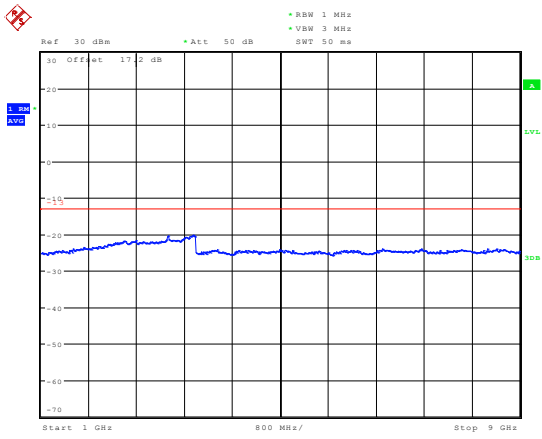


Date: 29.OCT.2019 10:35:57

LTE Band 5 10MHz CH-Middle 30MHz~1GHz

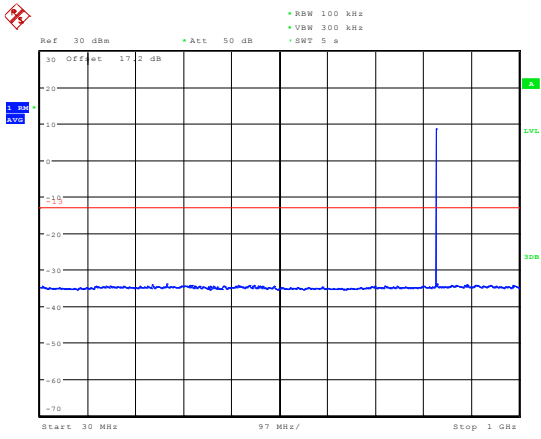


Date: 29.OCT.2019 10:25:32

LTE Band 5 10MHz CH-Middle 1GHz ~9GHz

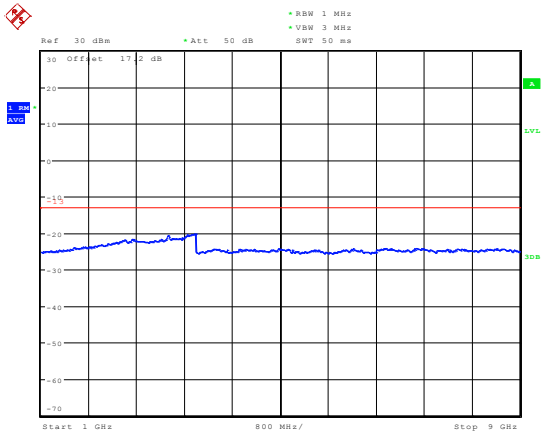


Date: 29.OCT.2019 10:37:40

LTE Band 5 10MHz CH-High 30MHz~1GHz

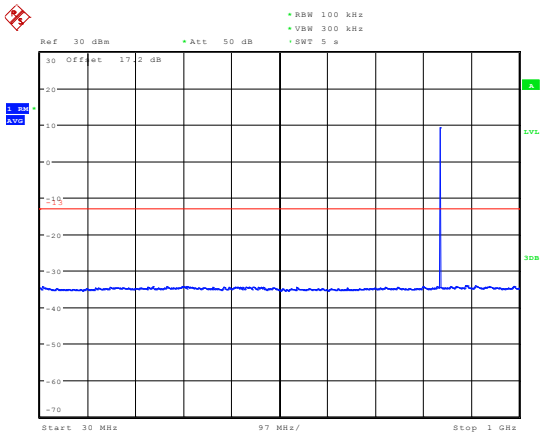

Date: 29.OCT.2019 10:27:03


LTE Band 5 10MHz CH-High 1GHz ~9GHz

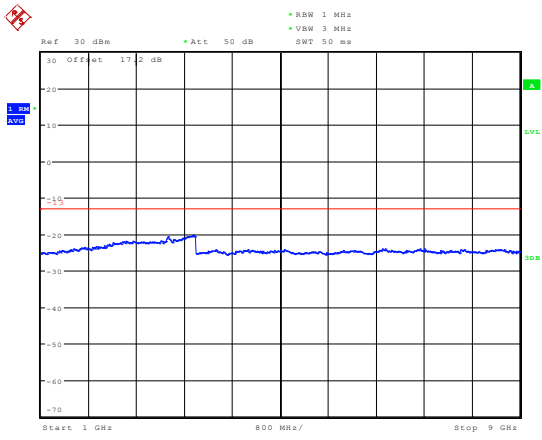

Date: 29.OCT.2019 10:37:58




LTE Band 26 1.4MHz CH-Low 30MHz~1GHz

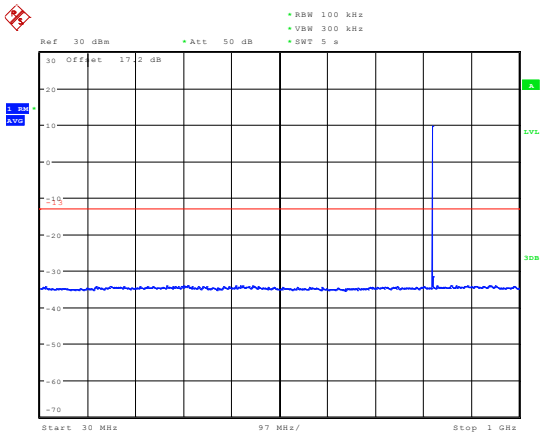


Date: 29.OCT.2019 14:56:43

LTE Band 26 1.4MHz CH-Low 1GHz ~9GHz

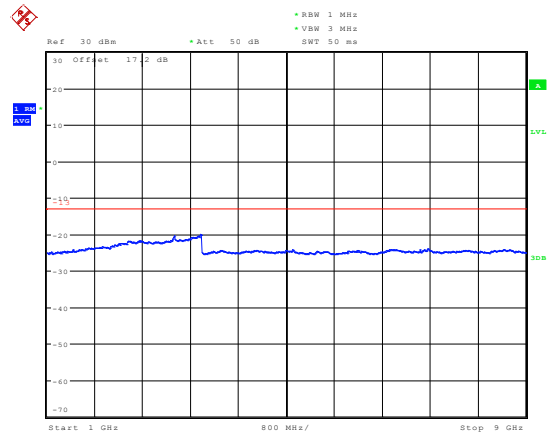


Date: 29.OCT.2019 15:26:29

LTE Band 26 1.4MHz CH-Middle 30MHz~1GHz

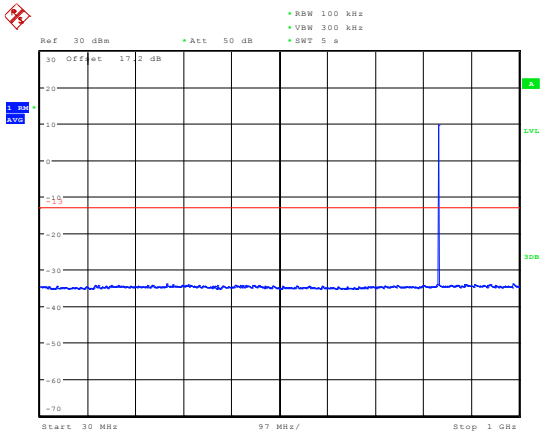


Date: 29.OCT.2019 15:00:25

LTE Band 26 1.4MHz CH-Middle 1GHz ~9GHz

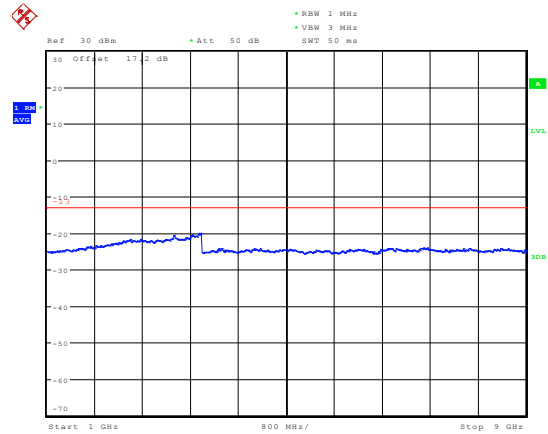


Date: 29.OCT.2019 15:31:26

LTE Band 26 1.4MHz CH-High 30MHz~1GHz

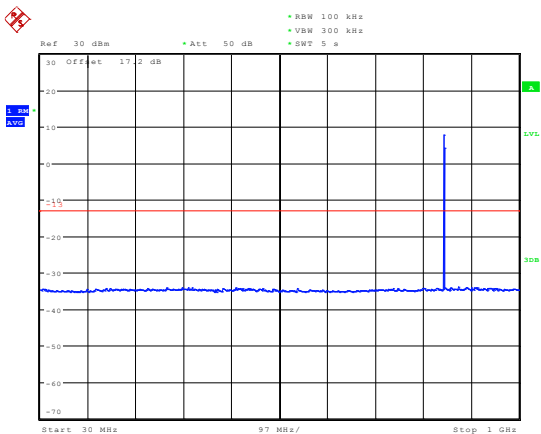

Date: 29.OCT.2019 15:01:57


LTE Band 26 1.4MHz CH-High 1GHz ~9GHz

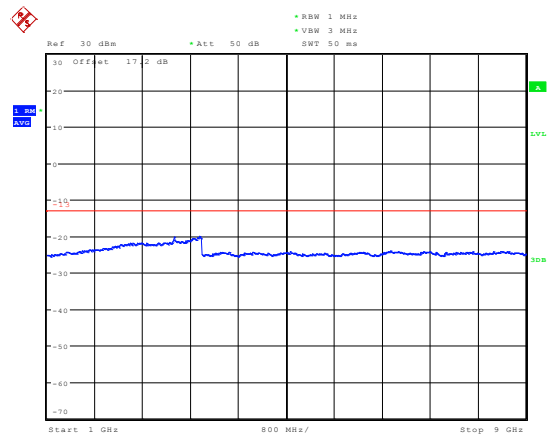

Date: 29.OCT.2019 15:34:57




LTE Band 26 3MHz CH-Low 30MHz~1GHz

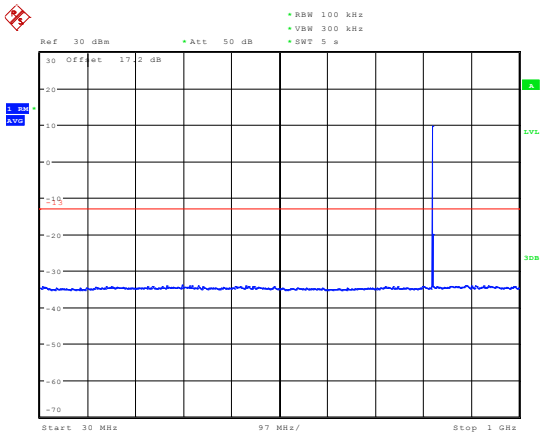


Date: 29.OCT.2019 15:03:27

LTE Band 26 3MHz CH-Low 1GHz ~9GHz

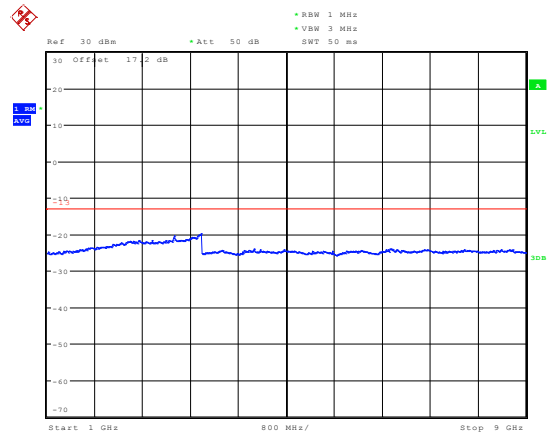


Date: 29.OCT.2019 15:35:19

LTE Band 26 3MHz CH-Middle 30MHz~1GHz

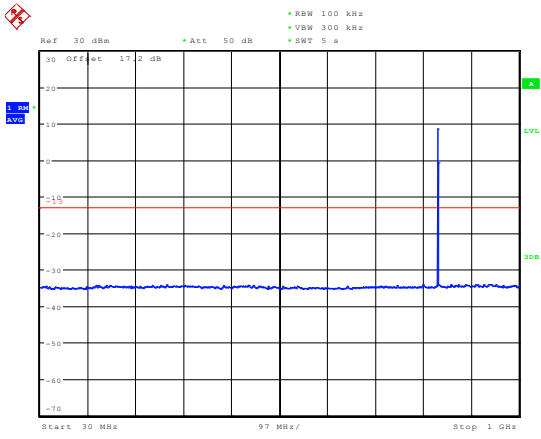


Date: 29.OCT.2019 15:04:18

LTE Band 26 3MHz CH-Middle 1GHz ~9GHz

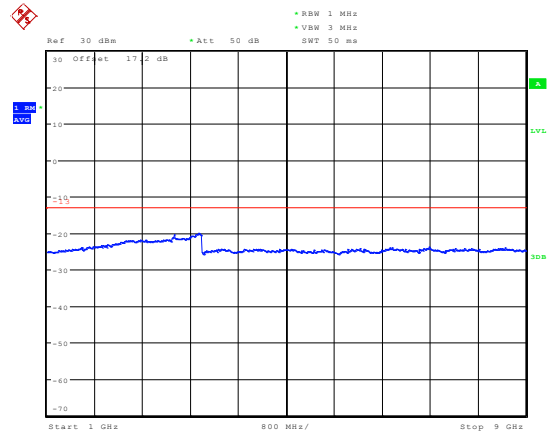


Date: 29.OCT.2019 15:35:38

LTE Band 26 3MHz CH-High 30MHz~1GHz

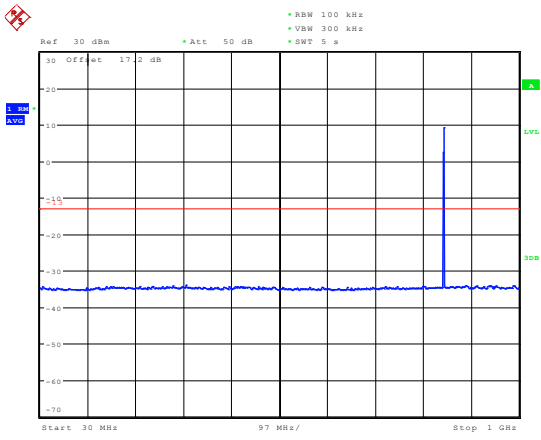

Date: 29.OCT.2019 15:05:42


LTE Band 26 3MHz CH-High 1GHz ~9GHz

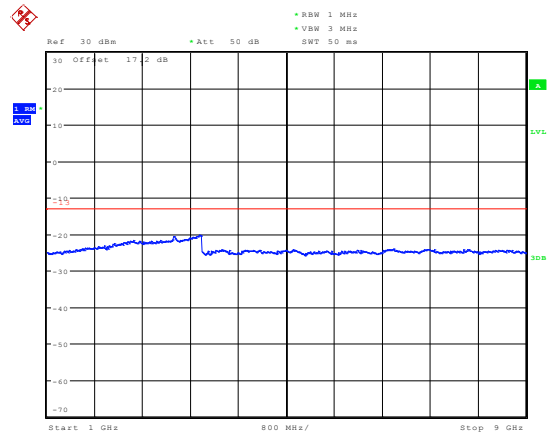

Date: 29.OCT.2019 15:35:57




LTE Band 26 5MHz CH-Low 30MHz~1GHz

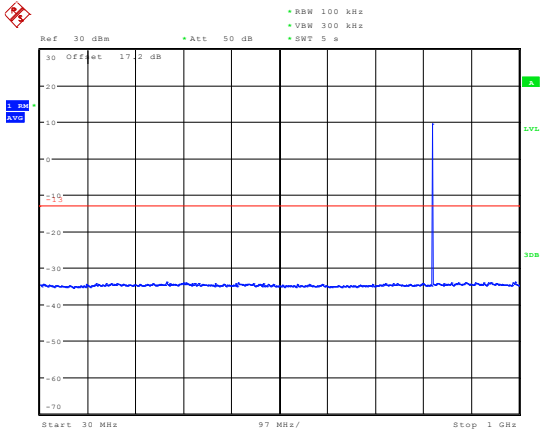


Date: 29.OCT.2019 15:06:50

LTE Band 26 5MHz CH-Low 1GHz ~9GHz

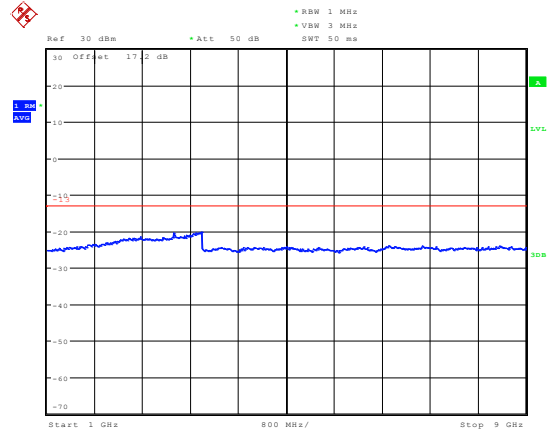


Date: 29.OCT.2019 15:36:21

LTE Band 26 5MHz CH-Middle 30MHz~1GHz

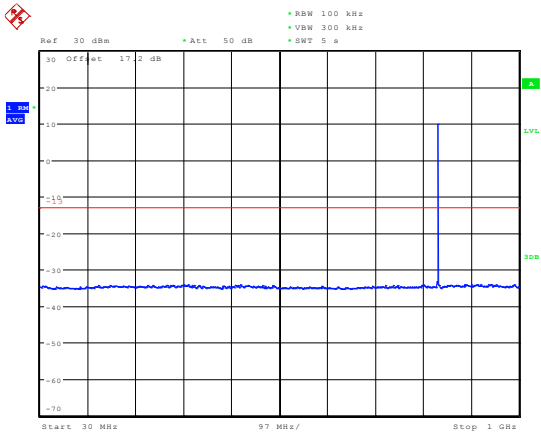


Date: 29.OCT.2019 15:07:38

LTE Band 26 5MHz CH-Middle 1GHz ~9GHz

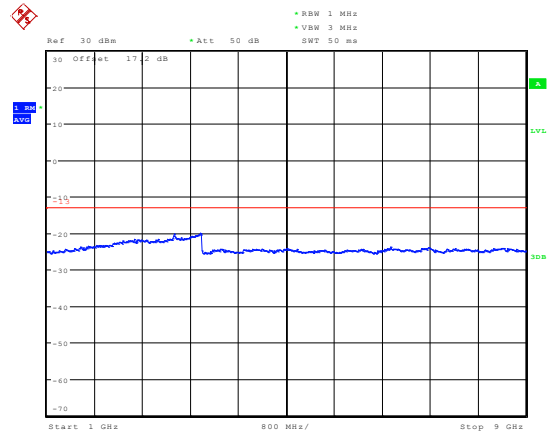


Date: 29.OCT.2019 15:36:40

LTE Band 26 5MHz CH-High 30MHz~1GHz

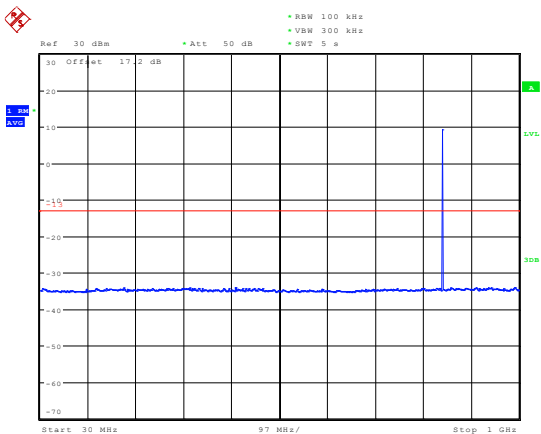

Date: 29.OCT.2019 15:10:18


LTE Band 26 5MHz CH-High 1GHz ~9GHz

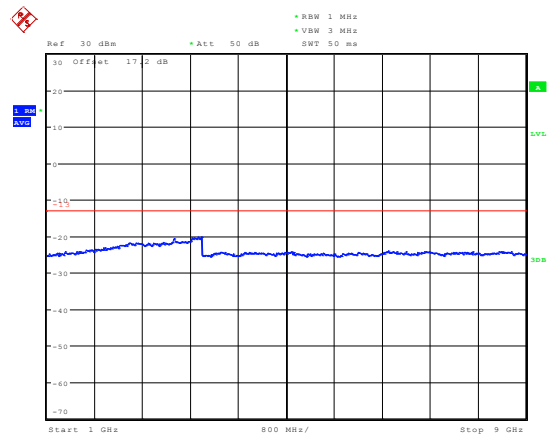

Date: 29.OCT.2019 15:37:07




LTE Band 26 10MHz CH-Low 30MHz~1GHz

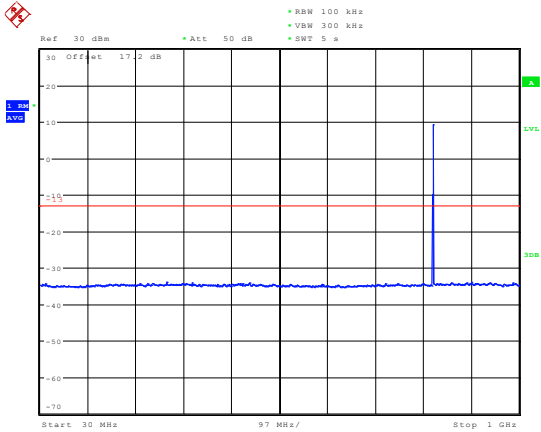


Date: 29.OCT.2019 15:13:34

LTE Band 26 10MHz CH-Low 1GHz ~9GHz

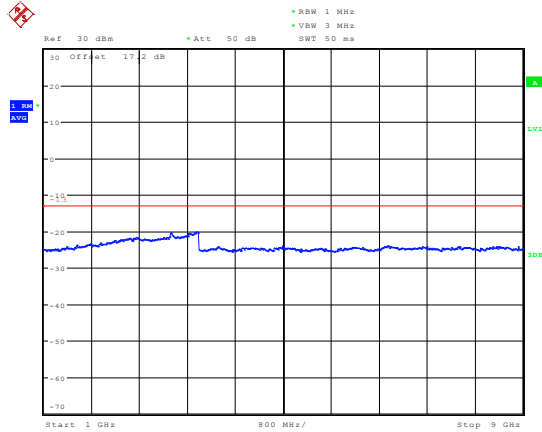


Date: 29.OCT.2019 15:37:32

LTE Band 26 10MHz CH-Middle 30MHz~1GHz

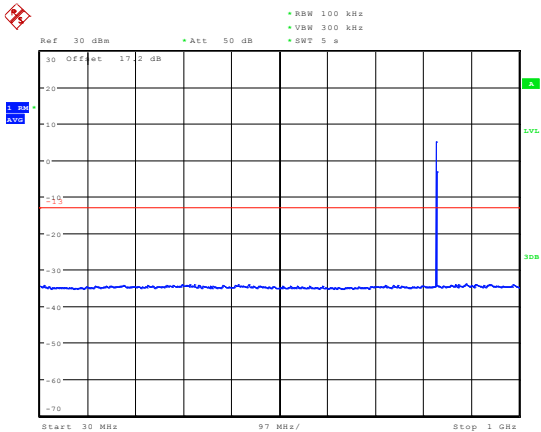


Date: 29.OCT.2019 15:17:20

LTE Band 26 10MHz CH-Middle 1GHz ~9GHz

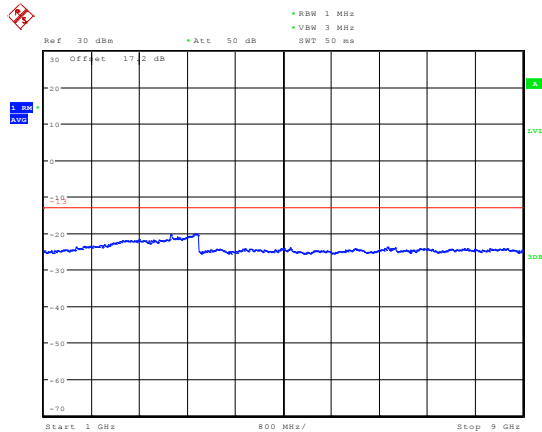


Date: 29.OCT.2019 15:37:50

LTE Band 26 10MHz CH-High 30MHz~1GHz

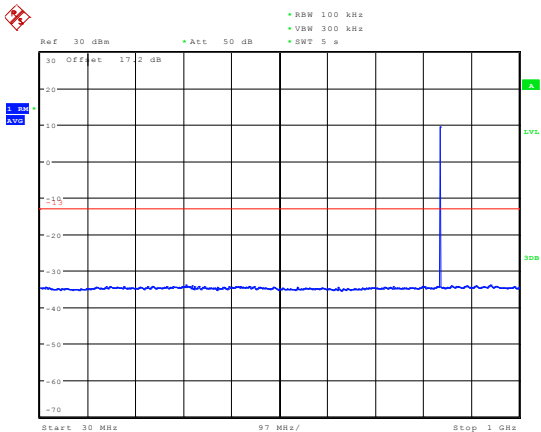

Date: 29.OCT.2019 15:19:55


LTE Band 26 10MHz CH-High 1GHz ~9GHz

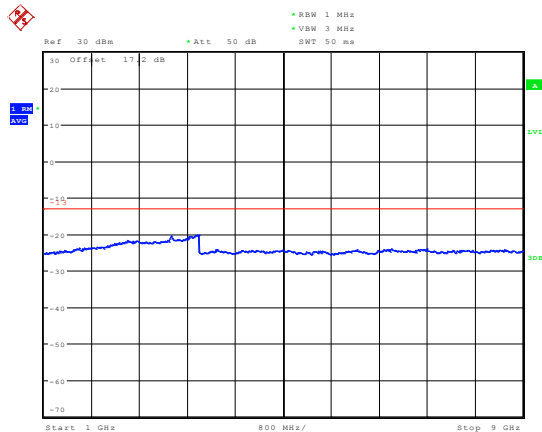

Date: 29.OCT.2019 15:40:03




LTE Band 26 15MHz CH-Low 30MHz~1GHz

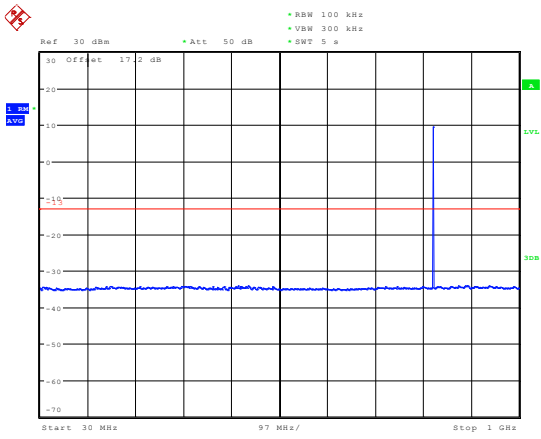


Date: 29.OCT.2019 15:22:02

LTE Band 26 15MHz CH-Low 1GHz ~9GHz

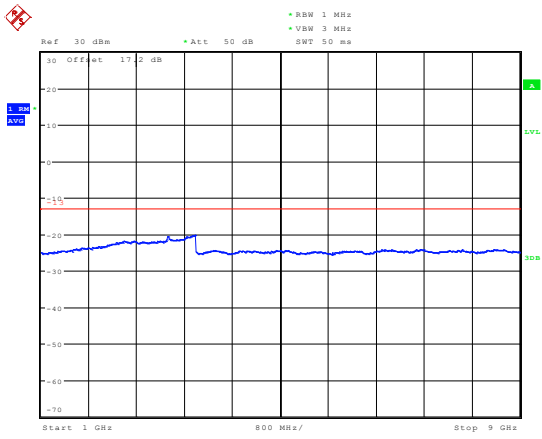


Date: 29.OCT.2019 15:43:33

LTE Band 26 15MHz CH-Middle 30MHz~1GHz

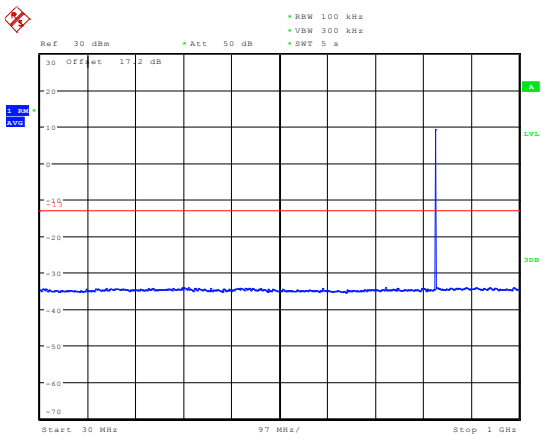


Date: 29.OCT.2019 15:22:58

LTE Band 26 15MHz CH-Middle 1GHz ~9GHz

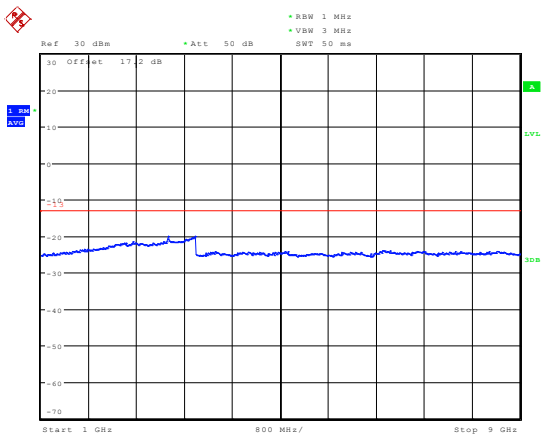


Date: 29.OCT.2019 15:43:54

LTE Band 26 15MHz CH-High 30MHz~1GHz

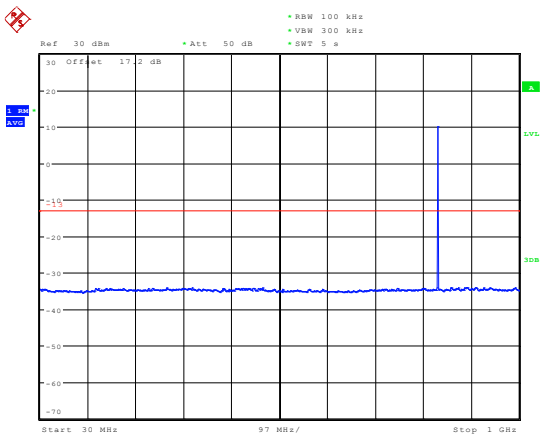

Date: 29.OCT.2019 15:24:00

LTE Band 26 15MHz CH-High 1GHz ~9GHz

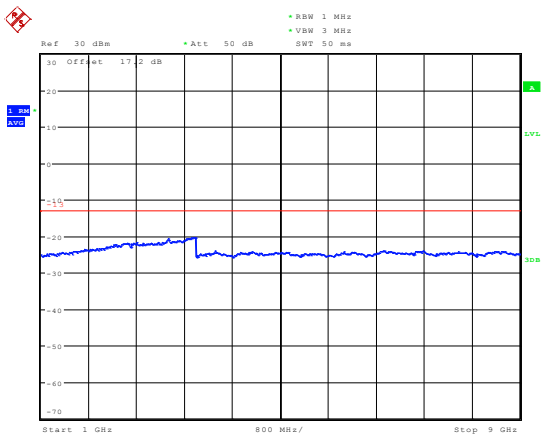

Date: 29.OCT.2019 15:44:35

5.9. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

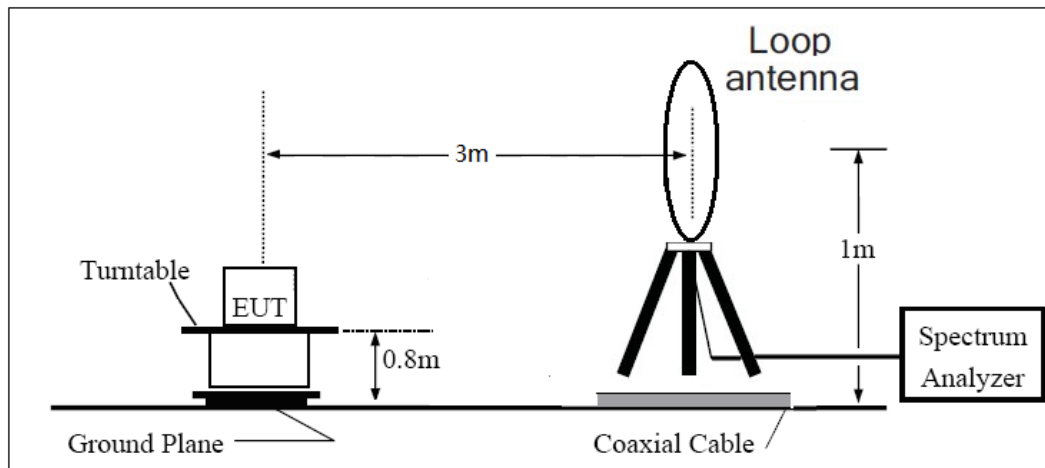

30MHz ~ 1GHz

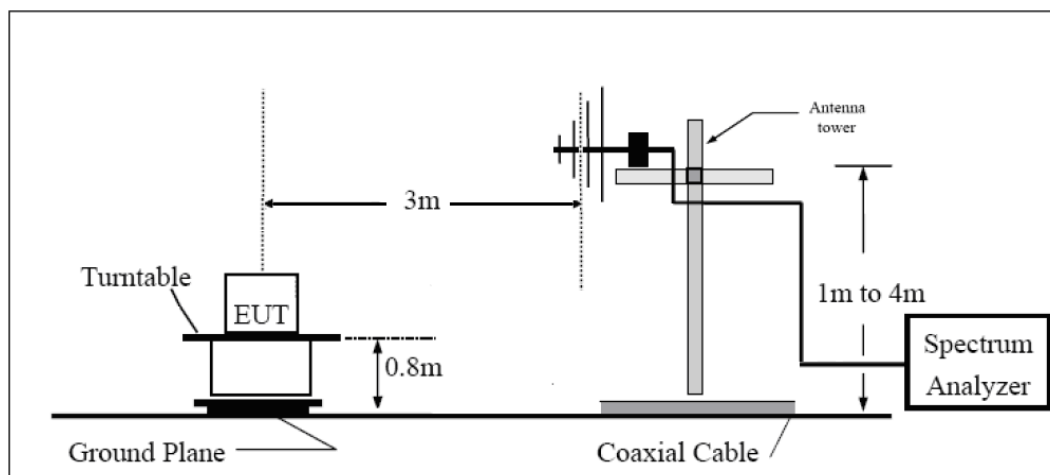

Above 1GHz

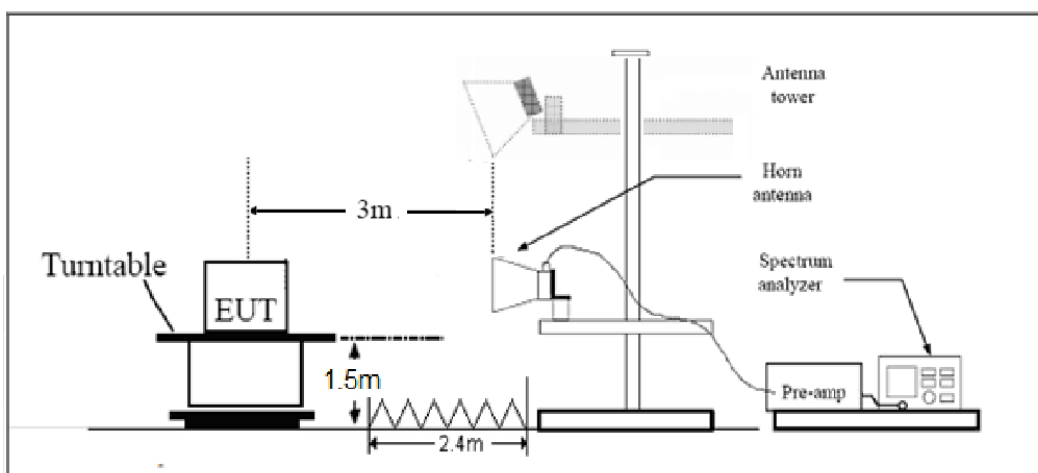



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-51.83	2.00	10.75	Horizontal	-45.23	-13.00	32.23	135
3	2509.5	-45.25	2.51	11.05	Horizontal	-38.86	-13.00	25.86	45
4	3346.0	-53.28	4.20	11.15	Horizontal	-48.48	-13.00	35.48	135
5	4182.5	-61.29	5.20	11.15	Horizontal	-57.49	-13.00	44.49	45
6	5019.0	-60.49	5.50	11.95	Horizontal	-56.19	-13.00	43.19	270
7	5855.5	-61.49	5.70	13.55	Horizontal	-55.79	-13.00	42.79	45
8	6692.0	-58.90	6.30	13.75	Horizontal	-53.60	-13.00	40.60	0
9	7528.5	-55.02	6.80	13.85	Horizontal	-50.12	-13.00	37.12	135
10	8365.0	-55.45	6.90	14.25	Horizontal	-50.25	-13.00	37.25	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-52.37	2.00	10.75	Horizontal	-45.77	-13.00	32.77	225
3	2509.5	-43.19	2.51	11.05	Horizontal	-36.80	-13.00	23.80	90
4	3346.0	-52.95	4.20	11.15	Horizontal	-48.15	-13.00	35.15	45
5	4182.5	-61.36	5.20	11.15	Horizontal	-57.56	-13.00	44.56	135
6	5019.0	-60.63	5.50	11.95	Horizontal	-56.33	-13.00	43.33	225
7	5855.5	-60.80	5.70	13.55	Horizontal	-55.10	-13.00	42.10	270
8	6692.0	-58.00	6.30	13.75	Horizontal	-52.70	-13.00	39.70	45
9	7528.5	-54.74	6.80	13.85	Horizontal	-49.84	-13.00	36.84	0
10	8365.0	-56.09	6.90	14.25	Horizontal	-50.89	-13.00	37.89	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-52.09	2.00	10.75	Horizontal	-45.49	-13.00	32.49	45
3	2509.5	-43.09	2.51	11.05	Horizontal	-36.70	-13.00	23.70	135
4	3346.0	-51.80	4.20	11.15	Horizontal	-47.00	-13.00	34.00	45
5	4182.5	-61.80	5.20	11.15	Horizontal	-58.00	-13.00	45.00	135
6	5019.0	-60.29	5.50	11.95	Horizontal	-55.99	-13.00	42.99	225
7	5855.5	-60.25	5.70	13.55	Horizontal	-54.55	-13.00	41.55	45
8	6692.0	-58.85	6.30	13.75	Horizontal	-53.55	-13.00	40.55	135
9	7528.5	-55.81	6.80	13.85	Horizontal	-50.91	-13.00	37.91	315
10	8365.0	-55.85	6.90	14.25	Horizontal	-50.65	-13.00	37.65	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-53.70	2.00	10.75	Horizontal	-47.10	-13.00	34.10	45
3	2509.50	-43.57	2.51	11.05	Horizontal	-37.18	-13.00	24.18	225
4	3346.00	-51.49	4.20	11.15	Horizontal	-46.69	-13.00	33.69	270
5	4182.50	-60.84	5.20	11.15	Horizontal	-57.04	-13.00	44.04	180
6	5019.00	-59.37	5.50	11.95	Horizontal	-55.07	-13.00	42.07	0
7	5855.50	-61.02	5.70	13.55	Horizontal	-55.32	-13.00	42.32	315
8	6692.00	-58.89	6.30	13.75	Horizontal	-53.59	-13.00	40.59	135
9	7528.50	-55.43	6.80	13.85	Horizontal	-50.53	-13.00	37.53	225
10	8365.00	-56.87	6.90	14.25	Horizontal	-51.67	-13.00	38.67	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.56	-52.83	2.00	10.75	Horizontal	-46.23	-13.00	33.23	135
3	2502.94	-43.33	2.51	11.05	Horizontal	-36.94	-13.00	23.94	45
4	3346.00	-51.20	4.20	11.15	Horizontal	-46.40	-13.00	33.40	45
5	4182.50	-60.71	5.20	11.15	Horizontal	-56.91	-13.00	43.91	270
6	5019.00	-59.94	5.50	11.95	Horizontal	-55.64	-13.00	42.64	225
7	5855.50	-61.67	5.70	13.55	Horizontal	-55.97	-13.00	42.97	180
8	6692.00	-58.31	6.30	13.75	Horizontal	-53.01	-13.00	40.01	0
9	7528.50	-55.18	6.80	13.85	Horizontal	-50.28	-13.00	37.28	135
10	8365.00	-56.16	6.90	14.25	Horizontal	-50.96	-13.00	37.96	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 15MHz CH- Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1660.13	-51.57	2.00	10.75	Horizontal	-44.97	-13.00	31.97	270
3	2490.00	-43.91	2.51	11.05	Horizontal	-37.52	-13.00	24.52	315
4	3346.00	-73.47	4.20	11.15	Horizontal	-68.67	-13.00	55.67	135
5	4182.50	-70.57	5.20	11.15	Horizontal	-66.77	-13.00	53.77	45
6	5019.00	-69.33	5.50	11.95	Horizontal	-65.03	-13.00	52.03	225
7	5855.50	-70.16	5.70	13.55	Horizontal	-64.46	-13.00	51.46	180
8	6692.00	-68.21	6.30	13.75	Horizontal	-62.91	-13.00	49.91	270
9	7528.50	-66.44	6.80	13.85	Horizontal	-61.54	-13.00	48.54	315
10	8365.00	-64.96	6.90	14.25	Horizontal	-59.76	-13.00	46.76	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV40	15195-01-00	2019-05-19	2020-05-18
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-6-12
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****