



# RF TEST REPORT

**Applicant**      Quectel Wireless Solutions Co., Ltd  
**FCC ID**            XMR202007BG95M6  
**Product**          LTE Cat M1 & Cat NB2 Module  
**Brand**             Quectel  
**Model**             BG95-M6  
**Marketing**        Quectel BG95-M6  
**Report No.**       R2108A0769-R3V1  
**Issue Date**      November 25, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 90S (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the Test Report .....	5
1.2. Test facility .....	5
1.3. Testing Location .....	5
2. General Description of Equipment under Test.....	6
2.3. Applicant and Manufacturer Information .....	6
2.4. General Information.....	6
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	9
5.3. RF Power Output and Effective Radiated Power .....	9
5.4. Occupied Bandwidth .....	12
5.5. Emission Mask .....	16
5.6. Peak-to-Average Power Ratio (PAPR) .....	23
5.7. Frequency Stability.....	25
5.8. Spurious Emissions at Antenna Terminals .....	30
5.9. Radiates Spurious Emission .....	35
6. Main Test Instruments .....	40
ANNEX A: The EUT Appearance .....	41
ANNEX B: Test Setup Photos .....	42
ANNEX C: Verify data .....	43
ANNEX D: Product Change Description .....	44



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	September 26, 2021
Rev.1	Update data. Update description	November 25, 2021

Note: This revised report (Report No. R2108A0769-R3V1) supersedes and replaces the previously issued report (Report No. R2108A0769-R3). Please discard or destroy the previously issued report and dispose of it accordingly.

## Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046/90.635(b)	PASS
2	Occupied Bandwidth	2.1049/ 90.209	PASS
3	Emission Masks	2.1051 / 90.691	PASS
4	Peak-to-Average Power Ratio	KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 90.213	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 90.691	PASS
7	Radiates Spurious Emission	2.1053 /90.691	PASS
Date of Testing: (Original) May 23, 2020 ~ June 16, 2020 (Variant) August 24, 2021~ November 25, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

**BG95-M6 (Report No.: R2108A0769-R3V1) is a variant model of BG95-M6 (Report No.: R2006A0413-R3). There is only changed the Power Amplifier and Software Version of product. Tested cases refer to the following table. Please refer to Appendix C for Verify data**

Test Case	Original	Variant
RF Power Output and Effective Radiated Power	PASS	Retest(LTE band 26)
Occupied Bandwidth	PASS	Verify the worst combination of each frequency band(LTE band 26)
Band Edge Compliance	PASS	Verify the worst combination of each frequency band(LTE band 26)
Peak-to-Average Power Ratio	PASS	Retest(LTE band 26)
Frequency Stability	PASS	Verify the worst combination of each frequency band(LTE band 26)
Spurious Emissions at Antenna Terminals	PASS	Verify the worst combination of each frequency band(LTE band 26)
Radiates Spurious Emission	PASS	Verify the worst combination of each frequency band(LTE band 26)

**The detailed product change description please refers to the Difference Declaration Letter.**



## 1. Test Laboratory

### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### 2.3. Applicant and Manufacturer Information

Applicant	Quectel Wireless Solutions Co., Ltd
Applicant address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
Manufacturer	Quectel Wireless Solutions Co., Ltd
Manufacturer address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

### 2.4. General Information

EUT Description			
Model	BG95-M6		
SN	Original	866642050000803	
	Variant	866642053044873	
Hardware Version	R1.1		
Software Version	BG95M6LAR02A02		
Power Supply	External Power Supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Antenna Gain	Frequency(MHz)	Gain(dBi)	
	810	3.19	
	820	2.53	
Test Mode(s)	LTE Band 26;		
Test Modulation	QPSK 16QAM;		
LTE Category	M1		
Maximum E.R.P.	LTE Band 26:	24.04dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.3V    Maximum: 4.3V		
Extreme Temperature	Lowest: -40°C    Highest: +85°C		
Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 26	814 ~ 824	859 ~ 869
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR 47 Part 90S (2020)**

**ANSI C63.26 (2015)**

**Reference standard:**

**FCC CFR47 Part 2 (2020)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

## 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen as the worst case configuration below for LTE Band 26.

Test items	Bandwidth (MHz)					Modulation		RB			Test Channel		
	1.4	3	5	10	15	QPSK	16QAM	1	50%	100%	L	M	H
RF Power Output and Effective Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	-	-	O	-	O	-
Emission Mask	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	-	-	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	-	O	O	-	O	-	O	-	O	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.												



## 5. Test Case Results

### 5.1. RF Power Output and Effective Radiated Power

#### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.



The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
- f) The maximum ERP is the maximum value determined in the preceding step.
- g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:  
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$   
 where: dBd refers to gain relative to an ideal dipole.  
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$   
 The RB allocation refers to section 5.1, using the maximum output power configuration.

**Test Setup**

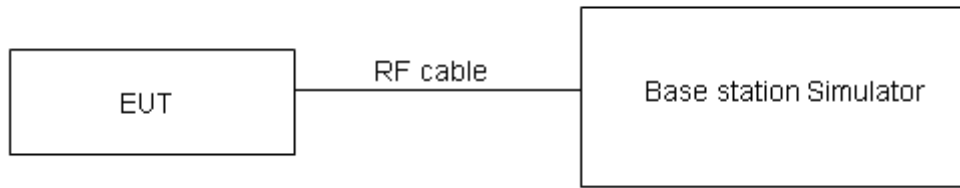

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

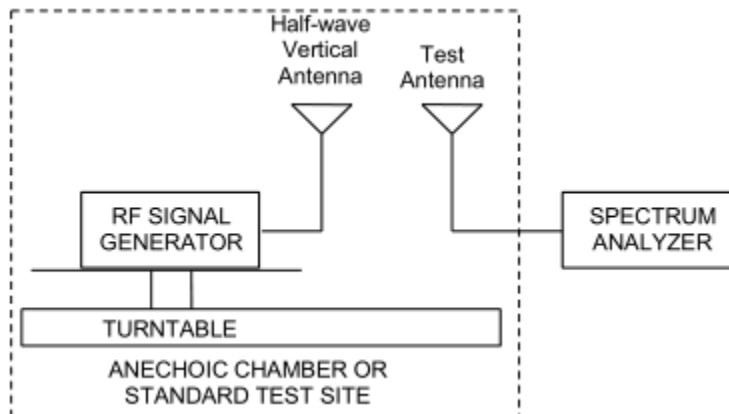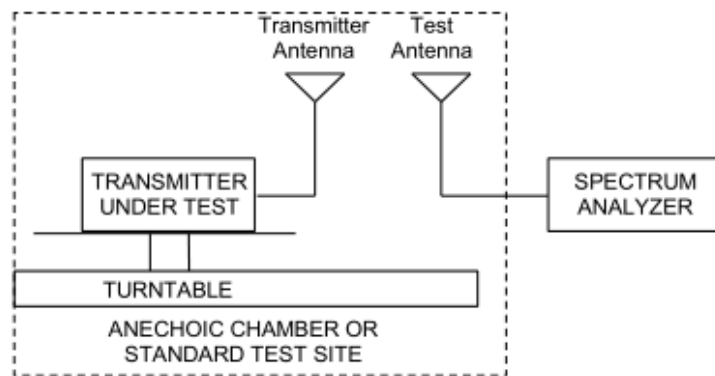

**Limits**

Part 90.635 (b) the maximum output power of the transmitter for mobile stations is 100 watts.

Rule Part 90.635(b) specifies that “The maximum output power of the transmitter for mobile stations is 100 watts”.

Limit	$\leq 100\text{ W}$ (50 dBm)
-------	------------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4\text{ dB}$  for RF power output,  $k = 2$ ,  $U = 1.19\text{ dB}$  for ERP.



## Test Results

LTE Band26	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)		ERP (dBm)	
				QPSK	16QAM	QPSK	16QAM
1.4MHz	26697/814.7	0	1#0	23.34	21.73	23.72	22.11
		0	6#0	21.02	21.70	21.40	22.08
	26740/819	0	1#0	23.49	21.91	23.87	22.29
		0	6#0	21.06	21.80	21.44	22.18
	26783/823.3	0	1#5	23.52	22.01	23.90	22.39
		0	6#0	21.21	21.82	21.59	22.20
3MHz	26705/815.5	0	1#0	23.29	22.56	23.67	22.94
		0	6#0	21.03	21.07	21.41	21.45
	26740/819	0	1#0	23.66	22.19	24.04	22.57
		0	6#0	21.14	21.45	21.52	21.83
	26775/822.5	1	1#5	23.57	22.08	23.95	22.46
		1	6#0	21.13	21.58	21.51	21.96
5MHz	26715/816.5	3	1#0	23.15	22.91	23.53	23.29
		0	6#0	22.13	21.45	22.51	21.83
	26740/819	0	1#0	23.16	23.38	23.54	23.76
		0	6#0	22.16	21.28	22.54	21.66
	26765/821.5	0	1#5	23.36	22.92	23.74	23.30
		3	6#0	22.26	21.55	22.64	21.93
10MHz	26740/819	0	1#0	23.23	22.84	23.61	23.22
		0	4#0	23.22	22.67	23.60	23.05

## 5.2. Occupied Bandwidth

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%


### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160 kHz for LTE Band 26 (1.4MHz/3MHz/5MHz /10MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

### Test Setup

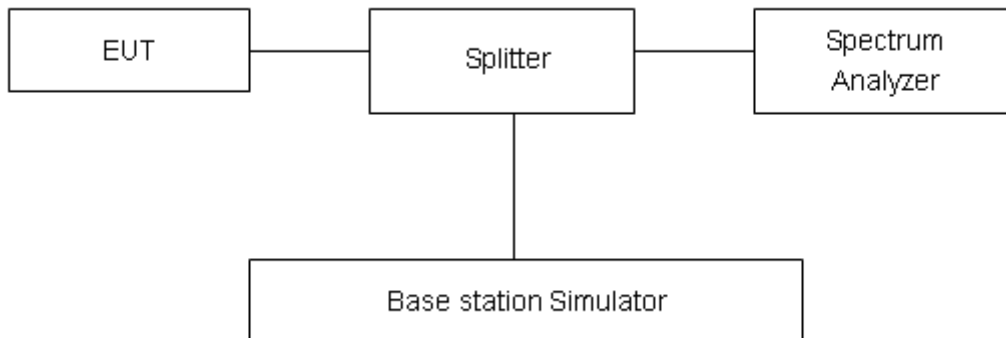

### Limits

No specific occupied bandwidth requirements in part 2.1049.







Part 90.209 (a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where part 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.



### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .

**Test Result**

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Bandwidth(MHz)	
					99%Power	-26dBc
LTE Band26	1.4MHz	QPSK	26740/819	6#0	1.1035	1.344
		16QAM	26740/819	6#0	0.9423	1.164
	3MHz	QPSK	26740/819	6#0	1.1049	1.314
		16QAM	26740/819	6#0	0.9445	1.171
	5MHz	QPSK	26740/819	6#0	1.1086	1.359
		16QAM	26740/819	6#0	0.9519	1.196
	10MHz	QPSK	26740/819	6#0	1.1141	1.331
		16QAM	26740/819	6#0	0.9616	1.168

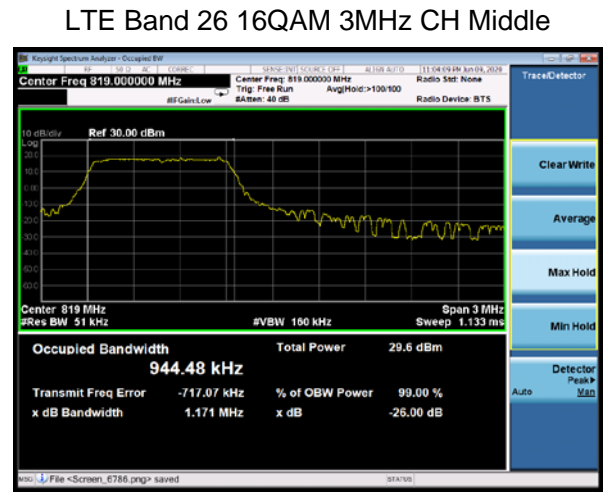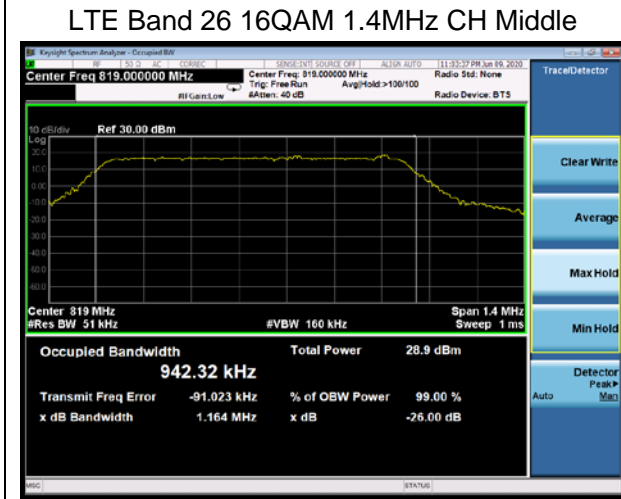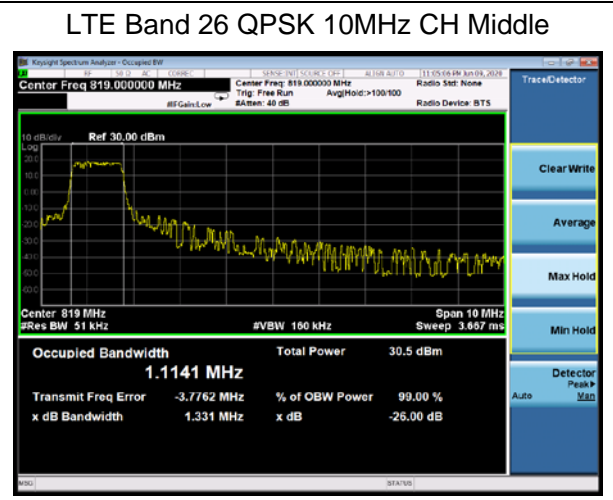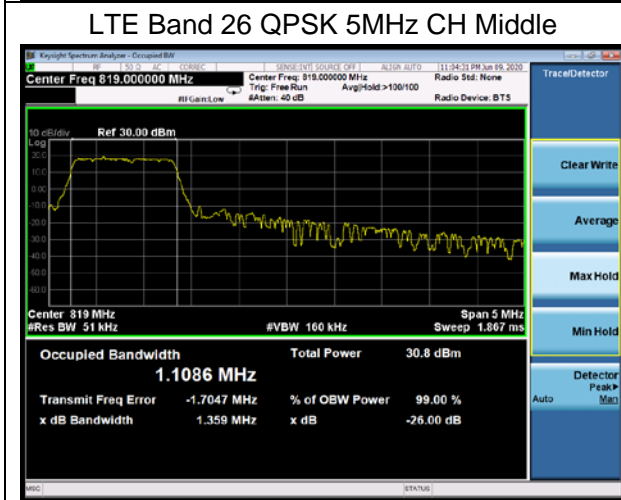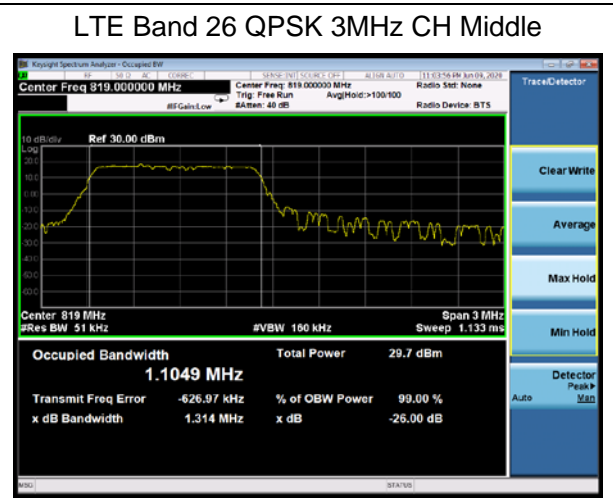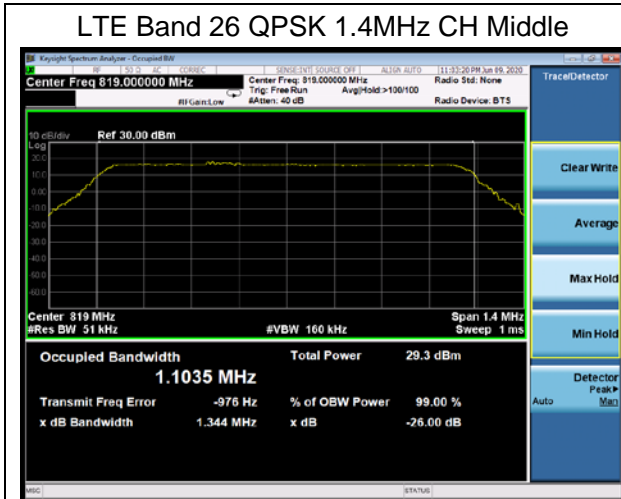

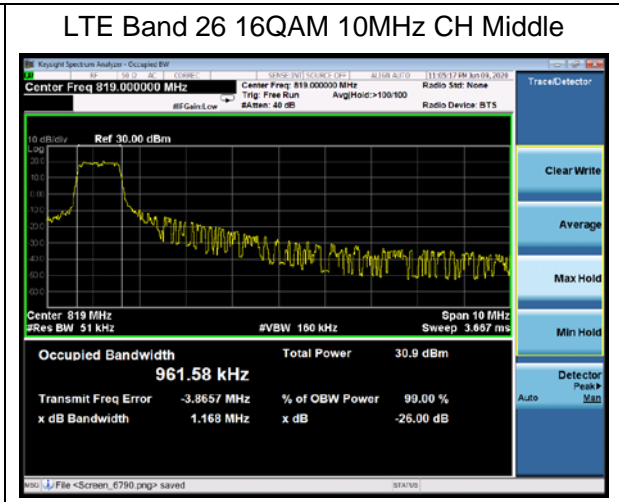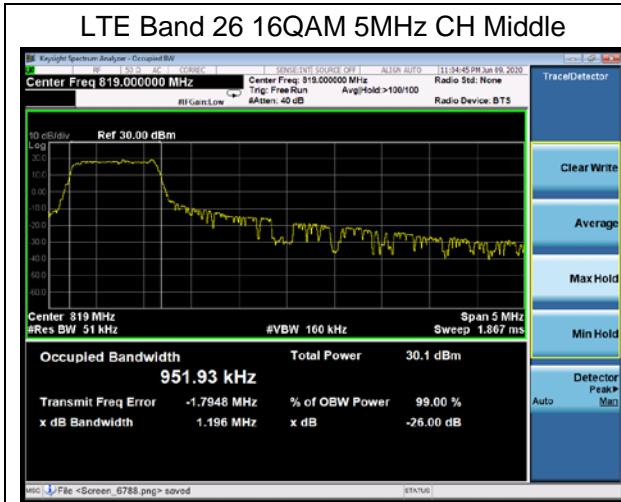

### 5.3. Emission Mask

#### Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used. For Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.

Spectrum analyzer plots are included on the following pages.

#### Test Setup

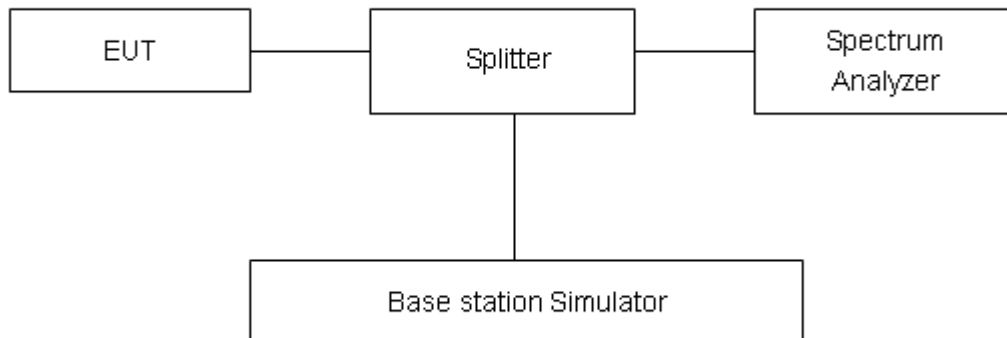

#### Limits

Rule Part 90.691(a) specifies that “ For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.”

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684\text{dB}$ .






Test Result:


LTE Band 26 QPSK 1.4MHz CH-Low 1RB

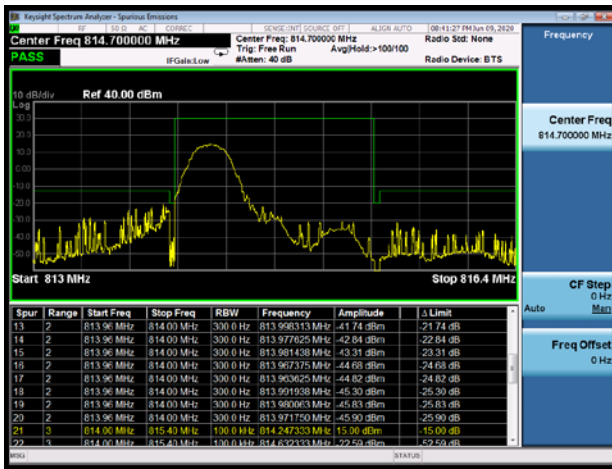


LTE Band 26 QPSK 1.4MHz CH-High 1RB

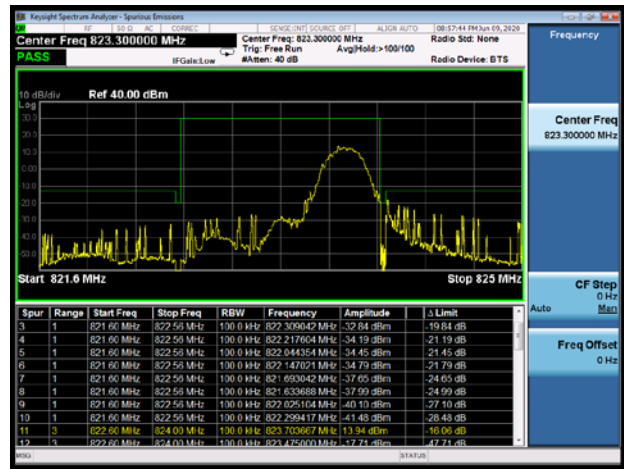


LTE Band 26 QPSK 1.4MHz CH-Low 100%RB

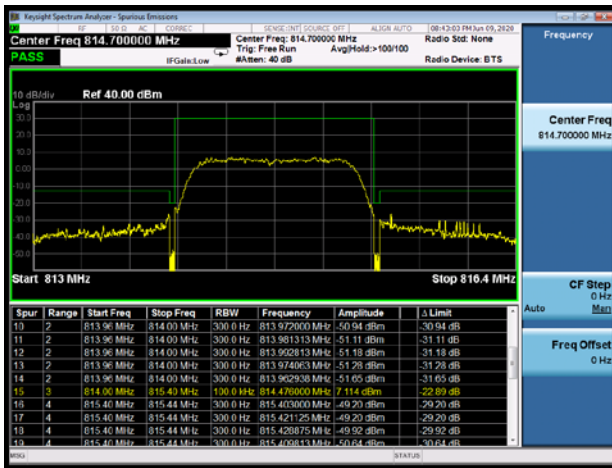


LTE Band 26 QPSK 1.4MHz CH-High 100%RB

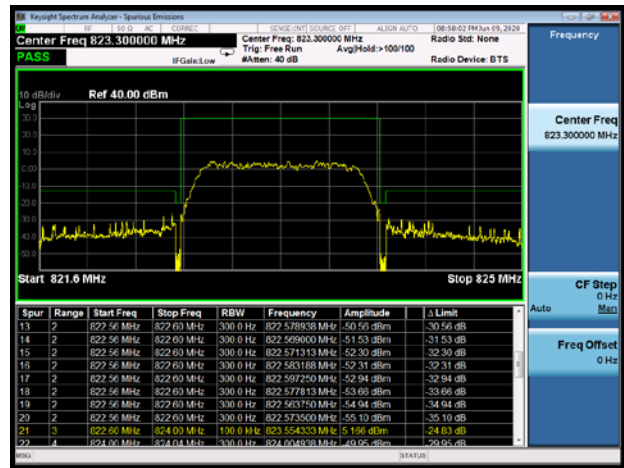

LTE Band 26 QPSK 3MHz CH-Low 1RB

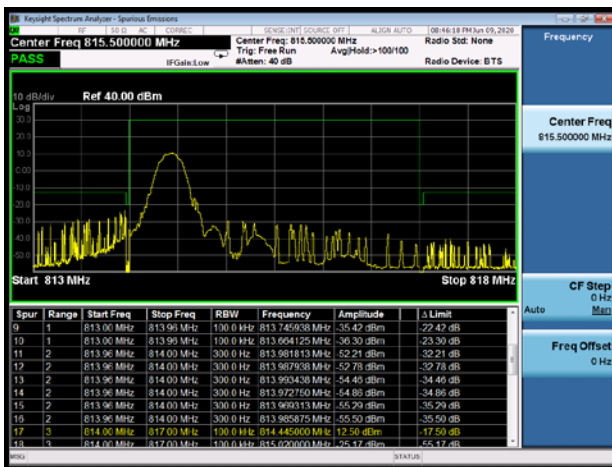


LTE Band 26 QPSK 3MHz CH-High 1RB

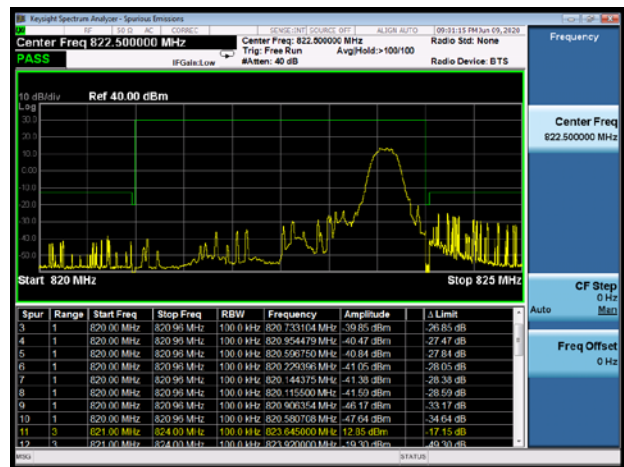




LTE Band 26 QPSK 3MHz CH-Low 100%RB

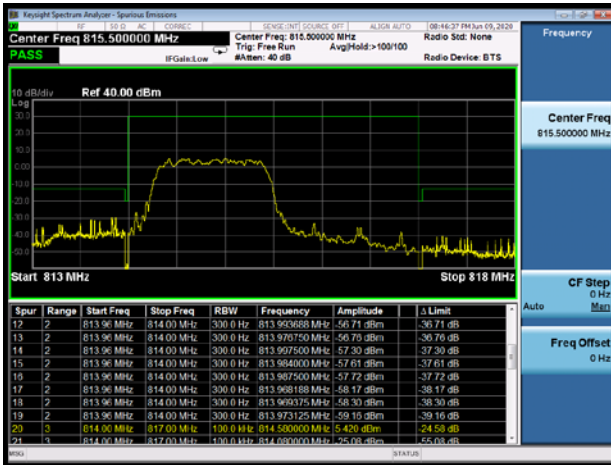


LTE Band 26 QPSK 3MHz CH-High 100%RB

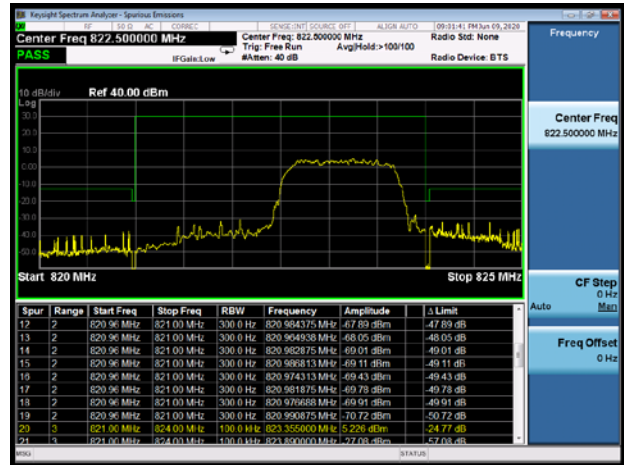

LTE Band 26 QPSK 5MHz CH-Low 1RB




LTE Band 26 QPSK 5MHz CH-High 1RB

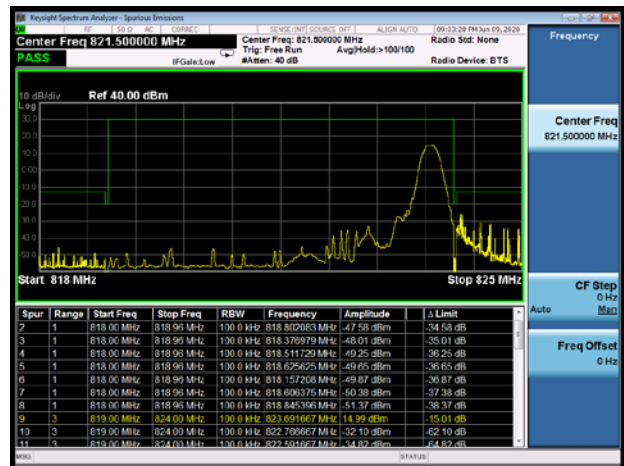

LTE Band 26 QPSK 5MHz CH-Low 100%RB




LTE Band 26 QPSK 5MHz CH-High 100%RB

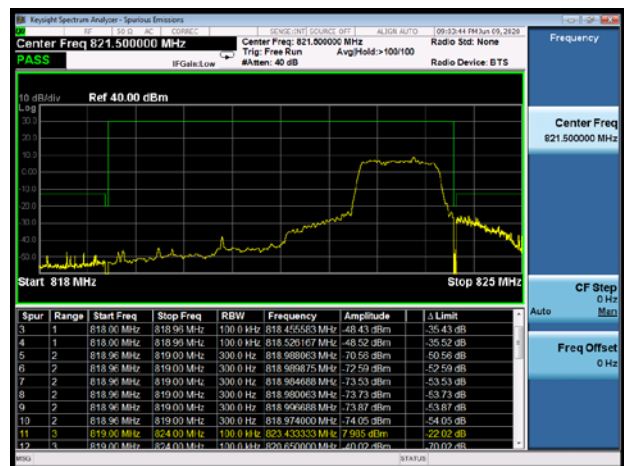




### LTE Band 26 QPSK 10MHz CH-Low 1RB

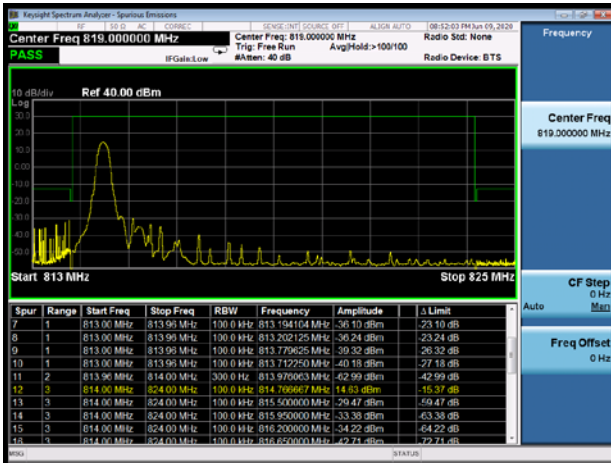

### LTE Band 26 QPSK 10MHz CH-High 1RB

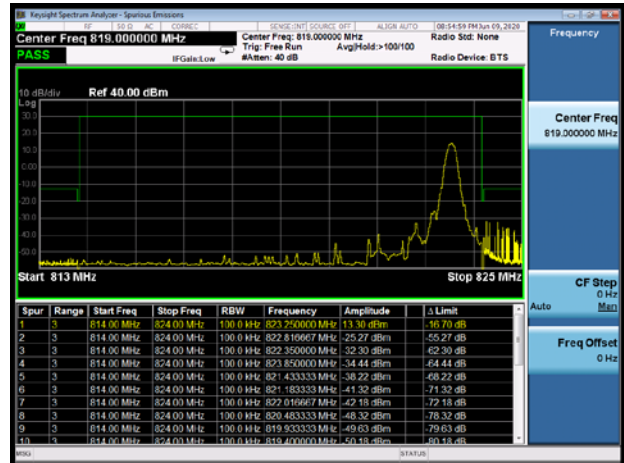


### LTE Band 26 QPSK 10MHz CH-Low 100%RB




### LTE Band 26 QPSK 10MHz CH-High 100%RB



### LTE Band 26 16QAM 1.4MHz CH-Low 1RB

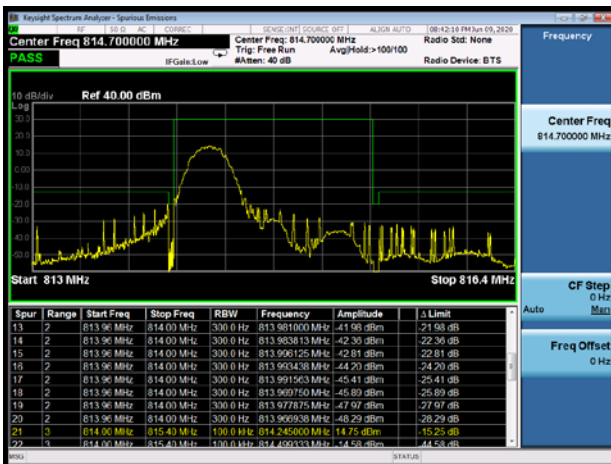


### LTE Band 26 16QAM 1.4MHz CH-High 1RB

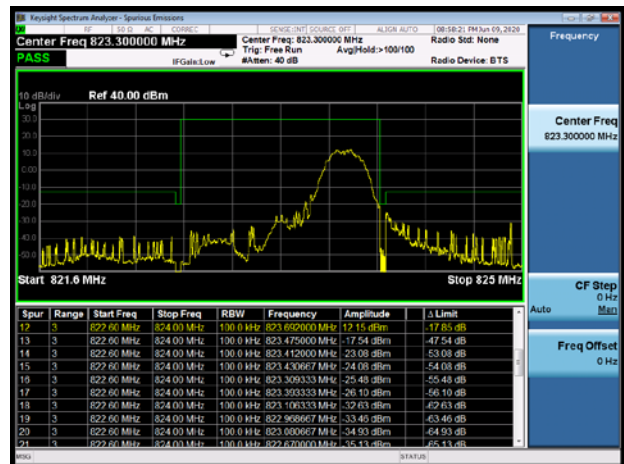





LTE Band 26 16QAM 1.4MHz CH-Low 100%RB

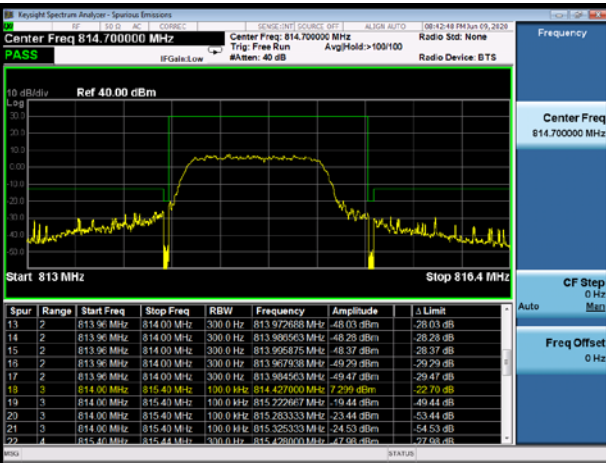


LTE Band 26 16QAM 1.4MHz CH-High 100%RB

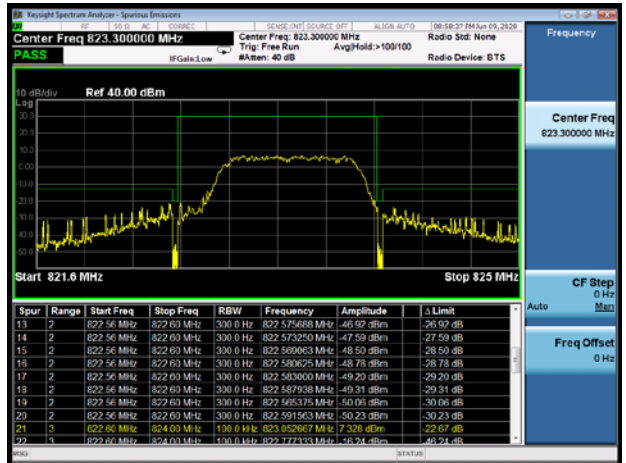


LTE Band 26 16QAM 3MHz CH-Low 1RB

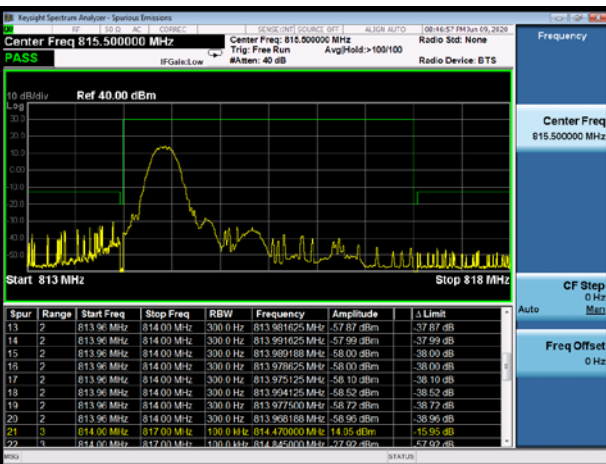

LTE Band 26 16QAM 3MHz CH-High 1RB

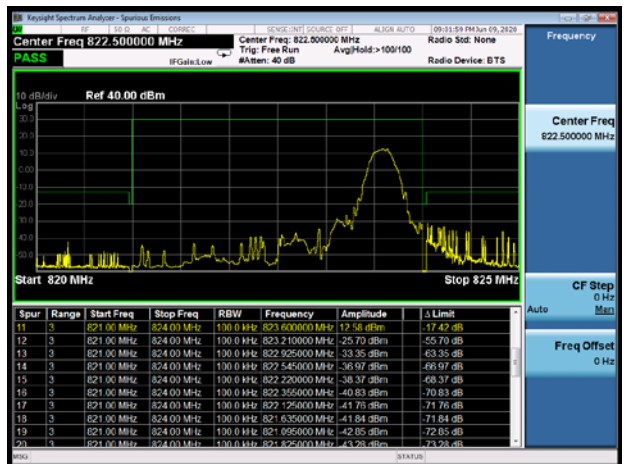

LTE Band 26 16QAM 3MHz CH-Low 100%RB

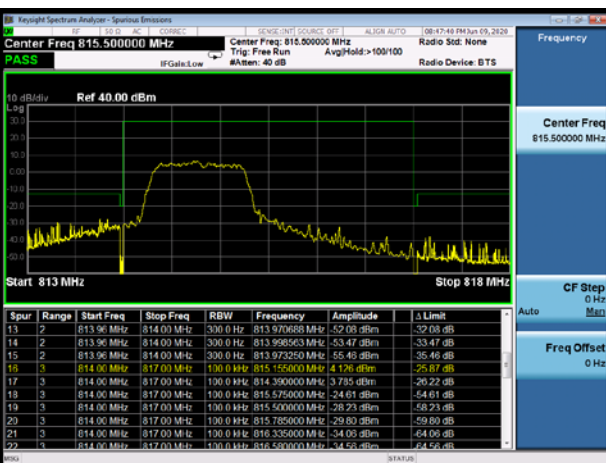


LTE Band 26 16QAM 3MHz CH-High 100%RB







LTE Band 26 16QAM 5MHz CH-Low 1RB

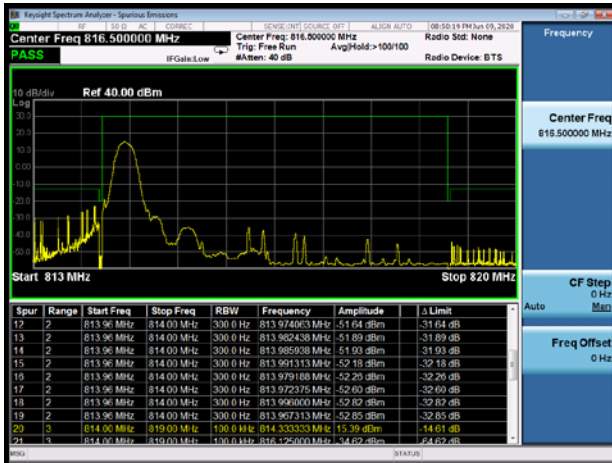


LTE Band 26 16QAM 5MHz CH-High 1RB

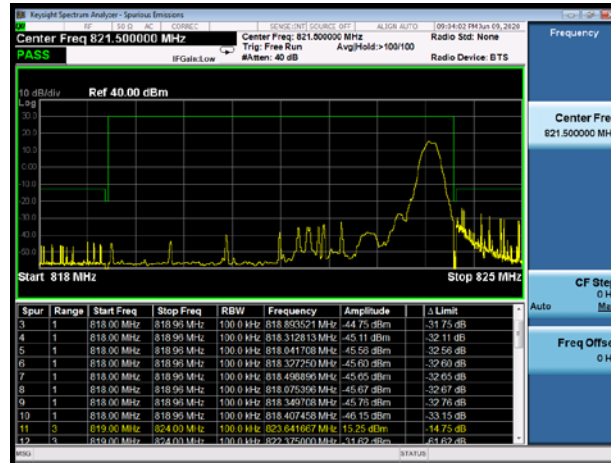

LTE Band 26 16QAM 5MHz CH-Low 100%RB

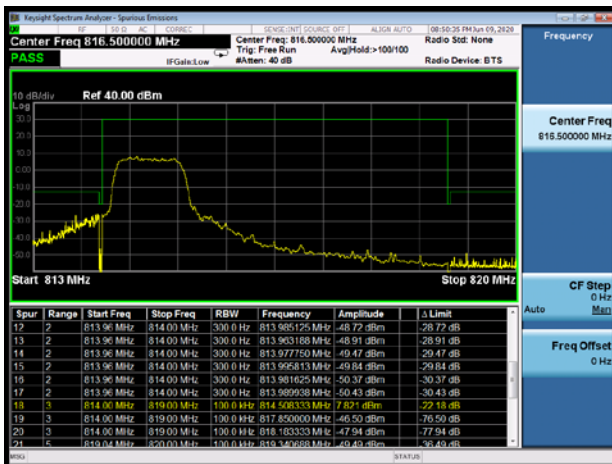


LTE Band 26 16QAM 5MHz CH-High 100%RB

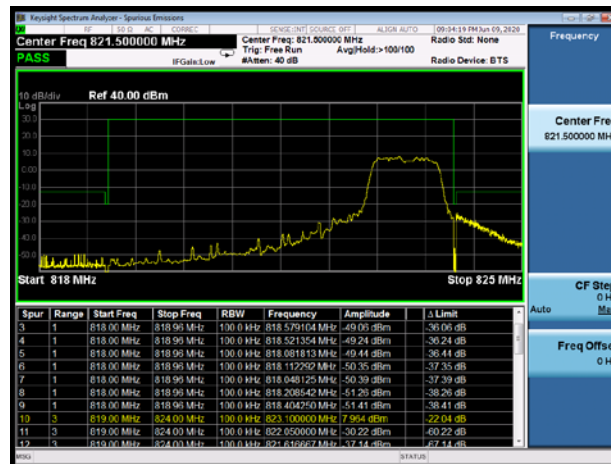

LTE Band 26 16QAM 10MHz CH-Low 1RB




LTE Band 26 16QAM 10MHz CH-High 1RB

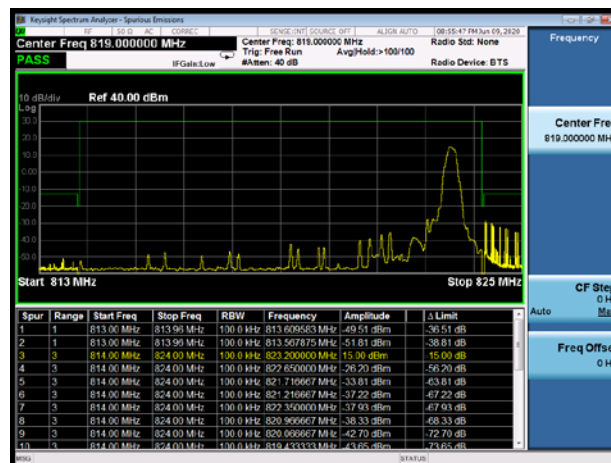




LTE Band 26 16QAM 10MHz CH-Low 100%RB

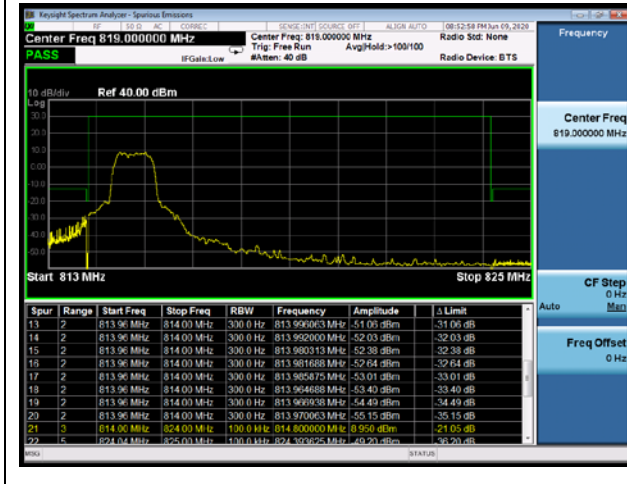

LTE Band 26 16QAM 10MHz CH-High 100%RB

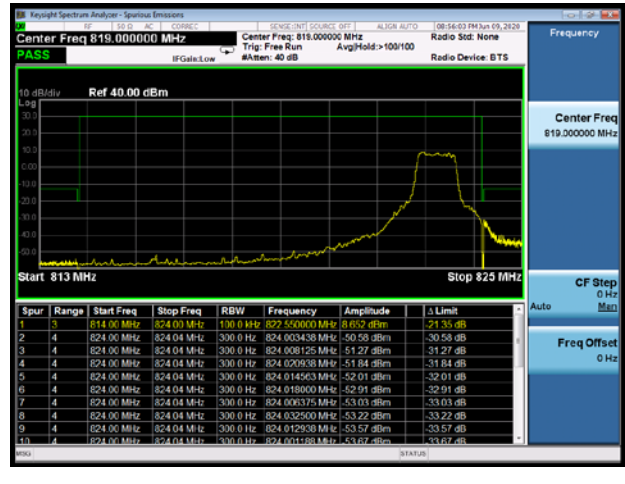

### 5.4. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

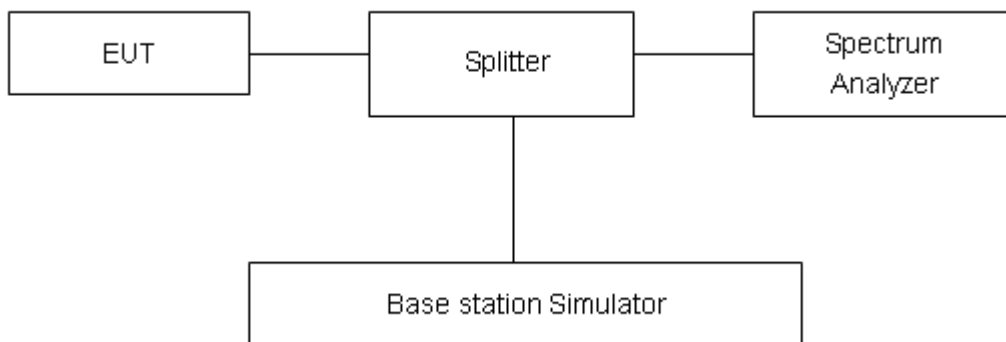

#### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

Mode	Bandwidth	Modulation	Channel/ Frequency (MHz)	Peak-to-Average Power Ratio (PAPR)			Limit (dB)	Conclusion
				Peak (dBm)	Avg (dBm)	PAPR (dB)		
LTE Band 26	1.4MHz	QPSK	26740/819	25.38	15.64	9.74	13	PASS
		16QAM	26740/819	25.89	15.59	10.30	13	PASS
	3MHz	QPSK	26740/819	25.15	15.40	9.75	13	PASS
		16QAM	26740/819	25.88	15.64	10.24	13	PASS
	5MHz	QPSK	26740/819	26.09	16.73	9.36	13	PASS
		16QAM	26740/819	25.92	15.85	10.07	13	PASS
	10MHz	QPSK	26740/819	25.93	16.73	9.20	13	PASS
		16QAM	26740/819	26.61	16.90	9.71	13	PASS



## 5.5. Frequency Stability

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### 2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.3 V and 4.3 V, with a nominal voltage of 3.8V.

### Test setup

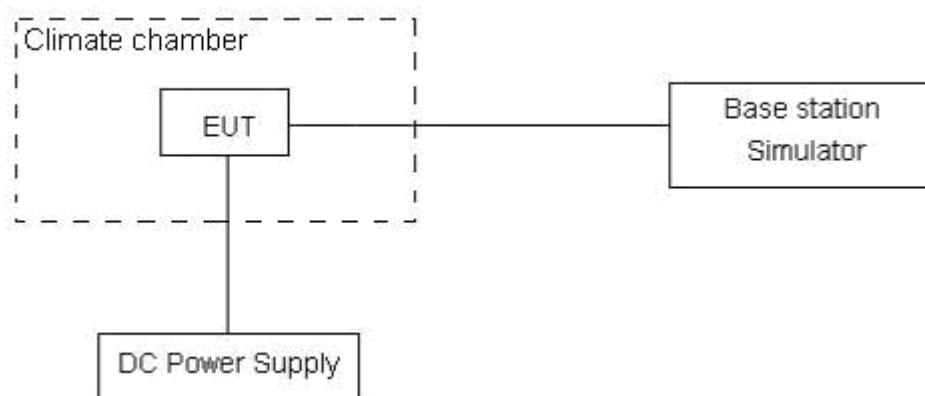

**Limits**

According to the Sec. 90.213.(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
814 ~ 824	1.5	2.5	2.5

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01$ ppm.

**Test Result**

LTE Band 26						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	6.41	4.18	0.00341	0.00222	PASS
Extreme (85°C)		1.22	17.73	0.00065	0.00943	PASS
Extreme (80°C)		8.91	7.15	0.00474	0.00380	PASS
Extreme (70°C)		2.08	3.91	0.00110	0.00208	PASS
Extreme (60°C)		3.24	5.58	0.00172	0.00297	PASS
Extreme (50°C)		7.89	2.20	0.00420	0.00117	PASS
Extreme (40°C)		9.49	4.60	0.00505	0.00245	PASS
Extreme (30°C)		12.78	15.69	0.00680	0.00835	PASS
Extreme (20°C)		16.38	1.50	0.00871	0.00080	PASS
Extreme (10°C)		7.98	2.23	0.00424	0.00118	PASS
Extreme (0°C)		16.74	13.98	0.00890	0.00743	PASS
Extreme (-10°C)		8.32	10.35	0.00442	0.00551	PASS
Extreme (-20°C)		6.50	14.55	0.00346	0.00774	PASS
Extreme (-30°C)		1.01	15.48	0.00054	0.00824	PASS
Extreme (-40°C)		12.80	7.11	0.00681	0.00378	PASS
25°C	LV	16.51	15.07	0.00878	0.00802	PASS
	HV	7.38	5.39	0.00392	0.00287	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	12.03	16.86	0.00640	0.00897	PASS
Extreme (85°C)		1.90	3.97	0.00101	0.00211	PASS
Extreme (80°C)		13.02	14.17	0.00692	0.00754	PASS
Extreme (70°C)		3.29	9.67	0.00175	0.00514	PASS
Extreme (60°C)		8.31	8.11	0.00442	0.00431	PASS
Extreme (50°C)		4.28	3.14	0.00228	0.00167	PASS
Extreme (40°C)		7.71	8.89	0.00410	0.00473	PASS
Extreme (30°C)		15.71	4.32	0.00836	0.00230	PASS
Extreme (20°C)		15.87	7.46	0.00844	0.00397	PASS
Extreme (10°C)		13.32	5.84	0.00708	0.00311	PASS
Extreme (0°C)		12.34	15.84	0.00657	0.00843	PASS



Extreme (-10°C)		14.07	7.18	0.00748	0.00382	PASS
Extreme (-20°C)		5.17	7.71	0.00275	0.00410	PASS
Extreme (-30°C)		12.98	4.89	0.00690	0.00260	PASS
Extreme (-40°C)		16.10	15.37	0.00856	0.00818	PASS
25°C	LV	2.84	10.41	0.00151	0.00554	PASS
	HV	17.88	3.06	0.00951	0.00163	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	7.22	6.34	0.00384	0.00337	
Extreme (85°C)		1.48	2.21	0.00079	0.00118	PASS
Extreme (80°C)		17.94	17.81	0.00954	0.00947	PASS
Extreme (70°C)		17.43	4.25	0.00927	0.00226	PASS
Extreme (60°C)		13.04	9.30	0.00694	0.00495	PASS
Extreme (50°C)		4.32	1.42	0.00230	0.00075	PASS
Extreme (40°C)		7.42	1.92	0.00394	0.00102	PASS
Extreme (30°C)		6.83	9.29	0.00363	0.00494	PASS
Extreme (20°C)		10.87	10.24	0.00578	0.00545	PASS
Extreme (10°C)		6.61	6.83	0.00352	0.00363	PASS
Extreme (0°C)		11.35	3.26	0.00604	0.00173	PASS
Extreme (-10°C)		12.26	1.05	0.00652	0.00056	PASS
Extreme (-20°C)		7.04	16.57	0.00375	0.00881	PASS
Extreme (-30°C)		6.51	9.72	0.00346	0.00517	PASS
Extreme (-40°C)		2.52	10.15	0.00134	0.00540	PASS
25°C	LV	16.50	7.18	0.00878	0.00382	PASS
	HV	1.88	10.56	0.00100	0.00562	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz					
Temperature	Voltage	16QAM	QPSK	16QAM	QPSK	
Normal (25°C)	Normal	16.65	1.91	0.00886	0.00102	
Extreme (85°C)		9.17	13.04	0.00488	0.00693	PASS
Extreme (80°C)		16.44	10.29	0.00875	0.00547	PASS
Extreme (70°C)		2.68	15.55	0.00142	0.00827	PASS
Extreme (60°C)		13.53	15.17	0.00720	0.00807	PASS
Extreme (50°C)		13.37	10.98	0.00711	0.00584	PASS
Extreme (40°C)		14.47	9.71	0.00770	0.00516	PASS
Extreme (30°C)		11.26	5.78	0.00599	0.00308	PASS
Extreme (20°C)		13.28	7.00	0.00706	0.00372	PASS



Extreme (10°C)		4.56	10.02	0.00243	0.00533	PASS
Extreme (0°C)		3.68	3.94	0.00196	0.00209	PASS
Extreme (-10°C)		1.65	16.05	0.00088	0.00854	PASS
Extreme (-20°C)		3.03	6.80	0.00161	0.00361	PASS
Extreme (-30°C)		11.49	17.36	0.00611	0.00923	PASS
Extreme (-40°C)		15.21	13.11	0.00809	0.00697	PASS
25°C	LV	13.07	16.20	0.00695	0.00862	PASS
	HV	16.28	5.11	0.00866	0.00272	PASS

## 5.6. Spurious Emissions at Antenna Terminals


### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

### Test setup

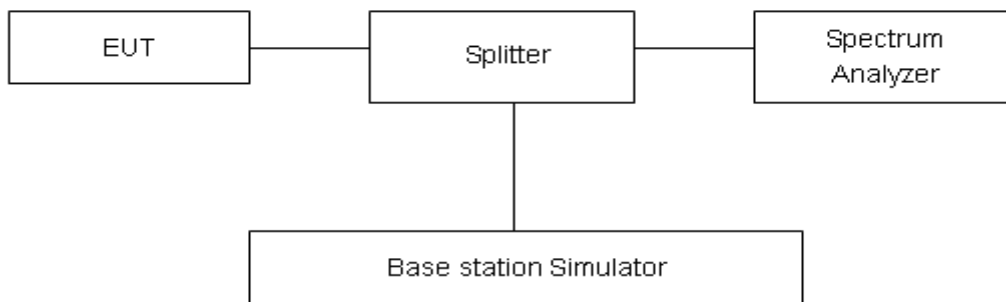

### Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.”

Limit	-13 dBm

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
100kHz-1GHz	0.684 dB
1GHz-12.75GHz	1.407 dB




### Test Result


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.  
The signal beyond the limit is carrier.

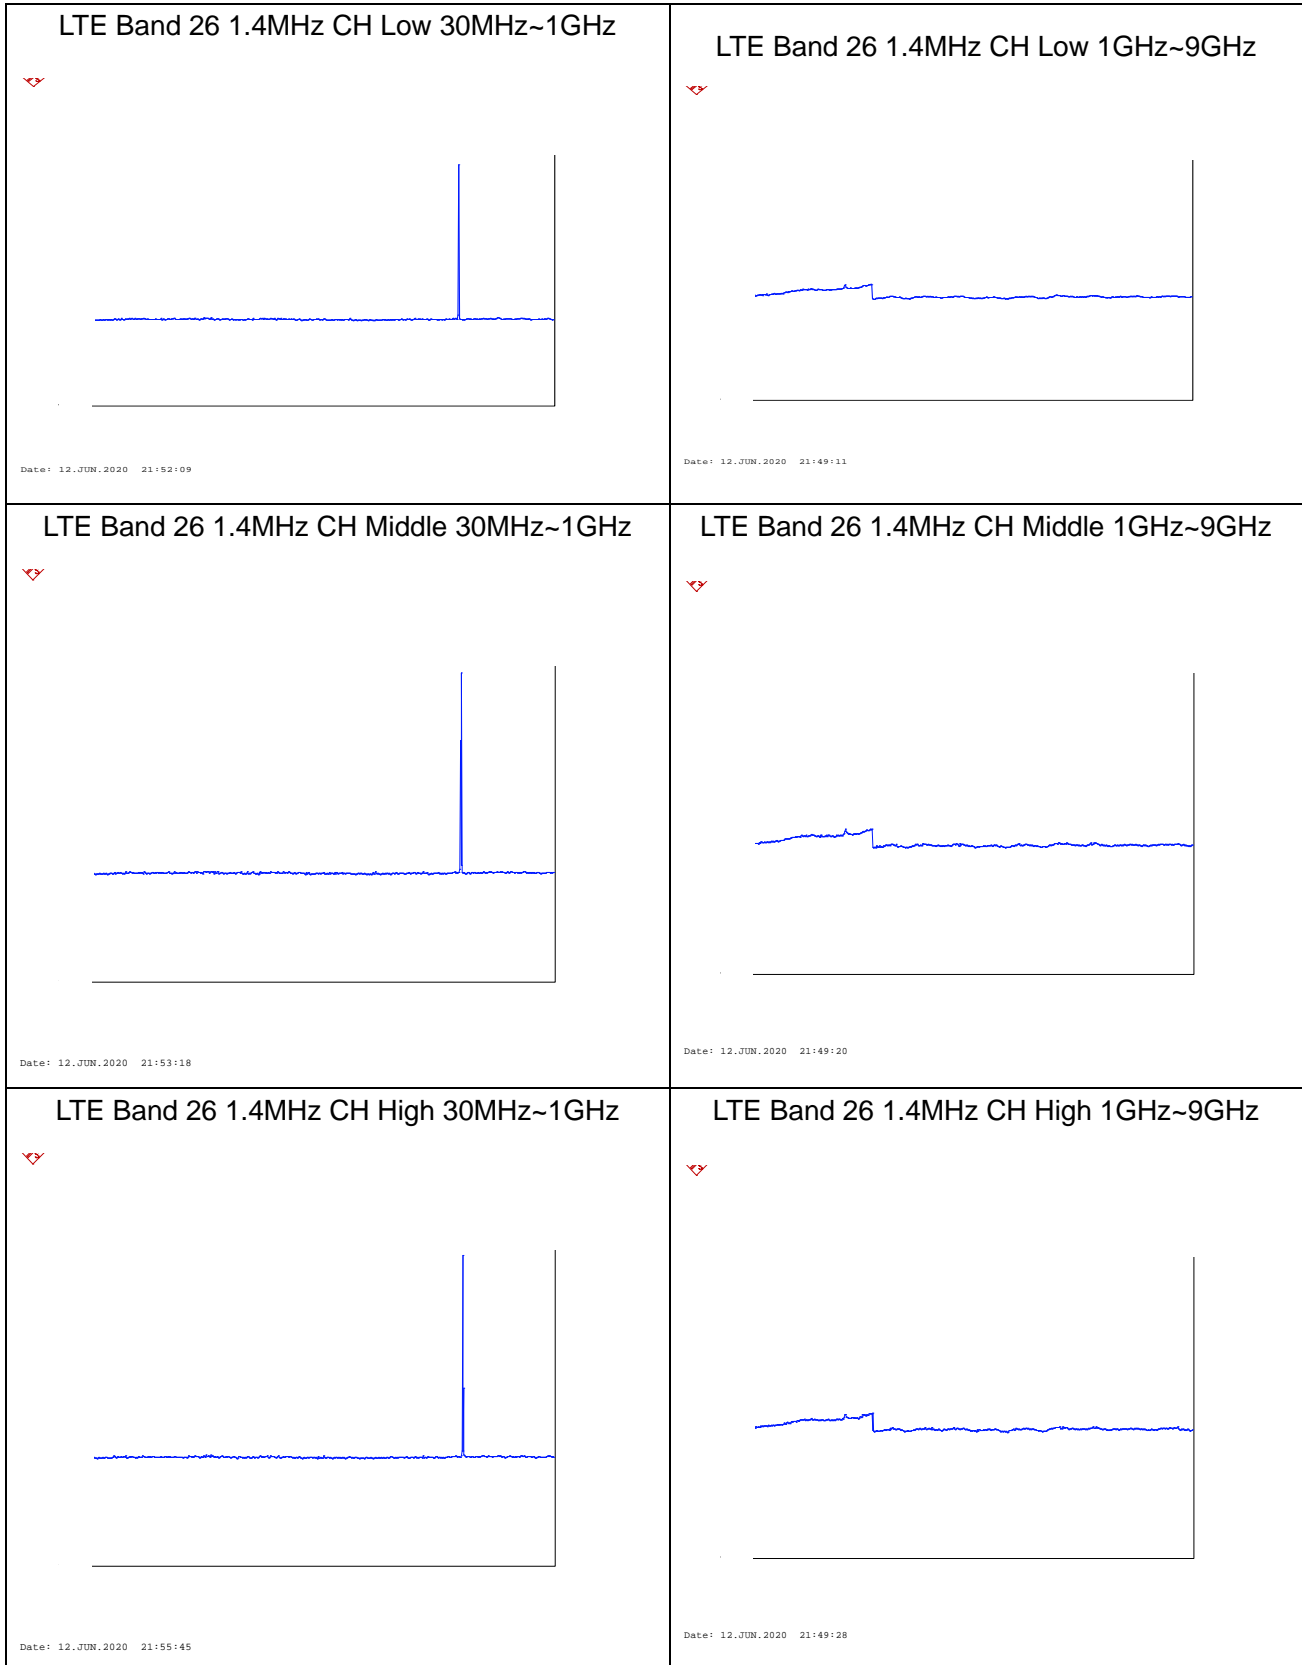

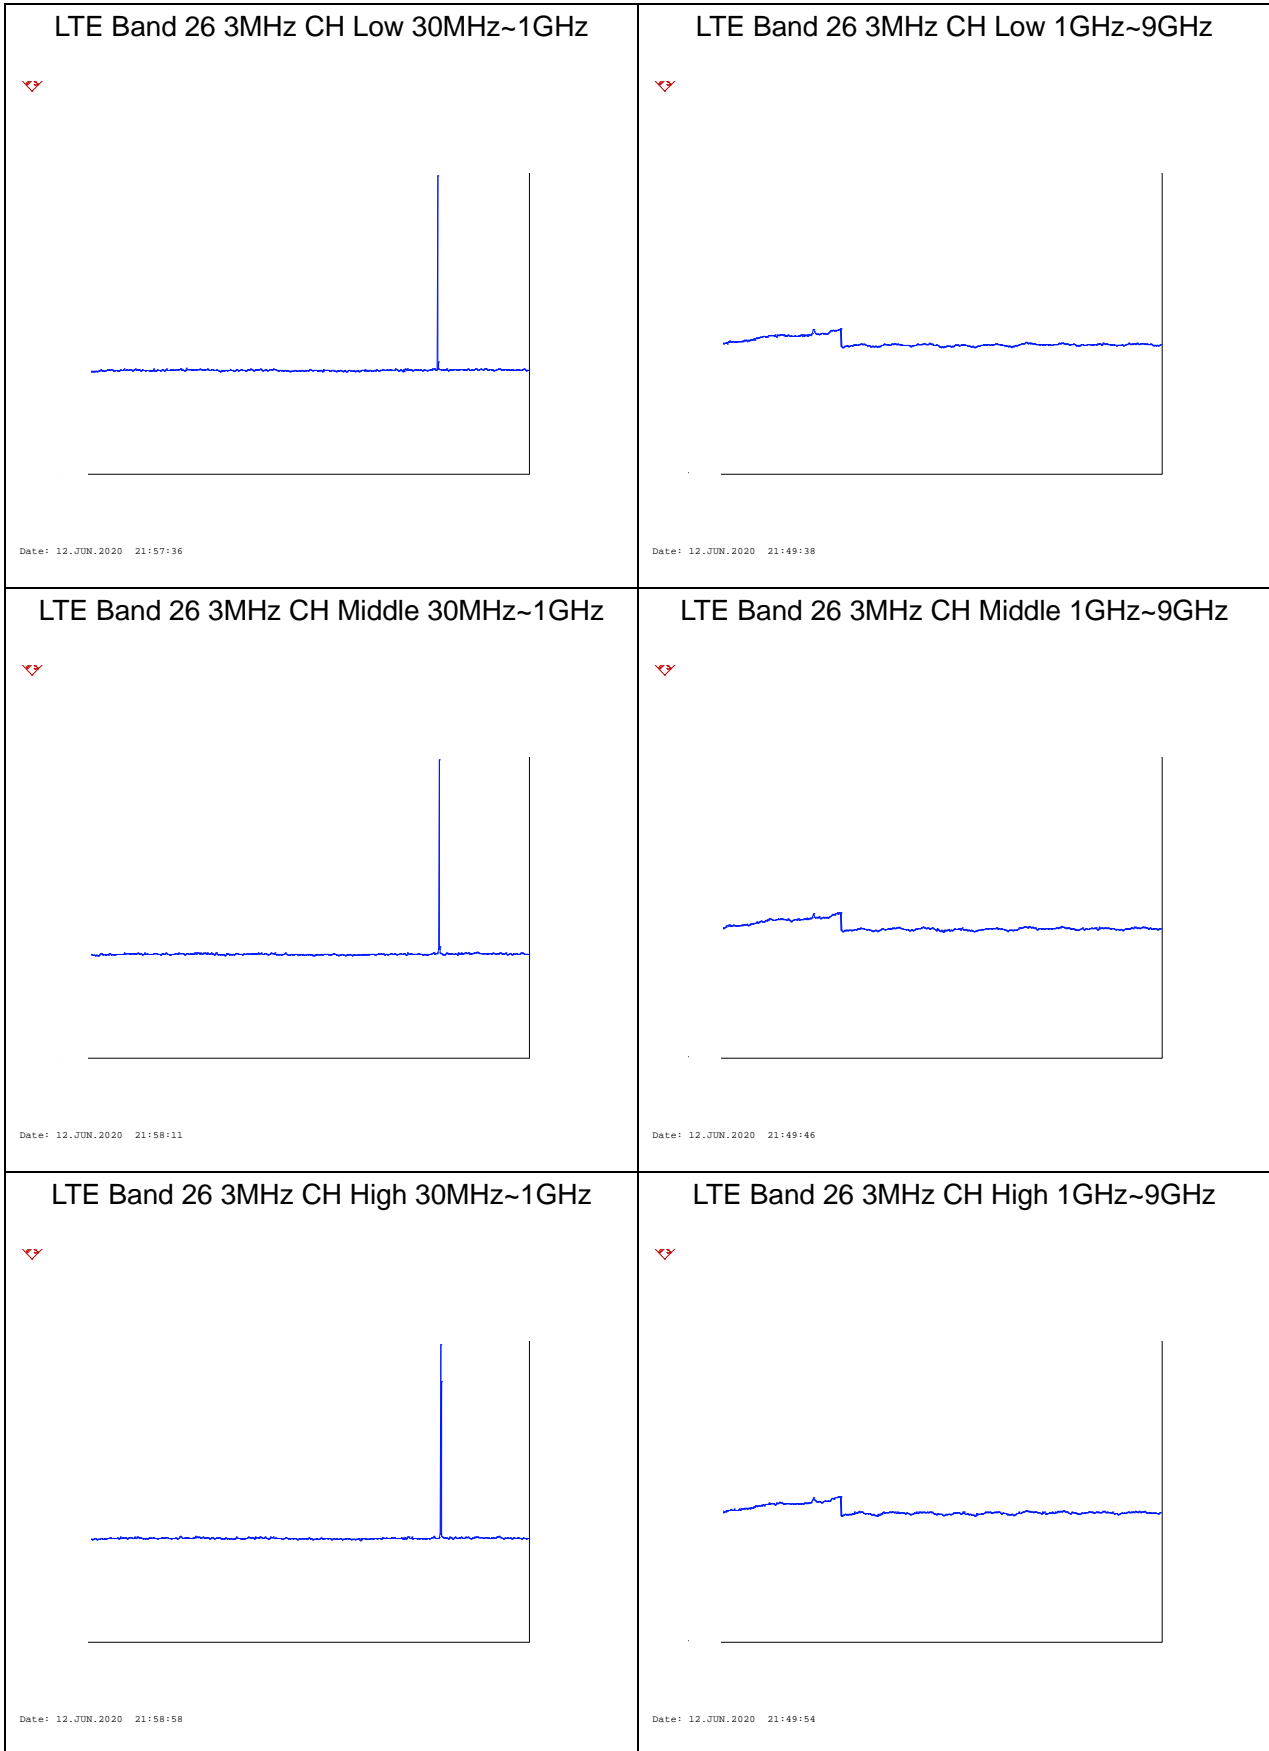



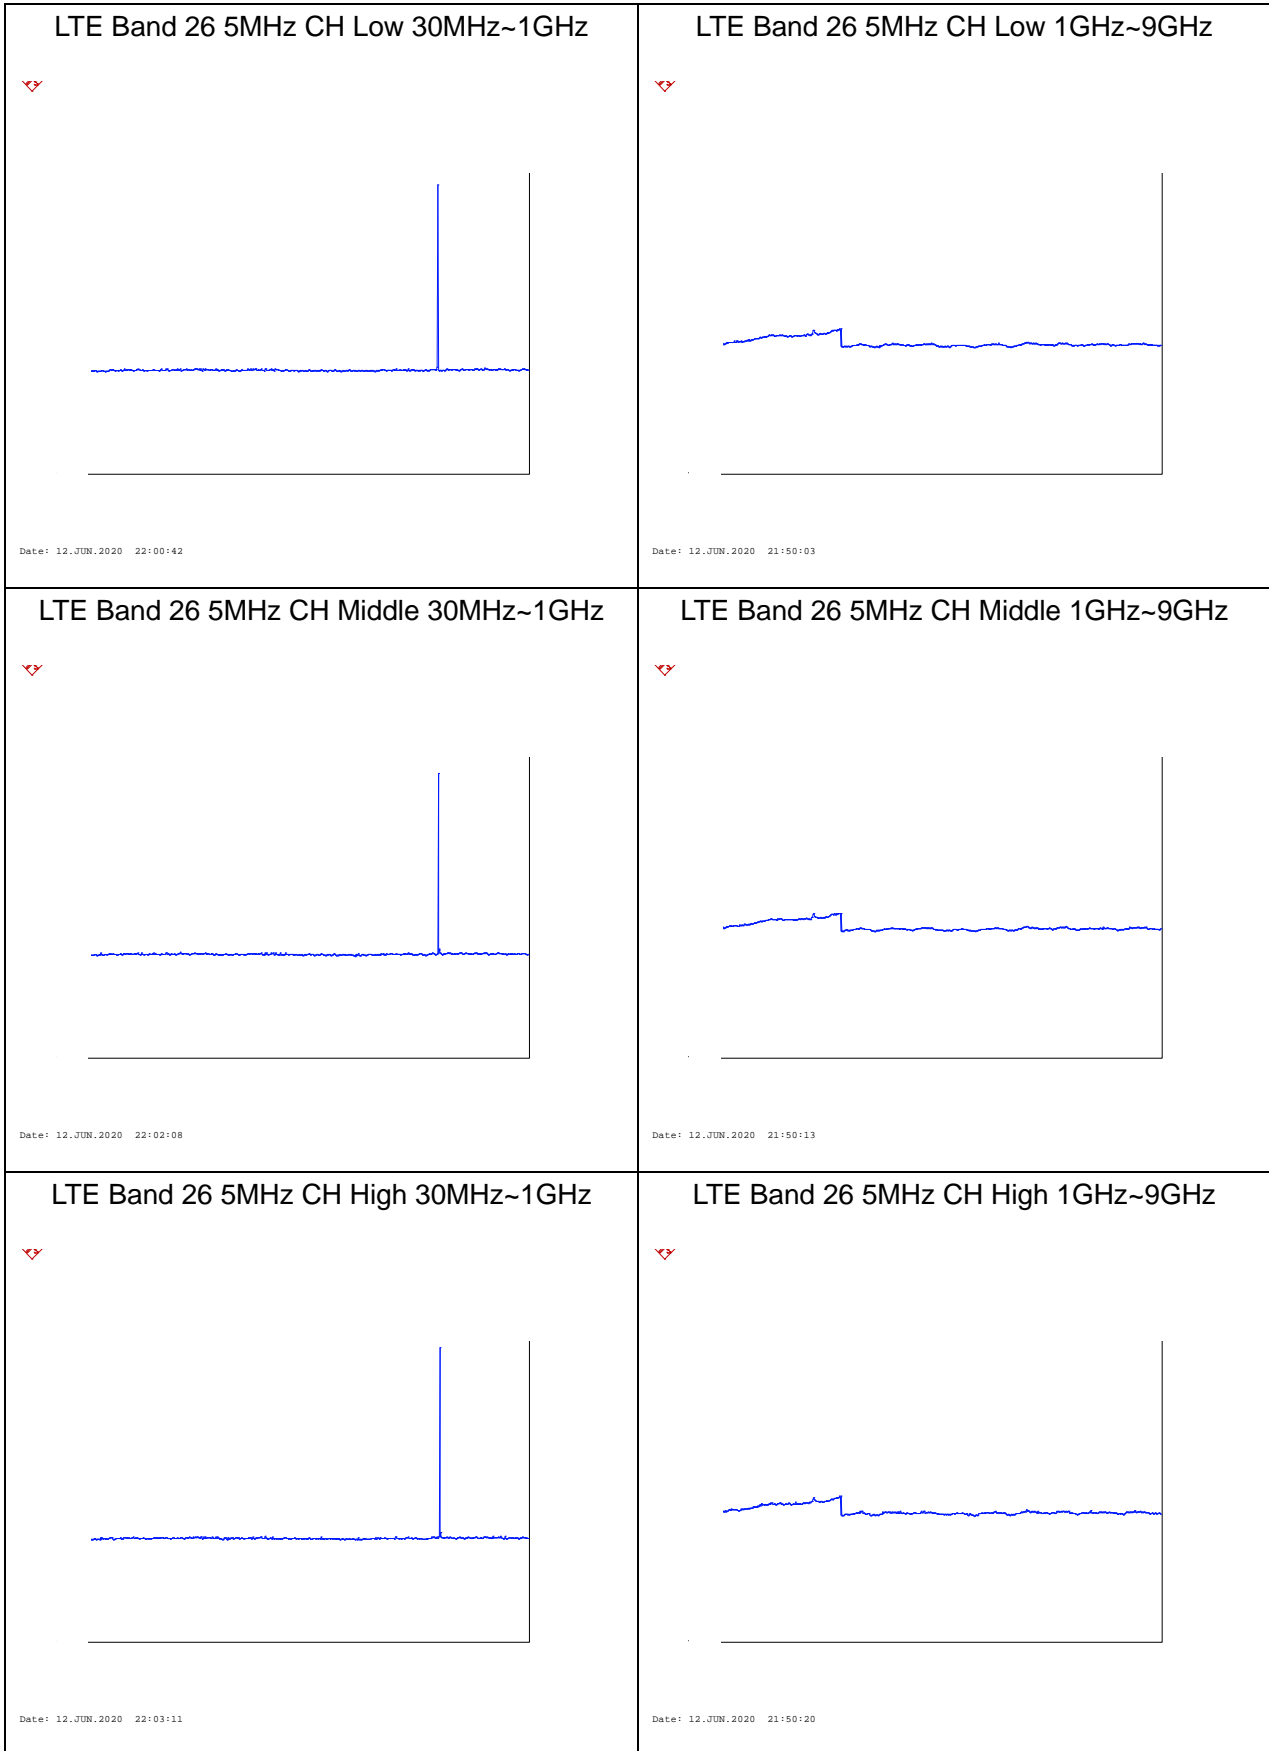

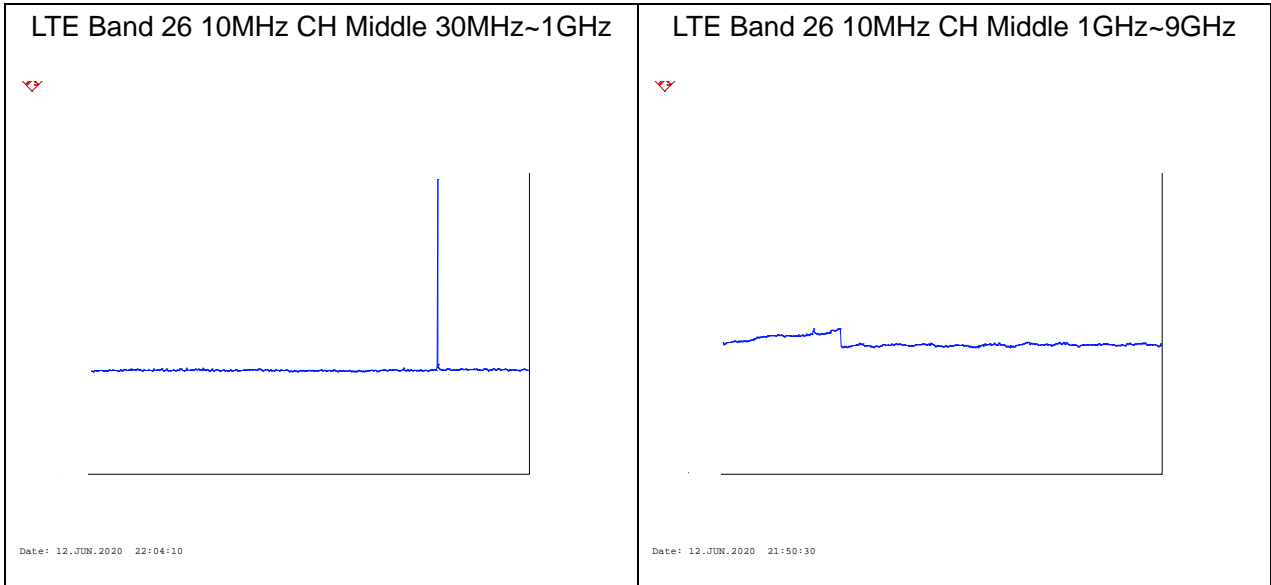

## 5.7. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

### Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz-150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

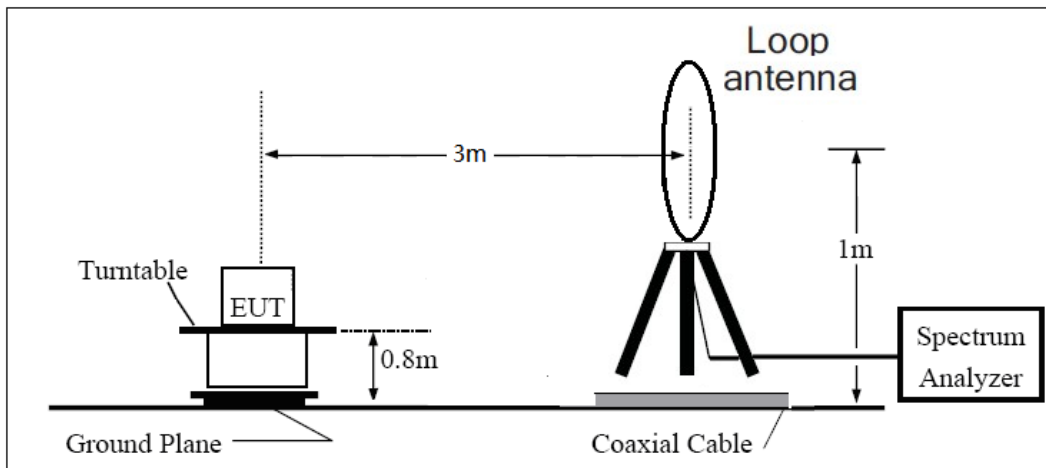

**30MHz ~ 1GHz**

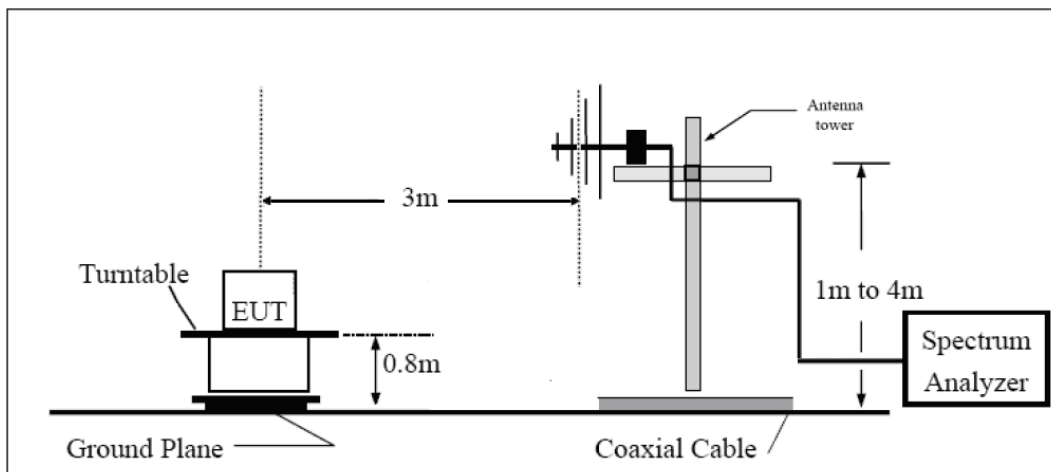

**Above 1GHz**

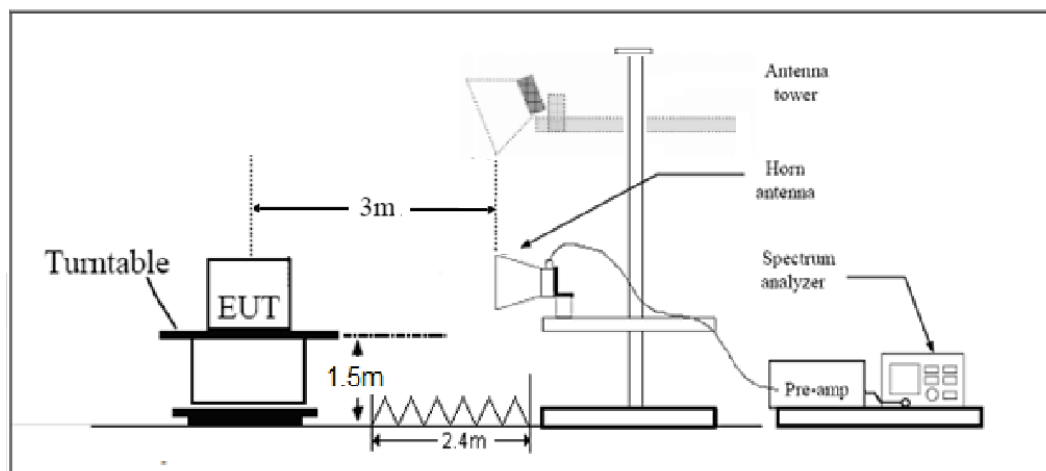



## Limits

Rule Part 90.691 specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.”

Limit	-13 dBm
-------	---------

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

For radiated spurious emissions test, the worst mode (Middle Channel) should be reflected in the report.

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 26 1.4MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-64.25	2.00	10.75	Horizontal	-55.50	-13.00	42.50	90
3	2457.0	-61.84	2.51	11.05	Horizontal	-53.30	-13.00	40.30	270
4	3276.0	-58.65	4.20	11.15	Horizontal	-51.70	-13.00	38.70	135
5	4095.0	-56.55	5.20	11.15	Horizontal	-50.60	-13.00	37.60	225
6	4914.0	-55.15	5.50	11.95	Horizontal	-48.70	-13.00	35.70	90
7	5733.0	-59.45	5.70	13.55	Horizontal	-51.60	-13.00	38.60	0
8	6552.0	-57.05	6.30	13.75	Horizontal	-49.60	-13.00	36.60	45
9	7371.0	-56.85	6.80	13.85	Horizontal	-49.80	-13.00	36.80	90
10	8190.0	-56.65	6.90	14.25	Horizontal	-49.30	-13.00	36.30	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.

LTE Band 26 5MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-64.15	2.00	10.75	Horizontal	-55.40	-13.00	42.40	270
3	2457.0	-64.04	2.51	11.05	Horizontal	-55.50	-13.00	42.50	90
4	3269.6	-58.35	4.20	11.15	Horizontal	-51.40	-13.00	38.40	135
5	4086.0	-55.45	5.20	11.15	Horizontal	-49.50	-13.00	36.50	270
6	4903.0	-55.45	5.50	11.95	Horizontal	-49.00	-13.00	36.00	0
7	5720.0	-57.95	5.70	13.55	Horizontal	-50.10	-13.00	37.10	90
8	6538.0	-58.75	6.30	13.75	Horizontal	-51.30	-13.00	38.30	45
9	7355.0	-56.95	6.80	13.85	Horizontal	-49.90	-13.00	36.90	135
10	8172.5	-55.15	6.90	14.25	Horizontal	-47.80	-13.00	34.80	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 26 10MHz CH Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1638.0	-65.15	2.00	10.75	Horizontal	-56.40	-13.00	43.40	135
3	2457.0	-59.64	2.51	11.05	Horizontal	-51.10	-13.00	38.10	225
4	3259.0	-56.45	4.20	11.15	Horizontal	-49.50	-13.00	36.50	225
5	4070.0	-55.55	5.20	11.15	Horizontal	-49.60	-13.00	36.60	135
6	4884.0	-56.05	5.50	11.95	Horizontal	-49.60	-13.00	36.60	180
7	5698.0	-58.25	5.70	13.55	Horizontal	-50.40	-13.00	37.40	90
8	6512.0	-58.15	6.30	13.75	Horizontal	-50.70	-13.00	37.70	315
9	7326.0	-56.90	6.80	13.85	Horizontal	-49.85	-13.00	36.85	45
10	8140.0	-55.33	6.90	14.25	Horizontal	-47.98	-13.00	34.98	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY50210259	2020-05-18	2021-05-17
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Signal generator	R&S	SMF 100A	102235	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2021-6-14
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*





## **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.



## **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.



## **ANNEX C: Verify data**

The Verify data are submitted separately.



## **ANNEX D: Product Change Description**

The Product Change Description are submitted separately.